



**FCC 47 CFR PART 15 SUBPART E**

**CERTIFICATION TEST REPORT**

**FOR**

**802.11b/g/n/a/ac 3X3 WLAN + Bluetooth PCI-E Custom Combination Card**

**MODEL NUMBER: BCM943602CDP**

**FCC ID: QDS-BRCM1089**

**REPORT NUMBER: 15U20173-E3 Revision B**

**ISSUE DATE: MAY 27, 2015**

*Prepared for*  
**BROADCOM CORPORATION**  
**190 MATHILDA PLACE**  
**SUNNYVALE, CA 94086, U.S.A.**

*Prepared by*  
**UL VERIFICATION SERVICES INC.**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	05/14/15	Initial Issue	H. Mustapha
A	05/20/15	Added reference in Section 7 to KDB 662911 D01 v02r01 Added version no. to the KDB 789033 reference in Section 2 Updated Model Numbers on Pg. 21	H. Mustapha
B	05/27/15	Added statement in section 5.3 regarding first antenna set being used for radiated testing.	H. Mustapha

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>11</b>
<b>2. TEST METHODOLOGY .....</b>	<b>12</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>12</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>12</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>12</i>
4.2. <i>SAMPLE CALCULATION .....</i>	<i>12</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>13</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>14</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>14</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>14</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>21</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>21</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>22</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>23</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>25</b>
<b>7. MEASUREMENT METHODS .....</b>	<b>26</b>
<b>8. ANTENNA PORT TEST RESULTS .....</b>	<b>27</b>
8.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>27</i>
8.2. <i>DUTY CYCLE PLOTS .....</i>	<i>28</i>
8.3. <i>802.11a LEGACY 1TX MODE IN THE 5.2 GHz BAND .....</i>	<i>35</i>
8.3.1. <i>26 dB BANDWIDTH.....</i>	<i>35</i>
8.3.2. <i>99% BANDWIDTH.....</i>	<i>38</i>
8.3.3. <i>OUTPUT POWER AND PSD .....</i>	<i>41</i>
8.4. <i>802.11n HT20 CDD 2TX MODE IN THE 5.2 GHz BAND .....</i>	<i>45</i>
8.4.1. <i>OUTPUT POWER AND PSD .....</i>	<i>45</i>
8.5. <i>802.11n HT20 STBC 2TX MODE IN THE 5.2 GHz BAND .....</i>	<i>51</i>
8.5.1. <i>OUTPUT POWER AND PSD .....</i>	<i>51</i>
8.6. <i>802.11n HT20 TxBF 2TX MODE IN THE 5.2 GHz BAND .....</i>	<i>57</i>
8.6.1. <i>OUTPUT POWER AND PSD .....</i>	<i>57</i>
8.7. <i>802.11n HT20 CDD 3TX MODE IN THE 5.2 GHz BAND .....</i>	<i>63</i>
8.7.1. <i>26 dB BANDWIDTH.....</i>	<i>63</i>
8.7.2. <i>99% BANDWIDTH.....</i>	<i>69</i>
8.7.3. <i>OUTPUT POWER AND PSD .....</i>	<i>75</i>
8.8. <i>802.11n HT20 STBC 3TX MODE IN THE 5.2 GHz BAND .....</i>	<i>83</i>

8.8.1. 26 dB BANDWIDTH.....83  
8.8.2. 99% BANDWIDTH.....89  
8.8.3. OUTPUT POWER AND PSD.....95  
8.9. 802.11n HT20 TxBF 3TX MODE IN THE 5.2 GHz BAND ..... 103  
8.9.1. OUTPUT POWER AND PSD ..... 103  
8.10. 802.11n HT40 1TX MODE IN THE 5.2 GHz BAND ..... 111  
8.10.1. OUTPUT POWER.....111  
8.11. 802.11n HT40 CDD 2TX MODE IN THE 5.2 GHz BAND..... 113  
8.11.1. OUTPUT POWER AND PSD ..... 113  
8.12. 802.11n HT40 TxBF 2TX MODE IN THE 5.2 GHz BAND..... 118  
8.12.1. OUTPUT POWER AND PSD ..... 118  
8.13. 802.11n HT40 CDD 3TX MODE IN THE 5.2 GHz BAND..... 123  
8.13.1. 26 dB BANDWIDTH ..... 123  
8.13.2. 99% BANDWIDTH ..... 127  
8.13.3. OUTPUT POWER AND PSD ..... 131  
8.14. 802.11n HT40 TxBF 3TX MODE IN THE 5.2 GHz BAND..... 137  
8.14.1. OUTPUT POWER AND PSD ..... 137  
8.15. 802.11ac VHT80 1TX MODE IN THE 5.2 GHz BAND ..... 143  
8.15.1. OUTPUT POWER.....143  
8.16. 802.11ac VHT80 CDD 2TX MODE IN THE 5.2 GHz BAND..... 145  
8.16.1. OUTPUT POWER AND PSD ..... 145  
8.17. 802.11ac VHT80 TxBF 2TX MODE IN THE 5.2 GHz BAND..... 149  
8.17.1. OUTPUT POWER AND PSD ..... 149  
8.18. 802.11ac VHT80 CDD 3TX MODE IN THE 5.2 GHz BAND..... 153  
8.18.1. 26 dB BANDWIDTH ..... 153  
8.18.2. 99% BANDWIDTH ..... 156  
8.18.3. OUTPUT POWER AND PSD ..... 159  
8.19. 802.11ac VHT80 TxBF 3TX MODE IN THE 5.2 GHz BAND..... 164  
8.19.1. OUTPUT POWER AND PSD ..... 164  
8.20. 802.11a LEGACY 1TX MODE IN THE 5.3 GHz BAND..... 169  
8.20.1. 26 dB BANDWIDTH ..... 169  
8.20.2. 99% BANDWIDTH ..... 171  
8.20.3. OUTPUT POWER AND PSD ..... 173  
8.21. 802.11n HT20 CDD 2TX MODE IN THE 5.3 GHz BAND..... 176  
8.21.1. OUTPUT POWER AND PSD ..... 176  
8.22. 802.11n HT20 STBC 2TX MODE IN THE 5.3 GHz BAND ..... 181  
8.22.1. OUTPUT POWER AND PSD ..... 181  
8.23. 802.11n HT20 TxBF 2TX MODE IN THE 5.3 GHz BAND..... 186  
8.23.1. OUTPUT POWER AND PSD ..... 186  
8.24. 802.11n HT20 CDD 3TX MODE IN THE 5.3 GHz BAND..... 191  
8.24.1. 26 dB BANDWIDTH ..... 191  
8.24.2. 99% BANDWIDTH ..... 197  
8.24.3. OUTPUT POWER AND PSD ..... 203

8.25. 802.11n HT20 STBC 3TX MODE IN THE 5.3 GHz BAND ..... 210  
8.25.1. 26 dB BANDWIDTH ..... 210  
8.25.2. 99% BANDWIDTH ..... 216  
8.25.3. OUTPUT POWER AND PSD ..... 222  
8.26. 802.11n HT20 TxBF 3TX MODE IN THE 5.3 GHz BAND ..... 229  
8.26.1. OUTPUT POWER AND PSD ..... 229  
8.27. 802.11n HT40 1TX MODE IN THE 5.3 GHz BAND ..... 236  
8.27.1. OUTPUT POWER ..... 236  
8.28. 802.11n HT40 CDD 2TX MODE IN THE 5.3 GHz BAND ..... 238  
8.28.1. OUTPUT POWER AND PSD ..... 238  
8.29. 802.11n HT40 TxBF 2TX MODE IN THE 5.3 GHz BAND ..... 242  
8.29.1. OUTPUT POWER AND PSD ..... 242  
8.30. 802.11n HT40 CDD 3TX MODE IN THE 5.3 GHz BAND ..... 246  
8.30.1. 26 dB BANDWIDTH ..... 246  
8.30.2. 99% BANDWIDTH ..... 250  
8.30.3. OUTPUT POWER AND PSD ..... 254  
8.31. 802.11n HT40 TxBF 3TX MODE IN THE 5.3 GHz BAND ..... 259  
8.31.1. OUTPUT POWER AND PSD ..... 259  
8.32. 802.11ac VHT80 1TX MODE IN THE 5.3 GHz BAND ..... 264  
8.32.1. OUTPUT POWER ..... 264  
8.33. 802.11ac VHT80 CDD 2TX MODE IN THE 5.3 GHz BAND ..... 266  
8.33.1. OUTPUT POWER AND PSD ..... 266  
8.34. 802.11ac VHT80 TxBF 2TX MODE IN THE 5.3 GHz BAND ..... 269  
8.34.1. OUTPUT POWER AND PSD ..... 269  
8.35. 802.11ac VHT80 CDD 3TX MODE IN THE 5.3 GHz BAND ..... 272  
8.35.1. 26 dB BANDWIDTH ..... 272  
8.35.2. 99% BANDWIDTH ..... 275  
8.35.3. OUTPUT POWER AND PSD ..... 278  
8.36. 802.11ac VHT80 TxBF 3TX MODE IN THE 5.3 GHz BAND ..... 282  
8.36.1. OUTPUT POWER AND PSD ..... 282  
8.37. 802.11a LEGACY MODE IN THE 5.6 GHz BAND ..... 286  
8.37.1. 26 dB BANDWIDTH ..... 286  
8.37.2. 99% BANDWIDTH ..... 289  
8.37.3. OUTPUT POWER AND PSD ..... 292  
8.38. 802.11n HT20 CDD 2TX MODE IN THE 5.6 GHz BAND ..... 296  
8.38.1. OUTPUT POWER AND PSD ..... 296  
8.38.2. AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) ..... 307  
8.39. 802.11n HT20 STBC 2TX MODE IN THE 5.6 GHz BAND ..... 308  
8.39.1. OUTPUT POWER AND PSD ..... 308  
8.40.1. AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) ..... 319  
8.40. 802.11n HT20 TxBF 2TX MODE IN THE 5.6 GHz BAND ..... 320  
8.40.1. OUTPUT POWER AND PSD ..... 320  
8.41. 802.11n HT20 CDD 3TX MODE IN THE 5.6 GHz BAND ..... 325

8.41.1.	26 dB BANDWIDTH .....	325
8.41.2.	99% BANDWIDTH .....	332
8.41.3.	OUTPUT POWER AND PSD .....	339
8.41.4.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) .....	352
8.42.	<i>802.11n HT20 STBC 3TX MODE IN THE 5.6 GHz BAND</i> .....	353
8.42.1.	26 dB BANDWIDTH .....	353
8.42.2.	99% BANDWIDTH .....	360
8.42.3.	OUTPUT POWER AND PSD .....	367
8.42.4.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) .....	380
8.43.	<i>802.11n HT20 TxBF 3TX MODE IN THE 5.6 GHz BAND</i> .....	381
8.43.1.	OUTPUT POWER AND PSD .....	381
8.43.2.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) .....	394
8.44.	<i>802.11n HT40 1TX MODE IN THE 5.6 GHz BAND</i> .....	395
8.44.1.	OUTPUT POWER .....	395
8.45.	<i>802.11n HT40 CDD 2TX MODE IN THE 5.6 GHz BAND</i> .....	397
8.45.1.	OUTPUT POWER AND PSD .....	397
8.45.2.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) .....	408
8.46.	<i>802.11n HT40 TxBF 2TX MODE IN THE 5.6 GHz BAND</i> .....	409
8.46.1.	OUTPUT POWER AND PSD .....	409
8.46.2.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) .....	420
8.47.	<i>802.11n HT40 CDD 3TX MODE IN THE 5.6 GHz BAND</i> .....	421
8.47.1.	26 dB BANDWIDTH .....	421
8.47.2.	99% BANDWIDTH .....	428
8.47.3.	OUTPUT POWER AND PSD .....	435
8.47.4.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) .....	448
8.48.	<i>802.11n HT40 TxBF 3TX MODE IN THE 5.6 GHz BAND</i> .....	449
8.48.1.	OUTPUT POWER AND PSD .....	449
8.48.2.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) .....	462
8.49.	<i>802.11ac VHT80 1TX MODE IN THE 5.6 GHz BAND</i> .....	463
8.49.1.	OUTPUT POWER .....	463
8.50.	<i>802.11n VHT80 CDD 2TX MODE IN THE 5.6 GHz BAND</i> .....	465
8.50.1.	OUTPUT POWER AND PSD .....	465
8.50.2.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) .....	475
8.51.	<i>802.11n VHT80 TxBF 2TX MODE IN THE 5.6 GHz BAND</i> .....	476
8.51.1.	OUTPUT POWER AND PSD .....	476
8.51.2.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) .....	486
8.52.	<i>802.11ac VHT80 CDD 3TX MODE IN THE 5.6 GHz BAND</i> .....	487
8.52.1.	26 dB BANDWIDTH .....	487
8.52.2.	99% BANDWIDTH .....	493
8.52.3.	OUTPUT POWER AND PSD .....	499
8.52.4.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) .....	510
8.53.	<i>802.11ac VHT80 TxBF 3TX MODE IN THE 5.6 GHz BAND</i> .....	511
8.53.1.	OUTPUT POWER AND PSD .....	511
8.53.2.	AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL) .....	522
8.54.	<i>802.11a LEGACY MODE IN THE 5.8 GHz BAND</i> .....	523

8.54.1.	OUTPUT POWER.....	523
8.54.2.	Maximum Power Spectral Density (PSD) .....	525
8.55.	<i>802.11n HT20 CDD 2TX MODE IN THE 5.8 GHz BAND.....</i>	<i>528</i>
8.55.1.	OUTPUT POWER.....	528
8.55.2.	Maximum Power Spectral Density (PSD) .....	530
8.56.	<i>802.11n HT20 STBC 2TX MODE IN THE 5.8 GHz BAND.....</i>	<i>535</i>
8.56.1.	OUTPUT POWER.....	535
8.56.2.	Maximum Power Spectral Density (PSD) .....	537
8.57.	<i>802.11n HT20 TxBF 2TX MODE IN THE 5.8 GHz BAND.....</i>	<i>542</i>
8.57.1.	OUTPUT POWER.....	542
8.57.2.	Maximum Power Spectral Density (PSD) .....	544
8.58.	<i>802.11n HT20 CDD 3TX MODE IN THE 5.8 GHz BAND.....</i>	<i>549</i>
8.58.1.	6 dB BANDWIDTH .....	549
8.58.2.	99% BANDWIDTH .....	555
8.58.3.	OUTPUT POWER.....	561
8.58.4.	Maximum Power Spectral Density (PSD) .....	563
8.59.	<i>802.11n HT20 TxBF 3TX MODE IN THE 5.8 GHz BAND.....</i>	<i>570</i>
8.59.1.	OUTPUT POWER.....	570
8.60.	<i>802.11n HT40 1TX MODE IN THE 5.8 GHz BAND .....</i>	<i>572</i>
8.60.1.	OUTPUT POWER.....	572
8.61.	<i>802.11n HT40 CDD 2TX MODE IN THE 5.8 GHz BAND.....</i>	<i>574</i>
8.61.1.	OUTPUT POWER.....	574
8.61.2.	Maximum Power Spectral Density (PSD) .....	576
8.62.	<i>802.11n HT40 TxBF 2TX MODE IN THE 5.8 GHz BAND.....</i>	<i>580</i>
8.62.1.	OUTPUT POWER.....	580
8.62.2.	Maximum Power Spectral Density (PSD) .....	582
8.63.	<i>802.11n HT40 CDD 3TX MODE IN THE 5.8 GHz BAND.....</i>	<i>586</i>
8.63.1.	6 dB BANDWIDTH .....	586
8.63.2.	99% BANDWIDTH .....	590
8.63.3.	OUTPUT POWER.....	594
8.63.4.	Maximum Power Spectral Density (PSD) .....	596
8.64.	<i>802.11n HT40 TxBF 3TX MODE IN THE 5.8 GHz BAND.....</i>	<i>601</i>
8.64.1.	OUTPUT POWER.....	601
8.64.2.	Maximum Power Spectral Density (PSD) .....	603
8.65.	<i>802.11ac VHT80 1TX MODE IN THE 5.8 GHz BAND .....</i>	<i>608</i>
8.65.1.	OUTPUT POWER.....	608
8.66.	<i>802.11ac VHT80 CDD 2TX MODE IN THE 5.8 GHz BAND.....</i>	<i>610</i>
8.66.1.	OUTPUT POWER.....	610
8.66.2.	Maximum Power Spectral Density (PSD) .....	612
8.67.	<i>802.11ac VHT80 TxBF 2TX MODE IN THE 5.8 GHz BAND.....</i>	<i>616</i>
8.67.1.	OUTPUT POWER.....	616
8.67.2.	Maximum Power Spectral Density (PSD) .....	618
8.68.	<i>802.11ac VHT80 CDD 3TX MODE IN THE 5.8 GHz BAND.....</i>	<i>620</i>
8.68.1.	6 dB BANDWIDTH .....	620

8.68.2.	99% BANDWIDTH .....	623
8.68.3.	OUTPUT POWER.....	626
8.68.4.	Maximum Power Spectral Density (PSD) .....	628
8.69.	802.11ac VHT80 TxBF 3TX MODE IN THE 5.8 GHz BAND.....	632
8.69.1.	OUTPUT POWER.....	632
<b>9.</b>	<b>RADIATED TEST RESULTS.....</b>	<b>638</b>
9.1.	LIMITS AND PROCEDURE.....	638
9.2.	TX ABOVE 1 GHz 802.11a LEGACY MODE IN THE 5.2 GHz BAND.....	639
9.3.	TX ABOVE 1 GHz 802.11n HT20 CDD 2TX MODE IN THE 5.2 GHz BAND.....	641
9.4.	TX ABOVE 1 GHz 802.11n HT20 TxBF 2TX MODE IN THE 5.2 GHz BAND.....	643
9.5.	TX ABOVE 1 GHz 802.11n HT20 CDD 3TX MODE IN THE 5.2 GHz BAND.....	645
9.6.	TX ABOVE 1 GHz 802.11n HT20 TxBF 3TX MODE IN THE 5.2 GHz BAND.....	653
9.7.	TX ABOVE 1 GHz 802.11n HT40 1TX MODE IN THE 5.2 GHz BAND .....	657
9.8.	TX ABOVE 1 GHz 802.11n HT40 CDD 2TX MODE IN THE 5.2 GHz BAND.....	661
9.9.	TX ABOVE 1 GHz 802.11n HT40 TxBF 2TX MODE IN THE 5.2 GHz BAND.....	665
9.10.	TX ABOVE 1 GHz 802.11n HT40 CDD 3TX MODE IN THE 5.2 GHz BAND .....	667
9.11.	TX ABOVE 1 GHz 802.11n HT40 TxBF 3TX MODE IN THE 5.2 GHz BAND .....	673
9.12.	TX ABOVE 1 GHz 802.11ac VHT80 1TX MODE IN THE 5.2 GHz BAND.....	679
9.13.	TX ABOVE 1 GHz 802.11ac VHT80 2TX MODE IN THE 5.2 GHz BAND.....	681
9.14.	TX ABOVE 1 GHz 802.11ac VHT80 TxBF 2TX MODE IN THE 5.2 GHz BAND ....	683
9.15.	TX ABOVE 1 GHz 802.11ac VHT80 CDD 3TX MODE IN THE 5.2 GHz BAND ....	685
9.16.	TX ABOVE 1 GHz 802.11ac VHT80 TxBF 3TX MODE IN THE 5.2 GHz BAND ....	689
9.17.	TX ABOVE 1 GHz 802.11a 1TX MODE IN THE 5.3 GHz BAND .....	693
9.18.	TX ABOVE 1 GHz 802.11n HT20 CDD 2TX MODE IN THE 5.3 GHz BAND.....	697
9.19.	TX ABOVE 1 GHz 802.11n HT20 TxBF 2TX MODE IN THE 5.3 GHz BAND .....	701
9.20.	TX ABOVE 1 GHz 802.11n HT20 CDD 3TX MODE IN THE 5.3 GHz BAND .....	703
9.21.	TX ABOVE 1 GHz 802.11n HT20 TxBF 3TX MODE IN THE 5.3 GHz BAND .....	711
9.22.	TX ABOVE 1 GHz 802.11n HT40 1TX MODE IN THE 5.3 GHz BAND.....	719
9.23.	TX ABOVE 1 GHz 802.11n HT40 CDD 2TX MODE IN THE 5.3 GHz BAND.....	721
9.24.	TX ABOVE 1 GHz 802.11n HT40 TxBF 2TX MODE IN THE 5.3 GHz BAND .....	723
9.25.	TX ABOVE 1 GHz 802.11n HT40 CDD 3TX MODE IN THE 5.3 GHz BAND.....	725
9.26.	TX ABOVE 1 GHz 802.11n HT40 TxBF 3TX MODE IN THE 5.3 GHz BAND .....	731
9.27.	TX ABOVE 1 GHz 802.11ac VHT80 1TX MODE IN THE 5.3 GHz BAND.....	737
9.28.	TX ABOVE 1 GHz 802.11ac VHT80 2TX MODE IN THE 5.3 GHz BAND.....	739
9.29.	TX ABOVE 1 GHz 802.11ac VHT80 TxBF 2TX MODE IN THE 5.3 GHz BAND ....	741



9.30. TX ABOVE 1 GHz 802.11ac VHT80 CDD 3TX MODE IN THE 5.3 GHz BAND .....744

9.31. TX ABOVE 1 GHz 802.11ac VHT80 TxBF 3TX MODE IN THE 5.3 GHz BAND ....748

9.32. TX ABOVE 1 GHz 802.11a 1TX MODE IN THE 5.6 GHz BAND .....752

9.33. TX ABOVE 1 GHz 802.11n HT20 CDD 2TX MODE IN THE 5.6 GHz BAND .....756

9.34. TX ABOVE 1 GHz 802.11n HT20 TxBF 2TX MODE IN THE 5.6 GHz BAND .....760

9.35. TX ABOVE 1 GHz 802.11n HT20 CDD 3TX MODE IN THE 5.6 GHz BAND .....764

9.36. TX ABOVE 1 GHz 802.11n HT20 TxBF 3TX MODE IN THE 5.6 GHz BAND .....774

9.37. TX ABOVE 1 GHz 802.11n HT20 3TX CDD MODE CHANNEL 144.....784

9.38. TX ABOVE 1 GHz 802.11n HT20 TxBF 3TX MODE CHANNEL 144 .....786

9.39. TX ABOVE 1 GHz 802.11n HT40 1TX MODE IN THE 5.6 GHz BAND.....788

9.40. TX ABOVE 1 GHz 802.11n HT40 CDD 2TX MODE IN THE 5.6 GHz BAND .....792

9.41. TX ABOVE 1 GHz 802.11n HT40 TxBF 2TX MODE IN THE 5.6 GHz BAND .....796

9.42. TX ABOVE 1 GHz 802.11n HT40 CDD 3TX MODE IN THE 5.6 GHz BAND .....800

9.43. TX ABOVE 1 GHz 802.11n HT40 TxBF 3TX MODE IN THE 5.6 GHz BAND .....810

9.44. TX ABOVE 1 GHz 802.11n HT40 3Tx CDD MODE CHANNEL 142 .....820

9.45. TX ABOVE 1 GHz 802.11n HT40 TxBF 3TX MODE CHANNEL 142.....822

9.46. TX ABOVE 1 GHz 802.11ac VHT80 1TX MODE IN THE 5.6 GHz BAND.....824

9.47. TX ABOVE 1 GHz 802.11ac VHT80 CDD 2TX MODE IN THE 5.6 GHz BAND .....828

9.48. TX ABOVE 1 GHz 802.11ac VHT80 TxBF 2TX MODE IN THE 5.6 GHz BAND ....832

9.49. TX ABOVE 1 GHz 802.11ac VHT80 CDD 3TX MODE IN THE 5.6 GHz BAND .....836

9.50. TX ABOVE 1 GHz 802.11ac VHT80 TxBF 3TX MODE IN THE 5.6 GHz BAND ....844

9.52. TX ABOVE 1 GHz 802.11ac VHT80 3TX CDD MODE CHANNEL 138 .....852

9.53. TX ABOVE 1 GHz 802.11ac VHT80 TxBF 3TX MODE CHANNEL 138.....854

9.54. TX ABOVE 1 GHz 802.11a 1Tx MODE IN THE 5.8 GHz BAND.....856

9.55. TX ABOVE 1 GHz 802.11n HT20 CDD 2TX MODE IN THE 5.8 GHz BAND .....860

9.56. TX ABOVE 1 GHz 802.11n HT20 TxBF 2TX MODE IN THE 5.8 GHz BAND .....864

9.57. TX ABOVE 1 GHz 802.11n HT20 CDD 3TX MODE IN THE 5.8 GHz BAND .....868

9.58. TX ABOVE 1 GHz 802.11n HT20 TxBF 3TX MODE IN THE 5.8 GHz BAND .....880

9.59. TX ABOVE 1 GHz 802.11n HT40 1TX MODE IN THE 5.8 GHz BAND.....890

9.60. TX ABOVE 1 GHz 802.11n HT40 CDD 2TX MODE IN THE 5.8 GHz BAND .....894

9.61. TX ABOVE 1 GHz 802.11n HT40 TxBF 2TX MODE IN THE 5.8 GHz BAND .....898

9.62. TX ABOVE 1 GHz 802.11n HT40 CDD 3TX MODE IN THE 5.8 GHz BAND .....902

9.63. TX ABOVE 1 GHz 802.11n HT40 TxBF 3TX MODE IN THE 5.8 GHz BAND .....910

9.64. TX ABOVE 1 GHz 802.11ac VHT80 1TX MODE IN THE 5.8 GHz BAND.....918

9.65. TX ABOVE 1 GHz 802.11ac HT80 CDD 2TX MODE IN THE 5.8 GHz BAND .....922

---

9.66.	TX ABOVE 1 GHz 802.11ac HT80 TxBF 2TX MODE IN THE 5.8 GHz BAND .....	926
9.67.	TX ABOVE 1 GHz 802.11ac VHT80 CDD 3TX MODE IN THE 5.8 GHz BAND .....	930
9.68.	TX ABOVE 1 GHz 802.11ac VHT80 TxBF 3TX MODE IN THE 5.8 GHz BAND ....	936
9.69.	WORST-CASE ABOVE 18 GHz.....	942
9.70.	WORST-CASE BELOW 1 GHz .....	944
<b>10.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>945</b>
<b>11.</b>	<b>SETUP PHOTOS .....</b>	<b>950</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** BROADCOM CORPORATION  
190 MATHILDA PLACE  
SUNNYVALE, CA 94086, U.S.A.

**EUT DESCRIPTION:** 802.11b/g/n/a/ac 3X3 WLAN + Bluetooth PCI-E Custom  
Combination Card

**MODEL:** BCM943602CDP

**SERIAL NUMBER:** Conducted: FC84522014DGCY310  
Radiated: FC84522012PGCY31W

**DATE TESTED:** MARCH 5 - MAY 14, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

*Huda Mustapha*

HUDA MUSTAPHA  
PROJECT LEAD  
UL Verification Services Inc.



FRANK IBRAHIM  
PROGRAM MANAGER  
UL Verification Services Inc.

Tested By:



Jeffrey Wu  
EMC ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, FCC KDB 789033 D02 v01, ANSI C63.10-2009.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F
	<input type="checkbox"/> Chamber G
	<input type="checkbox"/> Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	$\pm 3.52$ dB
Radiated Disturbance, 30 to 1000 MHz	$\pm 4.94$ dB
Radiated Disturbance, 1 to 6 GHz	$\pm 3.86$ dB
Radiated Disturbance, 6 to 18 GHz	$\pm 4.23$ dB
Radiated Disturbance, 18 to 26 GHz	$\pm 5.30$ dB
Radiated Disturbance, 26 to 40 GHz	$\pm 5.23$ dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1.DESCRPTION OF EUT

The EUT is an 802.11b/g/n/a/ac 3X3 WLAN + Bluetooth PCI-E Custom Combination Card.

The radio module is manufactured by Broadcom.

### 5.2.MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

#### 5.2 GHz BAND

Frequency Range (MHz)	Mode	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Power, Chain 2 (dBm)	Output Power (dBm)	Output Power (mW)
<b>5.2 GHz band, 1TX</b>						
5180 - 5240	802.11a Legacy	18.00	N/A	N/A	18.00	63.10
5190 - 5230	802.11n HT40	N/A	18.00	N/A	18.00	63.10
5210	802.11ac VHT80	9.90	N/A	N/A	9.90	9.77
<b>5.2 GHz band, 2TX</b>						
5180 - 5240	802.11n HT20 CDD	15.30	15.10	N/A	18.21	66.24
5180 - 5240	802.11n HT20 STBC	17.10	17.20	N/A	20.16	103.77
5180 - 5240	802.11n HT20 TxBF	15.30	15.10	N/A	18.21	66.24
5190 - 5230	802.11n HT40 CDD	17.55	17.60	N/A	20.59	114.43
5190 - 5230	802.11n HT40 TxBF	17.55	17.60	N/A	20.59	114.43
5210	802.11ac VHT CDD	8.60	8.30	N/A	11.46	14.01
5210	802.11ac VHT80 TxBF	7.90	7.30	N/A	10.62	11.54
<b>5.2 GHz band, 3TX</b>						
5180 - 5240	802.11n HT20 CDD	12.40	12.40	11.70	16.95	49.547
5180 - 5240	802.11n HT20 STBC	17.00	17.00	16.30	21.55	142.895
5180 - 5240	802.11n HT20 TxBF	12.40	12.40	11.70	16.95	49.547
5190 - 5230	802.11n HT40 CDD	15.40	15.70	15.00	20.15	103.450
5190 - 5230	802.11n HT40 TxBF	14.30	14.90	14.10	19.22	83.522
5210	802.11ac VHT80 CDD	8.70	8.50	7.80	13.12	20.518
5210	802.11ac VHT80 TxBF	6.60	6.50	5.90	11.12	12.928

**5.3 GHz BAND**

Frequency Range (MHz)	Mode	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Power, Chain 2 (dBm)	Output Power (dBm)	Output Power (mW)
<b>5.3 GHz band, 1TX</b>						
5260 - 5320	802.11a Legacy	18.00	N/A	N/A	18.00	63.10
5270 - 5310	802.11n HT40	N/A	18.00	N/A	18.00	63.10
5290	802.11ac VHT80	14.80	N/A	N/A	14.80	30.20
<b>5.3 GHz band, 2TX</b>						
5260 - 5320	802.11n HT20 CDD	15.20	15.00	N/A	18.11	64.74
5260 - 5320	802.11n HT20 STBC	18.20	18.00	N/A	21.11	129.17
5260 - 5320	802.11n HT20 TxBF	15.20	15.00	N/A	18.11	64.74
5270 - 5310	802.11n HT40 CDD	18.12	18.00	N/A	21.07	127.96
5270 - 5310	802.11n HT40 TxBF	17.90	18.00	N/A	20.96	124.76
5290	802.11ac VHT80 CDD	8.70	8.40	N/A	11.56	14.33
5290	802.11ac VHT80 TxBF	7.80	7.50	N/A	10.66	11.65
<b>5.3 GHz band, 3TX</b>						
5260 - 5320	802.11n HT20 CDD	12.90	12.80	12.40	17.48	55.93
5260 - 5320	802.11n HT20 STBC	16.70	16.80	15.90	21.26	133.54
5260 - 5320	802.11n HT20 TxBF	12.90	12.80	12.40	17.48	55.93
5270 - 5310	802.11n HT40 CDD	15.30	15.70	14.80	20.05	101.24
5270 - 5310	802.11n HT40 TxBF	15.00	14.90	14.10	19.46	88.23
5290	802.11ac VHT80 CDD	8.50	8.30	7.60	12.92	19.59
5290	802.11ac VHT80 TxBF	7.00	6.80	6.10	11.42	13.87

5.6 GHz BAND

Frequency Range (MHz)	Mode	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Power, Chain 2 (dBm)	Output Power (dBm)	Output Power (mW)
<b>5.6 GHz band, 1TX</b>						
5500-5700	802.11a Legacy	18.00	N/A	N/A	18.00	63.10
5510-5670	802.11n HT40	N/A	18.00	N/A	18.00	63.10
5530-5610	802.11ac VHT80	17.50	N/A	N/A	17.50	56.23
<b>5.6 GHz band, 2TX</b>						
5500-5700	802.11n HT20 CDD	15.90	16.00	N/A	18.96	78.72
5500-5700	802.11n HT20 STBC	17.30	17.81	N/A	20.57	114.10
5500-5700	802.11n HT20 TxBF	15.90	16.00	N/A	18.96	78.72
5510-5670	802.11n HT40 CDD	17.98	17.65	N/A	20.83	121.02
5510-5670	802.11n HT40 TxBF	17.98	17.65	N/A	20.83	121.02
5530-5610	802.11ac VHT80 CDD	16.10	16.10	N/A	19.11	81.48
5530-5610	802.11ac VHT80 TxBF	14.80	14.20	N/A	17.52	56.50
<b>5.6 GHz band, 3TX</b>						
5500-5700	802.11n HT20 CDD	12.80	13.40	12.80	17.78	59.99
5500-5700	802.11n HT20 STBC	16.20	16.60	16.10	21.08	128.13
5500-5700	802.11n HT20 TxBF	12.80	13.40	12.80	17.78	59.99
5510-5670	802.11n HT40 CDD	16.20	16.30	16.10	20.97	125.08
5510-5670	802.11n HT40 TxBF	15.00	14.80	14.80	19.64	92.02
5530-5610	802.11ac VHT80 CDD	16.00	15.40	15.90	20.55	113.39
5530-5610	802.11n AC80 TxBF	14.00	13.90	14.00	18.74	74.78



**5.8 GHz BAND**

Frequency Range (MHz)	Mode	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Power, Chain 2 (dBm)	Output Power (dBm)	Output Power (mW)
<b>5.8 GHz band, 1TX</b>						
5745-5825	802.11a Legacy	18.00	N/A	N/A	18.00	63.10
5755-5795	802.11n HT40	N/A	16.60	N/A	16.60	45.71
5775	802.11ac VHT80	9.10	N/A	N/A	9.10	8.13
<b>5.8 GHz band, 2TX</b>						
5745-5825	802.11n HT20 CDD	17.52	17.58	N/A	20.56	113.77
5745-5825	802.11n HT20 STBC	17.45	17.60	N/A	20.54	113.13
5745-5825	802.11n HT20 TxBF	17.52	17.58	N/A	20.56	113.77
5755-5795	802.11n HT40 CDD	15.60	15.10	N/A	18.37	68.67
5755-5795	802.11n HT40 TxBF	15.30	15.10	N/A	18.21	66.24
5775	802.11ac VHT80 CDD	7.90	7.70	N/A	10.81	12.05
5775	802.11ac VHT80 TxBF	7.50	7.50	N/A	10.51	11.25
<b>5.8 GHz band, 3TX</b>						
5745-5825	802.11n HT20 CDD	18.60	18.48	17.85	23.09	203.87
5745-5825	802.11n HT20 TxBF	18.60	18.48	17.85	23.09	203.87
5755-5795	802.11n HT40 CDD	16.30	16.10	15.80	20.84	121.41
5755-5795	802.11n HT40 TxBF	15.70	15.70	15.60	20.44	110.61
5775	802.11ac VHT80 CDD	7.20	6.90	6.90	11.77	15.04
5775	802.11ac VHT80 TxBF	7.50	7.50	7.20	12.17	16.49

**STRADDLE CHANNELS**

Frequency Range (MHz)	Mode	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Power, Chain 2 (dBm)	Output Power (dBm)	Output Power (mW)
<b>5.6 GHz band, 2TX (Channels overlapping UNII-2C and UNII-3)</b>						
5720 (Whole signal)	802.11n HT20 CDD	17.90	17.50	N/A	20.71	117.89
5720 (Whole signal)	802.11n HT20 STBC	18.15	17.60	N/A	20.89	122.86
5710 (Whole signal)	802.11n HT40 CDD	18.10	17.70	N/A	20.91	123.45
5710 (Whole signal)	802.11n HT40 TxBF	18.10	17.70	N/A	20.91	123.45
5690 (Whole signal)	802.11ac VHT80 CDD	18.55	17.60	N/A	21.11	129.16
5690 (Whole signal)	802.11ac VHT80 TxBF	18.55	17.45	N/A	21.05	127.20
<b>5.6 GHz band, 3TX (Channels overlapping UNII-2C and UNII-3)</b>						
5720 (Whole signal)	802.11n HT20 CDD	12.90	13.00	12.80	17.67	58.51
5720 (Whole signal)	802.11n HT20 STBC	15.60	15.80	15.50	20.41	109.81
5720 (Whole signal)	802.11n HT20 TxBF	13.20	13.25	13.30	18.02	63.41
5710 (Whole signal)	802.11n HT40 CDD	15.70	15.70	15.60	20.44	110.61
5710 (Whole signal)	802.11n HT40 TxBF	15.30	15.30	14.90	19.94	98.67
5690 (Whole signal)	802.11ac VHT80 CDD	18.00	17.90	18.00	22.74	187.85
5690 (Whole signal)	802.11ac VHT80 TxBF	14.90	14.80	15.00	19.67	92.73

**List of test reduction (Non Beam-Forming modes)**

<b>Antenna Port Testing</b>		
<b>Band</b>	<b>Mode</b>	<b>Covered by</b>
5 GHz bands	802.11a Legacy 1TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11a CDD 2TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11a CDD 3TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11n HT20 CDD/SDM/STBC 2TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11n HT40 1TX	802.11n HT40 CDD 3TX
5 GHz bands	802.11n HT40 CDD/SDM/STBC 2TX	802.11n HT40 CDD 3TX
5 GHz bands	802.11n HT40 STBC 3TX	802.11n HT40 CDD 3TX
5 GHz bands	802.11ac VHT80 1TX	802.11ac VHT80 CDD 3TX
5 GHz bands	802.11ac VHT80 CDD/SDM/STBC 2TX	802.11ac VHT80 CDD 3TX
5 GHz bands	802.11ac VHT80 STBC 3TX	802.11ac VHT80 CDD 3TX

<b>Radiated Testing</b>		
<b>Band</b>	<b>Mode</b>	<b>Covered by</b>
5 GHz bands	802.11a Legacy 1TX (Harmonics)	802.11n HT20 CDD 3TX (Harmonics)
5 GHz bands	802.11a CDD 2TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11a CDD 3TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11n HT20 CDD/SDM/STBC 2TX	802.11n HT20 CDD 3TX
5 GHz bands	802.11n HT40 1TX (Harmonics)	802.11n HT40 CDD 3TX (Harmonics)
5 GHz bands	802.11n HT40 STBC 3TX	802.11n HT40 CDD 3TX
5 GHz bands	802.11ac VHT80 1TX (Harmonics)	802.11ac VHT80 CDD 3TX (Harmonics)
5 GHz bands	802.11ac VHT80 CDD/SDM/STBC 2TX	802.11ac VHT80 CDD 3TX
5 GHz bands	802.11ac VHT80 STBC 3TX	802.11ac VHT80 CDD 3TX

**List of test reduction (Beam-Forming modes)**

<b>Antenna Port Testing</b>		
<b>Band</b>	<b>Mode</b>	<b>Covered by</b>
5 GHz bands	802.11n HT40 BF 2Tx	802.11n HT40 BF 3Tx
5 GHz bands	802.11ac VHT80 BF 2Tx	802.11ac VHT80 BF 3Tx

<b>Radiated Testing</b>		
<b>Band</b>	<b>Mode</b>	<b>Covered by</b>
5 GHz bands	802.11a BF 2TX	802.11n HT20 BF 3Tx
5 GHz bands	802.11a BF 3TX	802.11n HT20 BF 3Tx
5 GHz bands	802.11n HT20 BF 2Tx	802.11n HT20 BF 3Tx
5 GHz bands	802.11n HT40 BF 2Tx	802.11n HT40 BF 3Tx
5 GHz bands	802.11ac VHT80 BF 2Tx	802.11ac VHT80 BF 3Tx

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The EUT utilizes the following antennas:

First Set (host 1 and 2)

Antenna Manufacturer	Antenna Type	Model	Peak Gain (5150-5250MHz) @5200MHz	Peak Gain (5250-5350MHz) @5320MHz	Peak Gain (5470-5725MHz) @5500, 5700MHz	Peak gain (5725-5850MHz) @5785, 5805MHz
Amphenol/Molex	802.11abgn WLAN Antenna	604-03492 /04563/04564, WF2	4.83	4.52	4.72	4.86
Amphenol/Molex	802.11abgn WLAN Antenna	604-03493, WF3	2.84	3.21	2.09	1.95
Amphenol/Molex	802.11abgn WLAN Antenna	604-03490, WF4	1.18	1.48	2.85	3.09

Second Set (host 3)

Antenna Manufacturer	Antenna Type	Model	Peak Gain (5150-5250MHz) @5200MHz	Peak Gain (5250-5350MHz) @5320MHz	Peak Gain (5470-5725MHz) @5500, 5700MHz	Peak gain (5725-5850MHz) @5785, 5805MHz
Amphenol/Molex	802.11abgn WLAN Antenna	604-04672/04678, WF2	4.15	3.91	4.56	4.42
Amphenol/Molex	802.11abgn WLAN Antenna	604-03424, WF3	3.19	2.55	1.88	0.42
Amphenol/Molex	802.11abgn WLAN Antenna	604-03425, WF4	3.08	3.48	3.17	2.68

For antenna port testing, the following antenna gains were used as worst-case representative of both sets shown above:

Antenna Type	Peak gain (5150-5250MHz)	Peak gain (5250-5350MHz)	Peak gain (5470-5725MHz)	Peak gain (5725-5805MHz)
802.11abgn WLAN Antenna (WF2)	4.83	4.52	4.72	4.86
802.11abgn WLAN Antenna (WF3)	3.19	3.21	2.09	1.95
802.11abgn WLAN/BT Antenna (WF4)	3.08	3.48	3.17	3.09

Both first and second sets of antennas are of the same type. For radiated testing, the first set was used for 5 GHz bands because first set had the highest individual AG.

### 5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was Broadcom, rev. 7.15.163.2.

The test utility software used during testing was Broadcom, rev. 7.15RC163.2 (r518356 WLTEST).

## 5.5. WORST-CASE CONFIGURATION AND MODE

The EUT was tested as an external module installed in a test jig board connected to a host Laptop PC.

The EUT can only be setup in desktop orientation, therefore all radiated testing was performed with the EUT in desktop orientation.

Radiated emission below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Preliminary radiated testing investigation showed that the worst case chains and antenna connections were as follows:

### For SISO modes:


- 5 GHz band (11a/HT20/VHT80): chain 0 (connector J1) connected to antenna with highest gain (WF2).
- 5 GHz band (HT40): chain 1 (connector J2) connected to antenna with highest gain (WF2).

### For 2 TX modes:

- 5.2 and 5.3 GHz band: chain 0 (connector J1) connected to antenna with highest gain (WF2) and chain 1 (connector J2) connected to antenna with second highest gain (WF3).
- 5.6 and 5.8 GHz band: chain 0 (connector J1) connected to antenna with highest gain (WF2) and chain 1 (connector J2) connected to antenna with second highest gain (WF4).

### The 3TX antenna mapping to chains was as follows:

1/ RADIATED (Laptop & Sample)

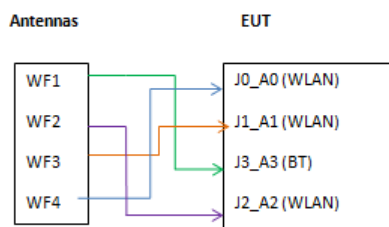

Worst-case data rates as provided by the client were:

- 802.11b mode: 1 Mbps
- 802.11g mode: 6 Mbps
- 802.11a mode: 6 Mbps
- 802.11n HT20 mode: MCS0
- 802.11n HT40 mode: MCS0
- 802.11ac VHT80 mode: MCS0

Based on client's input, there is no collocation among different radios.

## 5.6.DESCRPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	Lenovo G560	CBU3474487	N/A
AC / DC Adapter	Lenovo	PA-1650-56LC	N/A	N/A
Laptop	DELL	Latitude E6400	7WCBYH1	N/A
AC / DC Adapter	DELL	DA90PM111	N/A	N/A
Catalyst PCIe. Board	Enterprises Inc.	NA	NA	DoC


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US115V	Unshielded	1	
2	DC	1	19.5 Vdc	Unshielded	1.5	Ferrite on Laptop end

### TEST SETUP

The EUT was connected to a host laptop via PCIE card. Test software exercised the EUT.

**SETUP DIAGRAM FOR TESTS**

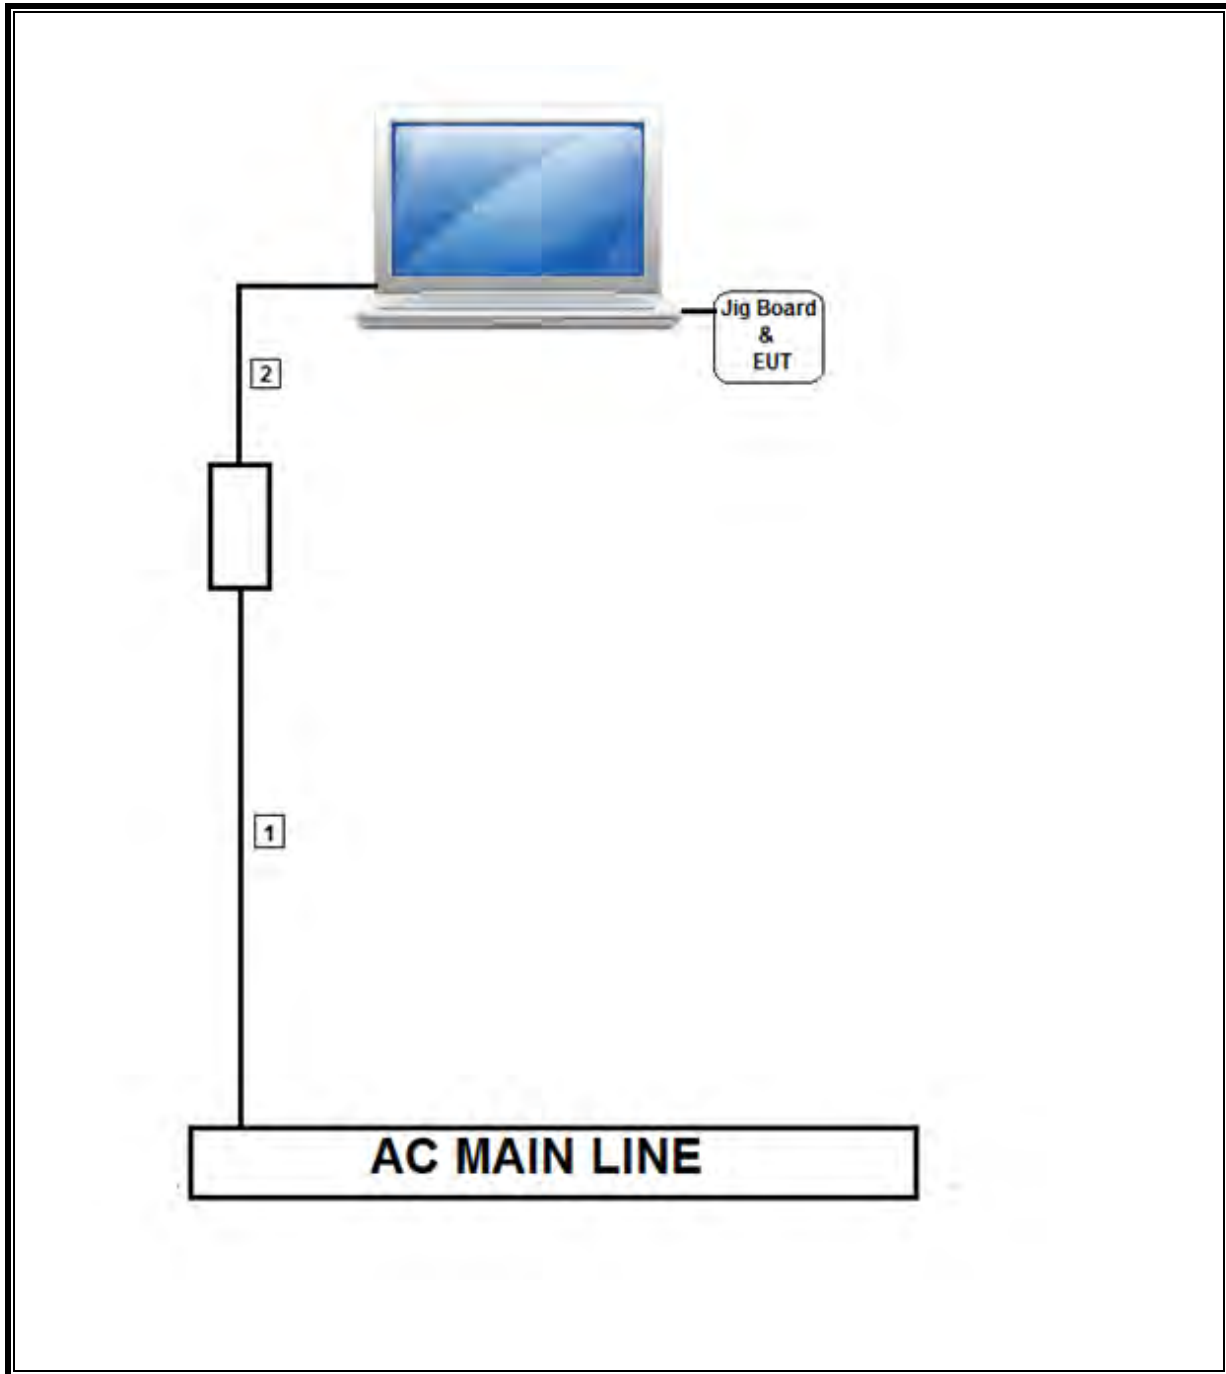



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	T No.	Cal Date	Cal Due
Radiated Software	UL	UL EMC	Ver 9.5, July 22, 2014		
Line Conducted Software	UL	UL EMC	Ver 9.5, May 17, 2012		
Bilog Antenna 30-1000MHz	Sunol	JB1	130	09/10/14	09/10/15
Horn Antenna 1-18GHz	ETS	3117	136	01/15/15	01/15/16
Horn Antenna 1-18GHz	ETS	3117	345	03/03/15	03/03/16
Horn Antenna 18-26GHz	ARA	SWH-28	125	05/09/14	05/09/15
Horn Antenna 26.5- 40GHz	ARA	MWH-2640/B	446	05/09/14	05/09/15
Preamp 10kHz-1000MHz	Sonoma	310	300	11/01/14	11/01/15
Preamp 1-8GHz	Miteq	AMF-4D-01000800-30-29P	782	11/18/14	11/18/15
Preamp 1-18GHz	Miteq	AFS42-00101800-25-2-42	492	08/09/14	08/09/15
Preamp 1-26.5GHz	Agilent	8449B	404	04/13/15	04/13/16
Amplifier, 26-40GHz	Miteq	NSP4000-SP2	88	04/07/15	04/07/16
Spectrum Analyzer 3kHz - 44GHz	Agilent	N9030A	908	09/05/14	09/05/15
Spectrum Analyzer 9kHz - 40GHz	HP	8564E	106	08/06/14	08/06/15
Coaxial Switchbox	Agilent	SP6T	927	09/15/14	09/15/15
3GHz HPF	Micro-Tronics	HPM17543	487	01/31/15	01/31/16
EMI Test Receiver	Rohde & Schwarz	ECSI 7	284	09/16/14	09/16/15
Spectrum Analzer 3Hz to 44GHz	Agilent	E4440A	123	10/28/14	10/28/15
Power Meter	Agilent	N1911A	377	06/30/14	06/30/15
LISN for Conducted Emission	FCC	50/250-25-2	24	01/16/15	01/16/16
Power Sensor	Agilent	E9323A	399	05/02/14	05/02/15

---

## 7. MEASUREMENT METHODS

On Time and Duty Cycle: KDB 789033 D02 v01, Section B.

26 dB Emission BW: KDB 789033 D02 v01, Section C.

99% Occupied BW: KDB 789033 D02 v01, Section D.

Conducted Output Power: KDB 789033 D02 v01, Section E.3.b (Method PM-G), and KDB 662911 D01 v02r01.

Power Spectral Density: KDB 789033 D02 v01, Section F, and KDB 662911 D01 v02r01.

Unwanted emissions in restricted bands: KDB 789033 D02 v01, Sections G.2, G.3, G.4, G.5, and G.6.

Unwanted emissions in non-restricted bands: KDB 789033 D02 v01, Sections G.2, G.3, G.4, and G.5.

AC Power Line Conducted Emissions: ANSI C63.10-2009, Section 6.2.

## 8. ANTENNA PORT TEST RESULTS

### 8.1.ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only.



#### ON TIME AND DUTY CYCLE RESULTS



Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
<b>5GHz Band</b>						
802.11a 1TX	2.063	2.082	0.991	99.09%	0.00	0.010
802.11n HT20 CDD 3TX	1.923	1.938	0.992	99.23%	0.00	0.010
802.11n HT20 STBC 3TX	1.928	1.947	0.990	99.02%	0.00	0.010
802.11n HT20 BF 3TX	23.720	26.720	0.888	88.77%	0.52	0.042
802.11n HT40 CDD 3TX	0.9433	0.9633	0.9792	97.92%	0.09	1.060
802.11n HT40 TxBF 3TX	5.730	6.675	0.858	85.84%	0.66	0.175
802.11ac VHT80 CDD 3TX	0.4607	0.4807	0.9584	95.84%	0.18	2.171
802.11ac VHT80 BF 3TX	2.800	3.817	0.733	73.35%	1.35	0.357



#### Note:



The duty cycle correction factors of CDD modes were used for antenna port beam-forming testing, however, the duty cycle correction factors of beam-forming modes were used for radiated emissions of beam-forming modes.



### 8.2.DUTY CYCLE PLOTS

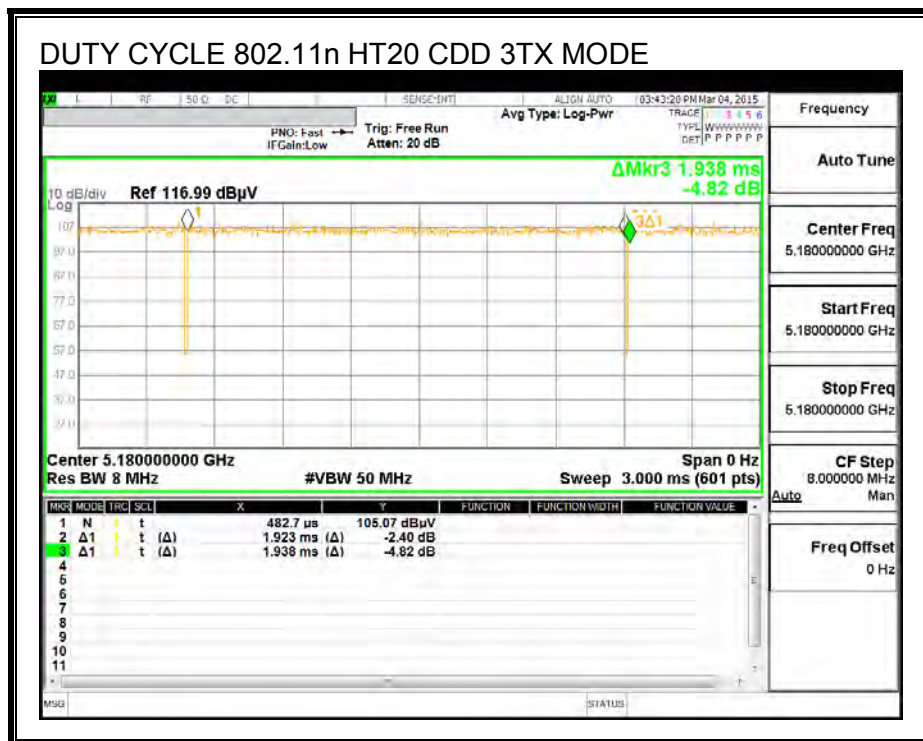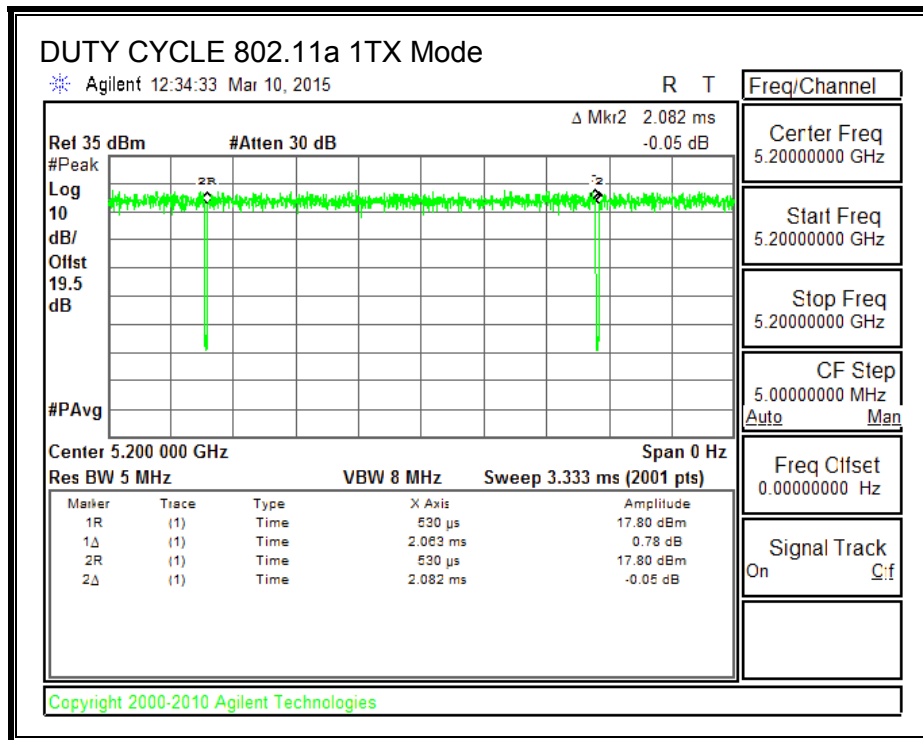

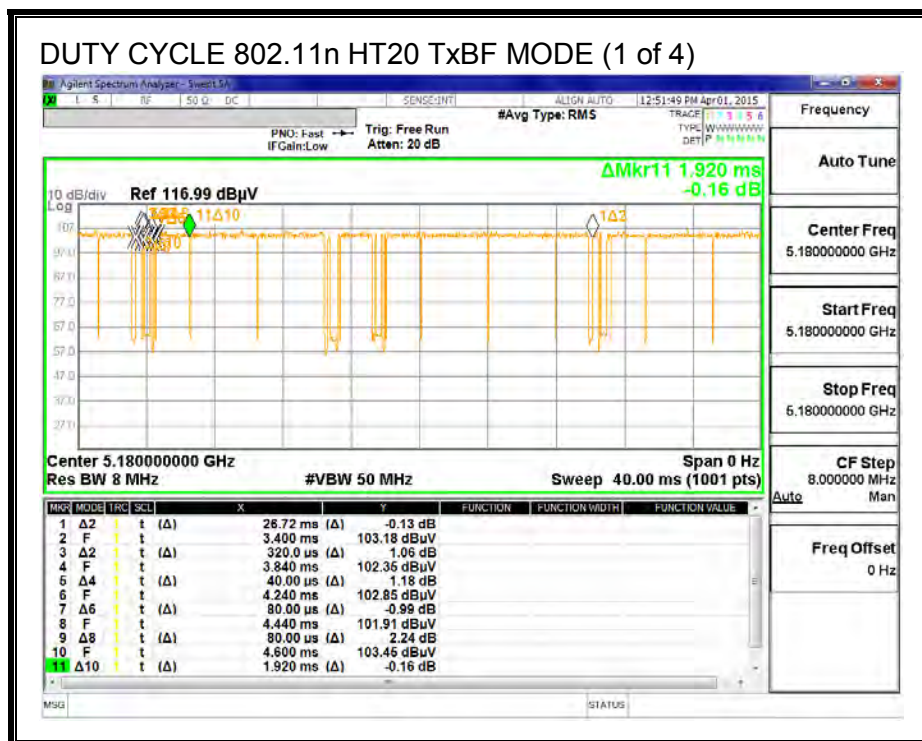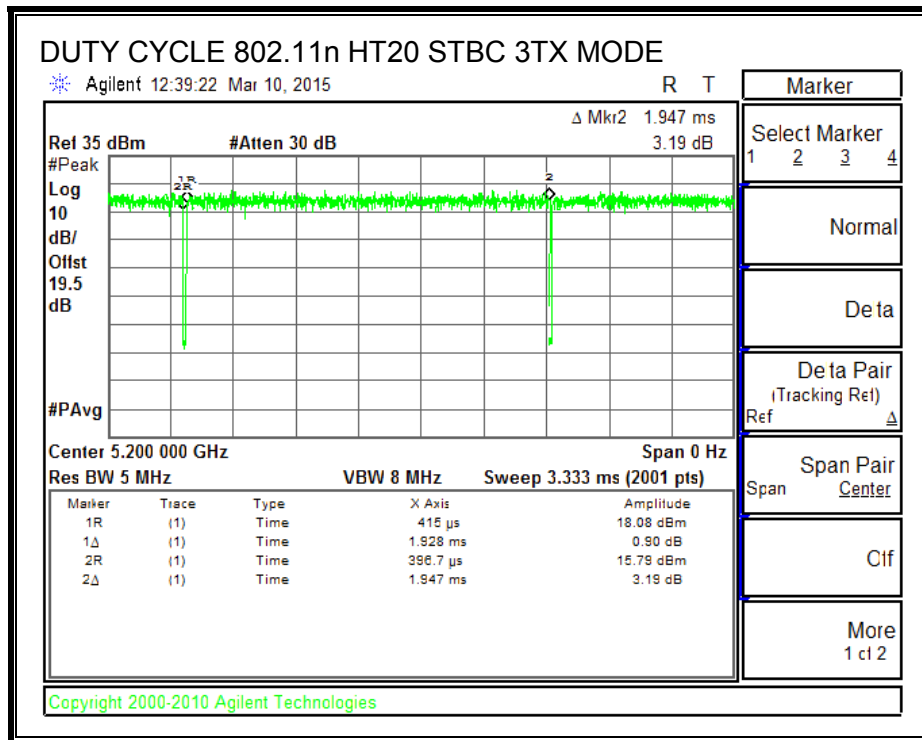


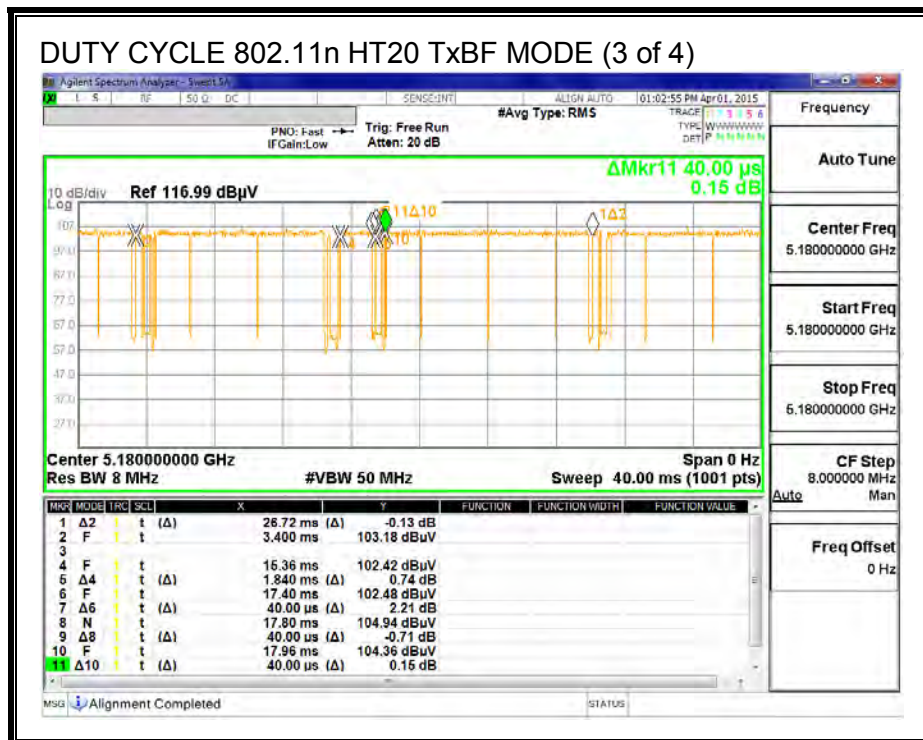
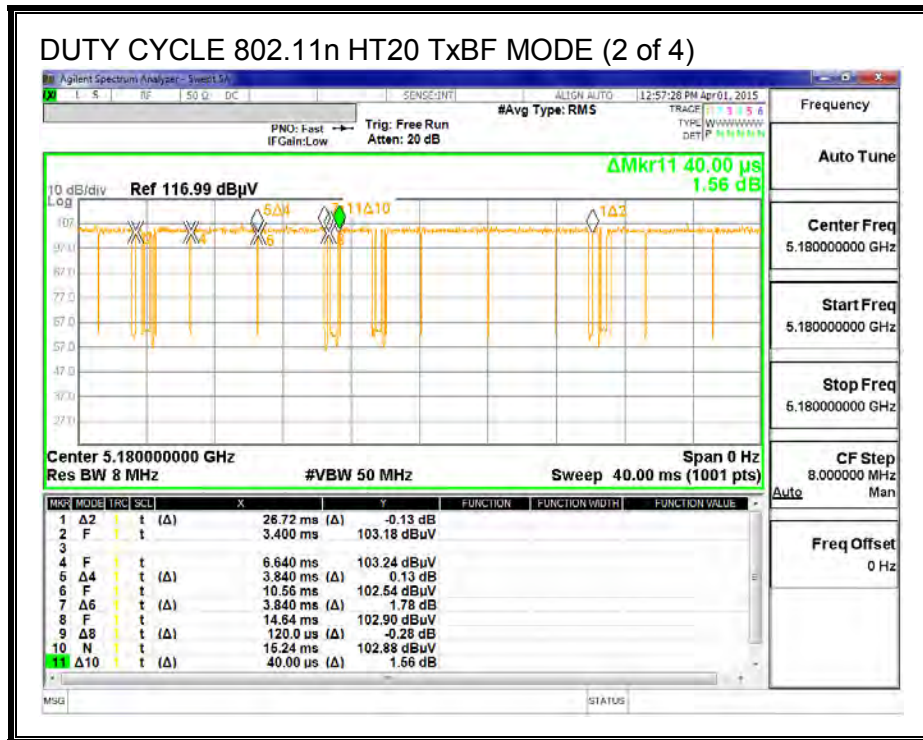


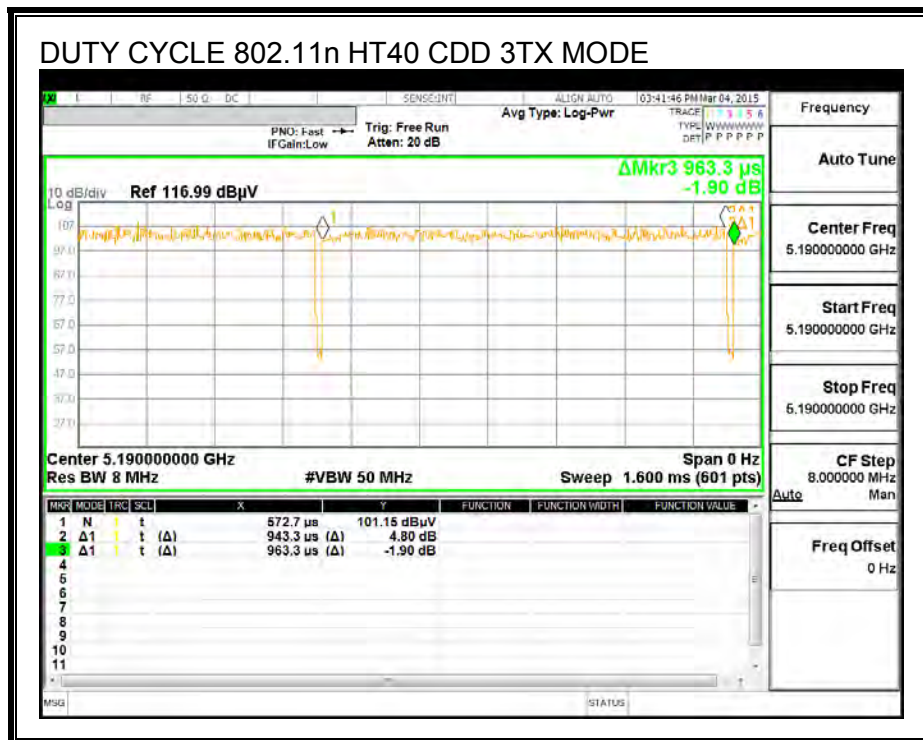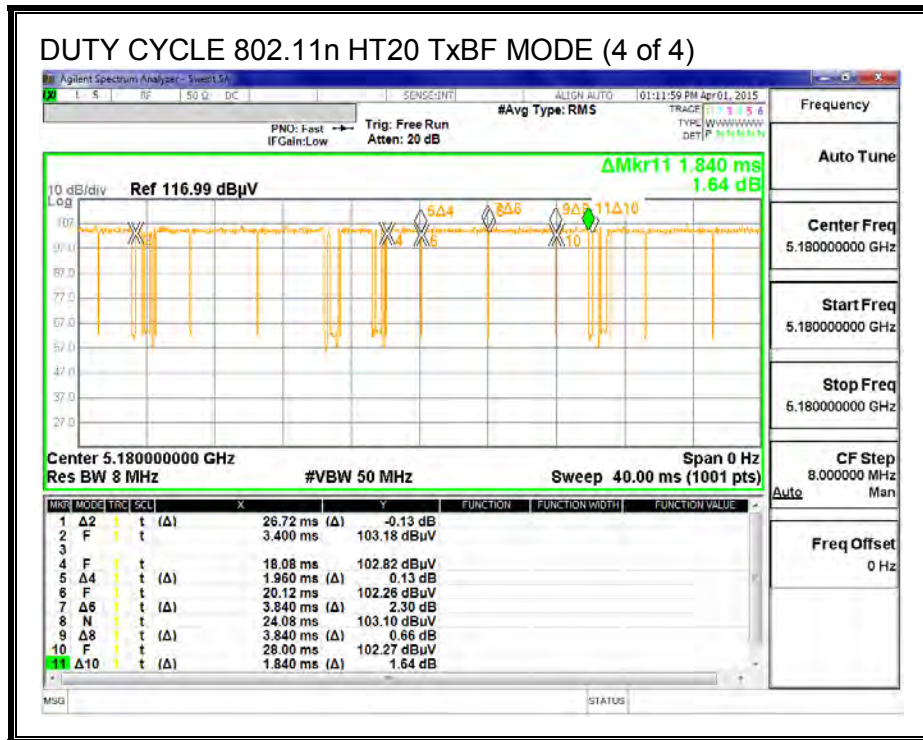

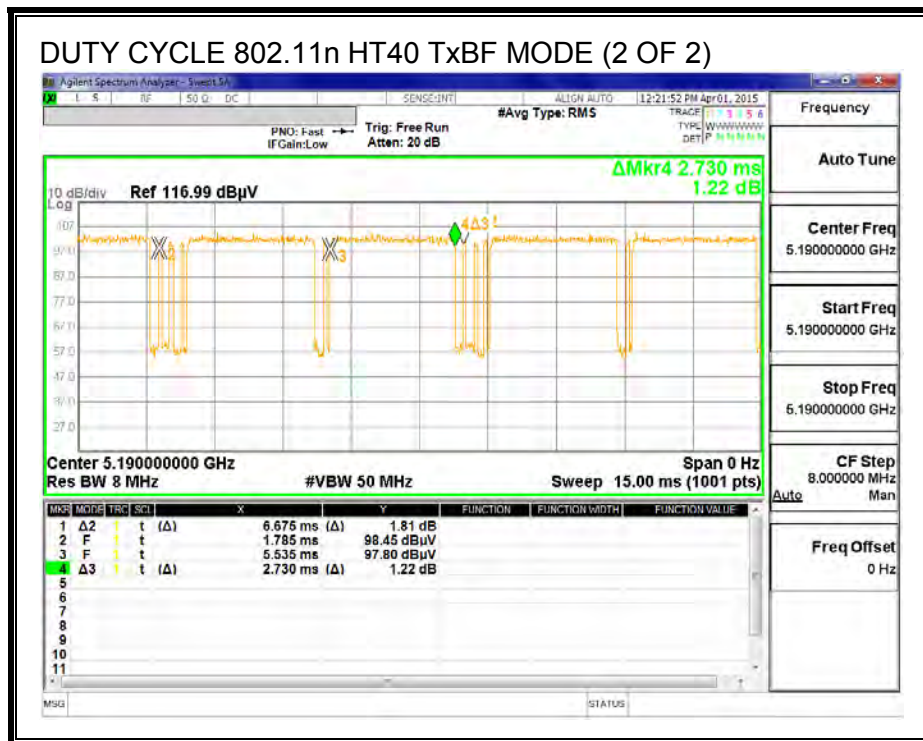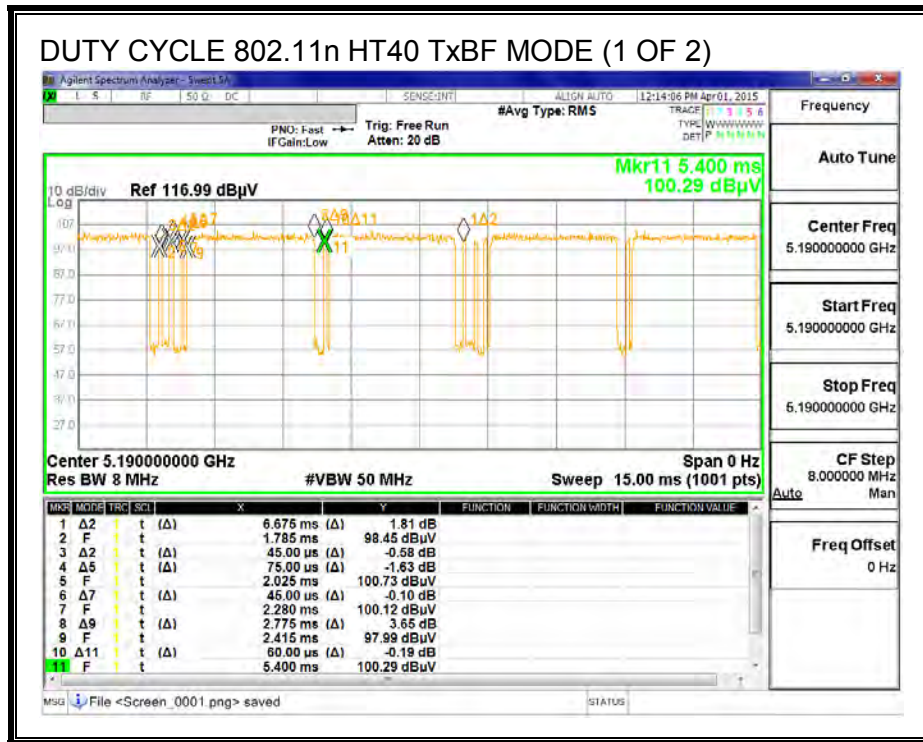



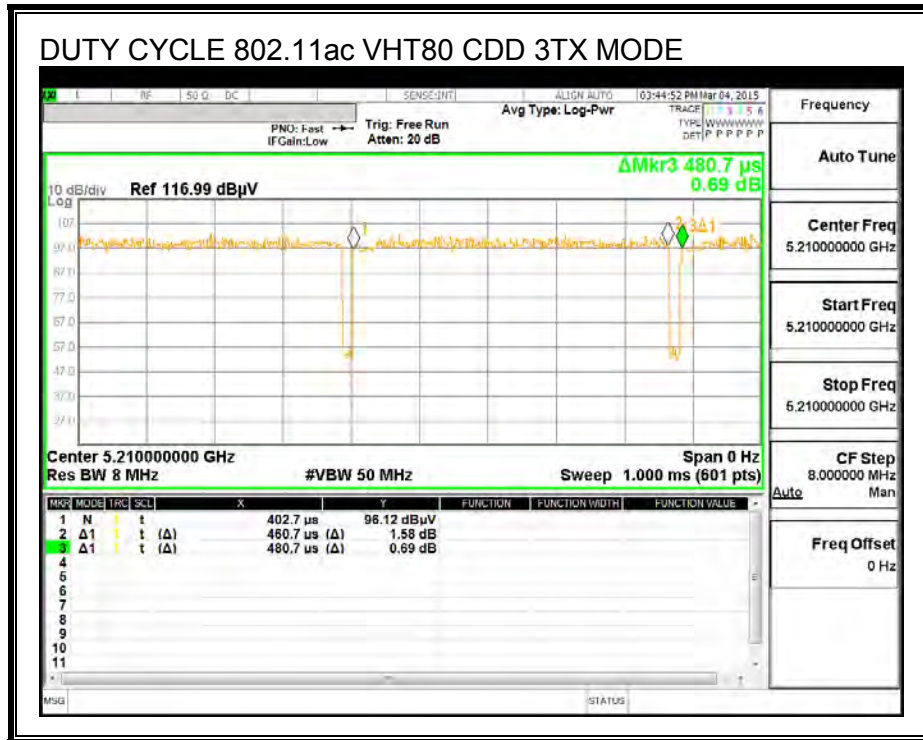

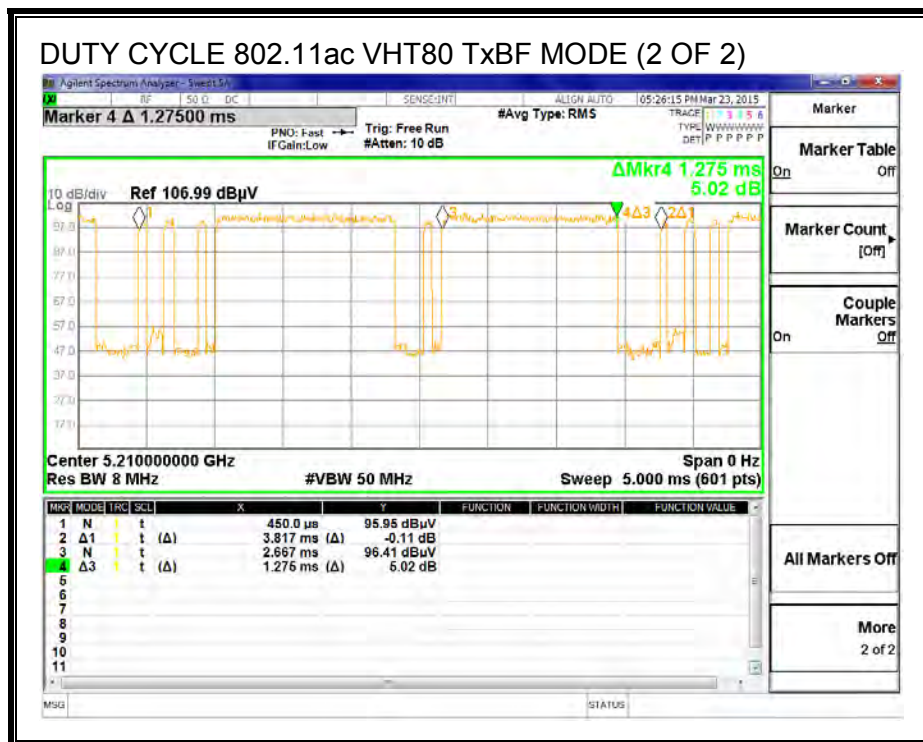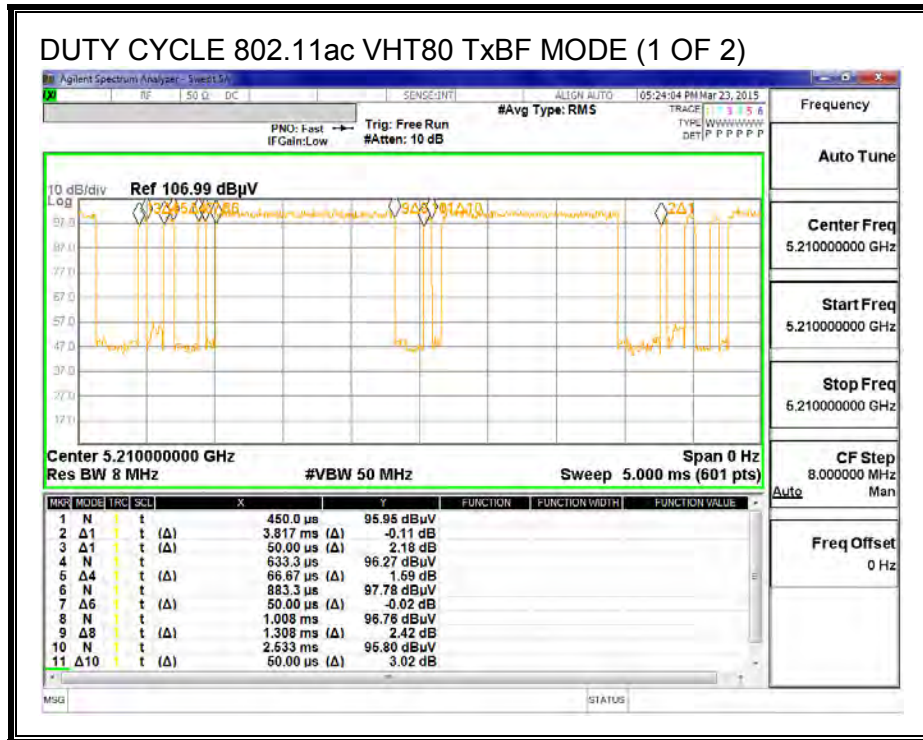

### 8.3.802.11a LEGACY 1TX MODE IN THE 5.2 GHz BAND

#### 8.3.1. 26 dB BANDWIDTH



##### LIMITS


None; for reporting purposes only.

##### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.802
Mid	5200	21.112
High	5240	21.164

**26 dB BANDWIDTH**

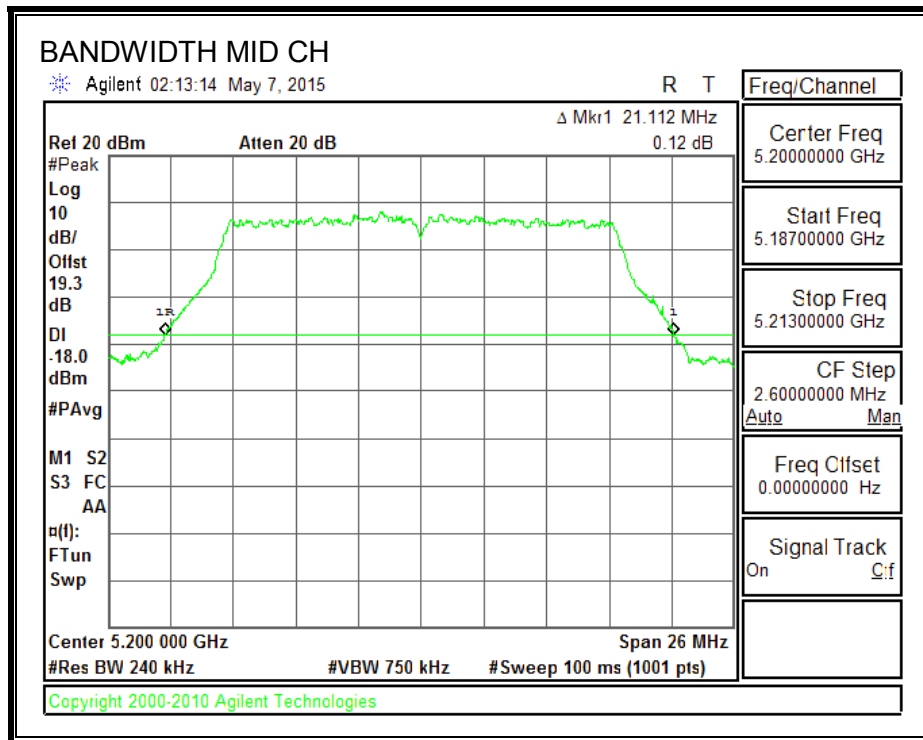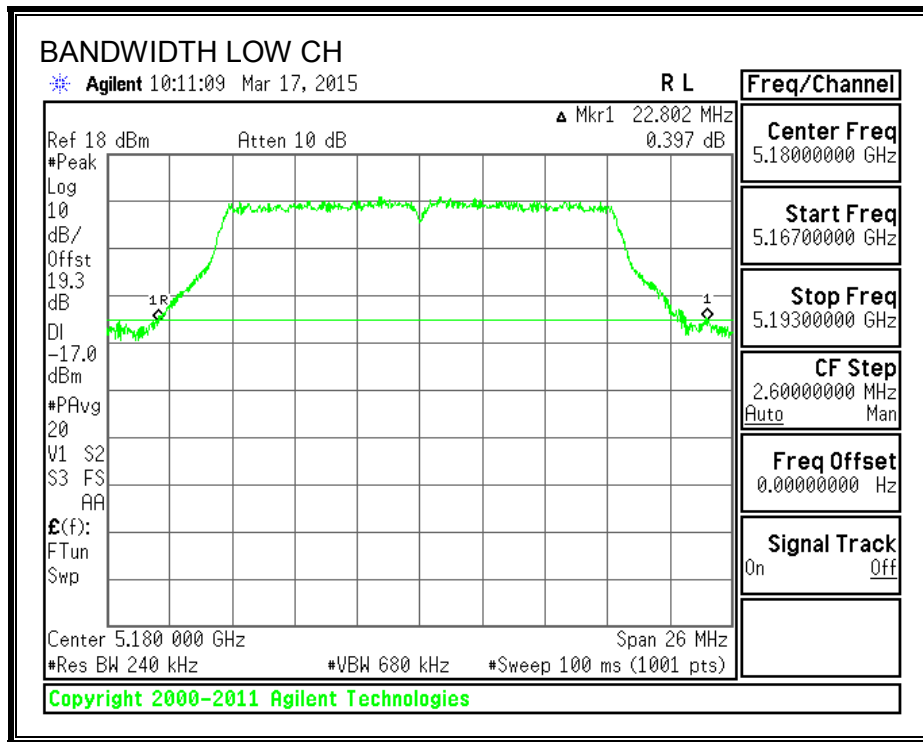

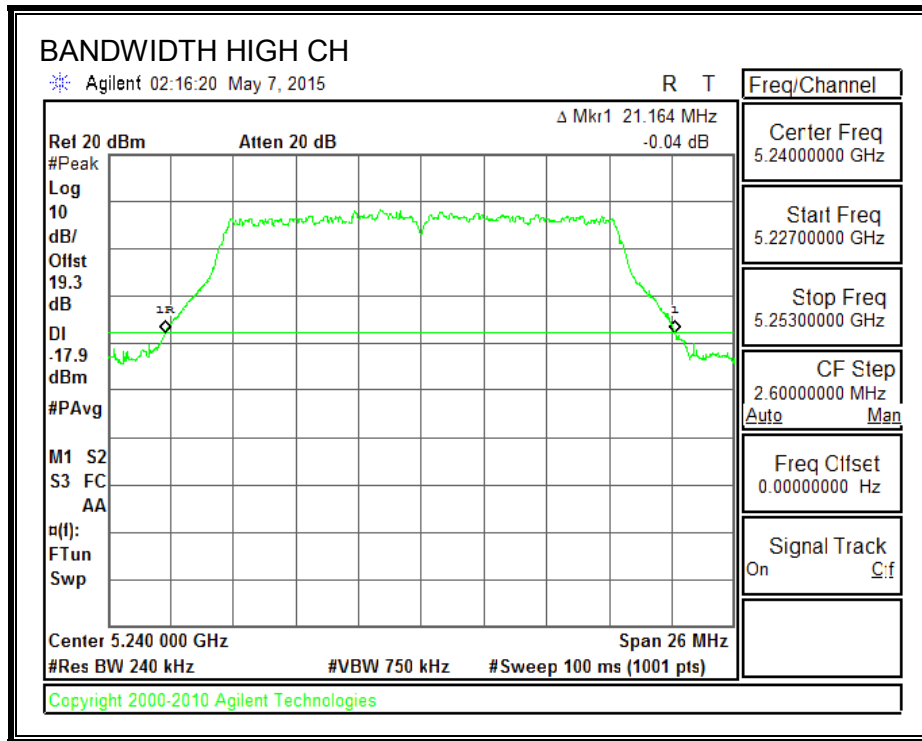

### 8.3.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	16.5813
Mid	5200	16.5298
High	5240	16.5481

**99% BANDWIDTH**

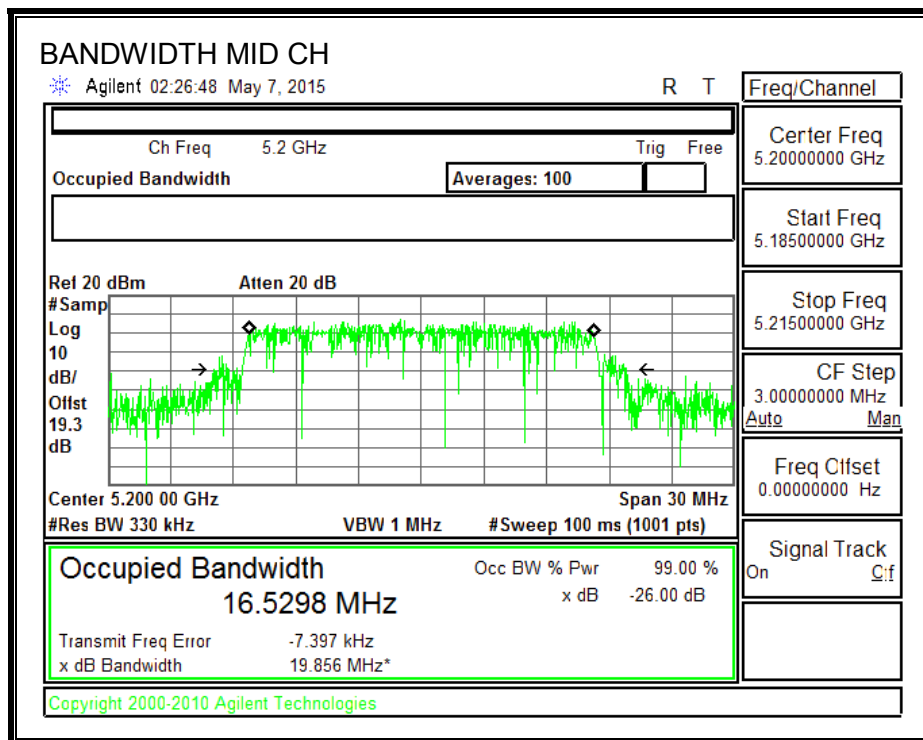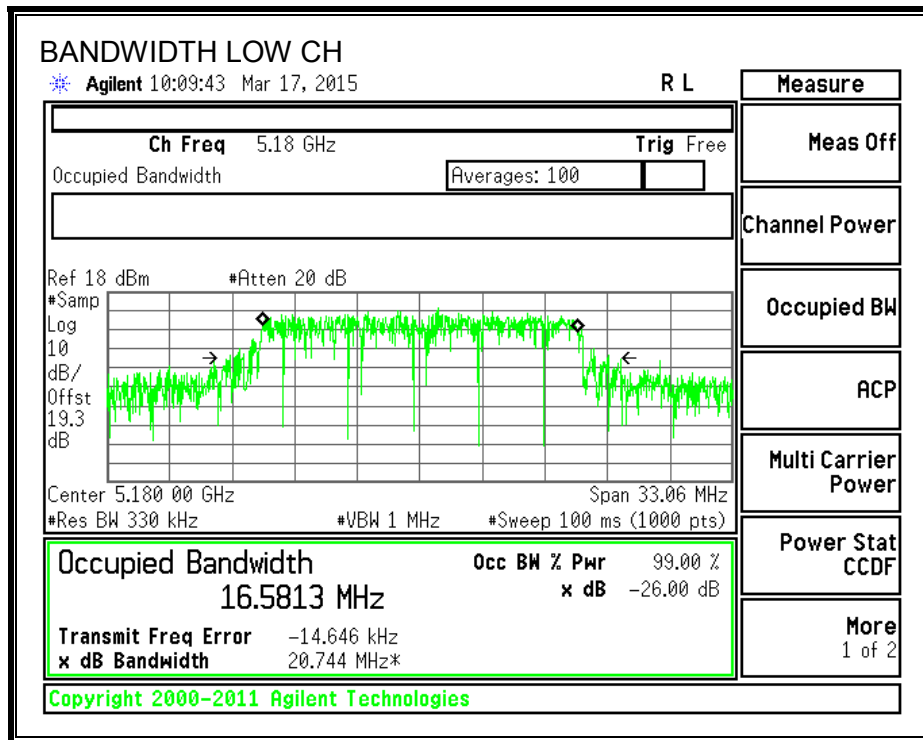

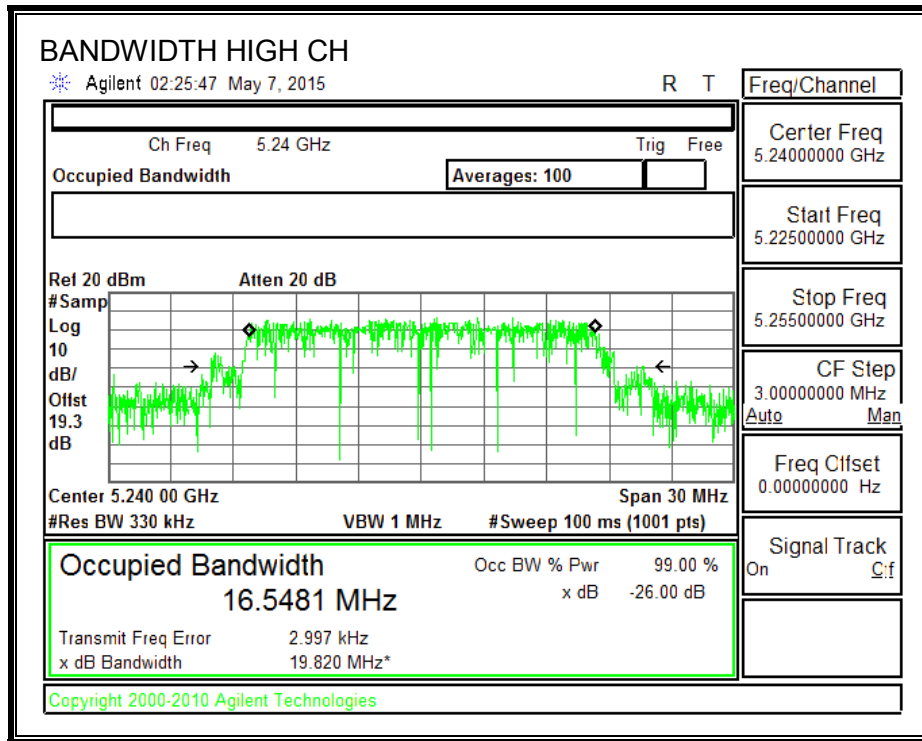



### 8.3.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

This is SISO mode, AG is the highest (worst-case) = 5.83 dBi

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	5.83	5.83	24.00	11.00
Mid	5200	5.83	5.83	24.00	11.00
High	5240	5.83	5.83	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	16.20	16.20	24.00	-7.80
Mid	5200	18.00	18.00	24.00	-6.00
High	5240	17.90	17.90	24.00	-6.10


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	5.054	5.05	11.00	-5.95
Mid	5200	6.637	6.64	11.00	-4.36
High	5240	6.755	6.76	11.00	-4.25

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

**PSD, Chain 0**

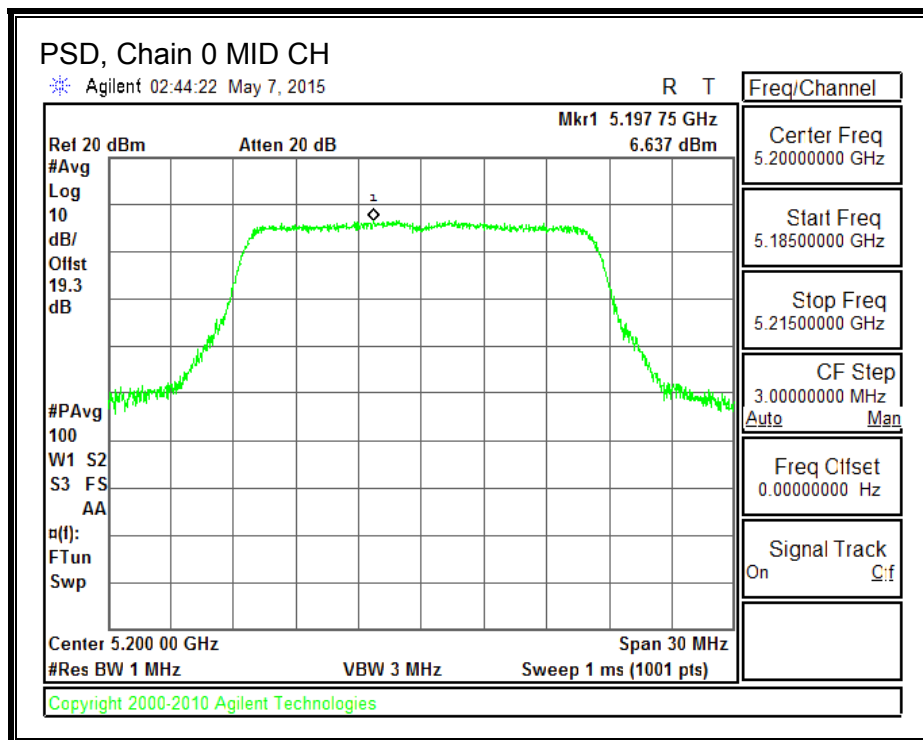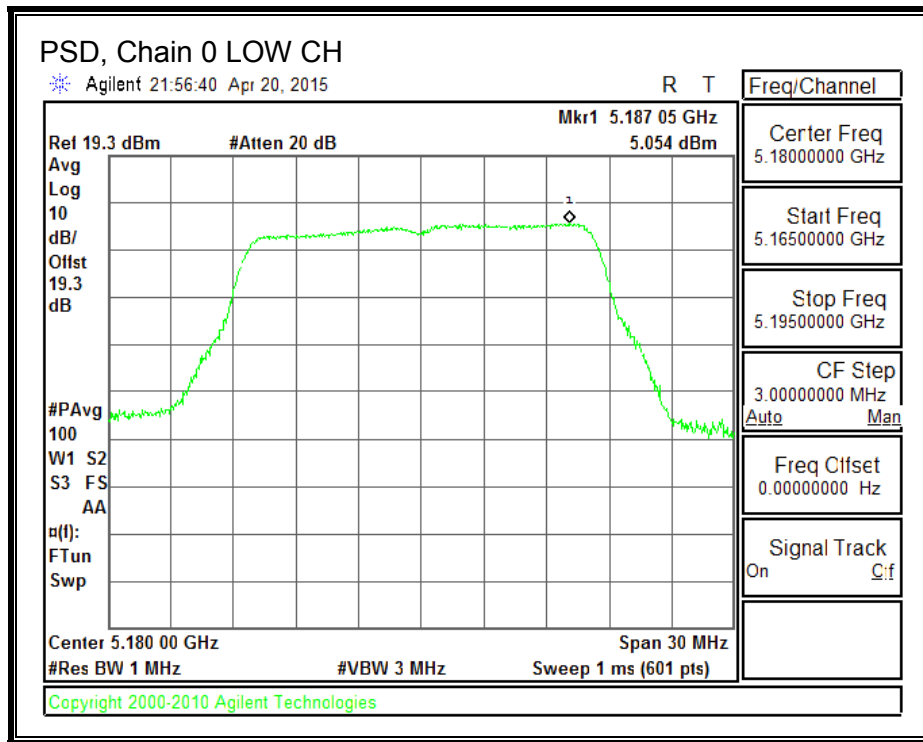

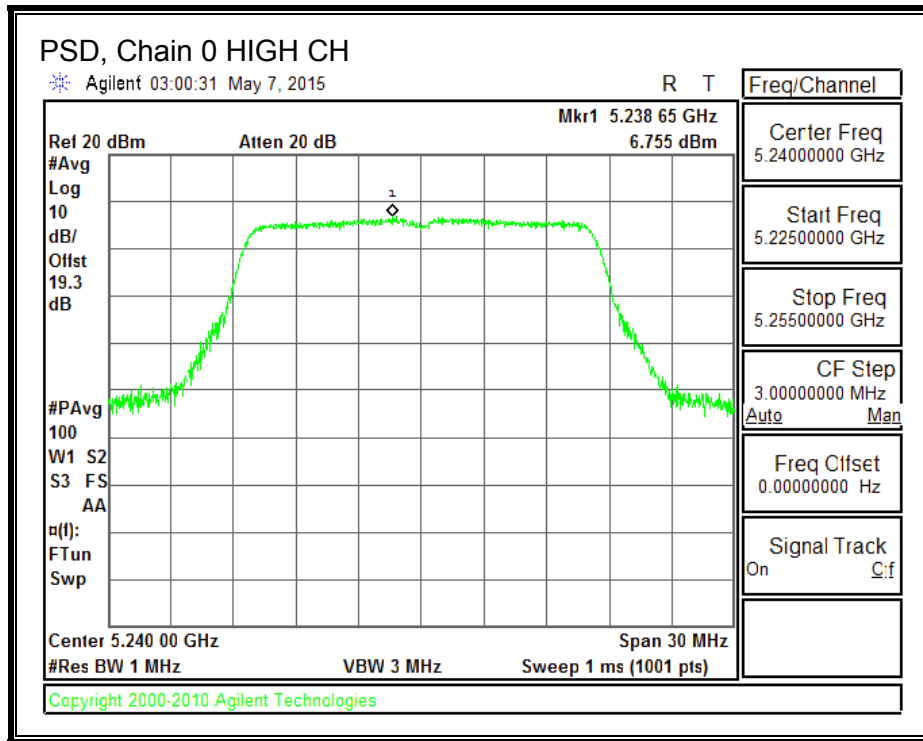

## 8.4.802.11n HT20 CDD 2TX MODE IN THE 5.2 GHZ BAND

### 8.4.1. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
3.19	4.83	5.09

For PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.19	4.83	8.06

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	5.09	8.06	24.00	8.94
Mid	5200	5.09	8.06	24.00	8.94
High	5240	5.09	8.06	24.00	8.94

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.10	15.30	18.21	24.00	-5.79
Mid	5200	15.30	15.10	18.21	24.00	-5.79
High	5240	15.10	15.00	18.06	24.00	-5.94

**PSD Results**


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.981	4.859	7.931	8.94	-1.01
Mid	5200	4.808	4.962	7.896	8.94	-1.04
High	5240	5.012	4.775	7.905	8.94	-1.03

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.


**PSD, Chain 0**

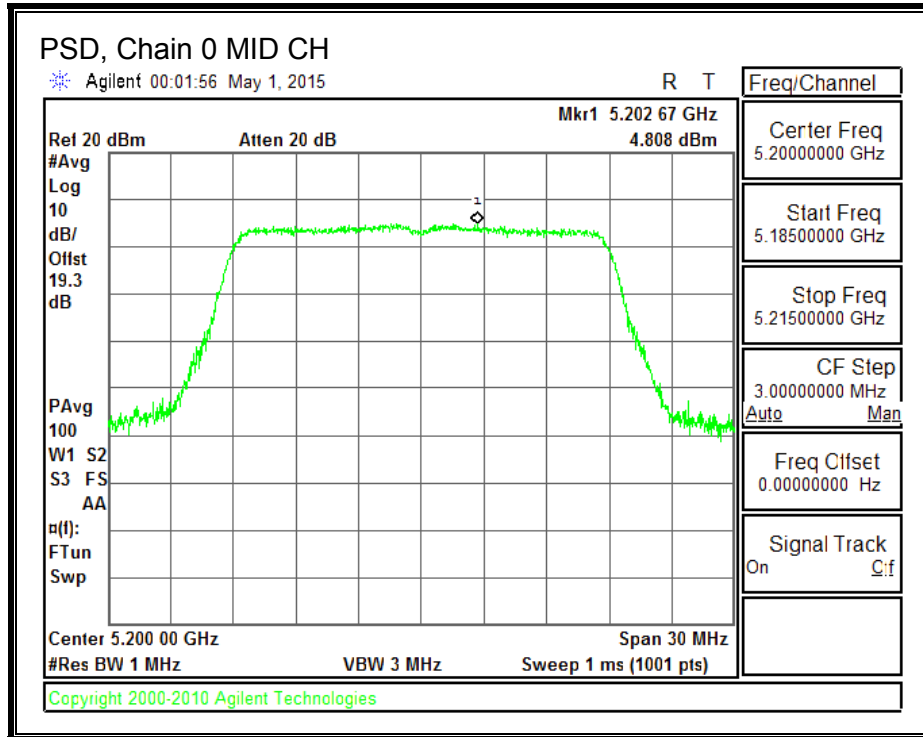
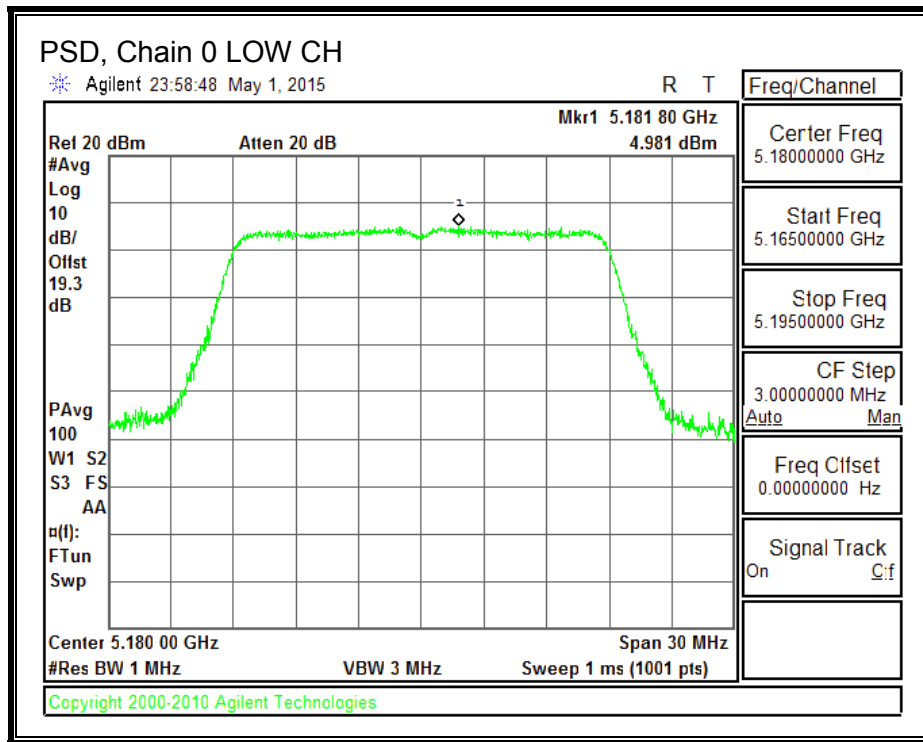




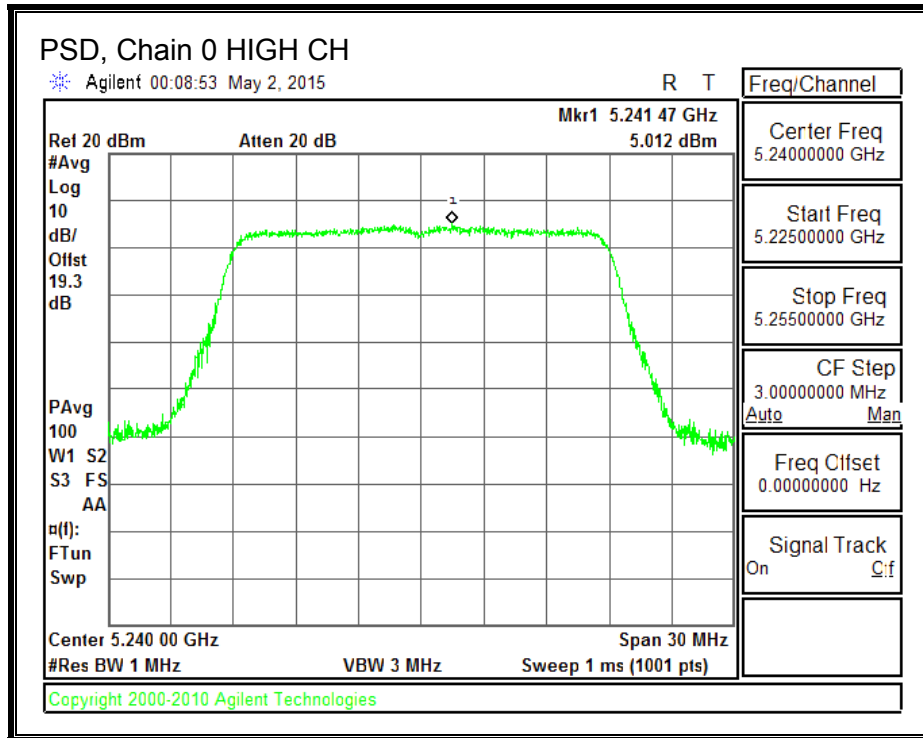

**PSD, Chain 1**

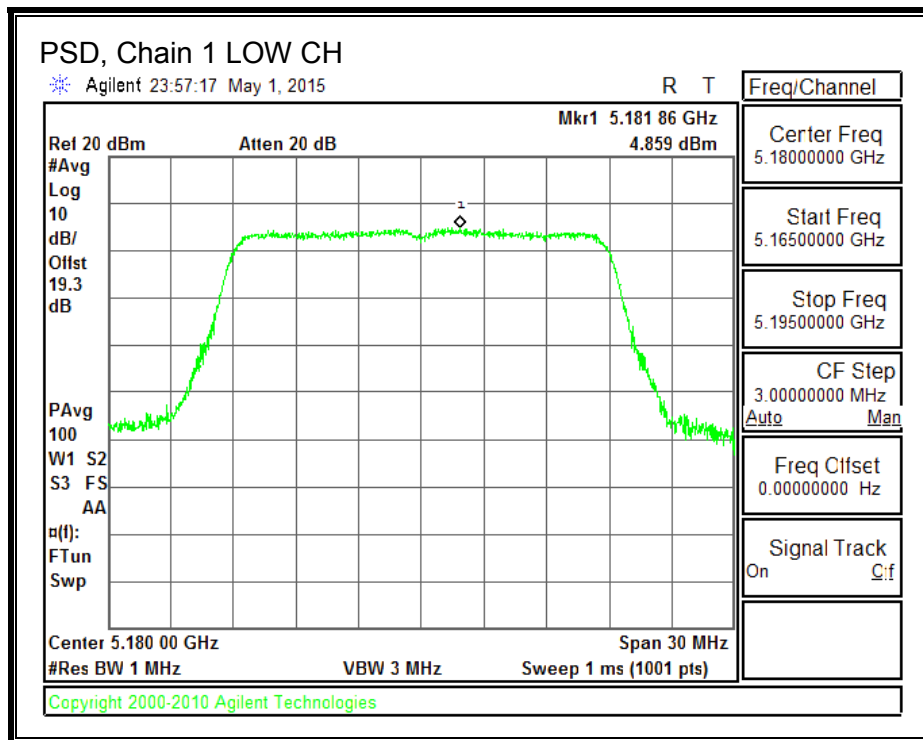

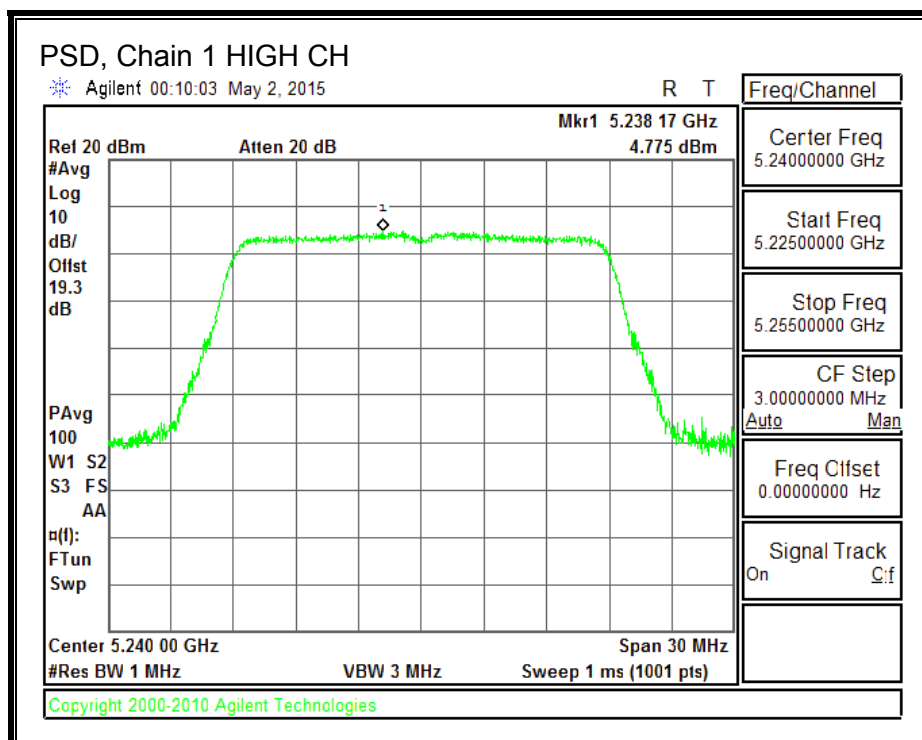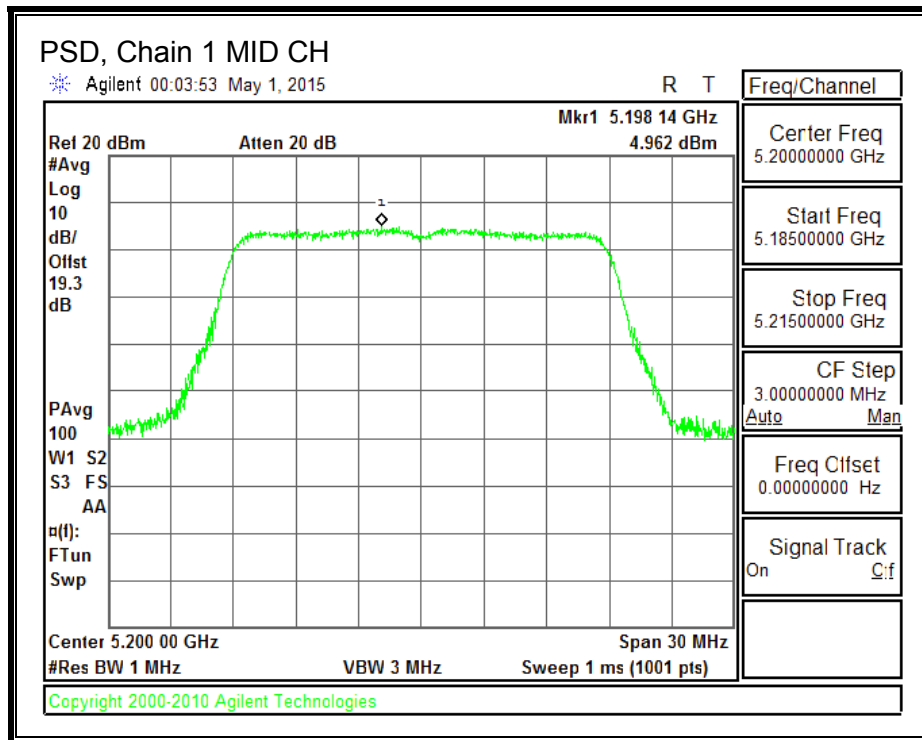

## 8.5.802.11n HT20 STBC 2TX MODE IN THE 5.2 GHz BAND

### 8.5.1. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power and PSD, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
3.19	4.83	5.09

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	5.09	5.09	24.00	11.00
Mid	5200	5.09	5.09	24.00	11.00
High	5240	5.09	5.09	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---



**Output Power Results**


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.10	15.30	18.21	24.00	-5.79
Mid	5200	17.06	17.10	20.09	24.00	-3.91
High	5240	17.10	17.20	20.16	24.00	-3.84

**PSD Results**


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	6.277	6.137	9.22	11.00	-1.78
Mid	5200	6.091	6.040	9.08	11.00	-1.92
High	5240	6.303	6.193	9.26	11.00	-1.74



**PSD, Chain 0**

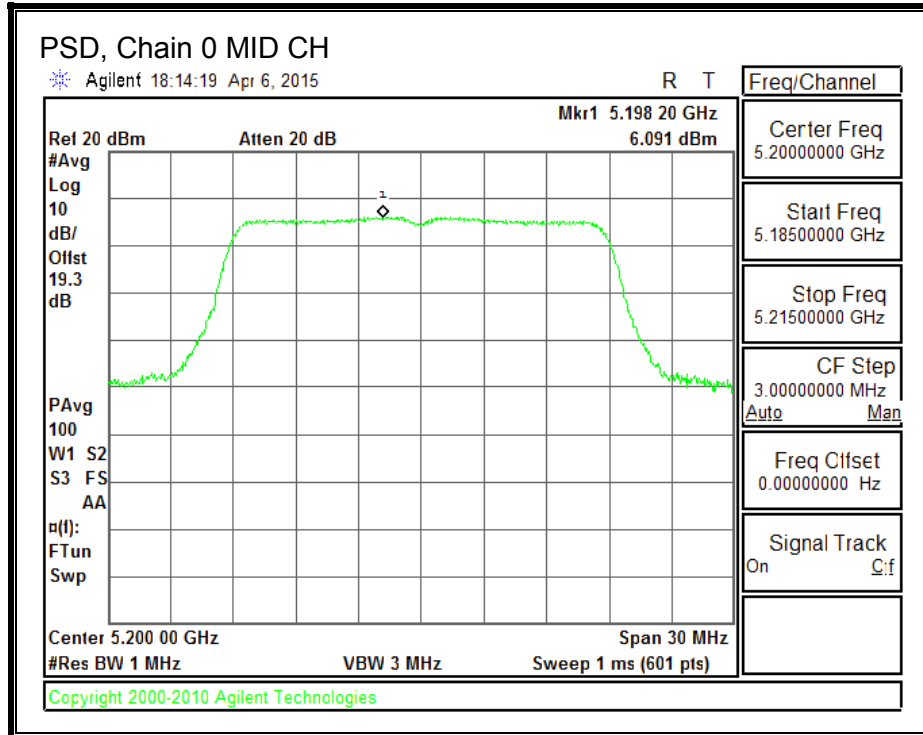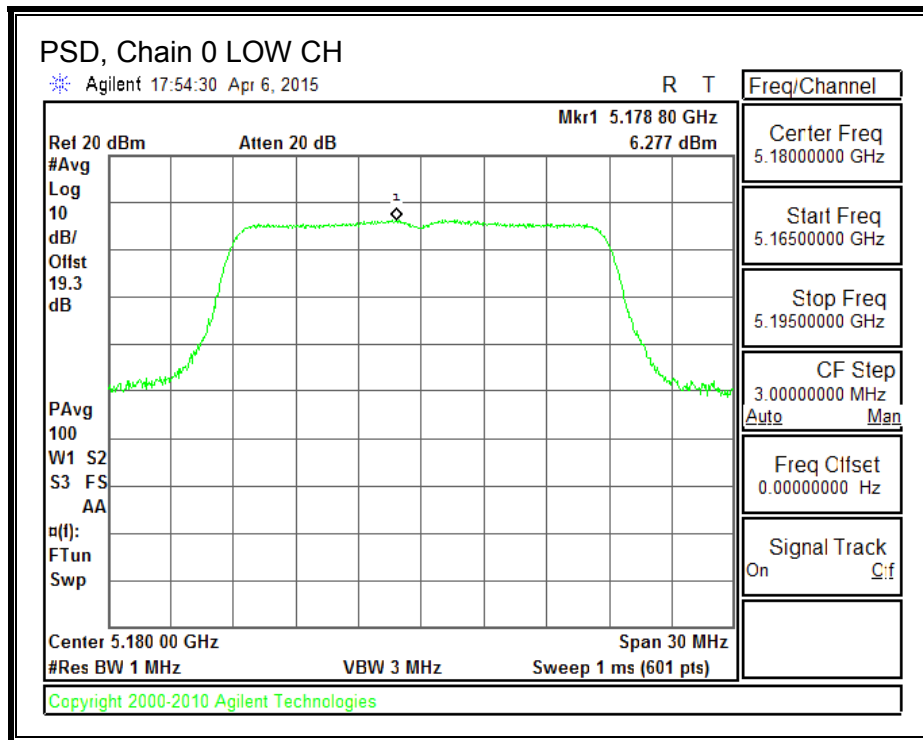

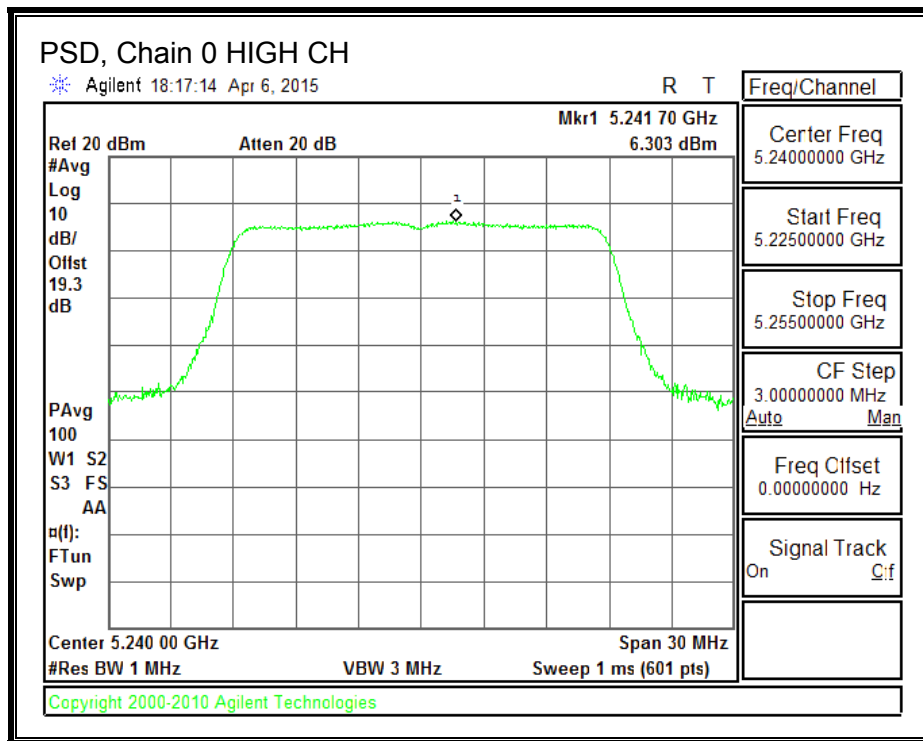

**PSD, Chain 1**

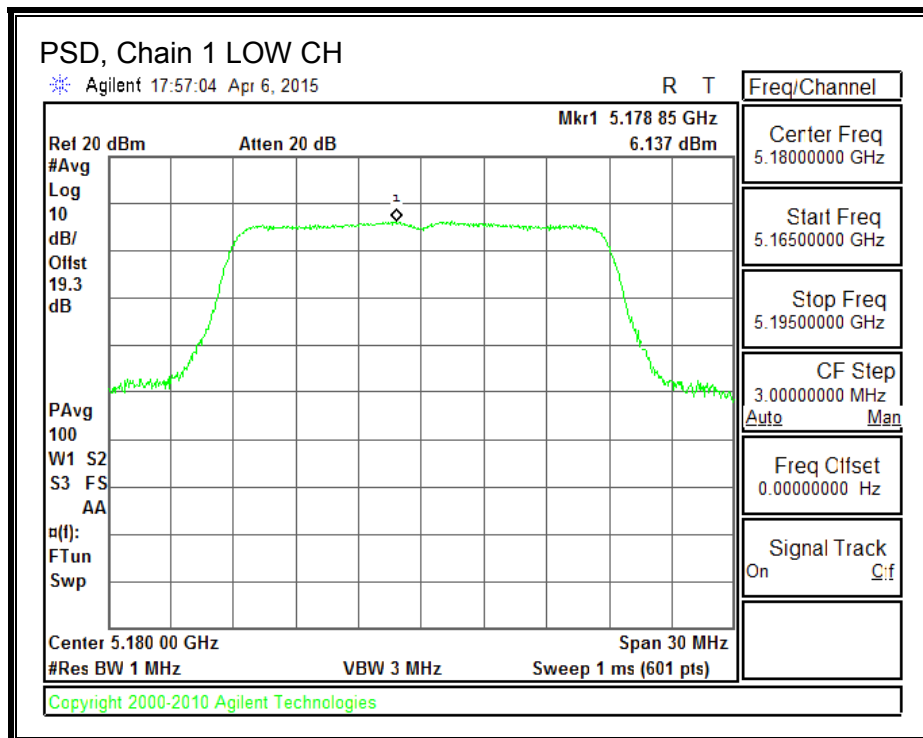

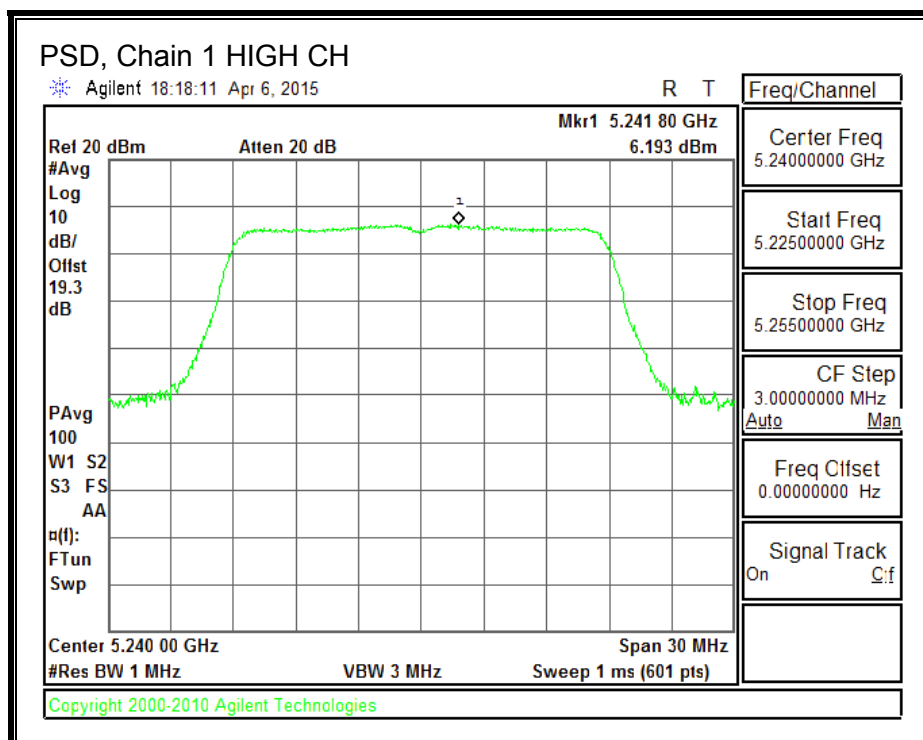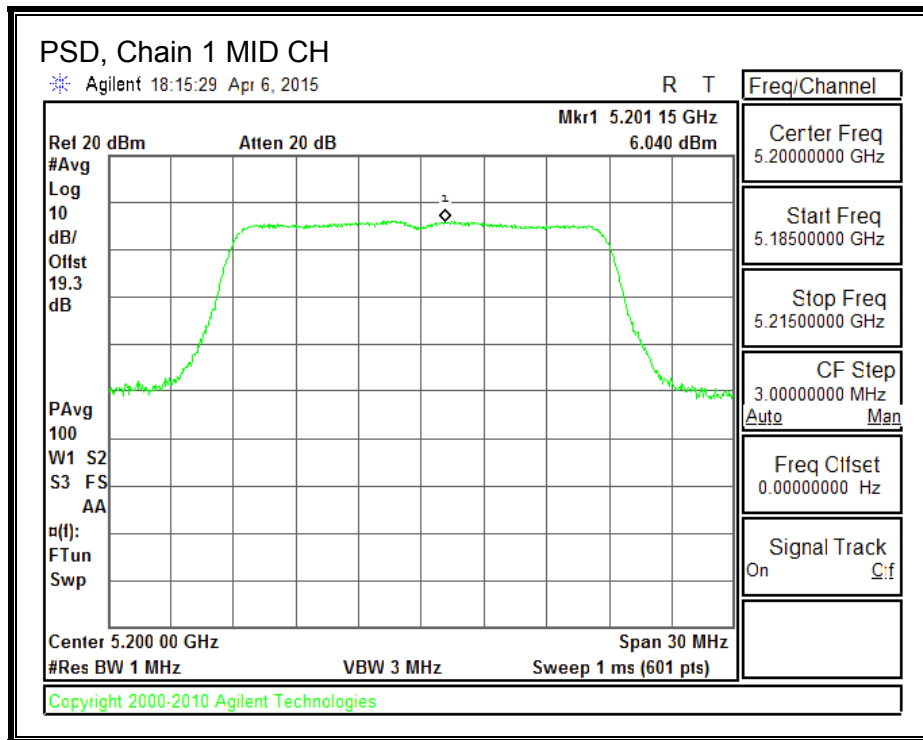



## 8.6.802.11n HT20 TxBF 2TX MODE IN THE 5.2 GHz BAND

### 8.6.1. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power, the TX chains are correlated and the antenna gain is unequal among the chains.  
The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.19	4.83	8.06

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	8.06	8.06	21.94	8.94
Mid	5200	8.06	8.06	21.94	8.94
High	5240	8.06	8.06	21.94	8.94

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.10	15.30	18.21	21.94	-3.73
Mid	5200	15.30	15.10	18.21	21.94	-3.73
High	5240	15.10	15.00	18.06	21.94	-3.88


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	4.981	4.859	7.931	8.94	-1.01
Mid	5200	4.808	4.962	7.896	8.94	-1.04
High	5240	5.012	4.775	7.905	8.94	-1.03


**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



**PSD, Chain 0**

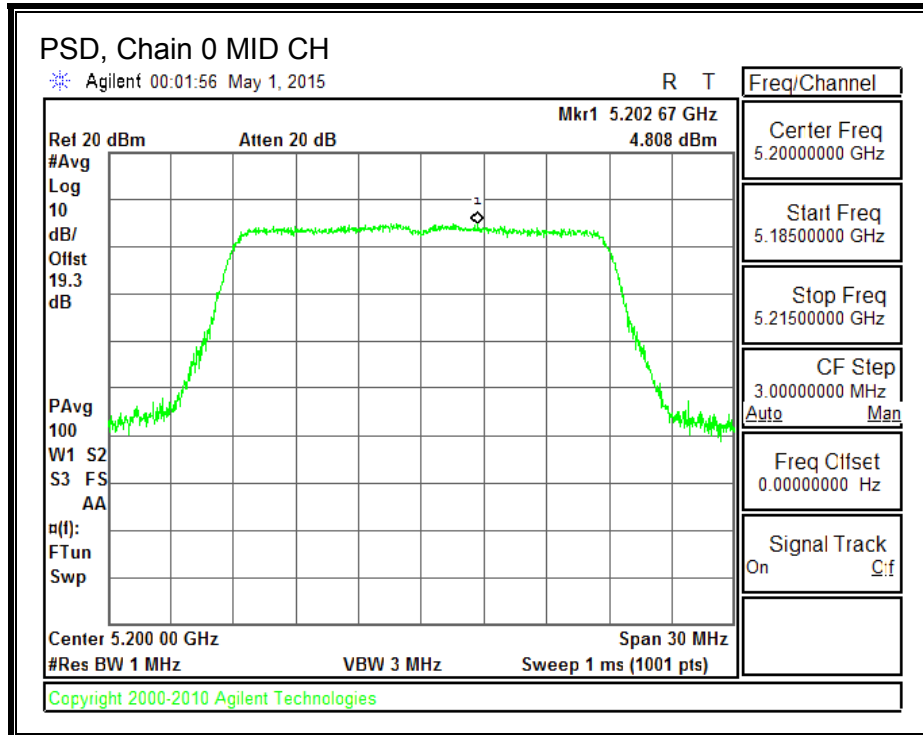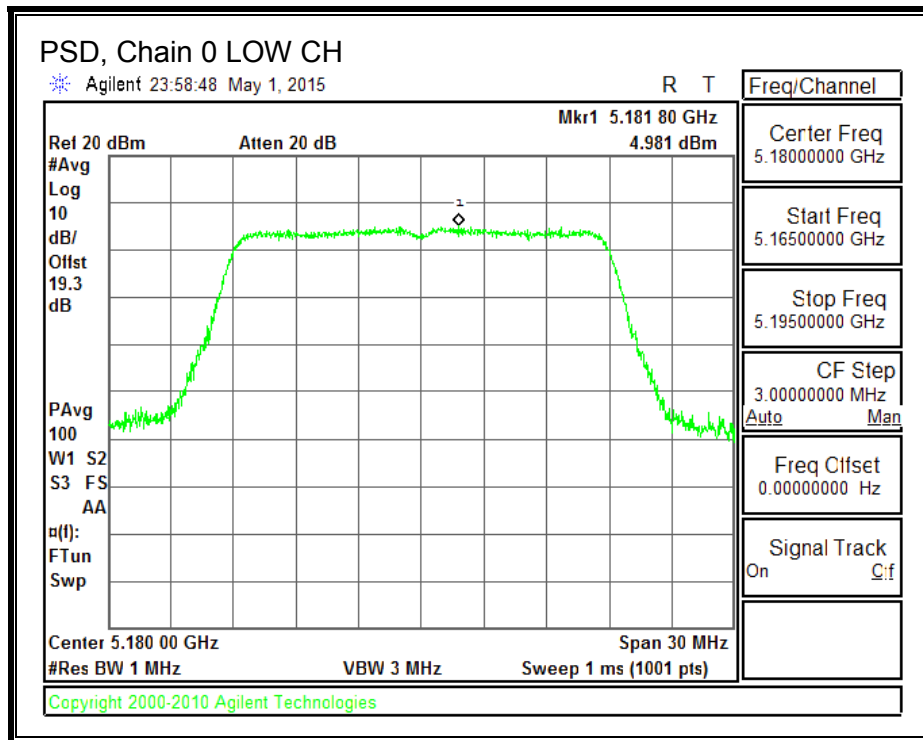

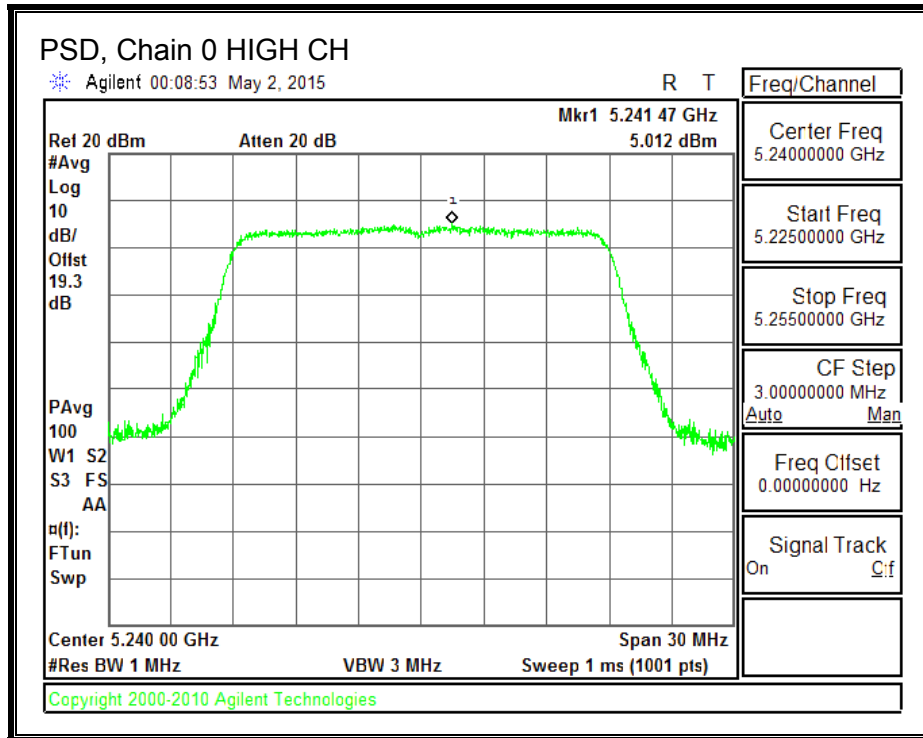

**PSD, Chain 1**

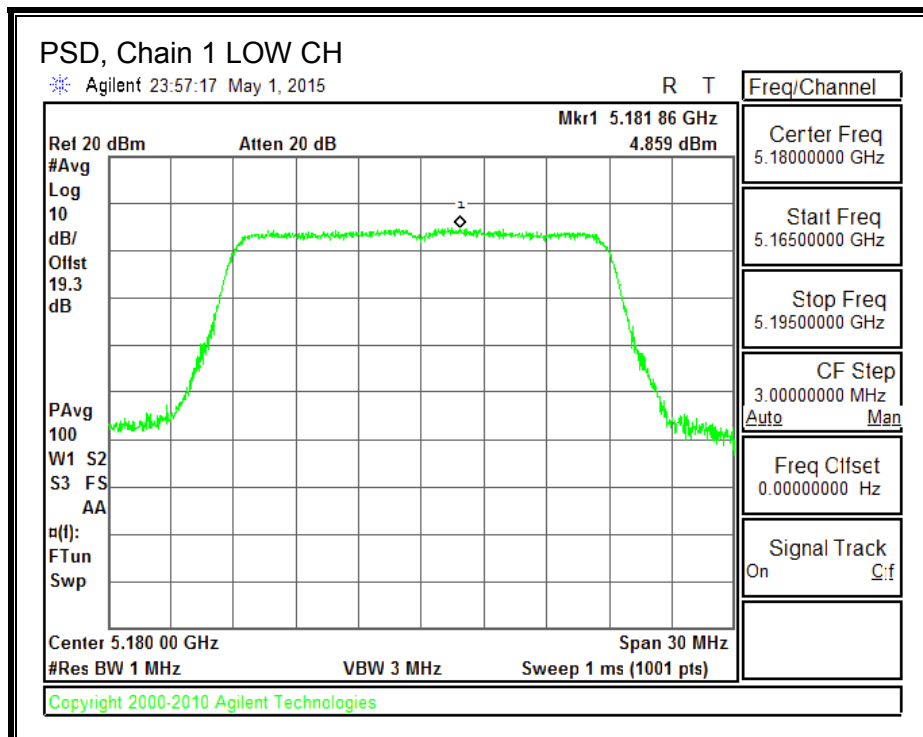

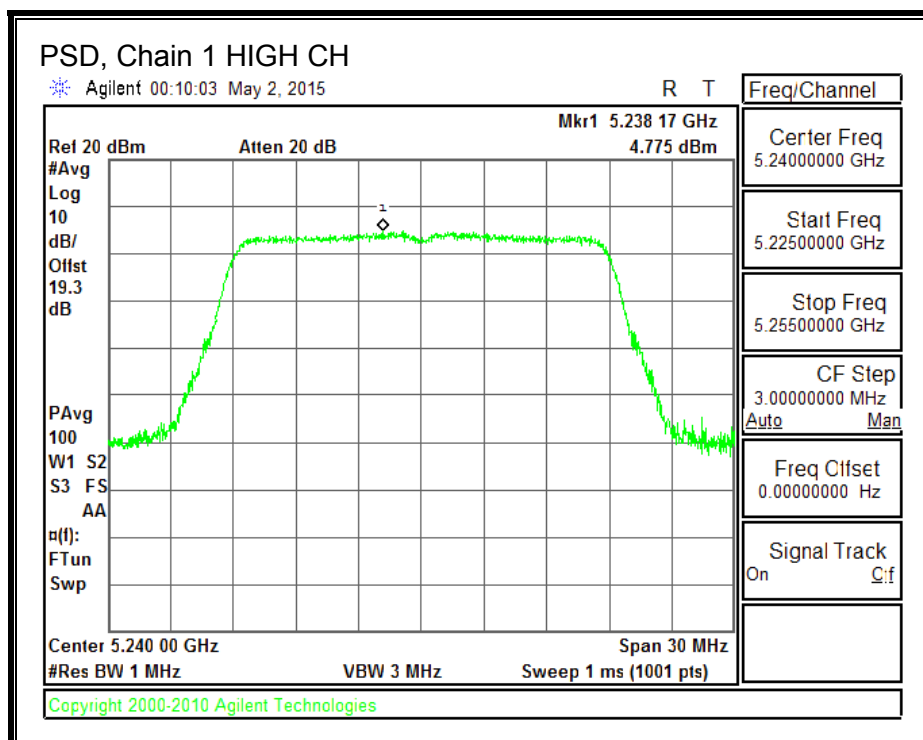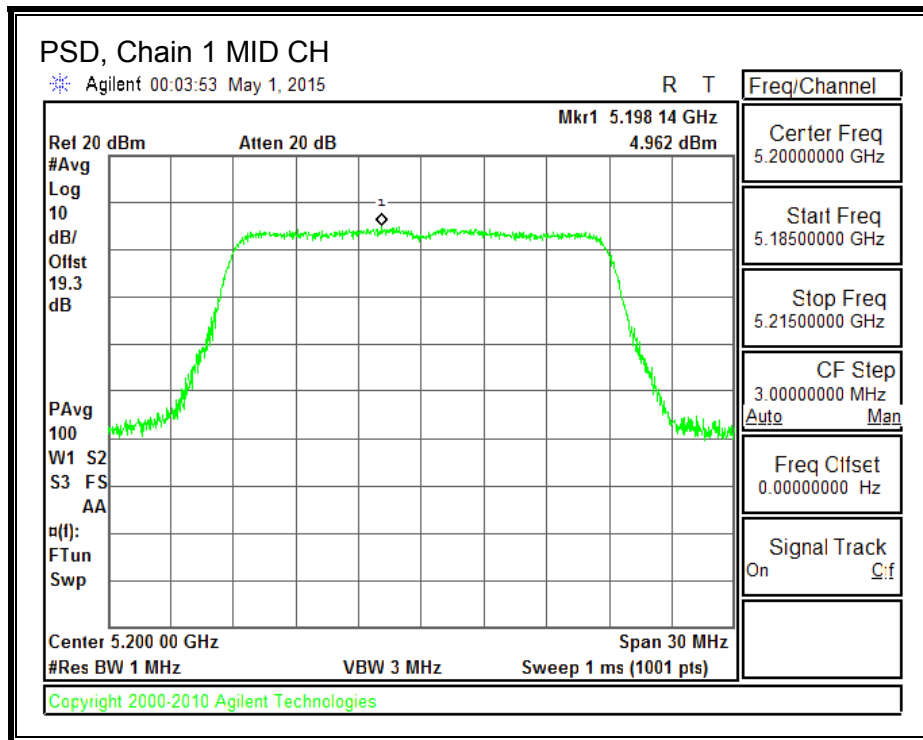

## 8.7.802.11n HT20 CDD 3TX MODE IN THE 5.2 GHZ BAND

### 8.7.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5180	26.780	25.350	24.050
Mid	5200	28.080	28.340	26.260
High	5240	25.155	23.960	25.285


**26 dB BANDWIDTH, Chain 0**

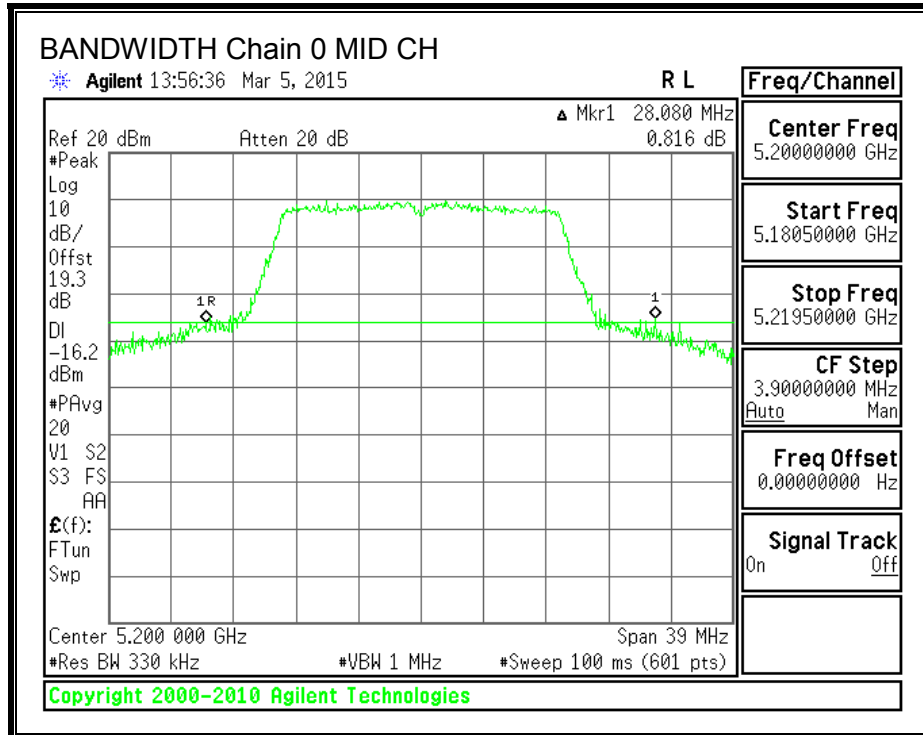
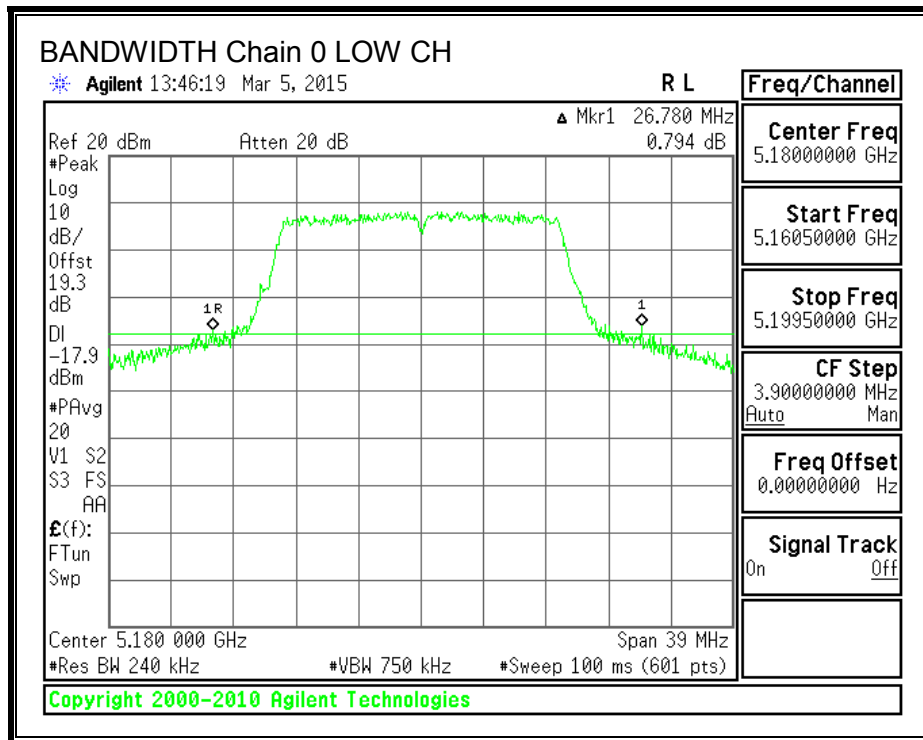





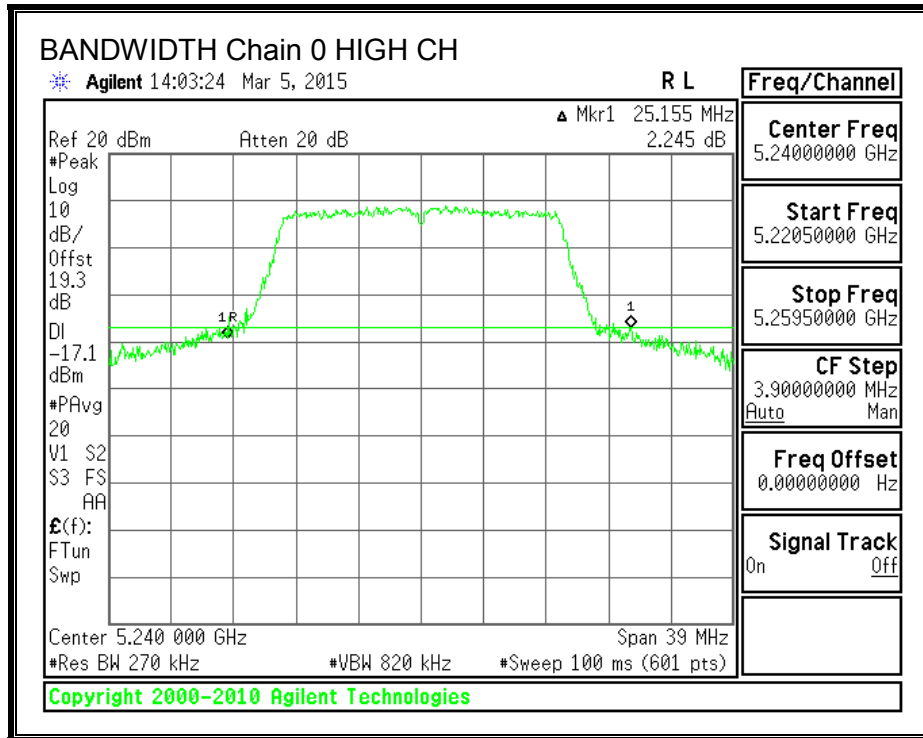



**26 dB BANDWIDTH, Chain 1**

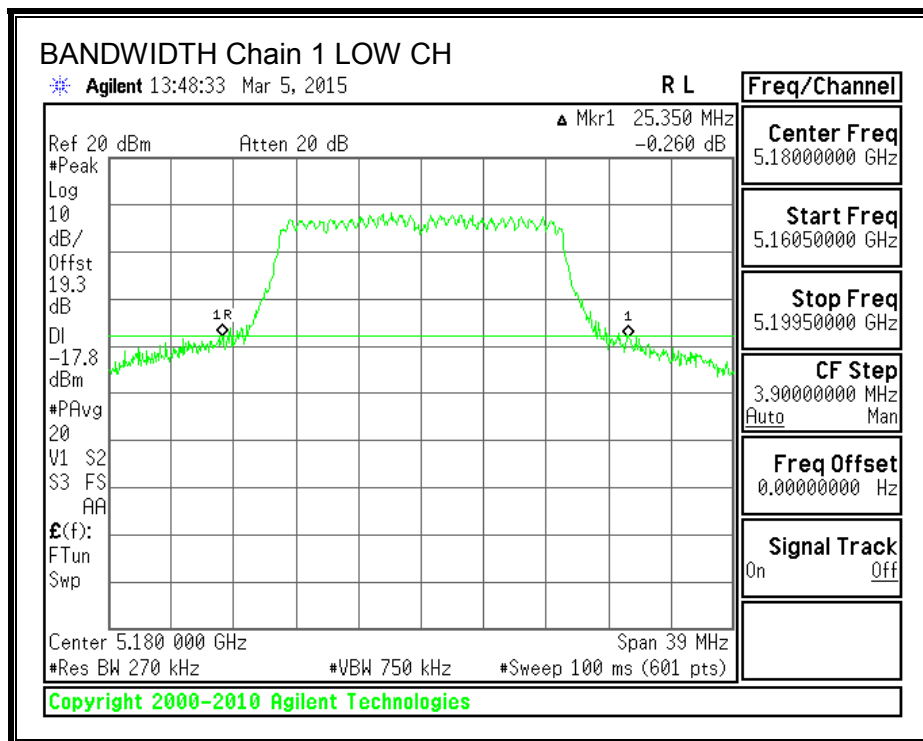

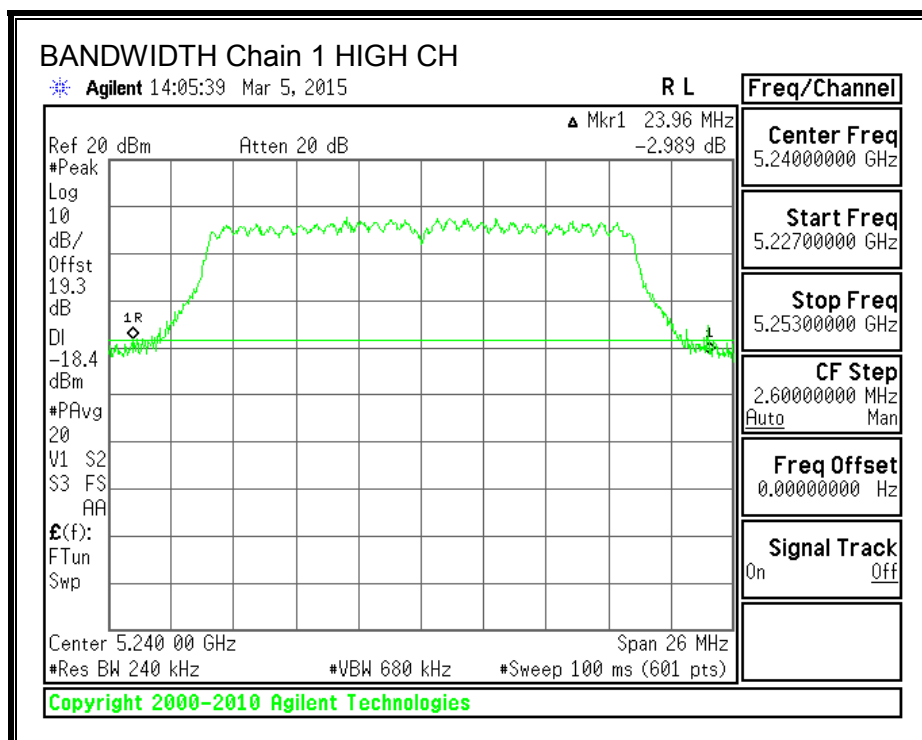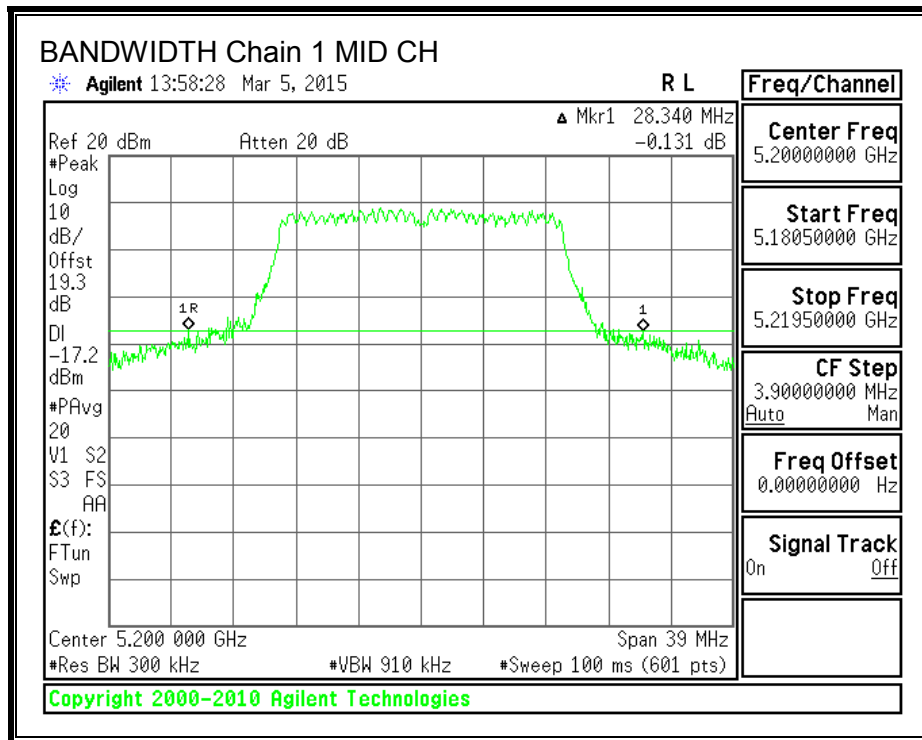

**26 dB BANDWIDTH, Chain 2**

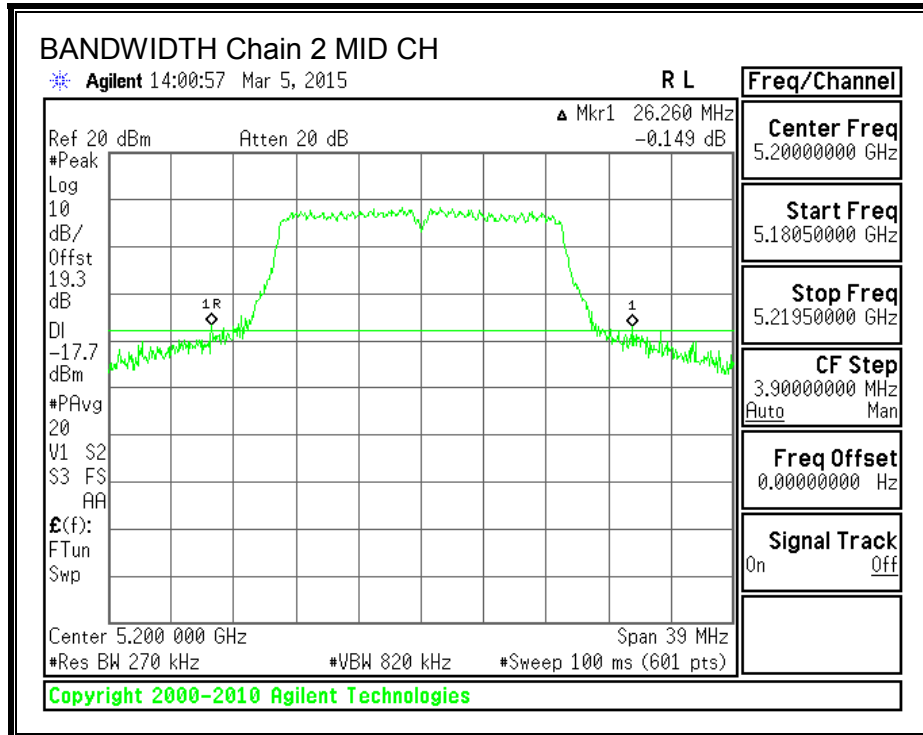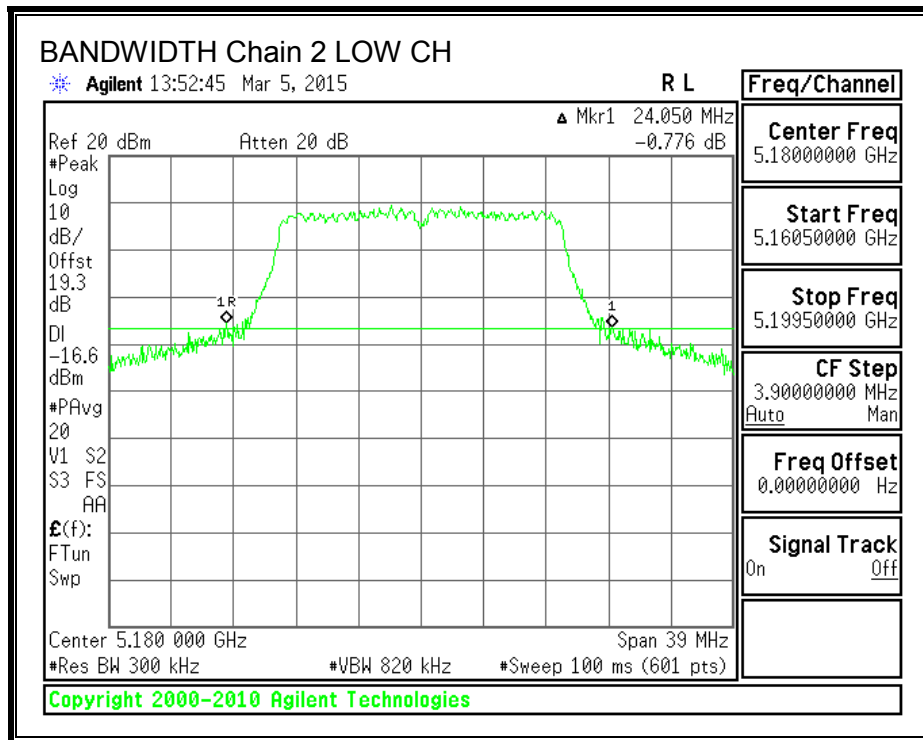

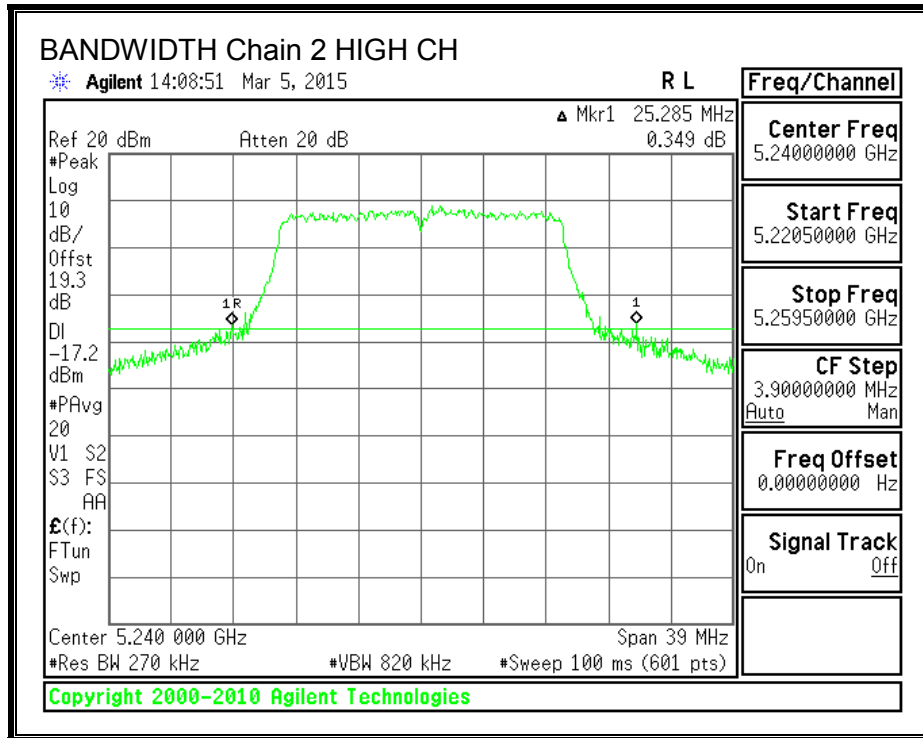

### 8.7.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5180	17.7723	17.7681	17.7758
Mid	5200	17.7718	17.7767	17.7585
High	5240	17.7638	17.7590	17.7527



**99% BANDWIDTH, Chain 0**

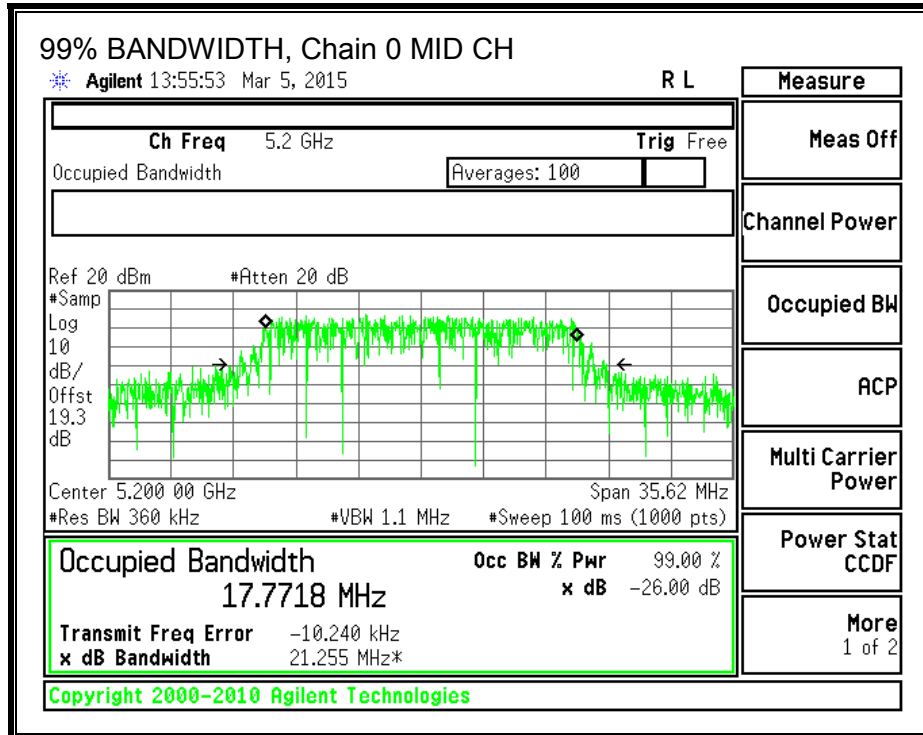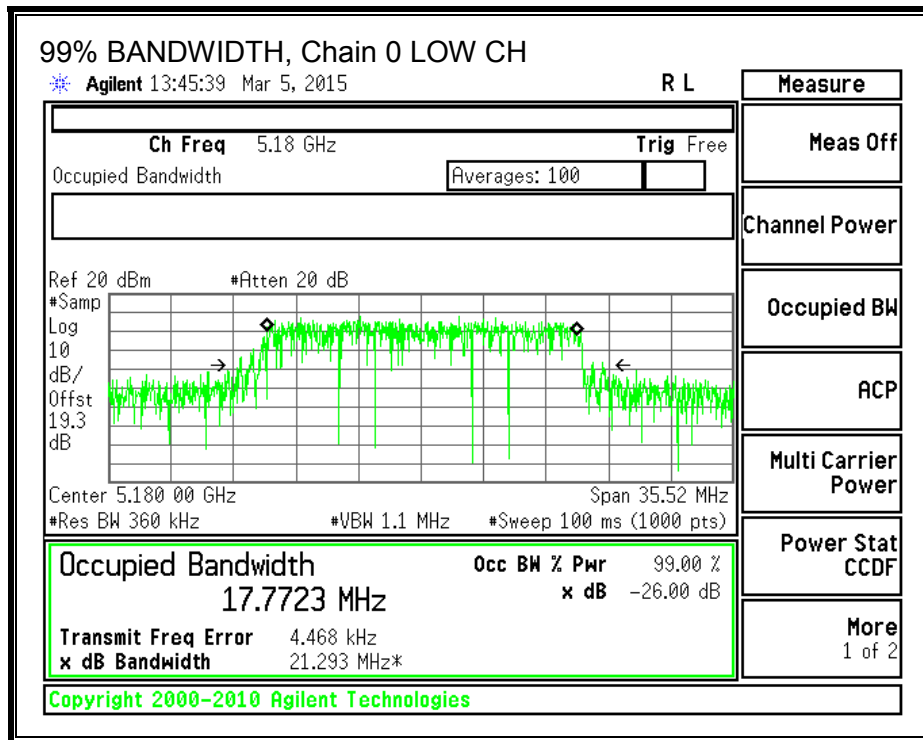

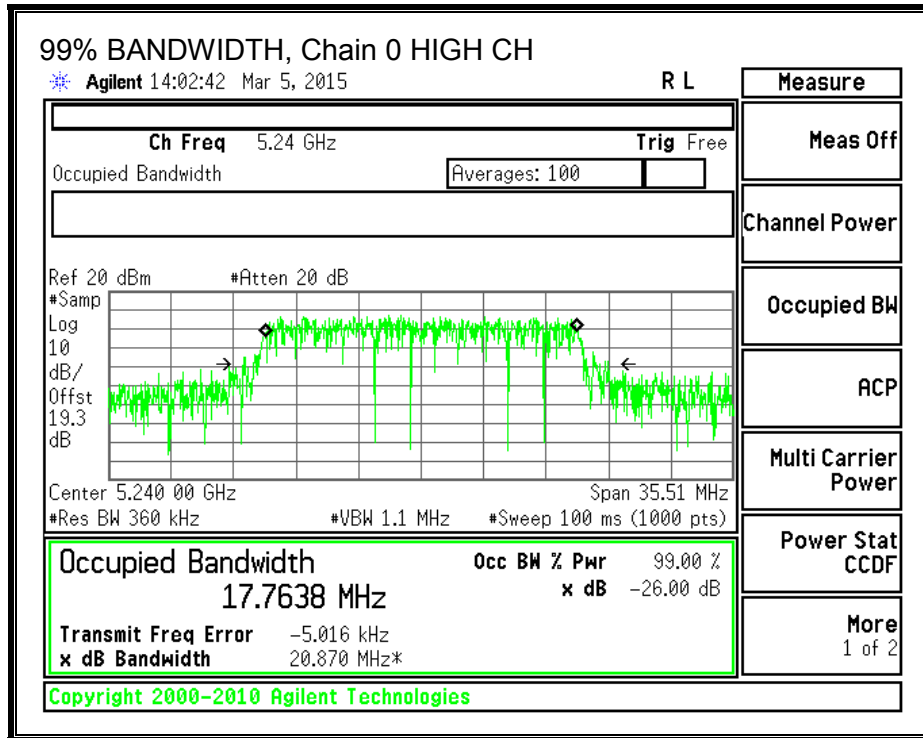



**99% BANDWIDTH, Chain 1**

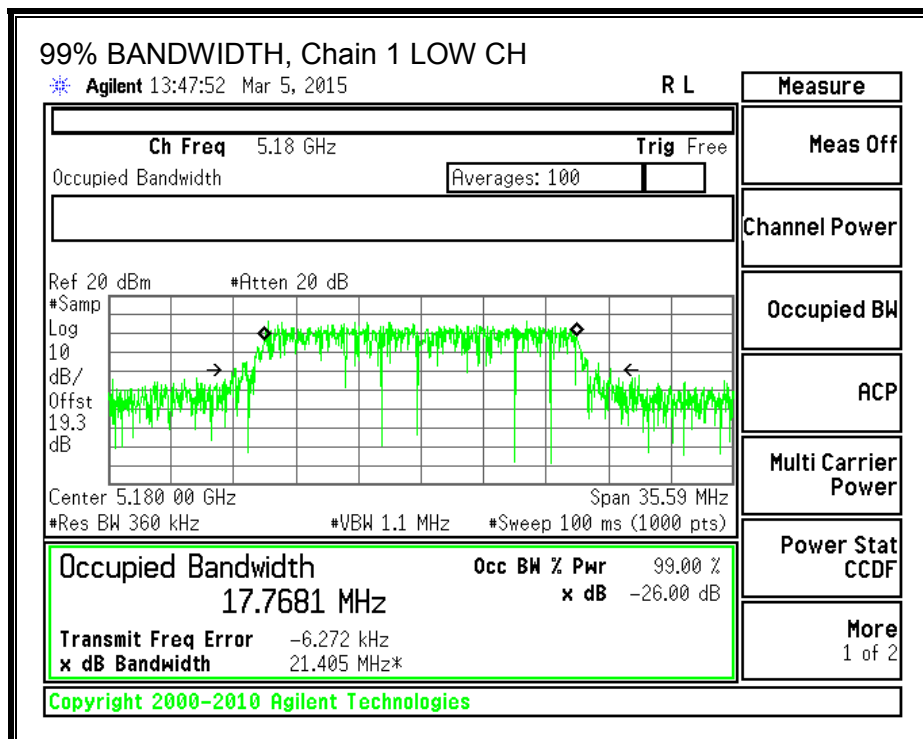


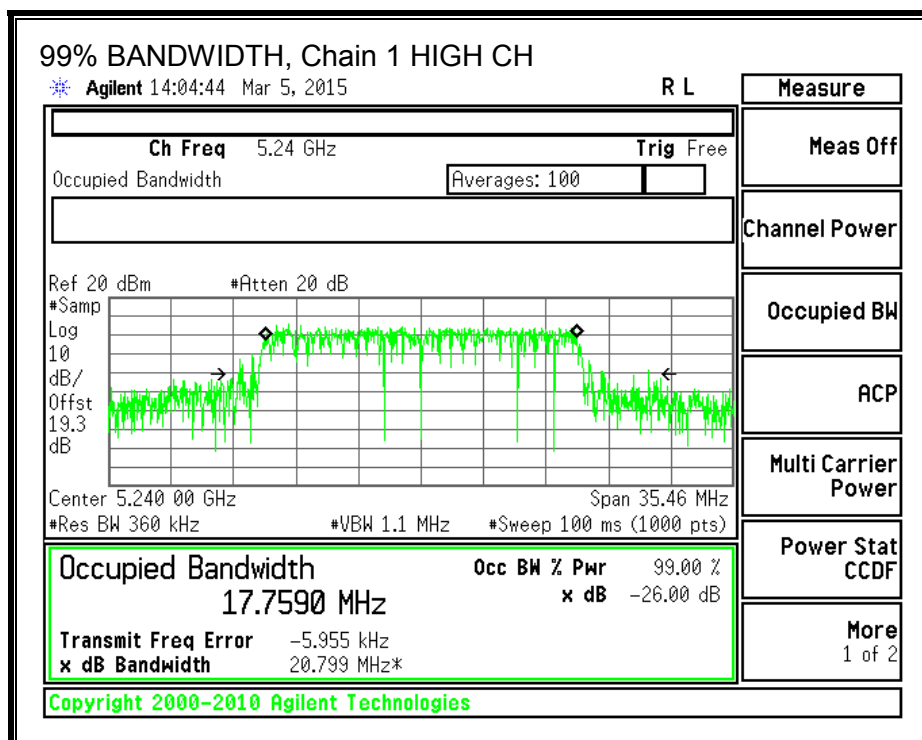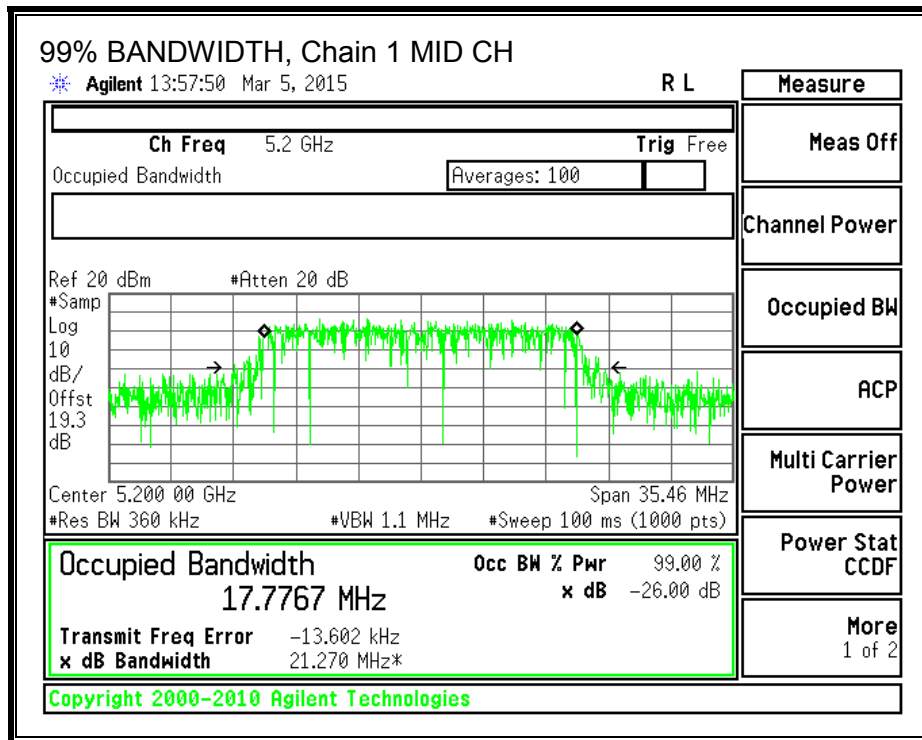



**99% BANDWIDTH, Chain 2**

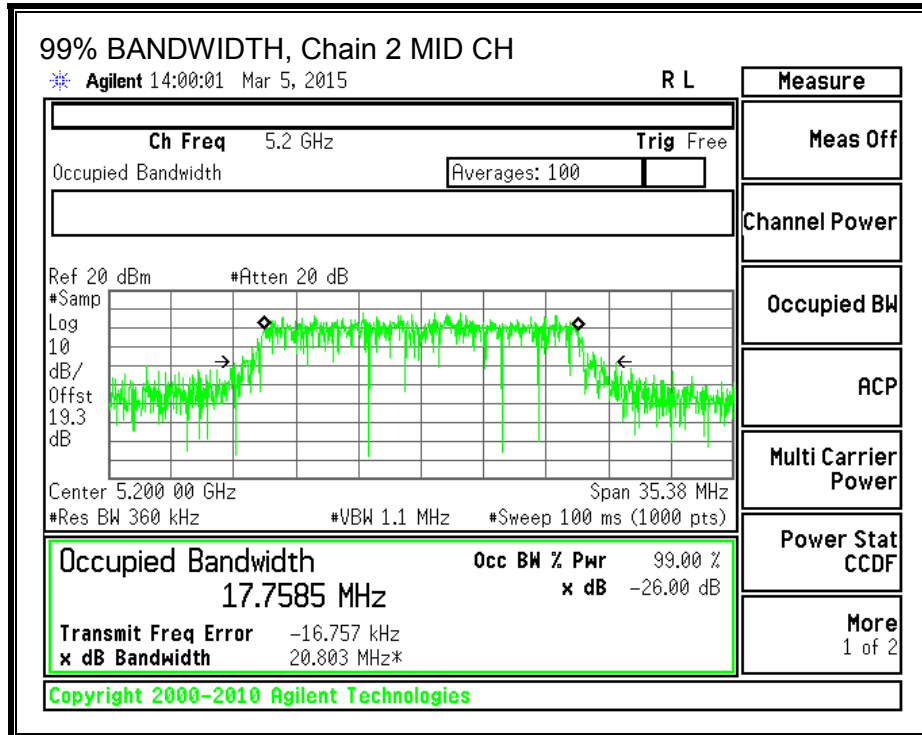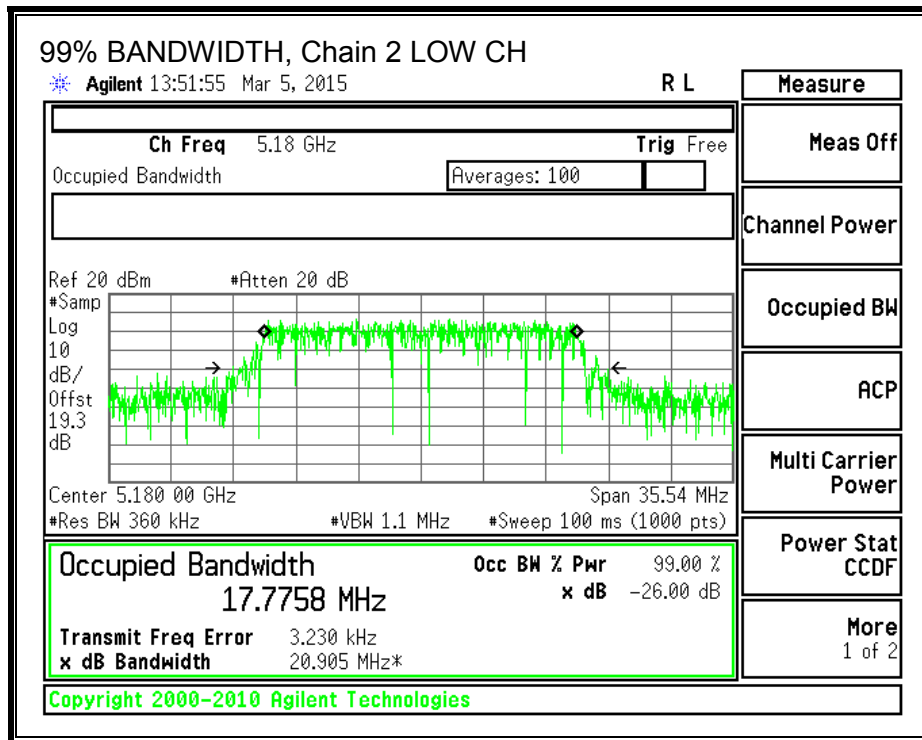

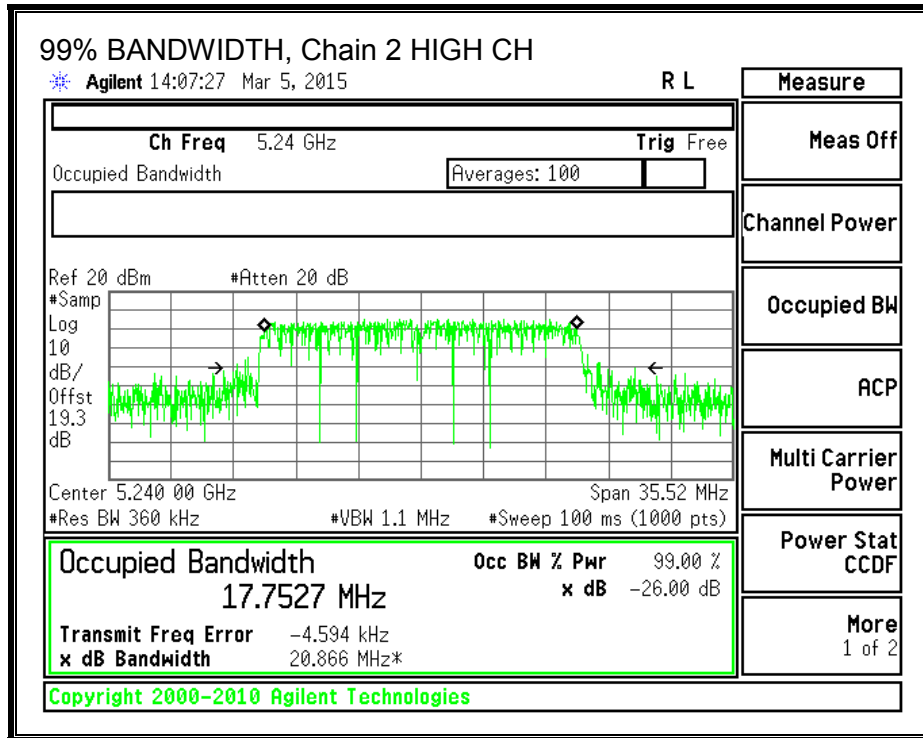

### 8.7.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Chain 2 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
3.08	3.19	4.83	4.78

For PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Chain 2 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.08	3.19	4.83	9.51

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	4.78	9.51	24.00	7.49
Mid	5200	4.78	9.51	24.00	7.49
High	5240	4.78	9.51	24.00	7.49

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of PSD</b>
---------------------------	------	--

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	12.40	12.30	11.80	16.95	24.00	-7.05
Mid	5200	12.40	12.30	11.60	16.89	24.00	-7.11
High	5240	12.40	12.40	11.70	16.95	24.00	-7.05


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	1.700	1.592	1.365	6.326	7.49	-1.16
Mid	5200	1.716	1.636	1.320	6.332	7.49	-1.16
High	5240	1.723	1.833	1.331	6.406	7.49	-1.08


**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



**PSD, Chain 0**

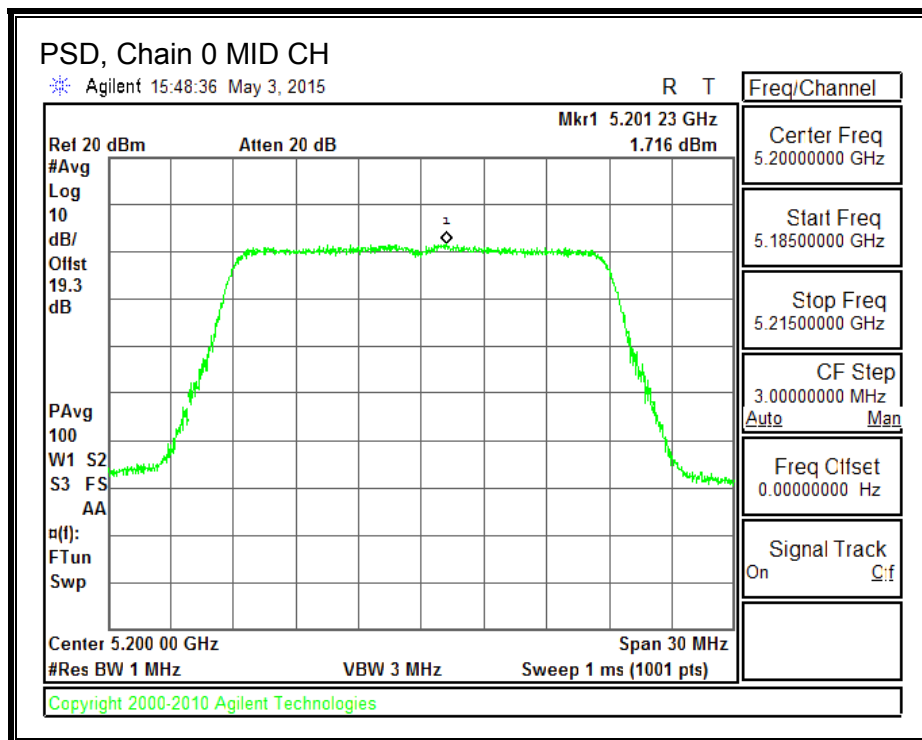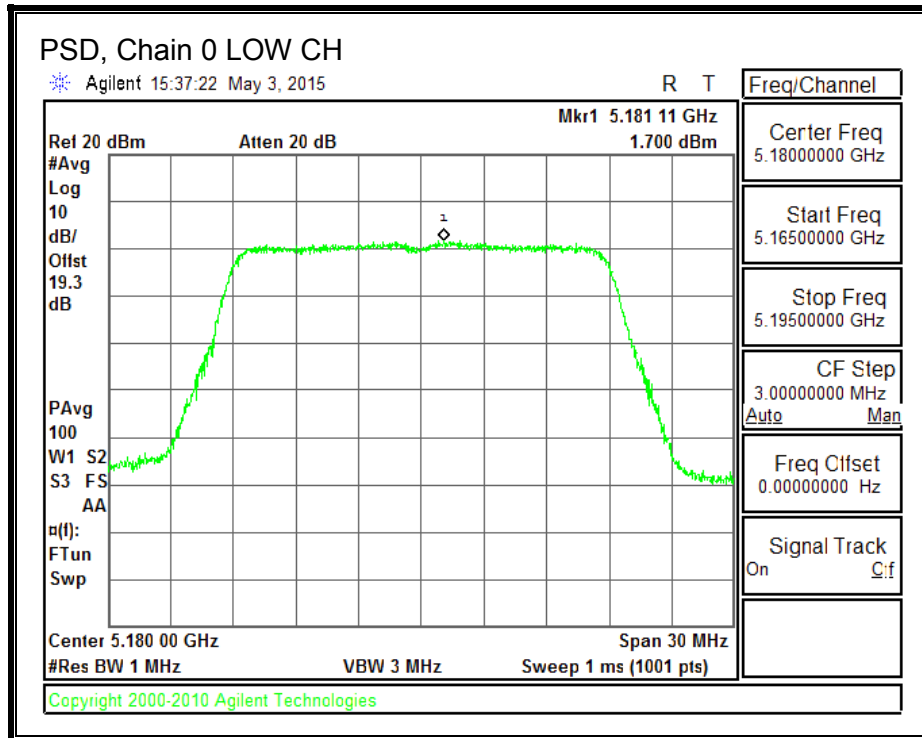

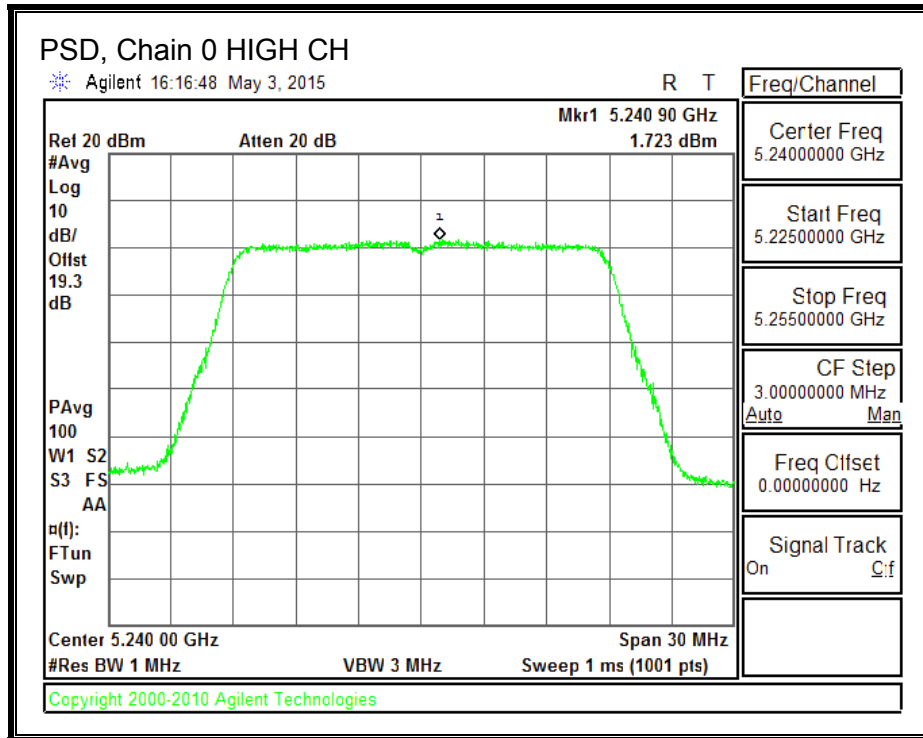



**PSD, Chain 1**

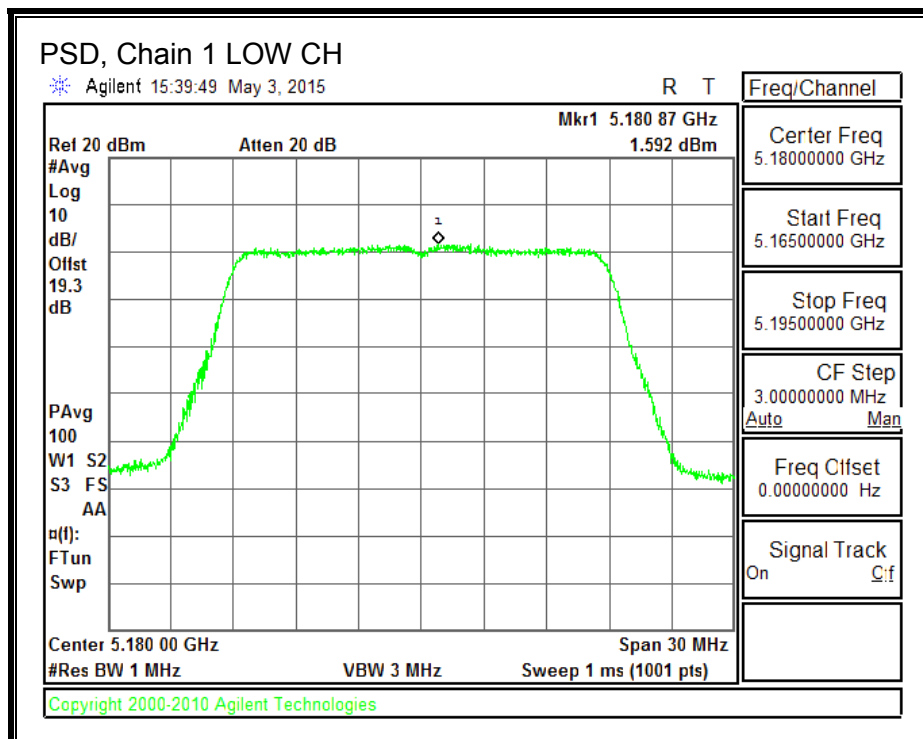


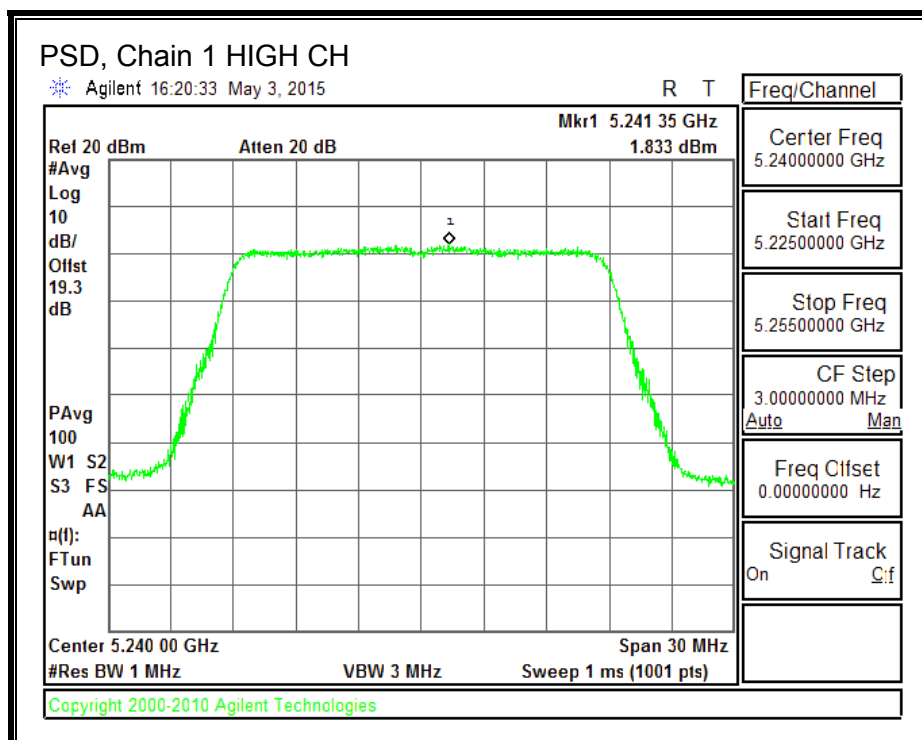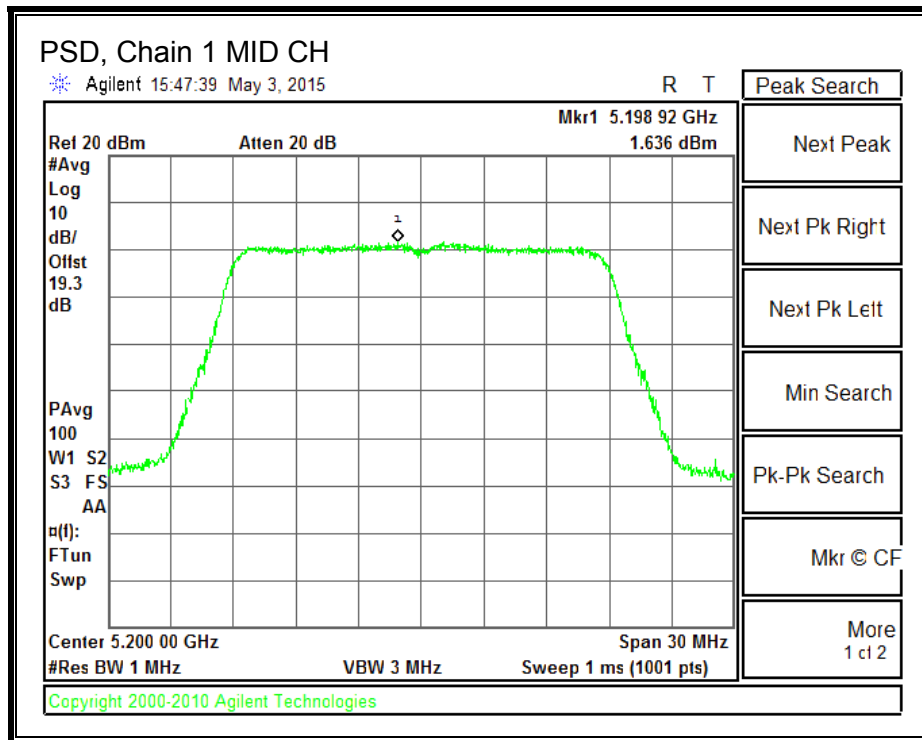



**PSD, Chain 2**

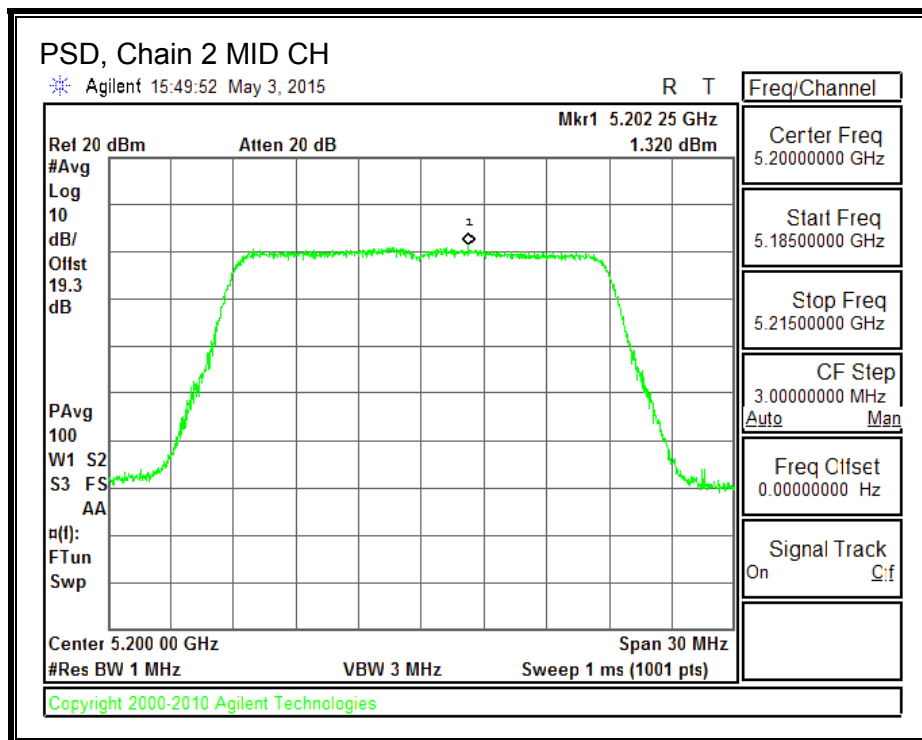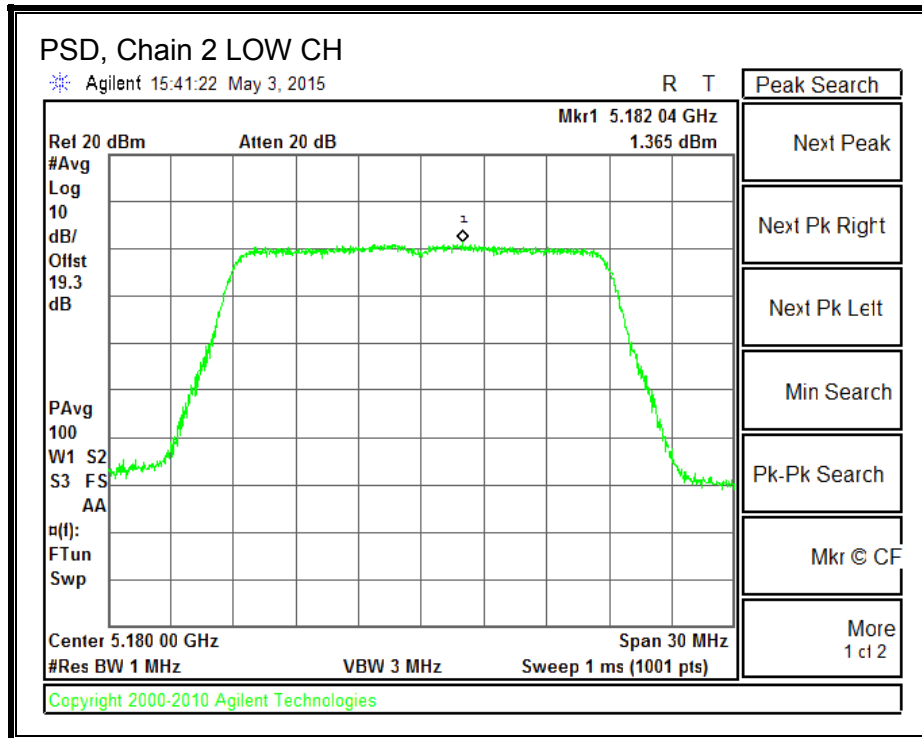

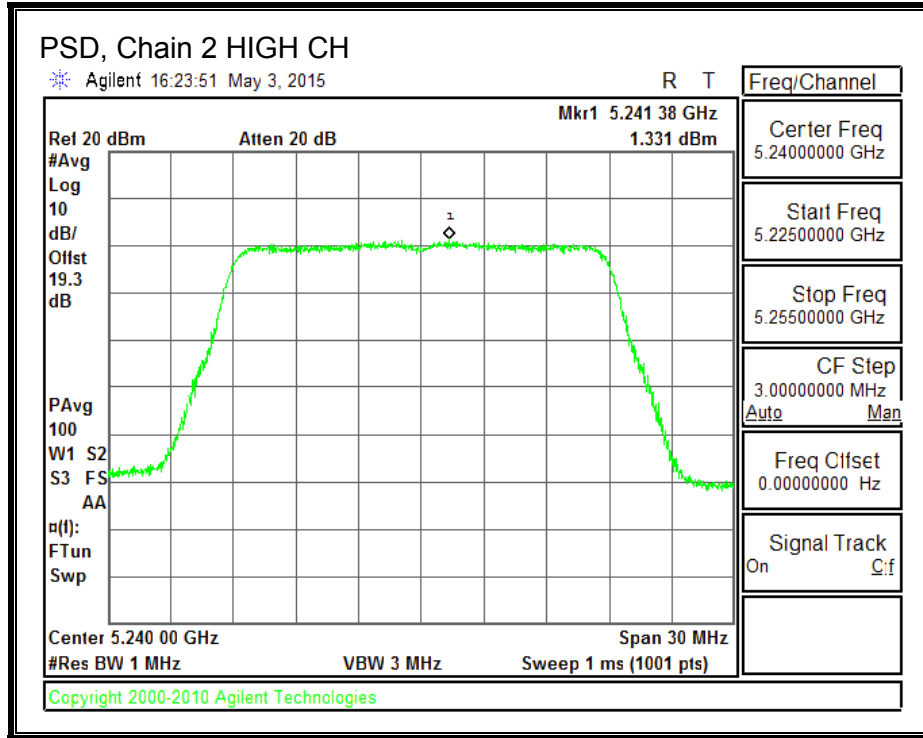

## 8.8.802.11n HT20 STBC 3TX MODE IN THE 5.2 GHz BAND

### 8.8.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5180	21.957	25.584	21.216
Mid	5200	23.246	24.960	21.424
High	5240	22.048	25.376	21.268



**26 dB BANDWIDTH, Chain 0**

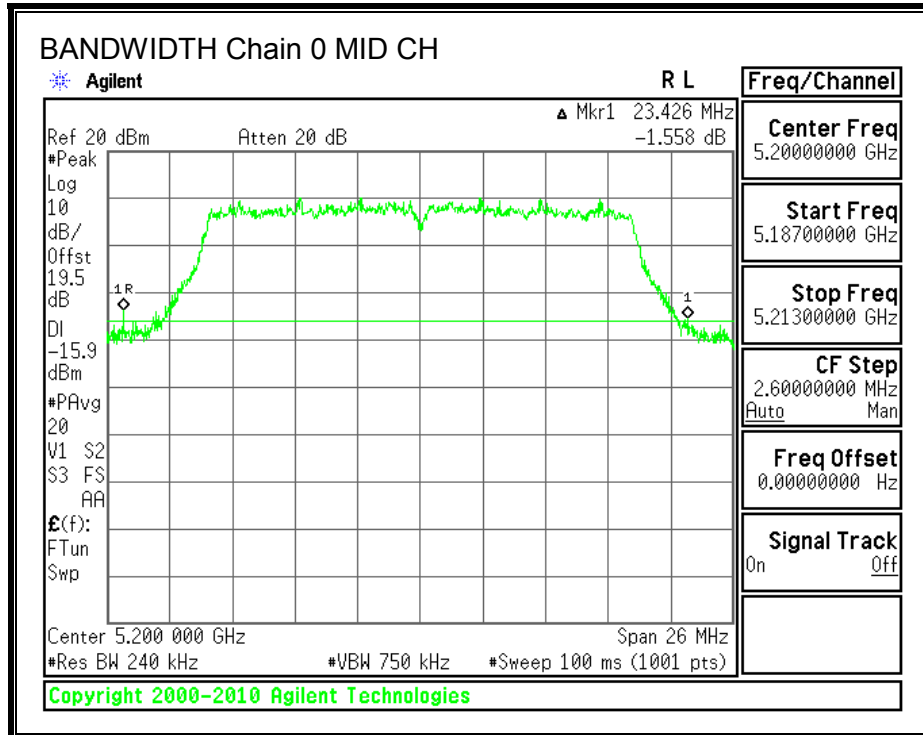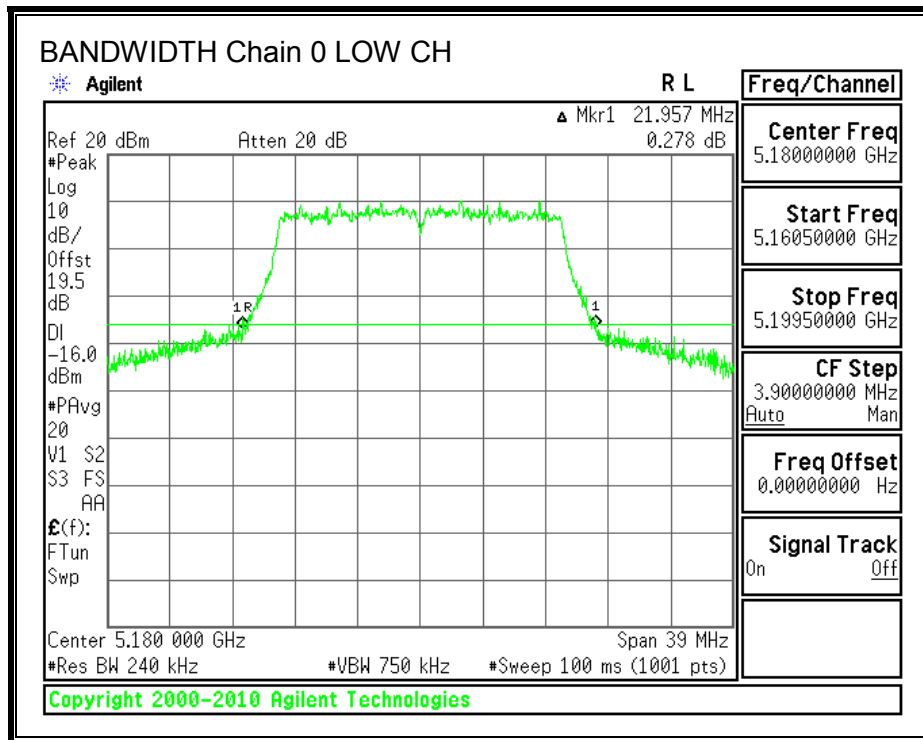


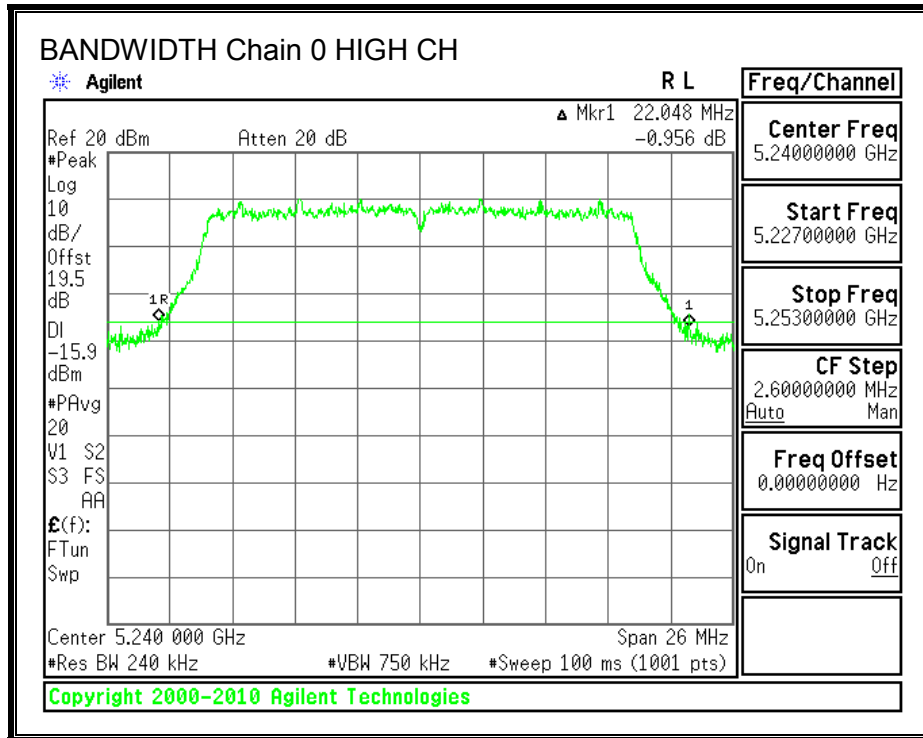



**26 dB BANDWIDTH, Chain 1**

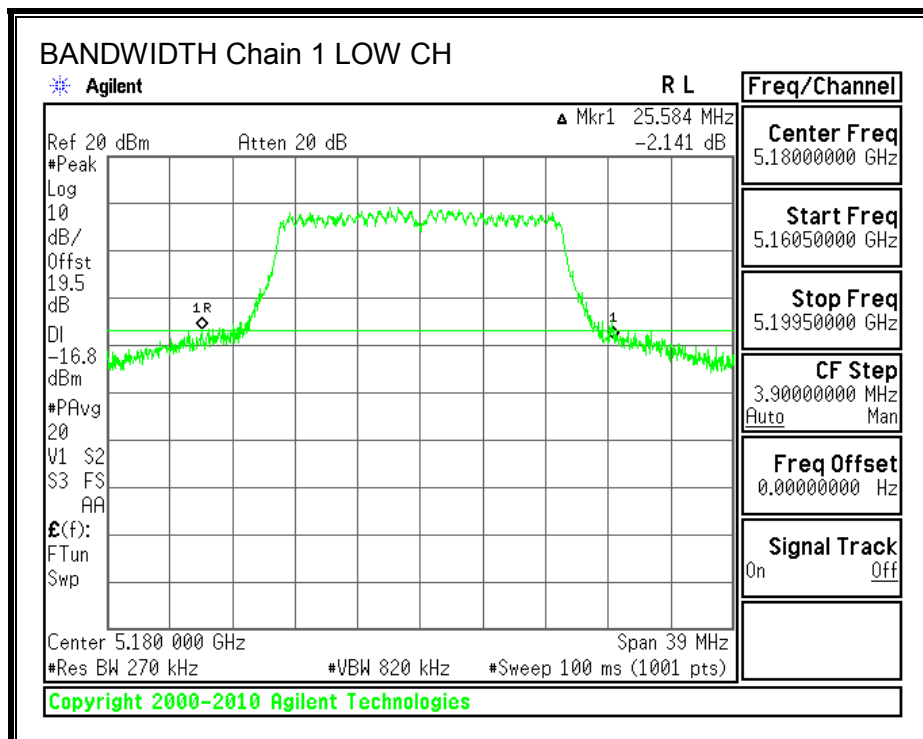

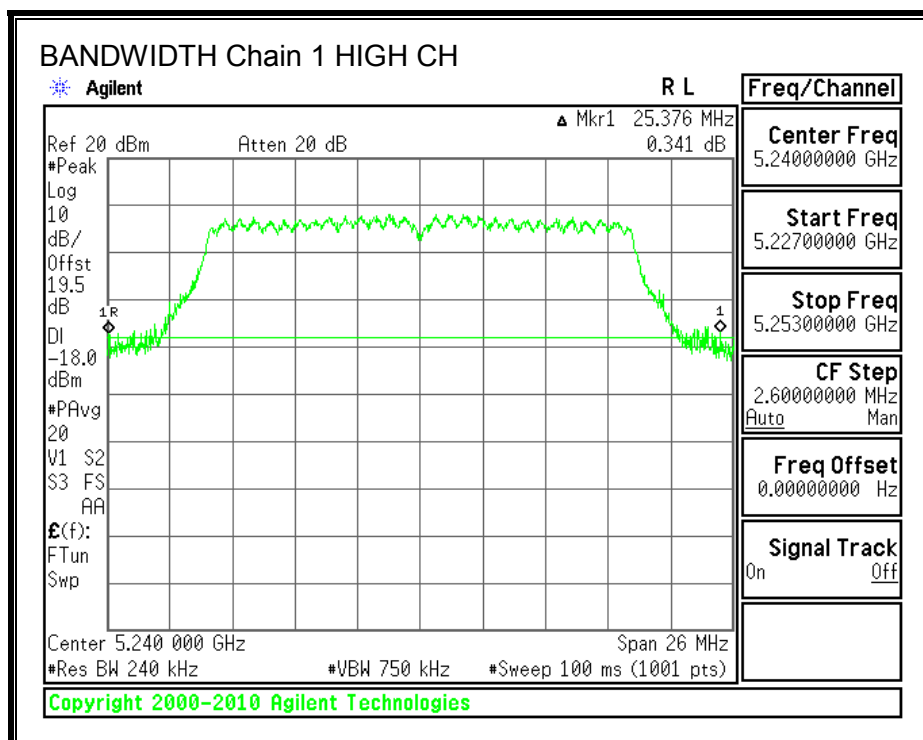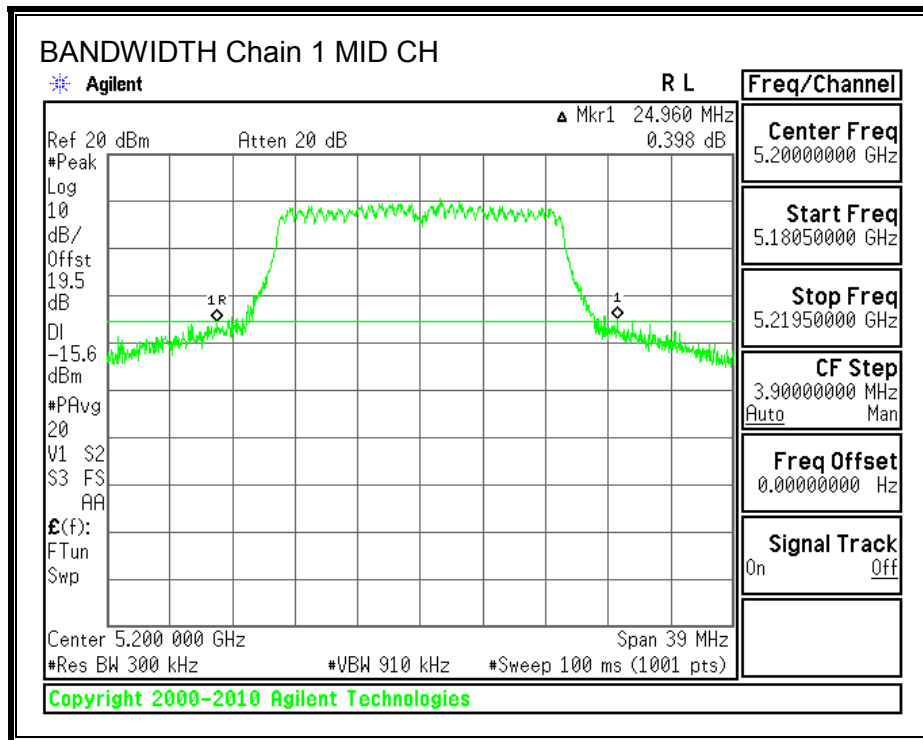

**26 dB BANDWIDTH, Chain 2**

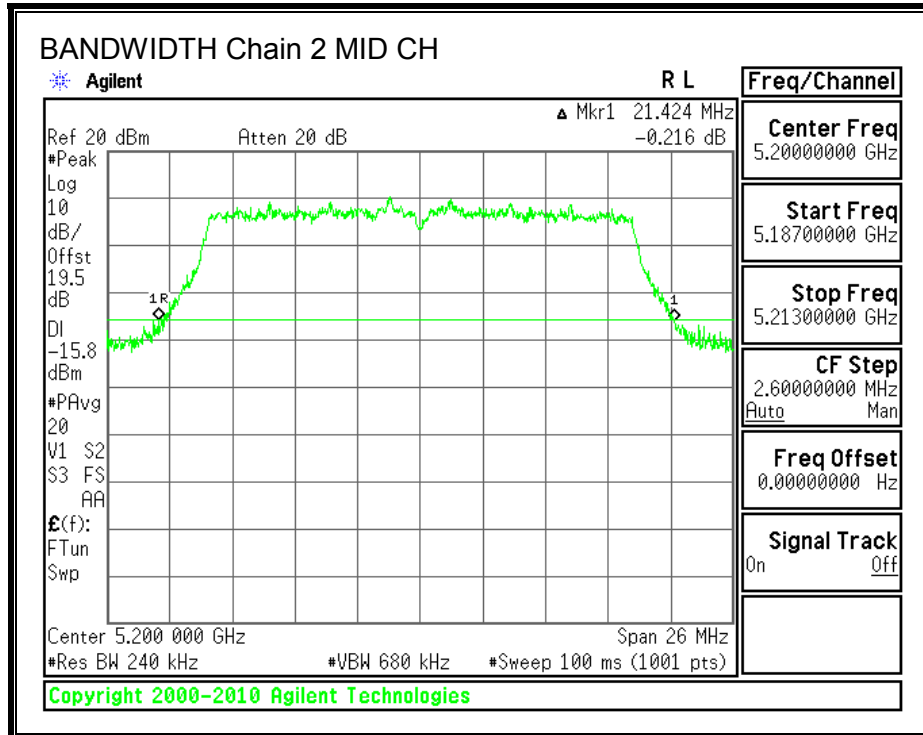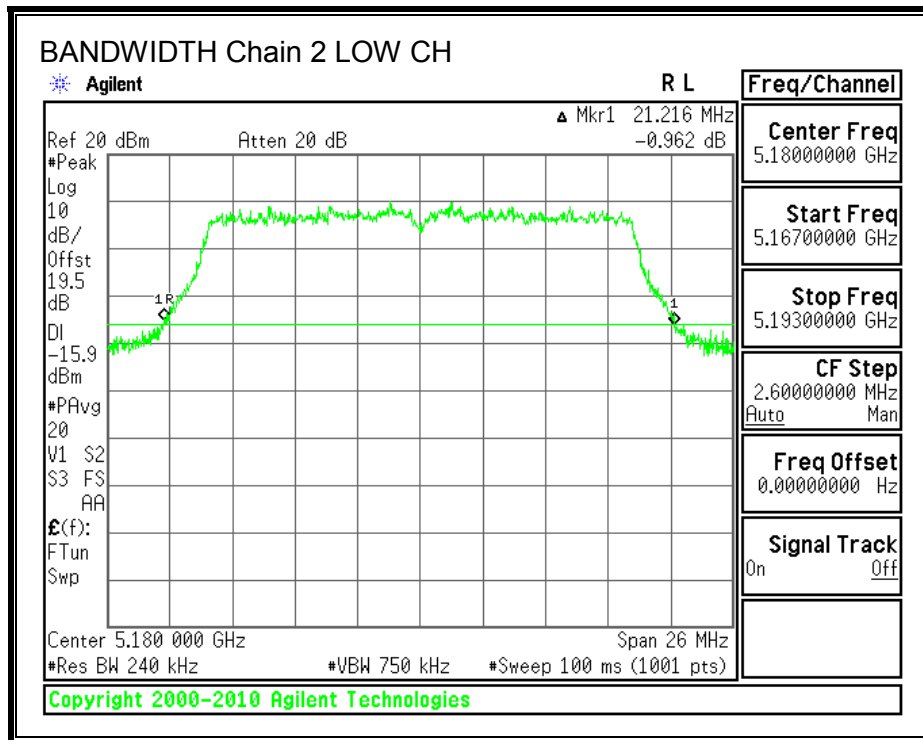

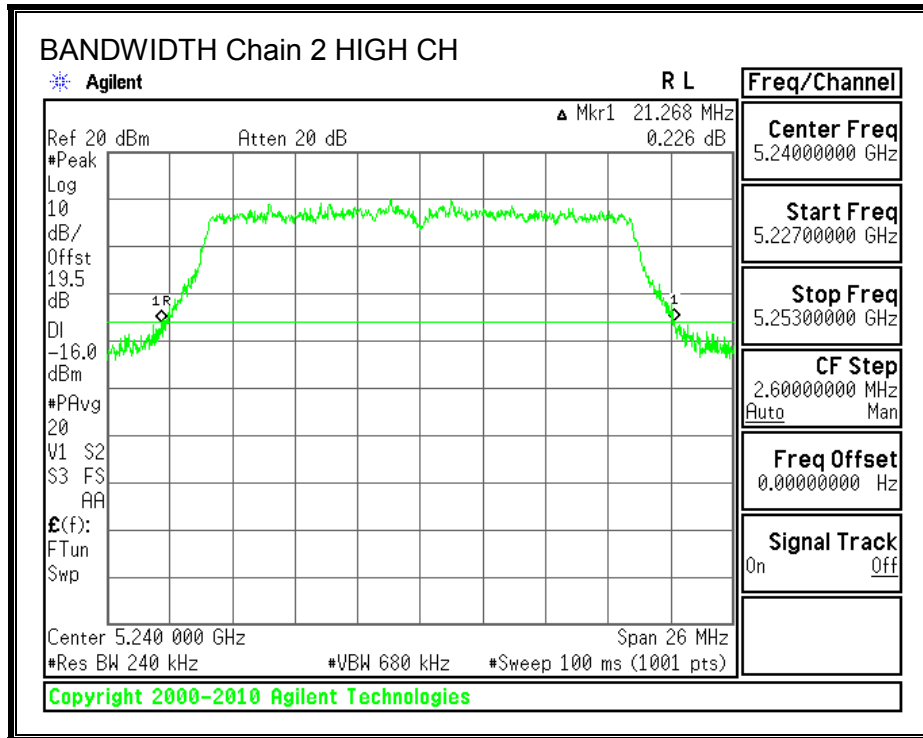



### 8.8.2. 99% BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5180	17.7679	17.7888	17.7518
Mid	5200	17.7479	17.7749	17.7417
High	5240	17.7527	17.7635	17.7400



**99% BANDWIDTH, Chain 0**

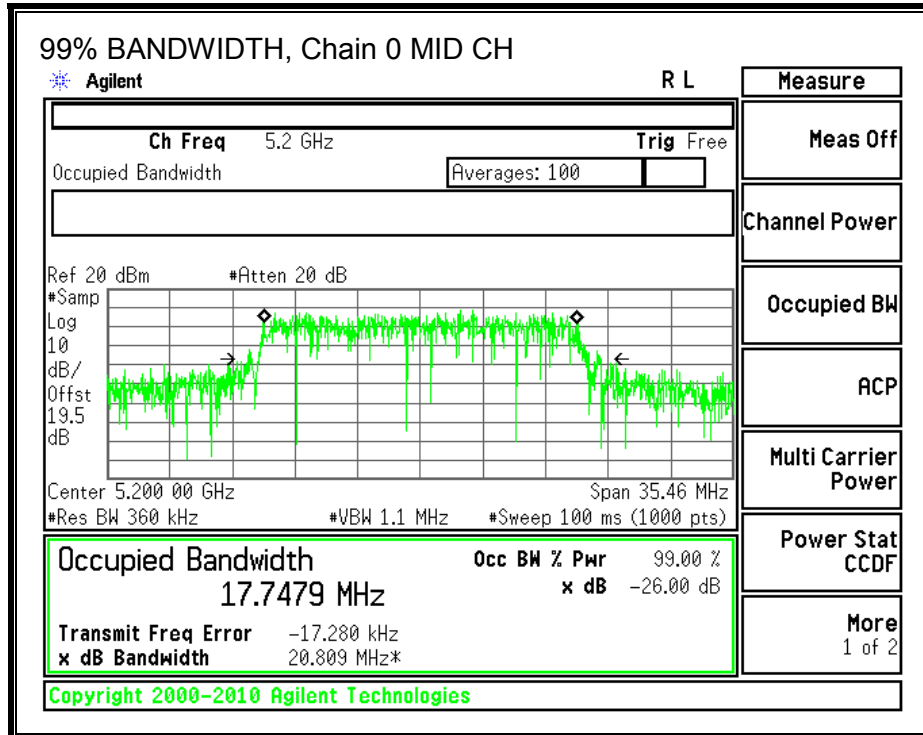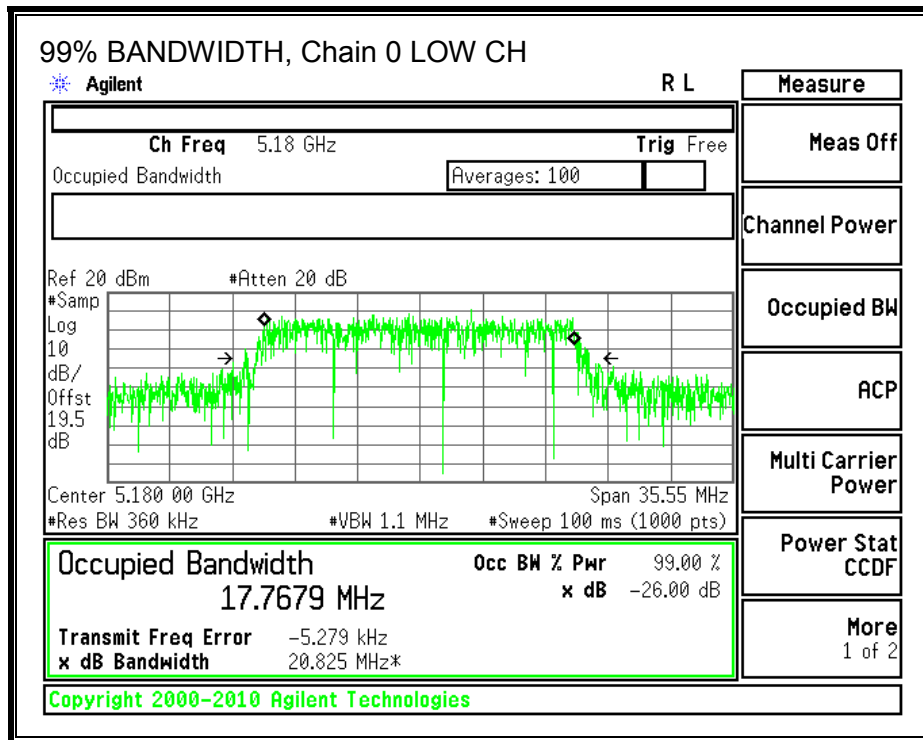


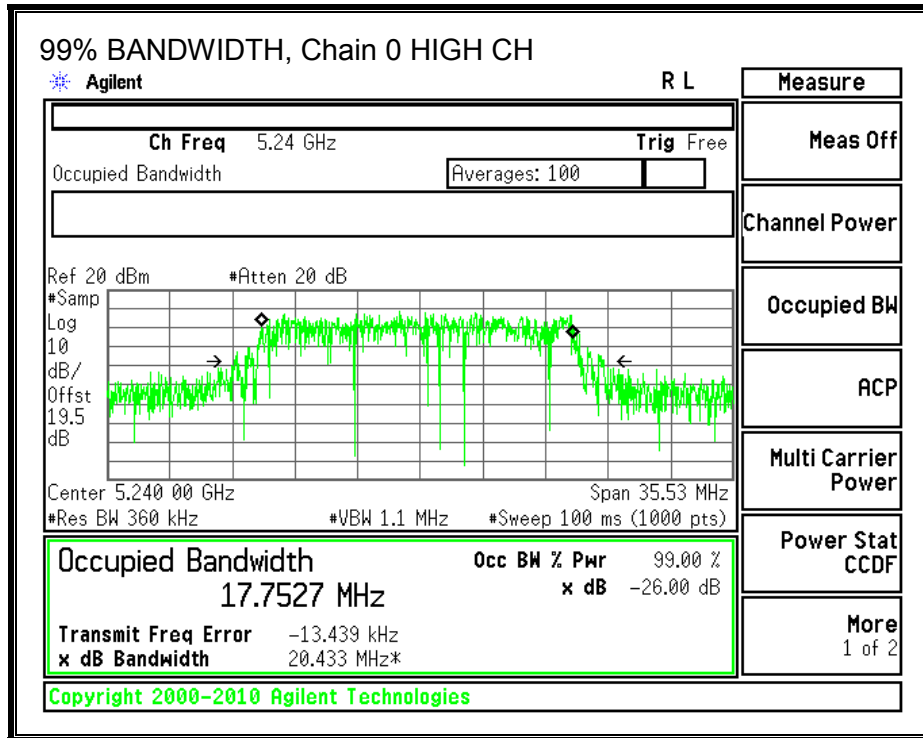



**99% BANDWIDTH, Chain 1**

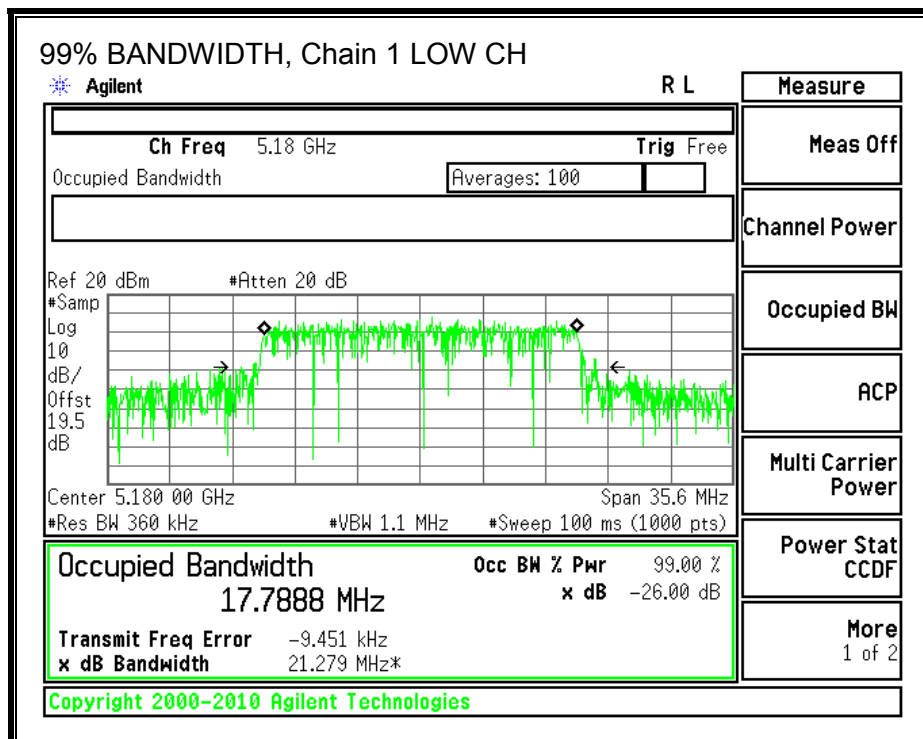

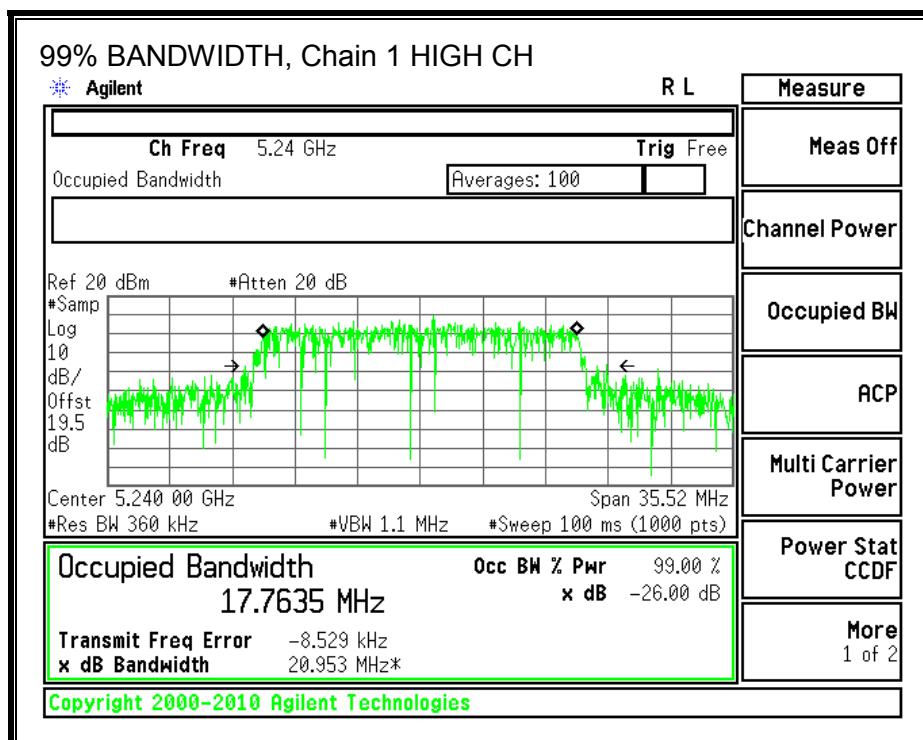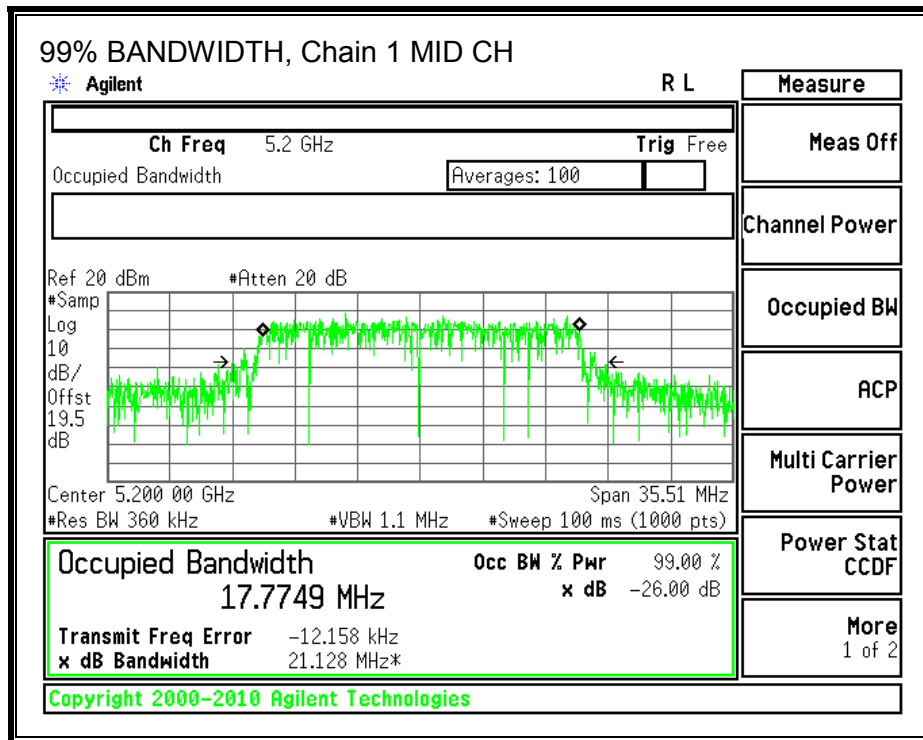

**99% BANDWIDTH, Chain 2**

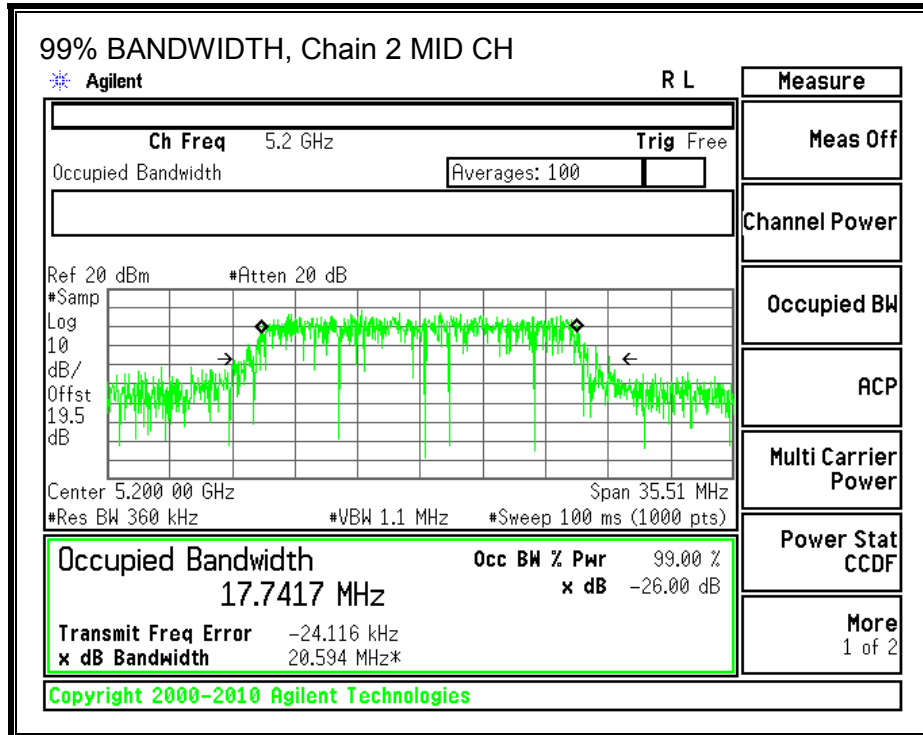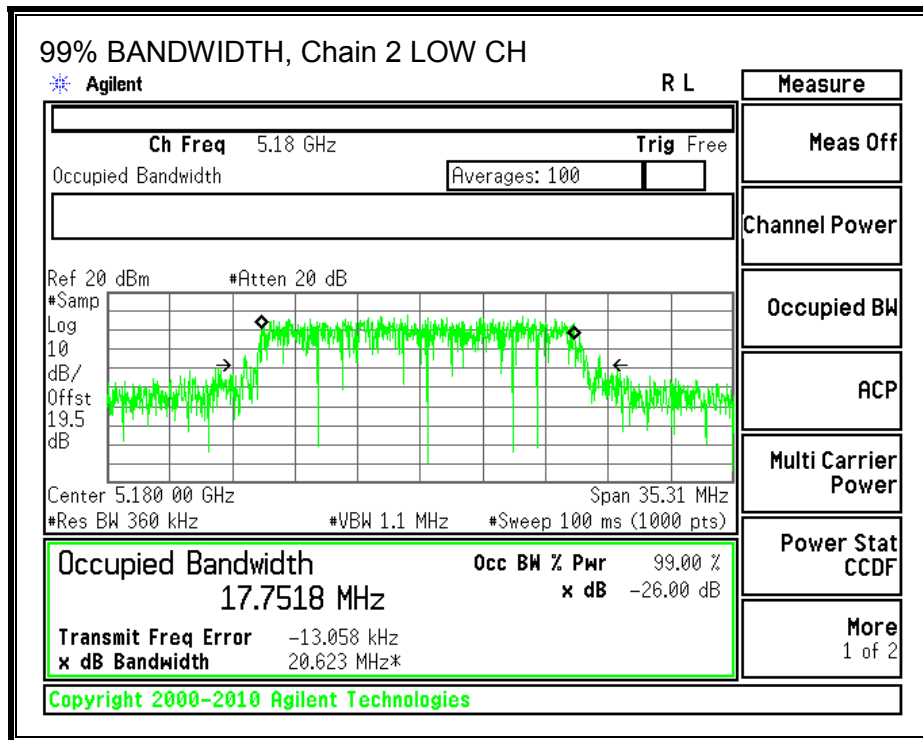

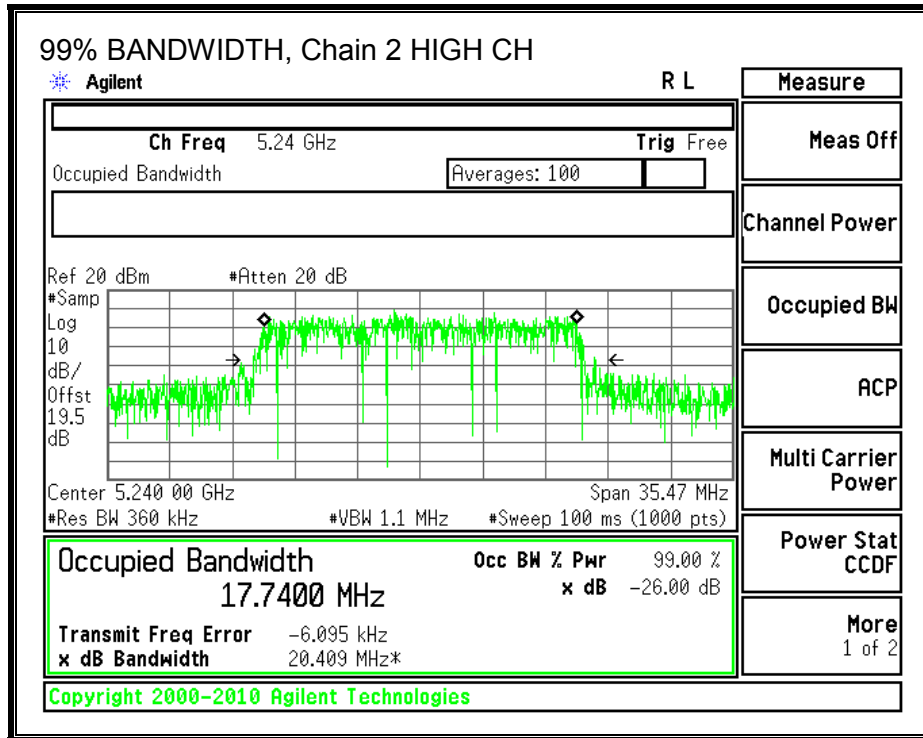

### 8.8.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power and PSD, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Chain 2 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
3.08	3.19	4.83	4.78



**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	4.78	4.78	24.00	11.00
Mid	5200	4.78	4.78	24.00	11.00
High	5240	4.78	4.78	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of PSD</b>
---------------------------	------	--

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	15.10	14.90	14.30	19.55	24.00	-4.45
Mid	5200	16.80	16.80	16.20	21.38	24.00	-2.62
High	5240	17.00	17.00	16.30	21.55	24.00	-2.45


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	5.020	5.321	4.960	9.874	11.00	-1.13
Mid	5200	5.010	5.188	4.572	9.702	11.00	-1.30
High	5240	5.270	5.474	4.872	9.984	11.00	-1.02


**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



**PSD, Chain 0**

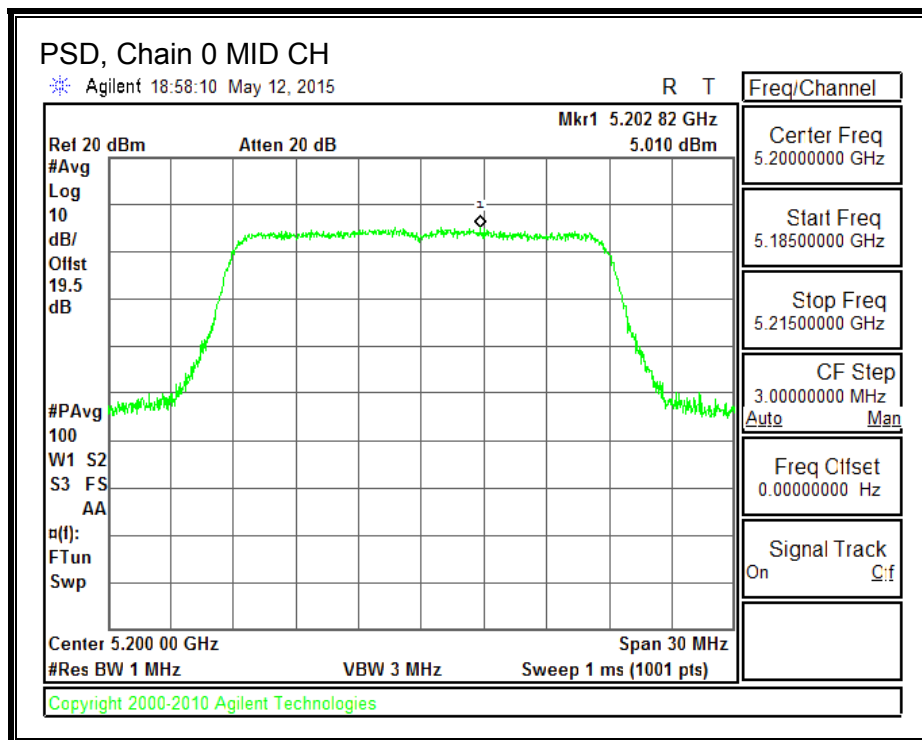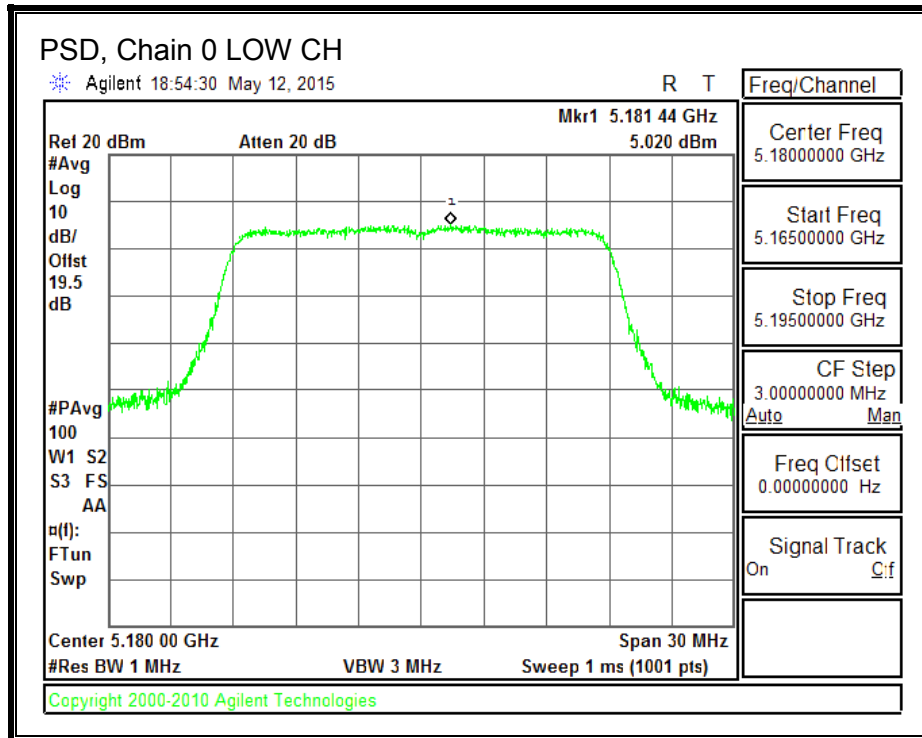


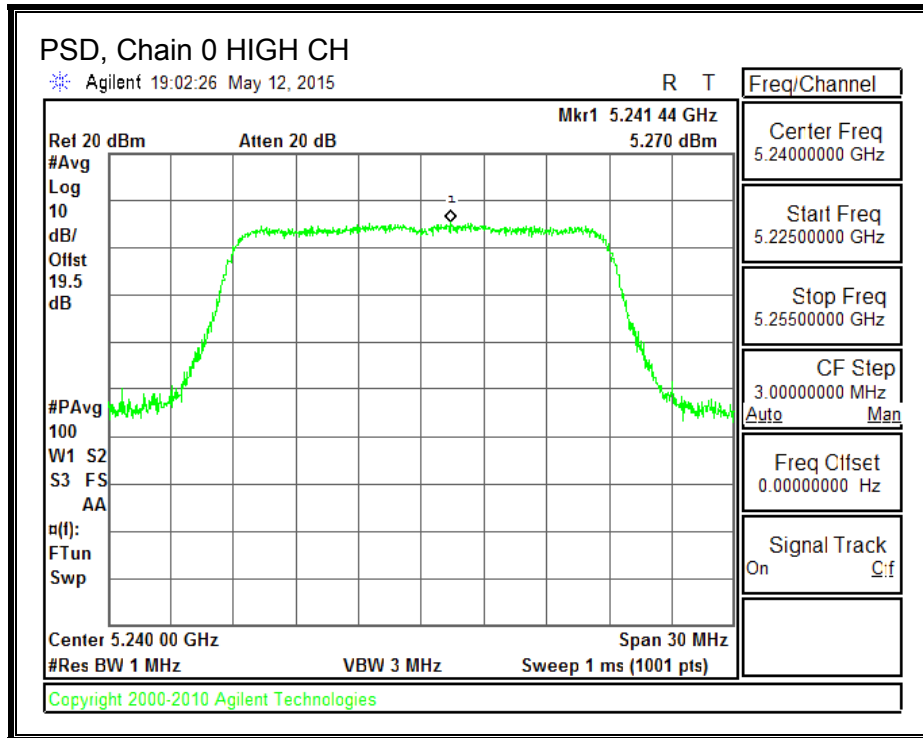



**PSD, Chain 1**

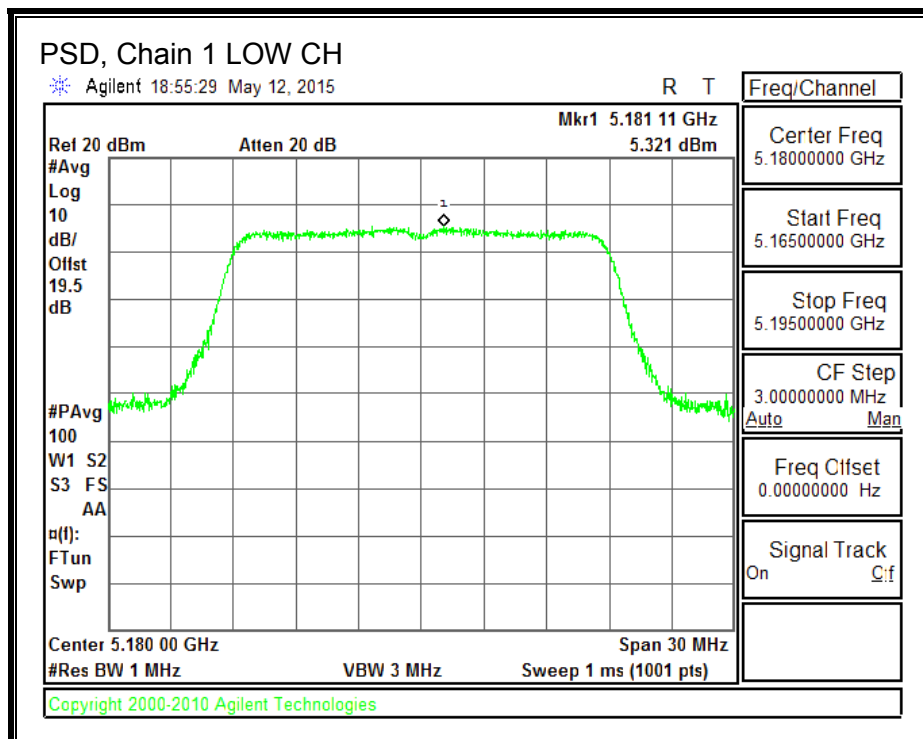

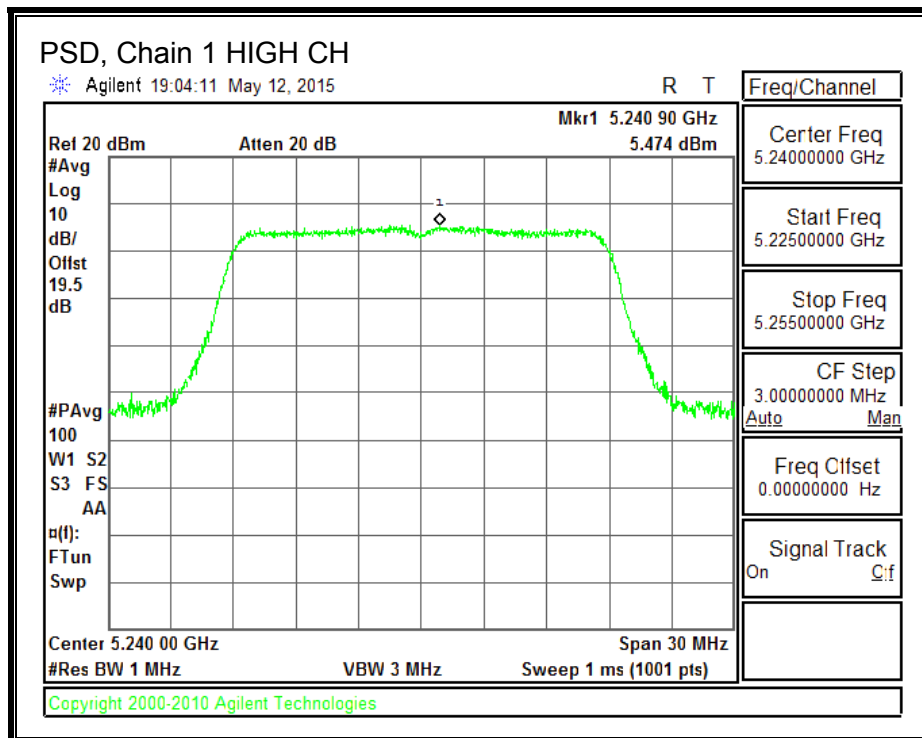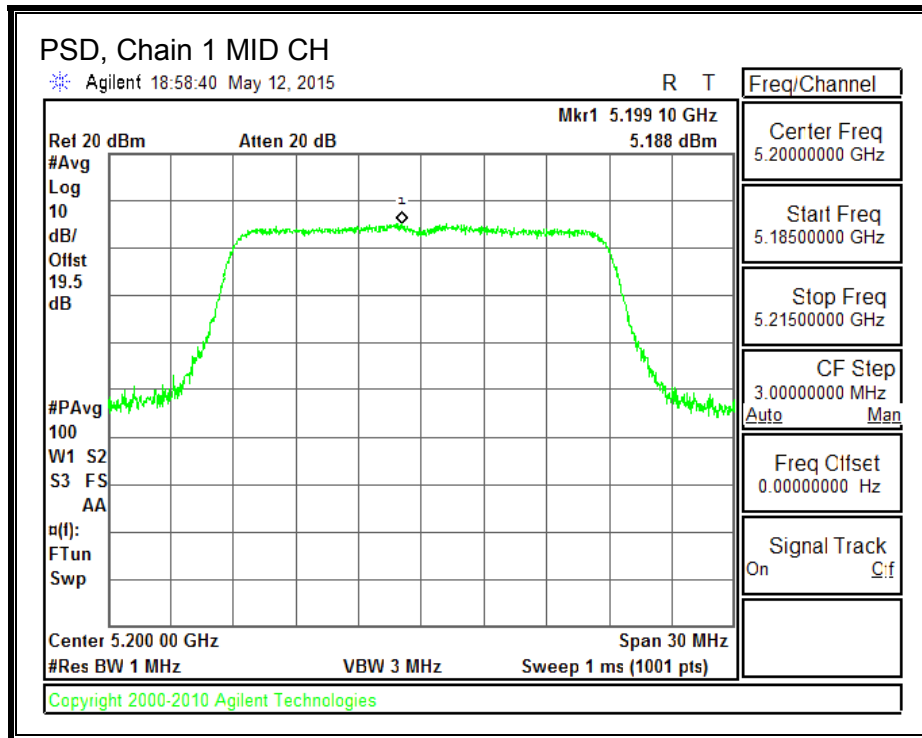

**PSD, Chain 2**

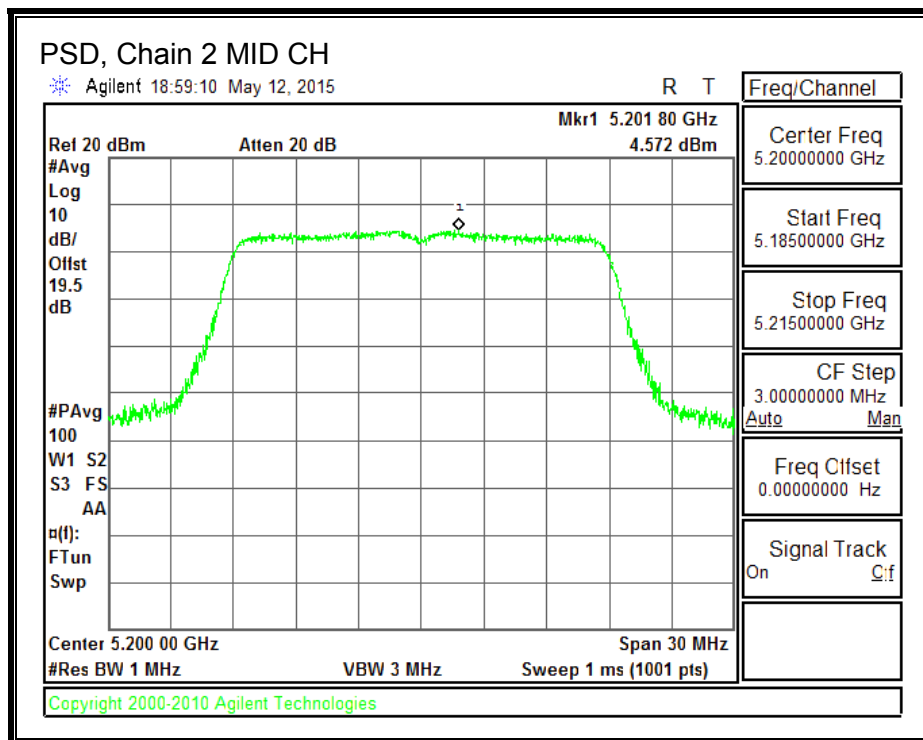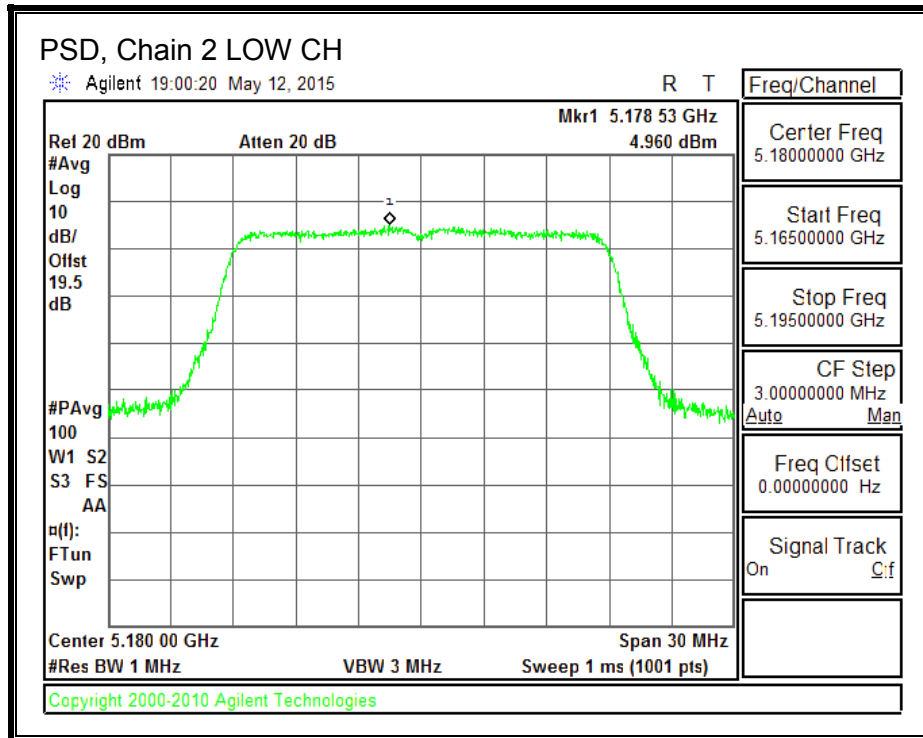

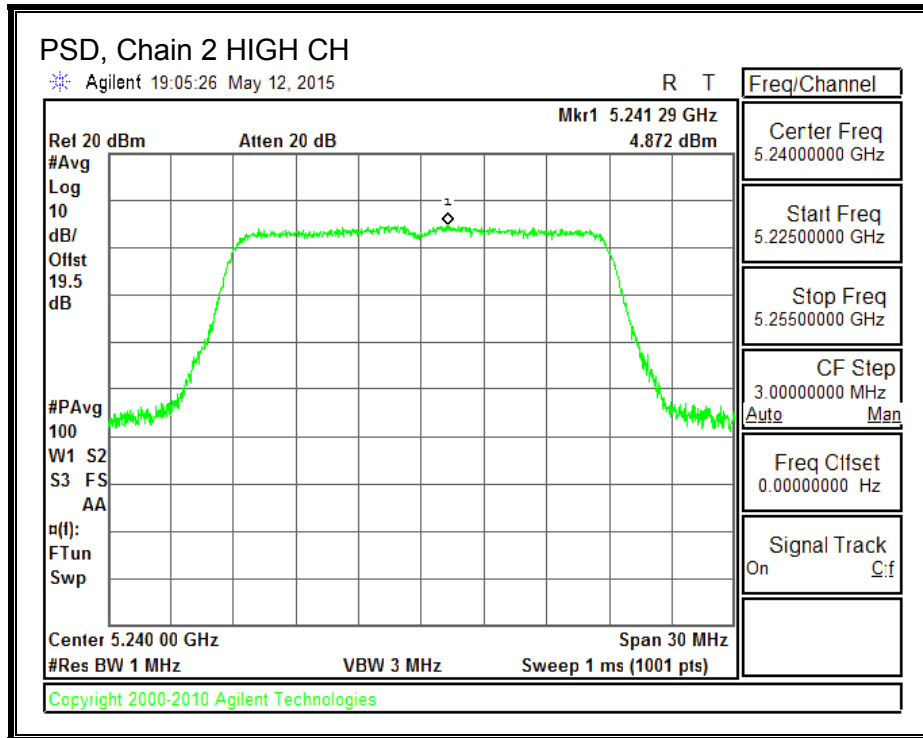

## 8.9.802.11n HT20 TxBF 3TX MODE IN THE 5.2 GHz BAND

### 8.9.1. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For Power and PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Chain 2 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.08	3.19	4.83	9.51



**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5180	9.51	9.51	20.49	7.49
Mid	5200	9.51	9.51	20.49	7.49
High	5240	9.51	9.51	20.49	7.49

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of PSD</b>
---------------------------	------	--

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	12.40	12.30	11.80	16.95	20.49	-3.54
Mid	5200	12.40	12.30	11.60	16.89	20.49	-3.60
High	5240	12.40	12.40	11.70	16.95	20.49	-3.54


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5180	1.700	1.592	1.365	6.326	7.49	-1.16
Mid	5200	1.716	1.636	1.320	6.332	7.49	-1.16
High	5240	1.723	1.833	1.331	6.406	7.49	-1.08


**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



**PSD, Chain 0**

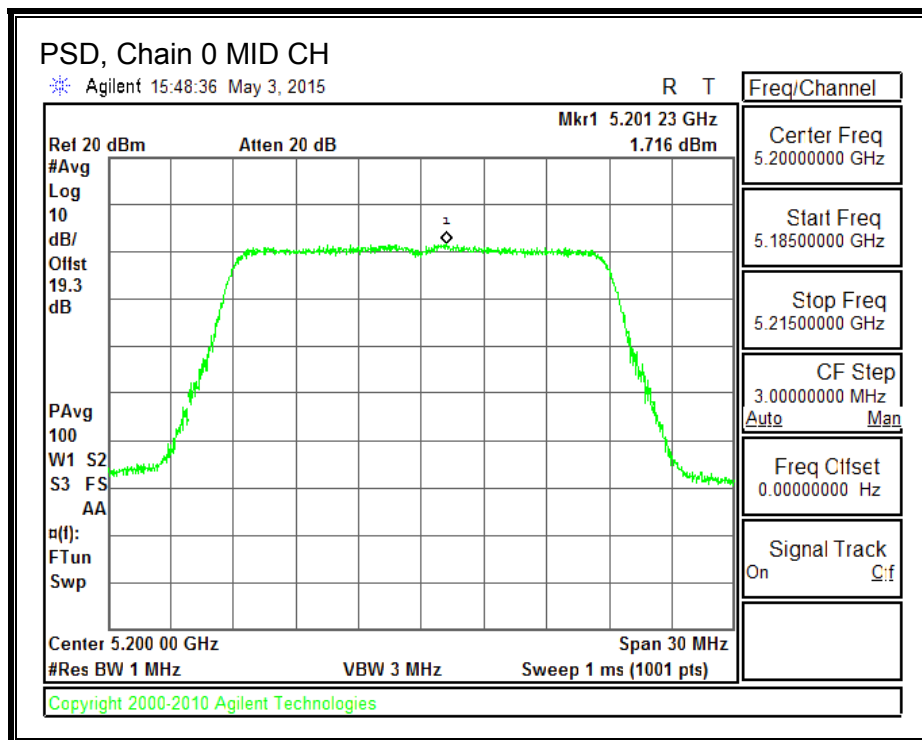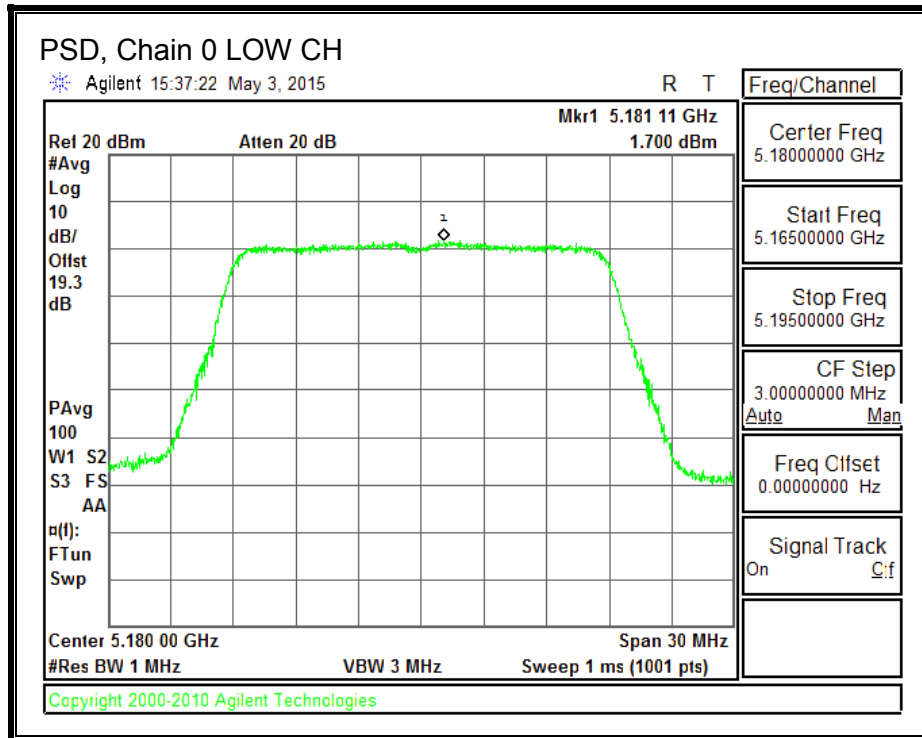


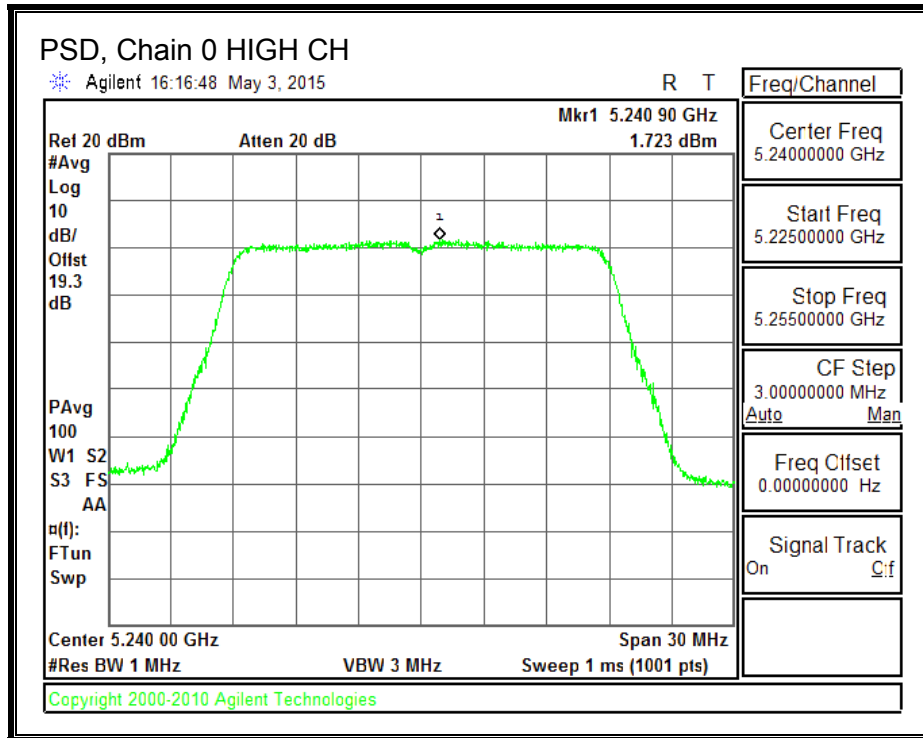



**PSD, Chain 1**

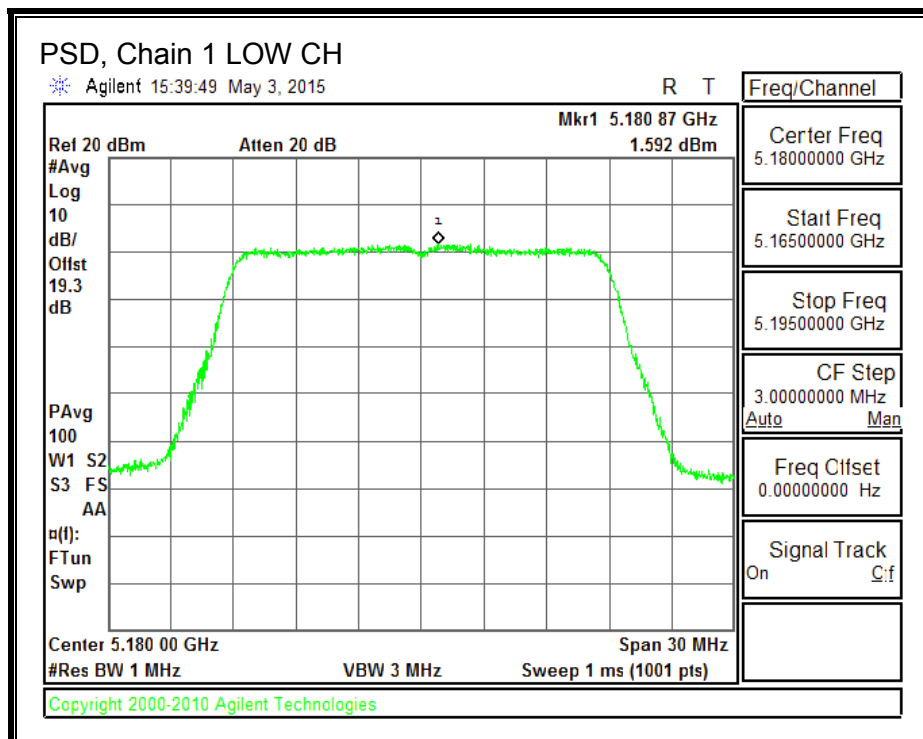

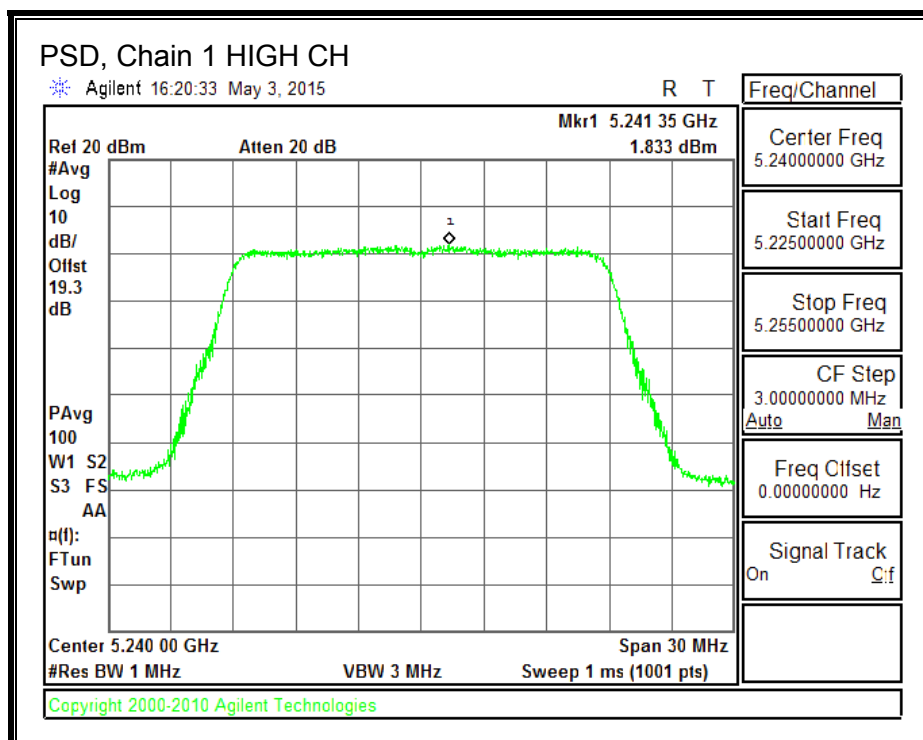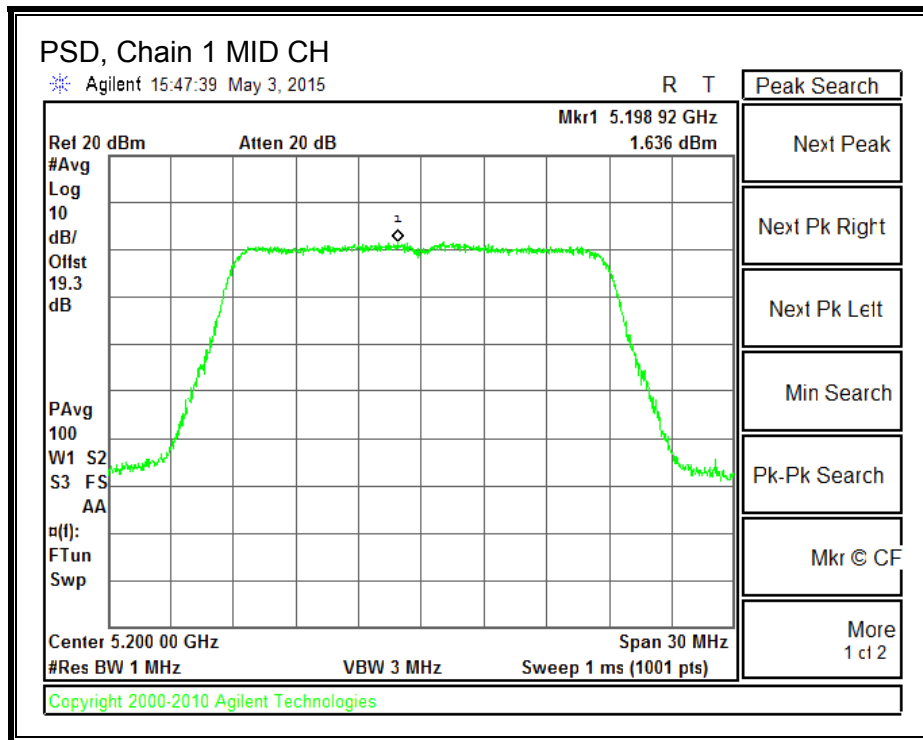

**PSD, Chain 2**

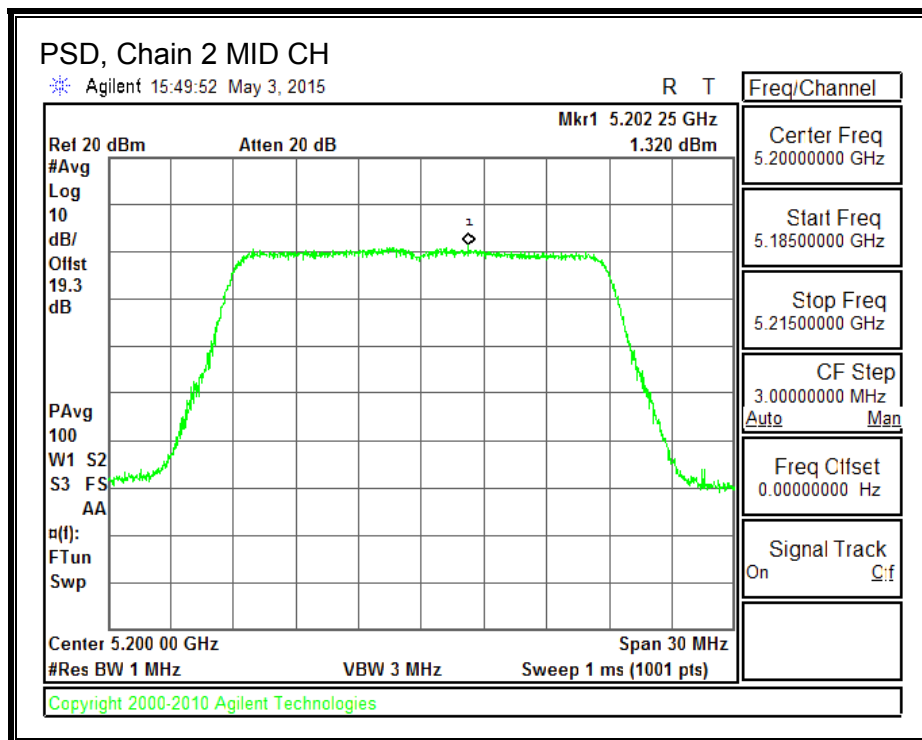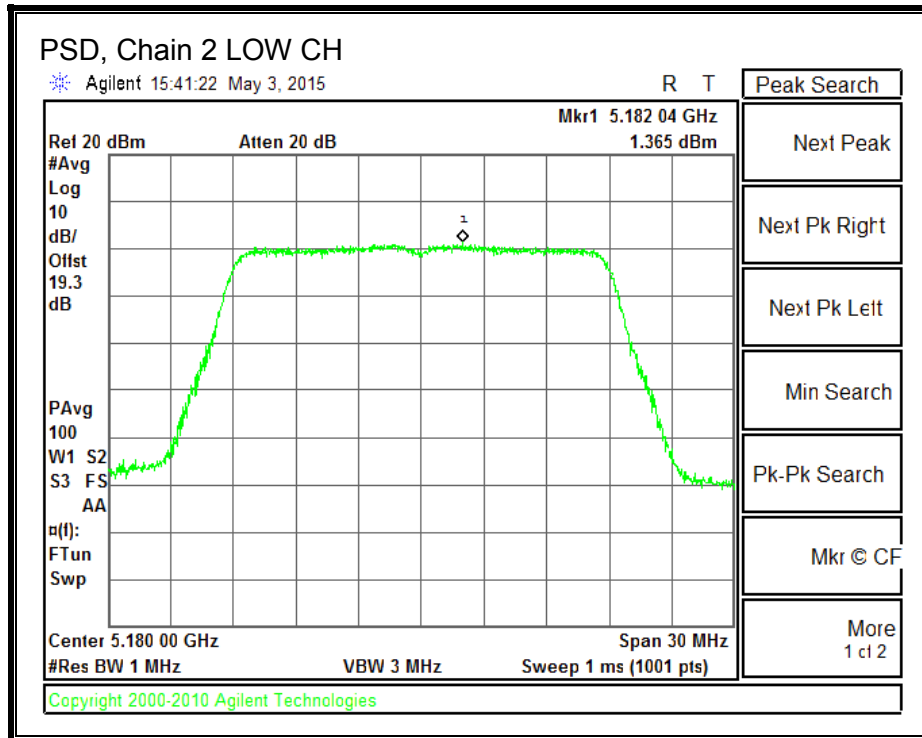

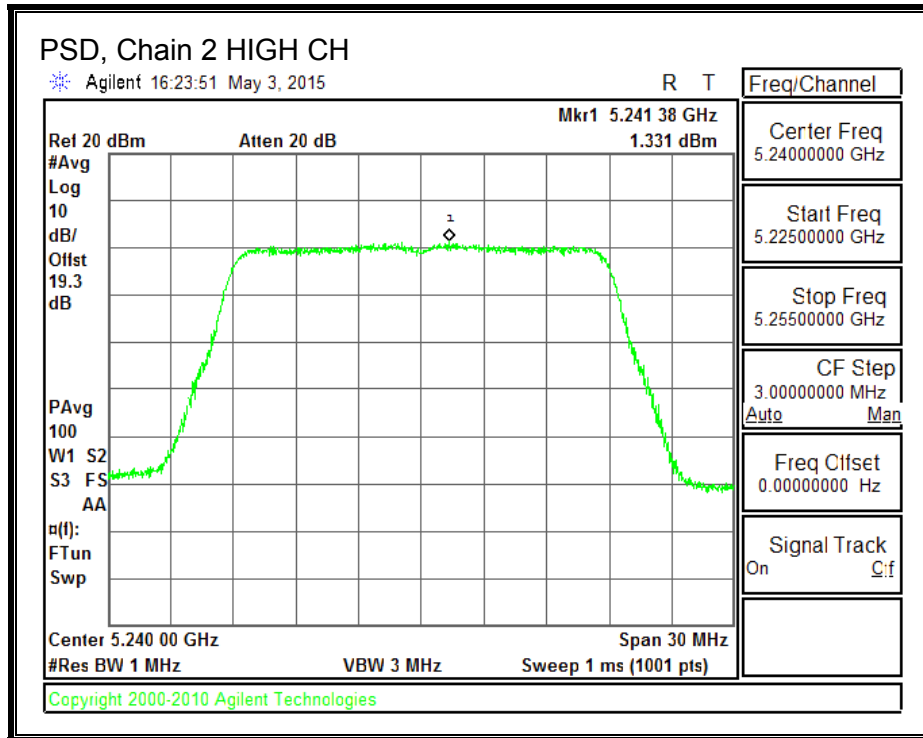

## **8.10. 802.11n HT40 1TX MODE IN THE 5.2 GHz BAND**

### **8.10.1. OUTPUT POWER**

#### **LIMITS**

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

This is SISO mode, AG is the highest (worst-case) = 4.83 dBi

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Low	5190	4.83	24.00
High	5230	4.83	24.00

**Output Power Results**

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	10.90	10.90	24.00	-13.10
High	5230	18.00	18.00	24.00	-6.00

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



## **8.11. 802.11n HT40 CDD 2TX MODE IN THE 5.2 GHz BAND**

### **8.11.1. OUTPUT POWER AND PSD**

#### **LIMITS**

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
3.19	4.83	5.09

For PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.19	4.83	8.06

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	5.09	8.06	24.00	8.94
High	5230	5.09	8.06	24.00	8.94

<b>Duty Cycle CF (dB)</b>	0.09	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	8.90	9.30	12.11	24.00	-11.89
High	5230	17.55	17.60	20.59	24.00	-3.41

**PSD Results**



Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	4.093	4.191	7.243	8.94	-1.70
High	5230	3.759	3.818	6.889	8.94	-2.05

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

**PSD, Chain 0**

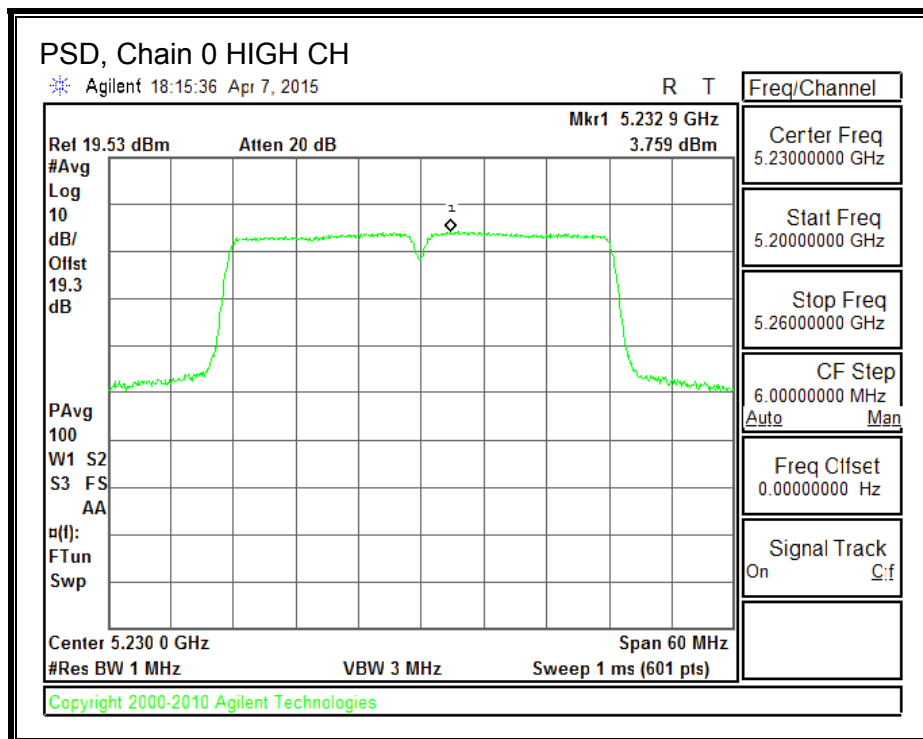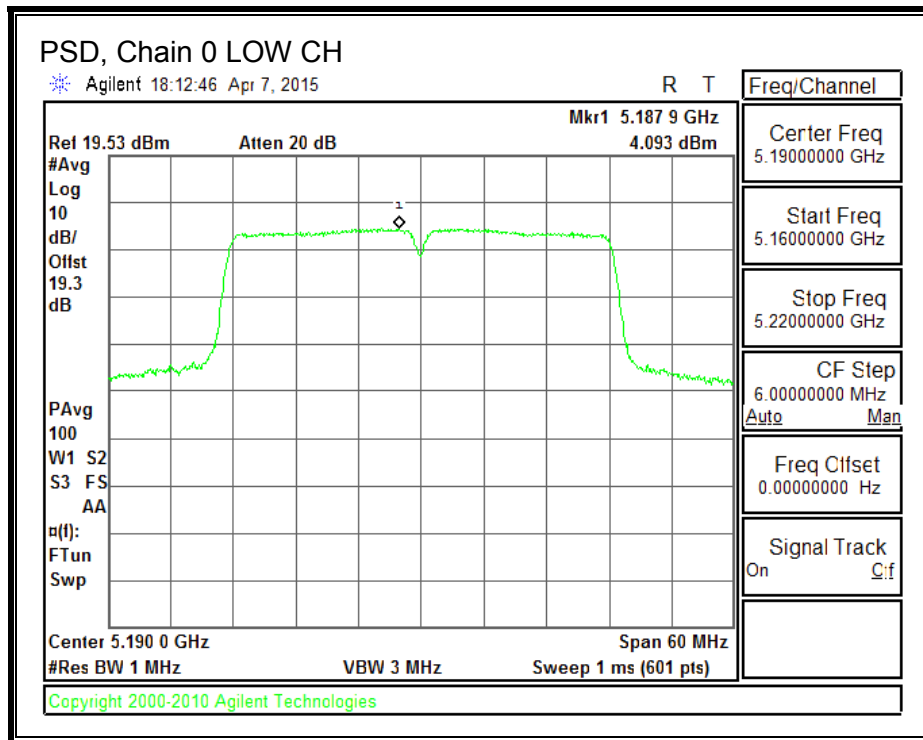

**PSD, Chain 1**

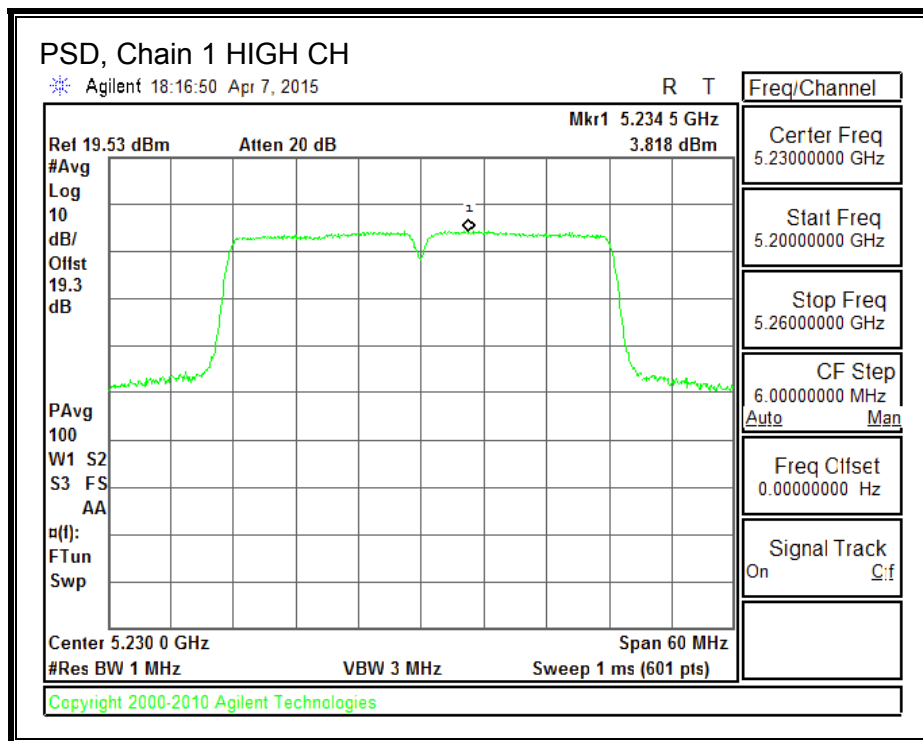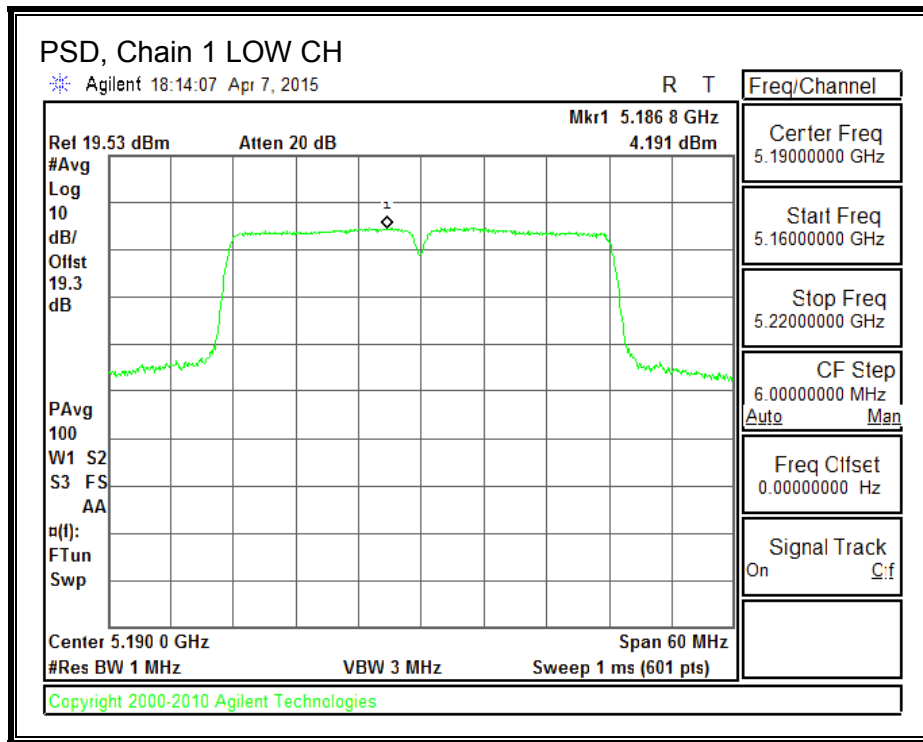

## **8.12. 802.11n HT40 TxBF 2TX MODE IN THE 5.2 GHz BAND**

### **8.12.1. OUTPUT POWER AND PSD**

#### **LIMITS**

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power and PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.19	4.83	8.06

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	8.06	8.06	21.94	8.94
High	5230	8.06	8.06	21.94	8.94

<b>Duty Cycle CF (dB)</b>	0.09	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	10.20	10.50	13.36	21.94	-8.58
High	5230	17.55	17.60	20.59	21.94	-1.35



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	4.093	4.191	7.243	8.94	-1.70
High	5230	3.759	3.818	6.889	8.94	-2.05



**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



**PSD, Chain 0**

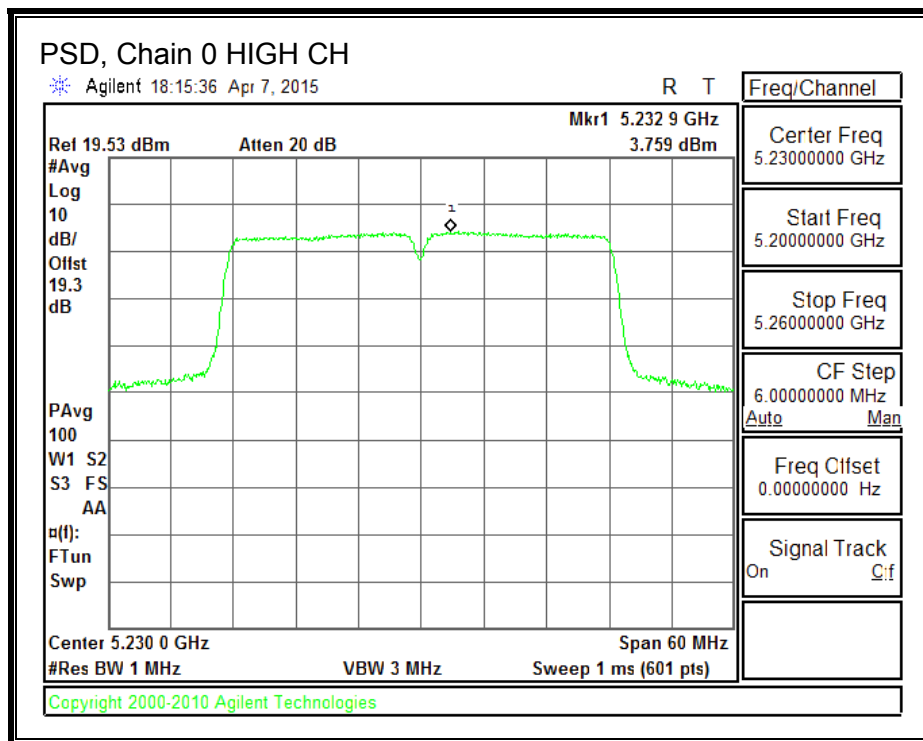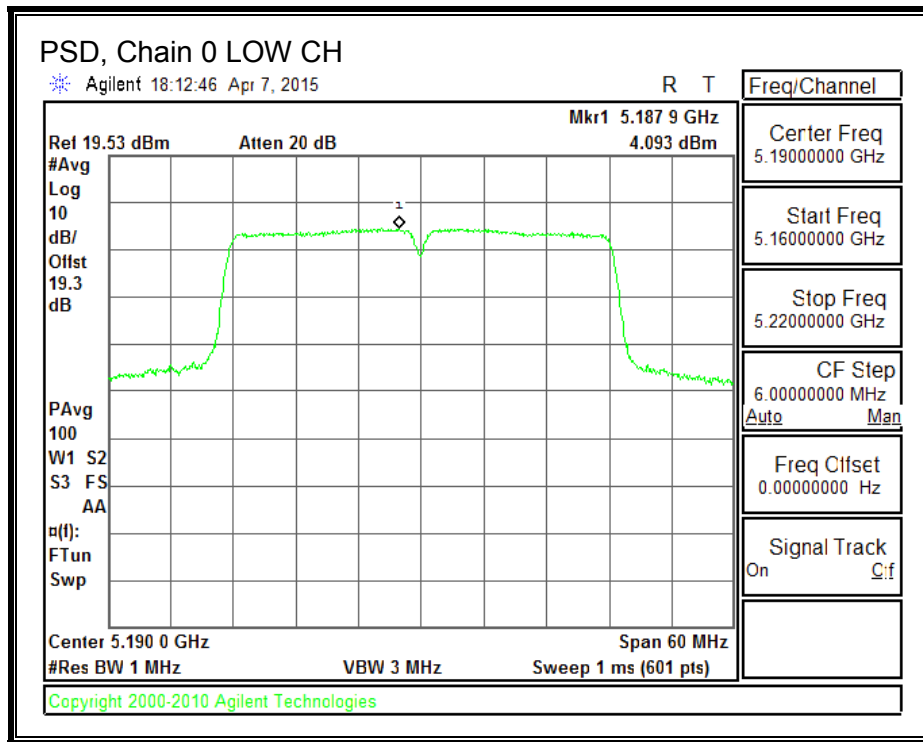

**PSD, Chain 1**

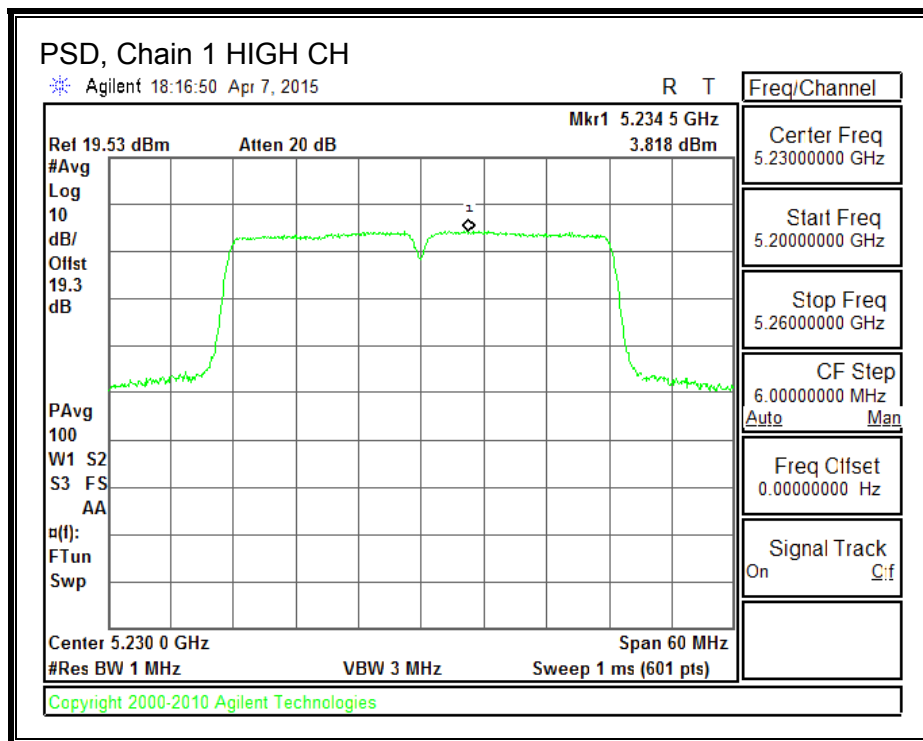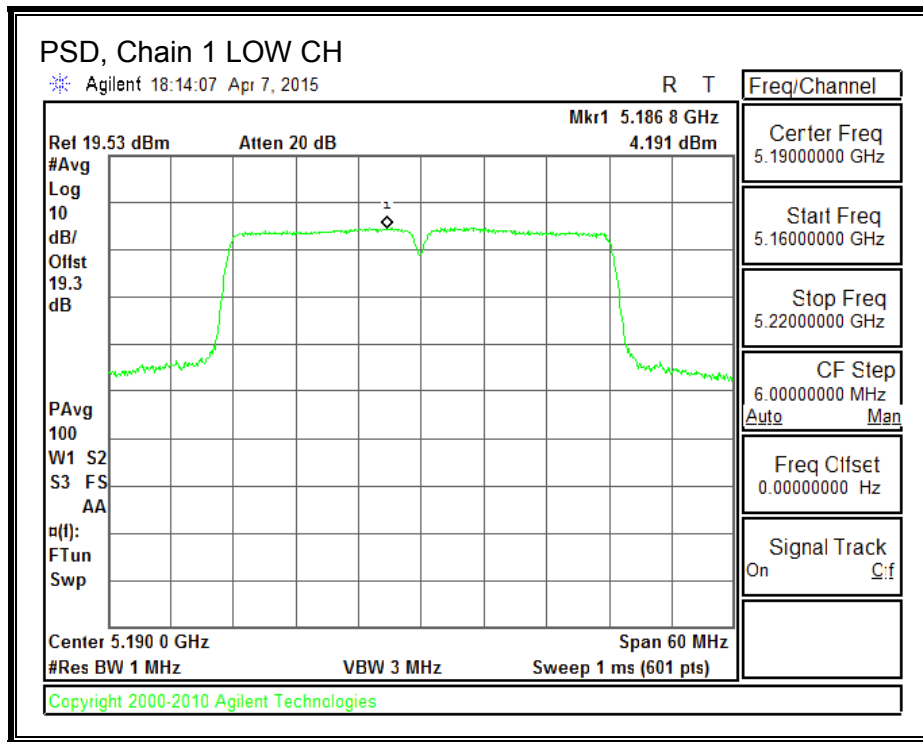

### 8.13. 802.11n HT40 CDD 3TX MODE IN THE 5.2 GHz BAND

#### 8.13.1. 26 dB BANDWIDTH



##### LIMITS

None; for reporting purposes only.



##### RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5190	62.45	63.91	63.33
High	5230	61.28	53.09	51.48



**26 dB BANDWIDTH, Chain 0**

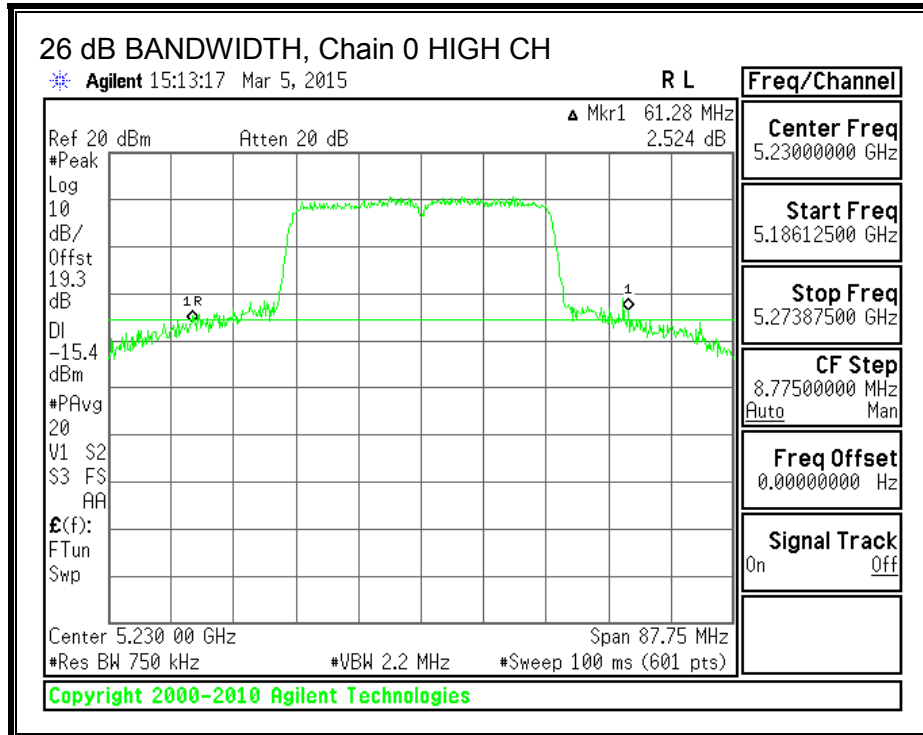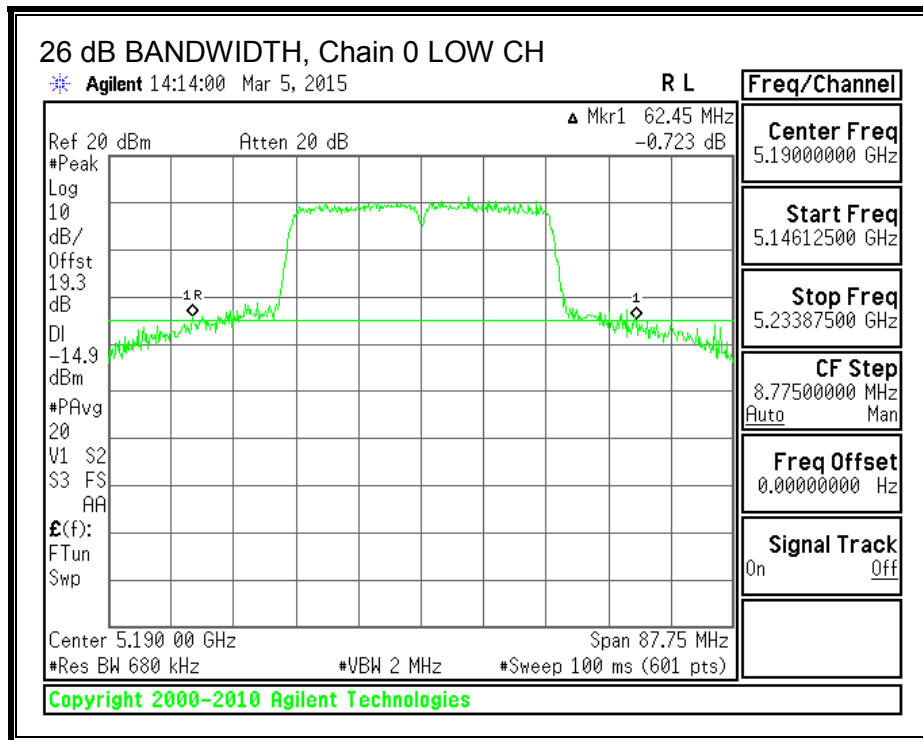

**26 dB BANDWIDTH, Chain 1**

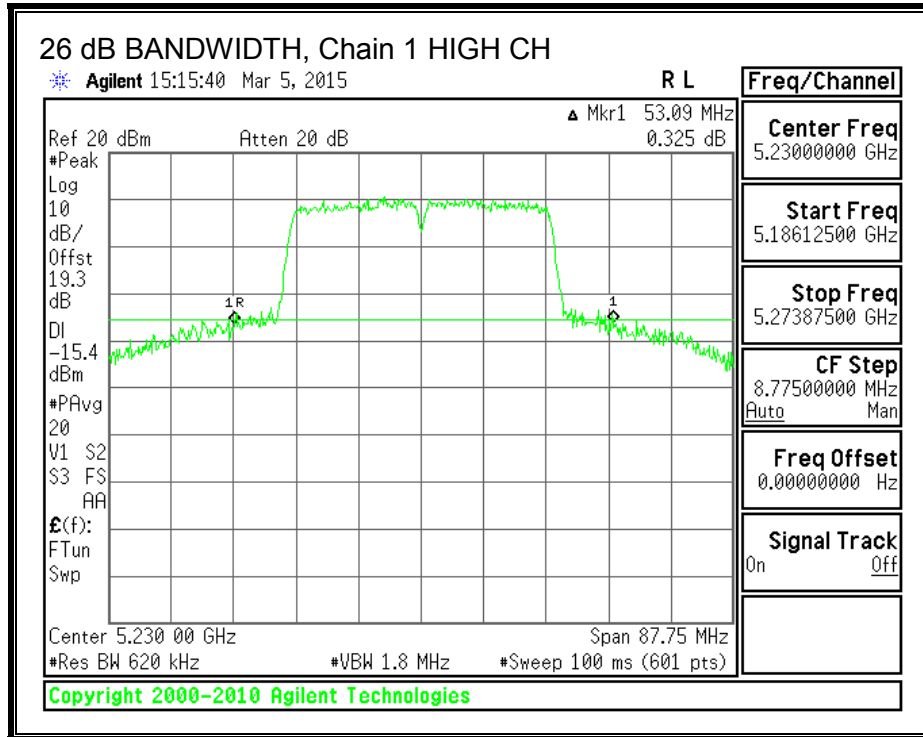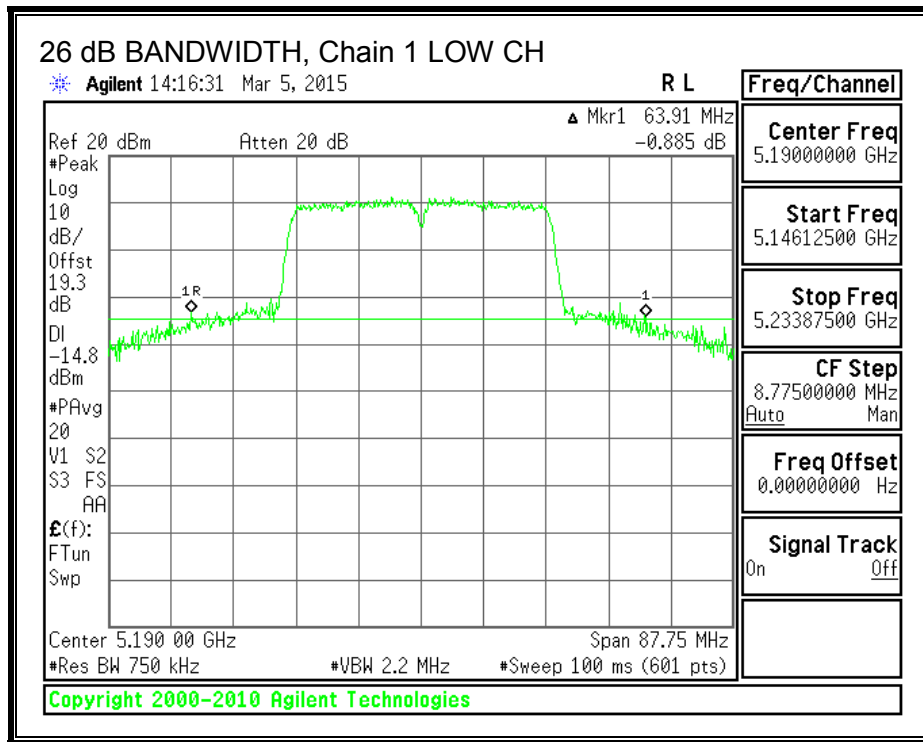

**26 dB BANDWIDTH, Chain 2**

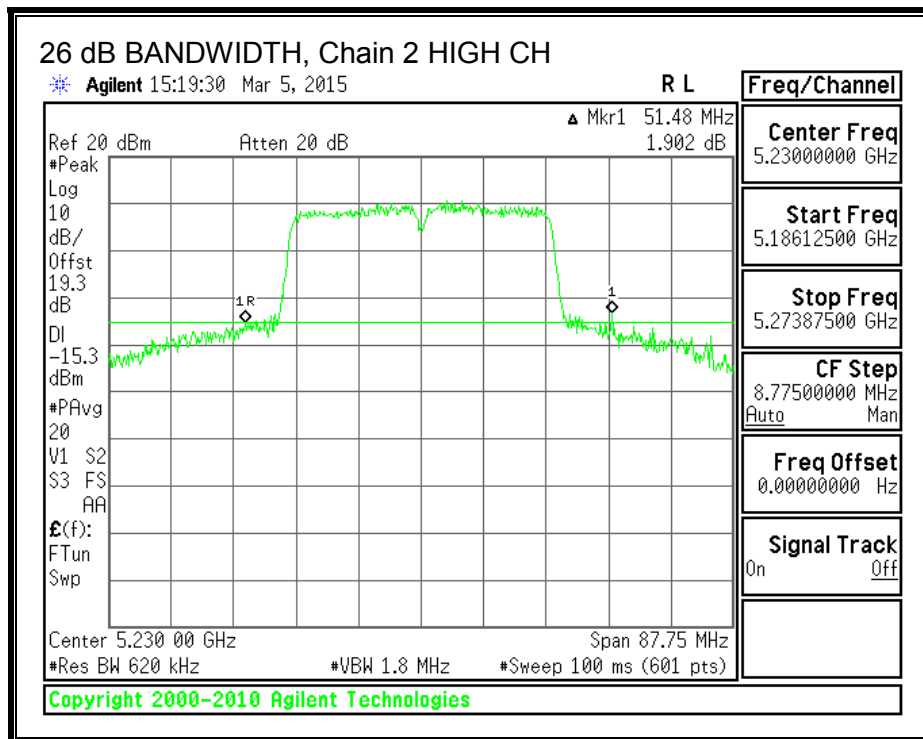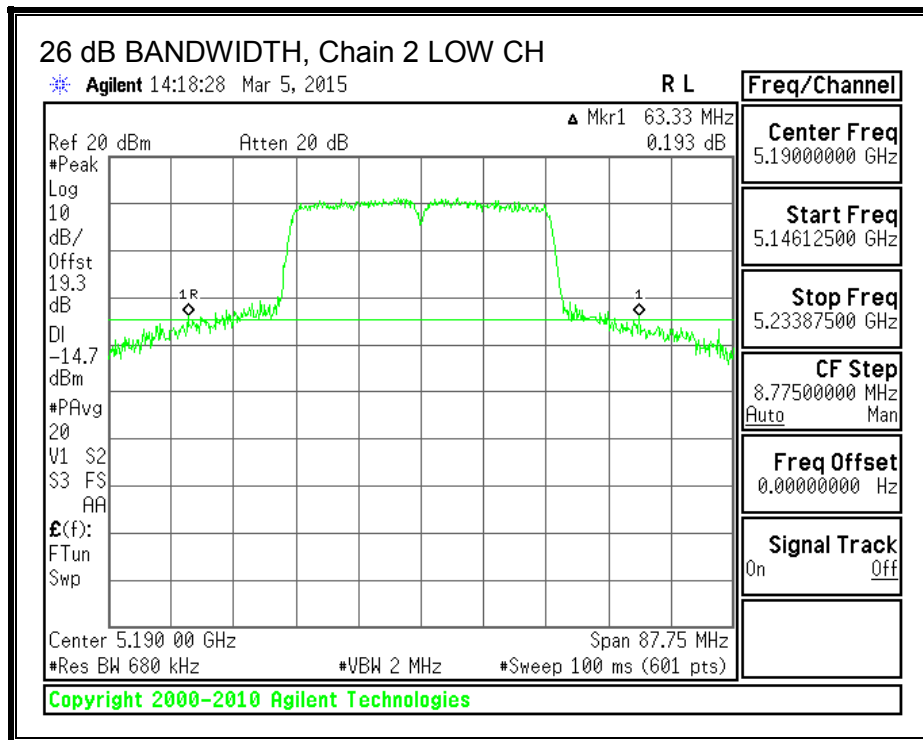

**8.13.2. 99% BANDWIDTH**



**LIMITS**

None; for reporting purposes only.

**RESULTS**



Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5190	36.3356	36.3901	36.3482
High	5230	36.3506	36.3615	36.3384

**99% BANDWIDTH, Chain 0**

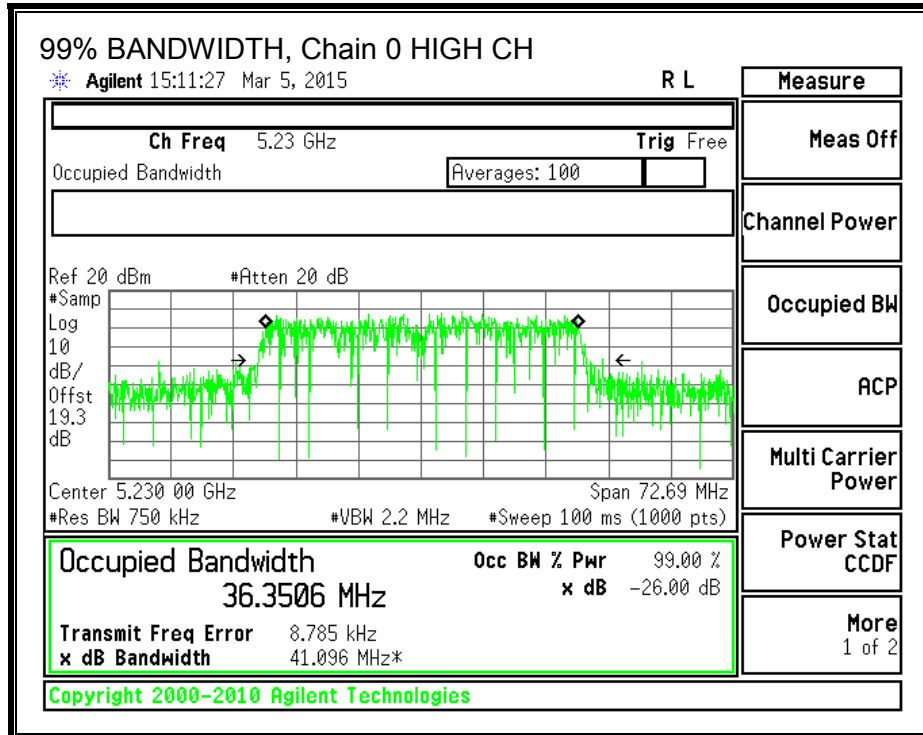
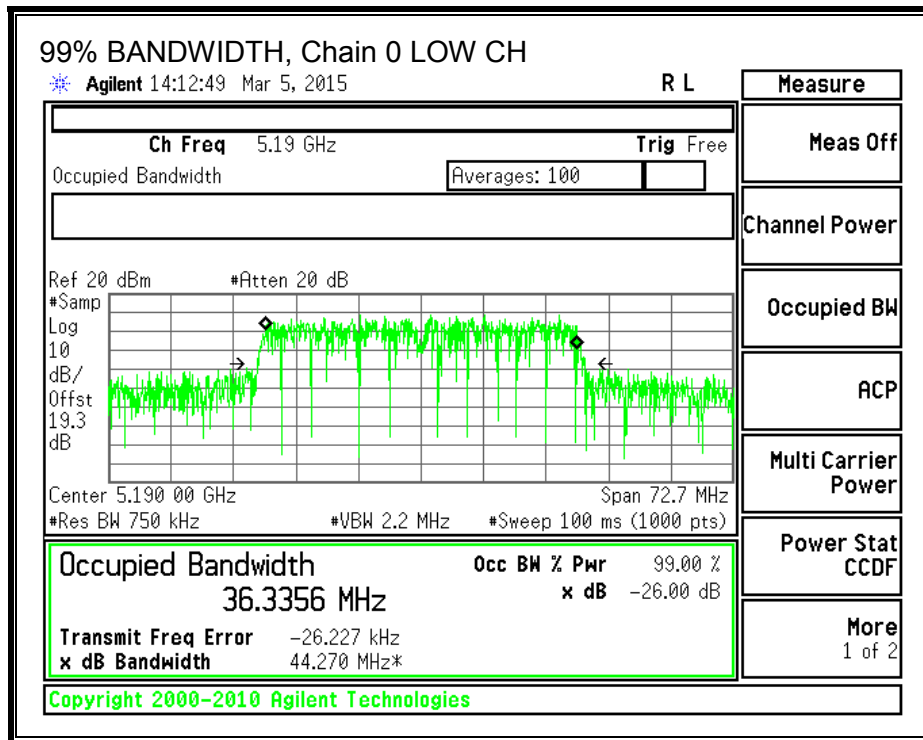




**99% BANDWIDTH, Chain 1**

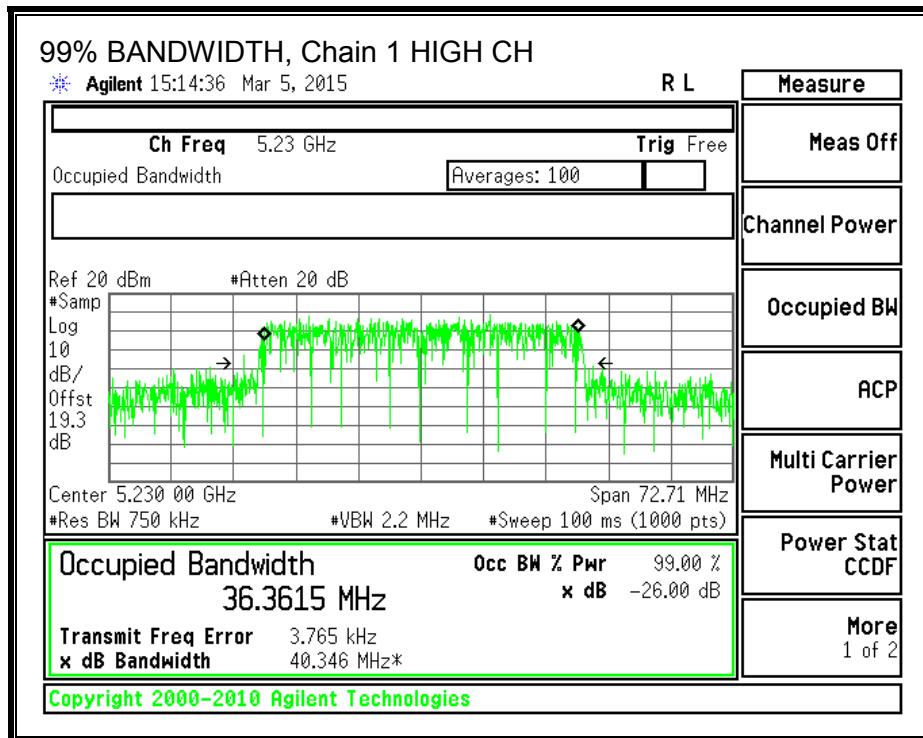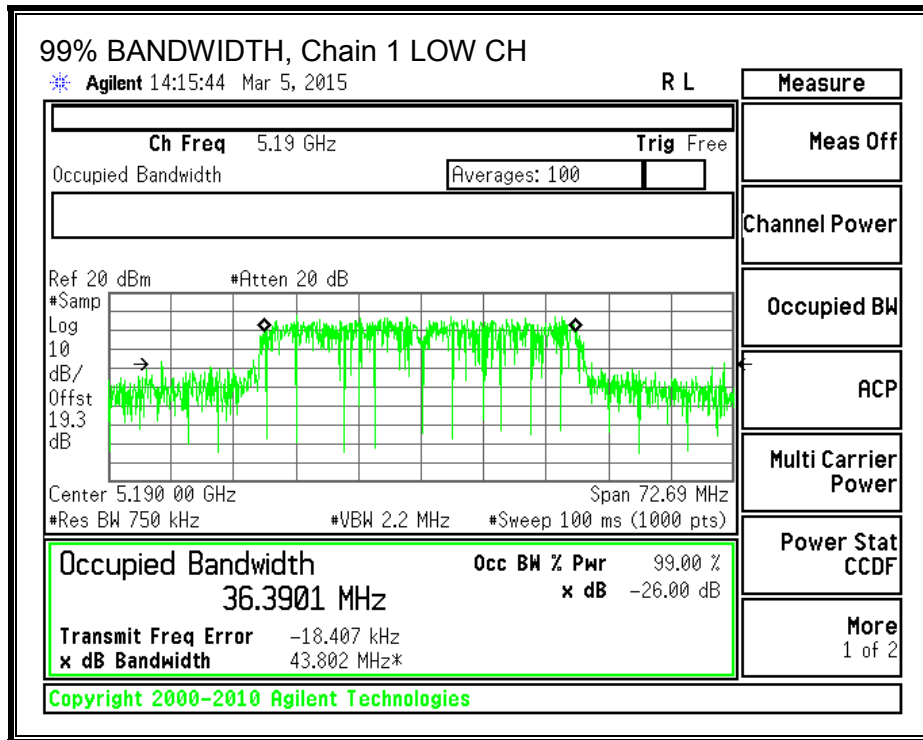

**99% BANDWIDTH, Chain 2**

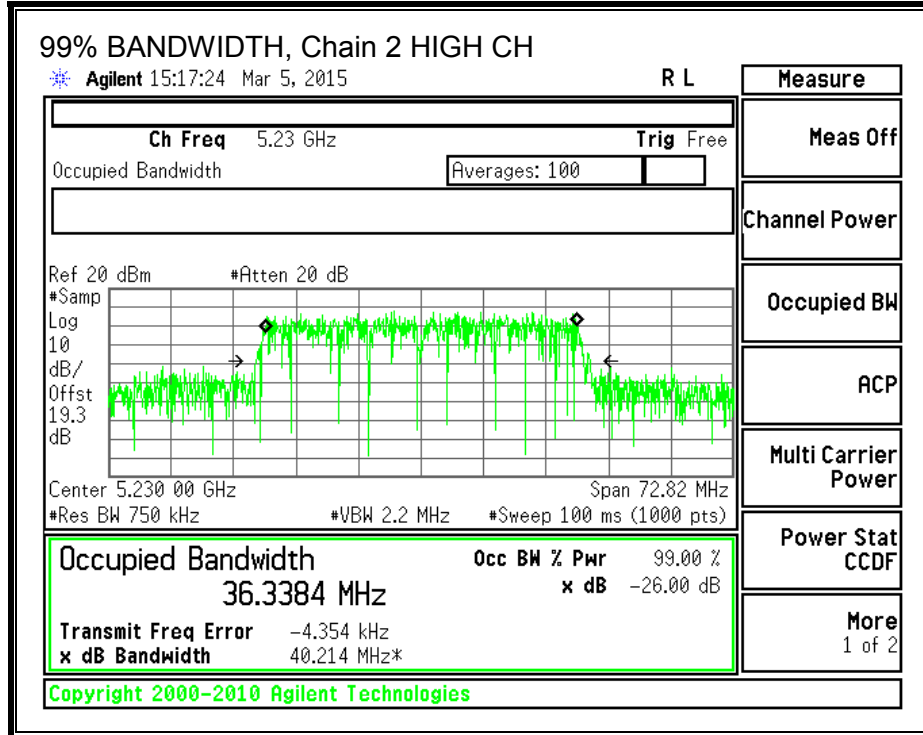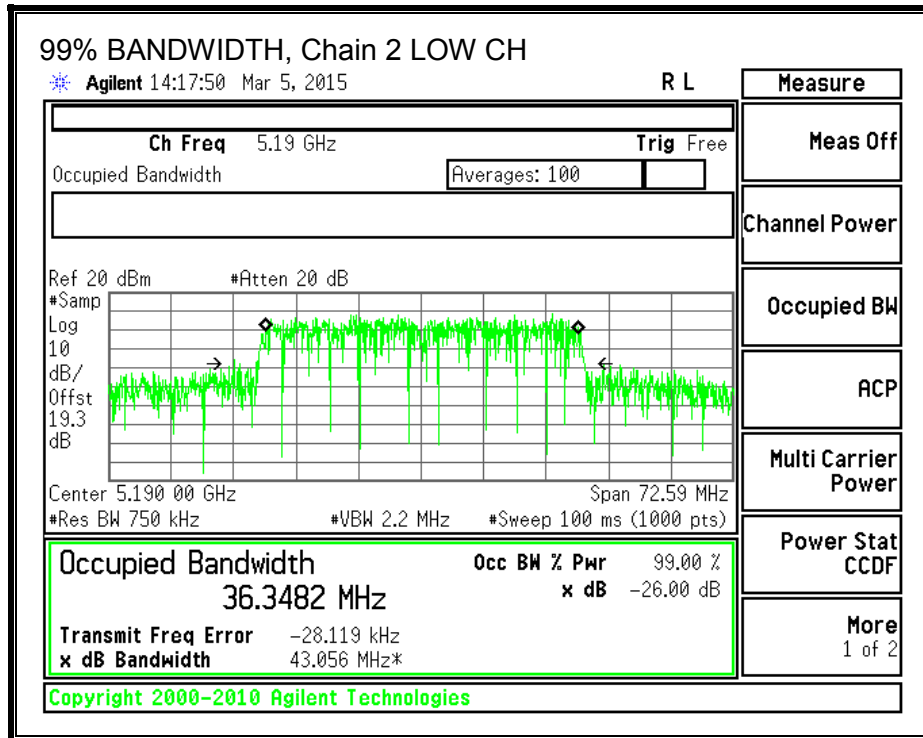

### 8.13.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Chain 2 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
3.08	3.19	4.83	4.78

For PSD the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Chain 2 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.08	3.19	4.83	9.51

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	4.78	9.51	24.00	7.49
High	5230	4.78	9.51	24.00	7.49

<b>Duty Cycle CF (dB)</b>	0.09	<b>Included in Calculations of PSD</b>
---------------------------	------	--

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	10.60	10.80	10.20	15.31	24.00	-8.69
High	5230	15.40	15.70	15.00	20.15	24.00	-3.85

**PSD Results**



Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	1.596	1.857	1.249	6.436	7.49	-1.05
High	5230	1.186	2.003	1.652	6.488	7.49	-1.00

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



**PSD, Chain 0**

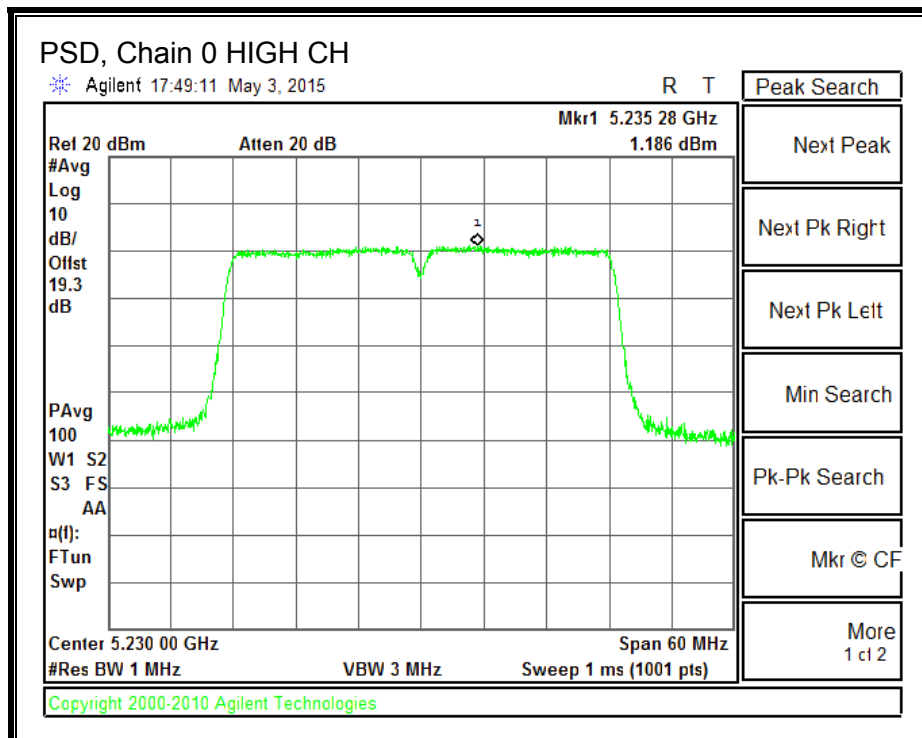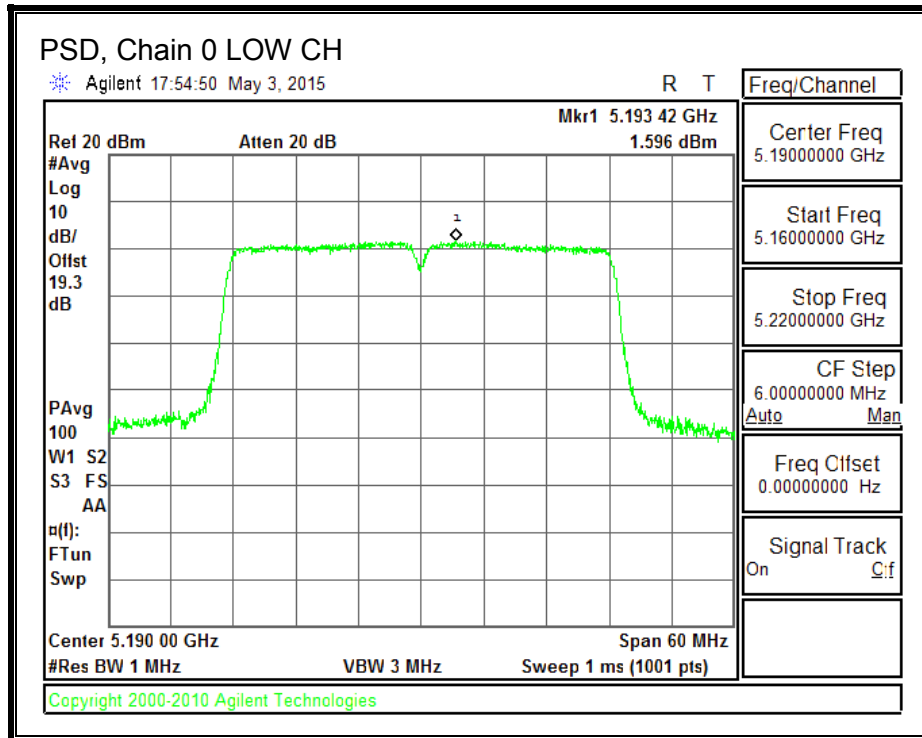

**PSD, Chain 1**

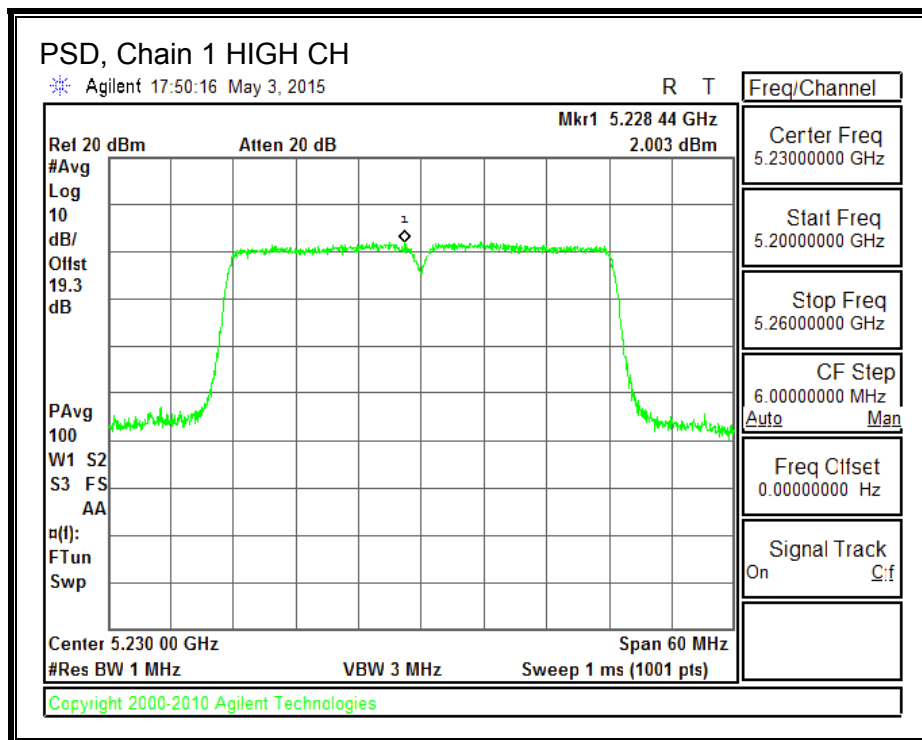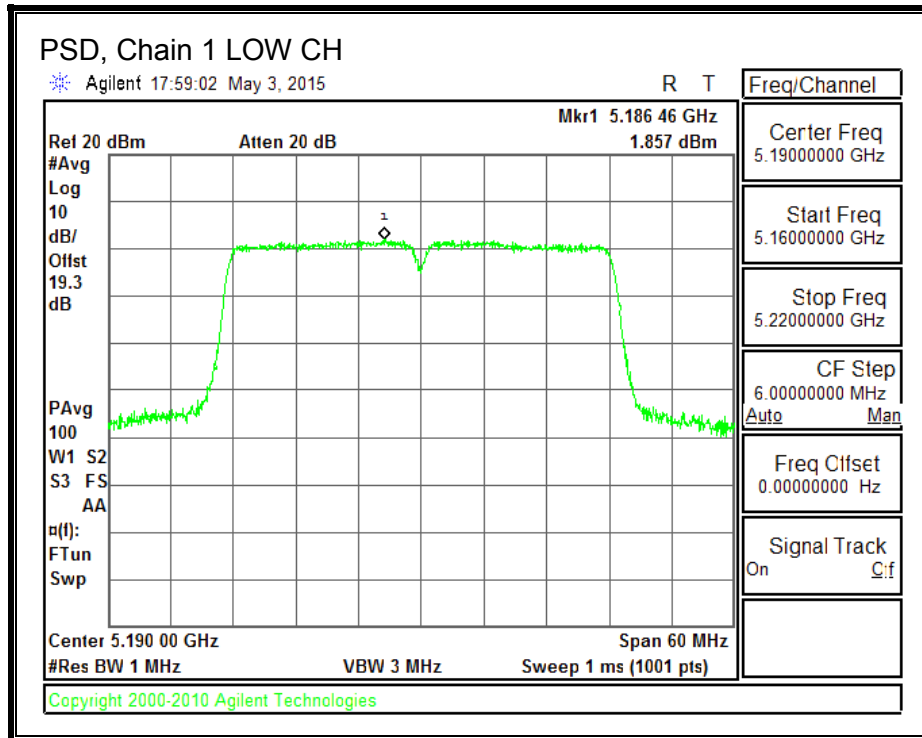

**PSD, Chain 2**

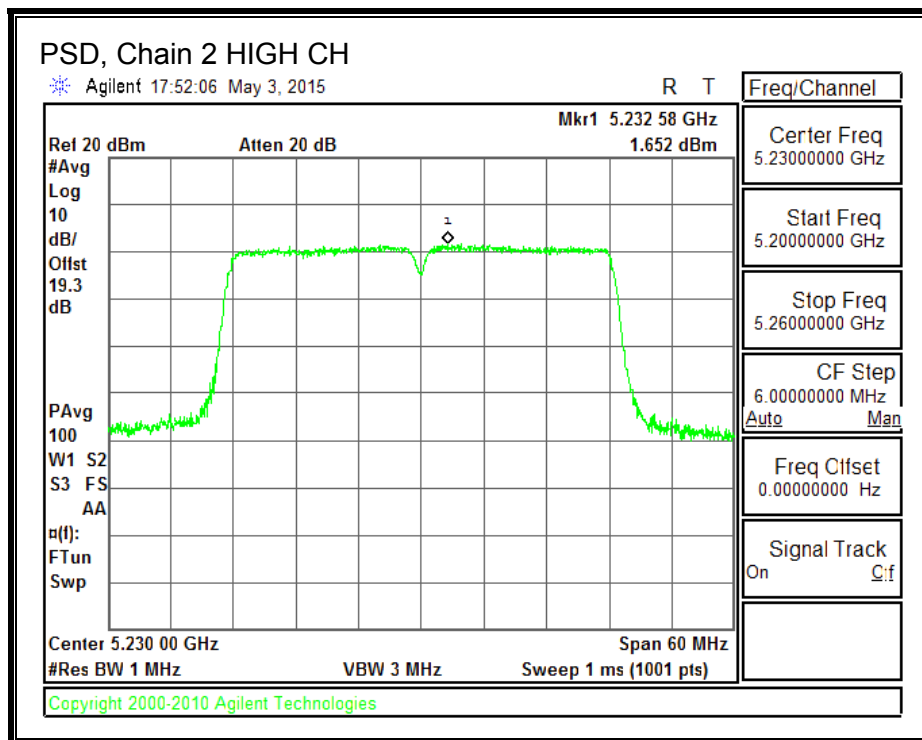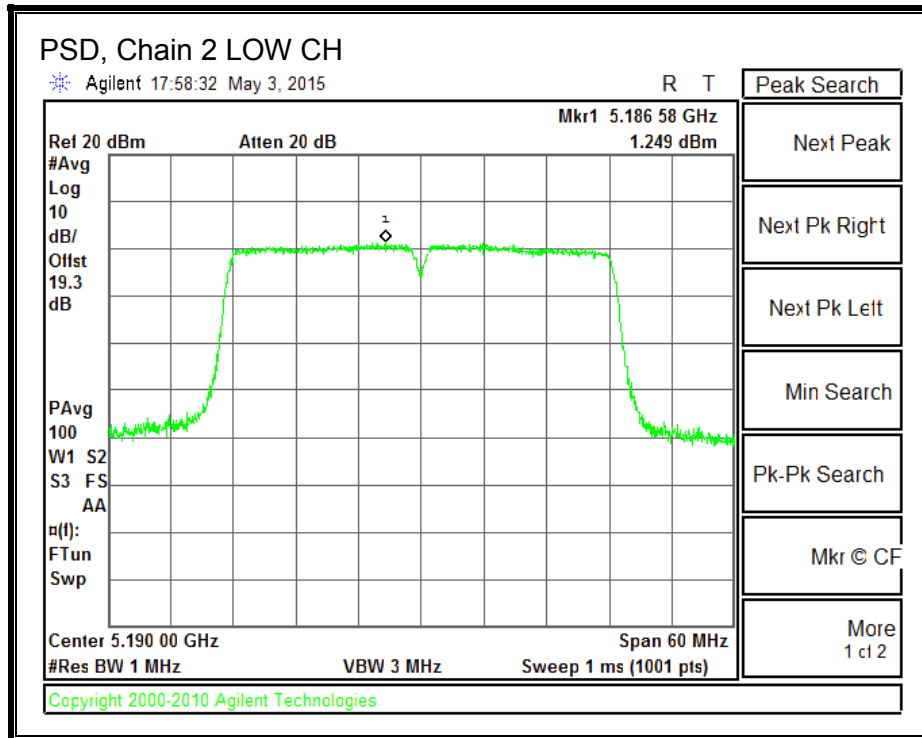



## **8.14. 802.11n HT40 TxBF 3TX MODE IN THE 5.2 GHz BAND**

### **8.14.1. OUTPUT POWER AND PSD**

#### **LIMITS**

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power and PSD the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Chain 2 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.08	3.19	4.83	9.51

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5190	9.51	9.51	20.49	7.49
High	5230	9.51	9.51	20.49	7.49

<b>Duty Cycle CF (dB)</b>	0.09	<b>Included in Calculations of PSD</b>
---------------------------	------	--

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	10.60	10.80	10.20	15.31	20.49	-5.18
High	5230	14.30	14.90	14.10	19.22	20.49	-1.27

**PSD Results**



Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5190	1.596	1.857	1.249	6.44	7.49	-1.05
High	5230	1.186	2.003	1.652	6.49	7.49	-1.00

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



**PSD, Chain 0**

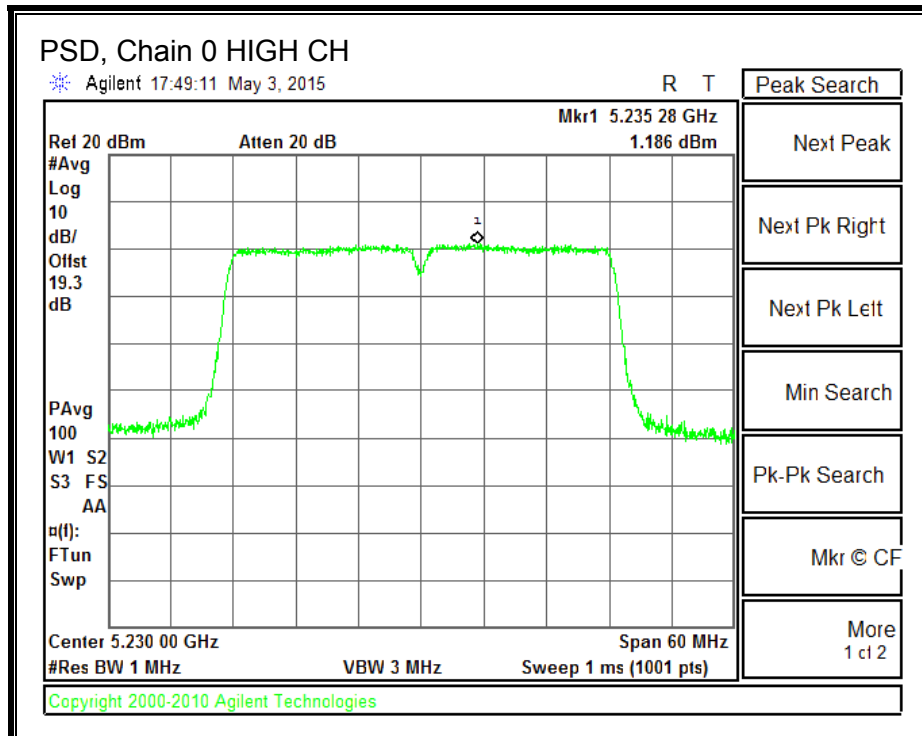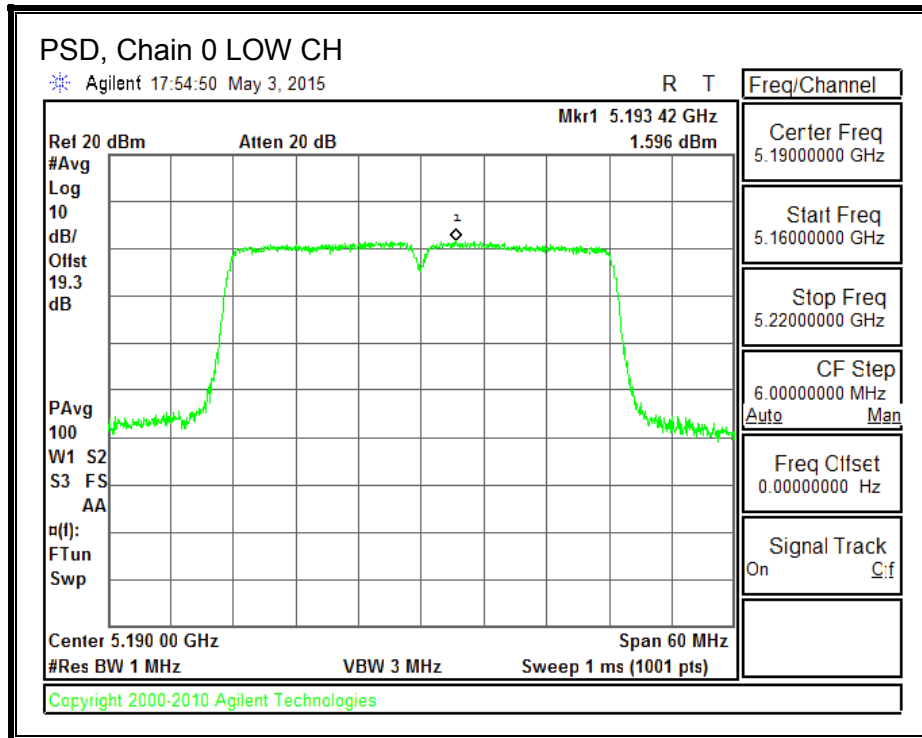

**PSD, Chain 1**

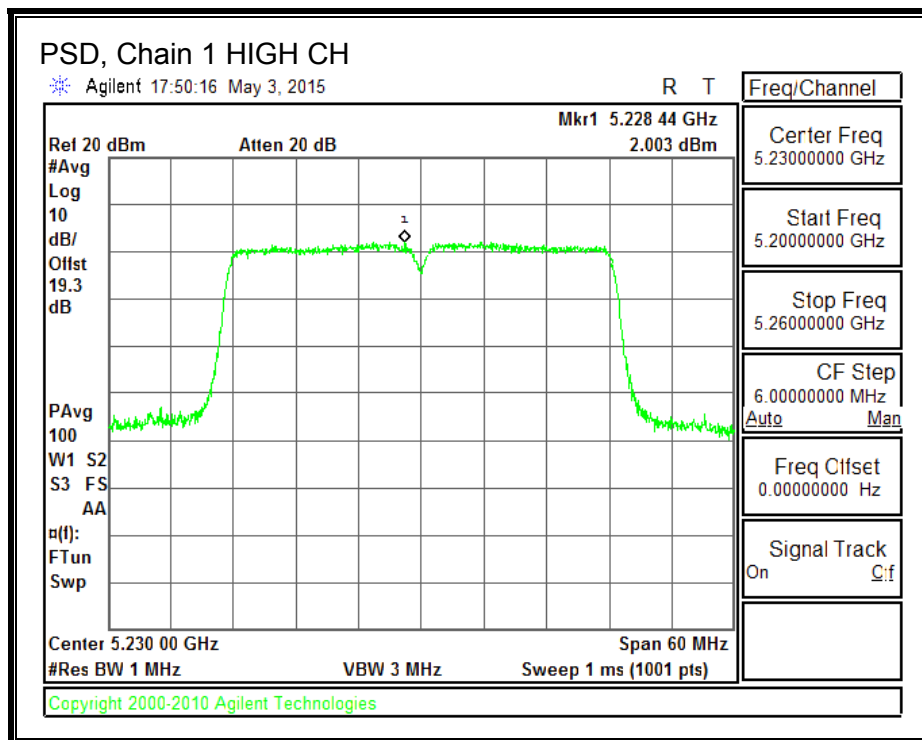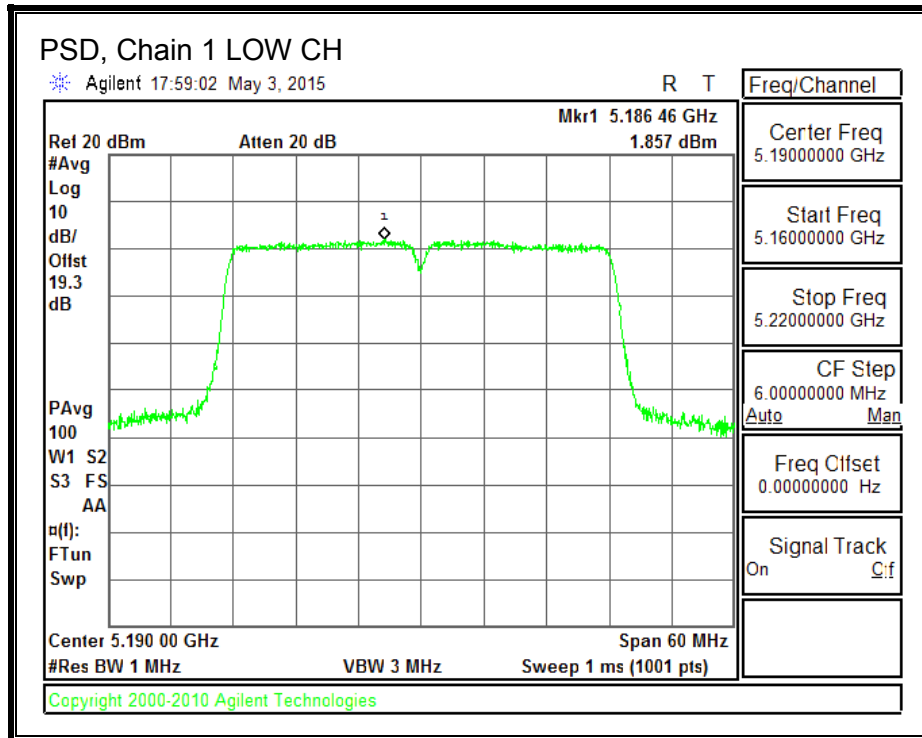

**PSD, Chain 2**

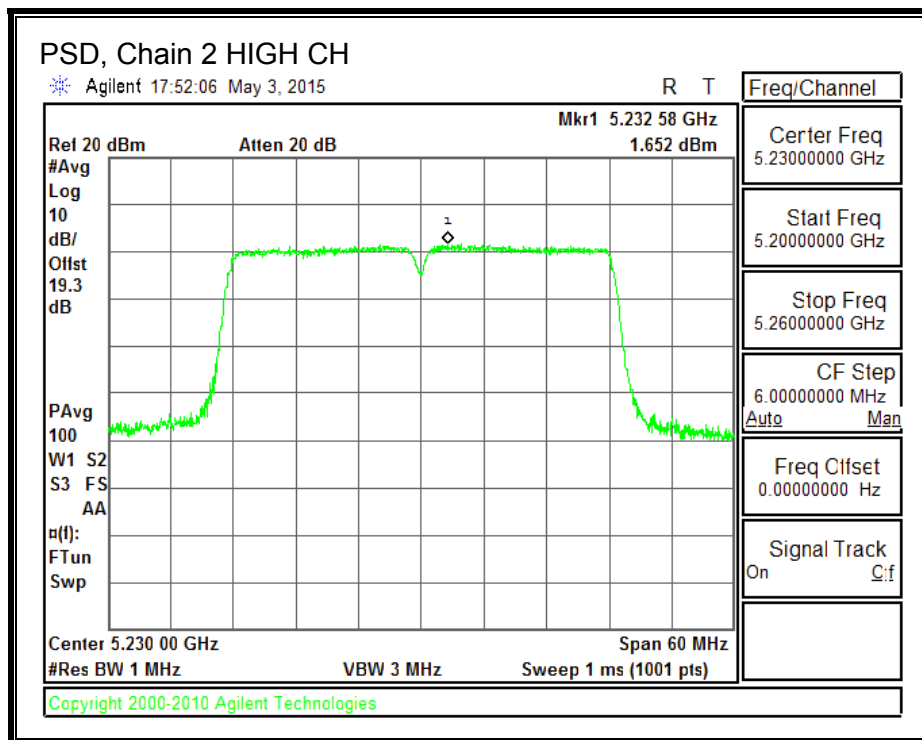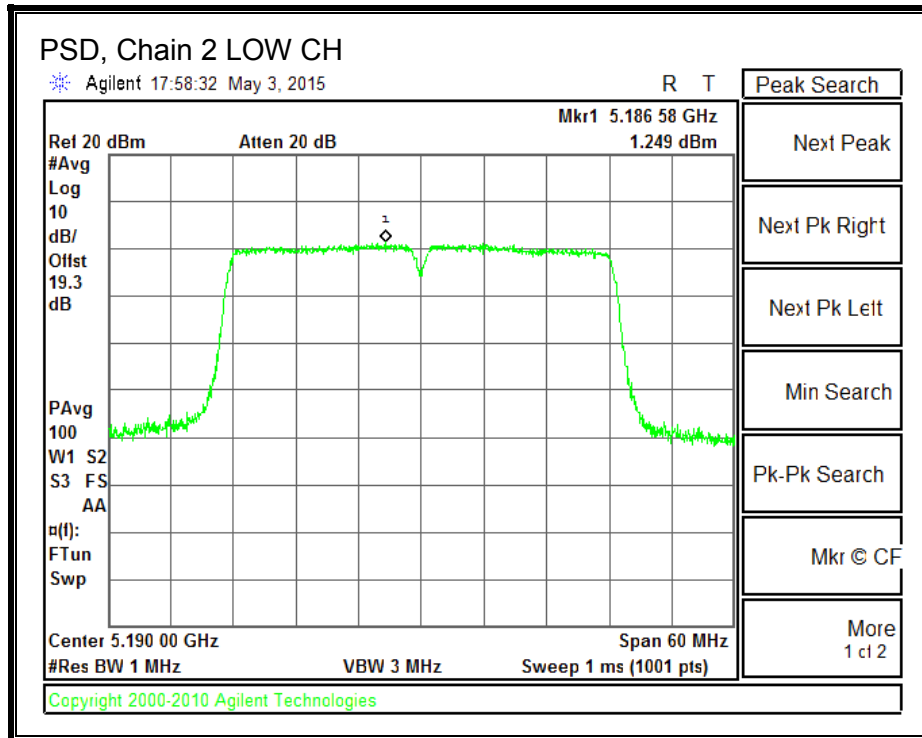

## **8.15. 802.11ac VHT80 1TX MODE IN THE 5.2 GHz BAND**

### **8.15.1. OUTPUT POWER**

#### **LIMITS**

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

This is SISO mode, AG is the highest (worst-case) = 5.83 dBi

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Power Limit (dBm)
Mid	5210	5.83	24.00

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	9.90	9.90	24.00	-14.10

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



## **8.16. 802.11ac VHT80 CDD 2TX MODE IN THE 5.2 GHz BAND**

### **8.16.1. OUTPUT POWER AND PSD**

#### **LIMITS**

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
3.19	4.83	5.09

For PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.19	4.83	8.06

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	5.09	8.06	24.00	8.94

<b>Duty Cycle CF (dB)</b>	0.18	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	8.60	8.30	11.46	24.00	-12.54


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	0.001	-0.111	3.136	8.94	-5.80

**PSD, Chain 0**

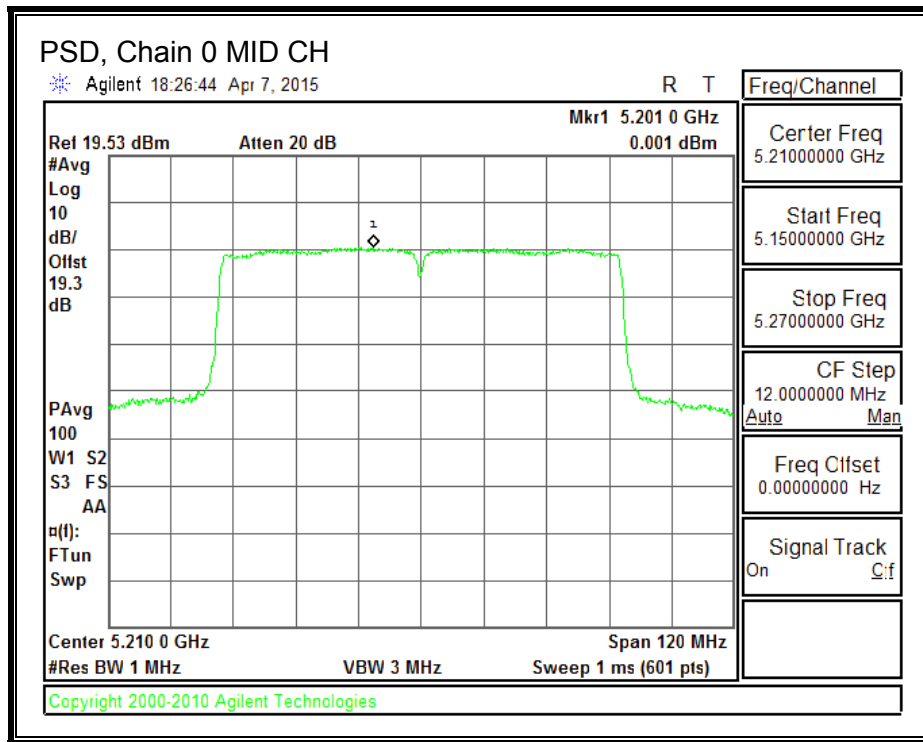

**PSD, Chain 1**

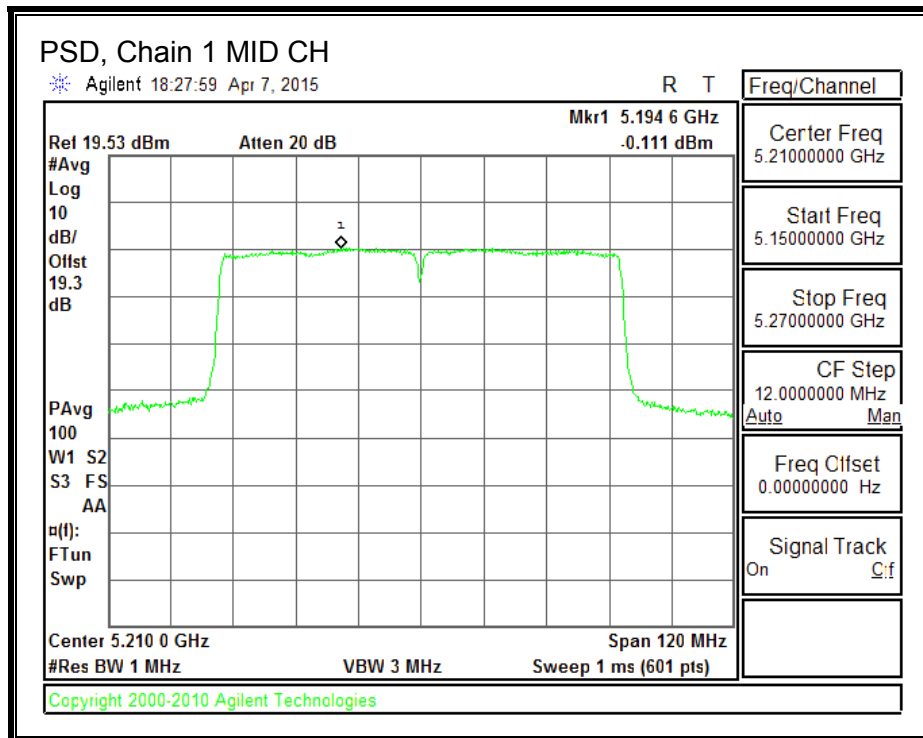

## 8.17. 802.11ac VHT80 TxBF 2TX MODE IN THE 5.2 GHz BAND

### 8.17.1. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power and PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.19	4.83	8.06

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5210	8.06	8.06	21.94	8.94

<b>Duty Cycle CF (dB)</b>	0.18	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	7.90	7.30	10.62	21.94	-11.32


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	0.001	-0.111	3.136	8.94	-5.80

**PSD, Chain 0**

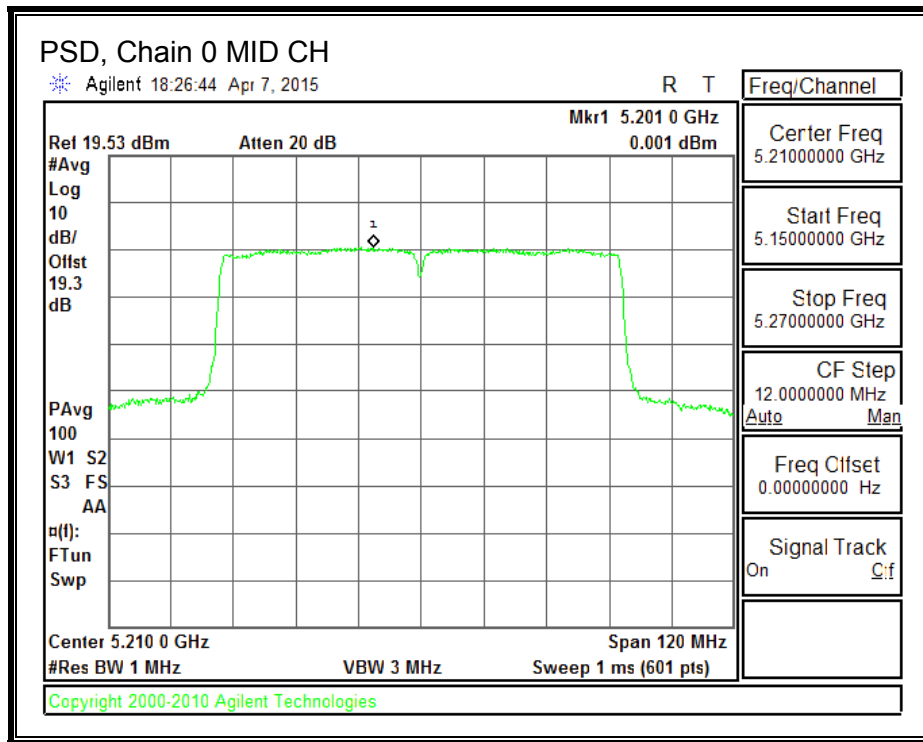

**PSD, Chain 1**

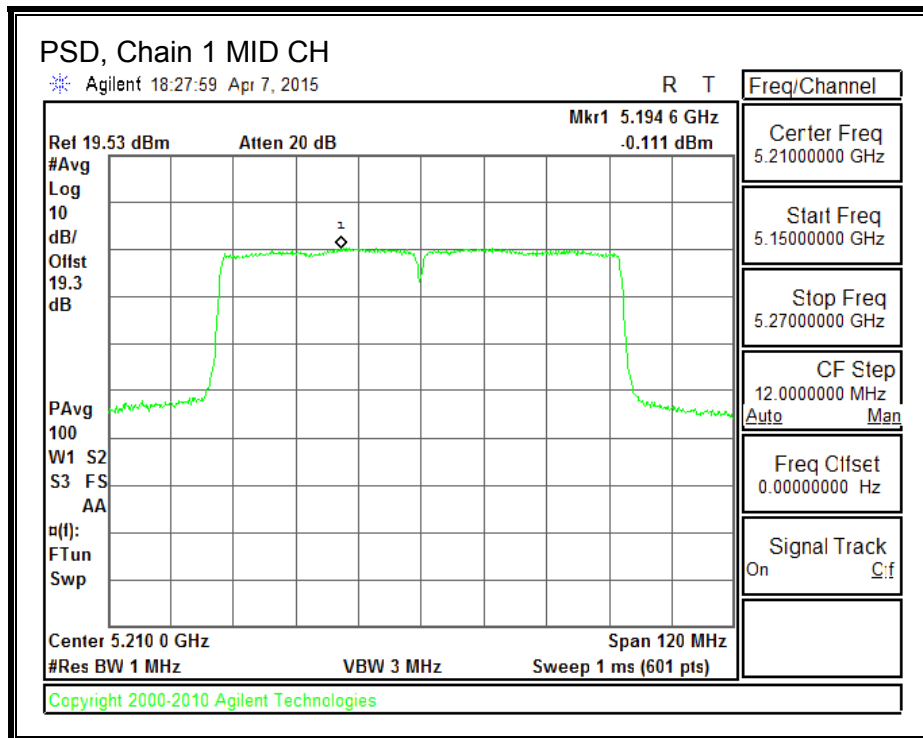



## 8.18. 802.11ac VHT80 CDD 3TX MODE IN THE 5.2 GHz BAND

### 8.18.1. 26 dB BANDWIDTH


#### LIMITS

None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Mid	5210	132.0	132.9	115.39


**26 dB BANDWIDTH, Chain 0**

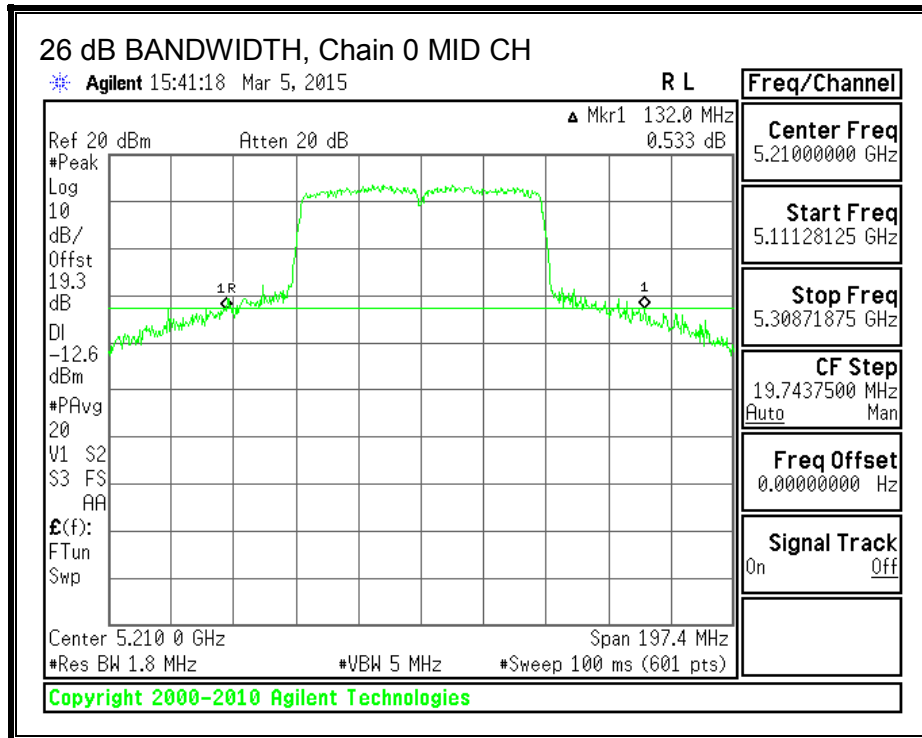

**26 dB BANDWIDTH, Chain 1**

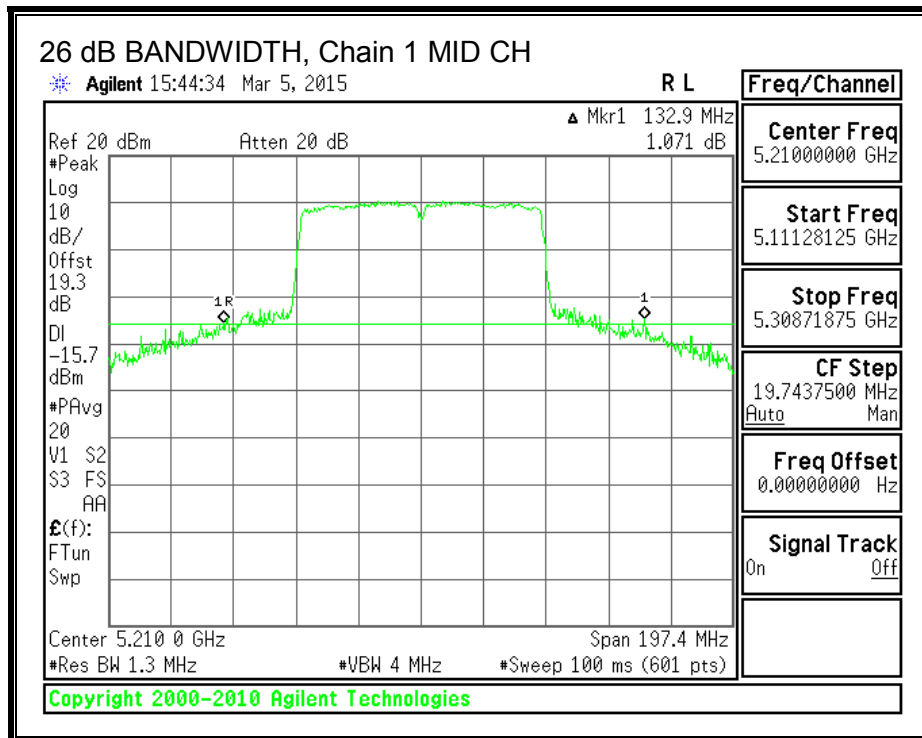

**26 dB BANDWIDTH, Chain 2**

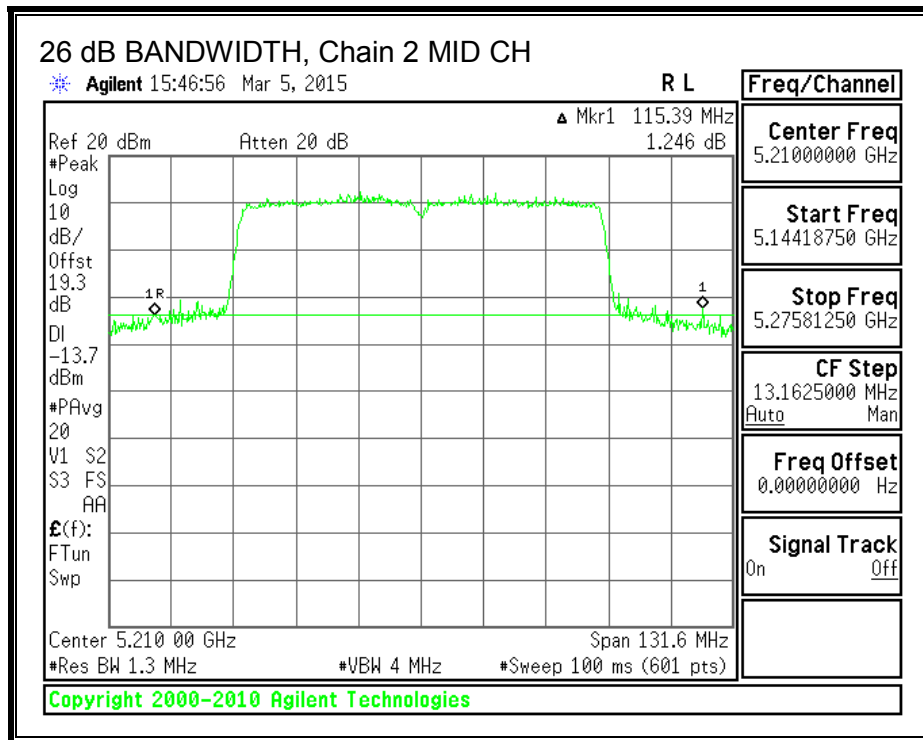

**8.18.2. 99% BANDWIDTH**


**LIMITS**

None; for reporting purposes only.


**RESULTS**

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Mid	5210	75.9467	75.9436	75.9433


**99% BANDWIDTH, Chain 0**

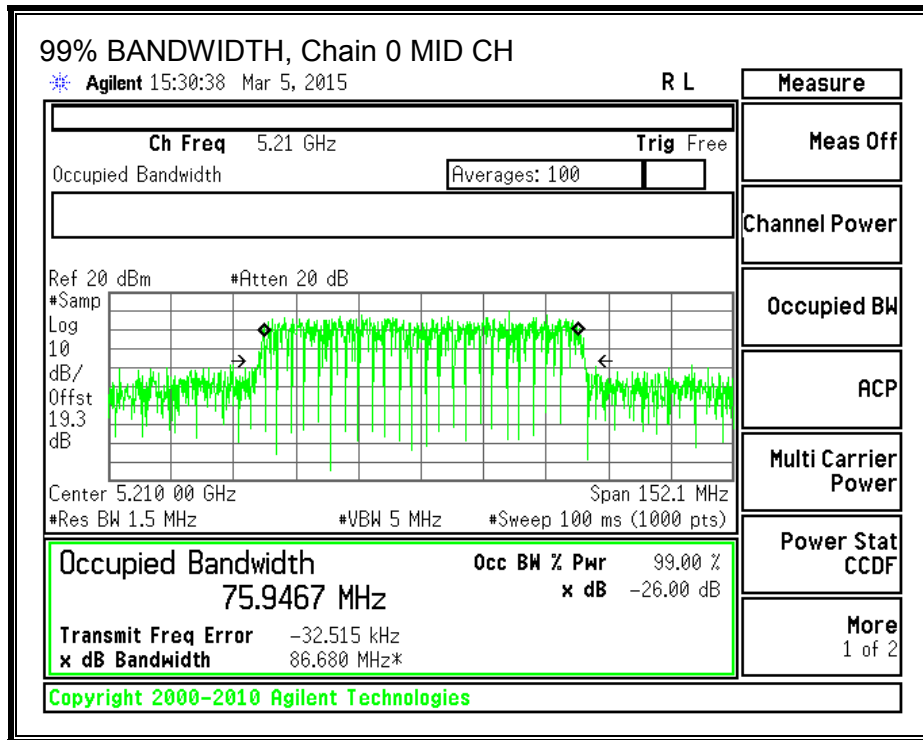

**99% BANDWIDTH, Chain 1**

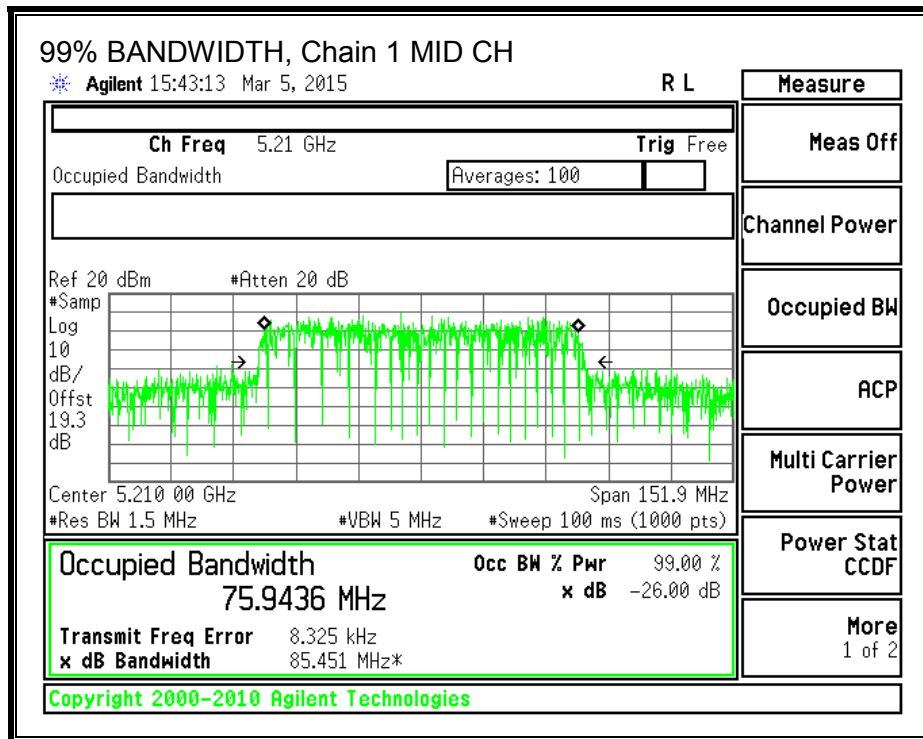

**99% BANDWIDTH, Chain 2**

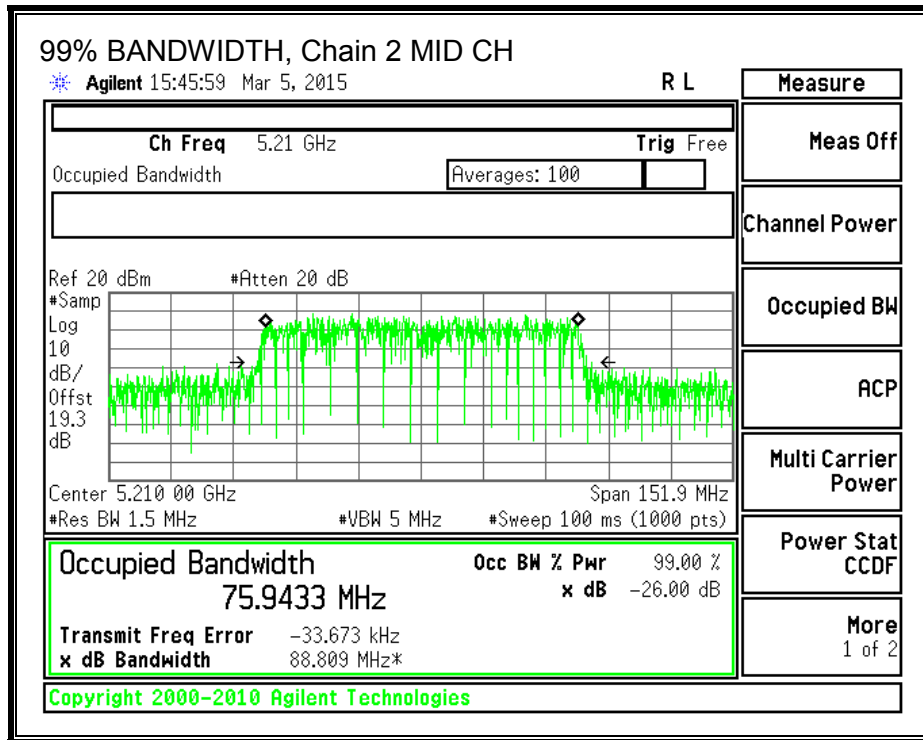

### 8.18.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Chain 2 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
3.08	3.19	4.83	4.78

For PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Chain 2 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.08	3.19	4.83	9.51



**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBi)	PSD Limit (dBi)
Mid	5210	4.78	9.51	24.00	7.49

Duty Cycle CF (dB)	0.18	Included in Calculations of PSD
--------------------	------	---------------------------------

**Output Power Results**


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	8.70	8.50	7.80	13.12	24.00	-10.88

**PSD Results**


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	1.805	1.533	1.140	6.452	7.49	-1.04

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.


**PSD, Chain 0**

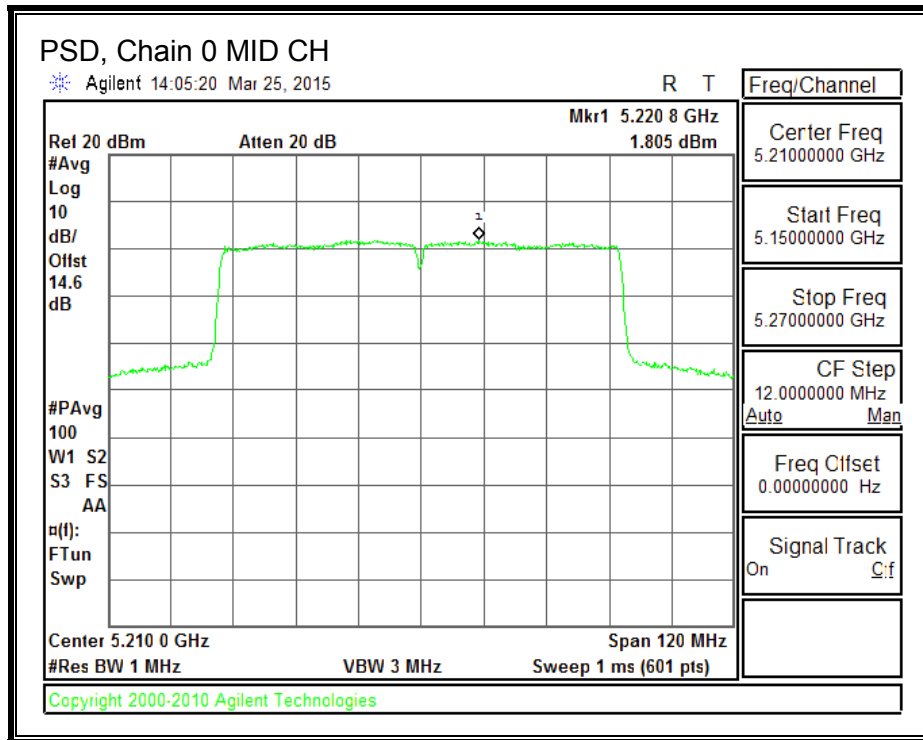

**PSD, Chain 1**

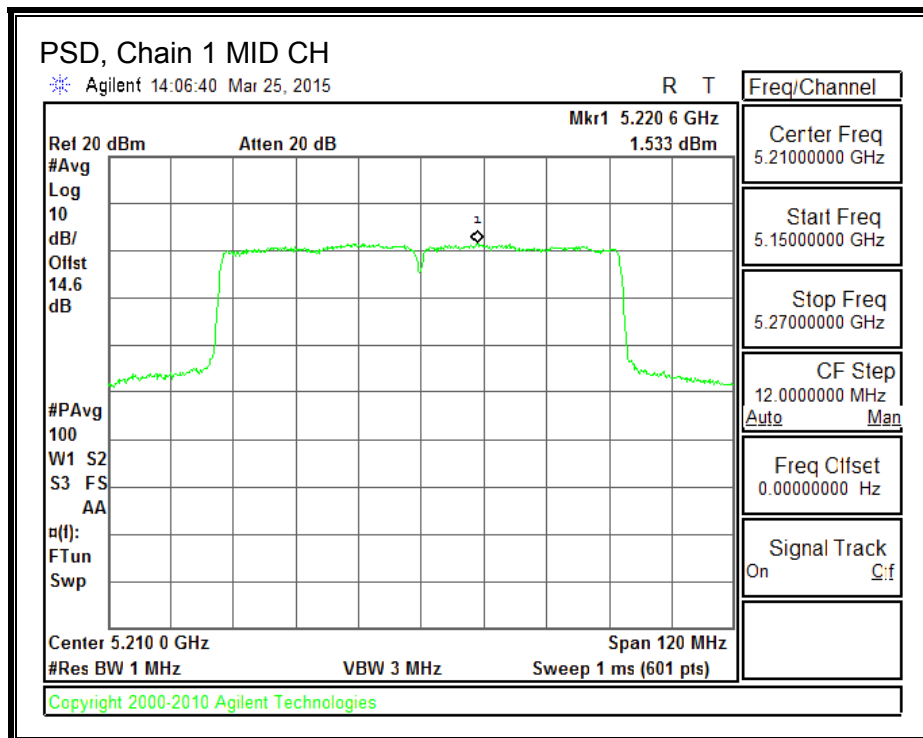

**PSD, Chain 2**

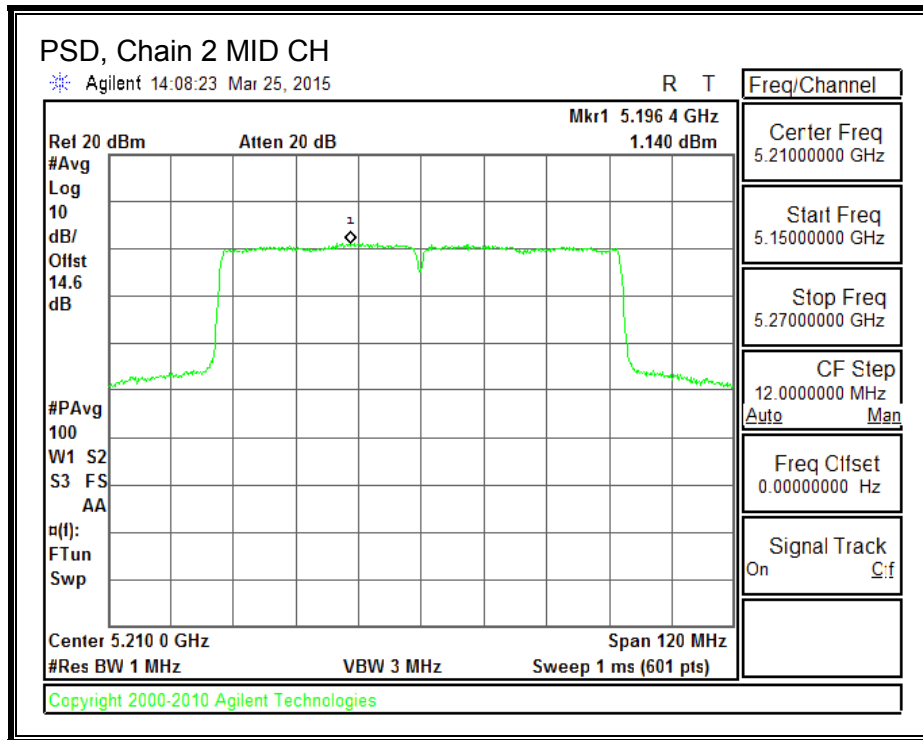

## **8.19. 802.11ac VHT80 TxBF 3TX MODE IN THE 5.2 GHz BAND**

### **8.19.1. OUTPUT POWER AND PSD**

#### **LIMITS**

FCC §15.407 (a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power and PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Chain 2 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.08	3.19	4.83	9.51

**RESULTS**

**Antenna Gain and Limits**

Channel	Frequency (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBi)	PSD Limit (dBi)
Mid	5210	9.51	9.51	20.49	7.49

Duty Cycle CF (dB)	0.18	Included in Calculations of PSD
--------------------	------	---------------------------------

**Output Power Results**


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5210	6.60	6.50	5.90	11.12	20.49	-9.37

**PSD Results**


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5210	1.805	1.533	1.140	6.45	7.49	-1.04

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.


**PSD, Chain 0**

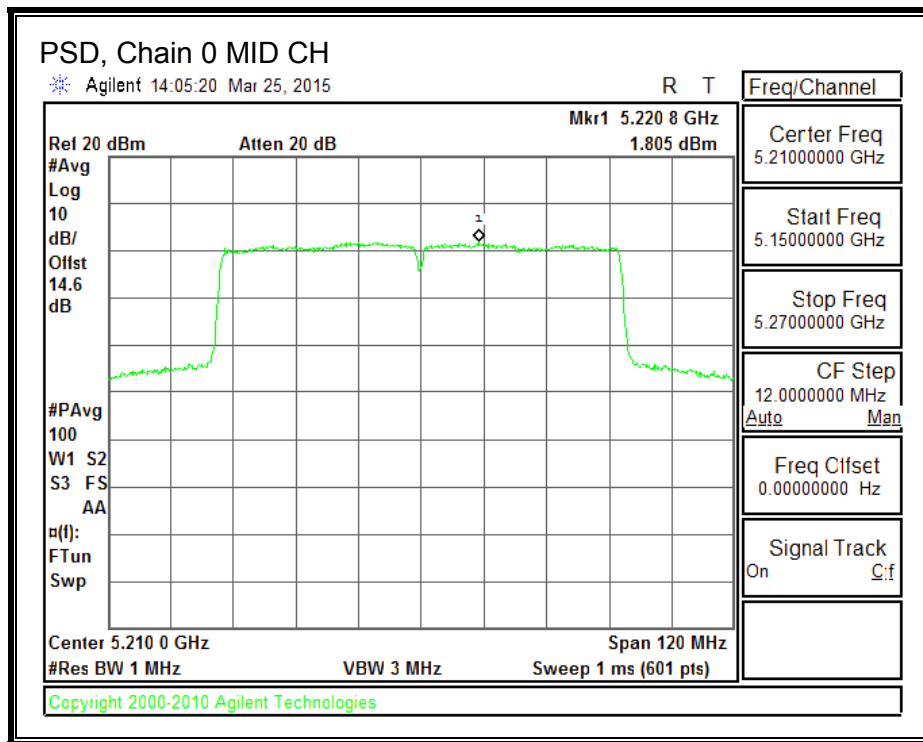

**PSD, Chain 1**

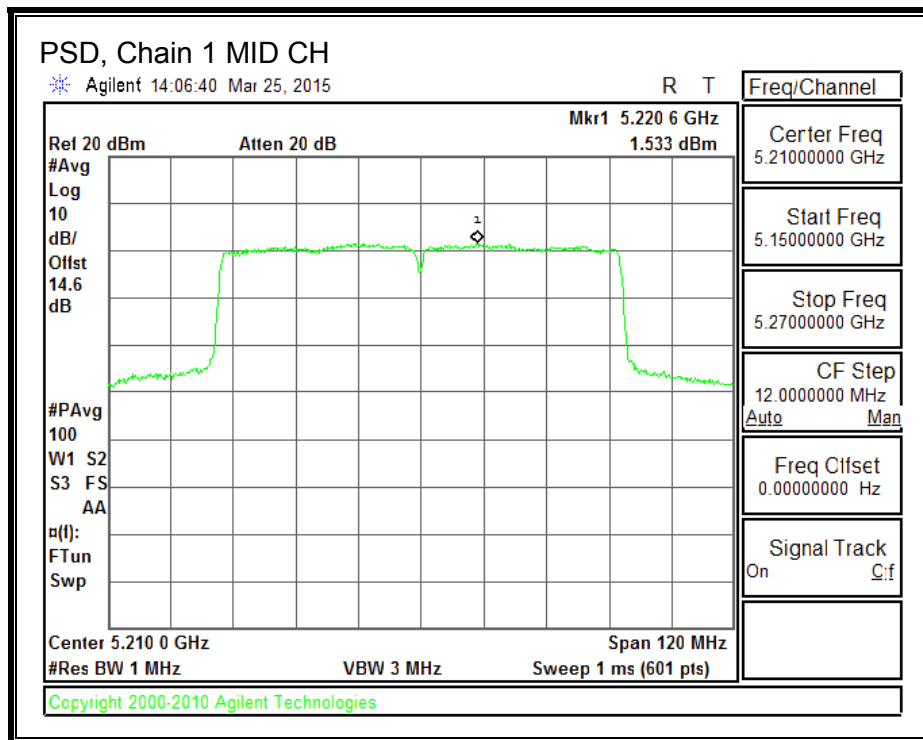

**PSD, Chain 2**

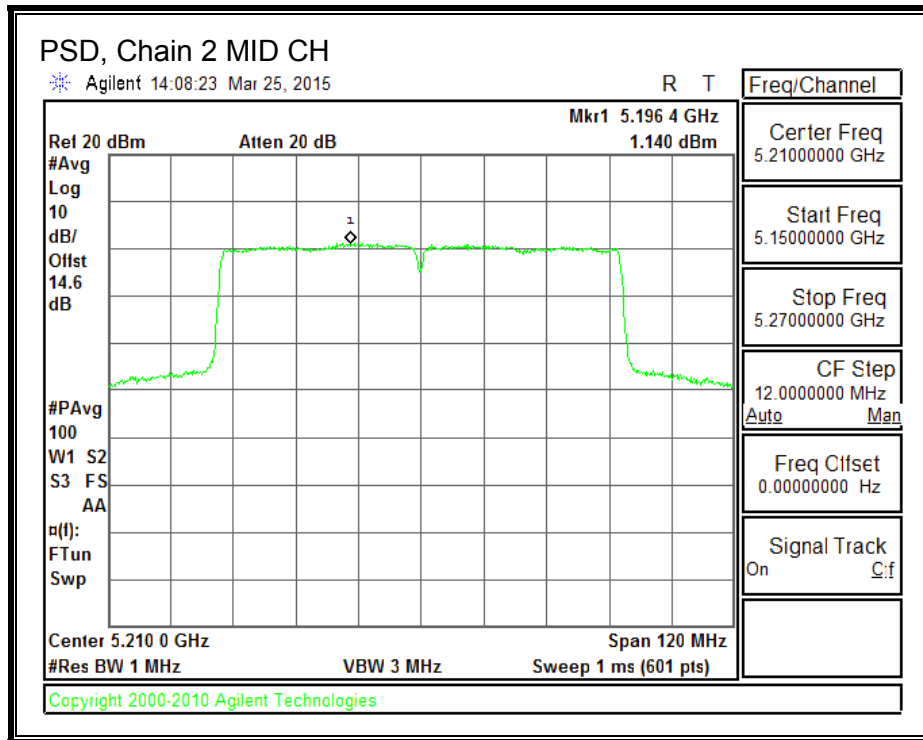



## 8.20. 802.11a LEGACY 1TX MODE IN THE 5.3 GHz BAND

### 8.20.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.

#### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Mid	5300	21.086
High	5320	21.008

**26 dB BANDWIDTH**

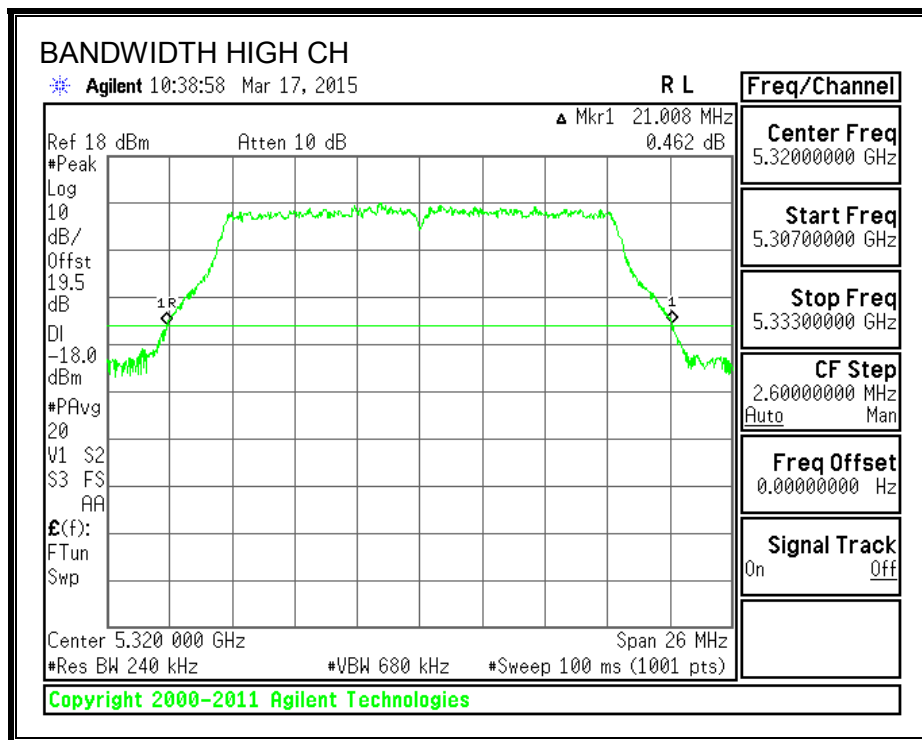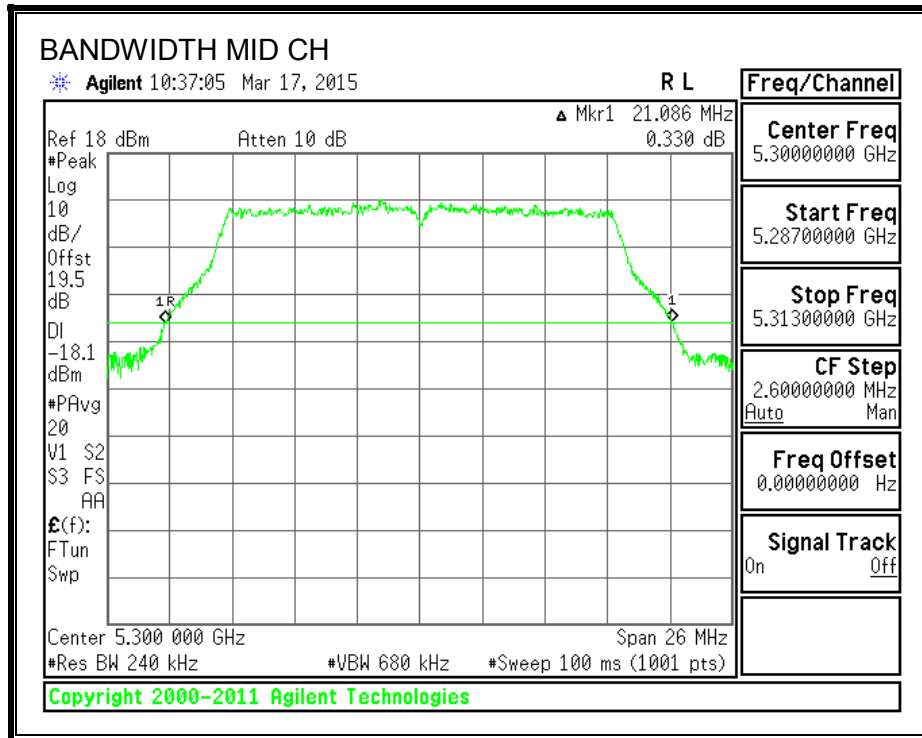

**8.20.2. 99% BANDWIDTH**



**LIMITS**

None; for reporting purposes only.

**RESULTS**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Mid	5300	16.5440
High	5320	16.5483

**99% BANDWIDTH**

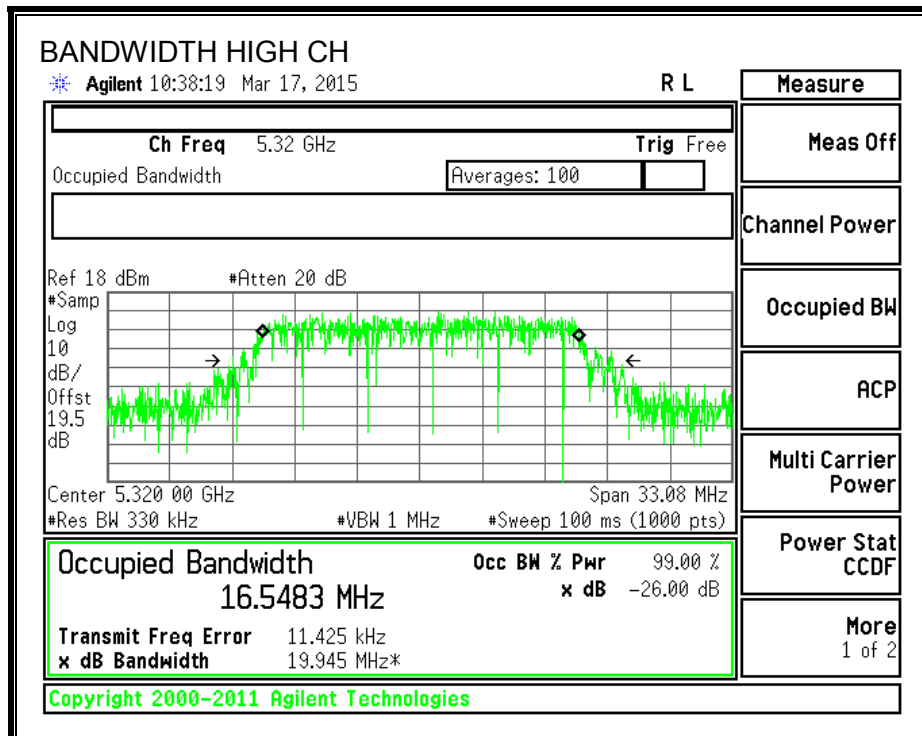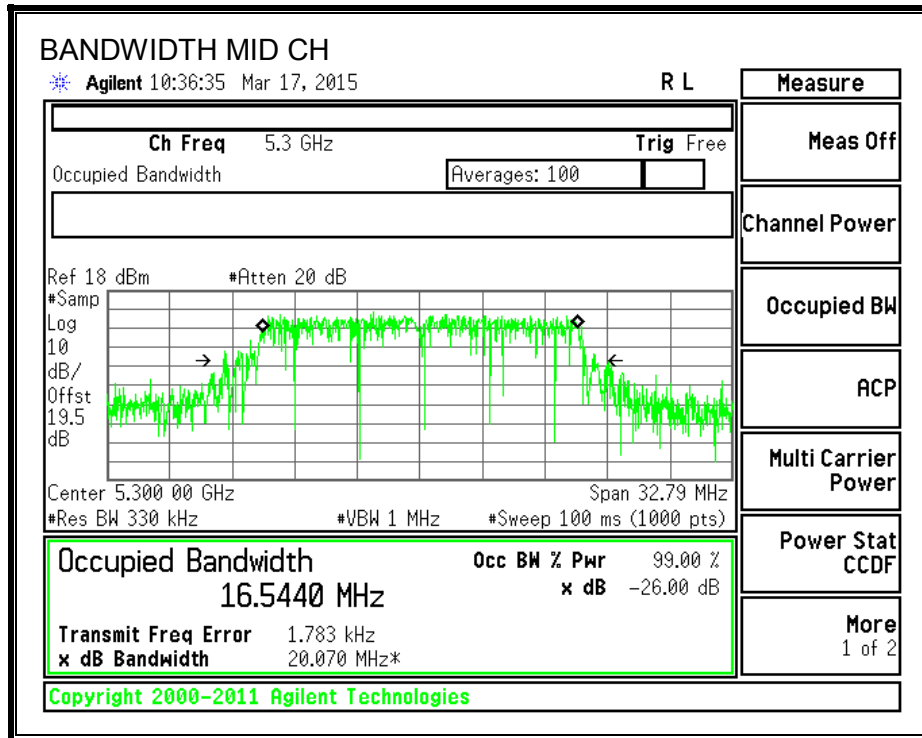

### **8.20.3. OUTPUT POWER AND PSD**

#### **LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **DIRECTIONAL ANTENNA GAIN**

This is SISO mode, AG is the highest (worst-case) = 5.52 dBi.

**RESULTS**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain For Power (dBi)	Directional Gain For PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5300	21.09	5.52	5.52	24.00	11.00
High	5320	21.01	5.52	5.52	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5300	18.00	18.00	24.00	-6.00
High	5320	18.00	18.00	24.00	-6.00

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5300	6.943	6.943	11.00	-4.057
High	5320	7.969	7.969	11.00	-3.031

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

**PSD, Chain 0**

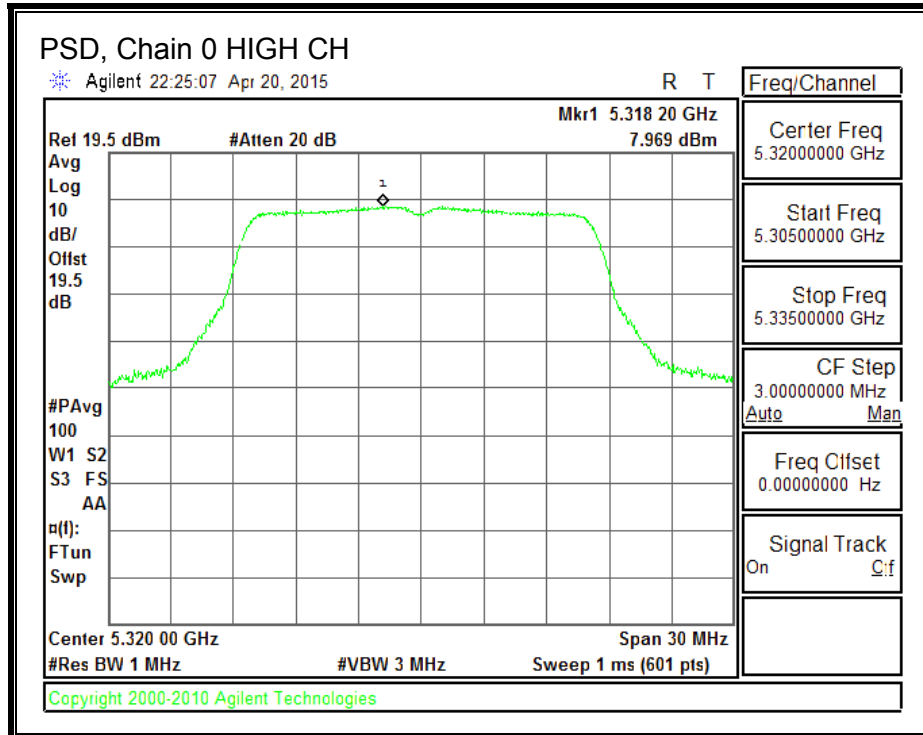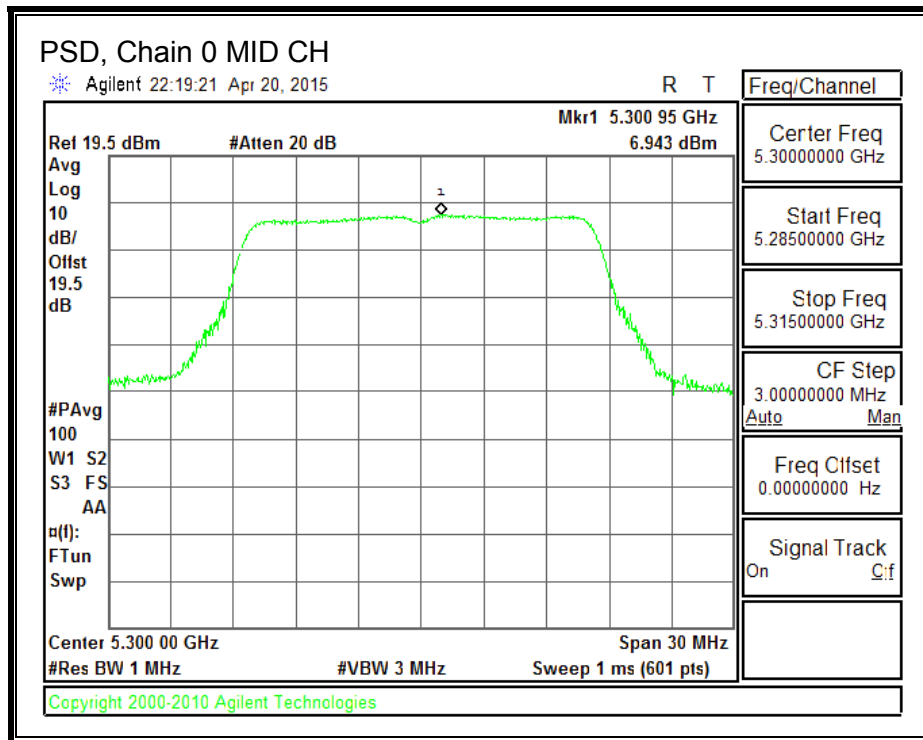

**8.21. 802.11n HT20 CDD 2TX MODE IN THE 5.3 GHz BAND**

**8.21.1. OUTPUT POWER AND PSD**

**LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
3.48	4.52	5.03

For PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
3.48	4.52	8.03



**RESULTS**

**Bandwidth, Antenna Gain and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	22.14	5.03	8.03	24.00	8.97
Mid	5300	23.27	5.03	8.03	24.00	8.97
High	5320	22.79	5.03	8.03	24.00	8.97

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.20	15.00	18.11	24.00	-5.89
Mid	5300	15.00	14.90	17.96	24.00	-6.04
High	5320	15.00	14.90	17.96	24.00	-6.04


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	4.860	5.064	7.973	8.97	-1.00
Mid	5300	4.871	4.770	7.831	8.97	-1.14
High	5320	4.757	4.793	7.785	8.97	-1.18


**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary



**PSD, Chain 0**

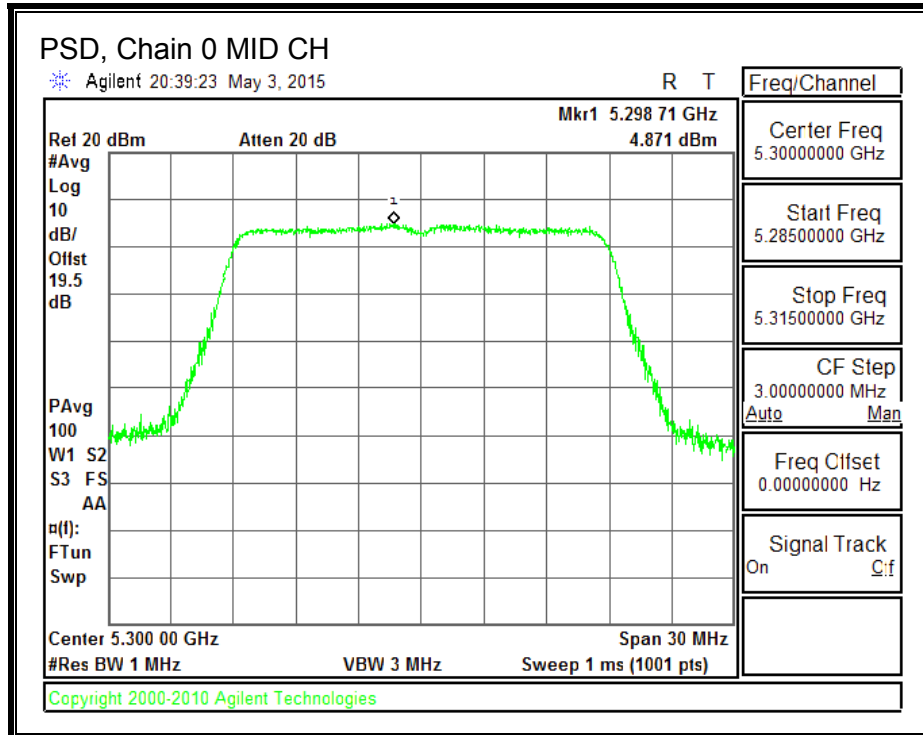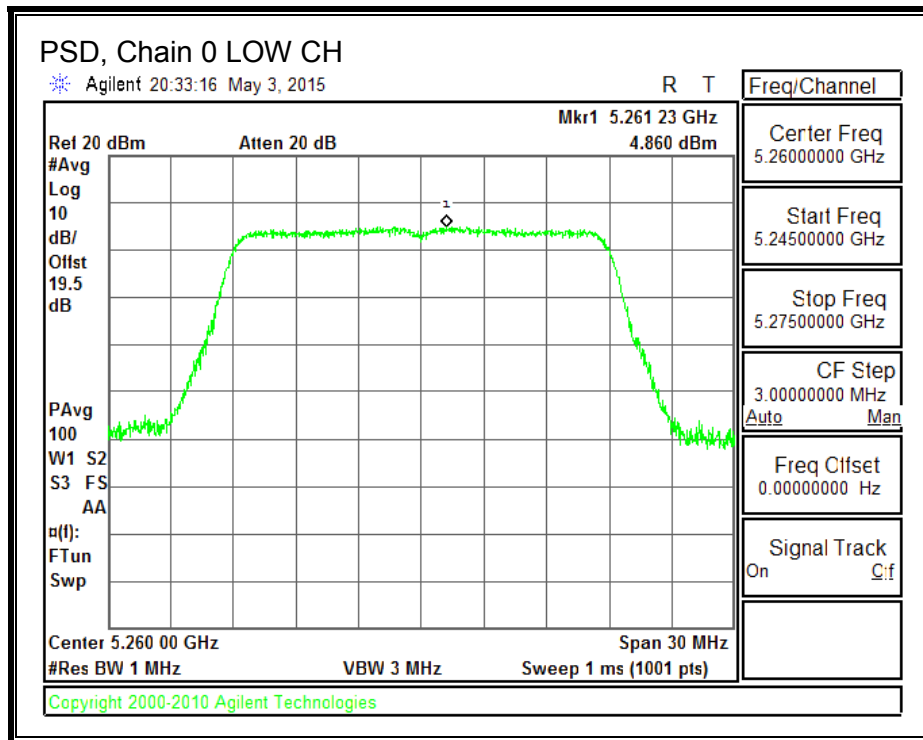

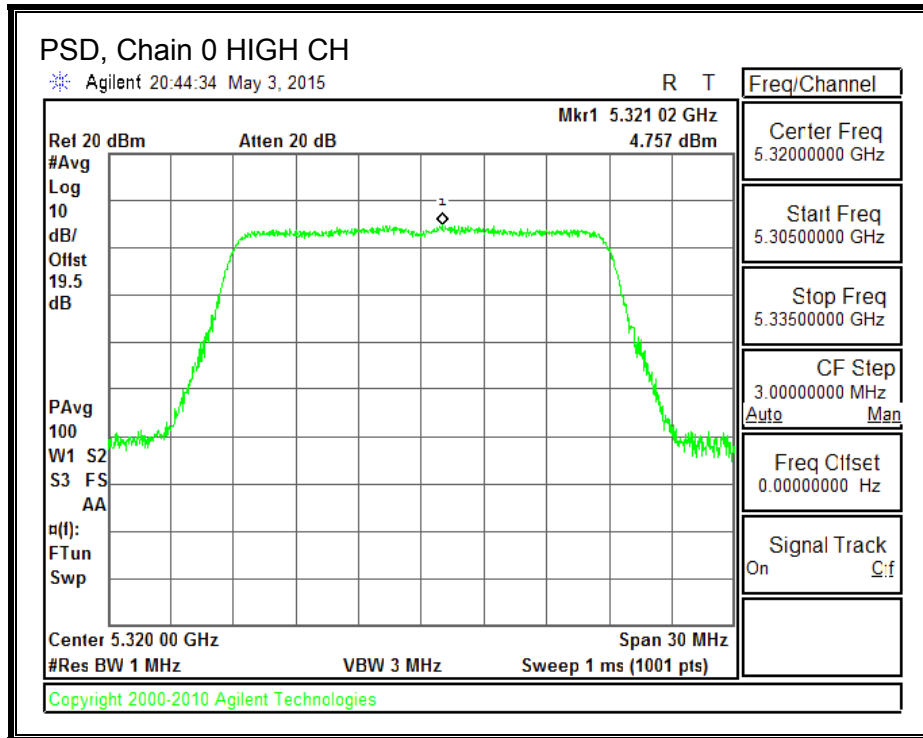

**PSD, Chain 1**

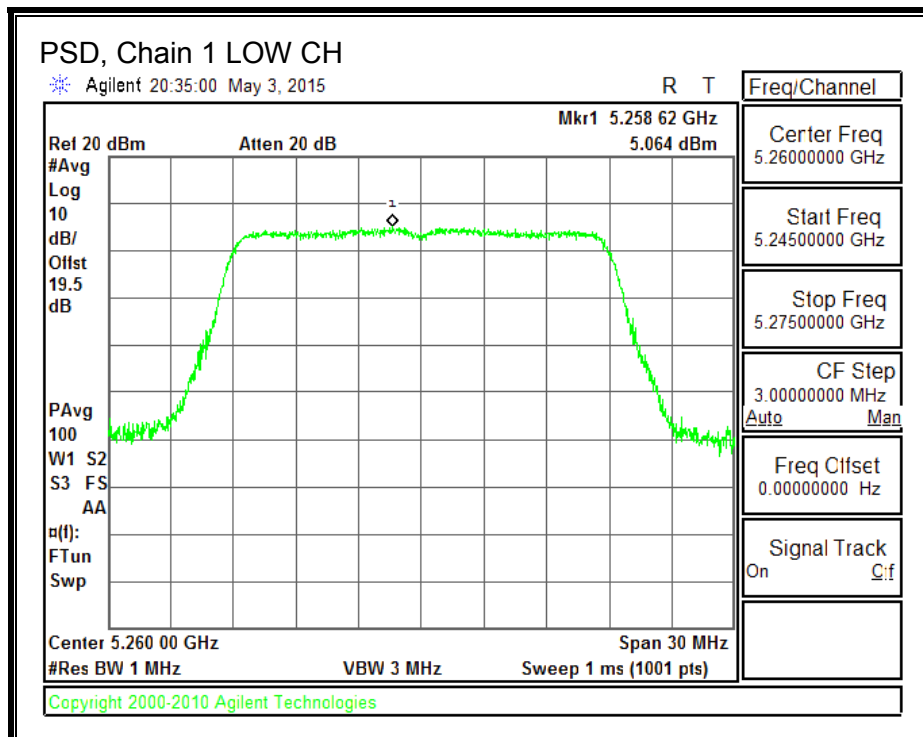

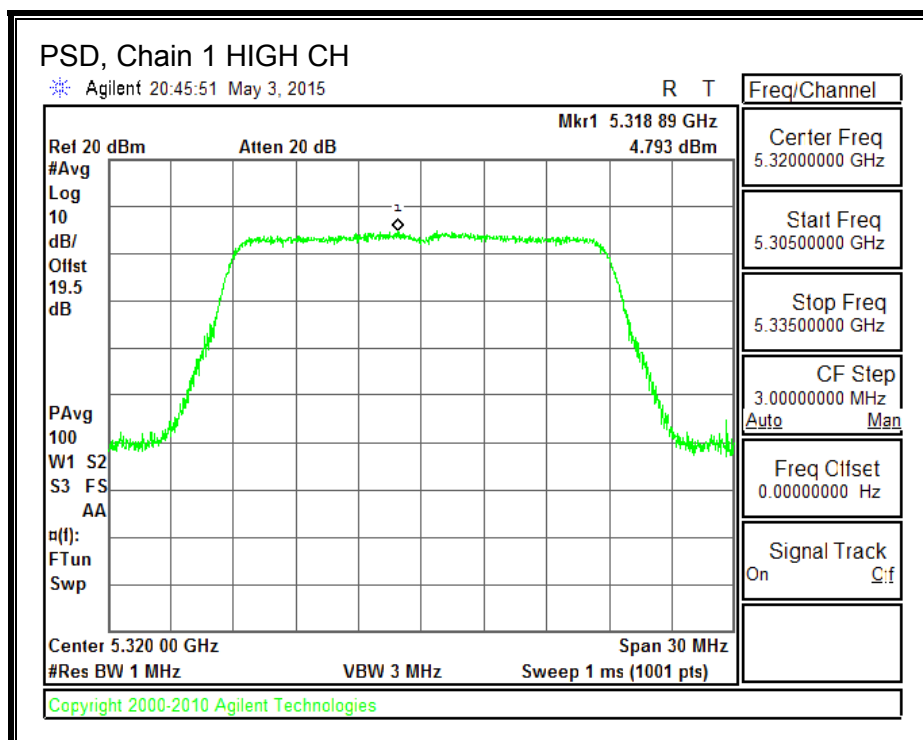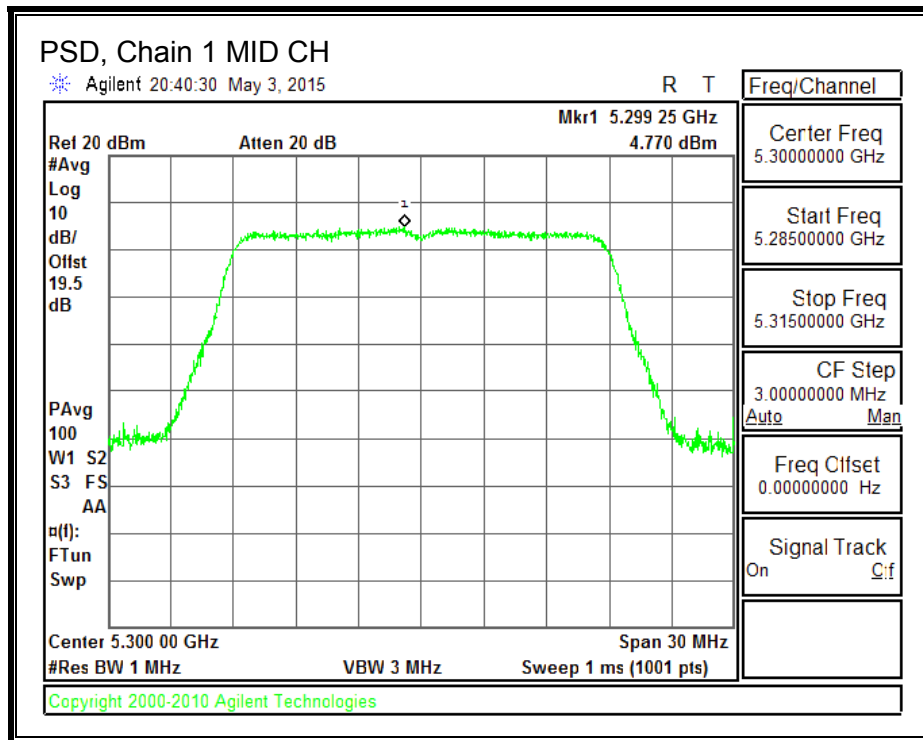

## 8.22. 802.11n HT20 STBC 2TX MODE IN THE 5.3 GHz BAND

### 8.22.1. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

For PSD and power the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
3.48	4.52	5.03

**RESULTS**

**Bandwidth, Antenna Gain and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.14	5.03	5.03	24.00	11.00
Mid	5300	21.06	5.03	5.03	24.00	11.00
High	5320	21.03	5.03	5.03	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	18.20	18.00	21.11	24.00	-2.89
Mid	5300	18.00	17.80	20.91	24.00	-3.09
High	5320	17.80	17.10	20.47	24.00	-3.53


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	6.977	6.898	9.948	11.00	-1.05
Mid	5300	6.836	6.463	9.664	11.00	-1.34
High	5320	6.927	6.866	9.907	11.00	-1.09


**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary

**PSD, Chain 0**

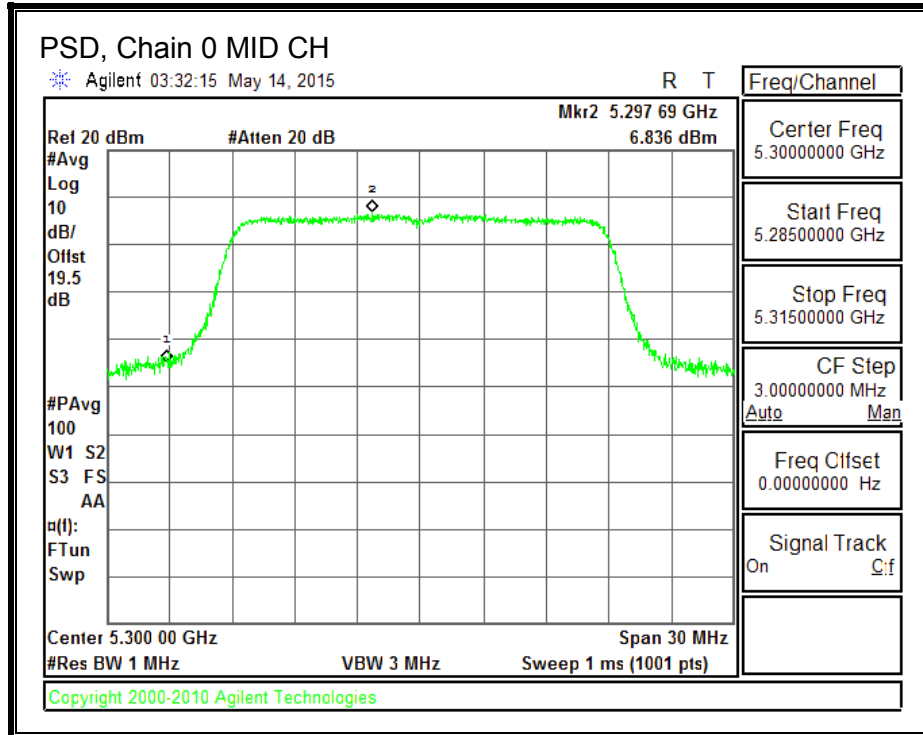
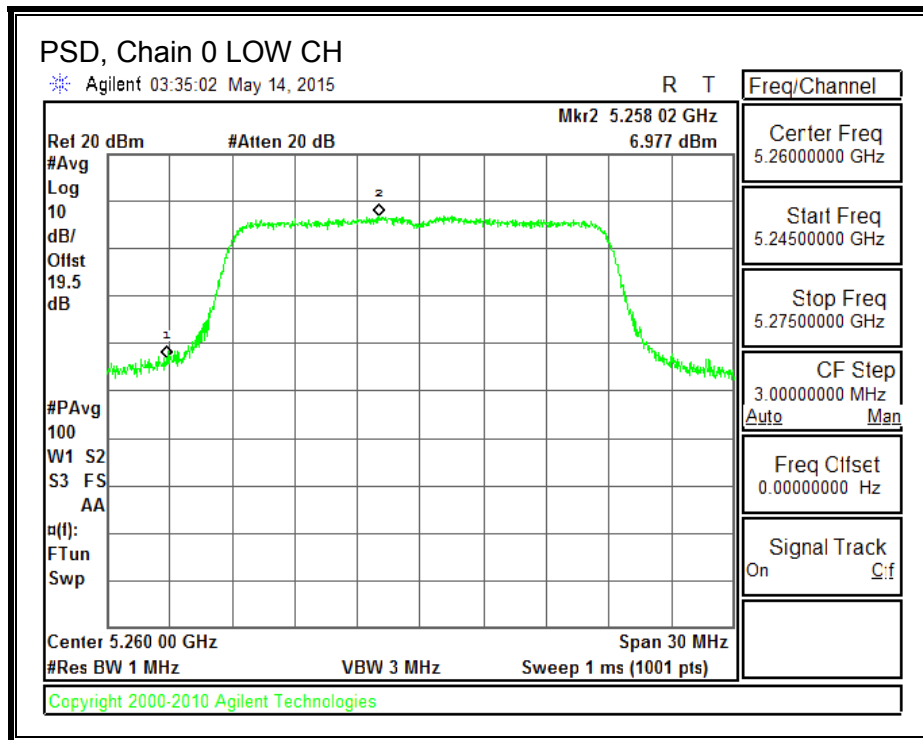


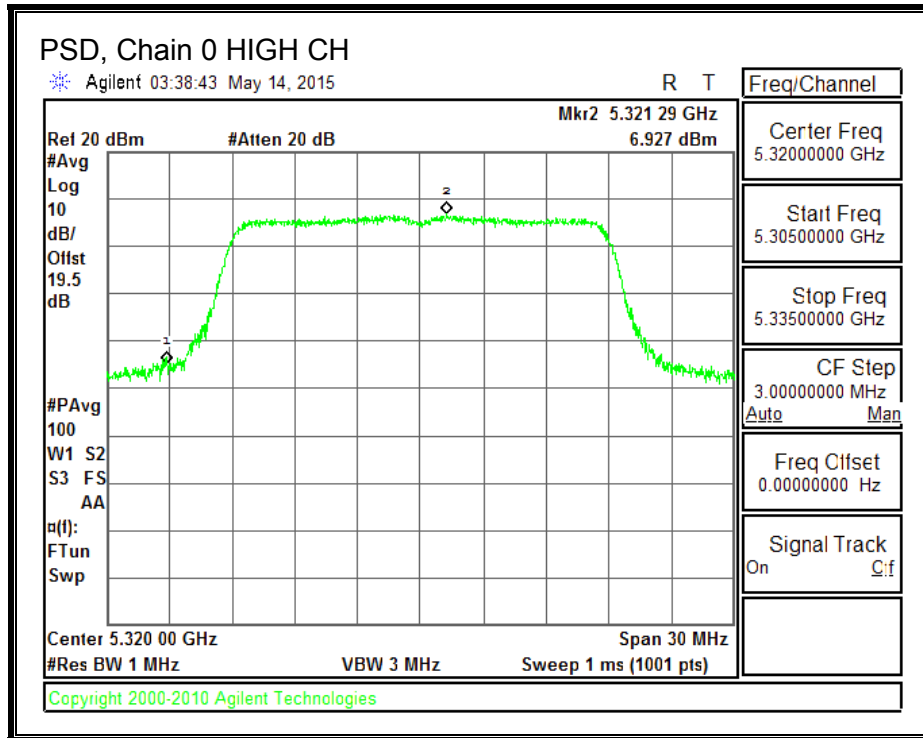

**PSD, Chain 1**

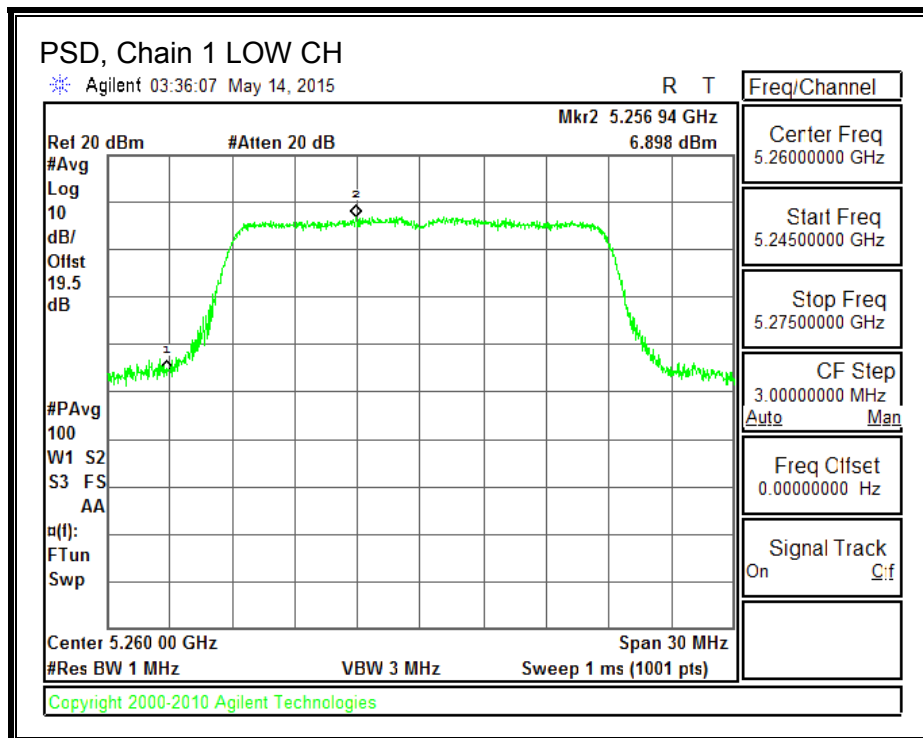



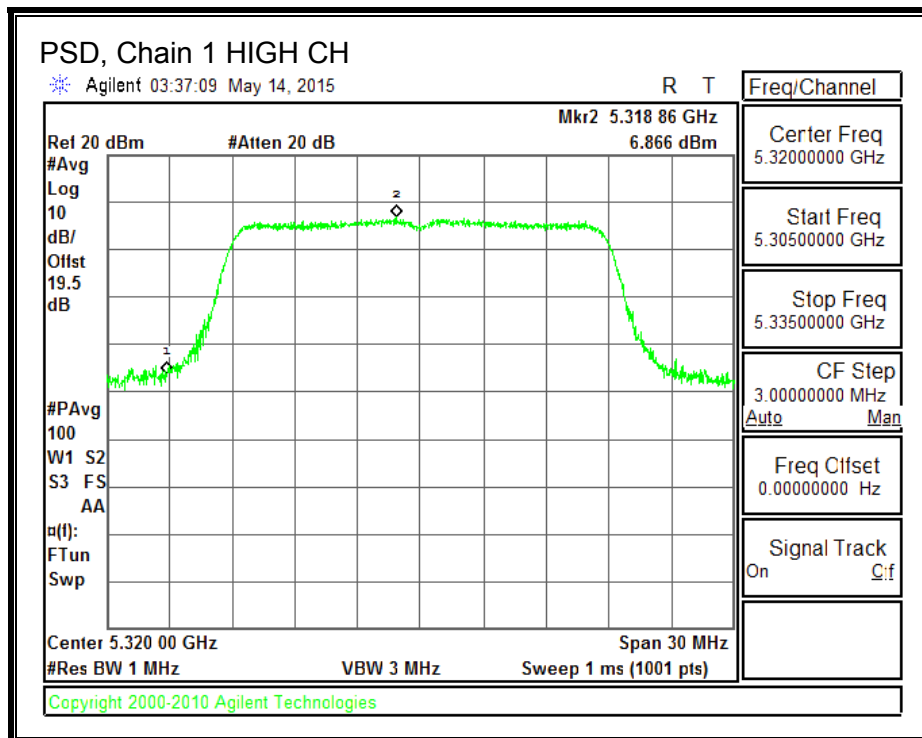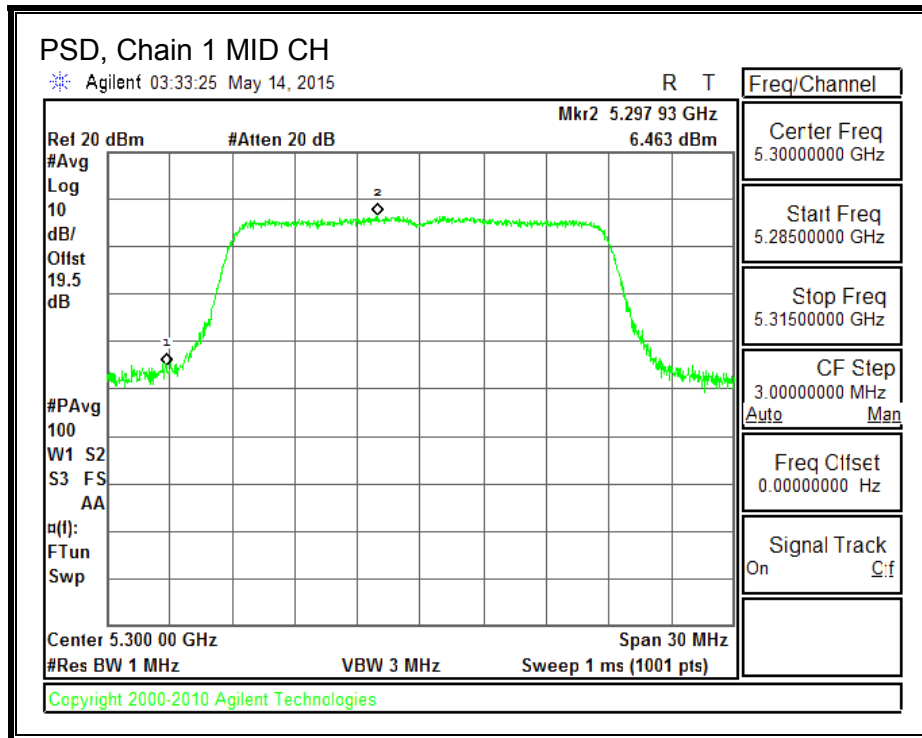

## 8.23. 802.11n HT20 TxBF 2TX MODE IN THE 5.3 GHz BAND

### 8.23.1. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

For power, PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.48	4.52	8.03

**RESULTS**

**Bandwidth, Antenna Gain and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	22.14	8.03	8.03	21.97	8.97
Mid	5300	23.27	8.03	8.03	21.97	8.97
High	5320	22.79	8.03	8.03	21.97	8.97

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	15.20	15.00	18.11	21.97	-3.86
Mid	5300	15.00	14.90	17.96	21.97	-4.01
High	5320	15.00	14.90	17.96	21.97	-4.01


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	4.860	5.064	7.97	8.97	-1.00
Mid	5300	4.871	4.770	7.83	8.97	-1.14
High	5320	4.757	4.793	7.79	8.97	-1.18


**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary



**PSD, Chain 0**

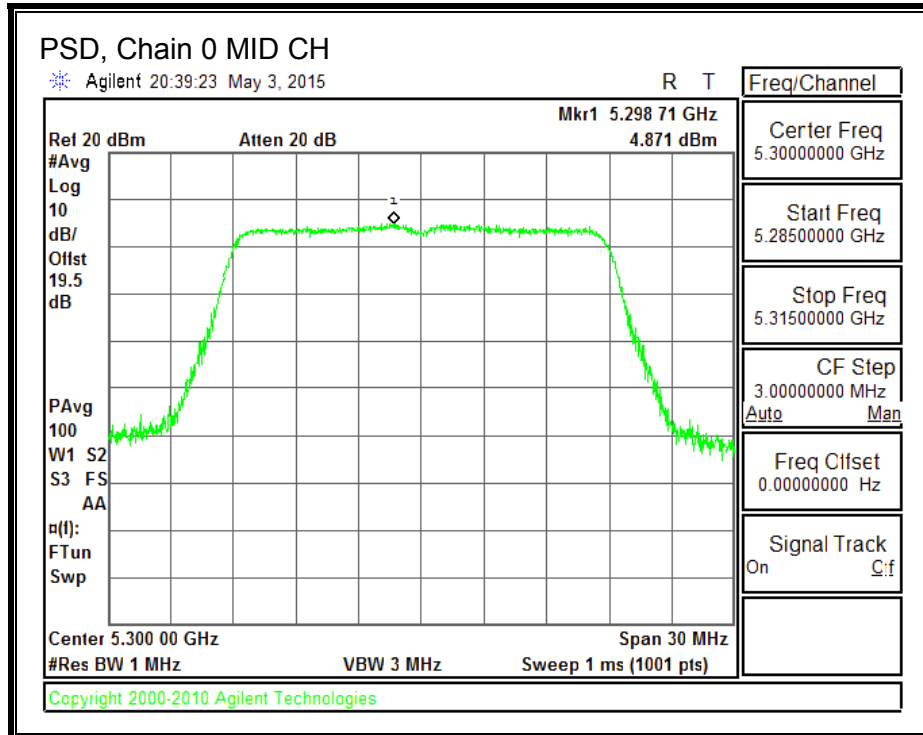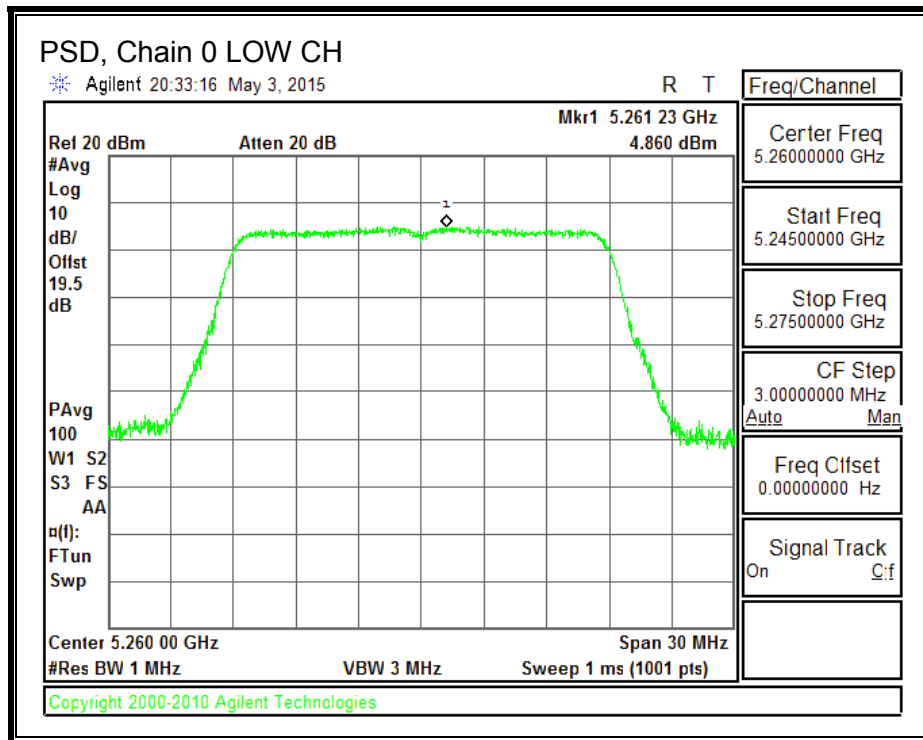

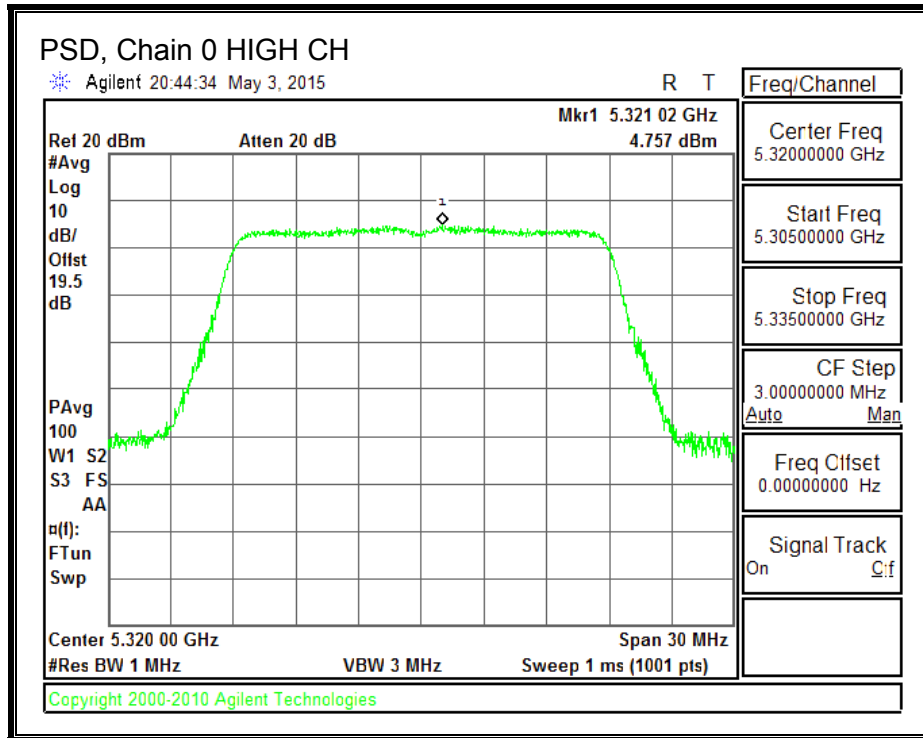

**PSD, Chain 1**

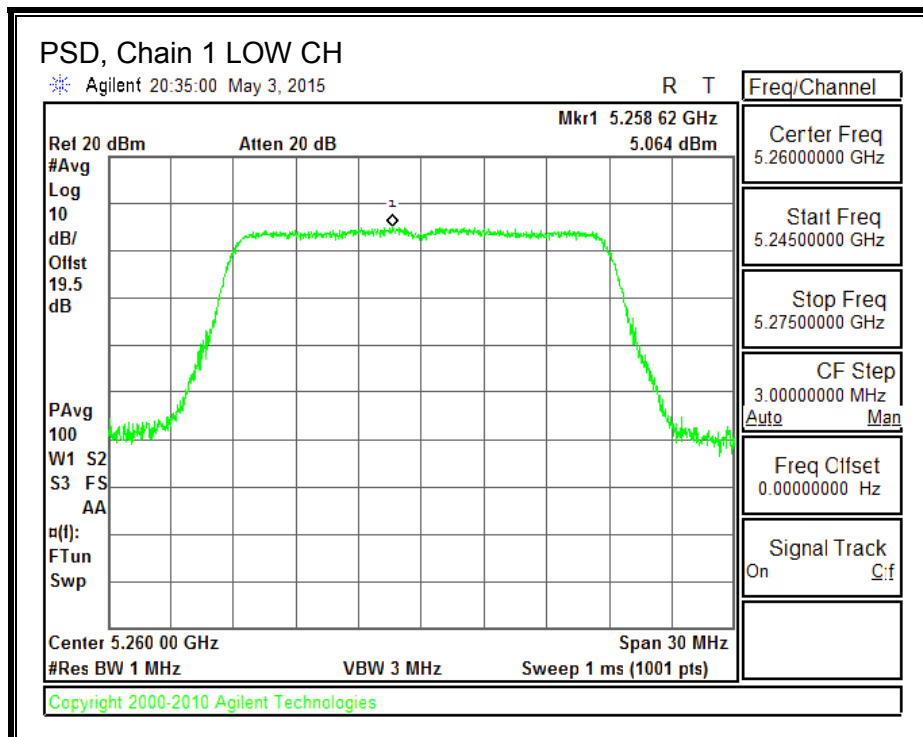

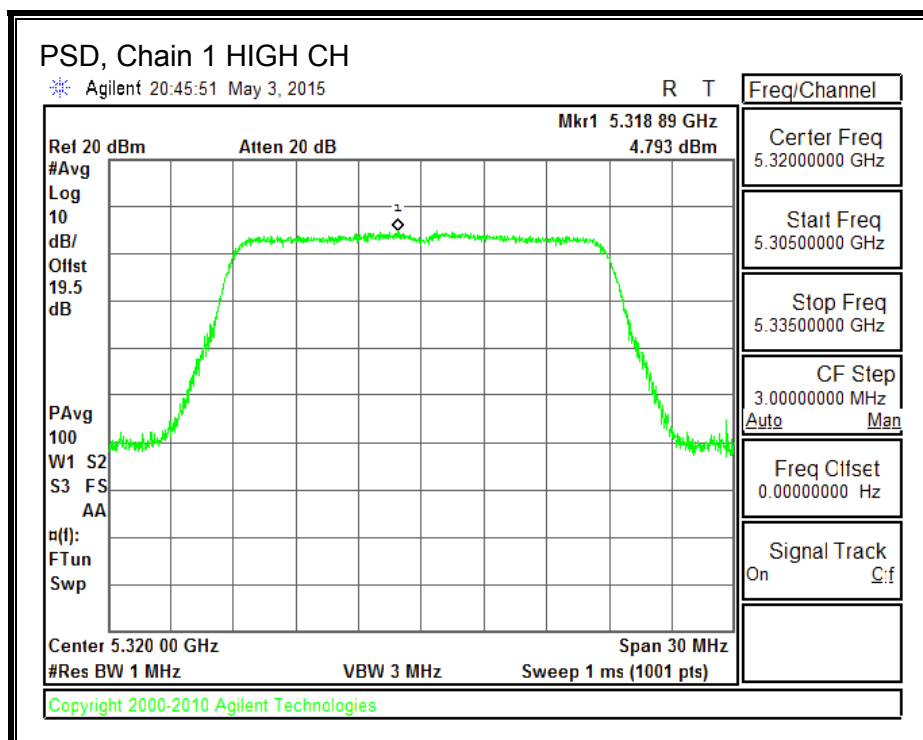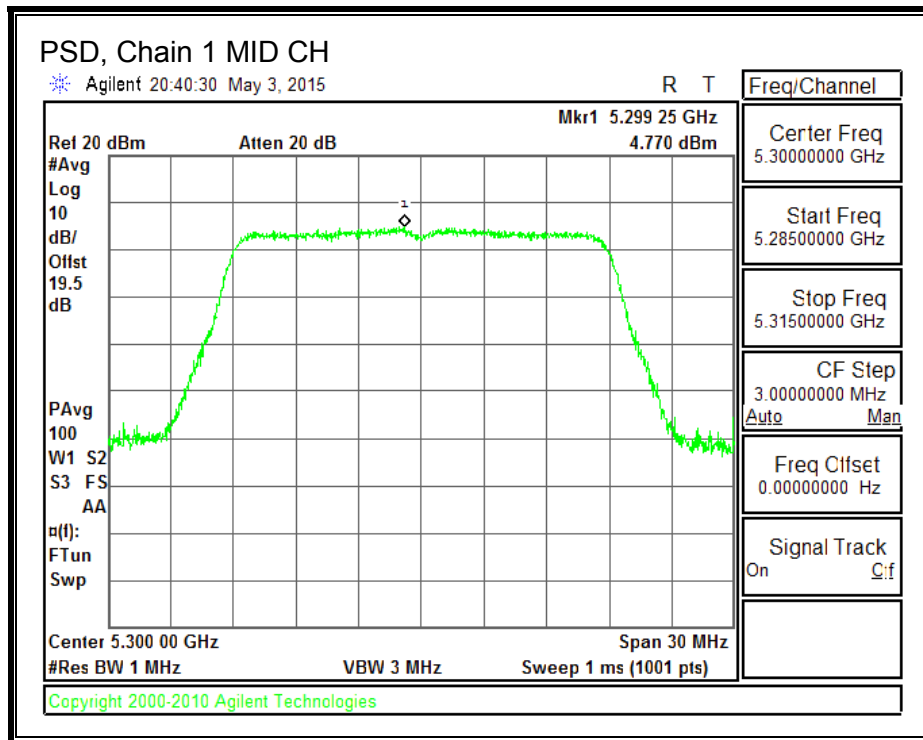

## 8.24. 802.11n HT20 CDD 3TX MODE IN THE 5.3 GHZ BAND

### 8.24.1. 26 dB BANDWIDTH



#### LIMITS

None; for reporting purposes only.


#### RESULTS

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5260	25.415	22.14	22.750
Mid	5300	25.740	23.27	23.360
High	5320	27.040	23.75	22.790


**26 dB BANDWIDTH, Chain 0**

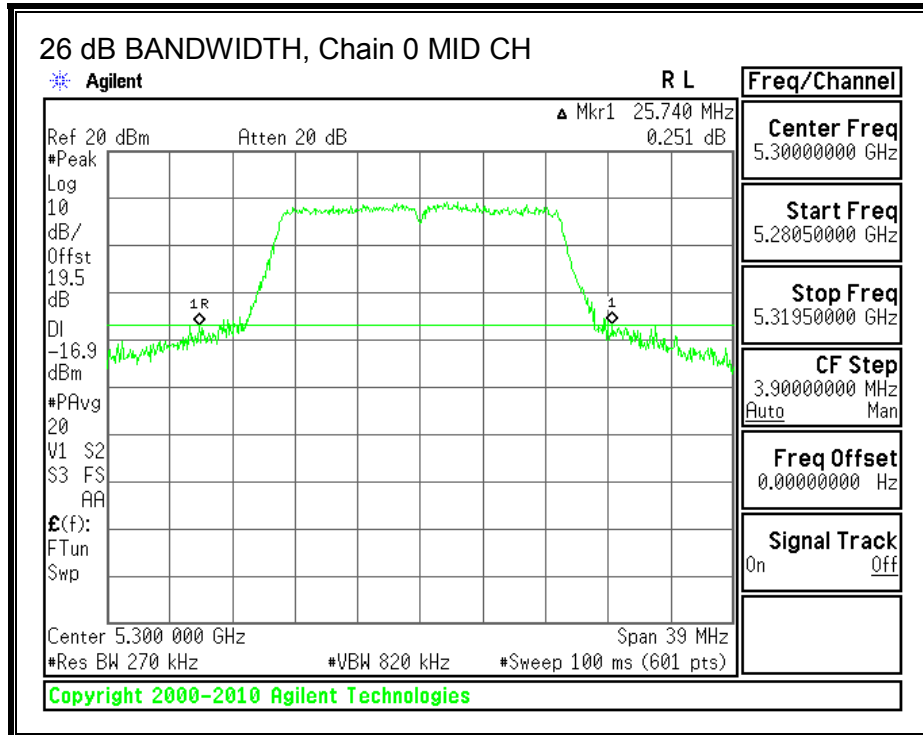
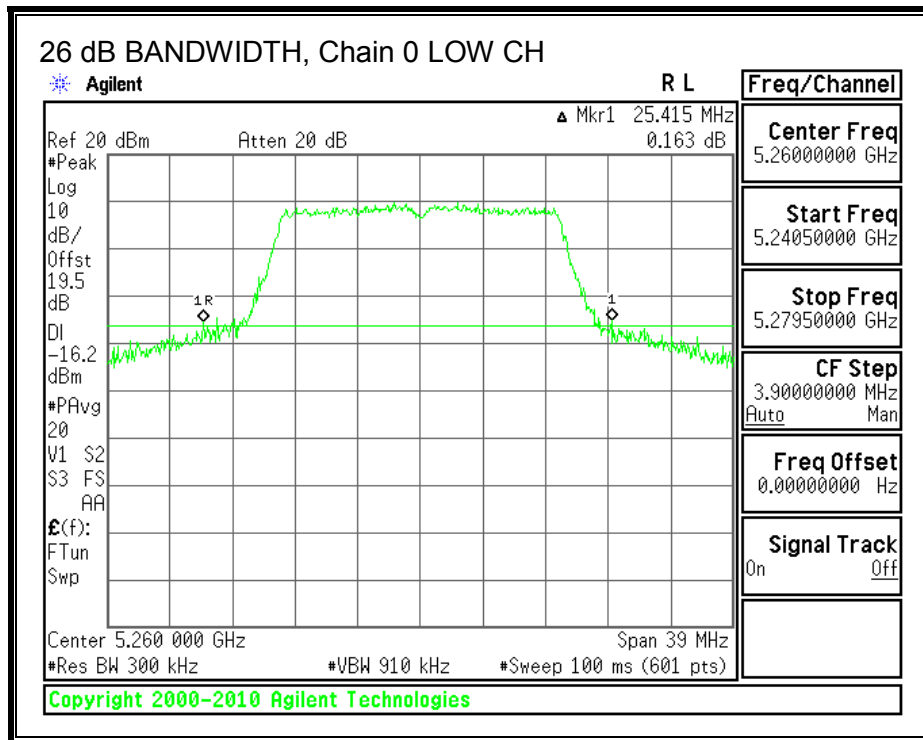





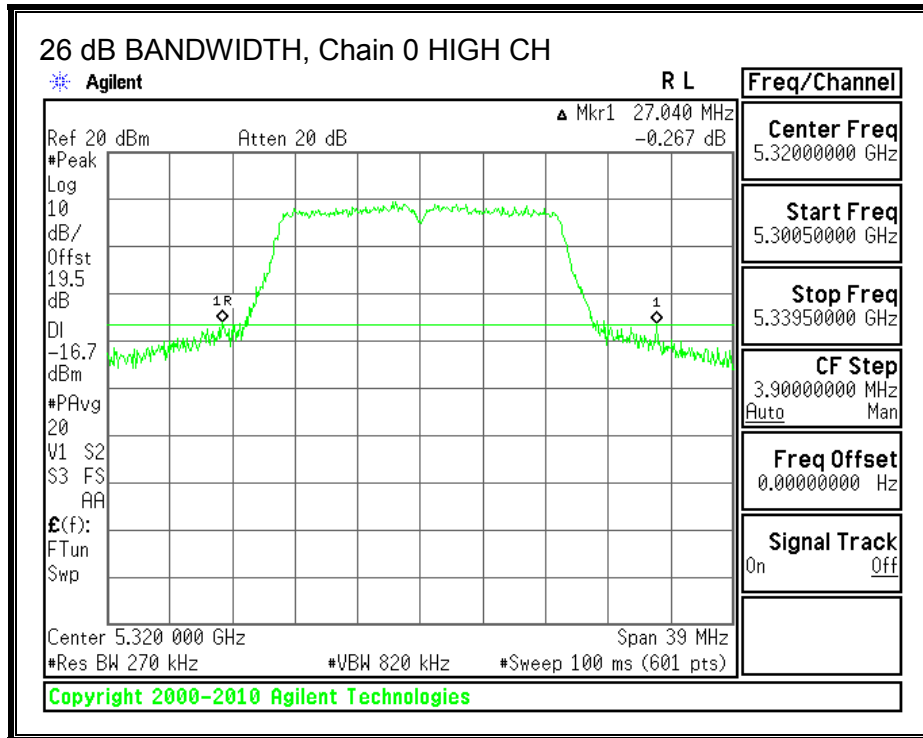



**26 dB BANDWIDTH, Chain 1**

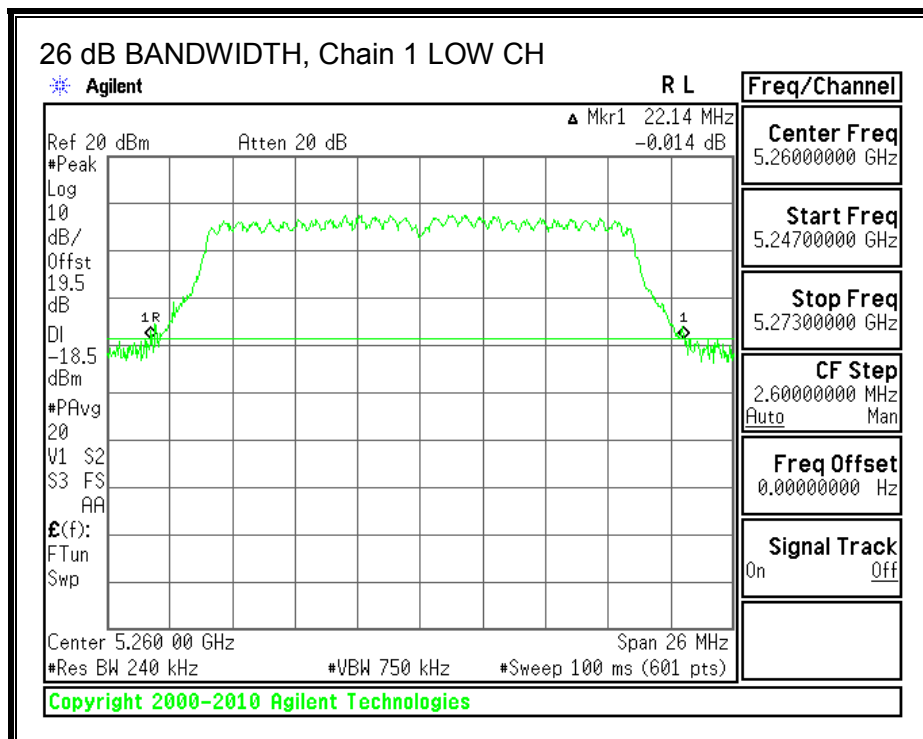

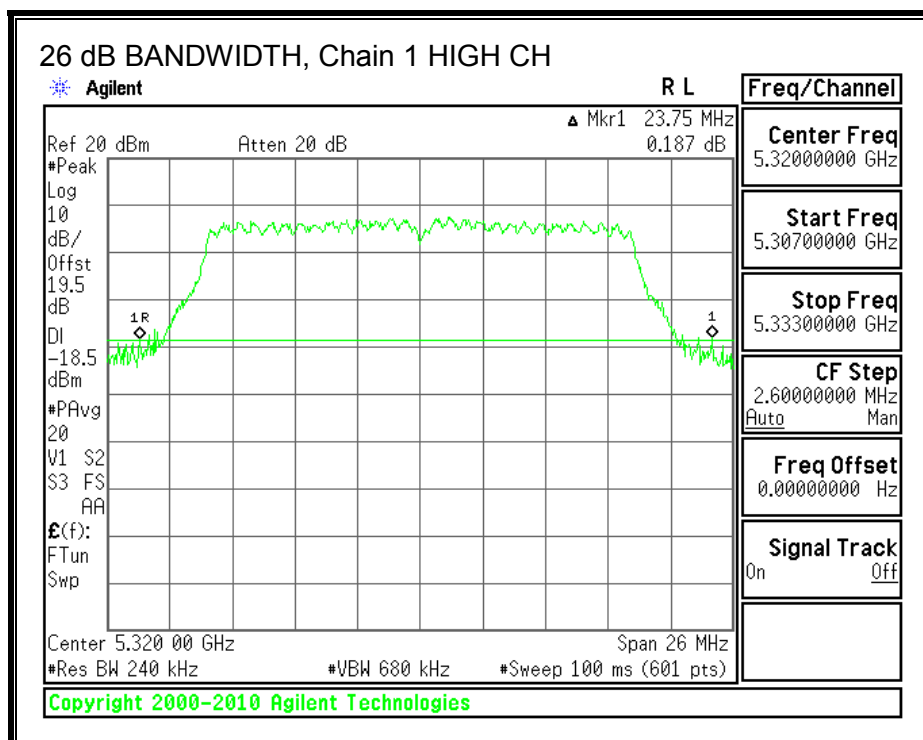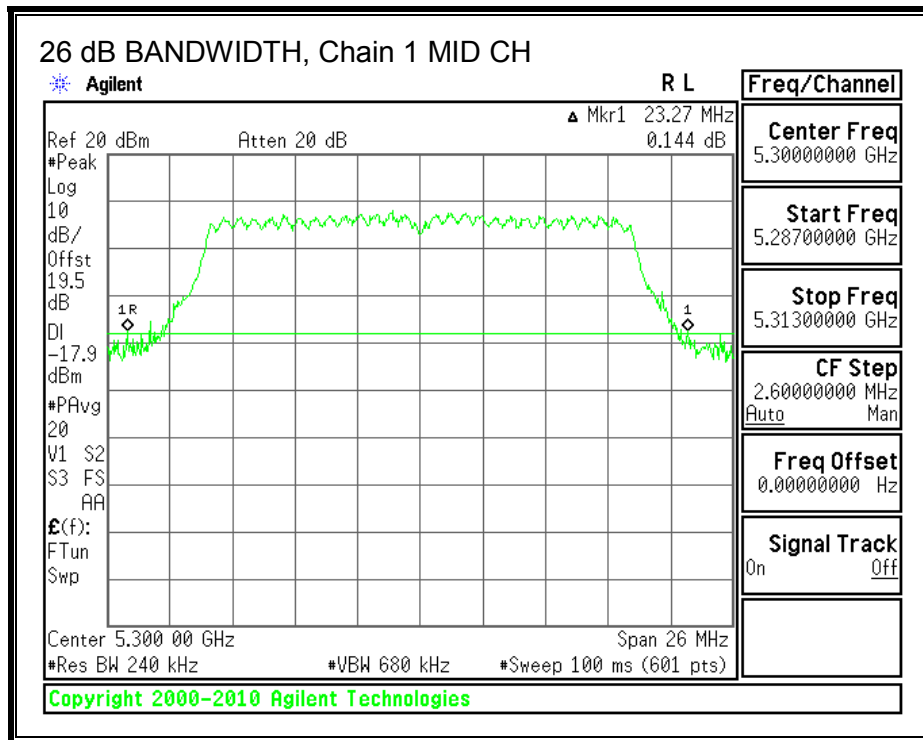

**26 dB BANDWIDTH, Chain 2**

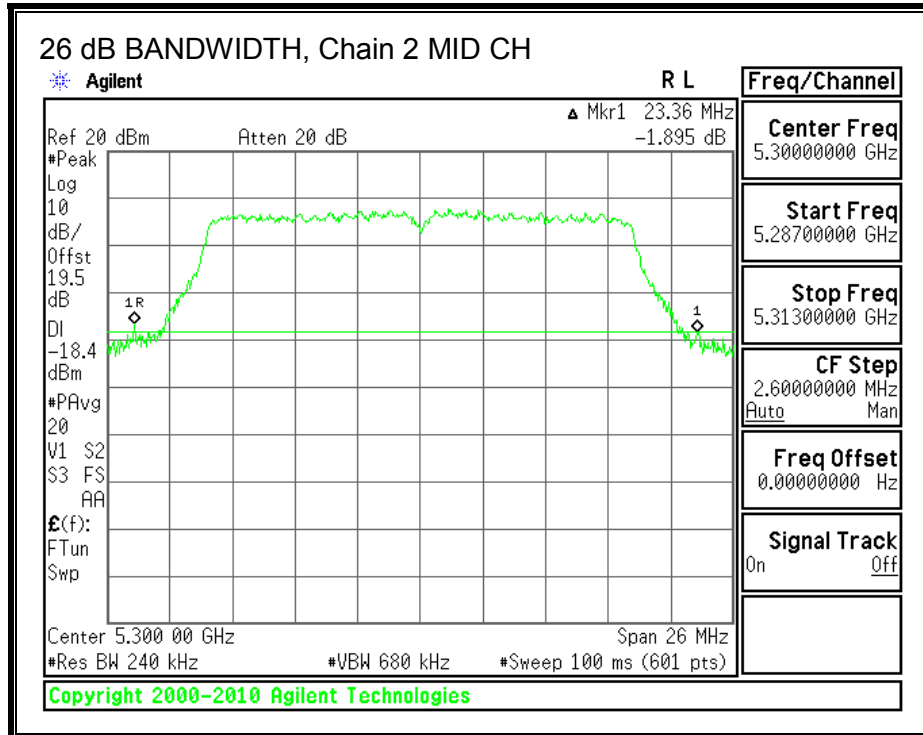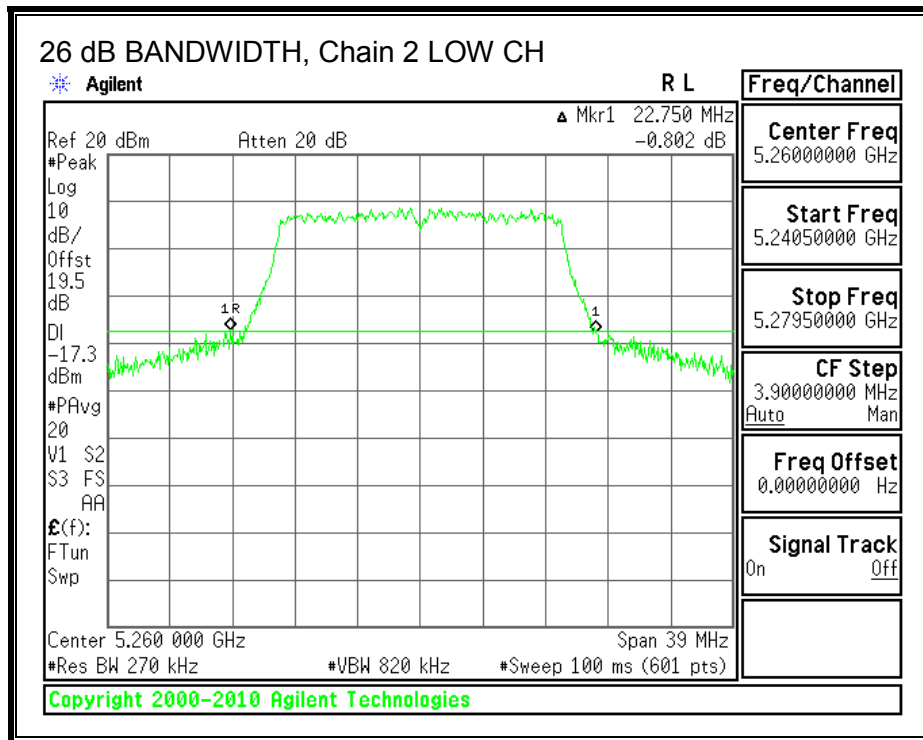

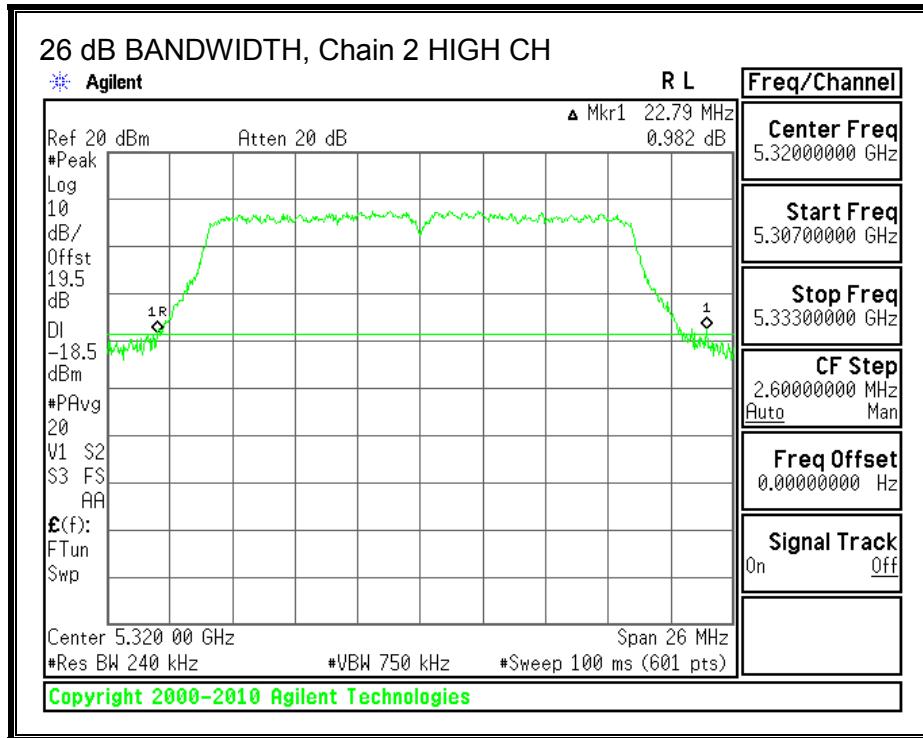

**8.24.2. 99% BANDWIDTH**



**LIMITS**


None; for reporting purposes only.

**RESULTS**


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5260	17.7734	17.7531	17.7542
Mid	5300	17.7630	17.7621	17.7465
High	5320	17.7739	17.7523	17.7555



**99% BANDWIDTH, Chain 0**

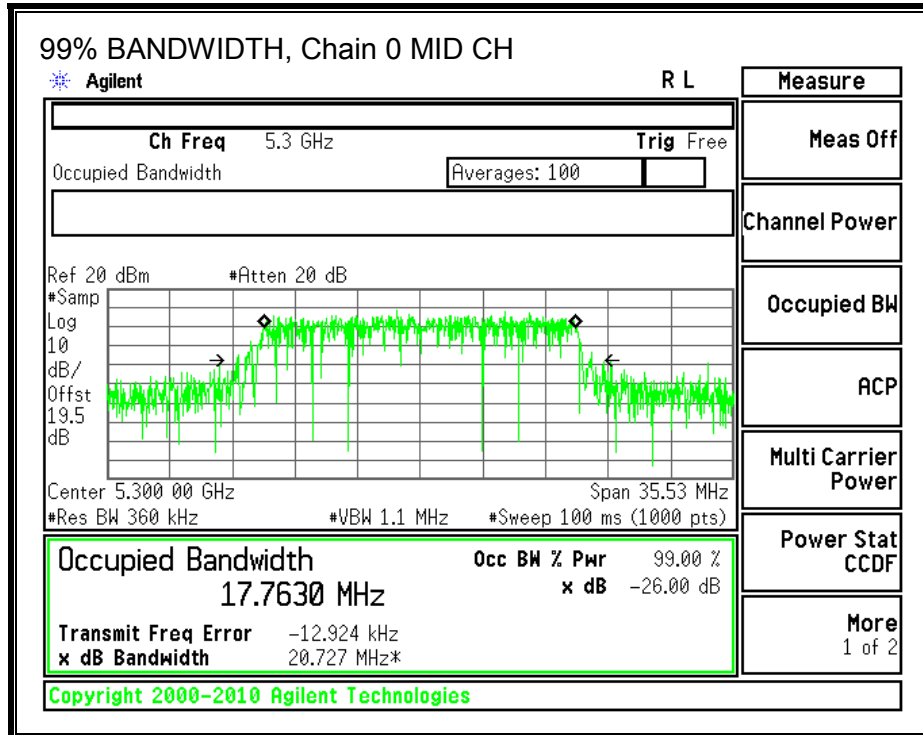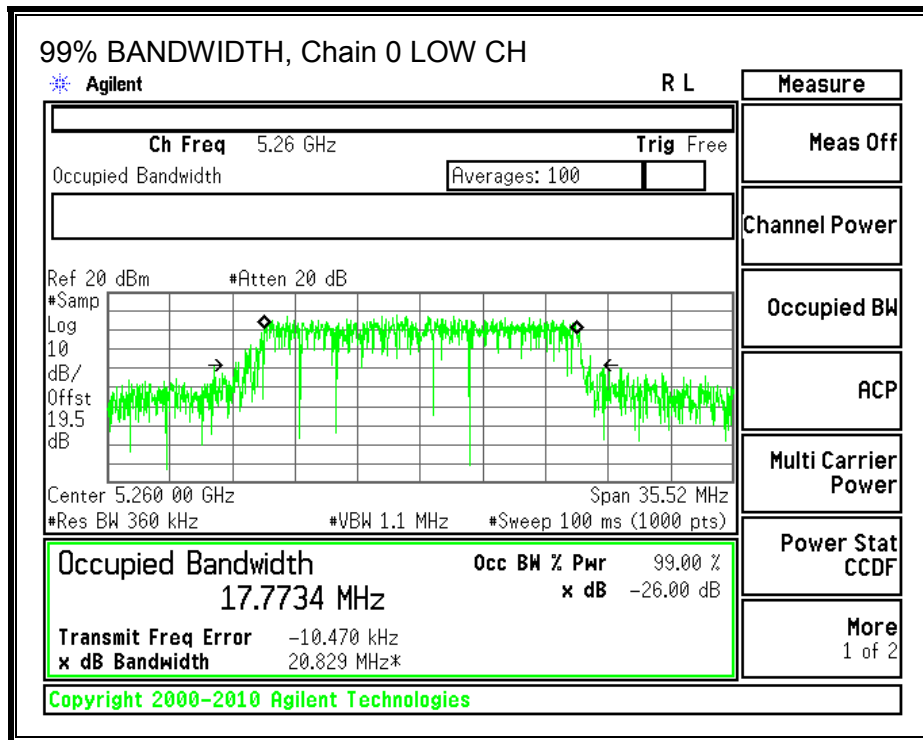

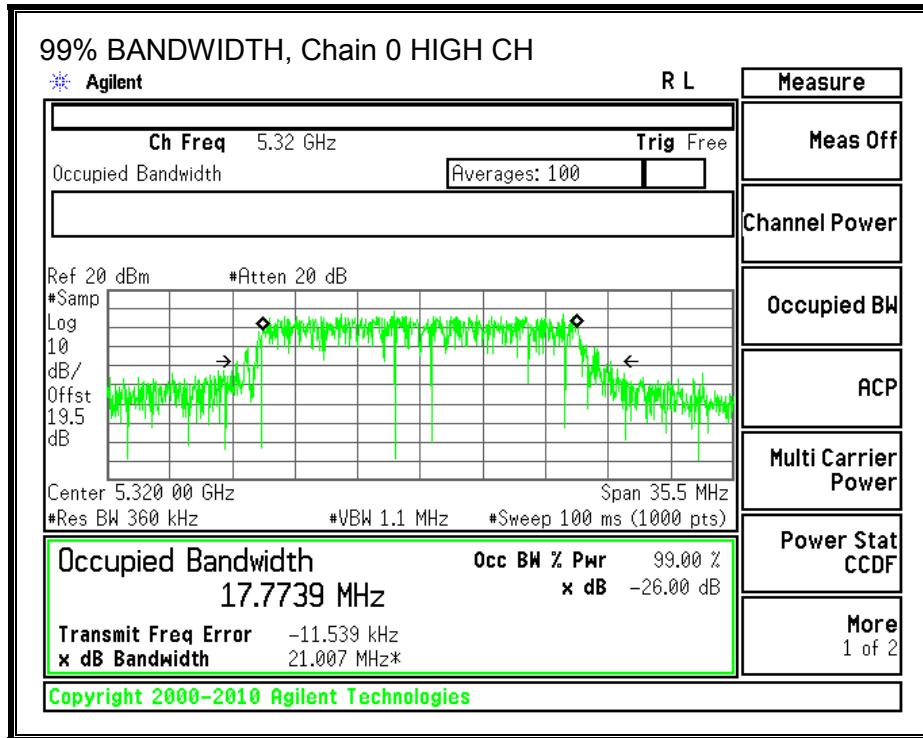



**99% BANDWIDTH, Chain 1**

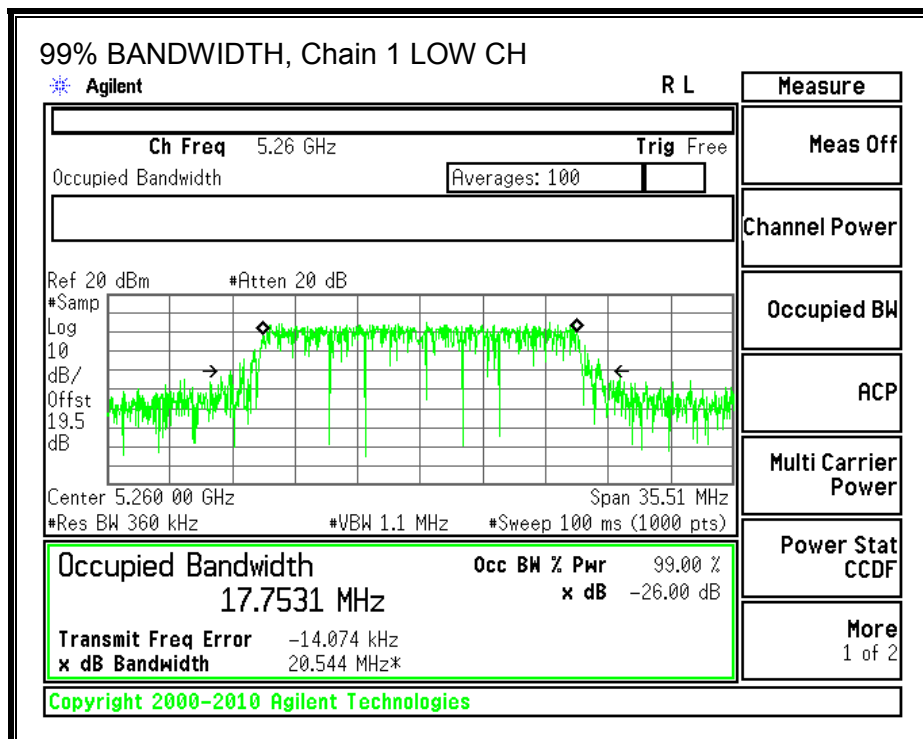


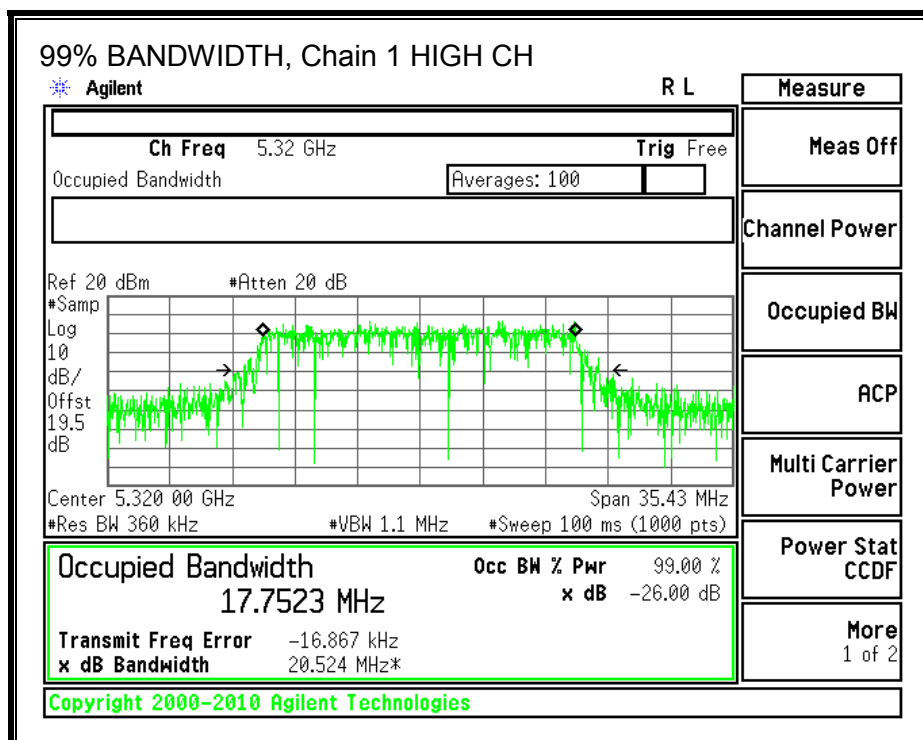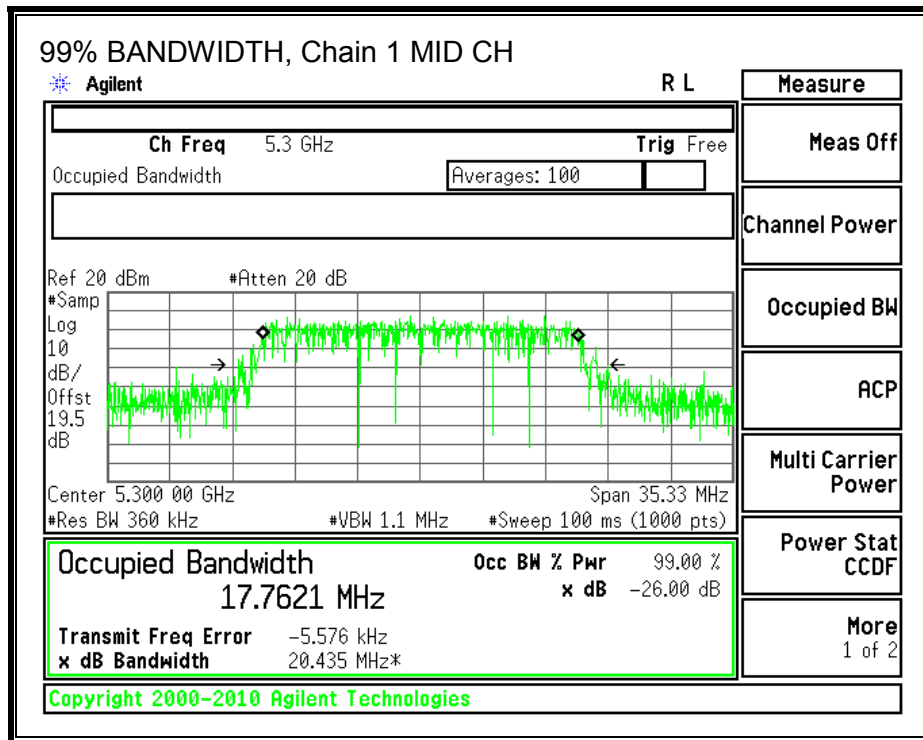



**99% BANDWIDTH, Chain 2**

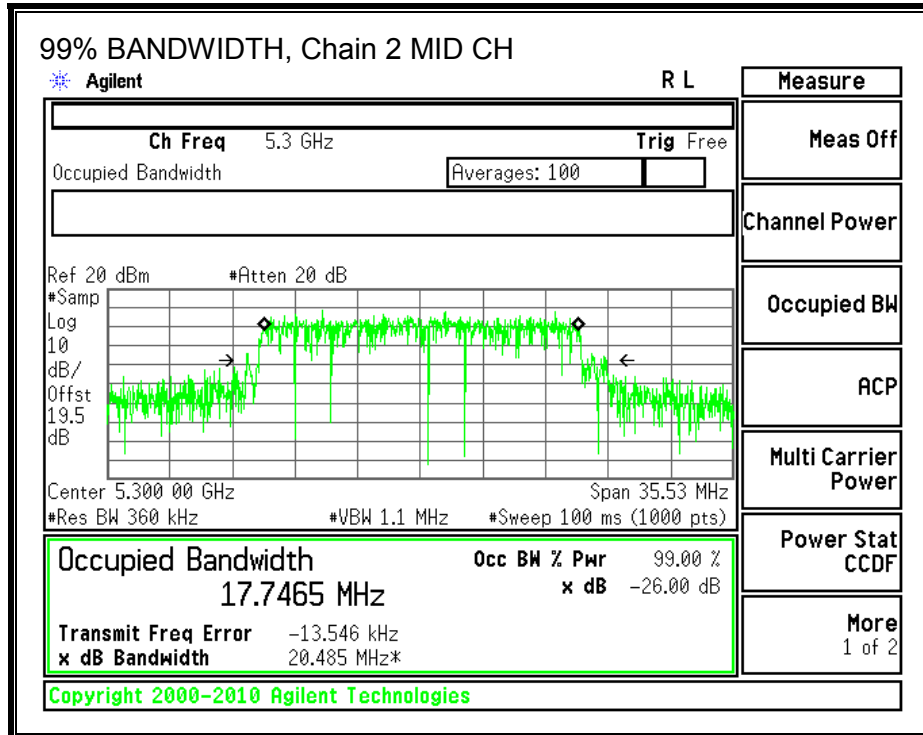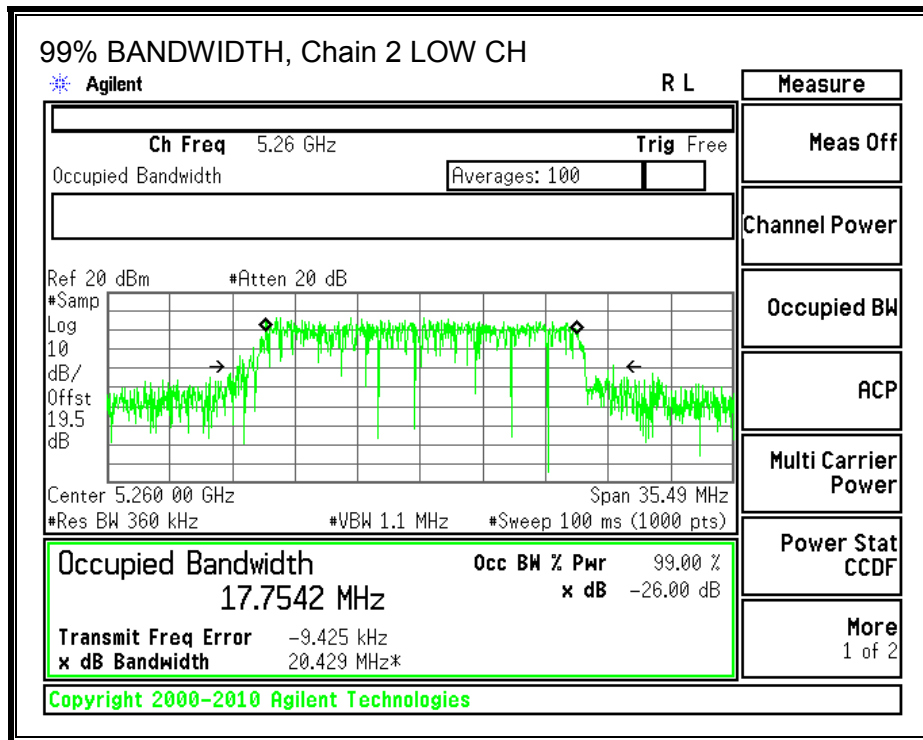

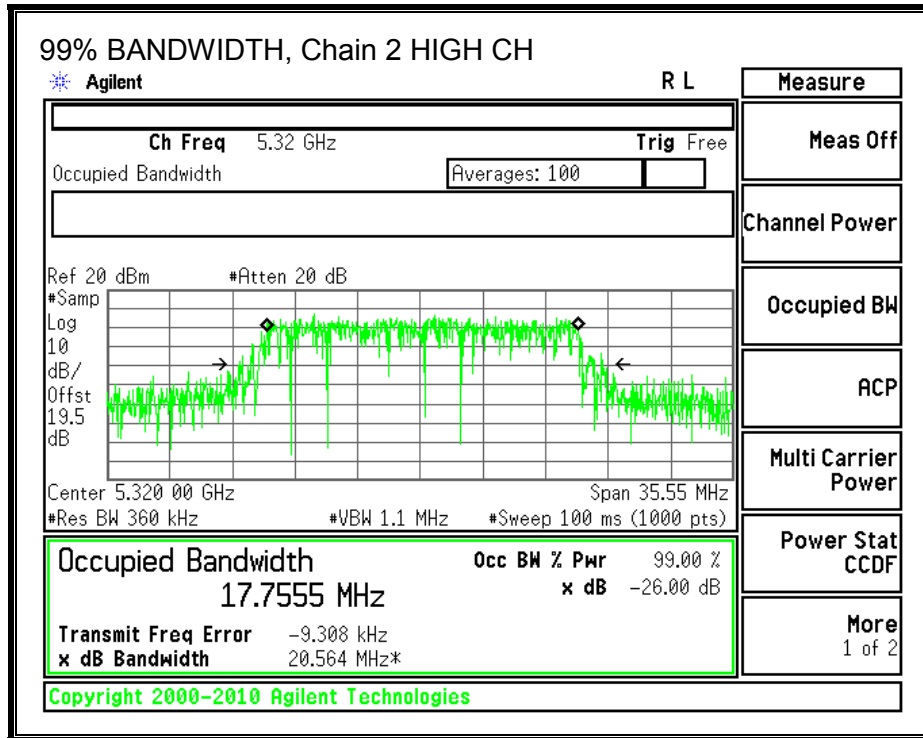

**8.24.3. OUTPUT POWER AND PSD**

**LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
3.48	3.21	4.52	4.77

For PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
3.48	3.21	4.52	9.53

**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	22.14	4.77	9.53	24.00	7.47
Mid	5300	23.27	4.77	9.53	24.00	7.47
High	5320	22.79	4.77	9.53	24.00	7.47

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	12.80	12.70	12.20	17.35	24.00	-6.65
Mid	5300	12.90	12.80	12.40	17.48	24.00	-6.52
High	5320	12.70	12.70	11.90	17.22	24.00	-6.78


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	1.781	1.670	1.349	6.38	7.47	-1.09
Mid	5300	1.959	1.866	1.135	6.44	7.47	-1.03
High	5320	1.889	1.949	0.921	6.38	7.47	-1.09


**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



**PSD, Chain 0**

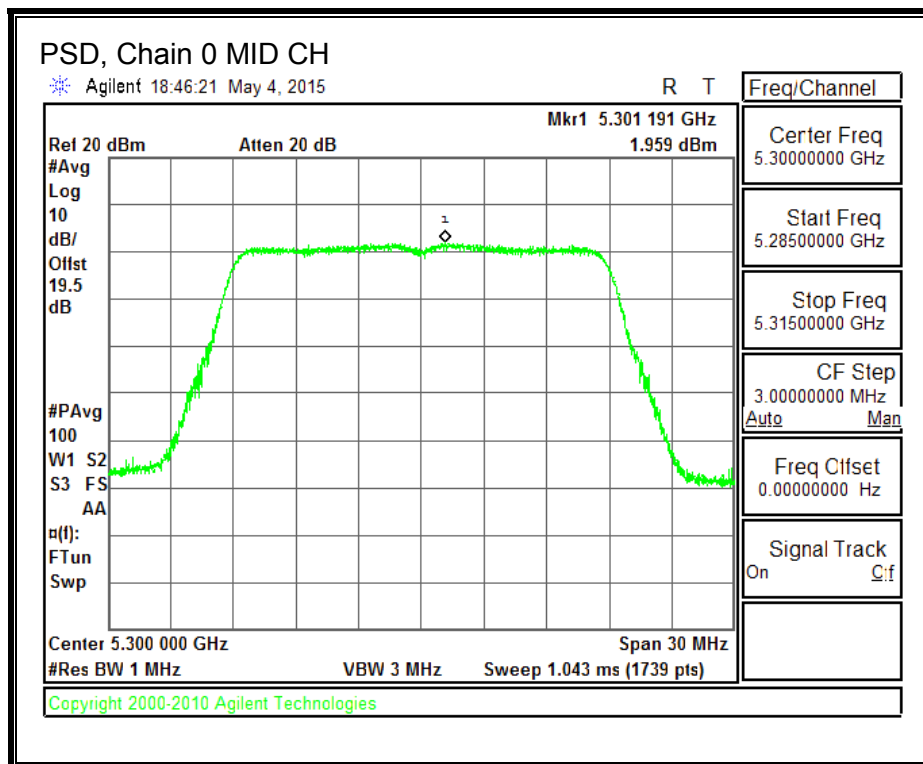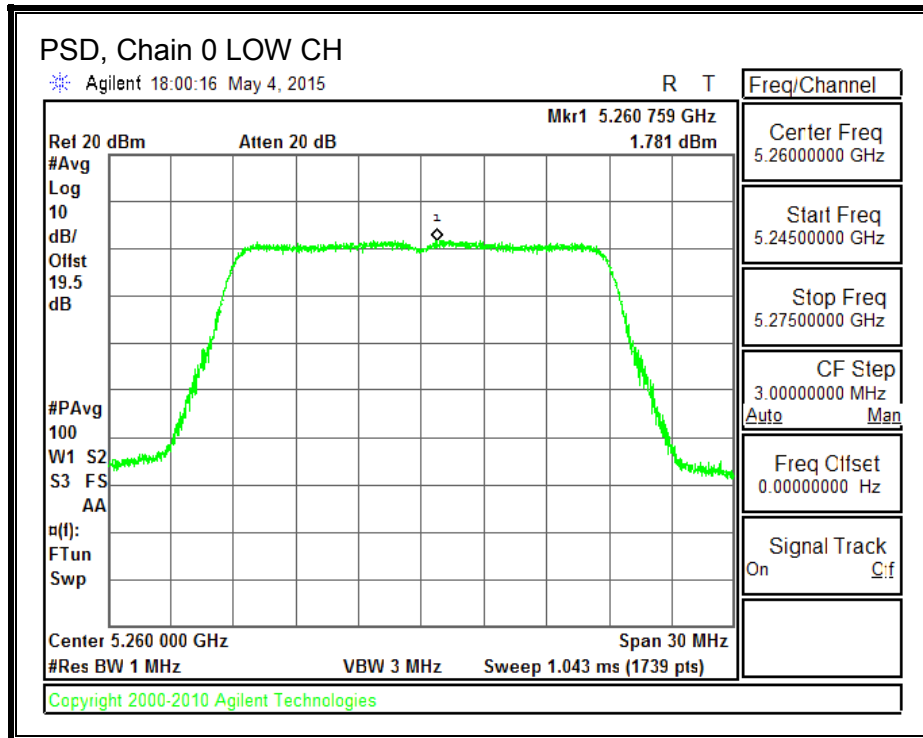


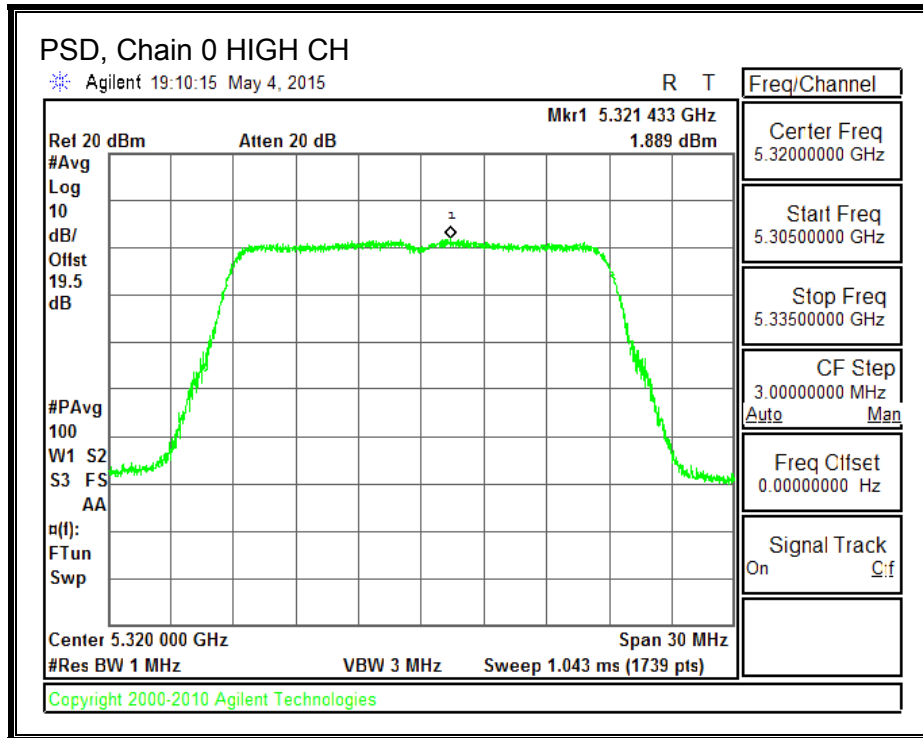


**PSD, Chain 1**

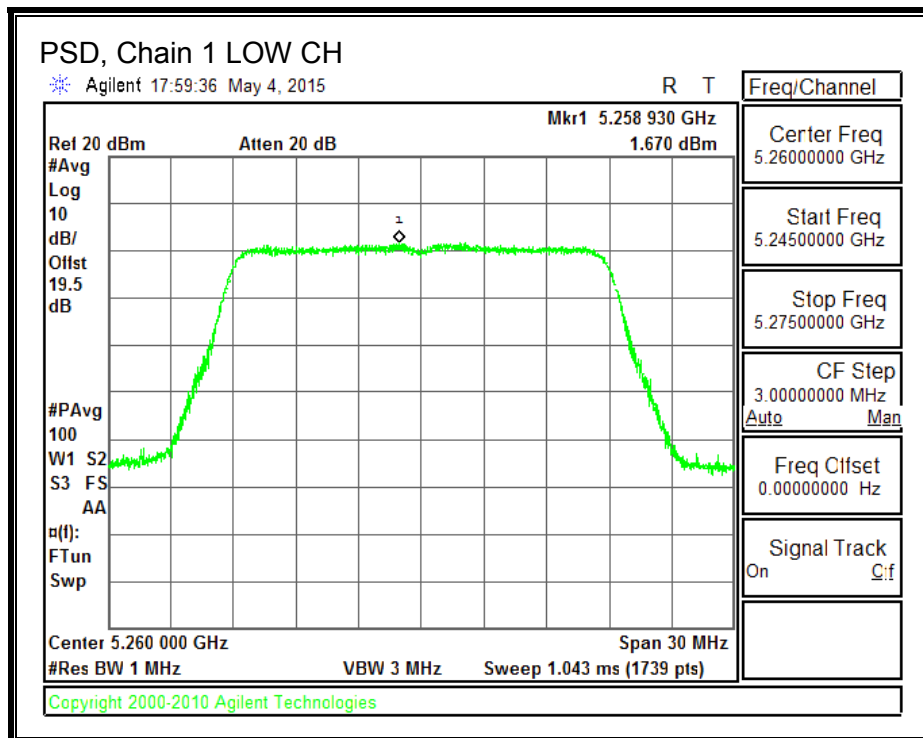


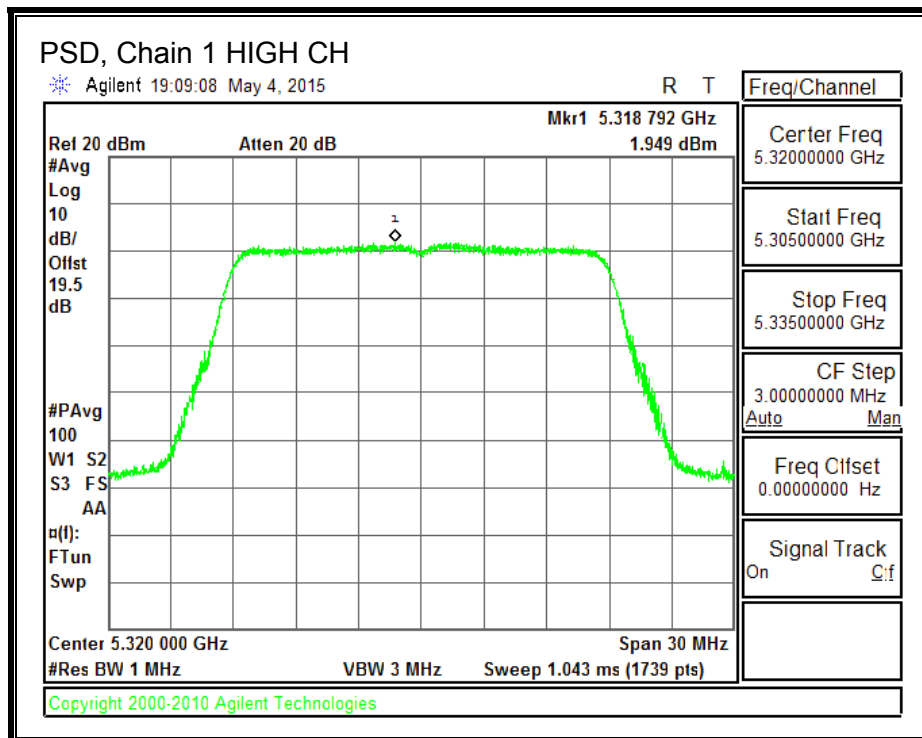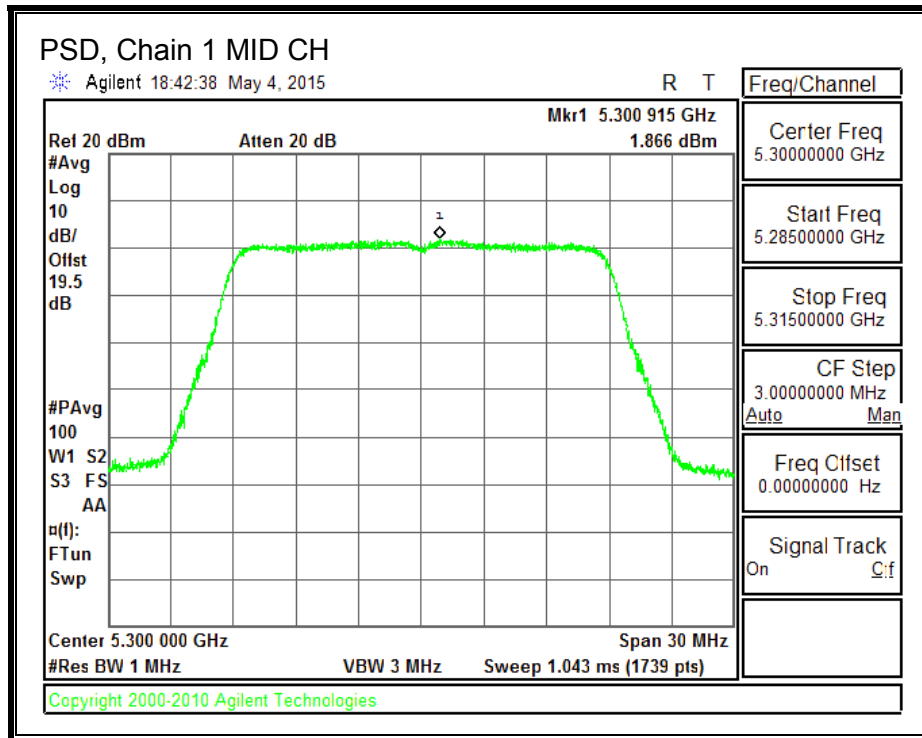

**PSD, Chain 2**

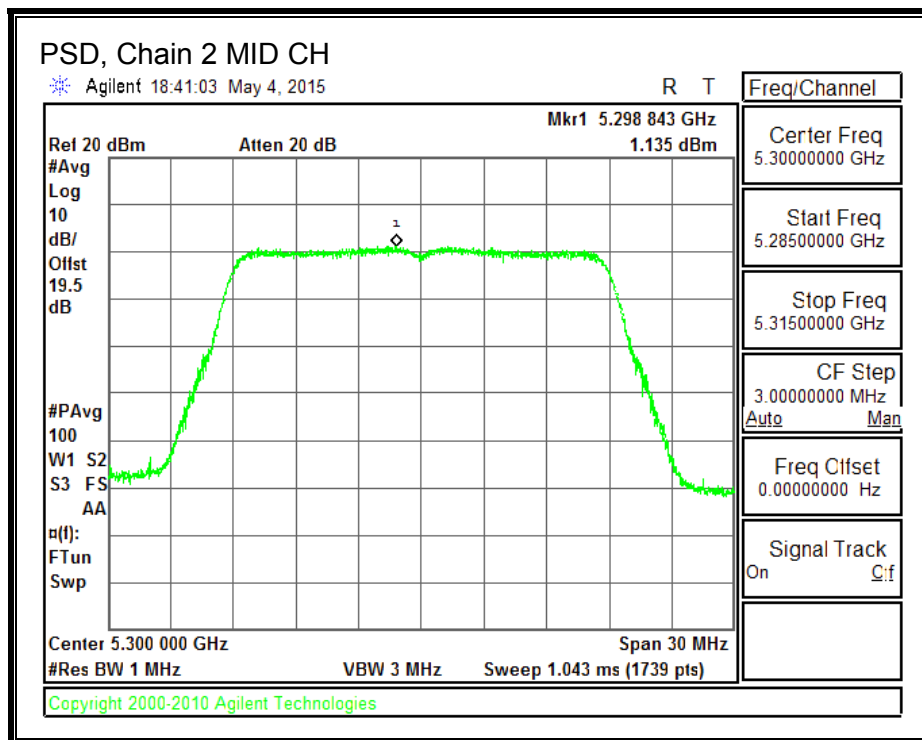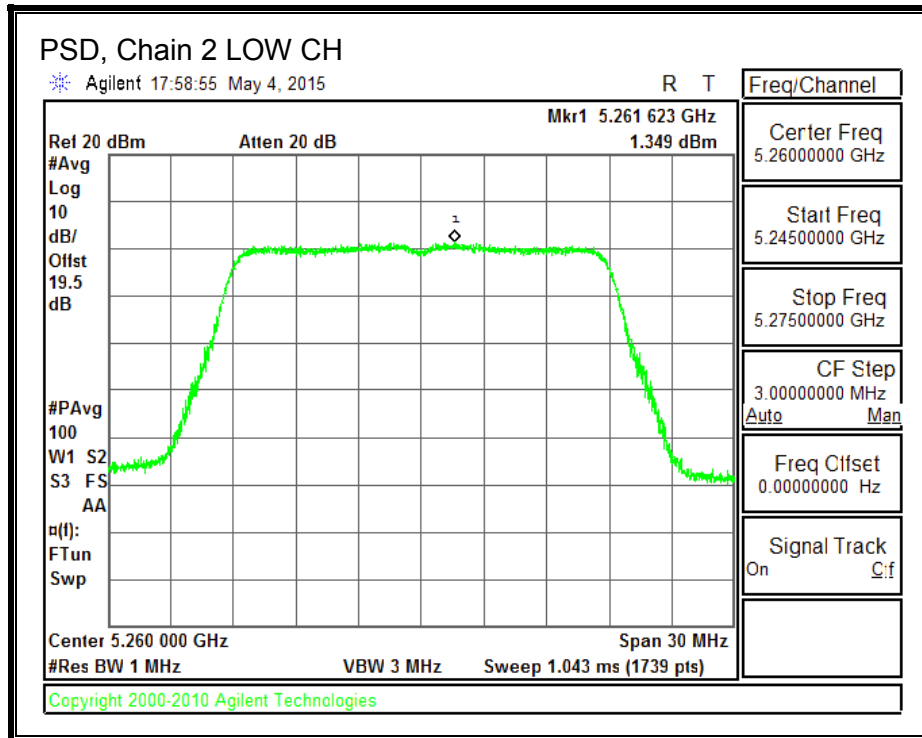



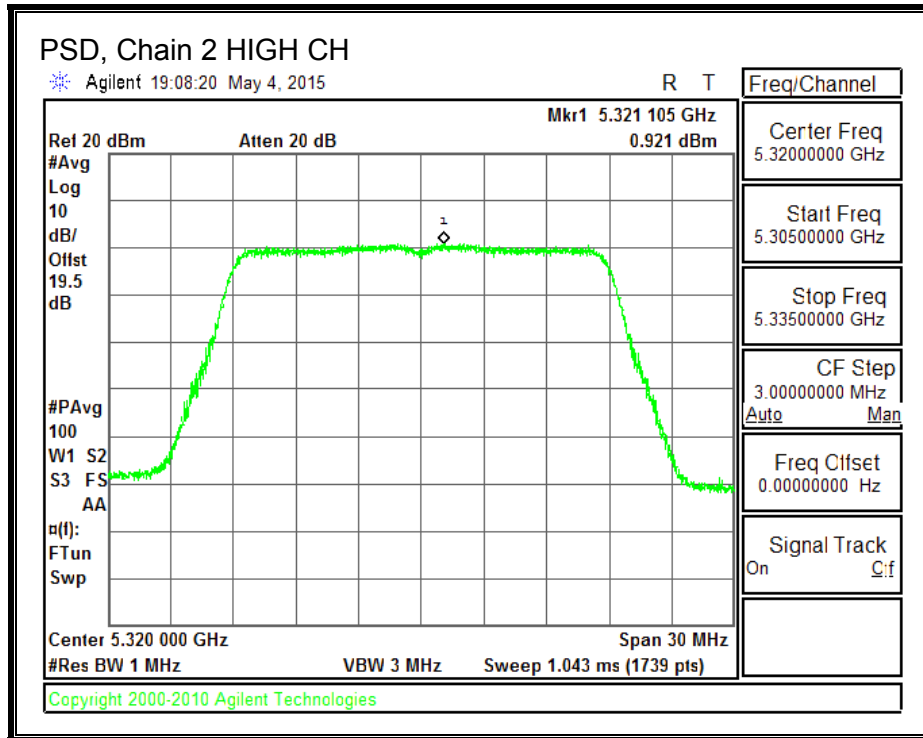

## 8.25. 802.11n HT20 STBC 3TX MODE IN THE 5.3 GHz BAND

### 8.25.1. 26 dB BANDWIDTH



#### LIMITS


None; for reporting purposes only.

#### RESULTS


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5260	21.216	22.048	21.138
Mid	5300	21.840	22.672	21.060
High	5320	21.372	22.698	21.034



**26 dB BANDWIDTH, Chain 0**

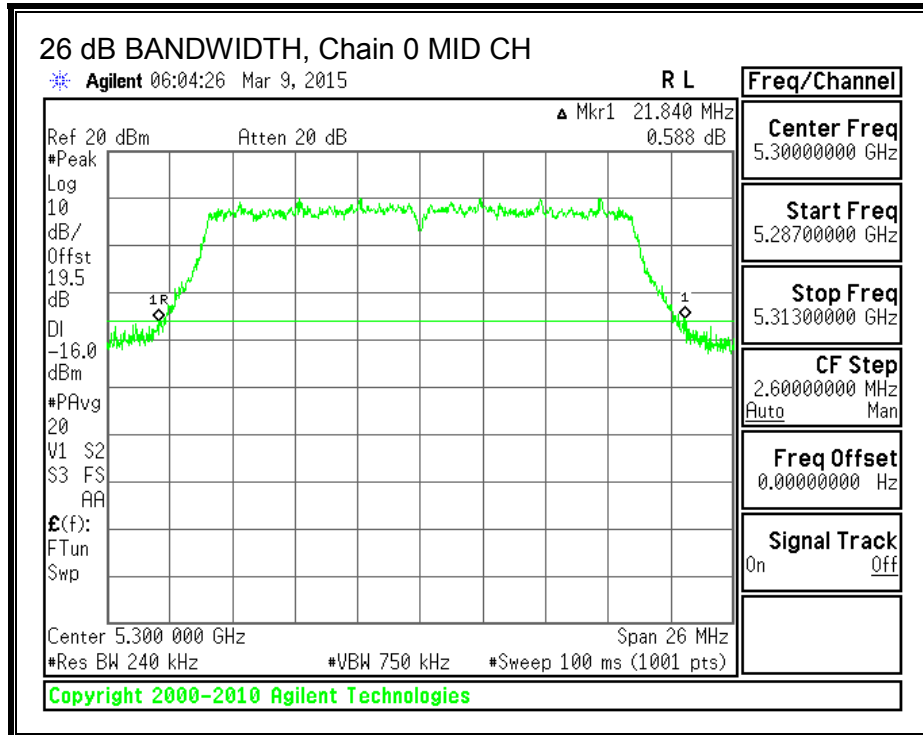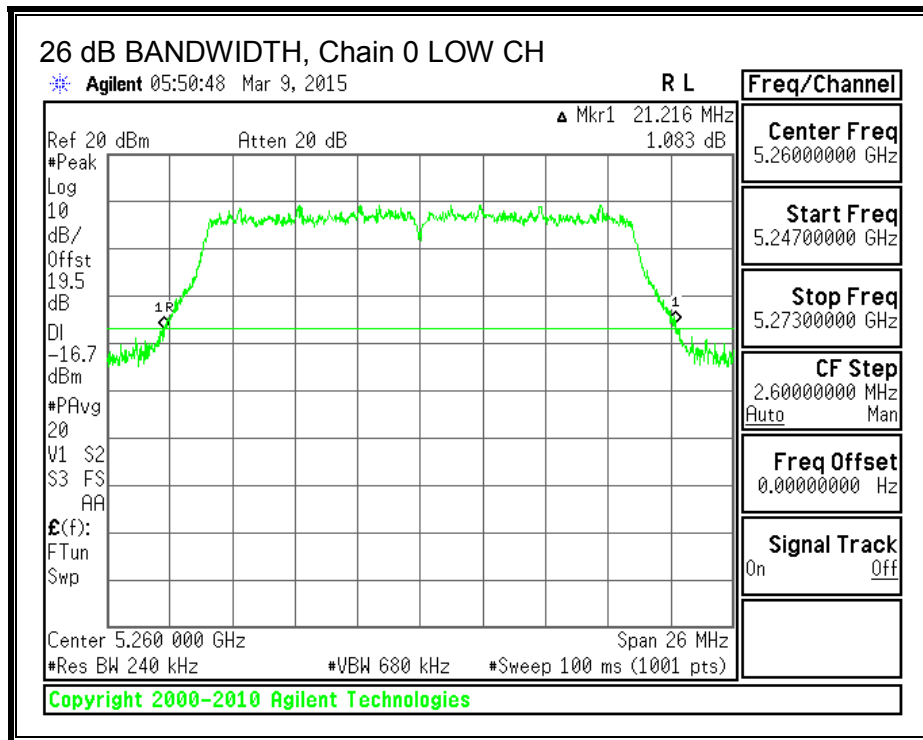


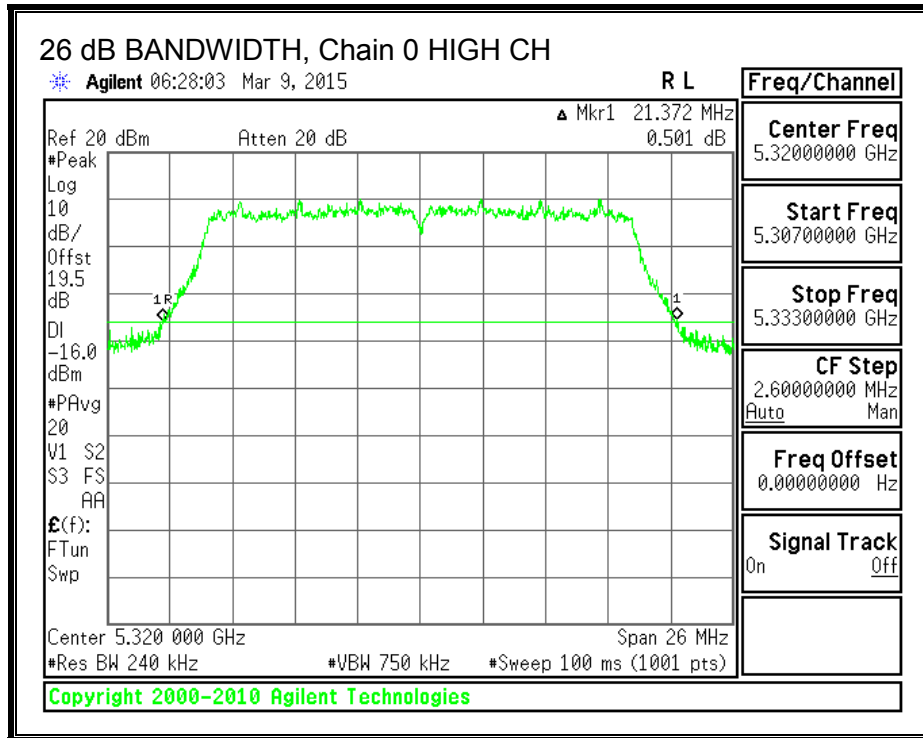



**26 dB BANDWIDTH, Chain 1**

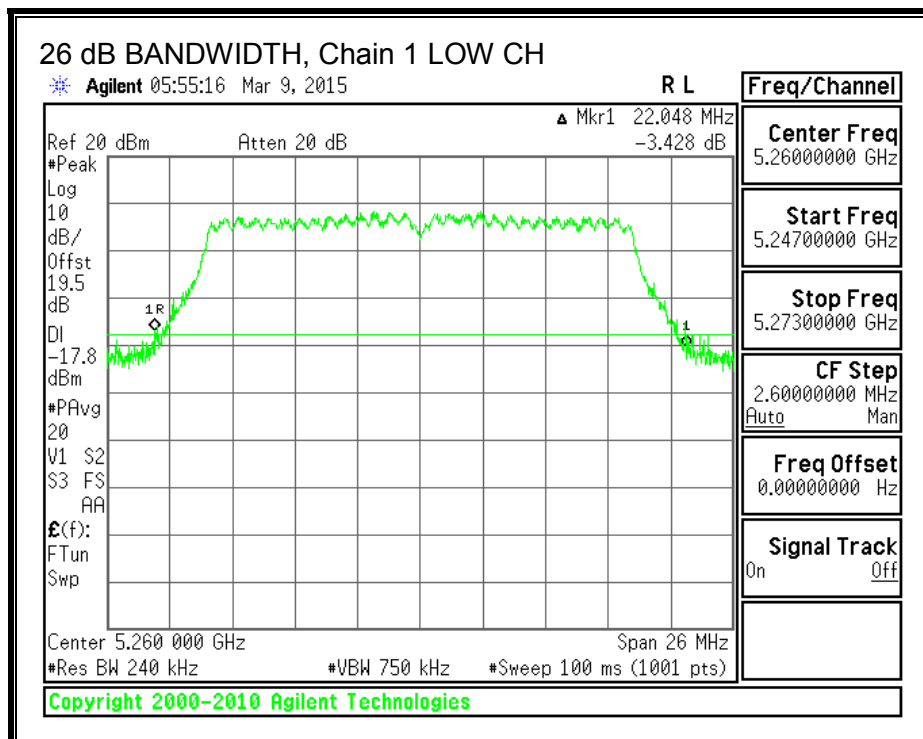

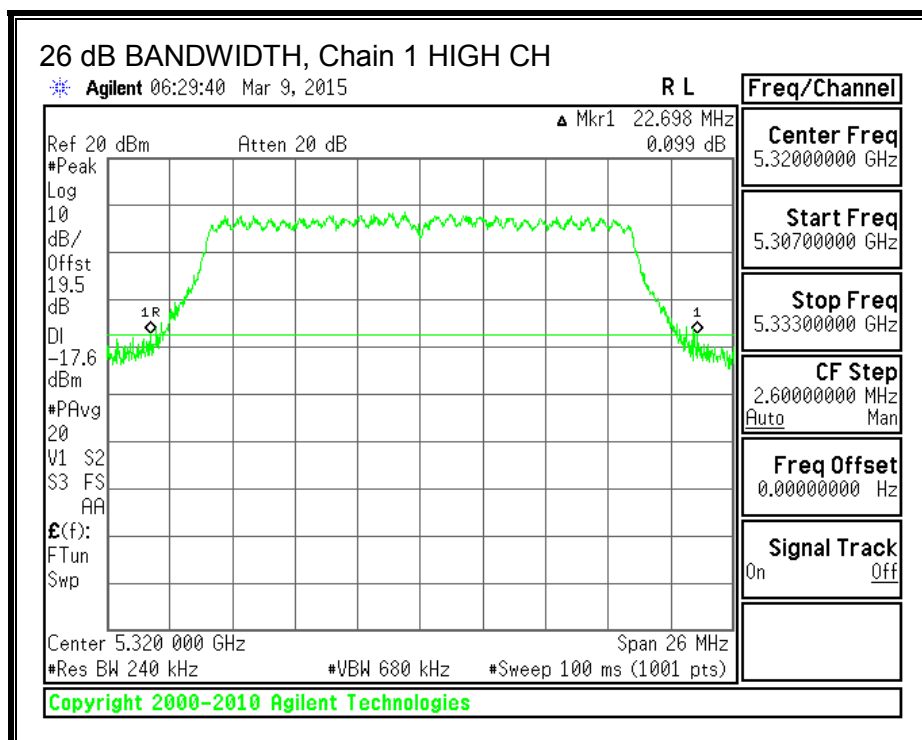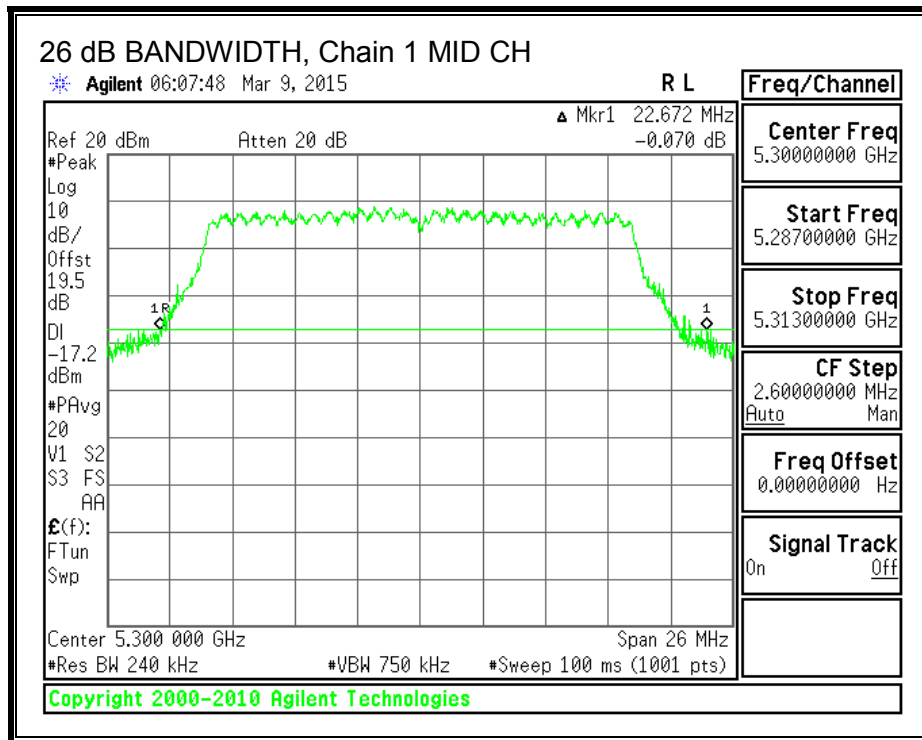

**26 dB BANDWIDTH, Chain 2**

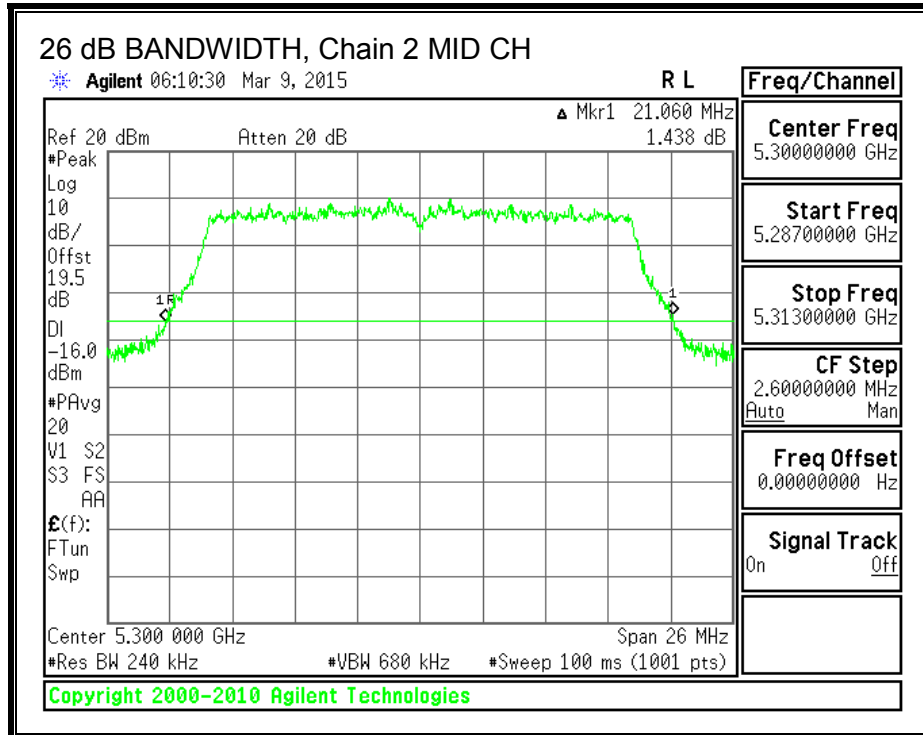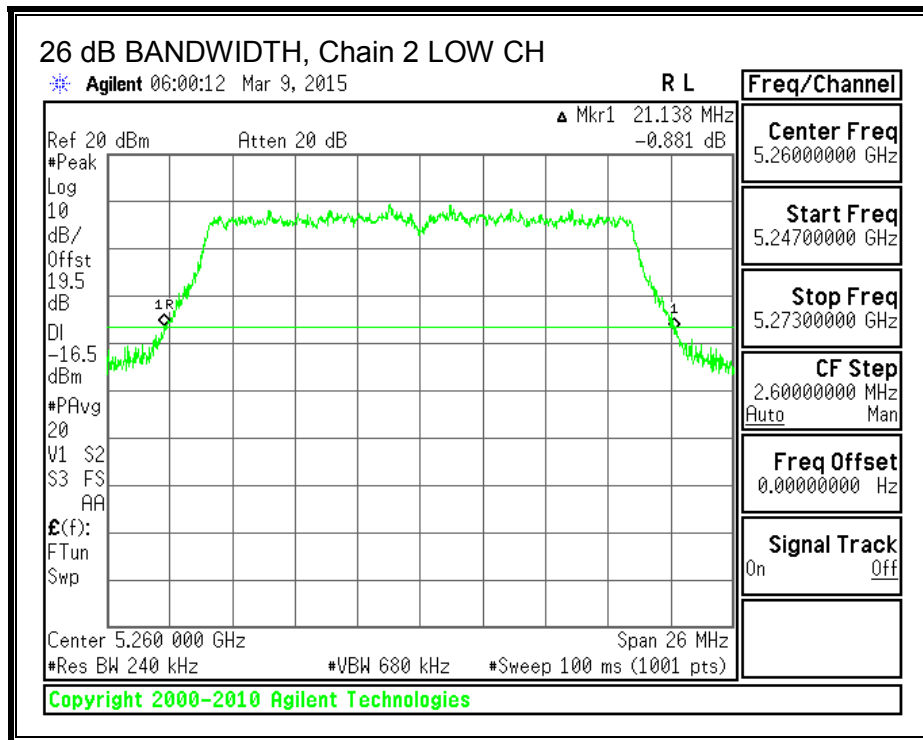

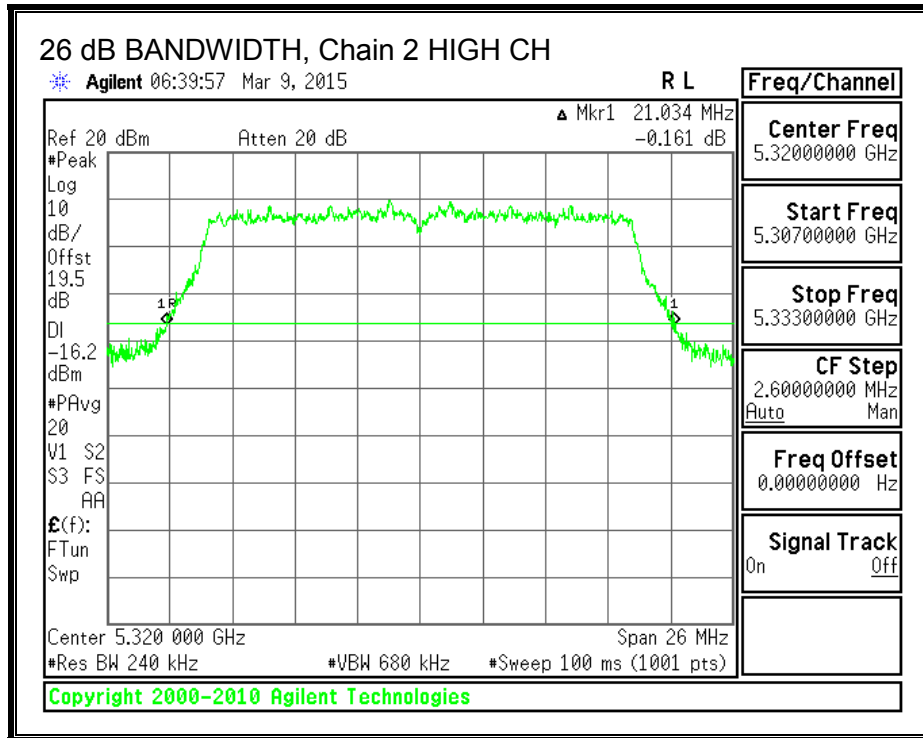

**8.25.2. 99% BANDWIDTH**

**LIMITS**



None; for reporting purposes only.


**RESULTS**

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5260	17.7618	17.7570	17.7335
Mid	5300	17.7434	17.7571	17.7366
High	5320	17.7622	17.7685	17.7459






**99% BANDWIDTH, Chain 0**

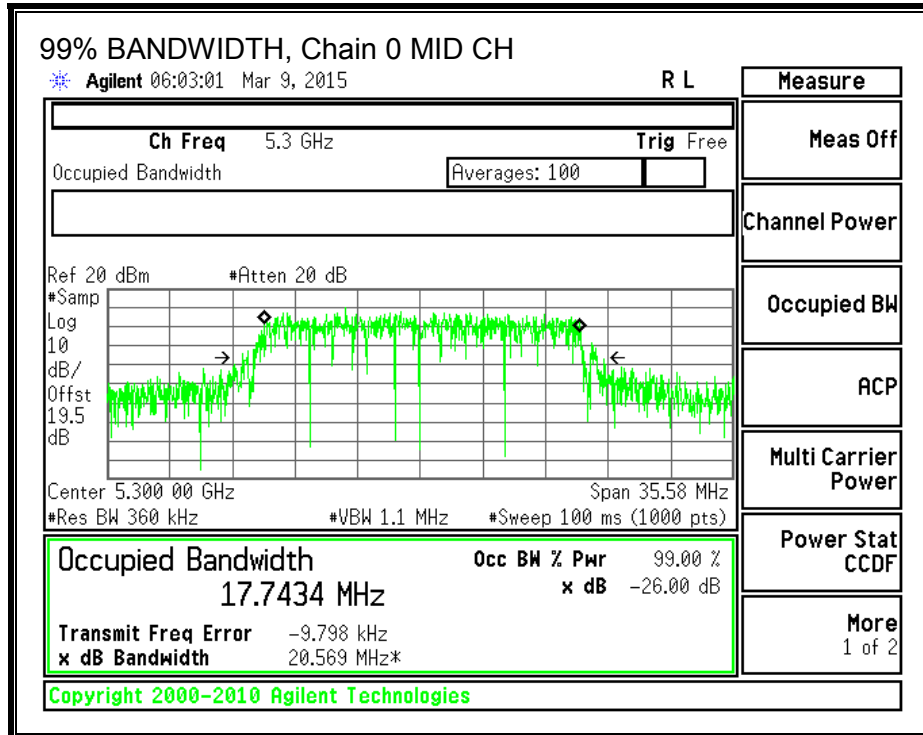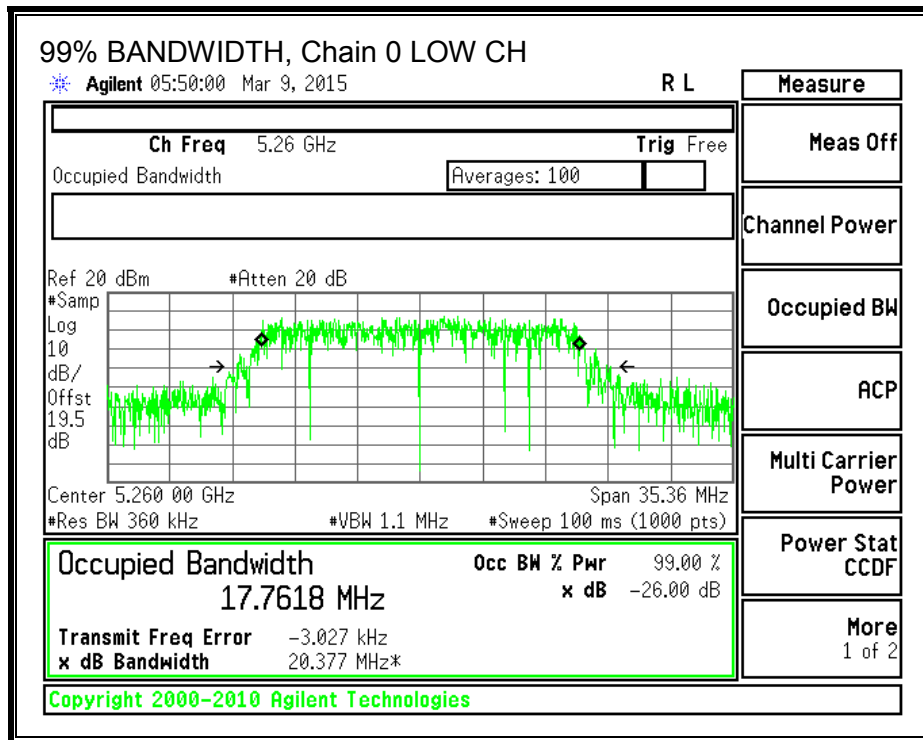


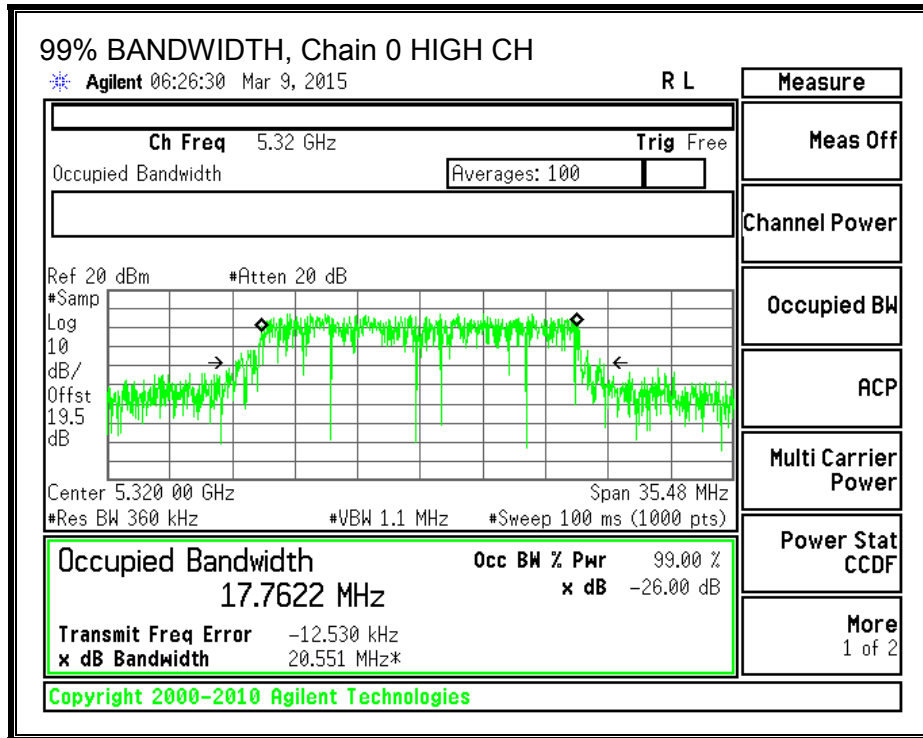



**99% BANDWIDTH, Chain 1**

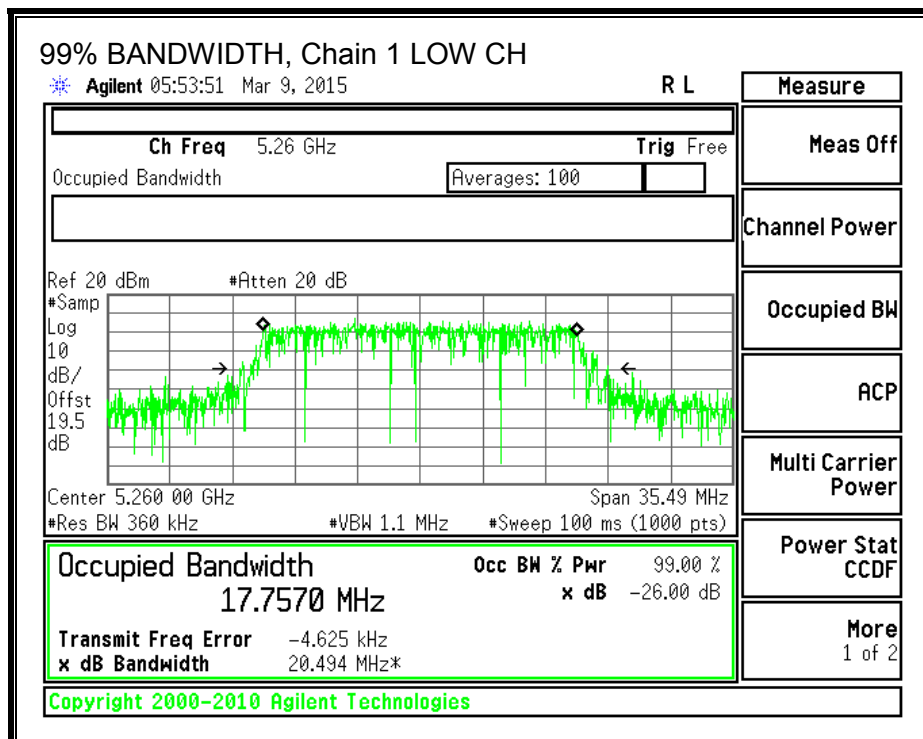

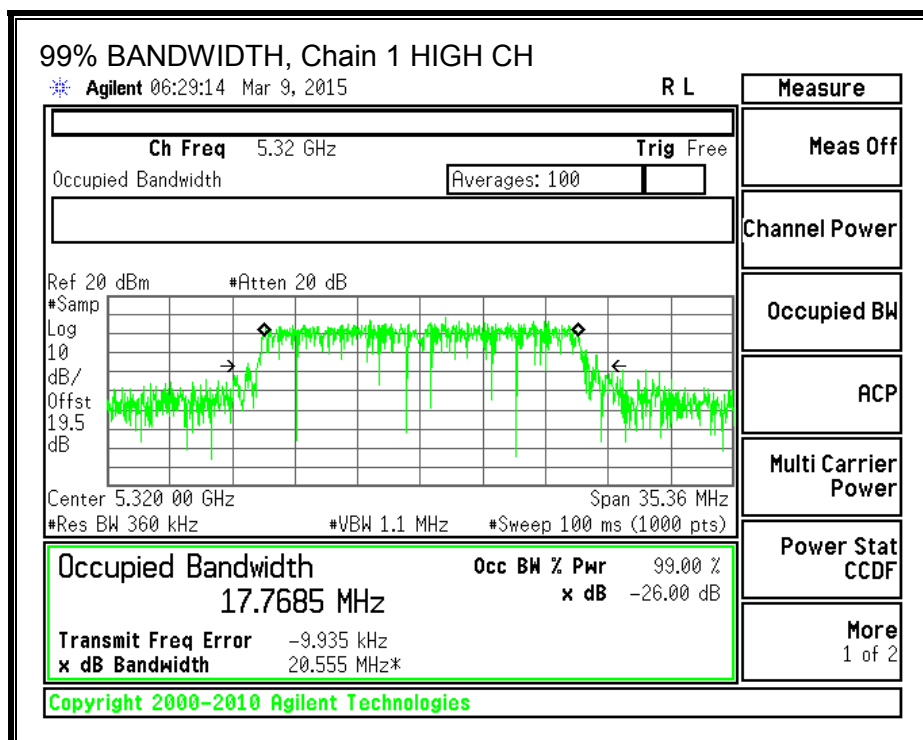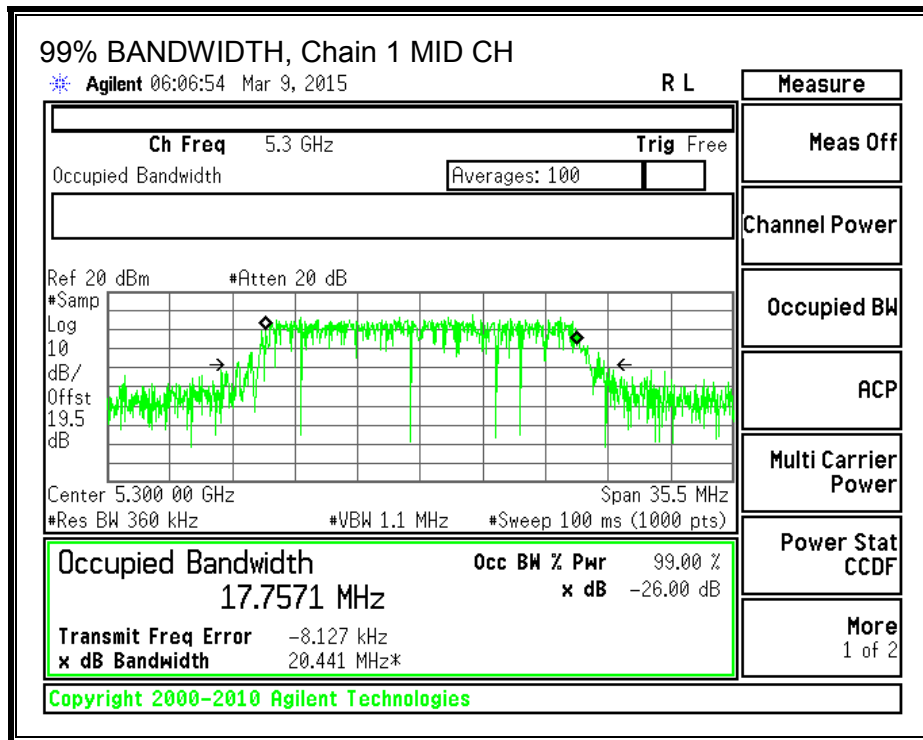

**99% BANDWIDTH, Chain 2**

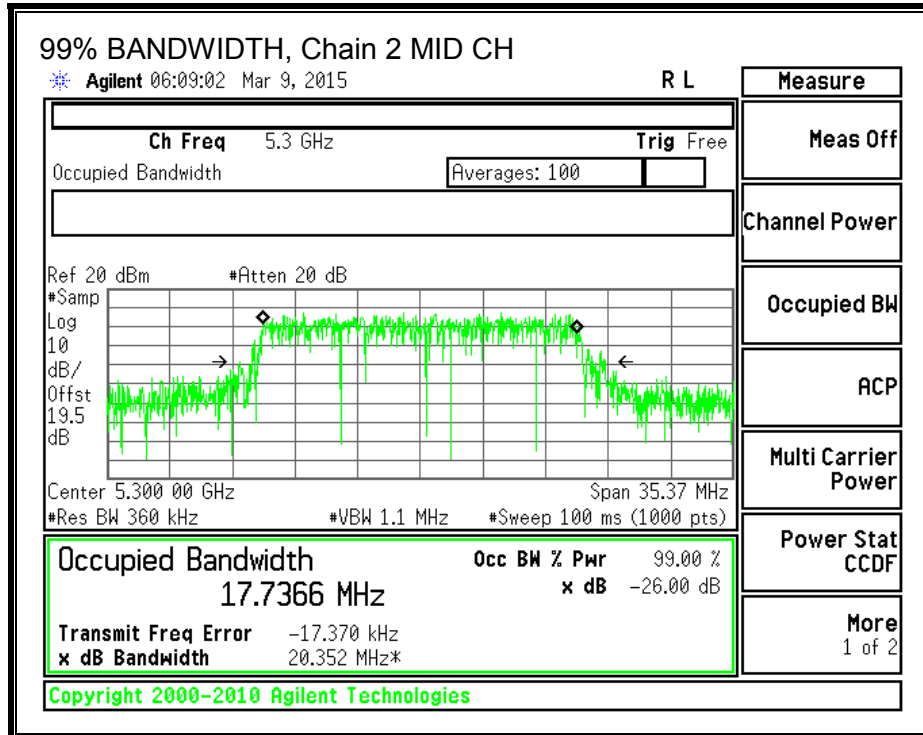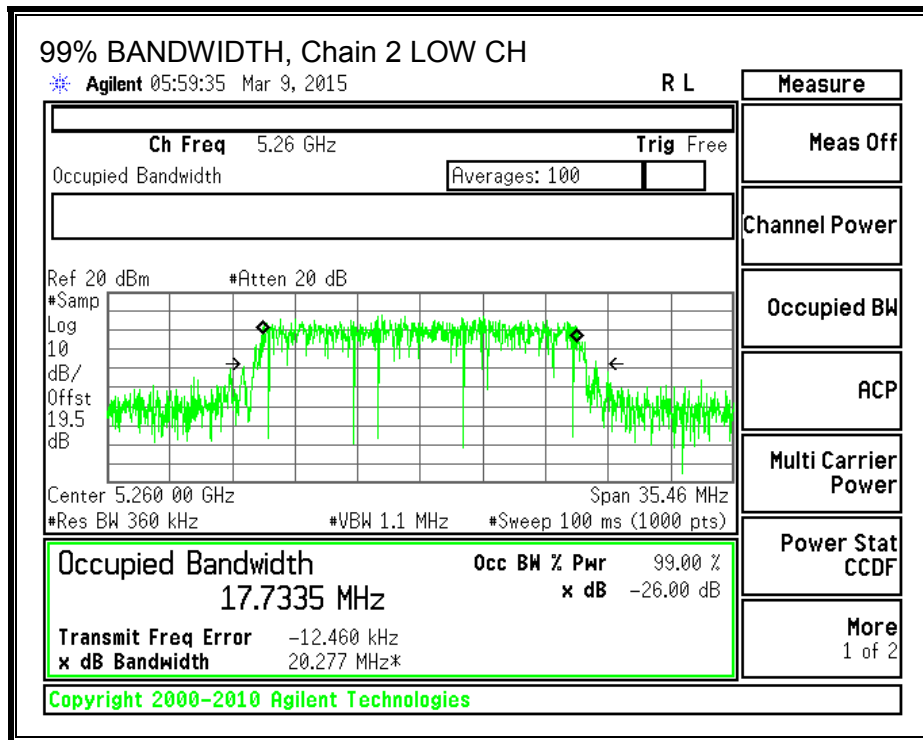

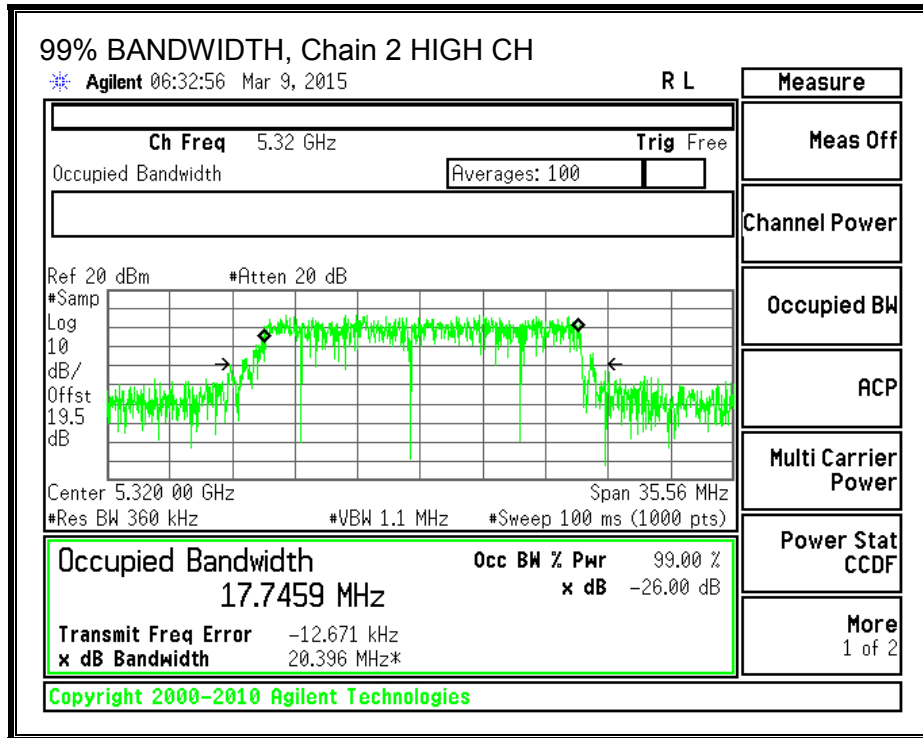

### 8.25.3. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

For power and PSD, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
3.48	3.21	4.52	4.77

**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	21.14	4.77	4.77	24.00	11.00
Mid	5300	21.06	4.77	4.77	24.00	11.00
High	5320	21.03	4.77	4.77	24.00	11.00

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	16.70	16.80	15.90	21.26	24.00	-2.74
Mid	5300	16.50	16.40	15.80	21.02	24.00	-2.98
High	5320	16.70	16.50	15.90	21.15	24.00	-2.85

**PSD Results**


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	5.132	5.498	4.772	9.92	11.00	-1.08
Mid	5300	5.208	5.466	4.710	9.91	11.00	-1.09
High	5320	5.059	5.218	4.857	9.82	11.00	-1.18

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.


**PSD, Chain 0**

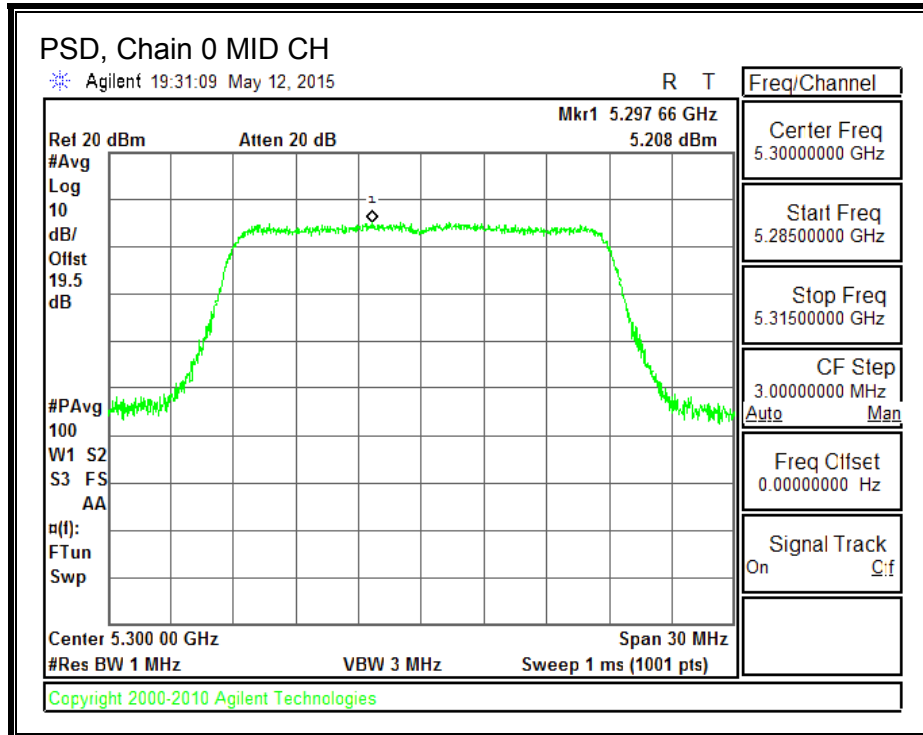
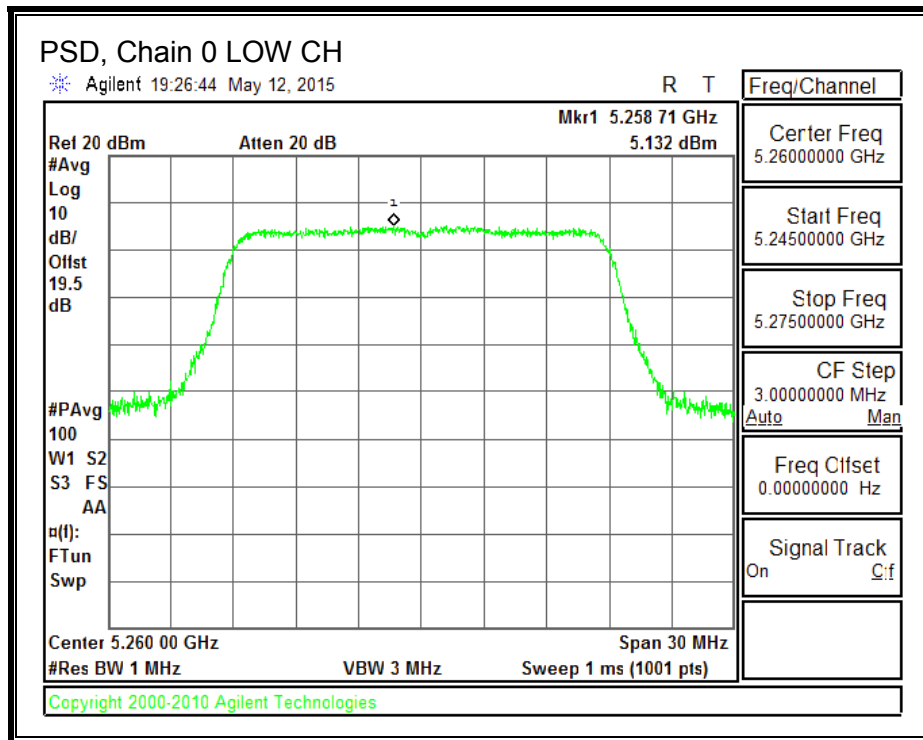





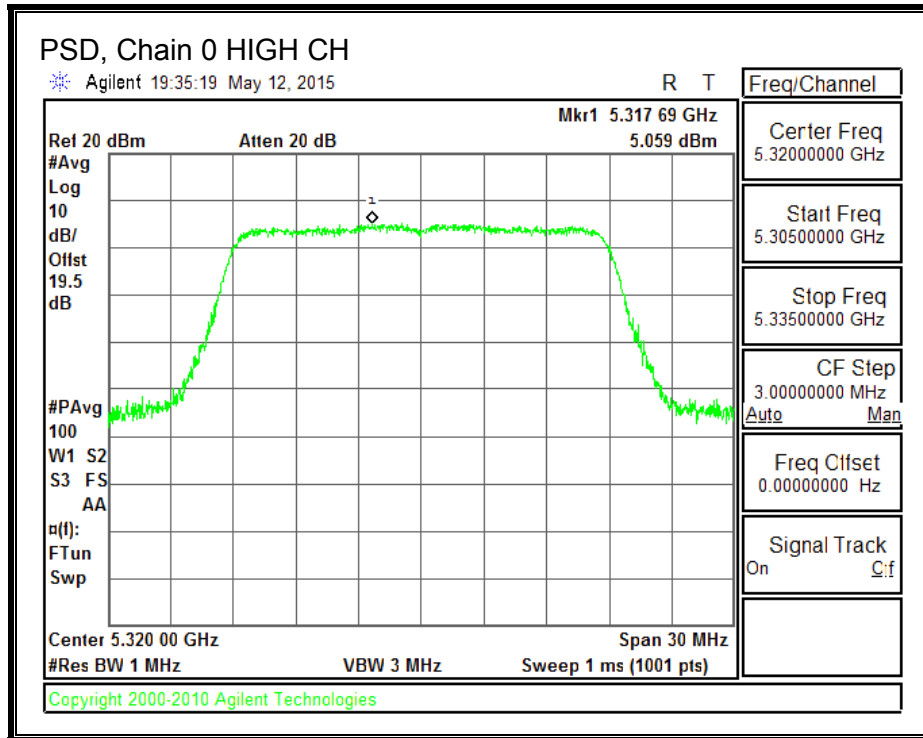



**PSD, Chain 1**

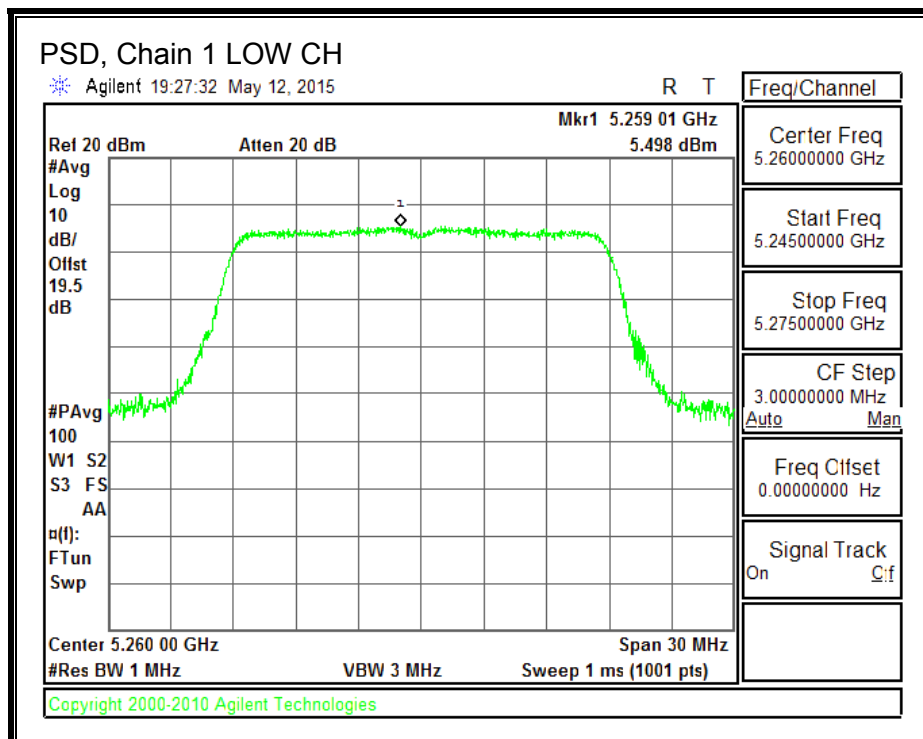

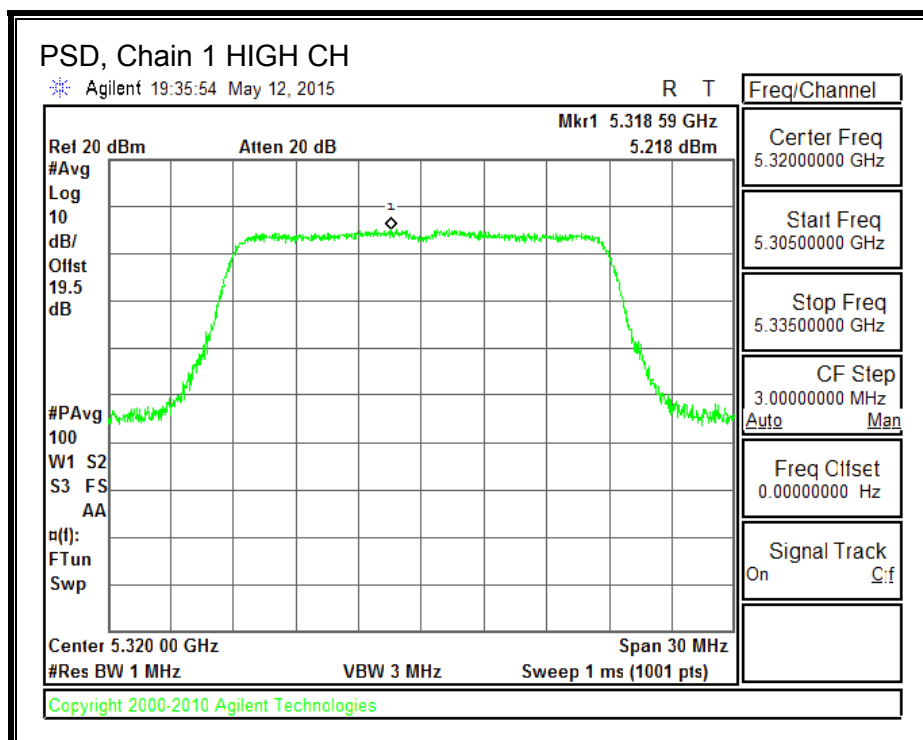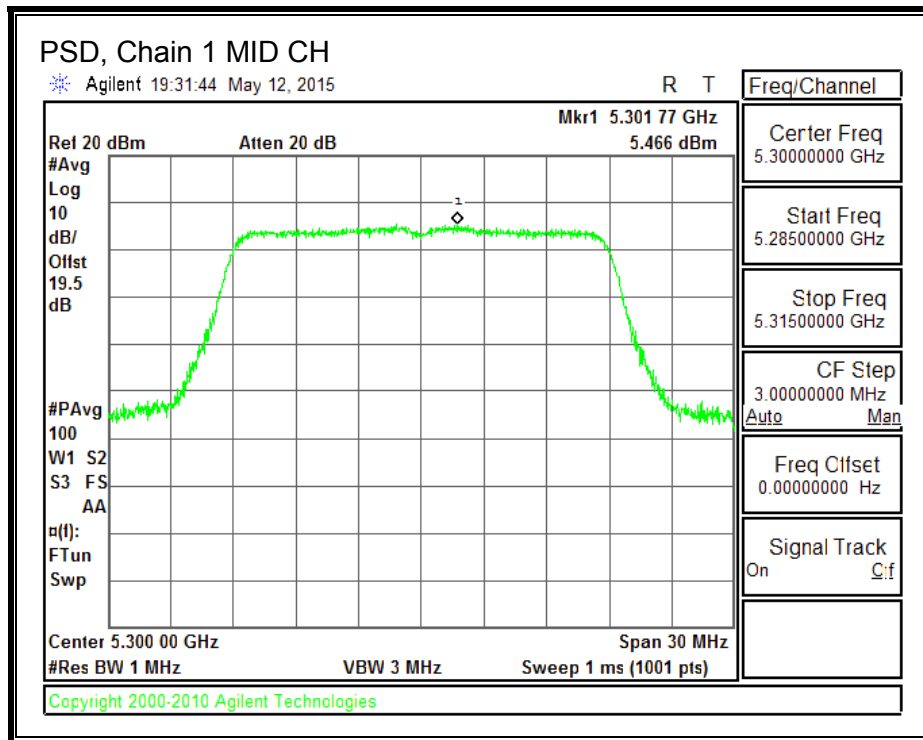

**PSD, Chain 2**

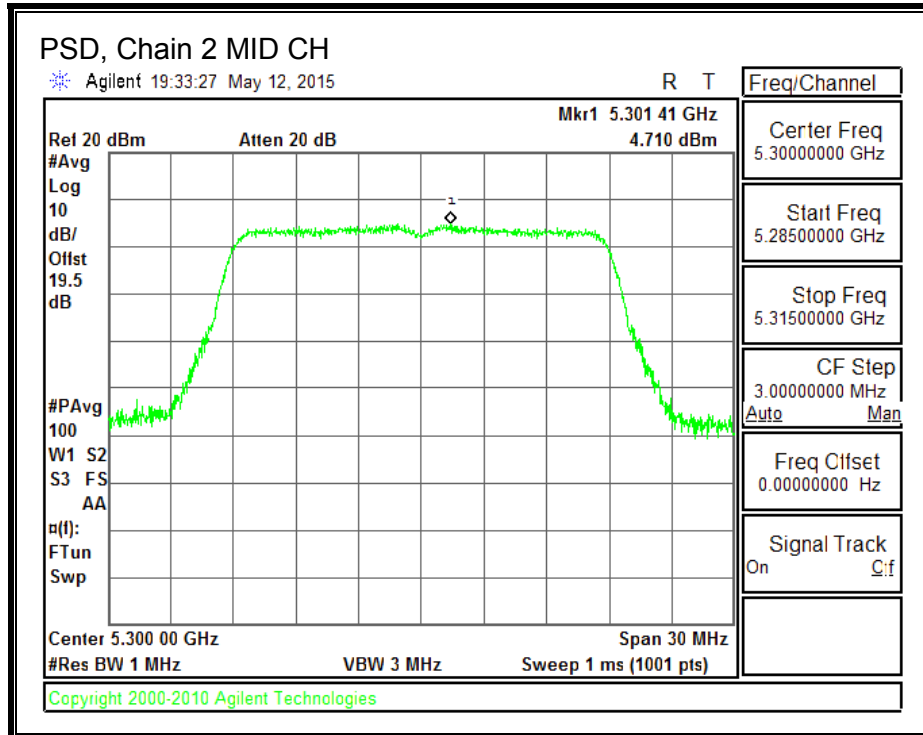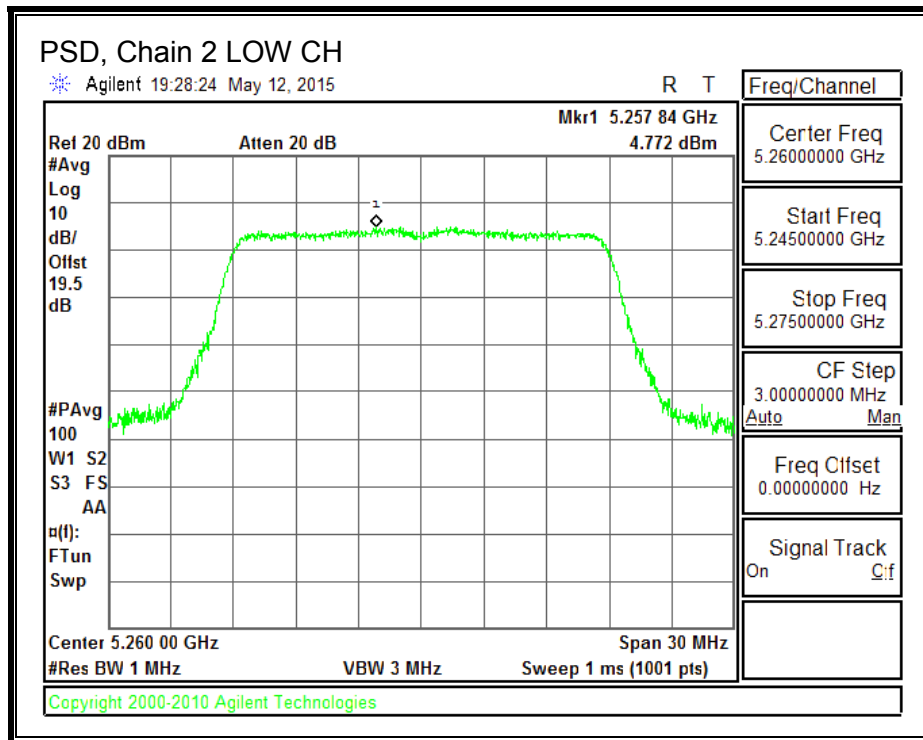

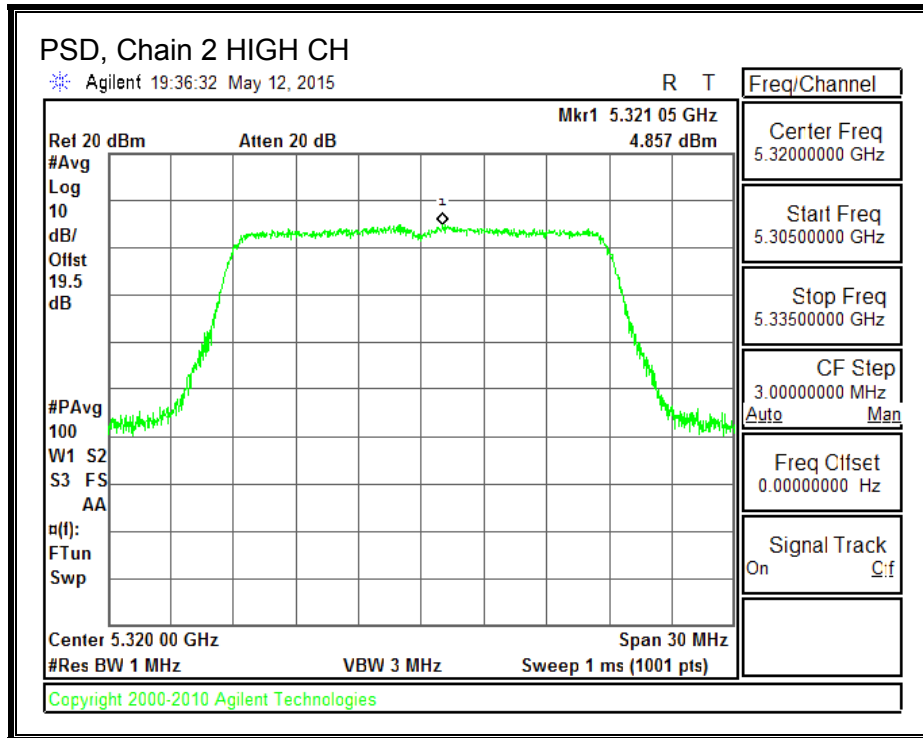

## 8.26. 802.11n HT20 TxBF 3TX MODE IN THE 5.3 GHz BAND

### 8.26.1. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

For power, PSD the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
3.48	3.21	4.52	9.53

**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directiona Gain for Power (dBi)	Direction Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5260	22.14	9.53	9.53	20.47	7.47
Mid	5300	23.27	9.53	9.53	20.47	7.47
High	5320	22.79	9.53	9.53	20.47	7.47

<b>Duty Cycle CF (dB)</b>	0.00	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	12.80	12.70	12.20	17.35	20.47	-3.12
Mid	5300	12.90	12.80	12.40	17.48	20.47	-2.99
High	5320	12.70	12.70	11.90	17.22	20.47	-3.25


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5260	1.781	1.670	1.349	6.38	7.47	-1.09
Mid	5300	1.959	1.866	1.135	6.44	7.47	-1.03
High	5320	1.889	1.949	0.921	6.38	7.47	-1.09


**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

**PSD, Chain 0**

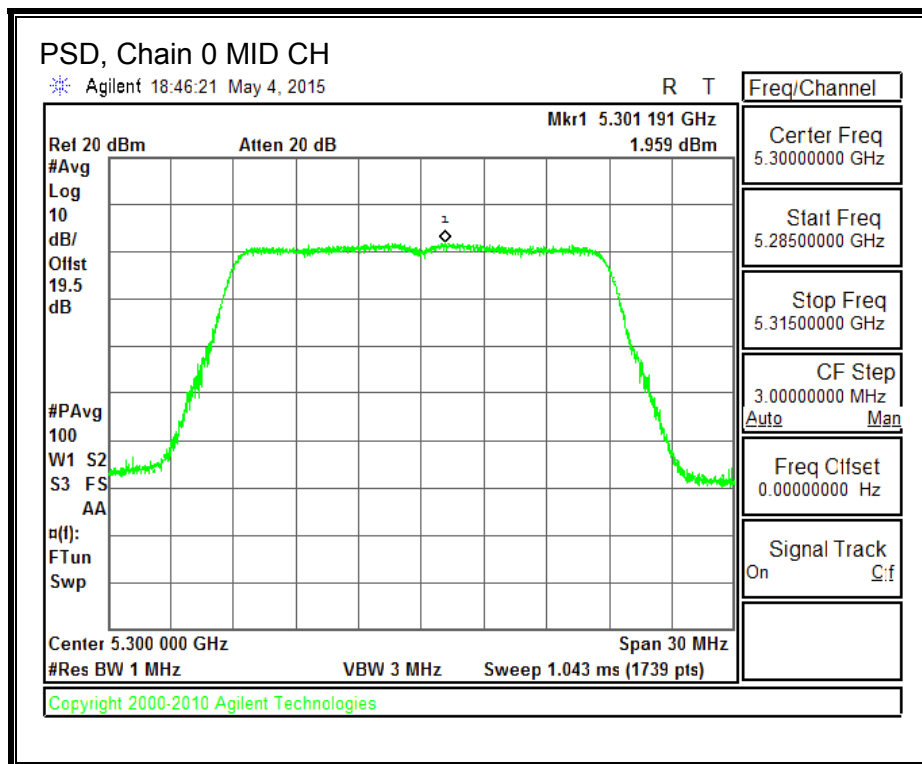
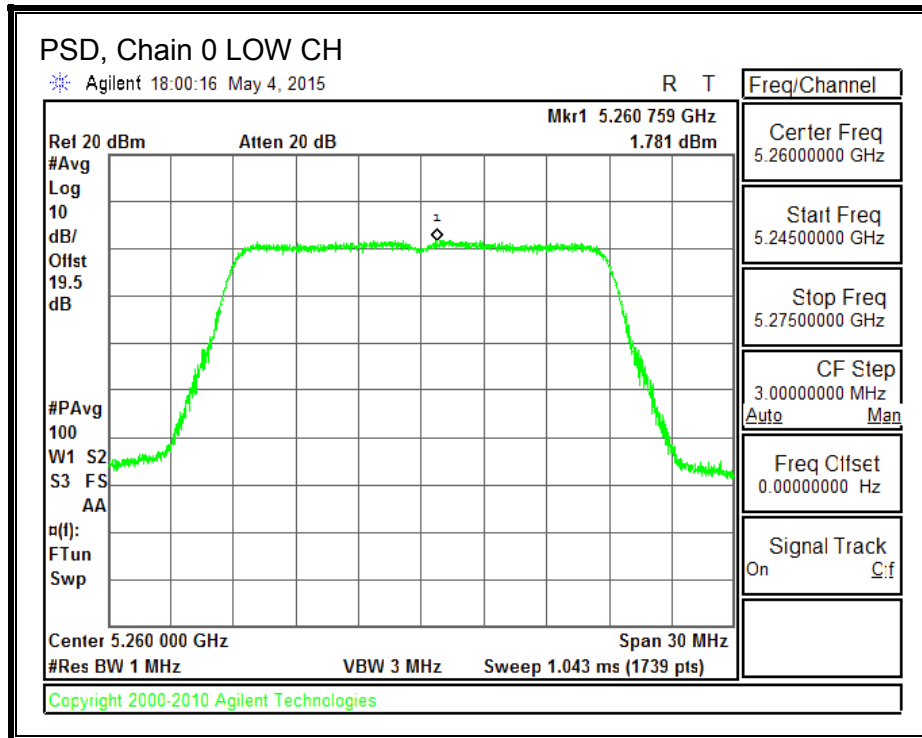


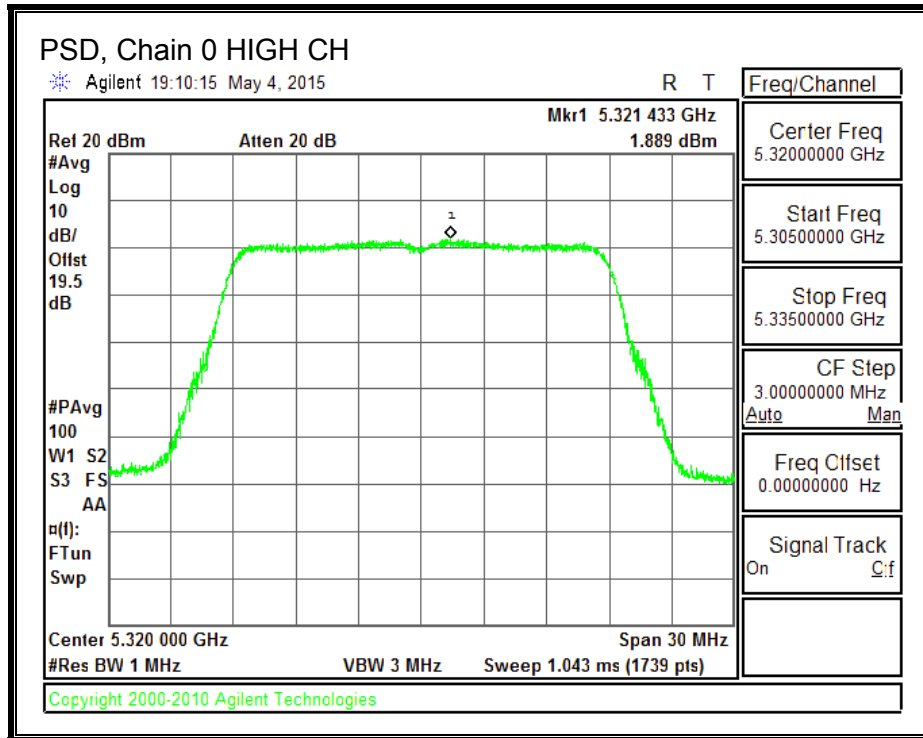



**PSD, Chain 1**

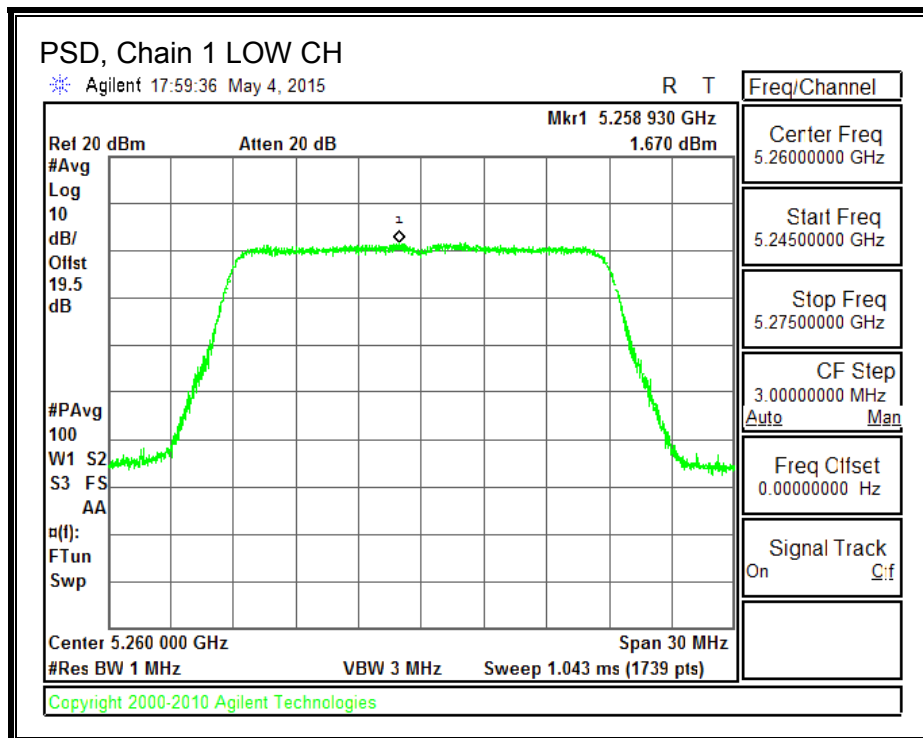




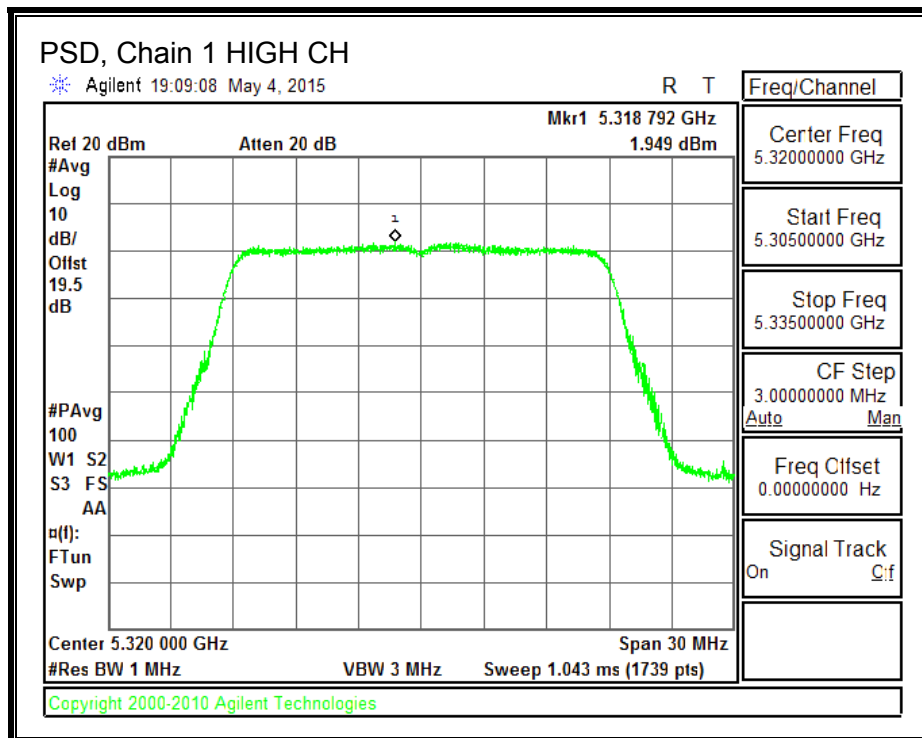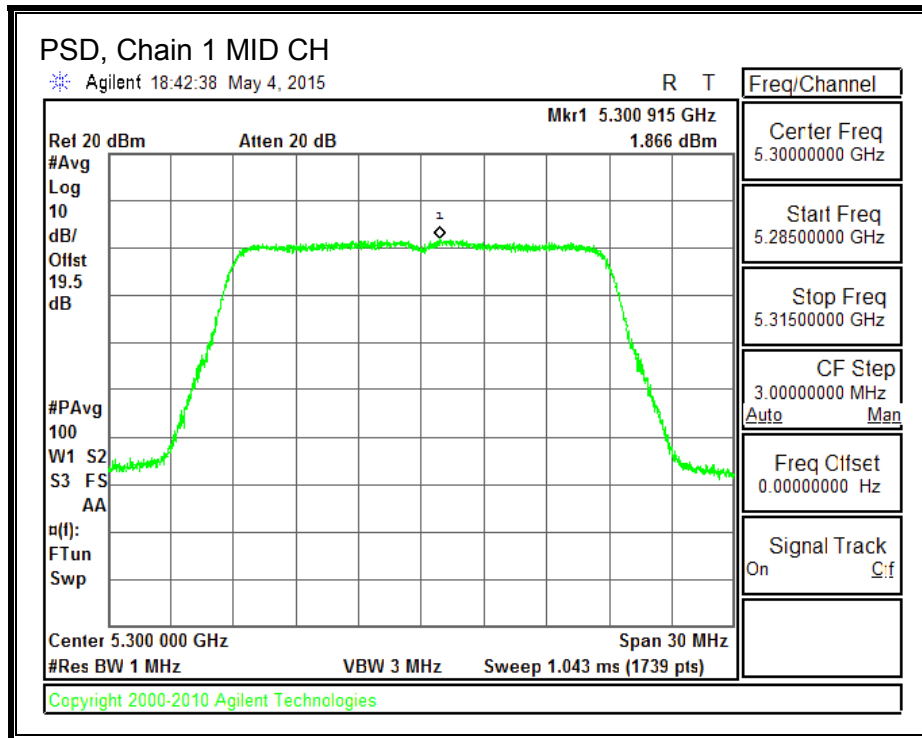

**PSD, Chain 2**

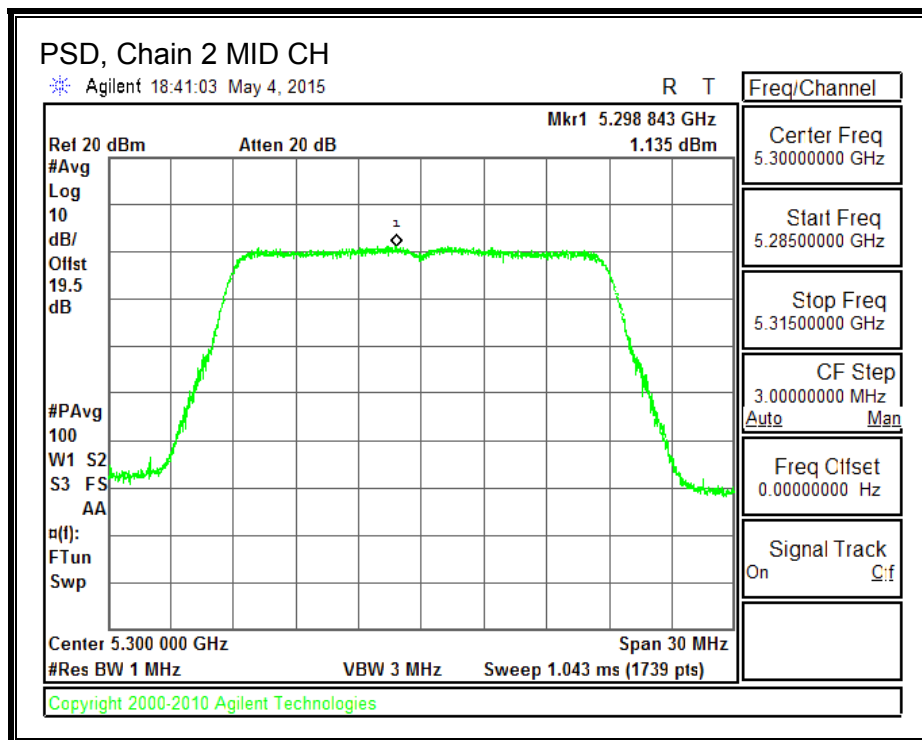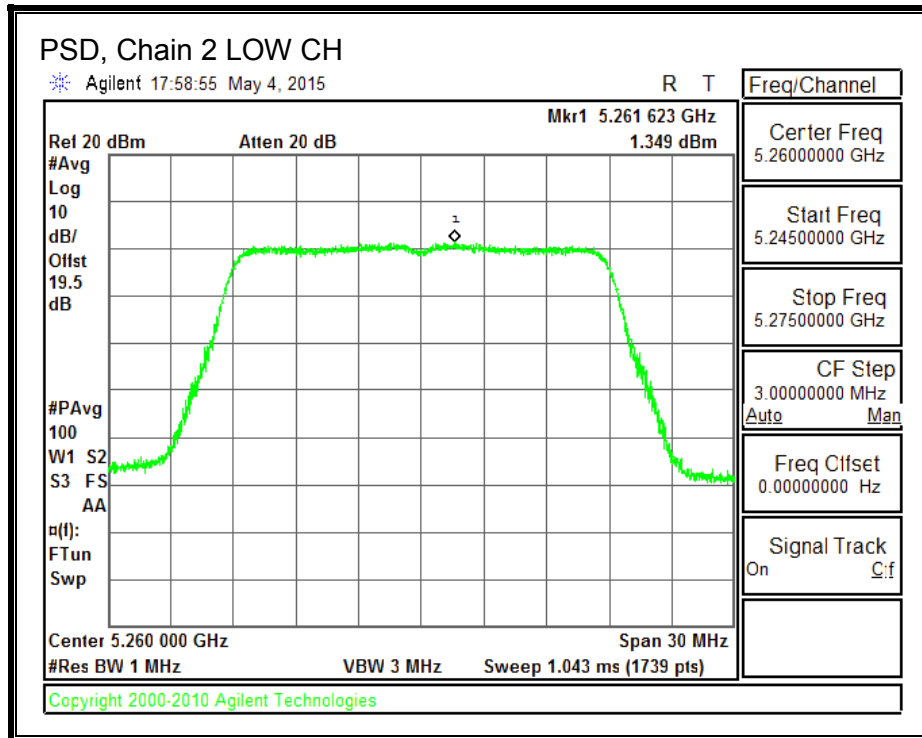

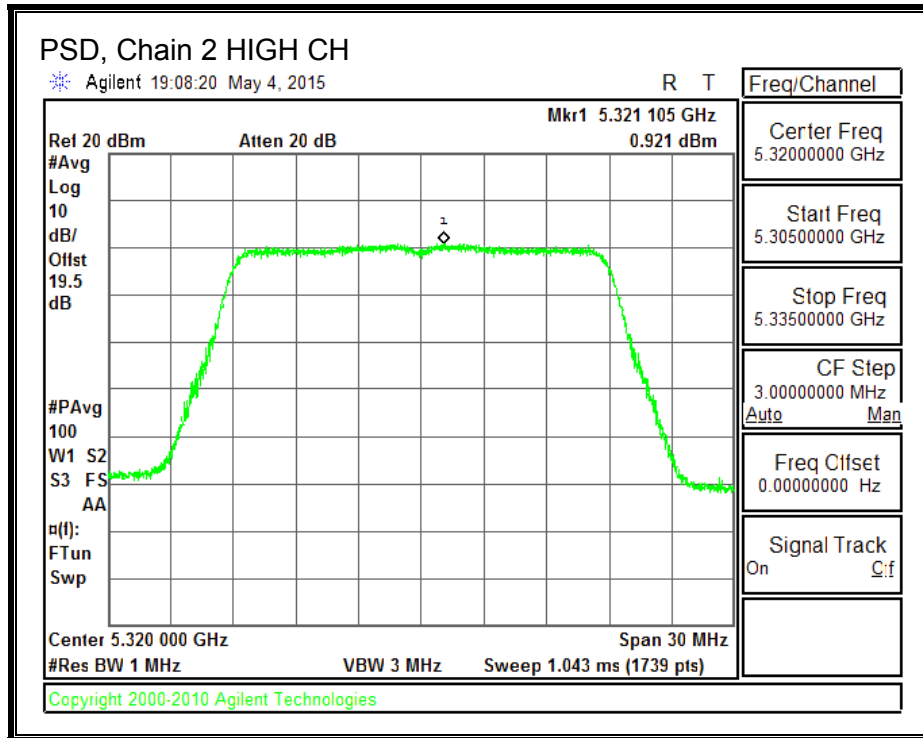

## **8.27. 802.11n HT40 1TX MODE IN THE 5.3 GHz BAND**

### **8.27.1. OUTPUT POWER**

#### **LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **DIRECTIONAL ANTENNA GAIN**

This is SISO mode, AG is the highest (worst-case) = 5.52 dBi.

**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	51.63	5.52	24.00	11.00
High	5310	53.53	5.52	24.00	11.00

**Output Power Results**

Channel	Frequency (MHz)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	18.00	18.00	24.00	-6.00
High	5310	11.10	11.10	24.00	-12.90

**Note:** for Chain 1, 26dB & 99% data & plots, see section 11n HT40 CDD 3TX MODE IN THE 5.3 GHz BAND

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

**8.28. 802.11n HT40 CDD 2TX MODE IN THE 5.3 GHz BAND**

**8.28.1. OUTPUT POWER AND PSD**

**LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
3.48	4.52	5.03

For PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.48	4.52	8.03

**RESULTS**

**Bandwidth, Antenna Gain and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	51.63	5.03	8.03	24.00	8.97
High	5310	53.53	5.03	8.03	24.00	8.97

<b>Duty Cycle CF (dB)</b>	0.09	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	18.12	18.00	21.07	24.00	-2.93
High	5310	10.15	9.90	13.04	24.00	-10.96



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	4.179	4.226	7.303	8.97	-1.67
High	5310	3.982	4.036	7.109	8.97	-1.86

**Note:** for Chain 1, 26dB data & plots, see section 11n HT40 CDD 3TX MODE IN THE 5.3 GHz BAND



**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

**PSD, Chain 0**

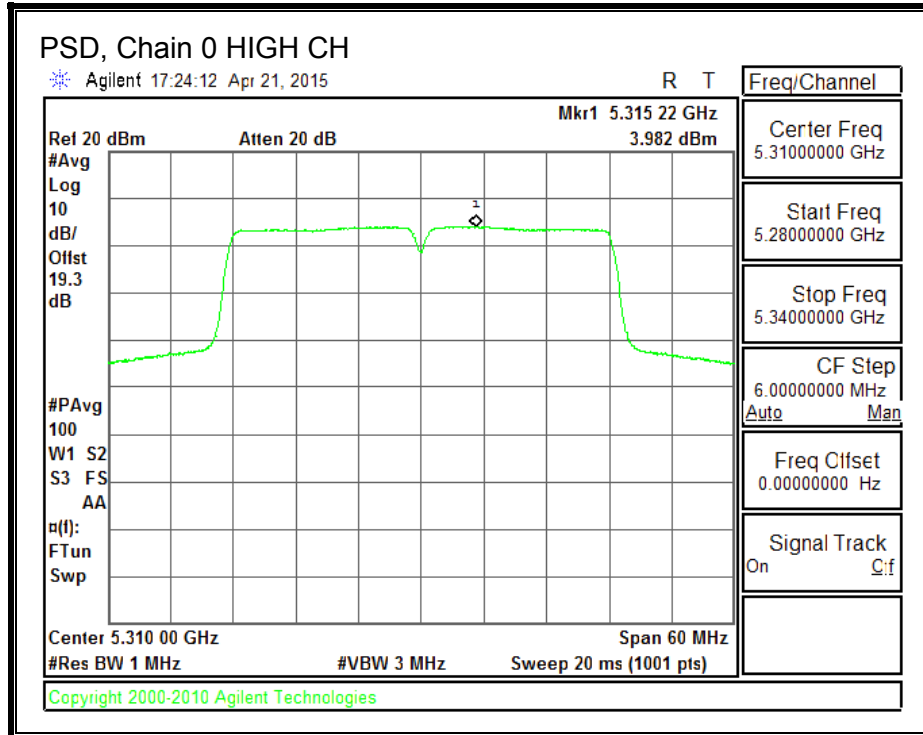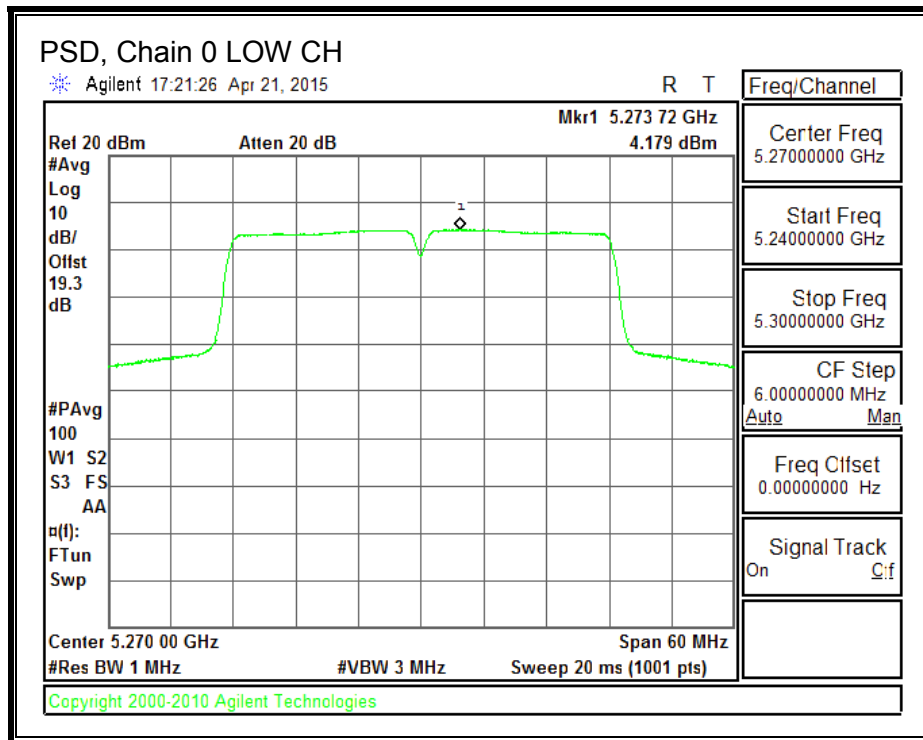



**PSD, Chain 1**

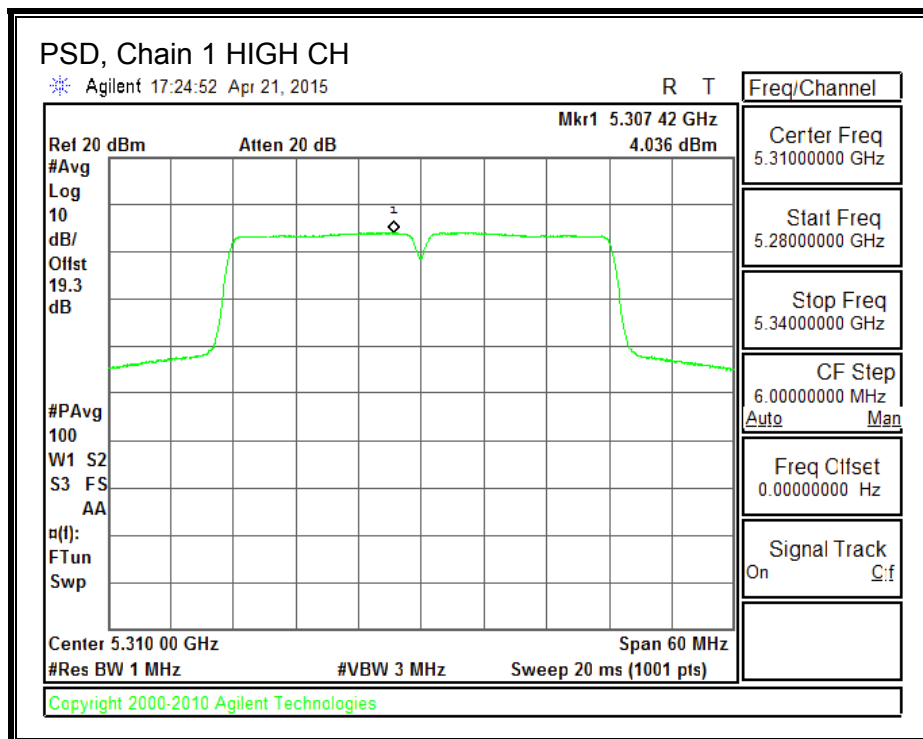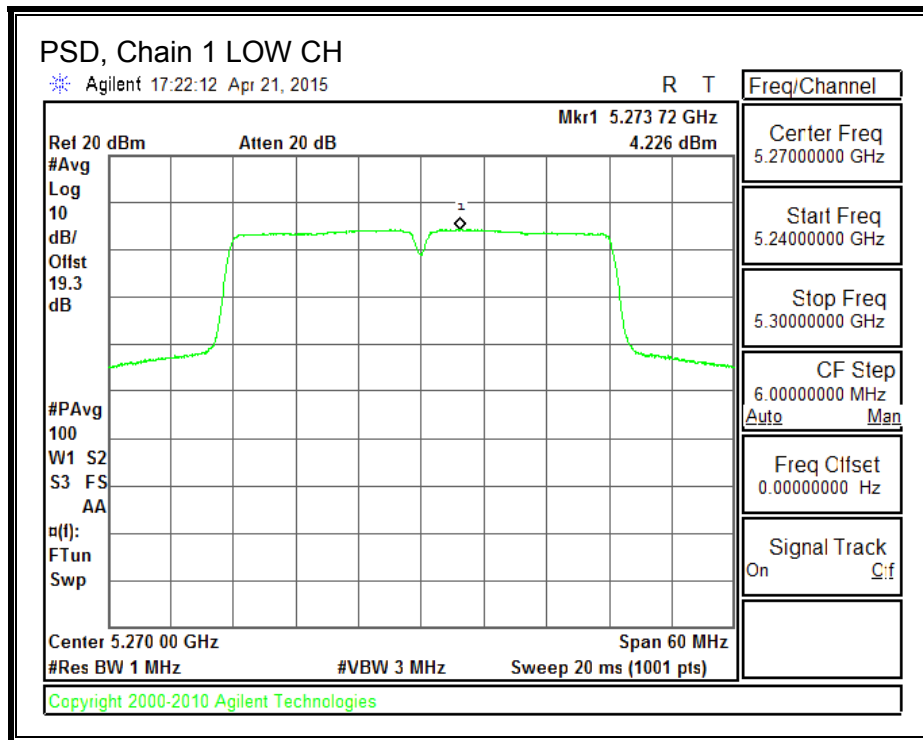

## 8.29. 802.11n HT40 TxBF 2TX MODE IN THE 5.3 GHz BAND

### 8.29.1. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

For power, PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.48	4.52	8.03

**RESULTS**

**Bandwidth, Antenna Gain and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	51.63	8.03	8.03	21.97	8.97
High	5310	53.53	8.03	8.03	21.97	8.97

<b>Duty Cycle CF (dB)</b>	0.09	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	17.90	18.00	20.96	21.97	-1.01
High	5310	8.89	8.60	11.76	21.97	-10.21



**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	4.179	4.226	7.303	8.97	-1.67
High	5310	3.982	4.036	7.109	8.97	-1.86



**Note:** for Chain 1, 26dB data & plots, see section 11n HT40 CDD 3TX MODE IN THE 5.3 GHz BAND

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

**PSD, Chain 0**

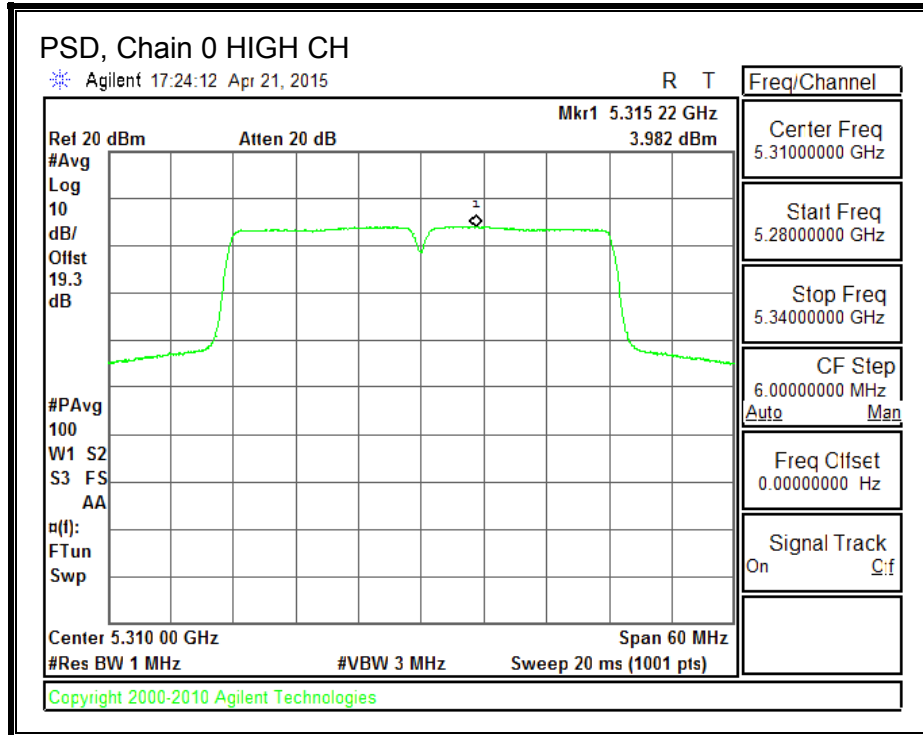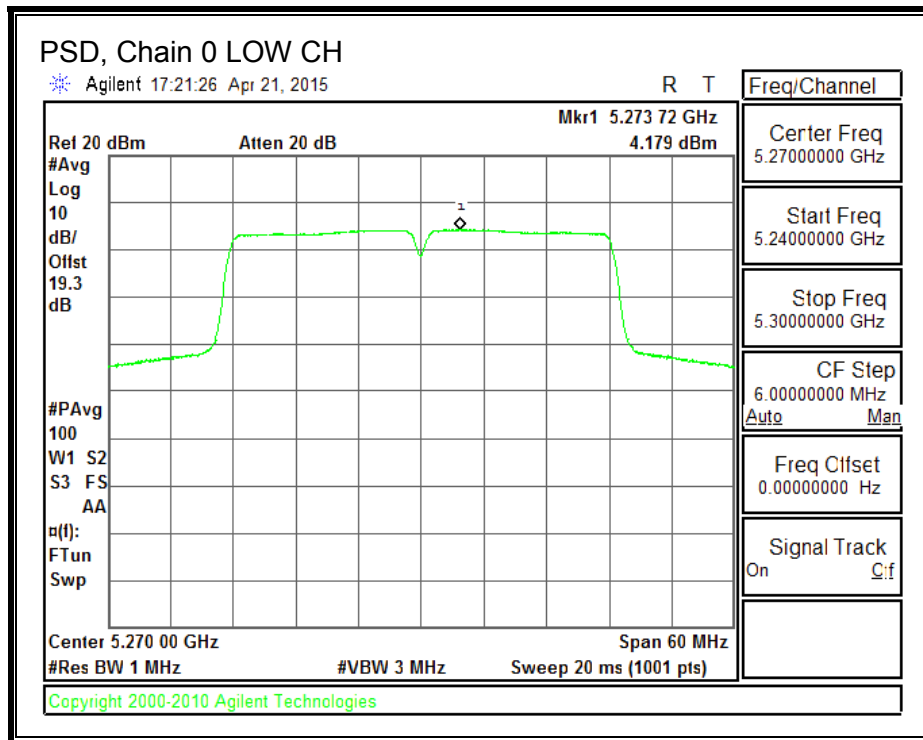

**PSD, Chain 1**

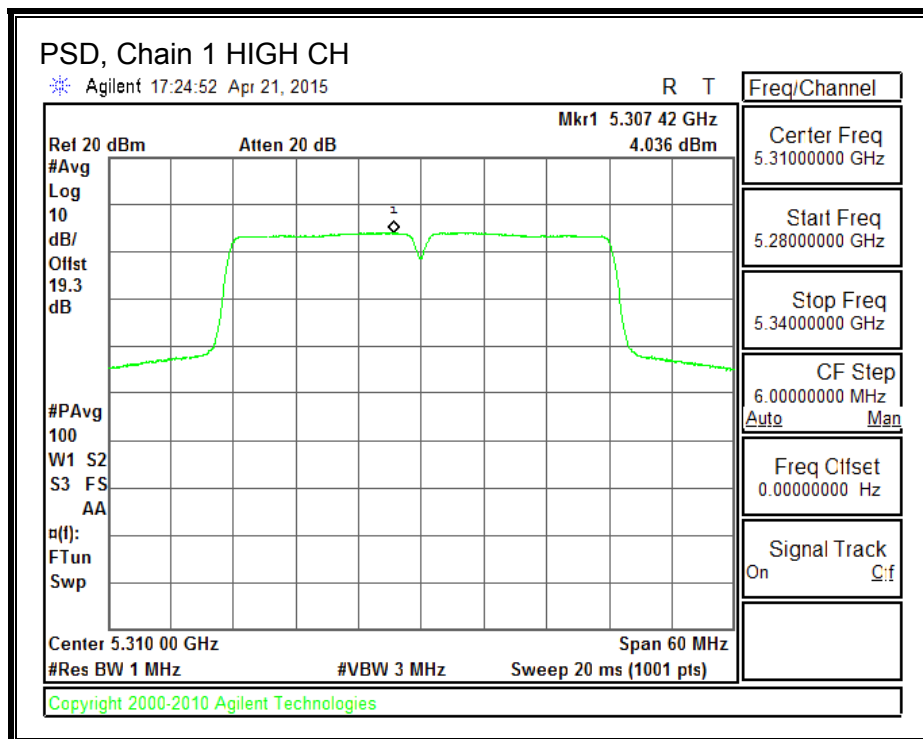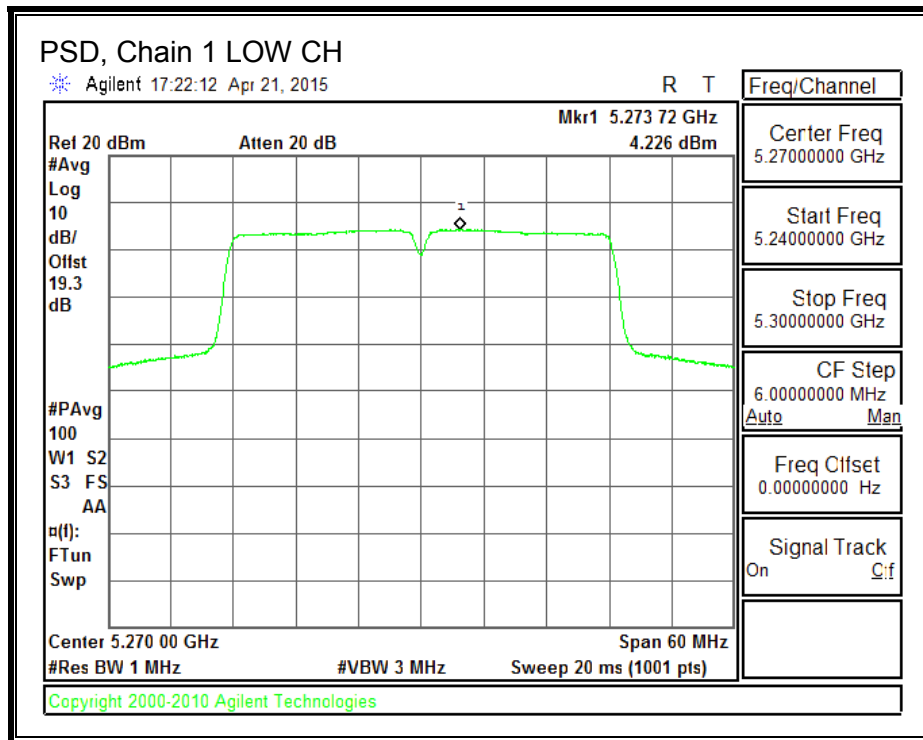

**8.30. 802.11n HT40 CDD 3TX MODE IN THE 5.3 GHz BAND**

**8.30.1. 26 dB BANDWIDTH**



**LIMITS**

None; for reporting purposes only.



**RESULTS**

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Low	5270	59.38	51.63	52.94
High	5310	61.86	53.53	54.99

**26 dB BANDWIDTH, Chain 0**

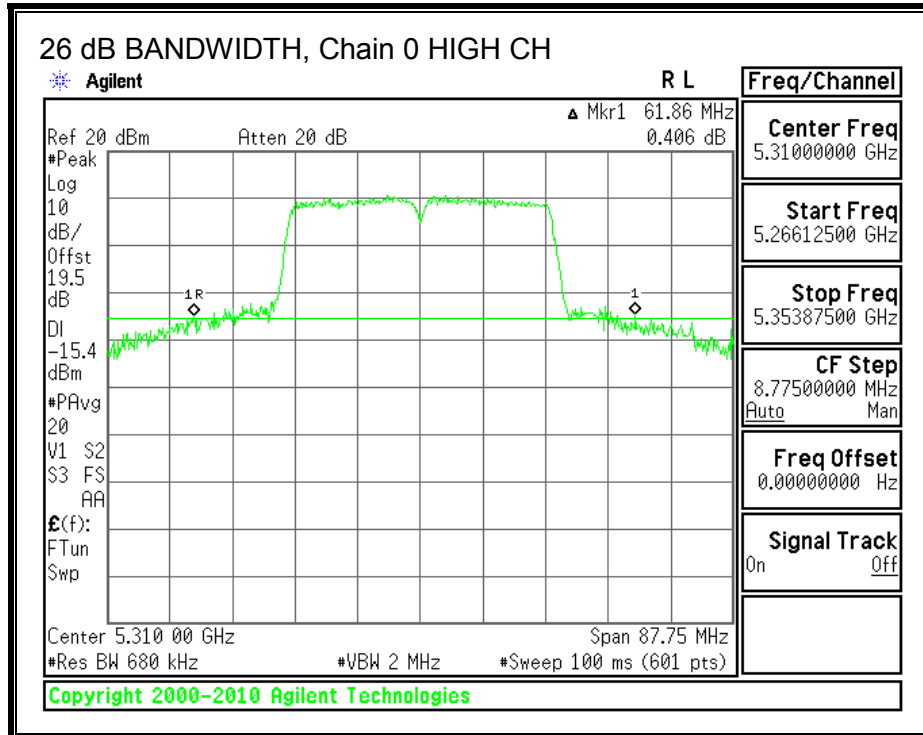
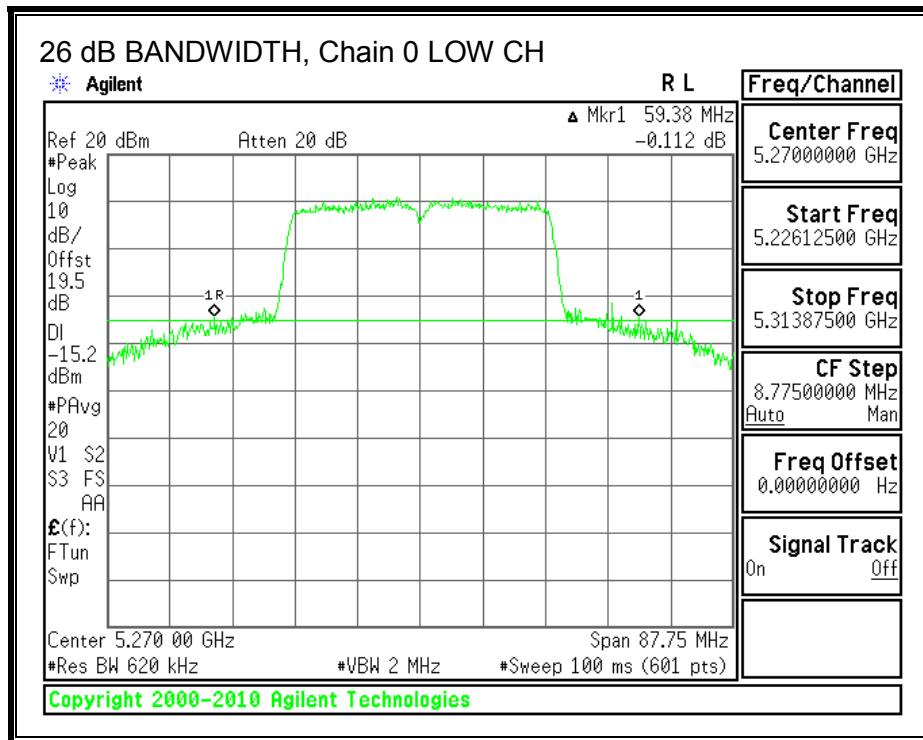


**26 dB BANDWIDTH, Chain 1**

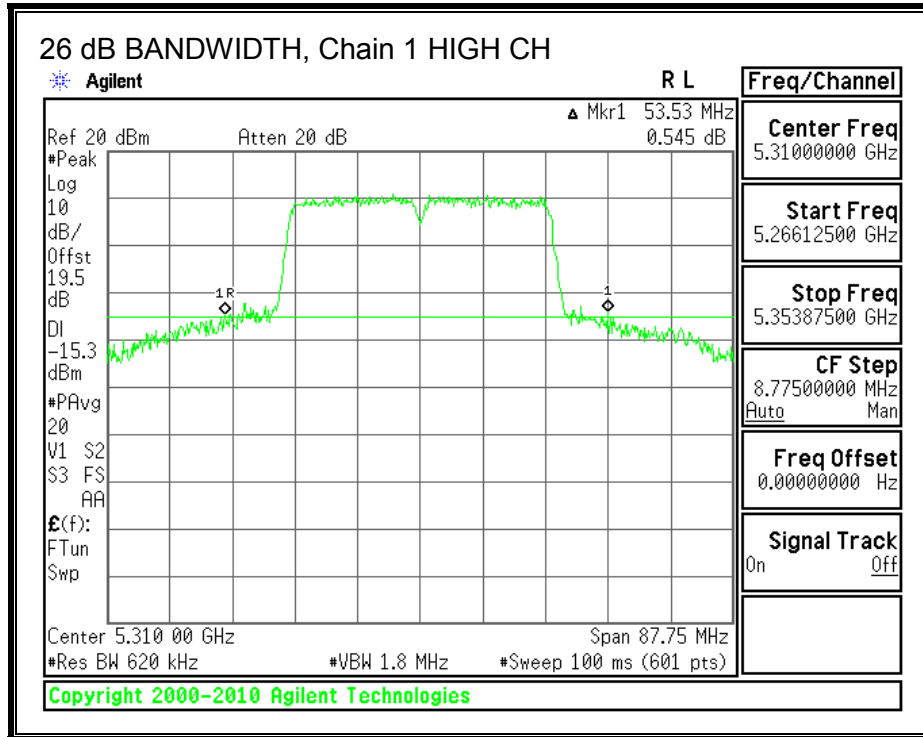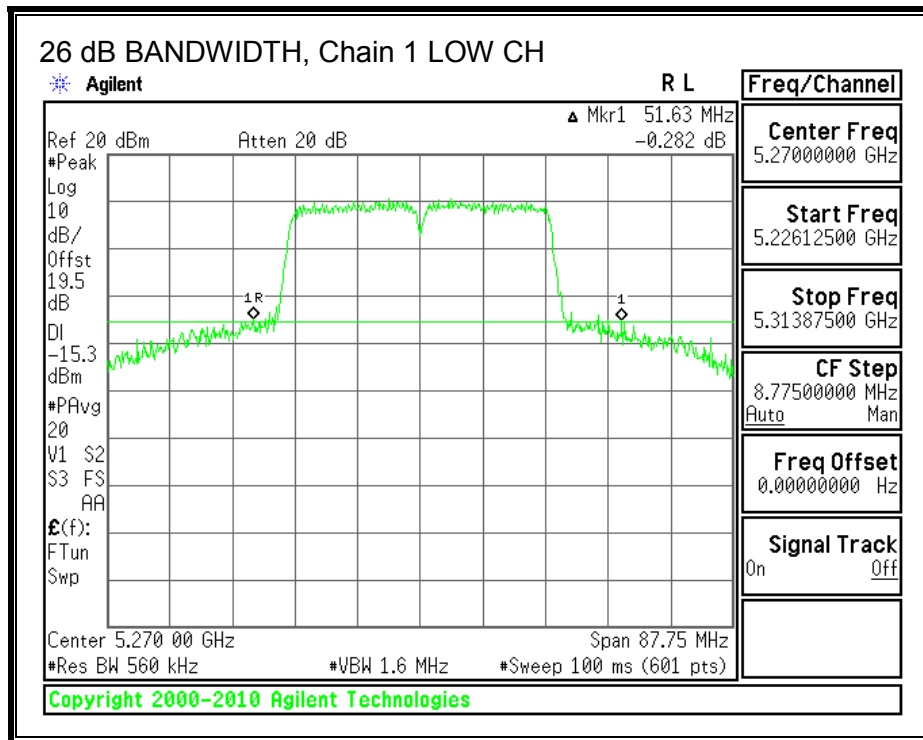



**26 dB BANDWIDTH, Chain 2**

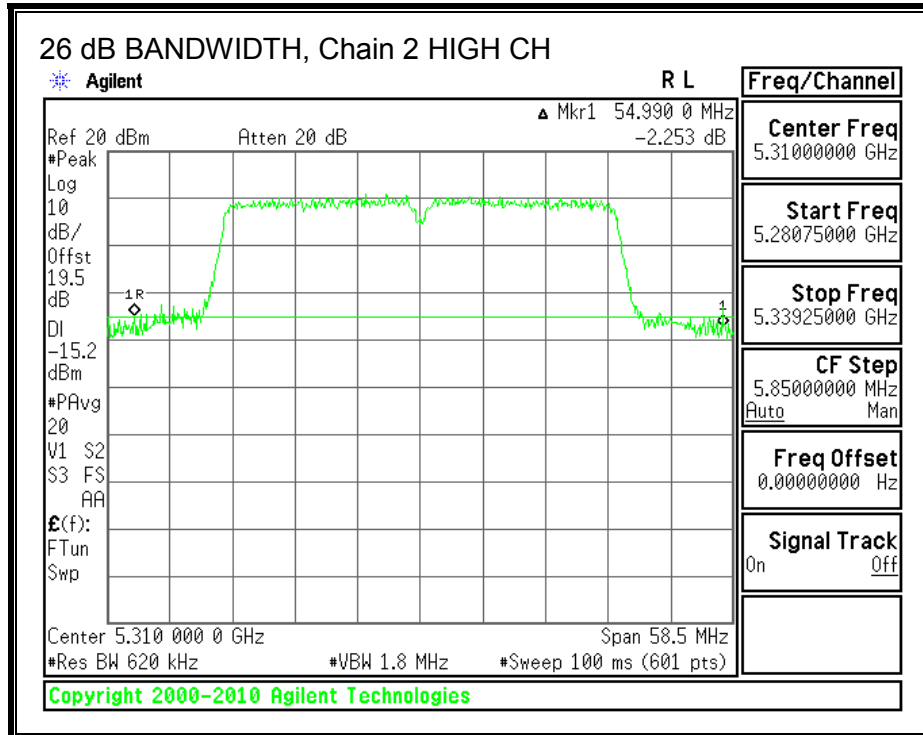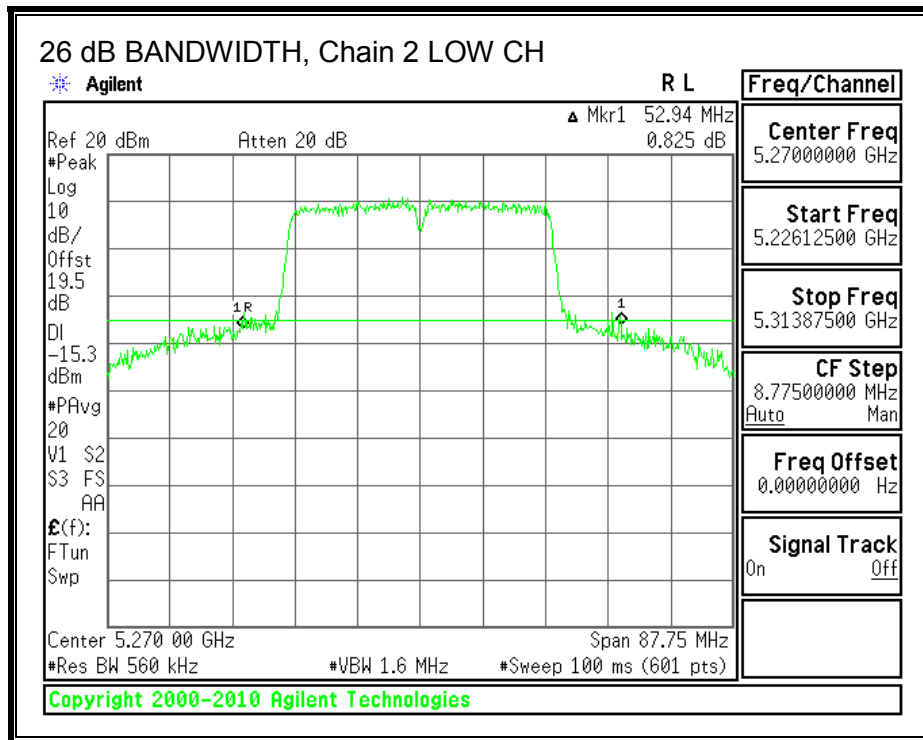

**8.30.2. 99% BANDWIDTH**



**LIMITS**

None; for reporting purposes only.



**RESULTS**

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Low	5270	36.3721	36.3500	36.3453
High	5310	36.4075	36.3601	36.3978



**99% BANDWIDTH, Chain 0**

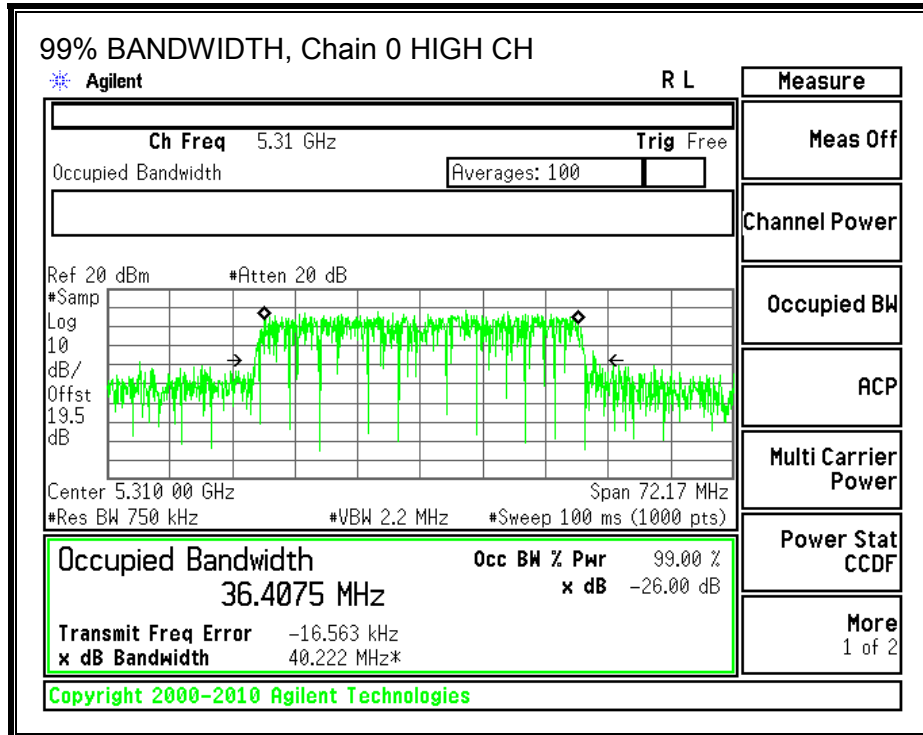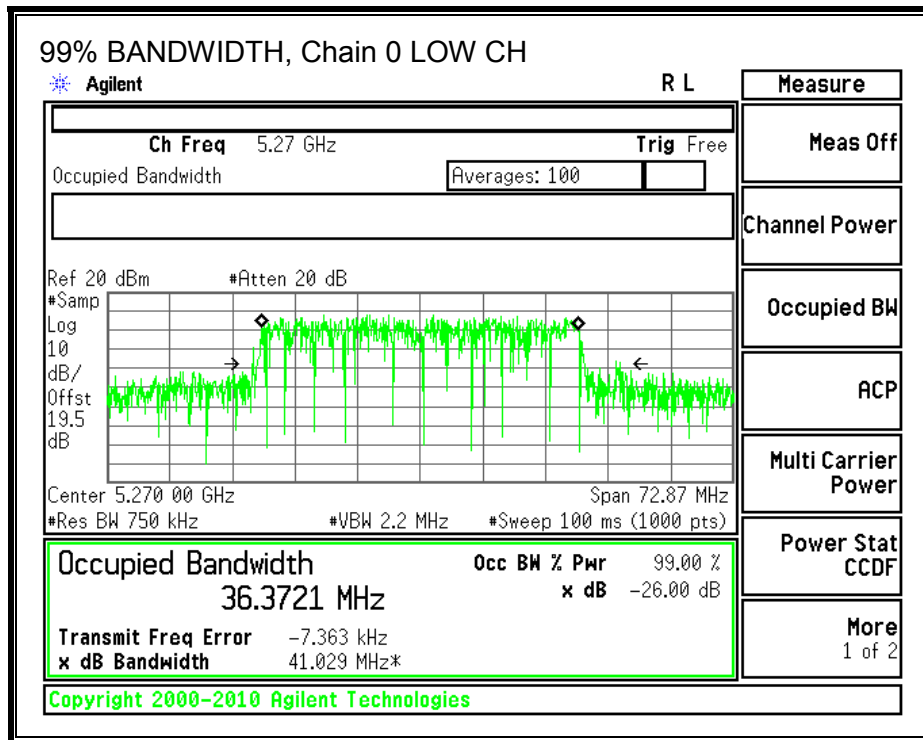

**99% BANDWIDTH, Chain 1**

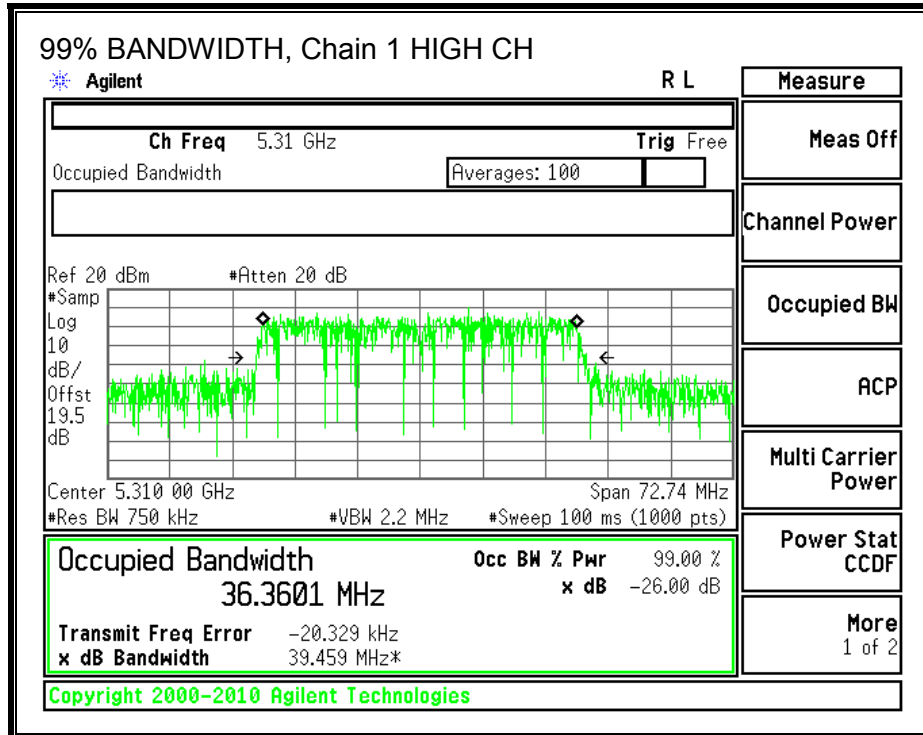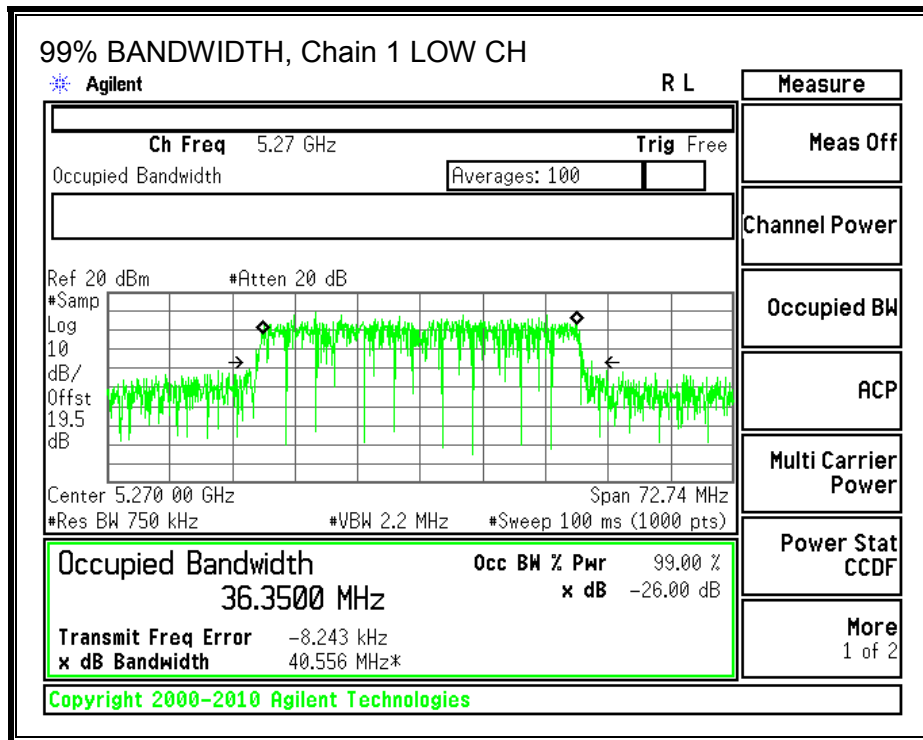

**99% BANDWIDTH, Chain 2**

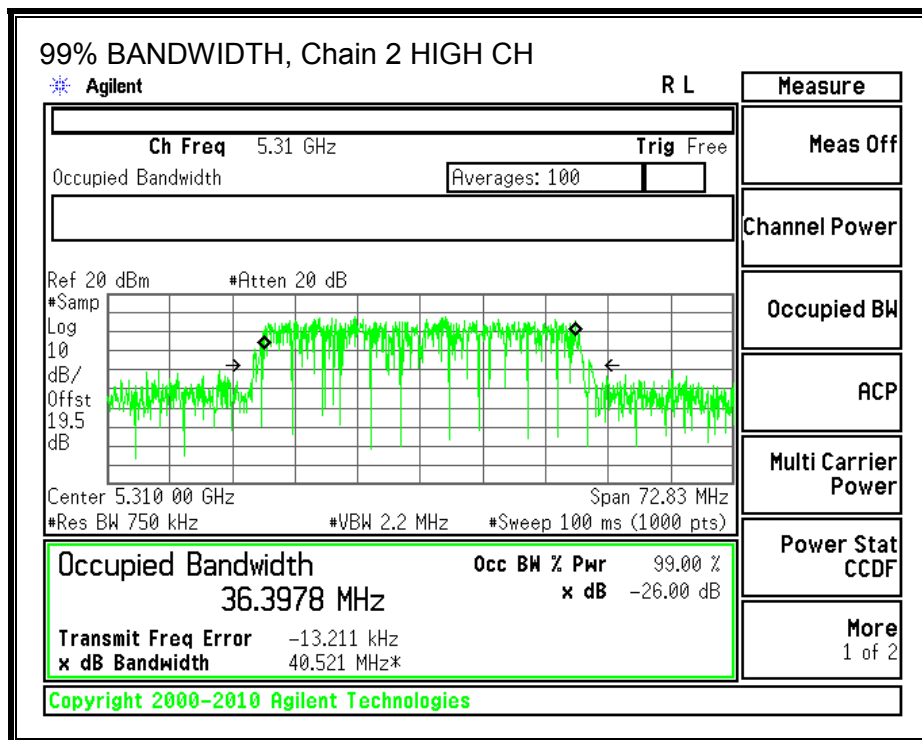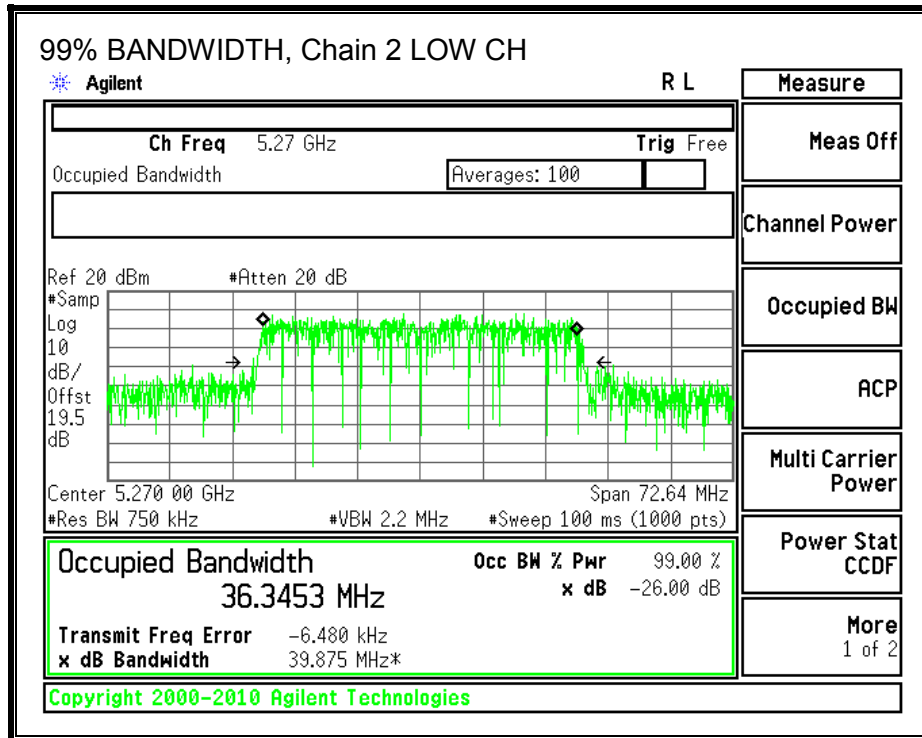

**8.30.3. OUTPUT POWER AND PSD**

**LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
3.48	3.21	4.52	4.77

For PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
3.48	3.21	4.52	9.53

**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	51.63	4.77	9.53	24.00	7.47
High	5310	53.53	4.77	9.53	24.00	7.47

Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd PSD
--------------------	------	--

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	15.30	15.70	14.80	20.05	24.00	-3.95
High	5310	10.00	10.00	9.20	14.52	24.00	-9.48

**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	1.728	1.974	0.963	6.44	7.47	-1.03
High	5310	1.395	2.038	0.974	6.35	7.47	-1.12



**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

**PSD, Chain 0**

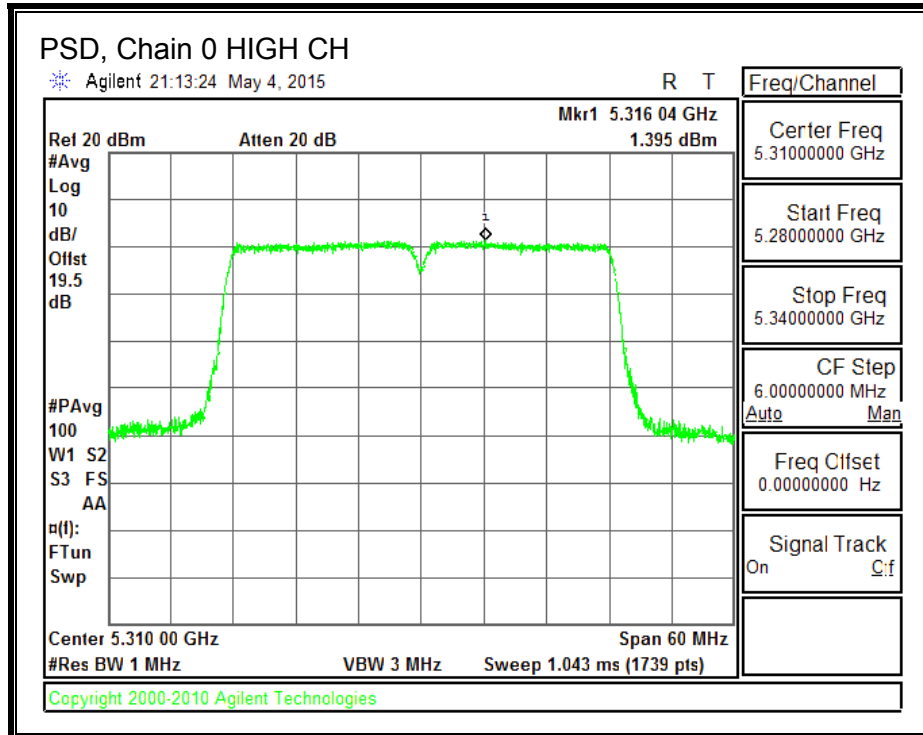
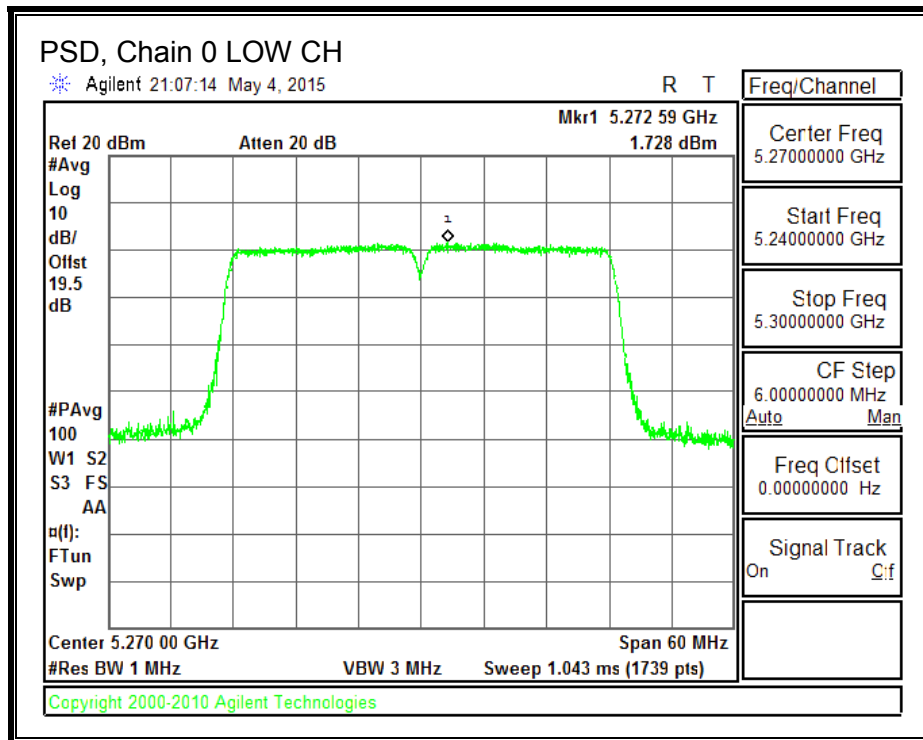




**PSD, Chain 1**

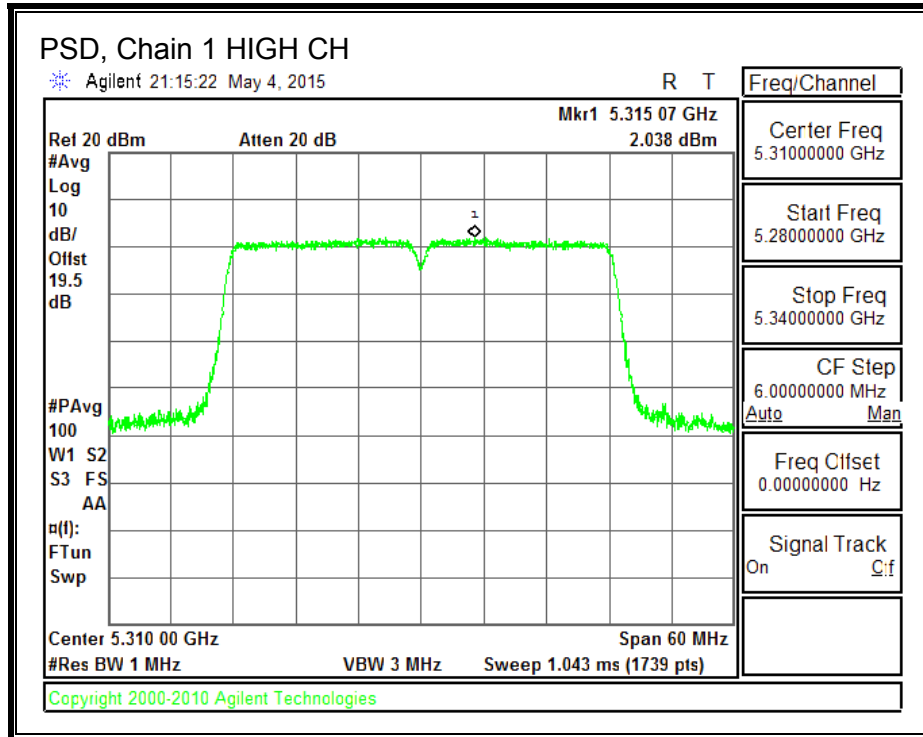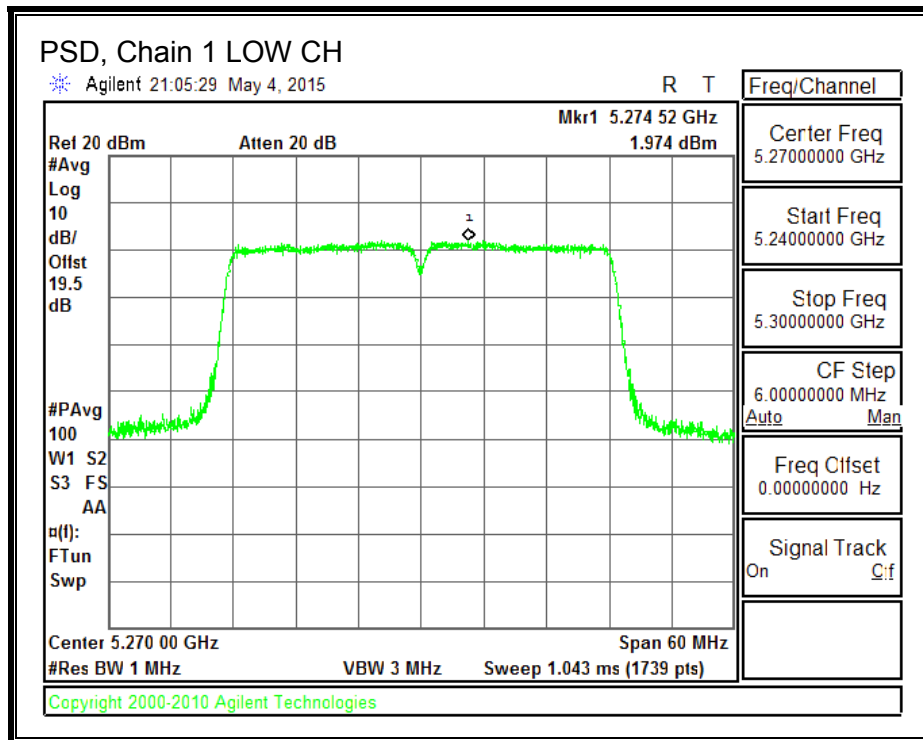

**PSD, Chain 2**

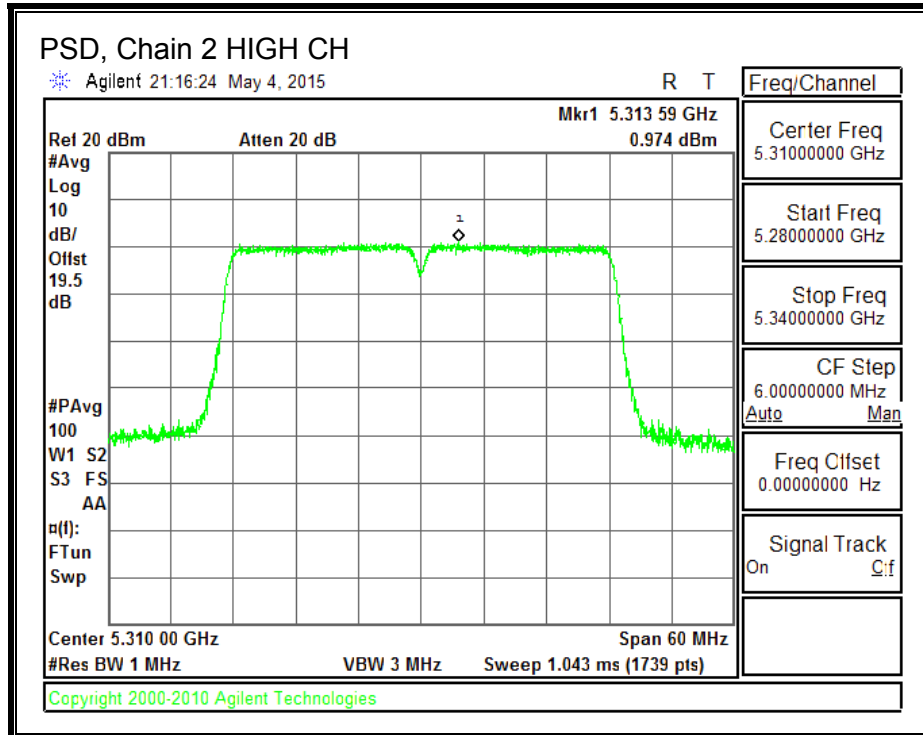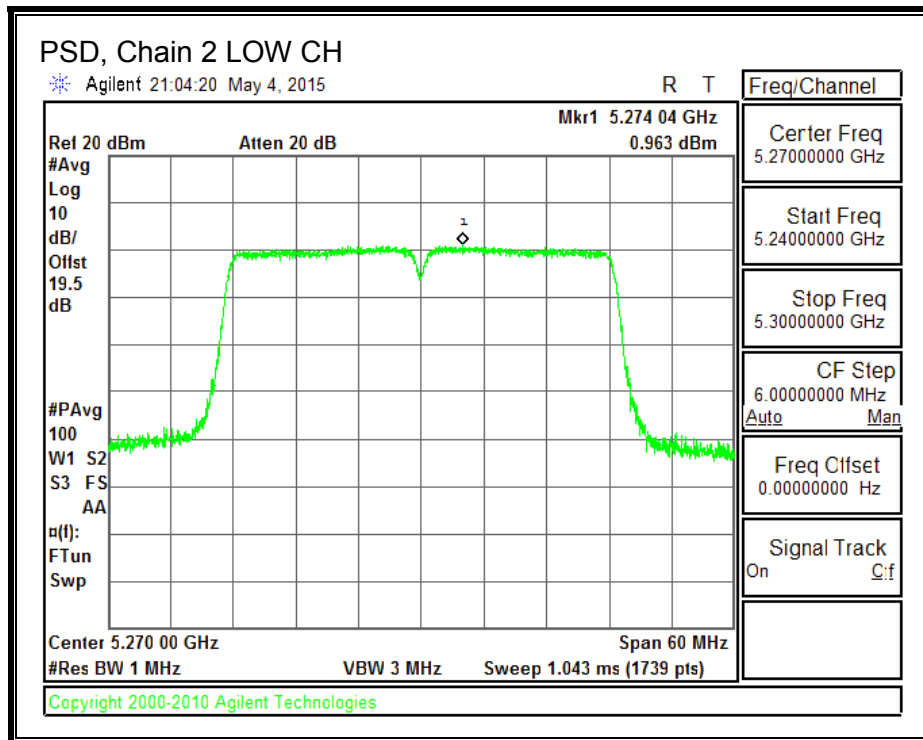

## 8.31. 802.11n HT40 TxBF 3TX MODE IN THE 5.3 GHz BAND

### 8.31.1. OUTPUT POWER AND PSD

#### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### DIRECTIONAL ANTENNA GAIN

For power and PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
3.48	3.21	4.52	9.53

**RESULTS**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Low	5270	51.63	9.53	9.53	20.47	7.47
High	5310	53.53	9.53	9.53	20.47	7.47

<b>Duty Cycle CF (dB)</b>	0.09	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**



Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	15.00	14.90	14.10	19.46	20.47	-1.01
High	5310	10.20	10.40	9.60	14.85	20.47	-5.62

**PSD Results**



Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Low	5270	1.728	1.974	0.963	6.44	7.47	-1.03
High	5310	1.395	2.038	0.974	6.35	7.47	-1.12

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.



**PSD, Chain 0**

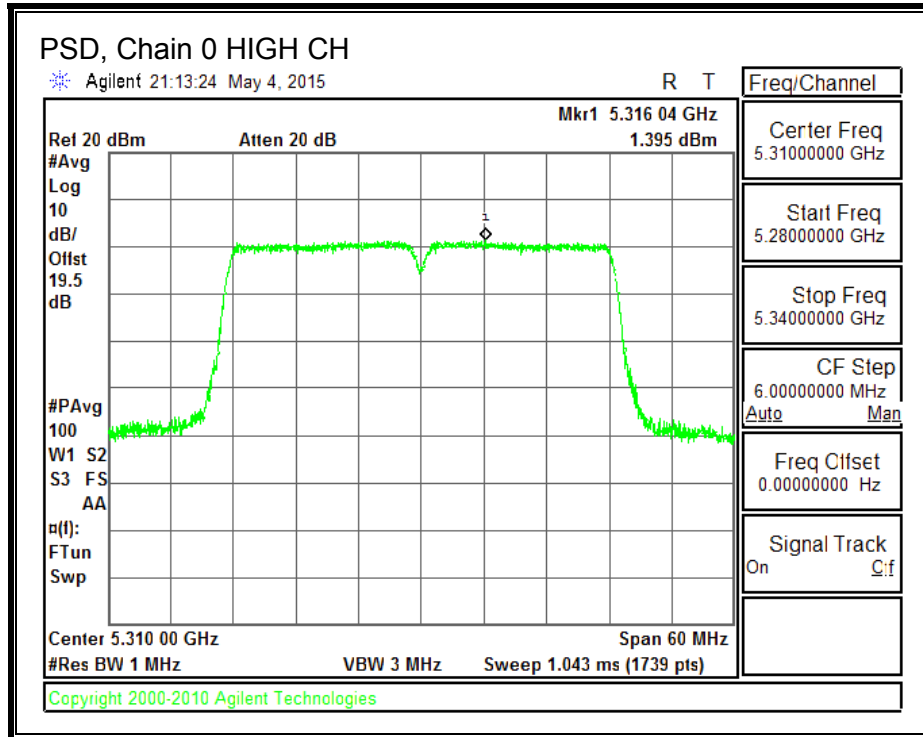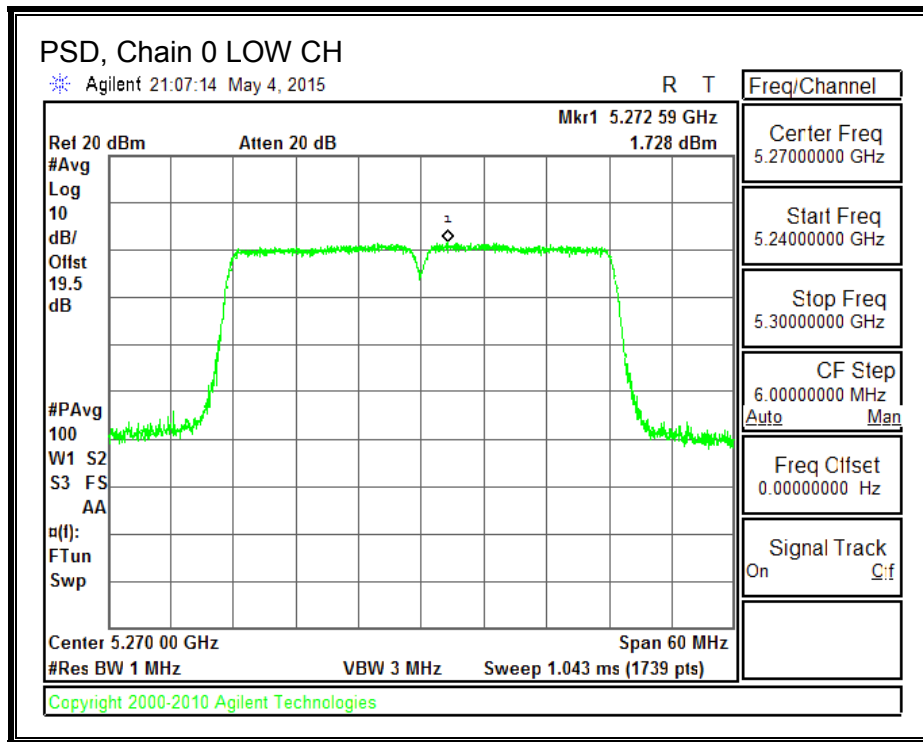

**PSD, Chain 1**

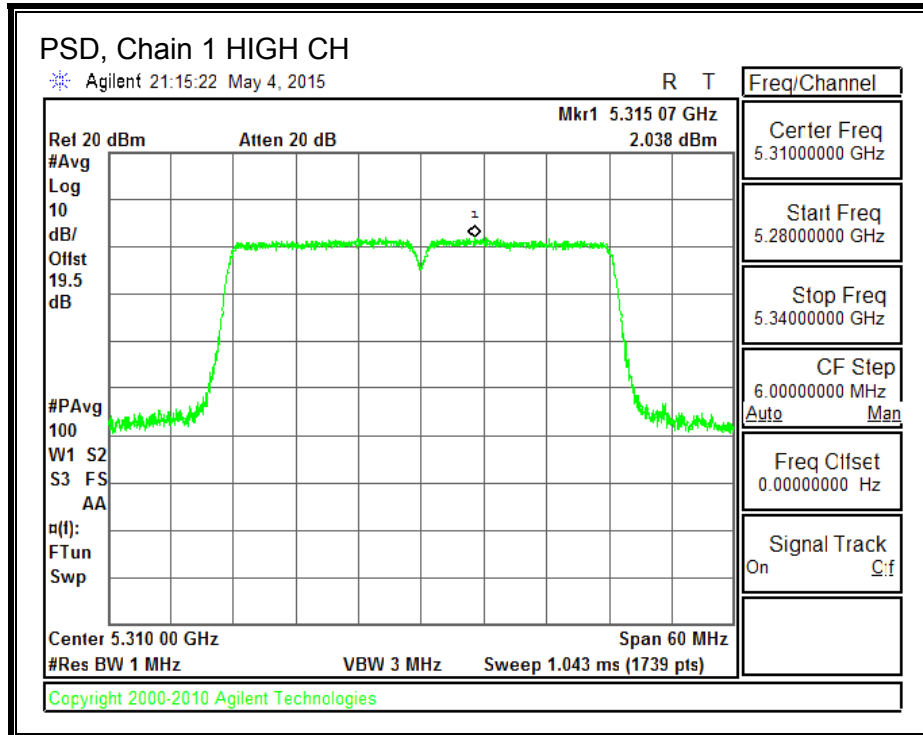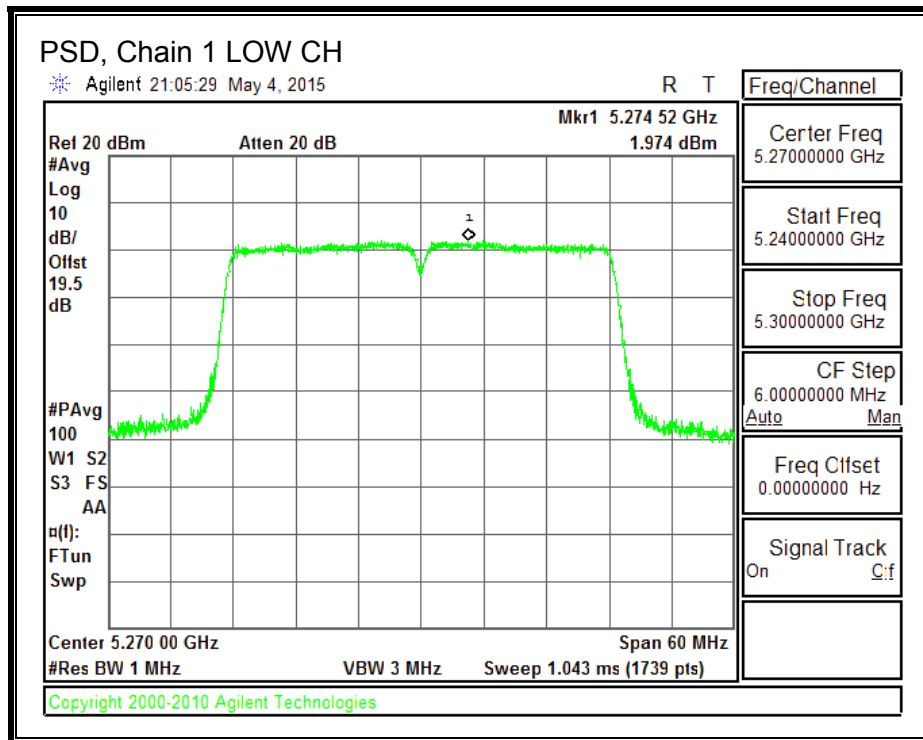

**PSD, Chain 2**

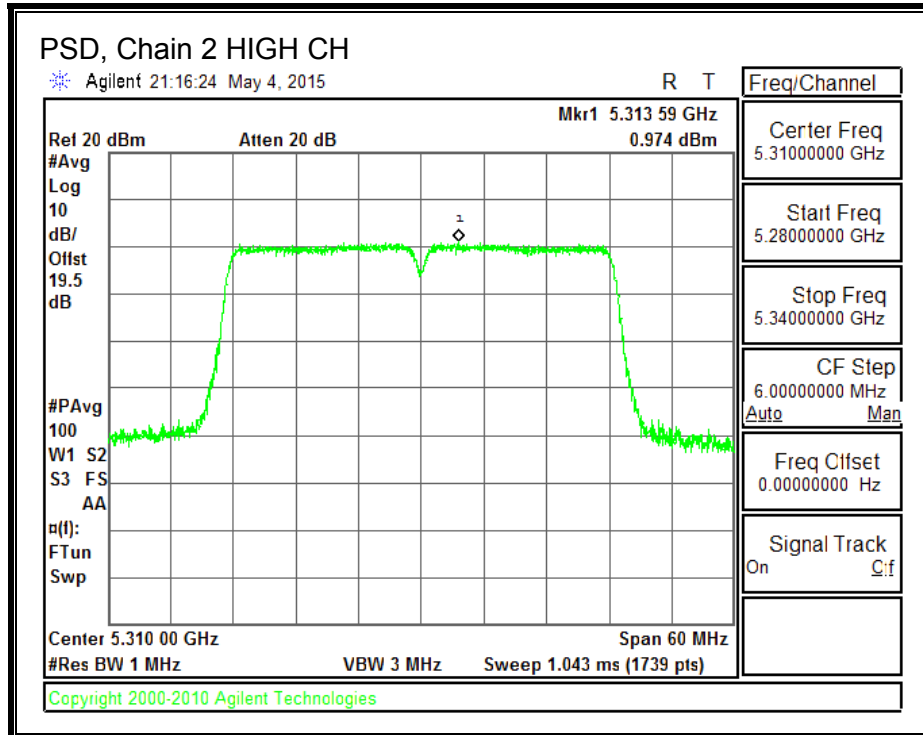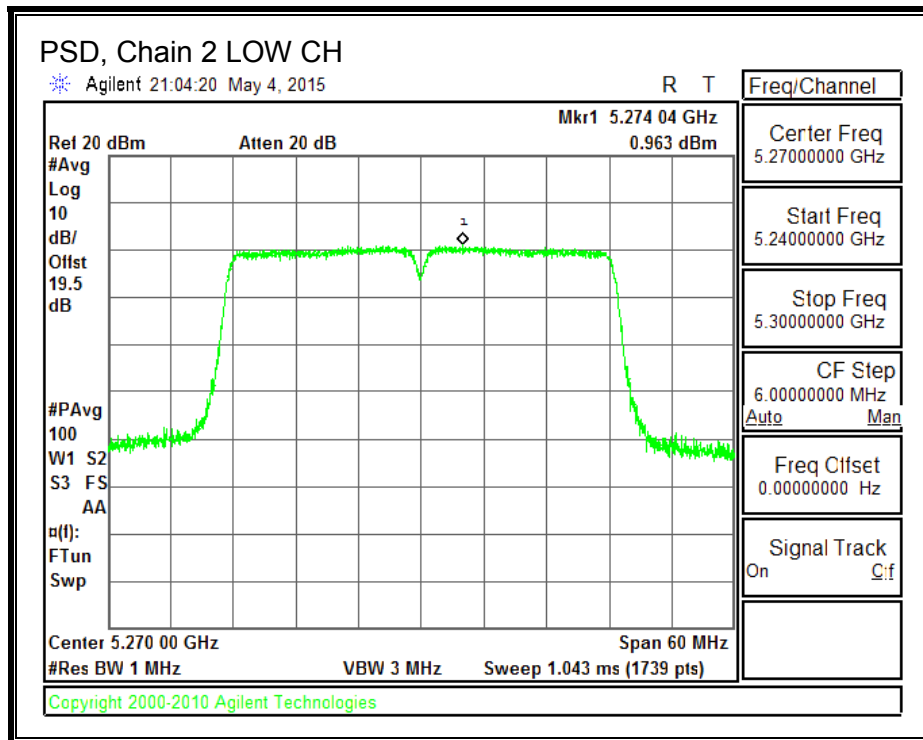

## **8.32. 802.11ac VHT80 1TX MODE IN THE 5.3 GHz BAND**

### **8.32.1. OUTPUT POWER**

#### **LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **DIRECTIONAL ANTENNA GAIN**

This is SISO mode, AG is the highest (worst-case) = 5.52 dBi.



**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain (dBi)	Power Limit (dBm)
Mid	5290	97.62	5.52	24.00

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	14.80	14.80	24.00	-9.20

**Note:** for Chain 0, 26dB & 99% data & plots, see section 11ac VHT80 CDD 3TX MODE IN THE 5.3 GHz BAND

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

**8.33. 802.11ac VHT80 CDD 2TX MODE IN THE 5.3 GHz BAND**

**8.33.1. OUTPUT POWER AND PSD**

**LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
3.48	4.52	5.03

For PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
3.48	4.52	8.03

**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5290	97.62	4.03	8.03	24.00	8.97

<b>Duty Cycle CF (dB)</b>	0.18	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	8.70	8.40	11.56	24.00	-12.44


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5290	0.465	0.149	3.50	8.97	-5.47


**Note:** for Chain 0, 26dB & 99% data & plots, see section 802.11n HT80 CDD 3TX MODE IN THE 5.3 GHz BAND

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary

**PSD, Chain 0**

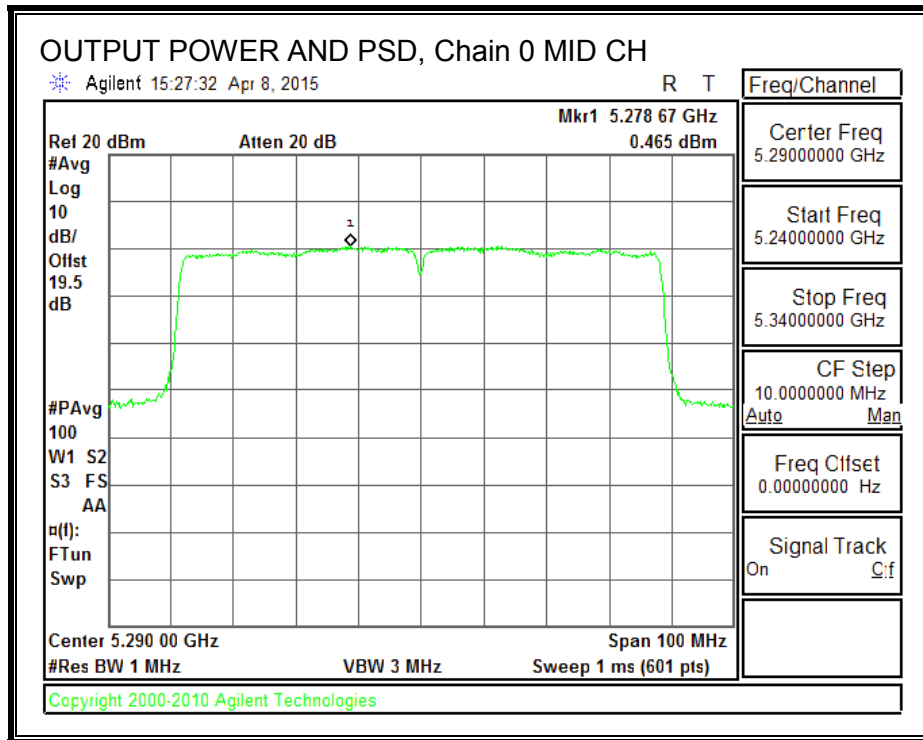

**PSD, Chain 1**

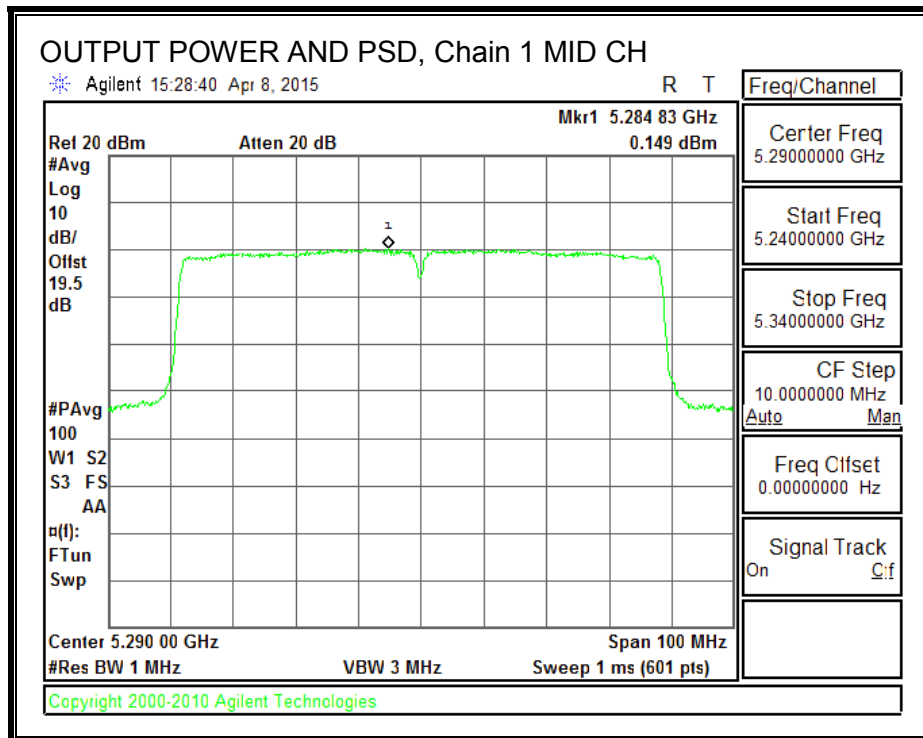

### 8.34. 802.11ac VHT80 TxBF 2TX MODE IN THE 5.3 GHz BAND

#### 8.34.1. OUTPUT POWER AND PSD

##### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### DIRECTIONAL ANTENNA GAIN

For power, PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
3.48	4.52	8.03

**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5290	97.62	8.03	8.03	21.97	8.97

<b>Duty Cycle CF (dB)</b>	0.18	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---


**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	7.80	7.50	10.66	21.97	-11.31


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5290	0.465	0.149	3.50	8.97	-5.47

**PSD, Chain 0**

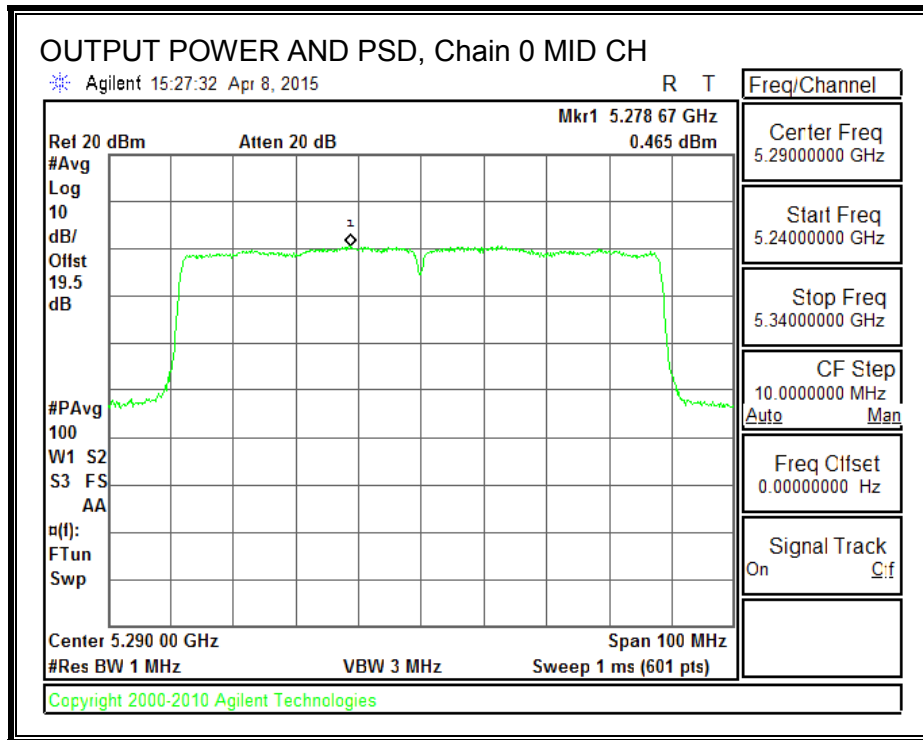

**PSD, Chain 1**

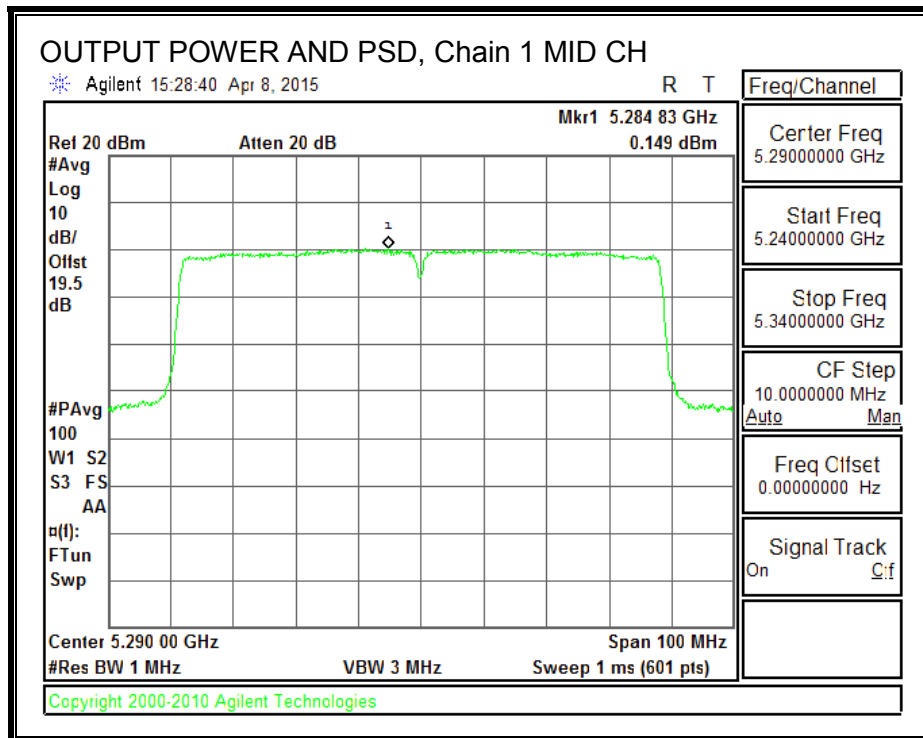

**8.35. 802.11ac VHT80 CDD 3TX MODE IN THE 5.3 GHz BAND**

**8.35.1. 26 dB BANDWIDTH**

**LIMITS**


None; for reporting purposes only.

**RESULTS**


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)	26 dB BW Chain 2 (MHz)
Mid	5290	121.10	119.56	97.62




**26 dB BANDWIDTH, Chain 0**

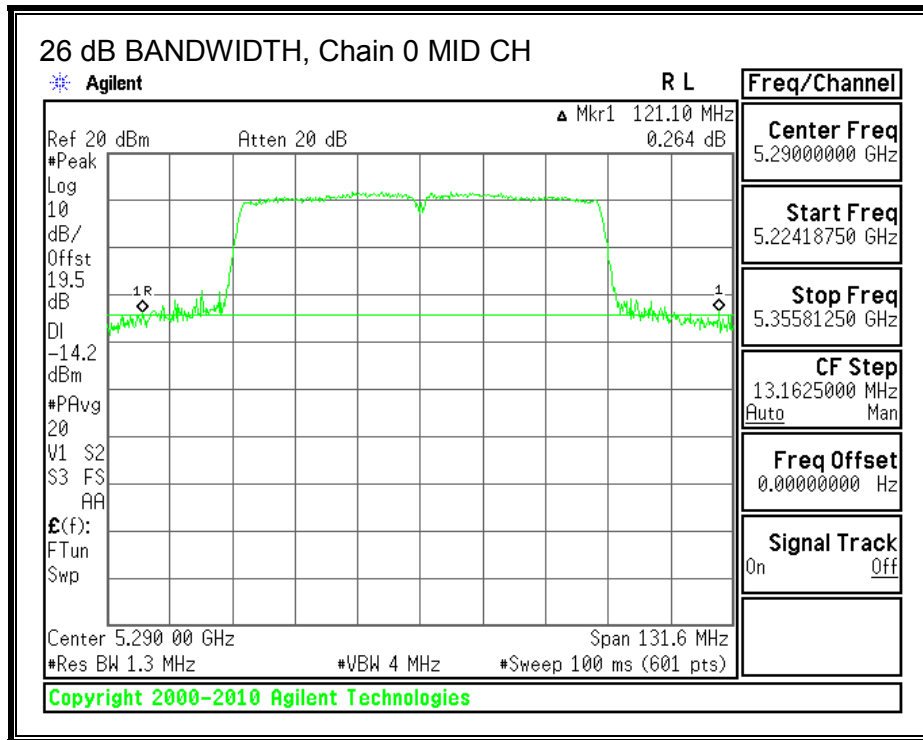

**26 dB BANDWIDTH, Chain 1**

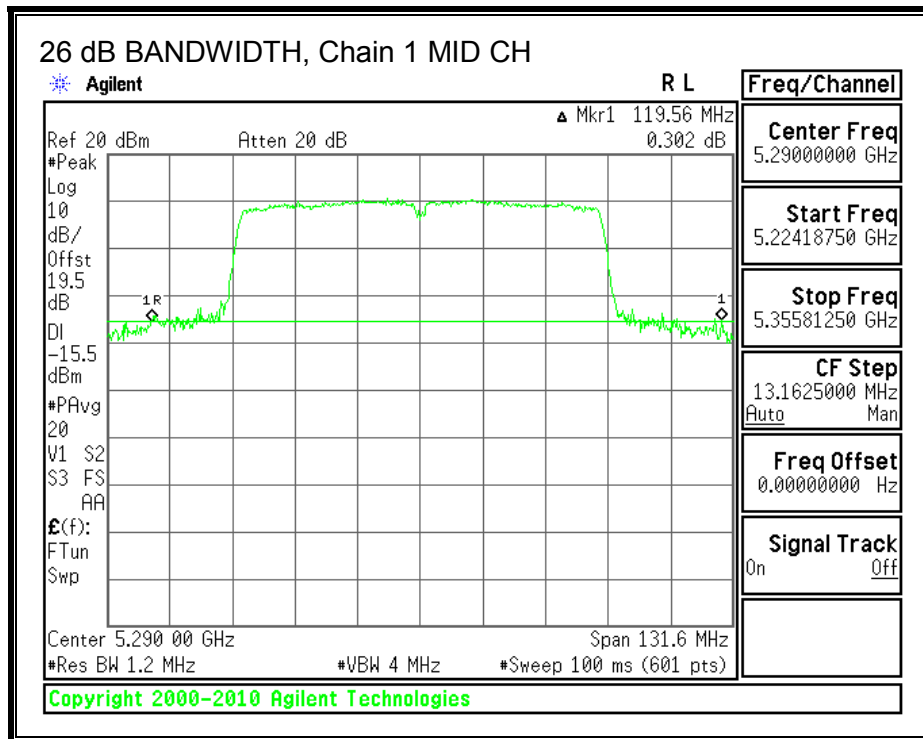

**26 dB BANDWIDTH, Chain 2**

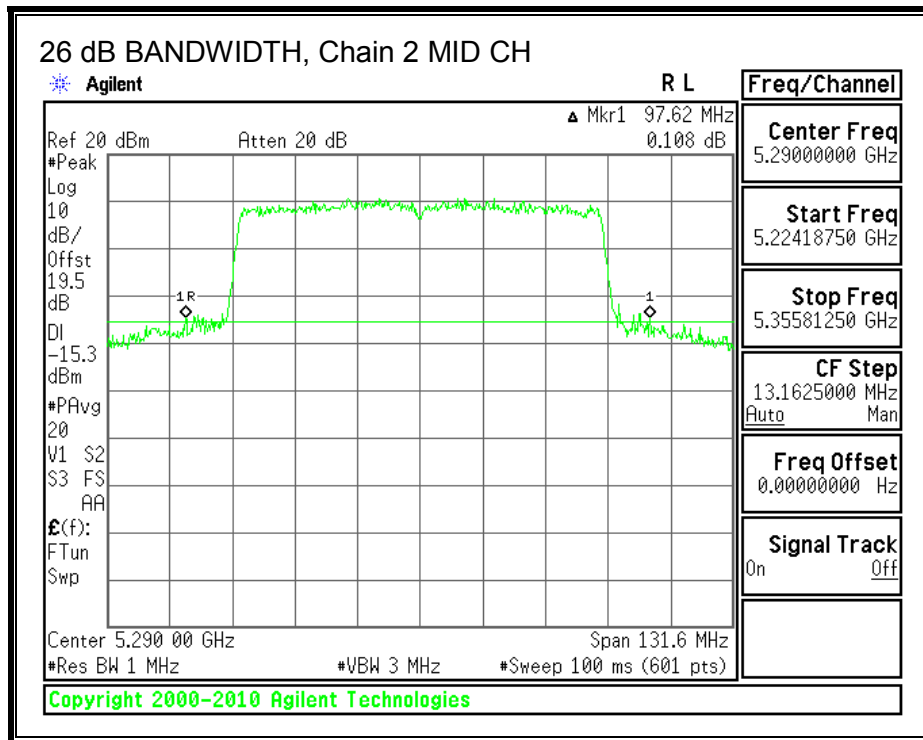

**8.35.2. 99% BANDWIDTH**


**LIMITS**

None; for reporting purposes only.


**RESULTS**

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)	99% BW Chain 2 (MHz)
Mid	5290	75.9064	75.8983	75.8694


**99% BANDWIDTH, Chain 0**

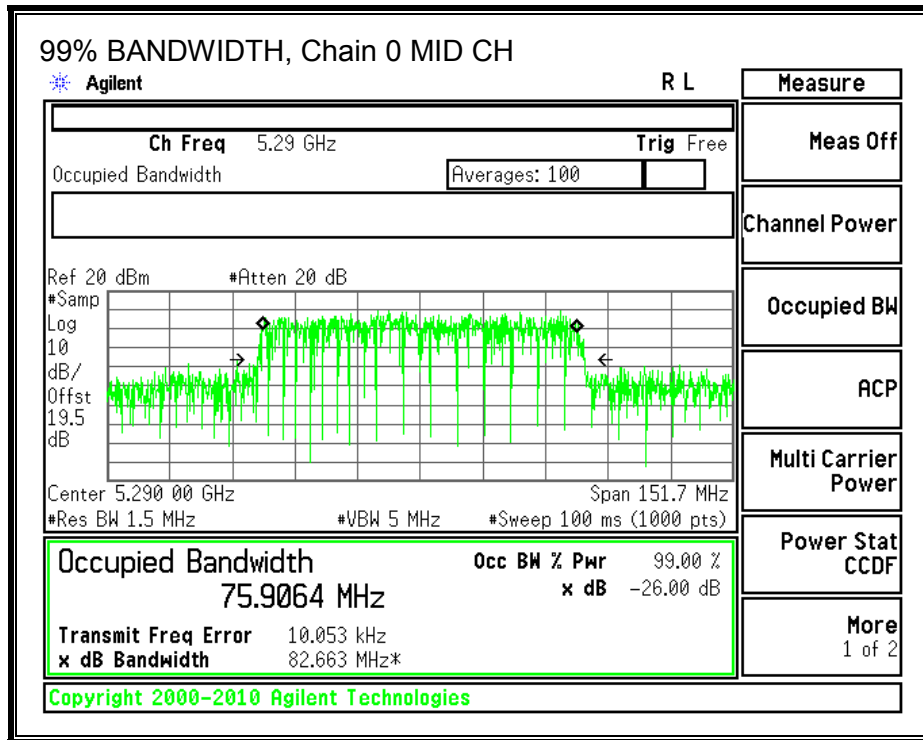

**99% BANDWIDTH, Chain 1**

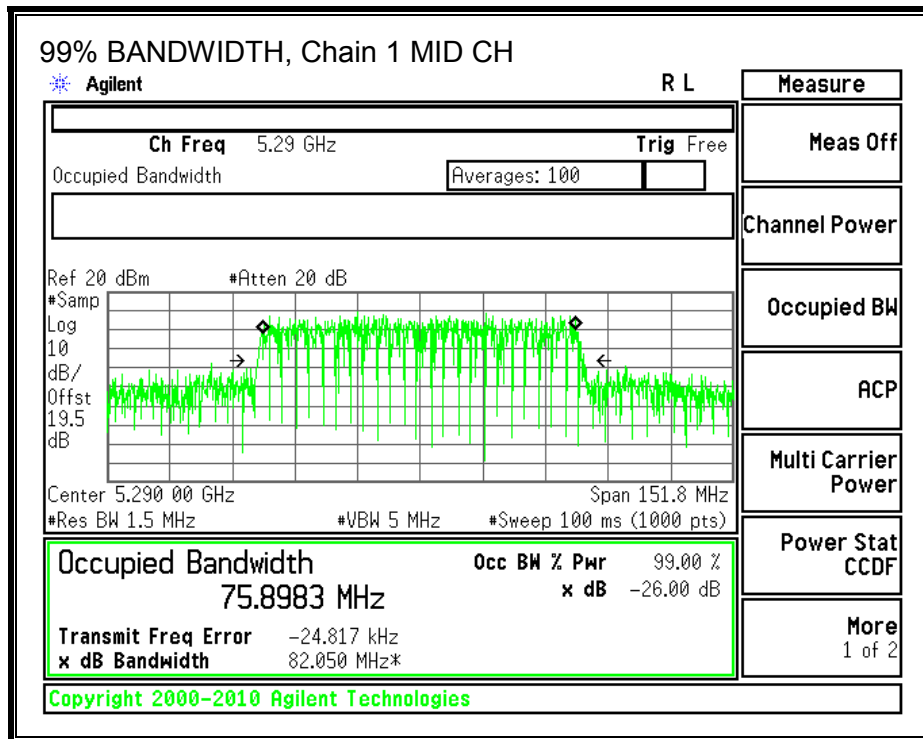

**99% BANDWIDTH, Chain 2**

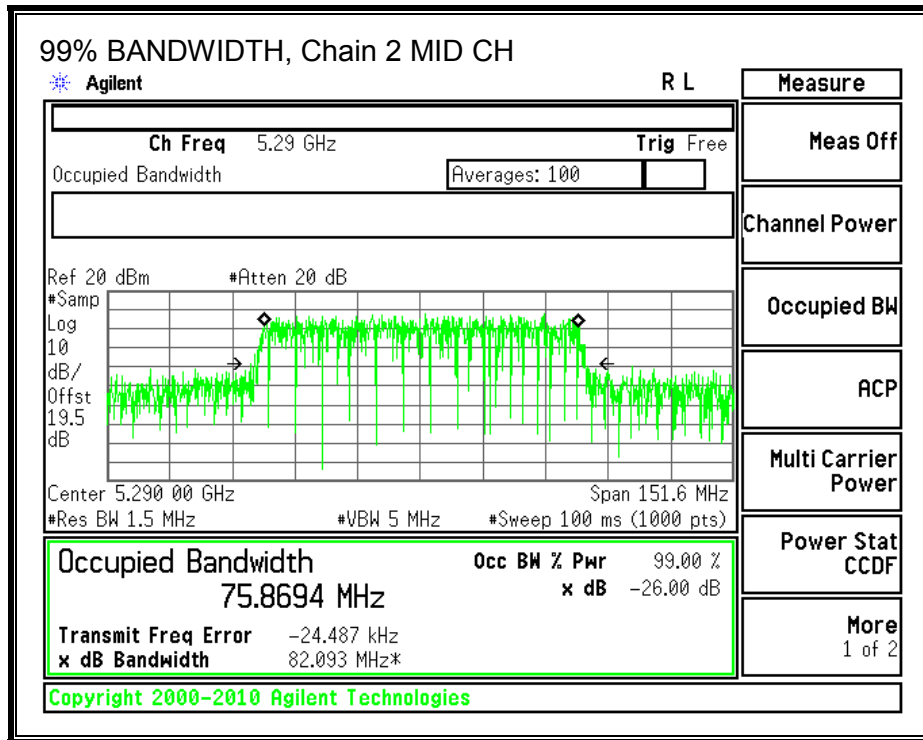

**8.35.3. OUTPUT POWER AND PSD**

**LIMITS**

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**DIRECTIONAL ANTENNA GAIN**

For power, the TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
3.48	3.21	4.52	4.77

For PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
3.48	3.21	4.52	9.53

**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5290	97.62	4.77	9.53	24.00	7.47

<b>Duty Cycle CF (dB)</b>	0.18	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	8.50	8.30	7.60	12.92	24.00	-11.08

**PSD Results**


Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5290	1.619	1.223	0.744	6.16	7.47	-1.31

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

**PSD, Chain 0**

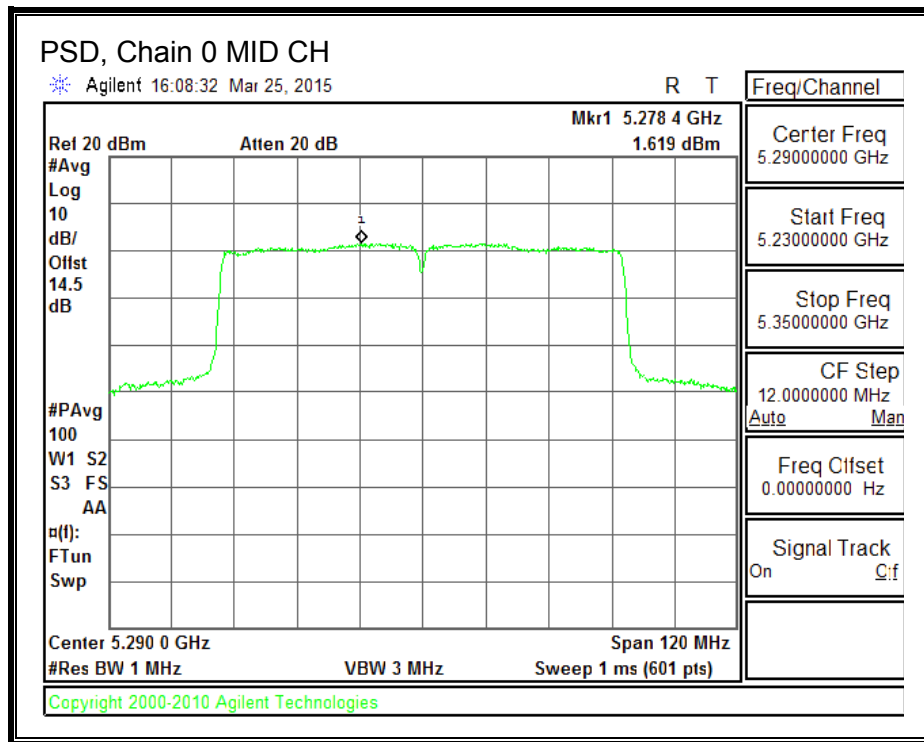


**PSD, Chain 1**

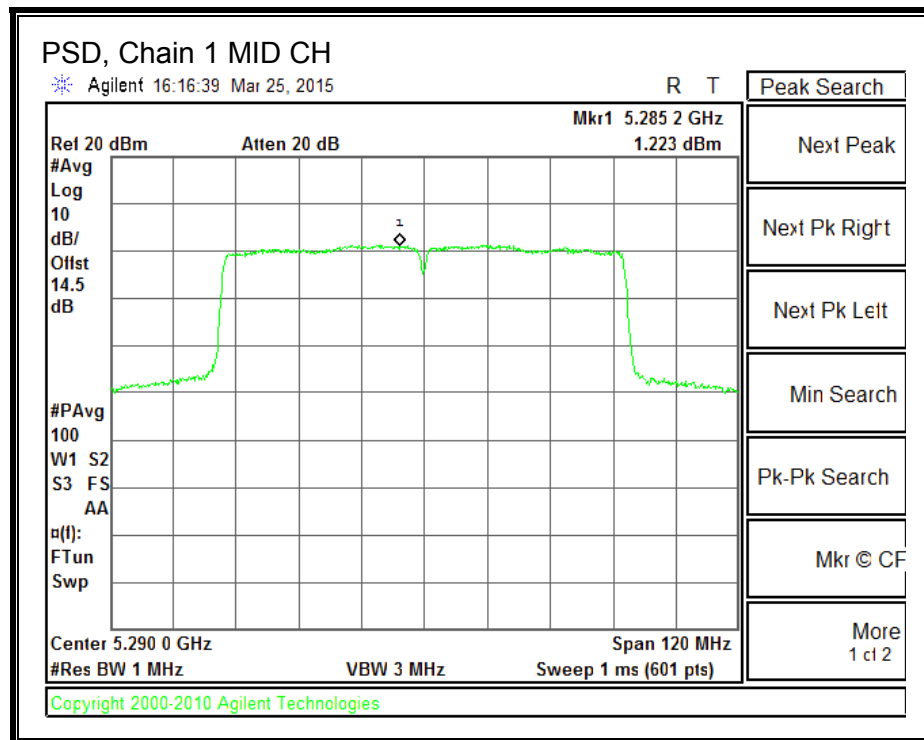



**PSD, Chain 2**

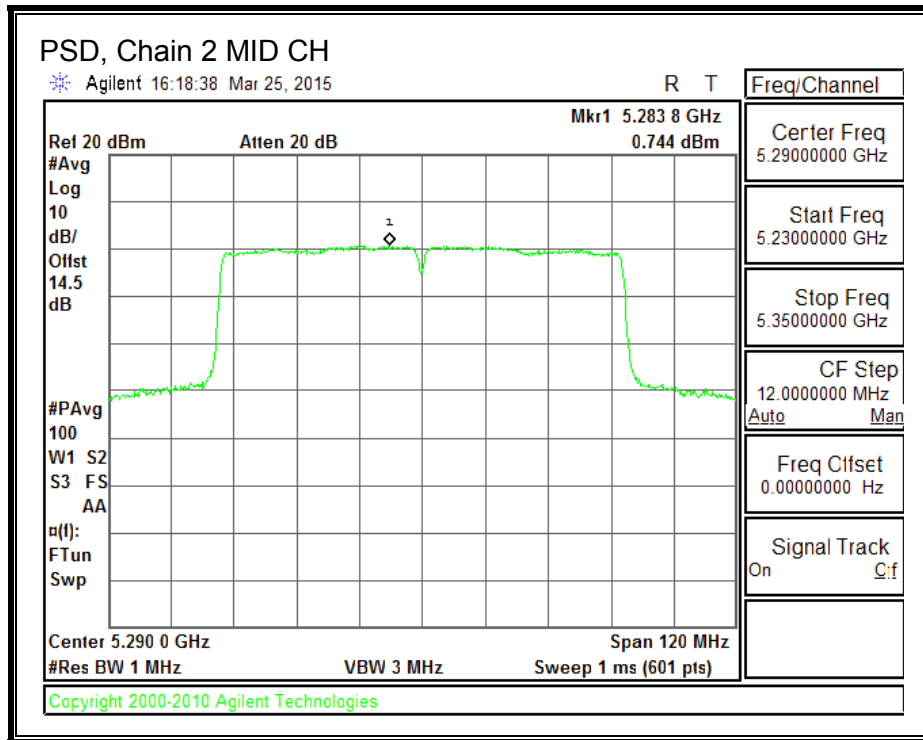

### 8.36. 802.11ac VHT80 TxBF 3TX MODE IN THE 5.3 GHz BAND

#### 8.36.1. OUTPUT POWER AND PSD

##### LIMITS

FCC §15.407 (a) (2)

For the band 5.25–5.35 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26–dB emission bandwidth in MHz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### DIRECTIONAL ANTENNA GAIN

For power and PSD, the TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Chain 2 Antenna Gain (dBi)	Correlated Chains Directional Gain (dBi)
3.48	3.21	4.52	9.53

**RESULTS**

**Bandwidth, Antenna Gain, and Limits**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PSD (dBi)	Power Limit (dBm)	PSD Limit (dBm)
Mid	5290	97.62	9.53	9.53	20.47	7.47

<b>Duty Cycle CF (dB)</b>	0.18	<b>Included in Calculations of Corr'd PSD</b>
---------------------------	------	---

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Chain 2 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Mid	5290	7.00	6.80	6.10	11.42	20.47	-9.05


**PSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PSD (dBm)	Chain 1 Meas PSD (dBm)	Chain 2 Meas PSD (dBm)	Total Corr'd PSD (dBm)	PSD Limit (dBm)	PSD Margin (dB)
Mid	5290	1.619	1.223	0.744	6.16	7.47	-1.31


**Note:** for Chains 0, 1 and 2, 26dB & 99% data & plots, see section 11ac VHT80 CDD 3TX MODE IN THE 5.3 GHz BAND

**Note:** the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.


**PSD, Chain 0**

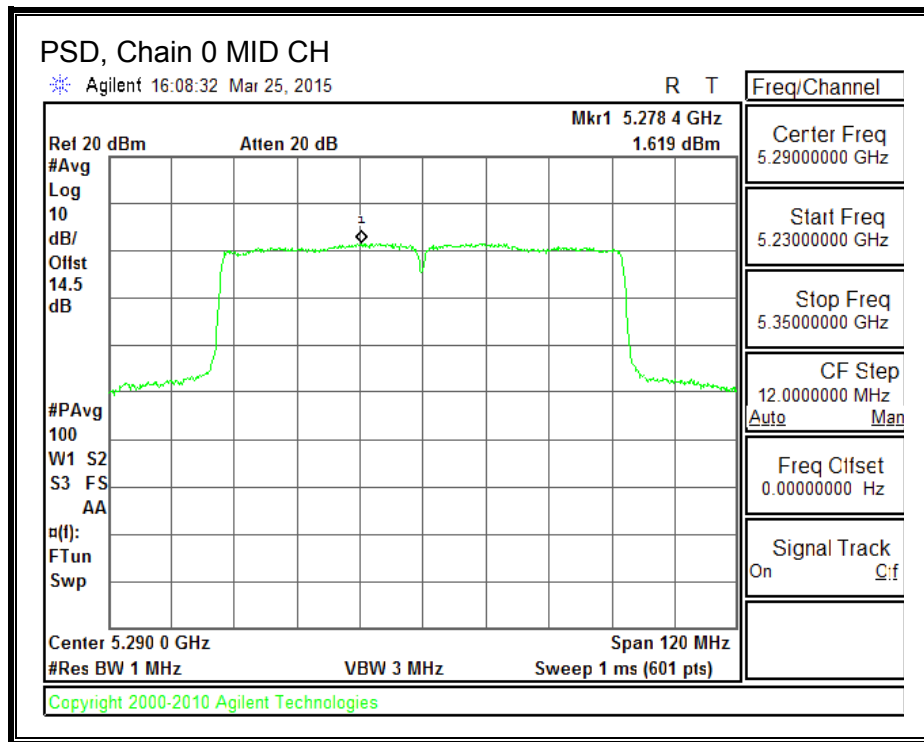

**PSD, Chain 1**

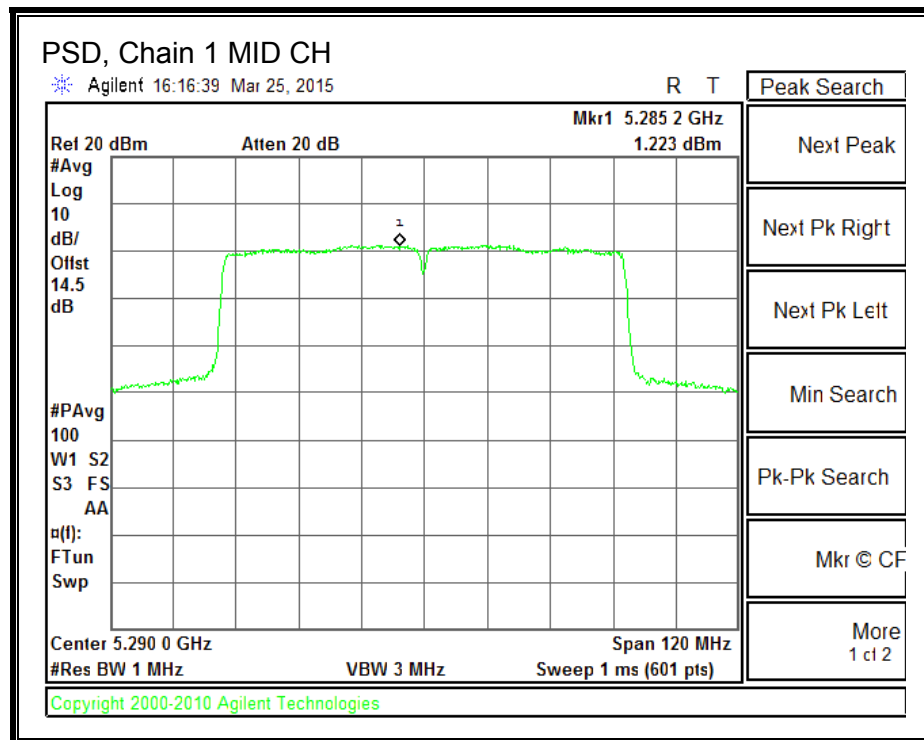

**PSD, Chain 2**

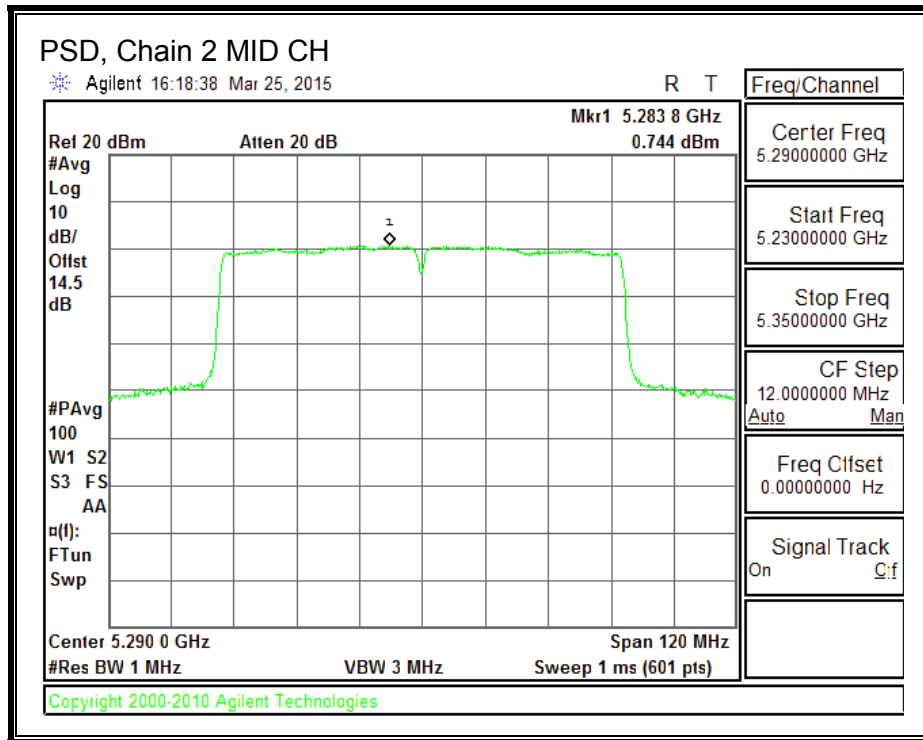

### 8.37. 802.11a LEGACY MODE IN THE 5.6 GHz BAND

#### 8.37.1. 26 dB BANDWIDTH

##### LIMITS

None; for reporting purposes only.

##### RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	21.190
Mid	5580	21.190
High	5700	21.216