




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/14/2006 3:24:29 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	20.00 mm
DUT Position:	Tablet side touching	Max SAR Y-axis Location:	18.00 mm
Antenna Configuration:	Main	Max E Field:	11.67 V/m
Test Frequency:	2437MHz	SAR 1g:	0.385 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.151 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.020 W/kg
Type of Modulation:		SAR End:	0.019 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.79 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/11/06
Input Power Level:	max	Extrapolation:	poly4

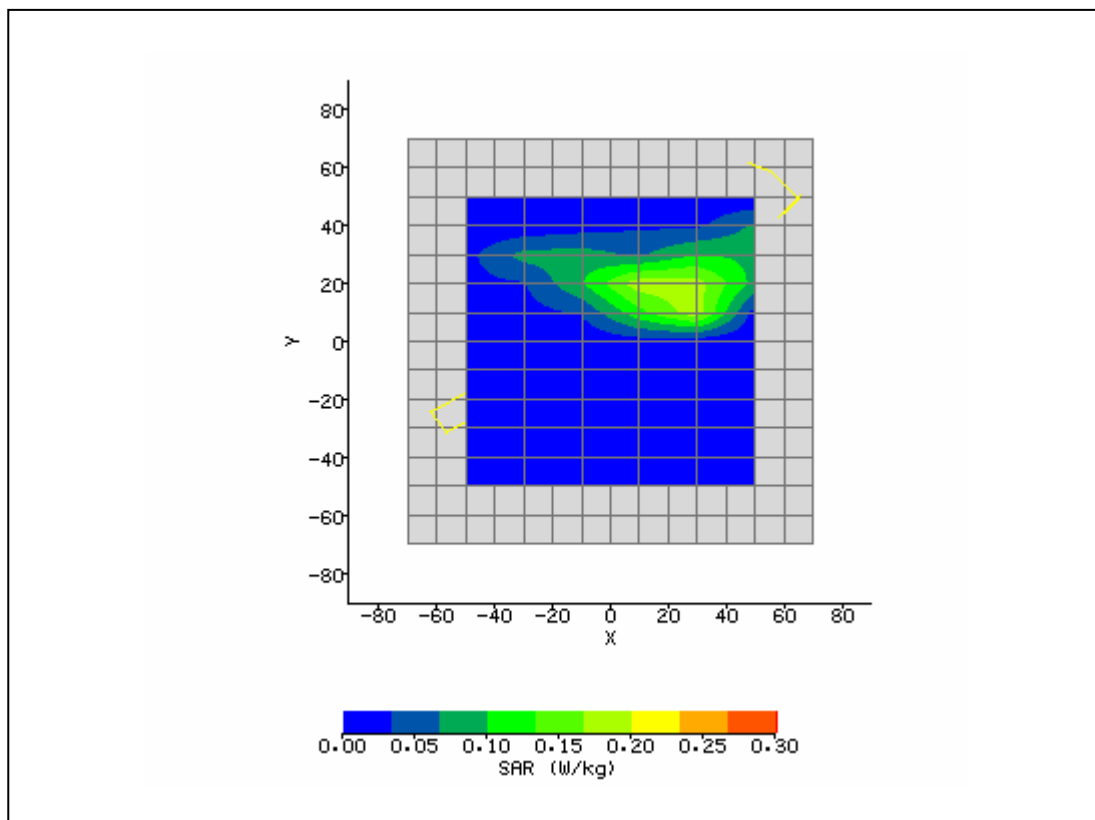


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/15/2006 3:38:18 PM	DUT Battery Model/No:	
Filename:	left_aux6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.00 mm
DUT Position:	right side	Max SAR Y-axis Location:	4.00 mm
Antenna Configuration:	Main	Max E Field:	2.16 V/m
Test Frequency:	2437MHz	SAR 1g:	0.013 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.004 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.92 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/15/06
Input Power Level:	max	Extrapolation:	poly4

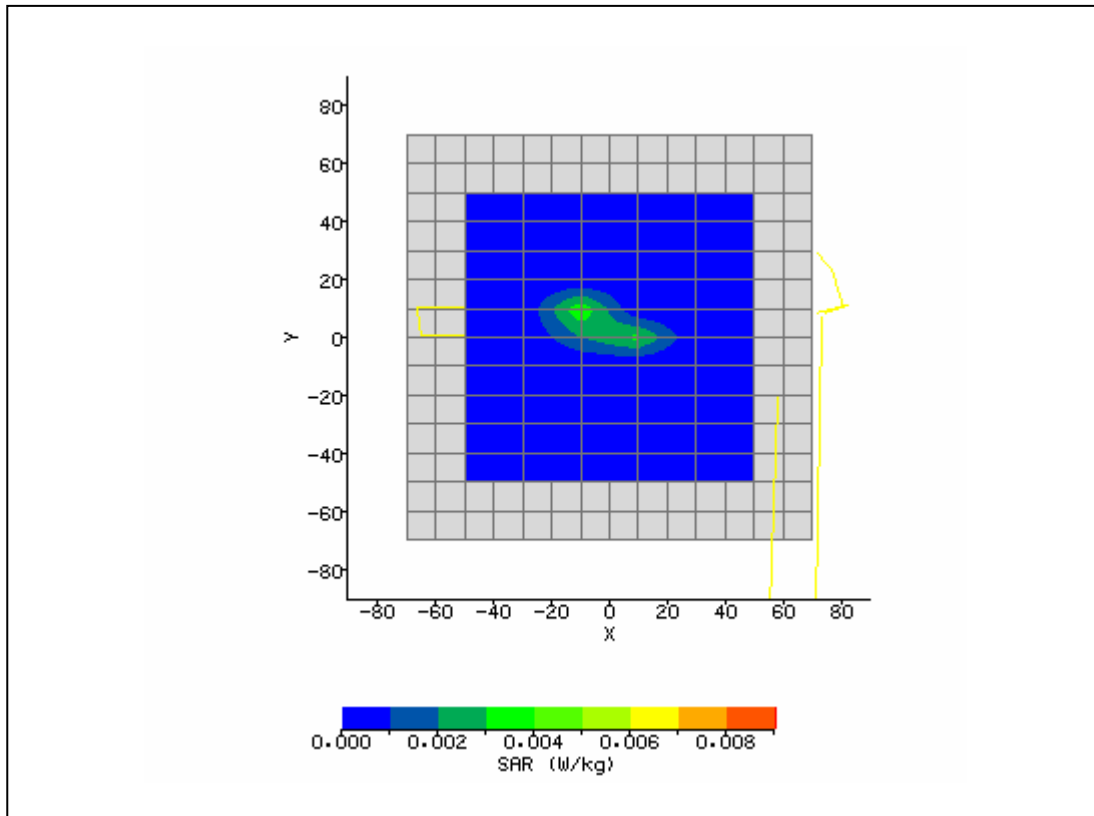


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/15/2006 4:44:07 PM	DUT Battery Model/No:	
Filename:	right_main6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main	Max E Field:	1.23 V/m
Test Frequency:	2437MHz	SAR 1g:	0.004 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.001 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.95 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/15/06
Input Power Level:	max	Extrapolation:	poly4

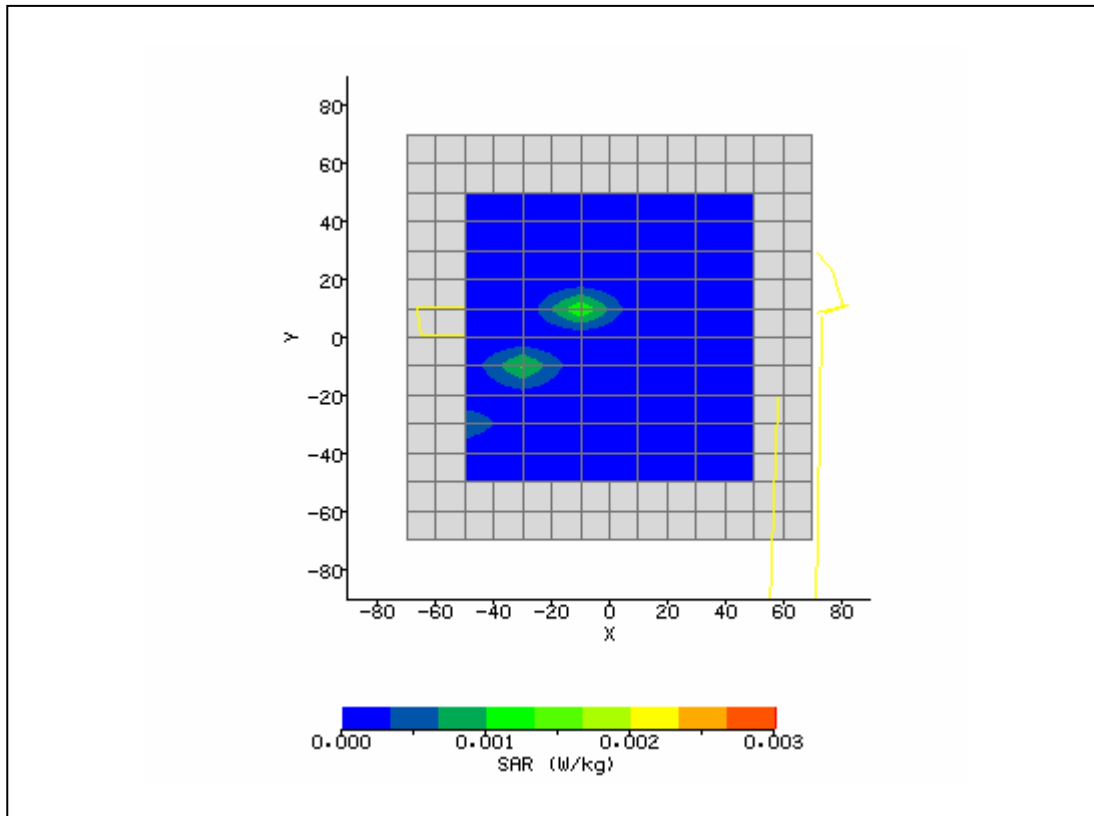


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/15/2006 5:26:08 PM	DUT Battery Model/No:	
Filename:	lap_AUX6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.10 mm
DUT Position:	lap touching	Max SAR Y-axis Location:	9.71 mm
Antenna Configuration:	Aux	Max E Field:	2.85 V/m
Test Frequency:	2437MHz	SAR 1g:	0.025 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.008 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/15/06
Input Power Level:	max	Extrapolation:	poly4

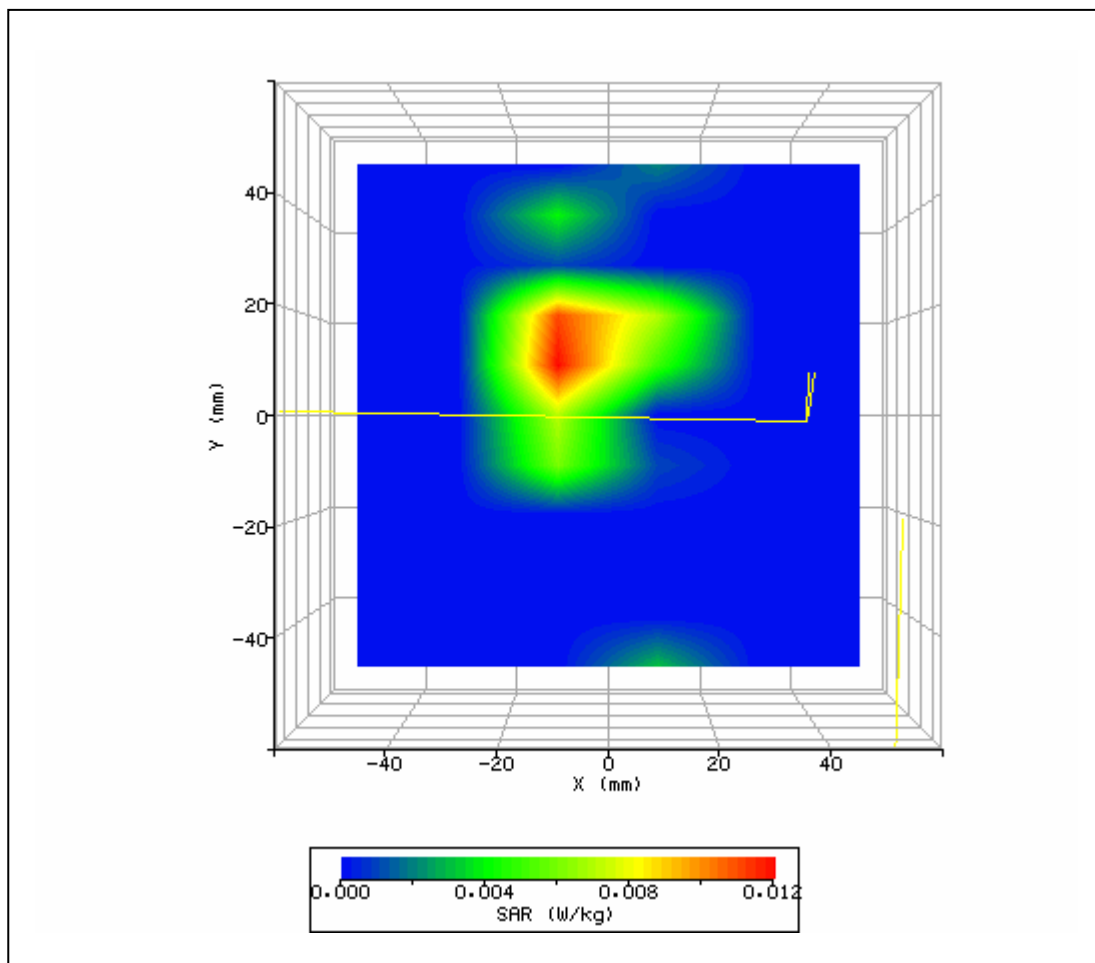


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/15/2006 3:13:21 PM	DUT Battery Model/No:	
Filename:	top_aux6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	left side	Max SAR Y-axis Location:	16.00 mm
Antenna Configuration:	Aux	Max E Field:	14.08 V/m
Test Frequency:	2437MHz	SAR 1g:	0.489 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.227 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.021 W/kg
Type of Modulation:		SAR End:	0.021 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.92 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/15/06
Input Power Level:	max	Extrapolation:	poly4

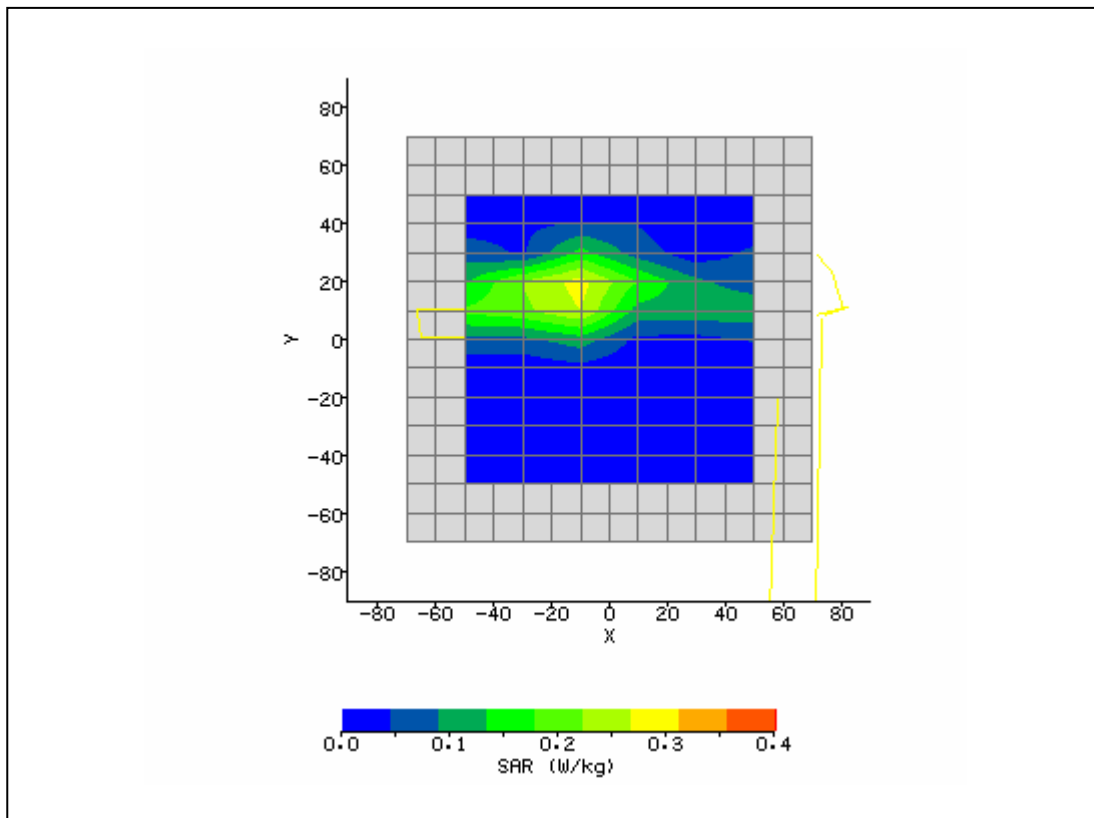


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/15/2006 2:48:51 PM	DUT Battery Model/No:	
Filename:	top-left_aux6_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCAG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	34.00 mm
DUT Position:	top left side	Max SAR Y-axis Location:	15.00 mm
Antenna Configuration:	Aux	Max E Field:	2.93 V/m
Test Frequency:	2437MHz	SAR 1g:	0.025 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.008 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.57 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/15/06
Input Power Level:	max	Extrapolation:	poly4

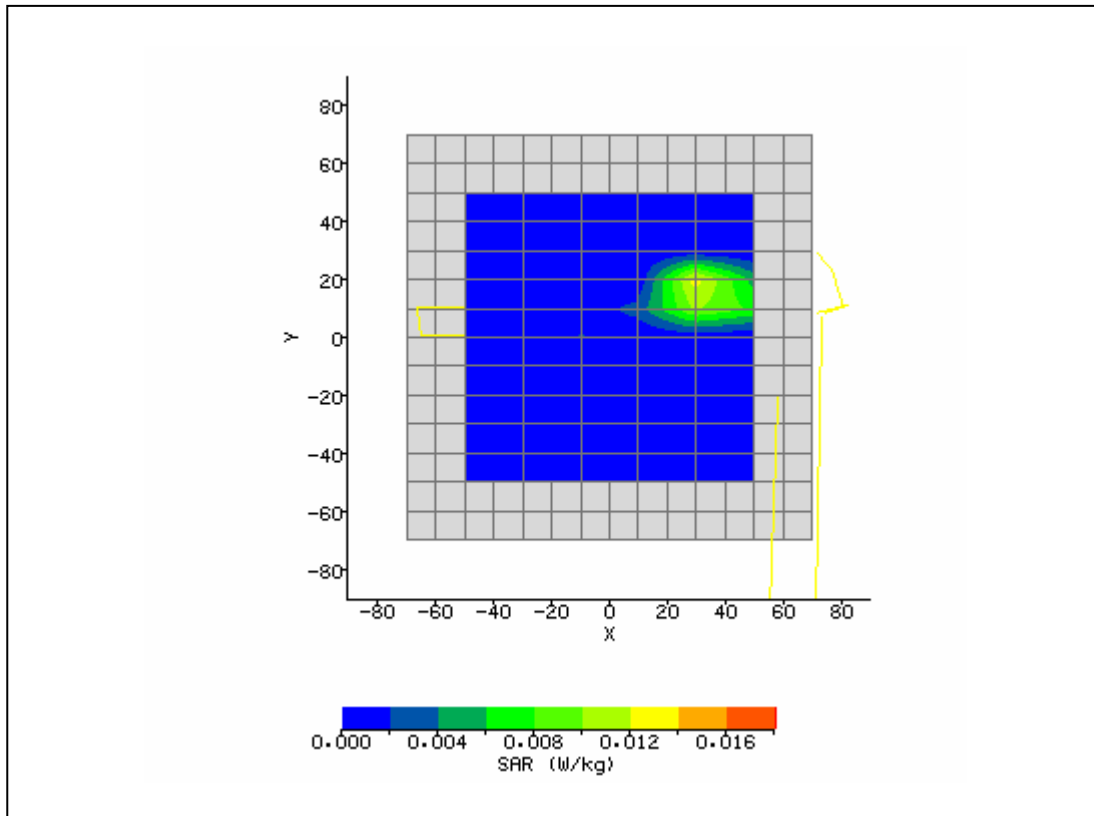


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/15/2006 6:24:29 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	BCM94311MCG	Relative Permittivity:	51.68
Relative Humidity:	30%	Conductivity:	1.901
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	Tablet left side touching	Max SAR Y-axis Location:	4.90 mm
Antenna Configuration:	Aux	Max E Field:	14.00 V/m
Test Frequency:	2437MHz & 2402 BT	SAR 1g:	0.495 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.204 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.024 W/kg
Type of Modulation:		SAR End:	0.024 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.39 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/11/06
Input Power Level:	max	Extrapolation:	poly4

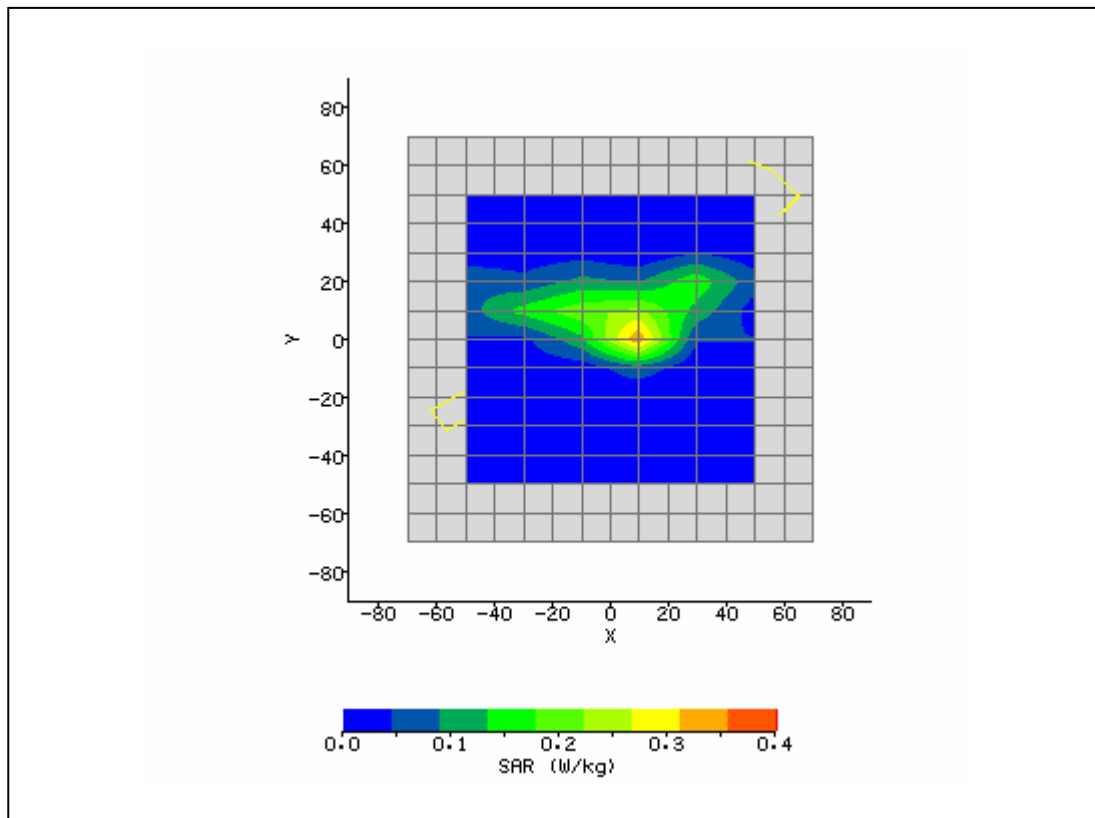


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Broadcom	Relative Permittivity:	48.06
Relative Humidity:	30%	Conductivity:	5.218
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	13.20 mm
DUT Position:	top	Max SAR Y-axis Location:	-8.40 mm
Antenna Configuration:	main	Max E Field:	11.31 V/m
Test Frequency:	5260MHz	SAR 1g:	0.628 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.371 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.182 W/kg
Type of Modulation:		SAR End:	0.174 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.76 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

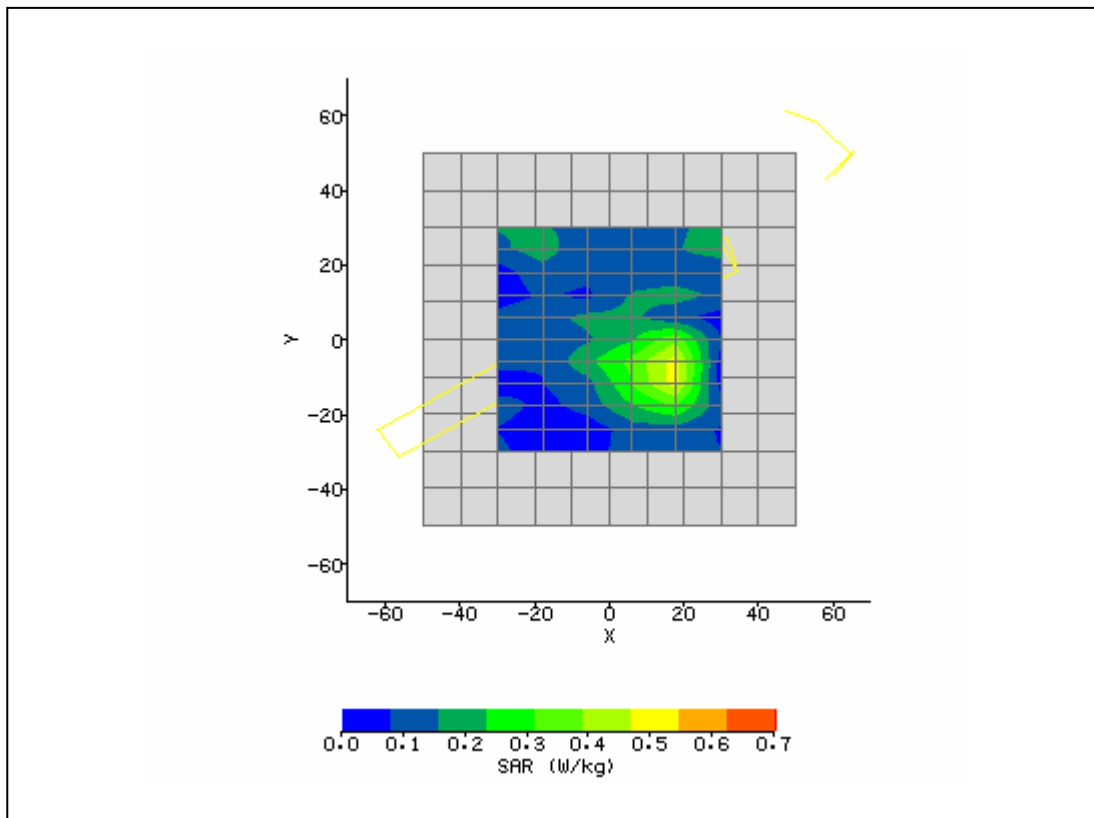


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Broadcom	Relative Permittivity:	48.06
Relative Humidity:	30%	Conductivity:	5.218
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	7.20 mm
DUT Position:	right	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	main	Max E Field:	6.99 V/m
Test Frequency:	5260MHz	SAR 1g:	0.284 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.200 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.160 W/kg
Type of Modulation:		SAR End:	0.159 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.63 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

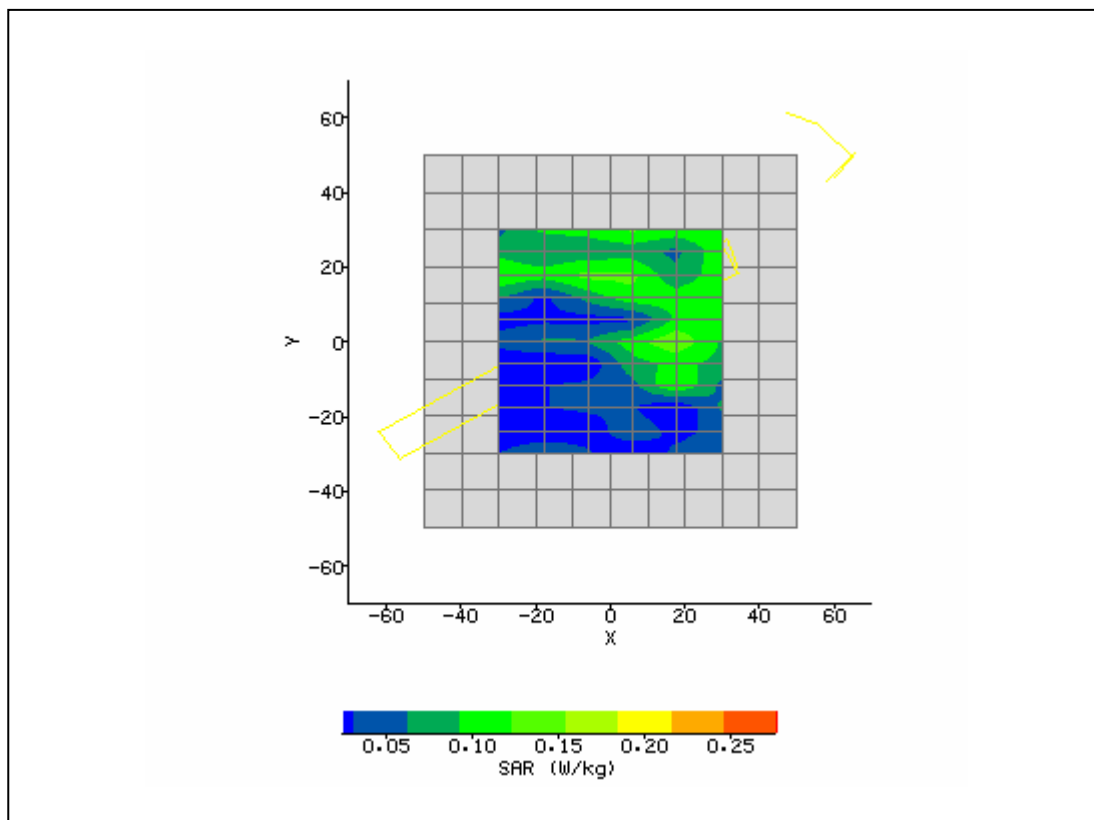


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Broadcom	Relative Permittivity:	48.06
Relative Humidity:	30%	Conductivity:	5.218
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	50.00 mm
DUT Position:	lap	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	main	Max E Field:	9.00 V/m
Test Frequency:	5260MHz	SAR 1g:	0.512 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.518 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.302 W/kg
Type of Modulation:		SAR End:	0.301 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.33 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

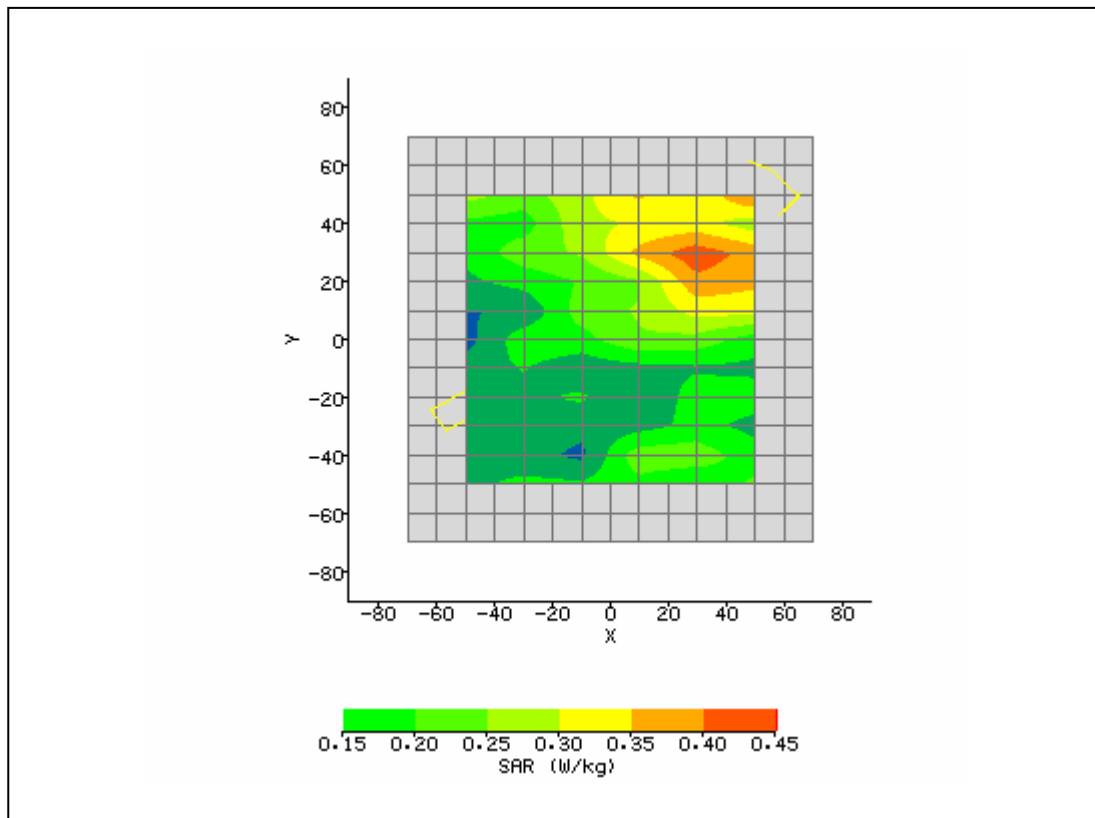


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Broadcom	Relative Permittivity:	48.06
Relative Humidity:	30%	Conductivity:	5.218
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	18.00 mm
DUT Position:	lap	Max SAR Y-axis Location:	41.00 mm
Antenna Configuration:	Aux	Max E Field:	8.67 V/m
Test Frequency:	5260MHz	SAR 1g:	0.757 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.380 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.277 W/kg
Type of Modulation:		SAR End:	0.277 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.75 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

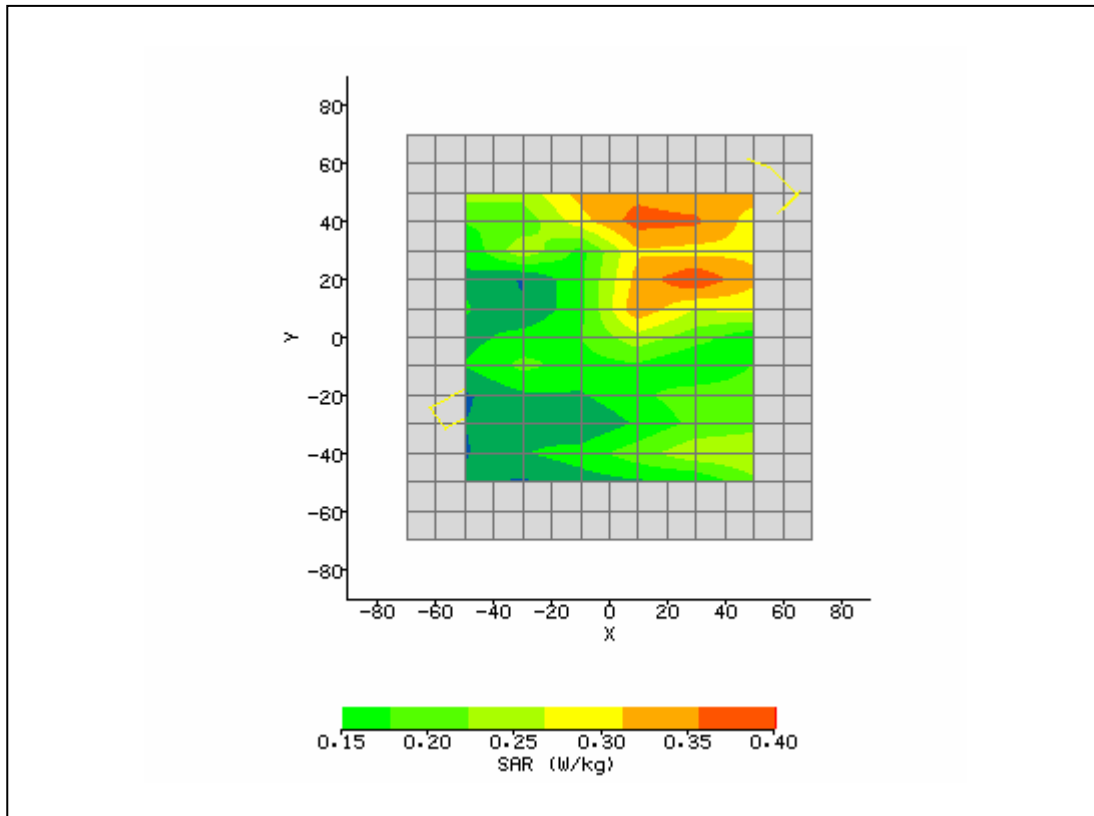


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Broadcom	Relative Permittivity:	48.06
Relative Humidity:	30%	Conductivity:	5.218
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	13.20 mm
DUT Position:	left	Max SAR Y-axis Location:	-10.80 mm
Antenna Configuration:	aux	Max E Field:	13.42 V/m
Test Frequency:	5260MHz	SAR 1g:	1.059 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.543 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.165 W/kg
Type of Modulation:		SAR End:	0.173 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

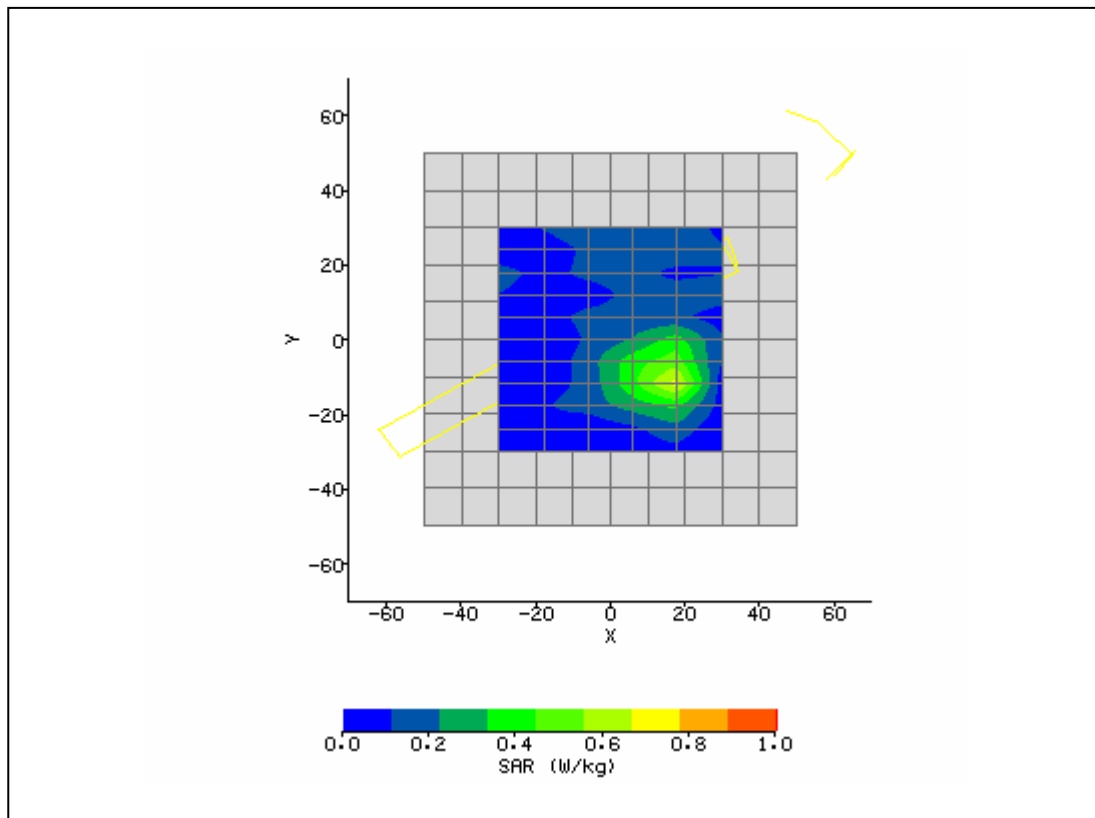


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Broadcom	Relative Permittivity:	48.06
Relative Humidity:	30%	Conductivity:	5.218
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	7.20 mm
DUT Position:	Top	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Aux	Max E Field:	6.93 V/m
Test Frequency:	5260MHz	SAR 1g:	0.168 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.120 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.093 W/kg
Type of Modulation:		SAR End:	0.093 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.54 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

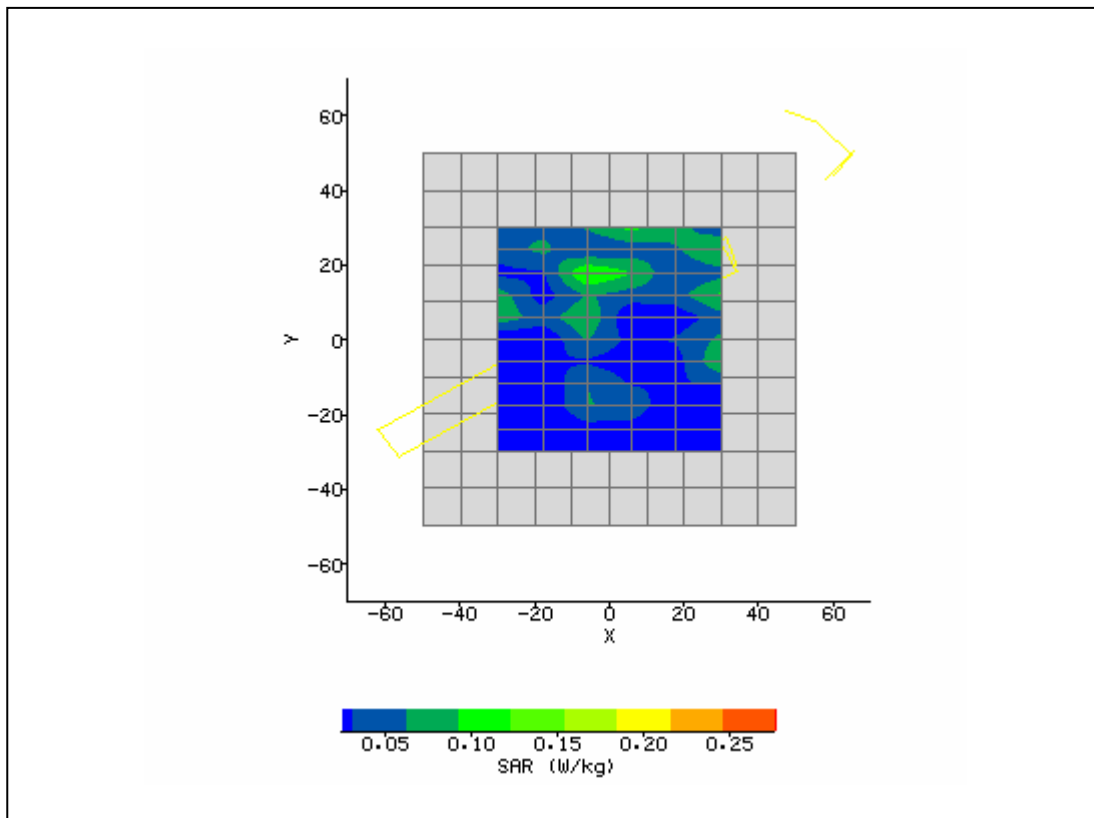


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	top_aux6_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	BCM94311MCAG	Relative Permittivity:	48.11
Relative Humidity:	30%	Conductivity:	5.235
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	left side	Max SAR Y-axis Location:	16.00 mm
Antenna Configuration:	Aux	Max E Field:	10.24 V/m
Test Frequency:	5180 MHz	SAR 1g:	0.525 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.231W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.101 W/kg
Type of Modulation:		SAR End:	0.101 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.91%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

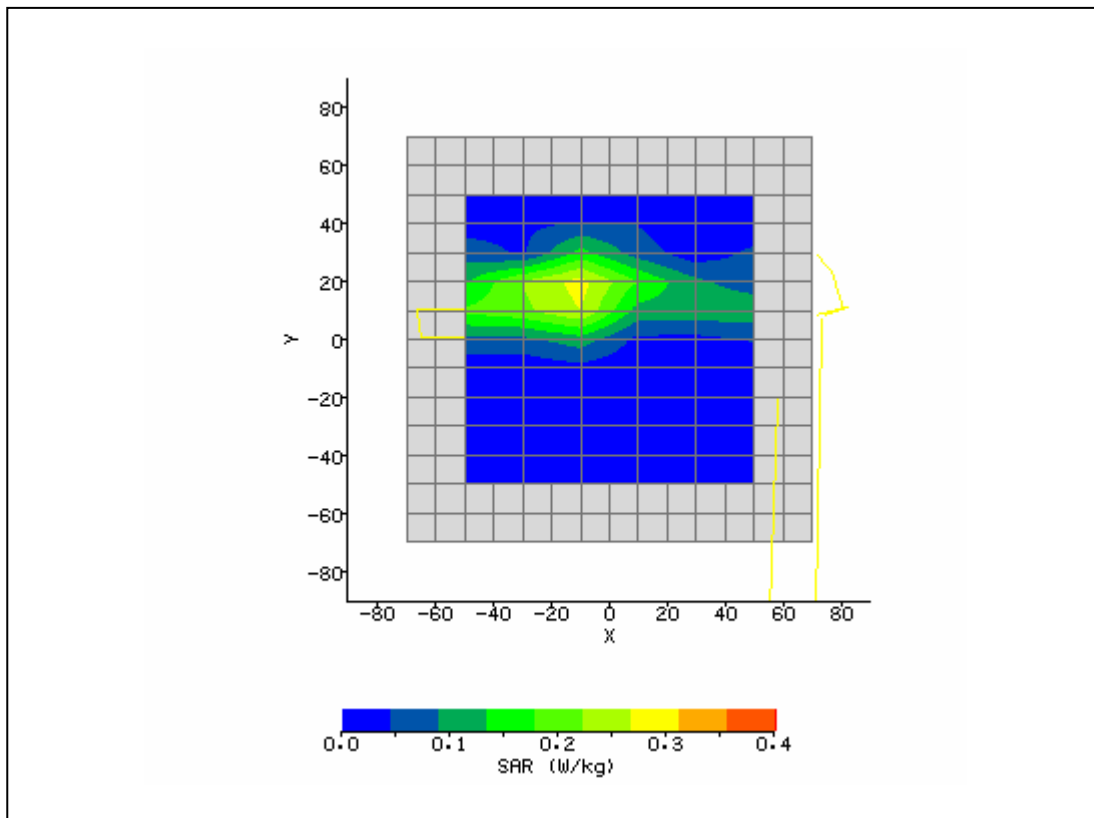


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Broadcom	Relative Permittivity:	47.89
Relative Humidity:	30%	Conductivity:	5.189
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-7.10 mm
DUT Position:	left side	Max SAR Y-axis Location:	-8.40 mm
Antenna Configuration:	Aux	Max E Field:	12.38 V/m
Test Frequency:	5320MHz	SAR 1g:	0.952 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.734 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.225 W/kg
Type of Modulation:		SAR End:	0.223 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.89 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

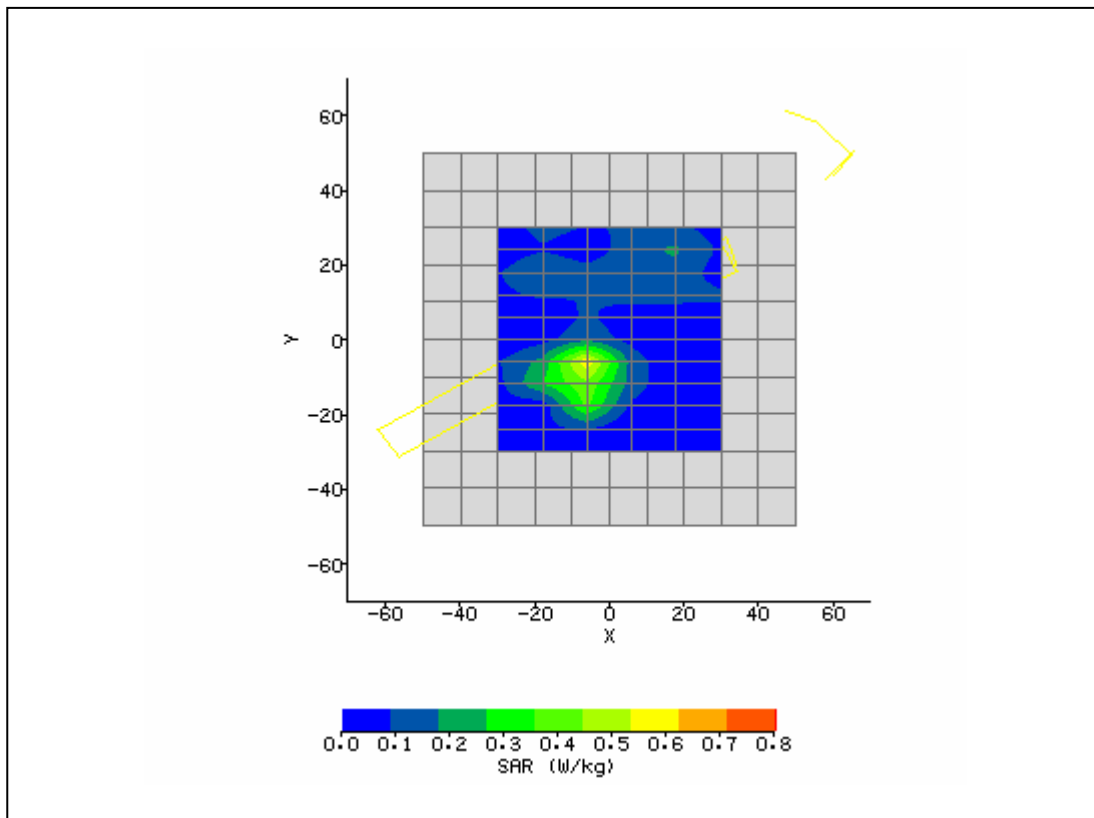


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	Broadcom	Relative Permittivity:	48.06
Relative Humidity:	30%	Conductivity:	5.218
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	13.20 mm
DUT Position:	left	Max SAR Y-axis Location:	-9.00 mm
Antenna Configuration:	Aux	Max E Field:	13.69 V/m
Test Frequency:	5260MHz	SAR 1g:	1.190 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.604 W/kg
Conversion Factors:	.494 / .494 / .494	SAR Start:	0.243 W/kg
Type of Modulation:		SAR End:	0.243 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.80 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

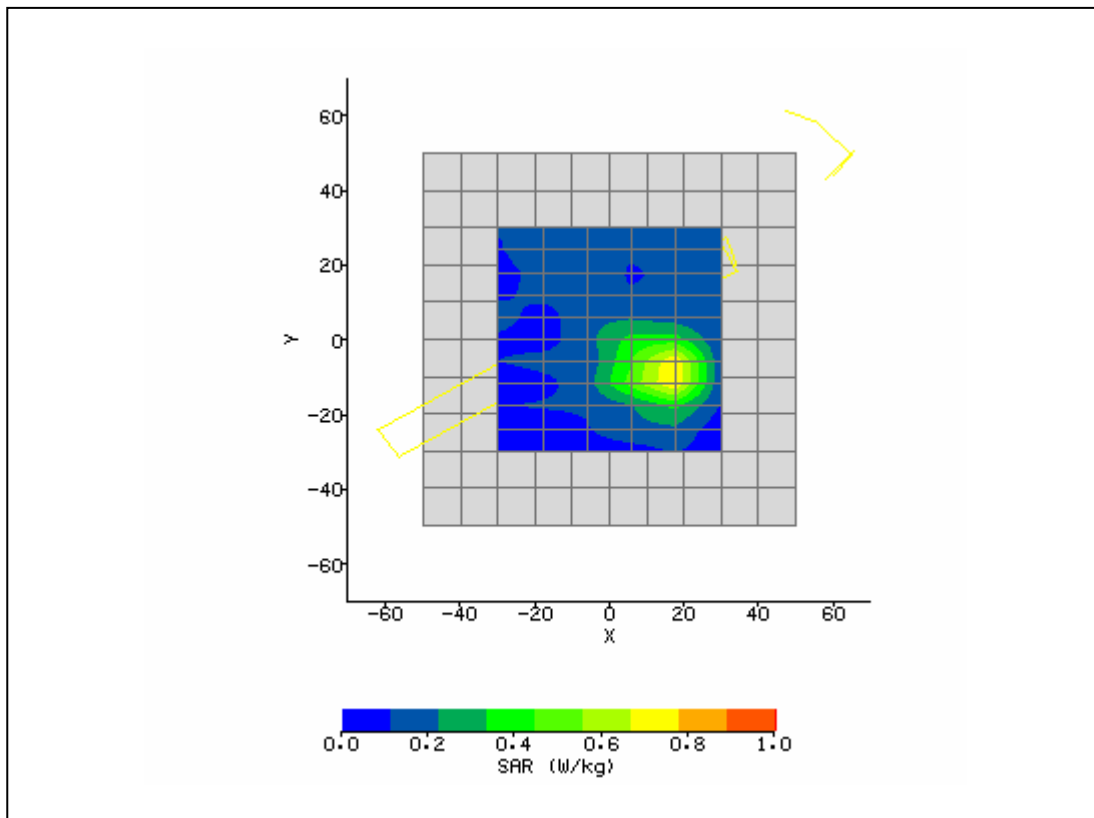


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Broadcom	Relative Permittivity:	46.89
Relative Humidity:	30%	Conductivity:	6.044
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	top	Max SAR Y-axis Location:	-8.40 mm
Antenna Configuration:	main	Max E Field:	11.82 V/m
Test Frequency:	5785MHz	SAR 1g:	0.762 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.467 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.113 W/kg
Type of Modulation:		SAR End:	0.113 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

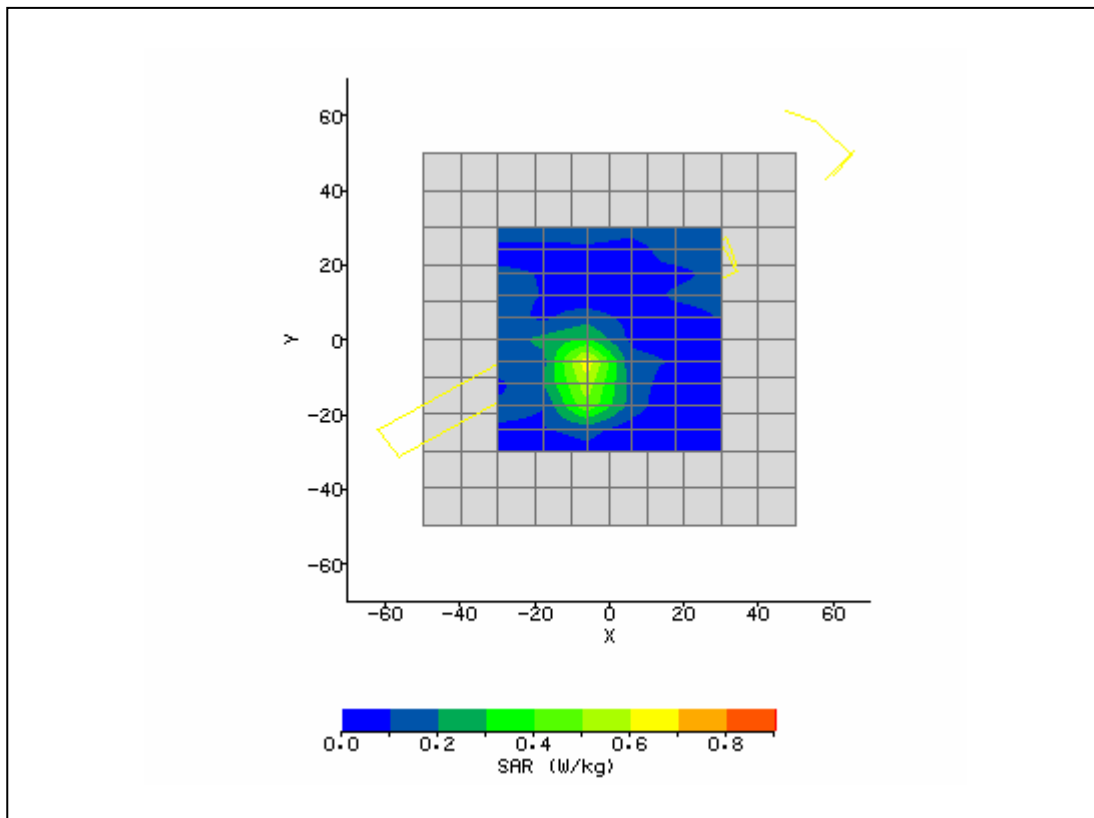


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/3/2007 9:06:25 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Broadcom	Relative Permittivity:	46.89
Relative Humidity:	30%	Conductivity:	6.044
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-9.60 mm
DUT Position:	right	Max SAR Y-axis Location:	9.00 mm
Antenna Configuration:	main	Max E Field:	9.52 V/m
Test Frequency:	5785 MHz	SAR 1g:	0.407 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.526 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.243 W/kg
Type of Modulation:		SAR End:	0.243 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.86 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

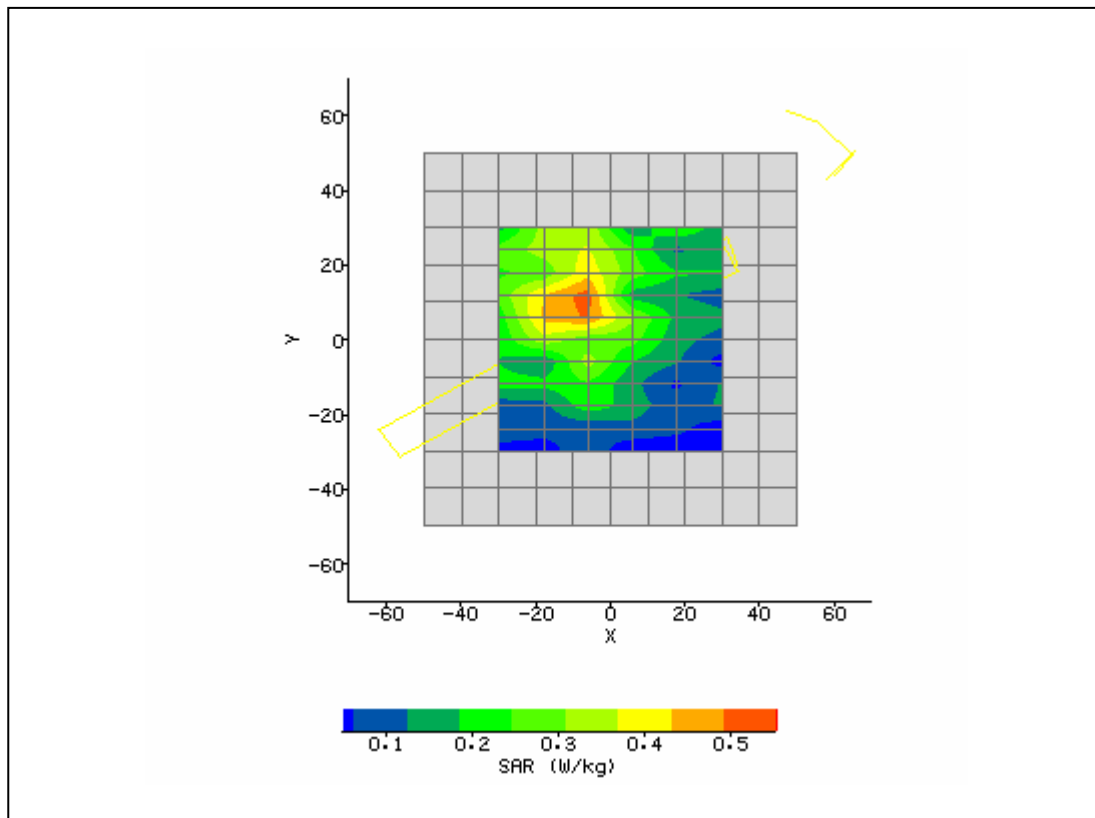


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Broadcom	Relative Permittivity:	46.89
Relative Humidity:	30%	Conductivity:	6.044
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-7.20 mm
DUT Position:	lap	Max SAR Y-axis Location:	-8.40 mm
Antenna Configuration:	main	Max E Field:	11.38 V/m
Test Frequency:	5785MHz	SAR 1g:	0.660 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.424 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.114 W/kg
Type of Modulation:		SAR End:	0.114 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.97 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

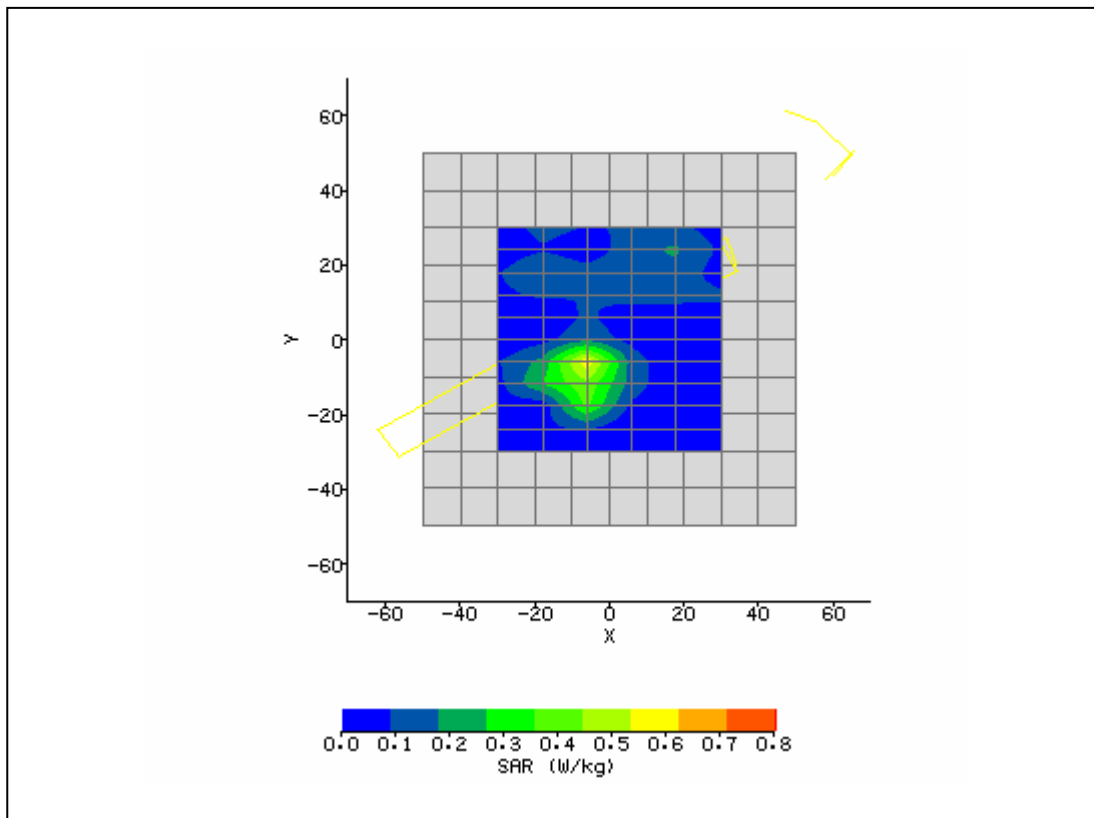


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Broadcom	Relative Permittivity:	46.89
Relative Humidity:	30%	Conductivity:	6.044
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-8.40 mm
DUT Position:	lap	Max SAR Y-axis Location:	-9.00 mm
Antenna Configuration:	aux	Max E Field:	11.17 V/m
Test Frequency:	5785MHz	SAR 1g:	0.675 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.433 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.163 W/kg
Type of Modulation:		SAR End:	0.166 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.85 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

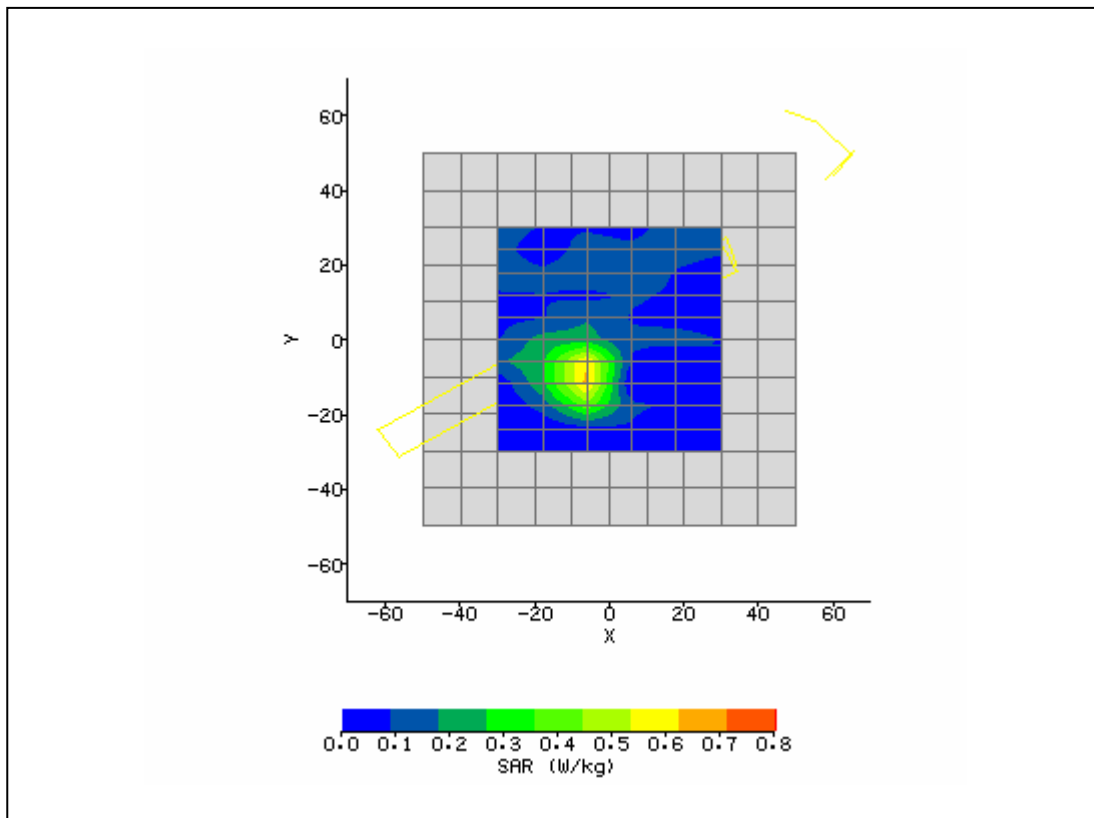


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Broadcom	Relative Permittivity:	46.89
Relative Humidity:	30%	Conductivity:	6.044
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-7.20 mm
DUT Position:	left	Max SAR Y-axis Location:	-6.60 mm
Antenna Configuration:	aux	Max E Field:	11.24 V/m
Test Frequency:	5785MHz	SAR 1g:	0.992 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.652 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.154 W/kg
Type of Modulation:		SAR End:	0.154 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

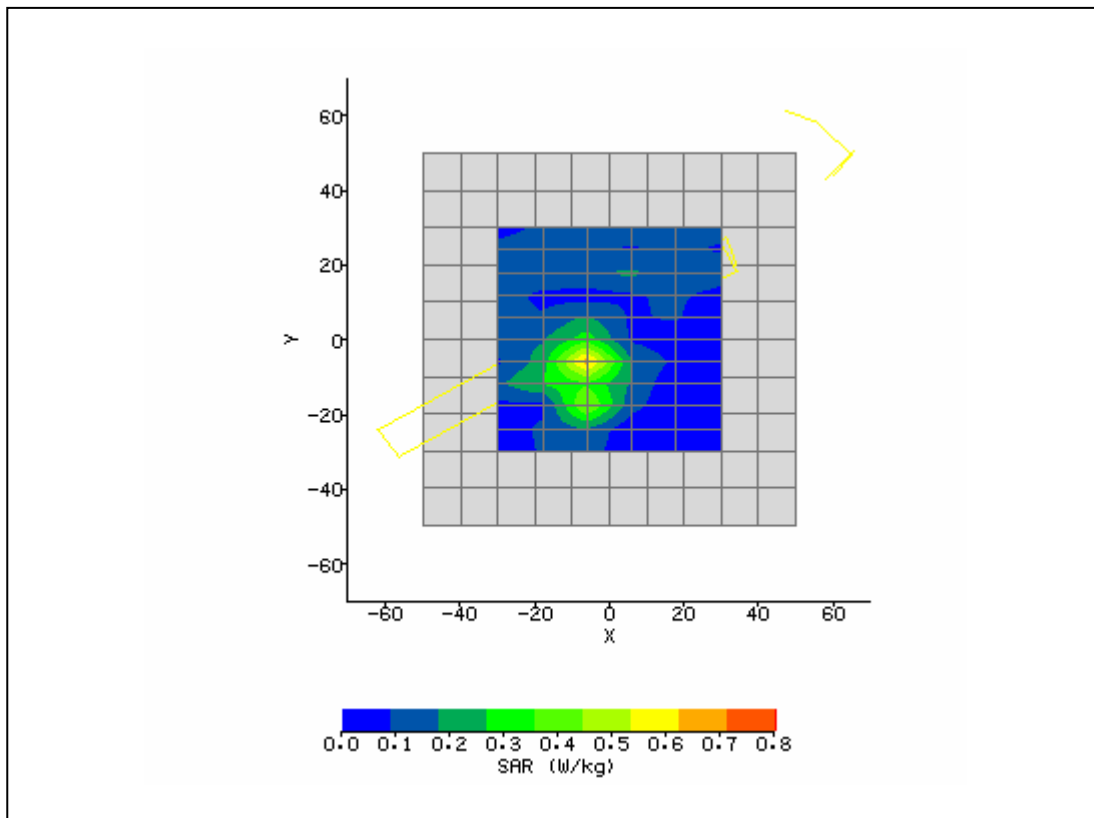


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/3/2007 9:06:25 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Broadcom	Relative Permittivity:	46.89
Relative Humidity:	30%	Conductivity:	6.044
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.80 mm
DUT Position:	top	Max SAR Y-axis Location:	13.20 mm
Antenna Configuration:	Aux	Max E Field:	7.76 V/m
Test Frequency:	5785 MHz	SAR 1g:	0.312 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.792 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.197 W/kg
Type of Modulation:		SAR End:	0.196 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.51 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

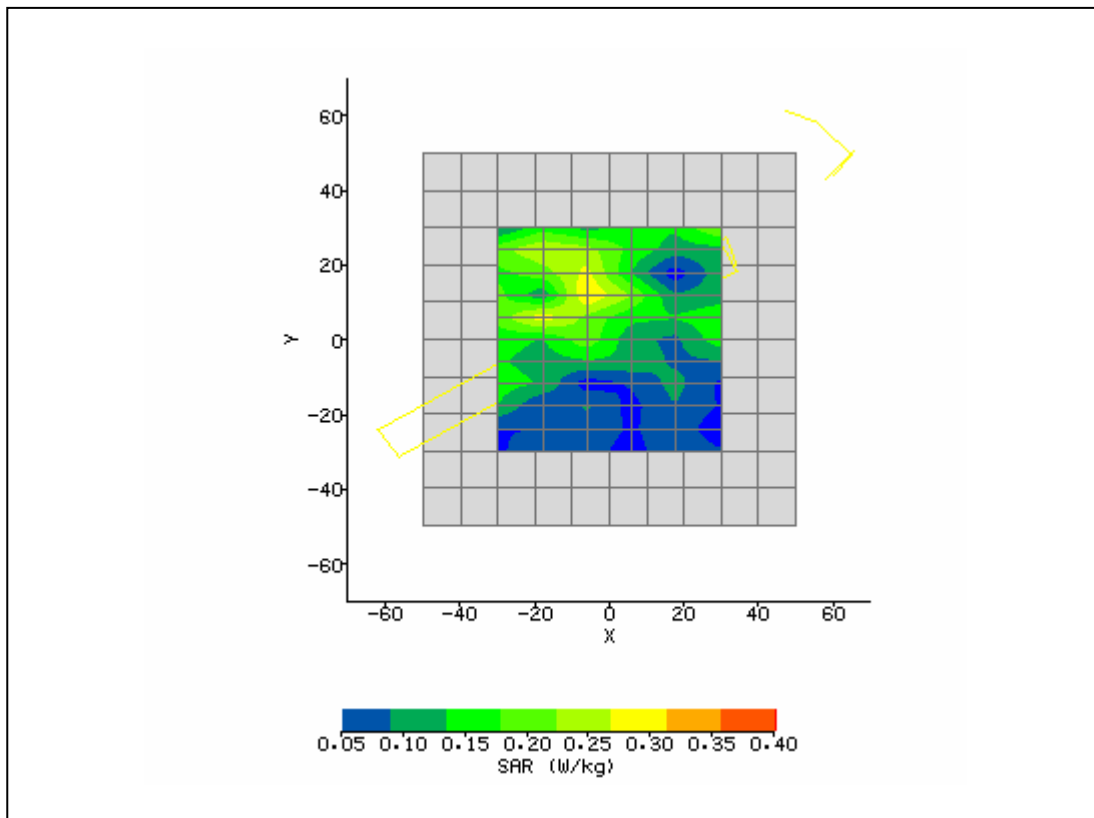


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Broadcom	Relative Permittivity:	47.71
Relative Humidity:	30%	Conductivity:	5.876
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-5.90 mm
DUT Position:	top	Max SAR Y-axis Location:	-8.30 mm
Antenna Configuration:	main	Max E Field:	12.14 V/m
Test Frequency:	5745MHz	SAR 1g:	0.991 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.440 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.146 W/kg
Type of Modulation:		SAR End:	0.146 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

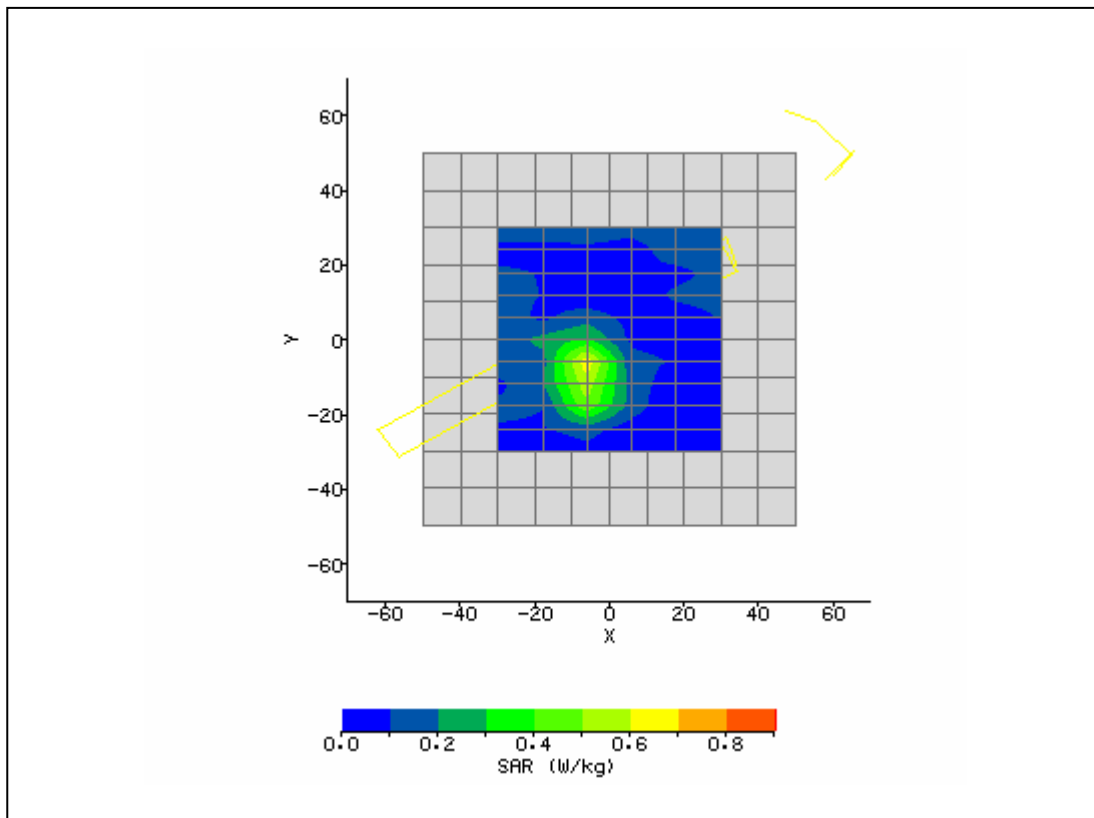


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Broadcom	Relative Permittivity:	46.56
Relative Humidity:	30%	Conductivity:	6.106
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	13.30 mm
DUT Position:	left	Max SAR Y-axis Location:	-9.10 mm
Antenna Configuration:	Aux	Max E Field:	13.69 V/m
Test Frequency:	5825MHz	SAR 1g:	0.982 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.541 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.202 W/kg
Type of Modulation:		SAR End:	0.201 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.50 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

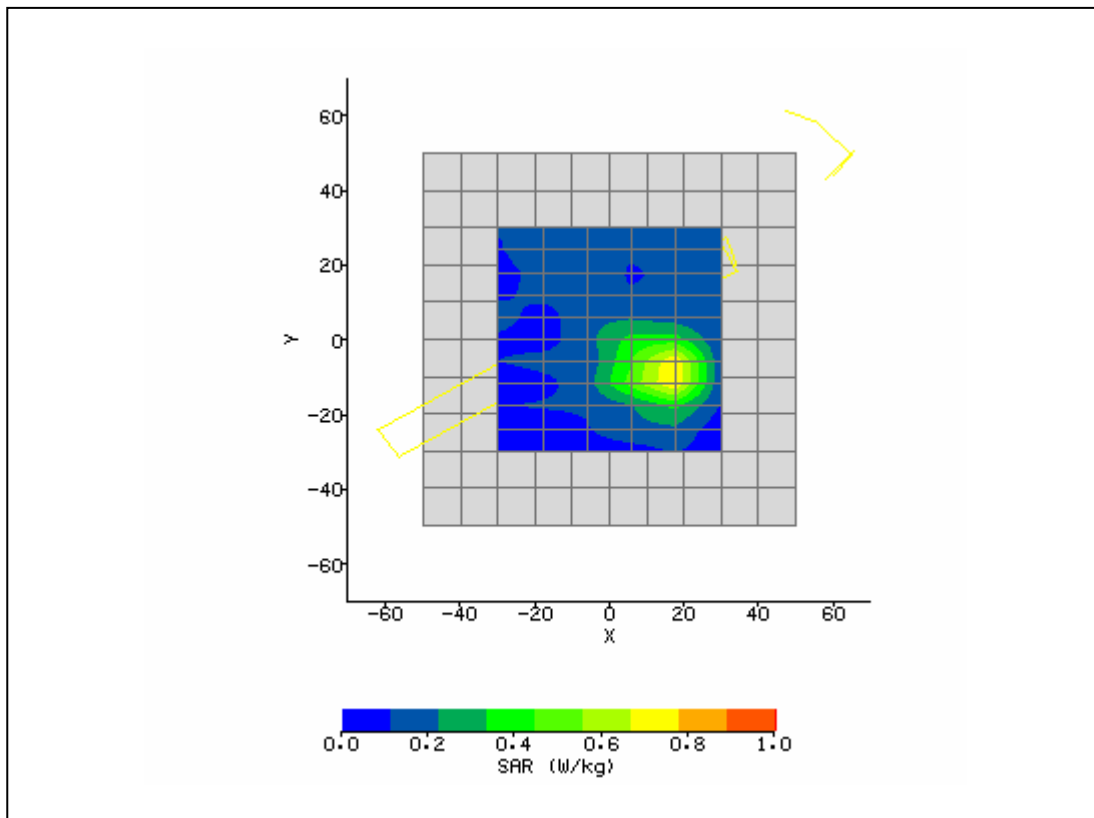


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/3/2007 9:06:25 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Broadcom	Relative Permittivity:	46.89
Relative Humidity:	30%	Conductivity:	6.044
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	left	Max SAR Y-axis Location:	5.40 mm
Antenna Configuration:	Aux	Max E Field:	12.74 V/m
Test Frequency:	5785 & 2402 BTMHz	SAR 1g:	1.152 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	0.733 W/kg
Conversion Factors:	.583 / .583 / .583	SAR Start:	0.450 W/kg
Type of Modulation:		SAR End:	0.429 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.72 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/2/07
Input Power Level:	max	Extrapolation:	poly4

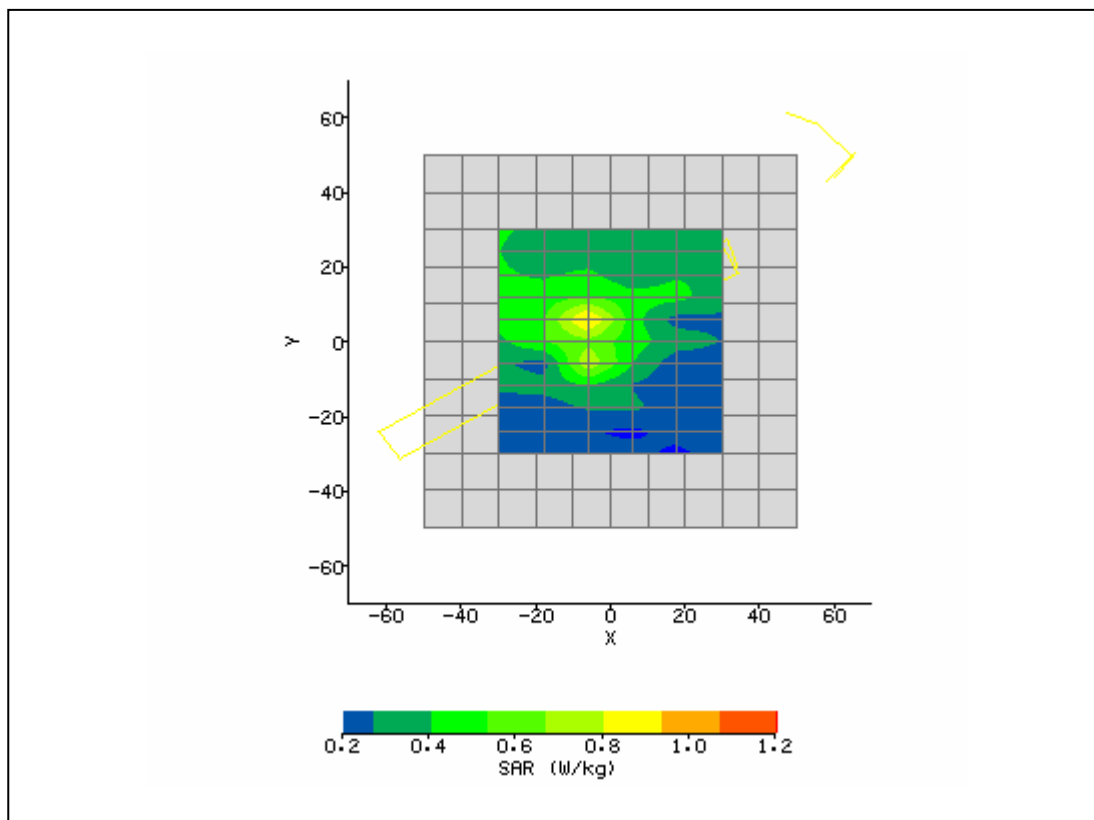

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/14/2006 12:06:49 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	System verification	Relative Permittivity:	39.86
Relative Humidity:	30%	Conductivity:	1.86
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	verification	Max SAR Y-axis Location:	8.00 mm
Antenna Configuration:	dipole	Max E Field:	142.82 V/m
Test Frequency:	2450MHz	SAR 1g:	51.977 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	22.968 W/kg
Conversion Factors:	.613 / .613 / .613	SAR Start:	4.031 W/kg
Type of Modulation:		SAR End:	4.042 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/11/06
Input Power Level:	max	Extrapolation:	poly4

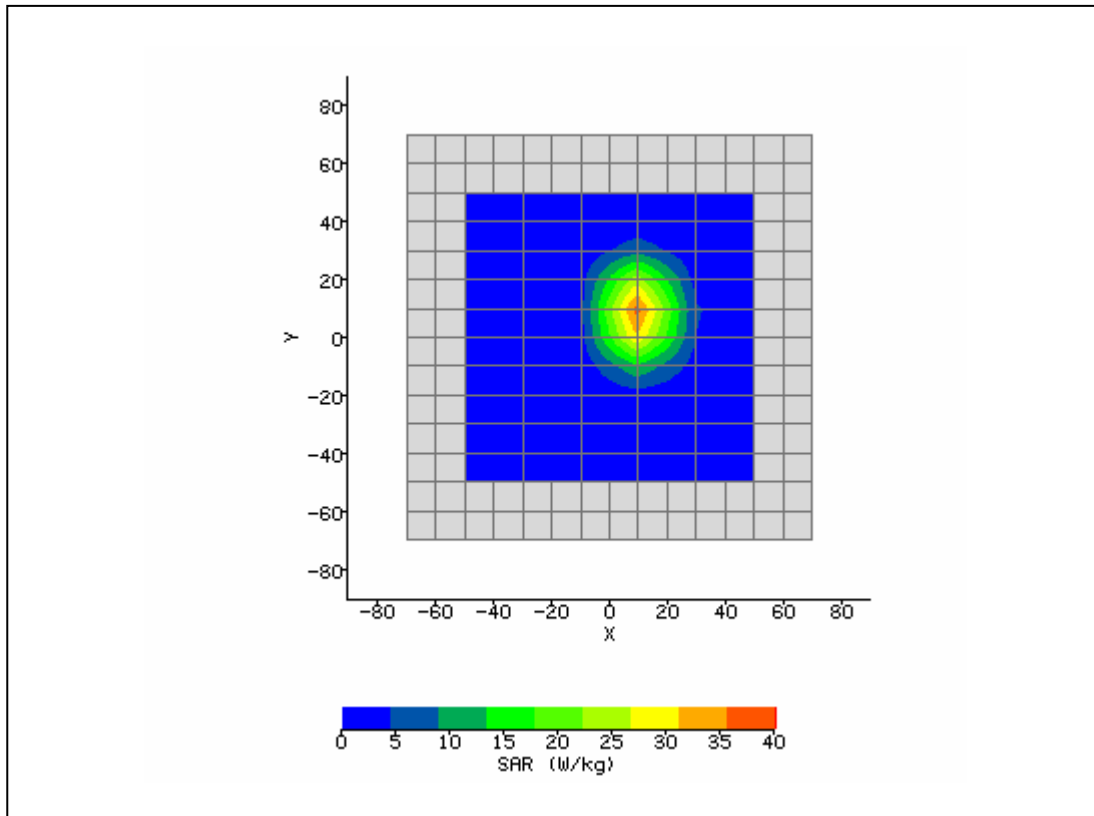

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	1_17_07_100mw_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	System	Relative Permittivity:	39.11
Relative Humidity:	30%	Conductivity:	4.492
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-2.40 mm
DUT Position:	verification	Max SAR Y-axis Location:	-0.60 mm
Antenna Configuration:	waveguide	Max E Field:	40.12 V/m
Test Frequency:	5200MHz	SAR 1g:	9.362 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	4.401 W/kg
Conversion Factors:	.390 / .390 / .390	SAR Start:	1.429 W/kg
Type of Modulation:		SAR End:	1.432 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.22 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/17/07
Input Power Level:	250 mW	Extrapolation:	poly4

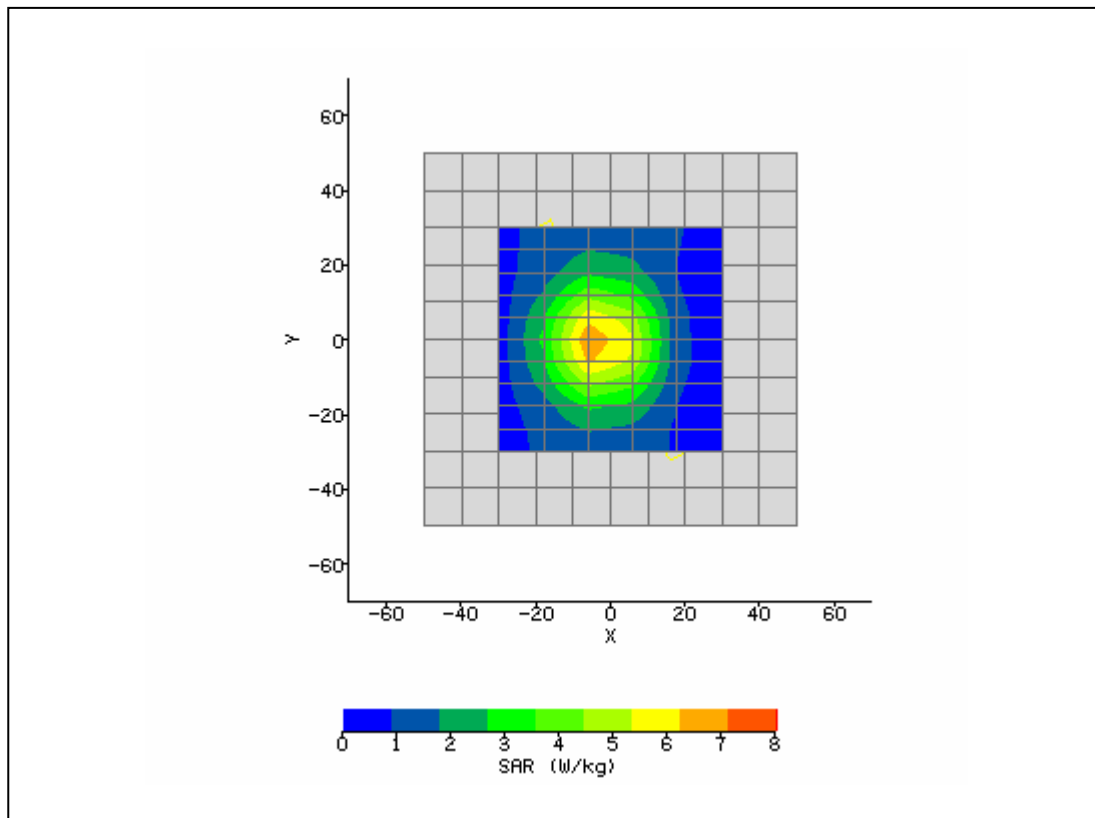

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	1/2/2007 9:39:06 AM	DUT Battery Model/No:	
Filename:	1_17_07_250mw_3d.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	System	Relative Permittivity:	36.29
Relative Humidity:	30%	Conductivity:	4.783
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-9.60 mm
DUT Position:	verification	Max SAR Y-axis Location:	-11.40 mm
Antenna Configuration:	waveguide	Max E Field:	40.87 V/m
Test Frequency:	5800MHz	SAR 1g:	9.875 W/kg
Air Factors:	2685 / 2277 / 2238	SAR 10g:	5.237 W/kg
Conversion Factors:	.428 / .428 / .428	SAR Start:	1.220 W/kg
Type of Modulation:		SAR End:	1.238 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.47 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	1/17/07
Input Power Level:	250 mW	Extrapolation:	poly4

