

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : E106R-014
AGR No : A103A-221
Applicant : Menix Co., Ltd.
Address : 539, Yongsan-dong, Yuseong-gu, Daejeon, 305-500, Korea
Manufacturer : Menix Co., Ltd.
Address : 539, Yongsan-dong, Yuseong-gu, Daejeon, 305-500, Korea
Type of Equipment : WIRELESS REMOTE CONTROLLER
FCC ID. : QDYARC-300F
Model Name : ARC-300F
Serial number : None
Total page of Report : 14 pages (including this page)
Date of Incoming : May 13, 2010
Date of issue : June 09, 2010

SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.231**.

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by:


Young-Min, Choi / Asst. Chief Engineer
EMC/RF Center
ONETECH Corp.

Reviewed by:


Y. K. Kwon / Managing Director
EMC/RF Center
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	4
2. GENERAL INFORMATION	5
2.1 PRODUCT DESCRIPTION.....	5
2.2 MODEL DIFFERENCES.....	5
2.3 RELATED SUBMITTAL(S) / GRANT(S)	5
2.4 PURPOSE OF THE TEST	5
2.5 TEST METHODOLOGY	5
2.6 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION	6
3.1 JUSTIFICATION	6
3.2 PERIPHERAL EQUIPMENT.....	6
3.3 MODE OF OPERATION DURING THE TEST.....	6
3.4. EUT MODIFICATIONS	6
3.5 CONFIGURATION OF TEST SYSTEM	6
3.6 ANTENNA REQUIREMENT	7
4. PRELIMINARY TEST	7
4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	7
4.2 GENERAL RADIATED EMISSIONS TESTS.....	7
5. FINAL RESULT OF MEASURMENT	8
5.1 FIELD STRENGTH OF THE CARRIER TEST	8
5.2 TRANSMITTER TRANSMISSION DURATION.....	9
5.3 SPURIOUS EMISSION TEST	10
5.4 BANDWIDTH OF THE OPERATING FREQUENCY	11
6. FIELD STRENGTH CALCULATION	13
7. LIST OF TEST EQUIPMENT	14

Revision History

Issue Report No.	Issued Date	Revisions	Effect Section
E106R-014	June 09, 2010	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : Menix Co., Ltd.
Address : 539, Yongsan-dong, Yuseong-gu, Daejeon, 305-500, Korea
Contact Person : Ms. Jang-Mi, Lee / Manager
Telephone No. : +82-42-930-9478
FCC ID : QDYARC-300F
Model Name : ARC-300F
Brand Name : SECURITY SYSTEM
Serial Number : N/A
Date : June 09, 2010

Equipment Class	DSC – Low Power Communications Transmitter
Kind of Equipment	WIRELESS REMOTE CONTROLLER
This Report Concerns	Original Grant
Measurement Procedures	ANSI C63.4: 2003
Type of Equipment Tested	Pre-Production
Kind of Equipment Authorization Requested	Certification
Equipment Will be operated under FCC Rules Part(s)	FCC PART 15 SUBPART C § 15.231
Modification on the Equipment to Achieve Compliance	No
Final Test was conducted on	3 m open area test site

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. GENERAL INFORMATION

2.1 Product Description

The Menix Co., Ltd., Model: ARC-300F (referred to as the EUT in this report) is a WIRELESS REMOTE CONTROLLER. Product specification information described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
RF FREQUENCY	426.275 MHz
MODULATION	FSK
LIST OF EACH OSC. OR CRY. FREQ.(FREQ. \geq 1 MHz)	13.321 MHz
ANTENNA TYPE	PCB Pattern Antenna
TRANSMISSION TIME	Not longer than 5 s
RATED SUPPLY VOLTAGE	DC 3 V from a battery
NUMBER OF LAYERS	2 Layers

2.2 Model Differences

- None

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 15.231.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003 at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862, Korea. Description details of test facilities were submitted to the Commission on August 21, 2008. (Registration Number: 340658)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Menix Co., Ltd.	ARC-300F V1.1	N/A

3.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested: None

3.3 Mode of operation during the test

To get a maximum radiated emission from the EUT, the button on the EUT was continuously pressed to transmit the signal. To activate continuous transmission, place a small plastic block between rubber band and the push button on the EUT. To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, YZ, and ZX axis and the worst case is “XY” axis.

3.4. EUT MODIFICATIONS

- None

3.5 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC battery.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 20 kHz/division frequency span, 10 kHz resolution bandwidth and 5 dB/division logarithmic display from the spectrum analyzer.

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.1)

HEAD OFFICE : #505 SK Apt. Factory, 223-28 Sangdaewon1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do 462-121 Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea.(TEL: 82-31-765-8289 FAX: 82-31-766-2904)

3.6 Antenna Requirement

According to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a PCB pattern antenna on the main board in the EUT, so no consideration of replacement by the user.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied from a DC battery.	

4.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX Mode	X

5. FINAL RESULT OF MEASURMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

5.1 Field Strength of the Carrier Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>43 % R.H.</u>	Temperature: <u>21 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.231</u>	
Type of Test	: <u>INTENTIONAL RADIATOR</u>	
Result	: <u>PASSED BY -3.15 dB</u>	

EUT	: WIRELESS REMOTE CONTROLLER		Date: May 19, 2010
Operating Condition	: TX mode		
Distance	: 3 m		

Radiated Emissions			Ant	Correction Factors		Total(dB μ V/m)	FCC Limit (dB μ V/m)	
Carrier Freq. (MHz)	Amp. (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Peak	Limit	Margin (dB)
426.275	55.30	Average	H	17.96	4.16	77.42	80.57	-3.15
	36.90	Average	V			59.02	80.57	-21.55

* Remark: "H": Horizontal Polarization, "V": Vertical Polarization



Tested by: Young-Cheol, Park / Engineer

5.2 Transmitter Transmission Duration

Humidity Level : 41 % R.H. Temperature: 20 °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231 (a)

Type of Test : INTENTIONAL RADIATOR

EUT : WIRELESS REMOTE CONTROLLER

Date: May 17, 2010

Operating Condition : Switch on the wireless remote controller was continuously pushed

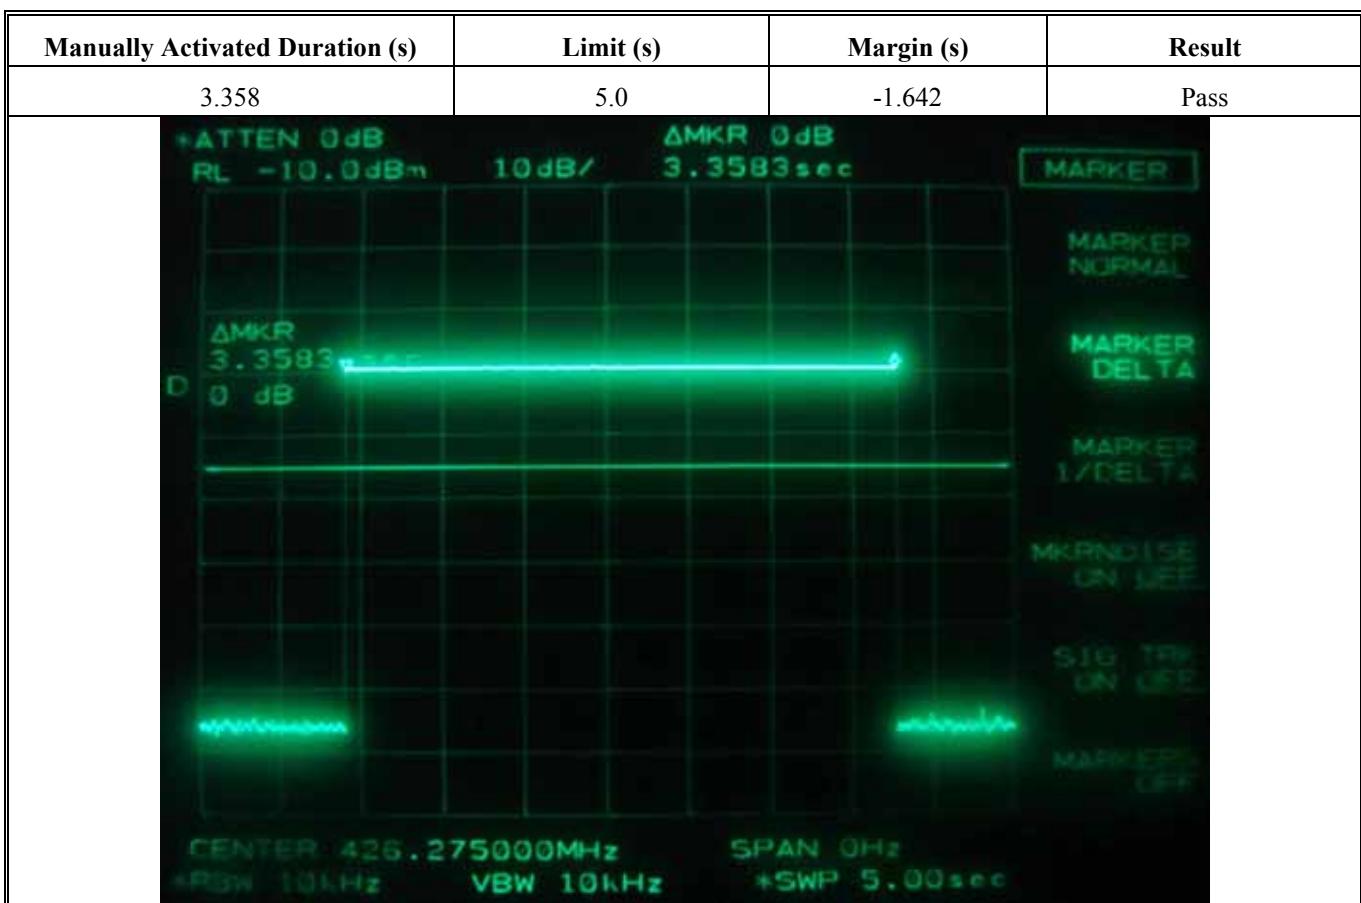

Tested by: Young-Cheol, Park / Engineer

5.3 Spurious Emission Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level	: <u>43 % R.H.</u>	Temperature: <u>21 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)</u>	
Type of Test	: <u>INTENTIONAL RADIATOR</u>	
Result	: <u>PASSED BY -1.38 dB at 1 278.82 MHz</u>	

EUT : WIRELESS REMOTE CONTROLLER Date: May 19, 2010
 Distance : 3 m

Radiated Emissions			Ant	Correction Factors		Total(dB μ V/m)	FCC Limit(dB μ V/m)	
Freq. (MHz)	Amp. (dB μ V)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Peak	Limit	Margin(dB)
852.55	22.20	Average	H	22.77	6.81	51.78	60.57	-8.79
1 278.82	31.40	Average	H	25.36	2.43	59.19	60.57	-1.38
1 705.10	25.20	Average	V	25.74	2.50	53.44	60.57	-7.13
2 131.37	20.30	Average	V	26.36	2.56	49.22	60.57	-11.35
2 557.65	15.00	Average	H	27.51	3.17	45.68	60.57	-14.89

Other spurious frequencies were not found up to 4 300 MHz.

*Remark: "H": Horizontal Polarization, "V": Vertical Polarization



Tested by: Young-Cheol, Park / Engineer

5.4 Bandwidth of the operating frequency

Humidity Level : 41 % R.H. Temperature: 20 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231
Type of Test : INTENTIONAL RADIATOR
Result : PASSED

EUT : WIRELESS REMOTE CONTROLLER Date: May 17, 2010
Operating Condition : TX mode
Minimum Resolution
Bandwidth : 1 kHz


Carrier Freq. (MHz)	Bandwidth of the emission. (kHz)	Limit (kHz)	Remark
426.275	36.00	1 065.70	<u>The point 20 dB down from the modulated carrier</u>

Remark: Please refer to Photo Data for bandwidth for test data.



Tested by: Young-Cheol, Park / Engineer

Photo Data for bandwidth

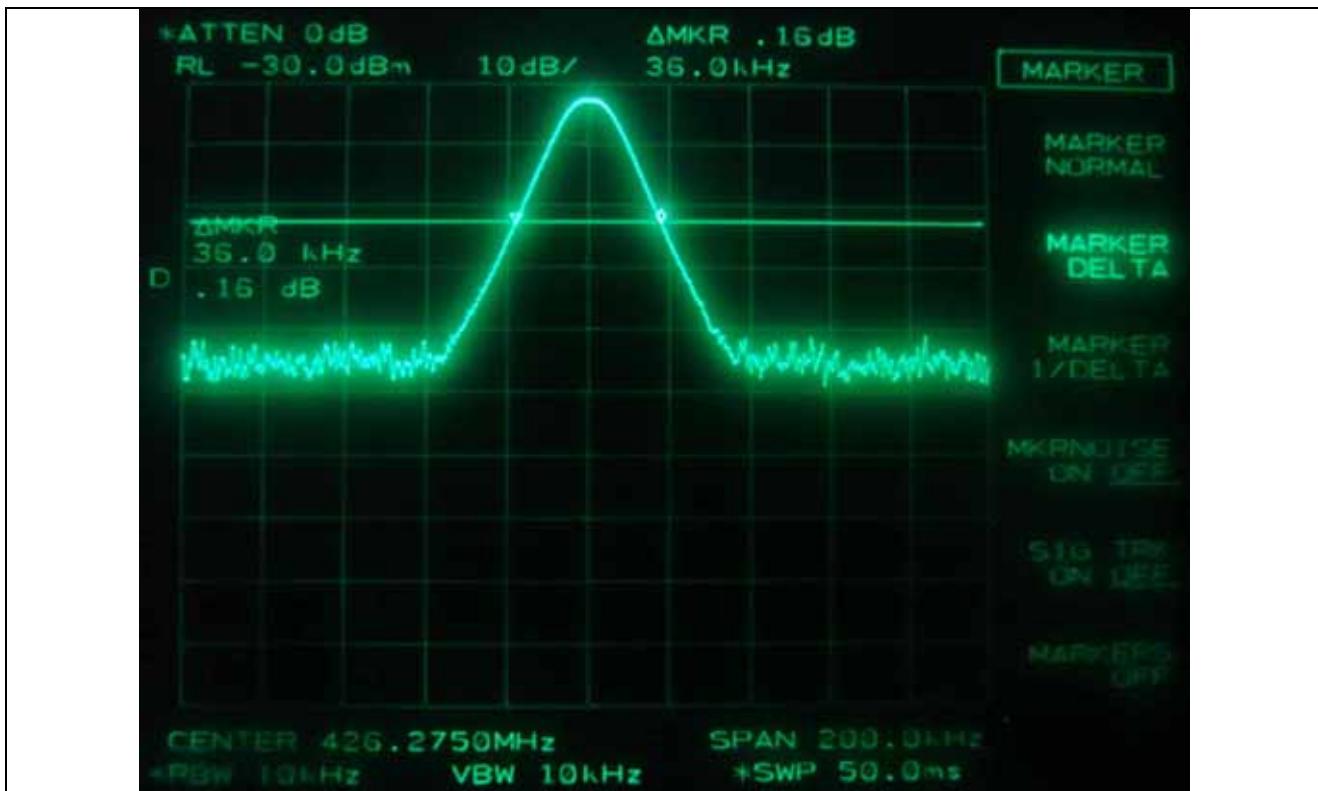

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.1)

HEAD OFFICE : #505 SK Apt. Factory, 223-28 Sangdaewon1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do 462-121 Korea
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

EMC Testing Dept : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea.(TEL: 82-31-765-8289 FAX: 82-31-766-2904)

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dB μ V)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/m)

= Corrected Reading (dB μ V/m)

- Specification Limit (dB μ V/m)

= dB Relative to Spec (\pm dB)

7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVD	838453/018	NOV/09	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/10	12MONTH	
3.	Spectrum analyzer	HP	8566B	2421A00473	NOV/09	12MONTH	■
4.	Loop Antenna	R/S	HFH 2-Z2	889 285 / 26	OCT/08	24MONTH	
5.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 202	MAY/10	24MONTH	
6.	Biconical antenna	EMCO	3110	9003-1121	FEB/10	24MONTH	
		Schwarzbeck	VHA9103	91031852	MAR/10		■
7.	Log Periodic antenna	Schwarzbeck	9108-A(494)	62281001	MAR/10	24MONTH	■
8.	LISN	EMCO	3825/2	9109-1867	JUN/09	12MONTH	
				9109-1869	JUN/09		
		Schwarzbeck	NSLK 8128	8128-216	JUN/09		
9.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
10.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
11.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■
12.	RF Amplifier	HP	8447D	2727A04987	JUN/09	12MONTH	■
13.	Horn Antenna	Schwarzbeck	BBHA9120D	BBHA9120D294	JUL/09	24MONTH	■
14.	Spectrum Analyzer	HP	8564E	3650A00756	JUN/09	12MONTH	■
15.	Isolation Transformer	Digitek Power	DPT	DPF-22027	N/A	N/A	■
16.	Isolation Transformer	Digitek Power	DPT	DPF-22028	N/A	N/A	■
17.	Frequency Converter	Digitek Power	VFS/DEFC	N/A	N/A	N/A	■