
FCC Test Report

Report No.: AGC02224160501FE03

FCC ID : QEA-20241-27T
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Remote Control for Dump Truck
BRAND NAME : N/A
MODEL NAME : 20241, LM143176
CLIENT : Kid Galaxy Inc.
DATE OF ISSUE : May 17, 2016
**STANDARD(S)
TEST PROCEDURE(S)** : FCC Part 15 Rules
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 17, 2016	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	6
5. SYSTEM TEST CONFIGURATION	7
5.1. CONFIGURATION OF EUT SYSTEM.....	7
5.2. EQUIPMENT USED IN EUT SYSTEM.....	7
5.3. SUMMARY OF TEST RESULTS.....	7
6. TEST FACILITY	8
7. RADIATED EMISSION	9
7.1 TEST LIMIT	9
7.2. MEASUREMENT PROCEDURE	10
7.3. TEST SETUP	12
7.4. TEST RESULT	13
8. 20DB BANDWIDTH	16
8.1. MEASUREMENT PROCEDURE	16
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
8.3. MEASUREMENT RESULTS	17
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	18
APPENDIX B: PHOTOGRAPHS OF EUT	19

1. VERIFICATION OF CONFORMITY

Applicant	Kid Galaxy Inc.
Address	150 Dow Street, Tower 2, Unit 425B Manchester, NewHampshire United States 03101
Manufacturer	HK TAIHUI INDUSTRIAL CO.,LIMITED
Address	2LAYER FOUR ZONE, GUANGHUA INDUSTRIAL, CHENGHAI, SHANTOU, GUANGDONG, CHINA
Product Designation	Remote Control for Dump Truck
Brand Name	N/A
Test Model	20241
Series Model	LM143176
Model Difference	All the same except for the model name and color.
Date of test	May 10, 2016 to May 11, 2016
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.227.

Tested by

Max Zhang

Max Zhang(Zhang Yi) May 17, 2016

Reviewed by

Rock Huang

Rock Huang(Huang Dinglue) May 17, 2016

Approved by

Solger Zhang

Solger Zhang(Zhang Hongyi) May 17, 2016
Authorized Officer

2. GENERAL INFORMATION

A major technical description of EUT is described as following

Operation Frequency	27.147MHz
Maximum field strength	58.3 dB μ V/m@3m(AV)
Modulation	ASK
Number of channels	1
Antenna Gain	2dBi
Antenna Designation	Fixed Antenna (Met 15.203 Antenna requirement)
Hardware Version	YK-301T
Software Version	N/A
Power Supply	DC6V by battery

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	TX ON
4	TX OFF
<p>Note:</p> <ol style="list-style-type: none"> All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases. For Radiated Emission, 3axis were chosen for testing for each applicable mode. 	

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure :



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Remote Control for Dump Truck	20241	QEA-20241-27T	EUT

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.227	Radiated Emission	Compliant
§15.215	20dB bandwidth	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China.
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013.

ALL TEST EQUIPMENT LIST

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 6, 2015	June 5, 2016
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	June 6, 2015	June 5, 2016
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 6, 2015	June 5, 2016

7. RADIATED EMISSION

7.1 TEST LIMIT

Standard FCC15.227

Fundamental Frequency	Field Strength of Fundamental (micro volts/meter) AV Detector	Field Strength of Fundamental (micro volts/meter) PK Detector
26.96-27.28MHz	10000(80 dB μ V/m)	100000(100 dB μ V/m)

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

7.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground below 1G. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

7.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

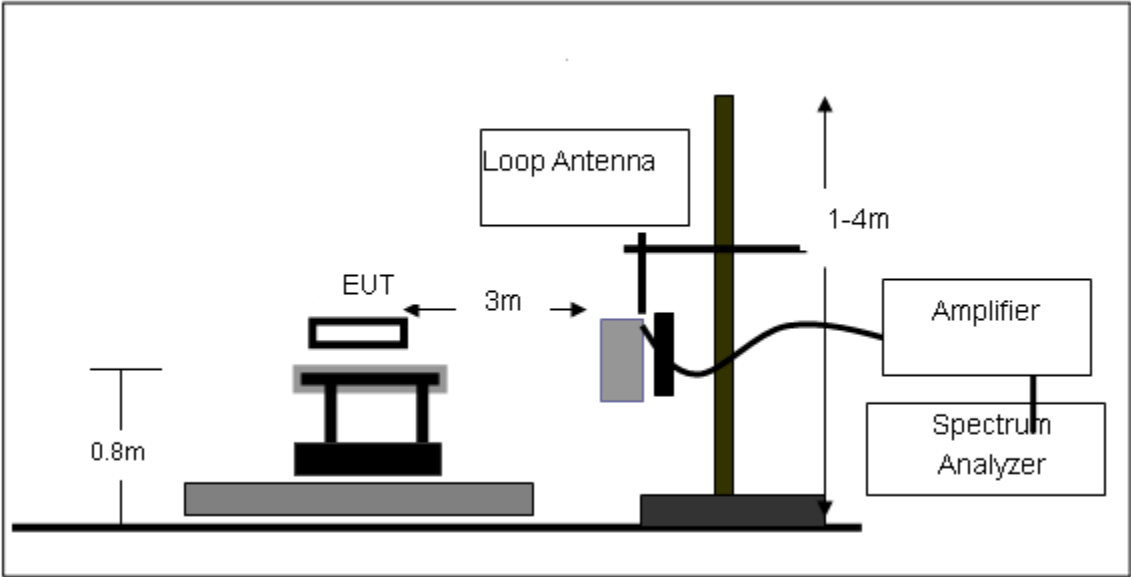

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

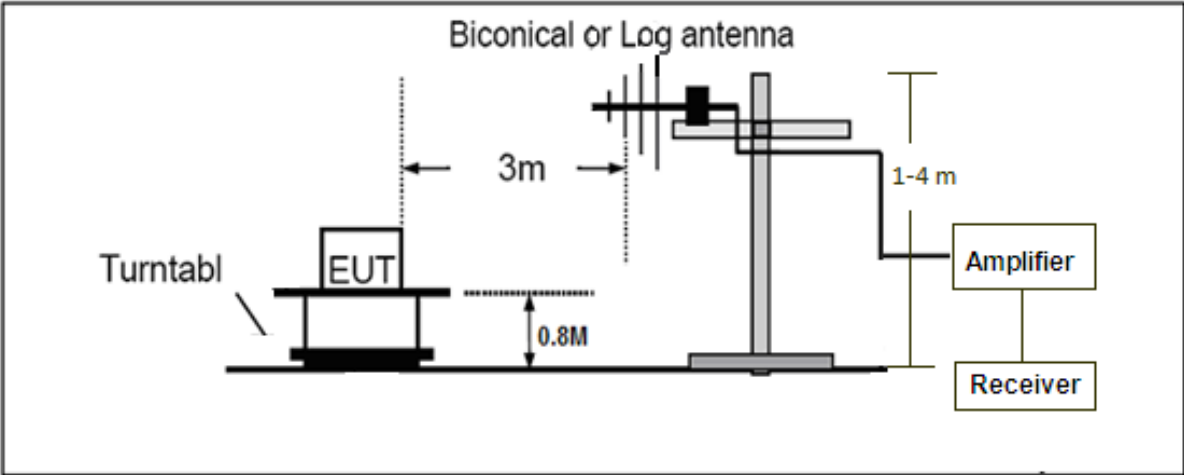

7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ


EUT :	Remote Control for Dump Truck	Model Name. :	20241
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC6V
Test Mode :	Mode 1	Polarization :	--

Frequency MHz	Polarization	Reading dB(uV) PK	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) PK	Margin dB	Pass/Fail
27.147	Face	46.1	14.5	60.6	100	39.4	Pass
27.147	Side	40.4	14.5	54.9	100	45.1	Pass
Frequency MHz	Polarization	Reading dB(uV) AV	Factor dB (1/m)	Level dB(uV/m) AV	Limit dB(uV/m) AV	Margin dB	Pass/Fail
27.147	Face	43.8	14.5	58.3	80	21.7	Pass
27.147	Side	38.5	14.5	53.0	80	27.0	Pass

Note: Other emissions from 9 kHz to 30 MHz are considered as ambient noise. No recording in the test report.

RADIATED EMISSION 30MHz- 1GHZ


EUT :	Remote Control for Dump Truck	Model Name. :	20241
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC6V
Test Mode :	Mode 1	Polarization :	Horizontal

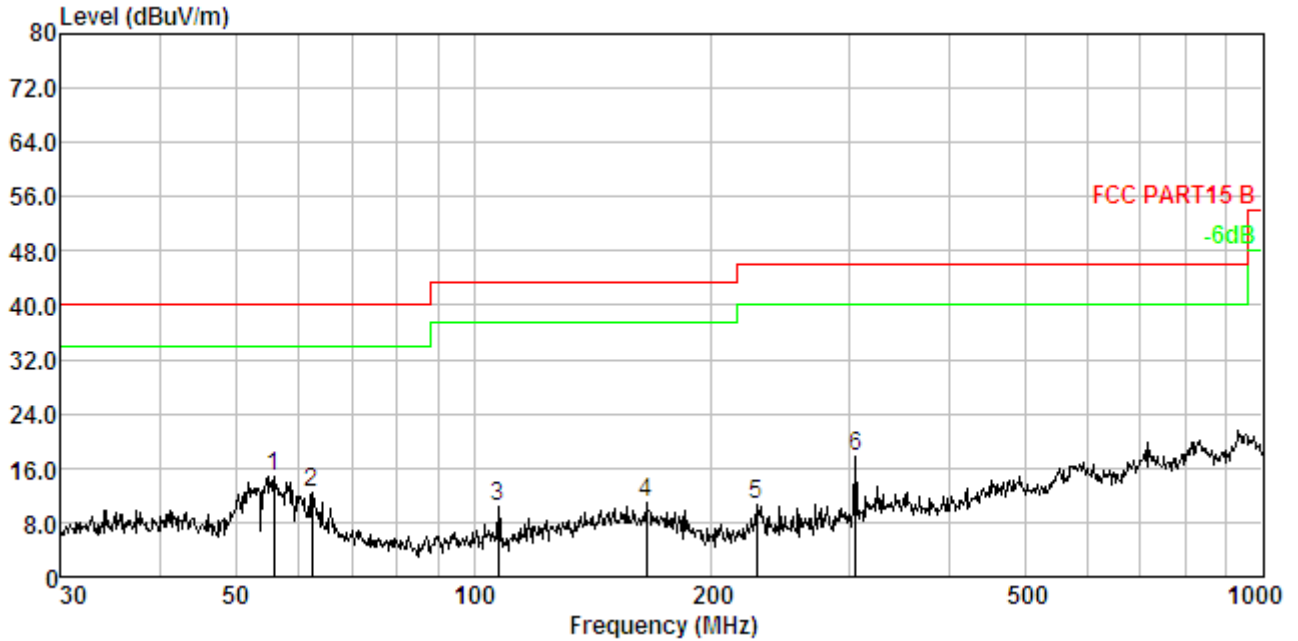

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	55.805	1.62	11.95	31.37	30.19	14.75	40.00	-25.25	Peak
2.	62.431	1.72	12.01	28.85	30.22	12.36	40.00	-27.64	Peak
3.	107.510	2.21	10.87	27.75	30.41	10.42	43.50	-33.08	Peak
4.	165.487	2.60	13.57	25.38	30.56	10.99	43.50	-32.51	Peak
5.	228.490	2.89	11.17	27.38	30.68	10.76	46.00	-35.24	Peak
6.	304.610	3.15	13.30	32.06	30.78	17.73	46.00	-28.27	Peak

RESULT: PASS

EUT :	Remote Control for Dump Truck	Model Name. :	20241
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC6V
Test Mode :	Mode 1	Polarization :	Vertical

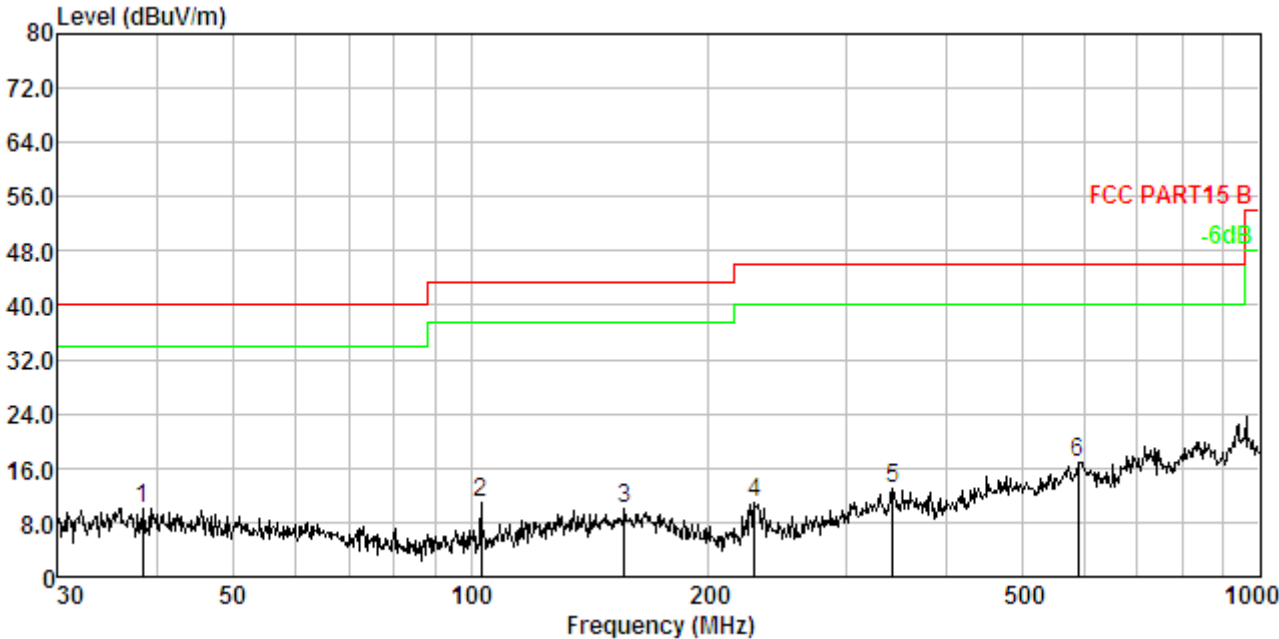

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	38.346	1.28	13.58	25.38	30.06	10.18	40.00	-29.82	Peak
2.	103.080	2.17	10.50	28.74	30.40	11.01	43.50	-32.49	Peak
3.	156.458	2.55	13.89	24.18	30.54	10.08	43.50	-33.42	Peak
4.	229.293	2.90	11.21	27.47	30.68	10.90	46.00	-35.10	Peak
5.	343.180	3.26	14.14	26.32	30.82	12.90	46.00	-33.10	Peak
6.	588.905	3.75	18.86	25.36	31.01	16.96	46.00	-29.04	Peak

RESULT: PASS

Note:


Factor=Antenna Factor + Cable loss, Margin=Result-Limit.
 The "Factor" value can be calculated automatically by software of measurement system.
 The mode 1 is the worst case, and only the data of the worst case recorded in this test report.

8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 10 KHz, VBW \geq 3 \times RBW.
4. Set SPA Trace 1 Max hold, then View.


8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

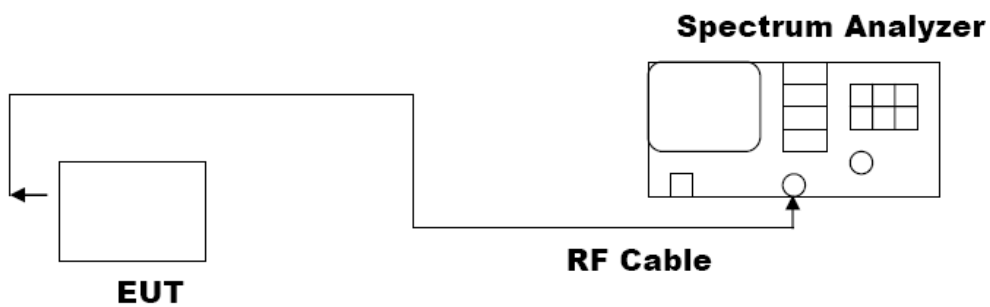


8.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH
TEST MODE	Mode1

Test Data (MHz)		Criteria
Operate channel	0.04863	PASS

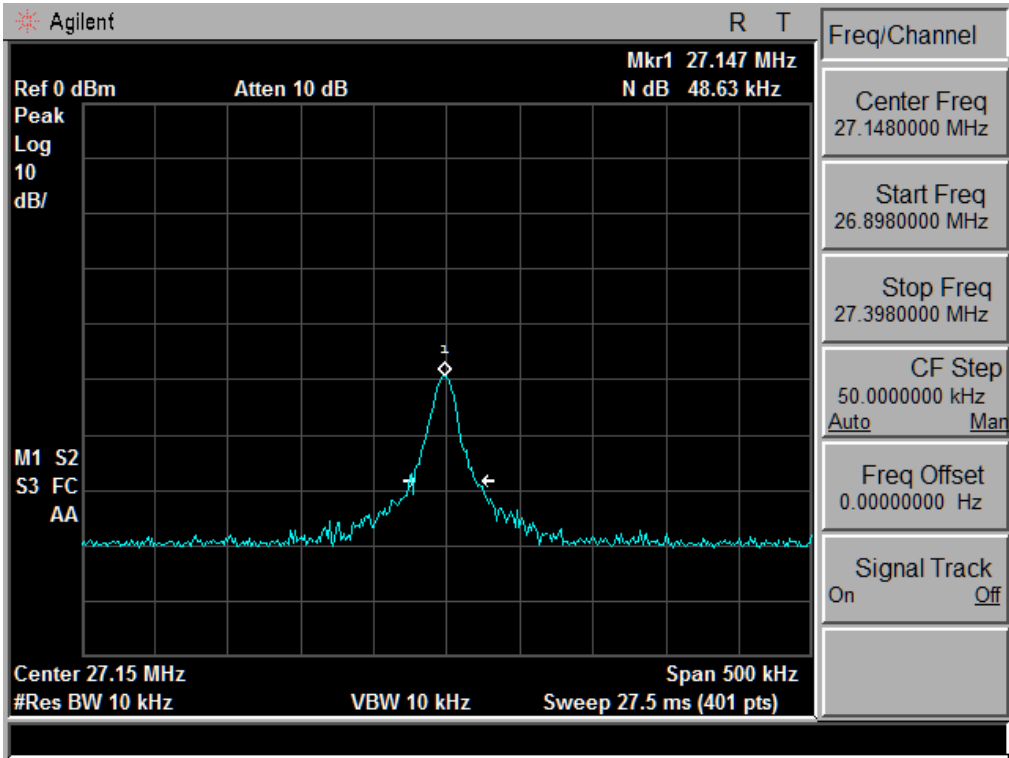


APPENDIX A: PHOTOGRAPHS OF TEST SETUP
RADIATED EMISSION TEST SETUP BELOW 1GHz

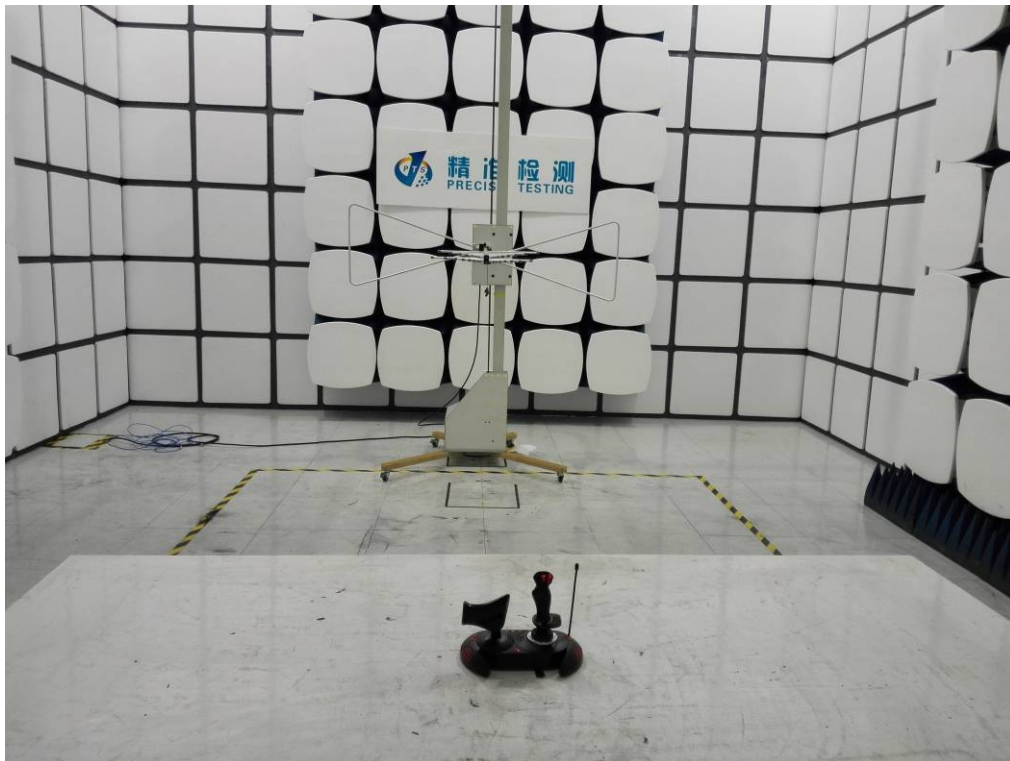

APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT

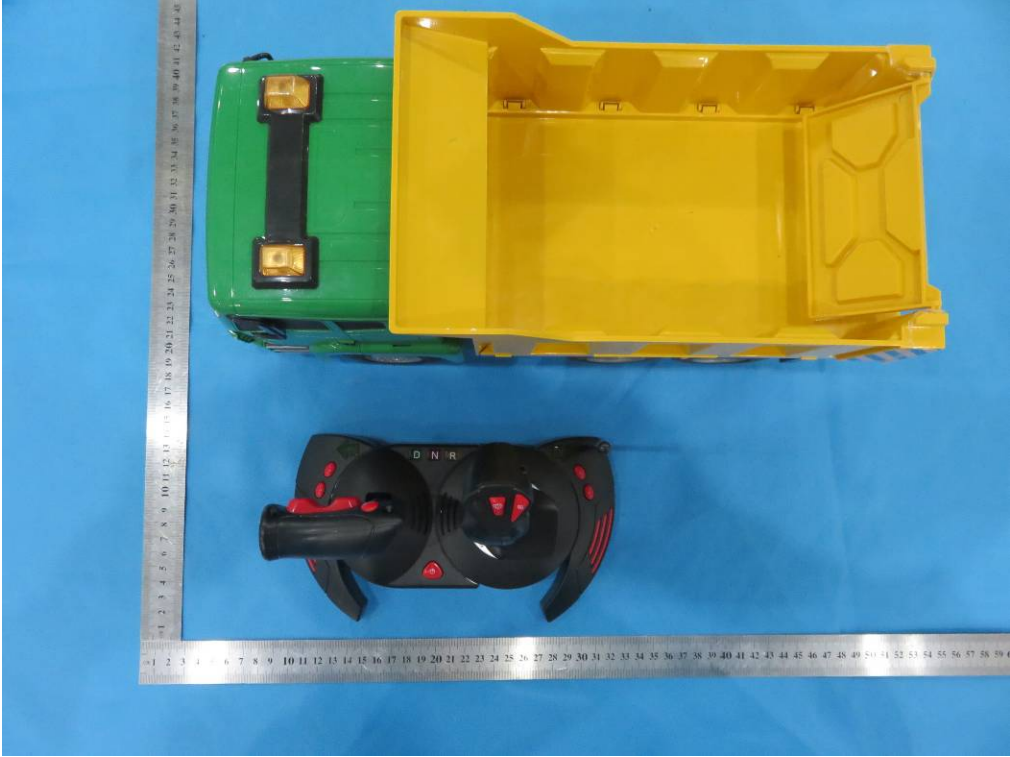

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT




LEFT VIEW OF EUT




RIGHT VIEW OF EUT




OPEN VIEW OF EUT

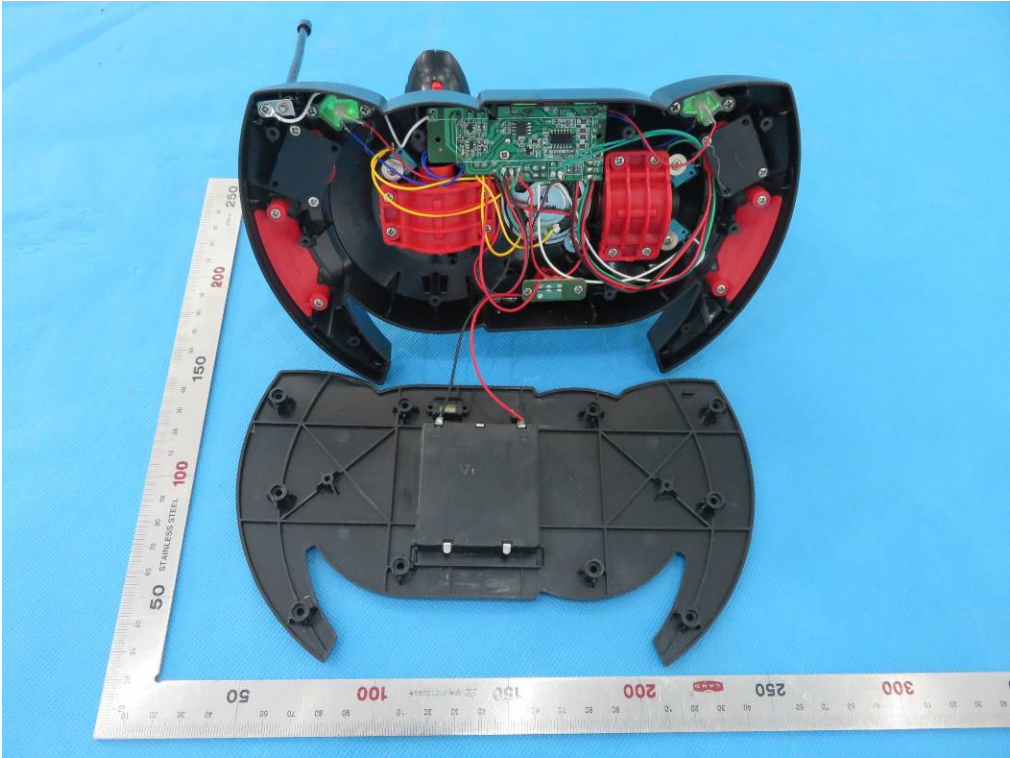

INTERNAL VIEW OF EUT-1

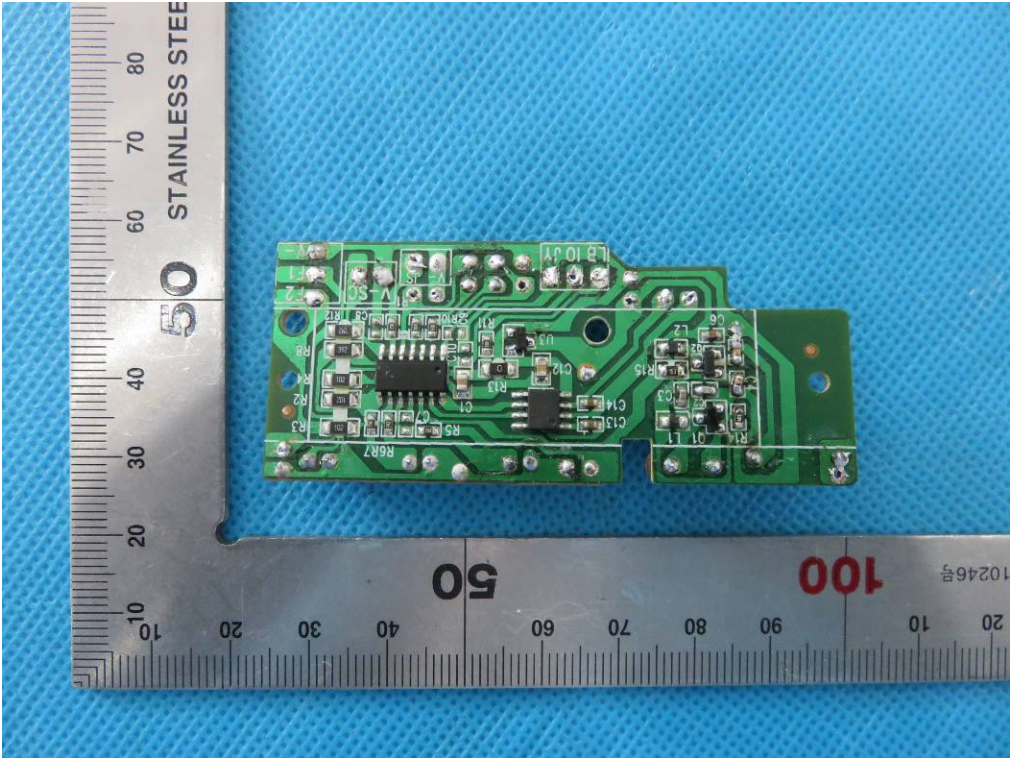

INTERNAL VIEW OF EUT-2

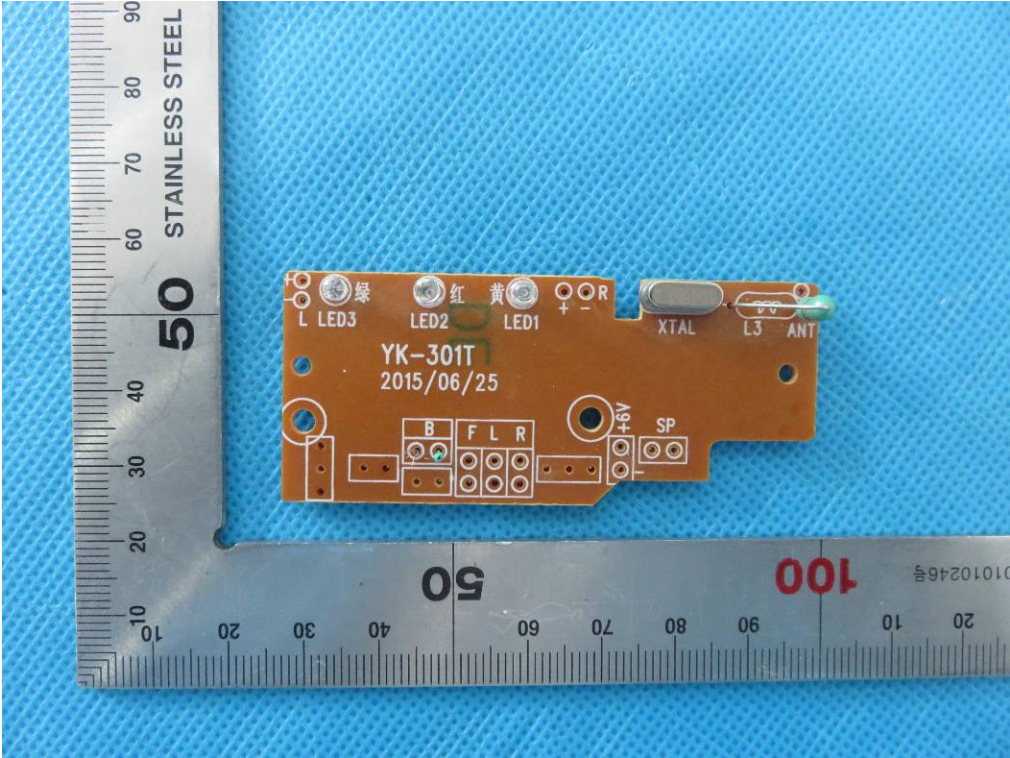

----END OF REPORT----