

廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

Application No. : LV018432(7)

Applicant : Kid Galaxy Inc

150 Dow Street,

Unit 425B Manchester, NH03101, U.S.A

Sample Description : One(1) item of submitted sample stated to be Remote of 2.4G High Speed 20V RC

F150 of Model No. 10314, 10315

Sample registration no. : RV0024505-001

Radio Frequency : 2413MHz – 2473MHz Transceiver

Rating : 2 x 1.5V AA size batteries

No. of submitted sample : Two (2) piece (s)

Date Received : 02 Jun 2017

Test Period : 06 Jun 2017 to 09 Jun 2017

Test Requested : FCC Part 15 Certification (15.249), FCC Part 15 Verification Procedure

Industry Canada RSS-210 Issue 9, Class B digital apparatus under ICES-003 Issue

6

Test Method : 47 CFR Part 15 (10-1-15 Edition), ANSI C63.4 – 2014, ANSI C63.10 – 2013,

Industry Canada RSS-210 Issue 9, Industry Canada RSS-Gen Issue 6

Test Engineer : Mr. LEUNG Shu-kan, Ken

Test Result : See attached sheet(s) from page 2 to 34.

Conclusion : The submitted sample was found to comply with requirement of FCC Subpart B

and C, Industry Canada RSS-210 Issue 9, Class B digital apparatus under ICES-

003 Issue 6.

Remark : All two models are the same in circuitry and components and construction, and

therefore model 10314 was chosen to be the representative of the test sample. The difference(s) between the tested model and the declared model(s) is: Model no.

Andrew

For and on behalf of

CMA Industrial Development Foundation Limited

Authorized Signature :

Page 1 of 34

Manager V Electrical Division

FCC ID: QEA-U282-2G4T

IC: 22849-U282T

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com. This document shall not be reproduced except in full or with written approval by CMA Testing

Mr. WONG Lap-pon



廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

Table of Contents

1 Ge	eneral Information	3
1.1	General Description	
1.2	Location of the test site	
1.3	List of measuring equipment	5
1.4	Measurement Uncertainty	
2 De	escription of the emission test	7
2.1	Test Procedure	7
2.2	Radiated Emission Measurement Data	8
2.3	99% bandwidth	23
3 De	escription of the Line-conducted Test	24
3.1	Test Procedure	24
3.2	Test Result	24
4 Ph	otograph	
4.1	Photographs of the Test Setup for Radiated Emission and Conducted Emission	
4.2	Photographs of the External and Internal Configurations of the EUT	
4.3	Antenna requirement	
5 Ar	ppendices	

Page 2 of 34



TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

1 General Information

1.1 General Description

The equipment under test (EUT) is a controller for cycle. The EUT is power by 2 x 1.5V AA size batteries. It operates at 2413MHz – 2473MHz. There are joysticks on the EUT. When the joysticks are moved, the EUT will transmit the radio control signal to receiver.

The brief circuit description is listed as follows:

- U1 and its associated circuit act as MCU with RF circuit

- R4, R5, C5 and its associated circuit act as LVD and its associated circuit act as control

FCC ID: QEA-U282-2G4T IC: 22849-U282T

Page 3 of 34



TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

1.2 Location of the test site

FCC Registered Test Site Number: 416666 IC Registered Test Site Number: 4093A

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 - 2013. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre, 9 – 13 Wong Chuk Yeung Street, Fo Tan, Shatin, New Territories, Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 – 2013. A shielded room is located at:

Ground Floor, Yan Hing Centre, 9 – 13 Wong Chuk Yeung Street, Fo Tan, Shatin, New Territories, Hong Kong.

Page 4 of 34



廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	R&S	ESCI	100152	15 Nov 2017	1Year
Spectrum Analyzer	R&S	FSV40	100964	08 Feb 2018	1Year
Biconical Antenna	Rohde & Schwarz	HK116	837414/004	17 Aug 2017	1Year
Log Periodic Antenna	Teseq	UPA6109	43666	27 Jul 2017	1Year
Loop Antenna	EMCO	6502	00056620	25 Jan 2018	2Years
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	19 Dec 2018	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	21 Dec 2018	2Years
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170442	02 Aug 2017	2Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	02 Aug 2017	2Years
Horn Antenna	Schwarzbeck	BBHA 9120C	9120C 594	26 Jul 2018	2Years
Pre-amplifier	Schwarzbeck	BBV9718	BBV9718 297	24 Jul 2018	2Years
Coaxial Cable	Schaffner	RG 213/U	N/A	18 May 2018	1Year
Coaxial Cable	Suhner	RG 214/U	N/A	18 May 2018	1Year
Coaxial Cable	Suhner	Sucoflex_104	N/A	20 Dec 2017	1Year

Page 5 of 34



廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U _{lab})
30MHz ~ 200MHz (Horizontal)	4.83dB
30MHz ~ 200MHz (Vertical)	4.84dB
200MHz ~1000MHz (Horizontal)	4.87dB
200MHz ~1000MHz (Vertical)	5.94dB
1GHz ~6GHz	4.41dB
6GHz ~18GHz	4.64dB

Line-conducted emissions

Frequency	Uncertainty (U _{lab})		
150kHz~30MHz	2.64dB		

FCC ID: QEA-U282-2G4T IC: 22849-U282T

Page 6 of 34



TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

2 Description of the emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 - 2013.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground for below 1GHz measurement and 1.5m high above the ground for above 1GHz measurement. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

For 30MHz to 1GHz, broadband antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. And the reference point of antenna shall be 1 m above the ground.

For above 1GHz, horn antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. Preamplifier and High Pass filter was used for measurements. The reference point of antenna shall be 1 m above the ground.

The device was rotated through three orthogonal to determine which attitude and configuration produce the highest emission during measurement for Radiated Emission measurement.

The EUT will connect to TS 8997 testing system for direct conducted measurement.

Page 7 of 34



廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

2.2 Radiated Emission Measurement Data

Environmental conditions:

ParameterRecorded valueAmbient temperature:28° CRelative humidity:65%

Testing frequency range: 9kHz to 26GHz Mode: Transmission

Measurement: Quasi-peak (9kHz – 1GHz), Peak and Average(above 1GHz) RBW: 9kHz (below 30MHz), 120kHz (30MHz – 1GHz), 1MHz (above 1GHz)

VBW: 30kHz (below 30MHz), 300kHz (30MHz – 1GHz,), 3MHz (above 1GHz, Peak measurement), 10Hz (above

1GHz, Average measurement)

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBµV)	Transducer Factor (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)	Measurement (Peak/ Average)
2412.967	Н	93.6	- 4.7	88.9	114.0	- 25.1	Peak
2412.804	V	90.5	- 4.7	85.8	114.0	- 28.2	Peak
2450.079	Н	92.7	- 4.7	88.0	114.0	- 26.0	Peak
2449.966	V	90.3	- 4.7	85.6	114.0	- 28.4	Peak
2473.273	Н	92.3	- 4.7	87.6	114.0	- 26.4	Peak
2473.071	V	89.5	- 4.7	84.8	114.0	- 29.2	Peak
2448.353	Н	70.3	- 4.7	65.6	74.0	- 8.4	Peak
2448.353	Н	27.2	- 4.7	22.5	54.0	- 31.5	Average
2448.249	V	68.5	- 4.7	63.8	74.0	- 10.2	Peak
2488.249	V	26.8	- 4.7	22.1	54.0	- 31.9	Average
2524.387	Н	69.3	- 4.7	64.6	74.0	- 9.4	Peak
2524.387	Н	26.9	- 4.7	22.2	54.0	- 31.8	Average
2523.924	V	68.1	- 4.7	63.4	74.0	- 10.6	Peak
2523.924	V	26.8	- 4.7	22.1	54.0	- 31.9	Average
4825.914	Н	58.2	3.0	61.2	74.0	- 12.8	Peak
4825.916	Н	28.2	3.0	31.2	54.0	- 22.8	Average
4825.987	V	56.7	3.0	59.7	74.0	- 14.3	Peak
4825.859	V	28.1	3.0	31.1	54.0	- 22.9	Average

Remark: Other emissions more than 20dB below the limit are not reported.

If Peak measurement values are lower than average limit, average measurement is not necessary.

Page 8 of 34

FCC ID: QEA-U282-2G4T IC: 22849-U282T



廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBµV)	Transducer Factor (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)	Measurement (Peak/ Average)
4899.984	Н	57.3	3.0	60.3	74.0	- 13.7	Peak
4899.828	Н	27.8	3.0	30.8	54.0	- 23.2	Average
4900.114	V	55.6	3.6	59.2	74.0	- 14.8	Peak
4899.839	V	27.7	3.0	30.7	54.0	- 23.3	Average
4945.958	Н	57.8	3.6	61.4	74.0	- 12.6	Peak
4945.942	Н	27.8	3.6	31.4	54.0	- 22.6	Average
4945.962	V	55.7	3.6	59.3	74.0	- 14.7	Peak
4945.918	V	27.4	3.6	31.0	54.0	- 23.0	Average
9651.831	V	41.2	13.5	54.7	74.0	- 19.3	Peak
9651.851	V	22.4	13.5	35.9	54.0	- 18.1	Average
9800.265	V	42.2	13.5	55.7	74.0	- 18.3	Peak
9799.786	V	23.2	13.5	36.7	54.0	- 17.3	Average
9891.939	V	41.4	13.5	54.9	74.0	- 19.1	Peak
9891.841	V	23.1	13.5	36.6	54.0	- 17.4	Average

Remark: Other emissions more than 20dB below the limit are not reported.

If Peak measurement values are lower than average limit, average measurement is not necessary.

FCC ID: QEA-U282-2G4T IC: 22849-U282T

Page 9 of 34





廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017


2.2 Radiated Emission Measurement Data (Con't)






Lower channel, 30MHz - 300MHz, Horizontal

Lower channel, 30MHz - 300MHz, Vertical



Lower channel, 300MHz – 1GHz, Horizontal



Lower channel, 300MHz – 1GHz, Vertical

Page 10 of 34





廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017


2.2 Radiated Emission Measurement Data (Con't)






Lower channel, 1GHz - 3GHz, Horizontal

Lower channel, 1GHz - 3GHz, Vertical



Lower channel, 3GHz – 7GHz, Horizontal



Lower channel, 3GHz – 7GHz, Vertical

Page 11 of 34





廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017


2.2 Radiated Emission Measurement Data (Con't)






Lower channel, 7GHz - 15GHz, Horizontal

Lower channel, 7GHz – 15GHz, Vertical



Lower channel, above 15GHz, Horizontal



Lower channel, above 15GHz, Vertical

Page 12 of 34




廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017


2.2 Radiated Emission Measurement Data (Con't)




-20 dByV/m Start 30.0 MHz 1001 pts

Middle channel, 30MHz - 300MHz, Horizontal





Middle channel, 300MHz – 1GHz, Horizontal



Middle channel, 300MHz - 1GHz, Vertical

Page 13 of 34

™




廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

2.2 Radiated Emission Measurement Data (Con't)




100 dbµV/m
2.449900 dHz
90 dbµV/m
80 dbµV/m
80 dbµV/m
40 dbµV/m
40 dbµV/m
20 dbµV/m
10 dbµV/m


V

Middle channel, 1GHz - 3GHz, Horizontal

Middle channel, 1GHz – 3GHz, Vertical



Middle channel, 3GHz – 7GHz, Horizontal



Middle channel, 3GHz – 7GHz, Vertical

Page 14 of 34




廠商會檢定中心


TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017


2.2 Radiated Emission Measurement Data (Con't)




Middle channel, 7GHz – 15GHz, Horizontal



Middle channel, 7GHz – 15GHz, Vertical



Middle channel, above 15GHz, Horizontal



Middle channel, above 15GHz, Vertical

Page 15 of 34




廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

2.2 Radiated Emission Measurement Data (Con't)



TOF

IPK Max

70 dBuV/m

So dBuV/m

So dBuV/m

O dBuV/m


O dBuV/m

-20 dBuV/m


™

Higher channel, 30MHz - 300MHz, Horizontal

Higher channel, 30MHz – 300MHz, Vertical



Higher channel, 300MHz – 1GHz, Horizontal



Higher channel, 300MHz - 1GHz, Vertical

Page 16 of 34




廠商會檢定中心


TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017


2.2 Radiated Emission Measurement Data (Con't)




Higher channel, 1GHz – 3GHz, Horizontal



Higher channel, 1GHz – 3GHz, Vertical



Higher channel, 3GHz - 7GHz, Horizontal



Higher channel, 3GHz – 7GHz, Vertical

Page 17 of 34




廠商會檢定中心


TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017


2.2 Radiated Emission Measurement Data (Con't)




Higher channel, 7GHz – 15GHz, Horizontal



Higher channel, 7GHz – 15GHz, Vertical



Higher channel, above 15GHz, Horizontal



Higher channel, above 15GHz, Vertical

Page 18 of 34



廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

2.2 Radiated Emission Measurement Data (Con't)

Environmental conditions:

Parameter	Recorded value		
Ambient temperature:	28	° C	
Relative humidity:	65	%	

Testing frequency range: 9kHz to 26GHz Mode: Receiving Measurement: Quasi-peak (9kHz – 1GHz), Peak (above 1GHz)

RBW: 9kHz (below 30MHz), 120KHz (30MHz – 1GHz), 1MHz (above 1GHz) VBW: 30kHz (below 30MHz), 300kHz (30MHz – 1GHz), 3MHz (above 1GHz)

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBµV)	Transducer Factor (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)

Remark: No specified emission found

Page 19 of 34





廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017


2.2 Radiated Emission Measurement Data (Con't)






Receiving mode, 30MHz - 300MHz, Horizontal

Receiving mode, 30MHz - 300MHz, Vertical







Receiving mode, 300MHz - 1GHz, Vertical

Page 20 of 34




廠商會檢定中心

TEST REPORT


Report No. : AV0032301(9) Date : 16 Jun 2017


2.2 Radiated Emission Measurement Data (Con't)




Receiving mode, 1GHz - 3GHz, Horizontal

Receiving mode, 1GHz – 3GHz, Vertical







Receiving mode, 3GHz – 7GHz, Vertical

Page 21 of 34





廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017


2.2 Radiated Emission Measurement Data (Con't)






Receiving mode, 7GHz - 15GHz, Horizontal

Receiving mode, 7GHz – 15GHz, Vertical



Receiving mode, above 15GHz, Horizontal



Receiving mode, above 15GHz, Vertical

Page 22 of 34





廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

2.3 99% bandwidth

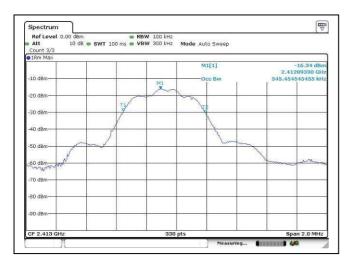



Lower channel

Middle channel



Higher channel

Page 23 of 34



TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

3 Description of the Line-conducted Test

3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 - 2013. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

No measurement is required as the EUT is a battery-operated product

FCC ID: QEA-U282-2G4T IC: 22849-U282T

Page 24 of 34



TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

4 Photograph

4.1 Photographs of the Test Setup for Radiated Emission and Conducted Emission

For electronic filing, the photos are saved with filename QEA-U282-2G4T TSup.pdf.

4.2 Photographs of the External and Internal Configurations of the EUT

For electronic filing, the photos are saved with filename QEA-U282-2G4T ExPho.pdf and QEA-U282-2G4T InPho.pdf.

4.3 Antenna requirement

Appendices A3 shows the antenna is permanently attached and cannot be changed. Therefore it fulfils the section 15.203 requirement

FCC ID: QEA-U282-2G4T IC: 22849-U282T

Page 25 of 34



廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

5 Appendices

A1	Photos of the set-up of Radiated Emissions	2	pages
A2	Photos of External Configurations	2	pages
A3	Photos of Internal Configurations	2	pages
A4	ID Label/Location	2	nages

Page 26 of 34



廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

A1. Photos of the set-up of Radiated Emissions



30MHz - 300MHz



300MHz - 1GHz

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 27 of 34

FCC ID: QEA-U282-2G4T IC: 22849-U282T



廠商會檢定中心


TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

A1. Photos of the set-up of Radiated Emissions



9kHz - 30MHz



Above 1GHz

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 28 of 34

FCC ID: QEA-U282-2G4T IC: 22849-U282T



廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

A2 Photos of External Configurations



External Configuration 1



External Configuration 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 29 of 34

FCC ID: QEA-U282-2G4T IC: 22849-U282T



廠商會檢定中心

TEST REPORT

Report No. AV0032301(9) 16 Jun 2017 Date:

A2 Photos of External Configurations



External Configuration 3



External Configuration 4

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 30 of 34

FCC ID: QEA-U282-2G4T IC: 22849-U282T



廠商會檢定中心


TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

A3 Photos of Internal Configurations



Internal Configuration 1



Internal Configuration 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 31 of 34

FCC ID: QEA-U282-2G4T IC: 22849-U282T



廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

A3 Photos of Internal Configurations



EUT antenna

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 32 of 34

FCC ID: QEA-U282-2G4T IC: 22849-U282T



廠商會檢定中心

TEST REPORT

Report No. : AV0032301(9) Date : 16 Jun 2017

A4 ID Label / Location



ID Label 1 (FCC)



ID Label 2 (FCC)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 33 of 34

FCC ID: QEA-U282-2G4T IC: 22849-U282T



廠商會檢定中心

TEST REPORT

Report No. Date: 16 Jun 2017 AV0032301(9)

ID Label / Location



ID Label 3 (IC)



ID Label 4 (IC)

***** End of Report *****

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

Page 34 of 34

FCC ID: QEA-U282-2G4T

IC: 22849-U282T