

Date : 2008-11-18 Page 1 of 18

No. : HM162651

Applicant (KIG003): Kid Galaxy INC

150 Dow Street, Tower2, Unit 425B, Manchester, NH

03101.U.S.A.

Manufacturer: DONGGUAN LC TECHNOLOGY CO.LTD

Qiao LiMgt. District, Changping Town, Dongguan City,

Guangdong Province, China.

Description of Samples: Product: #10258 Pro-launcher rescue one - 49mhz

Brand Name: #10258 Pro-Launcher, Rescue One

Model Number: 10258

FCC ID: QEALANCHER9R

Date Samples Received: 2008-10-21

Date Tested: 2008-10-27

Investigation Requested: Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2007 and ANSI C63.4:2003 for FCC Certification.

Conclusions: The submitted product COMPLIED with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remarks: ----

Dr. LEE Kam Chuen, ElectroMagnetic Compatibility Department For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2008-11-18 Page 2 of 18

No. : HM162651

CONTENT:

	Cover Content	Page 1 o Page 2-3	
<u>1.0</u>	General Details		
1.1	Test Laboratory	Page 4 o	f 18
1.2	Applicant Details Applicant Manufacturer	Page 4 o	f 18
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 o	f 18
1.4	Date of Order	Page 5 o	f 18
1.5	Submitted Samples	Page 5 o	f 18
1.6	Test Duration	Page 5 o	f 18
1.7	Country of Origin	Page 5 o	f 18
<u>2.0</u>	Technical Details		
2.1	Investigations Requested	Page 6 o	f 18
2.2	Test Standards and Results Summary	Page 6 o	f 18
<u>3.0</u>	Test Results		
3.1	Emission	Page 7-9	of 18
3.2	Bandwidth Measurement	Page 10-	·12 of 18



Date: 2008-11-18 Page 3 of 18

: HM162651 No.

Appendix A

Page 13 of 18 List of Measurement Equipment

Appendix B

Page 14-16 of 18 Duty Cycle Correction During 100 msec

Appendix C

Page 17-18 of 18 Photographs



Date : 2008-11-18 Page 4 of 18

No. : HM162651

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 Applicant Details Applicant

Kid Galaxy INC 150 Dow Street, Tower2, Unit 425B Manchester, NH 03101.U.S.A.

Manufacturer

DONGGUAN LC TECHNOLOGY CO.LTD Qiao LiMgt. District, Changping Town, Dongguan City, Guangdong Province, China.



Date: 2008-11-18 Page 5 of 18

No. : HM162651

1.3 Equipment Under Test [EUT] Description of Sample

Product: #10258 Pro-launcher rescue one - 49mhz
Manufacturer: DONGGUAN LC TECHNOLOGY CO.LTD

Brand Name: #10258 Pro-Launcher, Rescue One

Model Number: 10258

Input Voltage: 9.0Vd.c. ("AA" size battery x 6)

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Kid Galaxy INC, #10258 Pro-launcher rescue one -49mhz. The transmitter is a 2 buttons transmitter. The EUT continues to transmit while button is being pressed, Modulation by IC, and type is pulse modulation.

1.4 Date of Order

2008-10-21

1.5 Submitted Sample(s):

1 Sample

1.6 Test Duration

2008-10-27

1.7 Country of Origin

CHINA



Date: 2008-11-18 Page 6 of 18

No. : HM162651

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2007 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class /	Test	Test Result	
			Severity	Pass	Failed	
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A	\boxtimes		
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	N/A			

Note: N/A - Not Applicable



Date: 2008-11-18 Page 7 of 18

No. : HM162651

3.0 Test Results

3.1 Emission

3.1.1 Radiated Emissions (30 – 1000MHz)

Test Requirement: FCC 47CFR 15.235 Test Method: ANSI C63.4:2003

Test Date: 2008-10-27


Mode of Operation: TX: On Mode (49MHz)

Test Method:

The sample was placed 0.8m above the ground plane of Semi-Anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-Anechoic Chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Test Setup:

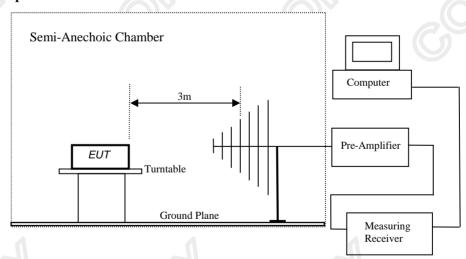



Date : 2008-11-18 Page 8 of 18

No. : HM162651

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of		Field Strength of	Field Strength of
Fundamental		Fundamental Emission	Fundamental Emission
		[Peak]	[Average]
	[MHz]	$[\mu V/m]$	$[\mu V/m]$
	49.82-49.90	100,000	10,000

Results:

Field Strength of Fundamental Emissions							
	Peak Value						
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field						
Level @3m Factor Strength Strength Po					Polarity		
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m		
49.86	58.9	9.3	68.2	2,570.4	100,000	Vertical	

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB



Date : 2008-11-18 Page 9 of 18

No. : HM162651

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]			
30-88	100			
88-216	150			
216-960	200			
Above960	500			

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

Radiated Emissions								
Quasi-Peak								
Frequency	Measured	easured Correction Field Field		Field	Limit @3m	E-Field		
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m			
100.00	12.5	8.8	21.3	11.6	150	Vertical		
149.58	12.8	9.2	22.0	12.6	150	Vertical		
199.44	< 1.0	11.5	< 12.5	< 4.2	150	Vertical		
249.30	< 1.0	15.9	< 16.9	< 7.0	200	Vertical		
299.20	< 1.0	15.4	< 16.4	< 6.6	200	Vertical		
349.02	< 1.0	17.2	< 18.2	< 8.1	200	Vertical		
398.88	< 1.0	17.3	< 18.3	< 8.2	200	Vertical		
448.74	< 1.0	20.5	< 21.5	< 11.9	200	Vertical		
498.60	< 1.0	20.6	< 21.6	< 12.0	200	Vertical		

Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz.

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB



Date: 2008-11-18 Page 10 of 18

No. : HM162651

3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2008-10-27 Mode of Operation: On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.



Date: 2008-11-18 Page 11 of 18

No. : HM162651

Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range [MHz]	20dB Bandwidth [KHz]	FCC Limits [MHz]
49.86	14.228	within 49.82-49.90

20dB Bandwidth of Fundamental Emission Marker 1 [T1 ndB] RBW 3 kHz RF Att 10 dB 20.00 dB 3 kHz Ref Lvl ndB VBW 72 dbyv BW 14.22845691 kHz 50 ms SWT Unit dвиv [T1] 58.82 dBy 9.8608d160 MHz -38 60 -50.8016d321 kHz 20.00 dB ndE 50 BW 4.22845691 kHz ∇_{T} 38.71 dByV [T1] 9.85368737 MHz 1MAX [T1] 38.88 dBy 49.86791583 MHz 3.0 P20 -10 Start 49.81 MHz 10 kHz/ Stop 49.91 MHz 27.OCT.2008 20:13:54 Date:

A



Date: 2008-11-18 Page 12 of 18

No. : HM162651

20dB Bandwidth of Fundamental Emission Delta 1 [T1] RBW 3 kHz RF Att 10 dB Ref Lvl 0.00 dB VBW 3 kHz 72 dbyv 0.00000000 Hz SWT 50 ms Unit dвуv 58.90 dByv [T1] 9.8608d160 MH [T1] .00 dB о.00000000 нг 50 I2D 40 1MAX P20 2.0 10 -20 -28Stop 49.91 MHz Start 49.81 MHz 10 kHz/ 27.OCT.2008 20:04:31

The Hong Kong Standards and Testing Centre Ltd.



Date: 2008-11-18 Page 13 of 18

No. : HM162651

Appendix A

List of Measurement Equipment

Radiated Emission

	EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
	EM215	MULTIDEVICE CONTROLER	EMCO	2090	00024676	N/A	N/A
5	EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
	EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
	EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3	-	2006/05/02	2009/05/02
	EM174	BICONILOG ANTENNA	EMCO	3142C	00029071	2008/01/24	2010/01/24
	EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	2008/06/16	2009/06/16
	EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2006/07/26	2009/07/26

Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined



Date: 2008-11-18 Page 14 of 18

No. : HM162651

Appendix B

Duty Cycle Correction During 100msec


Each function key sends a different series of characters, but each packet period (95.39msec) never exceeds a series of 10 long (2.04msec) and 37 short (0.4msec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered (10x2.04msec)+(37x0.4msec) per 95.39msec=36.9% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.369) = -8.7dB

*Measurement is based on 18msec.


The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

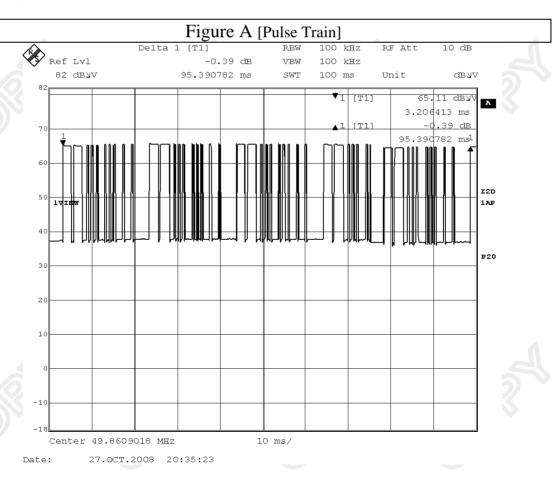



Date: 2008-11-18 Page 15 of 18


No. : HM162651

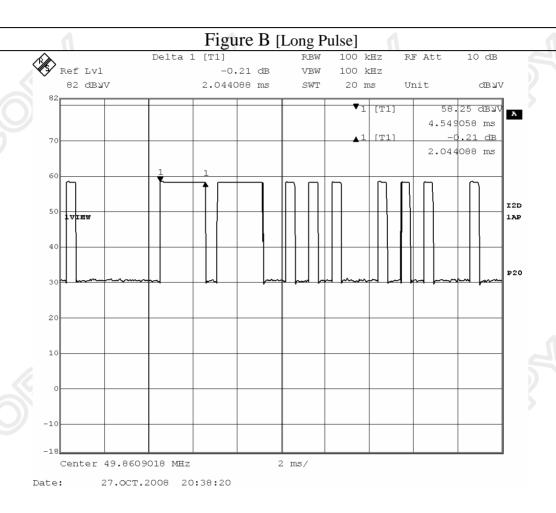



Date: 2008-11-18 Page 16 of 18

No. : HM162651

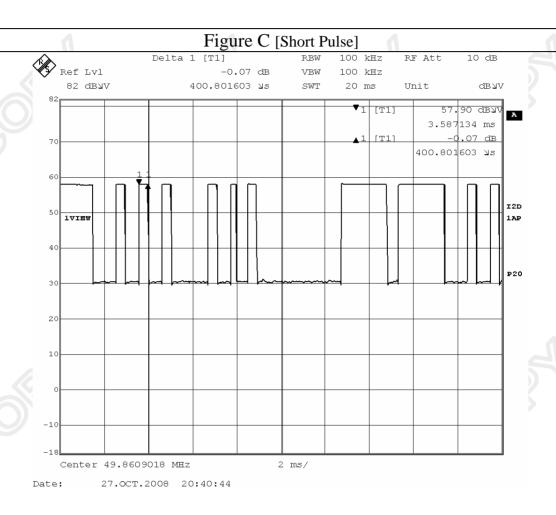



Date: 2008-11-18 Page 17 of 18

No. : HM162651

Appendix C

Photographs of EUT

Front View of the product



Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View






Date: 2008-11-18 Page 18 of 18

No. : HM162651

Photographs of EUT

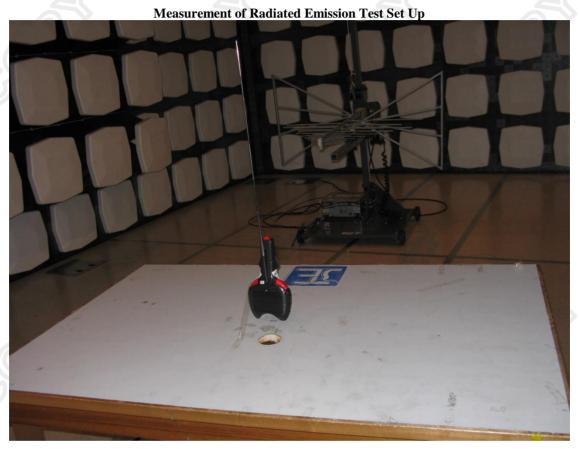

***** End of Test Report *****

The Hong Kong Standards and Testing Centre Ltd.

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong
Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org