

Page 1 of 17

Applicant:	KID GALAXY IN ONE SUNDIAL / 03103, U.S.A.	C AVE, SUITE 310 MANCHE	STER, NH
Description of Samples:	Model name: Model no.: Brand name: FCC ID:	MDM Patriot Flames 10704 Mad Dog Motor QEAMDM49T	
Date Samples Received:	2006-07-14		
Date Tested:	2006-07-20		
Investigation Requested:	FCC Part 15 Sub	opart C	
Conclusions:	Federal Commu Regulations Pa	roduct <u>COMPLIED</u> with the unications Commission [F rt 15. The tests were the standards described is Test Report.	CC] Rules and e performed in
Remarks:			
	The	TSANG Chi Ho, E For and on behalf Hong Kong Standards and T	of C

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Ce ntre Ltd. For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of Homepage.



Page 2 of 17

Date : 2006-07-24 No. : HM157041

CONT	ENT:	
	Cover Content	Page 1 of 17 Page 2-3 of 17
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 17
1.2	Applicant Details Applicant HKSTC Code Number for Applicant Manufacturer	Page 4 of 17
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 17
1.4	Date of Order	Page 5 of 17
1.5	Submitted Samples	Page 5 of 17
1.6	Test Duration	Page 5 of 17
1.7	Country of Origin	Page 5 of 17
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 6 of 17
2.2	Test Standards and Results Summary	Page 6 of 17
<u>3.0</u>	Test Results	
3.1	Emission	Page 7-10 of 17
3.2	Bandwidth Measurement	Page 11-12 of 17

 The Hong Kong Standards and Testing Centre Ltd.

 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

 Tel: (852) 2666 1888
 Fax: (852) 2664 4353

 Homepage: www.hkstc.org
 E-mail: hkstc@hkstc.org



Page 3 of 17

Appendix A

List of Measurement Equipment

Appendix B

Duty Cycle Correction During 100 msec

Appendix C

Photographs

Page 16-17 of 17

Page 14-15 of 17

Page 13 of 17





The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date : 2006-07-24

No. : HM157041

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

1.2 Applicant Details Applicant

KID GALAXY INC ONE SUNDIAL AVE, SUITE 310 MANCHESTER, NH 03103, U.S.A.

Manufacturer

Lung Cheong Toys Ltd. Lung Cheong Building, 1 Lok Yip Road On Lok Tsuen, Fanling N.T. Hong Kong



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd . For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 4 of 17



Page 5 of 17

1.3	Equipment Under Description of Sam		
	Model Name: Manufacturer: Brand Name: Model Number: Input Voltage:	MDM Patriot Flames Lung Cheong Toys Ltd. Mad Dog Motor 10704 4.5Vd.c. ("AAA" size battery x 3)	

1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a KID GALAXY INC, MDM Patriot Flames. The transmitter is a 2 Joystick transmitter. The EUT continues to transmit while joystick is being pressed, It is pulse transmitter, Modulation by IC, and type is pulse modulation.

1.4 Date of Order

2006-07-14

1.5 Submitted Sample(s):

2 Samples per model

1.6 Test Duration

2006-07-20

1.7 Country of Origin

China



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Date : 2006-07-24

No. : HM157041

Page 6 of 17

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2005 and ANSI C63.4:2003 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary							
Test Condition	Test Condition Test Requirement Test Method Class / Test Result						
			Severity	Pass	Failed	N/A	
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A	\boxtimes			
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	N/A	\boxtimes			
Conducted Emissions on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	N/A				

Note: N/A - Not Applicable



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 7 of 17

3.0 Test Results

3.1 Emission


3.1.1 Radiated Emissions (30 – 1000MHz)

Test Requirement: Test Method: Test Date: Mode of Operation: FCC 47CFR 15.235 ANSI C63.4:2003 2006-07-20 Tx mode

Test Method:

The sample was placed 0.8m above the ground plane on a standard radiated emission test site *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: On a standard radiated emission test site located at HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

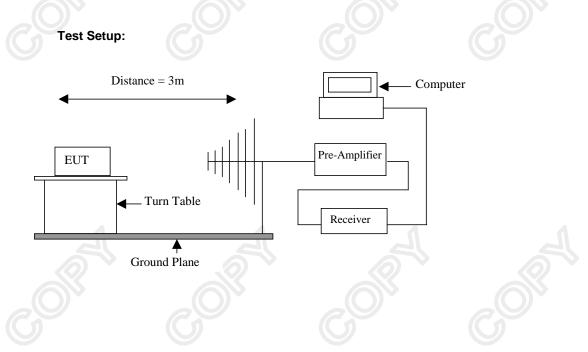

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Fundamental Emission
	[Peak]	[Average]
[MHz]	[µV/m]	[µV/m]
49.82-49.90	100,000	10,000

Results:

Field Strength of Fundamental Emissions Peak Value							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field	
	Level @3m	Factor	Strength	Strength		Polarity	
MHz	dBµV	dB/m	dBµV/m	μV/m	μV/m		
49.85	74.2	9.0	83.2	14,454.4	100,000	Vertical	

		Field Streng	th of Funda	amental Er	nissions		
			Averag	ge			
Frequency	Measured	Adjusted by	Correction	Field	Field	Limit @3m	E-Field
	Level @3m	Duty Cycle	Factor	Strength	Strength		Polarity
MHz	dBµV	dB	dB/m	dBµV/m	μV/m	μV/m	
49.85	56.0	-18.2	9.0	65.0	1,778.3	10,000	Vertical
5)		

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB

> The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 9 of 17

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Results:

Radiated Emissions Quasi-Peak									
Frequency		easured	Correction		Field		Field	Limit @3m	E-Field
MHz	Level @3m dBµV		Factor dB/m	Strength dBµV/m			trength µV/m	μŴ/m	Polarity
99.70	H.	34.3	8.6		42.9		139.6	150	Vertical
149.55)	25.0	9.0	\mathbf{O}	34.0		50.1	150	Vertical
199.40	<	1.0	11.5	<	12.5	<	4.2	150	Vertical
249.25	<	1.0	15.9	<	16.9	<	7.0	200	Vertical
299.10	<	1.0	17.4	<	18.4	<	8.3	200	Vertical
348.95	<	1.0	17.2	<	18.2	<	8.1	200	Vertical
398.80		20.8	17.0		37.8		77.6	200	Vertical
448.65	<	1.0	19.7	<	20.7	<	10.8	200	Vertical
498.50	<	1.0	20.6	<	21.6	<	12.0	200	Vertical

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation. Calculated measurement uncertainty : 30MHz to 1GHz ±4.1dB

ord cord cord c

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 10 of 17

3.1.2 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: Test Method: Test Date: Mode of Operation:	FCC 47CFR 15.207 ANSI C63.4:2003 N/A N/A	
Results: N/A		

The EUT is operated by a single source of internal battery power [located in the battery compartment], therefore power line conducted emission was deemed unnecessary.



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 11 of 17

3.2 26dB Bandwidth of Fundamental Emission

Test Requirement: Test Method: Test Date: Mode of Operation: FCC 47 CFR 15.235 ANSI C63.4:2003 (Section 13.1.7) 2006-07-19 On mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.





The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



26dB Bandwidth FCC Limits **Frequency Range** [MHz] [KHz] [MHz] 49.8613 38.8 within 49.82-49.90 26dB Bandwidth of Fundamental Emission 10 ACTV DET: MEAS DET: MK PEAK 0P 49.861 MARKER 49.8618 MHz 76.49 d8µV AVG MHz dByV 13 L06 18 dB/ #ATN 8 dB REF 97.0 dBpV MA SB SC FC CORR 49 #1F .8100 MHz BW 3.0 kHz STOP 49.9100 MHz SWP 100 msec START kHz 26dB Bandwidth of Fundamental Emission ACTV DET: PEAK MEAS DET: PEAK QP AVG MKR& 40.0 kHz -30.96 dB 10 MARKER 48.8 kHz -38.96 dB L06 18 dB/ #ATN 0 dB REF 97.8 dByV MA SB SC FC CORR 49.8100 MHz #IF BW 3.0 kHz 9.9100 MHz SNP 100 msec START STOP SW 3 kHz HAVG 100

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

Limits for 26dB Bandwidth of Fundamental Emission:



Appendix A

List of Measurement Equipment

		Radiated Emissi			
EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	27/06/05
EM008	SPECTRUM ANALYZER DISPLAY	HEWLETT PACKARD	HP85662A	3144A20514	27/06/05
EM009	QUASI PEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	27/06/05
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	27/06/05
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	27/06/05
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	27/06/05
EM020	HORN ANTENNA	ETS-Linggren	3115	4032	30/07/03
EM022	LOOP ANTENNA	ETS-Linggren	6502	1189-2424	19/09/03
EM072	SIGNAL GENERATOR	HEWLETT PACKARD	8640B	1948A11892	N/A
EM083	OPEN AREA TEST SITE	HKSTC	N/A	N/A	08/12/05
EM131	EMC ANALYZER	HEWLETT PACKARD	8595EM	3710A00155	29/03/06
EM145	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCS 30	830245/021	04/10/04
EM195	ANTENNA POSITIONING MAST	ETS-Linggren	2075	2368	N/A
EM196	MULTI-DEVICE CONTROLLER	ETS-Linggren	2090	1662	N/A
EM215	MULTIDEVICE CONTROLER	ETS-Linggren	2090	00024676	N/A
EM216	MINI MAST SYSTEM	ETS-Linggren	2075	00026842	N/A
EM217	ELECTRIC POWERED TURNTABLE	ETS-Linggren	2088	00029144	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3	-	02/05/06
EM219	BICONILOG ANTENNA	ETS-Linggren	3142C	00029071	01/02/06
EM229	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB40	100248	04/02/2005

Line Conducted

		Line Conducted	4		
EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL
EM078	VARIAC	SHANGHAI VOLTAGE	TDGC-3/0.5	N/A	CM
EM081	SMALL SCREENED ROOM	MIKO INST HK	N/A	N/A	12/01/06
EM119	LISN	ROHDE & SCHWARZ	ESH3-Z5	0831.5518.52	14/10/04
EM127	ISOLATION TRANSFORMER 220 TO 300V	WING SUN	N/A	N/A	CM
EM233	PULSE LIMITER	ROHDE & SCHWARZ	ESH3-Z2	100314	09/01/06
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	17/03/06
EM154	SHIELDING ROOM	SIEMENA MATSUSHITA COMPONENTS	N/A	803-740-057- 99A	12/01/06
EM197	LISN	ETS-Linggren	4825/2	1193	27/06/05
EM213	DIGITAL POWER METER	VICNOBL	VIP120	00277	14/09/04

Remarks:-

- СМ Corrective Maintenance
- Not Applicable or Not Available N/A
- To Be Determined TBD

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 14 of 17

Appendix B

Duty Cycle Correction During 100msec

Each function key sends a different series of characters, but each packet period (73.5msec) never exceeds a series of 1 long (9.0msec) or short pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered 1x9.0msec per 73.5msec=12.24% duty cycle. Figure A through B show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.1224) =-18.2dB




The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 15 of 17

Date : 2006-07-24 No. : HM157041

The following figures [Figure A to Figure B] show the characteristics of the pulse train for one of these functions.

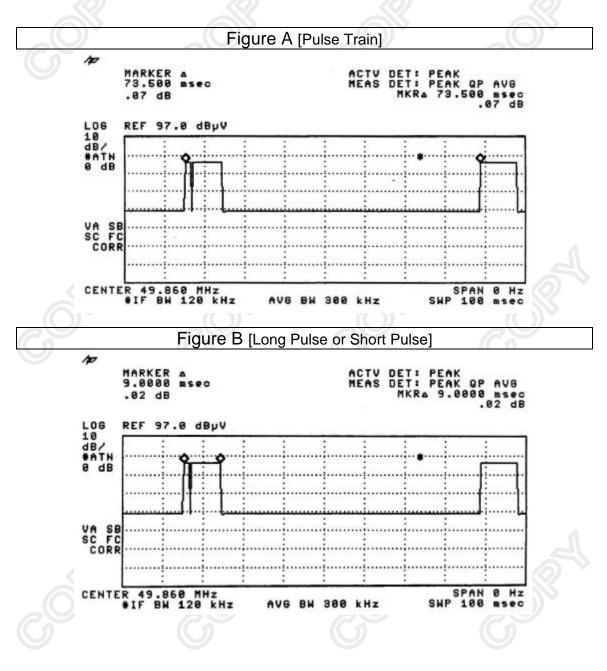

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 16 of 17

Appendix C

Photographs of EUT




Inner Circuit Top View

Rear View of the product




Inner Circuit Bottom View

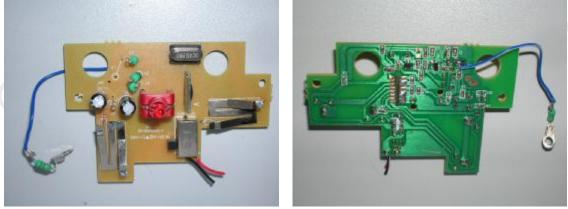


The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 17 of 17



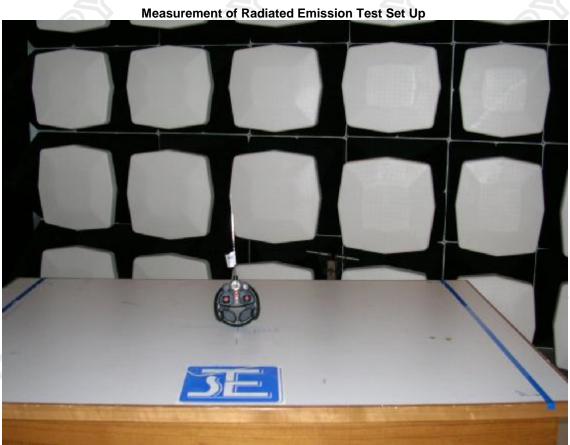

***** End of Test Report *****



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org