

FCC Part 15B Compliance Test Report

Test Report no.:	Cph_FCC_0832_02.doc	Date of Report:	07-Aug-2008
Number of pages:	8	Customer's Contact person:	Porttila Markku
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Nokia House Summit Avenue, Southwood FARNBOROUGH HAMPSHIRE GU14 0NG UK Tel. +44 1252 866000 Fax. +44 1252 866001
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-350 / Battery BL-6F, AC-charger AC-5E, Headset HS-45, Audio adapter AD-54		
FCC ID:	QFXRM-350	IC:	661Z-RM350
Supplement reports:	This report is based on report: Bej_FCC_0827_08		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132 (Issue 2, September 2005), RSS-133 (Issue 4, February 2008), RSS-139 (Issue 1, February 2008) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Christian Andersen, Test Engineer

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	01-Jul-2008
Testing completed	11-Jul-2008
The customer's contact person	Porttila Markku
Test Plan referred to	T:\Projects\RM-350\TestPlan_RS\RS_Testplan_RM-350.xls
Notes	Test results in this report are based on measurements results from report Bej_FCC_0827_08.
Document name	\\satcc01nmp\TCC_salo\Projects\RM-350\EMC\Results\FCC\Cph_FCC_0832_02.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band II/V) mobile phone with GPRS, EGPRS, Bluetooth, WLAN and FM transmitter. GSM bands are tested in idle mode. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-348	004401/10/096089/3	4001	-	0.70	50969
Battery	BL-6F	3820668142152344761;0670523	-	-	-	50971
AC-charger	AC-5E	3943497405080632681;0675540	-	-	-	50859
Headset	HS-45	0694644741701904821	-	-	-	50854
Audio adapter	AD-54	0750838720102100096	0.5	1.7	0.1	50853

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (4.6)	Radiated emissions	NP

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

Bluetooth:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5	Radiated emissions	NP

WLAN:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5	Radiated emissions	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Beijing Laboratory.

CONTENTS


1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated emissions	
(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 1900 Test results	5
2.4. WLAN Test results	6
3. Test Equipment.....	8
3.1. Conducted measurements	8
3.2. Radiated measurements	8

2. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)

EUT with DUT number	RM-348 DUT 50969
Accessories with DUT numbers	BL-6F DUT 50971, AC-5E DUT 50859, HS-45 DUT 50854, AD-54 DUT 50853
Operation Voltage [V] / [Hz]	110 / 60
Result	PASSED
Remarks	FM radio was on during testing.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 78 / 100.4 – 19 / 75 / 99.4
Date of measurements	08-Jul-2008, 16-Jul-2008
Measured by	Yin Hongpeng, Jia Dongsheng

2.1. Test setup

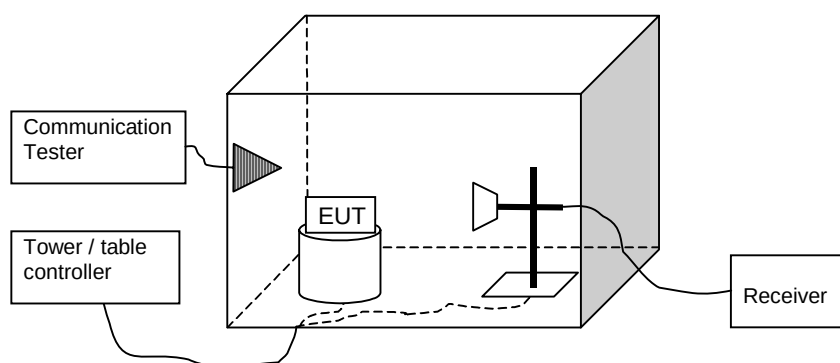

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

2.3. GSM 1900 Test results

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	42.60	134.90	42.70	-0.1	HORIZONTAL	PASSED
7720.000000	44.80	173.78	40.10	4.7	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	29.80	30.90	29.90	-0.1	HORIZONTAL	PASSED
7720.000000	31.80	38.90	27.10	4.7	VERTICAL	PASSED

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
34.450100	13.90	4.95	37.30	-23.4	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3524.550100	42.50	133.35	43.60	-1.1	HORIZONTAL	PASSED
3526.556112	42.10	127.35	43.20	-1.1	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2982.959920	35.50	59.57	33.80	1.7	VERTICAL	PASSED
3526.050100	29.30	29.17	30.40	-1.1	HORIZONTAL	PASSED
3528.556112	29.20	28.84	30.40	-1.2	VERTICAL	PASSED

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	41.60	120.23	43.10	-1.5	VERTICAL	PASSED
7960.000000	45.40	186.21	40.00	5.4	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3980.000000	28.30	26.00	29.80	-1.5	HORIZONTAL	PASSED
7960.000000	32.10	40.27	26.70	5.4	VERTICAL	PASSED

2.4. WLAN Test results

RX mode, channel 1 / 2412MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	40.60	107.15	41.00	-0.4	VERTICAL	PASSED
7236.000000	43.90	156.68	39.60	4.3	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	27.60	23.99	28.00	-0.4	HORIZONTAL	PASSED
7236.000000	31.00	35.48	26.70	4.3	HORIZONTAL	PASSED

RX mode, channel 7 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.695391	7.70	2.43	33.30	-25.6	HORIZONTAL	PASSED
51.202806	9.30	2.92	44.70	-35.4	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2860.864729	50.10	319.89	46.70	3.4	HORIZONTAL	PASSED
7334.169339	43.80	154.88	39.20	4.6	VERTICAL	PASSED
7390.275551	43.90	156.68	39.30	4.6	HORIZONTAL	PASSED
7391.781563	44.60	169.82	40.00	4.6	HORIZONTAL	PASSED
17469.445892	52.50	421.70	35.40	17.1	VERTICAL	PASSED
17972.449900	55.90	623.73	36.00	19.9	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
2863.864729	37.40	74.13	34.00	3.4	HORIZONTAL	PASSED
7335.169339	31.10	35.89	26.50	4.6	VERTICAL	PASSED
7386.775551	31.40	37.15	26.80	4.6	HORIZONTAL	PASSED
7393.781563	31.30	36.73	26.80	4.5	HORIZONTAL	PASSED
17473.445892	40.40	104.71	23.30	17.1	VERTICAL	PASSED
17978.449900	43.00	141.25	23.10	19.9	HORIZONTAL	PASSED

RX mode, channel 11 / 2462 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4924.000000	40.90	110.92	40.50	0.4	VERTICAL	PASSED
7386.000000	44.60	169.82	40.00	4.6	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4924.000000	28.40	26.30	28.00	0.4	HORIZONTAL	PASSED
7386.000000	31.50	37.58	26.90	4.6	HORIZONTAL	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCPT0039	LISN	ESH3-Z5	BJPCPT0039	15C, 15B
BJPCPT0040	TEST RECEIVER	ESCS30	BJPCPT0040	15C, 15B
BJPCPT0069	LISN	ESH3-Z5	BJPCPT0069	15C, 15B
BJPCPT0079	LISN	ESH3-Z5	BJPCPT0079	15C, 15B
BJPCPT0191	PULSE LIMITER	ESH3-Z2	BJPCPT0191	15C, 15B

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
BJPCPT0129	Relay Unit	TS-RSP	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0130	Relay Unit	TS-RSP	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0080	Device Controller	EMCO2090	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0048	RF Preamplifier 10MHz-3GHz (Metal chassis)	AFS4-00100300-10-10P-4	MITEQ	22/24/27, 15C, 15B
BJPCTC0007	Ultra Broadband Antenna 30MHz-3000MHz	HL562	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0162	Horn Antenna 1GHz-18GHz	HF906	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0029	Horn Antenna 1GHz-18GHz	HF906	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0049	RF preamplifier 3GHz-18GHz	BLMA-0118-1A-BT	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCTC0072	3m anechoic chamber	-	ETS-Lindgren	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2088	ETS-EMCO	22/24/27, 15C, 15B
BJPCPT0072	EMI Test Receiver 20Hz-26.5GHz	ESIB26	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0150	High Pass filter	WHKS 1200-10SS	Wainwright instruments	22/24/27, 15C, 15B
BJPCTC0034	Notch Filter	WRCT800/880-0.2/40-5SSK	Wainwright instruments	22, 15B
BJPCPT0151	Notch Filter	WRCD1800/2000-0.2/40-5SSK	Wainwright instruments	24, 15B
BJPCTC0017	Radio Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
BJPCPT0154	Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright instruments	15C, 15B
BJPCTC0058	Bluetooth tester	CBT	Rohde&Schwarz	15C, 15B
BJPCTC0064	WCDMA II FILTER	WRCG1877/1883-1870/1890-40/6SS	Wainwright instruments	24, 15B
BJPCTC0065	WCDMA V FILTER	WRCG832/838-825/845-40/5SS	Wainwright instruments	22, 15B