

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-609_16.docx	Date of Report:	04-Mar-2011
Number of pages:	15	Customer's Contact person:	Read Simon.J
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation Nokia House Summit Avenue, Southwood FARNBOROUGH HAMPSHIRE GU14 0NG UK Tel. +44 1252 866000 Fax. +44 1252 866001
FCC listing no.:	99059		
IC recognition no.:	661AL-1		
Tested devices/ accessories:	Phone RM-609 / Battery BP-4L / Headset WH-207 / Charger AC-15E		
FCC ID:	QFXRM-609	IC:	661Z-RM609
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Christian Andersen, System Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	28-Jan-2011
Testing completed	02-Mar-2011
The customer's contact person	Read Simon.J
Test Plan referred to	T:\Projects\RM-609\TestPlan\RS_testplan_RM-609_CR_HW3500.xls
Notes	-
Document name	T:\Projects\RM-609\EMC\FCC15C_RM-609_16.docx

1.1. EUT and Accessory Information

The EUT is a 9-band (GSM850/900/1800/1900) and WCDMA Band (I/II(1900)/IV(1700)/V(850)/VIII/) mobile phone with GPRS, EGPRS, HSDPA, HSUPA and WLAN and Bluetooth. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-609	004402/13/343495/5	3500	-	020.027	23780
Battery	BP-4L	3932130126461068045;0670519	-	-	-	23886
Headset	WH-207	06949370422A1R00320	-	-	-	23923
AC Charger	AC-15E	4090499512230700762;0675463	-	-	-	23789

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	NP
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	NP
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)	4
2.2. Test method and limit	4
2.3. Bluetooth Test results.....	5
3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	9
3.2. Test method and limit	9
3.3. Bluetooth Test results.....	11
4. Test Equipment	14
4.1. Conducted measurements	14
4.2. Radiated measurements	14

2. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-609, DUT 23780
Accessories with DUT numbers	BP-4L, DUT 23886 ; WH-207, DUT 23923 ; AC-15E, DUT 23789
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 36 / 100.1
Date of measurements	01-Mar-2011
Measured by	Christian Andersen

2.1.1 Test Setup

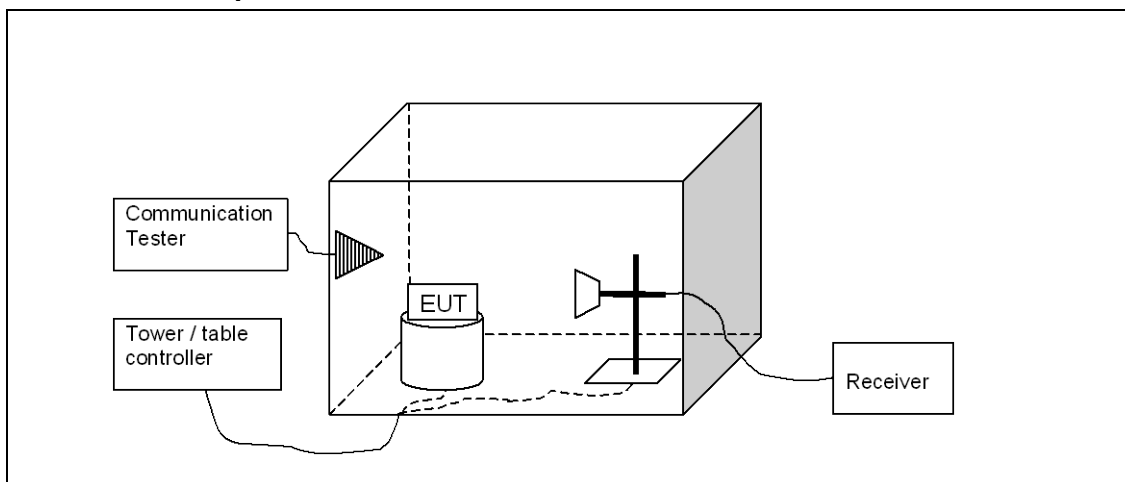

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	<=54	<=74

2.3. Bluetooth Test results

2.3.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	37.03	71.077	37.41	-0.38	Passed
Hopping on, low end	38.19	81.232	38.57	-0.38	Passed
78 / 2480	46.23	204.866	45.68	0.55	Passed
Hopping on, high end	46.7	216.248	46.15	0.55	Passed


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	48.91	278.903	49.29	-0.38	Passed
Hopping on, low end	55.18	574.245	55.56	-0.38	Passed
78 / 2480	53.4	467.76	52.85	0.55	Passed
Hopping on, high end	53.47	471.727	52.92	0.55	Passed


GFSK mode. Channel 0 / 2402 MHz

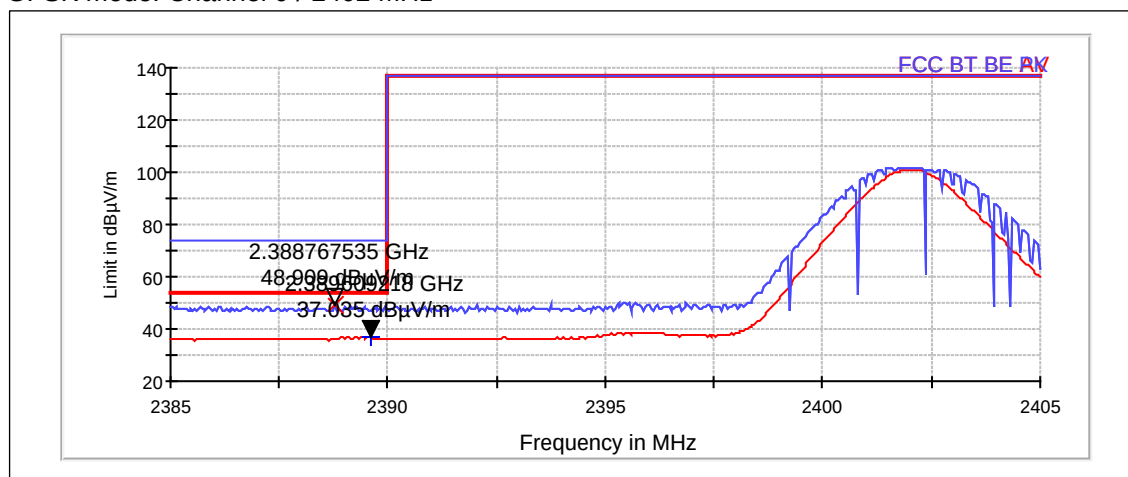


GFSK mode. Hopping on, low end

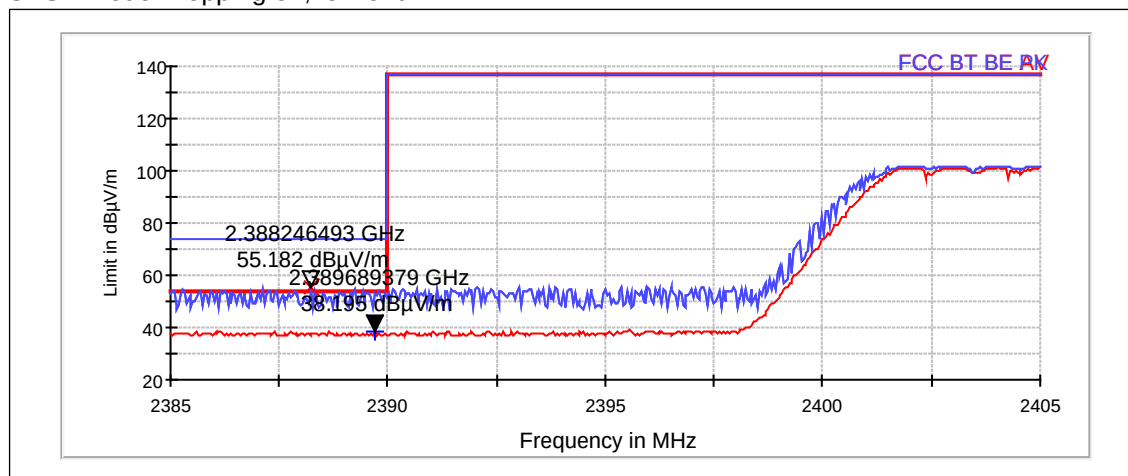

GFSK mode. Channel 78 / 2480 MHz

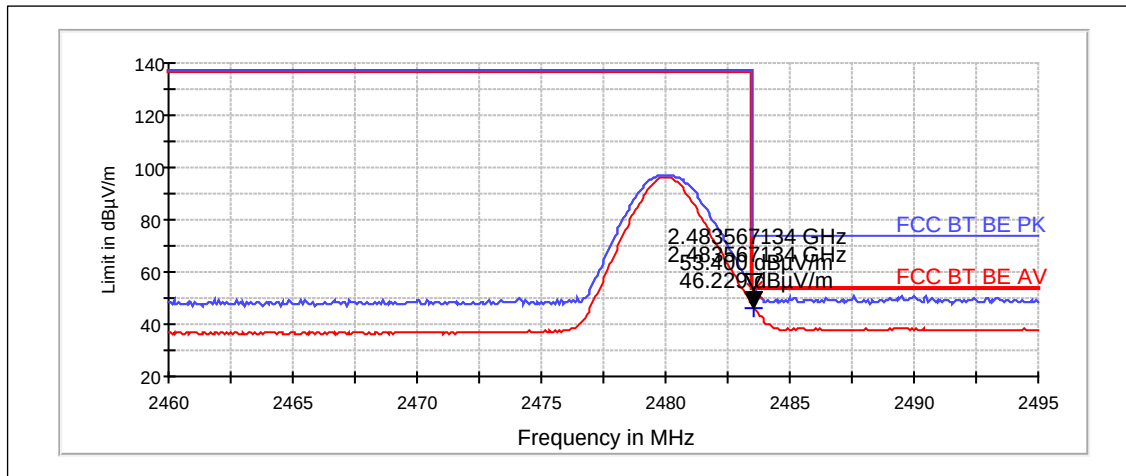

GFSK mode. Hopping on, high end

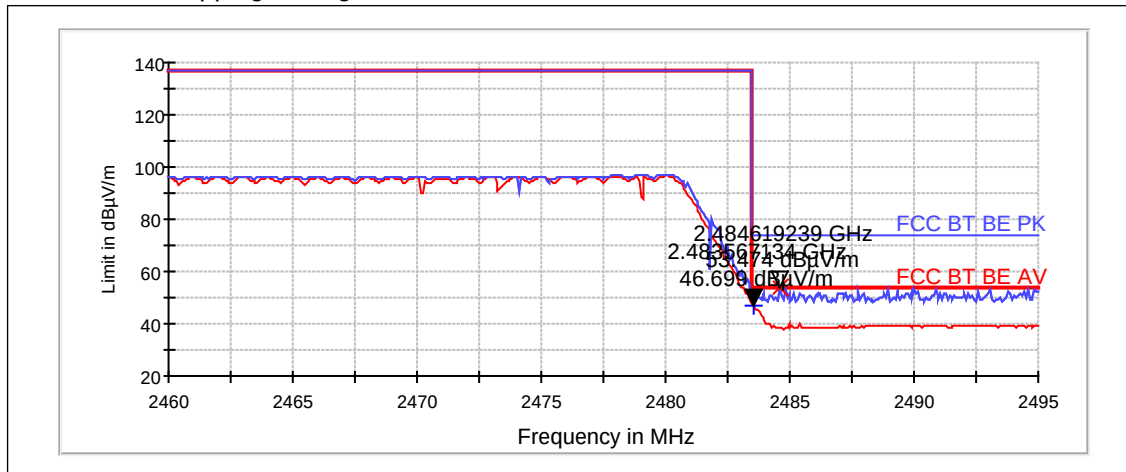

2.3.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	38.72	86.301	39.1	-0.38	Passed
Hopping on, low end	44.48	167.518	44.86	-0.38	Passed
78 / 2480	47.57	239.011	47.02	0.55	Passed
Hopping on, high end	48.36	261.773	47.81	0.55	Passed


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f _c [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Result
0 / 2402	58.24	816.704	58.62	-0.38	Passed
Hopping on, low end	58.33	825.099	58.71	-0.38	Passed
78 / 2480	56.46	665.056	55.91	0.55	Passed
Hopping on, high end	55.04	564.914	54.49	0.55	Passed


8DPSK mode. Channel 0 / 2402 MHz

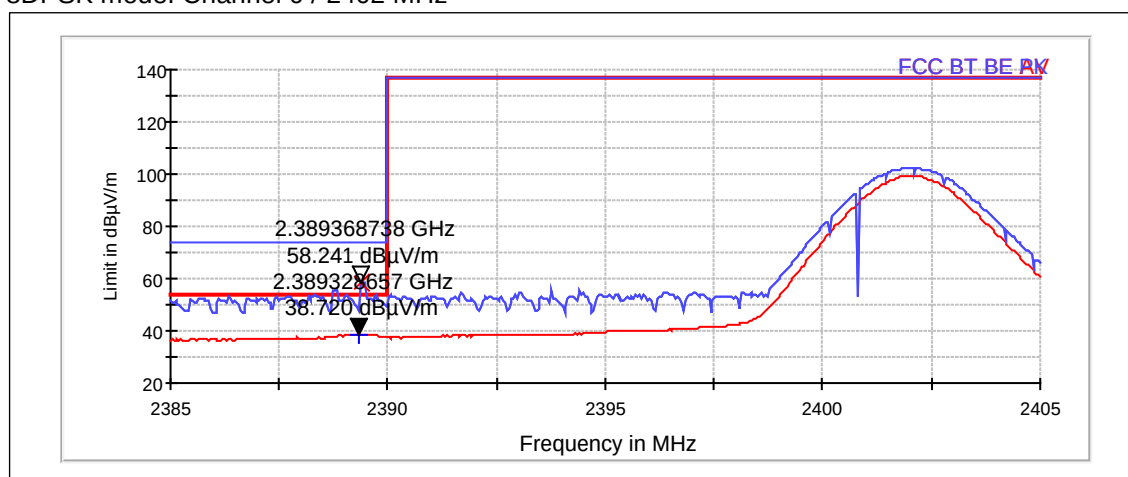


8DPSK mode. Hopping on, low end

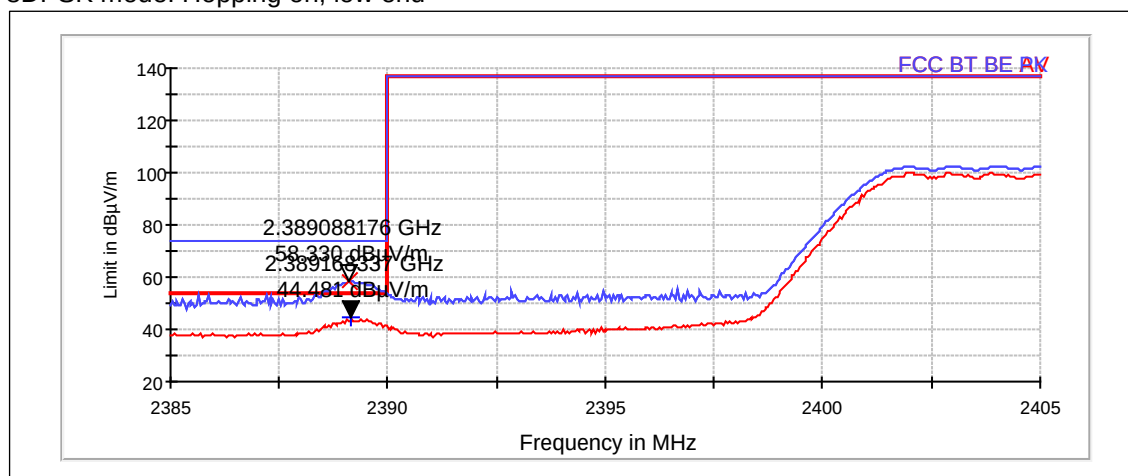

8DPSK mode. Channel 78 / 2480 MHz

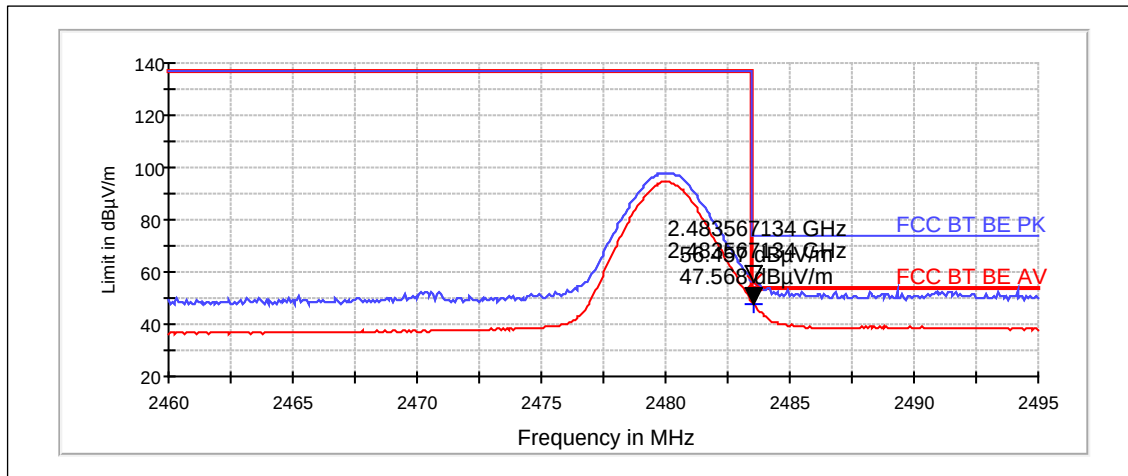


8DPSK mode. Hopping on, high end

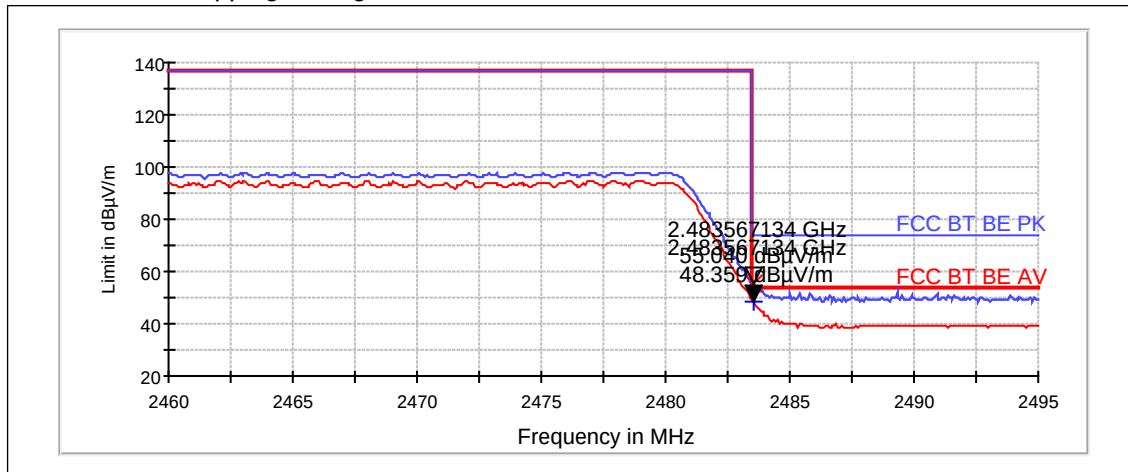

3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-609, DUT 23780
Accessories with DUT numbers	BP-4L, Sony v2.1, DUT 23886 ; WH-207, DUT 23923 ; AC-15E, DUT 23789
Operation Voltage [V] / [Hz]	115 / 60
Results	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 36 / 100.1
Date of measurements	01-Mar-2011
Measured by	Christian Andersen

3.1.1 Test Setup

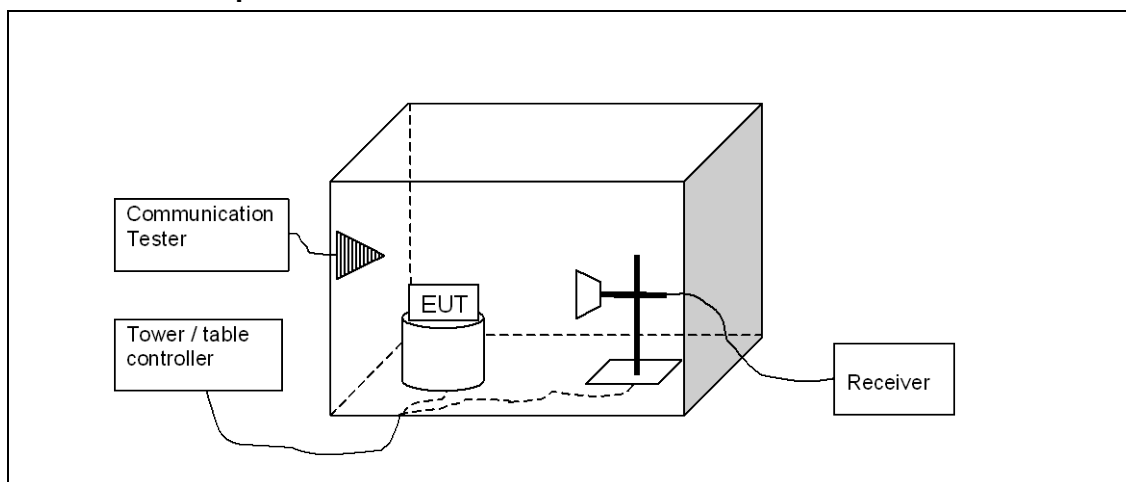

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

3.3. Bluetooth Test results

3.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4804.1	47.64	240.963	45.53	2.11	HORIZONTAL	Passed
7207.6	48.37	262.06	37.28	11.09	HORIZONTAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4804.1	28.76	27.416	26.65	2.11	HORIZONTAL	Passed
7207.6	35.15	57.194	24.06	11.09	HORIZONTAL	Passed

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
39.93	24.4	16.59	35.78	-11.38	HORIZONTAL	Passed
39.989	24.41	16.605	35.83	-11.42	HORIZONTAL	Passed
40	24.9	17.575	36.32	-11.42	HORIZONTAL	Passed
40.039	32.67	42.983	44.12	-11.45	HORIZONTAL	Passed
876.072	63.66	1524.404	68.73	-5.07	VERTICAL	Passed

*876.0 MHz frequency is coming from communication tester and thus ignored.

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
2382.212	57.11	716.721	54.95	2.16	HORIZONTAL	Passed
2383.1	56.42	661.912	54.28	2.14	HORIZONTAL	Passed
3913.627	38.96	88.746	39.84	-0.88	VERTICAL	Passed
3925.552	38.59	84.977	39.47	-0.88	HORIZONTAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
2382.212	33.12	45.264	30.96	2.16	HORIZONTAL	Passed
2383.1	33.11	45.238	30.97	2.14	HORIZONTAL	Passed
3913.627	25.69	19.255	26.57	-0.88	VERTICAL	Passed
3925.552	25.62	19.105	26.5	-0.88	HORIZONTAL	Passed

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4961.9	43.68	152.721	41.21	2.47	VERTICAL	Passed
7438.2	48.44	264.363	36.62	11.82	VERTICAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4961.9	30.78	34.598	28.31	2.47	VERTICAL	Passed
7438.2	35.7	60.947	23.88	11.82	VERTICAL	Passed

3.3.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4803.4	44.18	161.771	42.1	2.08	HORIZONTAL	Passed
7205.7	48.23	257.988	37.14	11.09	HORIZONTAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4803.4	28.58	26.853	26.5	2.08	HORIZONTAL	Passed
7205.7	35.17	57.319	24.08	11.09	HORIZONTAL	Passed

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.3	36.14	64.128	43.34	-7.2	VERTICAL	Passed
30.42	35.51	59.635	42.78	-7.27	VERTICAL	Passed
30.54	34.95	55.931	42.3	-7.35	VERTICAL	Passed
876.072	63.75	1539.749	68.82	-5.07	VERTICAL	Passed

*876.0 MHz frequency is coming from communication tester and thus ignored.

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2368.949	58.66	856.742	56.39	2.27	HORIZONTAL	Passed
2380.74	45.84	195.975	43.65	2.19	HORIZONTAL	Passed
3894.891	38.68	85.941	39.59	-0.91	VERTICAL	Passed
3919.24	38.59	85.006	39.47	-0.88	HORIZONTAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
2368.949	33.13	45.347	30.86	2.27	HORIZONTAL	Passed
2380.74	33.05	44.916	30.86	2.19	HORIZONTAL	Passed
3894.891	25.55	18.941	26.46	-0.91	VERTICAL	Passed
3919.24	25.61	19.079	26.49	-0.88	HORIZONTAL	Passed

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4959.6	44.8	173.86	42.36	2.44	HORIZONTAL	Passed
7438.1	49.37	294.137	37.55	11.82	VERTICAL	Passed

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4959.6	30.8	34.678	28.36	2.44	HORIZONTAL	Passed
7438.1	35.64	60.52	23.82	11.82	VERTICAL	Passed

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13357	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
13513	Pulse Limiter	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	Receiver	ESPC	Rohde&Schwarz	15C, 15B
13935	LISN	ESH3-Z5	Rohde&Schwarz	15C, 15B
16601	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19116	Power splitter	-	various	22/24/27, 15C, 15B
19171	Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
19625	Climatic Chamber	VT4002EMC	Vötsch	22/24/27, 15C, 15B
19678	Spectrum Analyzer	FSP	Rohde&Schwarz	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13077	Power Supply	EA-3016	-	22/24/27, 15C, 15B
13799	Signal Generator	SMP02	Rohde&Schwarz	22/24/27, 15C, 15B
13936	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	22/24/27, 15C, 15B
13937	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24/27, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B
14114	Highpass Filter	WHK1000-12SS	Wainwright Instruments	22/24/27, 15C, 15B
14187	Band reject filter	WRCD1747.5-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
14188	Band reject filter	WRCA902.4-0.2/40-6SS	Wainwright	22/24/27, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24/27, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24/27, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24/27, 15C, 15B
16633	Band reject filter	WRCD1880.0-0.2/40-10SS	Wainwright	22/24/27, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24/27, 15C, 15B
18416	Communication Tester	CMU200	Rohde&Schwarz	22/24/27, 15C, 15B
18773	Anechoic chamber	RFD-100	ETS-Lindgren	22/24/27, 15C, 15B
18774	Anechoic chamber	RFSD-F/A-100	ETS-Lindgren	22/24/27, 15C, 15B
18792	Mast/turntable controller	2090	ETS-EMCO	22/24/27, 15C, 15B
18860	Antenna	HL562	Rohde&Schwarz	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
19151	High Pass Filter	WHJS3000-10SS	Wainwright	22/24/27, 15C, 15B
19587	Band reject filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	22/24/27, 15C, 15B
19966	Antenna	HFH2-Z2	Rohde&Schwarz	15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24/27, 15C, 15B
20114	Band reject filter	WRCG1737/1743-1733/1747-40/6SS	Wainwright	22/24/27, 15C, 15B
20115	Band reject filter	-	Wainwright	22/24/27, 15C, 15B
20116	Band reject filter	WRCG832/83/-825/845-40/5SS	Wainwright	22/24/27, 15C, 15B
20168	Bluetooth Tester	CBT	Rohde&Schwarz	22/24/27, 15C, 15B
20543	UPS. 700V/A 490W	PW 9120 700i	Powerware	22/24/27, 15C, 15B
20544	Transformer. 230/115V	-	Nokia	22/24/27, 15C, 15B
20698	Antenna	BBHA 9120 D	SCHWARZBECK	22/24/27, 15C, 15B
-	Relay Dual 6 Chnl μ Wave Mux	10-785-522	-	22/24/27, 15C, 15B