

FCC Part 22/24 Compliance Test Report

Test Report no.:	FCC22&24_RM-688_06.docx	Date of Report:	17-Jun-2010
Number of pages:	13	Customer's Contact person:	Alison Lenaghan
Testing laboratory:	TCC Nokia Beijing Laboratory Beijing Economic and Technological Development Area No.5 Donghuan Zhonglu Beijing PRC China 100176 Tel. +86 10 8711 8888 Fax. +86 10 8711 4550	Customer:	Nokia Corporation Nokia House Summit Avenue, Southwood FARNBOROUGH HAMPSHIRE GU14 0NG UK Tel. +44 1252 866000 Fax. +44 1252 866001
FCC listing no.:	975940		
IC recognition no.:	661AH-1		
Tested devices/ accessories:	Phone RM-688 / Battery BL-5CT / AC-charger AC-8C / Charger adapter CA-100C / Headset WH-102 / Memory Card MU-37 / Dummy battery SD-62TA		
FCC ID:	QFXRM-688	IC:	661Z-RM688
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-C-2004 and IC standards RSS-GEN (Issue 2, June 2007), RSS-132 (Issue 2, September 2005) and RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jia Dongsheng, System Manager

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	29-May-2010
Testing completed	17-Jun-2010
The customer's contact person	Alison Lenaghan
Test Plan referred to	T:\Projects\RM-688\TestPlan\RS_testplan_RM-688.xls
Notes	-
Document name	FCC22&24_RM-688_06.docx

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band I/V(850)) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-688	004402130836020	4500	-	032.006	51689
Battery	BL-5CT	3635639385150103979;0670555	-	-	-	51694
AC-charger	AC-8C	4419299414010343046;0675391	-	-	-	51699
Charger adapter	CA-100C	0730339828511823010	-	-	-	51702
Headset	WH-102	06943239375c4106666	-	-	-	51704
Memory Card	MU-37	M24U2GTM1BRN11PK3991Q	-	-	-	51695
Dummy Battery	SD-62TA	03618	-	-	-	51728

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	4.3	Frequency stability, voltage variation	PASSED

GSM 1900:

Section in CFR 47	Section in RSS-GEN or RSS-133	Name of the test	Result
§2.1046(a)	6.4	Conducted RF output power	NP
§24.232(b)	6.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§24.238(a)	6.5	Band edge compliance	NP
§24.238(a), §2.1051	6.5	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.5	Spurious radiated emissions	NP
§2.1055(a)	6.3	Frequency stability, temperature variation	PASSED
§2.1055(d)	6.3	Frequency stability, voltage variation	PASSED

WCDMA 850 (Band V):

Section in CFR 47	Section in <i>RSS-GEN</i> or <i>RSS-132</i>	Name of the test	Result
§2.1046(a), 22.913(a)	4.4	Conducted RF output power	NP
§22.913(a)	4.4	Radiated RF output power	NP
§2.1049(h)	4.6.1	99 % occupied bandwidth	PASSED
§22.917(a)	4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.5	Spurious radiated emissions	NP
§2.1055(a)	4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.3	Frequency stability, voltage variation	NP

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Beijing Laboratory.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)	5
2.1. Test setup	5
2.2. Test method and limit	5
2.3. GSM 850 Test results	6
2.4. GSM 1900 Test results	7
2.5. WCDMA 850 Test results	8
3. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3)	9
3.1. Test setup	9
3.2. Test method and limit	9
3.3. GSM 850 Test results	10
3.4. GSM 1900 Test results	10
4. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3)	11
4.1. Test setup	11
4.2. Test method and limit	11
4.3. GSM 850 Test results	12
4.4. GSM 1900 Test results	12
5. Test Equipment	13
5.1. Conducted measurements	13
5.2. Radiated measurements	13

2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.6.1)

EUT with DUT number	RM-688, DUT 51689
Accessories with DUT numbers	BL-5CT, DUT 51694 ; AC-8C, DUT 51699 ; CA-100C, DUT 51702 ; WH-102, DUT 51704 ; MU-37, DUT 51695
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 61 / 100.9
Date of measurements	10-Jun-2010
Measured by	Yin Hongpeng

2.1. Test setup

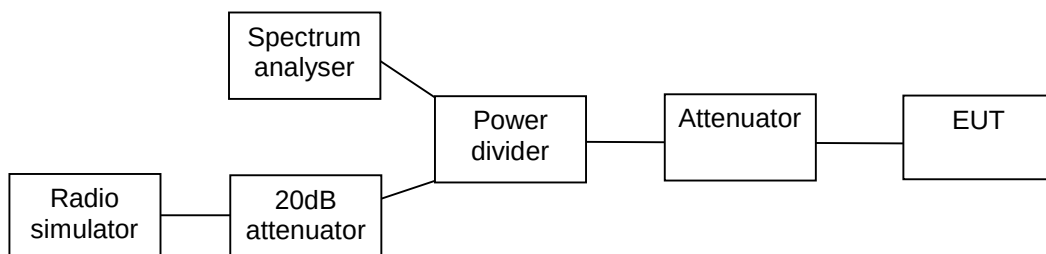


2.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standard RSS-GEN.

2.3. GSM 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	244.000


GSM mode, channel 190 / 836.6 MHz

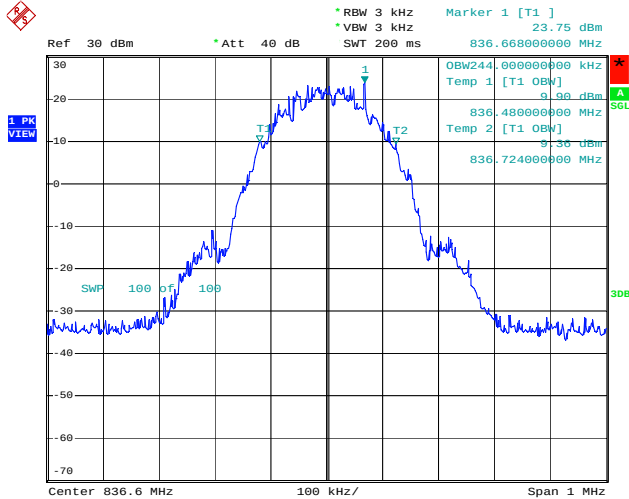

Date: 10.JUN.2010 09:39:21

Operation mode (TX on)	99% occupied bandwidth [kHz]
EGPRS	244.000

EGPRS mode, channel 190 / 836.6 MHz

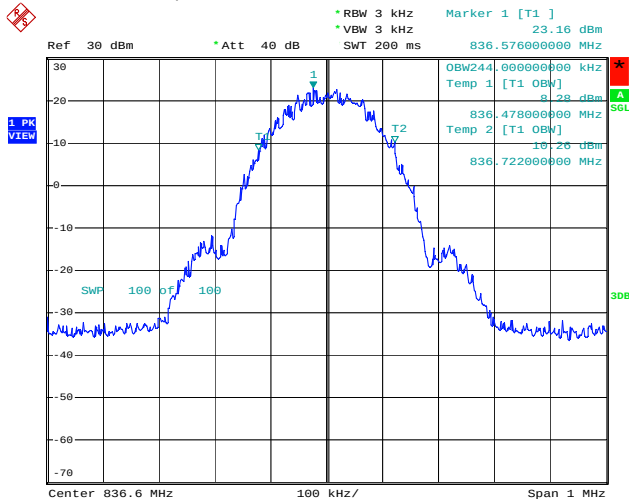


Date: 10.JUN.2010 10:04:24

2.4. GSM 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	244.000


GSM mode, channel 661 / 1880.0 MHz

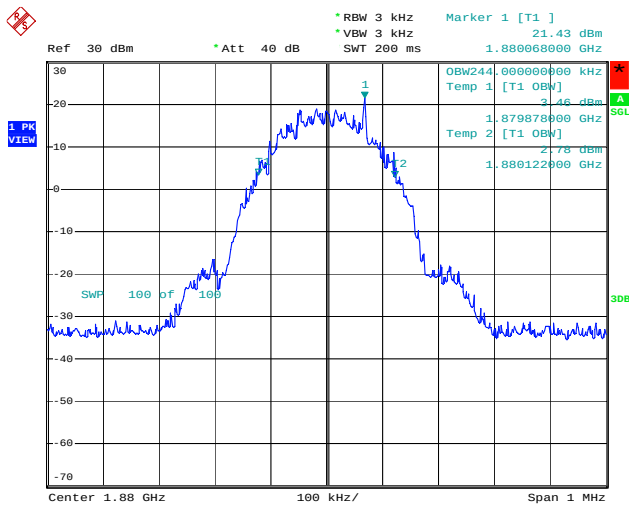

Date: 10.JUN.2010 09:43:02

Operation mode (TX on)	99% occupied bandwidth [kHz]
EGPRS	244.000

EGPRS mode, channel 661 / 1880.0 MHz

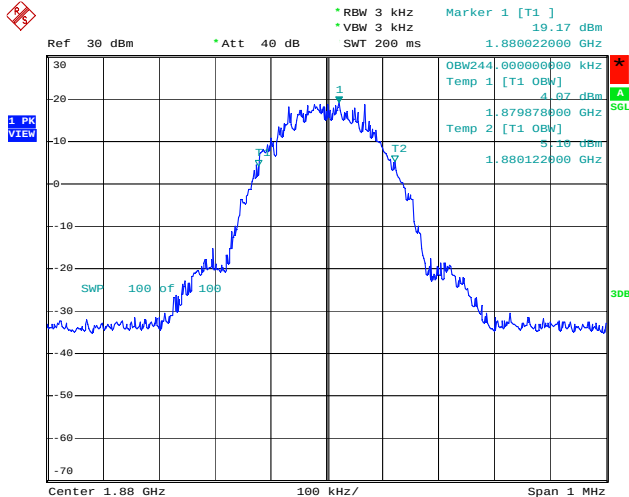


Date: 10.JUN.2010 09:58:47

2.5. WCDMA 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
FDD	4140.000

Channel 4175 / 835.0 MHz

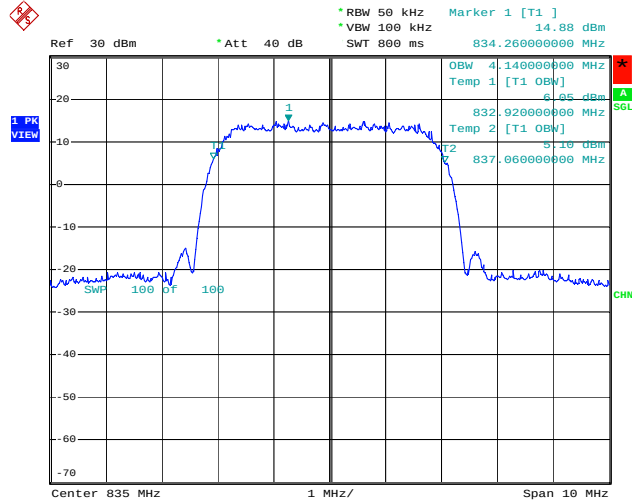


Date: 10.JUN.2010 10:21:09

3. Frequency stability, temperature variation (FCC §2.1055(a), RSS-132 4.3, RSS-133 6.3)

EUT with DUT number	RM-688, DUT 51689
Accessories with DUT numbers	BL-5CT, DUT 51694 ; AC-8C, DUT 51699 ; CA-100C, DUT 51702 ; WH-102, DUT 51704 ; MU-37, DUT 51695
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 61 / 100.9
Date of measurements	10-Jun-2010
Measured by	Yin Hongpeng

3.1. Test setup

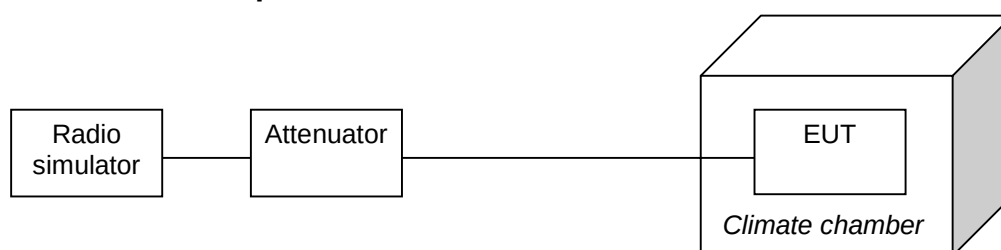

3.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-132 and RSS-133 as follows:

The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.
The EUT is placed in the chamber.
The EUT is set in idle mode for 15 minutes.
The EUT is set to transmit.
The transmit frequency error was measured immediately.
The steps c - e were repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
± 2.5

3.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-15	-0.0179
40	-15	-0.0179
30	-22	-0.0263
20	-15	-0.0179
10	11	0.0131
0	32	0.0383
-10	24	0.0287
-20	-20	-0.0239

3.4. GSM 1900 Test results


GSM mode, channel 661 / 1880.0 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-23	-0.0122
40	-14	-0.0074
30	-23	-0.0122
20	-44	-0.0234
10	37	0.0197
0	53	0.0282
-10	52	0.0277
-20	35	0.0186
-22	26	0.0138
-24	32	0.0170

4. Frequency stability, voltage variation (FCC §2.1055(d), RSS-132 4.3, RSS-133 6.3)

EUT with DUT number	RM-688, DUT51689
Accessories with DUT numbers	SD-62TA, DUT51728
Operation Voltage [V] / [Hz]	Nominal
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	26 / 63 / 99.8
Date of measurements	17-Jun-2010
Measured by	Yin Hongpeng

4.1. Test setup



4.2. Test method and limit

The measurement is made according to FCC rules parts 22 and 24 and IC standards RSS-132 and RSS-133 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
± 2.5

4.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.30	-10	-0.0120
Nominal / 3.70	-9	-0.0108

4.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.30	-40	-0.0213
Nominal / 3.70	-23	-0.0122

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
BJPCHW0020	DC Power supply	Hp6632B	HP	22/24/27, 15C
BJPCPT0040	Receiver	ESCS30	R&S	15C,15B
BJPCPT0069	LISN 50 µH	ESH3-Z5	R&S	15C,15B
BJPCPT0073	Signal Generator	SMR 20	R&S	22/24/27, 15C, 15B
BJPCPT0079	LISN 50 µH	ESH3-Z5	R&S	15C,15B
BJPCPT0131	Communication Tester	CMU200	R&S	15C,15B
BJPCPT0191	Pulse Limiter	ESH3-Z2	R&S	15C,15B
BJPCTC0017	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
BJPCTC0067	Bluetooth Tester	CBT	R&S	22/24/27, 15C
BJPCTC0089	Temperature Test chamber	VT4002	Votsch industrietechnik	22/24/27, 15C
BJPCTC0090	FSP spectrum analyzer	FSP30	R&S	22/24/27, 15C
BJPCTC0094	GPIO-RS232 convertor	GPIO-RS232	NI	22/24/27, 15C

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	BT / WLAN Antenna	SPA 2400/75/9/0/V	Huber-Suhner	15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24/27, 15C, 15B
BJPCPT0072	Receiver	ESI B26	R&S	22/24/27, 15C, 15B
BJPCPT0130	Relay Switch Unit	TS-RSP	R&S	22/24/27, 15C, 15B
BJPCPT0150	High Pass Filter	WHKS1200-10SS	Wainwright	22/24/27, 15C, 15B
BJPCPT0151	Band Reject Filter	WRCD1880/2000-0.2/40-5SSK	Wainwright	24, 15B
BJPCPT0154	Band Reject Filter	WRCT2402/2480-2400/2483.5-30-20SS	Wainwright	15C, 15B
BJPCPT0162	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0007	Antenna	HL562	R&S	22/24/27, 15C, 15B
BJPCTC0029	Antenna	HF906	R&S	22/24/27, 15C, 15B
BJPCTC0034	Band Reject Filter	WRCT 800/880-0.2/40-5SSK	Wainwright	22, 15B
BJPCTC0049	Preamplifier	Blma 0118-1A-Bt	Bonn	22/24/27, 15C, 15B
BJPCTC0055	Communication Tester	CMU200	R&S	22/24/27,15C,15B
BJPCTC0058	Bluetooth Tester	CBT	R&S	15C, 15B
BJPCTC0064	Band Reject Filter	WRCG1877/1883-1870/1890-40/6SS	Wainwright	24, 15B
BJPCTC0065	Band Reject Filter	WRCG832/838-825/845-40/5SS	Wainwright	27, 15B
BJPCTC0071	Multi-Device Controller	2090	EMCO	22/24/27, 15C, 15B
BJPCTC0072	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	ETS	22/24/27, 15C, 15B
BJPCTC0073	MAST	Model-TR/POL	ETS	22/24/27, 15C, 15B
BJPCTC0074	MAST	Model 2070-2	ETS	22/24/27, 15C, 15B
BJPCTC0075	Turntable	Model 2188	ETS-EMCO	22/24/27, 15C, 15B
BJPCTC0096	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B