

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RM-744_12.docx	Date of Report:	18-Feb-2011
Number of pages:	9	Customer's Contact person:	Lenaghan Alison
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Nokia House Summit Avenue, Southwood FARNBOROUGH HAMPSHIRE GU14 0NG UK Tel. +44 1252 866000 Fax. +44 1252 866001
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-744 / Battery BL-5CT / Charger AC-8E / Headset WH-102		
FCC ID:	QFXRM-744	IC:	661Z-RM744
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22, RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	25-Jan-2011
Testing completed	15-Feb-2011
The customer's contact person	Lenaghan Alison
Test Plan referred to	T:\Projects\RM-744\TestPlan\RS_testplan_RM-744.xls
Notes	-
Document name	FCC15B_RM-744_12.docx

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900) and WCDMA Band (I/V(850)/V(850)) mobile phone with GPRS, EGPRS, HSDPA, HSUPA and Bluetooth.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-744	004402133710883	9204	-	070.020	42469
Battery	BL-5CT	3635639511910602892;0670555	-	-	-	42470
Charger	AC-8E	4868679361310602230;0675387	-	-	-	42444
Headset	WH-102	0694323939454107471	-	-	-	42460

1.2. Summary of Test Results

GSM850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (4.6)	Radiated emissions	PASSED

WCDMA 850 (Band V):

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (4.6)	Radiated emissions	NP

GSM1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 15B Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated emissions	
(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6)	4
2.2. Test method and limit	4
2.3. GSM850 + FM radio Test results	5
2.4. GSM1900 + GPS receiver Test results	6
3. Test Equipment	8
3.1. Conducted measurements	8
3.2. Radiated measurements	8

2. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6)

EUT with DUT number	RM-744, DUT 42469
Accessories with DUT numbers	BL-5CT, DUT 42470 ; AC-8E, DUT 42444 ; WH-102, DUT 42460
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	24 / 50 / 99.9
Date of measurements	15-Feb-2011
Measured by	Jari Jantunen

2.1.1 Test Setup

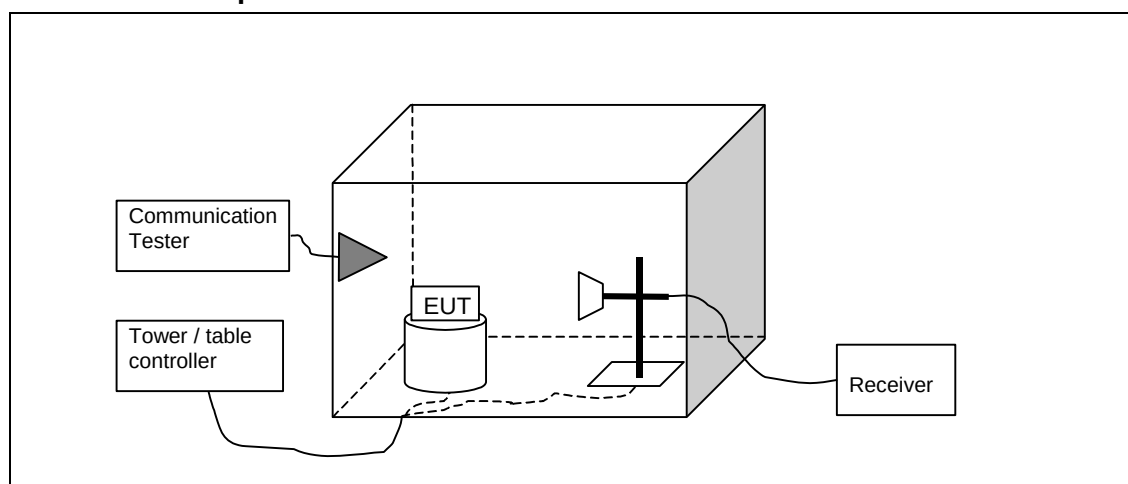

2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 - 230	40	-	-
230 - 1000	47	-	-
Above 1000	-	54	74

2.3. GSM850 + FM radio Test results

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3475.4	38.74	86.537	44.4	-5.66	HORIZONTAL	PASSED
6955	47.15	227.746	47.06	0.09	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3475.4	25.99	19.937	31.65	-5.66	HORIZONTAL	PASSED
6955	34.24	51.517	34.15	0.09	VERTICAL	PASSED

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 120 kHz, VBW: 300 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
32.605	26.73	21.695	55.28	-28.55	VERTICAL	PASSED
40.372	20.26	10.306	51.85	-31.59	VERTICAL	PASSED
47.455	14.31	5.196	49.46	-35.15	VERTICAL	PASSED
77.031	22.53	13.384	60.54	-38.01	HORIZONTAL	PASSED
77.585	24.4	16.592	61.93	-37.53	VERTICAL	PASSED
147.043	23.51	14.985	58.1	-34.59	HORIZONTAL	PASSED

RX mode, channel 190 / 881.6 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7859.822	45.63	191.161	43.34	2.29	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7859.822	32.19	40.686	29.9	2.29	VERTICAL	PASSED

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.6	38.43	83.455	43.74	-5.31	VERTICAL	PASSED
7149	43.82	155.31	43.21	0.61	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.6	26.11	20.195	31.42	-5.31	VERTICAL	PASSED
7149	30.39	33.06	29.78	0.61	VERTICAL	PASSED

2.4. GSM1900 + GPS receiver Test results

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.9	41.2	114.789	43.61	-2.41	HORIZONTAL	PASSED
7721.1	44.54	168.578	42.69	1.85	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.9	28	25.13	30.41	-2.41	HORIZONTAL	PASSED
7721.1	31.51	37.61	29.66	1.85	HORIZONTAL	PASSED

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz, VBW: 300 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.15	18.35	8.272	43.96	-25.61	HORIZONTAL	PASSED
76.941	22.55	13.404	60.57	-38.02	HORIZONTAL	PASSED
77.225	23.64	15.212	61.21	-37.57	VERTICAL	PASSED
148.227	23.01	14.148	57.38	-34.37	VERTICAL	PASSED

RX mode, channel 661 / 1960.0 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	
3548.495	39.94	99.277	45.19	-5.25	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	
3548.495	26.13	20.247	31.38	-5.25	VERTICAL	PASSED

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	
3981.1	40.68	108.106	43.61	-2.93	VERTICAL	PASSED
7959.6	44.72	172.167	42.31	2.41	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	
3981.1	27.92	24.894	30.85	-2.93	VERTICAL	PASSED
7959.6	32.29	41.177	29.88	2.41	HORIZONTAL	PASSED

3. Test Equipment

3.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
OM06312	Signal Generator	E4422B	Agilent	22/24
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27
2009	LISN 50 µH	ENV216	R&S	15C, 15B
2010	LISN 50 µH	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
TM39180	Laser distance meter	Disto Pro	Leica	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
-	High pass filter	F-90-1500-6-R	RLC Electronics	22/24/27, 15C, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	22
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27, 15C