


FCC Part 22/24 Compliance Test Report

Test Report no.:	Cph_FCC_0544_08.doc	Date of Report:	16-11-2005
Number of pages:	7	Customer's Contact person:	Stefan Emery
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Client:	Nokia Corporation Nokia House Summit Avenue, Southwood FARNBOROUGH HAMPSHIRE GU14 0NG UK Tel. +44 1252 866000 Fax. +44 1252 866001
FCC listing no.:	99059		
IC recognition no.:	4820 and 4820-1		
Tested devices/ accessories:	Phone; RM-92 (HW: 5020)		
FCC ID:	QFXRM-92	IC:	661Z-RM92
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-B-2002 and IC standards RSS-GEN, RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:	 Digitally signed by Allan Franch Henriksen DN: cn=Allan Franch Henriksen, c=DK, o=Nokia, ou=CertMT, email=allan.f.henriksen@nokia.com Date: 2005.11.18 12:55:15 +01'00'		

Allan F. Henriksen, Engineer

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	03-11-2005
Testing completed	15-11-2005
The customer's contact person	Stefan Emery
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	None
Document name	T:\\Projects\\RM-92\\EMC\\Results\\FCC\\Cph_FCC_0544_08.doc

1.1. EUT and Accessory Information

The EUT is a five band (GSM850/900/1800/1900 and WCDMA2100) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-92	004400/68/165227/5	5020	-	1.0540.0.4	28308

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.6, 4.4	Conducted RF output power	-
§22.913(a)	4.6, 4.4	Radiated RF output power	-
§2.1049(h)	4.4.1	99 % occupied bandwidth	-
§22.917(a)	4.7, 4.5	Band edge compliance	-
§22.917(a), §2.1051	4.7, 4.5	Spurious emissions at antenna terminals	-
§22.917(a), §2.1053	4.7, 4.5	Spurious radiated emissions	-
§2.1055(a)	4.5, 4.3	Frequency stability, temperature variation	-
§2.1055(d)	4.5, 4.3	Frequency stability, voltage variation	Passed

GSM 1900:

Section in CFR 47	Section in RSS-133	Name of the test	Result
§2.1046(a)	6.2	Conducted RF output power	-
§24.232(b)	6.2	Radiated RF output power	-
§2.1049(h)	5.6	99 % occupied bandwidth	-
§24.238(a)	6.3	Band edge compliance	-
§24.238(a), §2.1051	6.3	Spurious emissions at antenna terminals	-
§24.238(a), §2.1053	6.3	Spurious radiated emissions	-
§2.1055(a)	7	Frequency stability, temperature variation	-
§2.1055(d)	7	Frequency stability, voltage variation	Passed

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Frequency stability, voltage variation (FCC §2.1055(d), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 850 Test results	5
2.4. GSM 1900 Test results	5
3. Test Equipment.....	6
3.1. Conducted measurements	6
3.2. Radiated measurements	6

2. Frequency stability, voltage variation (FCC §2.1055(d), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)

EUT with DUT number	RM-92 dut 28308
Accessories with DUT numbers	None
Operation Voltage [V] / [Hz]	-
Result	Passed
Remarks	Dummy battery, DC power supply
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	22.6 / 39.5 998.5
Date of measurements	15-09-2005
Measured by	Jan Engelbrechtsen

2.1. Test setup



2.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
± 2.5

2.3. GSM 850 Test results

GSM mode, channel 190

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.34	-16	-0.0191
Nominal / 3.80	-17	-0.0203

2.4. GSM 1900 Test results

GSM mode, channel 661

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.32	-41	-0.0218
Nominal / 3.80	-44	-0.0234

3. Test Equipment

3.1. Conducted measurements


Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15B,15C
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15B,15C
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15B,15C
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15B,15C
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15B,15C
11386	System DC Power Supply	HP6632A	Hewlett Packard	22.24
11487	Network analyzer 300KHz-3,0GHz	HP8753A	Hewlett Packard	22.24
11584	Spectrum analyzer 50Hz-6,5GHz	HP8561B	Hewlett Packard	22.24
13134	Tracking generator	HP85645A	Hewlett Packard	22.24
13302	Spectrum Analyzer 9KHz-12.8GHz	HP8596E	Hewlett Packard	22.24
13371	Temperature Chamber	S-1,2C	Thermotron	22.24
13524	Digital Radiocomm. Tester	CMD55	Rohde&Schwarz	22.24
14807	S - Parameter Test Set 300KHz-6GHz	HP85047A	Hewlett Packard	22.24
15859	Digital Radio Communication Test Set	4201S	Wavetek	22.24
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22.24
17796	Radio Communication Test Set	4400M	Wavetek	22.24
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-	NMP Cph	22.24
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-	NMP Cph	22.24
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C

3.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
14020	Programmable Relay Switching System	-	Pickering	15B,15C,22,24
18792	Multi Device Controller	2090	ETS-EMCO	15B,15C,22,24
13829	Turntable Controller	4630-100	Comtest	15B,15C,22,24
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	15B,15C,22,24
13668	BiLog Antenna 30-2000MHz	BiLog-CBL6112A	Chase	15B,15C,22,24
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	15B,15C,22,24
12679	Dual Log Periodic Antenna 1-18 GHz	HL025	Rohde&Schwarz	15B,15C,22,24
18860	Ultra Broadband Antenna	HL562	Rohde&Schwarz	15B,15C,22,24

Eq. No	Equipment	Type	Manufacturer	Used in
	Ultralog 30-3000MHz			
18773	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C,22,24
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	15B,15C,22,24
18324	High Pass Filter 3GHz SMA f Conn	WHJS3000-10SS	Wainwright	15B,15C,22,24
14114	Highpass Filter 1000MHz-4500MHz	WHK1000-12SS	Wainwright	15B,15C,22,24
13918	Highpass Filter 2000-4000MHz 50OHM SMA Conn	WHKS2000-10SS	Wainwright Instruments	15B,15C,22,24
13937	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	15B,15C,22,24
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	15B,15C,22,24
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	15B,15C,22,24
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	15B,15C,22,24
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	15B,15C,22,24
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	15B,15C,22,24
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	15B,15C,22,24
15190	Infra Red Remote Control Unit	4630	Emco	22,24,15B,15C
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22,24,15B,15C
15191	Turntable Contoller Unit	G-800SDX	YAESU	22,24,15B,15C
14900	Antenna Controller	HD100	HD GmbH	22,24,15B,15C

FCC Part 22/24 Compliance Test Report

Test Report no.:	Cph_FCC_0544_06.doc	Date of Report:	17-11-2005
Number of pages:	14	Customer's Contact person:	Stefan Emery
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Client:	Nokia Corporation Nokia House Summit Avenue, Southwood FARNBOROUGH HAMPSHIRE GU14 0NG UK Tel. +44 1252 866000 Fax. +44 1252 866001
FCC listing no.:	99059		
IC recognition no.:	4820 and 4820-1		
Tested devices/ accessories:	Phone; RM-92 (HW: 5020), Battery; BL-5B, AC-Charger; AC-4E, Headset; HS-23		
FCC ID:	QFXRM-92	IC:	661Z-RM92
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-B-2002 and IC standards RSS-GEN, RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:	 Digitally signed by Allan Franch Henriksen DN: cn=Allan Franch Henriksen, c=DK, o=Nokia, ou=CertMT, email=allan.f.henriksen@nokia.com Date: 2005.11.18 12:52:08 +01'00'		

Allan F. Henriksen, Engineer

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	03-11-2005
Testing completed	15-11-2005
The customer's contact person	Stefan Emery
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	None
Document name	T:\\Projects\\RM-92\\EMC\\Results\\FCC\\Cph_FCC_0544_06.doc

1.1. EUT and Accessory Information

The EUT is a five band (GSM850/900/1800/1900 and WCDMA2100) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-92	004400/68/165227/5	5020	-	1.0540.0.4	28308
Miro	RM-92	004400/68/165245/7	5020	-	1.0540.0.4	29009
Battery	BL-5B	0670455363807 M183422202567	-	-	-	28309
Battery	BL-5B	0670455363807M183422202677	-	-	-	29010
AC-Charger	AC-4	0675384409049L261R1 0001709	1.3	0.3	-	28944
AC-Charger	AC-4E	3997915157121100129;0675384	-	-	-	28405
Headset	HS-23	HM3450741D	-	-	-	28340
Headset	HS-23	GM2750741A	0.6	1.2	0.2	29011

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.6, 4.4	Conducted RF output power	NP
§22.913(a)	4.6, 4.4	Radiated RF output power	NP
§2.1049(h)	4.4.1	99 % occupied bandwidth	Passed
§22.917(a)	4.7, 4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.7, 4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.7, 4.5	Spurious radiated emissions	Passed
§2.1055(a)	4.5, 4.3	Frequency stability, temperature variation	Passed
§2.1055(d)	4.5, 4.3	Frequency stability, voltage variation	NP

GSM 1900:

Section in CFR 47	Section in RSS-133	Name of the test	Result
§2.1046(a)	6.2	Conducted RF output power	NP
§24.232(b)	6.2	Radiated RF output power	NP
§2.1049(h)	5.6	99 % occupied bandwidth	Passed
§24.238(a)	6.3	Band edge compliance	NP
§24.238(a), §2.1051	6.3	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.3	Spurious radiated emissions	Passed
§2.1055(a)	7	Frequency stability, temperature variation	Passed
§2.1055(d)	7	Frequency stability, voltage variation	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.4.1, RSS-133 5.6)	5
2.1. Test setup	5
2.2. Test method and limit	5
2.3. GSM 850 Test results	6
2.4. GSM 1900 Test results	7
3. Spurious radiated emissions	
(FCC §22.917(a), §24.238(a), §2.1053, RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)	8
3.1. Test setup	8
3.2. Test method and limit	8
3.3. GSM 850 Test results, Flip open	9
3.4. GSM 1900 Test results, Flip open	9
3.5. GSM 850 Test results, Flip closed	10
3.6. GSM 1900 Test results, Flip closed	10
4. Frequency stability, temperature variation	
(FCC §2.1055(a), §2.1055(a), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)	11
4.1. Test setup	11
4.2. Test method and limit	11
4.3. GSM 850 Test results	12
4.4. GSM 1900 Test results	12
5. Test Equipment	13
5.1. Conducted measurements	13
5.2. Radiated measurements	13

2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.4.1, RSS-133 5.6)

EUT with DUT number	RM-92 dut 28308, BL-5B dut 28309
Accessories with DUT numbers	AC-4E dut 28944, HS-23 dut 28340
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	22.6 / 39.5 998.5
Date of measurements	15-11-2005
Measured by	Jan Engelbrechtsen

2.1. Test setup

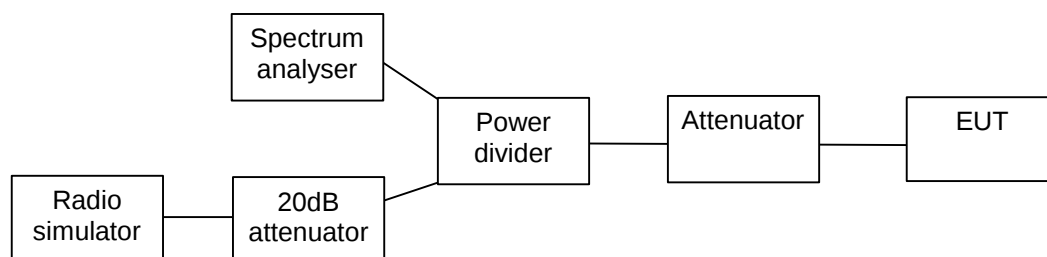


2.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN and RSS-133.


2.3. GSM 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	246.000
EGPRS	236.000

GSM mode, channel 190

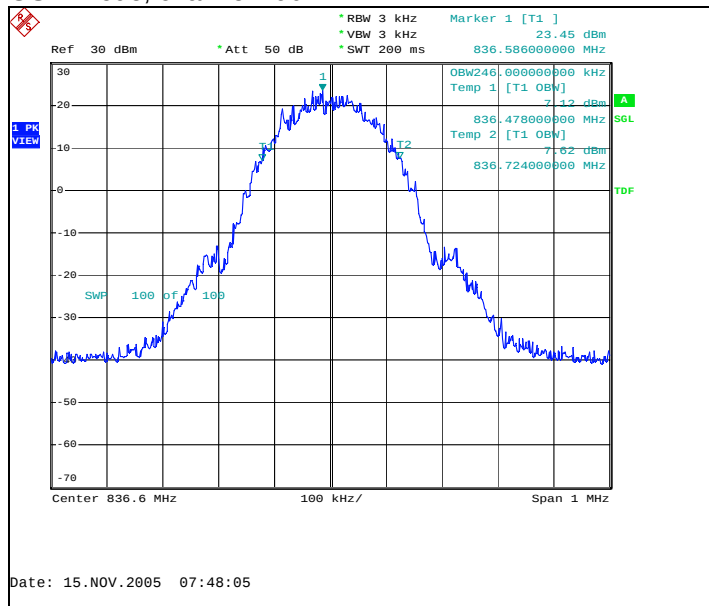


EGPRS mode, channel 190

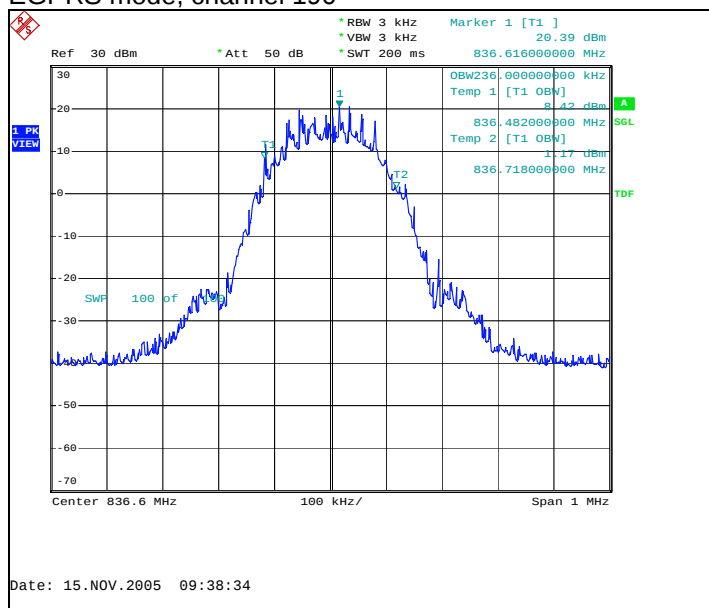


2.4. GSM 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	242.0
EGPRS	242.0

GSM mode, channel 661

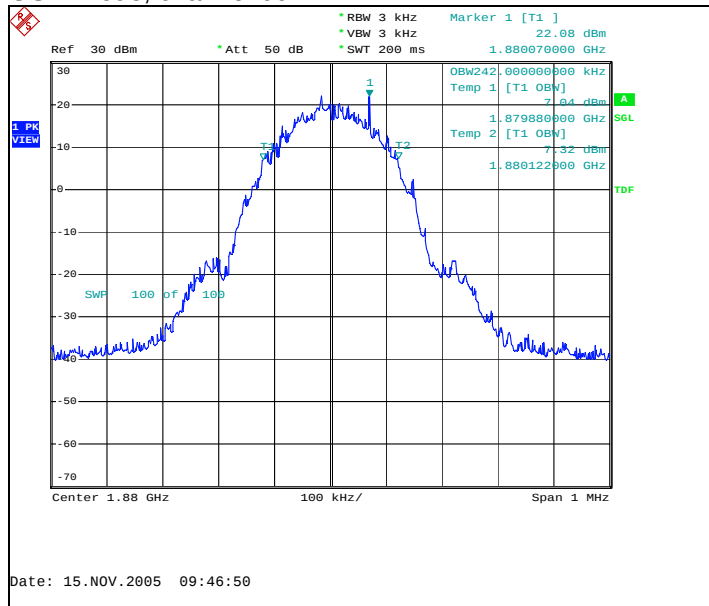

EGPRS mode, channel 661

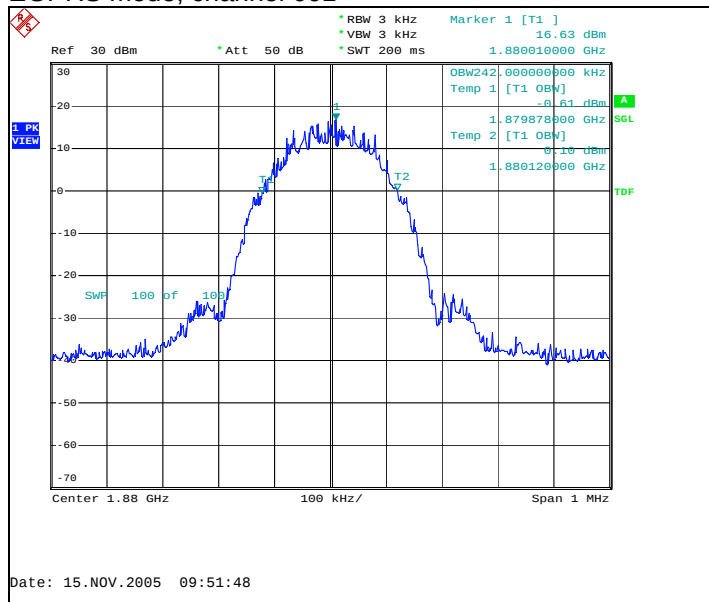


3. Spurious radiated emissions

(FCC §22.917(a), §24.238(a), §2.1053, RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)

EUT with DUT number	RM-92 #29009
Accessories with DUT numbers	BL-5B #29010, HS-23 #29011, AC-4E #28405
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	21.1 / 45.0 / 1018
Date of measurements	08.11.2005
Measured by	Juho Tuohino

3.1. Test setup

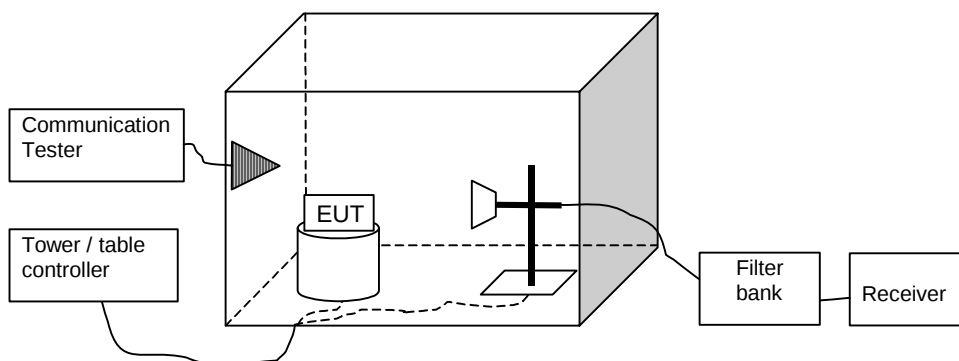

3.2. Test method and limit

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss, preamplifier gain and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	30 - 8500	-13
GSM 1900 / WCDMA 1900	30 - 18000	-13

3.3. GSM 850 Test results, Flip open

GSM mode, channel 190

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.143287	-42.50	0.05623	-54.10	11.60	HORIZONTAL	Passed
3346.689379	-32.90	0.51286	-47.40	14.50	HORIZONTAL	Passed

EGPRS mode, channel 190

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.348697	-51.30	0.00741	-63.10	11.80	VERTICAL	Passed
2510.320641	-49.00	0.01259	-67.60	18.60	HORIZONTAL	Passed
3346.189379	-38.90	0.12882	-53.40	14.50	HORIZONTAL	Passed

3.4. GSM 1900 Test results, Flip open

GSM mode, channel 661

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
3760.023046	-37.70	0.16982	-54.60	16.90	HORIZONTAL	Passed
5624.746493	-46.60	0.02188	-66.20	19.60	VERTICAL	Passed
5629.754509	-47.50	0.01778	-67.00	19.50	VERTICAL	Passed
5639.782565	-35.70	0.26915	-55.60	19.90	HORIZONTAL	Passed
5645.794589	-45.80	0.02630	-65.80	20.00	HORIZONTAL	Passed
7530.066132	-45.10	0.03090	-69.40	24.30	VERTICAL	Passed

EGPRS mode, channel 661

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
5640.286573	-45.20	0.03020	-65.10	19.90	HORIZONTAL	Passed

3.5. GSM 850 Test results, Flip closed

GSM mode, channel 190

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1672.848697	-43.60	0.04365	-55.30	11.70	VERTICAL	Passed
2509.820641	-41.60	0.06918	-60.30	18.70	HORIZONTAL	Passed
3346.689379	-32.20	0.60256	-46.70	14.50	HORIZONTAL	Passed

EGPRS mode, channel 190

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.348697	-46.30	0.02344	-58.10	11.80	VERTICAL	Passed
2508.320641	-47.70	0.01698	-66.40	18.70	HORIZONTAL	Passed
3346.689379	-37.90	0.16218	-52.40	14.50	HORIZONTAL	Passed

3.6. GSM 1900 Test results, Flip closed

GSM mode, channel 661

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
5639.786573	-47.00	0.01995	-66.90	19.90	HORIZONTAL	Passed


EGPRS mode, channel 661

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
5641.786573	-46.40	0.02291	-66.30	19.90	HORIZONTAL	Passed

4. Frequency stability, temperature variation (FCC §2.1055(a), §2.1055(a), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)

EUT with DUT number	RM-92 dut 28308, BL-5B dut 28309
Accessories with DUT numbers	AC-4E dut 28944, HS-23 dut 28340
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	22.6 / 39.5 998.5
Date of measurements	15-11-2005
Measured by	Jan Engelbrechtsen

4.1. Test setup

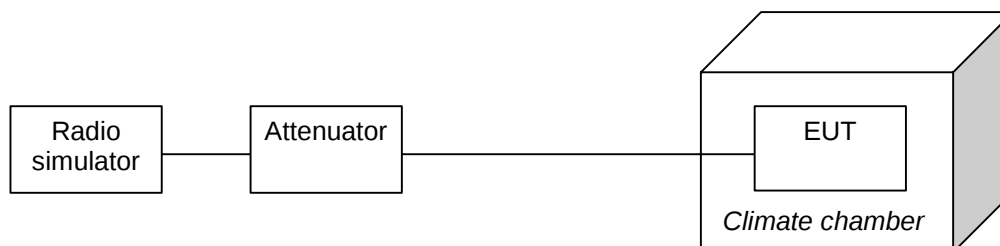

4.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133 as follows:

- The EUT is placed in the climate chamber.
- The climate chamber temperature is set to 50°C.
- The temperature is allowed to stabilize for 15 minutes.
- The EUT is set to transmit.
- The transmit frequency error is measured immediately.
- The EUT is set to idle and temperature decremented 10°C
- The steps c - f is repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
± 2.5

4.3. GSM 850 Test results

GSM mode, channel 190

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-16	-0.0191
40	-14	-0.0167
30	-18	-0.0215
20	-21	-0.0251
10	-21	-0.0251
0	-18	-0.0215
-10	-18	-0.0215
-20	-20	-0.0239
-30	-20	-0.0239

4.4. GSM 1900 Test results

GSM mode, channel 661

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-36	-0.0191
40	-42	-0.0223
30	-58	-0.0309
20	-46	-0.0245
10	-38	-0.0202
0	-53	-0.0282
-10	-50	-0.0266
-20	-39	-0.0207
-30	-45	-0.0239

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15B,15C
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15B,15C
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15B,15C
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15B,15C
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15B,15C
11386	System DC Power Supply	HP6632A	Hewlett Packard	22.24
11487	Network analyzer 300KHz-3,0GHz	HP8753A	Hewlett Packard	22.24
11584	Spectrum analyzer 50Hz-6,5GHz	HP8561B	Hewlett Packard	22.24
13134	Tracking generator	HP85645A	Hewlett Packard	22.24
13302	Spectrum Analyzer 9KHz-12.8GHz	HP8596E	Hewlett Packard	22.24
13371	Temperature Chamber	S-1,2C	Thermotron	22.24
13524	Digital Radiocomm. Tester	CMD55	Rohde&Schwarz	22.24
14807	S - Parameter Test Set 300KHz-6GHz	HP85047A	Hewlett Packard	22.24
15859	Digital Radio Communication Test Set	4201S	Wavetek	22.24
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22.24
17796	Radio Communication Test Set	4400M	Wavetek	22.24
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-	NMP Cph	22.24
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-	NMP Cph	22.24
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15B,15C

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
14020	Programmable Relay Switching System	-	Pickering	15B,15C,22,24
18792	Multi Device Controller	2090	ETS-EMCO	15B,15C,22,24
13829	Turntable Controller	4630-100	Comtest	15B,15C,22,24
14963	RF Preamplifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	15B,15C,22,24
13668	BiLog Antenna 30-2000MHz	BiLog-CBL6112A	Chase	15B,15C,22,24
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	15B,15C,22,24
12679	Dual Log Periodic Antenna 1-18 GHz	HL025	Rohde&Schwarz	15B,15C,22,24
18860	Ultra Broadband Antenna	HL562	Rohde&Schwarz	15B,15C,22,24

Eq. No	Equipment	Type	Manufacturer	Used in
	Ultralog 30-3000MHz			
18773	Shielded Chamber	RFD-100	ETS-Lindgren	15B,15C,22,24
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	15B,15C,22,24
18324	High Pass Filter 3GHz SMA f Conn	WHJS3000-10SS	Wainwright	15B,15C,22,24
14114	Highpass Filter 1000MHz-4500MHz	WHK1000-12SS	Wainwright	15B,15C,22,24
13918	Highpass Filter 2000-4000MHz 50OHM SMA Conn	WHKS2000-10SS	Wainwright Instruments	15B,15C,22,24
13937	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	15B,15C,22,24
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright Instruments	15B,15C,22,24
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	15B,15C,22,24
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	15B,15C,22,24
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40-10SS	Wainwright	15B,15C,22,24
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40-10SS	Wainwright	15B,15C,22,24
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953-1940/1960-40/6SS	Wainwright	15B,15C,22,24
15190	Infra Red Remote Control Unit	4630	Emco	22,24,15B,15C
14993	EMI Test Receiver 9KHz-2750MHz	ESCS30	Rohde&Schwarz	22,24,15B,15C
15191	Turntable Contoller Unit	G-800SDX	YAESU	22,24,15B,15C
14900	Antenna Controller	HD100	HD GmbH	22,24,15B,15C

FCC Part 22/24 Compliance Test Report

Test Report no.:	Salo_FCC_0548_03.doc	Date of Report:	01.12.2005
Number of pages:	13	Customer's Contact person:	Stefan Emery
Testing laboratory:	TCC Nokia Salo Laboratory P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Client:	Nokia Corporation Nokia House Summit Avenue, Southwood FARNBOROUGH HAMPSHIRE GU14 0NG UK Tel. +44 1252 866000 Fax. +44 1252 866001
FCC listing no.:	533467		
IC recognition no.:	5385		
Tested devices/ accessories:	Phone RM-92 / Battery BL-6B, AC-Charger AC-4E and Headset HS-23		
FCC ID:	QFXRM-92	IC:	661Z-RM92
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-B-2002 and IC standards RSS-GEN, RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:	 Digitally signed by Tomi Lipponen DN: CN = Tomi Lipponen, C = FI, O = Nokia, OU = CertMT Date: 2005.12.01 11:39:54 +02'00'		

Tomi Lipponen, System Manager

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	25.11.2005
Testing completed	30.11.2005
The customer's contact person	Stefan Emery
Test Plan referred to	T:\Projects\RM-92\TestPlan_RS\ RM-92_RS_EMC testplan.xls
Notes	-
Document name	T:\Projects\RM-92\EMC\Results\FCC\Salo_FCC_0548_03.doc

1.1. EUT and Accessory Information

The EUT is a quadri band (GSM850/900/1800 and WCDMA2100) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-92	004400/68/165233/3	5022	-	1.0540.0.4	10837
Battery	BL-5B	0670455363807M183422202540	-	-	-	10839
AC-Charger	AC-4E	3997915157121100122;0675384	-	-	-	10764
Headset	HS-23	GM2750741D	-	-	-	10765

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.6, 4.4	Conducted RF output power	NP
§22.913(a)	4.6, 4.4	Radiated RF output power	PASSED
§2.1049(h)	4.4.1	99 % occupied bandwidth	NP
§22.917(a)	4.7, 4.5	Band edge compliance	PASSED
§22.917(a), §2.1051	4.7, 4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.7, 4.5	Spurious radiated emissions	NP
§2.1055(a)	4.5, 4.3	Frequency stability, temperature variation	NP
§2.1055(d)	4.5, 4.3	Frequency stability, voltage variation	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Salo Laboratory.

CONTENTS


1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated RF output power (FCC §22.913(a), §24.232(b), RSS-GEN 4.6, RSS-132 4.4, RSS-133 6.2)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 850 Test results	5
3. Band edge compliance (FCC §22.917(a), 24.238(a), RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)	7
3.1. Test setup	7
3.2. Test method and limit	7
3.3. GSM 850 Test results	8
4. Test Equipment	12
4.1. Conducted measurements	12
4.2. Radiated measurements	12

2. Radiated RF output power

(FCC §22.913(a), §24.232(b), RSS-GEN 4.6, RSS-132 4.4, RSS-133 6.2)

EUT with DUT number	RM-92, DUT 10837
Accessories with DUT numbers	BL-5C, DUT 10839; AC-4E, DUT 10764; HS-23, DUT 10765
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 102
Date of measurements	30.11.2005
Measured by	Tomi Lipponen

2.1. Test setup

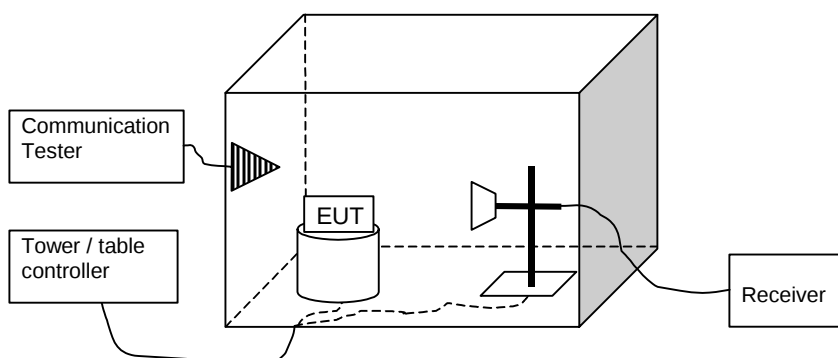

2.2. Test method and limit

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} + A_{SUBST}$).

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
824 - 849	7	38.5
1850 - 1910	2	33

2.3. GSM 850 Test results

GSM mode, Slide open

Channel	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128	26.90	0.490	- 9.70	36.60	HORIZONTAL	PASSED
190	27.40	0.550	- 8.30	35.70	HORIZONTAL	PASSED
251	28.00	0.631	- 6.60	34.60	HORIZONTAL	PASSED

GPRS mode, 2 TX Slots, Slide open

Channel	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128	28.00	0.631	- 8.60	36.60	HORIZONTAL	PASSED
190	27.40	0.550	- 8.30	35.70	HORIZONTAL	PASSED
251	26.40	0.437	- 8.20	34.60	HORIZONTAL	PASSED

GPRS mode, 3 TX Slots, Slide open

Channel	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128	26.80	0.479	- 9.80	36.60	HORIZONTAL	PASSED
190	26.10	0.407	- 9.60	35.70	HORIZONTAL	PASSED
251	26.40	0.437	- 8.20	34.60	HORIZONTAL	PASSED

EGPRS mode, 1 TX Slot, Slide open

Channel	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128	22.60	0.182	- 14.00	36.60	HORIZONTAL	PASSED
190	19.30	0.085	- 16.40	35.70	HORIZONTAL	PASSED
251	19.70	0.093	- 15.00	34.70	VERTICAL	PASSED

GSM mode, Slide closed

Channel	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128	28.90	0.776	- 7.70	36.60	HORIZONTAL	PASSED
190	28.20	0.661	- 7.50	35.70	HORIZONTAL	PASSED
251	28.70	0.741	- 5.90	34.60	HORIZONTAL	PASSED

GPRS mode, 2 TX Slots, Slide closed

Channel	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128	28.50	0.708	- 8.10	36.60	HORIZONTAL	PASSED
190	28.00	0.631	- 7.70	35.70	HORIZONTAL	PASSED
251	28.20	0.661	- 6.40	34.60	HORIZONTAL	PASSED

GPRS mode, 3 TX Slots, Slide closed

Channel	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128	27.60	0.575	- 9.00	36.60	HORIZONTAL	PASSED
190	27.90	0.617	- 7.80	35.70	HORIZONTAL	PASSED
251	28.50	0.708	- 6.10	34.60	HORIZONTAL	PASSED

EGPRS mode, 1 TX Slot, Slide closed


Channel	ERP [dBm]	ERP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
128	23.80	0.240	- 12.80	36.60	HORIZONTAL	PASSED
190	22.00	0.158	- 13.70	35.70	HORIZONTAL	PASSED
251	20.30	0.107	- 14.30	34.60	HORIZONTAL	PASSED

3. Band edge compliance

(FCC §22.917(a), 24.238(a), RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)

EUT with DUT number	RM-92, DUT 10837
Accessories with DUT numbers	BL-5C, DUT 10839; AC-4E, DUT 10764; HS-23, DUT 10765
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 102
Date of measurements	30.11.2005
Measured by	Tomi Lipponen

3.1. Test setup

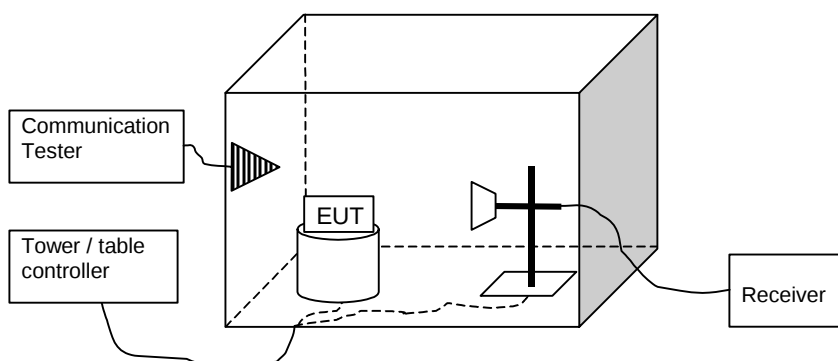

3.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133.

Limits for band edge compliance measurements


Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	Below 824 and above 849	-13
GSM 1900 / WCDMA 1900	Below 1850 and above 1910	-13

3.3. GSM 850 Test results


SLIDE OPEN:

Operation mode (TX on)	Channel	Level [dBm]
GSM	128	-17.95
GSM	251	-16.61
EGPRS	128	-25.63
EGPRS	251	-26.66


GSM mode, channel 128 (Peak detector, RBW: 3 kHz)

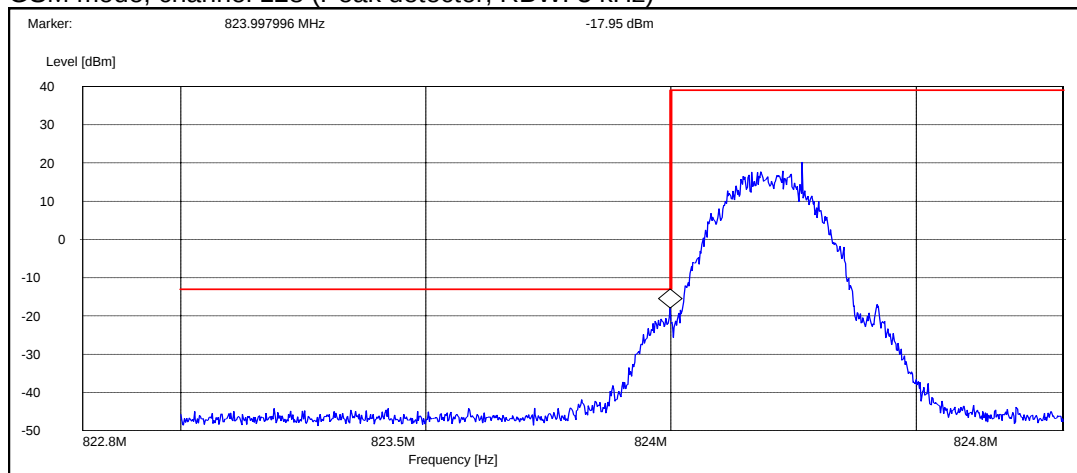


GSM mode, channel 251 (Peak detector, RBW: 3 kHz)

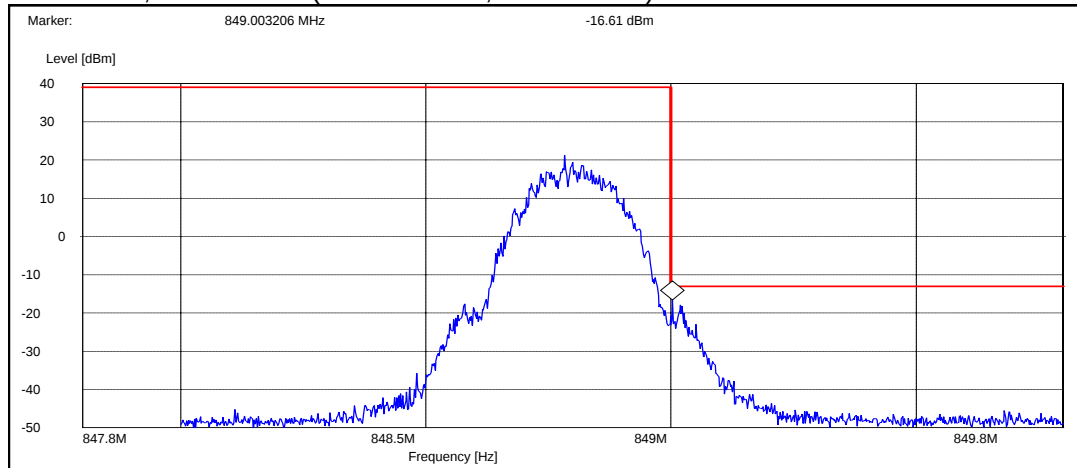

EGPRS mode, channel 128 (Peak detector, RBW: 3 kHz)

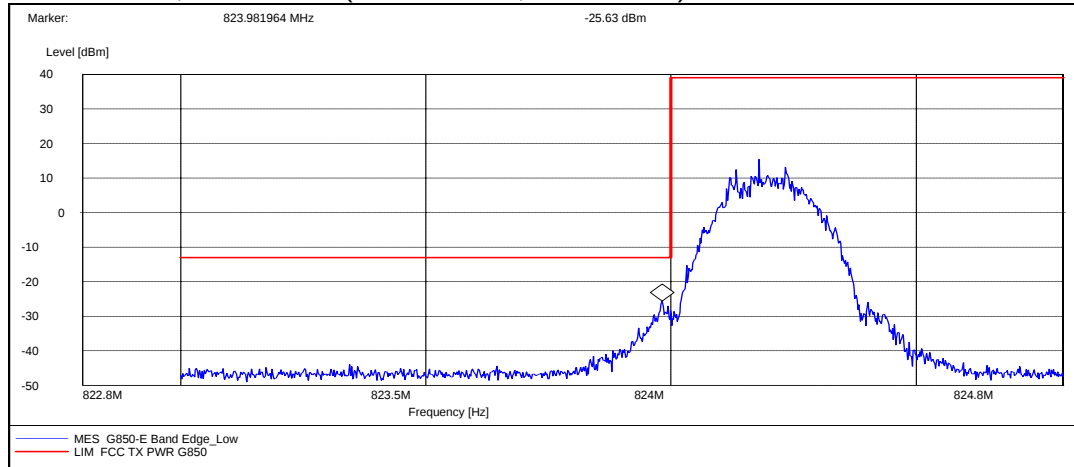


EGPRS mode, channel 251 (Peak detector, RBW: 3 kHz)

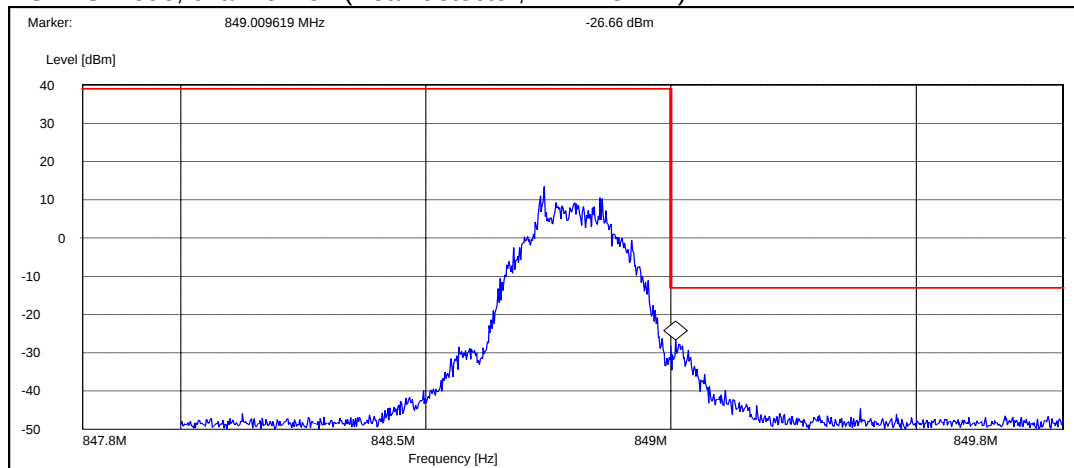


SLIDE CLOSED:

Operation mode (TX on)	Channel	Level [dBm]
GSM	128	-15.19
GSM	251	-16.76
EGPRS	128	-25.48
EGPRS	251	-29.49


GSM mode, channel 128 (Peak detector, RBW: 3 kHz)

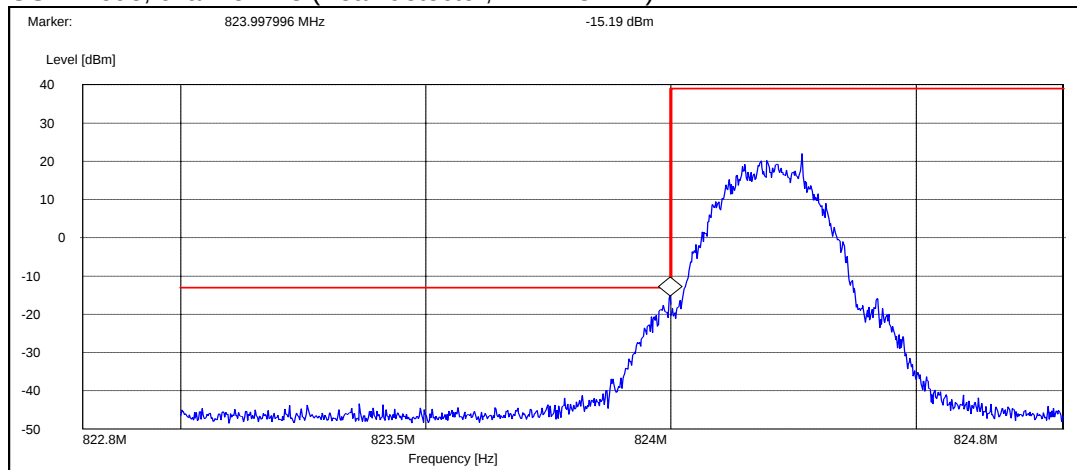


GSM mode, channel 251 (Peak detector, RBW: 3 kHz)

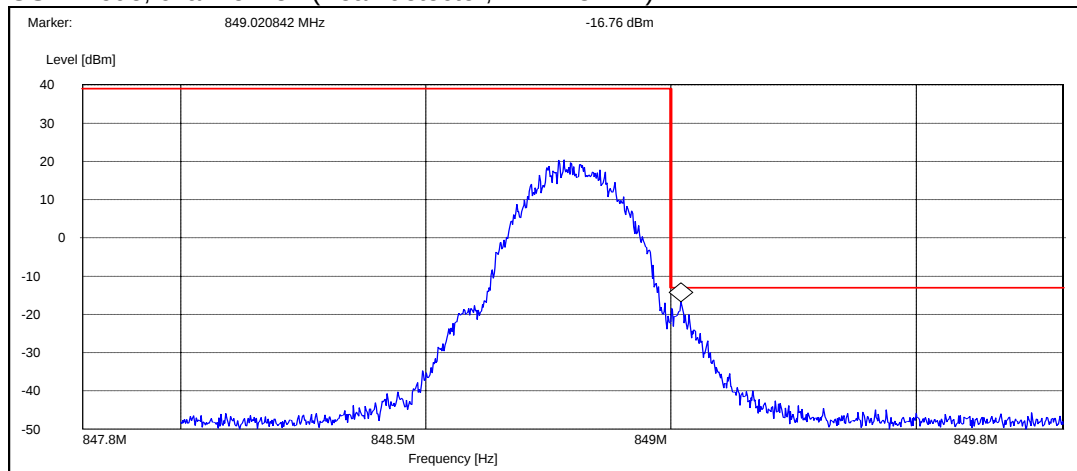

EGPRS mode, channel 128 (Peak detector, RBW: 3 kHz)

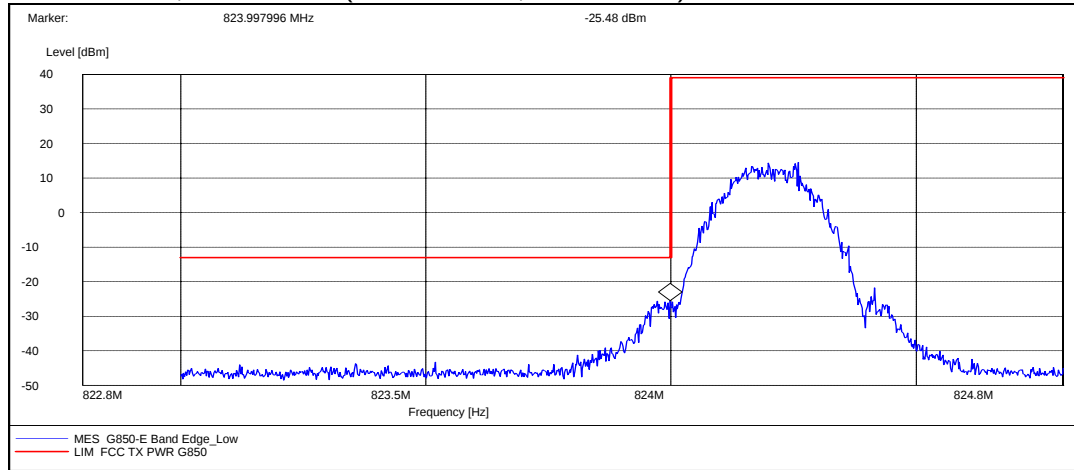

EGPRS mode, channel 251 (Peak detector, RBW: 3 kHz)

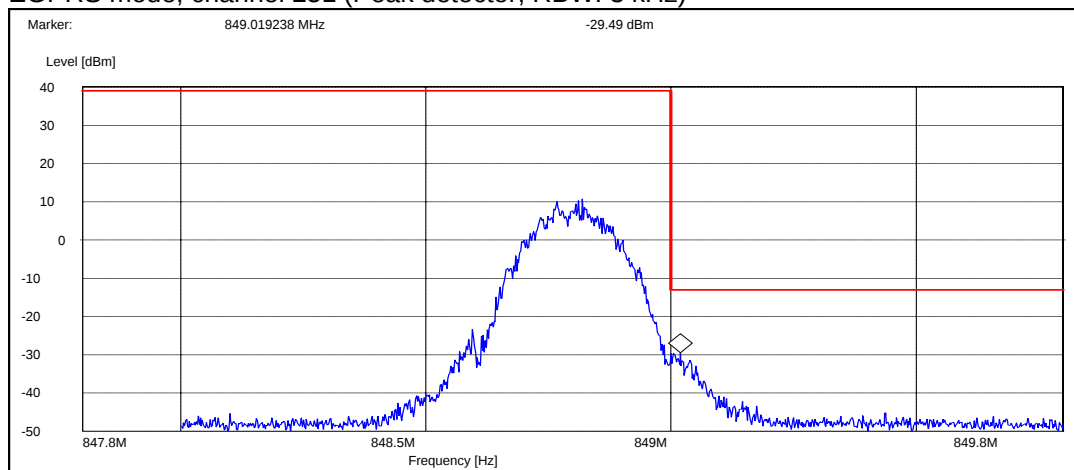

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1742	EMI Test Receiver	ESMI	R&S	15C, 15B
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1872	Thermo- Hygrograph	00.02520.150700	Lambrecht	15C, 15B
1916	Radio Communication tester	CMTA84	R&S	15C, 15B
2039	Power Supply	PL330QMD	THURLBY	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN-Antenna line	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2111	Multimeter	TX3	Tektronix	15C, 15B
2156	Digital Radio Communication Tester	CMU200	R&S	15C, 15B
2206	Signal generator	SMX	R&S	15C, 15B
2335	GPIB Switch 2 to 1	-	National Instruments	15C, 15B
2347	Digital Radio Communication Tester	CMU200	R&S	22/24, 15C, 15B
2352	Spectrum Analyzer	FSP	R&S	22/24, 15C
2359	Temperature Test system	VT4002	Vötsch Industrietechnik	22/24
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24
2362	Power Supply	NGPX 70/5	R&S	22/24
-	RF Emission Software	ES-K1 v.1.60	R&S	15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1748	Log. per. Antenna	HL025	R&S	22/24, 15C
1749	Log. per. Antenna	HL025	R&S	22/24, 15C
1875	Thermo- Hygrograph	00.02520.150700	Lambrecht	22/24, 15C, 15B
1917	Radio Communication tester	CMTA84	R&S	22/24, 15C, 15B
1933	Precision half-wave dipole antennas	HZ-13	R&S	22/24, 15C
1938	Precision half-wave dipole antennas	HZ-12	R&S	22/24, 15C
2004	Relay Switch Unit	RSU	R&S	22/24, 15C, 15B
2006	Radiation Reference Source	VSQ	MEB	22/24, 15C, 15B
2009	Signal generator	SMP 22	R&S	22/24, 15C, 15B
2019	Multimeter	34401A	HP	22/24, 15C, 15B
2027	Coupling and Decoupling Network	M2 (modified) DC1	MEB	22/24, 15C, 15B
2028	Coupling and Decoupling Network	M3 (modified) DC2	MEB	22/24, 15C, 15B
2029	Power Supply	PL330	THURLBY	22/24, 15C
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22/24, 15C, 15B
2047	Band Reject Filter	WRCC1800/2000-0,2-10SS	Wainwright	22/24, 15C, 15B
2051	High Pass Filter	4HC1700-1-KK	R&S	22/24, 15C
2057	Log. per. Antenna	HL025	R&S	22/24, 15C

Eq. No	Equipment	Type	Manufacturer	Used in
2109	Power Supply	PL330QMD	THURLBY	22/24, 15C, 15B
2110	Multimeter	34401A	HP	22/24, 15C, 15B
2112	Multimeter	TX3	Tektronix	22/24, 15C, 15B
2116	Controller	EMCO MODEL 2090	ETS	22/24, 15C, 15B
2133	Power Meter	NRVS	R&S	22/24, 15C
2134	Power Sensor	NRV-Z32	R&S	22/24, 15C
2135	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24, 15C, 15B
2138	Ultra Broadband Antenna	HL562	R&S	22/24, 15C, 15B
2140	Biconical Antenna	EMCO93110B	EMCO	22/24, 15C
2142	Log.-per.-dipol Antenna	3146	EMCO	22/24, 15C
2144	Attenuator	6803.17B	Huber-Suhner	22/24, 15C, 15B
2150	High Pass Filter	F-15041	RLC ELECTRONICS	22/24, 15C
2176	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24, 15C, 15B
2180	Digital Radio Communication Tester	CMU200	R&S	22/24, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	MITEQ	22/24, 15C, 15B
2330	EMI Test receiver	ESIB26	R&S	22/24, 15C, 15B
2334	GPIO Switch 2 to 1	-	National Instruments	22/24, 15C, 15B
2348	Yaesu controller	G-1000DXC	YAESU	22/24, 15C, 15B
2349	Computer controller (Yaesu)	GS-232B	YAESU	22/24, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	MITEQ	22/24, 15C
2361	Anechoic chamber	3 meter semi/full anechoic chamber	Euroshield	22/24, 15C, 15B
2398	Horn antenna	HF906	R&S	22/24, 15C
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24, 15C, 15B

FCC Part 22/24 Compliance Test Report

Test Report no.:	Salo_FCC_0547_02.doc	Date of Report:	30.11.2005
Number of pages:	13	Customer's Contact person:	Stefan Emery
Testing laboratory:	TCC Nokia Salo Laboratory P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Client:	Nokia Corporation Nokia House Summit Avenue, Southwood FARNBOROUGH HAMPSHIRE GU14 0NG UK Tel. +44 1252 866000 Fax. +44 1252 866001
FCC listing no.:	533467		
IC recognition no.:	5385		
Tested devices/ accessories:	Phone RM-92 / Battery BL-5B, AC-Charger AC-4E and Headset HS-23		
FCC ID:	QFXRM-92	IC:	661Z-RM92
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-B-2002 and IC standards RSS-GEN, RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:	 Digitally signed by Tomi Lipponen DN: CN = Tomi Lipponen, C = FI, O = Nokia, OU = CertMT Date: 2005.11.30 09:02:57 +02'00'		
	Tomi Lipponen, System Manager		

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	25.11.2005
Testing completed	28.11.2005
The customer's contact person	Stefan Emery
Test Plan referred to	T:\Projects\RM-92\TestPlan_RS\ RM-92_RS_EMC testplan.xls
Notes	-
Document name	T:\Projects\RM-92\EMC\Results\FCC\Salo_FCC_0547_02.doc

1.1. EUT and Accessory Information

The EUT is a quadri band (GSM900/1800/1900 and WCDMA2100) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-92	004400/68/165234/1	5020	-	1.0540.0.4	10838
Battery	BL-5B	0670455363807M183422202506	-	-	-	10835
AC-Charger	AC-4E	3997915157121100122;0675384	-	-	-	10764
Headset	HS-23	GM2750741D	-	-	-	10765

1.2. Summary of Test Results

GSM 1900:

Section in CFR 47	Section in RSS-133	Name of the test	Result
§2.1046(a)	6.2	Conducted RF output power	NP
§24.232(b)	6.2	Radiated RF output power	PASSED
§2.1049(h)	5.6	99 % occupied bandwidth	NP
§24.238(a)	6.3	Band edge compliance	PASSED
§24.238(a), §2.1051	6.3	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.3	Spurious radiated emissions	NP
§2.1055(a)	7	Frequency stability, temperature variation	NP
§2.1055(d)	7	Frequency stability, voltage variation	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Salo Laboratory.

CONTENTS


1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Radiated RF output power (FCC §22.913(a), §24.232(b), RSS-GEN 4.6, RSS-132 4.4, RSS-133 6.2)	4
2.1. Test setup	4
2.2. Test method and limit	4
2.3. GSM 1900 Test results	5
3. Band edge compliance (FCC §22.917(a), 24.238(a), RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)	7
3.1. Test setup	7
3.2. Test method and limit	7
3.3. GSM 1900 Test results	8
4. Test Equipment	12
4.1. Conducted measurements	12
4.2. Radiated measurements	12

2. Radiated RF output power

(FCC §22.913(a), §24.232(b), RSS-GEN 4.6, RSS-132 4.4, RSS-133 6.2)

EUT with DUT number	RM-92, DUT 10838
Accessories with DUT numbers	BL-5B, DUT 10835; AC-4E, DUT 10764; HS-23, DUT 10765
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 101
Date of measurements	28.11.2005
Measured by	Tomi Lipponen

2.1. Test setup

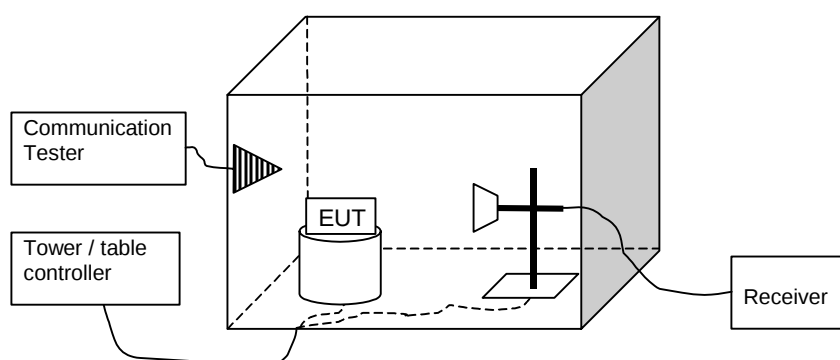

2.2. Test method and limit

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is performed in the Anechoic Chamber with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system. The turntable is rotated 360 degrees and this is repeated for both horizontal and vertical receive antenna polarizations.

The EUT is placed on a nonconductive plate at 170 cm height.

The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss and substitution correction ($A_{TOT} = L_{CABLES} + A_{SUBST}$).

Limits for radiated RF output power measurements

Frequency range [MHz]	Limit [W]	Limit [dBm]
824 - 849	7	38.5
1850 - 1910	2	33

2.3. GSM 1900 Test results

GSM mode, Slide open

Channel	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
512	30.30	1.072	- 13.40	43.70	HORIZONTAL	PASSED
661	31.00	1.259	- 13.30	44.30	HORIZONTAL	PASSED
810	30.00	1.000	- 15.30	45.30	VERTICAL	PASSED

GPRS mode, 2 TX Slots, Slide open

Channel	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
512	30.10	1.023	- 13.60	43.70	HORIZONTAL	PASSED
661	29.90	0.977	- 14.40	44.30	VERTICAL	PASSED
810	29.90	0.977	- 15.40	45.30	VERTICAL	PASSED

GPRS mode, 3 TX Slots, Slide open

Channel	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
512	28.60	0.724	- 15.90	44.50	HORIZONTAL	PASSED
661	29.40	0.871	- 15.70	45.10	HORIZONTAL	PASSED
810	27.70	0.589	- 16.40	44.10	HORIZONTAL	PASSED

EGPRS mode, 1 TX Slot, Slide open

Channel	EIRP [dBm]	EIRP [W]	P_{MEAS} [dBm]	A_{TOT} [dB]	Polarisation	Result
512	26.20	0.417	- 17.50	43.70	HORIZONTAL	PASSED
661	25.00	0.316	- 19.30	44.30	VERTICAL	PASSED
810	26.00	0.398	- 19.30	45.30	VERTICAL	PASSED

GSM mode, Slide closed

Channel	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512	29.90	0.977	- 14.60	44.50	HORIZONTAL	PASSED
661	30.50	1.122	- 14.60	45.10	HORIZONTAL	PASSED
810	27.90	0.617	- 16.20	44.10	HORIZONTAL	PASSED

GPRS mode, 2 TX Slots, Slide closed

Channel	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512	29.50	0.891	- 15.00	44.50	HORIZONTAL	PASSED
661	30.20	1.047	- 14.90	45.10	HORIZONTAL	PASSED
810	27.90	0.617	- 16.20	44.10	HORIZONTAL	PASSED

GPRS mode, 3 TX Slots, Slide closed

Channel	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512	28.20	0.661	- 16.30	44.50	HORIZONTAL	PASSED
661	29.10	0.813	- 16.00	45.10	HORIZONTAL	PASSED
810	26.60	0.457	- 17.50	44.10	HORIZONTAL	PASSED

EGPRS mode, 1 TX Slot, Slide closed


Channel	EIRP [dBm]	EIRP [W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
512	25.60	0.363	- 18.90	44.50	HORIZONTAL	PASSED
661	25.50	0.355	- 19.60	45.10	HORIZONTAL	PASSED
810	22.80	0.191	- 23.30	46.10	VERTICAL	PASSED

3. Band edge compliance

(FCC §22.917(a), 24.238(a), RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)

EUT with DUT number	RM-92, DUT 10838
Accessories with DUT numbers	BL-5B, DUT 10835; AC-4E, DUT 10764; HS-23, DUT 10765
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 101
Date of measurements	28.11.2005
Measured by	Tomi Lipponen

3.1. Test setup

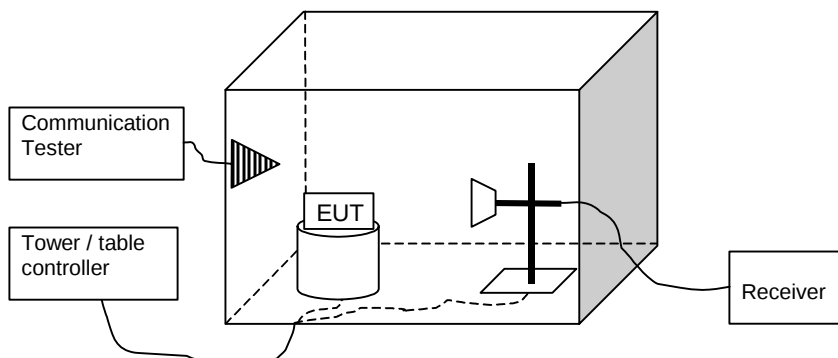

3.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133.

Limits for band edge compliance measurements


Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	Below 824 and above 849	-13
GSM 1900 / WCDMA 1900	Below 1850 and above 1910	-13

3.3. GSM 1900 Test results


SLIDE OPEN:

Operation mode (TX on)	Channel	Level [dBm]
GSM	512	-14.04
GSM	810	-14.48
EGPRS	512	-24.99
EGPRS	810	-20.21


GSM mode, channel 512 (Peak detector, RBW: 3 kHz)

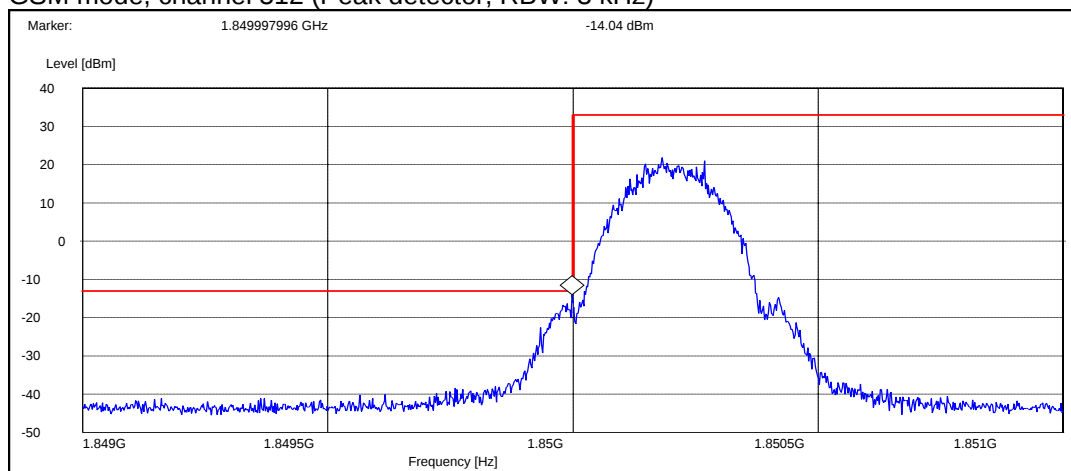


GSM mode, channel 810 (Peak detector, RBW: 3 kHz)

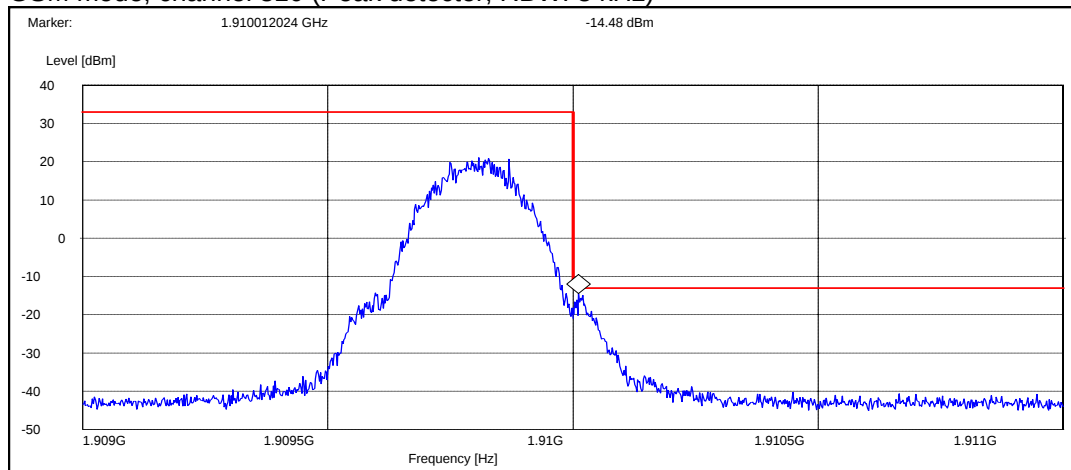

EGPRS mode, channel 512 (Peak detector, RBW: 3 kHz)

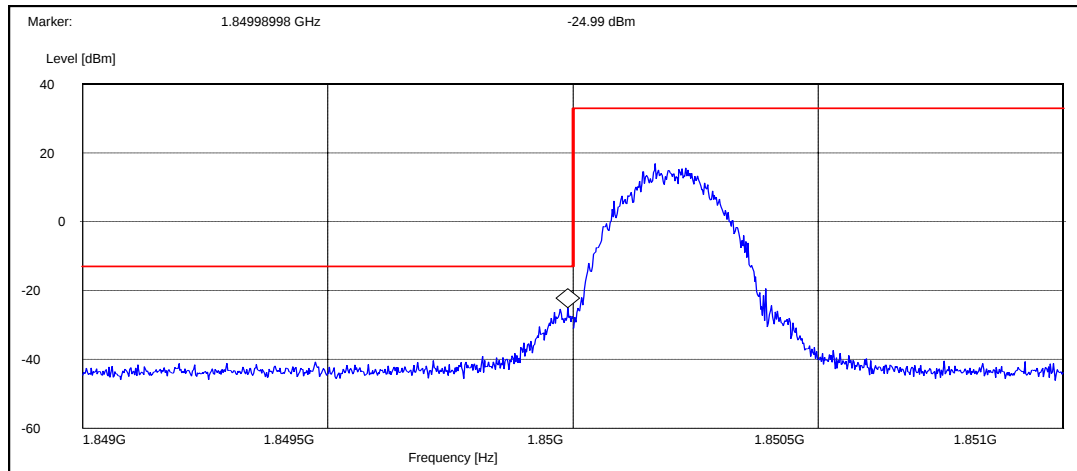


EGPRS mode, channel 819 (Peak detector, RBW: 3 kHz)

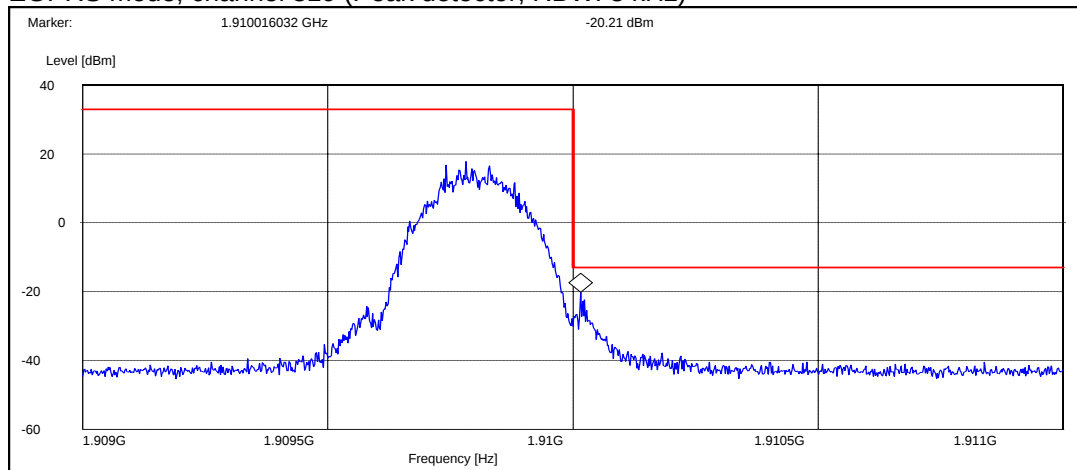


SLIDE CLOSED:

Operation mode (TX on)	Channel	Level [dBm]
GSM	512	-15.05
GSM	810	-16.05
EGPRS	512	-21.09
EGPRS	810	-23.50


GSM mode, channel 512 (Peak detector, RBW: 3 kHz)

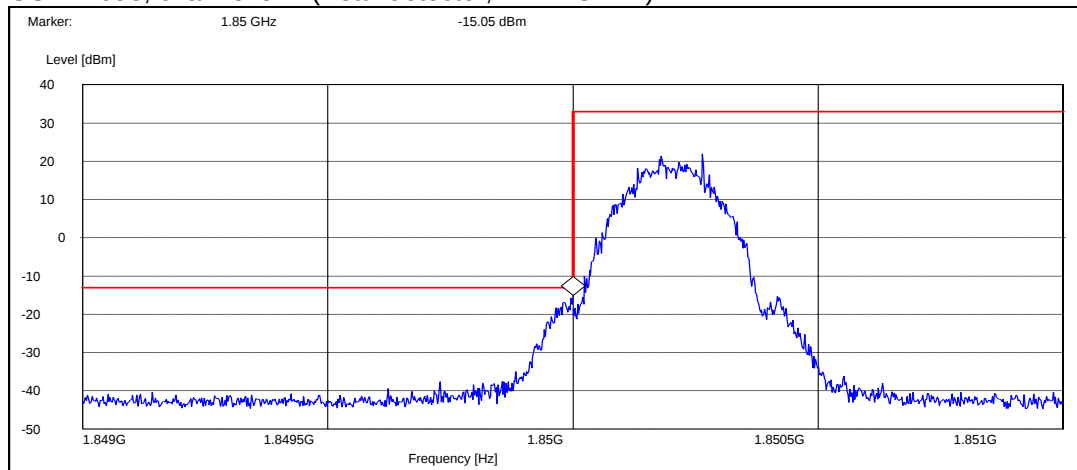


GSM mode, channel 810 (Peak detector, RBW: 3 kHz)

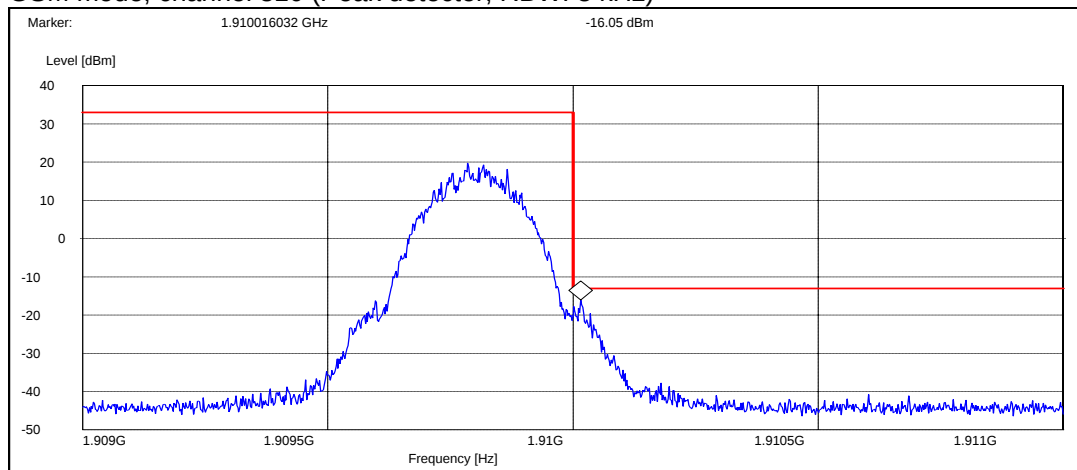

EGPRS mode, channel 512 (Peak detector, RBW: 3 kHz)

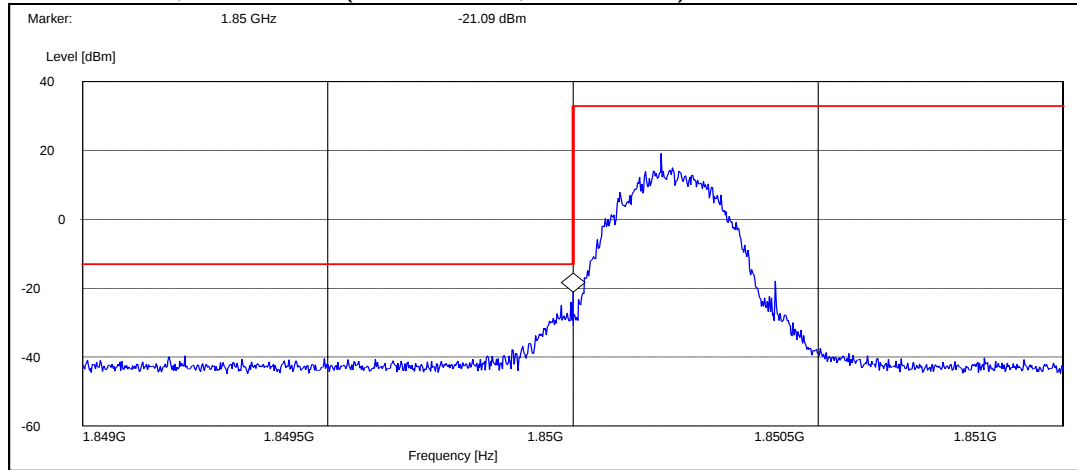

EGPRS mode, channel 819 (Peak detector, RBW: 3 kHz)

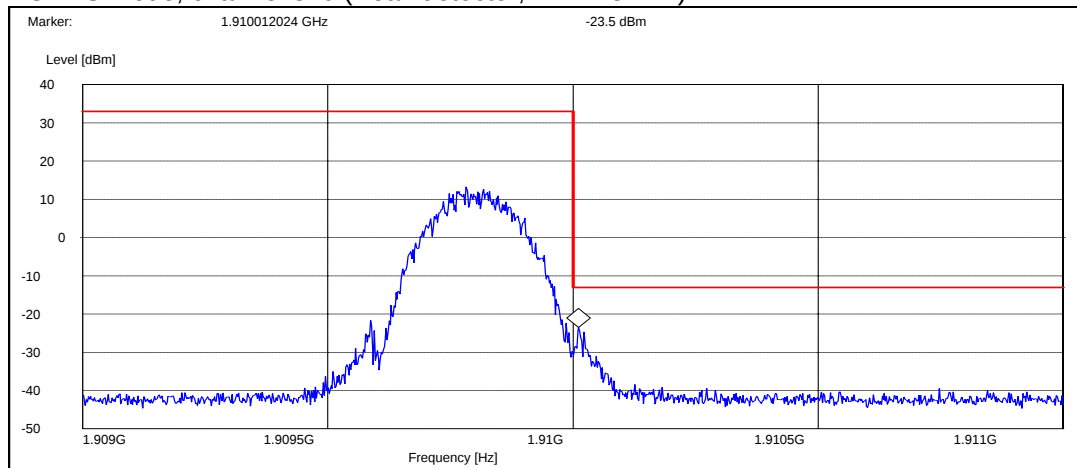

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1742	EMI Test Receiver	ESMI	R&S	15C, 15B
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1872	Thermo- Hygrograph	00.02520.150700	Lambrecht	15C, 15B
1916	Radio Communication tester	CMTA84	R&S	15C, 15B
2039	Power Supply	PL330QMD	THURLBY	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN-Antenna line	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2111	Multimeter	TX3	Tektronix	15C, 15B
2156	Digital Radio Communication Tester	CMU200	R&S	15C, 15B
2206	Signal generator	SMX	R&S	15C, 15B
2335	GPIB Switch 2 to 1	-	National Instruments	15C, 15B
2347	Digital Radio Communication Tester	CMU200	R&S	22/24, 15C, 15B
2352	Spectrum Analyzer	FSP	R&S	22/24, 15C
2359	Temperature Test system	VT4002	Vötsch Industrietechnik	22/24
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24
2362	Power Supply	NGPX 70/5	R&S	22/24
-	RF Emission Software	ES-K1 v.1.60	R&S	15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1748	Log. per. Antenna	HL025	R&S	22/24, 15C
1749	Log. per. Antenna	HL025	R&S	22/24, 15C
1875	Thermo- Hygrograph	00.02520.150700	Lambrecht	22/24, 15C, 15B
1917	Radio Communication tester	CMTA84	R&S	22/24, 15C, 15B
1933	Precision half-wave dipole antennas	HZ-13	R&S	22/24, 15C
1938	Precision half-wave dipole antennas	HZ-12	R&S	22/24, 15C
2004	Relay Switch Unit	RSU	R&S	22/24, 15C, 15B
2006	Radiation Reference Source	VSQ	MEB	22/24, 15C, 15B
2009	Signal generator	SMP 22	R&S	22/24, 15C, 15B
2019	Multimeter	34401A	HP	22/24, 15C, 15B
2027	Coupling and Decoupling Network	M2 (modified) DC1	MEB	22/24, 15C, 15B
2028	Coupling and Decoupling Network	M3 (modified) DC2	MEB	22/24, 15C, 15B
2029	Power Supply	PL330	THURLBY	22/24, 15C
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22/24, 15C, 15B
2047	Band Reject Filter	WRCC1800/2000-0,2-10SS	Wainwright	22/24, 15C, 15B
2051	High Pass Filter	4HC1700-1-KK	R&S	22/24, 15C
2057	Log. per. Antenna	HL025	R&S	22/24, 15C

Eq. No	Equipment	Type	Manufacturer	Used in
2109	Power Supply	PL330QMD	THURLBY	22/24, 15C, 15B
2110	Multimeter	34401A	HP	22/24, 15C, 15B
2112	Multimeter	TX3	Tektronix	22/24, 15C, 15B
2116	Controller	EMCO MODEL 2090	ETS	22/24, 15C, 15B
2133	Power Meter	NRVS	R&S	22/24, 15C
2134	Power Sensor	NRV-Z32	R&S	22/24, 15C
2135	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24, 15C, 15B
2138	Ultra Broadband Antenna	HL562	R&S	22/24, 15C, 15B
2140	Biconical Antenna	EMCO93110B	EMCO	22/24, 15C
2142	Log.-per.-dipol Antenna	3146	EMCO	22/24, 15C
2144	Attenuator	6803.17B	Huber-Suhner	22/24, 15C, 15B
2150	High Pass Filter	F-15041	RLC ELECTRONICS	22/24, 15C
2176	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24, 15C, 15B
2180	Digital Radio Communication Tester	CMU200	R&S	22/24, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	MITEQ	22/24, 15C, 15B
2330	EMI Test receiver	ESIB26	R&S	22/24, 15C, 15B
2334	GPIB Switch 2 to 1	-	National Instruments	22/24, 15C, 15B
2348	Yaesu controller	G-1000DXC	YAESU	22/24, 15C, 15B
2349	Computer controller (Yaesu)	GS-232B	YAESU	22/24, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	MITEQ	22/24, 15C
2361	Anechoic chamber	3 meter semi/full anechoic chamber	Euroshield	22/24, 15C, 15B
2398	Horn antenna	HF906	R&S	22/24, 15C
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24, 15C, 15B