

Test Report # 316375B

Equipment Under Test:	DLDNK Lumina RF Room Controller ZLDNK Intellect Room Controller
Test Date(s):	11/3/16 – 11/17/16, 6/4/18
Prepared for:	Dmitriy Moskovkin Leviton Manufacturing Co., Inc. Energy Management, Controls and Automation (EMC&A) 20497 SW Teton Avenue Tualatin, OR 97062

Report Issued by: Shane Dock, EMC Engineer

Signature:



Date: 8/24/2020

Report Reviewed by: Adam Alger, Quality Manager

Signature: 

Date: 06/04/2020

Report Constructed by: Shane Dock EMC Engineer

Signature:



Date: 5/2/2018

This test report may not be reproduced, except in full, without written approval of Laird Connectivity, Inc.

Company: Leviton Manufacturing Co., Inc.	Page 1 of 32	Name: DLDNK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job: C-2584		Model: See Section 2
		Serial: Engineering Sample

CONTENTS

Contents	2
Laird Connectivity Test Services in Review	3
1 Test Report Summary	4
2 Client Information	5
2.1 Equipment Under Test (EUT) Information	5
2.2 Product Description	5
2.3 Modifications Incorporated for Compliance	5
2.4 Deviations and Exclusions from Test Specifications	5
2.5 Additional Information	5
2.6 Channel Plan	6
3 References	6
4 Uncertainty Summary	7
5 Test Data	8
5.1 Antenna Port Conducted Emissions	8
5.2 Radiated Emissions	23
5.3 AC Mains Conducted Emissions	29
6 Revision History	32

Company: Leviton Manufacturing Co., Inc.
Report: 316375 B
Job: C-2584

Name: DLINK Lumina RF Room Controller
ZLDNK Intellect Room Controller
Model: See Section 2
Serial: Engineering Sample

Laird Connectivity Test Services in Review

The Laird Connectivity, Inc. laboratory located at W66 N220 Commerce Court Cedarburg, Wisconsin, 53012 USA is recognized through the following organizations:



A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025:2017 with Electrical (EMC) Scope

A2LA Certificate Number: 1255.01

Scope of accreditation includes all test methods listed herein unless otherwise noted



Federal Communications Commission (FCC) – USA

Accredited Test Firm Registration Number: 953492

Recognition of two 3 meter Semi-Anechoic Chambers



Government
of Canada

Innovation, Science and Economic Development Canada

Accredited U.S. Identification Number: US0218

Recognition of two 3 meter Semi-Anechoic Chambers

Company: Leviton Manufacturing Co., Inc.	Page 3 of 32	Name: DLINK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job: C-2584		Model: See Section 2

1 TEST REPORT SUMMARY

During **11/7/16 – 6/4/18** the Equipment Under Test, as provided by **Leviton Manufacturing Co., Inc.** was tested to the following requirements:

Requirement	Description	Specification	Method	Result
FCC: 15.247 (a)(2) IC: RSS-247 5.2 (1)	Digital Modulation System 6 dB bandwidth	500 kHz	ANSI C63.10	Pass
FCC: 2.1049 IC: RSS-GEN 6.7	Occupied Bandwidth	Reported	ANSI C63.10	Pass
FCC: 15.247 (b)(3) IC: RSS-247 5.4 (d)	Maximum Conducted Output Power	30 dBm	ANSI C63.10	Pass
FCC: 15.247 (e) IC: RSS-247 5.2 (b)	Digital Modulation System Power Spectral Density	8 dBm / 3 kHz	ANSI C63.10	Pass
FCC: 15.247 (d) IC: RSS-247 5.5	RF Spurious Emissions at the Transmitter Antenna Terminal	20 dBc	ANSI C63.10	Pass
FCC: 15.247 (d) IC: RSS-GEN 8.10	Spurious Radiated Emissions in Restricted Bands	FCC 15.209 RSS-GEN 8.9	ANSI C63.10	Pass
FCC: 2.1055 (d) IC: RSS-GEN 6.11	Frequency Stability	Reported	ANSI C63.10	Pass
FCC: 15.207 IC: RSS-GEN 8.8	AC Power Line Conducted Emissions	0.150-30 MHz	ANSI C63.10	Pass

Notice:

The results relate only to the item tested and described in this report. Any modifications made to the equipment under test after the specified test date(s) may invalidate the data herein.

If the resulting measurement margin is seen to be within the uncertainty value, as listed in this report, the possibility exists that this unit may not meet the required limit specification if subsequently tested.

Company: Leviton Manufacturing Co., Inc.	Page 4 of 32	Name: DLDNK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job: C-2584		Model: See Section 2
		Serial: Engineering Sample

2 CLIENT INFORMATION

Company Name	Leviton Manufacturing Co., Inc
Contact Person	Dmitriy Moskovkin
Address	20497 SW Teton Ave Tualatin, OR 97062

2.1 Equipment Under Test (EUT) Information

The following information has been supplied by the client

Product Name	DLDNK Lumina RF Room Controller ZLDNK Intellect Room Controller
Model Number	DLDNK-01W, DLDNK-02W, DLDNK – 04W, DLDNK-08W ZLDNK-01W, ZLDNK-02W, ZLDNK – 04W, ZLDNK-08W
Serial Number	Engineering Sample
FCC/IC ID	FCC: QGH-DLDNK IC: 2473A-DLDNK

2.2 Product Description

Lumina RF/Intellect Room Controller

1/2/4/8 Button multi-function Bluetooth keypad with room controller and LED feedback functionality. NEMA form factor.

2.3 Modifications Incorporated for Compliance

None noted at time of test

2.4 Deviations and Exclusions from Test Specifications

None noted at time of test

2.5 Additional Information

EUT programmed via Ember Desktop per channel plan listed below. Unit powered with 120 VAC, 60 Hz. The EUT has 8 variants. Each variant has 1, 2, 4, or 8 buttons and can have either the Intellect or Lumina RF firmware. Test data presented here is 8 button variant.

Company: Leviton Manufacturing Co., Inc.	Page 5 of 32	Name: DLDNK Lumina RF Room Controller ZLDNK Intellect Room Controller
Report: 316375 B		Model: See Section 2
Job:C-2584		Serial: Engineering Sample

2.6 Channel Plan

EUT emissions tested for Low Mid and High Channel.

CH11 – 2405 MHz – Power Setting of 8

CH18 – 2440 MHz – Power Setting of 8

CH25 – 2475 MHz – Power Setting of 8

CH26 – 2480 MHz – Power Setting of -2

3 REFERENCES

Publication	Edition	Date
CFR 47 Part 15	-	2020
ANSI C63.10	-	2013
RSS-247	2	2017
RSS GEN	5	2018

Company: Leviton Manufacturing Co., Inc.	Page 6 of 32	Name: DLDNK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job:C-2584		Model: See Section 2
		Serial: Engineering Sample

4 UNCERTAINTY SUMMARY

Using the guidance of the following publications the calculated measurement uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of $k = 2$.

References	Version / Date
CISPR 16-4-1	Ed. 2 (2009-02)
CISPR 16-4-2	Ed. 2 (2011-06)
CISPR 32	Ed. 1 (2012-01)
ANSI C63.23	2012
A2LA P103	February 4, 2016
A2LA P103c	August 10, 2015
ETSI TR 100-028	V1.3.1 (2001-03)

Measurement Type	Configuration	Uncertainty \pm
Radiated Emissions	Biconical Antenna	5.0 dB
Radiated Emissions	Log Periodic Antenna	5.3 dB
Radiated Emissions	Horn Antenna	4.7 dB
AC Line Conducted Emissions	Artificial Mains Network	3.4 dB
Telecom Conducted Emissions	Asymmetric Artificial Network	4.9 dB
Disturbance Power Emissions	Absorbing Clamp	4.1 dB
Radiated Immunity	3 Volts/meter	2.2 dB
Conducted Immunity	CDN/EM/BCI	2.4/3.5/3.4 dB
EFT Burst/Surge	Peak pulse voltage	164 volts
ESD Immunity	15 kV level	1377 Volts

Parameter	ETSI U.C. \pm	U.C. \pm
Radio Frequency, from F0	1×10^{-7}	0.55×10^{-7}
Occupied Channel Bandwidth	5 %	2 %
RF conducted Power (Power Meter)	1.5 dB	1.2 dB
RF conducted emissions (Spectrum Analyzer)	3.0 dB	1.7 dB
All emissions, radiated	6.0 dB	5.3 dB
Temperature	1° C	0.65° C
Humidity	5 %	2.9 %
Supply voltages	3 %	1 %


Company: Leviton Manufacturing Co., Inc.	Page 7 of 32	Name: DLDNK Lumina RF Room Controller
ZLDNK Intellect Room Controller		
Model: See Section 2		
Serial: Engineering Sample		
Report: 316375 B		
Job:C-2584		

5 TEST DATA

5.1 Antenna Port Conducted Emissions

Description of Measurement	<p>The direct measurement of emissions at the antenna port of the EUT is achieved by use of a RF connection to a spectrum analyzer or power meter.</p> <p>The cable and attenuator factors are loaded into the analyzer or power meter allowing for direct measurement readings without the need for further corrections.</p>
Example Calculations	<p>Measurement (dBm) + Cable factor (dB) + External Attenuator (dB) = Corrected Reading (dBm)</p> <p>Margin (dB) = Limit (dBm) – Corrected Reading (dBm)</p>

Block Diagram

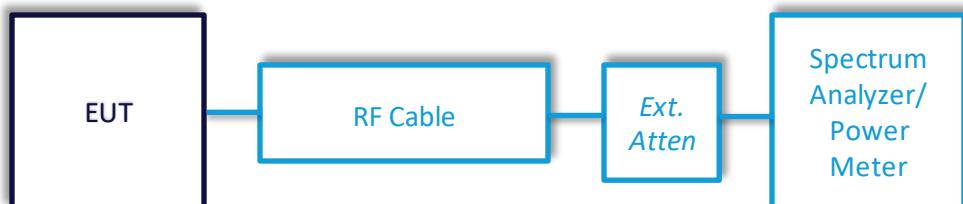

Company: Leviton Manufacturing Co., Inc.		Name: DLDNK Lumina RF Room Controller ZLDNK Intellect Room Controller
Report: 316375 B	Page 8 of 32	Model: See Section 2
Job:C-2584		Serial: Engineering Sample

5.1.1 Antenna Port Conducted Emissions – Bandwidth

Operator	Shane Dock
Test Date	11/16/16, 6/4/18
Location	Conducted measurement area
Temp. / R.H.	70-74 degrees F / 30-42% RH
Requirement	OBW: FCC: 2.1049 IC: RSS-GEN 6.7 DTS BW: FCC: 15.247 (a)(2) IC: RSS-247 5.2 (a)
Method	ANSI C63.10 Section 6.9.2, 11.8

Limits:

6 dB BW (MHz)

> 500

Test Parameters

Frequency	2405, 2440, 2480 MHz
------------------	----------------------

Tables

Channel	11	18	25	26
6dB BW (kHz)	1585	1599	1594	1620
99% BW (kHz)	2382.4	2407.9	2397.7	2436.5

Company: Leviton Manufacturing Co., Inc.	Page 9 of 32	Name: DLDNK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job:C-2584		Model: See Section 2
		Serial: Engineering Sample

Instrumentation



a Laird Business

Date : 3-Nov-2016

Type Test : Conducted Radio

Job # : C-2584

Prepared By: Shane Dock

Customer : Leviton LES

Quote #: 316375


No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960087	44GHz EXA Spectrum Analyzer	Agilent	N9010A	MY53400296	12/18/2015	12/18/2016	Active Calibration
2	AA 960143	Phaserflex	Gore	EKD01D01048.0	5546519	6/26/2015	6/26/2017	Active Calibration


6-4-18 Measurements

No.	Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due Date	Equipment Status
1	EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/25/2018	4/25/2019	Active Calibration
2	AA 960143	Cable	Gore	EKD01D01048.0	5546519	11/15/2017	11/15/2018	Active Verification

Company: Leviton Manufacturing Co., Inc.	Page 10 of 32	Name: DLDNK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job:C-2584		Model: See Section 2
		Serial: Engineering Sample

Plots (Worst Case Shown)

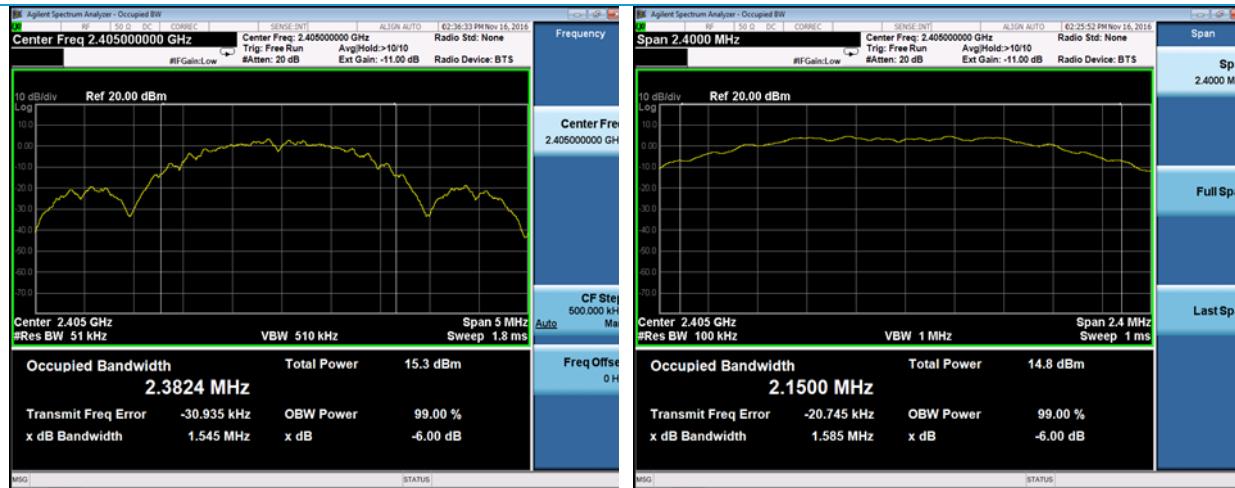

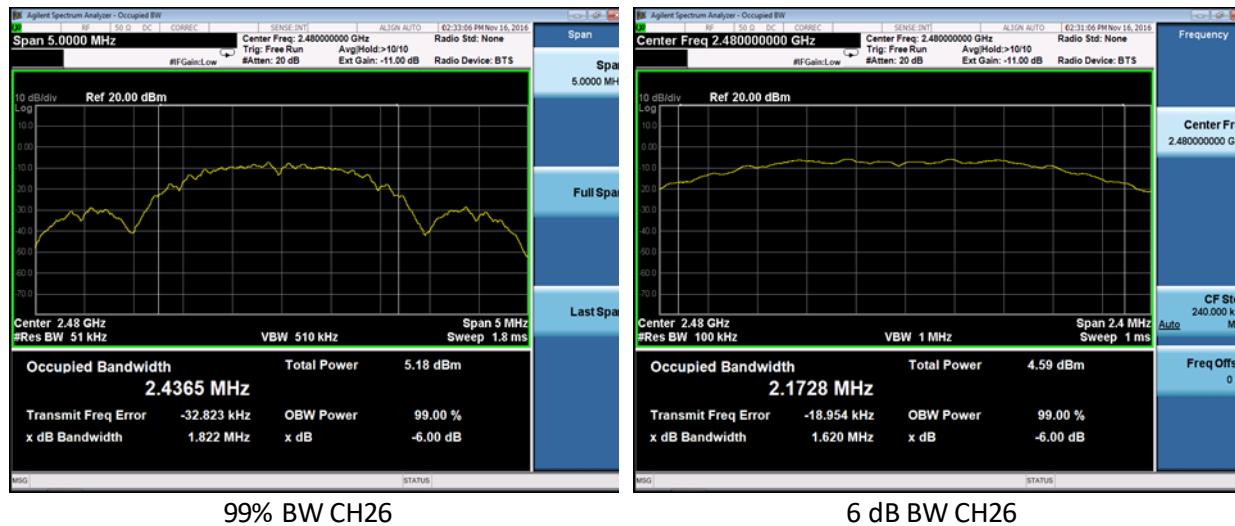

5.1.2 Antenna Port Conducted Emissions – Maximum Conducted Output Power

Operator	Shane Dock
Test Date	11/16/16
Location	Conducted measurement area
Temp. / R.H.	70-74 degrees F/ 30-42% RH
Requirement	FCC: 15.247 (b)(3) IC: RSS-247 5.4 (d)
Method	ANSI C63.10 Section 11.9.1.1

Limits:

Maximum Conducted Output Power (watts)	Maximum Conducted Output Power (dBm)
1	30

Test Parameters

Frequency	2405, 2440, 2480 MHz
RBW	8 MHz
Notes	On 6/4/18, original data was affirmed to be equivalent or lower within the bounds of the uncertainty of the measurement. 11/16/16 data reported as worst-case.


Table

Channel	11	18	25	26
Power Setting	8	8	8	-2
Pout Conducted (dBm)	7.917	7.341	6.648	-2.213

Worst Case Margin = 30.000 dBm – (7.917 dBm) = 22.083 dB

Company: Leviton Manufacturing Co., Inc.	Page 13 of 32	Name: DLDNK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job:C-2584		Model: See Section 2
		Serial: Engineering Sample

Plots

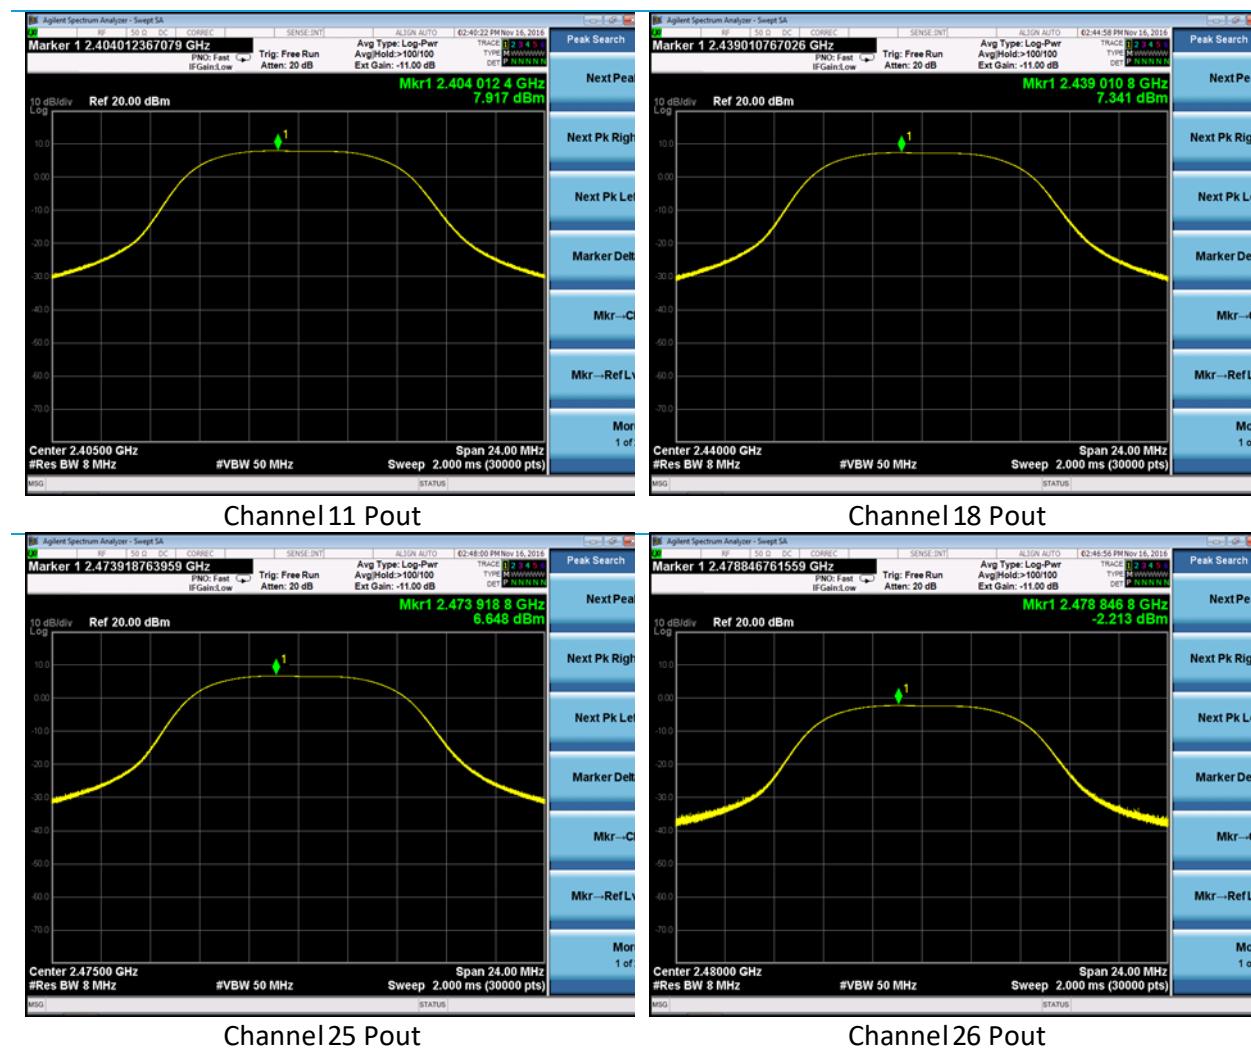

5.1.3 Antenna Port Conducted Emissions – RF Spurious Emissions

Operator	Shane Dock
Test Date	11/16/16, 6/4/18
Location	Conducted measurement area
Temp. / R.H.	70-74 degrees F/ 30-42% RH
Requirement	FCC: 15.247 (d) IC: RSS-247 5.5
Method	ANSI C63.10 Section 11.11

Limits:

RF Spurious Limit

20 dBc

Test Parameters

Frequency	30-25000 MHz
Settings	2405, 2440, 2480 MHz Channels
RBW	100k
VBW	300k
Trace	Max Hold
Detector	Peak
Note	All emissions are >20 dB below the limit.

Data

Frequency (MHz)	Measurement (dBm)	Limit (dBm)	Margin (dB)	Channel
2400.0	-38.2	-15.6	22.6	11
2483.9	-48.0	-15.6	32.5	25
2483.9	-42.1	-15.6	26.5	26


Company: Leviton Manufacturing Co., Inc.	Page 15 of 32	Name: DLDNK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job:C-2584		Model: See Section 2
		Serial: Engineering Sample

Plots

Reference Level




Company: Leviton Manufacturing Co., Inc.	Page 16 of 32	Name: DLINK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job:C-2584		Model: See Section 2
		Serial: Engineering Sample

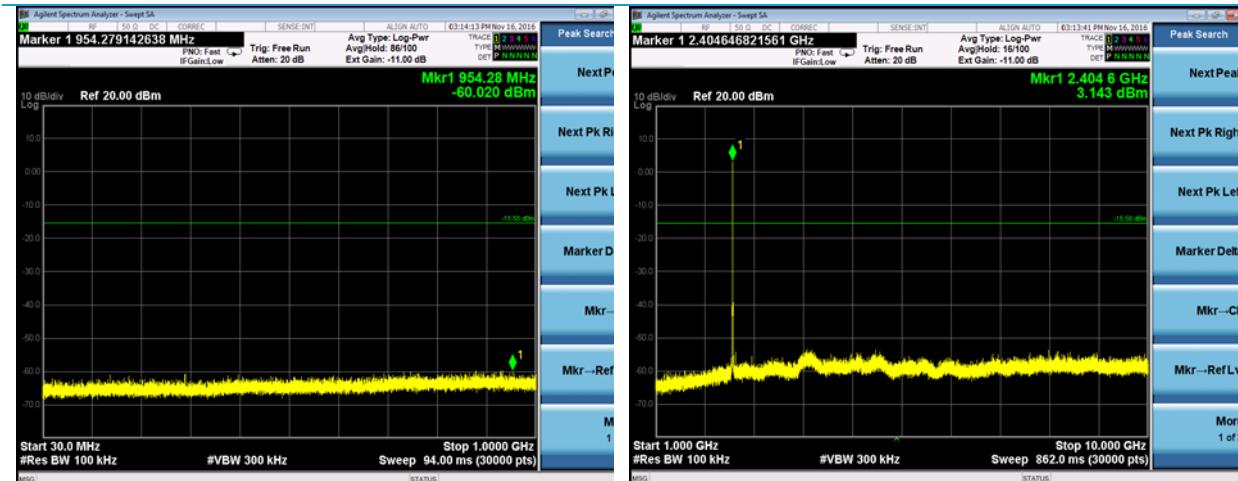


30-1000 MHz (11)

1000-10000 MHz (11)

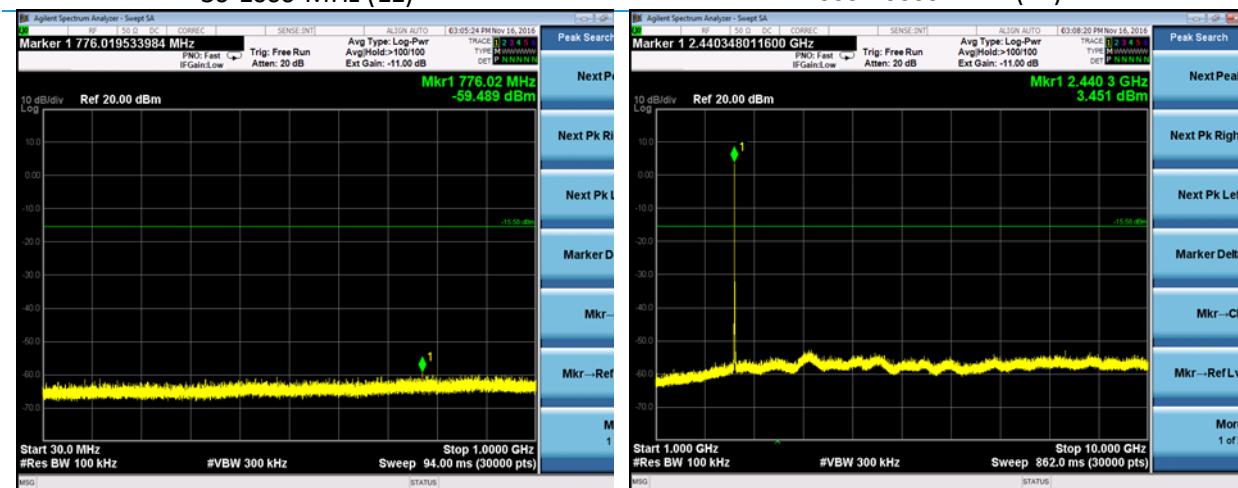

30-1000 MHz (18)

1000-10000 MHz (18)


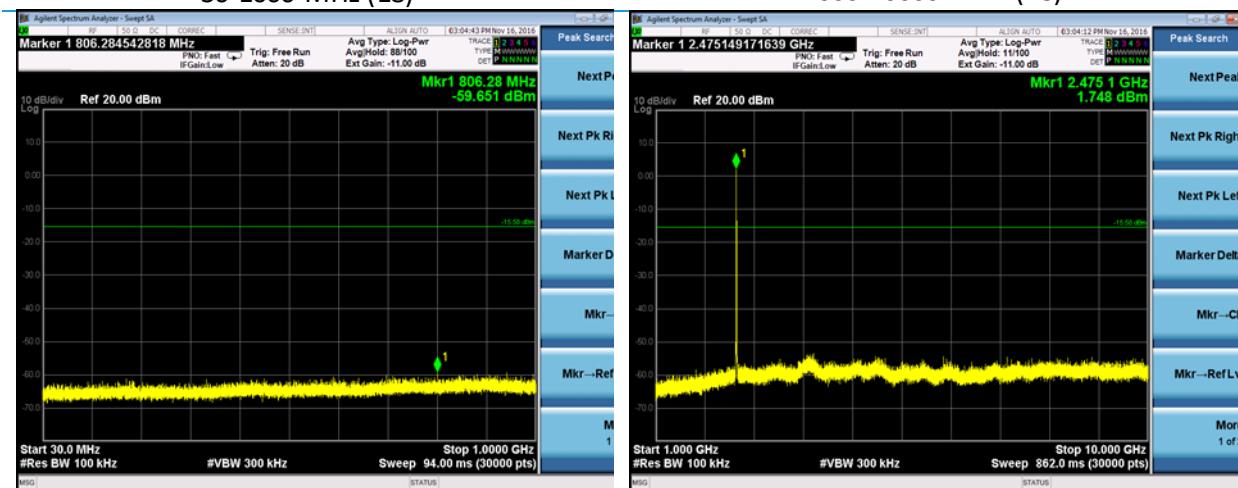


30-1000 MHz (25)

1000-10000 MHz (25)



Company: Leviton Manufacturing Co., Inc.	Page 17 of 32
Report: 316375 B	
Job:C-2584	

Name: DLDNK Lumina RF Room Controller
ZLDNK Intellect Room Controller
Model: See Section 2
Serial: Engineering Sample

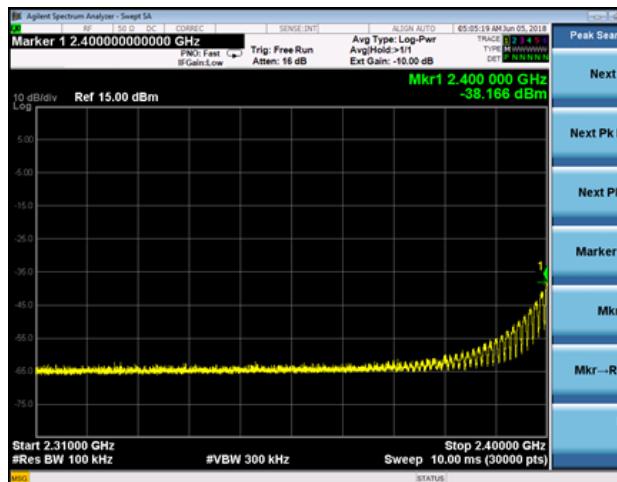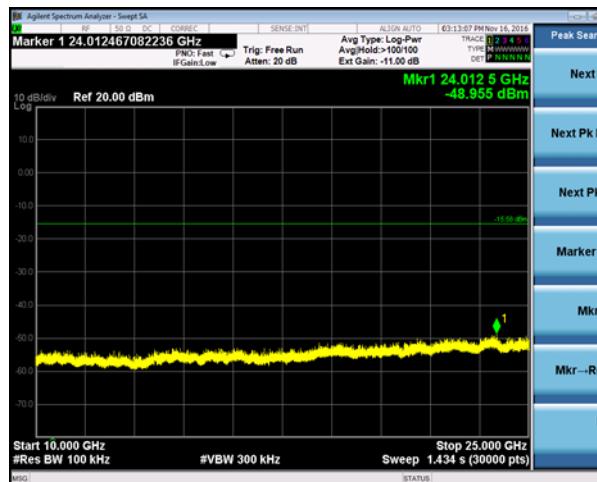


10000-25000 MHz (11)

Lower Band Edge (CH 11)

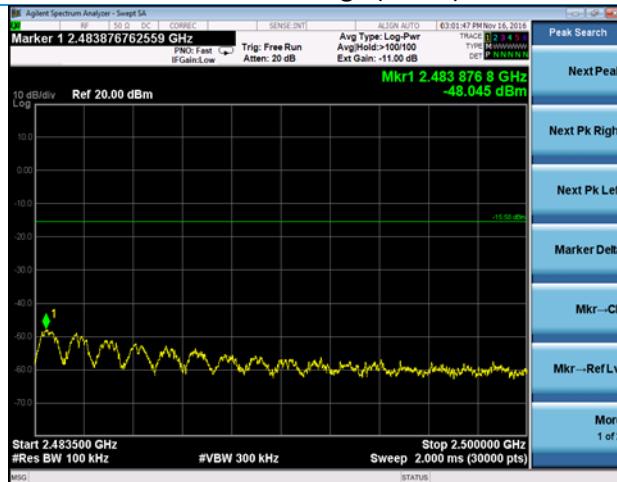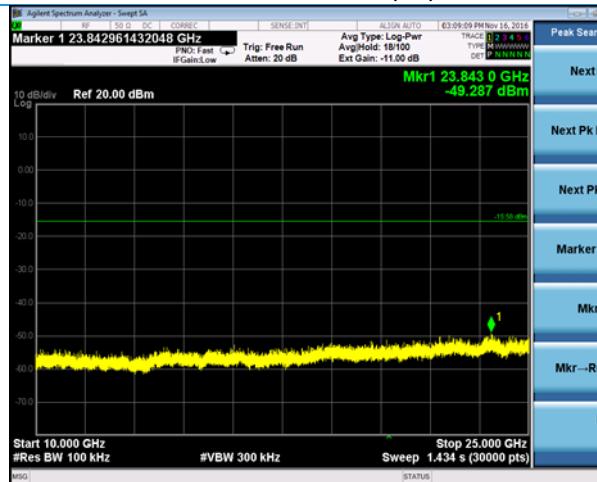


10000-25000 MHz (18)


Upper Band Edge (CH 25)

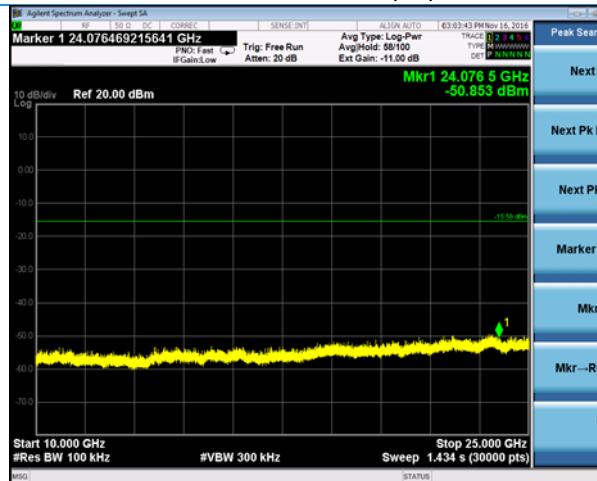

10000-25000 MHz (25)

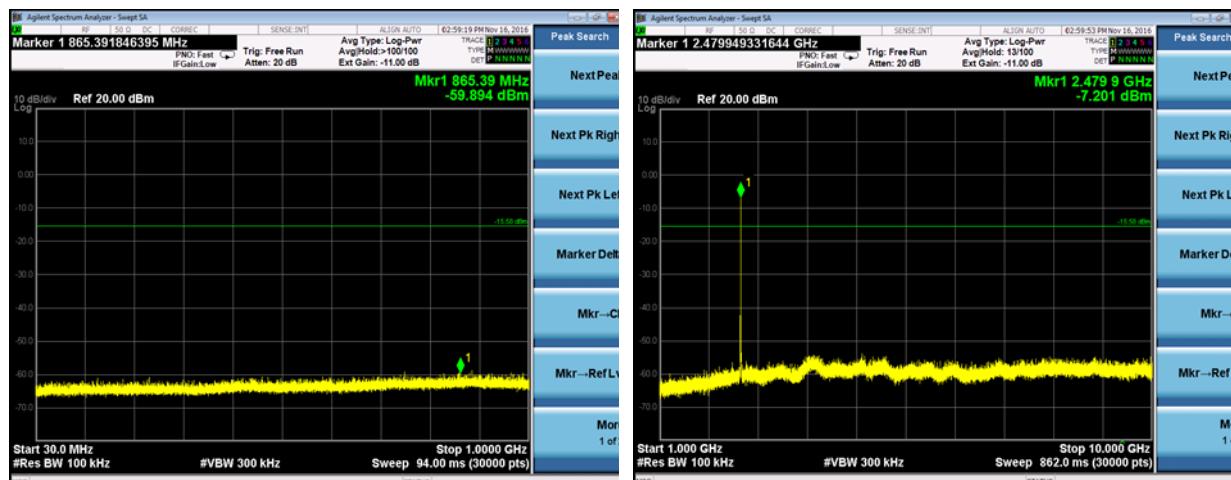

30-1000 MHz (26)

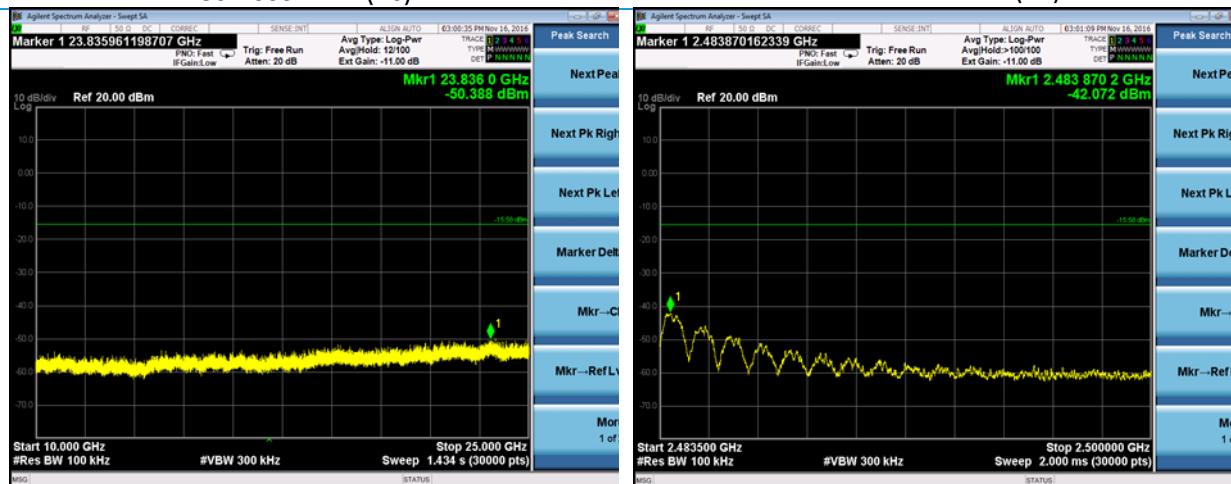

10000-25000 MHz (26)

1000-10000 MHz (26)

Upper band edge (26)

5.1.4 Antenna Port Conducted Emissions – Power Spectral Density

Operator	Shane Dock
Test Date	11/16/16
Location	Conducted measurement area
Temp. / R.H.	70-74 degrees F / 30-42% RH
Requirement	FCC: 15.247 (e) IC: RSS-247 5.2 (b)
Method	ANSI C63.10 Section 11.10.2

Limits:

PSD (dBm/3 kHz)

< 8

Test Parameters

Frequency	2405, 2440, 2480 MHz
RBW	100kHz
VBW	300kHz
Trace	Max Hold
Detector	Peak


Table

Channel	11	18	25	26
PSD (dBm)	4.418	3.756	3.083	-5.812

Worst Case Margin = 8.000 dBm – (4.418 dBm) = 3.582 dB

Company: Leviton Manufacturing Co., Inc.	Page 20 of 32	Name: DLDNK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job:C-2584		Model: See Section 2
		Serial: Engineering Sample

Plots

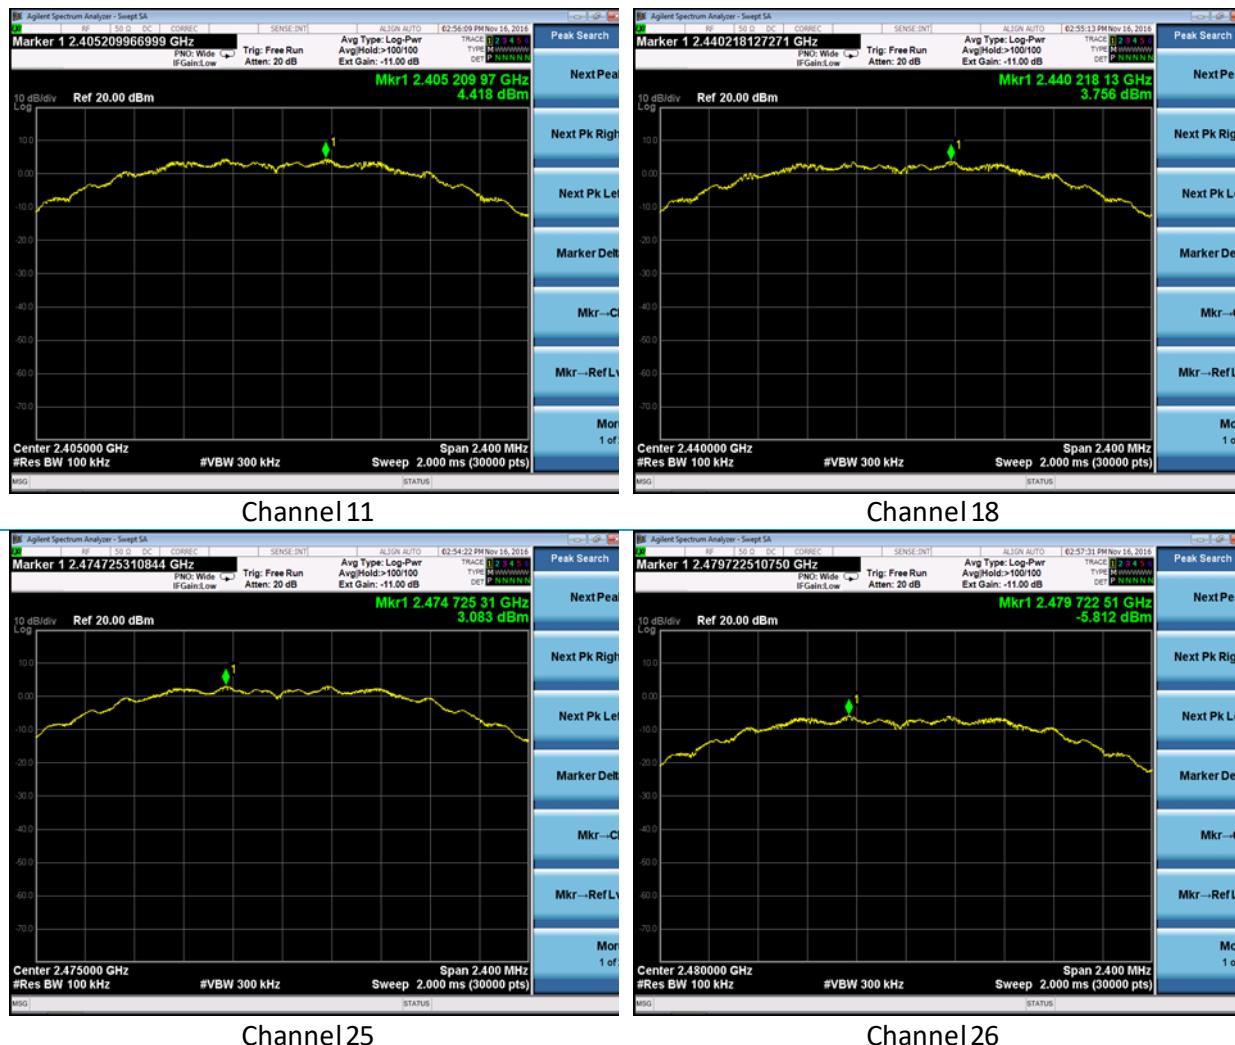

5.1.5 Antenna Port Conducted Emissions – Frequency Stability

Operator	Shane Dock
Test Date	11/16/16
Location	Conducted measurement area
Temp. / R.H.	70-74 degrees F/ 30-42% RH
Requirement	FCC: 2.1055 (d) IC: RSS-GEN 6.11
Method	ANSI C63.10 Section 6.8

Test Parameters

Frequency	2405, 2440, 2480 MHz
Channels	Low, Mid, High
Frequencies (Nominal)	2405, 2440, 2480 MHz
Voltages	See below

Table (Values below listed in Hz at the given voltages)

Channel	102 VAC	120 VAC	138 VAC	Deviation (Hz)
11	2404977250	2404962920	2404982250	19330
18	2439977920	2439975750	2439988250	12500
25	2474979250	2474977580	2474982250	4670
26	2479962420	2479965920	2479971420	9000

Company: Leviton Manufacturing Co., Inc.	Page 22 of 32	Name: DLDNK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job:C-2584		Model: See Section 2
		Serial: Engineering Sample

5.2 Radiated Emissions

Description of Measurement	<p>The frequency spectrum is investigated for intentional and / or unintentional signals emanating from the EUT by use of a standardized test site and measurement antenna.</p> <p>The antenna, cable, pre-amp, and other necessary measurement system correction factors are loaded onto the EMI receiver / spectrum analyzer when the measurements are performed allowing the data to be gathered and reported as corrected values.</p> <p>The maximum emissions from the EUT are determined by turn-table azimuth rotation (360°) and scanning of the measurement antenna. Maximized levels are noted at degree values of azimuth, measurement antenna height, and measurement antenna polarity.</p>
Example Calculations	<p>Measurement (dBμV) + Cable factor (dB) + Other (dB) + Antenna Factor (dB/m) = Corrected Reading (dBμV/m)</p> <p>Margin (dB) = Limit (dBμV/m) - Corrected Reading (dBμV/m)</p> <p>Example at 4000 MHz:</p> <p>Reading = 40 dBμV + 3.4 dB + 0.9 dB + 6.5 dB/m = 50.8 dBμV/m</p> <p>Average Limit = $20 \log (500) = 54$ dBμV/m</p> <p>Margin = 54 dBμV/m - 50.8 dBμV/m = 3.2 dB</p>

Block Diagram



5.2.1 Radiated Emissions

Operator	Shane Dock
Test Date	11/3/16 – 11/14/16
Location	Chamber 5, Chamber 3
Temp. / R.H.	70-74 degrees F / 30-42% RH
Requirement	FCC: 15.247 (d) IC: RSS-GEN 8.10
Method	ANSI C63.10 Sections 6.5 and 6.6

Limits:

	30-88 MHz	88-216 MHz	216 – 960 MHz	960+ MHz
Field Strength (μV/m)	100	150	200	500
Field Strength (dBμV/m)	40.0	43.5	46.0	54.0

Test Parameters

Frequency	30-25000 MHz
Distance	3m
Settings	Unit tested at Low, Mid, High Channels
Settings	RBW = 120kHz, VBW 1.2 MHz (<1 GHz) RBW = 1 MHz, VBW = 3 MHz (>1 GHz)
Notes	Measurements taken in restricted bands. For measurements above 1 GHz, antenna used with a tilt gear to keep EUT within the cone of radiation. Absorbers were also added to the floor of the chamber while measuring emissions above 1 GHz. Emissions under 1 GHz are not a function of Tx Mode.
Example Calculation	Limit (dBμV) = $20 * \log[\text{Limit } (\mu\text{V})]$ 40 = $20 * \log (100)$ Raw Data + Antenna Factor + Cable Factor = Reported Data 19.77 dBμV + 12.50 dB/m + 0.93 dB = 38.80 dBμV/m

Company: Leviton Manufacturing Co., Inc.	Page 24 of 32	Name: DLDNK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job:C-2584		Model: See Section 2
		Serial: Engineering Sample

Instrumentation



a Laird Business

Date : 3-Nov-2016

Type Test: Radiated Emissions

Job #: C-2584

Prepared By: Shane Dock

Customer: Leviton LES

Quote #: 316375

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	AA 980158	Double Ridge Horn Antenna	ETS Lindgren	3117	109300	10/13/2016	10/13/2017	Active Calibration
2	EE 980085	EMI Receiver	Agilent	N9038A	MY51210148	5/12/2016	5/12/2017	Active Calibration
3	AA 980154	High Pass Filter 2.4 GHz	KWM	HPF-L-14188	7272-02	7/25/2016	7/25/2017	Active Calibration
4	AA 980174	Small Horn Antenna	ETS Lindgren	3116C-PA	00206880	4/23/2016	4/23/2017	Active Calibration
5	AA 980150	Biconical Antenna	ETS Lindgren	3110B	0003-3346	2/1/2016	1/31/2017	Active Calibration
6	AA 980163	Log Periodic Antenna	A.H. Systems, Inc.	SAS-512-2	500	3/18/2016	3/18/2017	Active Calibration
7	EE 980088	MXE Spectrum Analyzer	Agilent	N9038A	MY51210138	2/24/2016	2/23/2017	Active Calibration
8	AA 980171	Cable - low loss 8m	A.H. Systems, Inc.	SAC-28G-6	386	3/31/2016	3/31/2017	Active Verification

Shane Dock
Project Engineer:

LH
Quality Assurance:

Company: Leviton Manufacturing Co., Inc.

Report: 316375 B

Job:C-2584

Page 25 of 32

Name: DLINK Lumina RF Room Controller
ZLDNK Intellect Room Controller

Model: See Section 2

Serial: Engineering Sample

Table

Frequency (MHz)	Height (cm)	Azimuth (degree)	Quasi Peak (dBuV/m)	Quasi Peak Limit (dBuV/m)	Quasi Peak Margin (dBuV/m)	Orientation	Polarization
38.06	100	359.75	23.89	40	16.11	V	V

Frequency (MHz)	Orientation	Polarization	Height (cm)	Azimuth (degree)	Peak (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Average (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4880	V	H	244.71	334.00	47.1	74.0	26.9	38.5	54.0	15.5
		V	117.00	292.25	45.7	74.0	28.3	36.9	54.0	17.1
	H	H	216.66	91.50	44.6	74.0	29.4	35.0	54.0	19.0
		V	242.14	0.00	46.3	74.0	27.7	37.8	54.0	16.2
	F	H	118.38	195.75	45.9	74.0	28.1	37.7	54.0	16.3
		V	134.76	173.75	45.5	74.0	28.5	36.6	54.0	17.4
7320	V	H	250.00	0.25	46.8	74.0	27.2	36.6	54.0	17.4
		V	118.85	24.00	44.5	74.0	29.5	33.9	54.0	20.1
	H	H	244.42	73.75	45.1	74.0	28.9	34.9	54.0	19.1
		V	142.76	16.25	47.3	74.0	26.7	37.8	54.0	16.2
	F	H	187.61	266.75	45.1	74.0	28.9	34.0	54.0	20.0
		V	164.04	205.25	47.1	74.0	26.9	35.3	54.0	18.7


Frequency (MHz)	Orientation	Polarization	Height (cm)	Azimuth (degree)	Peak (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)	Average (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4950	V	H	222.71	328.75	52.6	74.0	21.4	45.8	54.0	8.2
7425	H	V	137.28	0.25	46.8	74.0	27.2	37.5	54.0	16.5

Band Edge	Frequency (MHz)	Peak Measurement (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
Lower	2369.7	58.4	74.0	15.6
Upper	2484.1	59.3	74.0	14.7


Band Edge	Frequency (MHz)	Average Measurement (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
Lower	2390.0	42.0	54.0	12.0
Upper	2483.9	45.3	54.0	8.7

Company: Leviton Manufacturing Co., Inc.	Page 26 of 32	Name: DLINK Lumina RF Room Controller
ZLDNK Intellect Room Controller		
Report: 316375 B		Model: See Section 2
Job:C-2584		Serial: Engineering Sample


Plots (Worst-Case Shown)

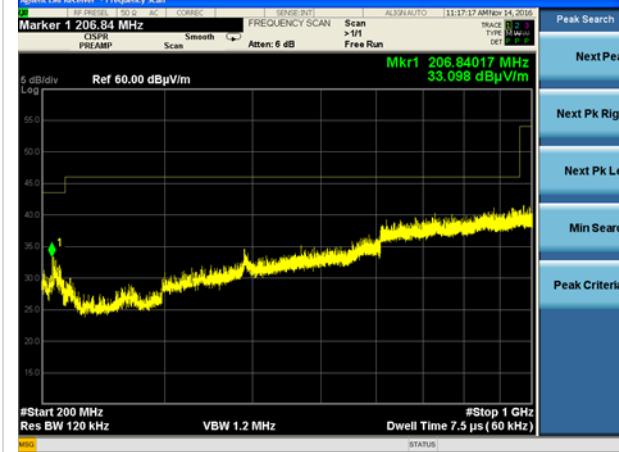


30 – 200 MHz (Low Channel, Vertical Polarization)

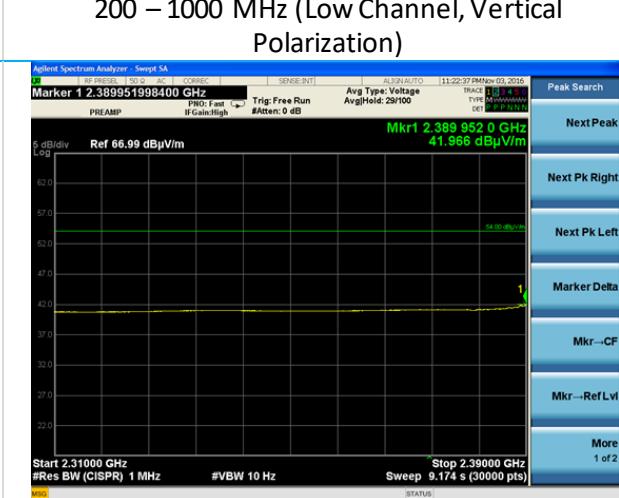


200 – 1000 MHz (Low Channel, Vertical Polarization)

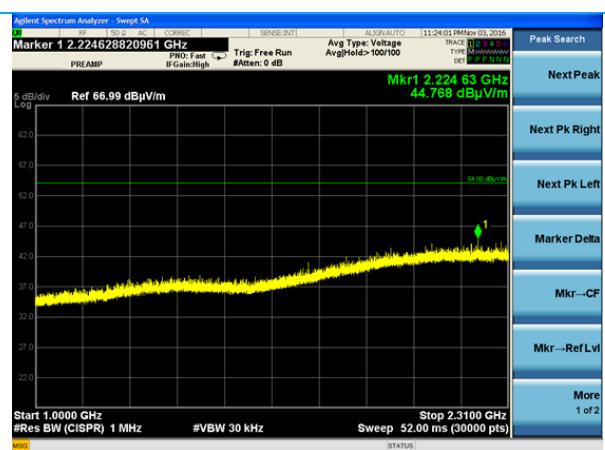


1 – 2.31 GHz (Low Channel)

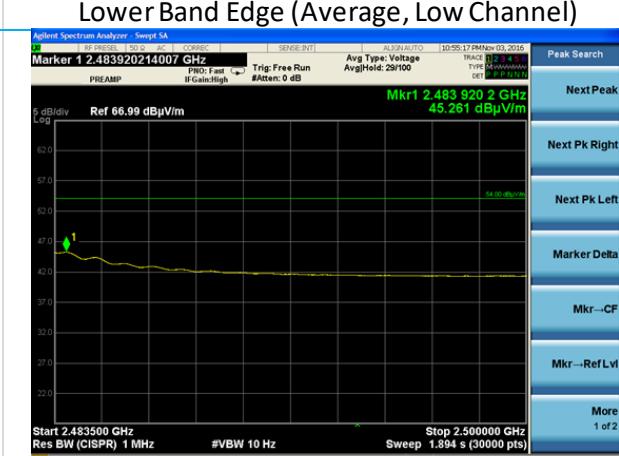


Lower Band Edge (Average, Low Channel)

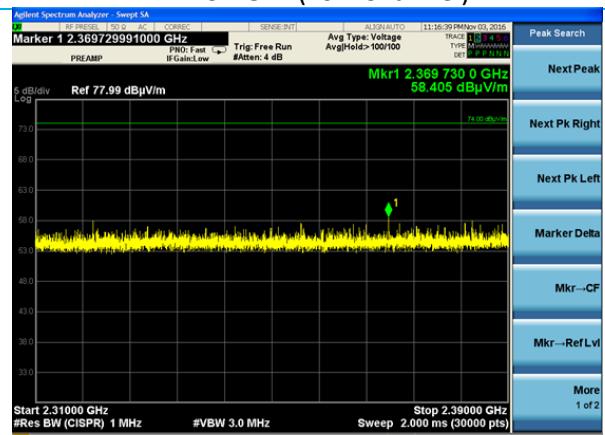


Lower Band Edge (Peak, Low Channel)

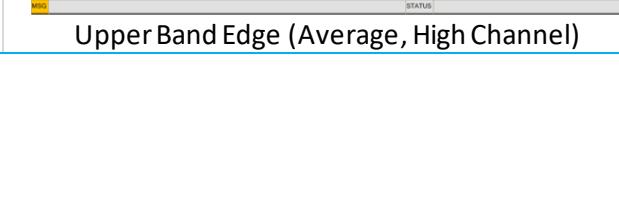


Upper Band Edge (Average, High Channel)

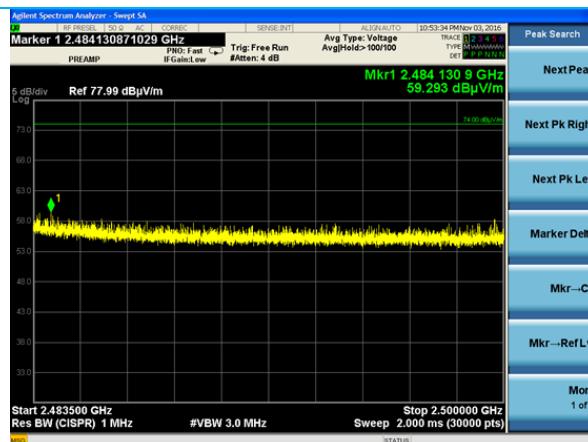


Upper Band Edge (Peak, High Channel)

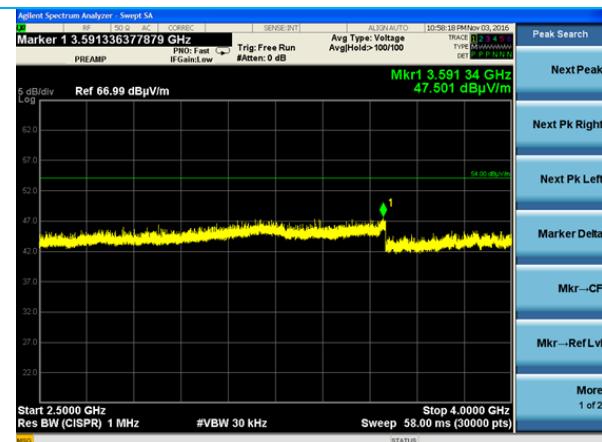

2.5 – 4 GHz (High Channel)

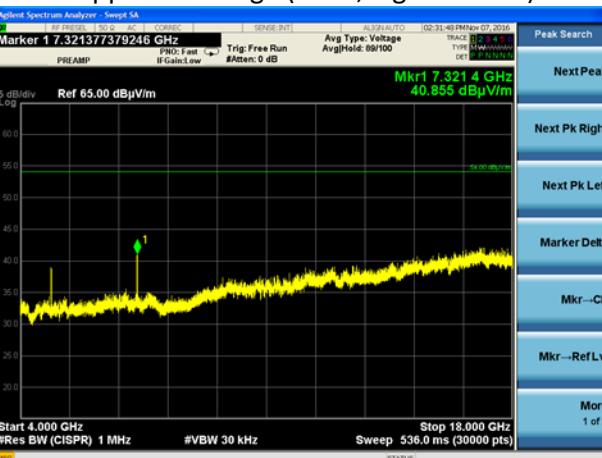

4 – 18 GHz (High Channel, Horizontal Polarization)

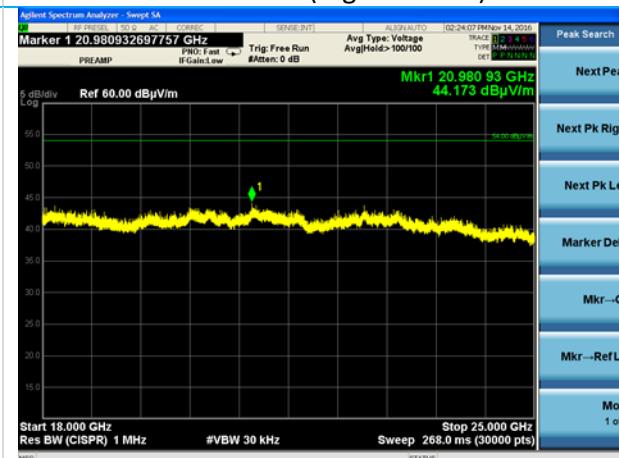

18 – 25 GHz (High Channel, Horizontal Polarization)

5.3 AC Mains Conducted Emissions

A line impedance stabilization network (LISN) or artificial mains network (AMN) allows the emissions of the power supply conductors to be measured while isolating the EUT from the supply mains.

Description of Measurement

The AMN, cable, and other necessary measurement system correction factors are loaded onto the EMI receiver when the measurements are performed. The data is gathered and reported as the corrected values.


Maximum emissions are determined with a peak max hold trace then measurements at a selection of the highest points are made with quasi-peak and average detectors. Results are recorded and compared to limit for each line. (e.g. line and neutral)

Example Calculations

Measurement (dB μ V) + Cable factor (dB) + Other (dB) = Corrected Reading (dB μ V)

Margin (dB) = Limit (dB μ V) - Corrected Reading (dB μ V)

Block Diagram

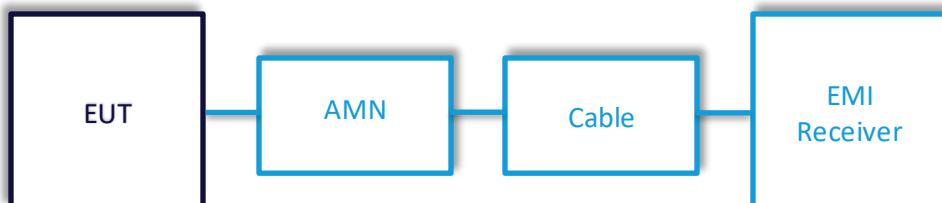

5.3.1 AC Mains Conducted Emissions

Operator	Zach Wilson
Test Date	11/17/16
Location	EMC Lab
Temp. / R.H.	70 degrees F / 60% RH
Requirement	FCC: 15.207 IC: RSS-GEN 8.8
Method	ANSI C63.10 Section 6.2

Limits:

Frequency of Emission (MHz)	Quasi-Peak Limit (dBuV)	Average Limit (dBuV)
0.15 - 0.50	66 to 56	56 to 46
0.5 - 5	56	46
5-30	60	50

Test Parameters

Frequency	0.15 – 30 MHz
Settings	RBW 9 kHz
Settings	VBW 90 kHz
EUT Power	120V 60 Hz
Channel	Mid Channel Tx mode (Found to be worst-case)

Instrumentation



a Laird Business

Date : 17 Nov 2016

Type Test : Conducted AC Emissions

Job # : C-2584

Prepared By: Zach Wilson

Customer : Leviton LES

Quote # : 316375

No.	Asset #	Description	Manufacturer	Model #	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960088	8GHz MXE Spectrum Analyzer	Agilent	N9038A	MY51210138	2/24/2016	2/24/2017	Active Calibration
2	EE 960089	LISN - 15A	COM-POWER	U-215A	191943	3/8/2016	3/8/2017	Active Calibration
3	EE 960162	LISN - 15A	COM-POWER	U-215A	191969	8/15/2016	8/15/2017	Active Calibration


Test Technician: Zach Wilson

Quality Assurance: STH

Company: Leviton Manufacturing Co., Inc.	Page 30 of 32	Name: DLINK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job: C-2584		Model: See Section 2
		Serial: Engineering Sample

Table

Frequency (MHz)	Line	Q-Peak Reading (dB μ V)	Q-Peak Limit (dB μ V)	Quasi-Peak Margin (dB)	Average Reading (dB μ V)	Average Limit (dB μ V)	Average Margin (dB)
0.690	L1	44.6	56.0	11.4	36.1	46.0	9.9
1.398	L1	34.4	56.0	21.6	25.7	46.0	20.4
5.029	L1	37.3	60.0	22.7	27.7	50.0	22.3
0.690	L2	44.1	56.0	11.9	30.7	46.0	15.4
4.760	L2	39.7	56.0	16.3	25.5	46.0	20.5
7.095	L2	44.0	60.0	16.0	29.9	50.0	20.2

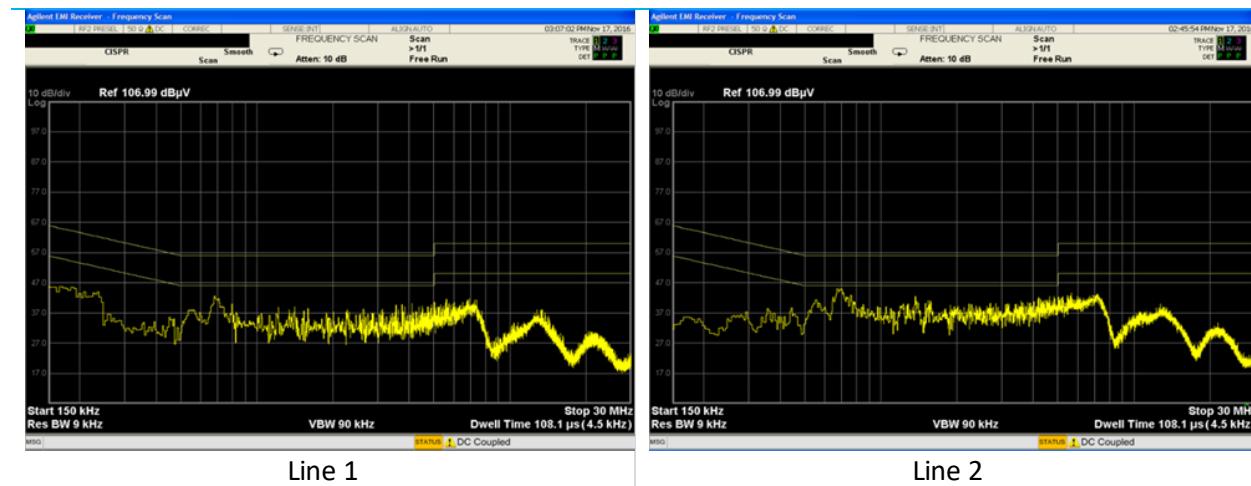Plots


6 REVISION HISTORY

Version	Date	Notes	Person
V0	5/2/18	First Draft	Shane Dock
V1	6/5/18	Revised Draft	Shane Dock
V2	5/28/20	Customer Info Added	Shane Dock
V3	6/3/20	Report, requirements updated	Shane Dock
V4	6/4/20	Final Draft	Shane Dock
V5	7/8/20	TCB Responses	Shane Dock
V6	8/24/20	Further Responses	Shane Dock

END OF REPORT

Company: Leviton Manufacturing Co., Inc.	Page 32 of 32	Name: DLDNK Lumina RF Room Controller
Report: 316375 B		ZLDNK Intellect Room Controller
Job: C-2584		Model: See Section 2
		Serial: Engineering Sample