

TEST REPORT

Report Number: 103615308MPK-009D

Project Number: G103615308

October 30, 2018

**Testing performed on the
Vocera V5000 Smartbadge
Model Number: V5000**

FCC ID: QGZ V5000

IC: 4362A-V5000

to

**FCC Part 15 Subpart E (15.407)
Industry Canada RSS-247, Issue 2**

For

Vocera Communications

Test Performed by:

Intertek

1365 Adams Court

Menlo Park, CA 94025 USA

Test Authorized by:

Vocera Communications

525 Race St, Ste 150

San Jose, CA 95126 USA


Prepared by:



Anderson Soungpanya

Date: October 30, 2018

Reviewed by:



Krishna K Vemuri

Date: October 30, 2018

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

Report No. 103615308MPK-009A	
Equipment Under Test:	Vocera V5000 Smartbadge
Trade Name:	Vocera Communications
Model Number:	V5000
Part Number:	220-02100
Applicant:	Vocera Communications
Contact:	Prakash Guda
Address:	Vocera Communications 525 Race St, Ste 150 San Jose, CA 95126
Country:	USA
Tel. Number:	(408) 882-5100
Email:	Pguda@vocera.com
Applicable Regulation:	FCC Part 15, Subpart E (15.407) Industry Canada RSS-247, Issue 2
Date of Test:	September 25 – October 12, 2018

We attest to the accuracy of this report:



Anderson Soungpanya
EMC Project Engineer



Krishna K Vemuri
Engineering Team Lead

TABLE OF CONTENTS

1.0 Introduction..... 4
1.1 Summary of Tests 4

2.0 General Description 5
2.1 Product Description 5
2.2 Related Submittal(s) Grants 6
2.3 Test Methodology 6
2.4 Test Facility 6
2.5 Measurement Uncertainty 6

3.0 System Test Configuration..... 7
3.1 Support Equipment 7
3.2 Block Diagram of Test Setup..... 7
3.3 Justification 9
3.4 Mode of Operation During Test..... 9
3.5 Modifications required for Compliance 10
3.6 Additions, deviations and exclusions from standards 10

4.0 Measurement Results..... 11
4.1 Emission Bandwidth and 99% Occupied Bandwidth 11
4.1.1 Requirement..... 11
4.1.2 Procedure 11
4.1.3 Test Result 12
4.2 Maximum Conducted Output & Power Spectral Density 35
4.2.1 Requirement..... 35
4.2.2 Procedure 35
4.2.3 Test Results..... 36
4.3 Transmitter Radiated Emissions 42
4.3.1 Requirement..... 42
4.3.2 Procedure 43
4.3.3 Field Strength Calculation 44
4.3.4 Antenna-port conducted measurements 45
4.3.5 General Procedure for conducted measurements in restricted bands..... 45
4.3.6 Test Results..... 45
4.3.7 Test setup 68

5.0 List of Test Equipment 69

6.0 Document History 70

1.0 Introduction

1.1 Summary of Tests

Test	Reference FCC	Reference RSS-247	Result
26 dB Emission Band width and 99% Occupied Bandwidth	15.407(a)(1)(2)(3)	RSS-247, 6.2.1	Complies
Conducted Output Power	15.407(a)(1)(2)(3)	RSS-247, 6.2.1	Complies
Peak Power Spectral Density	15.407(a)(1)(2)(3)	RSS-247, 6.2.1	Complies
Undesirable Emissions	15.407(b)(1-8)	RSS-247, 6.2.1	Complies
Transmitter Radiated Emissions	15.407(b)(1-8) 15.209, 15.205	RSS-247, 6.2.1	Complies
Frequency stability	15.407(g)	RSS-Gen	Complies*
Antenna Requirement	15.203	RSS-Gen	Complies. The EUT uses internal antenna.

*Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual.

EUT receive date: September 17, 2018

EUT receive condition: The pre-production version of the EUT was received in good condition with no apparent damage. As declared by the Applicant, it is identical to the production units.

Test start date: September 25, 2018

Test completion date: October 12, 2018

The test results in this report pertain only to the item tested.

2.0 General Description

2.1 Product Description

Vocera Communications supplied the following description of the EUT:

The V5000 Smartbadge is a wearable communication device powered by a removable, rechargeable Lithium Ion battery. The badge contains a 2.4” color, capacitive touch screen, with an array of microphones, a hands free speaker and an audio receiver.

The information about the 5GHz radio, installed in the model V5000, is presented below.

Radio Information	
Applicant	Vocera Communications
Model Number	V5000
FCC Identifier	QGZ V5000
IC Identifier	4362A-V5000
Modulation Technique	OFDM
Rated RF Output	20.06 dBm for 5745~5825 MHz
Frequency Range	U-NII 3: 5725 – 5850 MHz
Type of modulation	OFDM
Number of Channel(s)	5 for 802.11a/n 20 MHz 2 for 802.11n 40MHz 1 for 802.11ac 80MHz
Antenna(s) & Gain	Internal Antenna, Gain: +3.1 dBi
Applicant Name & Address	Vocera Communications 525 Race St, Ste 150 San Jose, CA 95126 USA

The EUT supports the following configurations:

Channels in 5725 – 5850 MHz band							
Number	Frequency, MHz	802.11a/n 20MHz Channels		802.11n 40MHz Channels		802.11ac 80MHz Channels	
149	5745	√	X				
151	5755			√	X		
153	5765	√					
155	5775					√	X
157	5785	√	X				
159	5795			√	X		
161	5805	√					
165	5825	√	X				

List of channels:

√ - available

X - tested

2.2 Related Submittal(s) Grants

None.

2.3 Test Methodology

Antenna conducted measurements were performed according to the FCC documents “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E” (789033 D02 General U-NII Test Procedures New Rules v02r01).

Radiated emissions measurements were performed according to the procedures in ANSI C63.10: 2013. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Data Sheet**" of this Application.

All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC, IC and A2LA accredited.

2.5 Measurement Uncertainty

Compliance with the limits was based on the results of the measurements and doesn't take into account the measurement uncertainty.

Estimated Measurement Uncertainty

Measurement	Expanded Uncertainty (k=2)		
	0.15 MHz – 1 GHz	1 GHz – 6 GHz	> 6 GHz
RF Power and Power Density – antenna conducted	1.1 dB	1.5 dB	–
Unwanted emissions - antenna conducted	1.2 dB	1.7 dB	2.0 dB
Bandwidth – antenna conducted	50 Hz	100 Hz	–
Radiated emissions	4.2 dB	5.4 dB	
AC mains conducted emissions	2.4 dB	-	-

3.0 System Test Configuration


3.1 Support Equipment

Support Equipment		
Description	Manufacturer	Model No./ Part No.
Laptop	Lenovo	T440P
USB Hub	Tendak	CP-029-BK
Serial Dongle	Vocera	210-01516-B04


3.2 Block Diagram of Test Setup

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Smartbadge – Conducted Unit	Vocera	V5000	SA3308HF5002D6
Smartbadge – Radiated Unit	Vocera	V5000	SA3308HR50031E
Power Adapter	Asian Power Devices Inc.	WB-10E05R	S8827999000015
Earphone	Kingstate Electronics Corp.	KJFGKS172JJB-01	Not listed


Antenna was removed and co-axial connector was installed for Conducted Measurements.

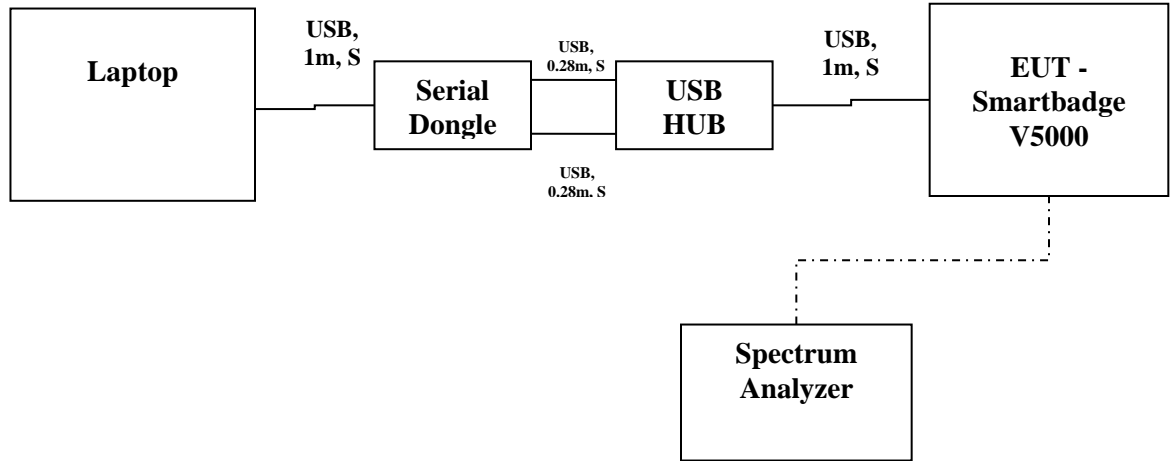

**Radiated Measurements
Charging Mode**

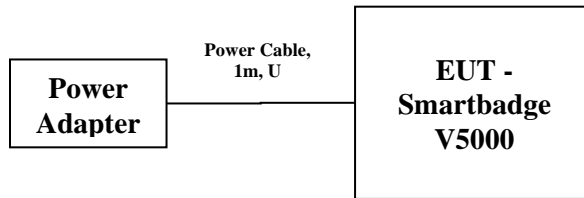

**Radiated Measurements
Normal Mode**

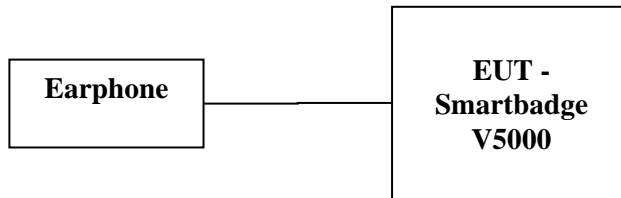

S = Shielded	F = With Ferrite
U = Unshielded	M = Meter

3.3 Justification

Preliminary testing was performed for all modulation/data rate modes. The worse-case data rate with highest power and widest spectrum were selected for final measurements:

- OFDM, 6MB/s – for 802.11a
- OFDM, MCS0 – for 802.11n 20MHz
- OFDM, MCS0 – for 802.11n 40MHz
- OFDM, MCS0 – for 802.11ac 80MHz

Different orientation of the EUT were tested and only the worse-case emissions were reported.

For radiated emission measurements the EUT is placed on a non-conductive table.

The EUT was tested in 2 configurations:

- A/ Charging mode: tested with power adapter
- B/ Normal mode: tested in battery mode and earphone.

Unless otherwise stated in this report, measurements made for, Radiated Spurious were made with the worst-case power setting (mid channel power).

3.4 Mode of Operation During Test

During transmitter testing, the transmitter was setup to transmit continuously using the maximum RF power setting provided by the manufacturers via test scripts. The corresponding output power in dBm can be found in section 4.2 of this report.

The table below reflects the RF power setting needed to be compliant with radiated restricted band edge requirements of 15.205 & 15.209.

Mode	Channel	Frequency MHz	RF Setting
802.11a	149	5745	19
	157	5785	19
	165	5825	19
802.11n 20MHz	149	5745	19
	157	5785	19
	165	5825	19
802.11n 40MHz	151	5755	19
	159	5795	19
802.11ac 80MHz	155	5775	18

3.5 Modifications required for Compliance

Intertek installed no modifications during compliance testing in order to bring the product into compliance.

3.6 Additions, deviations and exclusions from standards

No additions, deviations or exclusion have been made from standard.

4.0 Measurement Results

4.1 Emission Bandwidth and 99% Occupied Bandwidth

15.407(a)(1)(2)(e)

4.1.1 Requirement

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500kHz.

4.1.2 Procedure

The Procedure, described in the FCC Publication 789033 D02 General U-NII Test Procedures New Rules v02r01, was used. Specifically, Section C.1 for Emission Bandwidth and Minimum Emission Bandwidth for measuring the Emission Bandwidth (EBW). Section C.2 was utilized for measuring the 6dB Bandwidth in the band 5.725-5.850 GHz. Section D was used for 99% Occupied Bandwidth.

The antenna port of the EUT was connected to the input of a spectrum analyzer (SA). For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier.

The Occupied bandwidth was measured using the build-in spectrum analyzer facility for 99% power bandwidth measurement.


Tested By	Test Date
Anderson Soungpanya	September 25 & 26, 2018

4.1.3 Test Result

Refer to the following plots for the test result:


Mode	Channel	Frequency MHz	26-dB Bandwidth MHz	Occupied Bandwidth MHz	Plot #	6 dB Bandwidth, MHz	Plot #
802.11a	144	5720	-	-	-	16.360	1.10
	149	5745	21.355	16.713	1.1	16.320	1.11
	157	5785	21.202	16.713	1.2	16.378	1.12
	165	5825	21.317	16.730	1.3	16.322	1.13
802.11n 20MHz	144	5720	-	-	-	17.538	1.14
	149	5745	21.636	17.885	1.4	17.564	1.15
	157	5785	21.538	17.885	1.5	17.612	1.16
	165	5825	21.538	17.885	1.6	17.500	1.17
802.11n 40MHz	142	5710	-	-	-	35.998	1.18
	151	5755	40.009	36.295	1.7	35.849	1.19
	159	5795	40.057	36.295	1.8	36.010	1.20
802.11ac 80MHz	138	5690	-	-	-	75.641	1.21
	155	5775	82.340	75.760	1.9	75.834	1.22

Plot 1.1
802.11a, 5745MHz

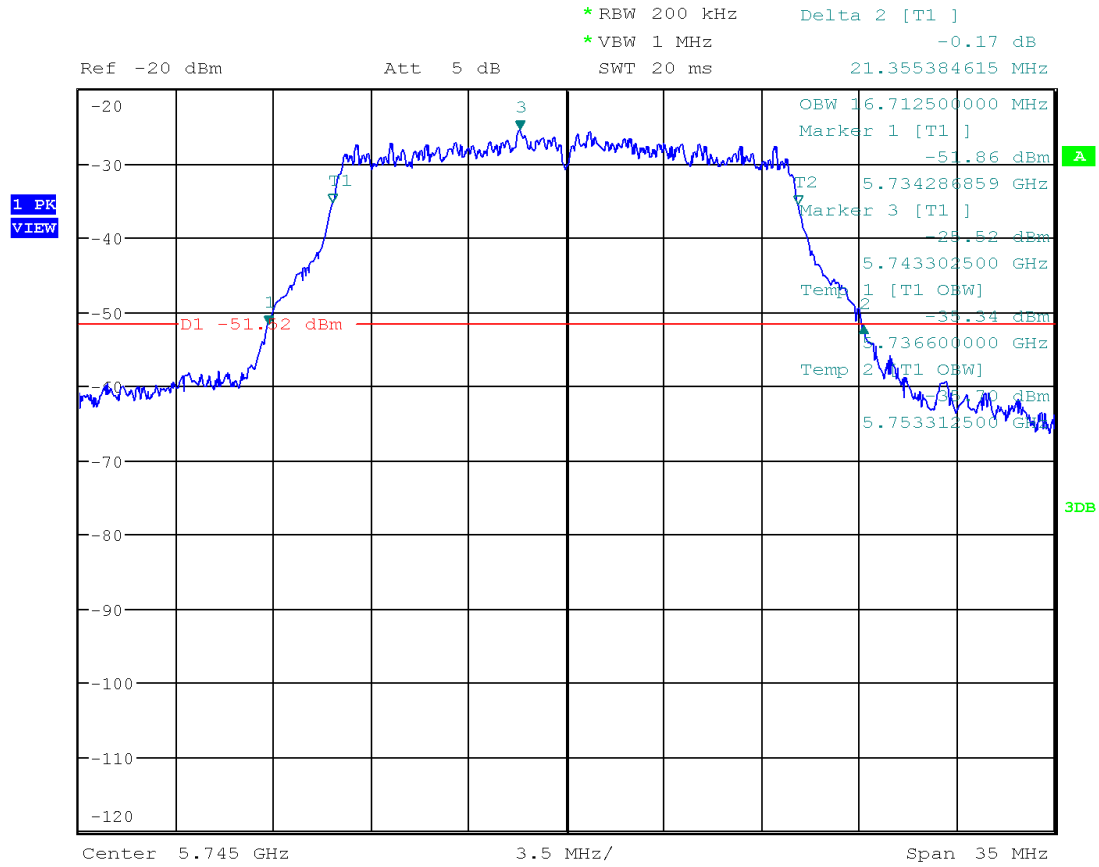


Date: 25.SEP.2018 09:20:42

Plot 1.2
802.11a, 5785MHz

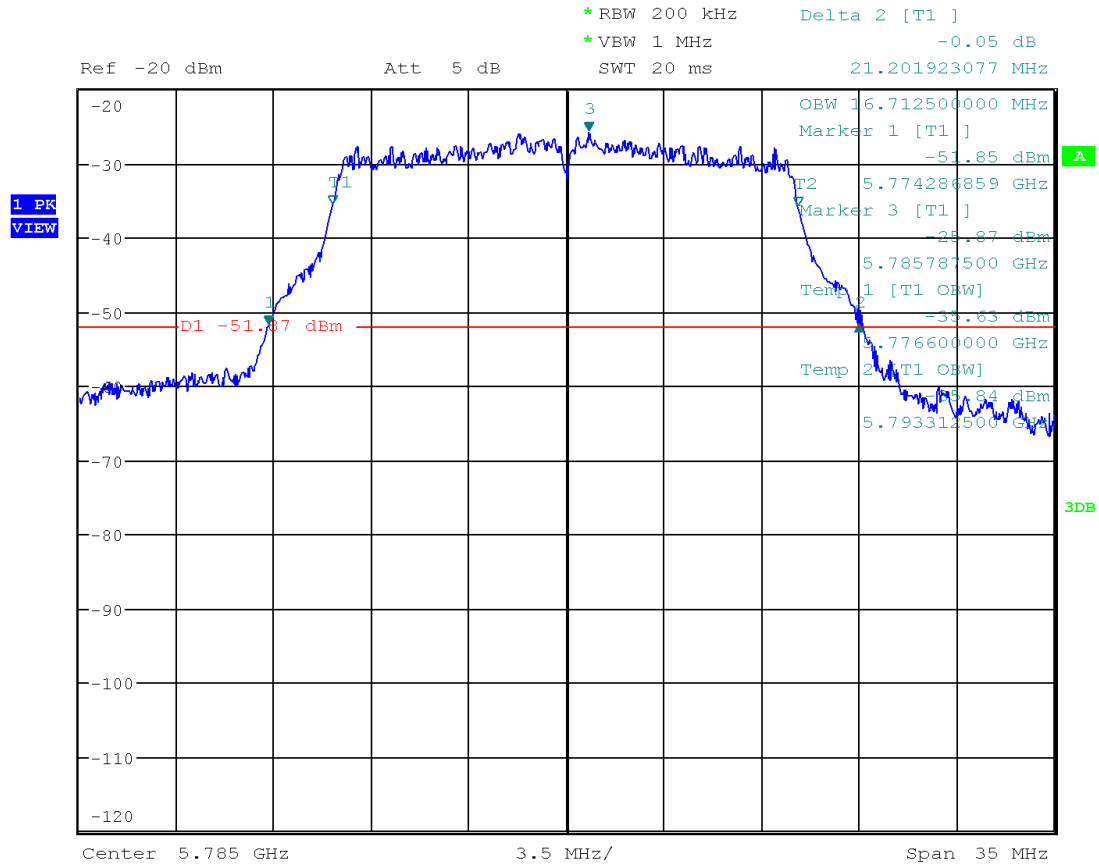


Date: 25.SEP.2018 09:25:36

Plot 1.1
802.11a, 5825MHz

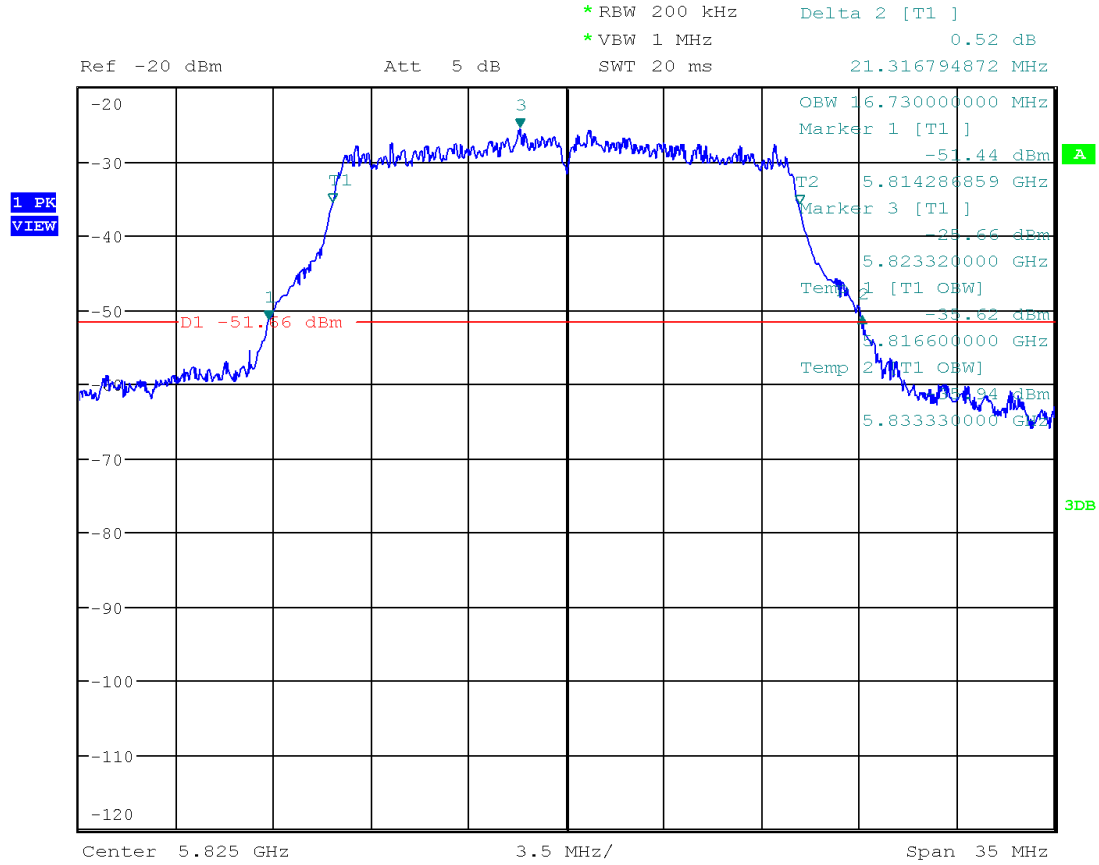


Date: 25.SEP.2018 09:32:47

Plot 1.2
802.11n 20MHz, 5745MHz

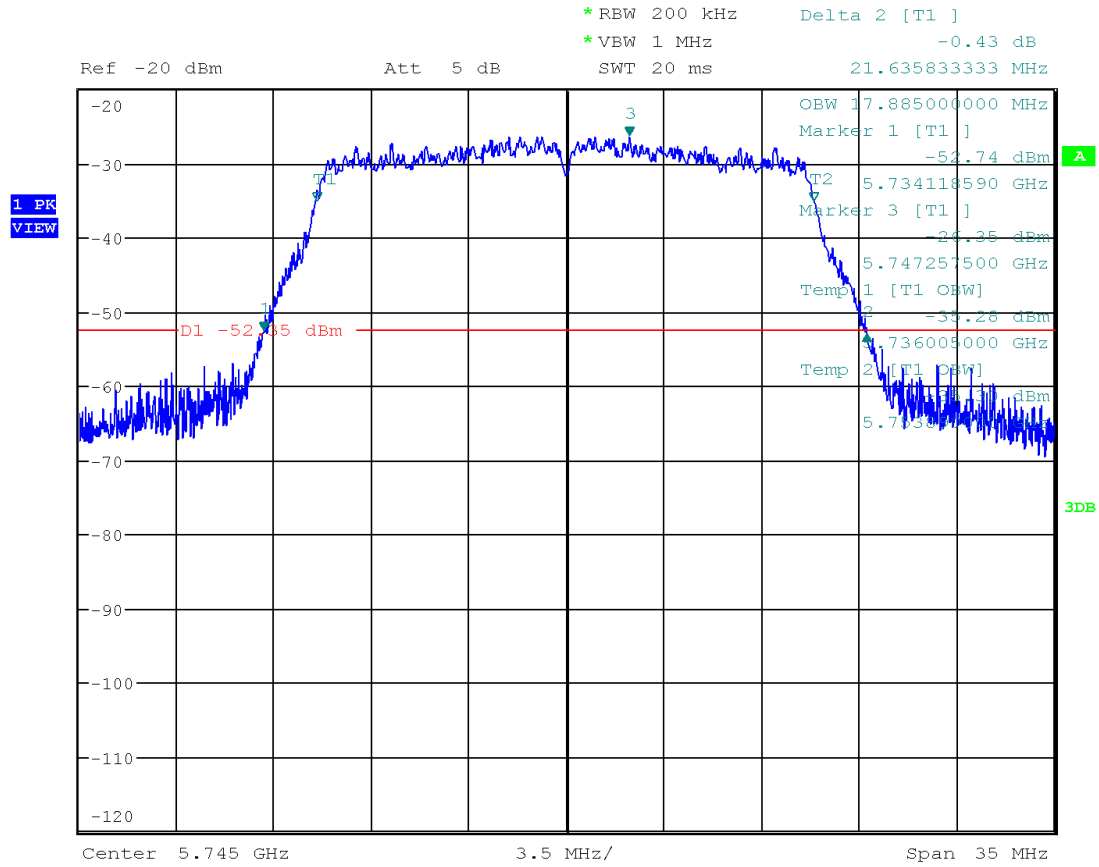


Date: 25.SEP.2018 09:23:31

Plot 1.3
802.11n 20MHz, 5785MHz

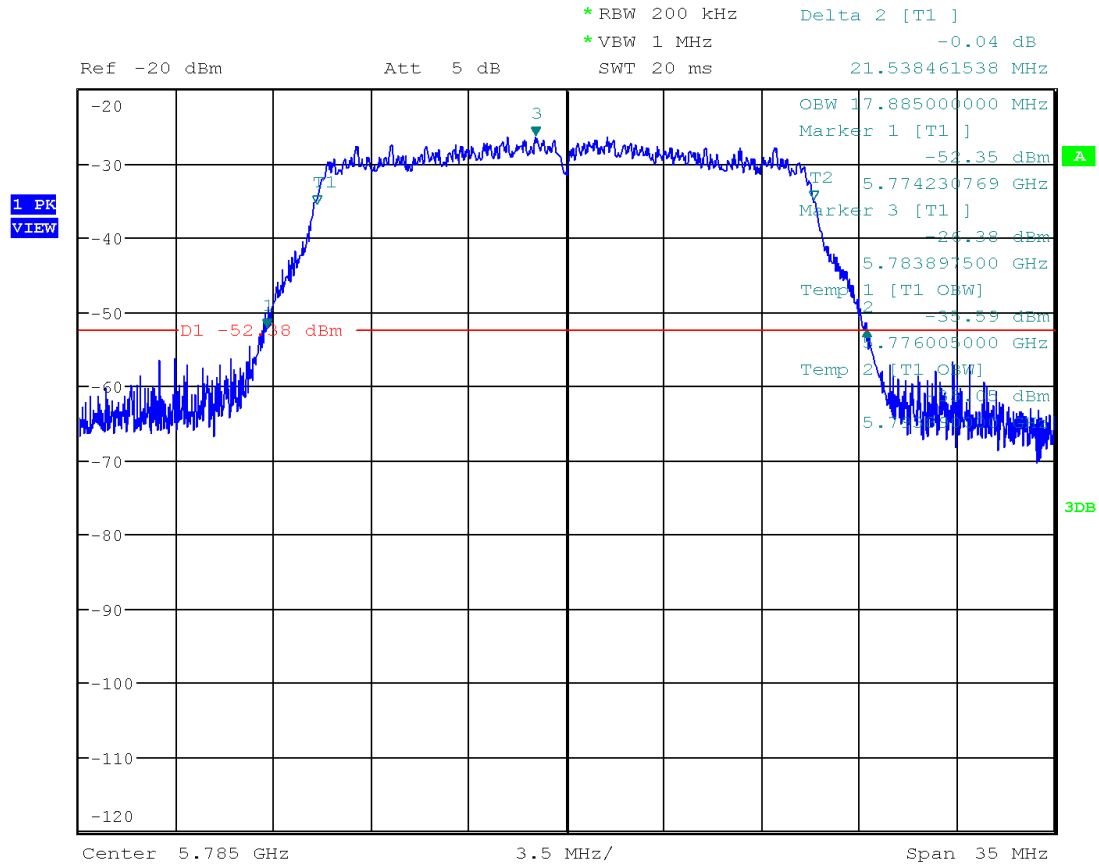


Date: 25.SEP.2018 09:28:05

Plot 1.4
802.11n 20MHz, 5825MHz

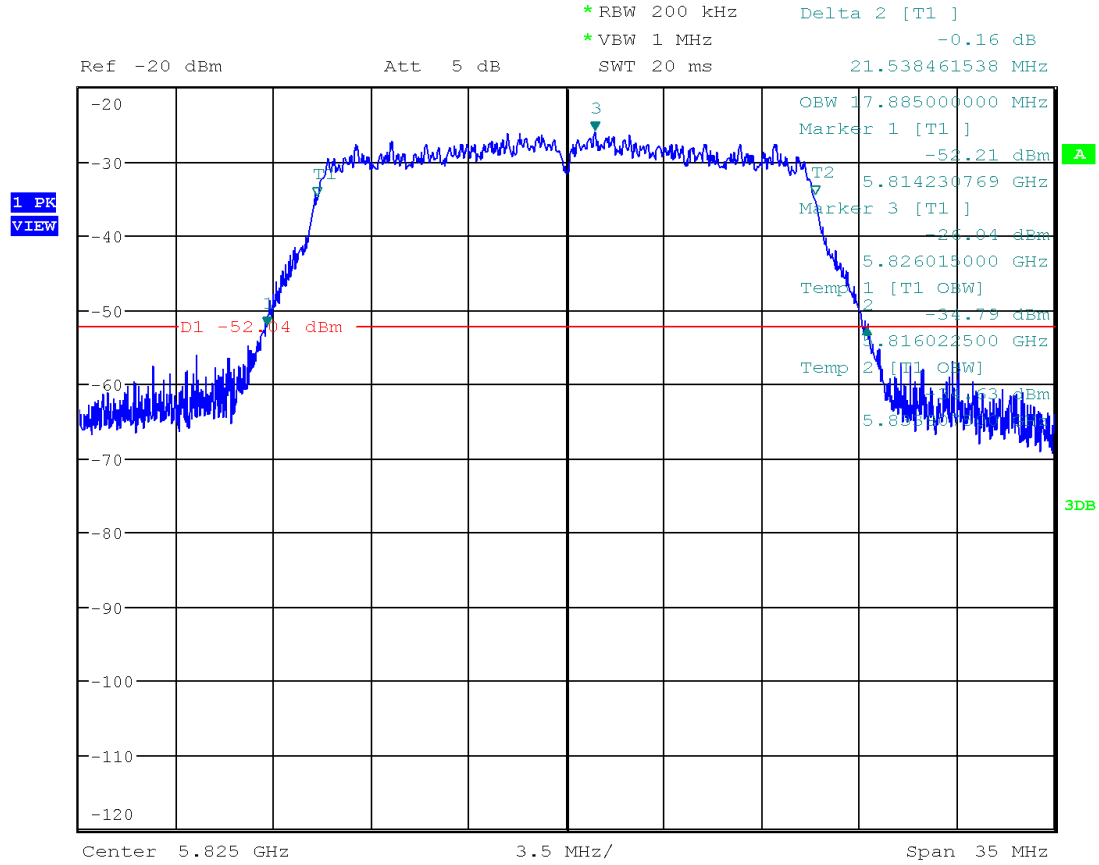


Date: 25.SEP.2018 09:30:28

Plot 1.5
802.11n 40MHz, 5755MHz

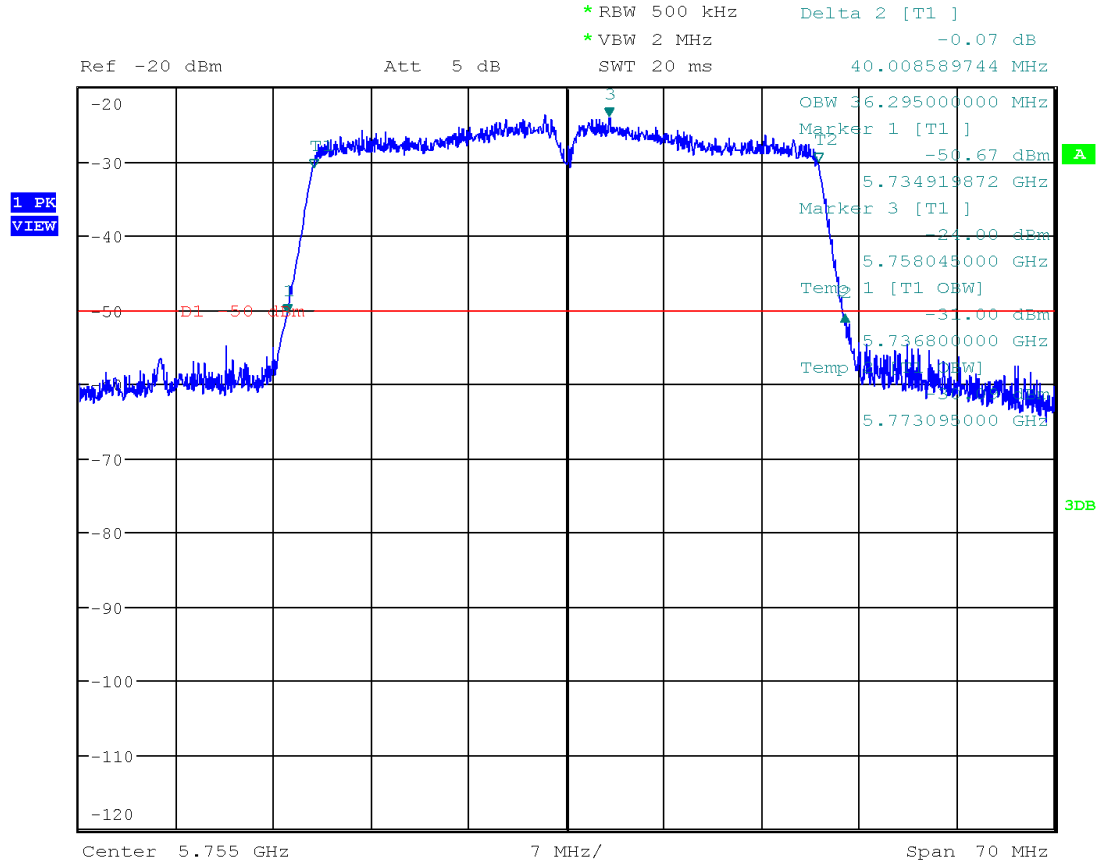


Date: 26.SEP.2018 10:46:32

Plot 1.6
802.11n 40MHz, 5795MHz

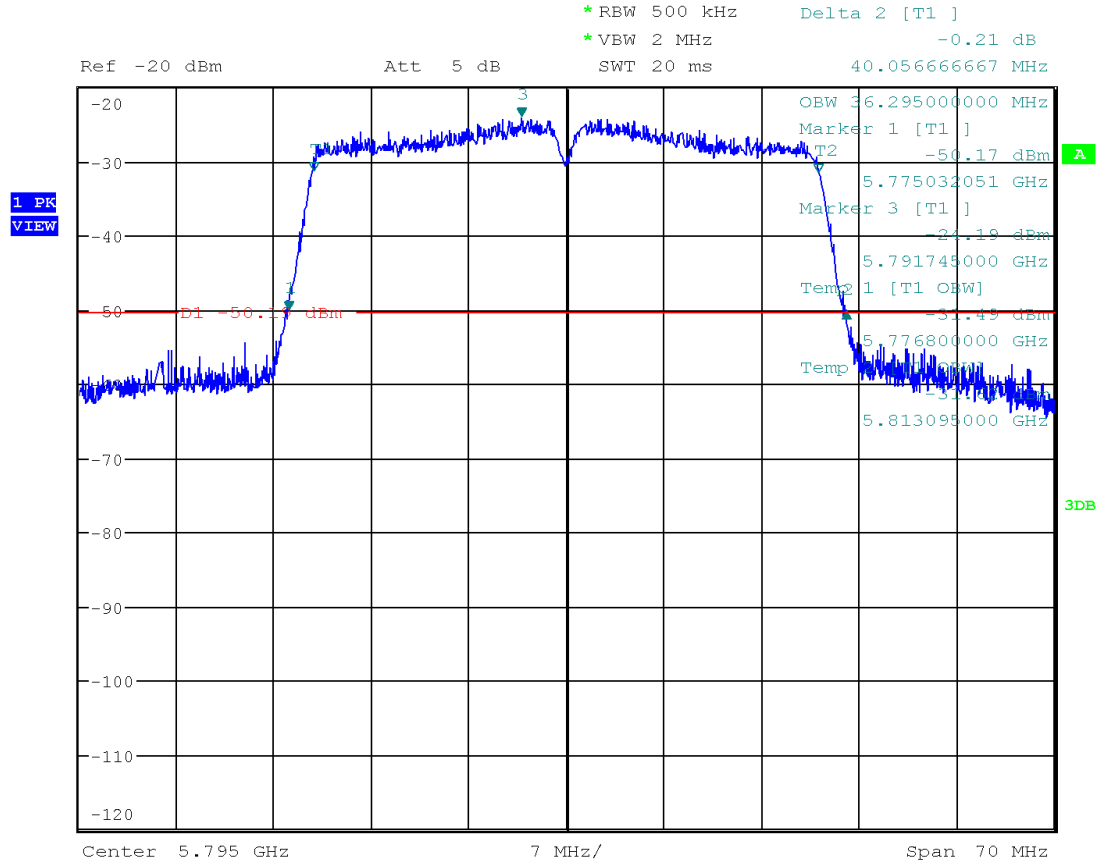


Date: 26.SEP.2018 10:48:55

Plot 1.9 802.11ac, 80MHz 5775MHz

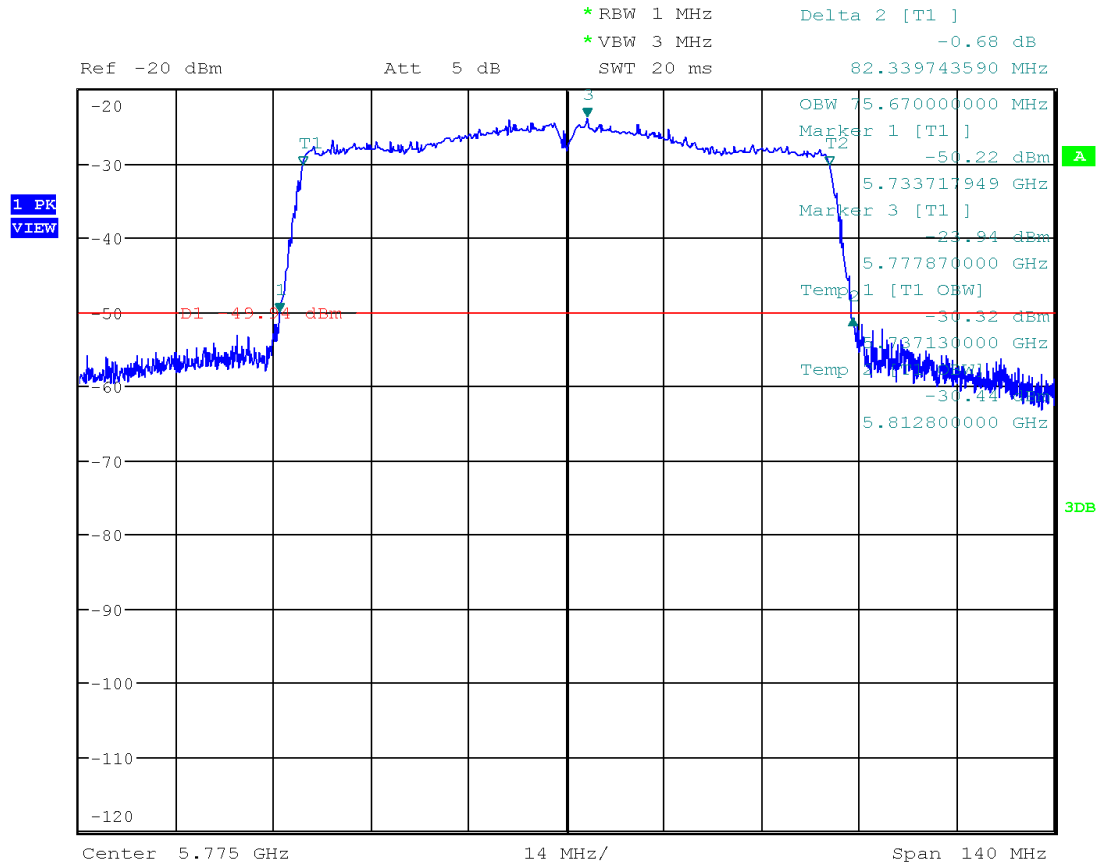


Date: 26.SEP.2018 11:14:49

Plot 1.10
802.11a, 5720MHz

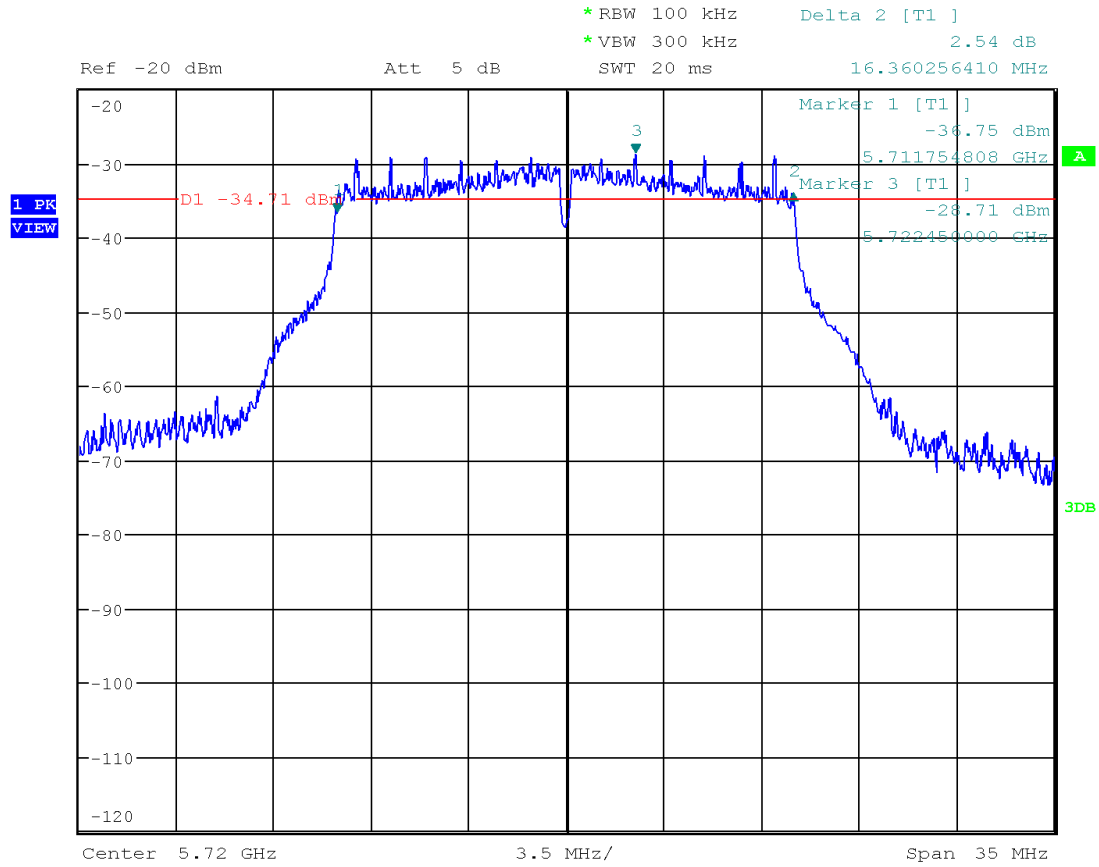


Date: 26.SEP.2018 11:34:44

Plot 1.11
802.11a, 5745MHz

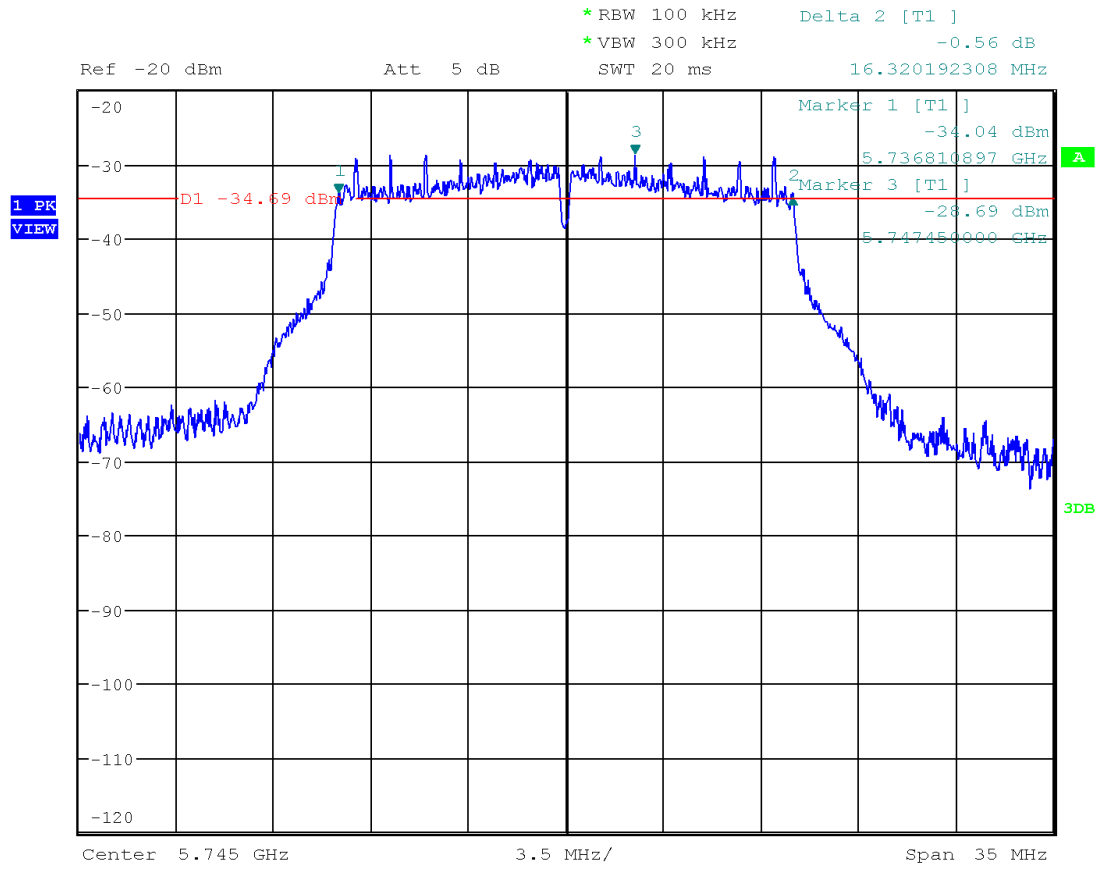


Date: 26.SEP.2018 11:39:16

Plot 1.12
802.11a, 5785MHz

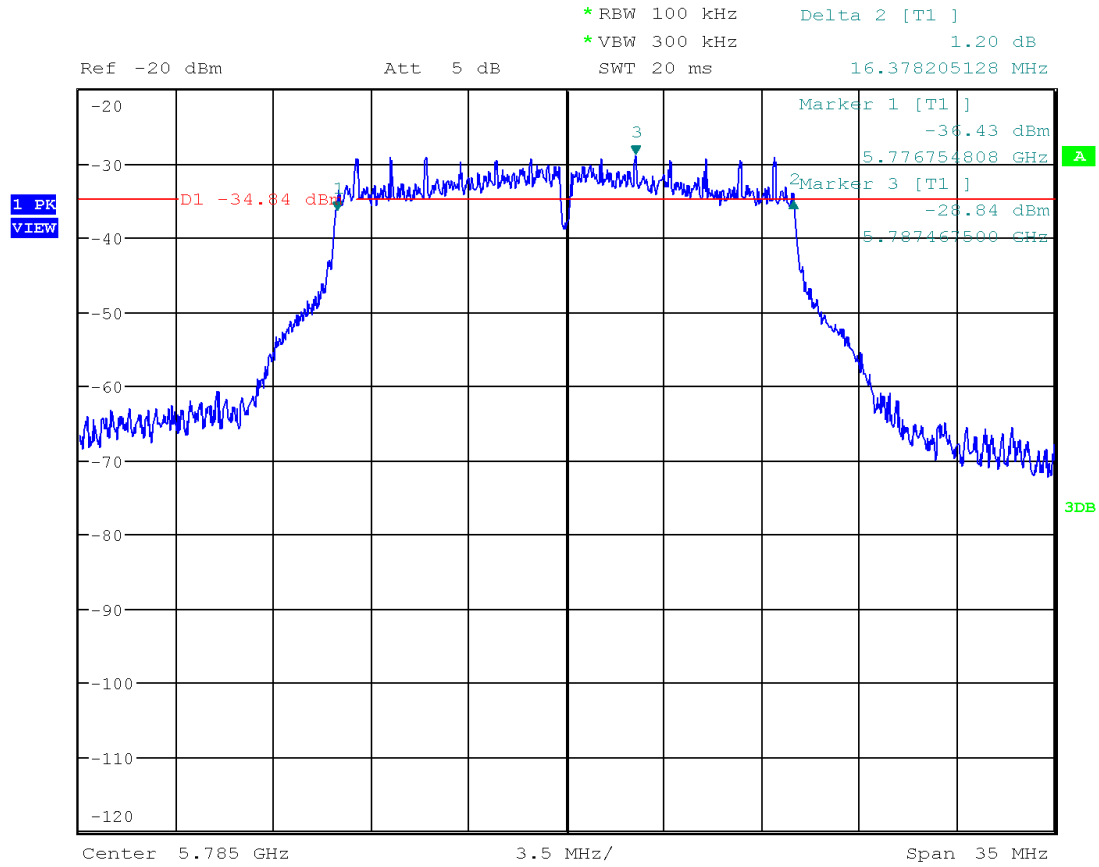


Date: 26.SEP.2018 11:42:58

Plot 1.13
802.11a, 5825MHz

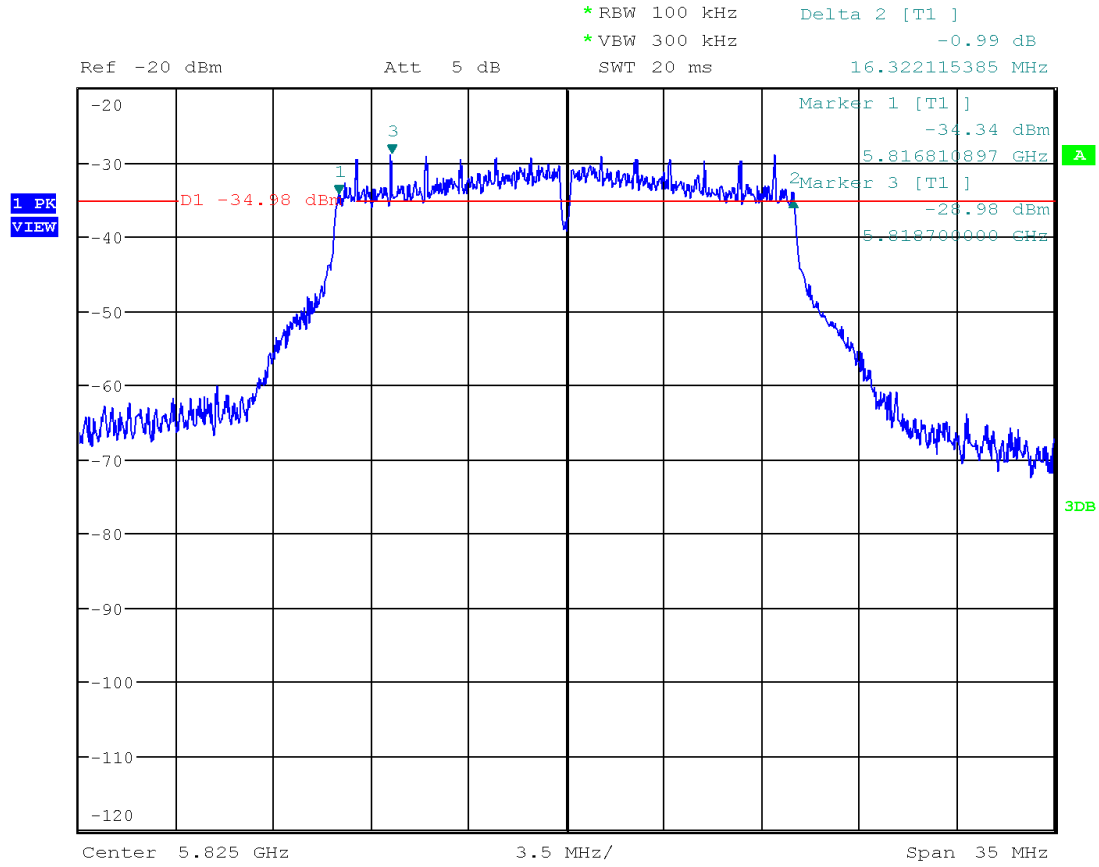


Date: 26.SEP.2018 11:46:08

Plot 1.14
802.11n 20MHz, 5720MHz

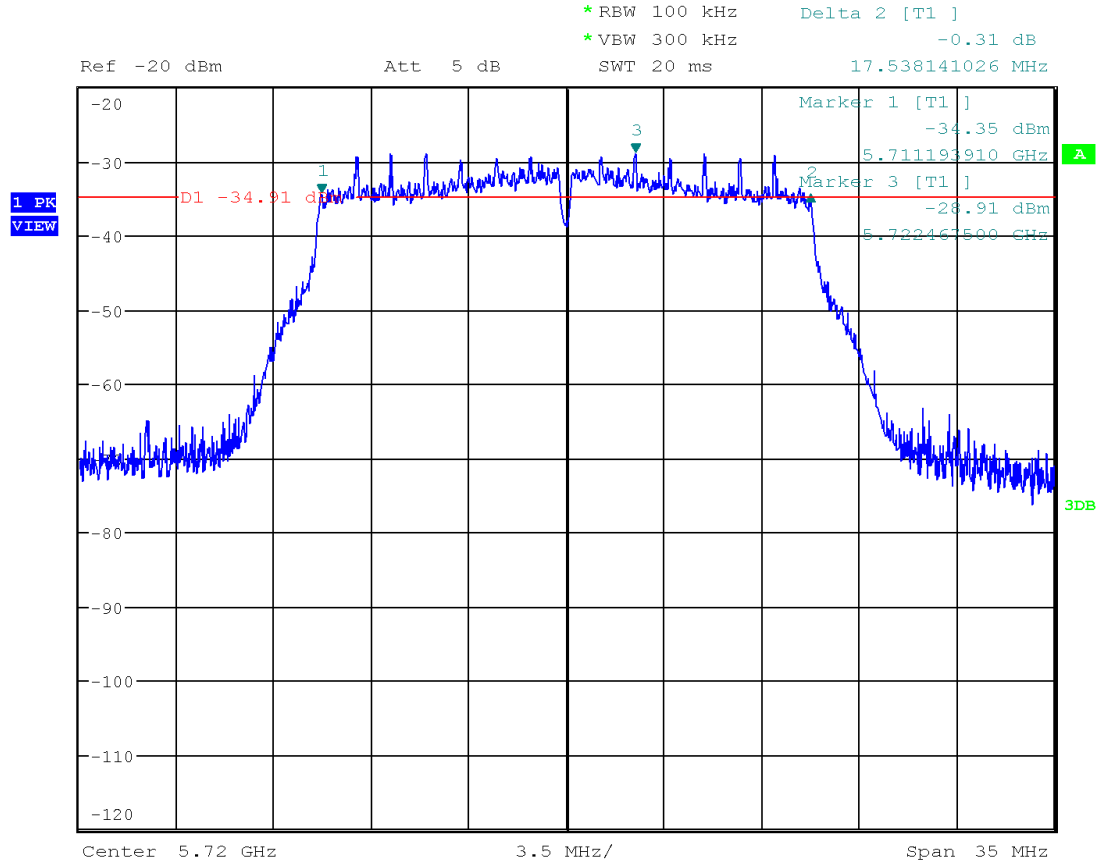


Date: 26.SEP.2018 11:37:05

Plot 1.15
802.11n 20MHz, 5745MHz

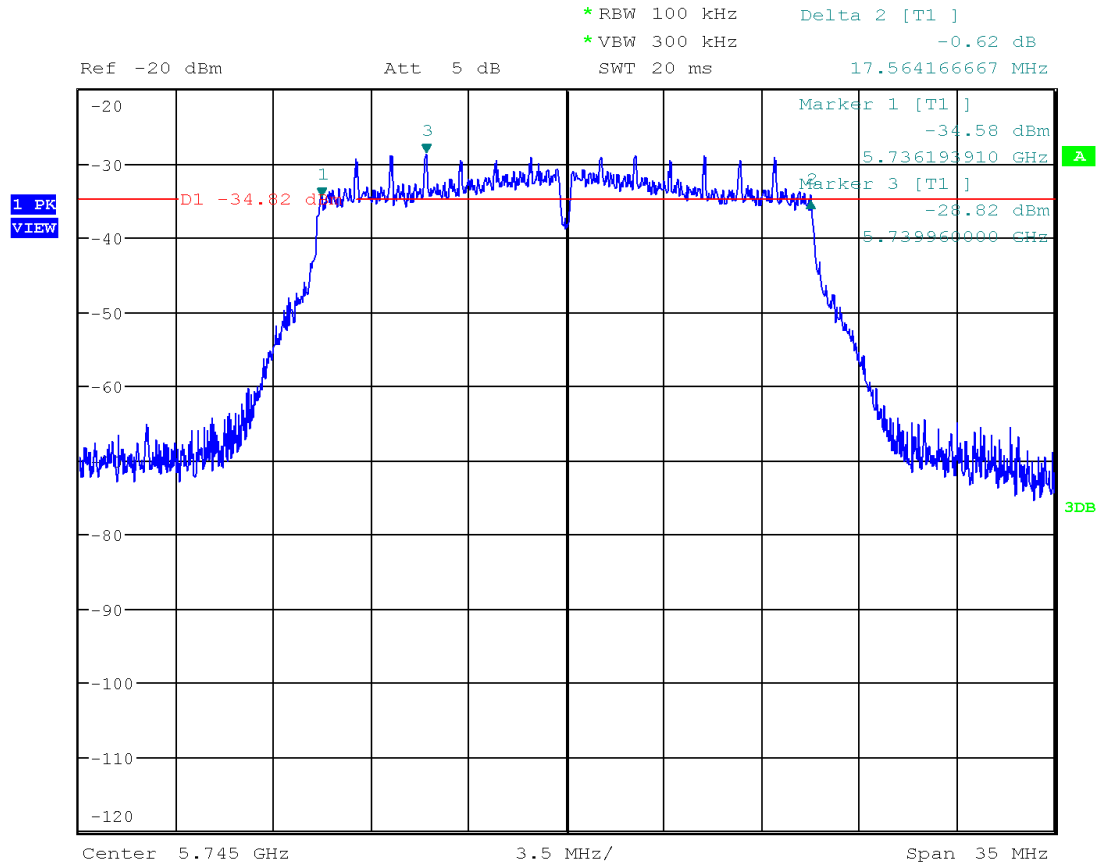


Date: 26.SEP.2018 11:41:03

Plot 1.16
802.11n 20MHz, 5785MHz

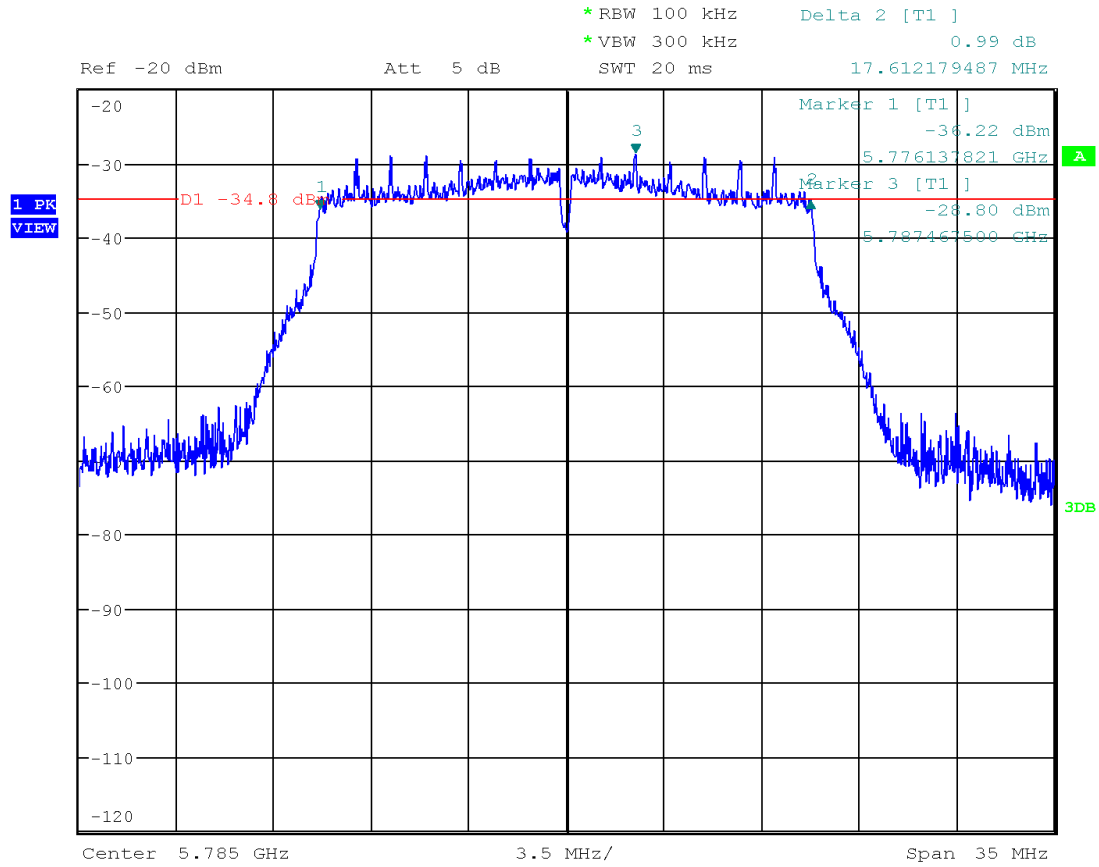


Date: 26.SEP.2018 11:44:40

Plot 1.17
802.11n 20MHz, 5825MHz

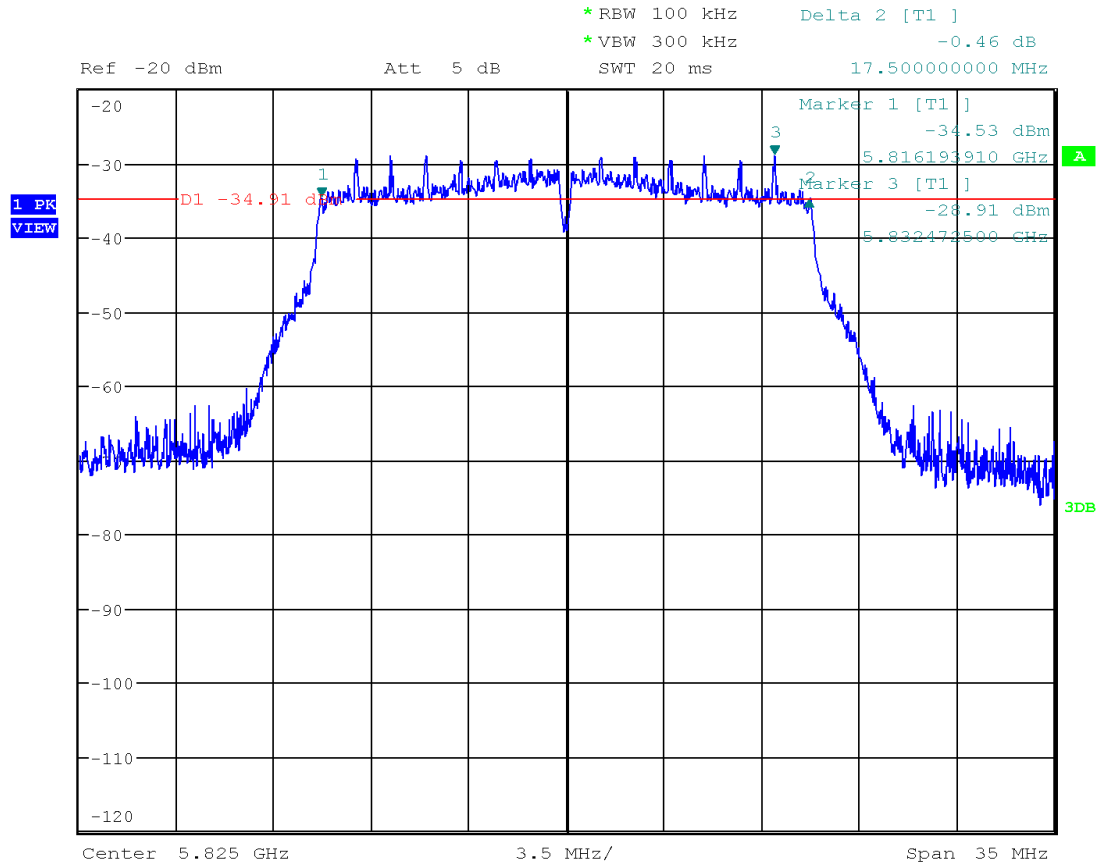


Date: 26.SEP.2018 11:48:02

Plot 1.18
802.11n 40MHz, 5710MHz

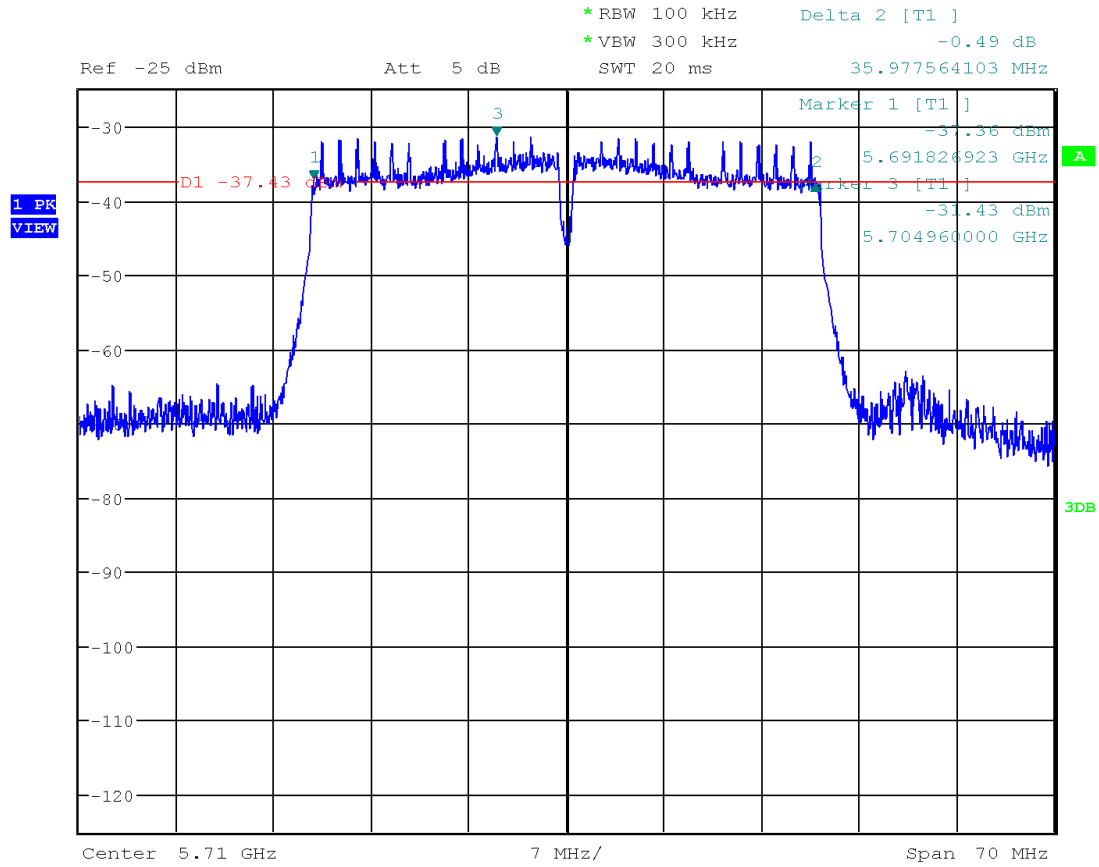


Date: 26.SEP.2018 11:25:38

Plot 1.19
802.11n 40MHz, 5755MHz

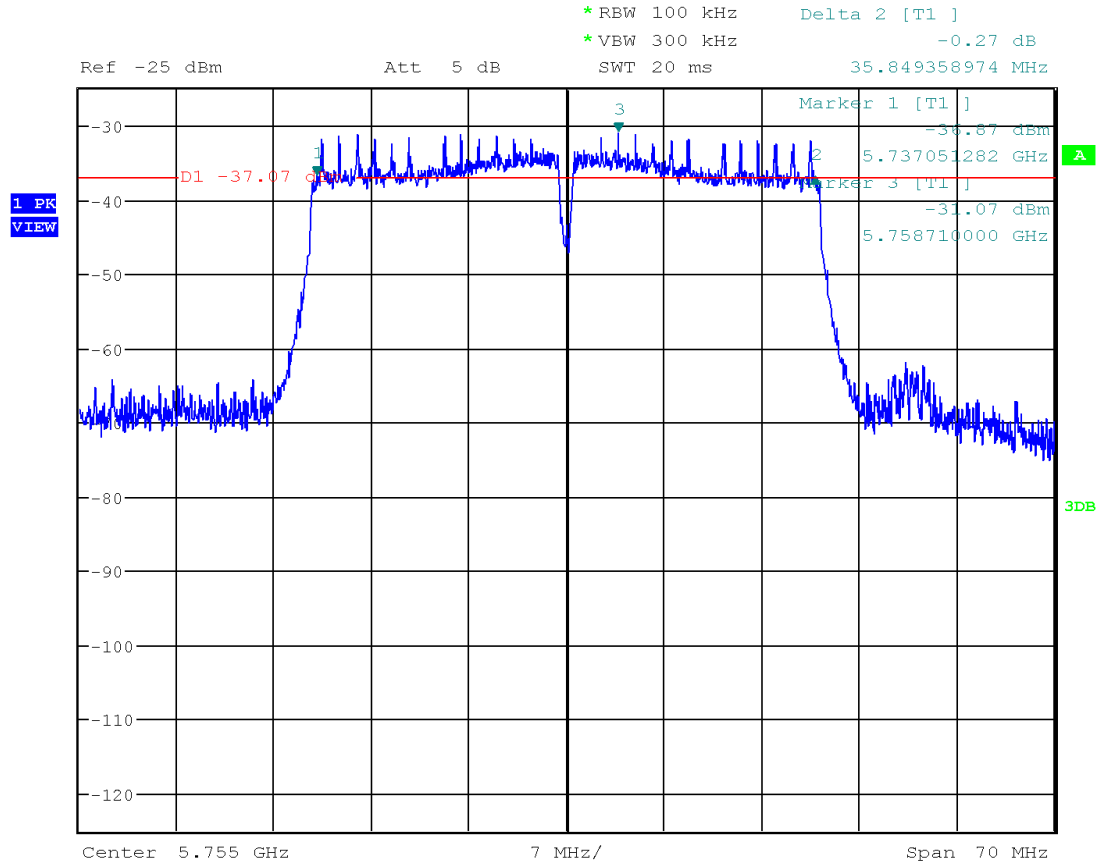


Date: 26.SEP.2018 11:28:22

Plot 1.20
802.11n 40MHz, 5795MHz

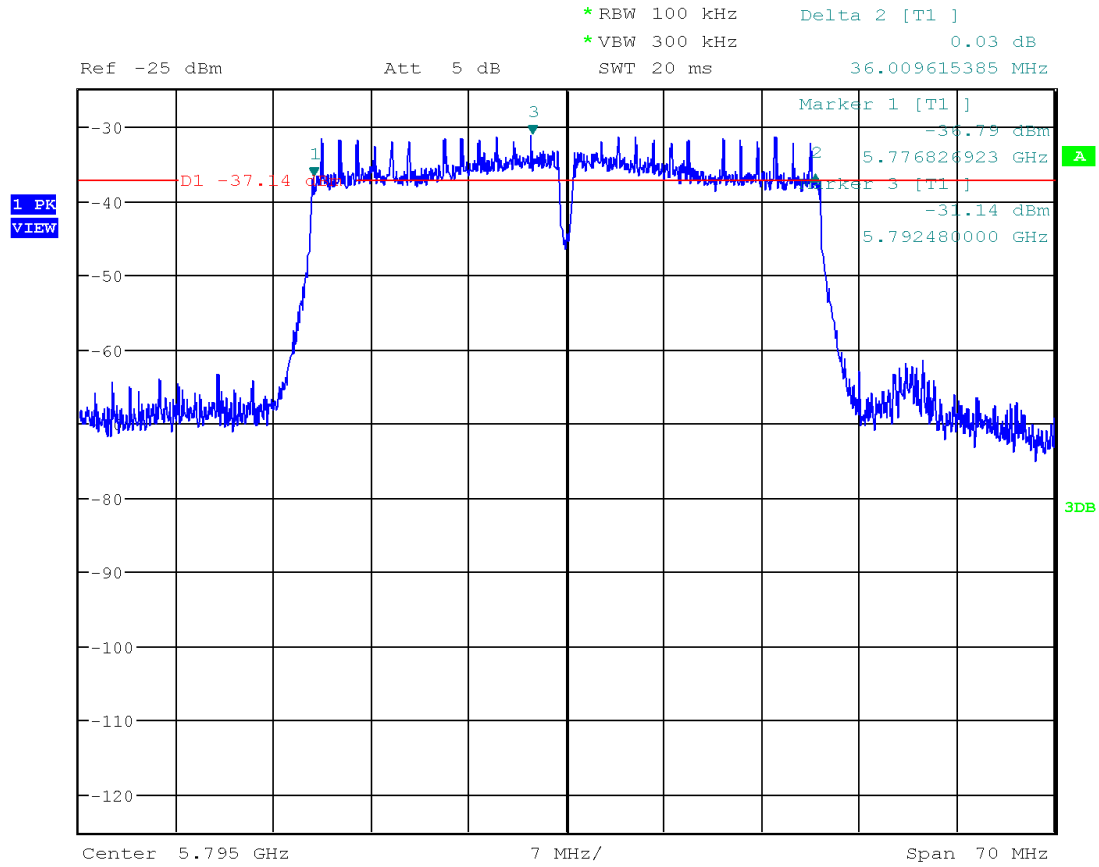


Date: 26.SEP.2018 11:30:18

Plot 1.21
802.11ac 80MHz, 5690MHz

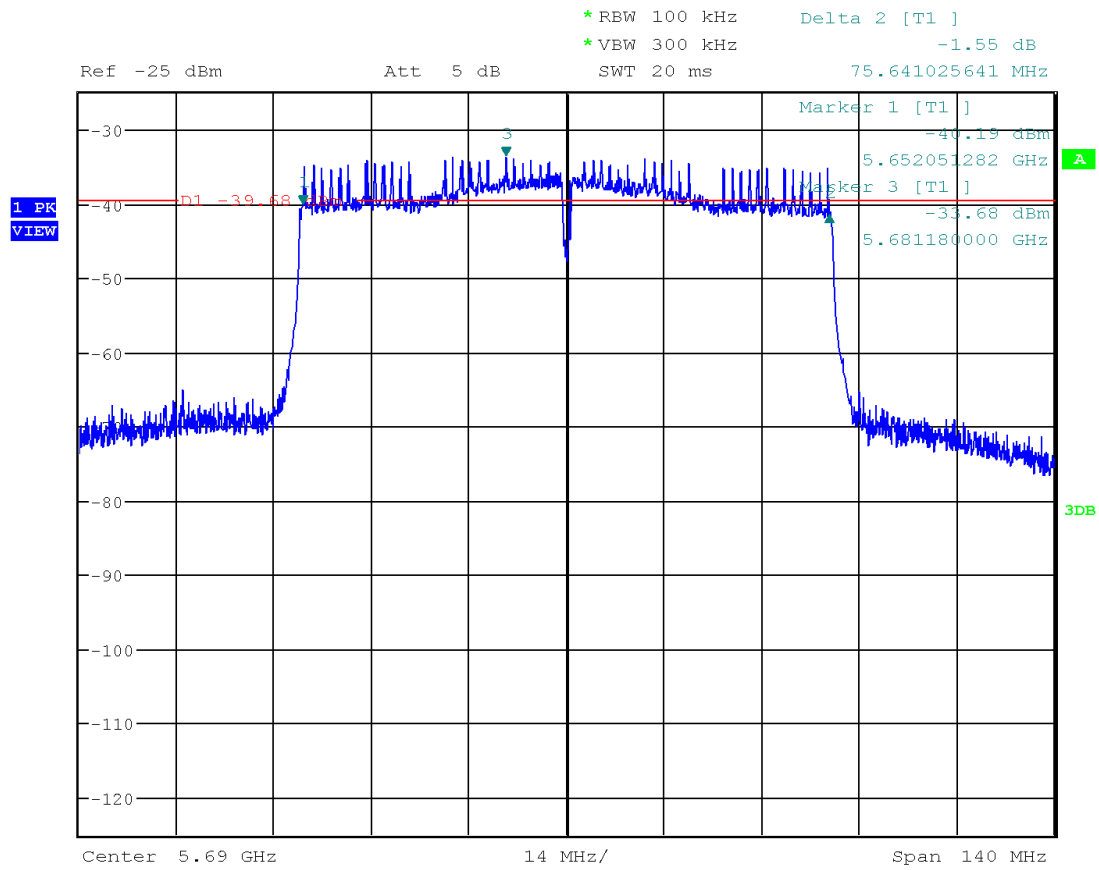

Date: 26.SEP.2018 11:22:38

Plot 1.22
802.11ac 80MHz, 5775MHz

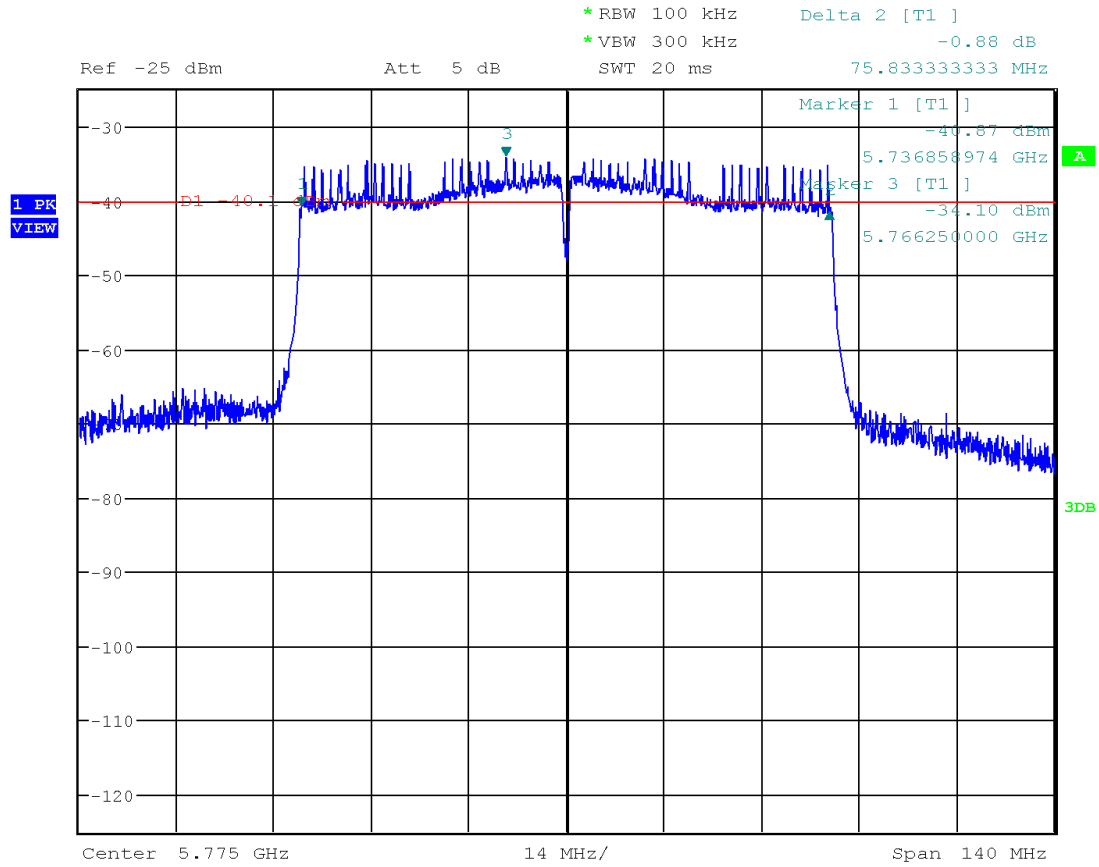

Date: 26.SEP.2018 11:17:31

4.2 Maximum Conducted Output & Power Spectral Density FCC Rule 15.407(a)(1)(iv)

4.2.1 Requirement

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.2.2 Procedure

The Procedure, described in the FCC Publication 789033 D02 General U-NII Test Procedures New Rules v02r01, was used. Specifically, Section E (2) (c) Method SA-1 for Maximum Conducted Output Power

The Procedure, described in the FCC Publication 789033 D02 General U-NII Test Procedures New Rules v02r01, was used. Specifically, procedure from Section F was utilized for Maximum Power Spectral Density (PSD).

Each antenna port of the EUT was connected to the input of a spectrum analyzer to measure the Maximum Conducted Transmitter Output Power & Peak Power Spectral Density (PPSD).


Tested By	Test Date
Anderson Soungpanya	October 3 & 4, 2018

4.2.3 Test Results


Refer to the following plots for the test result:

Mode	Channel	Frequency MHz	Conducted power (average) dBm	Conducted power Limit dBm	PSD (Peak) dBm	PSD Limit dBm	Plot #
802.11a	149	5745	19.81	30	9.78	30	2.1
	157	5785	19.68	30	9.58	30	2.2
	165	5825	19.85	30	9.79	30	2.3
802.11n 20MHz	149	5745	19.58	30	9.27	30	2.4
	157	5785	19.42	30	9.08	30	2.5
	165	5825	19.62	30	9.31	30	2.6
802.11n 40MHz	151	5755	20.06	30	7.00	30	2.7
	159	5795	19.96	30	7.02	30	2.8
802.11ac 80MHz	155	5775	18.81	30	2.70	30	2.9


Plot 2.1
802.11a, 5745MHz

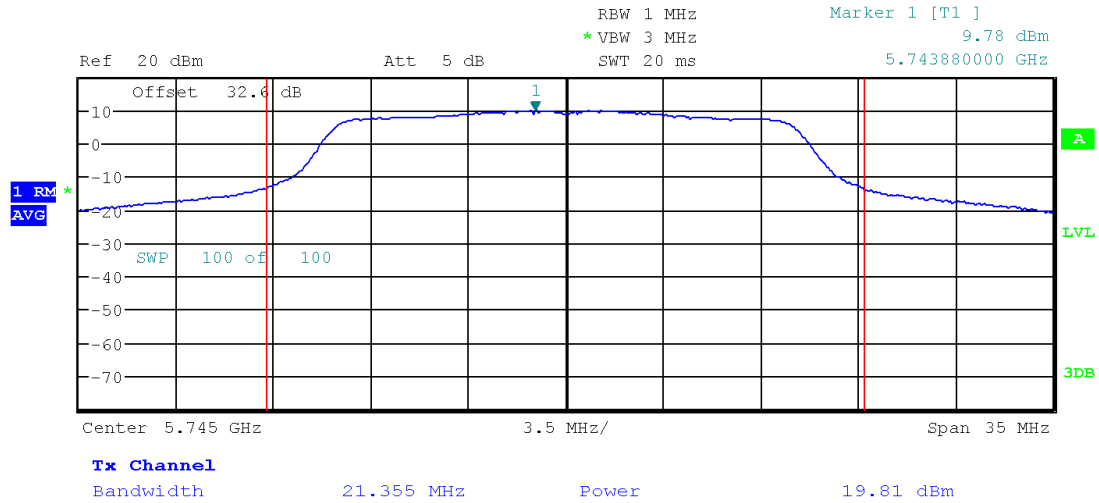


Plot 2.2
802.11a, 5785MHz

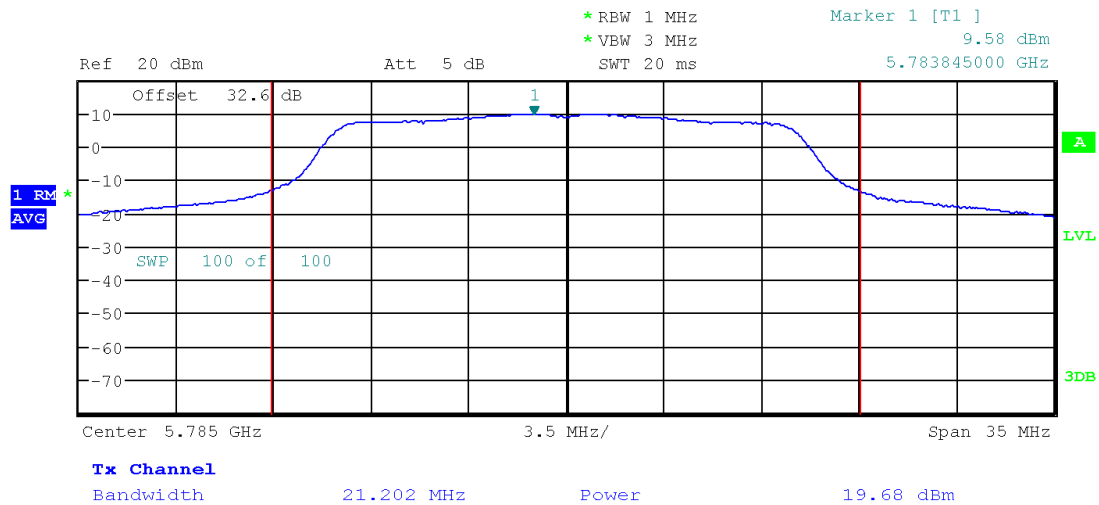


Plot 2.3
802.11a, 5825MHz

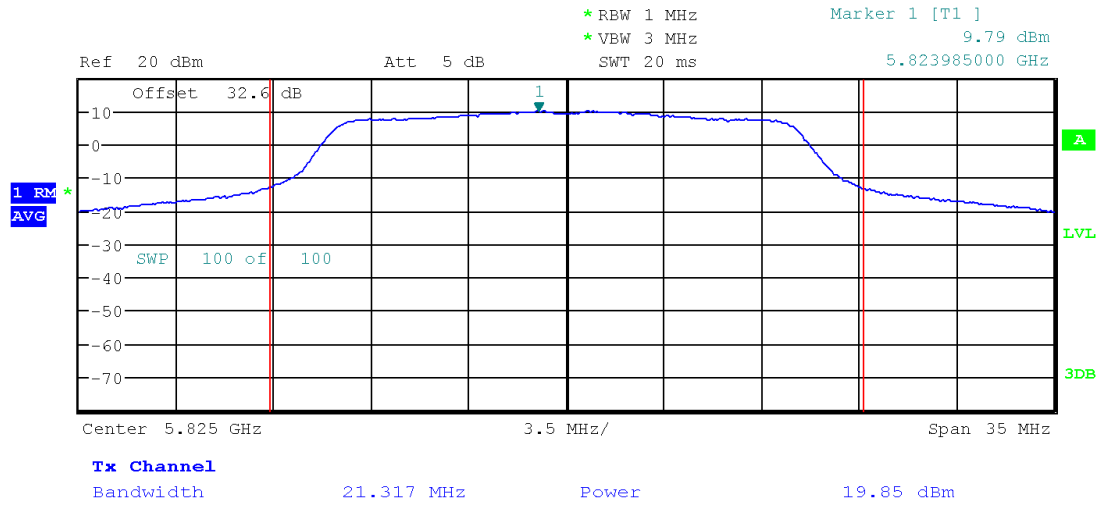


Plot 2.4
802.11n 20MHz, 5745MHz

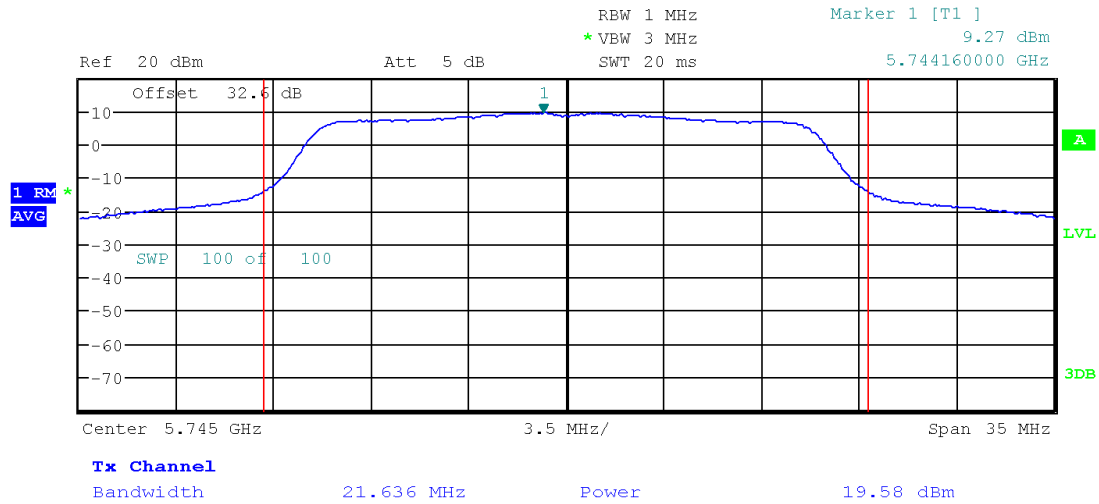


Plot 2.5
802.11n 20MHz, 5785MHz

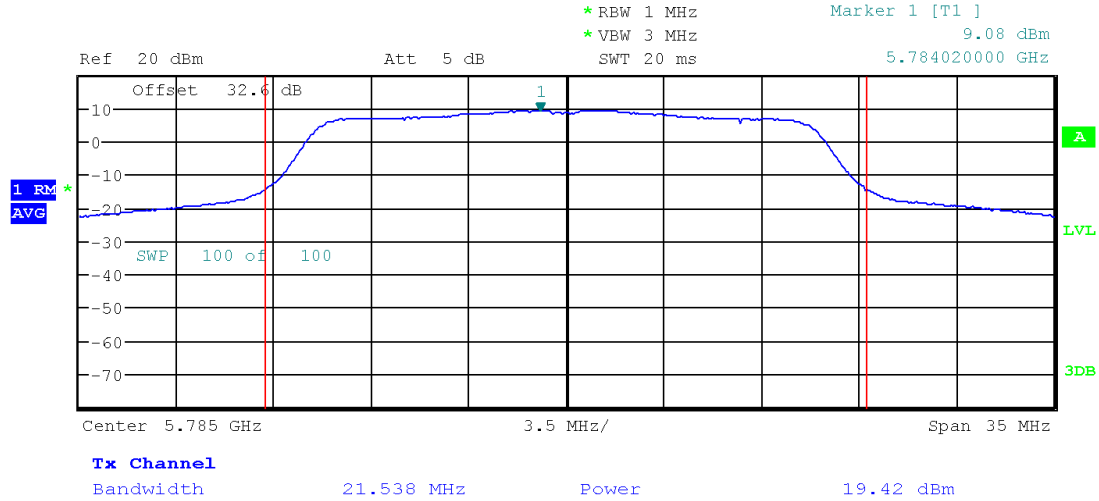


Plot 2.6
802.11n 20MHz, 5825MHz

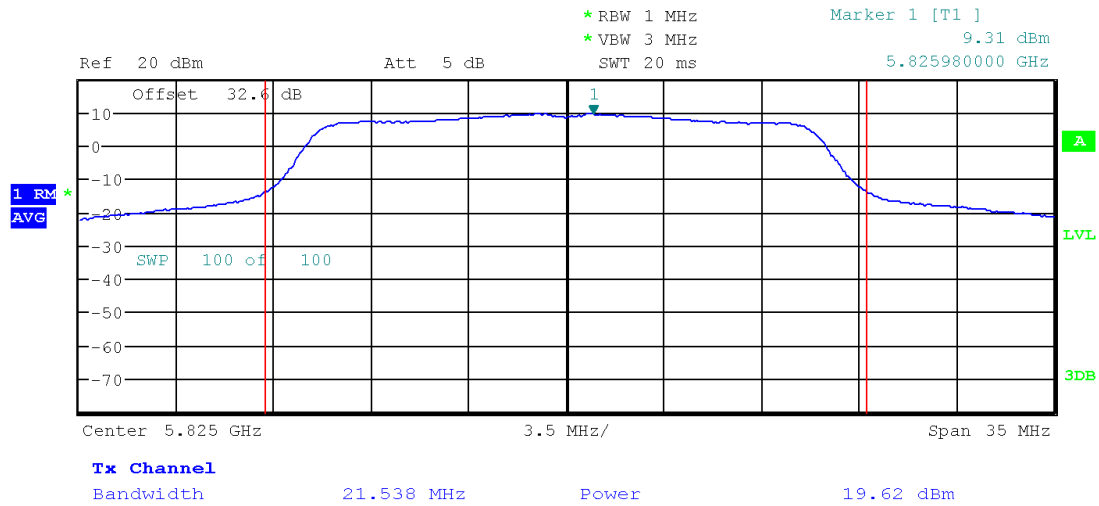


Plot 2.7
802.11n 40MHz, 5755MHz

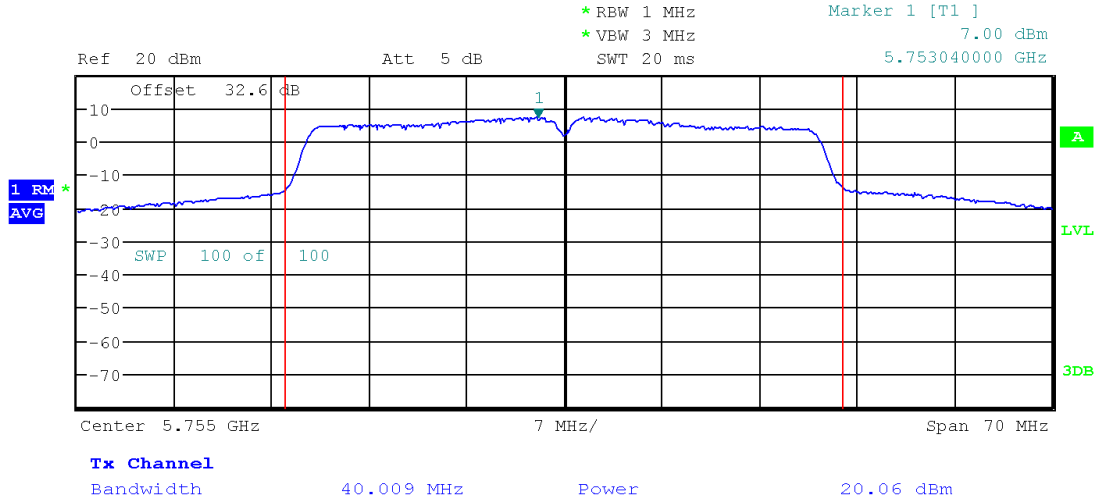

Plot 2.8
802.11n 40MHz, 5795MHz

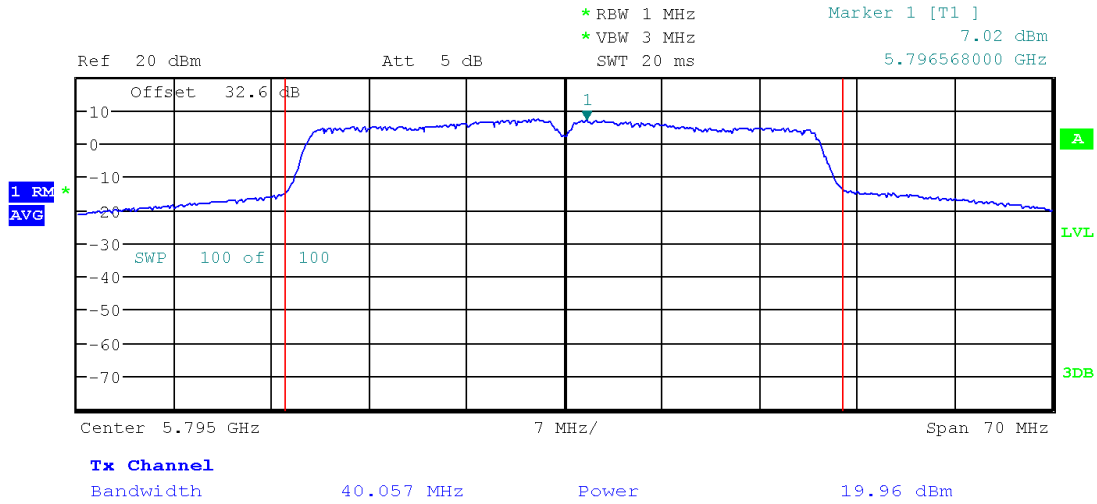

Plot 2.9
802.11ac 80MHz, 5775MHz

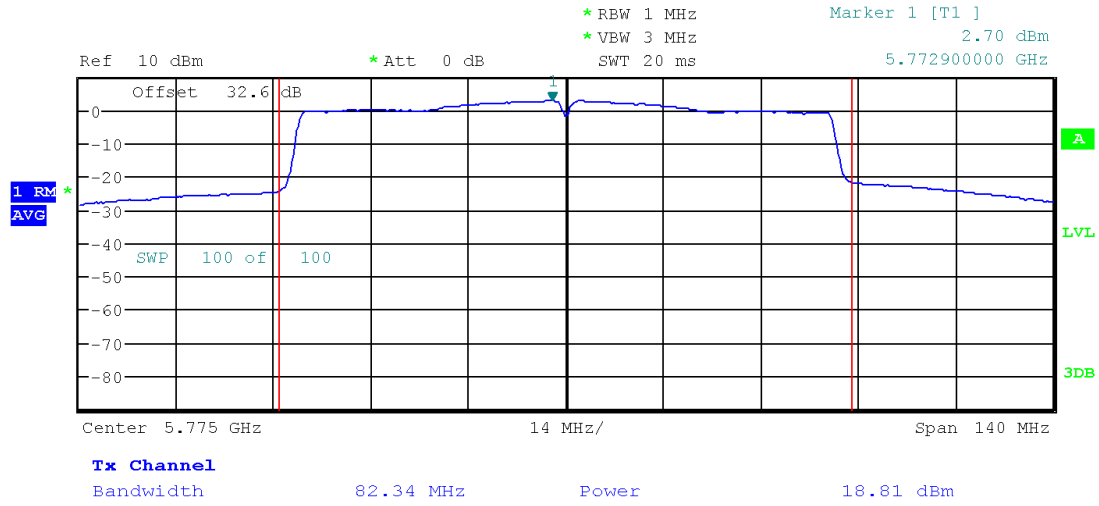

4.3 Transmitter Radiated Emissions FCC Rule 15.407(b) (1-8) 15.209, 15.205

4.3.1 Requirement

(b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

Out-of-band radiated emission complied with both the average and peak limits of Section 15.209 and an EIRP of -27 dBm/MHz (or 68.23 dBuV at 3m)

4.3.2 Procedure

Radiated emission measurements were performed from 30 MHz to 40 GHz according to the procedure described in ANSI C64.10. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz for frequencies above 1000 MHz. Above 1000 MHz Peak and Average measurements were performed.

The EUT is placed on a plastic turntable that is 80 cm in height for below 1000MHz and 1.5m in height for above 1GHz. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst-case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at 3 meters for frequencies above 1 GHz and at 10 meters for frequencies below 1 GHz.

Measurements made from 30 MHz to 40 GHz were measured with 50 ohm terminator on the output of the EUT RF port. A preamp was used from 30MHz to 40GHz.

All measurements were made with a Peak Detector and compared to QP limits for 30MHz – 1GHz and Average limits for 1GHz – 40 GHz.

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels).

4.3.3 Field Strength Calculation

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$FS = RA + AF + CF - AG$; if measurement is performed at a distance other than specified in the rule, a Distance Correction Factor (DCF) shall be added.

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V); AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB; AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

RA = 52.0 dB(μ V)

AF = 7.4 dB(1/m)

CF = 1.6 dB

AG = 29.0 dB

$FS = 52.0 + 7.4 + 1.6 - 29.0 = 32$ dB(μ V/m).

Level in μ V/m = Common Antilogarithm [(32 dB μ V/m)/20] = 39.8 μ V/m.

4.3.4 Antenna-port conducted measurements

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

4.3.5 General Procedure for conducted measurements in restricted bands

a) Measure the conducted output power (in dBm) using the detector specified for determining quasi-peak, peak, and average conducted output power, respectively.

b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)

c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).

d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (*e.g.*, Watts, mW).

e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dBμV/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

f) Compare the resultant electric field strength level to the applicable limit.

g) Perform radiated spurious emission test

4.3.6 Test Results

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.



All conducted antenna port plots are corrected with the consideration of a 3.1 dBi Antenna Gain.

Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz.

Tested By	Test Date
Anderson Soungpanya	September 27 -October 11, 2018



Test Results: 15.209/15.205 Restricted Band Emissions at Antenna Port

Out-of-Band Spurious Emissions at the Band Edge - 802.11a, 5745MHz & 5825MHz

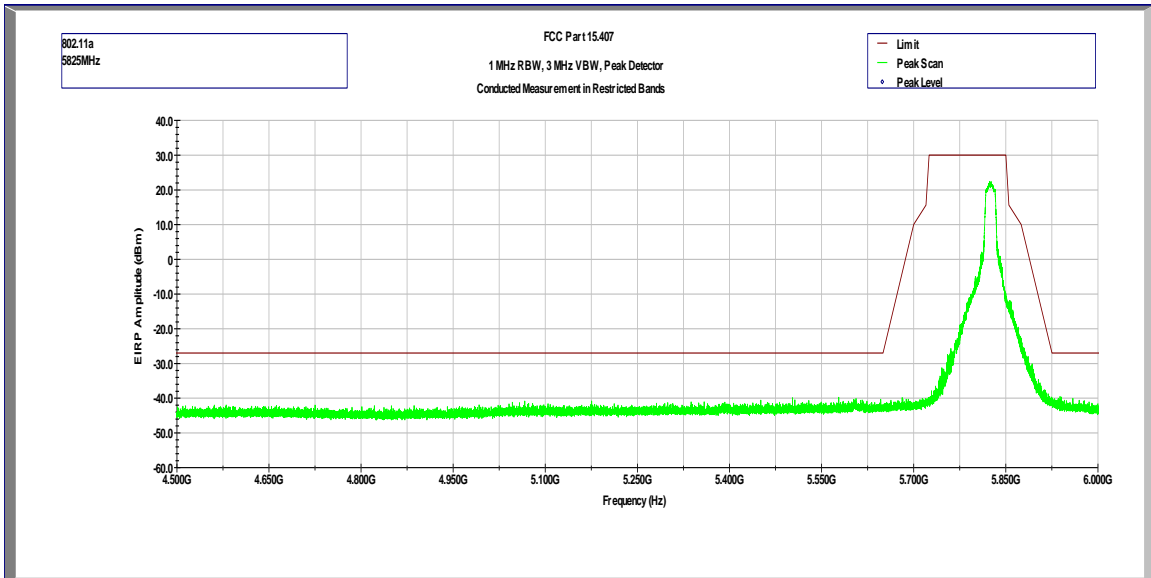
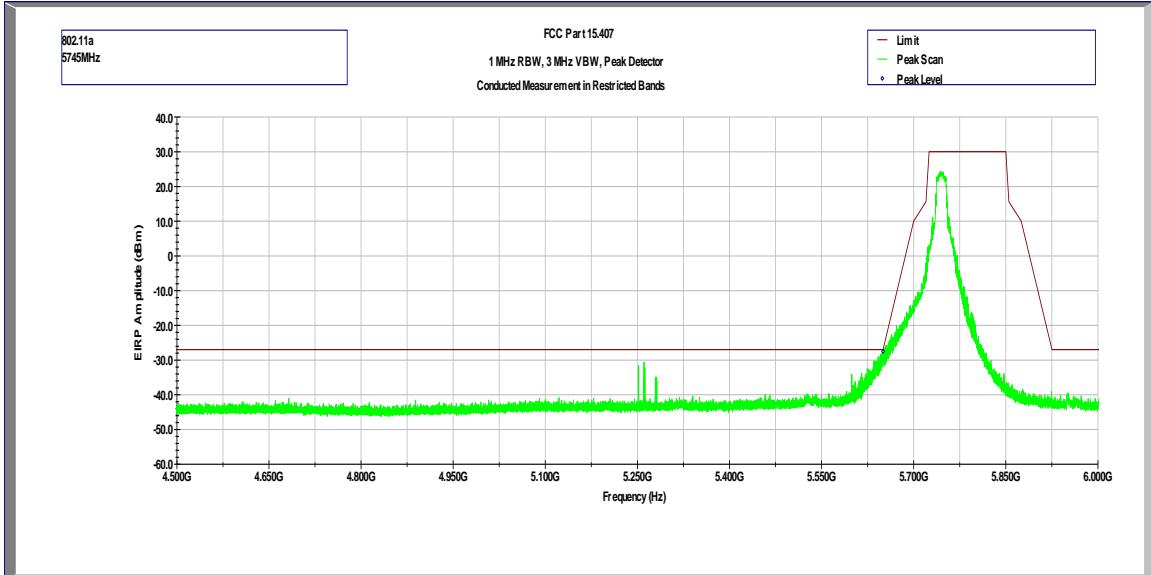


Frequency (MHz)	Detector	EIRP Amplitude (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail?
5650	Peak	-27.50	-27	-0.50	Pass

Out-of-Band Spurious Emissions at the Band Edge - 802.11n 20MHz, 5745MHz & 5825MHz

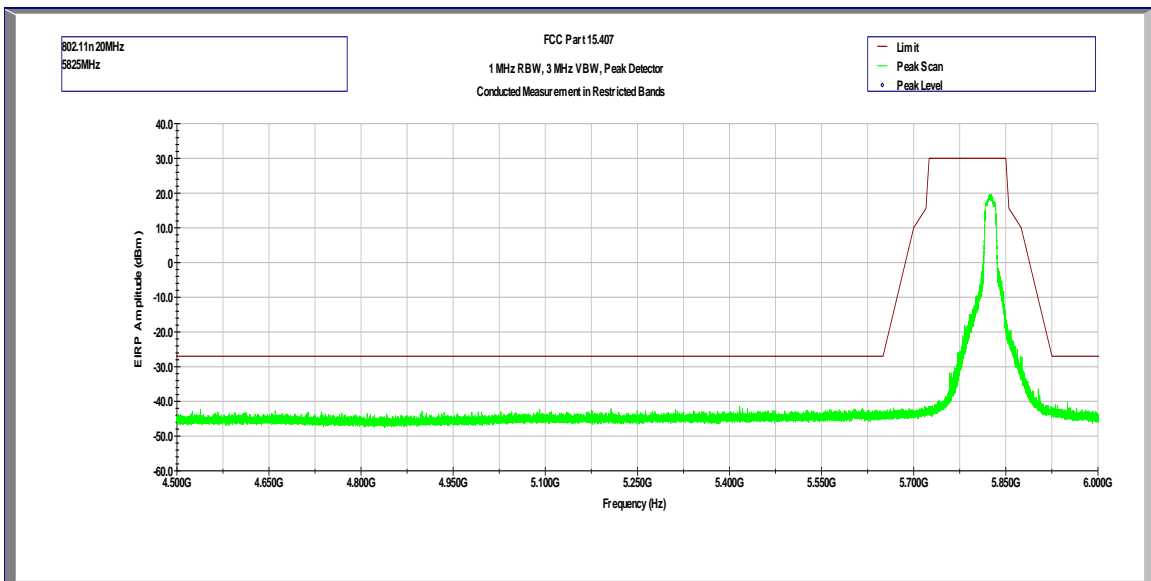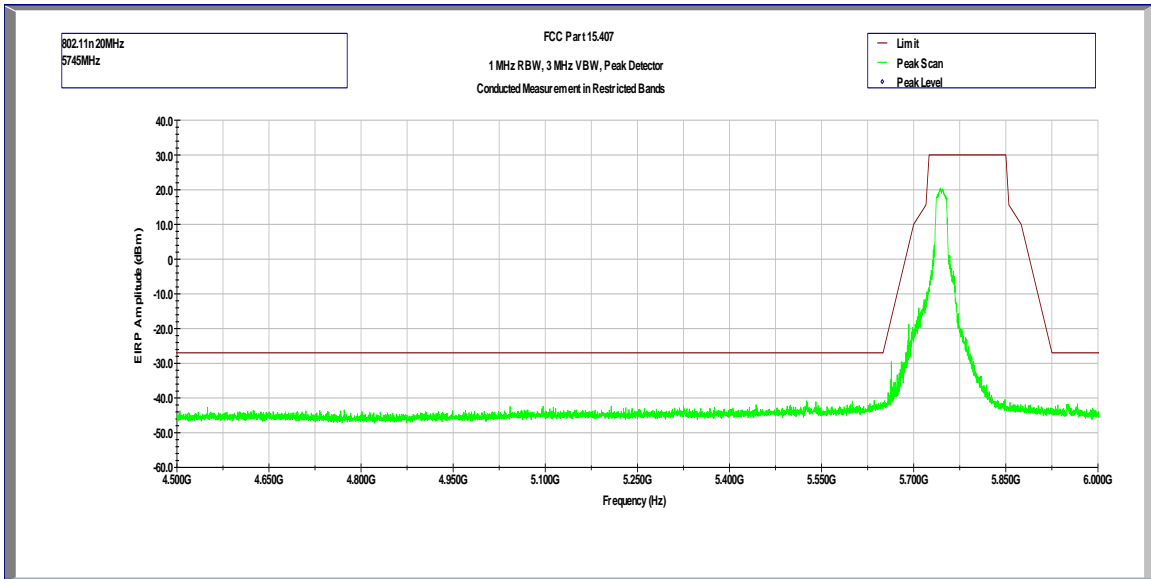


Out-of-Band Spurious Emissions at the Band Edge - 802.11n 40MHz, 5755MHz & 5795MHz

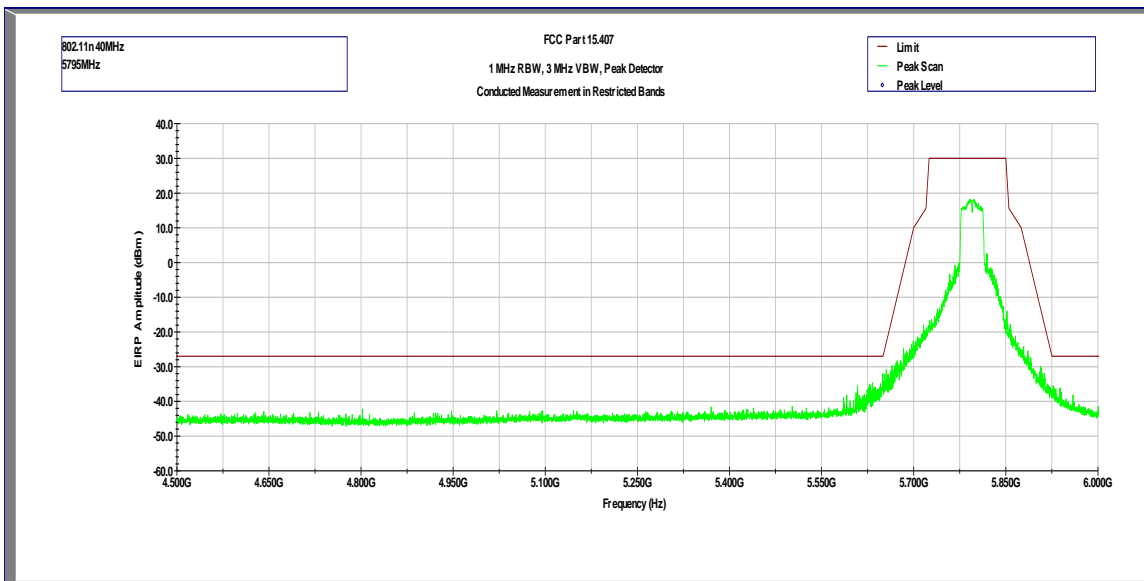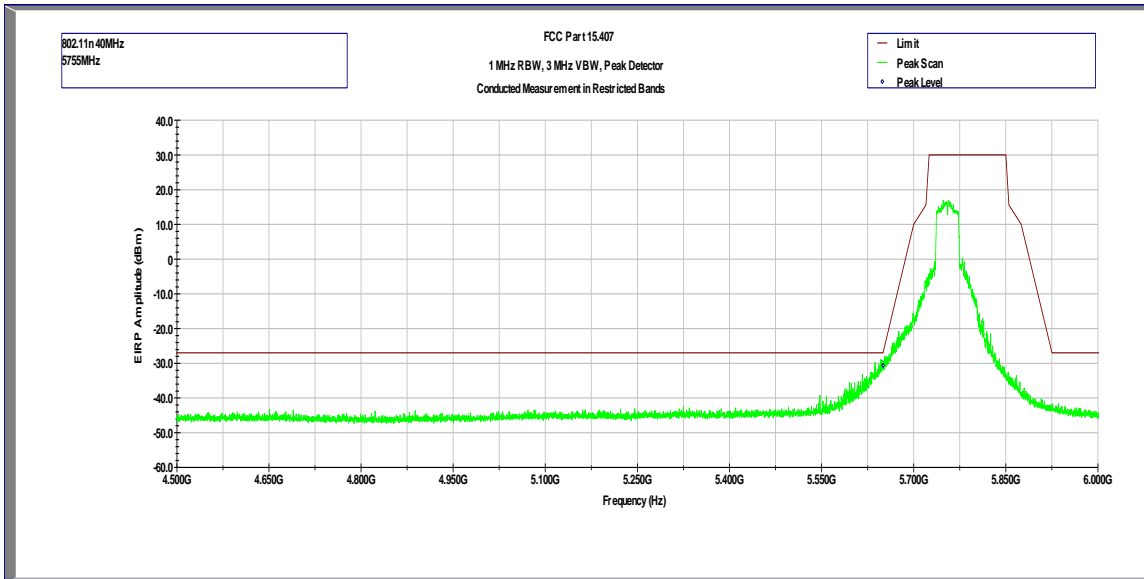

Frequency (MHz)	Detector	EIRP Amplitude (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail?
5650	Peak	-30.60	-27	-3.60	Pass

Out-of-Band Spurious Emissions at the Band Edge - 802.11ac 80MHz, 5775MHz

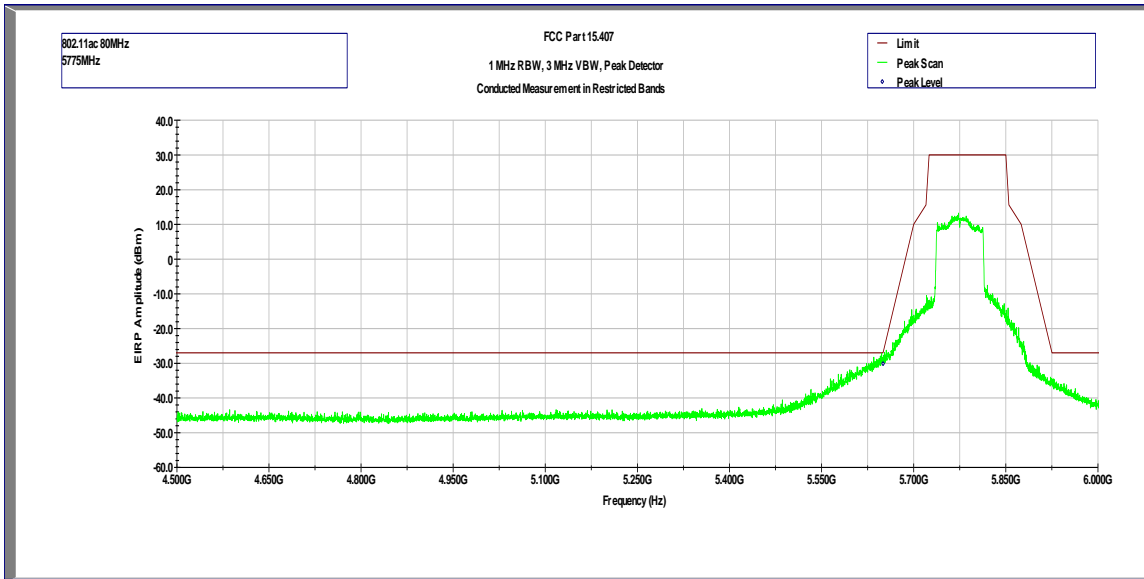


Frequency (MHz)	Detector	EIRP Amplitude (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail?
5650	Peak	-30.10	-27	-3.10	Pass


Out-of-Band Radiated Spurious Emissions (Charge Mode)

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11a 5745MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

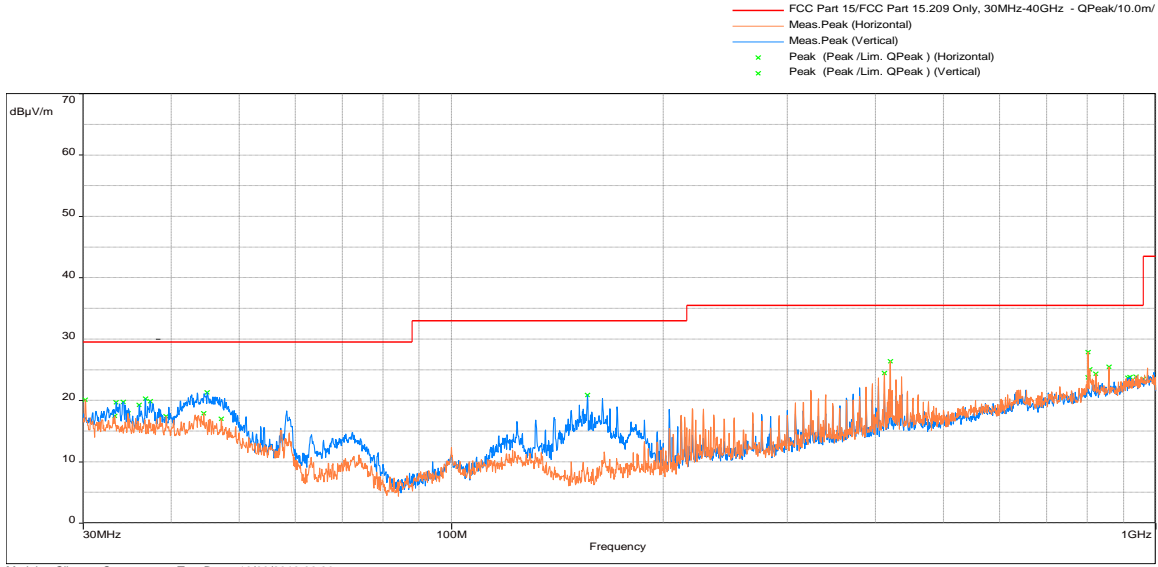


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

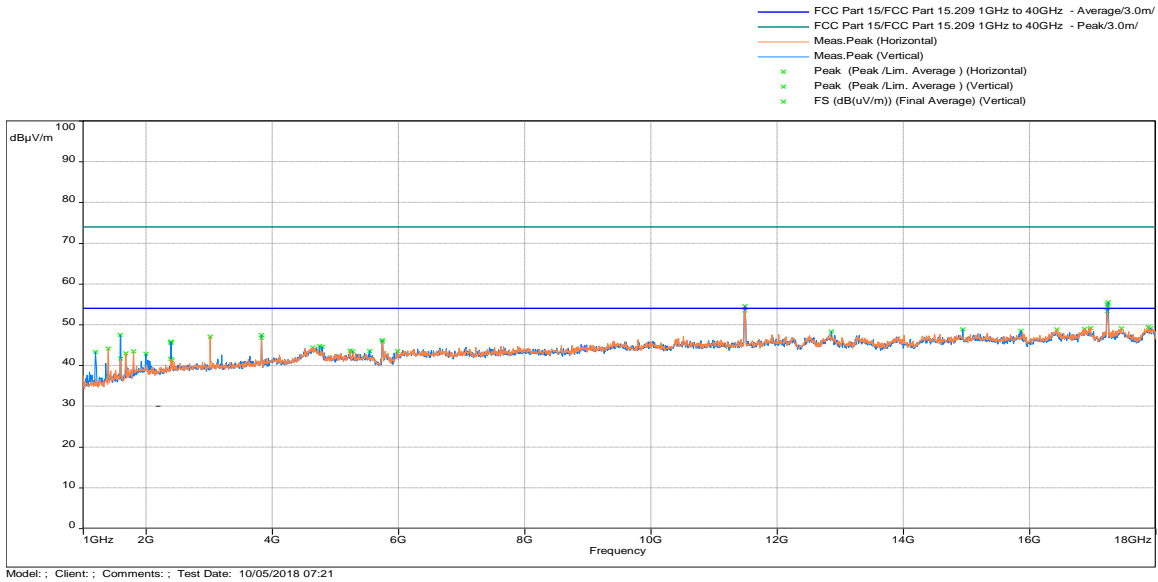


Frequency	Detector	FS@3m	Limit@3m	Margin	Azimuth	Height	Polarity	Correction
MHz		dBu V/m	dBu V/m	(dB)	(deg)	(m)		dB
11488.47	Avg	46.57	54	-7.43	162	1.78	Vertical	-3.35
17248.51	Avg	44.97	54	-9.03	312	1.21	Vertical	5.57

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11a 5785MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

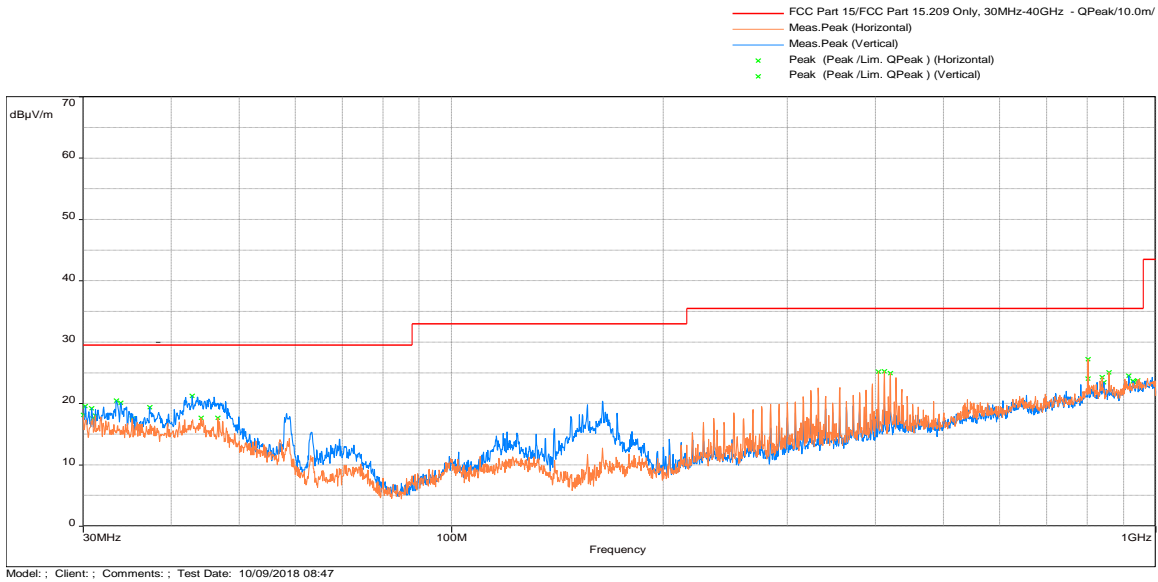


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

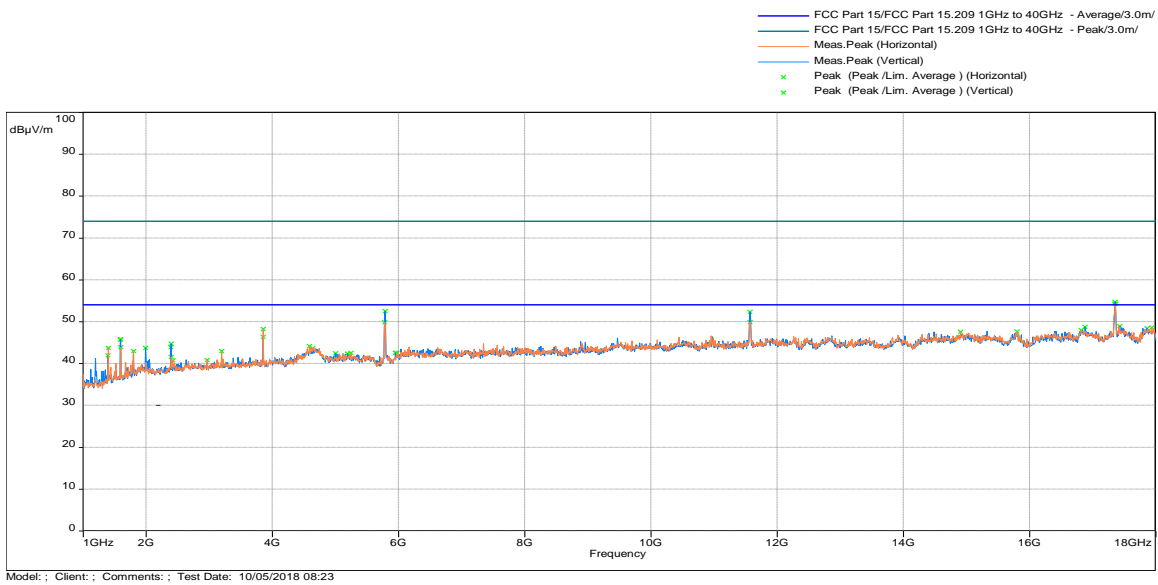


Frequency	Detector	FS@3m	Limit@3m	Margin	Azimuth	Height	Polarity	Correction
MHz		dBuV/m	dBuV/m	(dB)	(deg)	(m)		dB
11570.60	Peak	52.34	54	-1.66	311	1.74	Vertical	-3.14
17354.00	Avg	45.54	54	-8.46	312	1.81	Vertical	5.05
17354.00	Peak	54.67	74	-19.33	312	1.81	Vertical	5.05

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11a 5825MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

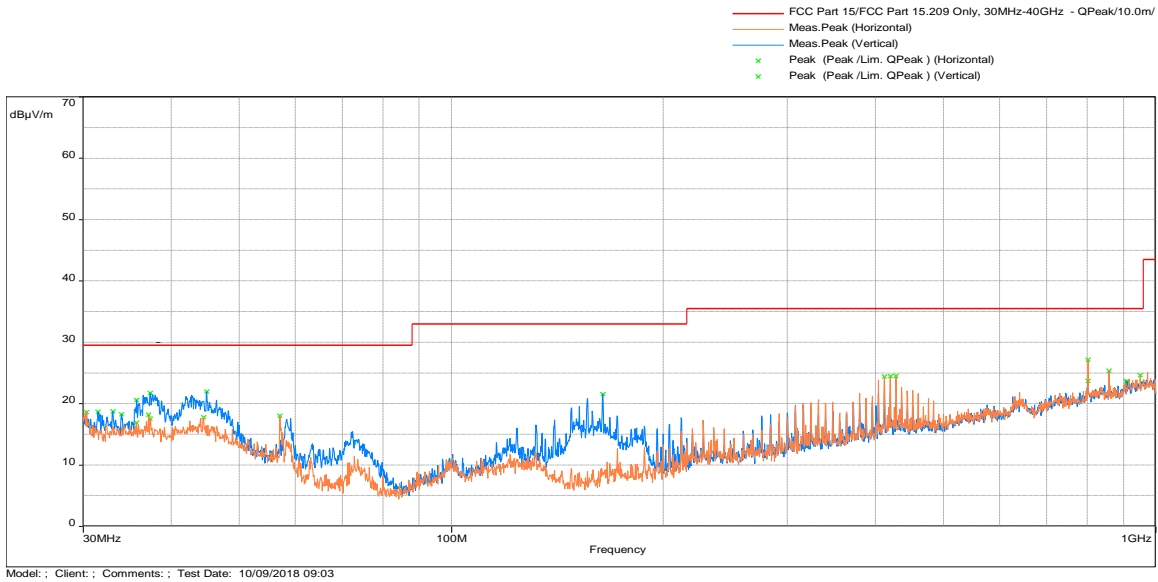


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

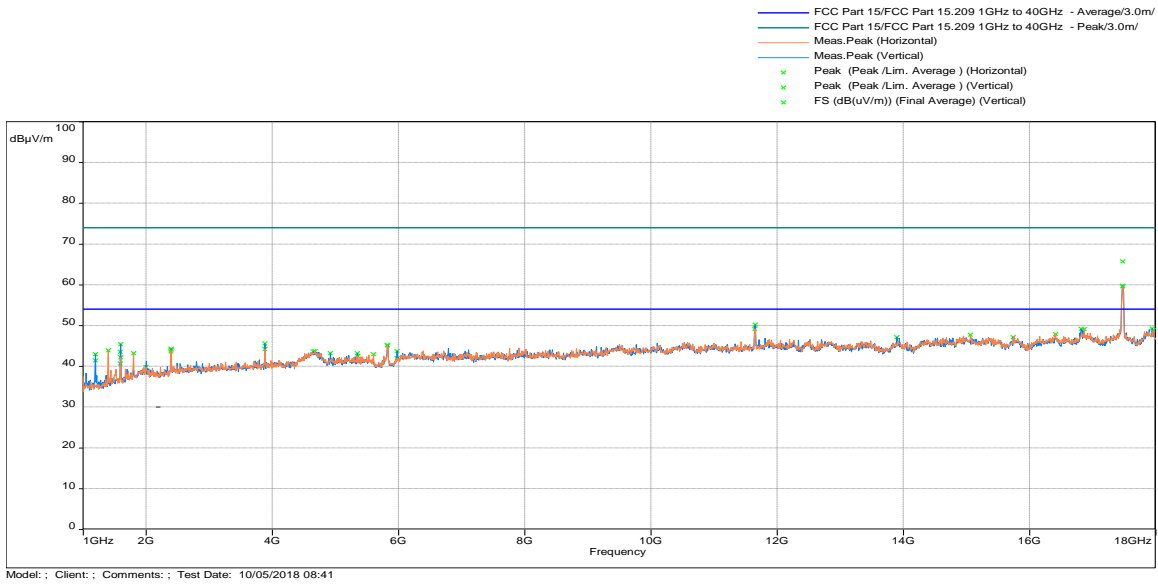


Frequency	Detector	FS@3m	Limit@3m	Margin	Azimuth	Height	Polarity	Correction
MHz		dBuV/m	dBuV/m	(dB)	(deg)	(m)		dB
17475.62	Avg	50.42	54	-3.58	319	1.37	Vertical	4.47
17475.62	Peak	67.57	74	-6.43	319	1.37	Vertical	4.47

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 20MHz 5745MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

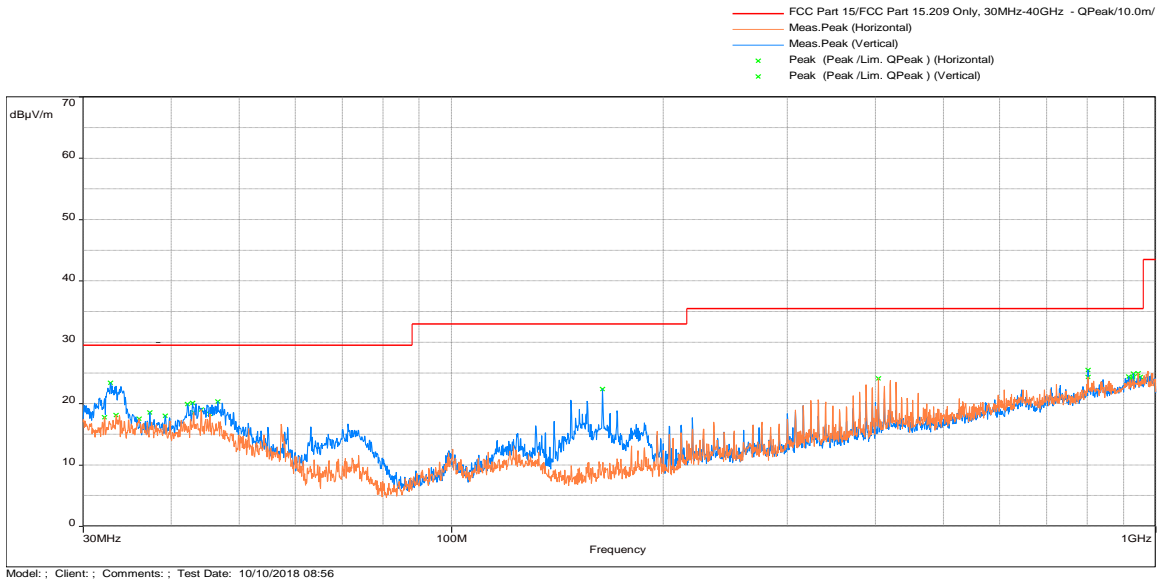


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

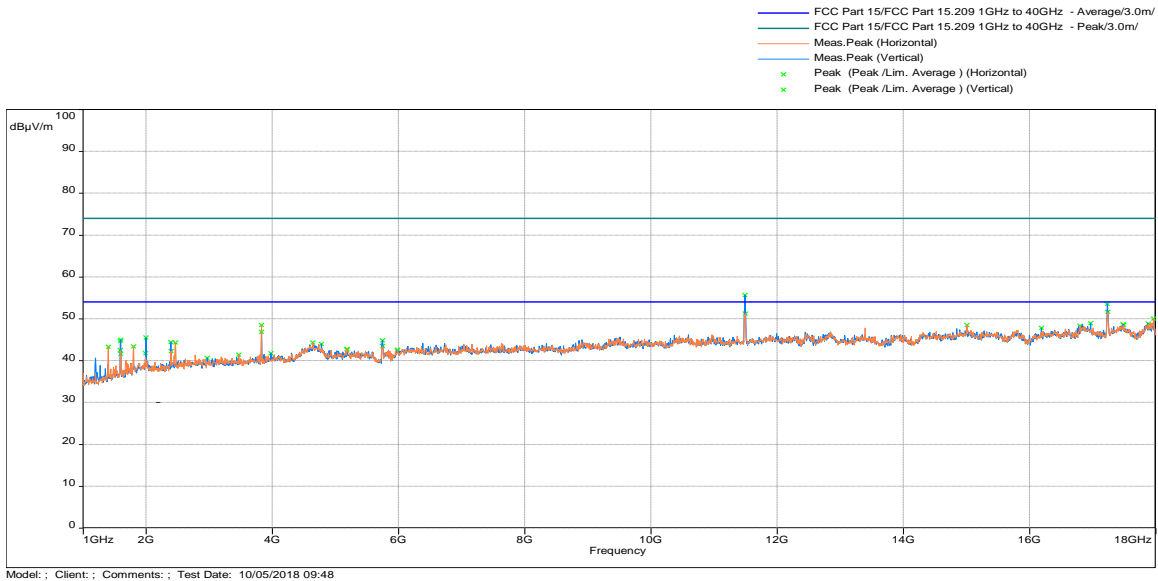


Frequency	Detector	FS@3m	Limit@3m	Margin	Azimuth	Height	Polarity	Correction
MHz		dBuV/m	dBuV/m	(dB)	(deg)	(m)		dB
11489.00	Avg	45.72	54	-8.28	321	1.65	Vertical	-3.34
11489.00	Peak	55.63	74	-18.37	321	1.65	Vertical	-3.34
17354.00	Peak	53.50	54	-0.50	266	1.70	Vertical	5.60

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 20MHz 5785MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

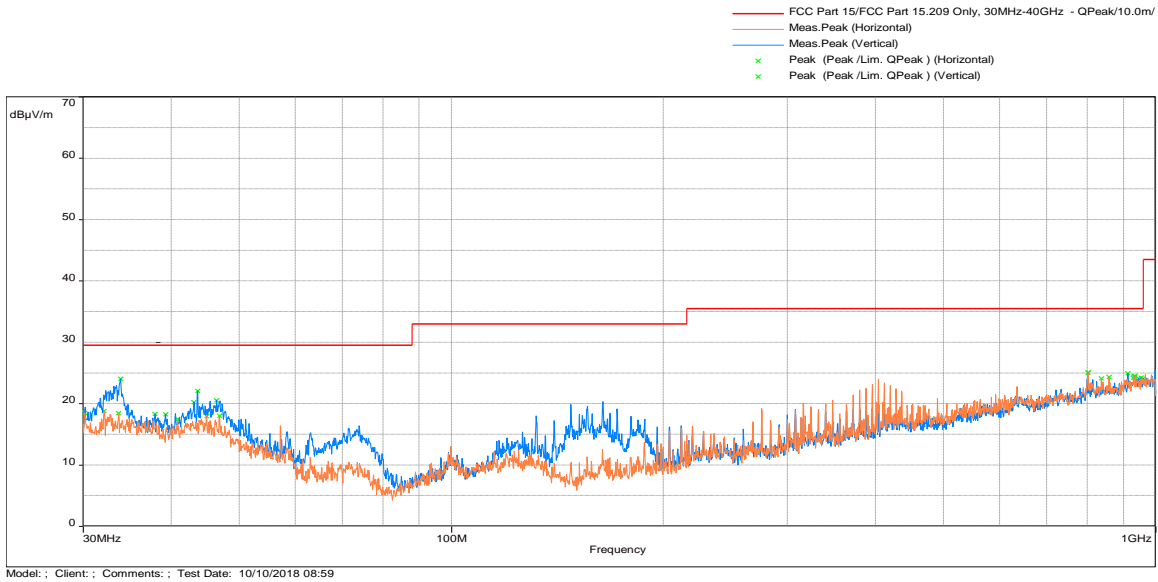


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

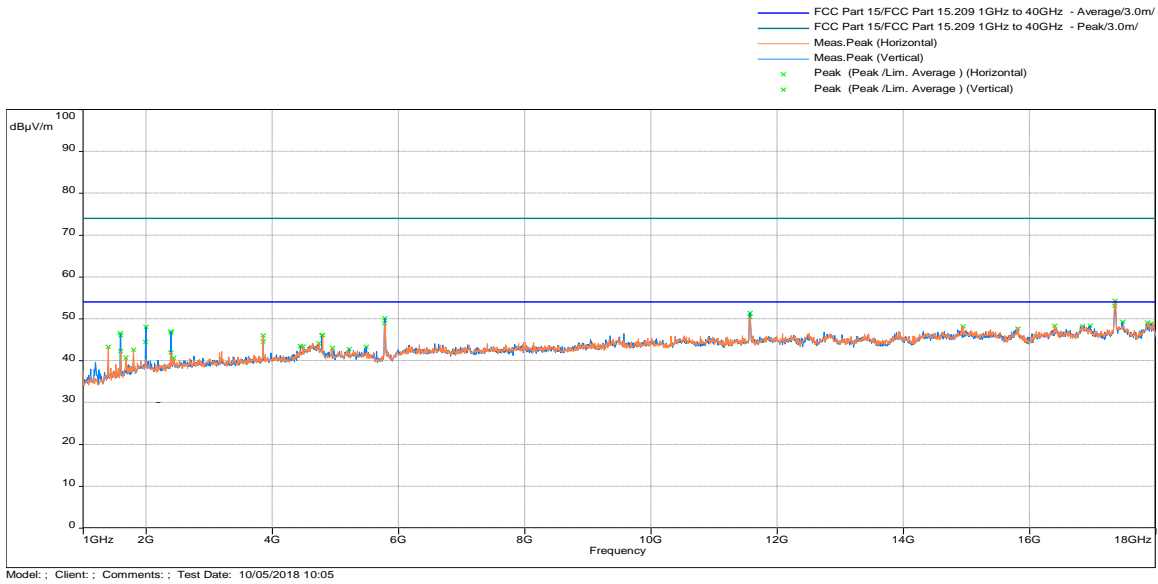


Frequency	Detector	FS@3m	Limit@3m	Margin	Azimuth	Height	Polarity	Correction
MHz		dBuV/m	dBuV/m	(dB)	(deg)	(m)		dB
11572.3	Peak	50.45	54	-3.55	123	1.52	Vertical	-3.15
17350.6	Peak	53.07	54	-0.93	278	1.26	Vertical	5.13

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 20MHz 5825MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

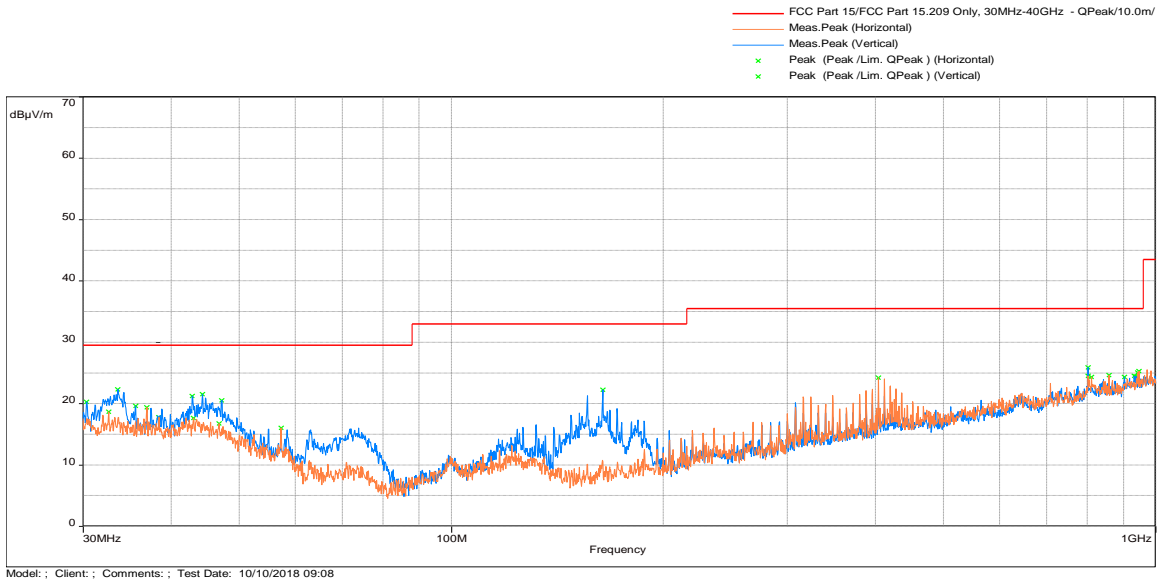


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

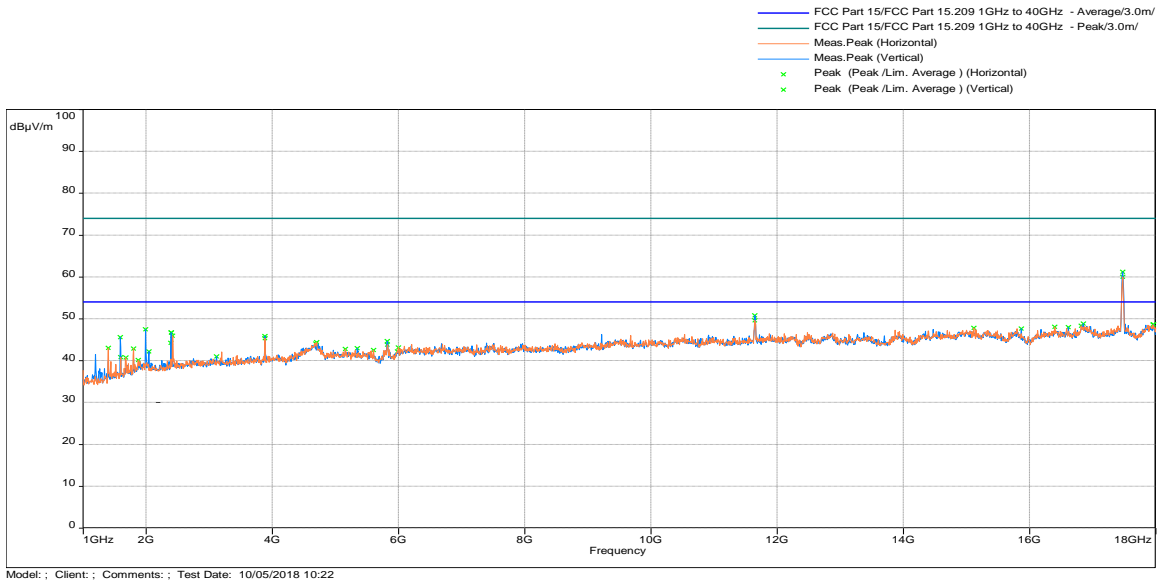


Frequency MHz	Detector	FS@3m dBuV/m	Limit@3m dBuV/m	Margin (dB)	Azimuth (deg)	Height (m)	Polarity	Correction dB
17474.70	Avg	47.87	54	-6.13	317	1.31	Vertical	4.47
17474.70	Peak	62.44	74	-11.56	317	1.31	Vertical	4.47

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 40MHz 5755MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

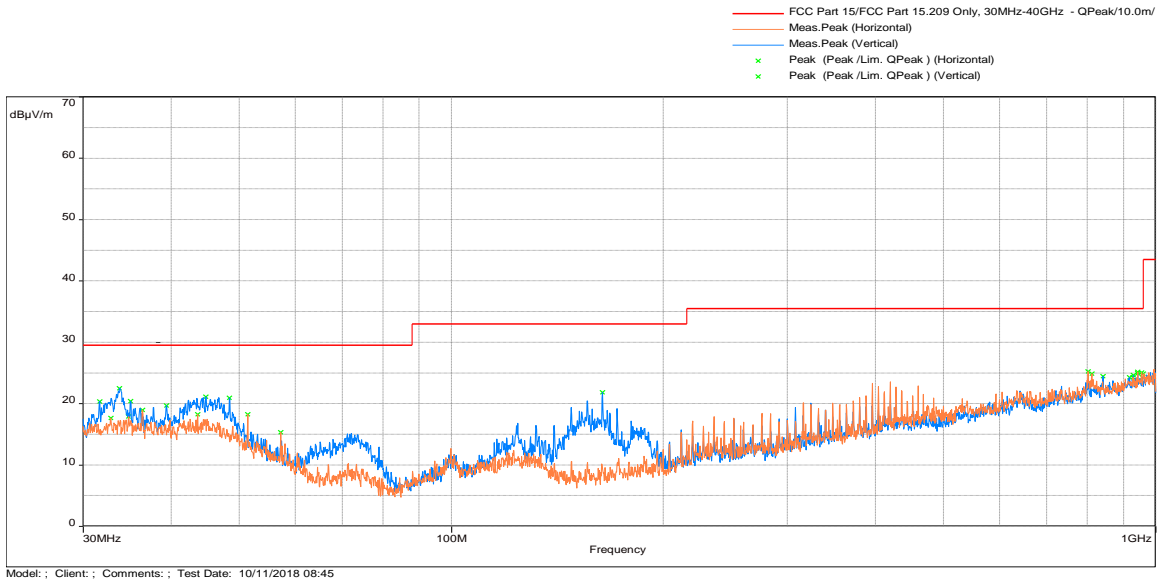


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

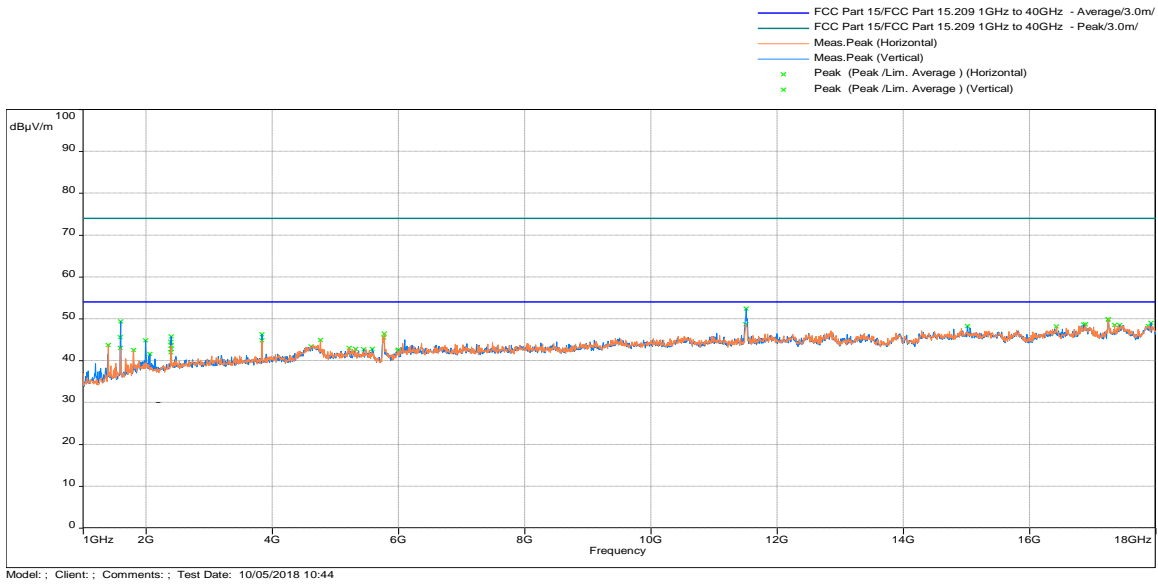


Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 40MHz 5795MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

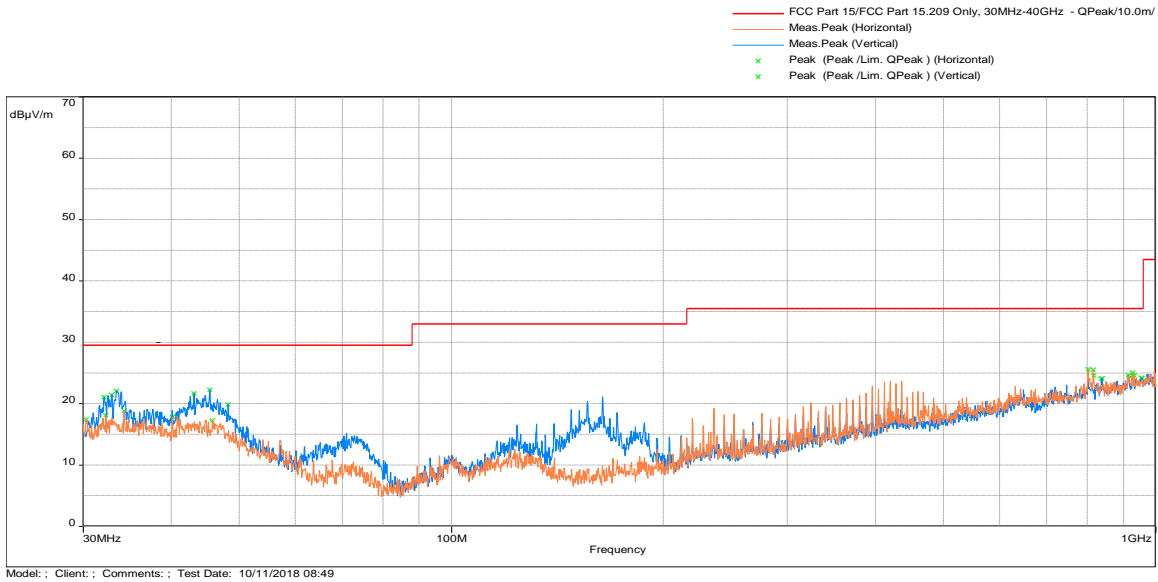


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

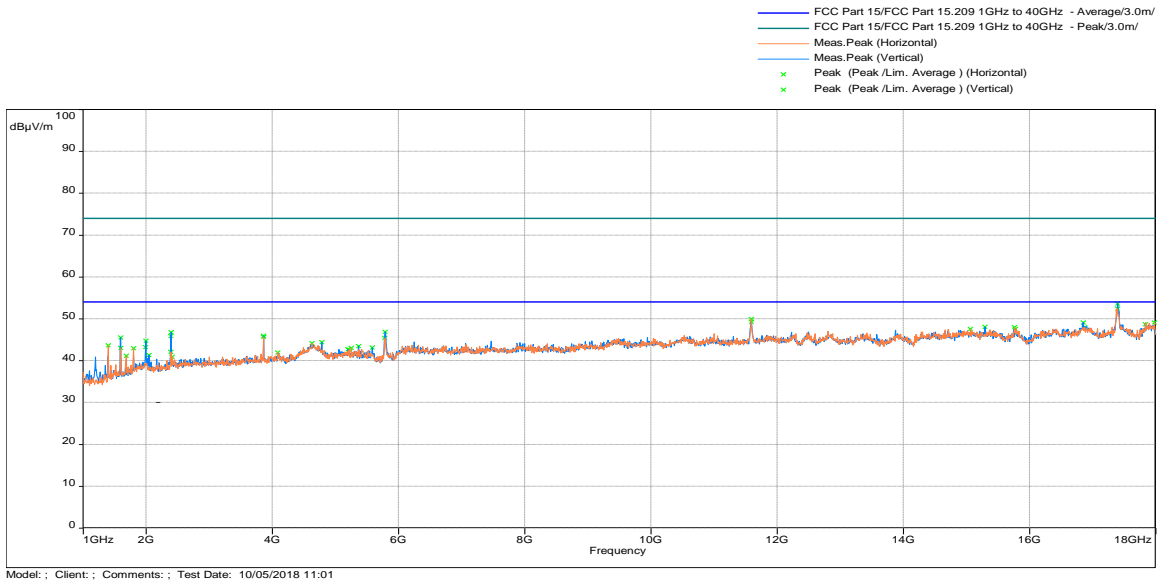


Frequency	Detector	FS@3m	Limit@3m	Margin	Azimuth	Height	Polarity	Correction
MHz		dBuV/m	dBuV/m	(dB)	(deg)	(m)		dB
17394.8	Peak	53.62	54	-0.38	70	1.71	Vertical	4.87

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11ac 80MHz 5775MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

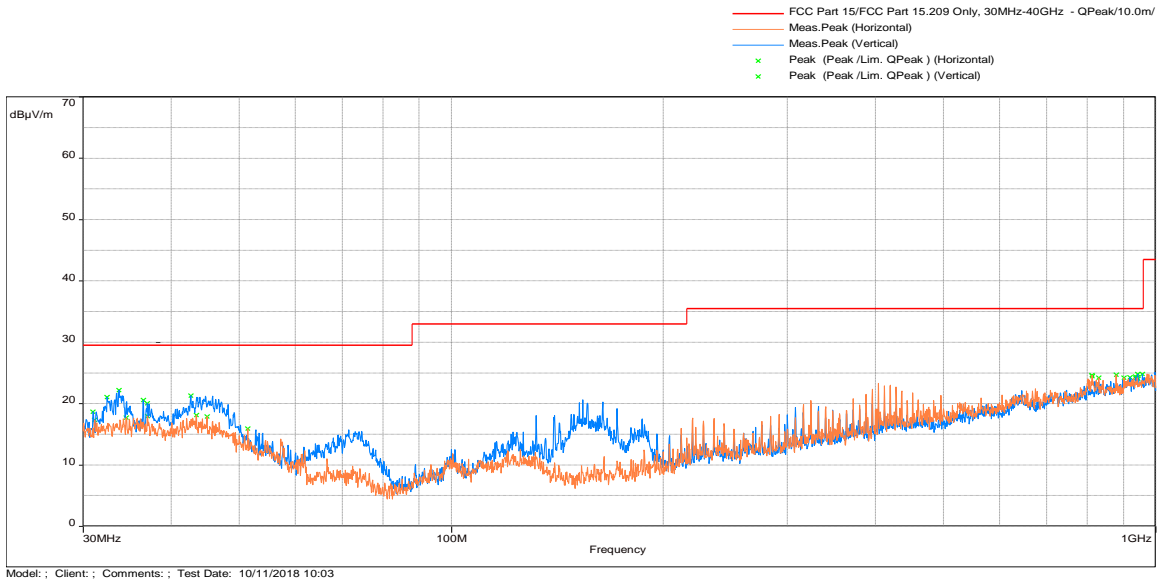


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

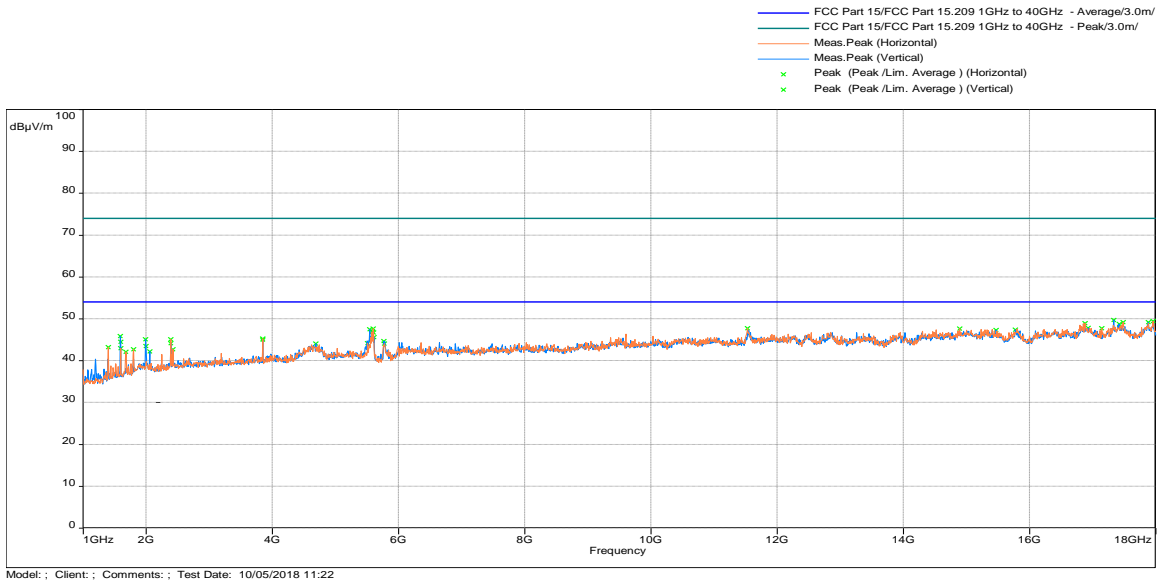


Out-of-Band Radiated Spurious Emissions (Normal Mode)
Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11a 5745MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

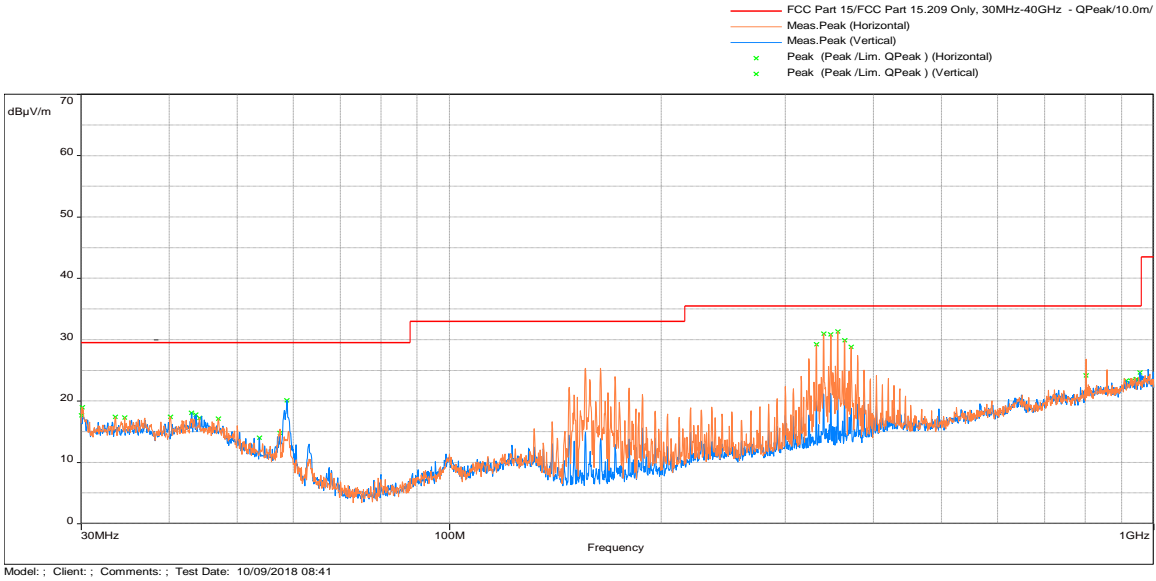


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

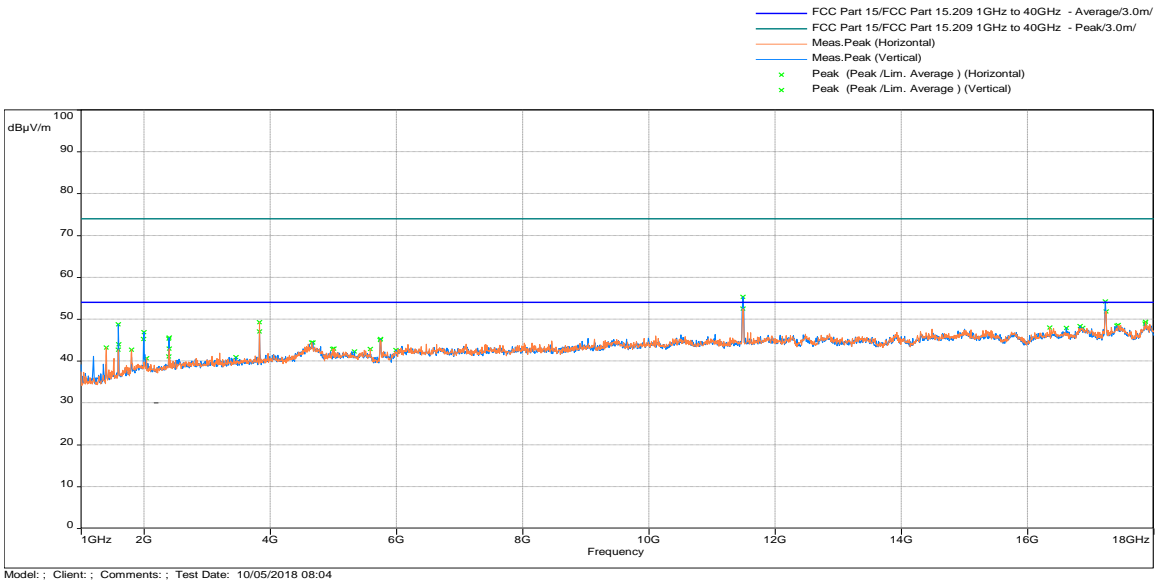


Frequency	Detector	FS@3m	Limit@3m	Margin	Azimuth	Height	Polarity	Correction
MHz		dBuV/m	dBuV/m	(dB)	(deg)	(m)		dB
11490.70	Avg	46.57	54	-7.33	317	1.68	Vertical	-3.34
11490.70	Peak	55.33	74	-18.67	317	1.68	Vertical	-3.34
17236.70	Avg	45.95	54	-8.05	275	1.74	Vertical	5.6
17236.70	Peak	54.16	74	-19.84	275	1.74	Vertical	5.6

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11a 5785MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

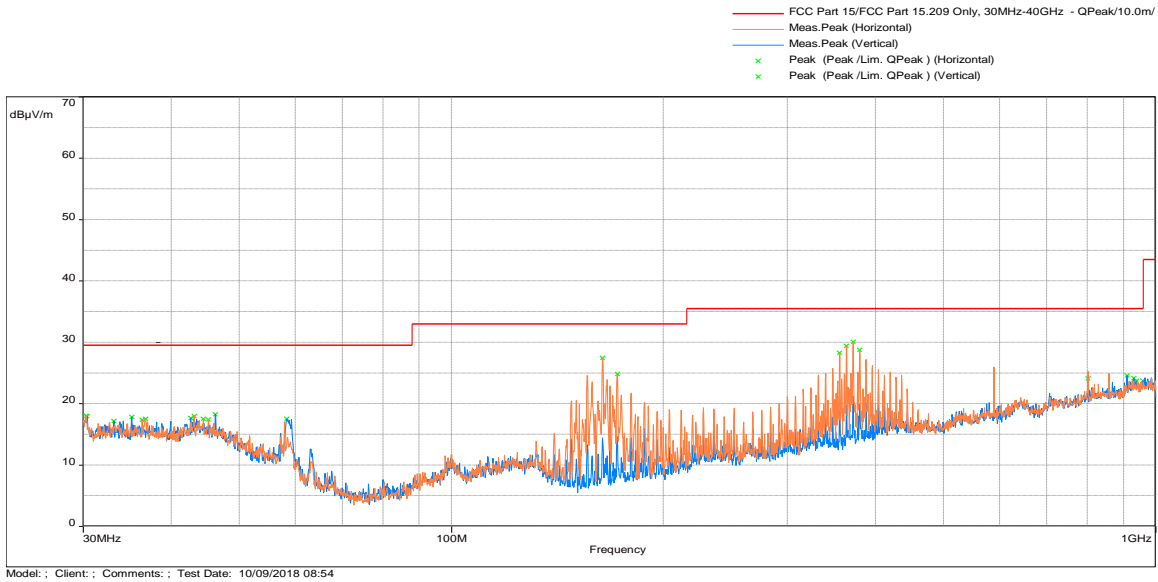


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

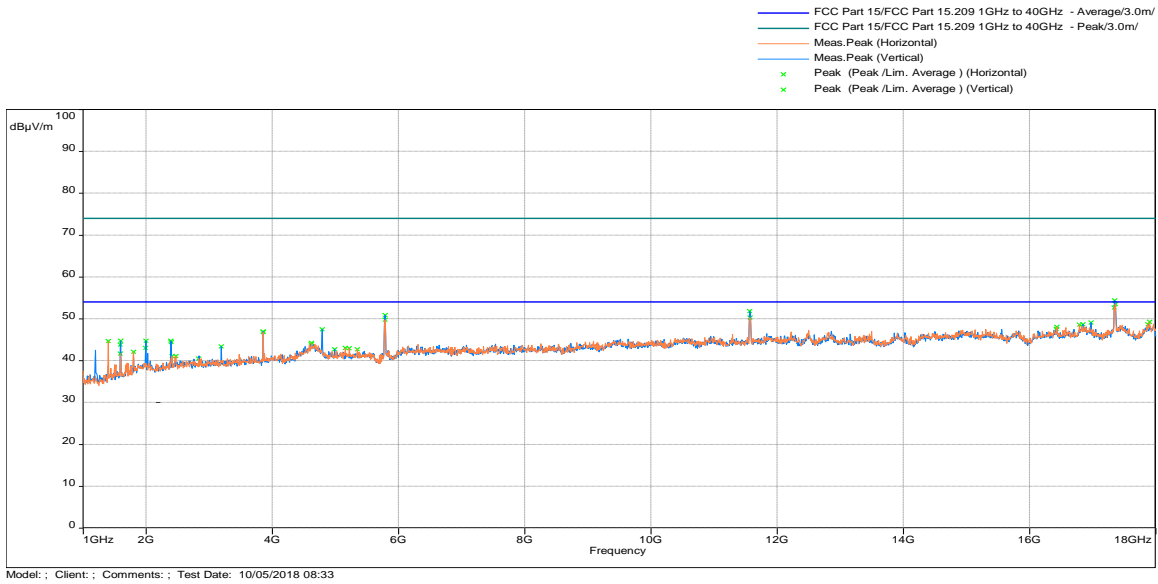


Frequency	Detector	FS@3m	Limit@3m	Margin	Azimuth	Height	Polarity	Correction
MHz		dBuV/m	dBuV/m	(dB)	(deg)	(m)		dB
17348.90	Avg	47.26	54	-6.74	81	1.89	Vertical	5.14
17348.90	Peak	54.39	74	-19.61	81	1.89	Vertical	5.14

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11a 5825MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

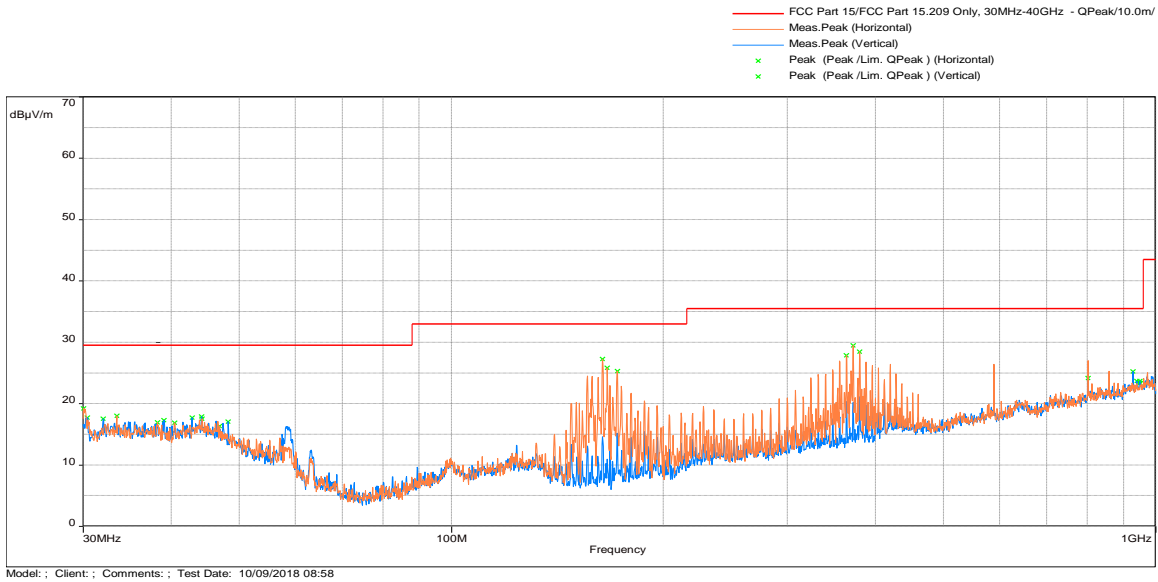


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

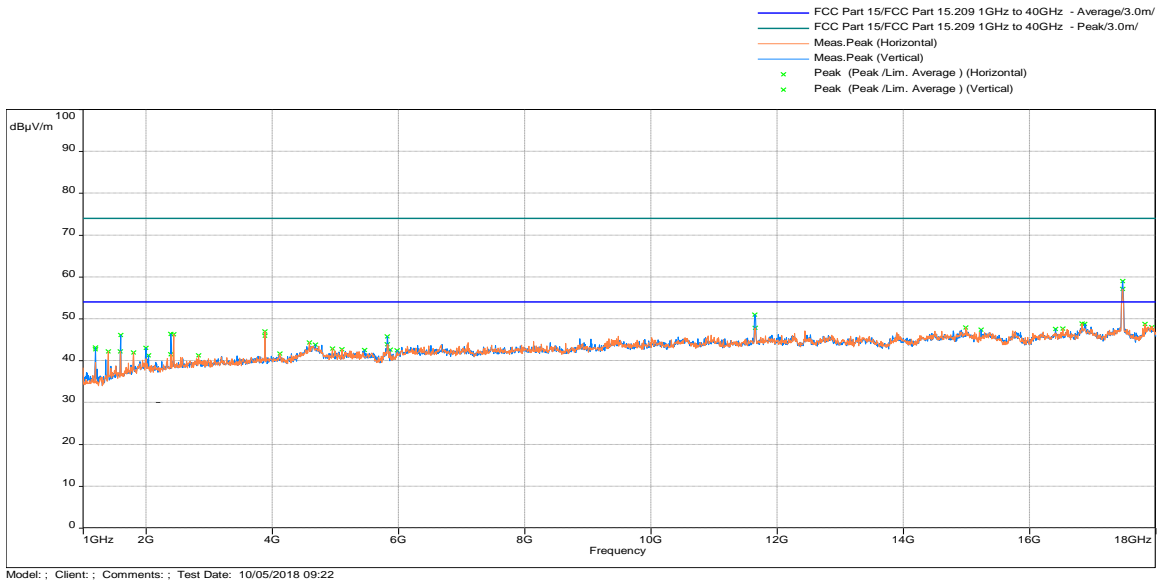


Frequency	Detector	FS@3m	Limit@3m	Margin	Azimuth	Height	Polarity	Correction
MHz		dBuV/m	dBuV/m	(dB)	(deg)	(m)		dB
17474.70	Avg	48.83	54	-5.17	180	1.65	Vertical	4.47
17474.70	Peak	59.92	74	-14.08	180	1.65	Vertical	4.47

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 20MHz 5745MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

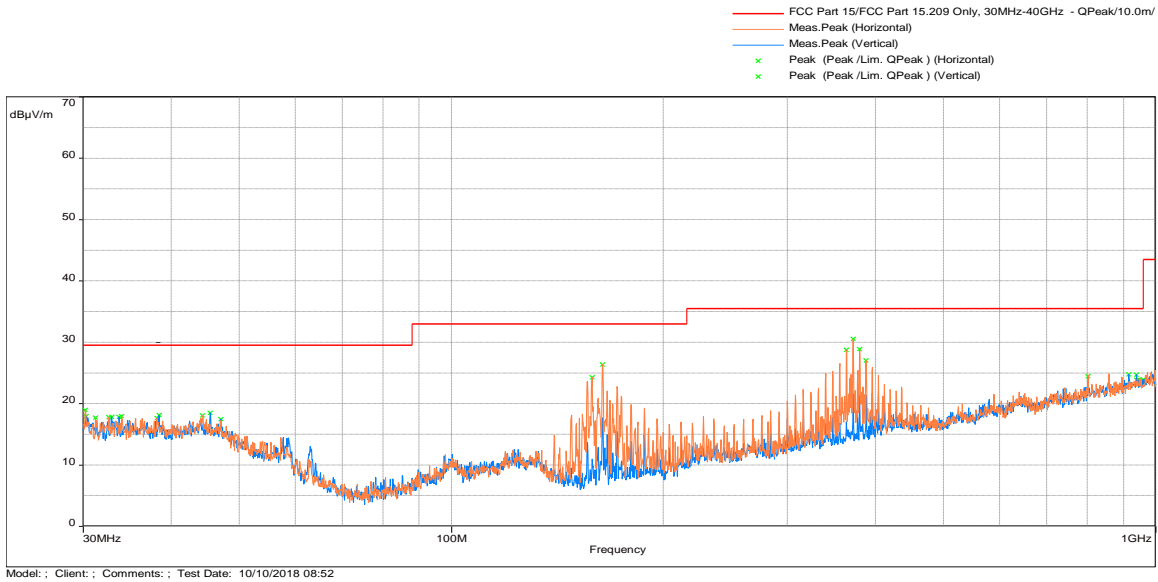


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

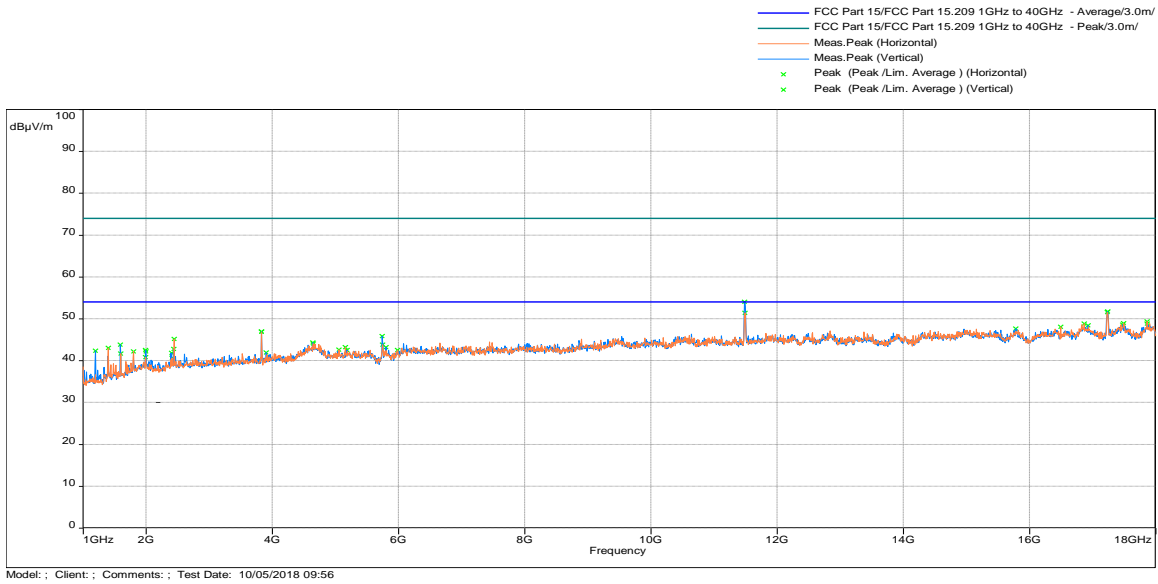


Frequency	Detector	FS@3m	Limit@3m	Margin	Azimuth	Height	Polarity	Correction
MHz		dBuV/m	dBuV/m	(dB)	(deg)	(m)		dB
11485.6	Peak	53.90	54	-0.1	304	1.86	Vertical	-3.36

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 20MHz 5785MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

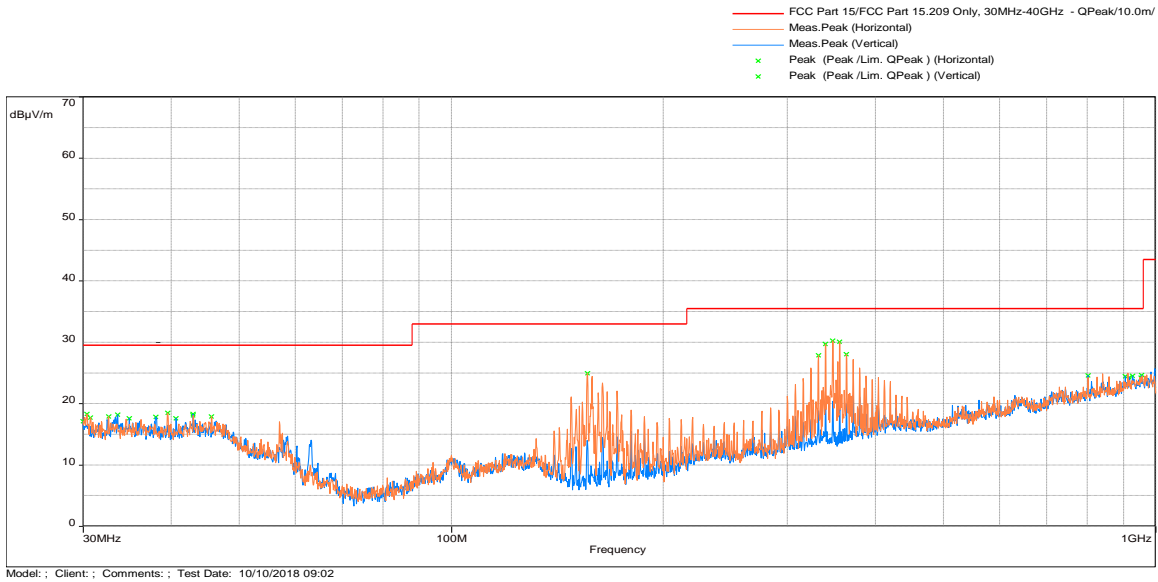


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

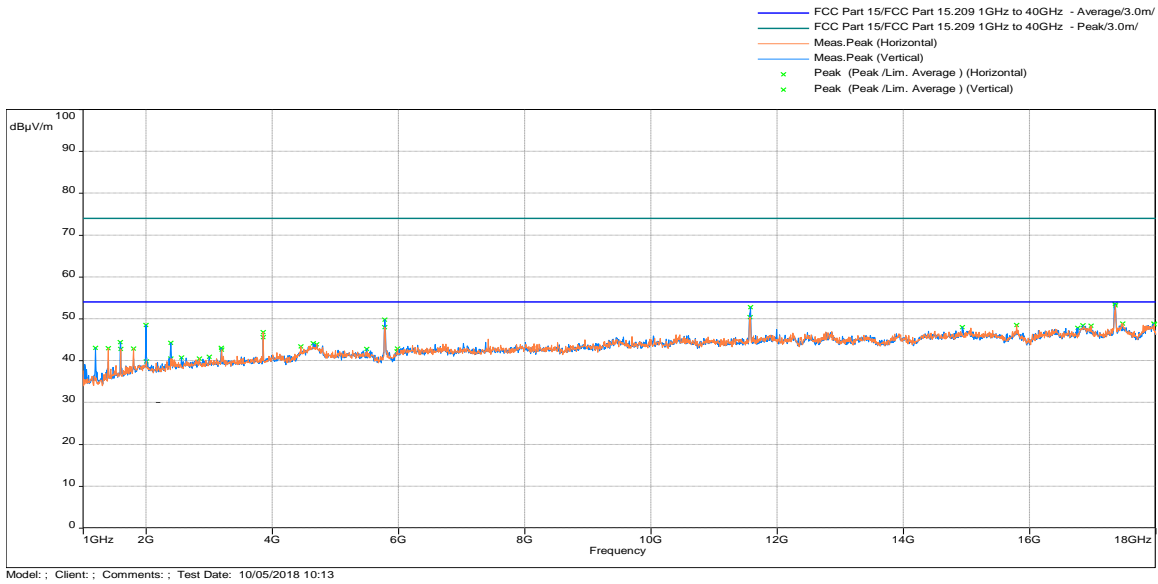


Frequency	Detector	FS	Limit	Margin	Azimuth	Height	Polarity	Correction
MHz		dBuV/m	dBuV/m	(dB)	(deg)	(m)		dB
11575.70	Peak	52.76	54	-1.24	318	1.65	Vertical	-3.14
17354.00	Peak	53.54	54	-0.46	150	1.74	Vertical	5.11

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 20MHz 5825MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

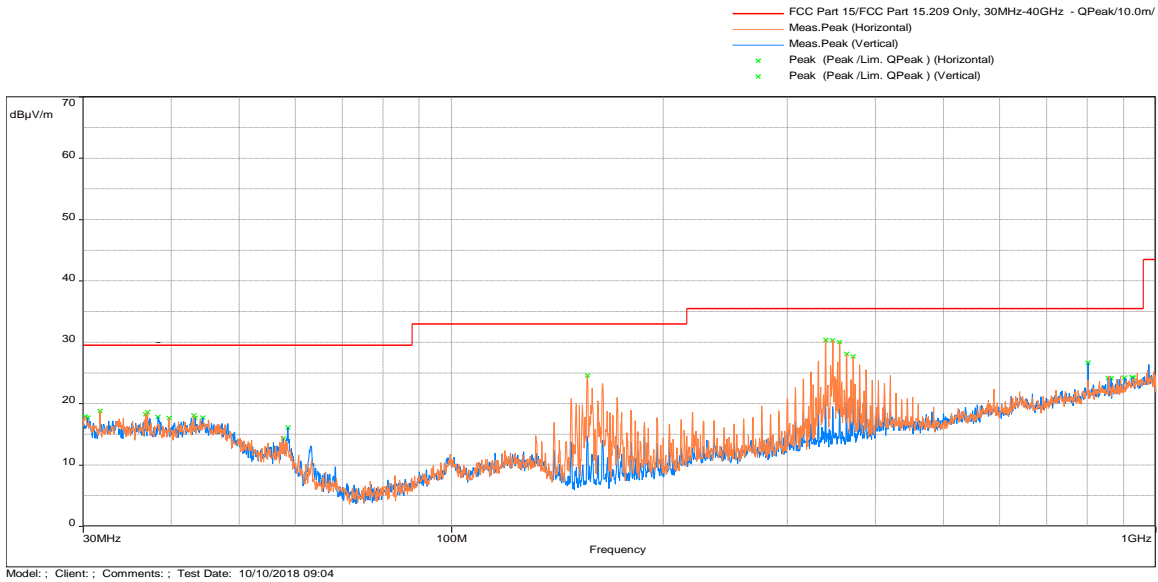


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

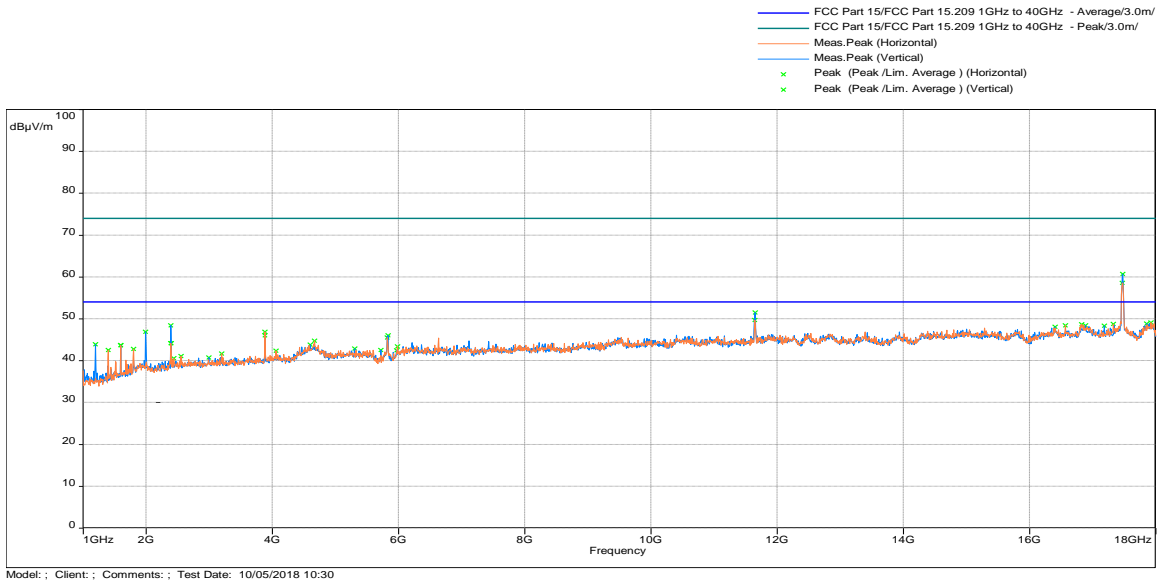


Frequency	Detector	FS	Limit	Margin	Azimuth	Height	Polarity	Correction
MHz		dBuV/m	dBuV/m	(dB)	(deg)	(m)		dB
17479.80	Avg	48.56	54	-5.44	318	1.65	Vertical	4.45
17479.80	Peak	60.69	74	-13.31	277	1.70	Vertical	4.45

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 40MHz 5755MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

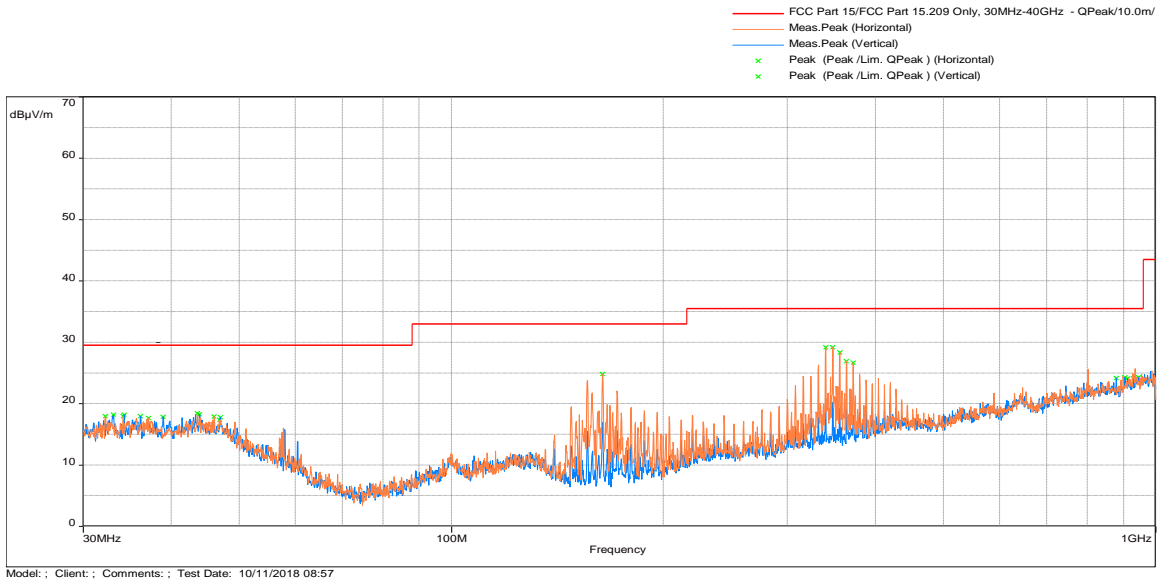


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

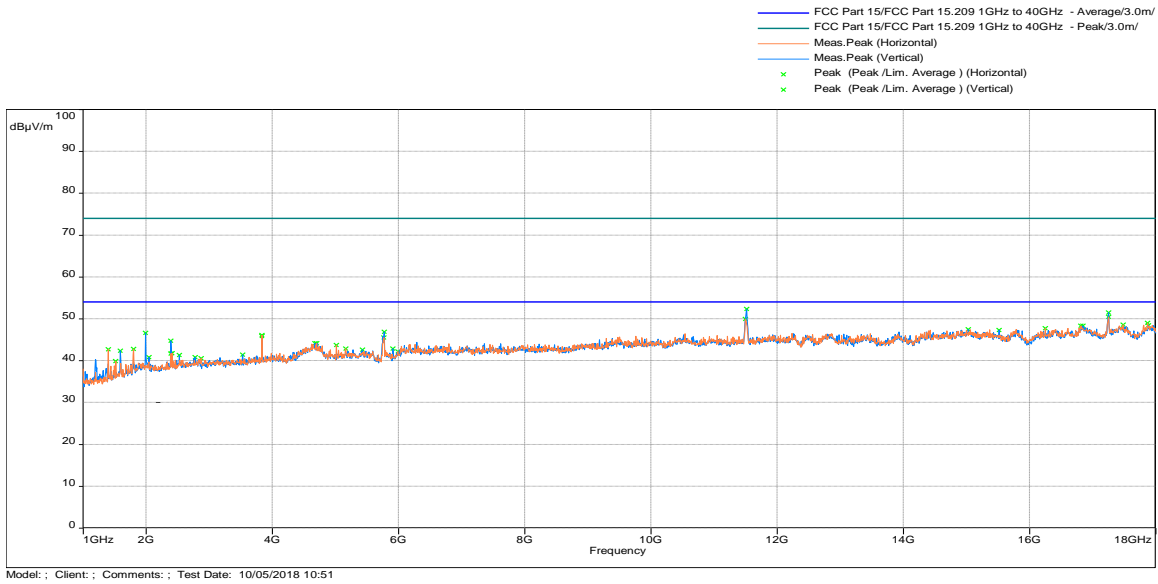


Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11n 40MHz 5795MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

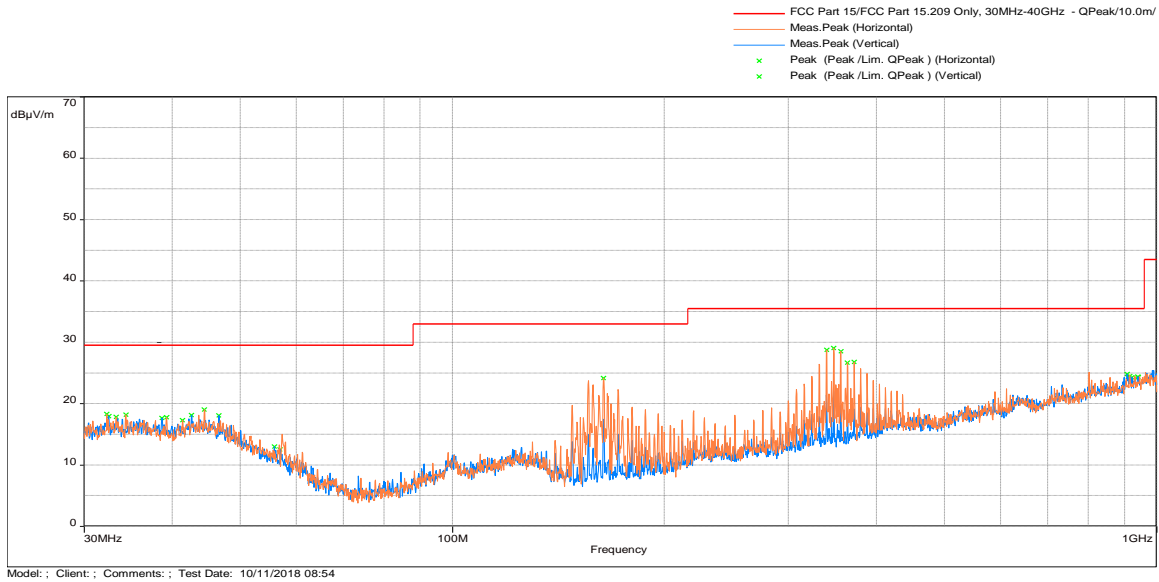


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

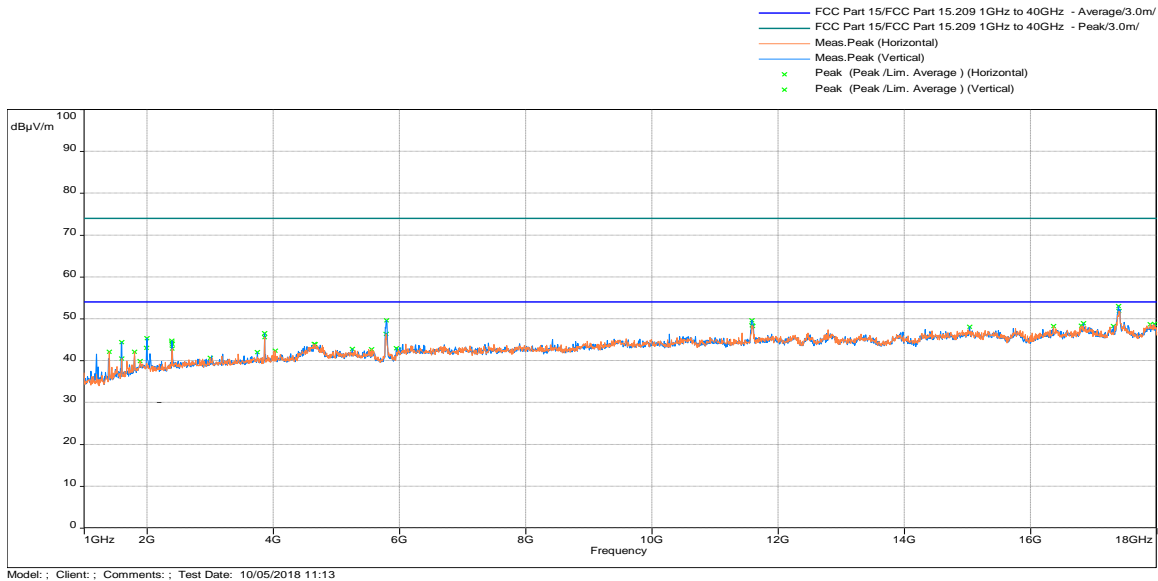


Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 802.11ac 80MHz 5775MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

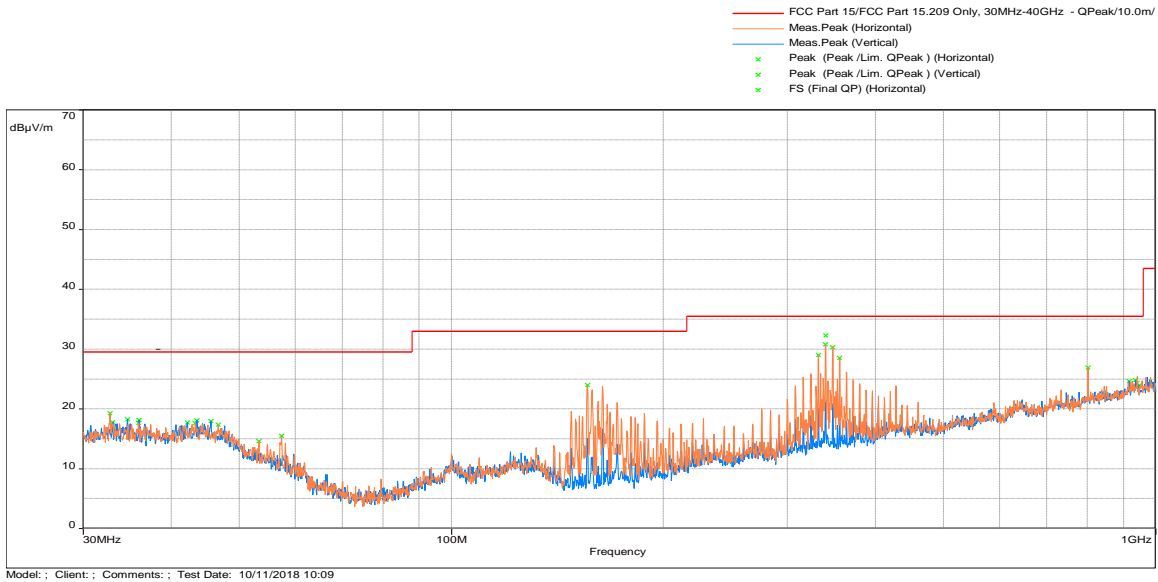


Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak & Avg Limit

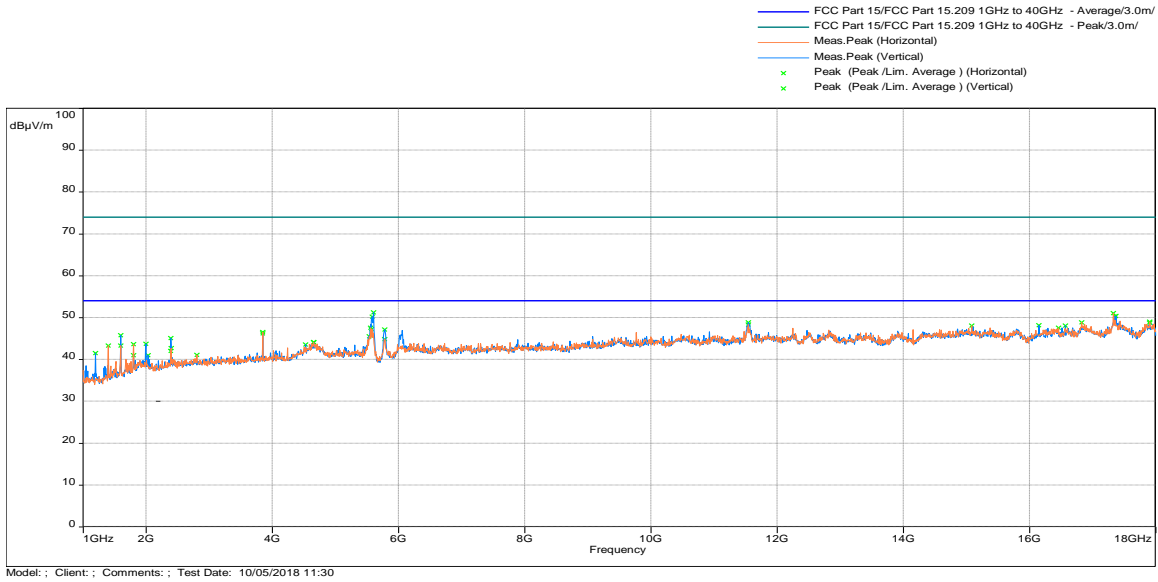

Frequency	Detector	FS	Limit	Margin	Azimuth	Height	Polarity	Correction
MHz		dBuV/m	dBuV/m	(dB)	(deg)	(m)		dB
11546.80	Peak	48.83	54	-5.17	310	1.62	Vertical	3.20
17331.90	Peak	51.04	54	-2.96	314	1.30	Horizontal	5.24

4.3.7 Test setup

The following photographs show the testing configurations used.

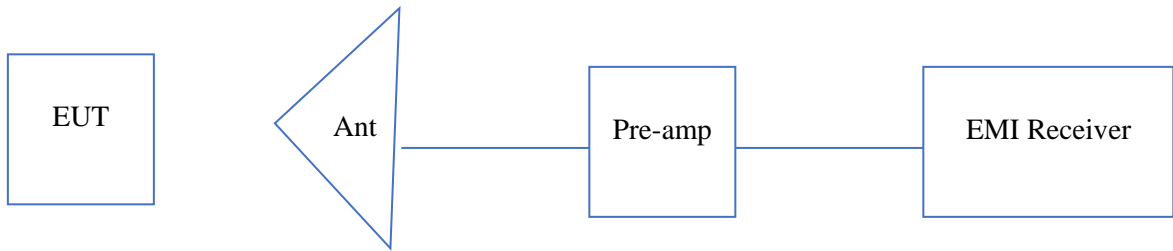

5.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Equipment	Manufacturer	Model/Type	Asset #	Cal Int	Cal Due
Spectrum Analyzer	Rohde and Schwarz	FSU	ITS 00913	12	01/24/19
Horn Antenna (10-40 GHz)	ETS-Lindgren	3116C	ITS 01376	12	04/25/19
Pre-Amplifier (18-40GHz)	Miteq	TTA1840-35-S-M	ITS 01393	12	01/19/19
Active Horn Antenna (1-18GHz)	ETS-Lindgren	3117-PA	ITS 01325	12	01/25/19
EMI Receiver	Rohde and Schwarz	ESW44	ITS 01669	12	07/30/19
BI-Log Antenna	Antenna Research	LPB-2513	ITS 00355	12	02/21/19
Pre-Amplifier	Sonoma Instrument	310N	ITS 01493	12	10/20/18
Notch Filter	MICRO-TRONICS	BRM50705	ITS 01169	12	03/14/19
RF Cable	Megaphase	EMC1-K1K1-236	ITS 01538	12	06/25/19
RF Cable	Megaphase	TM40-K1K1-59	ITS 01657	12	06/26/19
RF Cable	TRU Corporation	TRU CORE 300	ITS 01330	12	11/29/18
RF Cable	TRU Corporation	TRU CORE 300	ITS 01465	12	08/16/19
RF Cable	TRU Corporation	TRU CORE 300	ITS 01470	12	08/16/19
Attenuator	Fairview	SA 18H-30	ITS 01633	12	#

Verify before use

Software used for emission compliance testing utilized the following:

Name	Manufacturer	Version	Template/Profile
Tile	Quantum Change	3.4.K.22	Conducted Restricted Band Edge_Avg Conducted Restricted Band Edge_Peak
BAT-EMC	Nexio	3.16.0.64	103615308_Vocera 5GWIFI.bpp
RS Commander	Rohde Schwarz	1.6.4	Not Applicable (Screen grabber)

6.0 Document History

Revision/ Job Number	Writer Initials	Reviewer Initials	Date	Change
1.0 / G103615308	AS	KV	October 30, 2018	Original document