



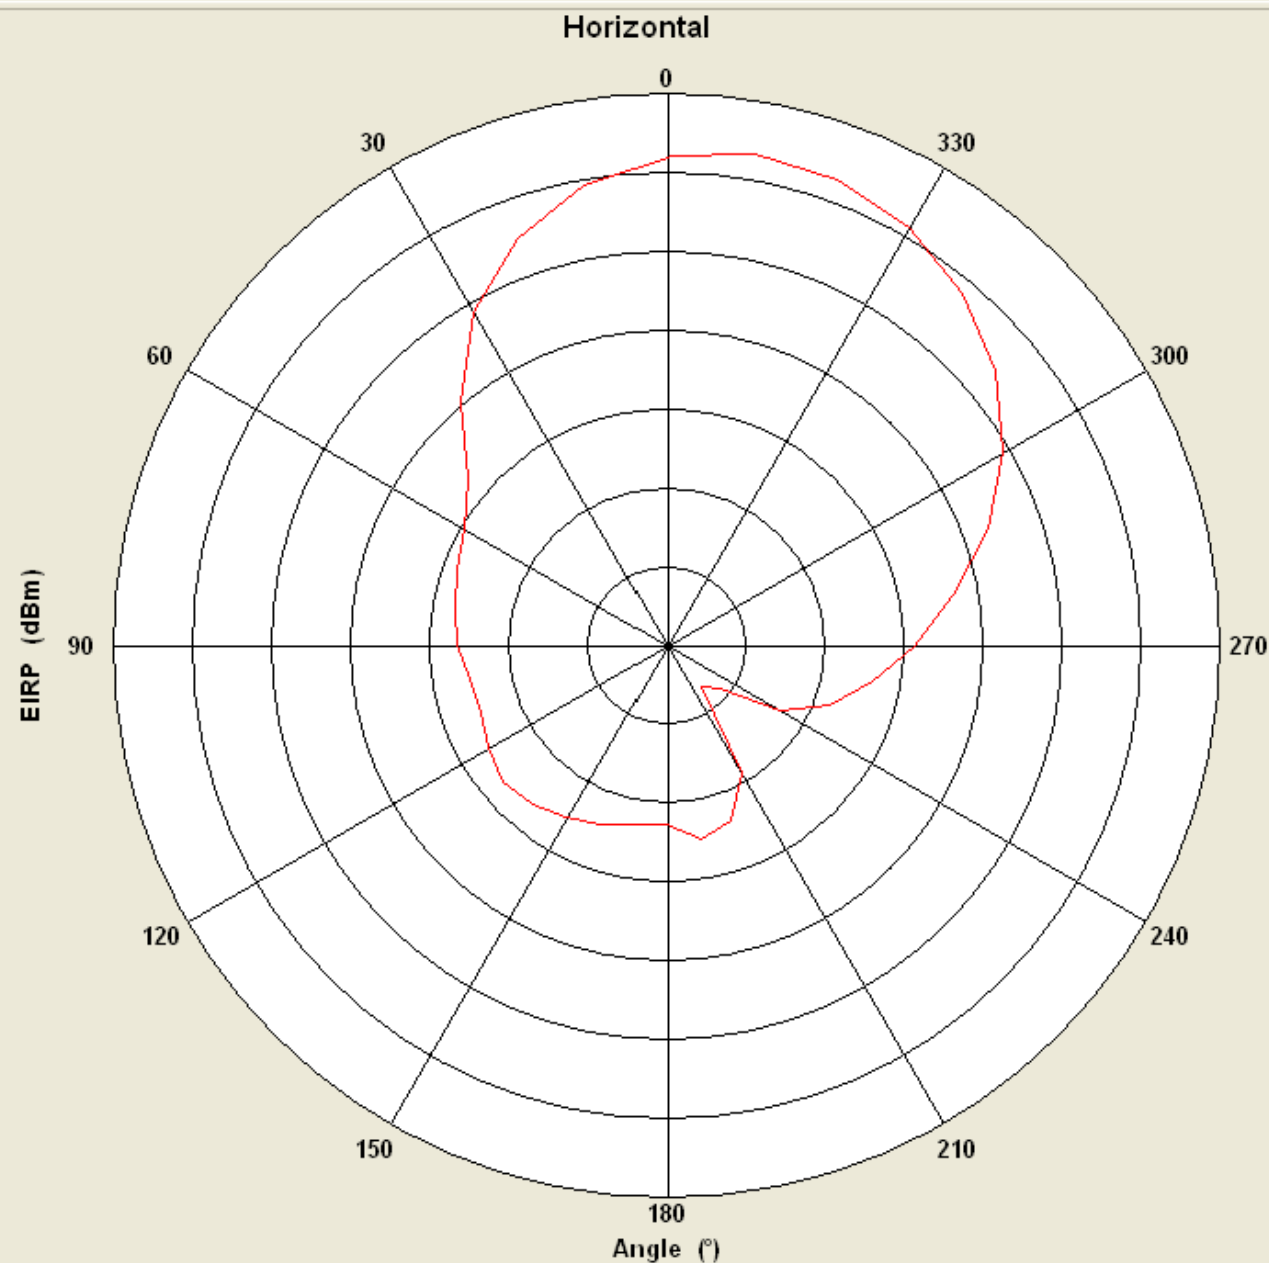

Max: 10
Min: -25
Scale: 5/div

Horizontal Polarization Results

Ant. Port Input Pwr. (dBm)	0
Tot. Rad. Pwr. (dBm)	-0.974532
Peak EIRP (dBm)	6.47755
Directivity (dBi)	7.45208
Efficiency (dB)	-0.974532
Gain (dBi)	6.47755
Front/Back Ratio (dB)	20.0202
Beamwidth (°)	58
+ Beamwidth (°)	25
- Beamwidth (°)	33
Boresight Angle (°)	350
Maximum Power (dBm)	6.47755
Minimum Power (dBm)	-21.6819
Average Power (dBm)	-0.544833
Max/Min Ratio (dB)	28.1594
Max/Avg Ratio (dB)	7.02238
Min/Avg Ratio (dB)	-21.137

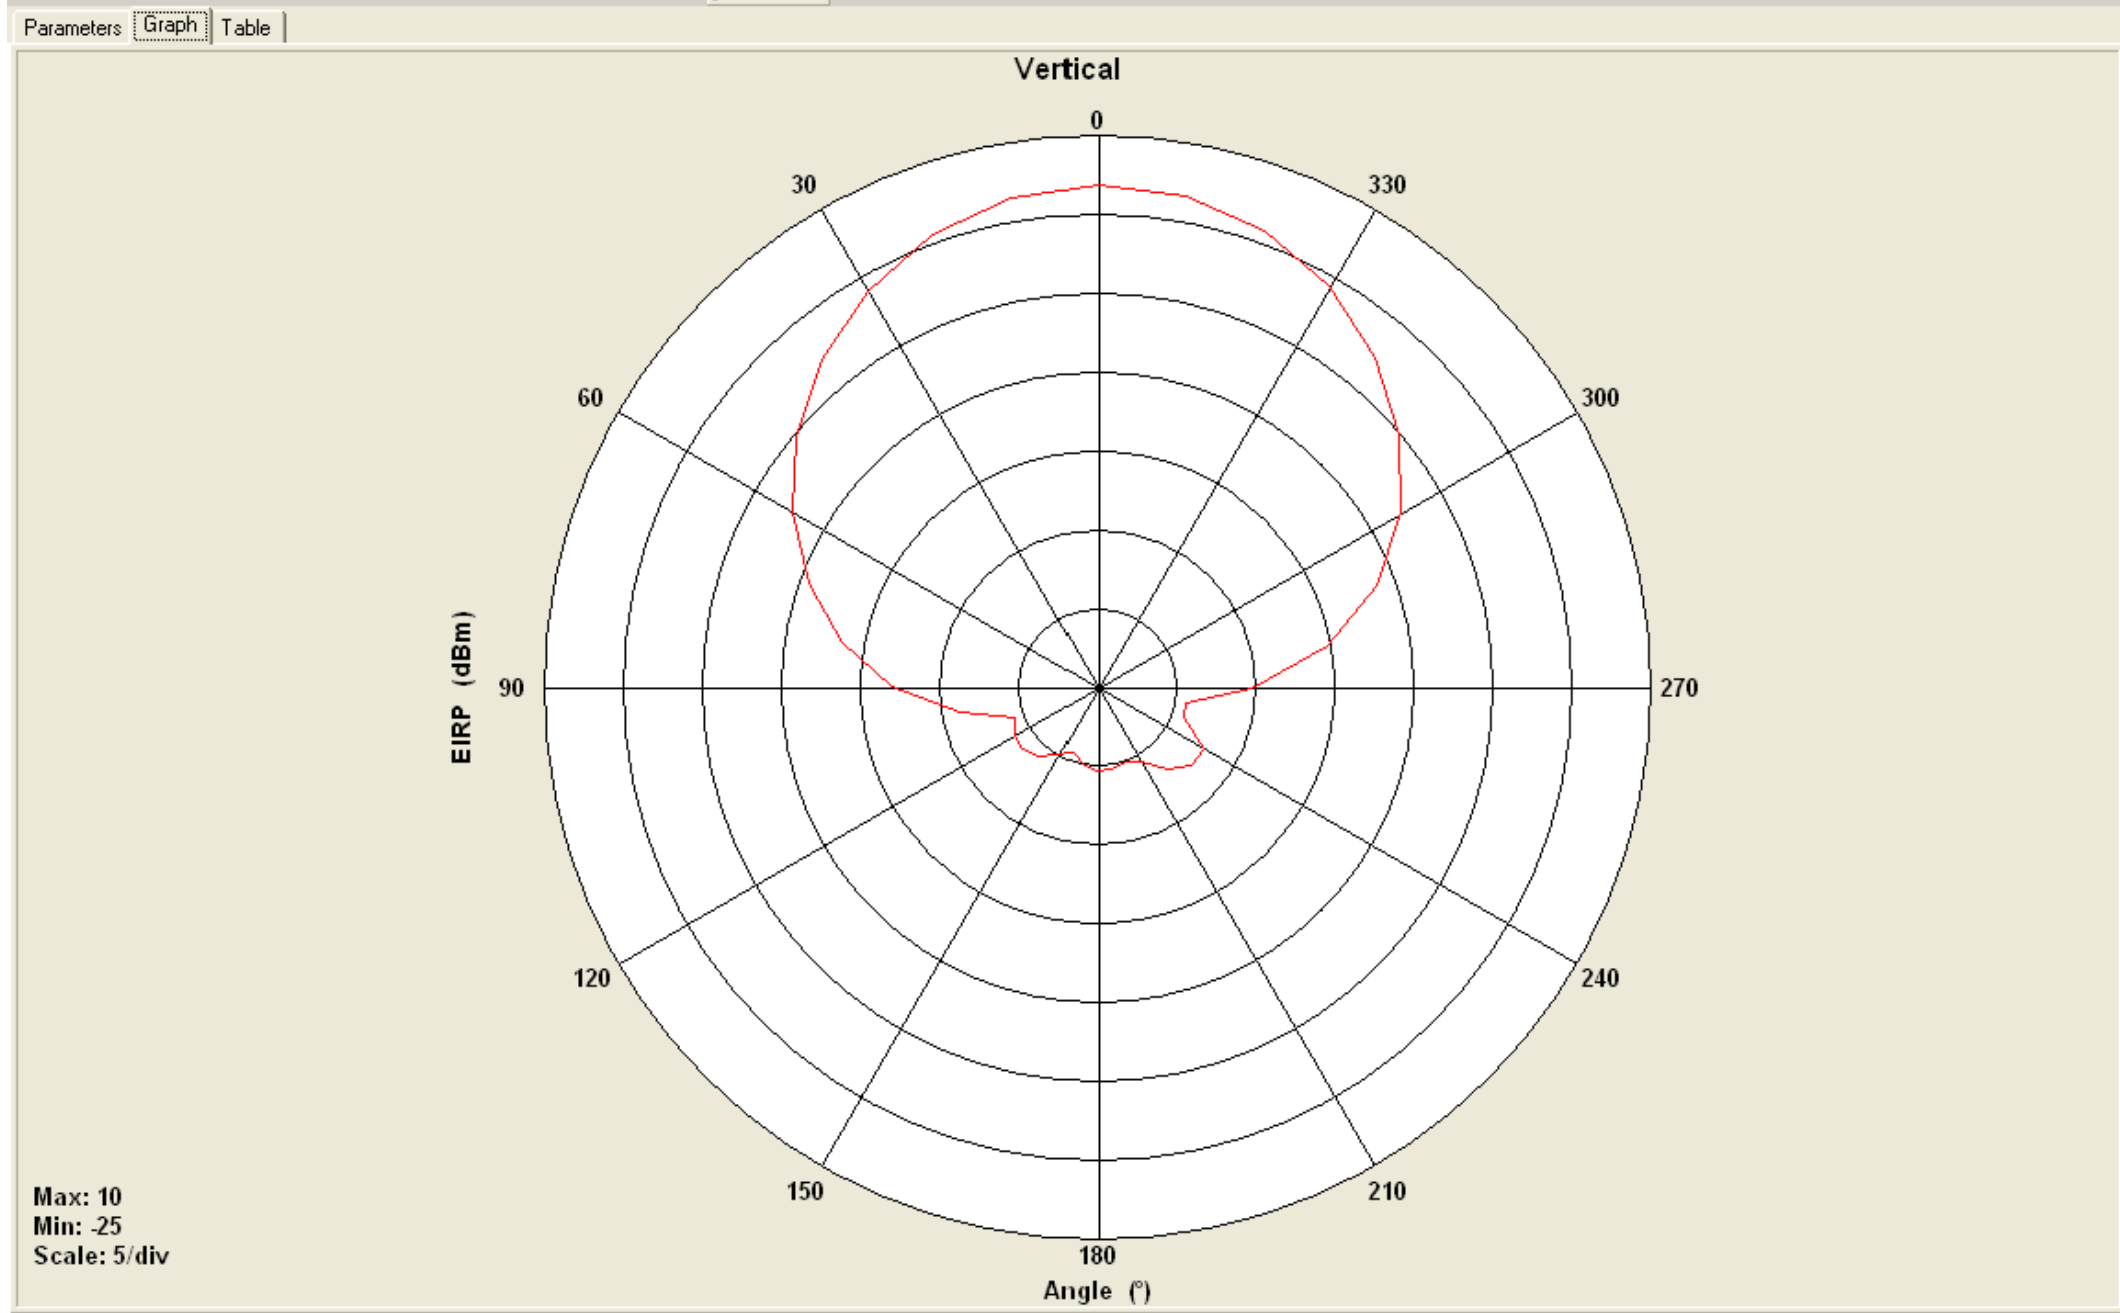

Vertical Polarization Results

Ant. Port Input Pwr. (dBm)	0
Tot. Rad. Pwr. (dBm)	-0.382897
Peak EIRP (dBm)	6.70628
Directivity (dBi)	7.08917
Efficiency (dB)	-0.382897
Gain (dBi)	6.70628
Front/Back Ratio (dB)	26.4232
Beamwidth (°)	64
+ Beamwidth (°)	31
- Beamwidth (°)	33
Boresight Angle (°)	360
Maximum Power (dBm)	6.70628
Minimum Power (dBm)	-20.6356
Average Power (dBm)	0.0751691
Max/Min Ratio (dB)	27.3419
Max/Avg Ratio (dB)	6.63111
Min/Avg Ratio (dB)	-20.7108