



Product Service

---

**Choose certainty.  
Add value.**

# Report On

FCC and Industry Canada Testing of the  
Laerdal Medical AS Little Anne QCPR Sensor  
In accordance with FCC 47 CFR Part 15C  
and Industry Canada RSS-247

COMMERCIAL-IN-CONFIDENCE

FCC ID: QHQ-120-60750  
IC: 20263-12060750

Document 75931051 Report 04 Issue 2

August 2015



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North, Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC and Industry Canada Testing of the Laerdal Medical AS Little Anne QCPR Sensor  
In accordance with FCC 47 CFR Part 15C and Industry Canada RSS-247

Document 75931051 Report 04 Issue 2

August 2015

PREPARED FOR

Laerdal Medical AS  
Tanke Svilandsgate  
Stavanger  
4002  
Norway

PREPARED BY

**Natalie Bennett**  
Senior Administrator, Project Support

APPROVED BY

**Nic Forsyth**  
Authorised Signatory

DATED

20 August 2015

**This report has been up-issued to Issue 2 to include the Hardware Version.**

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C and Industry Canada RSS-247. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

M Choudhury

G Lawler





## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT SUMMARY ..... 3</b>
1.1	Introduction ..... 4
1.2	Brief Summary of Results ..... 5
1.3	Application Form ..... 6
1.4	Product Information ..... 12
1.5	Test Conditions ..... 12
1.6	Deviations from the Standard ..... 12
1.7	Modification Record ..... 12
<b>2</b>	<b>TEST DETAILS ..... 13</b>
2.1	Power Spectral Density ..... 14
2.2	6 dB Bandwidth ..... 18
2.3	Maximum Conducted Output Power ..... 22
2.4	Spurious Radiated Emissions ..... 24
2.5	Restricted Band Edges ..... 38
2.6	Authorised Band Edges ..... 42
<b>3</b>	<b>TEST EQUIPMENT USED ..... 45</b>
3.1	Test Equipment Used ..... 46
3.2	Measurement Uncertainty ..... 48
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 49</b>
4.1	Accreditation, Disclaimers and Copyright ..... 50



Product Service

## **SECTION 1**

### **REPORT SUMMARY**

FCC and Industry Canada Testing of the  
Laerdal Medical AS Little Anne QCPR Sensor  
In accordance with FCC 47 CFR Part 15C and Industry Canada RSS-247



## 1.1 INTRODUCTION

The information contained in this report is intended to show the verification of FCC and Industry Canada Testing of the Laerdal Medical AS Little Anne QCPR Sensor to the requirements of FCC 47 CFR Part 15C and Industry Canada RSS-247.

Objective	To perform FCC and Industry Canada Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Laerdal Medical AS
Model Number(s)	Little Anne QCPR Sensor
Serial Number(s)	Not Serialised (75931051_TSR0006) Not Serialised (75931051_TSR0008) Not Serialised (75931051_TSR0009)
Hardware Version	REV A Prototype
Number of Samples Tested	3
Test Specification/Issue/Date	FCC 47 CFR Part 15C (2014) Industry Canada RSS-247 (Issue 1, 2015)
Incoming Release Date	Application Form 08 July 2015
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	Not supplied QAF 1 July 2015
Start of Test	3 August 2015
Finish of Test	4 August 2015
Name of Engineer(s)	M Choudhury G Lawler
Related Document(s)	ANSI C63.10: 2009



Product Service

## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C and Industry Canada RSS-247 is shown below.

Section	Specification Clause		Test Description	Result	Comments/Base Standard
	Part 15	RSS-247			
Bluetooth Low Energy					
2.1	15.247 (e)	5.2 (2)	Power Spectral Density	Pass	
2.2	15.247 (a)(2)	5.2(1)	6 dB Bandwidth	Pass	
2.3	15.247 (b)(3)	5.4(4)	Maximum Conducted Output Power	Pass	
2.4	15.247 (d) and 15.205	5.5	Spurious Radiated Emissions	Pass	
2.5	15.205	8.10	Restricted Band Edges	Pass	
2.6	15.247 (d)	5.5	Authorised Band Edges	Pass	



**1.3 APPLICATION FORM**

EQUIPMENT DESCRIPTION	
Model Name/Number	Little Anne QCPR Sensor
Part Number	120-60750
FCC ID (if applicable)	QHQ-120-60750
Industry Canada ID (if applicable)	20263-12060750
Technical Description (Please provide a brief description of the intended use of the equipment)	Give the user feedback on CPR performance in real time on their phone/tablet.

Types of Modulations used by the Equipment	
<input type="checkbox"/>	FHSS
<input type="checkbox"/>	Other forms of modulation
In case of FHSS Modulation	
In case of non-Adaptive Frequency Hopping equipment:	
Number of Hopping Frequencies:	
In case of Adaptive Frequency Hopping Equipment:	
Maximum number of Hopping Frequencies: BLE uses 3 in 'advertising' mode	
Minimum number of Hopping Frequencies: Bluetooth uses minimum 20	
Dwell Time:	
Minimum Channel Occupation Time: 1.25 ms	
Adaptive / non-adaptive equipment:	
<input type="checkbox"/>	non-adaptive Equipment
<input type="checkbox"/>	adaptive Equipment without the possibility to switch to a non-adaptive mode
<input checked="" type="checkbox"/>	adaptive Equipment which can also operate in a non-adaptive mode
In case of adaptive equipment:	
The Channel Occupancy Time implemented by the equipment:       ms	
<input checked="" type="checkbox"/>	The equipment has implemented an LBT based DAA mechanism
In case of equipment using modulation different from FHSS:	
<input checked="" type="checkbox"/>	The equipment is Frame Based equipment
<input type="checkbox"/>	The equipment is Load Based equipment
<input type="checkbox"/>	The equipment can switch dynamically between Frame Based and Load Based equipment
The CCA time implemented by the equipment: N/A $\mu$ s	
<input checked="" type="checkbox"/>	The equipment has implemented a non-LBT based DAA mechanism
<input type="checkbox"/>	The equipment can operate in more than one adaptive mode



<b>In case of non-adaptive Equipment:</b>	
The maximum RF Output Power (e.i.r.p.): 0 dBm	
The maximum (corresponding) Duty Cycle: connection interval = 25ms / advertising interval = 20ms %	
Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):	
connection interval = 25ms / advertising interval = 20ms	
<b>The worst case operational mode for each of the following tests:</b>	
RF Output Power: 0 dBm / 1 mW	
Power Spectral Density:	
Duty cycle, Tx-Sequence, Tx-gap:	
Accumulated Transmit Time, Frequency Occupation & Hopping Sequence (only for FHSS equipment):	
Hopping Frequency Separation (only for FHSS equipment):	
Medium Utilisation:	
Adaptivity & Receiver Blocking:	
Nominal Channel Bandwidth:	
Transmitter unwanted emissions in the OOB domain:	
Transmitter unwanted emissions in the spurious domain:	
Receiver spurious emissions:	
<b>The different transmit operating modes (tick all that apply):</b>	
<input checked="" type="checkbox"/>	Operating mode 1: Single Antenna Equipment
<input checked="" type="checkbox"/>	Equipment with only 1 antenna
<input type="checkbox"/>	Equipment with 2 diversity antennas but only 1 antenna active at any moment in time
<input type="checkbox"/>	Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
<input type="checkbox"/>	Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
<input type="checkbox"/>	Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2
<i>NOTE: Add more lines if more channel bandwidths are supported.</i>	
<input type="checkbox"/>	Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
<input type="checkbox"/>	Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
<input type="checkbox"/>	High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2
<i>NOTE: Add more lines if more channel bandwidths are supported.</i>	
<b>In case of Smart Antenna Systems:</b>	
The number of Receive chains:	
The number of Transmit chains:	
<input type="checkbox"/>	symmetrical power distribution
<input type="checkbox"/>	asymmetrical power distribution
In case of beam forming, the maximum (additional) beam forming gain:          dB	
<i>NOTE: The additional beam forming gain does not include the basic gain of a single antenna.</i>	





Product Service

<b>Operating Frequency Range(s) of the equipment:</b>	
Operating Frequency Range 1: 1 MHz to 2 MHz	
Operating Frequency Range 2:	MHz to MHz
<i>NOTE: Add more lines if more Frequency Ranges are supported.</i>	
<b>Nominal Channel Bandwidth(s):</b>	
Nominal Channel Bandwidth1:	MHz
Nominal Channel Bandwidth2:	MHz
<i>NOTE: Add more lines if more channel bandwidths are supported.</i>	
<b>Type of Equipment (stand-alone, combined, plug-in radio device, etc.):</b>	
<input type="checkbox"/>	Stand-alone
<input checked="" type="checkbox"/>	Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
<input type="checkbox"/>	Plug-in radio device (Equipment intended for a variety of host systems)
<input type="checkbox"/>	Other
<b>The extreme operating conditions that apply to the equipment:</b>	
Operating temperature range: 15 °C to 30 °C	
Details provided are for the:	
<input type="checkbox"/>	stand-alone equipment
<input checked="" type="checkbox"/>	combined (or host) equipment
<input type="checkbox"/>	test jig



The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:			
Antenna Type:			
<input checked="" type="checkbox"/> Integral Antenna			
Antenna Gain: PCB antenna dBi			
If applicable, additional beamforming gain (excluding basic antenna gain):          dB			
<input type="checkbox"/> Temporary RF connector provided			
<input type="checkbox"/> No temporary RF connector provided			
<input type="checkbox"/> Dedicated Antennas (equipment with antenna connector)			
<input type="checkbox"/> Single power level with corresponding antenna(s)			
<input type="checkbox"/> Multiple power settings and corresponding antenna(s)			
Number of different Power Levels:			
Power Level 1: 0 dBm			
Power Level 2: N/A dBm			
Power Level 3: N/A dBm			
<i>NOTE 1: Add more lines in case the equipment has more power levels.</i>			
<i>NOTE 2: These power levels are conducted power levels (at antenna connector).</i>			
For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable			
Power Level 1:          dBm			
Number of antenna assemblies provided for this power level:			
Assembly #	Gain (dBi)	e.i.r.p (dBm)	Part number or model number
1	PCB antenna	0	
2			
3			
4			
<i>NOTE: Add more rows in case more antenna assemblies are supported for this power level.</i>			
Power Level 2:          dBm			
Number of antenna assemblies provided for this power level:			
Assembly #	Gain (dBi)	e.i.r.p (dBm)	Part number or model number
1			
2			
3			
4			
<i>NOTE: Add more rows in case more antenna assemblies are supported for this power level.</i>			
Power Level 3:          dBm			
Number of antenna assemblies provided for this power level:			
Assembly #	Gain (dBi)	e.i.r.p (dBm)	Part number or model number
1			
2			
3			
4			
<i>NOTE: Add more rows in case more antenna assemblies are supported for this power level.</i>			



<b>The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:</b>	
Details provided are for the: <input type="checkbox"/> stand-alone equipment	
<input checked="" type="checkbox"/> combined (or host) equipment	
<input type="checkbox"/> test jig	
Supply Voltage <input type="checkbox"/> AC mains	State AC voltage      V
<input checked="" type="checkbox"/> DC	State DC voltage 1.5 V
In case of DC, indicate the type of power source	
<input type="checkbox"/> Internal Power Supply	
<input type="checkbox"/> External Power Supply or AC/DC adapter	
<input checked="" type="checkbox"/> Battery	
<input type="checkbox"/> Other:	
<b>Describe the test modes available which can facilitate testing:</b>	
Software with Direct Test Mode (DTM) gives RX/TX control over the radio in the test units	
<b>The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3.] IEEE 802.15.4™ [i.4], proprietary, etc.):</b>	
<b>If applicable, the statistical analysis referred in clause 5.3.1 q)</b>	
To be provided as separate attachment, please state document name:	
<b>If applicable, the statistical analysis referred in clause 5.3.1 r)</b>	
To be provided as separate attachment, please state document name:	
<b>Geo-location capability supported by the equipment:</b>	
<input type="checkbox"/> Yes	
<input type="checkbox"/> The geographical location determined by the equipment as defined in clause 4.3.1.13.2 or clause 4.3.2.12.2 is not accessible to the user.	
<input checked="" type="checkbox"/> No	
<b>Combination for testing (see clause 5.1.3.3 of EN 300 328 V1.9.1)</b>	
From all combinations of conducted power settings and intended antenna assembly(ies) specified in clause 3.1 m), specify the combination resulting in the highest e.i.r.p. for the radio equipment.	
Unless otherwise specified in ETSI EN 300 328, this power setting is to be used for testing against the requirements of ETSI EN 300 328. In case there is more than one such conducted power setting resulting in the same (highest) e.i.r.p. level, the highest power setting is to be used for testing. See also ETS EN 300 328, clause 5.1.3.3.	
Highest overall e.i.r.p. value: 0 dBm	
Corresponding Antenna assembly gain: PCB antenna dBi	Antenna Assembly #:
Corresponding conducted power setting:      dB (also the power level to be used for testing)	Listed as Power Setting #:
<b>Additional information provided by the applicant</b>	
<b>Modulation</b>	
ITU Class(es) of emission:	
Can the transmitter operate unmodulated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
<b>Duty Cycle</b>	
The transmitter is intended for:	
<input type="checkbox"/> Continuous duty	
<input checked="" type="checkbox"/> Intermittent duty	
<input type="checkbox"/> Continuous operation possible for testing purposes	



Product Service

<b>About the UUT</b>	
<input type="checkbox"/>	The equipment submitted are representative production models
<input checked="" type="checkbox"/>	If not, the equipment submitted are pre-production models ?
<input type="checkbox"/>	If pre-production equipment are submitted, the final production equipment will be identical in all respects with the equipment tested
<input checked="" type="checkbox"/>	If not, supply full details Prototype production run from sub supplier
<input type="checkbox"/>	The equipment submitted is CE marked
<input type="checkbox"/>	In addition to the CE mark, the Class-II identifier (Alert Sign) is affixed.
<b>Additional items and/or supporting equipment provided</b>	
<input type="checkbox"/>	Spare batteries (e.g. for portable equipment)
<input type="checkbox"/>	Battery charging device
<input type="checkbox"/>	External Power Supply or AC/DC adapter
<input type="checkbox"/>	Test Jig or interface box
<input type="checkbox"/>	RF test fixture (for equipment with integrated antennas)
<input type="checkbox"/>	Host System
	Manufacturer
	Model
	Model Name
<input type="checkbox"/>	Combined equipment
	Manufacturer
	Model
	Model Name
<input checked="" type="checkbox"/>	User Manual
<input checked="" type="checkbox"/>	Technical documentation (Handbook and circuit diagrams)

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature: *Lars Roger Solem*      Name: Lars Roger Solem  
 Position held: Product Developer, Electronics      Date: 28.07.2015



Product Service

## **1.4 PRODUCT INFORMATION**

### **1.4.1 Technical Description**

The Equipment Under Test (EUT) was a Laerdal Medical AS Little Anne QCPR Sensor. A full technical description can be found in the manufacturer's documentation.

## **1.5 TEST CONDITIONS**

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 1.5 V DC supply.

FCC Measurement Facility Registration Number  
90987 Octagon House, Fareham Test Laboratory

Industry Canada Company Address Code  
IC2932B-1 Octagon House, Fareham Test Laboratory

## **1.6 DEVIATIONS FROM THE STANDARD**

No deviations from the applicable test standard were made during testing.

## **1.7 MODIFICATION RECORD**

Modification 0 - No modifications were made to the test sample during testing.



Product Service

## **SECTION 2**

### **TEST DETAILS**

FCC and Industry Canada Testing of the  
Laerdal Medical AS Little Anne QCPR Sensor  
In accordance with FCC 47 CFR Part 15C and Industry Canada RSS-247



Product Service

## **2.1 POWER SPECTRAL DENSITY**

### **2.1.1 Specification Reference**

FCC 47 CFR Part 15C  
Industry Canada RSS-247, Clause 15.247 (e) and 5.2 (2)

### **2.1.2 Equipment Under Test and Modification State**

Little Anne QCPR Sensor S/N: Not Serialised (75931051\_TSR0008) - Modification State 0

### **2.1.3 Date of Test**

3 August 2015 & 4 August 2015

### **2.1.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.5 Test Procedure**

The test was performed in accordance with KDB 558074 D01 V03r02, clause 10.2 and Industry Canada RSS-247, clause 5.4(4).

### **2.1.6 Environmental Conditions**

Ambient Temperature	23.6 - 52.5°C
Relative Humidity	22.7 - 62.2%



Product Service


**2.1.7 Test Results**

1.5 V DC Supply

Bluetooth Low Energy, GFSK, Power Spectral Density Results

2402 MHz	2441 MHz	2480 MHz
dBm	dBm	dBm
-0.88	-0.89	-0.70

Bluetooth Low Energy, 2402 MHz, GFSK, Power Spectral Density Plot

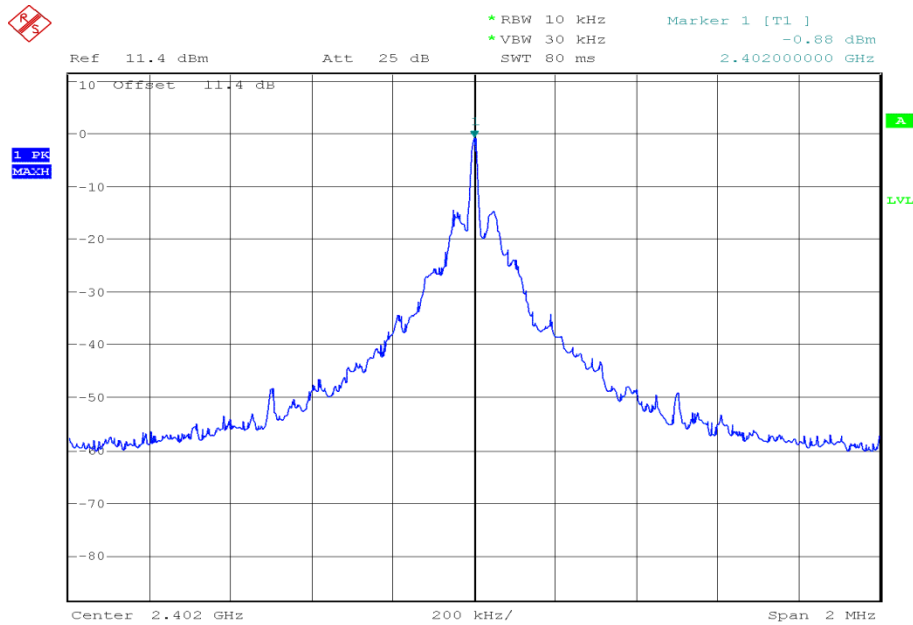


Date: 1.JAN.2000 03:23:07






Product Service

Bluetooth Low Energy, 2441 MHz, GFSK, Power Spectral Density Plot

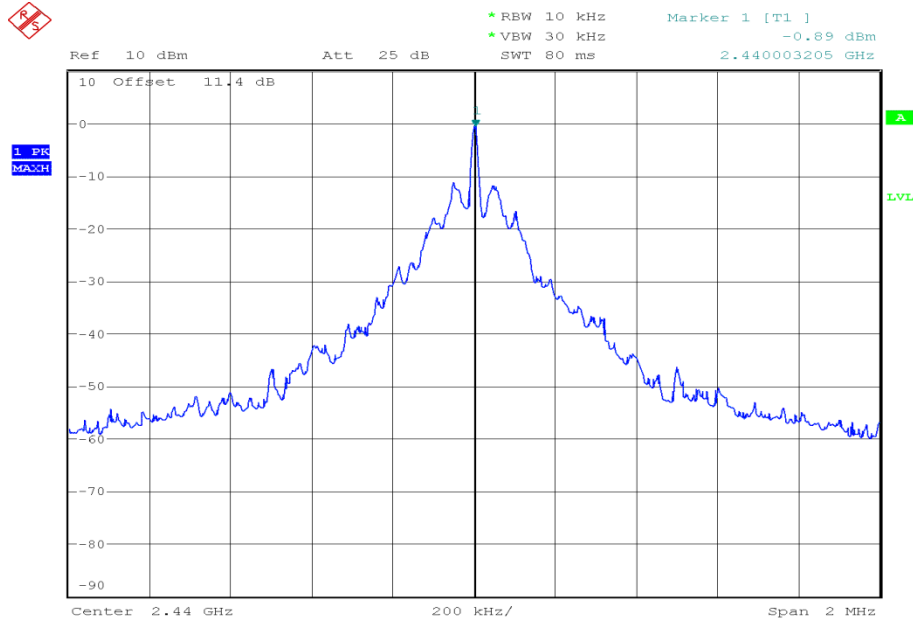

Date: 1.JAN.2000 04:18:05

Bluetooth Low Energy, 2480 MHz, GFSK, Power Spectral Density Plot

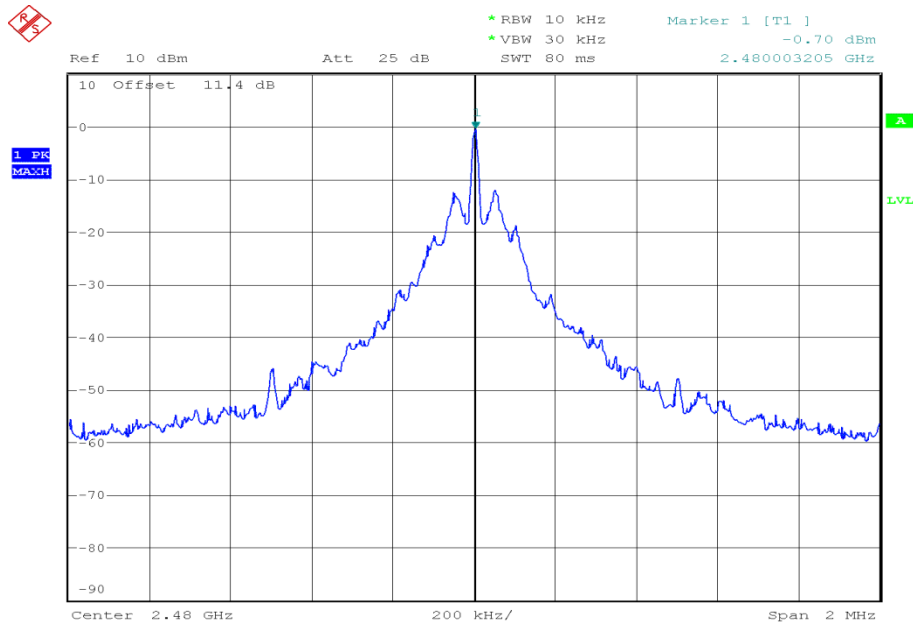

Date: 2.JAN.2000 00:53:51



Product Service

FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Industry Canada RSS-247, Limit Clause, 5.2 (2)

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



Product Service

## **2.2 6 dB BANDWIDTH**

### **2.2.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (a)(2)  
Industry Canada RSS-247, Clause 5.2(1)

### **2.2.2 Equipment Under Test and Modification State**

Little Anne QCPR Sensor S/N: Not Serialised (75931051\_TSR0008) - Modification State 0

### **2.2.3 Date of Test**

4 August 2015

### **2.2.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.2.5 Test Procedure**

The test was performed in accordance with KDB 558074 D01 v03r02, clause 8.1 and Industry Canada RSS-GEN, clause 6.6.

### **2.2.6 Environmental Conditions**

Ambient Temperature	22.7°C
Relative Humidity	52.5%



Product Service


**2.2.7 Test Results**

1.5 V DC Supply

Bluetooth Low Energy, GFSK, 6 dB Bandwidth Results

2402 MHz	2441 MHz	2480 MHz
kHz	kHz	kHz
682.69230	682.69230	689.10256


Bluetooth Low Energy, 2402 MHz, GFSK, 6 dB Bandwidth Plot

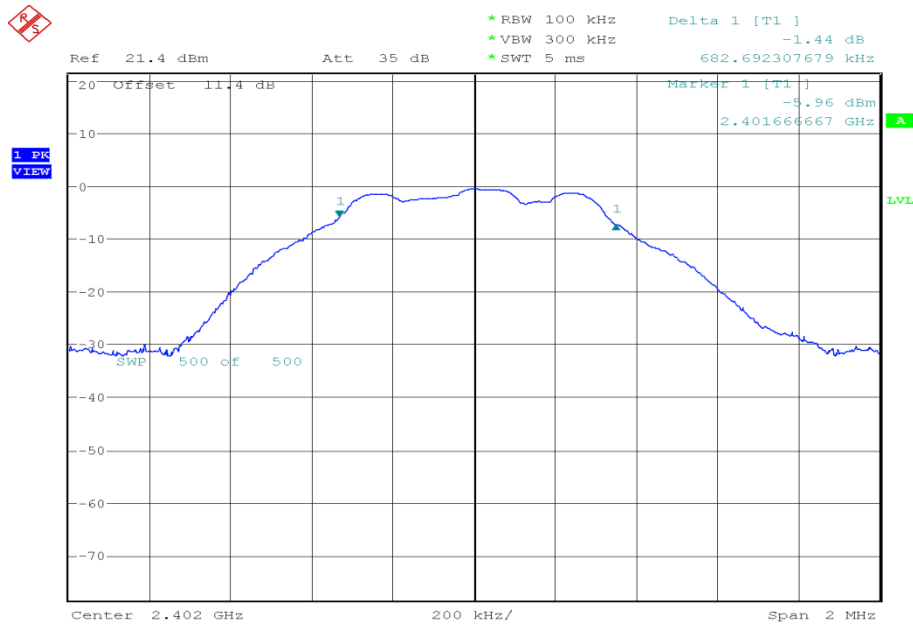

Date: 2.JAN.2000 04:27:18




Bluetooth Low Energy, 2441 MHz, GFSK, 6 dB Bandwidth Plot

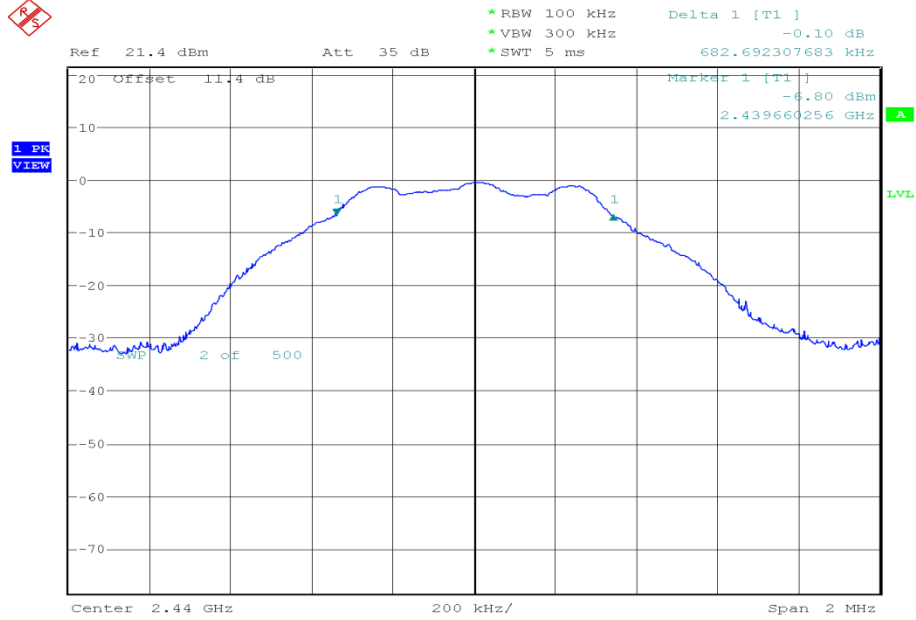

Date: 2.JAN.2000 04:50:44

Bluetooth Low Energy, 2480 MHz, GFSK, 6 dB Bandwidth Plot

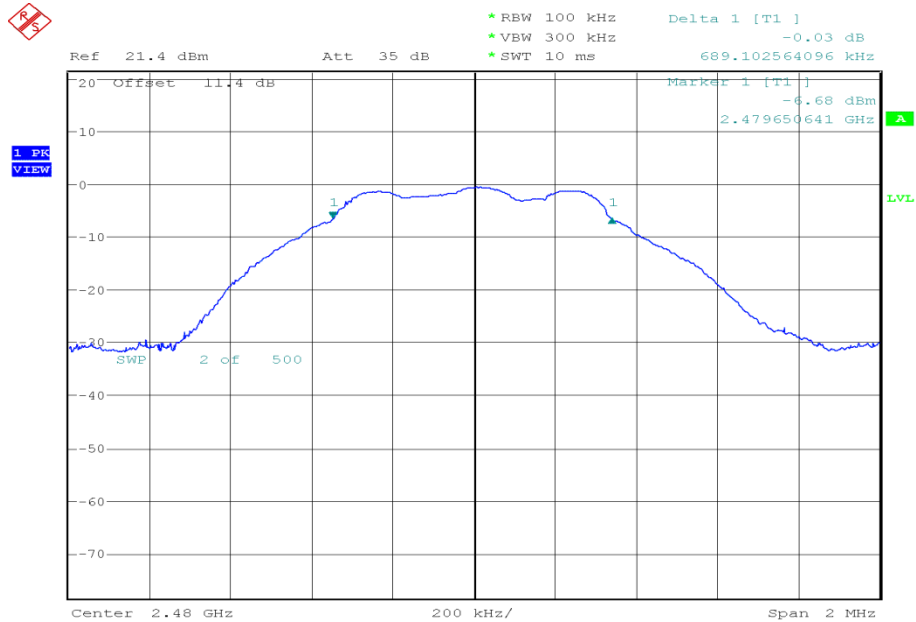

Date: 2.JAN.2000 05:05:30



Product Service

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(2)

The minimum 6 dB Bandwidth shall be at least 500 kHz.

Industry Canada RSS-247, Limit Clause, 5.2(1)

The minimum 6 dB bandwidth shall be 500 kHz.



Product Service

## **2.3 MAXIMUM CONDUCTED OUTPUT POWER**

### **2.3.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (b)(3)  
Industry Canada RSS-247, Clause 5.4(4)

### **2.3.2 Equipment Under Test and Modification State**

Little Anne QCPR Sensor S/N: Not Serialised (75931051\_TSR0006) - Modification State 0

### **2.3.3 Date of Test**

3 August 2015

### **2.3.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.3.5 Test Procedure**

The test was performed in accordance with KDB 558074 D01 v03r02, clause 9.1.2 and Industry Canada RSS-GEN, clause 6.12.

### **2.3.6 Environmental Conditions**

Ambient Temperature	23.6°C
Relative Humidity	62.2%



### 2.3.7 Test Results

1.5 V DC Supply

#### Bluetooth Low Energy, Maximum Conducted Output Power Results

2402 MHz		2441 MHz		2480 MHz	
dBm	mW	dBm	mW	dBm	mW
-0.09	0.98	0.12	1.03	0.16	1.04

#### FCC 47 CFR Part 15, Limit Clause 15.247 (b)

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

#### Industry Canada RSS-247, Limit Clause, 5.4(4)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.





Product Service

## **2.4 SPURIOUS RADIATED EMISSIONS**

### **2.4.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (d) and 15.205  
Industry Canada RSS-247, Clause 5.5

### **2.4.2 Equipment Under Test and Modification State**

Little Anne QCPR Sensor S/N: Not Serialised (75931051\_TSR0009) - Modification State 0

### **2.4.3 Date of Test**

3 August 2015 & 4 August 2015

### **2.4.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.4.5 Test Procedure**

The test was performed in accordance with KDB 558074 D01 v03r02, clause 11.0 and 12.1 and ANSI C63.10, clause 6.3, 6.5 and 6.6.

### **2.4.6 Environmental Conditions**

Ambient Temperature	19.3 - 19.7°C
Relative Humidity	53.0 - 62.0%




**2.4.7 Test Results**

1.5 V DC Supply

Bluetooth Low Energy, 2402 MHz, 30 MHz to 1 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	QP Level (dB $\mu$ V/m)	QP Margin (dB $\mu$ V/m)	QP Level ( $\mu$ V/m)	QP Margin ( $\mu$ V/m)	Angle (°)	Height (m)	Polarisation
31.019	29.6	-10.4	30.2	-69.8	45	1.00	Vertical
33.250	29.8	-10.2	30.9	-69.1	135	1.00	Vertical
36.790	26.6	-13.4	21.4	-78.6	225	1.00	Horizontal
841.987	33.0	-13.0	44.7	-155.3	270	1.00	Vertical
886.268	33.3	-12.7	46.2	-153.8	135	1.00	Vertical
945.777	33.9	-12.1	49.5	-150.5	315	1.00	Horizontal

Bluetooth Low Energy, 2402 MHz, 30 MHz to 1 GHz, Spurious Radiated Emissions Plot

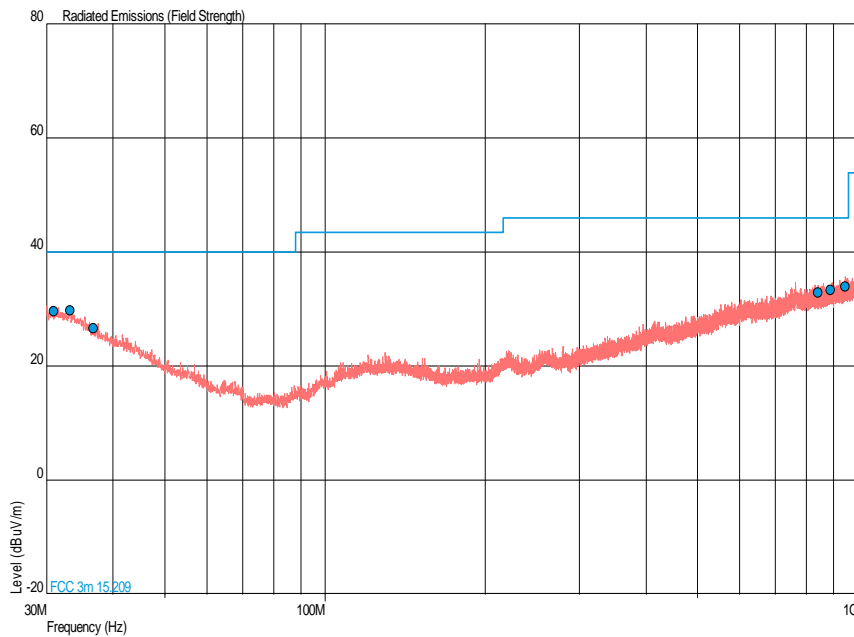




Product Service

Bluetooth Low Energy, 2402 MHz, 1 GHz to 25 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	Final Peak (dBµV/m)	Final Average (dBµV/m)	Final Peak (µV/m)	Final Average (µV/m)	Angle (°)	Height (m)	Polarisation
4804.000	55.46	53.95	592.92	498.31	342	1.59	Horizontal

No other emissions were detected within 10 dB of the limit.


Bluetooth Low Energy, 2402 MHz, 1 GHz to 3 GHz, Spurious Radiated Emissions Plot

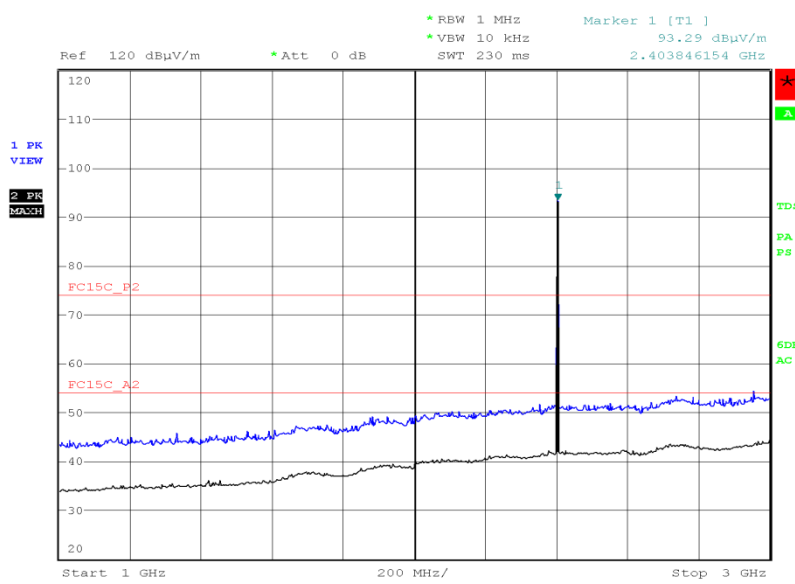

Date: 3.AUG.2015 17:35:51




Bluetooth Low Energy, 2402 MHz, 3 GHz to 8 GHz, Spurious Radiated Emissions Plot

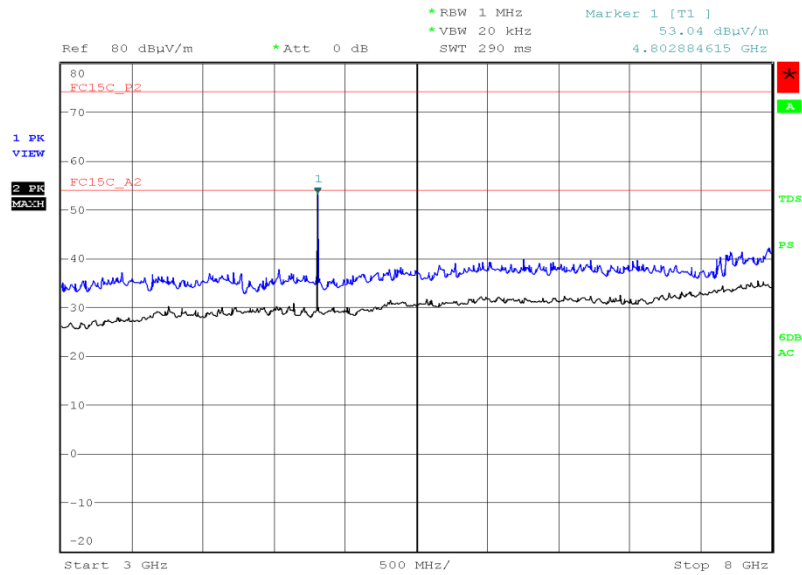

Date: 3.AUG.2015 21:44:16


Bluetooth Low Energy, 2402 MHz, 8 GHz to 18 GHz, Spurious Radiated Emissions Plot

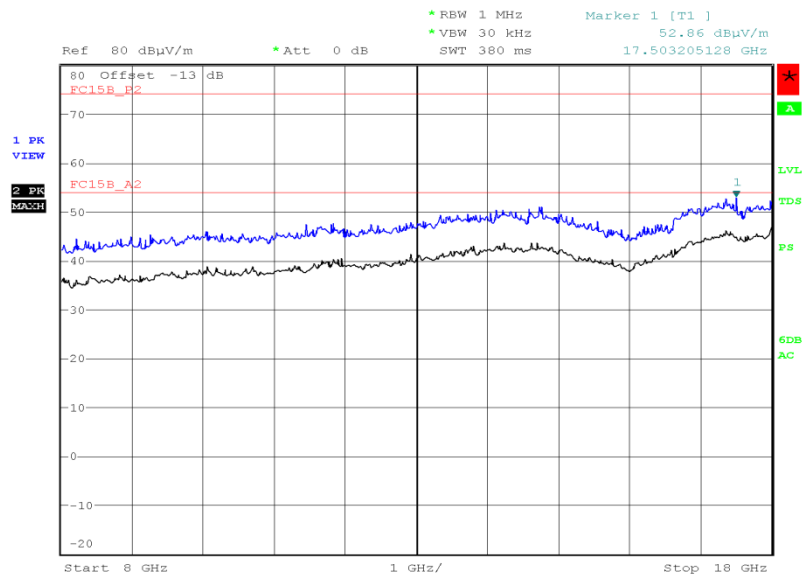

Date: 3.AUG.2015 20:27:22



Bluetooth Low Energy, 2402 MHz, 18 GHz to 25 GHz, Spurious Radiated Emissions Plot

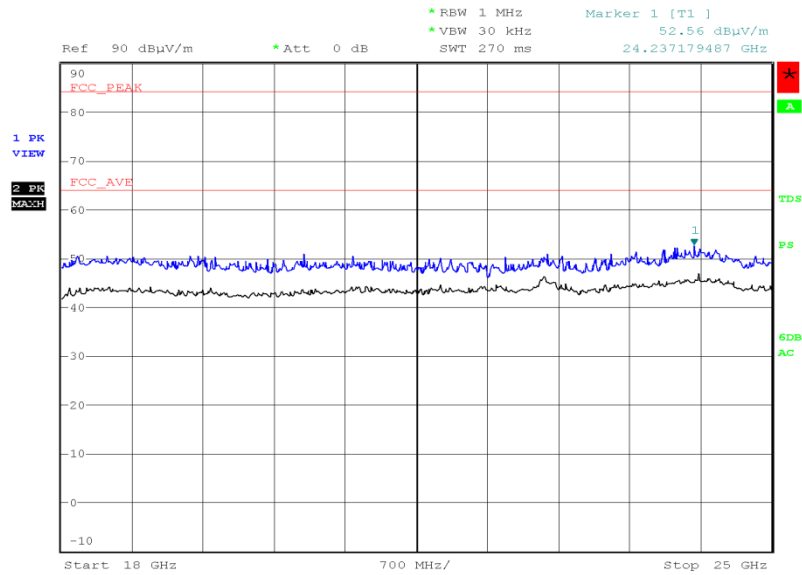


Date: 4.AUG.2015 21:28:19



**Bluetooth Low Energy, 2441 MHz, 30 MHz to 1 GHz, Spurious Radiated Emissions Results**

Frequency (MHz)	QP Level (dB $\mu$ V/m)	QP Margin (dB $\mu$ V/m)	QP Level ( $\mu$ V/m)	QP Margin ( $\mu$ V/m)	Angle (°)	Height (m)	Polarisation
30.388	29.7	-10.3	30.5	-69.5	135	1.00	Vertical
32.425	29.4	-10.6	29.5	-70.5	180	1.00	Vertical
34.123	28.6	-11.4	26.9	-73.1	90	1.00	Vertical
736.500	32.2	-13.8	40.7	-159.3	0	1.00	Vertical
820.744	33.0	-13.0	44.7	-155.3	225	1.00	Vertical
908.626	34.0	-12.0	50.1	-149.9	315	1.00	Vertical

**Bluetooth Low Energy, 2441 MHz, 30 MHz to 1 GHz, Spurious Radiated Emissions Plot**

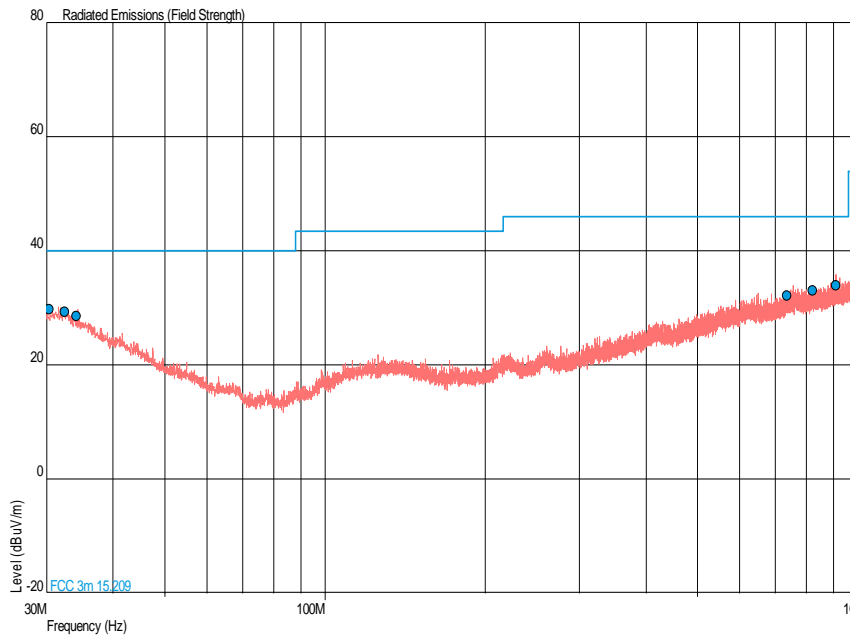




Product Service

Bluetooth Low Energy, 2441 MHz, 1 GHz to 25 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	Final Peak (dBµV/m)	Final Average (dBµV/m)	Final Peak (µV/m)	Final Average (µV/m)	Angle (°)	Height (m)	Polarisation
4880.000	54.85	53.87	552.71	493.74	345	1.70	Horizontal

No other emissions were detected within 10 dB of the limit.


Bluetooth Low Energy, 2441 MHz, 1 GHz to 3 GHz, Spurious Radiated Emissions Plot

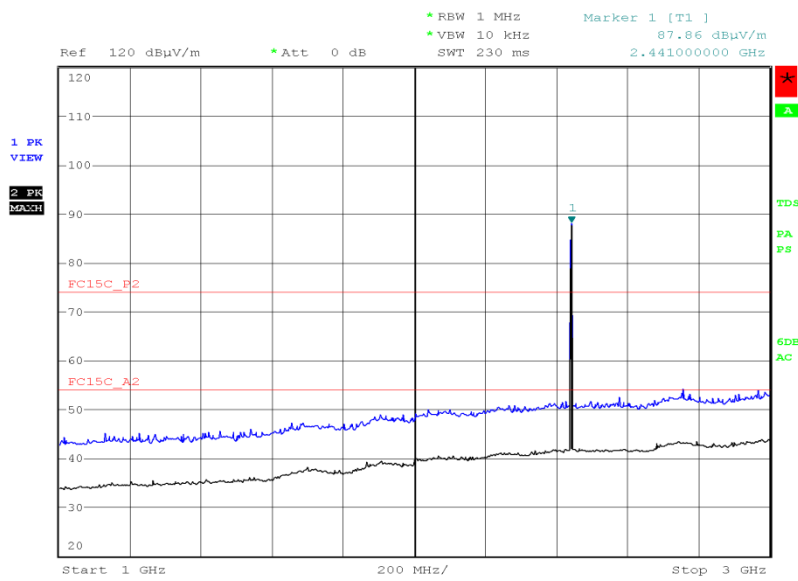

Date: 3.AUG.2015 18:14:47




Bluetooth Low Energy, 2441 MHz, 3 GHz to 8 GHz, Spurious Radiated Emissions Plot

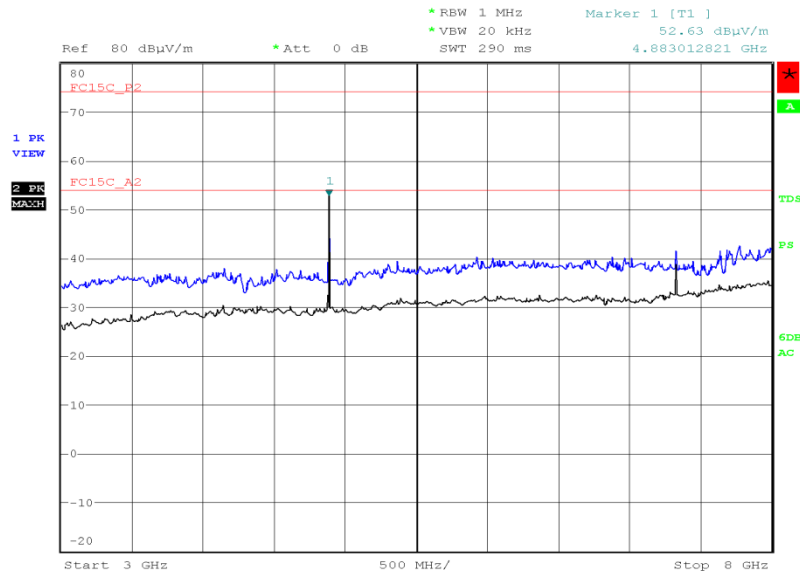

Date: 3.AUG.2015 22:05:46

Bluetooth Low Energy, 2441 MHz, 8 GHz to 18 GHz, Spurious Radiated Emissions Plot

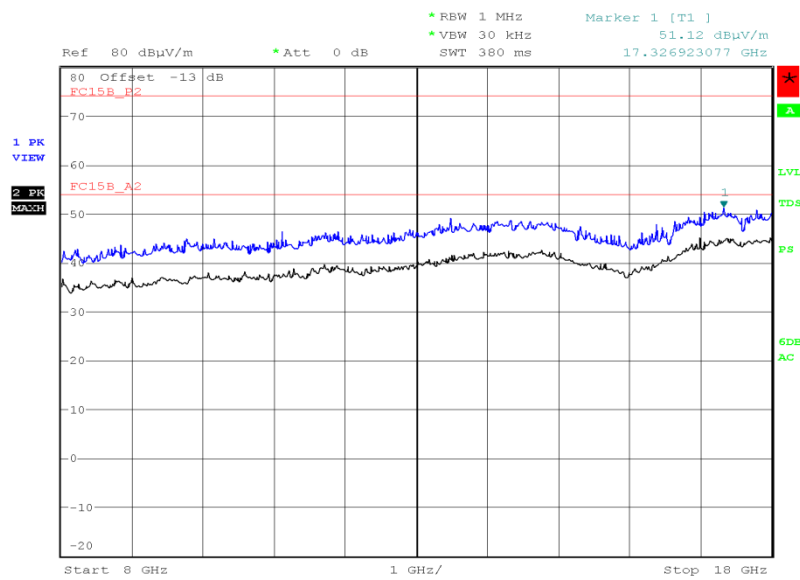


Date: 3.AUG.2015 20:35:07





Product Service

Bluetooth Low Energy, 2441 MHz, 18 GHz to 25 GHz, Spurious Radiated Emissions Plot

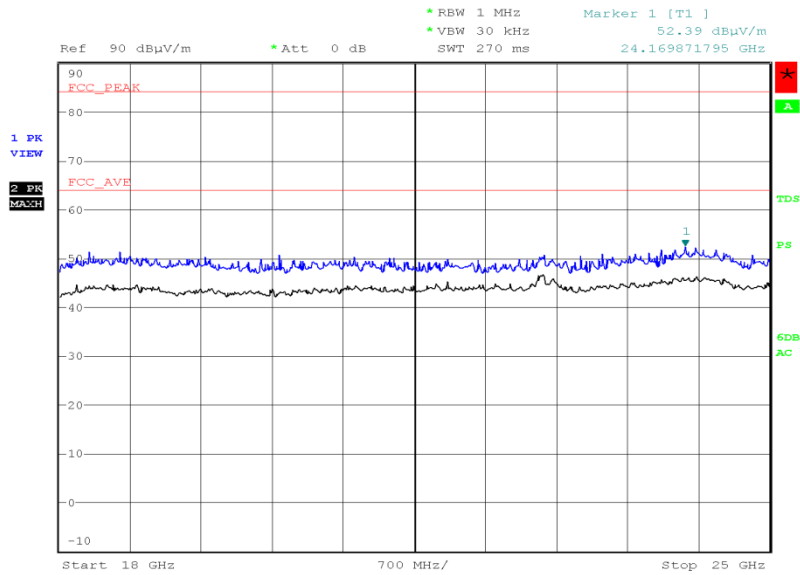


Date: 4.AUG.2015 21:14:49



**Bluetooth Low Energy, 2480 MHz, 30 MHz to 1 GHz, Spurious Radiated Emissions Results**

Frequency (MHz)	QP Level (dBµV/m)	QP Margin (dBµV/m)	QP Level (µV/m)	QP Margin (µV/m)	Angle (°)	Height (m)	Polarisation
33.153	29.2	-10.8	28.8	-71.2	180	1.00	Vertical
34.753	28.2	-11.8	25.7	-74.3	180	1.00	Vertical
37.372	26.3	-13.7	20.7	-79.3	90	1.00	Vertical
792.372	32.5	-13.5	42.2	-157.8	0	1.00	Vertical
874.689	33.0	-13.0	44.7	-155.3	0	1.00	Vertical
923.419	35.7	-10.3	61.0	-139.0	315	1.00	Vertical

**Bluetooth Low Energy, 2480 MHz, 30 MHz to 1 GHz, Spurious Radiated Emissions Plot**

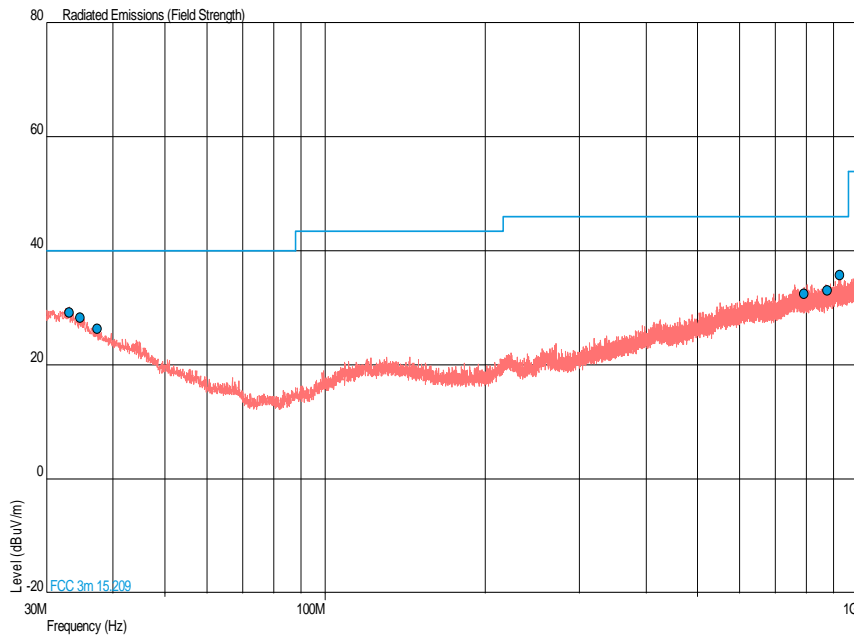




Product Service

Bluetooth Low Energy, 2480 MHz, 1 GHz to 25 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	Final Peak (dBµV/m)	Final Average (dBµV/m)	Final Peak (µV/m)	Final Average (µV/m)	Angle (°)	Height (m)	Polarisation
4960.000	53.47	52.10	471.52	402.72	350	100	Horizontal

No other emissions were detected within 10 dB of the limit.


Bluetooth Low Energy, 2480 MHz, 1 GHz to 3 GHz, Spurious Radiated Emissions Plot

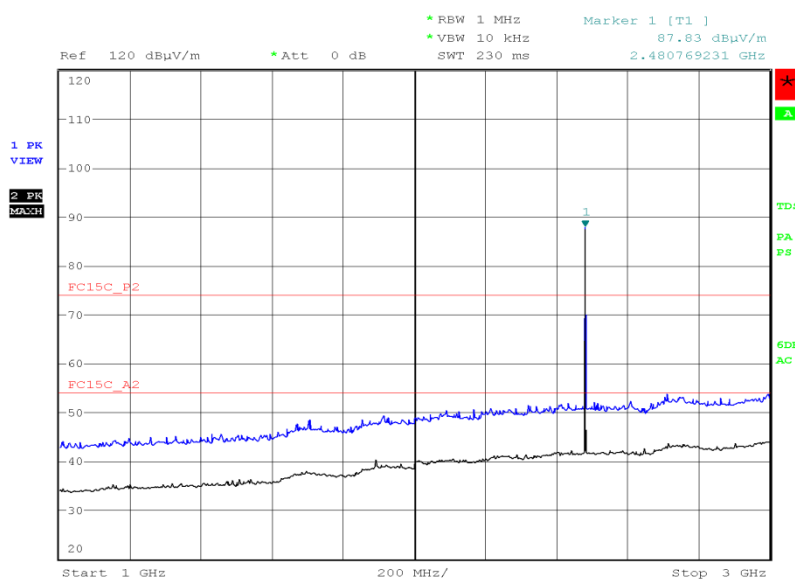

Date: 3.AUG.2015 18:32:19




Bluetooth Low Energy, 2480 MHz, 3 GHz to 8 GHz, Spurious Radiated Emissions Plot

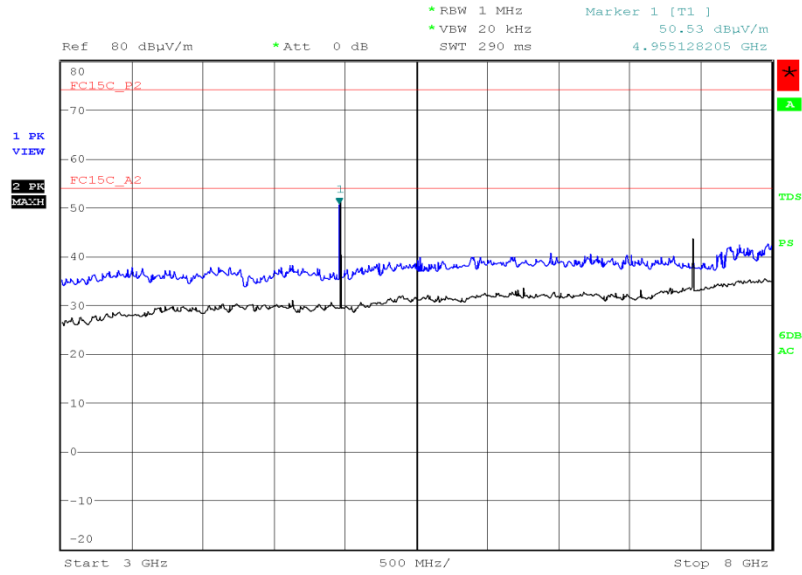

Date: 3.AUG.2015 20:48:53


Bluetooth Low Energy, 2480 MHz, 8 GHz to 18 GHz, Spurious Radiated Emissions Plot

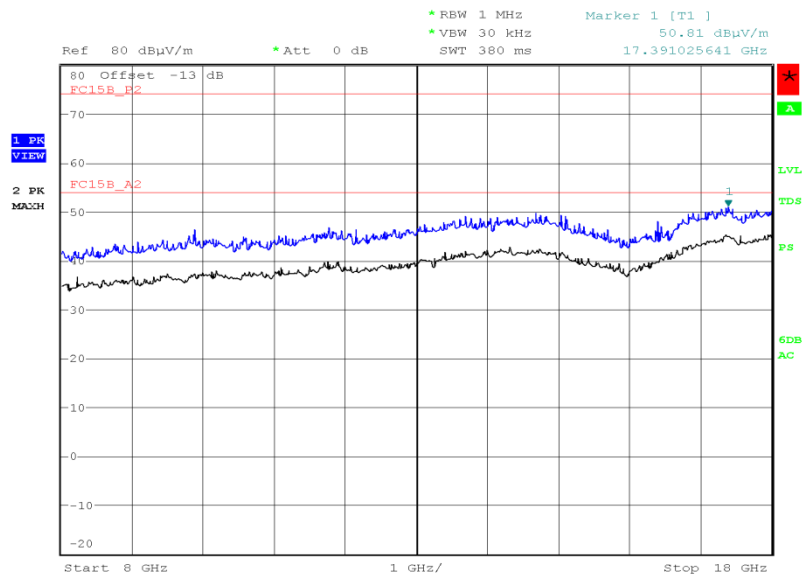

Date: 3.AUG.2015 20:41:23



Bluetooth Low Energy, 2480 MHz, 18 GHz to 25 GHz, Spurious Radiated Emissions Plot

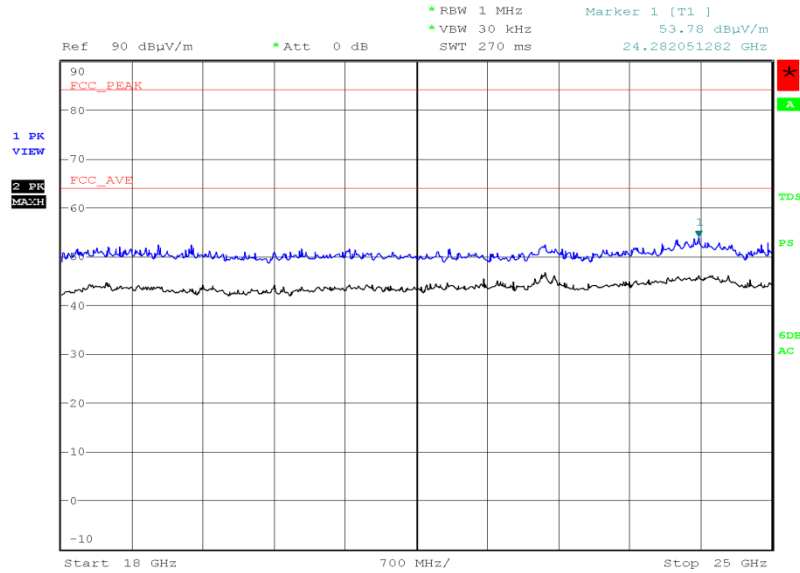

Date: 4.AUG.2015 21:07:11

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

Emissions outside the restricted bands shall be at least 20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

FCC 47 CFR Part 15, Limit Clause 15.205

	Peak (dBμV/m)	Average (dBμV/m)
Restricted Bands of Operation	74	54

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength			Measurement Distance (m)
	(μV/m)	Average (dBμV/m)	Peak (dBμV/m)	
30-88	100	40.0	60.0	3
88-216	150	43.5	63.5	3
216-960	200	46.0	66.0	3
Above 960	500	54.0	74.0	3



Product Service

Industry Canada RSS-247, Limit Clause, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



Product Service

## **2.5 RESTRICTED BAND EDGES**

### **2.5.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.205  
Industry Canada RSS-247, Clause 8.10

### **2.5.2 Equipment Under Test and Modification State**

Little Anne QCPR Sensor S/N: Not Serialised (75931051\_TSR0009) - Modification State 0

### **2.5.3 Date of Test**

3 August 2015

### **2.5.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.5.5 Test Procedure**

The test was performed in accordance with KDB 558074 D01 V03r02, clause 12.1 and ANSI C63.10, clause 6.5 and 6.6.

### **2.5.6 Environmental Conditions**

Ambient Temperature	19.7°C
Relative Humidity	62.0%



Product Service


**2.5.7 Test Results**

1.5 V DC Supply

Bluetooth Low Energy, GFSK, Restricted Band Edges Results

2402 MHz		2480 MHz	
Measured Frequency 2390 MHz		Measured Frequency 2483.5 MHz	
dBµV/m		dBµV/m	
Final Peak	Final Average	Final Peak	Final Average
59.14	48.36	60.18	48.33

Bluetooth Low Energy, 2402 MHz, Measured Frequency 2390 MHz, GFSK, Final Peak, Restricted Band Edges Plot

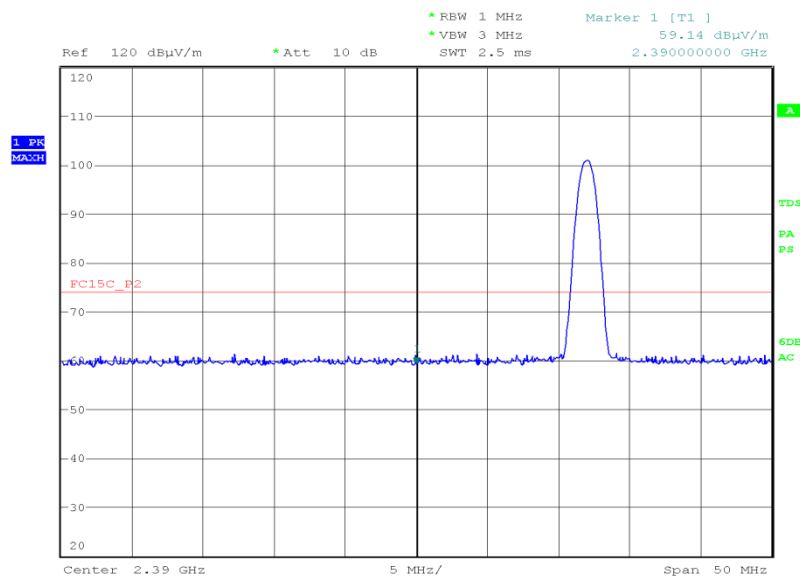


Date: 3.AUG.2015 19:13:23






Bluetooth Low Energy, 2402 MHz, Measured Frequency 2390 MHz, GFSK, Final Average, Restricted Band Edges Plot

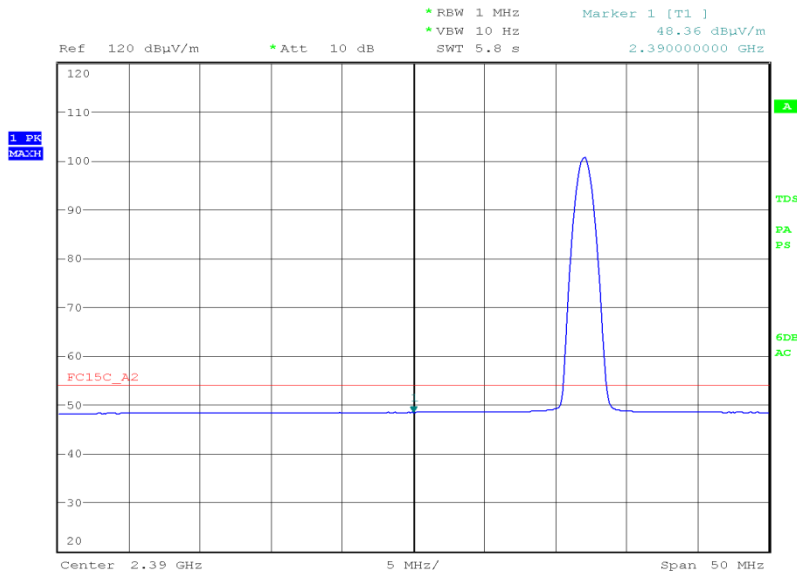

Date: 3.AUG.2015 19:14:04

Bluetooth Low Energy, 2480 MHz, Measured Frequency 2483.5 MHz, GFSK, Final Peak, Restricted Band Edges Plot

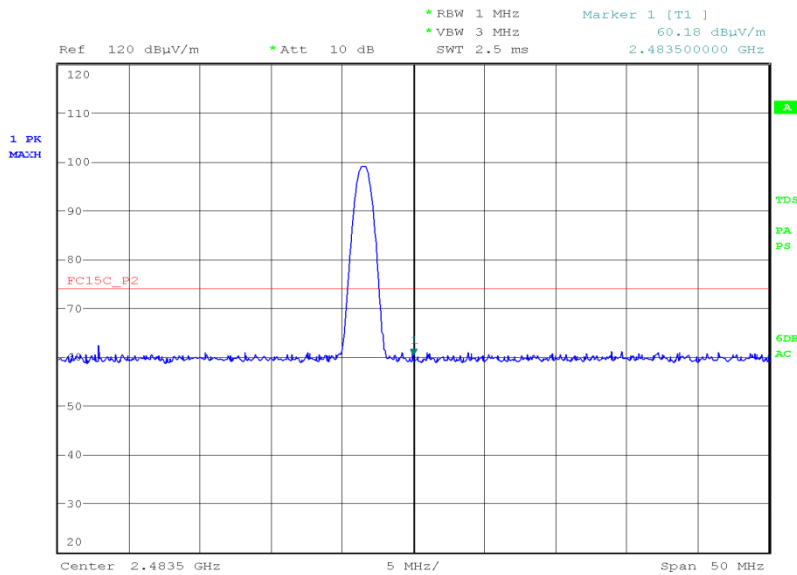


Date: 3.AUG.2015 18:39:36



Product Service

**Bluetooth Low Energy, 2480 MHz, Measured Frequency 2483.5 MHz, GFSK, Final Average, Restricted Band Edges Plot**

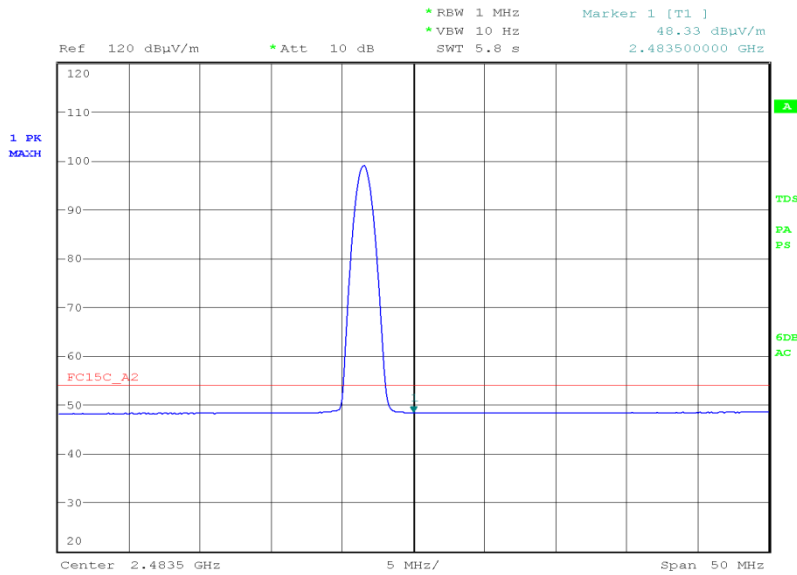

Date: 3.AUG.2015 18:38:50

**FCC 47 CFR Part 15, Limit Clause 15.205**

	Peak (dBμV/m)	Average (dBμV/m)
Restricted Bands of Operation	74	54

**Industry Canada RSS-GEN, Limit Clause 8.10**

	Peak (dBμV/m)	Average (dBμV/m)
Restricted Bands of Operation	74	54



Product Service

## 2.6 AUTHORISED BAND EDGES

### 2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)  
Industry Canada RSS-247, Clause 5.5

### 2.6.2 Equipment Under Test and Modification State

Little Anne QCPR Sensor S/N: Not Serialised (75931051\_TSR0009) - Modification State 0

### 2.6.3 Date of Test

3 August 2015

### 2.6.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.6.5 Test Procedure

The test was performed in accordance with KDB 558074 D01 V03r02, clause 11.0 and ANSI C63.10, clause 6.3, 6.5 and 6.6

### 2.6.6 Environmental Conditions

Ambient Temperature	19.7°C
Relative Humidity	62.0%



Product Service


**2.6.7 Test Results**

1.5 V DC Supply

Bluetooth Low Energy, GFSK, Authorised Band Edges Results

2402 MHz	2480 MHz
Measured Frequency 2400.00 MHz	Measured Frequency 2483.50 MHz
dBµV/m	dBµV/m
Final Peak	Final Peak
48.88	49.40


Bluetooth Low Energy, 2402 MHz, Measured Frequency 2400.00 MHz, GFSK, Final Peak, Authorised Band Edges Plot

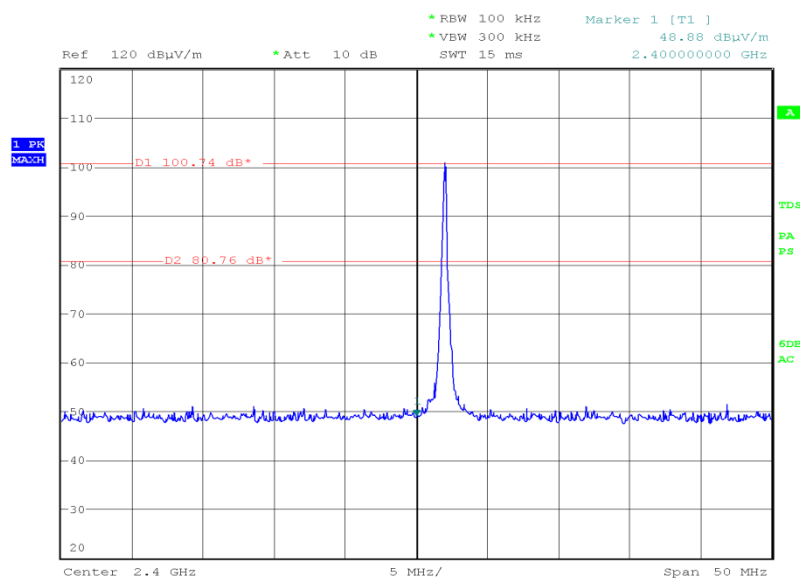

Date: 3.AUG.2015 19:15:21



Bluetooth Low Energy, 2480 MHz, Measured Frequency 2483.50 MHz, GFSK, Final Peak, Authorised Band Edges Plot

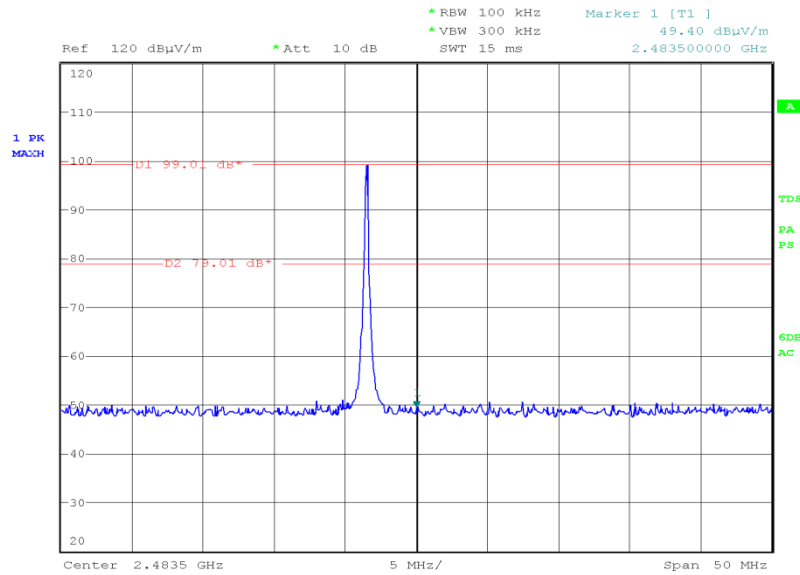

Date: 3.AUG.2015 18:42:16

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

Industry Canada RSS-247, Limit Clause 5.5

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.



Product Service

### **SECTION 3**

#### **TEST EQUIPMENT USED**



Product Service

3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.1 - Power Spectral Density</b>					
Multimeter	Fluke	79 Series III	611	12	1-Sep-2015
Hygromer	Rotronic	A1	2677	12	11-Jun-2016
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	20-Jan-2016
Climatic Chamber	TAS	Micro 225	2892	-	O/P Mon
Attenuator (10dB, 50W)	Aeroflex / Weinschel	47-10-34	3166	12	16-Sep-2015
Thermocouple Thermometer	Fluke	51	3174	12	4-Dec-2015
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	3-Sep-2015
P-Series Power Meter	Agilent Technologies	N1911A	3980	12	22-Sep-2015
50 MHz-18 GHz Wideband Power Sensor	Agilent Technologies	N1921A	3982	12	22-Sep-2015
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	24-Sep-2015
RadiPower USB RF power sensor	DARE!! Instruments	RPR3006W	4437	0	24-Aug-2015
1 metre SMA Cable	IW Microwave	3PS-1806LC-394-3PS	4521	12	27-Jan-2016
<b>Section 2.2 - 6 dB Bandwidth</b>					
Multimeter	Fluke	79 Series III	611	12	1-Sep-2015
Hygromer	Rotronic	A1	2677	12	11-Jun-2016
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	20-Jan-2016
Attenuator (10dB, 50W)	Aeroflex / Weinschel	47-10-34	3166	12	16-Sep-2015
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	3-Sep-2015
P-Series Power Meter	Agilent Technologies	N1911A	3980	12	22-Sep-2015
50 MHz-18 GHz Wideband Power Sensor	Agilent Technologies	N1921A	3982	12	22-Sep-2015
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	24-Sep-2015
1 metre SMA Cable	IW Microwave	3PS-1806LC-394-3PS	4521	12	27-Jan-2016
<b>Section 2.3 - Maximum Conducted Output Power</b>					
Hygromer	Rotronic	A1	2677	12	11-Jun-2016
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	20-Jan-2016
Attenuator (10dB, 50W)	Aeroflex / Weinschel	47-10-34	3166	12	16-Sep-2015
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	3-Sep-2015
P-Series Power Meter	Agilent Technologies	N1911A	3980	12	22-Sep-2015
50 MHz-18 GHz Wideband Power Sensor	Agilent Technologies	N1921A	3982	12	22-Sep-2015
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	24-Sep-2015



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.4 - Spurious Radiated Emissions</b>					
Antenna (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	230	24	26-Nov-2015
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	29-Apr-2016
Antenna (Bilog)	Schaffner	CBL6143	287	24	3-Feb-2016
Pre-Amplifier	Phase One	PSO4-0087	1534	12	23-Dec-2015
Screened Room (5)	Rainford	Rainford	1545	0	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Hygromer	Rotronic	A1	2677	12	11-Jun-2016
Comb Generator	Schaffner	RSG1000	3034	-	TU
Amplifier (8 - 18GHz)	Phase One	PS06-0061	3176	12	11-Aug-2015
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	27-Oct-2015
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
1 Metre K Type Cable	Rhophase	KPS-1501A-1000-KPS	4105	12	7-Nov-2015
1GHz to 8GHz Low Noise Amplifier	Wright Technologies	APS04-0085	4365	12	1-Oct-2015
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	15-Apr-2016
Suspended Substrate Highpass Filter	Advance Power Components	11SH10-3000/X18000-O/O	4411	12	24-Mar-2016
2m K-Type Cable (Rx)	Scott Cables	KPS-1501-2000-KPS	4527	-	TU
<b>Section 2.5 - Restricted Band Edges</b>					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	29-Apr-2016
Screened Room (5)	Rainford	Rainford	1545	0	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	27-Oct-2015
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	15-Apr-2016
2m K-Type Cable (Rx)	Scott Cables	KPS-1501-2000-KPS	4527	-	TU
<b>Section 2.6 - Authorised Band Edges</b>					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	29-Apr-2016
Screened Room (5)	Rainford	Rainford	1545	0	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	27-Oct-2015
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	15-Apr-2016
2m K-Type Cable (Rx)	Scott Cables	KPS-1501-2000-KPS	4527	-	TU

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment





### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
6 dB Bandwidth	$\pm 212.114$ kHz
Maximum Conducted Output Power	$\pm 0.70$ dB
Power Spectral Density	$\pm 3.0$ dB
Authorised Band Edges	Conducted: $\pm 3.08$ dB Radiated: 30 MHz to 1 GHz: $\pm 5.1$ dB Radiated: 1 GHz to 40 GHz: $\pm 6.3$ dB
Restricted Band Edges	30 MHz to 1 GHz: $\pm 5.1$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
Spurious Radiated Emissions	30 MHz to 1 GHz: $\pm 5.1$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB



Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA  
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of  
TÜV SÜD Product Service

© 2015 TÜV SÜD Product Service