

Test Report



Emission tests to FCC requirements of Laerdal Resusci Anne Simulator

Performed for Laerdal Medical AS

DANAK-197698

Project no.: E501991-1

Page 1 of 14

5 annexes

22 November 2004

DELTA

Danish Electronics,
Light & Acoustics

Venlighedsvej 4
2970 Hørsholm
Denmark

Tel. (+45) 72 19 40 00
Fax (+45) 72 19 40 01
www.delta.dk



Title Emission tests to FCC requirements of
Laerdal Resusci Anne Simulator

Test object Laerdal Resusci Anne Simulator

FCC ID QHQ-150-00001

Report no. DANAK-197698

Project no. E501991-1

Test period 18 August to 22 September 2004

Client Laerdal Medical AS
Tanke Svilandsgt. 30, P.O. Box 377
4001 Stavanger
Norway

Telephone: +47 5151 1700
Fax: +47 5151 1788

Contact person Mr. Håkon Hodne

Manufacturer Laerdal Medical AS

Specifications 47 CFR Part 15, Subpart C - Intentional Radiators

Results The equipment under test was in compliance with the
requirements.

Test personnel Henrik Nielsen

Date 22 November 2004

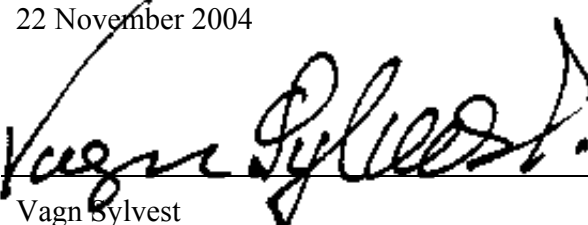
Responsible 
Vagn Sylvest
Project Manager - EMC
DELTA

Table of contents		Page
1.	Summaries	4
1.1	Technical report summary	4
1.2	Summary of tests	5
2.	Test objects	6
2.1	Test object - Resusci Anne Simulator (Tx & Rx)	6
2.2	Test object - Resusci Anne Simulator - Control board only (Rx)	6
2.3	Test object - Power adapter for Resusci Anne Simulator (for Unit-1)	7
2.4	Test object - Power adapter for Resusci Anne Simulator (for Unit-2)	7
3.	General test conditions	8
3.1	Test set-up	8
4.	Test and results	10
4.1	Conducted emission, AC mains (FCC Part 15, Subpart C)	10
4.2	Radiated electromagnetic field (FCC Part 15, Subpart C)	11
4.3	Occupied bandwidth	13
4.4	Peak output field strength	14

Annex 1 List of instruments (1 page)

Annex 2 Photos (2 pages)

Annex 3 Test record sheets regarding conducted emission (2 pages)

Annex 4 Test record sheets regarding radiated emission (6 pages)

Annex 5 Occupied bandwidth / Peak output power (2 pages)

1. Summaries

1.1 Technical report summary

The tests reported in this document have been performed to demonstrate compliance with the requirements of FCC Part 15, Section 15.249 "Rules for transmitters in band 902 - 928 MHz".

Furthermore, during the tests it was verified that the receiver was in compliance with the requirements of FCC Part 15.

This report contains measurement data from tests performed at DELTA, Hørsholm, Denmark, an FCC listed and DANAK accredited test laboratory.

1.1.1 Applicable FCC rules for test

47 CFR Part 15, Subpart C - Intentional Radiators

- §15.207 Conducted limits
- §15.209 Radiated emission limits, general requirements
- §15.215 Additional provisions to the general radiated emission limitations
- §15.249 Operation within the bands 902 - 928 MHz, 2400 - 2583.5 MHz.

The methods and procedures have been applied as specified in:

- §15.31 Measurements standards.

This point to the following procedure used during the measurements in this report:

ANSI C63.4:2003 Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Furthermore, the requirements of the following have been applied:

- § 15.33 Frequency range of radiated measurements
- § 15.35 Measurement detector functions and bandwidths.

1.2 Summary of tests

The results of the emission tests can be summarised as follows:

Tests of Intentional Radiator	Key references to requirement	FCC Part 15 Subpart C
Conducted emission, AC mains	§ 15.207	Passed
Radiated electromagnetic field emission	§15.209	Passed
Radiated emission limits, additional provisions	§15.215 and §15.249	Passed
Emission in restricted bands	§15.205	Passed

Abbreviations

Passed	:	The requirements are met.
Failed	:	The requirements are not met.
Not done	:	No test was performed.
N/A	:	Not applicable.
Not relevant	:	The test was not relevant for the test object.

The test results relate only to the objects tested.

2. Test objects

The Resusci Anne Simulator is used for basic and intermediate life support training for healthcare providers and is intended for use in professional training facilities.

This manikin can be programmed to perform a variety of capabilities using either a PC via an USB interface or a Laerdal Operating Device using RF link on 916 MHz carrier.

On the main board of the manikin is mounted a radio transceiver for communication with the operating device.

The test object can on the air interface receive and transmit data on one of five customer selected frequencies between 915.606 MHz and 916.484 MHz. The carrier is FSK modulated with 64 kHz swing at a bit rate of 9600 bps.

During test two modules were used, one programmed to Rx-only (Unit-2) and the other to constant Tx.

2.1 Test object - Resusci Anne Simulator (Tx & Rx)

Category	Short Range Device
Manufacturer	Laerdal Medical AS
Model / type	RA BLS Simulator
Part no.	150-00001
Serial no.	Unit-1
FCC ID	QHQ-150-00001
Supply voltage	9 VDC via 230 VAC adapter
Operational mode	TX-only

2.2 Test object - Resusci Anne Simulator - Control board only (Rx)

Category	Short Range Device
Manufacturer	Laerdal Medical AS
Model / type	RA BLS Simulator
Part no.	FST1959
Serial no.	Unit-2
FCC ID	QHQ-150-00001
Supply voltage	9 VDC via 230 VAC adapter
Operational mode	Rx-only

Note This unit consist of a bare PCB with the RF circuit and digital control electronics. Main purpose is to verify that LO leakage is within specifications.

2.3 Test object - Power adapter for Resusci Anne Simulator (for Unit-1)


Category	IT
Manufacturer	Friwo
Model / type	FW75550/09
Part no.	KID3129
Serial no.	Test Unit 101
Supply voltage	100-240 VAC 9VDC 1.5A
Operational mode	Normal operation

2.4 Test object - Power adapter for Resusci Anne Simulator (for Unit-2)


Category	IT
Manufacturer	Friwo
Model / type	FW75550/09
Part no.	KID3129
Serial no.	Test Unit 102
Supply voltage	100-240 VAC 9VDC 1.5A
Operational mode	Normal operation

3. General test conditions

3.1 Test setup

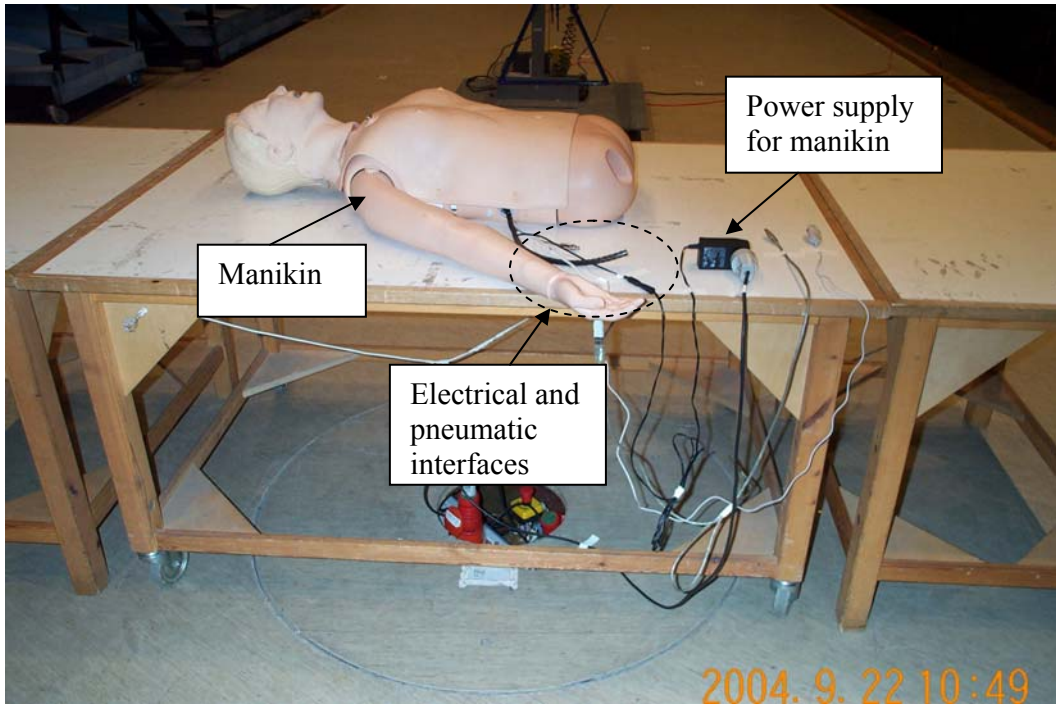

Resusci Anne Simulator. External view.

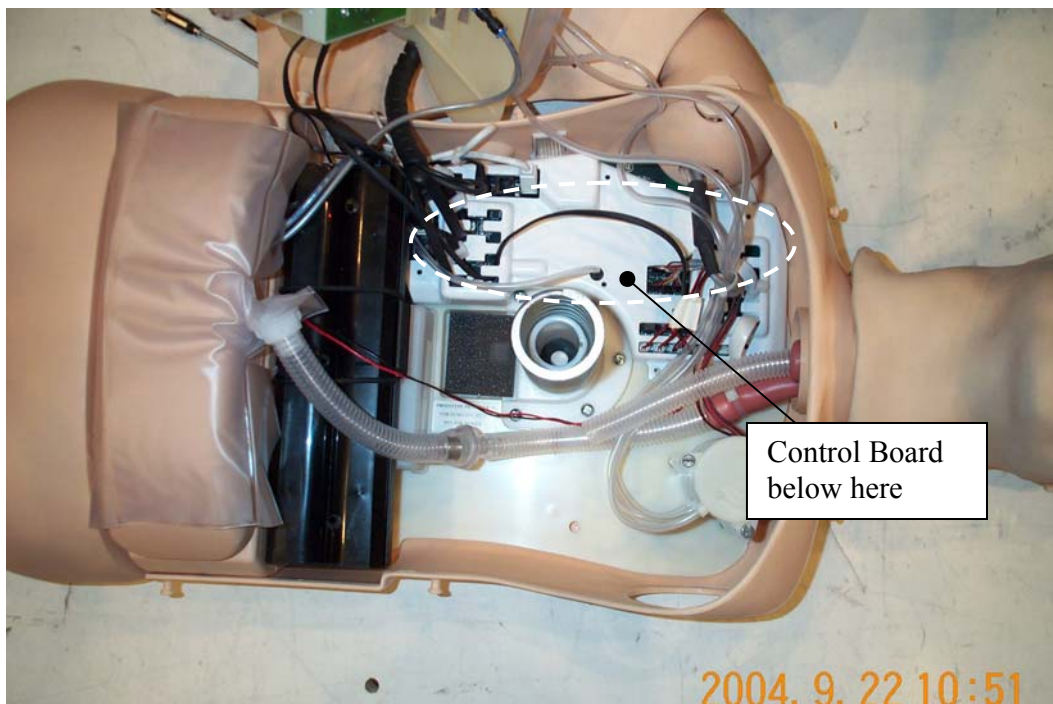

Resusci Anne Simulator. Breast plate removed.

The antenna of the EUT module is an internal PCB antenna on the Control board.

The module was also tested in receive-only mode to verify compliance with CFR47 Part 15. The test record sheets are contained in *Annex 4*, sheets 11 and 20, at which time the LO leakage has been adjusted. Plots of measurements above 1 GHz is found on sheets 21 and 23.

The EUT can be configured and monitored by a Laerdal Operating Device, FCC ID QHQ-FST1909. If radio communication is unreliable it is possible to interconnect the Operating Device with the Control Unit using a cable.

The EUT is configured to transmit un-modulated carrier. The EUT can be powered by batteries or by AC/DC converter supplied from mains power. During tests the units were supplied from 115 VAC.

A Control Board in receive-only was used to verify receiver spurious requirements.

4. Test and results

4.1 Conducted emission, AC mains (FCC Part 15, Subpart C)

	Requirements	
Specification	FCC Rules and Regulations Part 15, Subpart C	
Test set-up	ANSI C63.4:2003	
Frequency range	0.15-30 MHz	
Limit using quasi-peak detector	0.15-0.50 MHz *) 0.50-5.0 MHz 5.0-30 MHz	66-56 dB μ V 56 dB μ V 60 dB μ V
Limit using average detector	0.15-0.50 MHz *) 0.50-5.0 MHz 5.0-30 MHz	56-46 dB μ V 46 dB μ V 50 dB μ V
*) decreasing linear with the logarithm of frequency		
Test set-up	<i>Annex 2</i>	
Test record sheets	<i>Annex 3</i>	

Results

The module is in compliance with the requirements.

Comments

None.

4.2 Radiated electromagnetic field (FCC Part 15, Subpart C)

	Requirements	
Specification	FCC Rules and Regulations Part 15, Subpart C	
Test set-up	ANSI C63.4:2003	
Measuring distance	3 m	
Frequency range	30-10.000 MHz	
Limits: As specified in 15.209(a)	30-88 MHz: 88-216 MHz: 216-960 MHz: Above 960 MHz:	40 dB μ V/m 43.5 dB μ V/m 46 dB μ V/m 54 dB μ V/m
Measurement uncertainty (2 σ) <1 GHz	2.6 dB	
Measurement uncertainty (2 σ) >1 GHz	4.9 dB	
Below 1 GHz the limits apply to measurements performed using a quasi-peak detector. Above 1 GHz the limits apply to measurements of spurious emission performed with an average detector. Furthermore, the peak level must be no higher than 20 dB above the average limit.		
Test set-up	<i>Annex 2</i>	
Test record sheets	<i>Annex 4</i>	

Two modules were measured, sometimes simultaneously, one in Rx mode and one in Tx mode.

If for a frequency band only plots from one polarisation have been included, this will be the worst case plot.

On plots from the R&S receiver, found as A4-portrait plots, statements like "Ant 1 m vertical" and "4 m horizontal" are the antenna positions used during exploratory measurements.

The module was also tested in receive-only mode to verify compliance with CFR47 Part 15. The test record sheets are included in this report. The test record sheets with results from the receiver are contained in *Annex 4*, sheets 11 and 20, at which time the LO leakage has been adjusted. Plots of measurements of the receiver above 1 GHz is found on sheets 21 and 23.

Measurements 1 - 2.75 GHz were performed using an R&S test receiver. The tabulated values on the plot are the measured average values using a resolution bandwidth of 1 MHz.

Plots from 2.75 - 10 GHz are spectrum analyser plots in peak-hold mode. Peak-to-Average Factor is established to be 0 dB, because un-modulated carrier is transmitted.

Therefore, AVG emission values are 0 dB lower than the values indicated on the spectrum analyser plots.

Results

The emission was within the specified limits.

Spurious emission 30 - 1000 MHz in tabular form:

(For spectral plots see *Annex 4*)

Spurious freq. MHz	Polarisation	QPeak dB μ V/m	dB below QP limit	Note
143.200	H	27,3	16.2	
159.000	H	32,7	10,8	
264.000 (R)	H	40.4	5.6	
436.300	V	32.5	13.5	
576.000	H	31,8	14.2	
592.800	V	31.7	14.3	
915.49	V	38.8	7.2	LO Leakage

(R) means frequency in restricted band as defined in §15.205.

Spurious emission 1000 MHz to 10 GHz in tabular form:

(For spectral plots see *Annex 4*)

Spurious freq. MHz	Polarisation	Peak dB μ V/m	Average dB μ V/m	dB below peak limit	dB below average limit	Note
1832.17	H	53.7	53.7	20.2	0.2	2 nd harm.
2748.25 (R)	H	47.2	47.2	26.7	6.7	3 rd harm.
3656.3 (R)	V/H	52.3	52.3	21.7	1.7	4 th harm.

(R) Indicates frequency in restricted band as defined in §15.205.

Average limit is 500 μ V/m or 54 dB μ V/m.

Peak limit is 20 dB above average limit or 74 dB μ V/m.

General comments

Measurements of spurious emission are performed with CW carrier.

Measurements 30 - 1000 MHz are performed using a test receiver with quasi-peak detector.

Measurements 1 GHz to 2.7 GHz are performed using a test receiver with average detector and 1 MHz bandwidth.

Measurements above 2.7 GHz are performed using a spectrum analyser in peak-hold mode. Average measurements are performed on spurious peak emission exceeding the average limit, when measured in peak-hold mode.

The average level is determined using one of the following procedures:

- a) Measuring the signal using RBW 1 MHz and VBW 10 Hz, and using linear level axis, will give an output showing average value.
- b) Measuring the peak value of the signal and reducing it by the peak-to-average factor ratio (in dB), which is calculated as $20 \cdot \log \langle \text{duty cycle} \rangle$ or established by measurement using a test receiver.

The duty cycle is determined as described in C63.4, I4 j).

4.3 Occupied bandwidth

The limits of the transmission band are reached when only spurious emission can be measured.

The lower band limit is 902 MHz and the upper band limit is 928 MHz.

In *Annex 5* the occupied bandwidth is obtained from a radio module, using 10 kHz resolution bandwidth. The measurement is relative, based on absolute carrier measurement in peak-mode, where the level of the carrier of the module used for this test is (91.6-46) 45.6 dB above spurious limit. Subtracting 45.6 dB from the maximum value of the relative plots, the following occupied bandwidths are obtained:

Occupied bandwidth: 680 kHz measured in 10 kHz bandwidth.

The carrier of the module can be set on frequencies between 915.606 MHz and 916.484 MHz. Taking this into consideration together with the bandwidth, the result is:

The EUT is in compliance with the requirement(s).

Note: In its test configuration the unit is not able to transmit continuous modulated carrier. Only when the unit is switched on an enquiry is transmitted. The plot in *Annex 5* is the sum of some captured transmissions. The spikes are generated when switching. However, the stated occupied bandwidth is worst case because it includes the spikes.

4.4 Peak output field strength

The peak output field strength of the unit is limited to 50 mV/m, or 94 dB μ V/m, following §15.249(a). Measurements show:

Peak output field strength: 84.2 dB μ V/m at the frequency 915.67 MHz.

See plot in *Annex 5*.

The EUT is in compliance with the requirement.

Annex 1

List of instruments

(1 page)

NO.	DESCRIPTION	MANUFACTURER	TYPE NO.	CAL. EXPIRES
29433	SPECTRUM ANALYZER	HEWLETT-PACKARD	8566 B	2004-12-16
29499	BROADBAND RF PREAMPLIFIER	EC/MTS TELEMETER	TVV 711	2004-11-25
29680	IMPULSE VOLTAGE LIMITER	ROHDE & SCHWARZ	ESH3/Z2	2004-12-30
29797	BILOG ANTENNA, 30-1000 MHz	CHASE ELECTRICS LTD	CBL 6111A	2005-11-20
29861	EMI-SOFTWARE Ver. 1.60	ROHDE & SCHWARZ	ES-K1, PART: 1026.6790.02	ONLY CAL. IF REQUIRED
29876	RIDGED GUIDE HORN AN- TENNA, 1-12.75 (18) GHz	EMCO	3115	2005-02-11
29916	AUTOMATIC TEST RECEIVER, 9 kHz-2.75 GHz	ROHDE & SCHWARZ	ESCS 30 1102.4500.30	2005-01-02
49037	BROADBAND MICROWAVE PREAMPLIFIER, 1-12.8 GHz	MITEQ / DELTA	AMF-5D-001128- 35-11P	2005-11-16
49097	MICROWAVE HP FILTER 2.75- 12.75 GHz, MAX. 2 W	MICRO-TRONICS	HPM13106	2005-11-09
49306	"CABLE#52", LOW-LOSS uWAVE CABLE, N-N, 8.0 m "EMI"	SUHNER	SUCOFLEX 104 PB	2005-10-07
49307	"CABLE#53", LOW-LOSS uWAVE CABLE, N-N, 7.0 m "EMI"	SUHNER	SUCOFLEX 104 PB	2005-10-07

Annex 2
Photos
(2 pages)

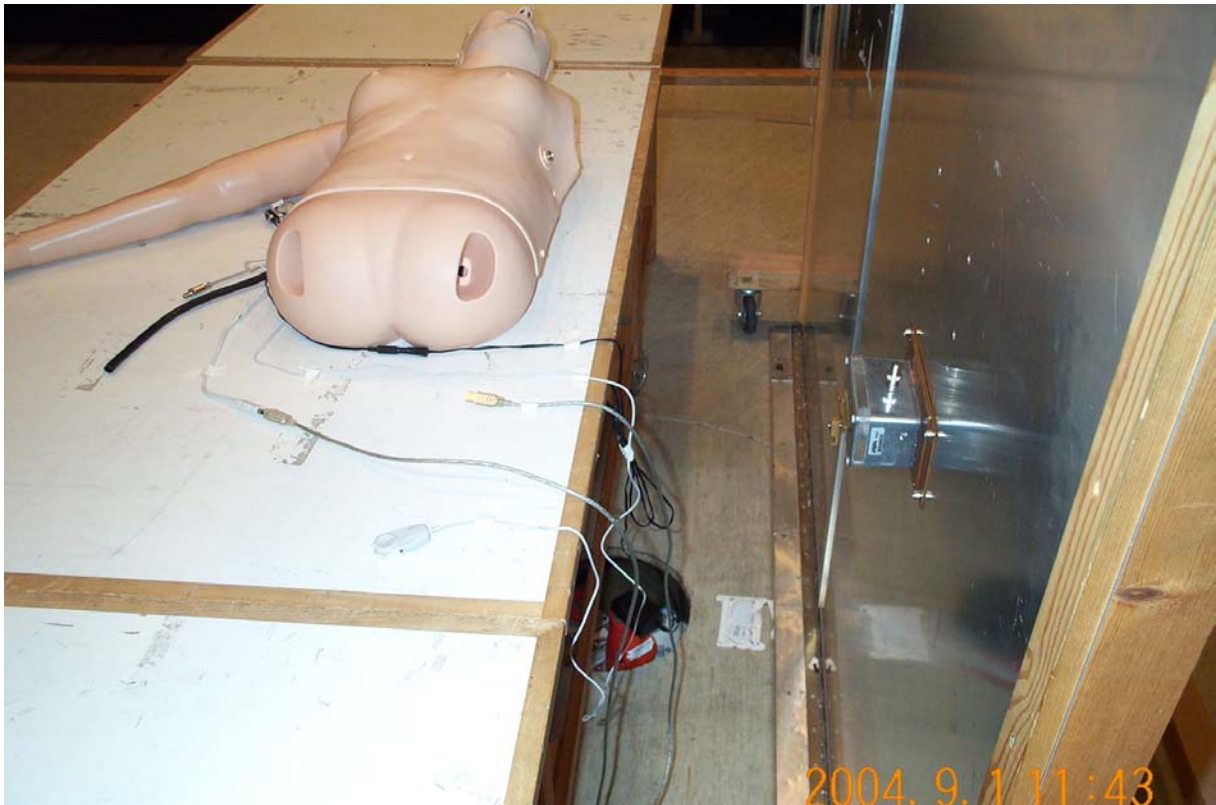


Photo A2.1 Test setup for conducted emission measurements.

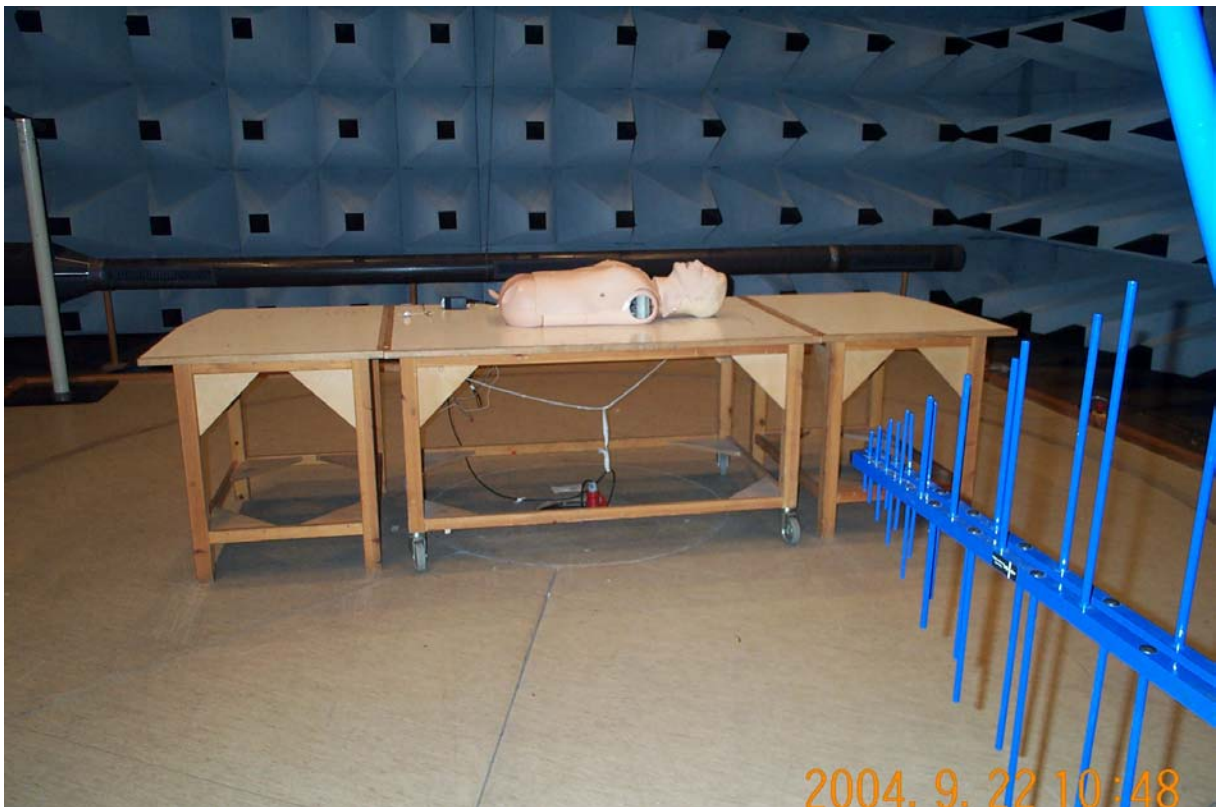


Photo A2.2 Test setup for radiated emission measurements 30-1000 MHz.

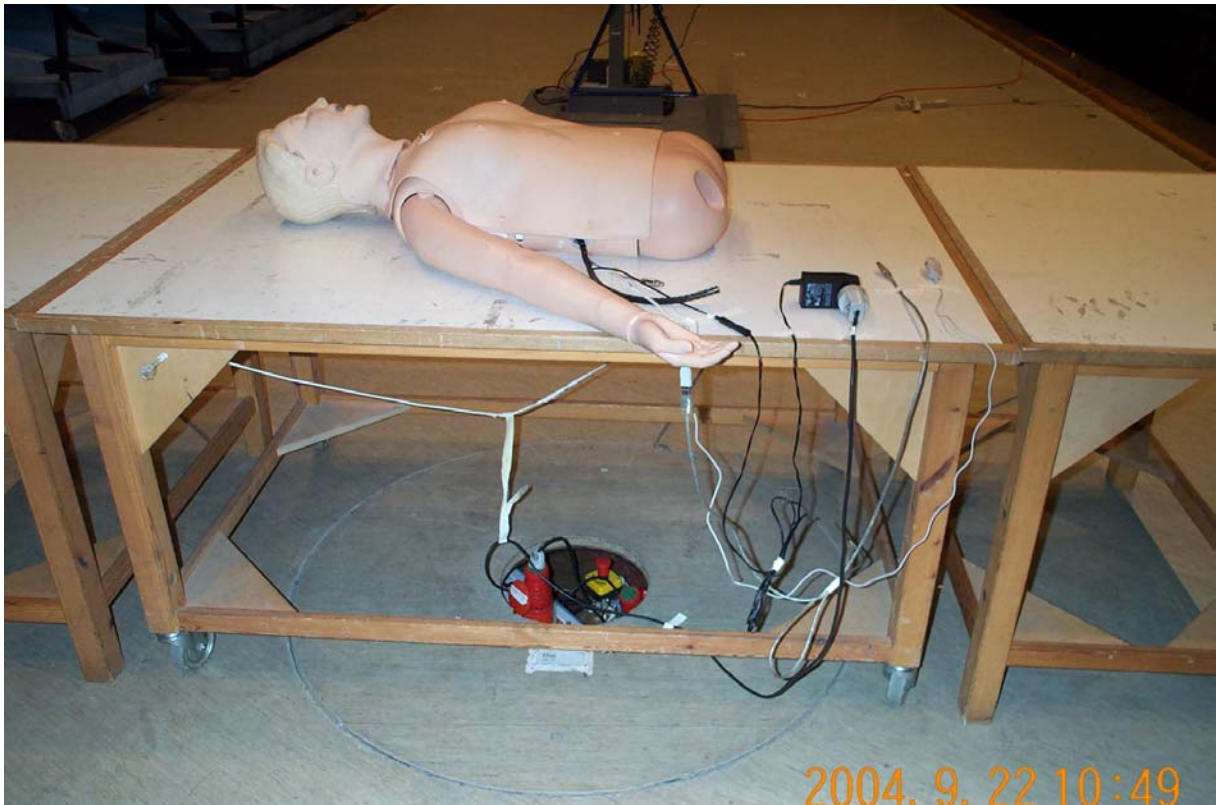


Photo A2.3 Test setup for radiated emission measurements 30-1000 MHz.

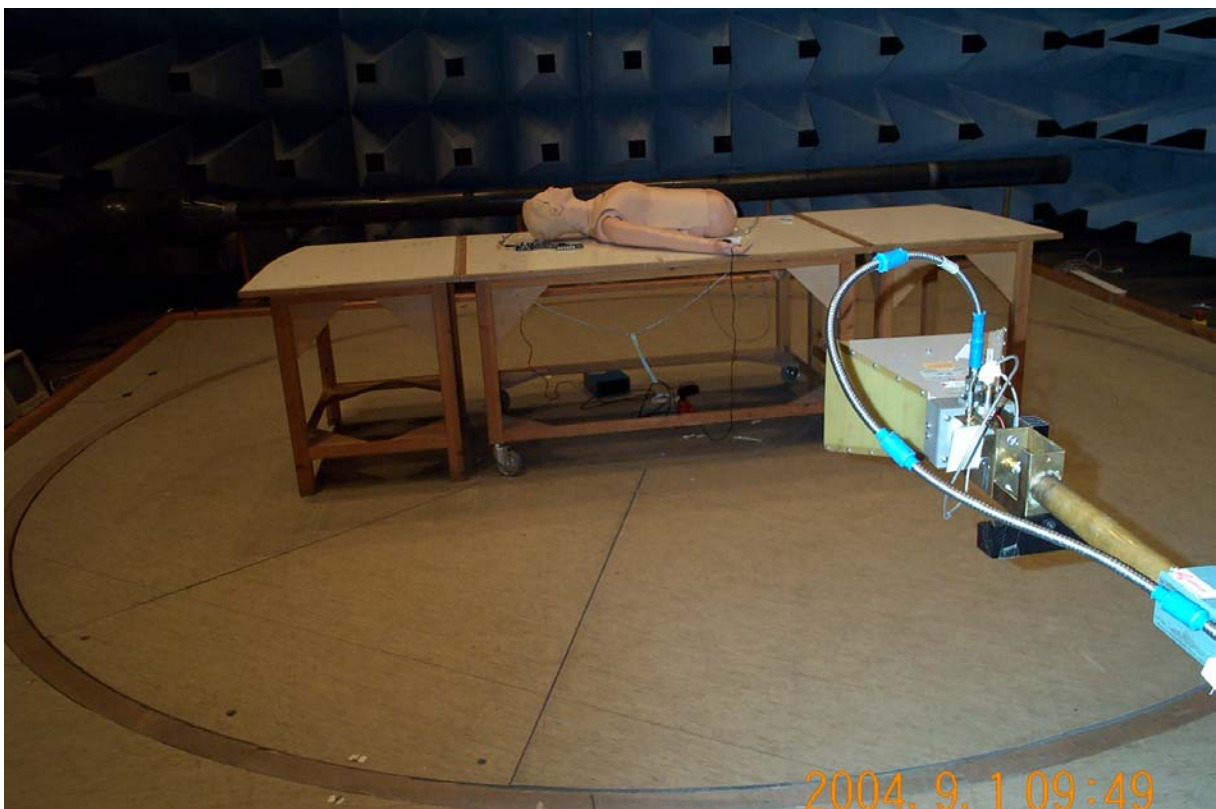



Photo A2.4 Test setup for radiated emission measurements 1-10 GHz.

Annex 3


Test record sheets regarding conducted emission

(2 pages)

EUT: RA BLS Simulator
Manufacturer: Laerdal Medical AS
Operating Condition: Line no.: Neutral. 120 VAC
Test Site: EMC-5
Operator: HEN - E501991
Test Specification: FCC Part 15 Subpart C
Comment: Sheet 24

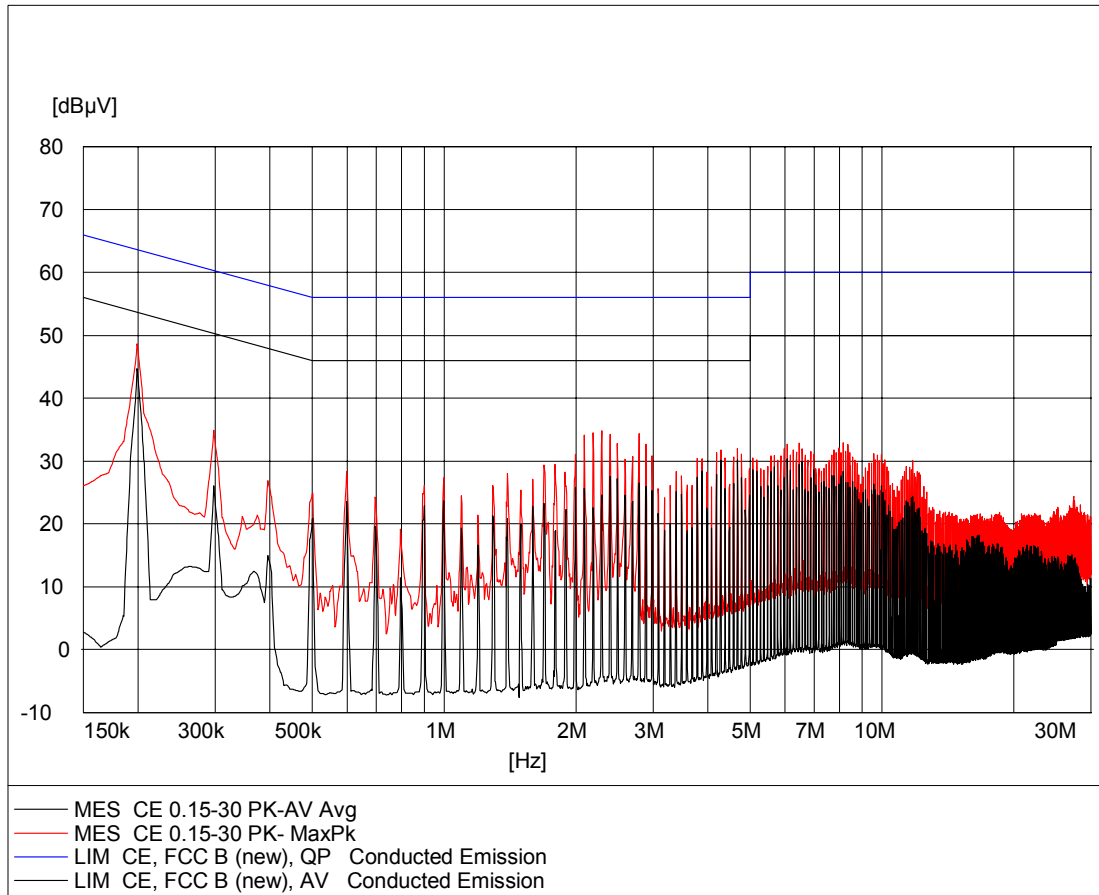

EUT: RA BLS Simulator
Manufacturer: Laerdal Medical AS
Operating Condition: Line no.: Line 1. 120 VAC
Test Site: EMC-5
Operator: HEN - E501991
Test Specification: FCC Part 15 Subpart C
Comment: Sheet 25

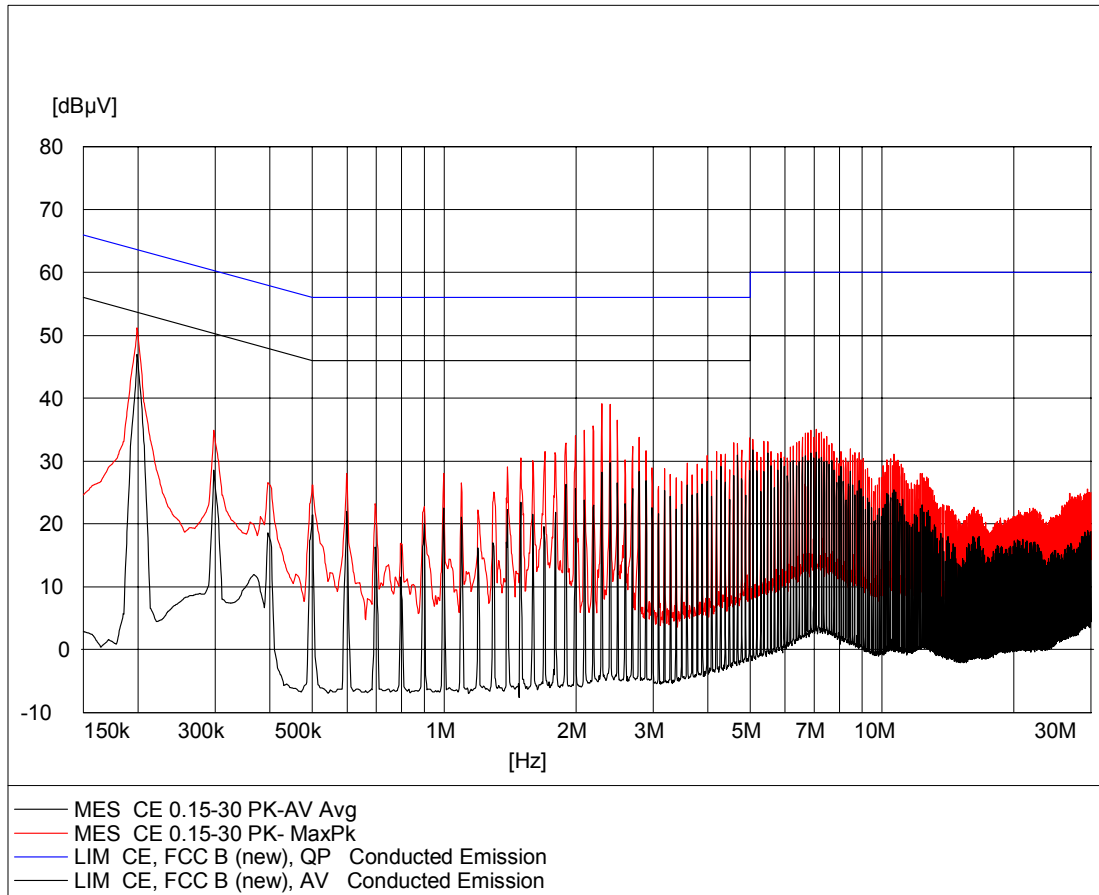


Annex 4

Test record sheets regarding radiated emission

(6 pages)

EUT: RA BLS Simulator Tx mode
 Manufacturer: Laerdal Medical AS
 Operating Condition: Ant. 1 m vertical. 115 VAC
 Test Site: EMC-5
 Operator: HEN - E501991
 Test Specification: FCC Class B
 Comment: Sheet 1

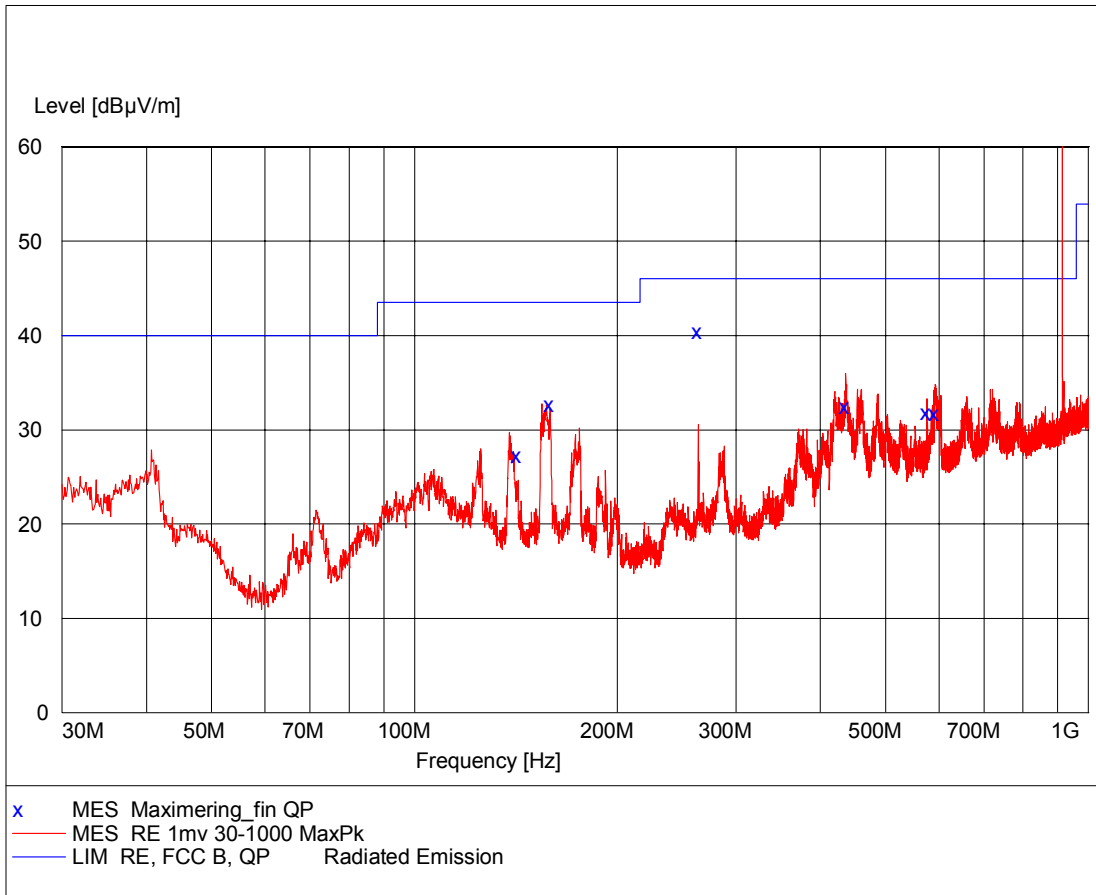


MEASUREMENT RESULT: "Maximering_fin QP"


2004-09-22 10:21

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
142.300000	27.30	14.0	43.5	16.2	208.0	358.00	HORIZONTAL
159.000000	32.70	13.1	43.5	10.8	200.0	8.00	HORIZONTAL
264.000000	40.40	15.7	46.0	5.6	101.0	266.00	HORIZONTAL
436.300000	32.50	20.4	46.0	13.5	112.0	168.00	VERTICAL
576.000000	31.80	23.5	46.0	14.2	155.0	331.00	HORIZONTAL
592.800000	31.70	23.5	46.0	14.3	111.0	261.00	VERTICAL

EUT: RA BLS Simulator Tx mode
Manufacturer: Laerdal Medical AS
Operating Condition: Ant. 3 m horizontal. 115 VAC
Test Site: EMC-5
Operator: HEN - E501991
Test Specification: FCC Class B
Comment: Sheet 2

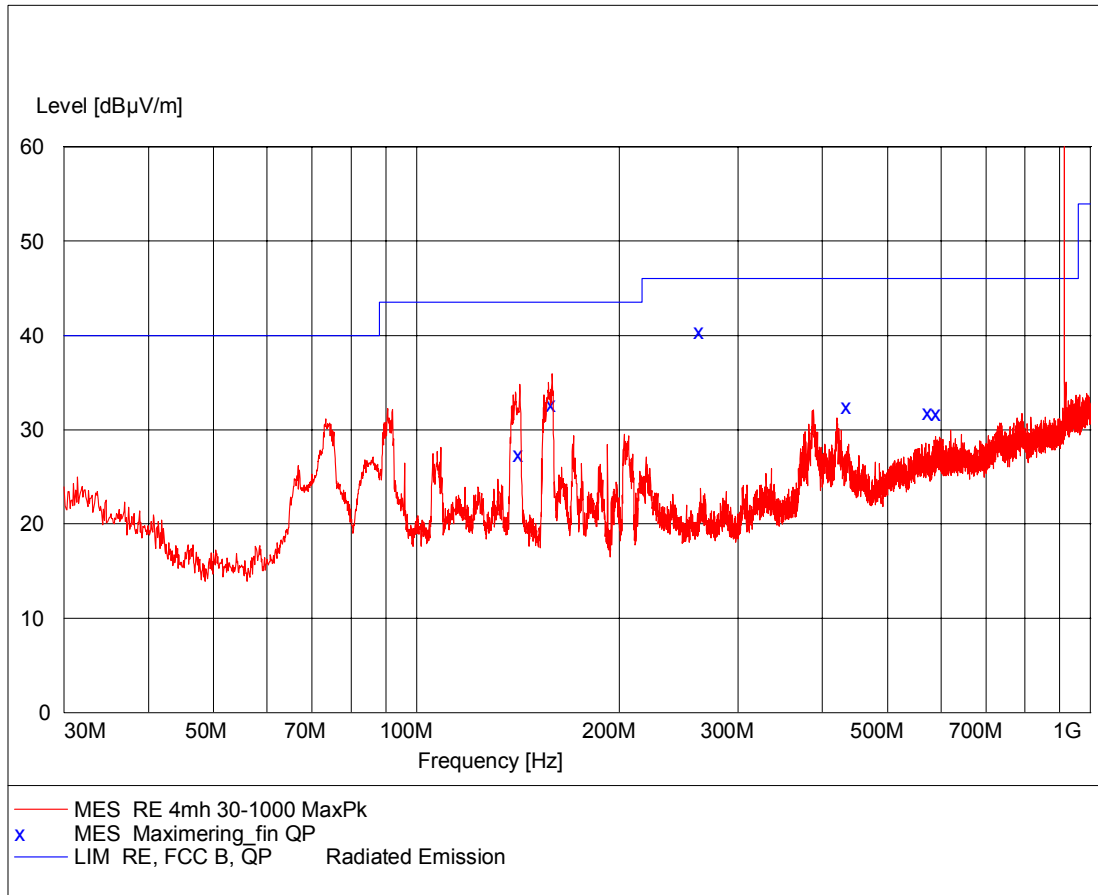

EUT: RA BLS Simulator Rx mode
 Manufacturer: Laerdal Medical AS
 Operating Condition: Ant. 1 m vertical. 120 VAC
 Test Site: EMC-5
 Operator: HEN - E501991
 Test Specification: FCC Part 15 Subpart C
 Comment: Sheet 11

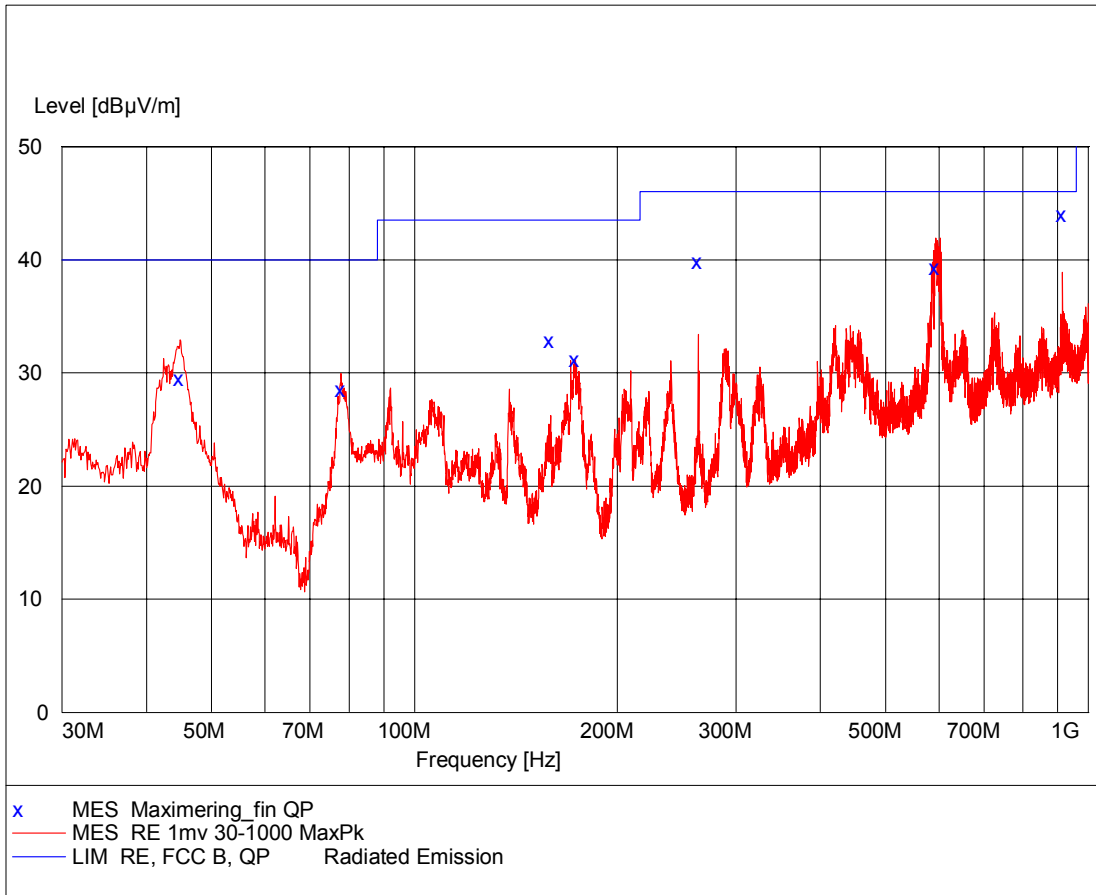


MEASUREMENT RESULT: "Maximering_fin QP"

2004-08-18 16:13

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
44.900000	29.50	12.9	40.0	10.5	101.0	344.00	VERTICAL
77.900000	28.50	10.2	40.0	11.5	400.0	358.00	HORIZONTAL
159.100000	32.90	13.1	43.5	10.6	190.0	27.00	HORIZONTAL
173.300000	31.20	12.4	43.5	12.3	128.0	314.00	HORIZONTAL
264.000000	39.90	15.7	46.0	6.1	196.0	349.00	VERTICAL
594.000000	39.30	23.5	46.0	6.7	101.0	1.00	VERTICAL
915.490000	44.00	28.2	46.0	2.0	101.0	96.00	HORIZONTAL

EUT: RA BLS Simulator Rx mode, LO Leakage
 Manufacturer: Laerdal Medical AS
 Operating Condition: Ant. 1 m vertical. 120 VAC
 Test Site: EMC-5
 Operator: HEN - E501991
 Test Specification: FCC Part 15 Subpart C
 Comment: Sheet 20

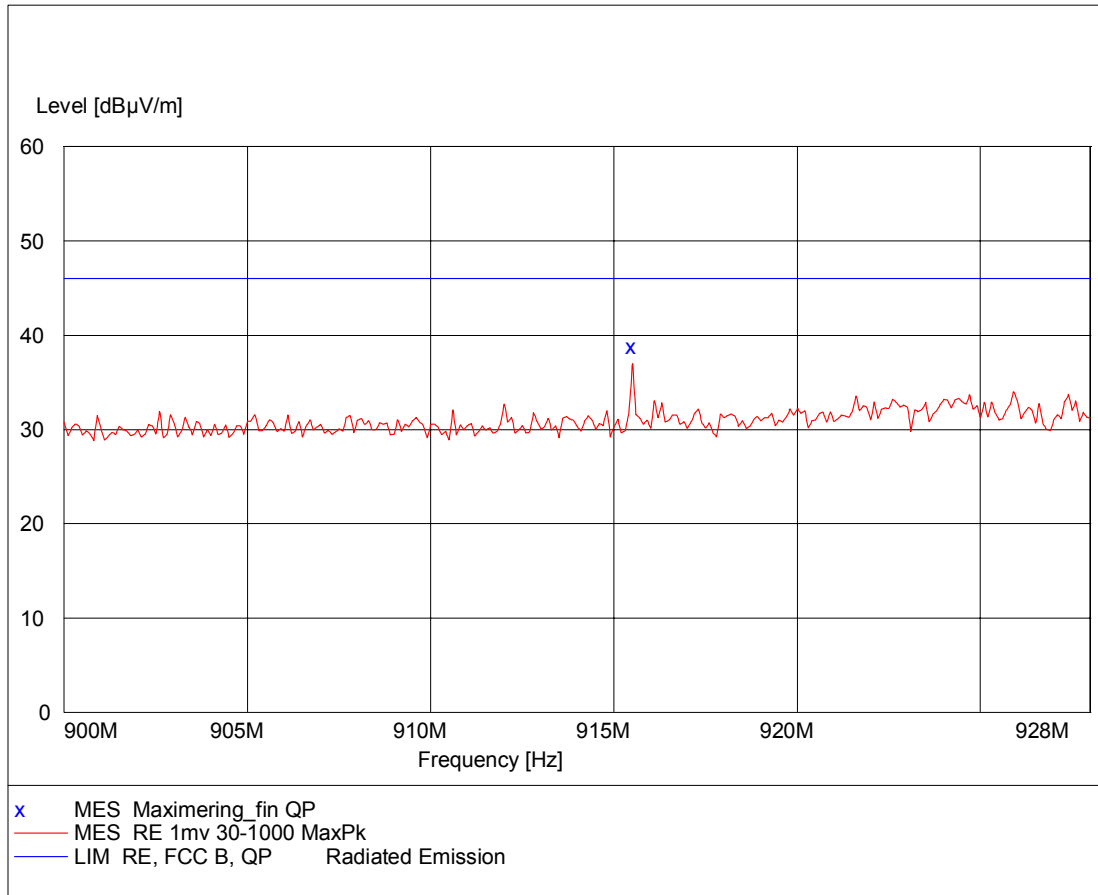


MEASUREMENT RESULT: "Maximering_fin QP"

2004-08-31 15:23

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
915.490000	38.80	28.2	46.0	7.2	147.0	33.00	VERTICAL

EUT: RA BLS Simulator Tx and Rx mode
 Manufacturer: Laerdal Medical AS
 Operating Condition: Ant. 1 m vertical. 120 VAC
 Test Site: EMC-5
 Operator: HEN - E501991
 Test Specification: FCC Part 15 Subpart C
 Comment: Sheet 21

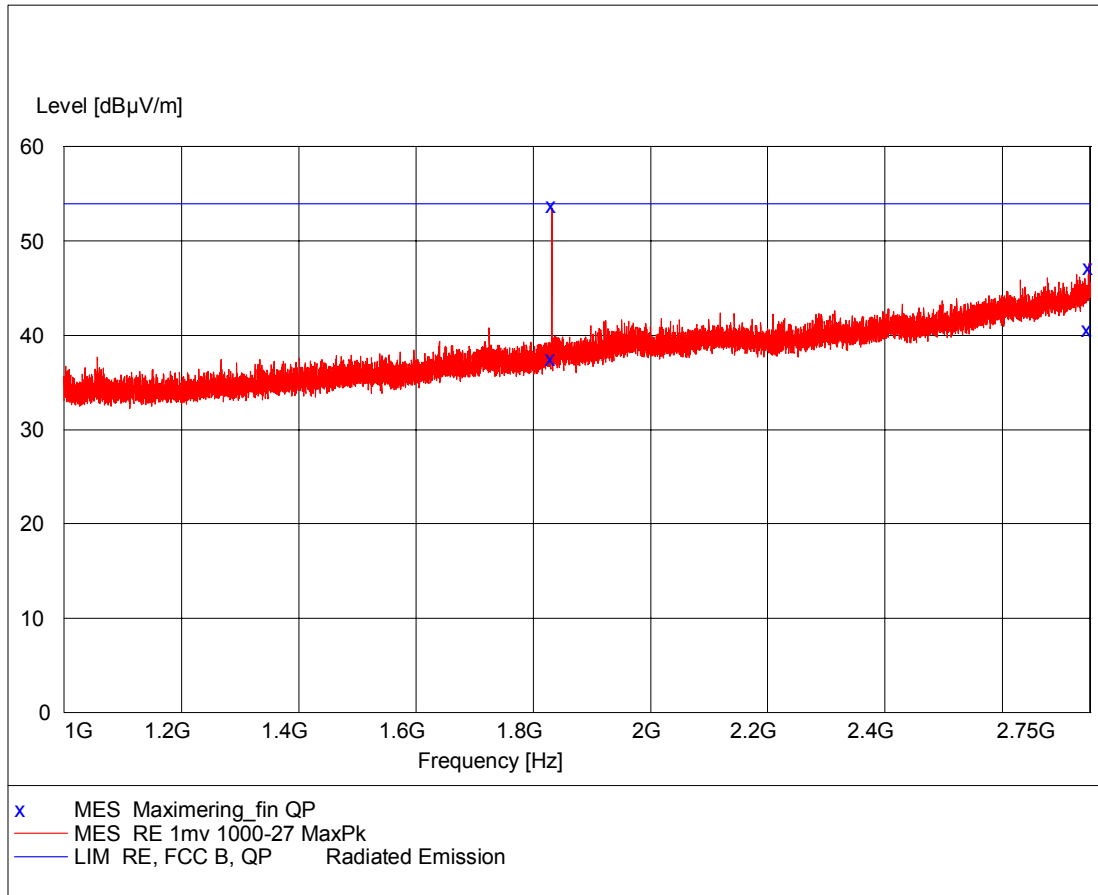


MEASUREMENT RESULT: "Maximering_fin QP"

2004-09-01 09:33

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1830.980000	37.50	34.0	53.9	16.4	112.0	20.00	VERTICAL
1832.170000	53.70	34.0	53.9	0.2	174.0	243.00	HORIZONTAL
2746.470000	40.60	37.6	53.9	13.3	254.0	321.00	HORIZONTAL
2748.250000	47.20	37.6	53.9	6.7	104.0	3.00	HORIZONTAL

DELTA Electronics Testing, EMC Section.

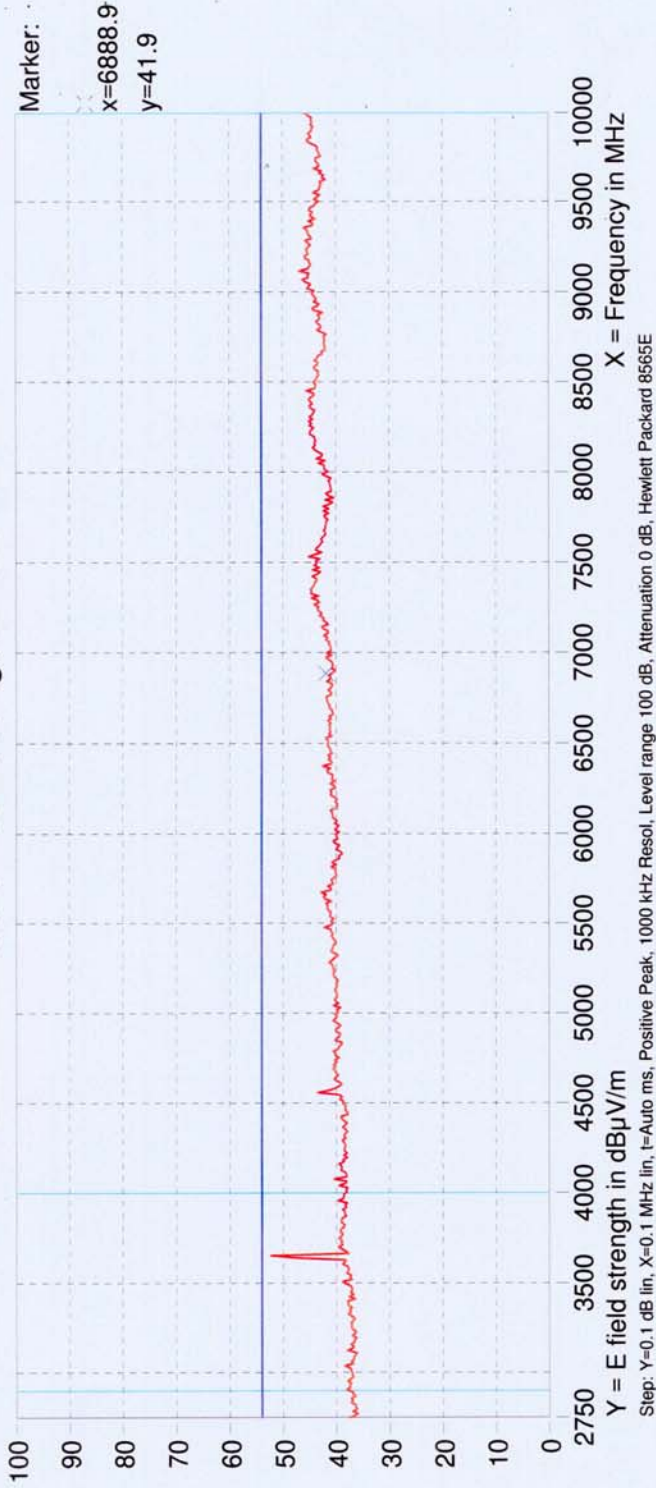

2004-09-01 10:42:14 File: FCC_X.TO1, EUT 1
2004-11-17 15:09:38 File: FCC_X.LM1, Limit 1, FCC15.109(part B) unintentional rad. and FCC 15.209(Part C) intentional rad. Both I

Laerdal
RA BLS Simulator

Ant. 1-3 meter horizontal ant vertical. T.T. 0-360 deg.

Project no: E501991 - HEN


Sheet 23

Annex 5

Occupied bandwidth / Peak output power

(2 pages)


EUT: RA BLS Simulator TX carrier
 Manufacturer: Laerdal Medical AS
 Operating Condition: Ant. 1 m vertical. 115 VAC
 Test Site: EMC-5
 Operator: HEN - E501991
 Test Specification: FCC Class B
 Comment: Sheet 3

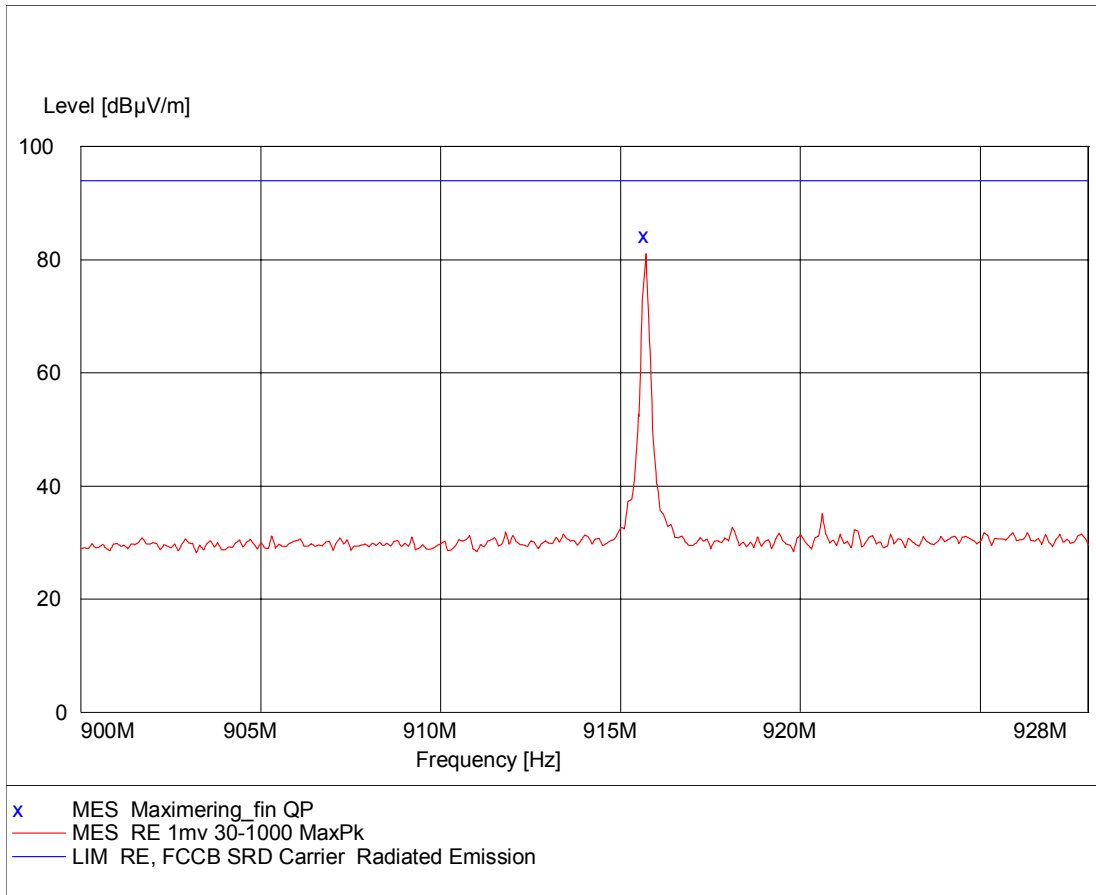

MEASUREMENT RESULT: "Maximering_fin QP"

2004-09-22 10:31

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
915.670000	84.20	28.2	94.0	9.8	171.0	278.00	VERTICAL

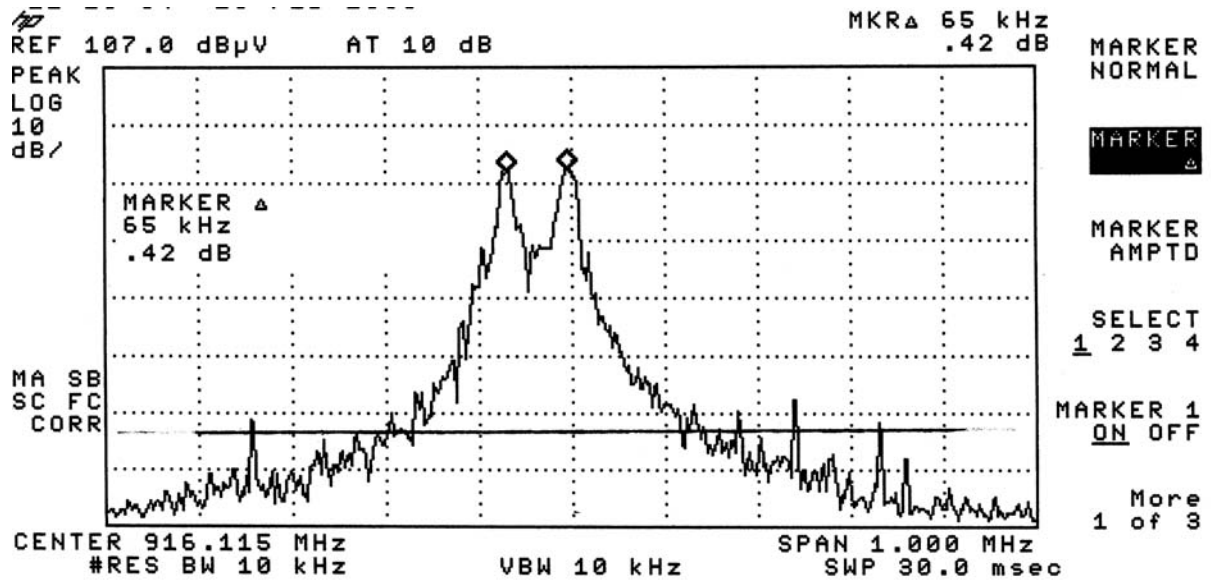

Occupied bandwidth. See section 4.3