

---

**Appendix B. Highest Measurement Data**

Test Laboratory: DEKRA

Date: 2023/10/14

**3\_WLAN2.4GHz\_802.11g\_CH9\_Top\_5mm\_ANT Main****DUT: SimPad PLUS 2; Type: 204-00150**

Communication System: UID 0, WLAN 2.4G; Frequency: 2452 MHz

Communication System PAR: 0dB

Medium parameters used:  $f = 2452 \text{ MHz}$ ;  $\sigma = 1.79 \text{ S/m}$ ;  $\epsilon_r = 39.95$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(7.58, 7.58, 7.58) @ 2452 MHz; Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Configuration/Flat/Area Scan (6x10x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
Maximum value of SAR (measured) = 1.42 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 28.79 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.96 W/kg

**SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.395 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 47.5%

Maximum value of SAR (measured) = 1.54 W/kg

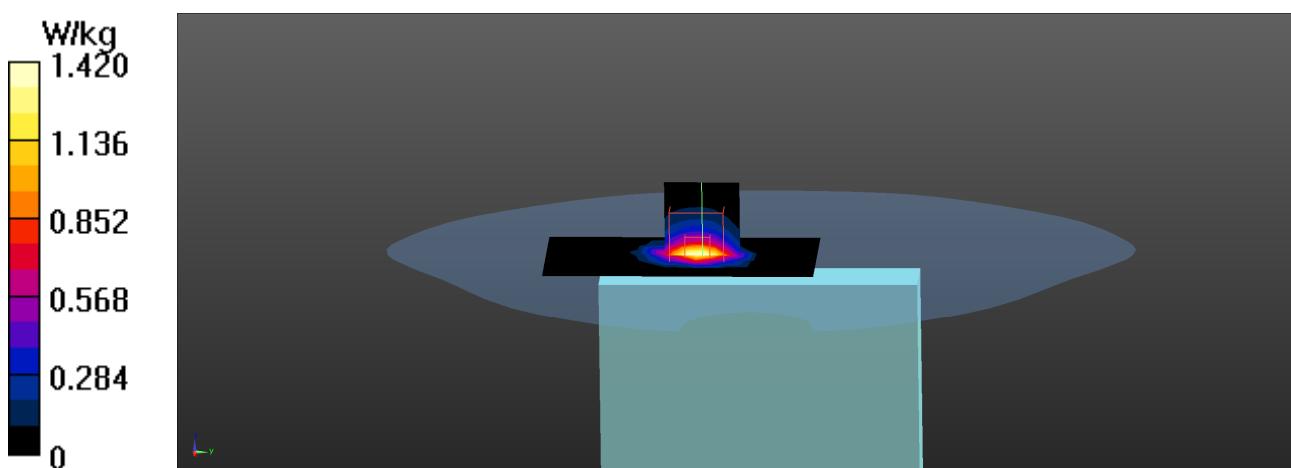

Test Laboratory: DEKRA

Date: 2023/10/14

**45\_Bluetooth\_BT-1M\_CH39\_Top\_5mm\_ANT Aux****DUT: SimPad PLUS 2; Type: 204-00150**

Communication System: UID 0, BT 1M&amp;3M&amp;BLE; Frequency: 2441 MHz

Communication System PAR: 0dB

Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.77 \text{ S/m}$ ;  $\epsilon_r = 39.99$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(7.58, 7.58, 7.58) @ 2441 MHz; Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Configuration/Flat/Area Scan (6x10x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
Maximum value of SAR (measured) = 0.00466 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 1.831 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.0120 W/kg

**SAR(1 g) = 0.00292 W/kg; SAR(10 g) = 0.00061 W/kg**

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (&gt; 15 mm)

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.00776 W/kg

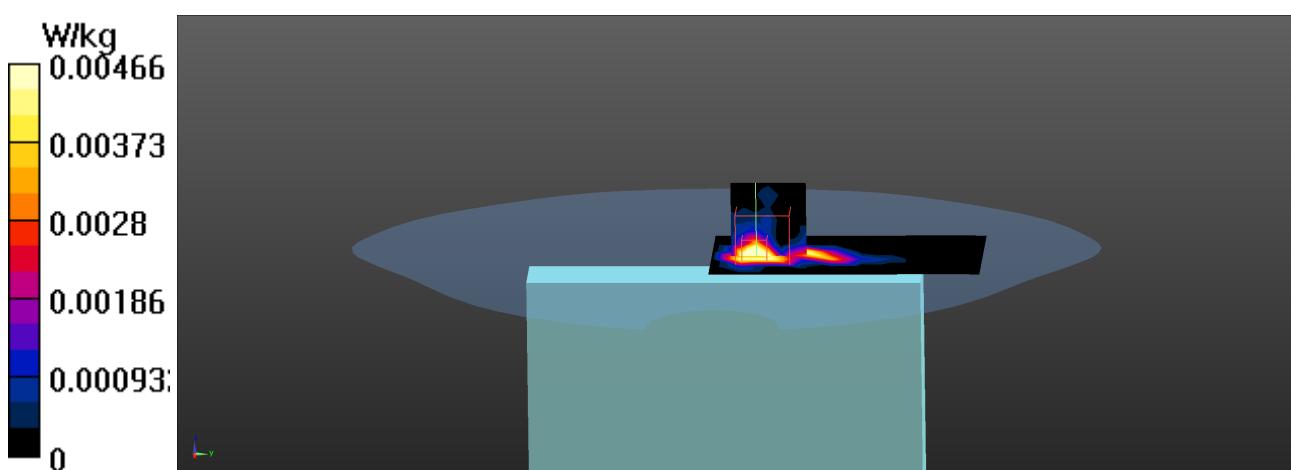

Test Laboratory: DEKRA

Date: 2023/10/18

**8\_WLAN5GHz\_802.11n40-HT0\_CH54\_Top\_5mm\_ANT Main****DUT: SimPad PLUS 2; Type: 204-00150**

Communication System: UID 0, WLAN 5G; Frequency: 5270 MHz

Communication System PAR: 0dB

Medium parameters used:  $f = 5270 \text{ MHz}$ ;  $\sigma = 4.64 \text{ S/m}$ ;  $\epsilon_r = 35.87$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.8, 4.8, 4.8) @ 5270 MHz; Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Configuration/Flat/Area Scan (8x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
Maximum value of SAR (measured) = 1.74 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ 

Reference Value = 7.020 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 3.15 W/kg

**SAR(1 g) = 0.831 W/kg; SAR(10 g) = 0.237 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 66.2%

Maximum value of SAR (measured) = 1.98 W/kg

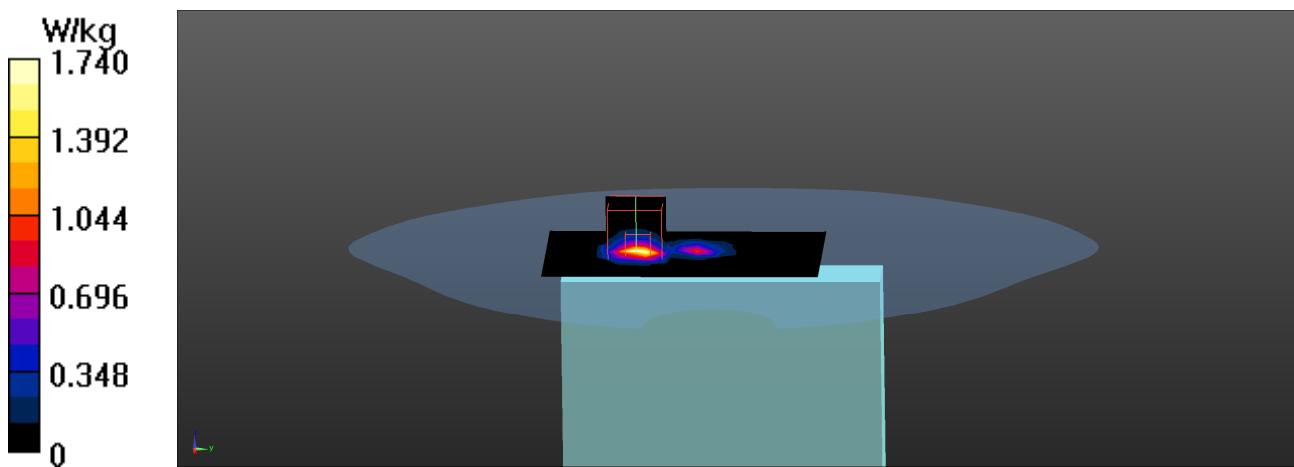

Test Laboratory: DEKRA

Date: 2023/10/18

**11\_WLAN5GHz\_802.11ac80-VHT0\_CH138\_Top\_5mm\_ANT Main****DUT: SimPad PLUS 2; Type: 204-00150**

Communication System: UID 0, WLAN 5G; Frequency: 5690 MHz

Communication System PAR: 0dB

Medium parameters used:  $f = 5690 \text{ MHz}$ ;  $\sigma = 5.2 \text{ S/m}$ ;  $\epsilon_r = 34.72$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.42, 4.42, 4.42) @ 5690 MHz; Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Configuration/Flat/Area Scan (8x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
Maximum value of SAR (measured) = 1.85 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ 

Reference Value = 5.452 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 3.41 W/kg

**SAR(1 g) = 0.826 W/kg; SAR(10 g) = 0.245 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 2.02 W/kg

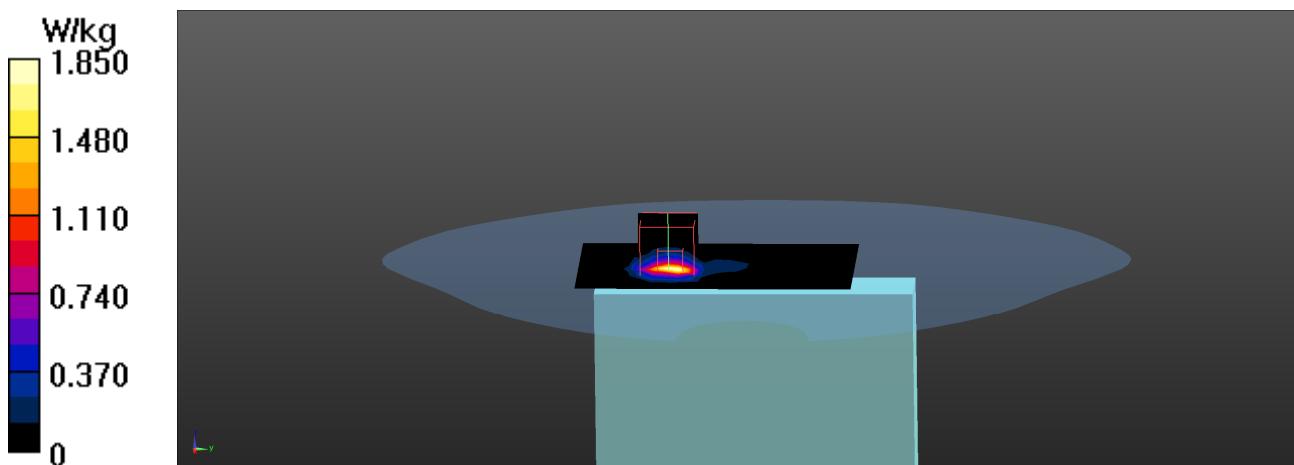

Test Laboratory: DEKRA

Date: 2023/10/18

**6\_WLAN5GHz\_802.11ac80-VHT0\_CH155\_Top\_5mm\_ANT Main****DUT: SimPad PLUS 2; Type: 204-00150**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz

Communication System PAR: 0dB

Medium parameters used:  $f = 5775 \text{ MHz}$ ;  $\sigma = 5.31 \text{ S/m}$ ;  $\epsilon_r = 34.48$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.4, 4.4, 4.4) @ 5775 MHz; Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Configuration/Flat/Area Scan (8x11x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
Maximum value of SAR (measured) = 1.64 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ 

Reference Value = 3.146 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 3.17 W/kg

**SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.213 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 62.7%

Maximum value of SAR (measured) = 1.88 W/kg

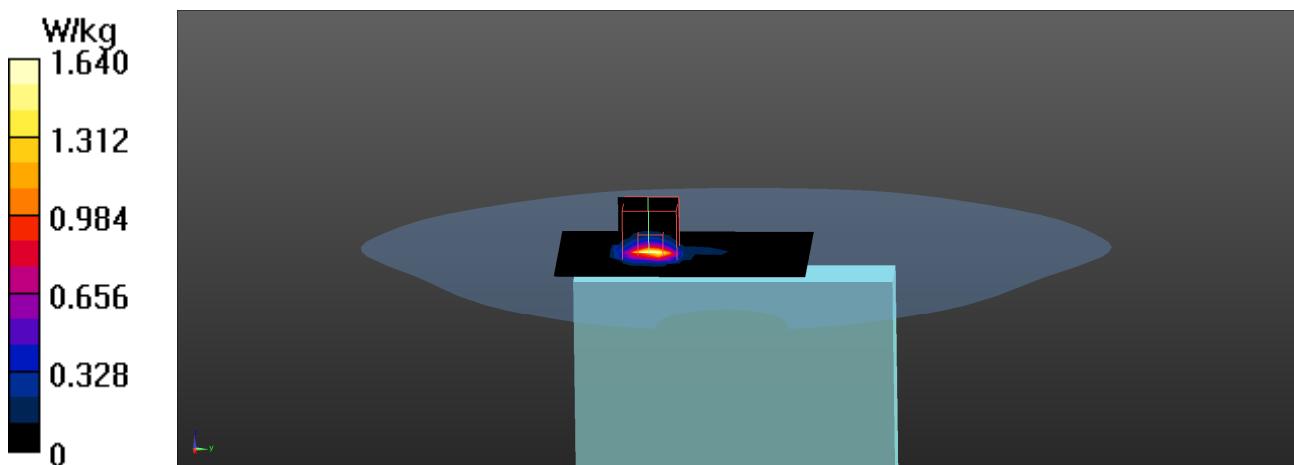

## SAR measurement variability

Test Laboratory: DEKRA

Date: 2023/10/14

### 4\_WLAN2.4GHz\_802.11g\_CH9\_Top\_5mm\_ANT Main-Verify

DUT: SimPad PLUS 2; Type: 204-00150

Communication System: UID 0, WLAN 2.4G; Frequency: 2452 MHz

Communication System PAR: 0dB

Medium parameters used:  $f = 2452 \text{ MHz}$ ;  $\sigma = 1.79 \text{ S/m}$ ;  $\epsilon_r = 39.95$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(7.58, 7.58, 7.58) @ 2452 MHz; Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Configuration/Flat/Area Scan (6x10x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$   
Maximum value of SAR (measured) = 1.38 W/kg

**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 30.56 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.94 W/kg

**SAR(1 g) = 0.900 W/kg; SAR(10 g) = 0.394 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 47.4%

Maximum value of SAR (measured) = 1.54 W/kg

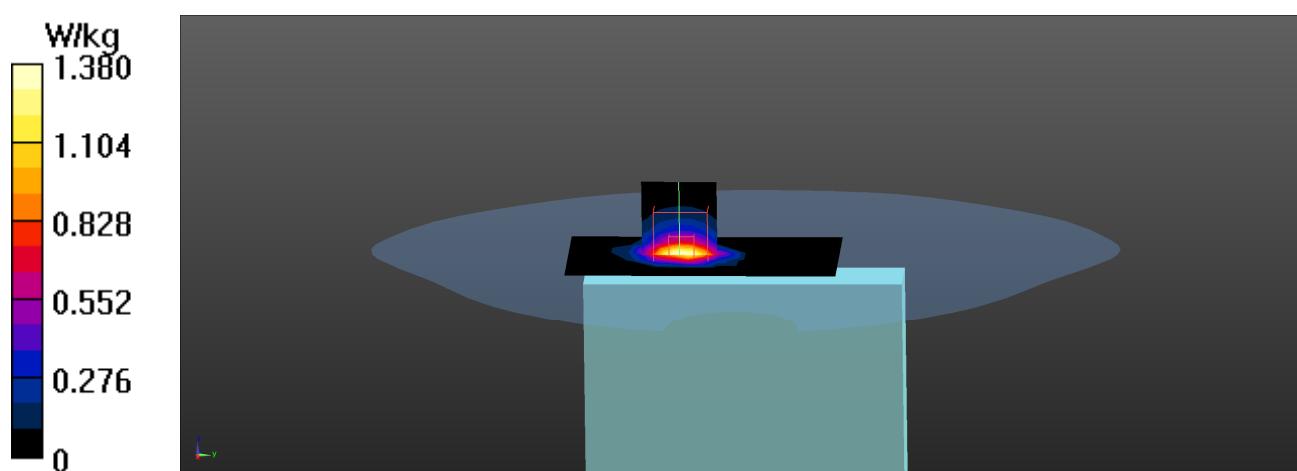

Test Laboratory: DEKRA

Date: 2023/10/18

**38\_WLAN5GHz\_802.11n40-HT0\_CH54\_Top\_5mm\_ANT Main-Verify****DUT: SimPad PLUS 2; Type: 204-00150**

Communication System: UID 0, WLAN 5G; Frequency: 5270 MHz

Communication System PAR: 0dB

Medium parameters used:  $f = 5270 \text{ MHz}$ ;  $\sigma = 4.64 \text{ S/m}$ ;  $\epsilon_r = 35.87$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN3979; ConvF(4.8, 4.8, 4.8) @ 5270 MHz; Calibrated: 2022/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1425; Calibrated: 2022/11/23
- Phantom: SAM with right table; Type: SAM;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Configuration/Flat/Area Scan (8x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
Maximum value of SAR (measured) = 1.53 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ 

Reference Value = 4.802 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.90 W/kg

**SAR(1 g) = 0.785 W/kg; SAR(10 g) = 0.233 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 66.5%

Maximum value of SAR (measured) = 1.87 W/kg

