
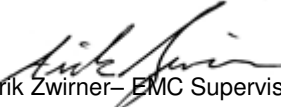




**BUREAU
VERITAS**

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

Test Report

Report No	EP0152-1
Client	Airvana
Address	250 Apollo Drive Chelmsford, MA 01824
Phone	978-250-2622
Item tested FCC ID	OneCell Radio Point QHYP-A2014
FRN	0024704082
Equipment Type Equipment Code	PCS Licensed Transmitter PCB
FCC Rule Parts	47 CFR 24 Subpart E 47 CFR 27 Subpart C
Test Dates	March 16 to July 30, 2015.
Results	As detailed within this report
Prepared by	 Tuyen Truong – EMC Engineer
Authorized by	 Arik Zwirner – EMC Supervisor
Issue Date	8/17/2015

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Contents

CONTENTS	2
SUMMARY	4
TEST METHODOLOGY.....	5
PRODUCT TESTED - CONFIGURATION DOCUMENTATION	8
STATEMENT OF CONFORMITY	9
TEST DATA AND RESULTS.....	10
LTE BANDS 25 & 2 (FCC PART 24)	10
<i>Occupied Bandwidth</i>	10
<i>Power and PAPR: 5MHz Operating Bandwidth</i>	12
<i>Power and PAPR: 10MHz Operating Bandwidth</i>	43
<i>Band Edge Measurements</i>	74
<i>Conducted Spurious Emissions at Antenna Port</i>	93
<i>Radiated Spurious Emissions Measurements</i>	102
<i>Conducted Spurious Emissions on AC Mains</i>	104
<i>Frequency Stability</i>	105
LTE BANDS 12 & 17 (FCC PART 27)	127
<i>Occupied Bandwidth</i>	127
<i>Power and PAPR: 5MHz Operating Bandwidth</i>	129
<i>Power and PAPR: 10MHz Operating Bandwidth</i>	138
<i>Band Edge Measurements</i>	169
<i>Conducted Spurious Emissions at Antenna Port</i>	189
<i>Radiated Spurious Emissions Measurements</i>	194
<i>Conducted Spurious Emissions on AC Mains</i>	196
<i>Frequency Stability</i>	197
LTE BAND 13 (FCC PART 27).....	231
<i>Occupied Bandwidth</i>	231
<i>Power and PAPR: 5MHz Operating Bandwidth</i>	232
<i>Power and PAPR: 10MHz Operating Bandwidth</i>	238
<i>Band Edge Measurements</i>	245
<i>Conducted Spurious Emissions at Antenna Port</i>	255
<i>Radiated Spurious Emissions Measurements</i>	291
<i>Conducted Spurious Emissions on AC Mains</i>	293
<i>Frequency Stability</i>	294
LTE BANDS 10 & 4 (FCC PART 27)	306
<i>Occupied Bandwidth</i>	306
<i>Power and PAPR: 5MHz Operating Bandwidth</i>	308
<i>Power and PAPR: 10MHz Operating Bandwidth</i>	317
<i>Band Edge Measurements</i>	348
<i>Conducted Spurious Emissions at Antenna Port</i>	359
<i>Radiated Spurious Emissions Measurements</i>	368
<i>Conducted Spurious Emissions on AC Mains</i>	370
<i>Frequency Stability</i>	371



TEST EQUIPMENT..... 394

CONDITIONS OF TESTING 395



Summary

This technical report supports an application for certification of a transmitter operating pursuant to 47 CFR 24 Subpart E, and 47 CFR 27 Subpart C. The product is OneCell Radio Point (m/n RP-A2014, p/n 800245-00-01) manufactured by Airvana.

Schematics and the Bill of Materials for the OneCell Radio Point are provided with the exhibits that accompany this report.

We found that the product met the above requirements without modification. The test sample was received in good condition. Tests were performed starting on March 16, 2015 and ending on July 30, 2015.

Release Control Record

Issue No.	Reason for change	Date Issued
1	Original Release	August 17, 2015



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Test Methodology

The product can operate in the bands 728-746MHz (LTE band 12), 734-746MHz (LTE Band 17), 746-756MHz (LTE band 13), 2110-2155MHz (LTE Band 4), 2110-2170MHz (LTE Band 10), 1930-1995MHz (LTE Band 25), and 1930-1990MHz (LTE Band 2).

LTE Band 10 (2110-2170MHz) falls within the combined range 2110-2180MHz, which is treated as two distinct bands in FCC Part 27 (2110-2155MHz & 2155-2180MHz). Because the bands are separate in the Part 27 rules, the tests in this report treat LTE Band 10 as having two ranges partitioned at 2155MHz for band edge requirements.

The lowest and highest operating center frequencies are listed by LTE Band and transmit bandwidth in the table below:

LTE Band	Band Range	Tx bandwidth: 5MHz		Tx bandwidth: 10MHz	
		Channel	Center Freq.	Channel	Center Freq.
Band 12	728-746MHz	Low/Mid/High	MHz	Low/Mid/High	MHz
		Low	730.5	Low	733.0
		Mid	737.0	Mid	737.0
		High	743.5	High	741.0
Band 17	734-746MHz	Low/Mid/High	MHz	Low/Mid/High	MHz
		Low	736.5	Low	739.0
		Mid	740.0	Mid	740.0
		High	743.5	High	741.0
Band 13	746-756MHz	Low/Mid/High	MHz	Low/Mid/High	MHz
		Low	748.5	Low	N/A
		Mid	751.0	Mid	751.0
		High	753.5	High	N/A
Band 25	1930-1995MHz	Low/Mid/High	MHz	Low/Mid/High	MHz
		Low	1932.5	Low	1935.0
		Mid	1962.5	Mid	1962.5
		High	1992.5	High	1990.0
Band 2	1930-1990MHz	Low/Mid/High	MHz	Low/Mid/High	MHz
		Low	1932.5	Low	1935.0
		Mid	1960.0	Mid	1960.0
		High	1987.5	High	1985.0
Band 10	2110-2170MHz	Low/Mid/High	MHz	Low/Mid/High	MHz
		Low-1	2112.5	Low-1	2115.0
		Mid-1	2140.0	Mid-1	2140.0
	(1) 2110-2155MHz	High-1	2152.5	High-1	2150.0
		Low-2	2157.5	Low-2	2160.0
		High-2	2167.5	High-2	2165.0
Band 4	2110-2155MHz	Low/Mid/High	MHz	Low/Mid/High	MHz
		Low	2112.5	Low	2115.0
		Mid	2132.5	Mid	2132.5
		High	2152.5	High	2150.0

Per Airvana, the device under test prevents the operation of multiple transmit channels operating on the same frequency at the same time (see Operational Description document).



Modulation is one of QPSK, 16QAM, and 64QAM, for each of the different types of channels. Each type of modulation can operate at 5MHz or 10MHz transmit bandwidths.

EIRP is calculated using the antenna gains (dBi) provided by the manufacturer. This transmitter has two output antennas and only operates on one frequency/channel at a time. The directional gain of these two antennas is calculated using the formula

$$\text{Directional gain} = G_{ANT} + 10 \log(NANT) \text{ dBi}$$

This formula is from the FCC KDB document 662911, *Emissions Testing of Transmitters with Multiple Outputs in the Same Band*.

Occupied bandwidth measurements were taken with the following spectrum analyzer settings: RBW: 120kHz, VBW: 1MHz, Peak Measurement mode, 10MHz span for 5MHz signals, 40MHz span for 10MHz signals, 401 points.

For Part 24, power measurements were done as follows:

For the 10MHz operating bandwidth, the Channel Power function of the analyzer was used to integrate the peak power over a 30MHz integration bandwidth, with the following settings: Span 40MHz; RBW 1MHz; VBW 50MHz; 1001 points/sweep; Sweep rate 1ms (auto); Avg/Hold counts: 100/100; Detector: peak; Trace: Max Hold.

For 5MHz operating bandwidth, Peak and Average readings were taken with the same method as above except the span was set to 20MHz and the integration bandwidth was set to 15MHz.

For both 5MHz and 10MHz average readings, the above Channel Power integration settings were used with the following exceptions: Detector: Average; Trace: Average (100/100).

For both 5MHz and 10MHz operating bandwidths, PAPR was calculated by the difference in dB between peak and average readings.

For Part 27 power measurements were done as follows:

For the 10MHz operating bandwidth, the Channel Power function of the analyzer was used to integrate the peak power over a 30MHz integration bandwidth, with the following settings: Span 40MHz; RBW 1MHz; VBW 50MHz; 1001 points/sweep; Sweep rate 1ms (auto); Avg/Hold counts: 100/100; Detector: peak; Trace: Max Hold.

For 10MHz average readings, the above Channel Power integration settings were used with the following exceptions: Detector: Average; Trace: Average (100/100).

For 10MHz operating bandwidth, PAPR was calculated by the difference in dB between peak and average readings.

For 5MHz peak readings, the spectrum analyzer was set to the following: RBW:10MHz, VBW: 50MHz; Span 20MHz; 1001 Points; Max Hold (until the trace is stable).



For 5MHz operating bandwidth, PAPR readings were taken with the same bandwidth settings as above under the CCDF function of the spectrum analyzer/receiver (Agilent MXE N9038A).

Note that per FCC 27, separate average readings are not needed. PAPR was measured by CCDF method for 5MHz, and calculated from the difference in peak and average dB values for 10MHz.

For Parts 24 & 27, peak and average power measurements were taken by summing the fundamental transmission from both antenna ports with a calibrated two-to-one RF combiner. The loss factors for the RF combiner and connecting coaxial cables were added to the spectrum analyzer measurements to calculate power at the antenna ports.

Radiated emission testing was performed according to the procedures specified in ANSI C63.4 (2003) and TIA-603-C. Radiated Emissions were maximized by rotating the device around its upright axes as well as varying the test antenna's height and polarity. Radiated spurious emissions tests were done in the frequency range of 30MHz-22GHz.

Conducted measurements at the antenna port were performed. For antenna port conducted spurious emissions testing 30MHz-22GHz range was checked.

AC mains conducted emissions tests were performed using 50 Ω /5 μ H LISN's.

Transmit chain which produced the highest EIRP was used for spurious emission scans. The EUT operating voltage is 120Vac 60Hz.



Product Tested - Configuration Documentation

EUT Configuration											
Work Order: P0152 Company: Airvana Company Address: 250 Apollo Drive Chelmsford MA USA 01824 Contact: Kevin Craig Person Present: Kevin Craig											
EUT:			MN	PN	SN						
RP-A2014				800245-00-01	1738						
EUT Description: Switched IQ Radio Point Domestic EUT Max Frequency: 200MHz EUT TX Frequency: 728-746MHz, 746-756MHz, 1930-1990MHz, 2110-2155MHz and 2155-2170MHz											
Support Equipment:			MN	SN							
Dell Latitude			D630	20264182597							
Linksys POE			LGS308P	14810C964P4107							
Netgear Router			NETGEAR90	3113465001E94							
EUT Ports:											
Port Label	Port Type	No. of ports	No. Populated	Cable Type	Shielded	Ferrites	Length	Max Length	In/Out NEBS Type	Unpopulated Reason	
POE	RJ45	1	1	Cat.5e	No	No	10m	100m	Indoor		
Serial	4-pins	1	0							Service Only	
Antenna	Coaxial	2	2	Coaxial	N/A	No	NA	NA	Indoor		
Software / Operating Mode Description:											
EUT is set to transmit on selected Band class (12, 17, 13, 10, 4, 25 and 2) on Low, Mid and High channels with 5 MHz bandwidth and 10 MHz bandwidth settings respectively. Telnet to EUT via IP address: 172.16.118.4											



Statement of Conformity

The EUT has been found to conform to the following parts of 47 CFR 24 and 47 CFR 27.

Parts 2 & 15	Parts 24 & 27	Comments
2.1033(c)(4)		QPSK, 16QAM, and 64QAM are the types of RF modulation.
2.1033(c)(6)		RF output power is not adjustable to end users.
2.1049(l)		Occupied bandwidth measured
2.1033(c)(9)		Tune-up procedure statement
	Part 24:	
2.1033(c)(7)	24.232(c,d,e)	Meets power limit: 2W EIRP. Peak-to-average ratio does not exceed 13dB.
2.1051	24.238(a)	Spurious emissions at antenna port below -13dBm
2.1053, 15.209	24.236, 24.238(a)	Radiated spurious emissions meet FCC Class B and are below -13dBm. Meets out of band emissions limits.
2.1055(a)(d)	24.235	Fundamental emission remains within authorized frequency block.
15.207		Meets FCC Class B limits for AC mains conducted emissions.
	Part 27:	
2.1033(c)(7)	27.50(b,c,d)	Meets power limits of 27.50(b)(9), 27.50(c)(9), and 27.50(d)(2)(ii).
2.1051	27.53(c,f,g,h)	Spurious emissions at antenna port below -13dBm
2.1053, 15.209	27.53(c,f,g,h)	Radiated spurious emissions meet FCC Class B and are below -13dBm. . Meets out of band emissions limits.
2.1055(a)(d)	27.54	Fundamental emission remains within authorized frequency block.
15.207		Meets FCC Class B limits for AC mains conducted emissions.



Test Data and Results

LTE Bands 25 & 2 (FCC Part 24)

Occupied Bandwidth

LIMIT

“The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.” [24.238(b)]



MEASUREMENTS / RESULTS

Occupied Bandwidth

Date: 17-Mar-15	Company: Airvana
Engineer: Tuyen Truong	EUT: Switched IQ Radio Point Domestic (750748)
WO# P0152	EUT Operating Voltage: POE
Temp: 22°C	Humidity: 33% Pressure: 1005mBar
Note: FCC 24.238(b):	

Modulation	Bandwidth		Frequency		
	Setting (MHz)	Band	Channel	(MHz)	26 dB BW (MHz)
QPSK	5	25	Low	1932.5	4.975
QPSK	5	25	Mid	1962.5	4.966
QPSK	5	25	High	1992.5	4.986
16QAM	5	25	Low	1932.5	4.975
16QAM	5	25	Mid	1962.5	4.947
16QAM	5	25	High	1992.5	4.955
64QAM	5	25	Low	1932.5	4.926
64QAM	5	25	Mid	1962.5	4.875
64QAM	5	25	High	1992.5	4.977
QPSK	10	25	Low	1935	22.627
QPSK	10	25	Mid	1962.5	23.056
QPSK	10	25	High	1990	19.353
16QAM	10	25	Low	1935	21.861
16QAM	10	25	Mid	1962.5	22.939
16QAM	10	25	High	1990	18.958
64QAM	10	25	Low	1935	21.156
64QAM	10	25	Mid	1962.5	22.302
64QAM	10	25	High	1990	19.083
QPSK	5	2	Low	1932.5	see band 25
QPSK	5	2	Mid	1960	4.984
QPSK	5	2	High	1987.5	4.98
16QAM	5	2	Low	1932.5	see band 25
16QAM	5	2	Mid	1960	4.98
16QAM	5	2	High	1987.5	4.977
64QAM	5	2	Low	1932.5	see band 25
64QAM	5	2	Mid	1960	4.908
64QAM	5	2	High	1987.5	4.919
QPSK	10	2	Low	1935	see band 25
QPSK	10	2	Mid	1960	23.191
QPSK	10	2	High	1985	23.086
16QAM	10	2	Low	1935	see band 25
16QAM	10	2	Mid	1960	23.147
16QAM	10	2	High	1985	23.028
64QAM	10	2	Low	1935	see band 25
64QAM	10	2	Mid	1960	22.279
64QAM	10	2	High	1985	22.264



Power and PAPR: 5MHz Operating Bandwidth

Power (EIRP)

FCC Part 24.232:

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

Output Power (E.I.R.P.)																	
Date: 30-Jul-15		Company: Airvana				Work Order: P0152											
Engineer: Ryan Brown		EUT Desc: Switched IQ Radio Point Domestic				EUT Operating Voltage/Frequency: POE											
Temp: 24.5°C		Humidity: 54%				Pressure: 1002mBar											
Frequency Range: Low, Mid and High Channels																	
Notes: 2W = 33.0dBm. Multiple antenna calculations using formula from FCC KDB 662911, Section F(2)(a)(i). Two antennas each with gain 5.0dBi in this range are installed on the EUT. For multiple output calculations, N _{ant} =2 is used to calculated overall directional gain: 5.0dBi + 10log(N _{ant}) = 5.0dBi + 3.0dB = 8.0dBi. Peak-to-Average Ratio (PAPR) must be less than 13dB for average measurements to be applicable to the EIRP limits.																	
Band	Bandwidth (MHz)	Modulation	Channel	Frequency (MHz)	Average Power Reading (dBm)	Peak Power Reading (dBm)	Power Combiner (dB)	30dB Attenuator (dB)	Cable Factor (dB)	Average Power Reading (dBm)	PAPR (limit: 13dB) (dB)	Directional Antenna Gain (dB)	FCC Part 24.232 c & d; Limit: 2W = 33.0dBm				
													Limit (dBm)	ERP (dB)	Margin (dB)	Result	
25	5	QPSK	Low	1932.5	-12.68	-2.25	4.2	29.8	0.6	21.9	10.42	8.0	33.0	29.9	-3.1	Pass	
25	5	QPSK	Mid	1962.5	-12.16	-2.46	4.2	29.8	0.6	22.4	9.70	8.0	33.0	30.4	-2.6	Pass	
25	5	QPSK	High	1992.5	-13.7	-4.32	4.2	29.8	0.6	20.9	9.38	8.0	33.0	28.9	-4.1	Pass	
25	5	16QAM	Low	1932.5	-12.83	-2.82	4.2	29.8	0.6	21.8	10.01	8.0	33.0	29.8	-3.3	Pass	
25	5	16QAM	Mid	1962.5	-12.16	-2.11	4.2	29.8	0.6	22.4	10.05	8.0	33.0	30.4	-2.6	Pass	
25	5	16QAM	High	1992.5	-13.81	-4.46	4.2	29.8	0.6	20.8	9.35	8.0	33.0	28.8	-4.2	Pass	
25	5	64QAM	Low	1932.5	-12.77	-2.75	4.2	29.8	0.6	21.8	10.01	8.0	33.0	29.8	-3.2	Pass	
25	5	64QAM	Mid	1962.5	-12.15	-2.74	4.2	29.8	0.6	22.4	9.41	8.0	33.0	30.4	-2.6	Pass	
25	5	64QAM	High	1992.5	-13.72	-4.31	4.2	29.8	0.6	20.9	9.41	8.0	33.0	28.9	-4.1	Pass	
2	5	QPSK	Low	1932.5	See Band 25												
2	5	QPSK	Mid	1960.0	-11.09	-1.89	4.2	29.8	0.6	23.5	9.20	8.0	33.0	31.5	-1.5	Pass	
2	5	QPSK	High	1987.5	-11.6	-2.35	4.2	29.8	0.6	23.0	9.25	8.0	33.0	31.0	-2.0	Pass	
2	5	16QAM	Low	1932.5	See Band 25												
2	5	16QAM	Mid	1960.0	-11.07	-1.6	4.2	29.8	0.6	23.5	9.47	8.0	33.0	31.5	-1.5	Pass	
2	5	16QAM	High	1987.5	-11.77	-2.35	4.2	29.8	0.6	22.8	9.42	8.0	33.0	30.8	-2.2	Pass	
2	5	64QAM	Low	1932.5	See Band 25												
2	5	64QAM	Mid	1960.0	-11.08	-1.55	4.2	29.8	0.6	23.5	9.53	8.0	33.0	31.5	-1.5	Pass	
2	5	64QAM	High	1987.5	-11.68	-2.06	4.2	29.8	0.6	22.9	9.62	8.0	33.0	30.9	-2.1	Pass	

Table Result: Pass

Test Site: ESD-1
Analyzer: MXE EMI Receiver

Cable: 1509
Power Combiner: 1939

30dB Attenuator: 1840


Spectrum analyzer plots are on the following pages.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880




Peak Measurements at 5MHz:

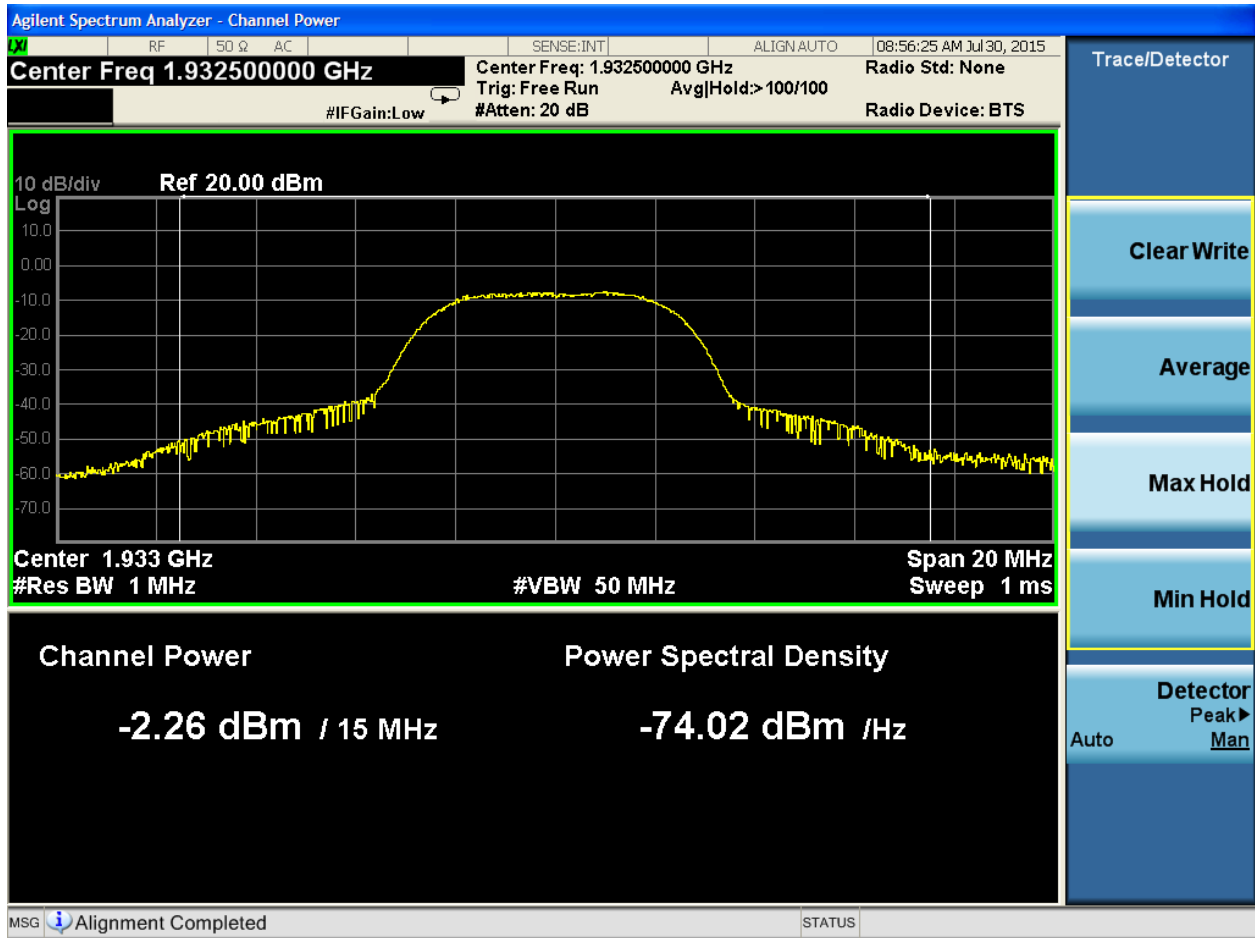


Band 25, Low Channel, QPSK



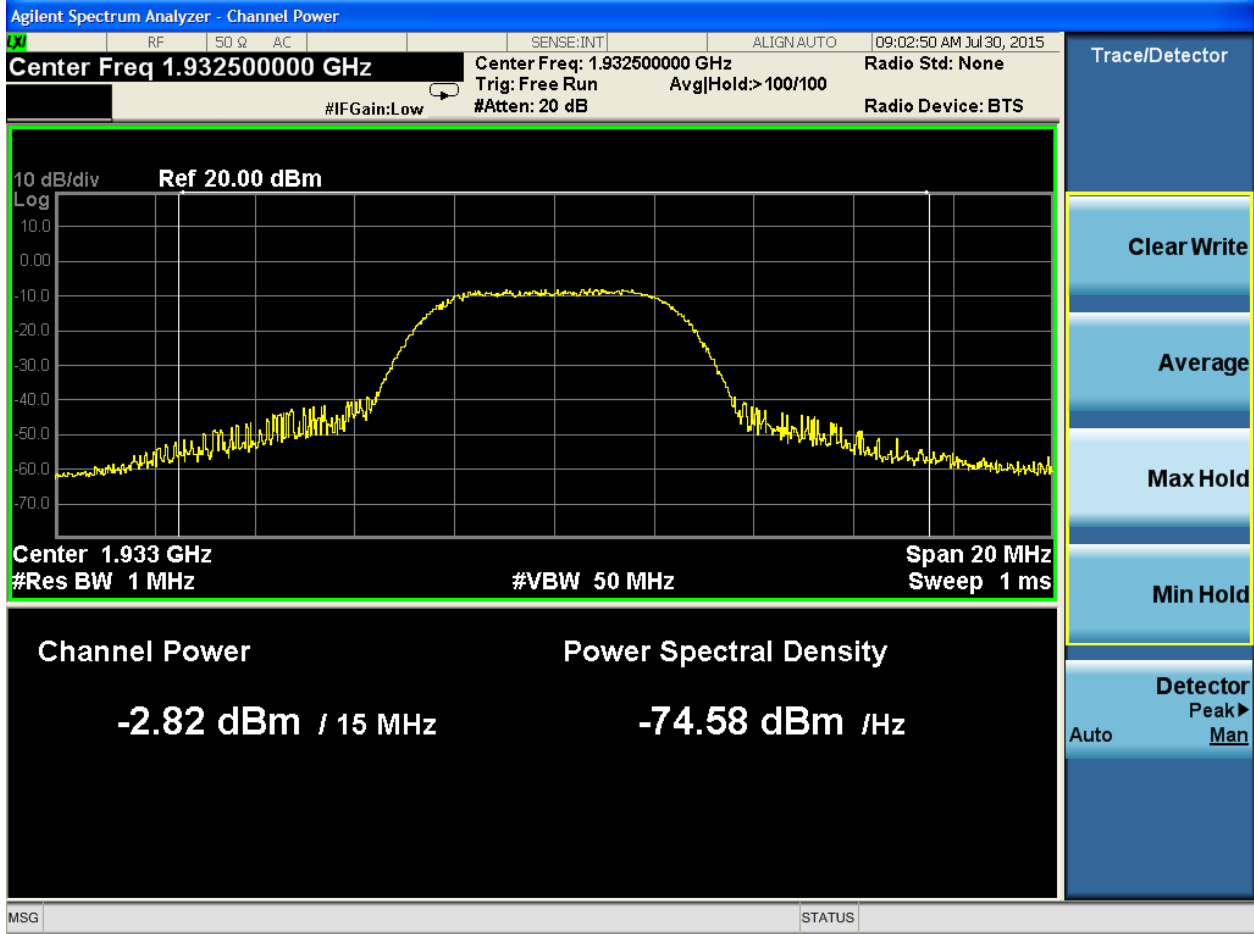

Band 25, Low Channel, 16 QAM



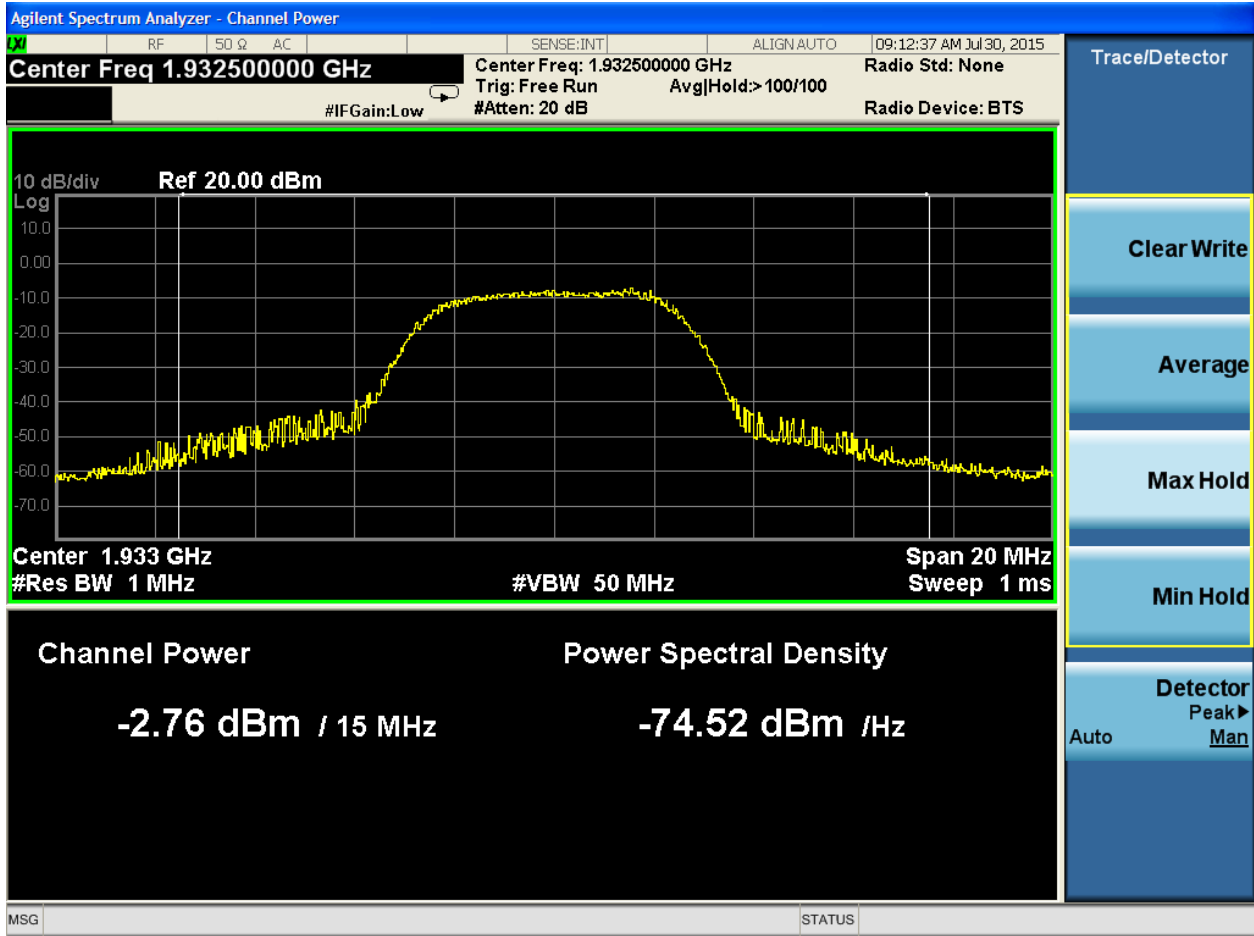


Band 25, Low Channel, 64 QAM




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



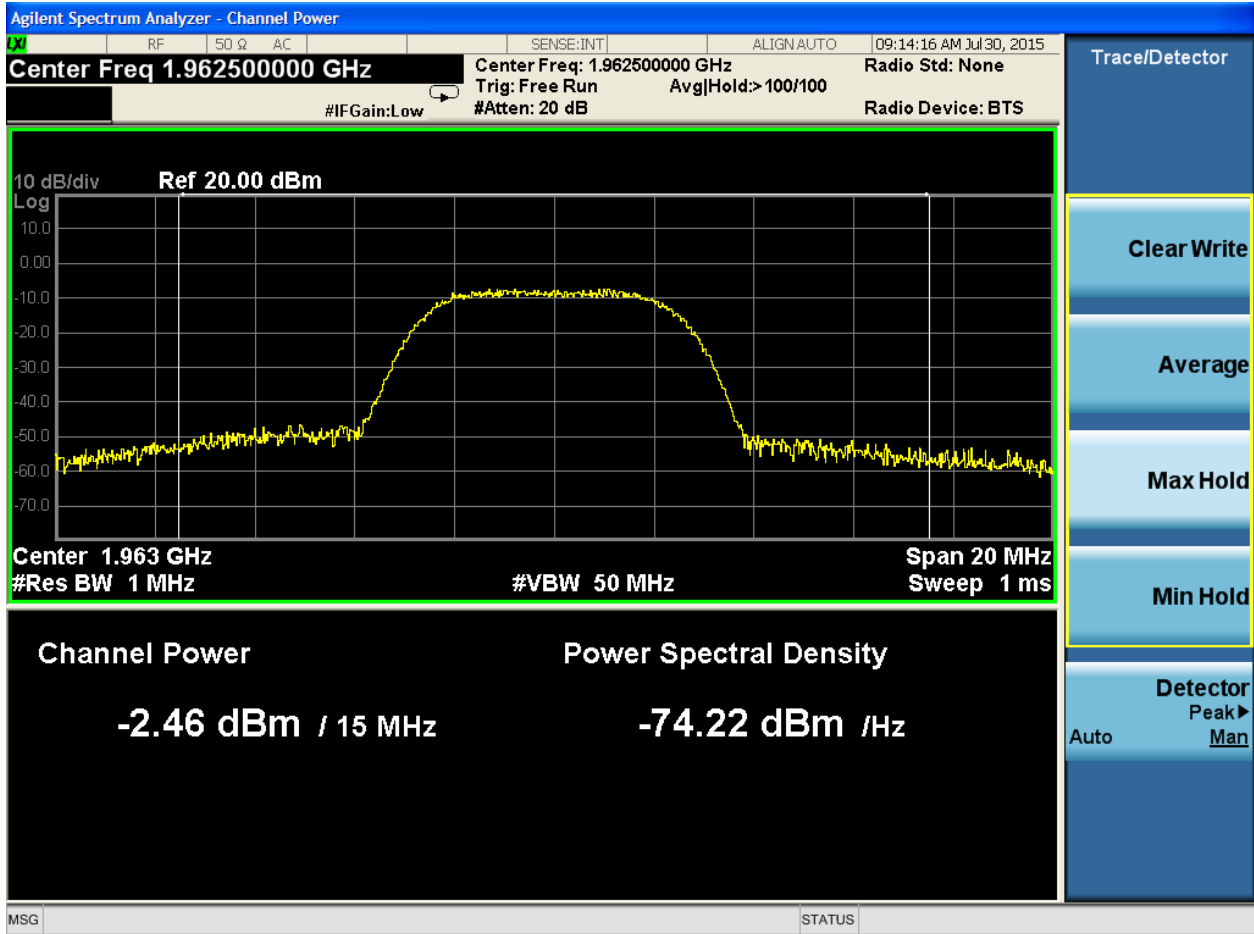


Band 25, Mid Channel, QPSK



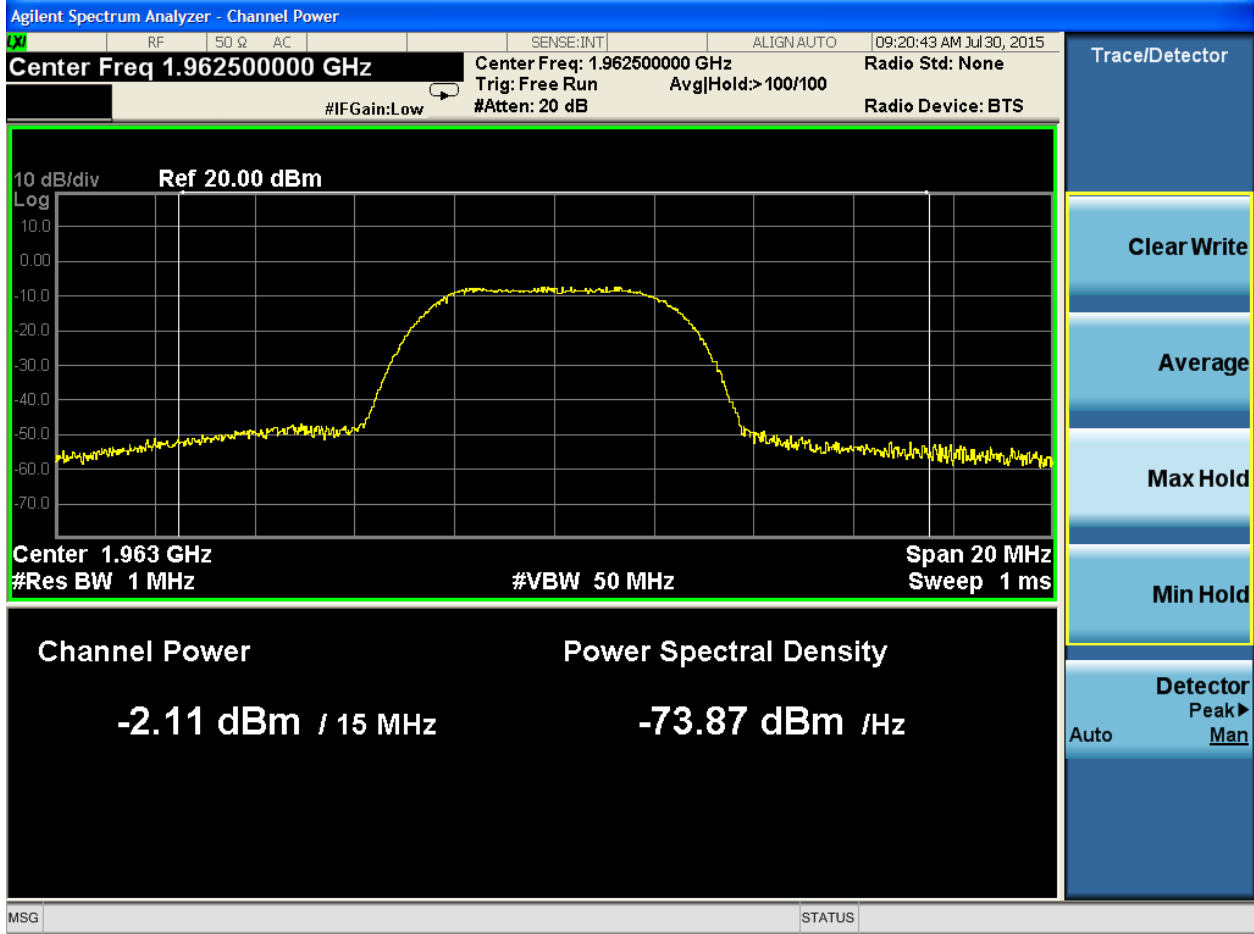


Band 25, Mid Channel, 16 QAM



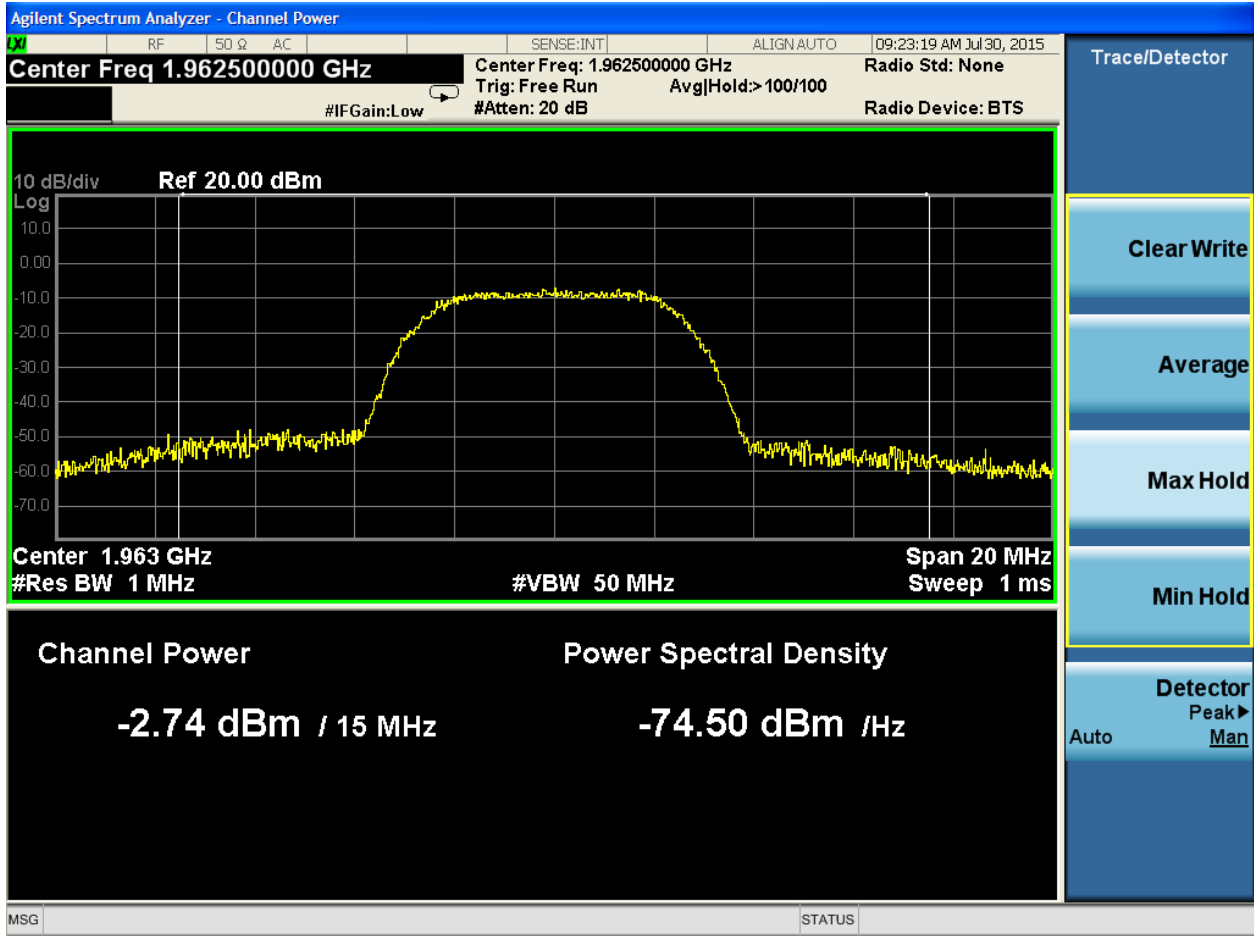

Band 25, Mid Channel, 64QAM



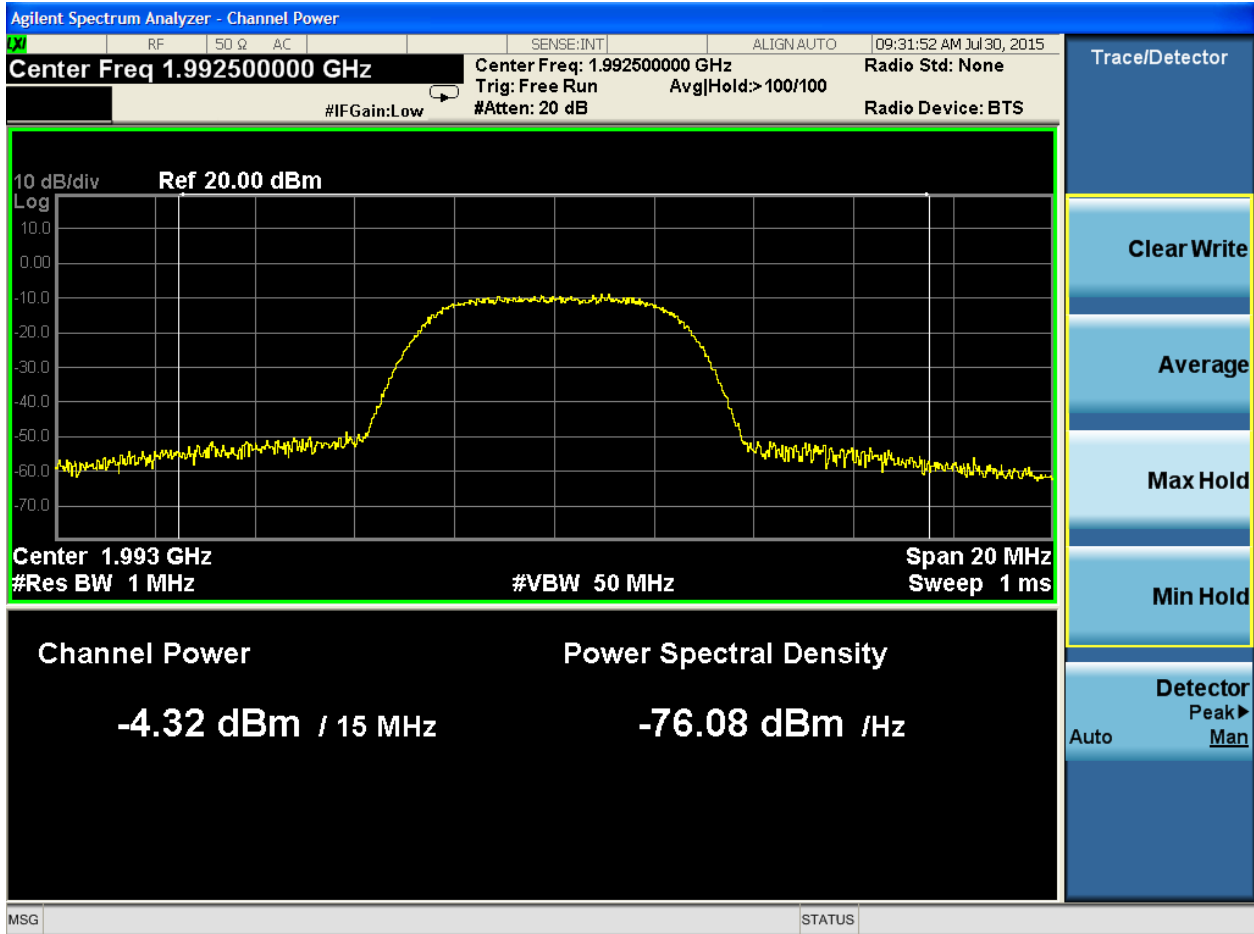


Band 25, High Channel, QPSK




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



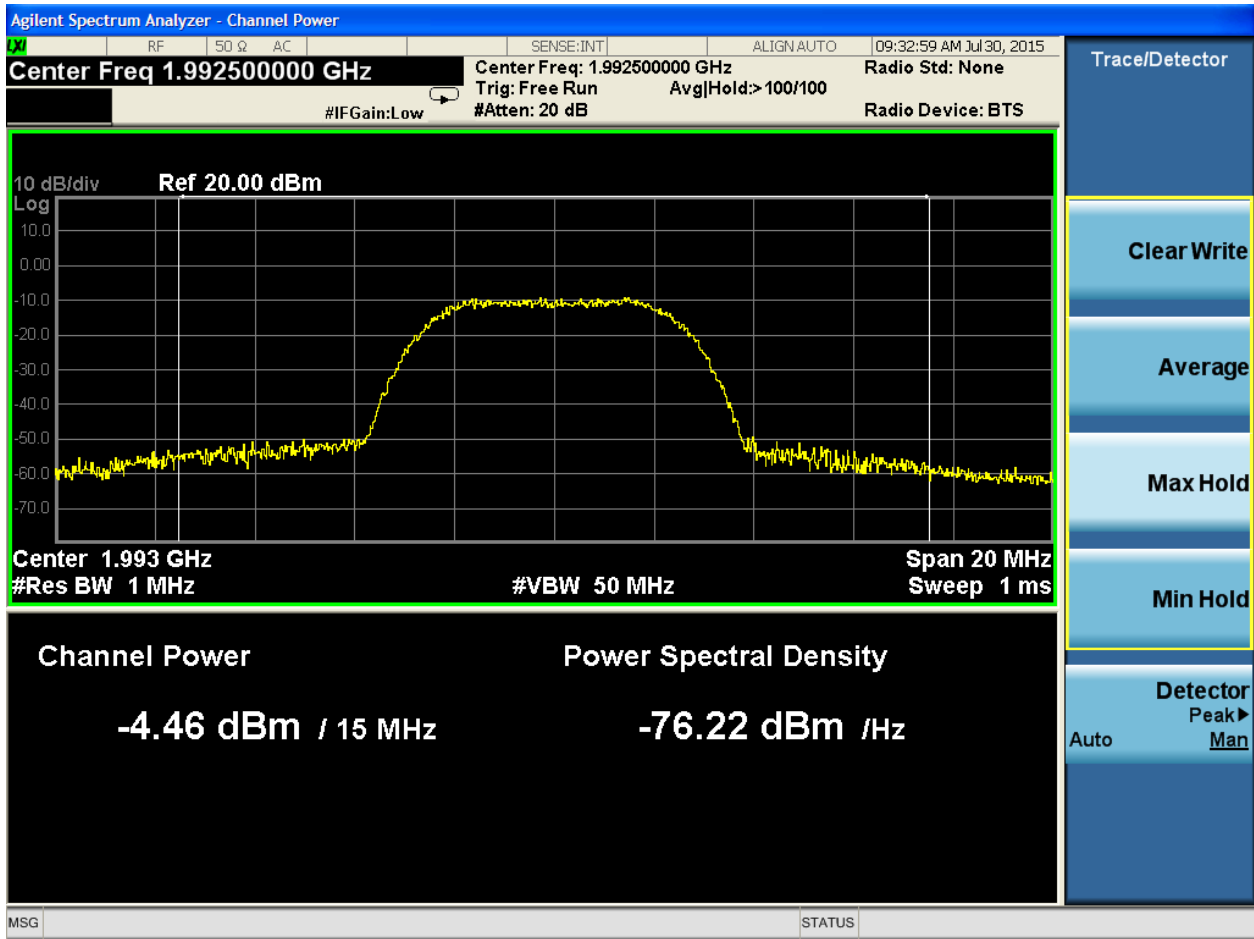


Band 25, High Channel, 16 QAM



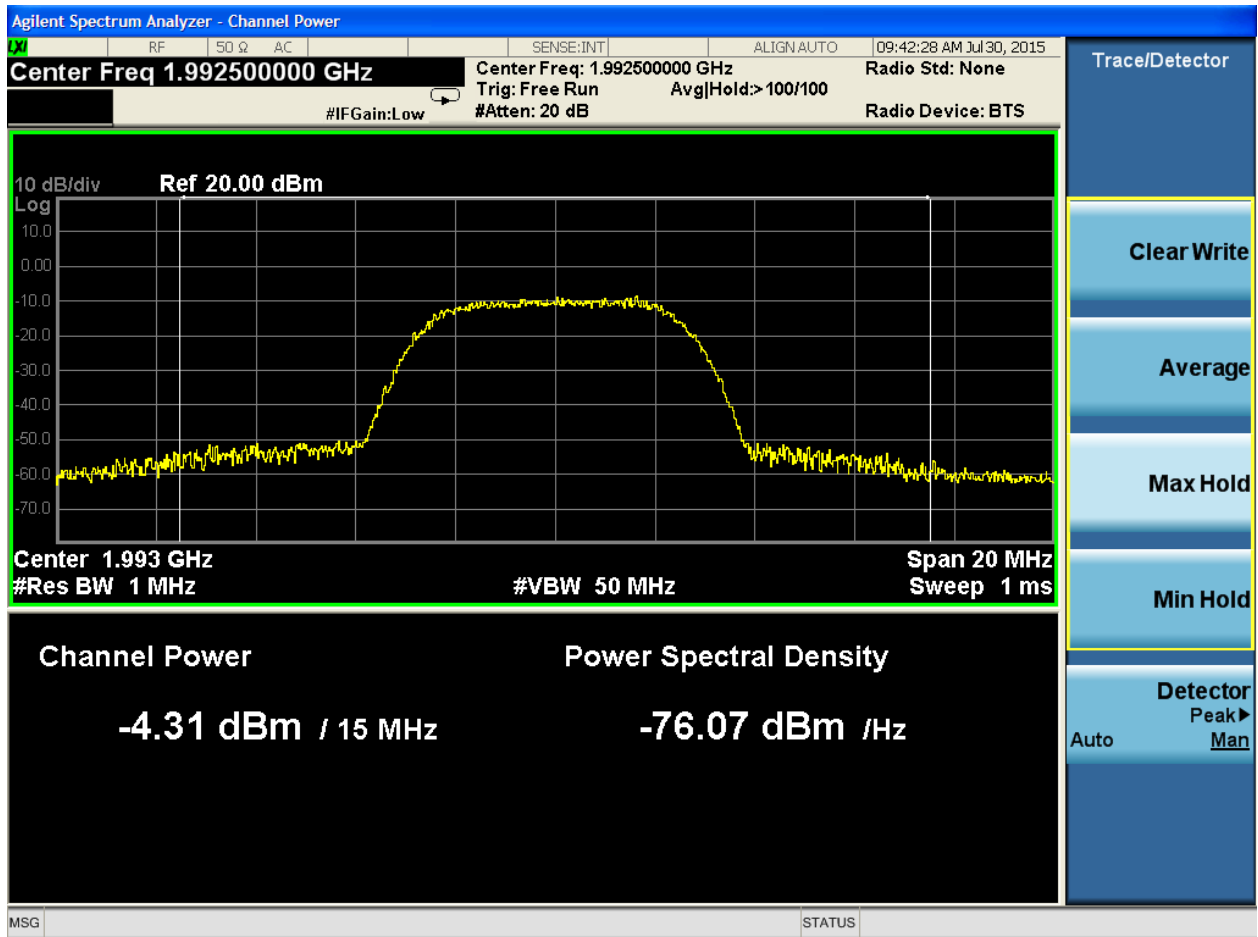


Band 25, High Channel, 64 QAM



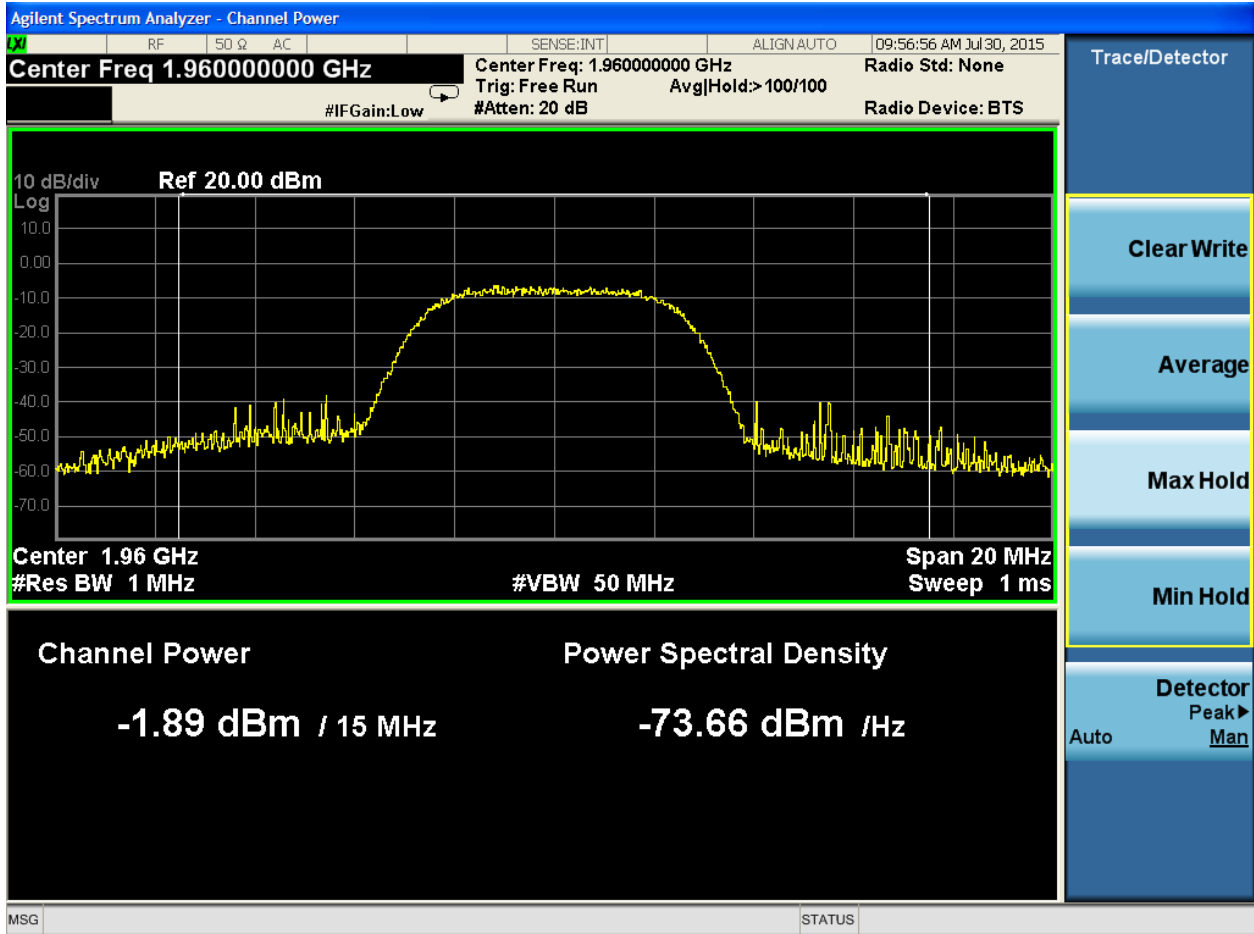

Band 2, Mid Channel, QPSK



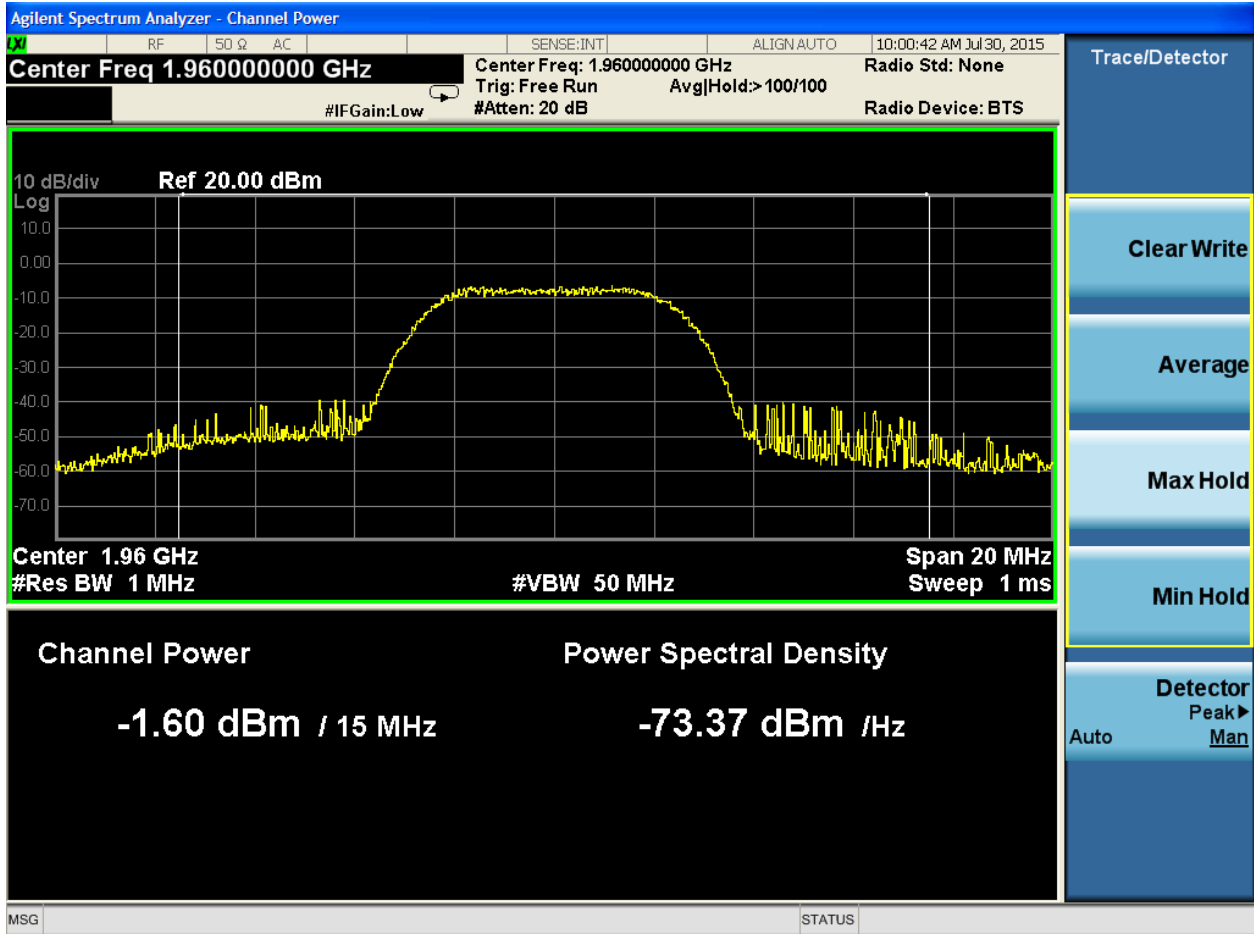


Band 2, Mid Channel, 16 QAM



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



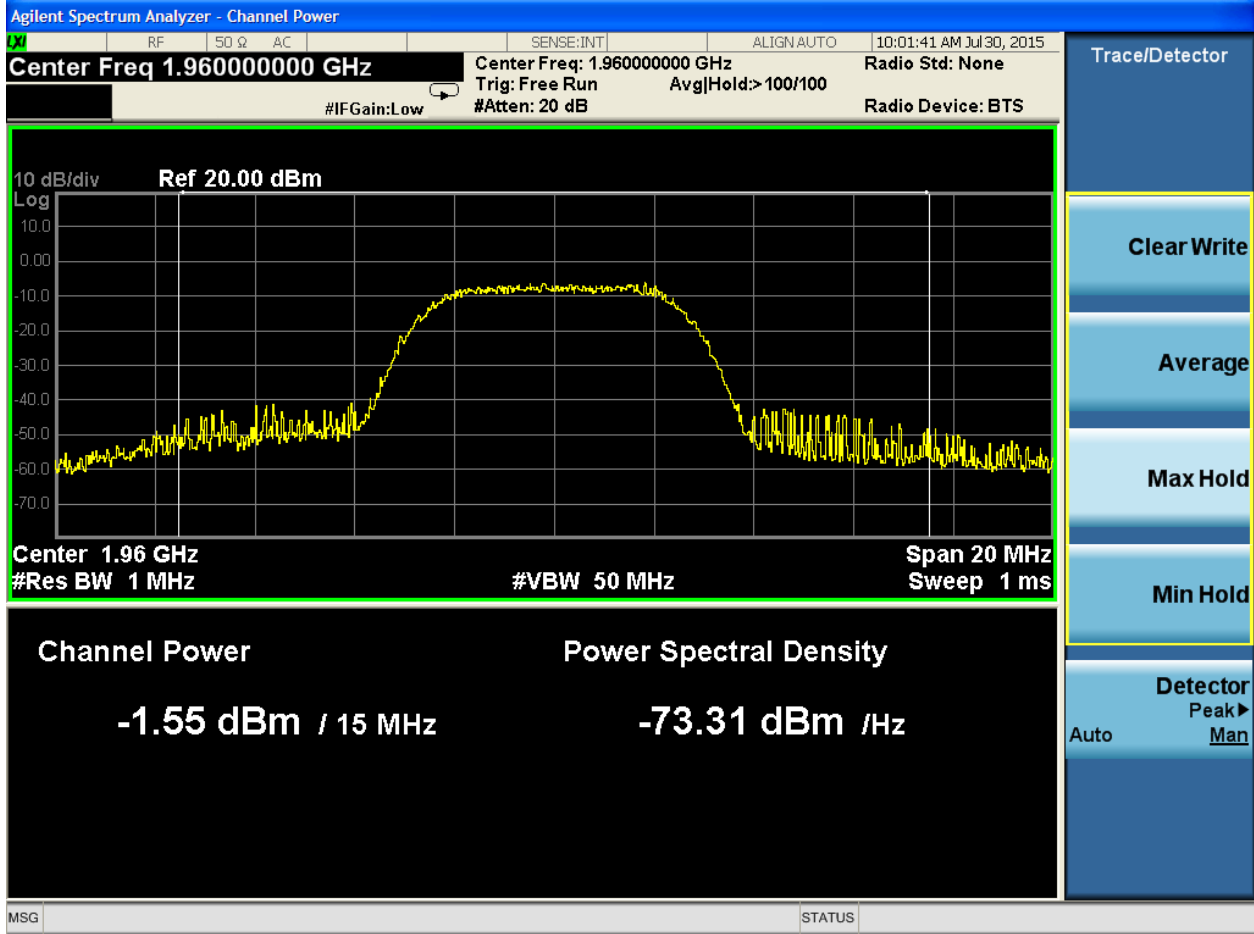


Band 2, Mid Channel, 64 QAM



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



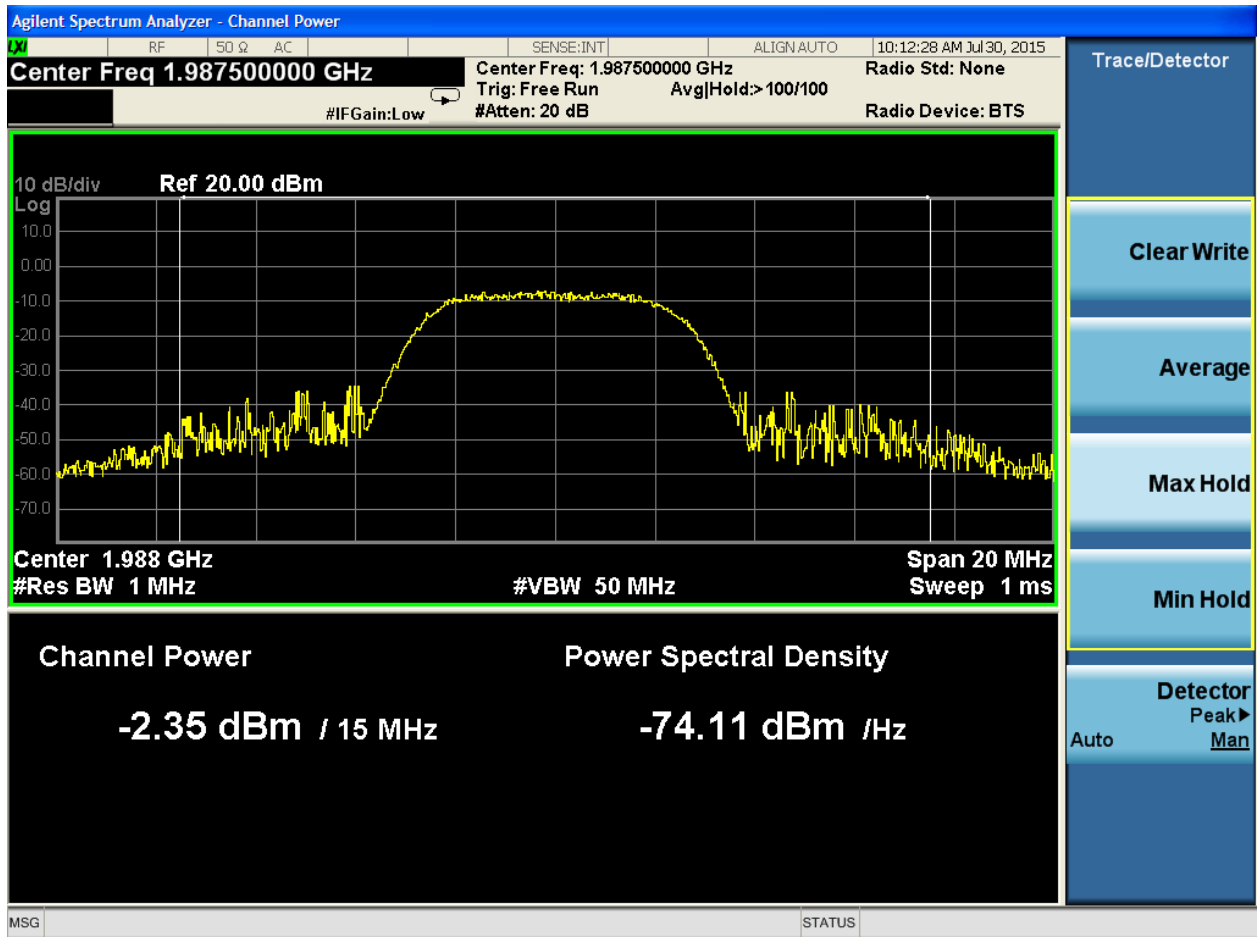


Band 2, High Channel, QPSK



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



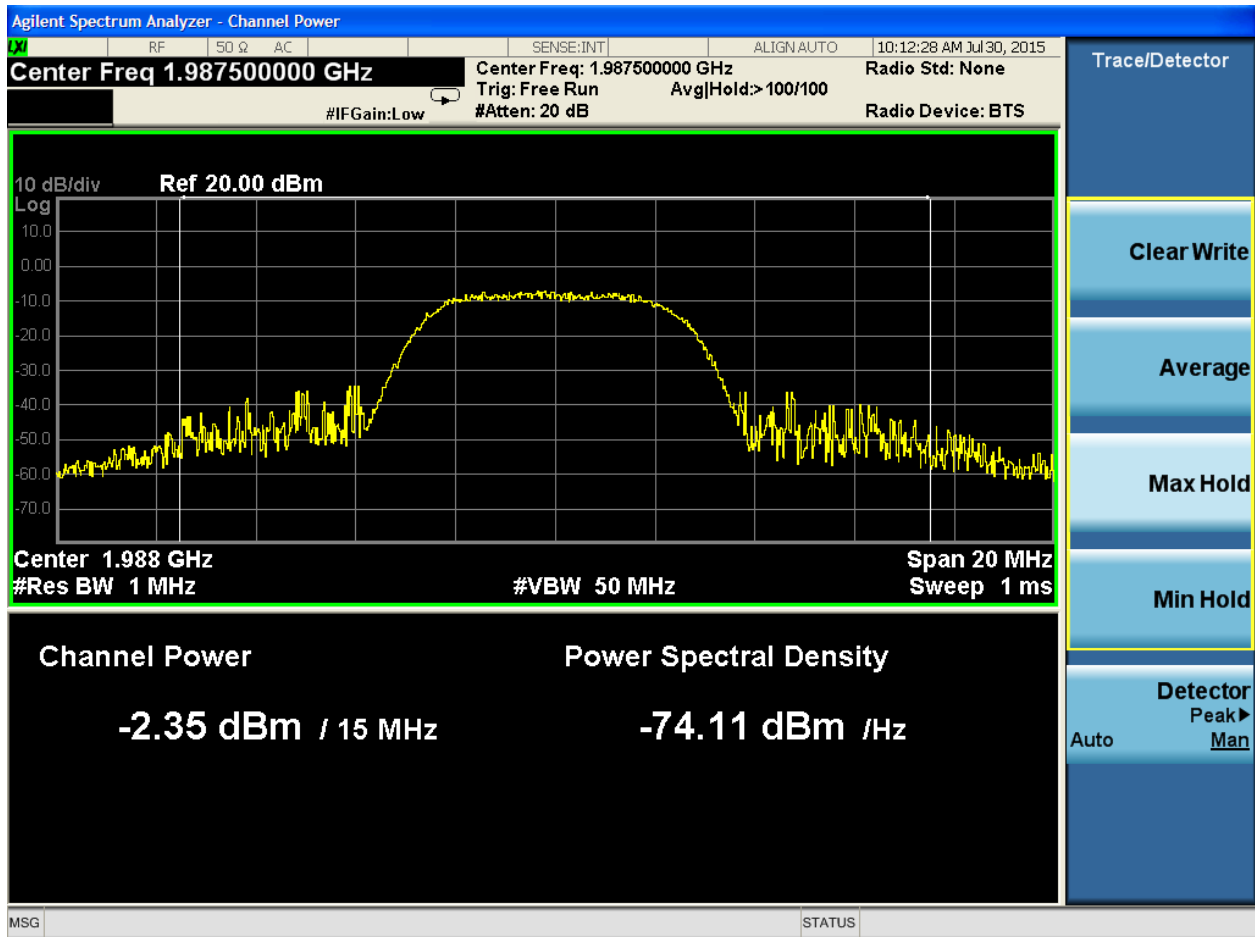


Band 2, High Channel, 16 QAM



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



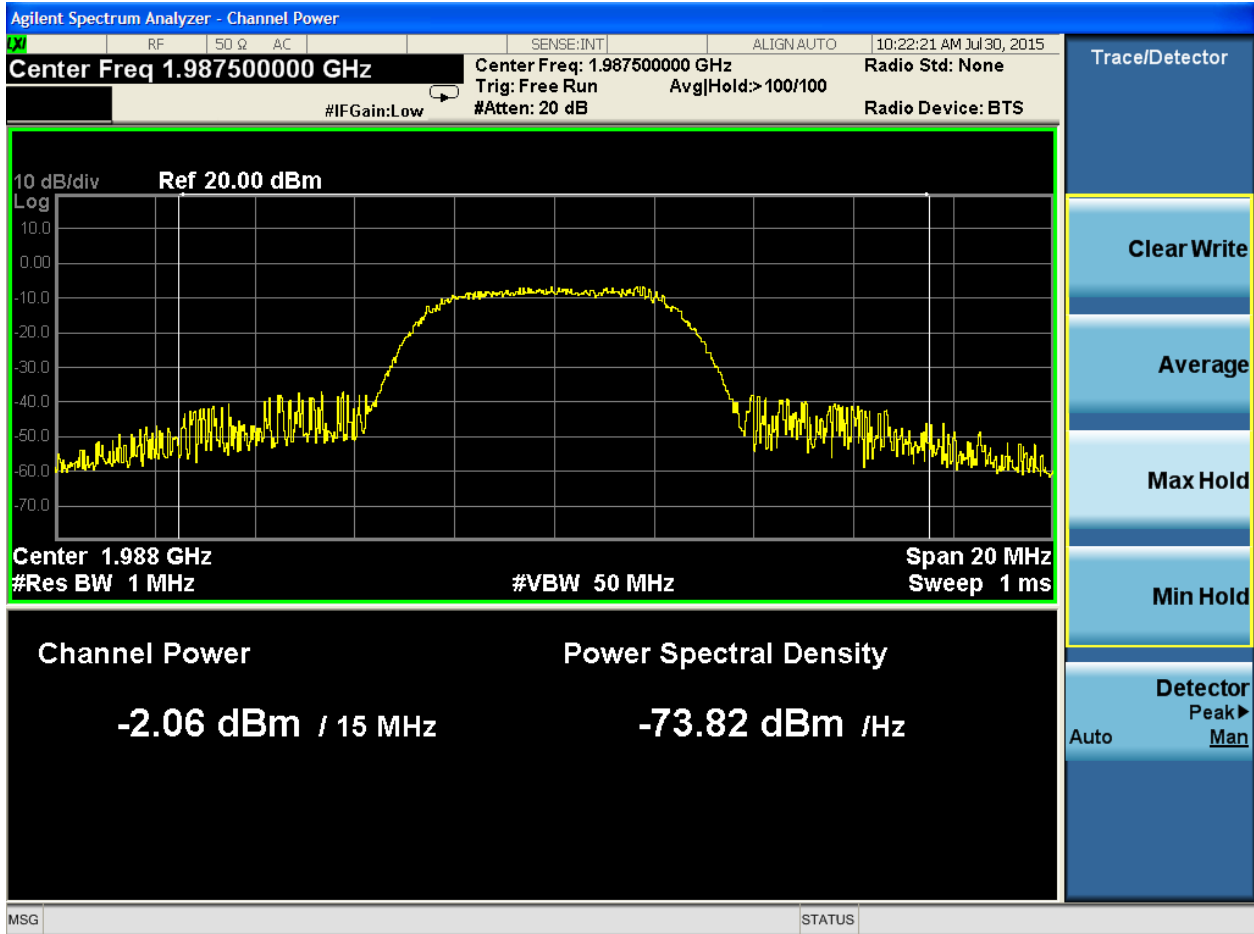


Band 2, High Channel, 64 QAM



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880




Average Measurements at 5MHz:

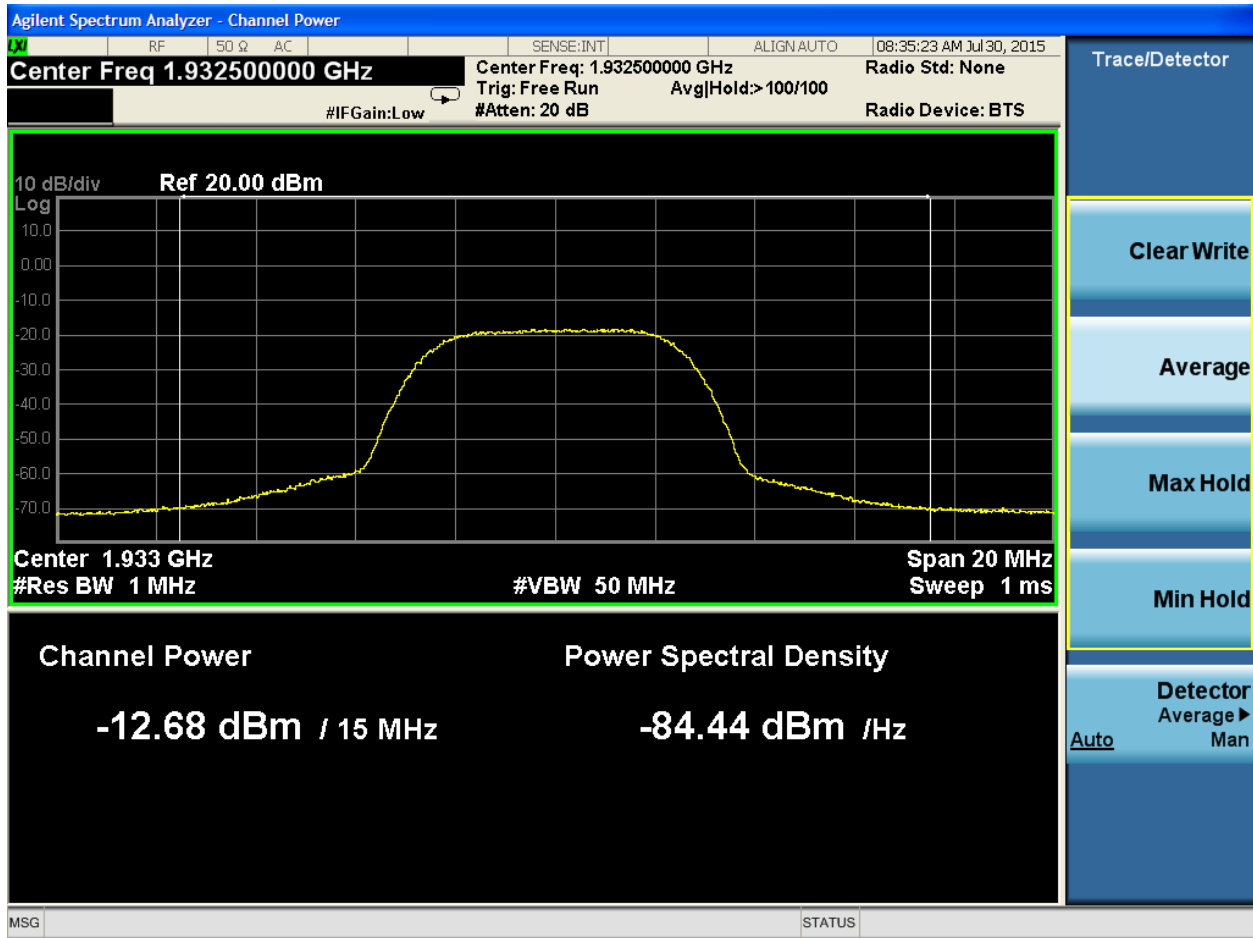

Band 25, Low Channel, QPSK



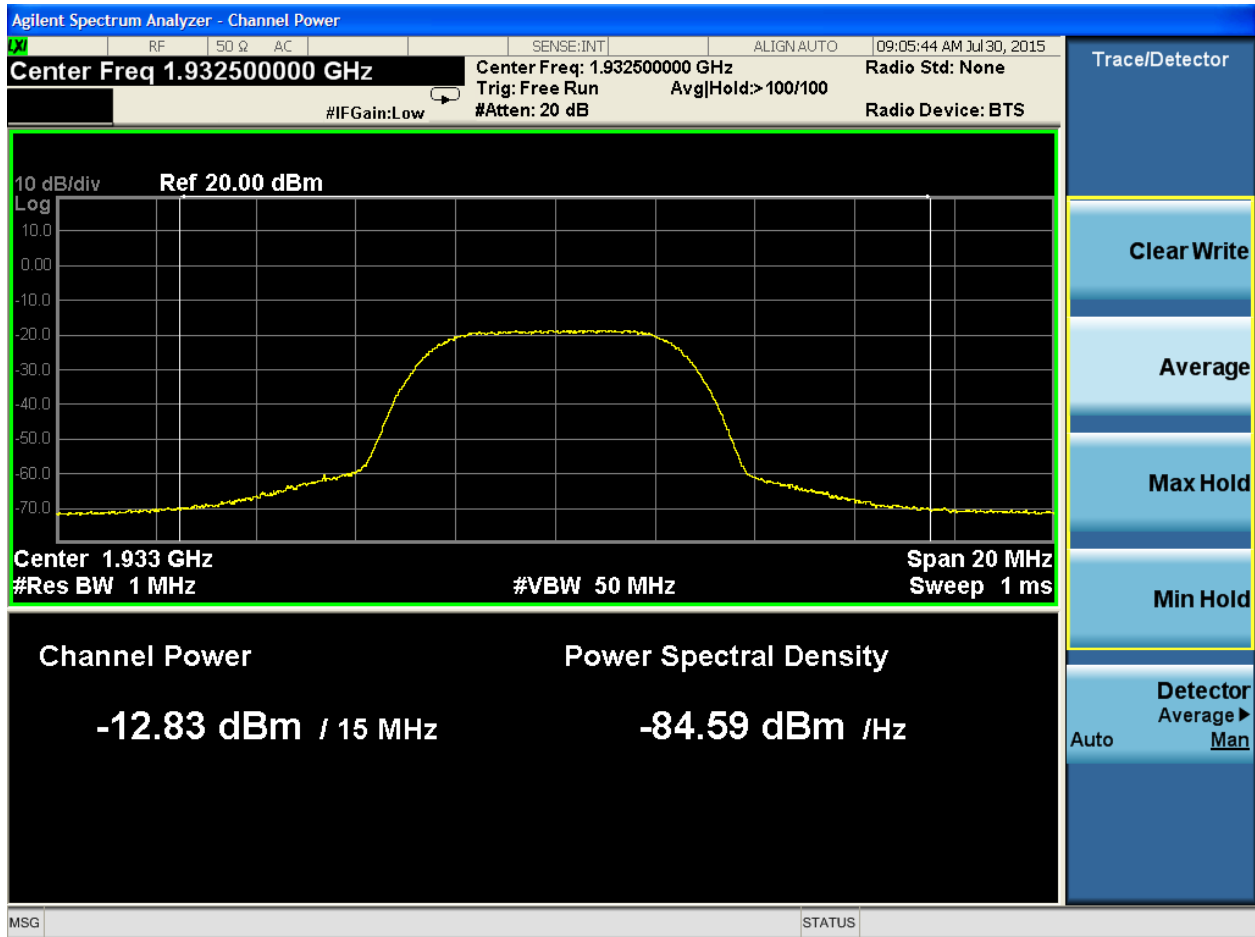


Band 25, Low Channel, 16 QAM




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



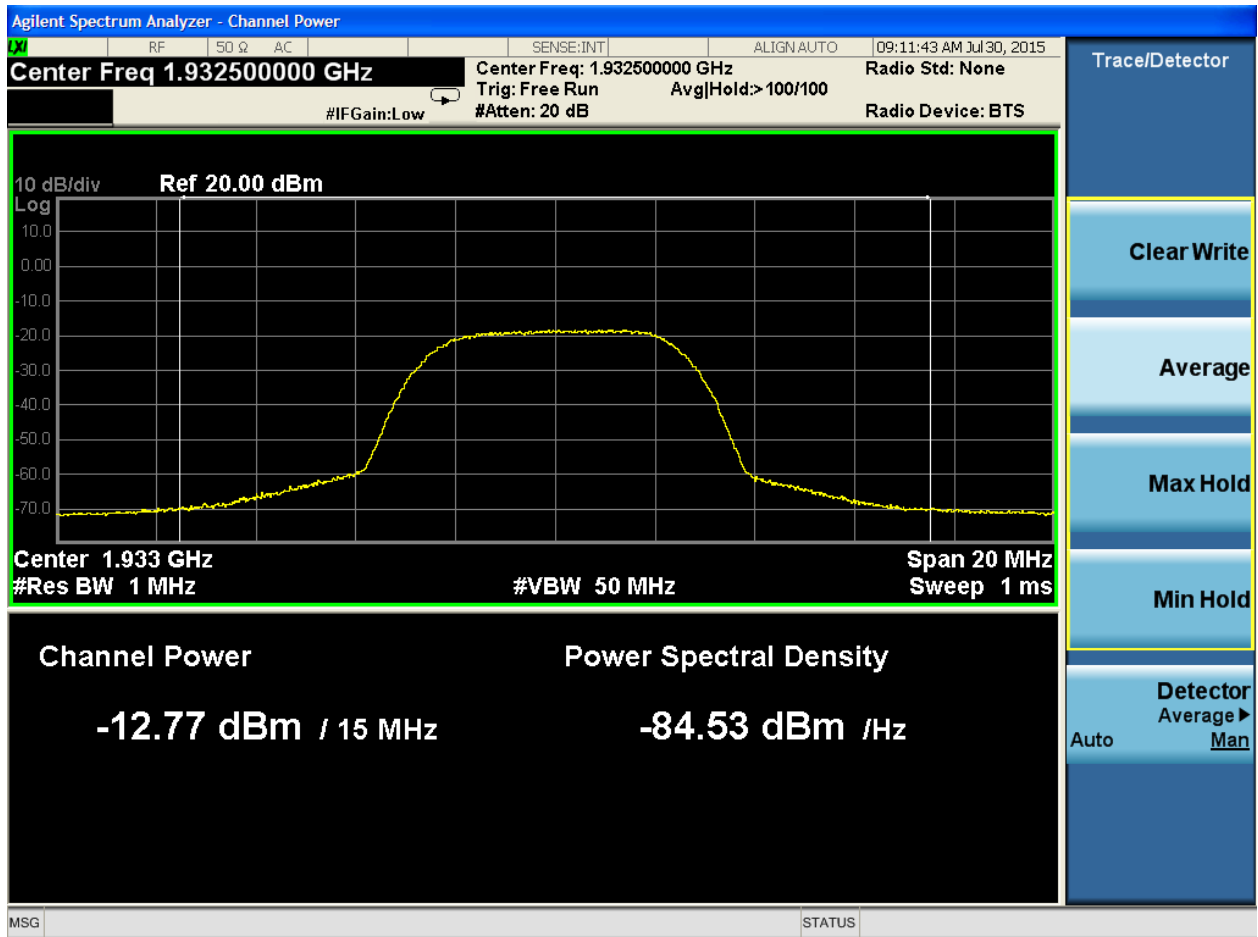


Band 25, Low Channel, 64 QAM



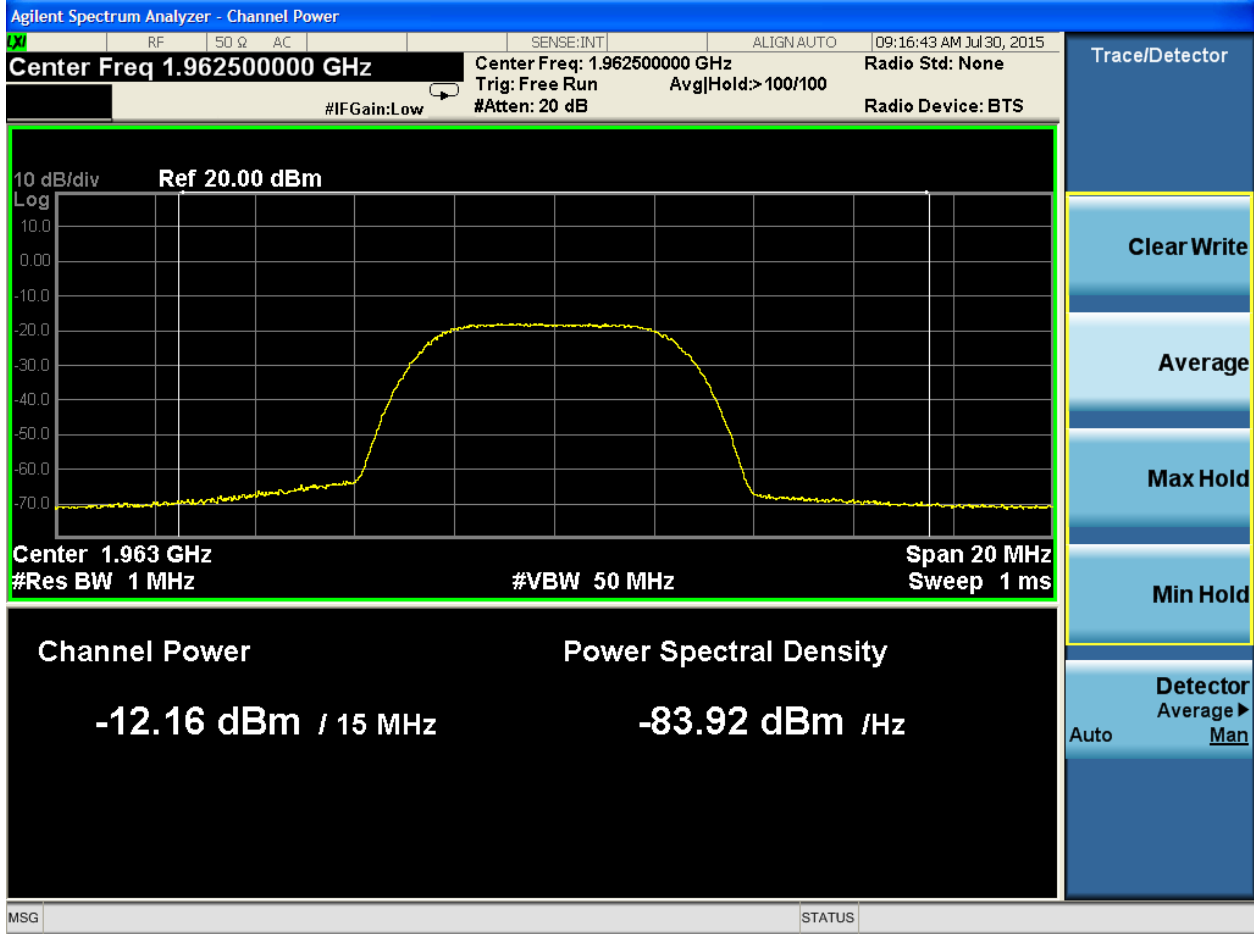


Band 25, Mid Channel, QPSK



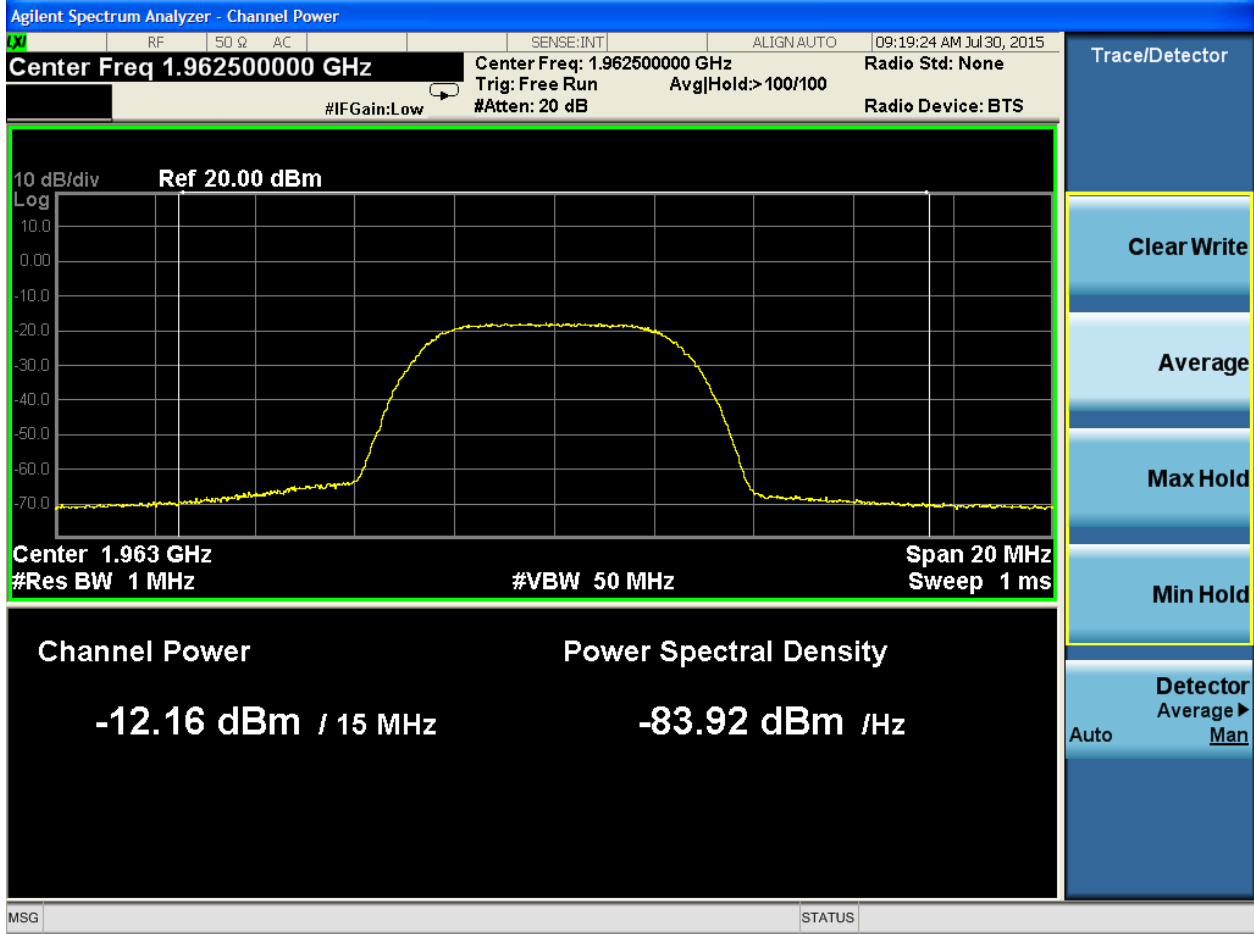

Band 25, Mid Channel, 16 QAM



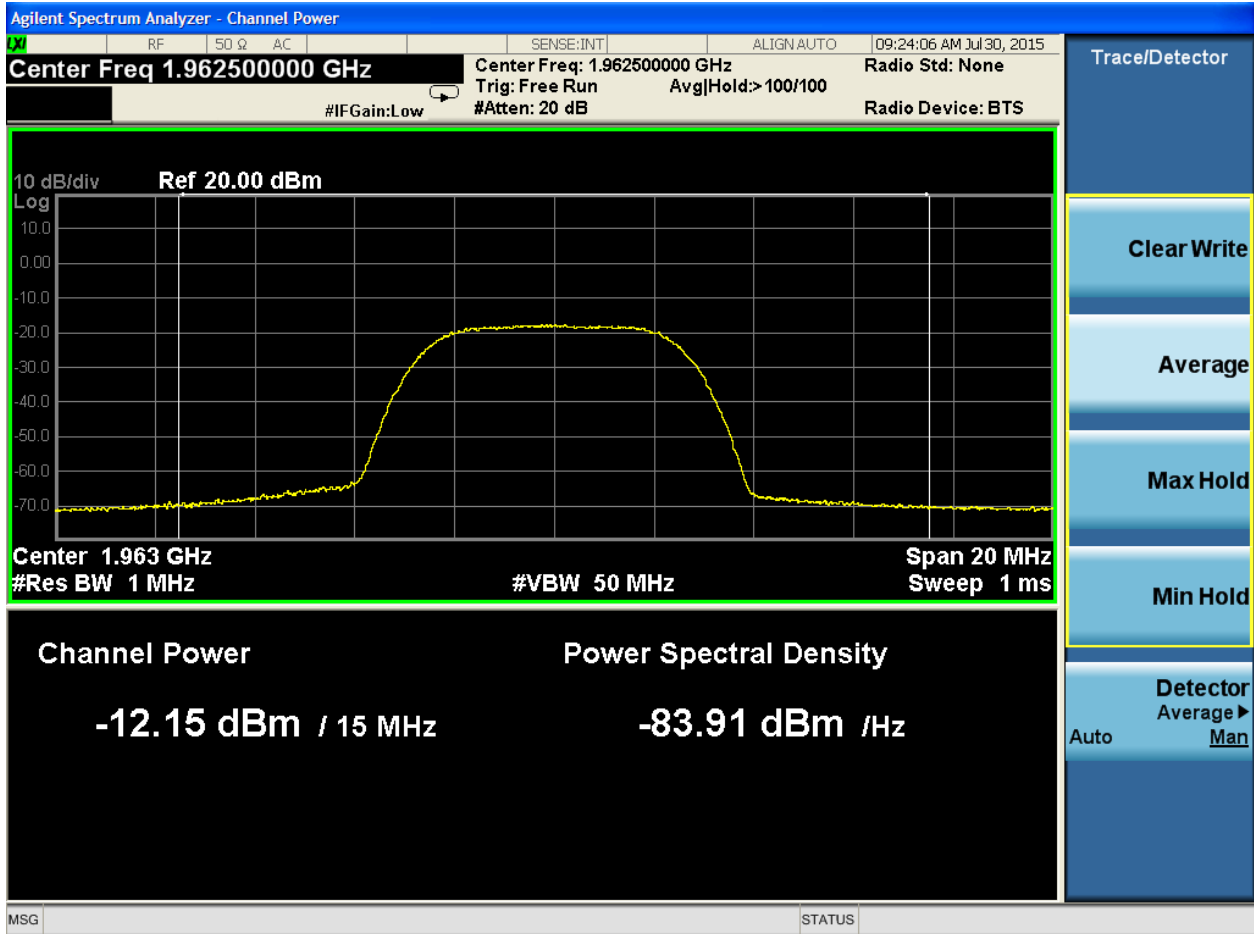


Band 25, Mid Channel, 64 QAM




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



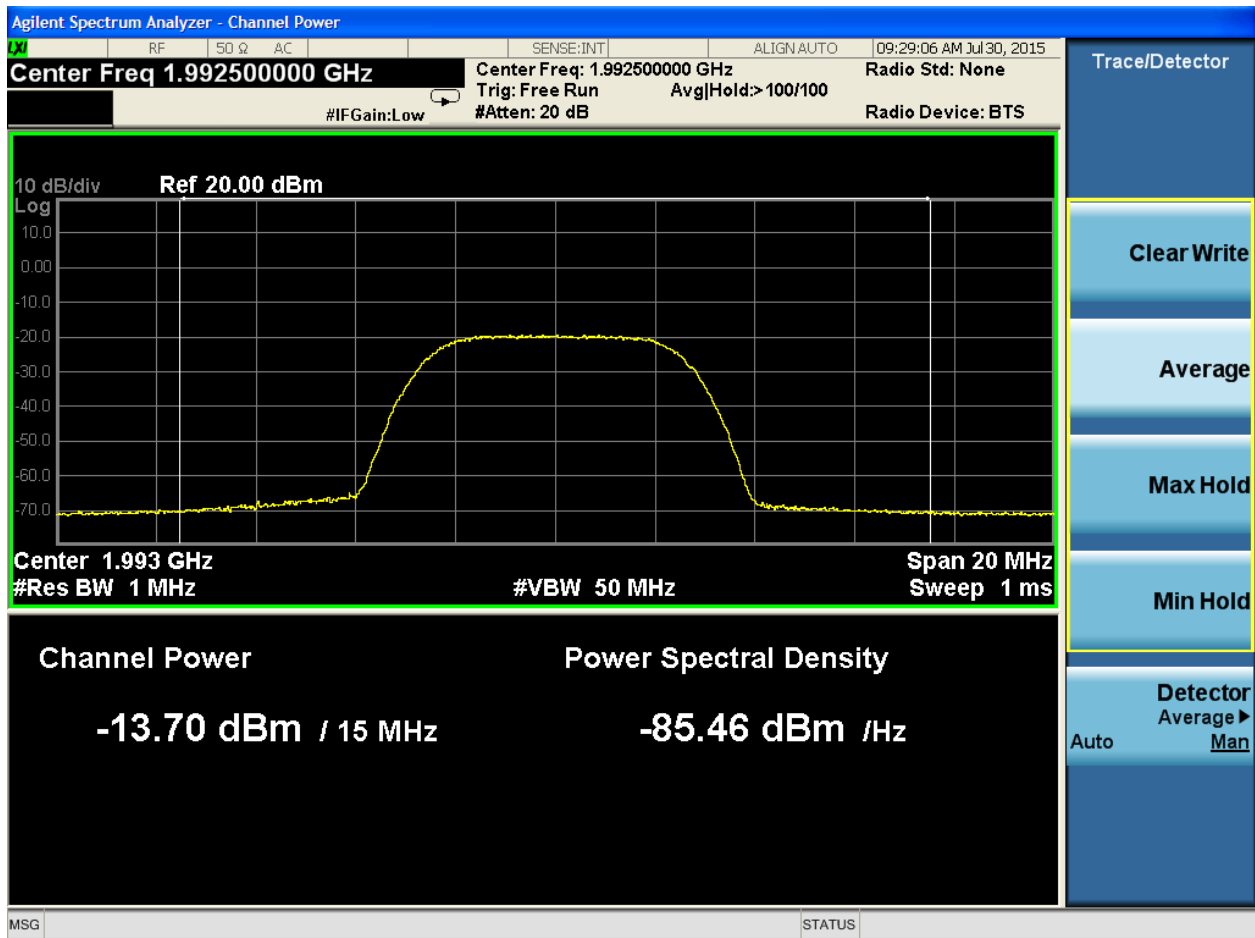


Band 25, High Channel, QPSK



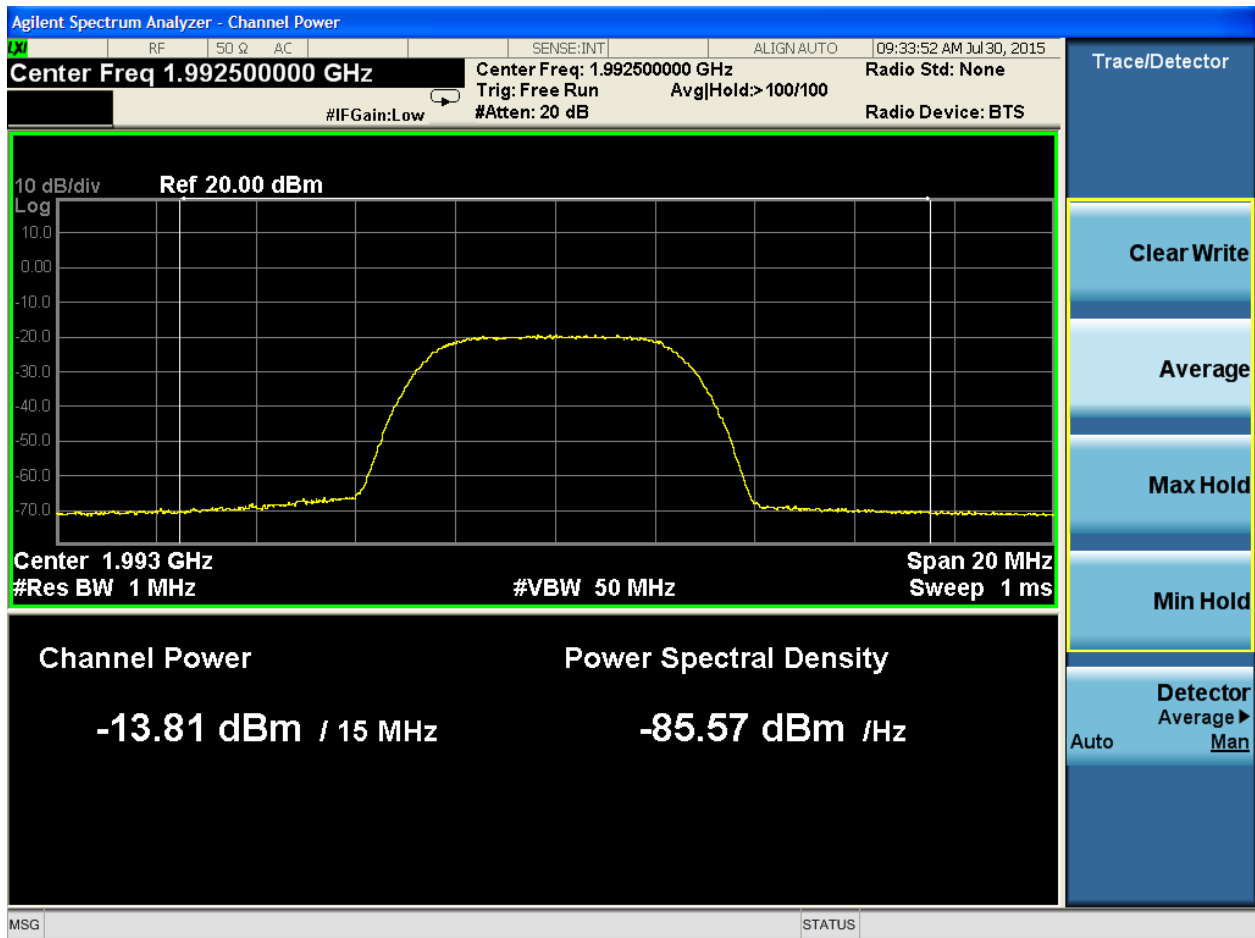


Band 25, High Channel, 16 QAM



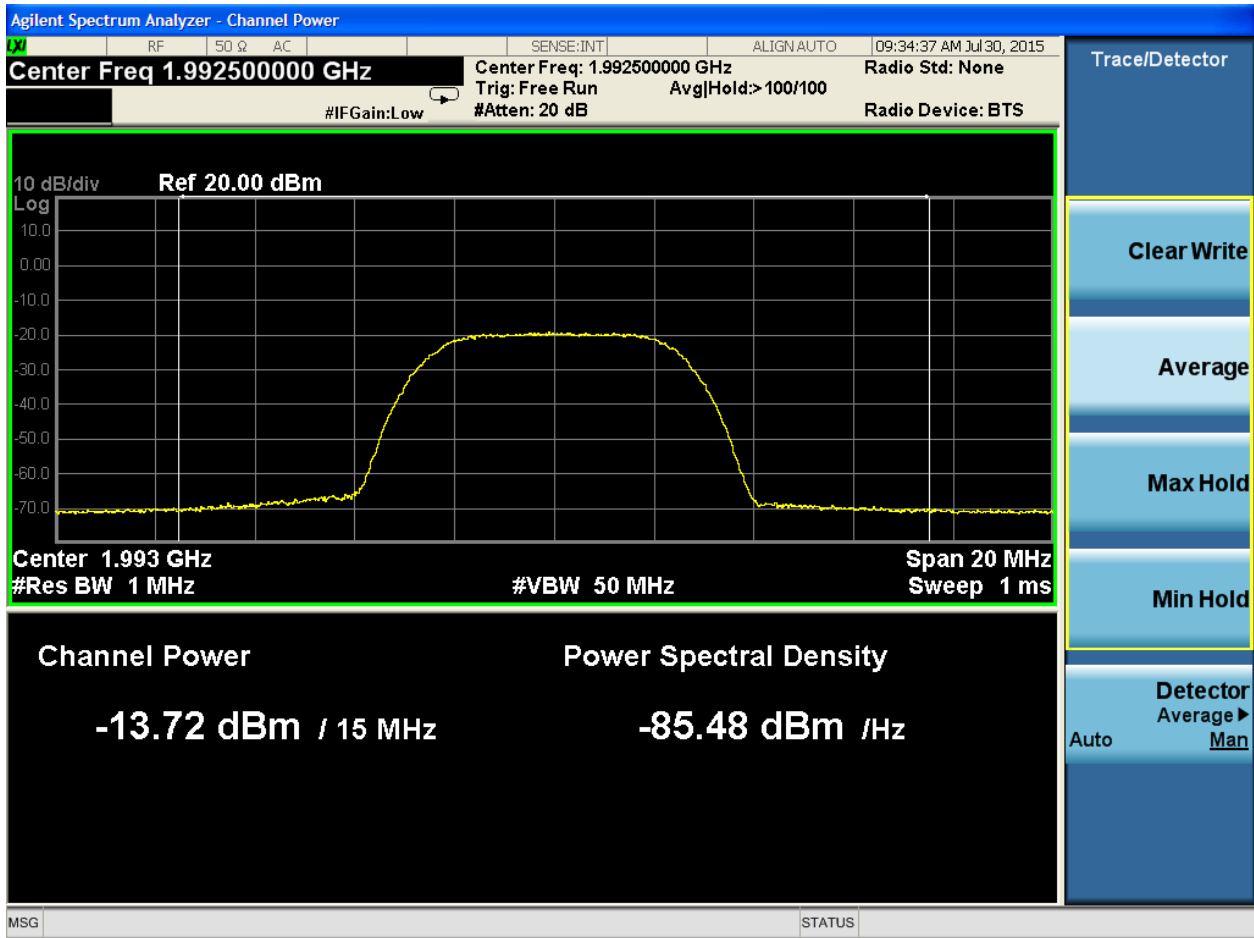

Band 25, High Channel, 64 QAM



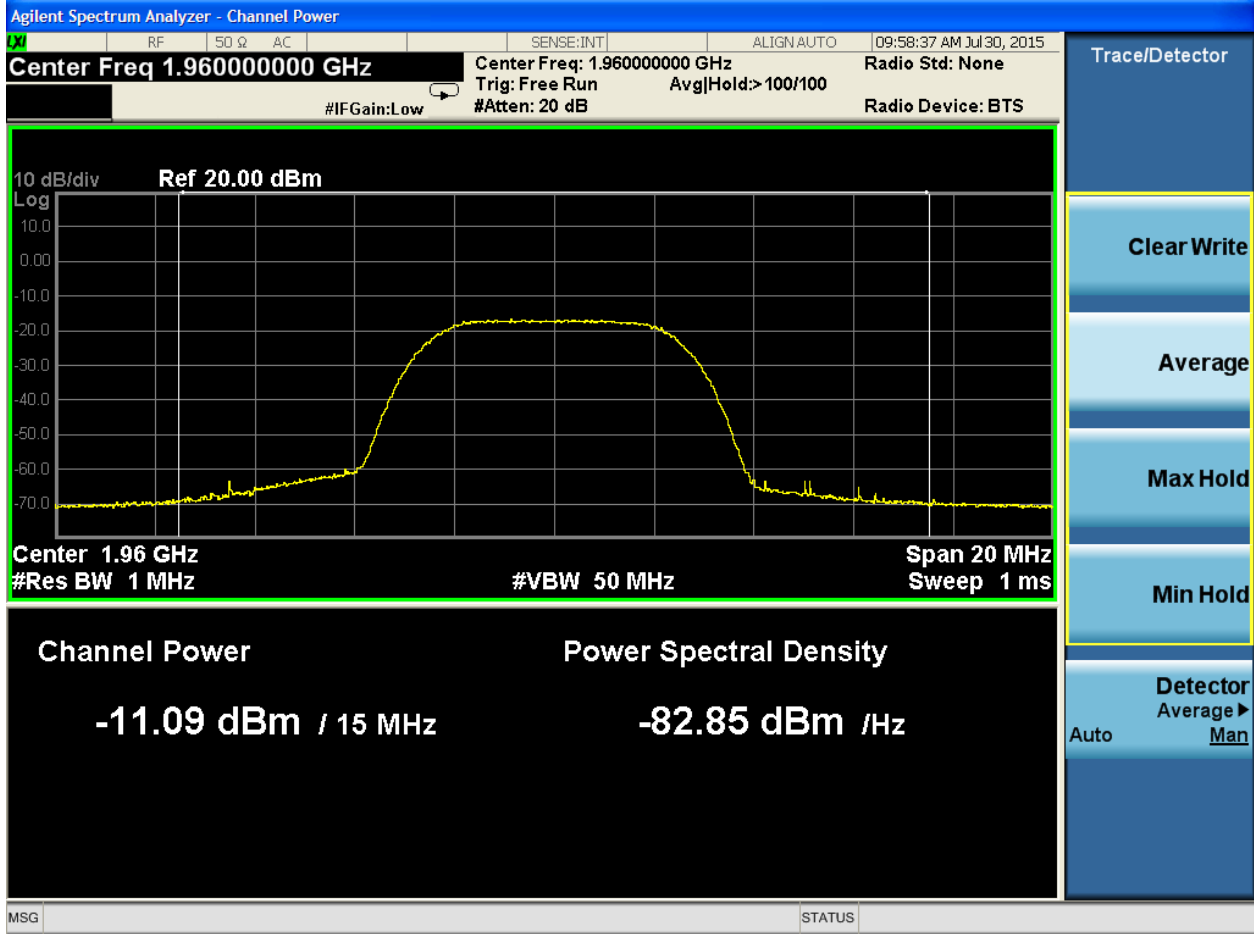


Band 2, Mid Channel, QPSK




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



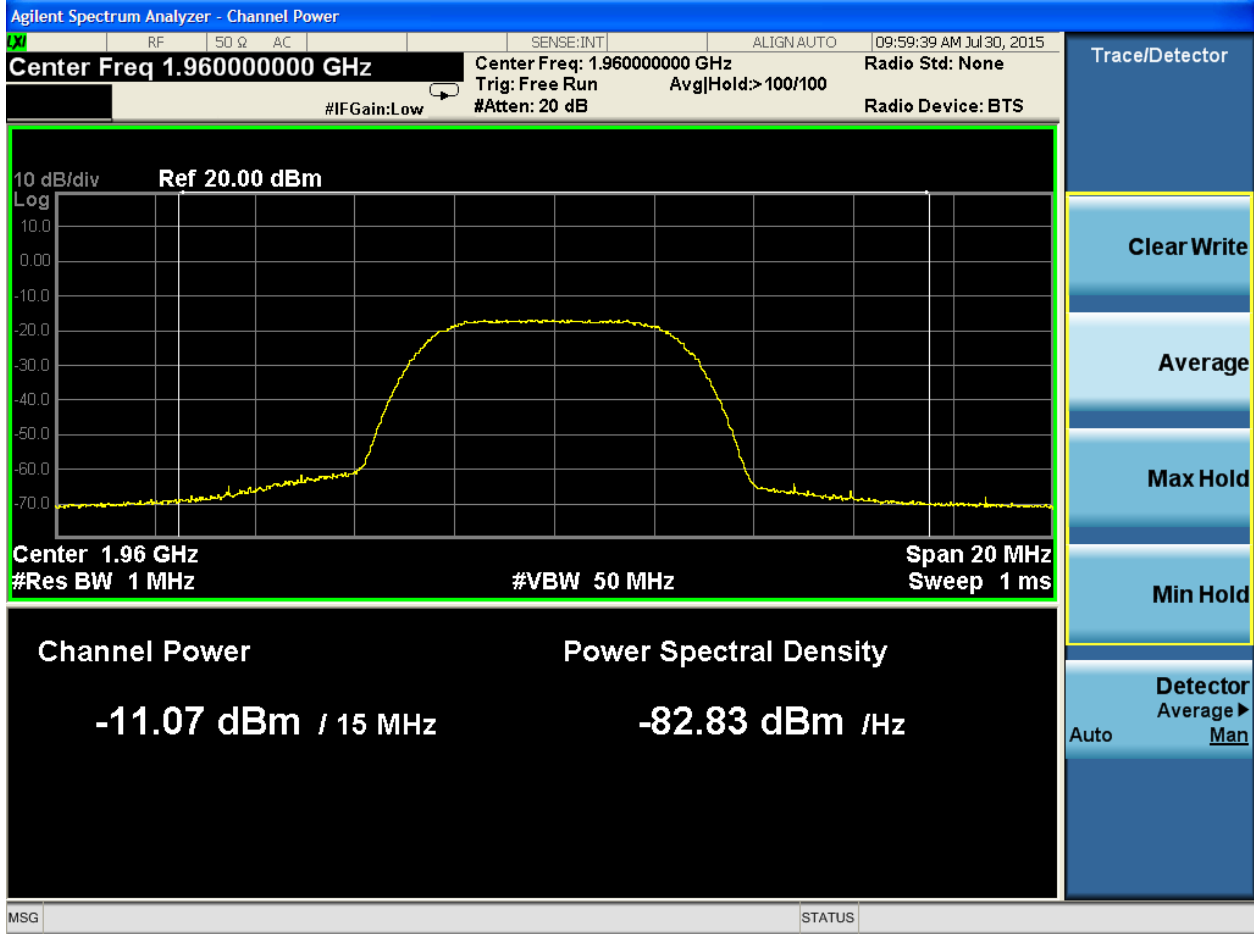

Band 2, Mid Channel, 16 QAM



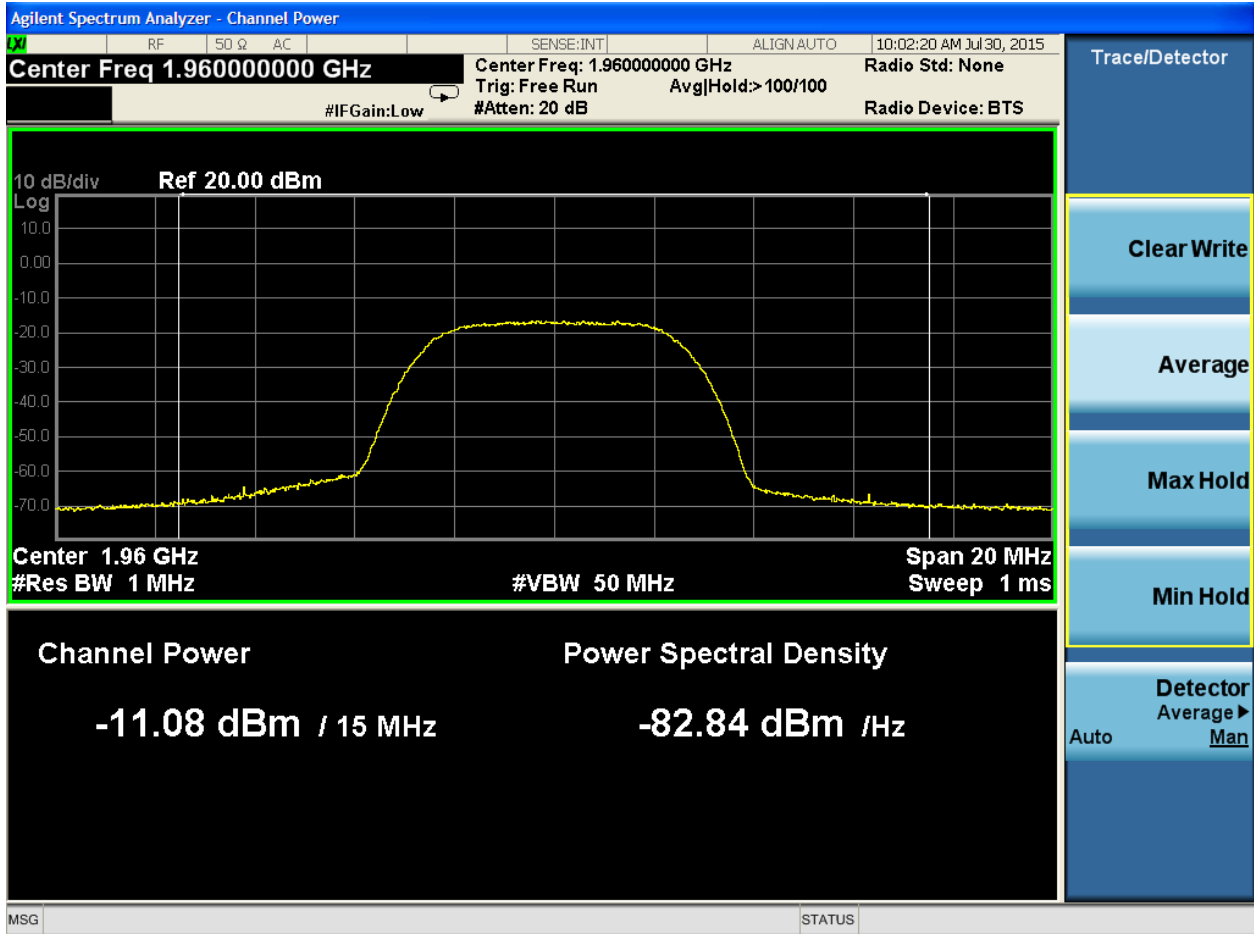


Band 2, Mid Channel, 64 QAM



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



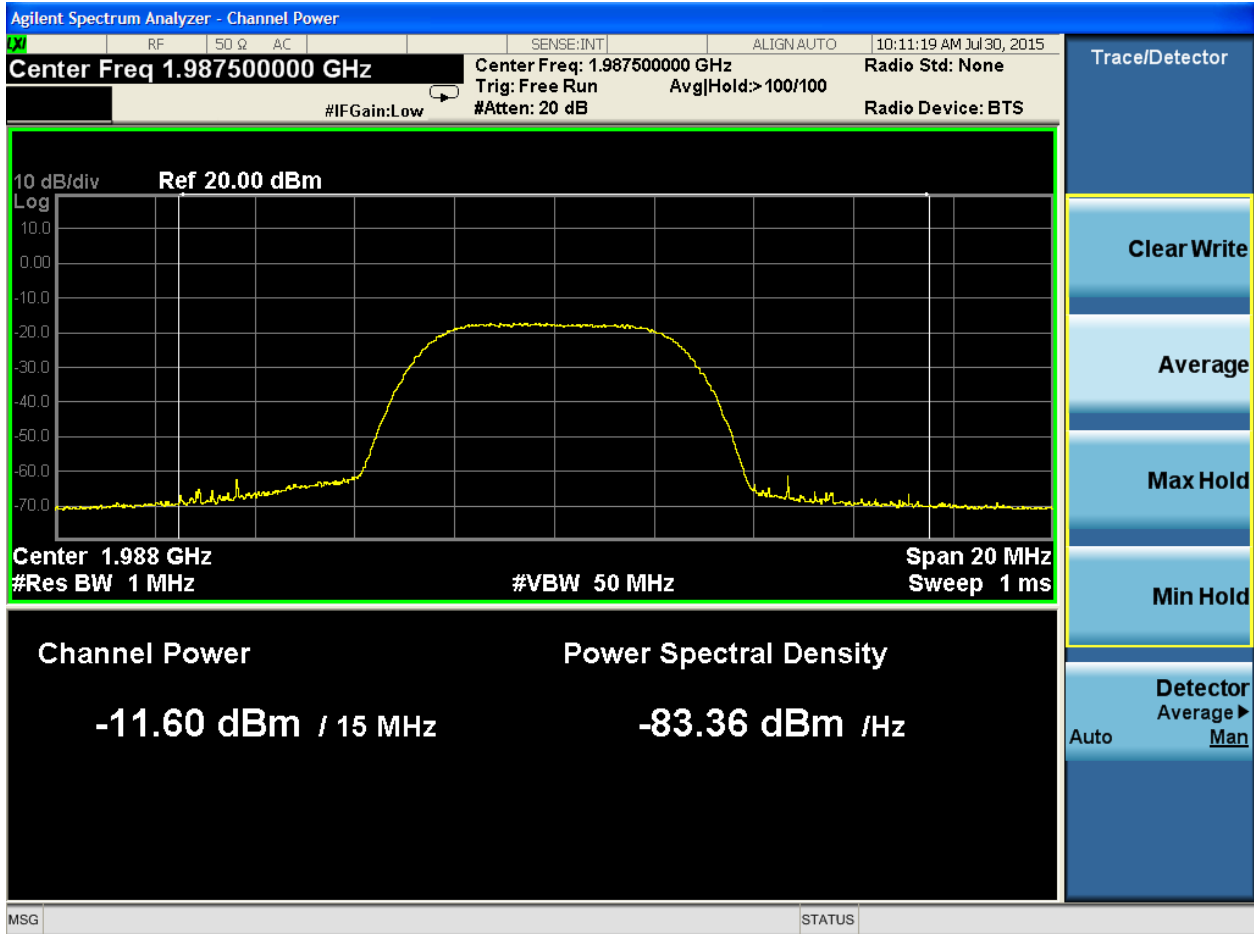


Band 2, High Channel, QPSK




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



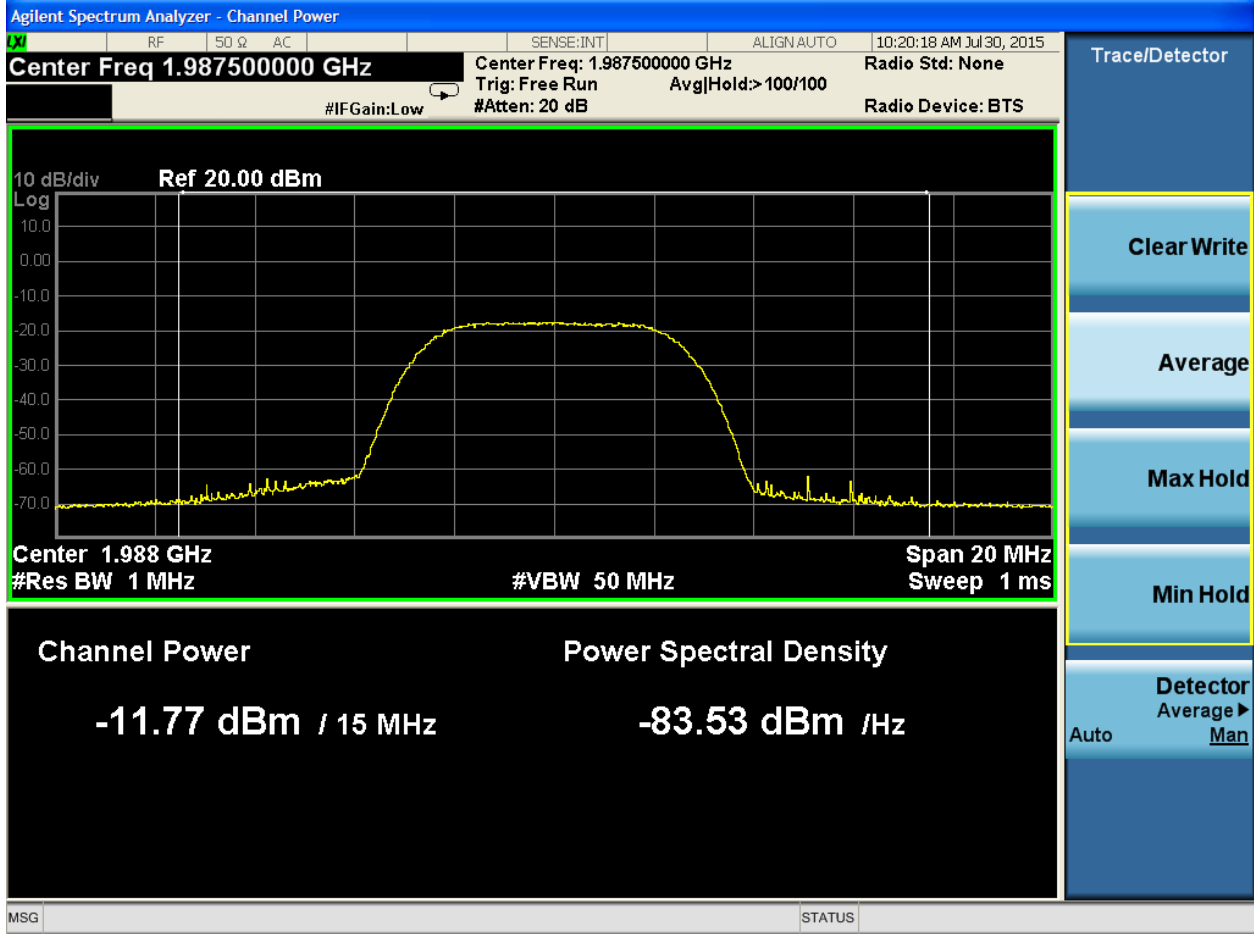

Band 2, High Channel, 16 QAM



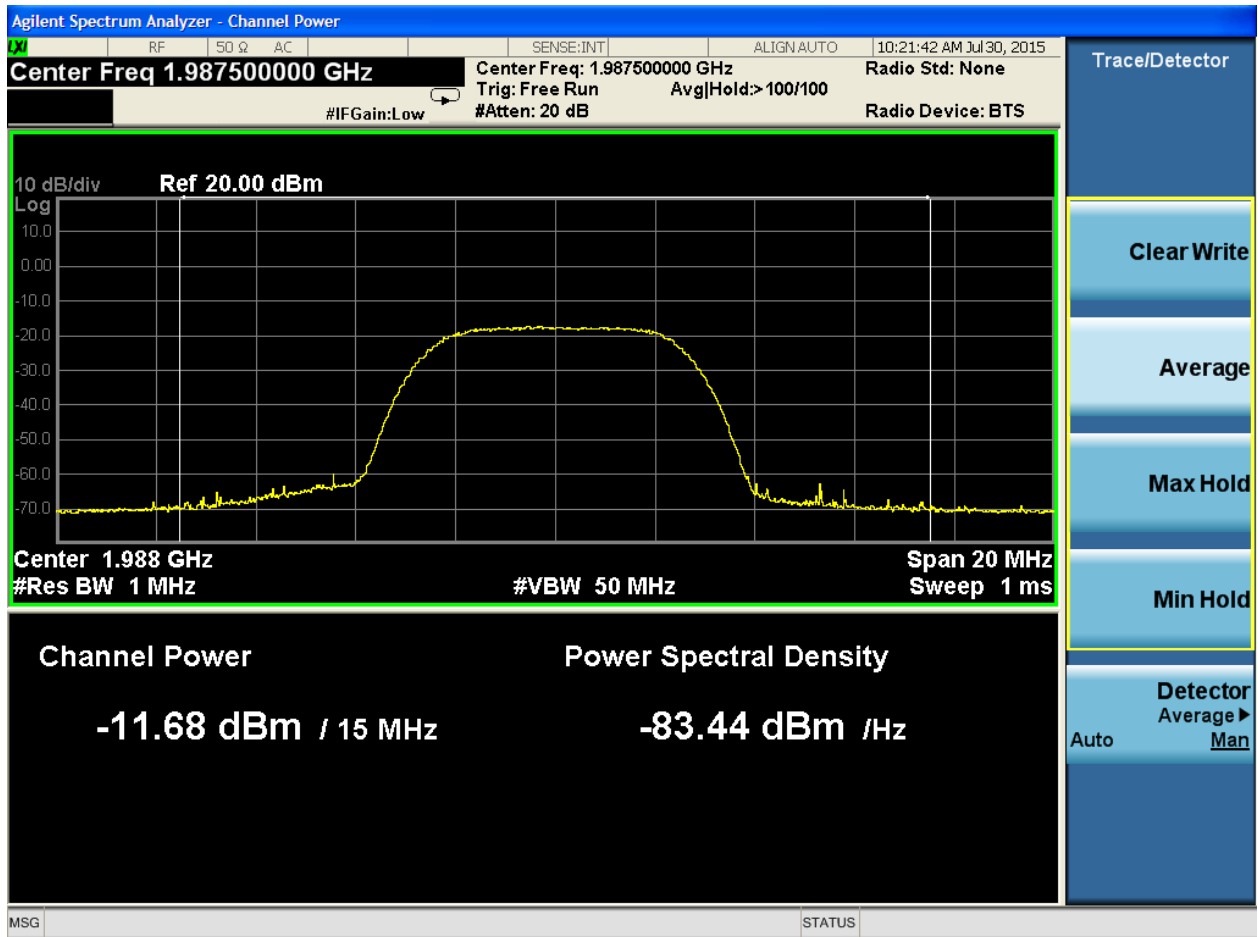

Band 2, High Channel, 64 QAM



Power and PAPR: 10MHz Operating Bandwidth

FCC Part 24.232:

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.


(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Output Power (E.I.R.P.)																
Date: 27-Jul-15		Company: Airvana				Work Order: P0152										
Engineer: Ryan Brown		EUT Desc: Switched IQ Radio Point Domestic				EUT Operating Voltage/Frequency: POE										
Temp: 27°C		Humidity: 51%				Pressure: 1008 mBar										
Frequency Range: Low, Mid and High Channels																
Notes: 2W = 33.0dBm. Multiple antenna calculations using formula from FCC KDB 662911, Section F(2)(a)(i). Two antennas each with gain 5.0dBi in this range are installed on the EUT. For multiple output calculations, N(ant.)=2 is used to calculated overall directional gain: 5.0dBi + 10log(N)dB = 5.0dBi + 3.0dB = 8.0dBi. Peak-to-Average Ratio (PAR) must be less than 13dB for average measurements to be applicable to the EIRP limits.																
Band	Bandwidth (MHz)	Modulation	Channel (MHz)	Frequency (MHz)	Average Power Reading (dBm)	Peak Power Reading (dBm)	Power Combiner (dB)	20dB Attenuator (dB)	Cable Factor (dB)	Average Power Reading (dBm)	PAPR (limit: 13dB) (dB)	Directional Antenna Gain (dB)	FCC Part 24.232 c & d; Limit: 2W = 33.0dBm			
													Limit (dBm)	ERP (dB)	Margin (dB)	Result
25	10	QPSK	Low	1935.0	-1.6	8.22	4.2	19.7	0.6	22.9	9.82	8.0	33.0	30.9	-2.1	Pass
25	10	QPSK	Mid	1962.5	-1.21	8.47	4.2	19.7	0.6	23.3	9.68	8.0	33.0	31.3	-1.7	Pass
25	10	QPSK	High	1990.0	-2.72	7.06	4.2	19.7	0.6	21.8	9.78	8.0	33.0	29.8	-3.2	Pass
25	10	16QAM	Low	1935.0	-1.55	8.4	4.2	19.7	0.6	23.0	9.95	8.0	33.0	31.0	-2.1	Pass
25	10	16QAM	Mid	1962.5	-1.2	8.62	4.2	19.7	0.6	23.3	9.82	8.0	33.0	31.3	-1.7	Pass
25	10	16QAM	High	1990.0	-2.69	7.18	4.2	19.7	0.6	21.8	9.87	8.0	33.0	29.8	-3.2	Pass
25	10	64QAM	Low	1935.0	-1.62	8.67	4.2	19.7	0.6	22.9	10.29	8.0	33.0	30.9	-2.1	Pass
25	10	64QAM	Mid	1962.5	-1.19	8.84	4.2	19.7	0.6	23.3	10.03	8.0	33.0	31.3	-1.7	Pass
25	10	64QAM	High	1990.0	-2.78	7.28	4.2	19.7	0.6	21.7	10.06	8.0	33.0	29.7	-3.3	Pass
2	10	QPSK	Low	1935.0	See Band 25	-0.95										
2	10	QPSK	Mid	1960.0		8.43	4.2	19.7	0.6	23.5	9.39	8.0	33.0	31.5	-1.5	Pass
2	10	QPSK	High	1985.0		7.73	4.2	19.7	0.6	22.3	9.93	8.0	33.0	30.3	-2.7	Pass
2	10	16QAM	Low	1935.0	See Band 25	-2.2										
2	10	16QAM	Mid	1960.0		8.66	4.2	19.7	0.6	23.5	9.63	8.0	33.0	31.5	-1.5	Pass
2	10	16QAM	High	1985.0		7.54	4.2	19.7	0.6	22.3	9.75	8.0	33.0	30.3	-2.7	Pass
2	10	64QAM	Low	1935.0	See Band 25	-1										
2	10	64QAM	Mid	1960.0		9.29	4.2	19.7	0.6	23.5	10.29	8.0	33.0	31.5	-1.5	Pass
2	10	64QAM	High	1985.0		7.54	4.2	19.7	0.6	22.2	9.81	8.0	33.0	30.2	-2.8	Pass
Table Result: Pass																
Test Site: ESD-1		Cable: 1509				20dB Attenuator: 791										
Analyzer: MXE EMI Receiver		Power Combiner: 1939														

Spectrum analyzer plots are on the following pages.




Peak Measurements at 10MHz:

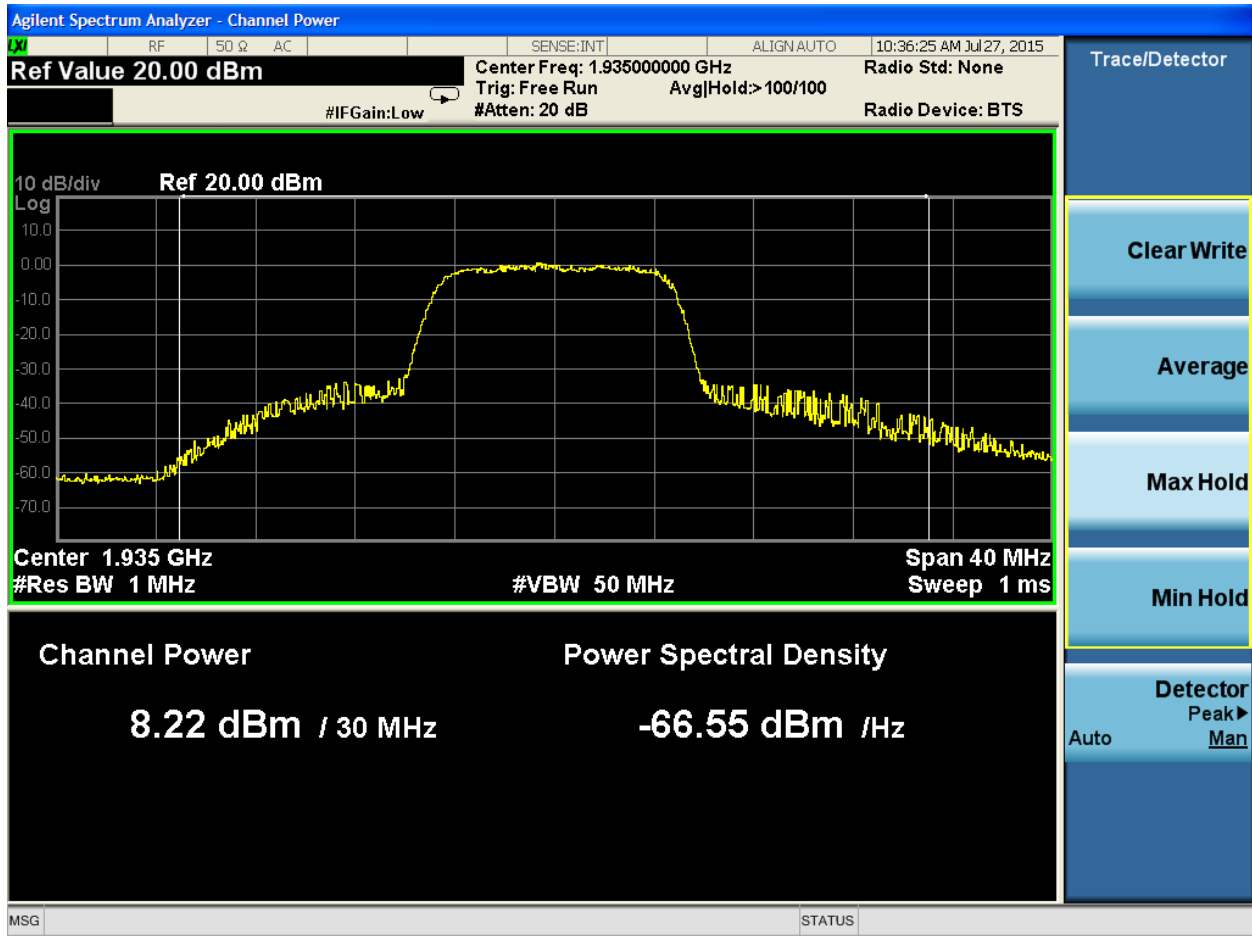


Band 25, Low Channel, QPSK



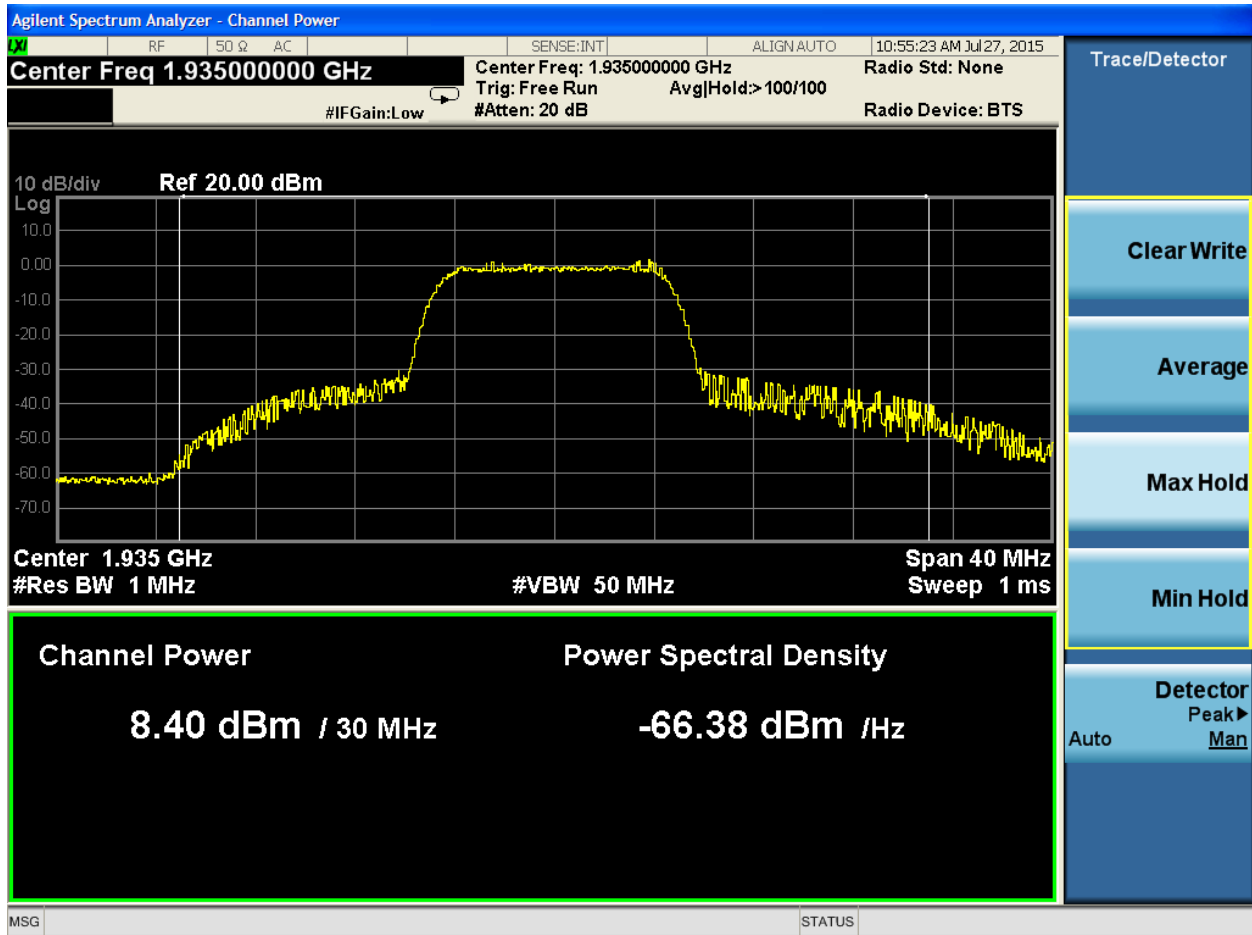


Band 25, Low Channel, 16QAM



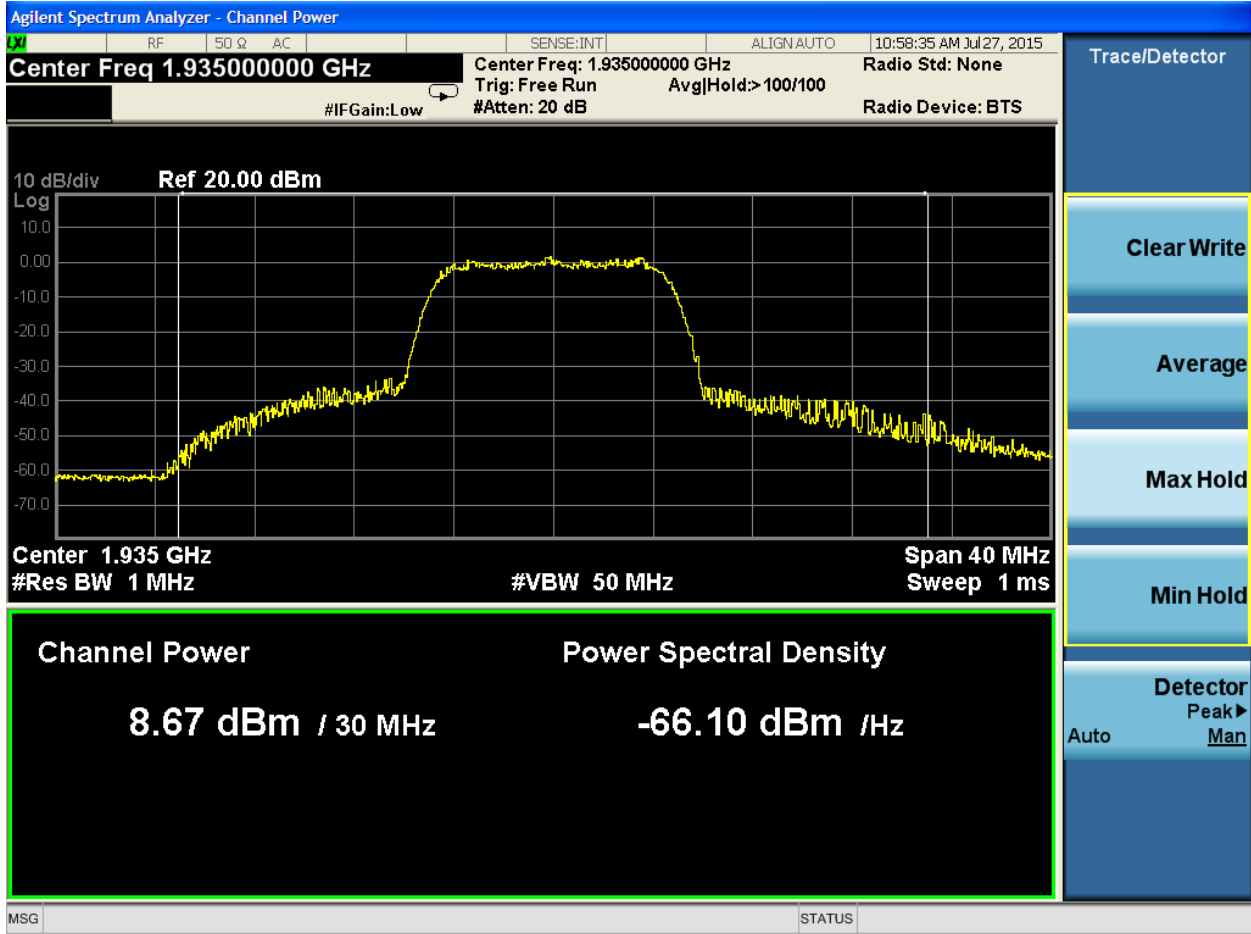


Band 25, Low Channel, 64QAM



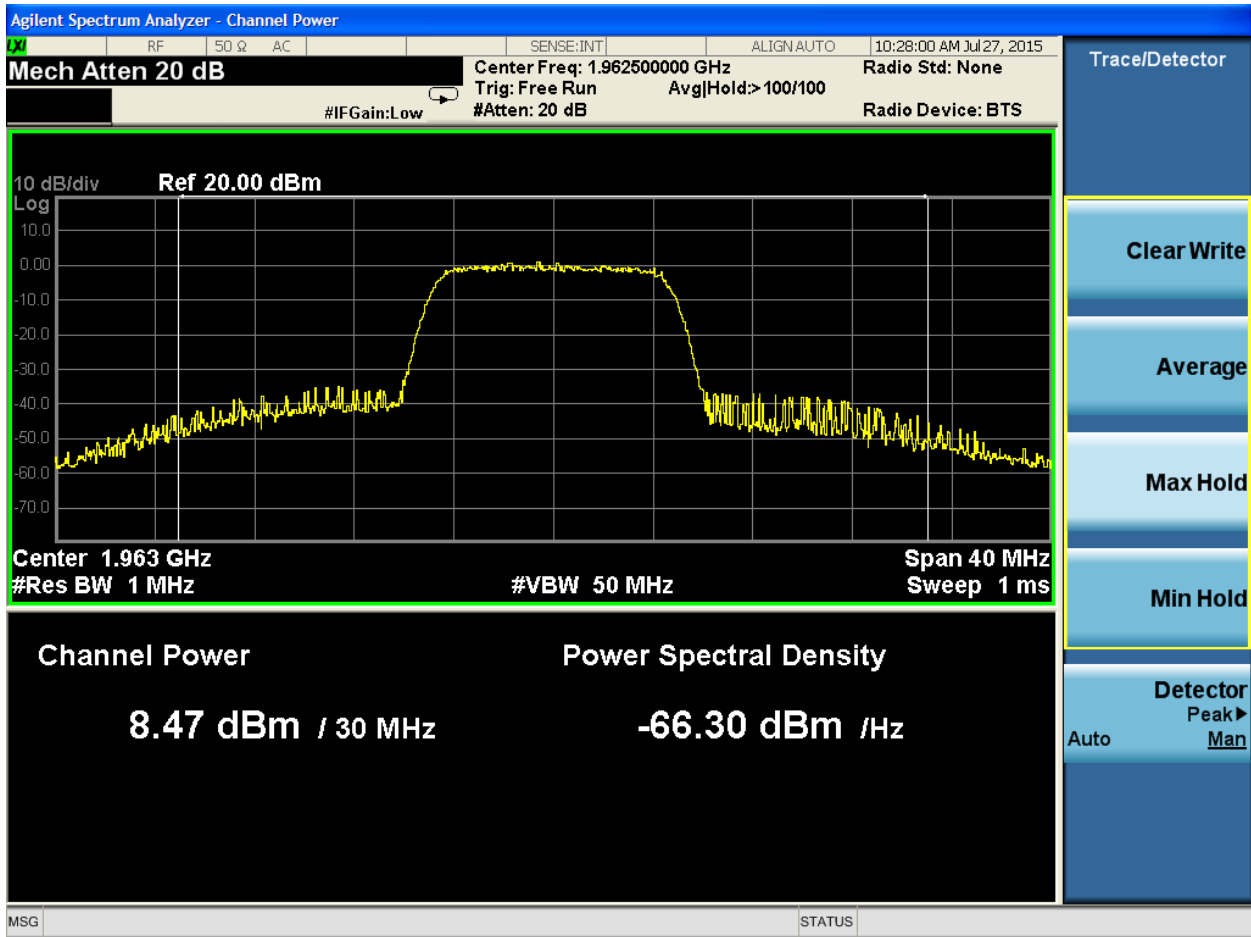


Band 25, Mid Channel, QPSK



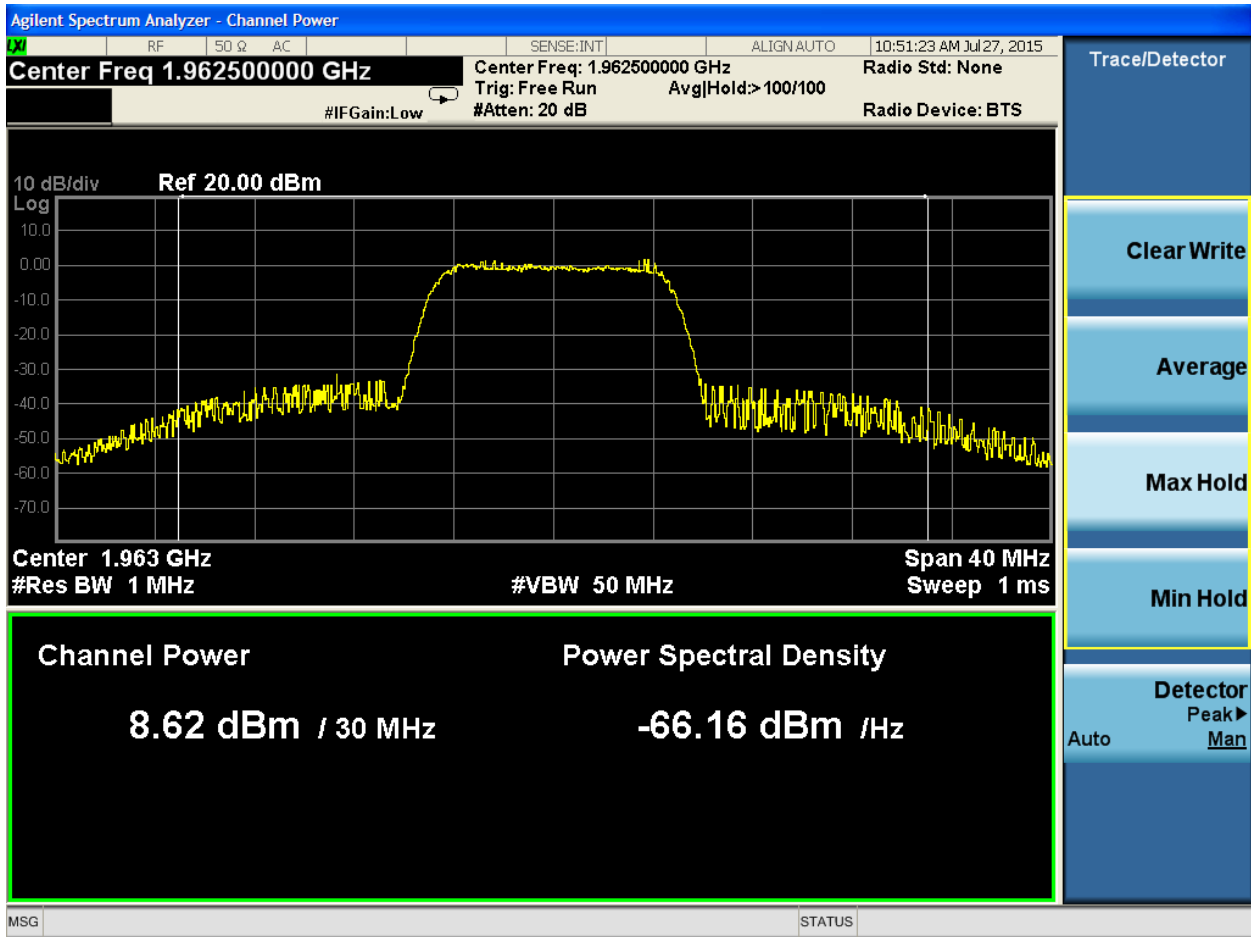


Band 25, Mid Channel, 16QAM



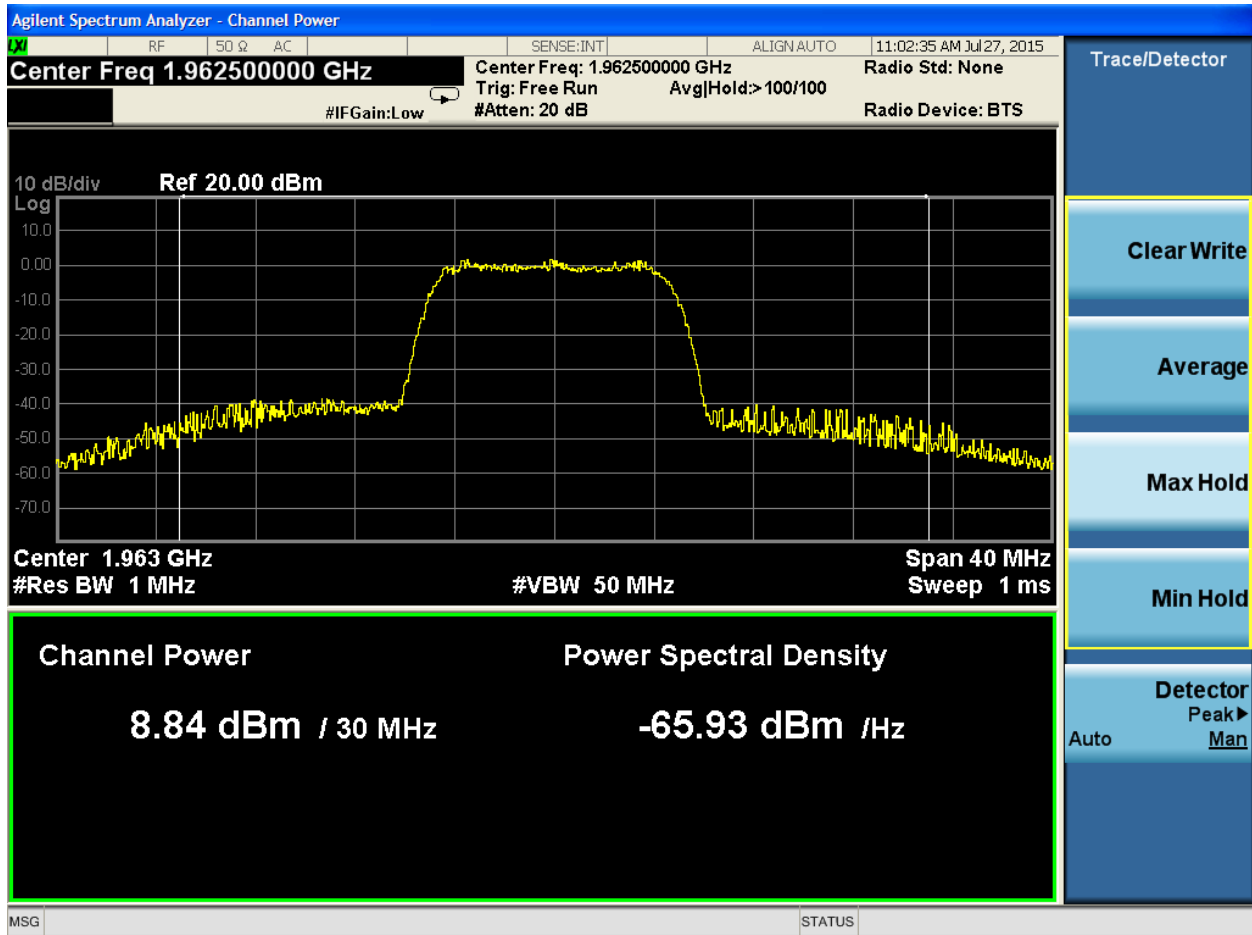


Band 25, Mid Channel, 64QAM



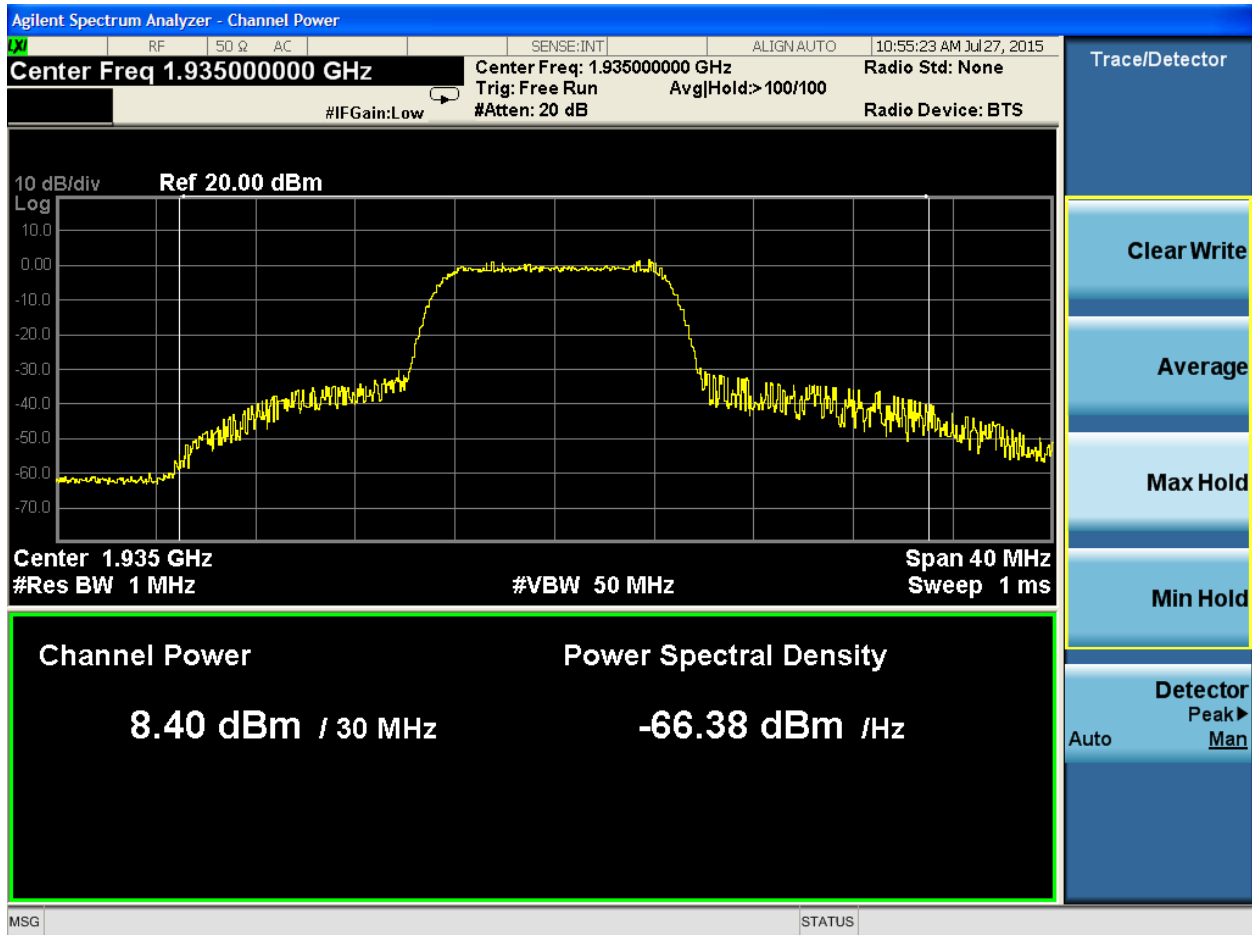

Band 25, High Channel, QPSK



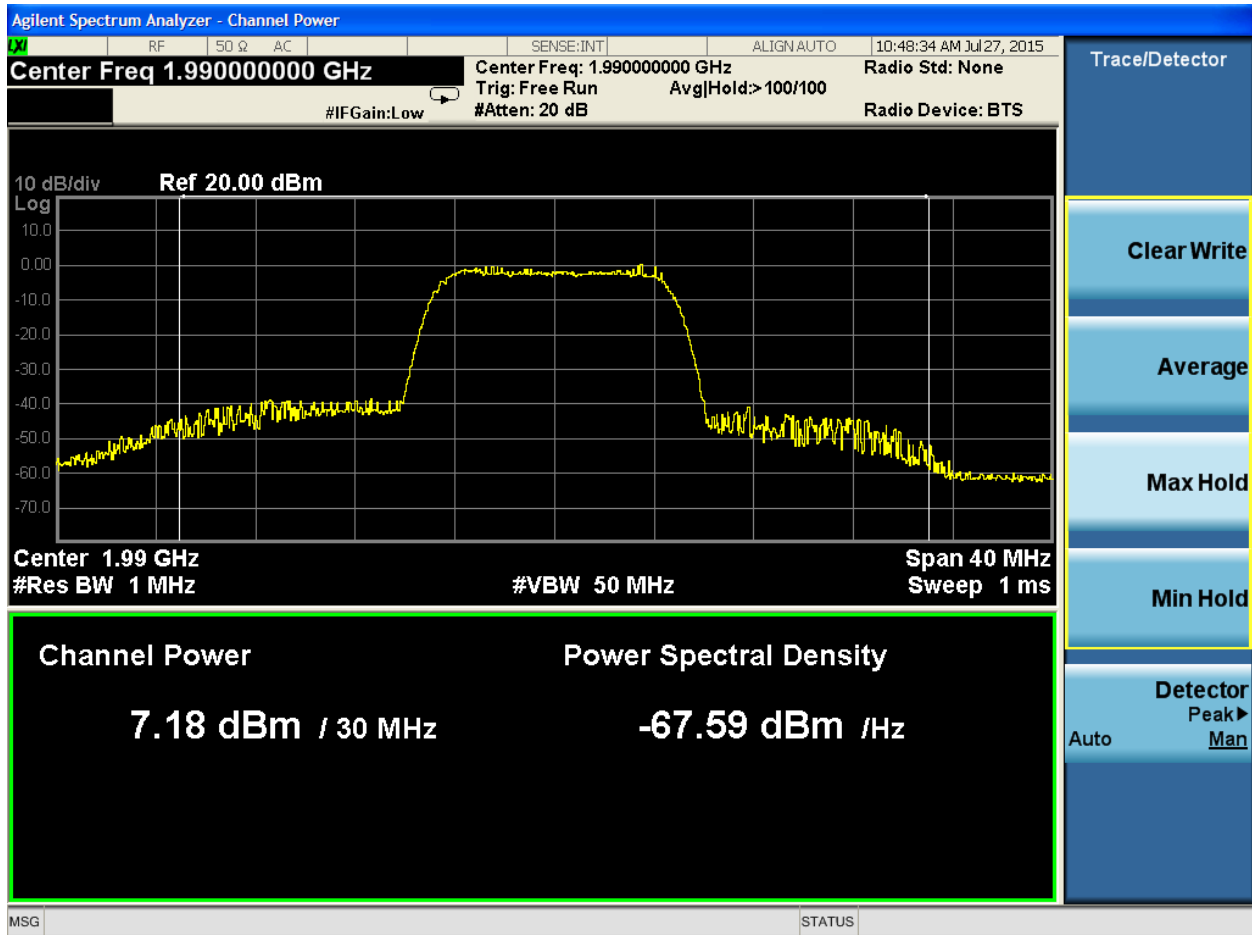


Band 25, High Channel, 16QAM




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



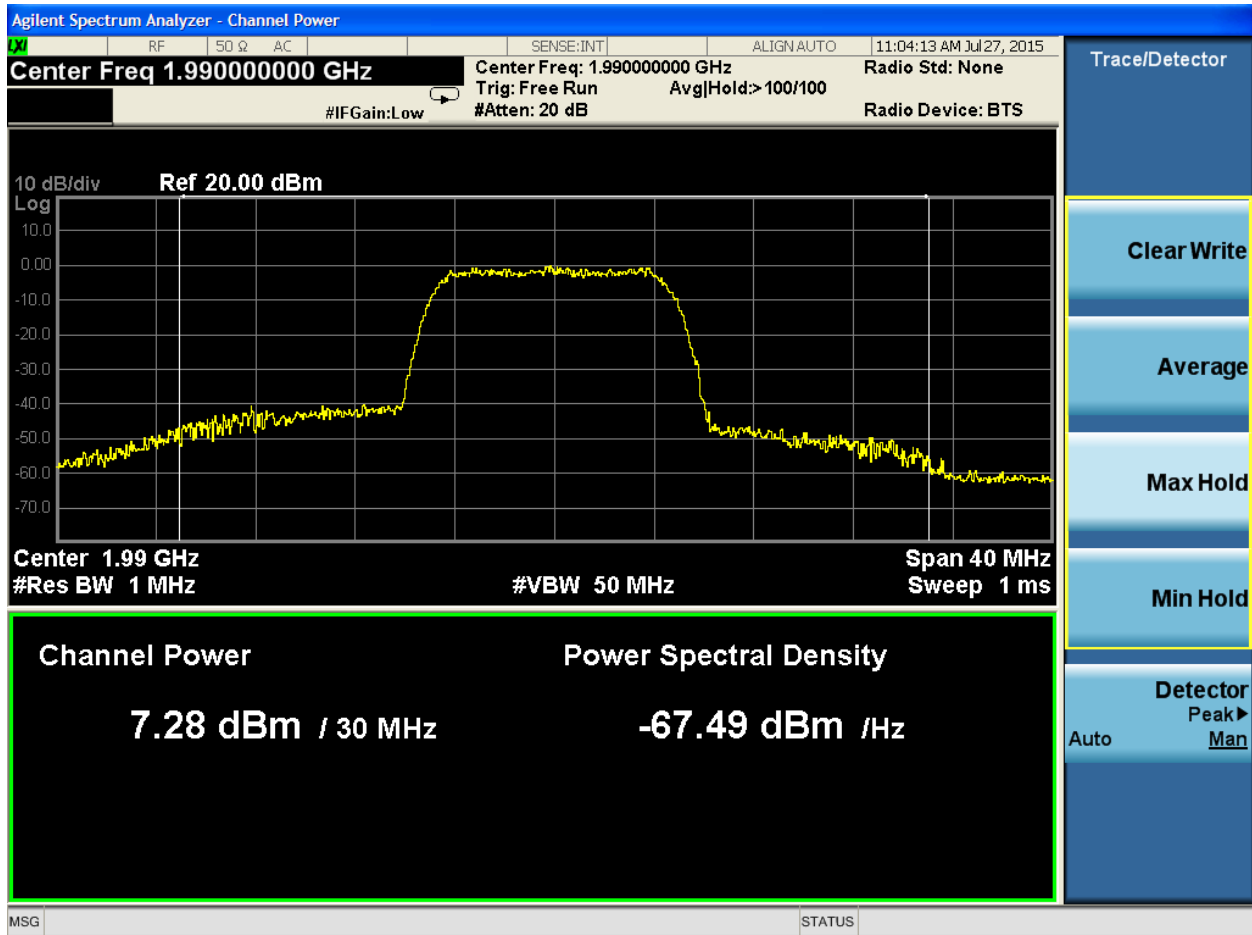


Band 25, High Channel, 64QAM



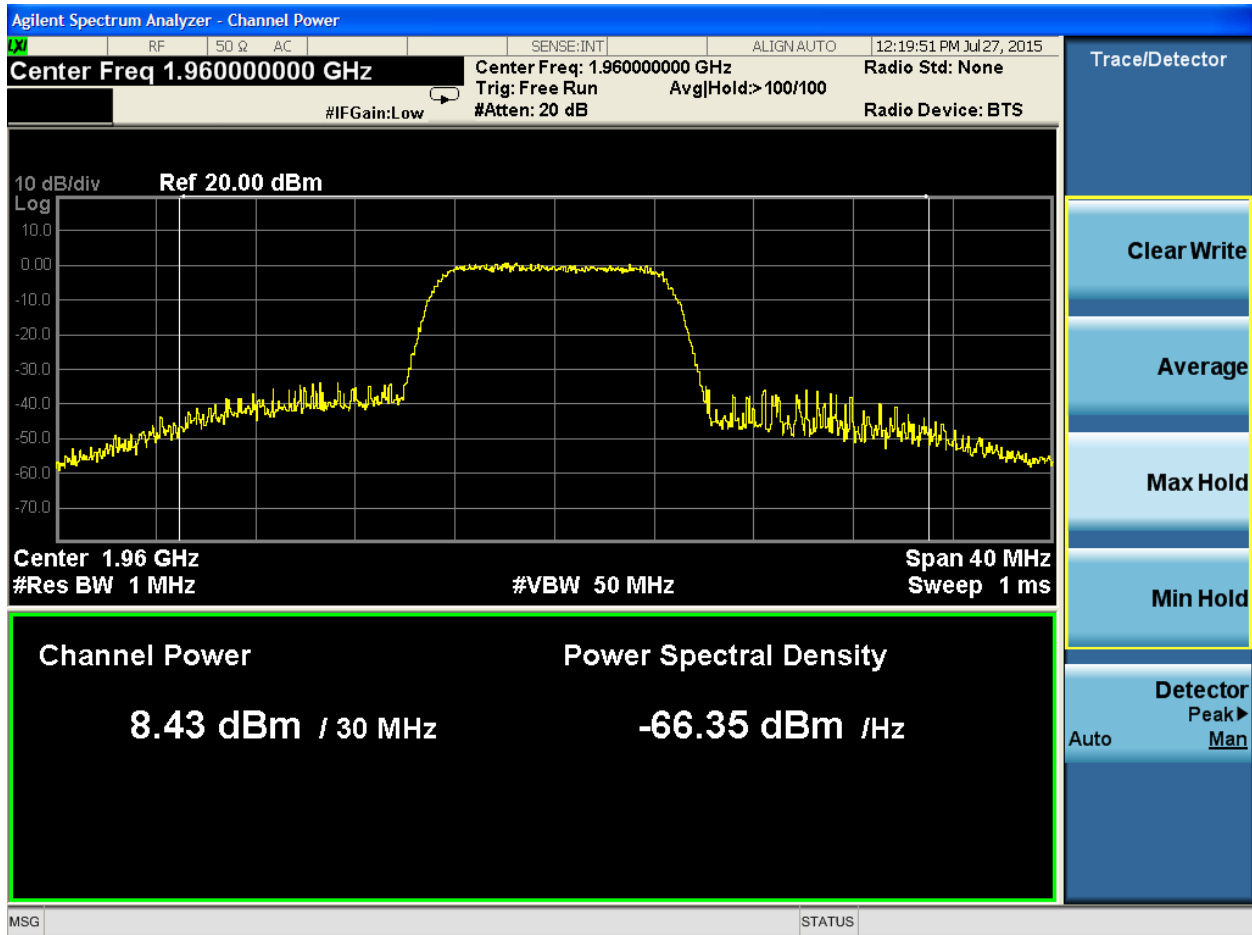


Band 2, Mid Channel, QPSK



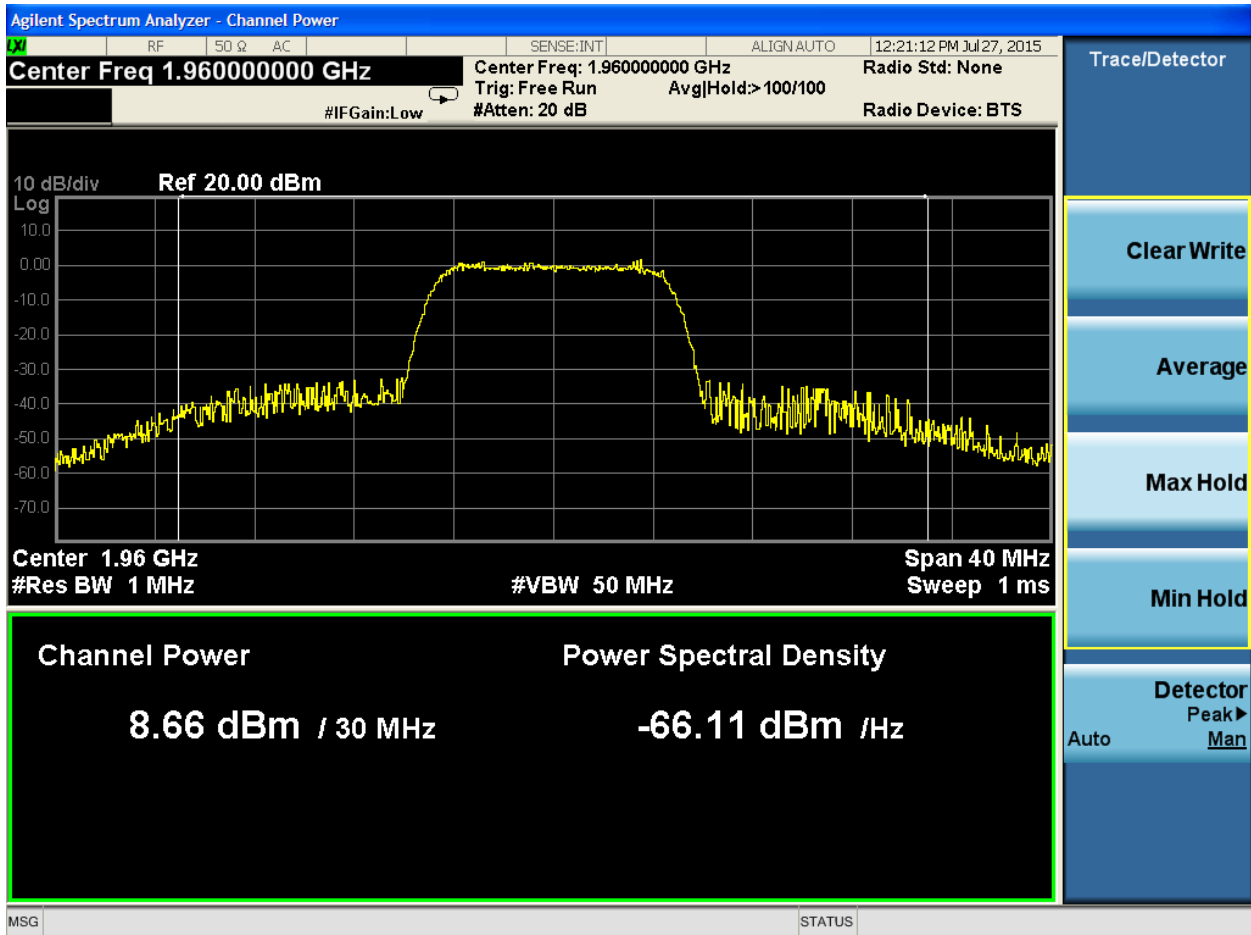

Band 2, Mid Channel, 16QAM



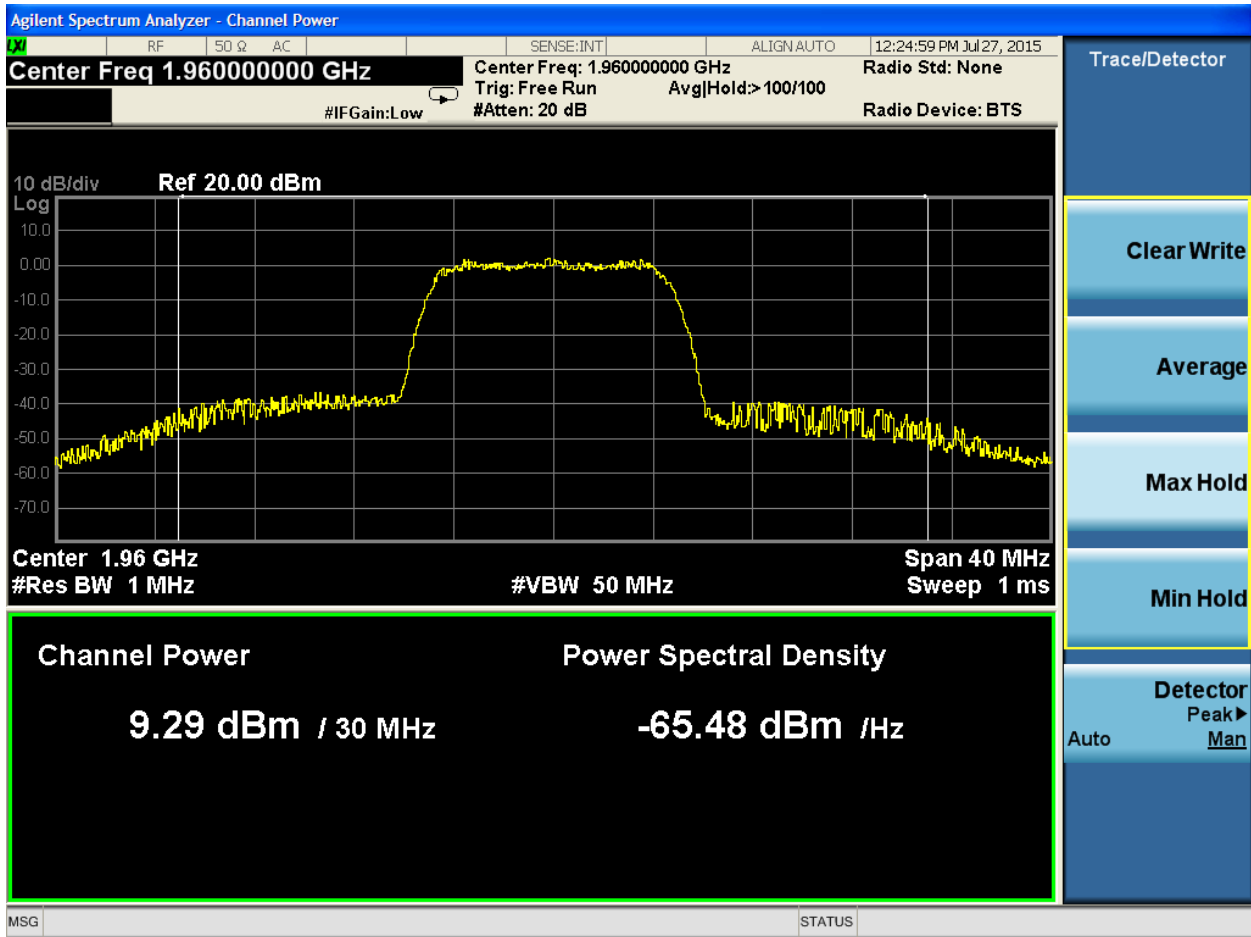


Band 2, Mid Channel, 64QAM




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



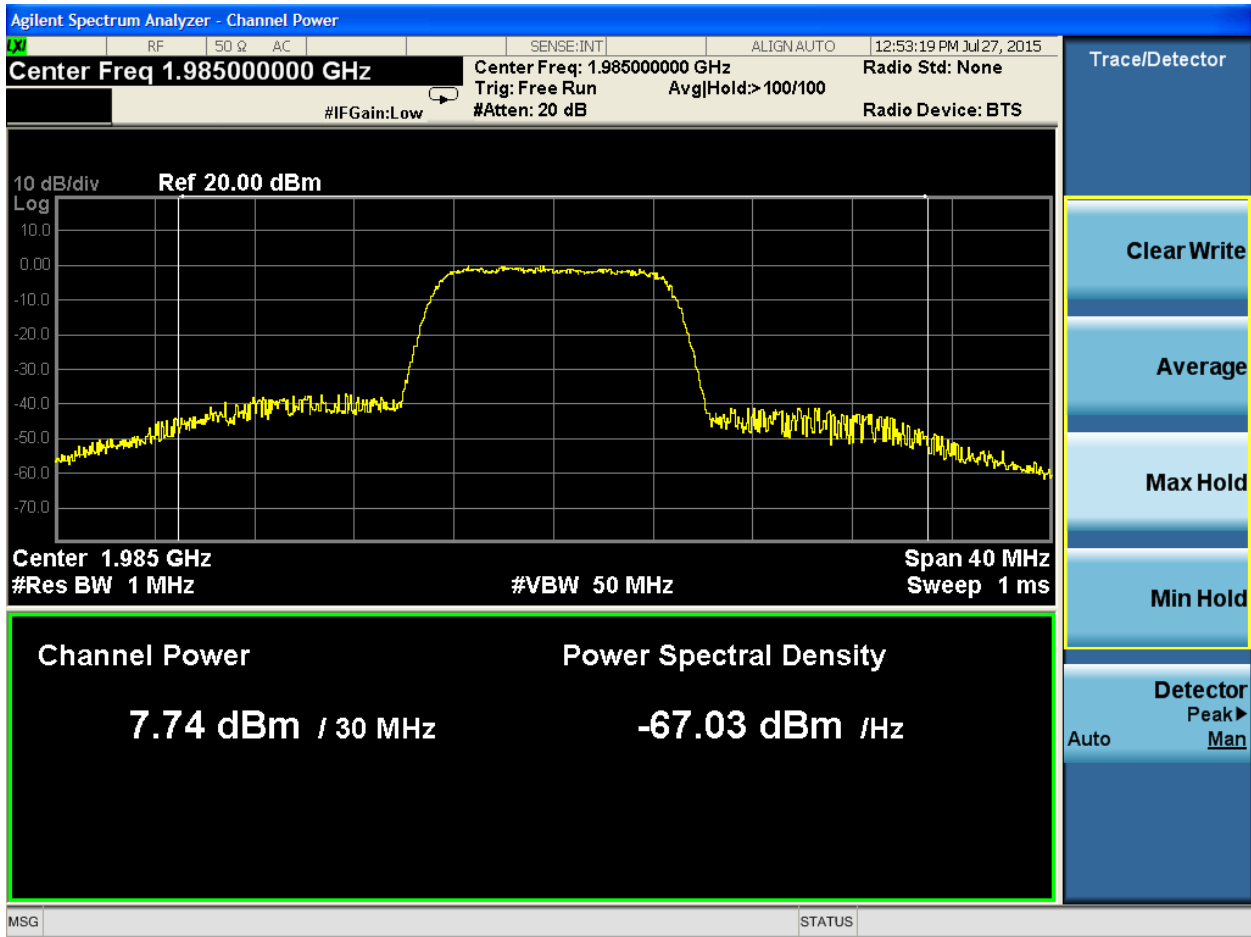


Band 2, High Channel, QPSK



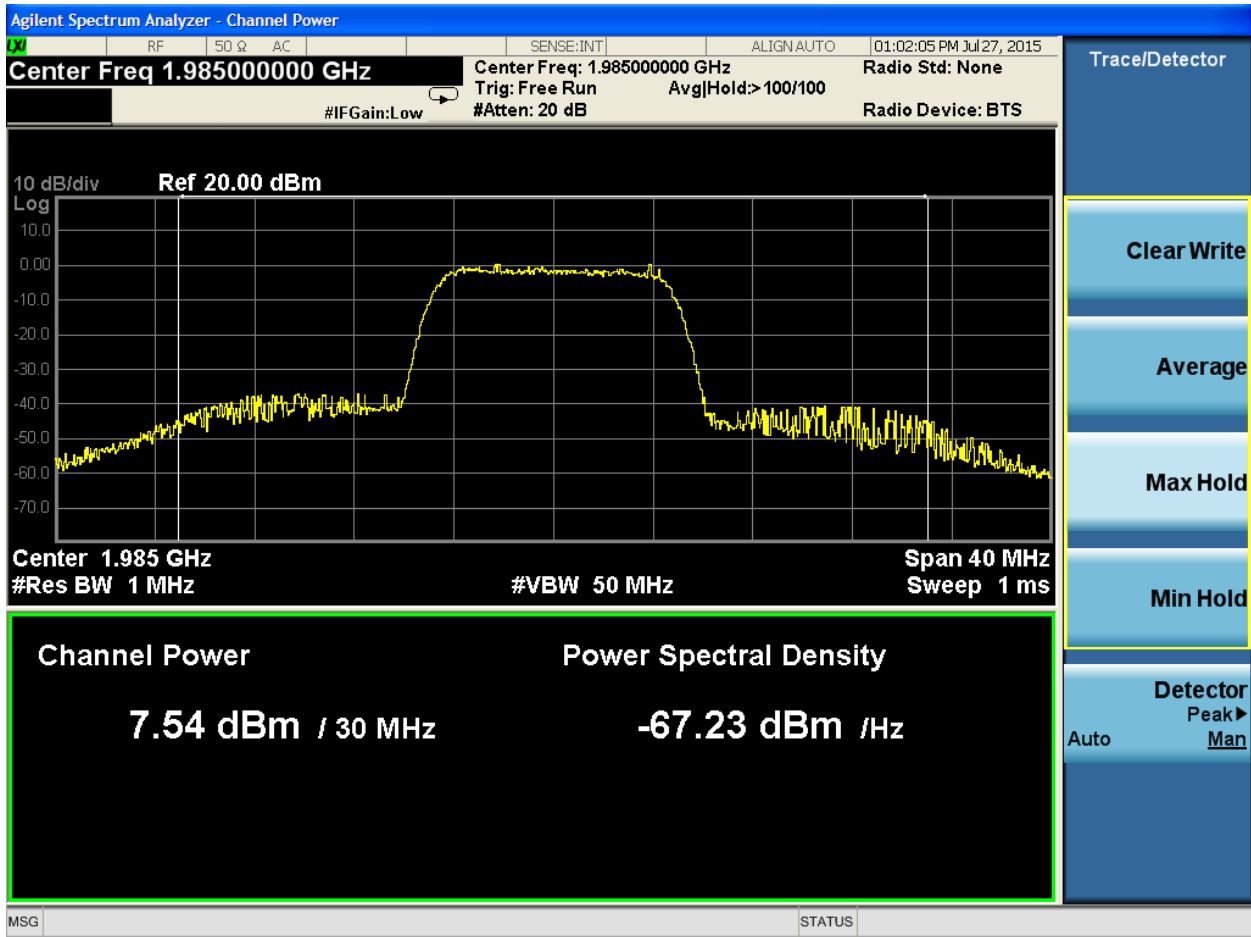

Band 2, High Channel, 16QAM




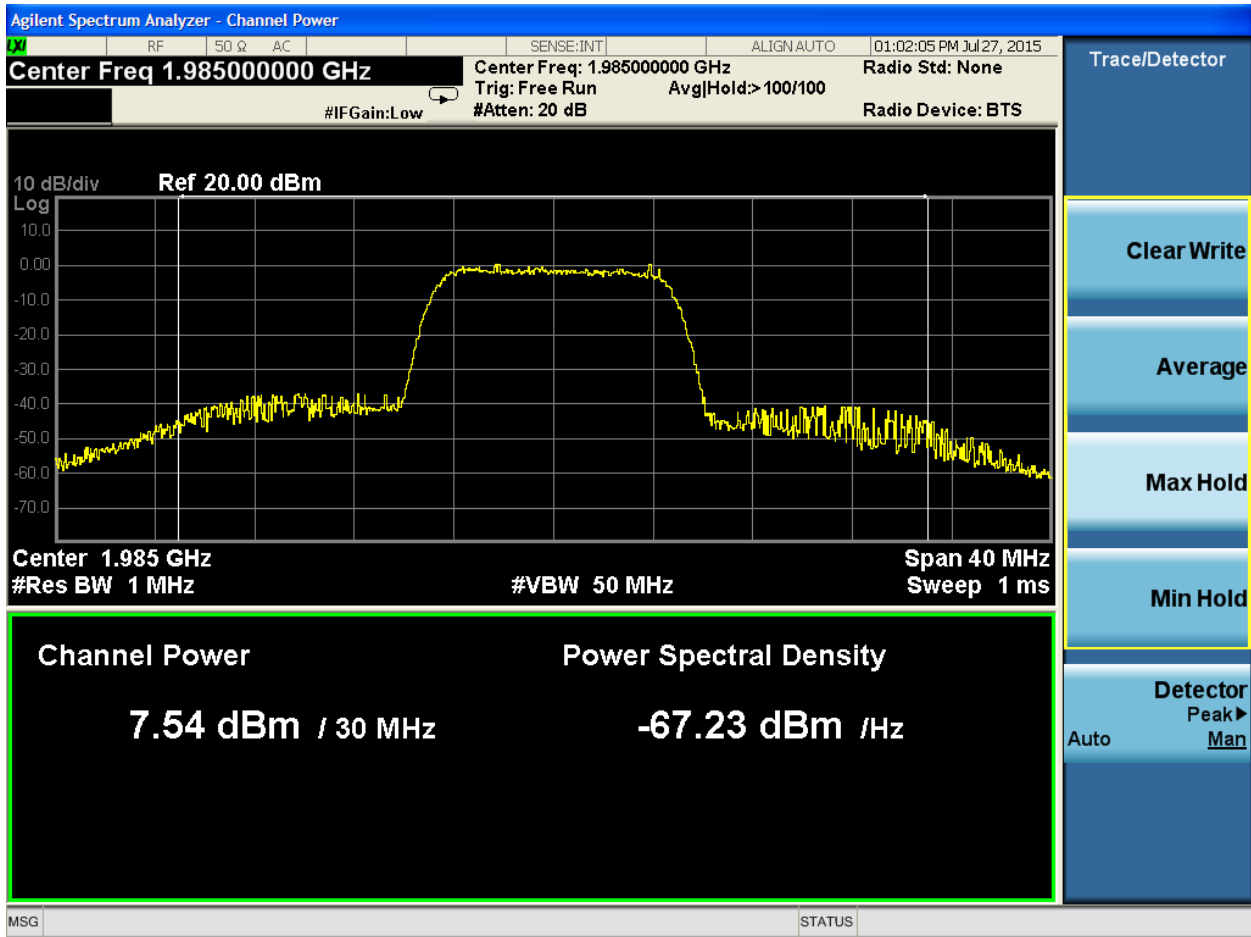

Band 2, High Channel, 64QAM


Average Measurements at 5MHz:



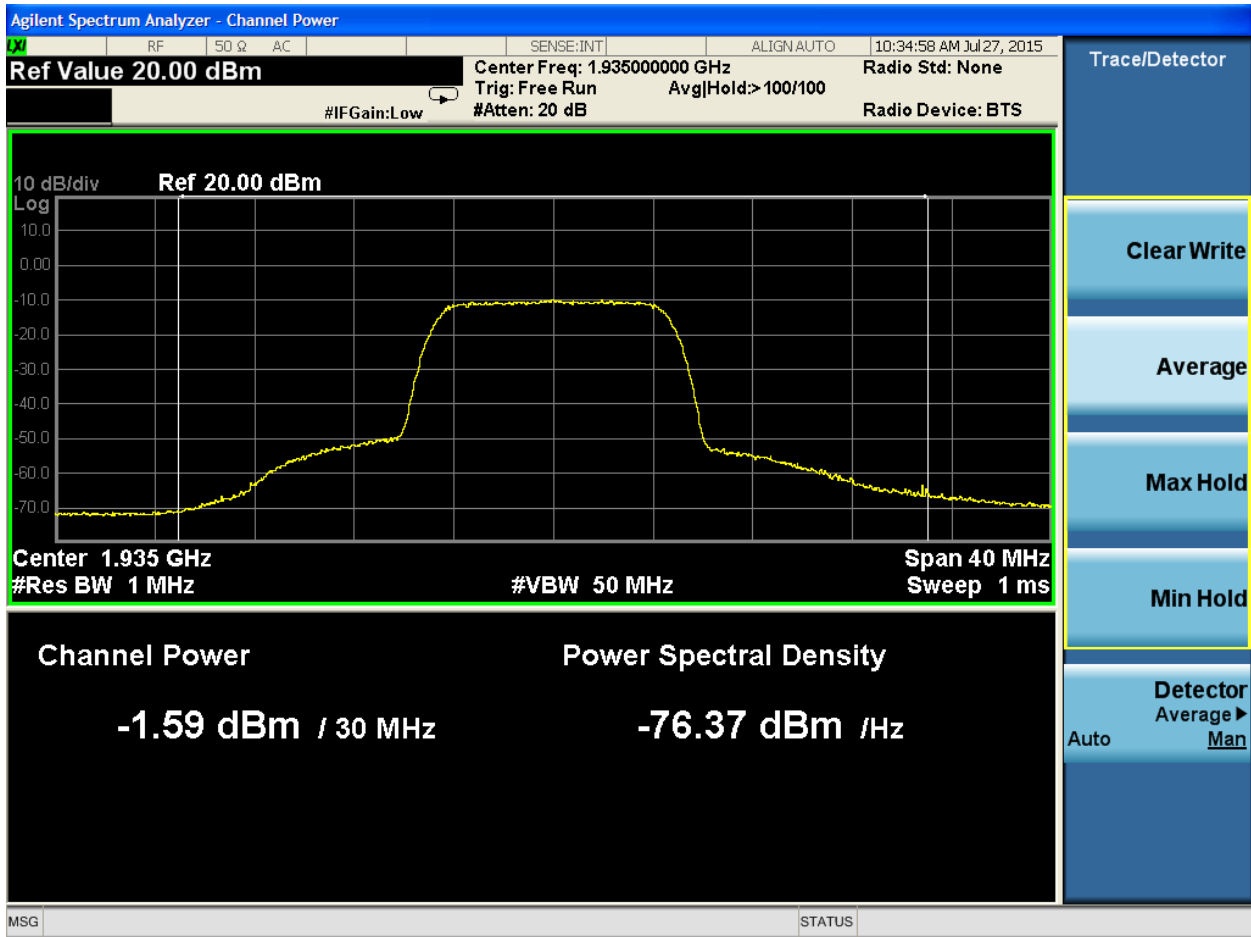


Band 25, Low Channel, QPSK



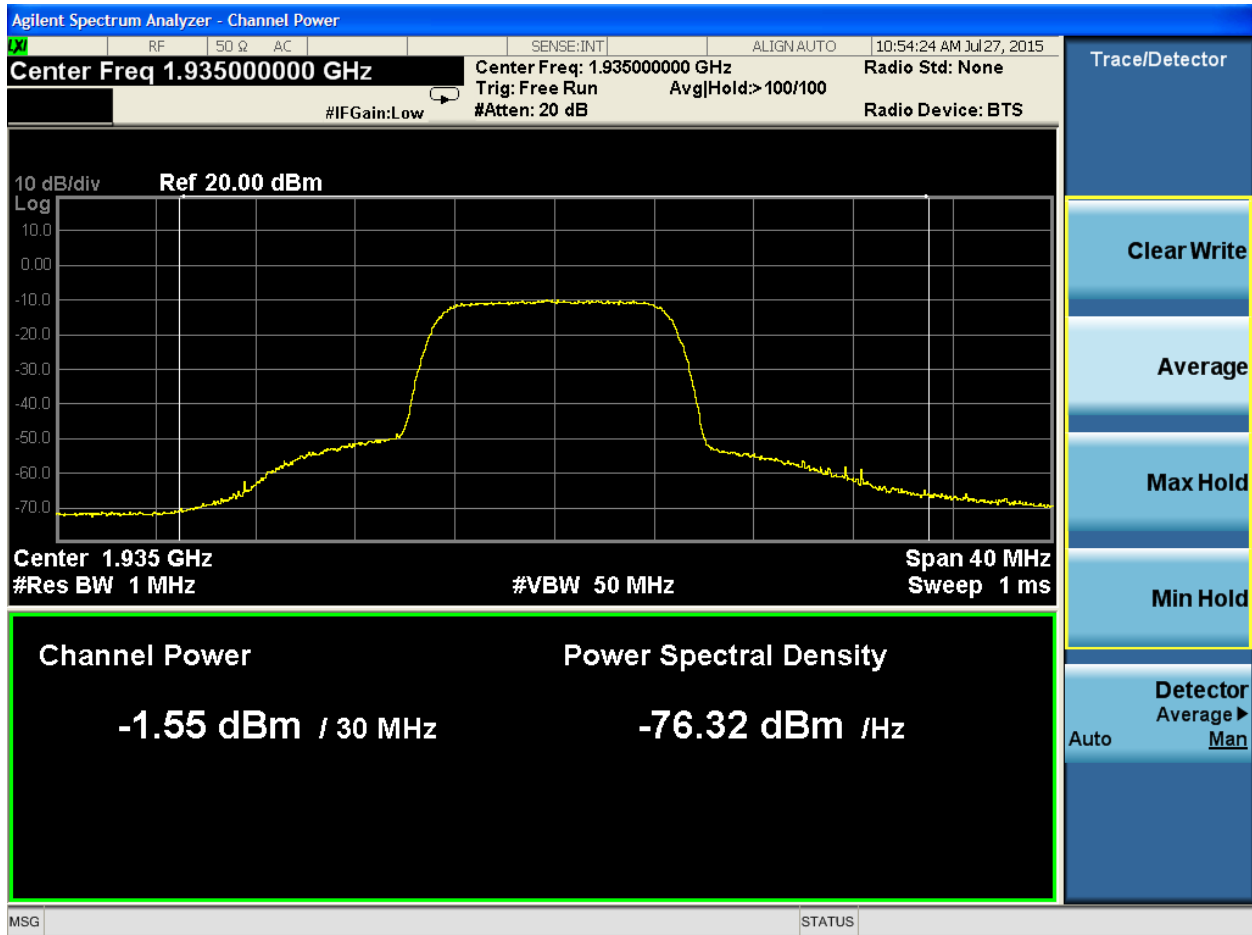


Band 25, Low Channel, 16QAM



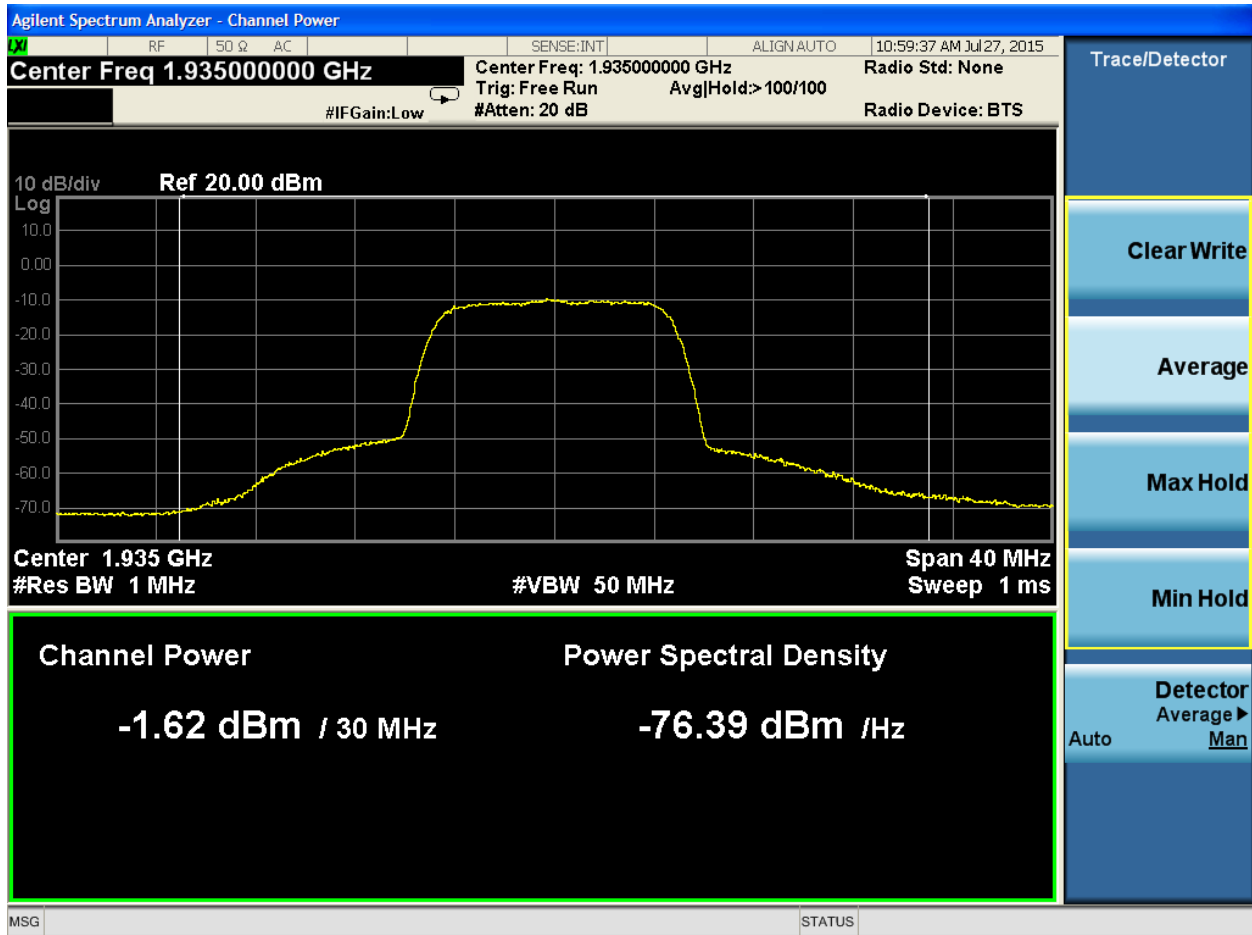


Band 25, Low Channel, 64QAM



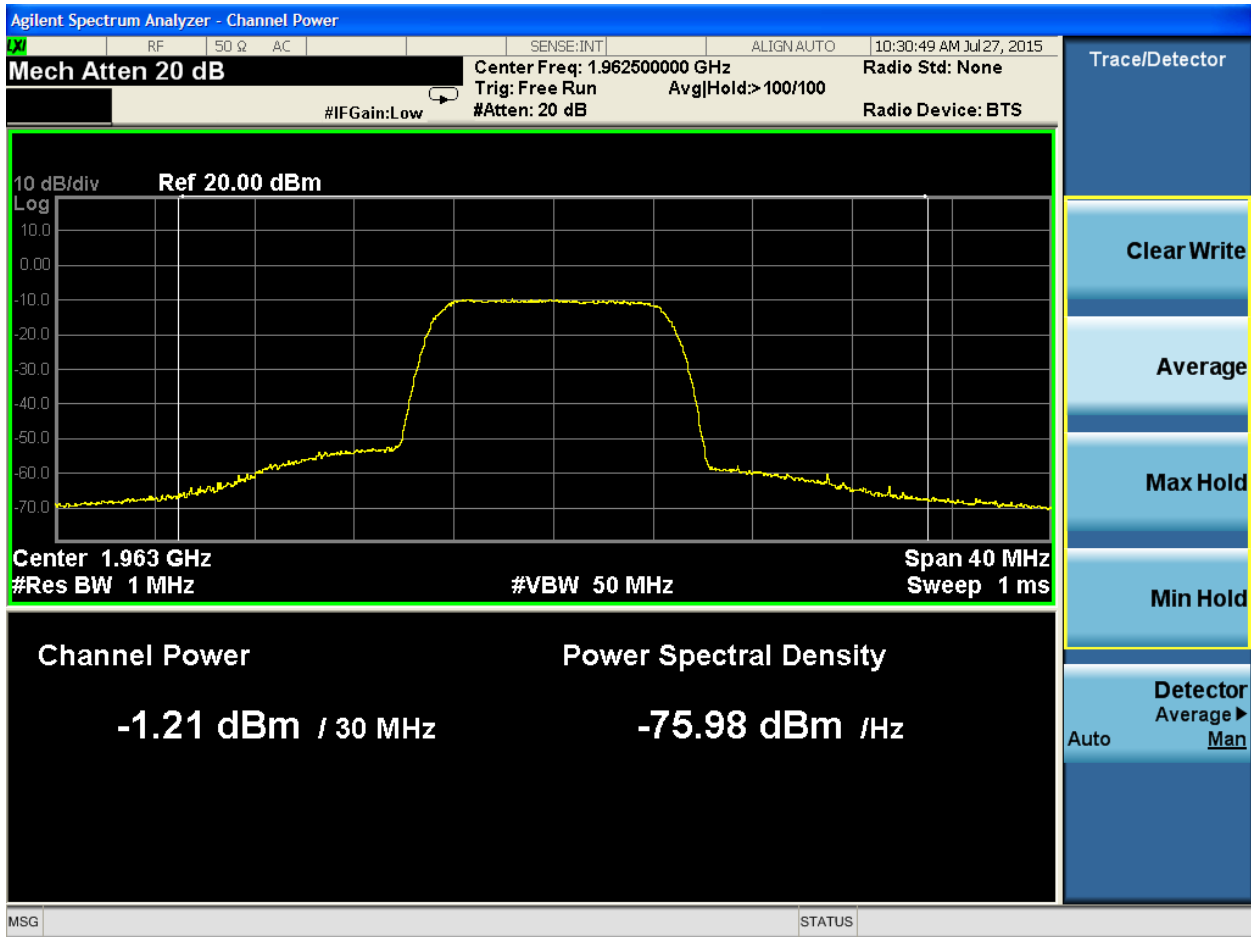


Band 25, Mid Channel, QPSK



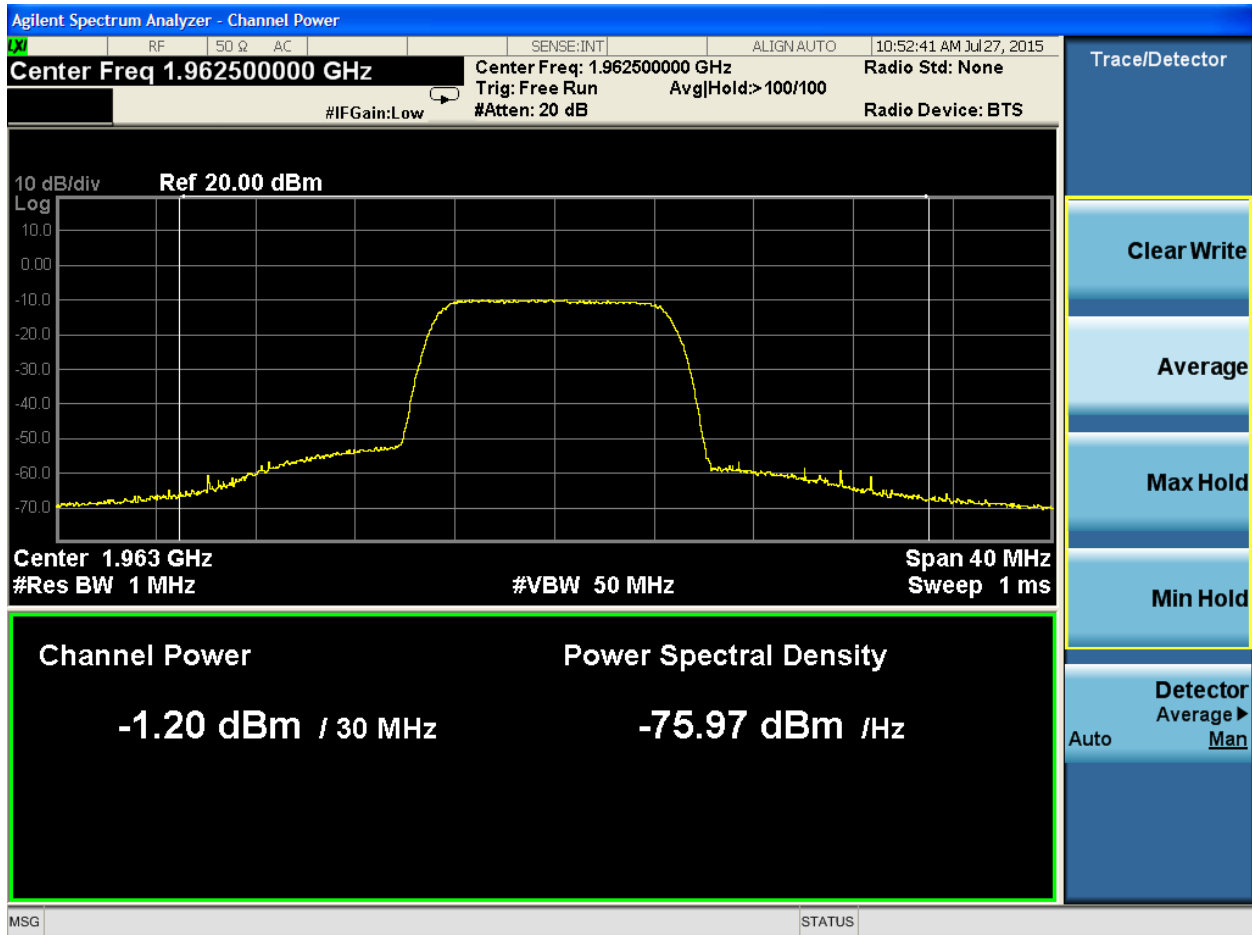


Band 25, Mid Channel, 16QAM



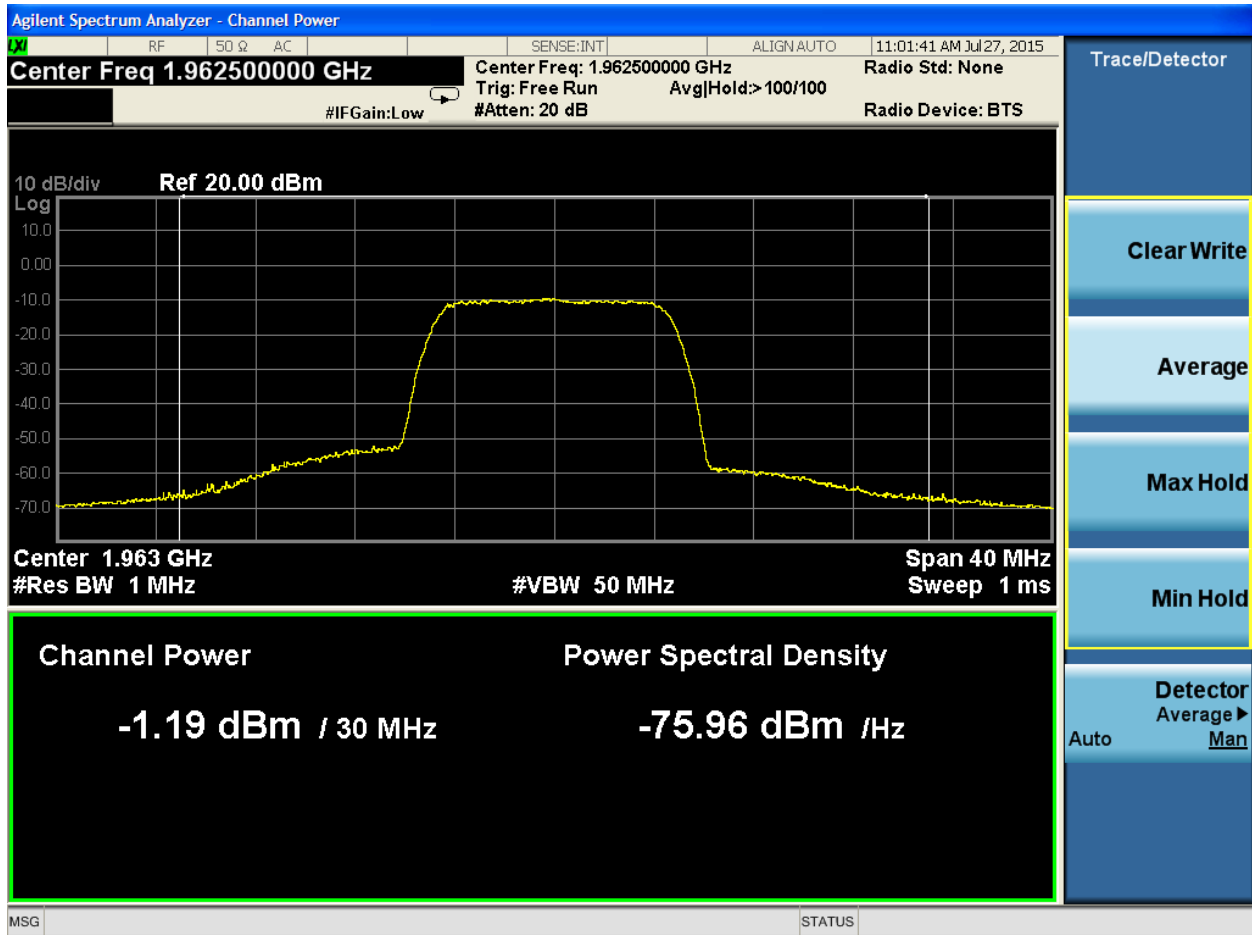


Band 25, Mid Channel, 64QAM



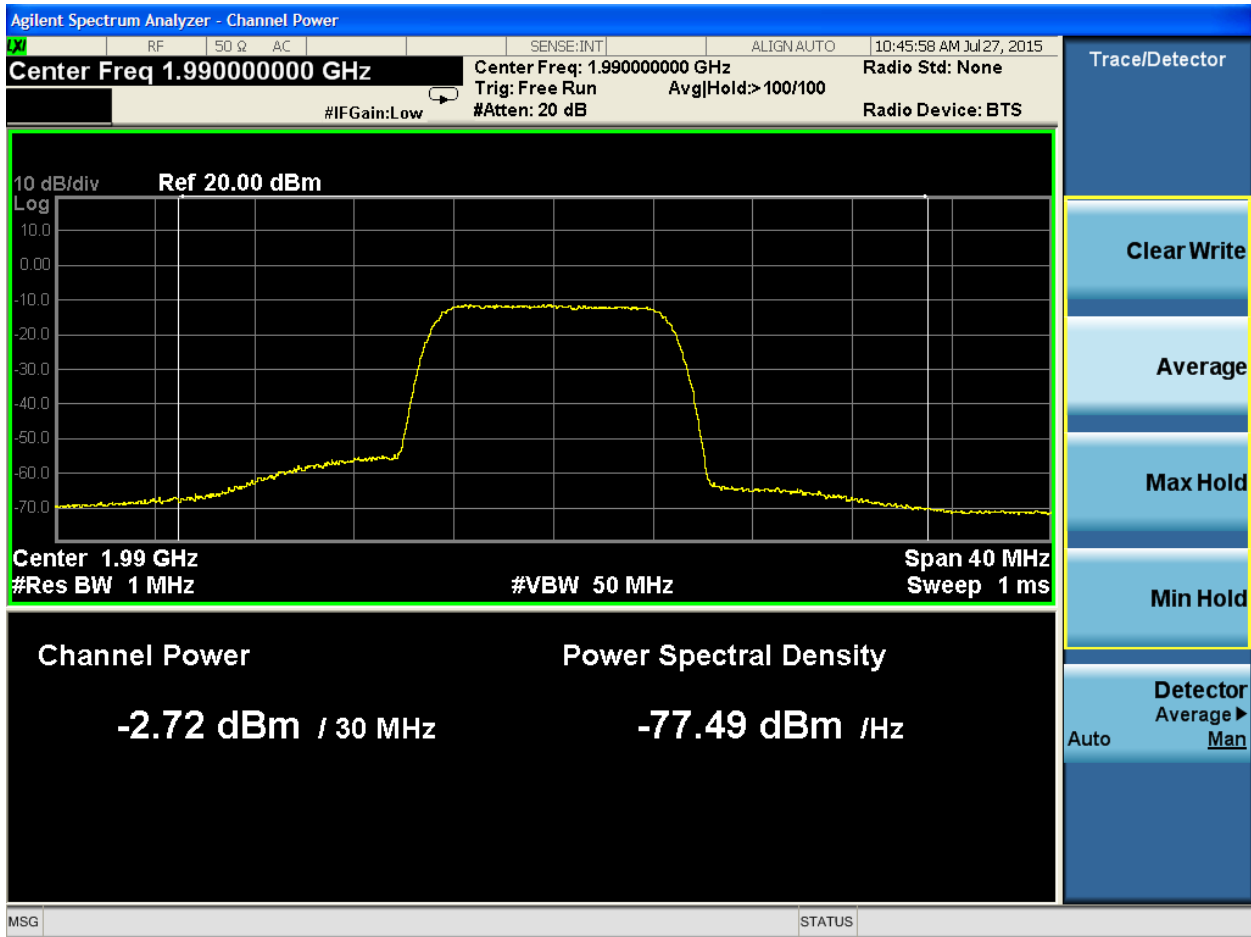


Band 25, High Channel, QPSK



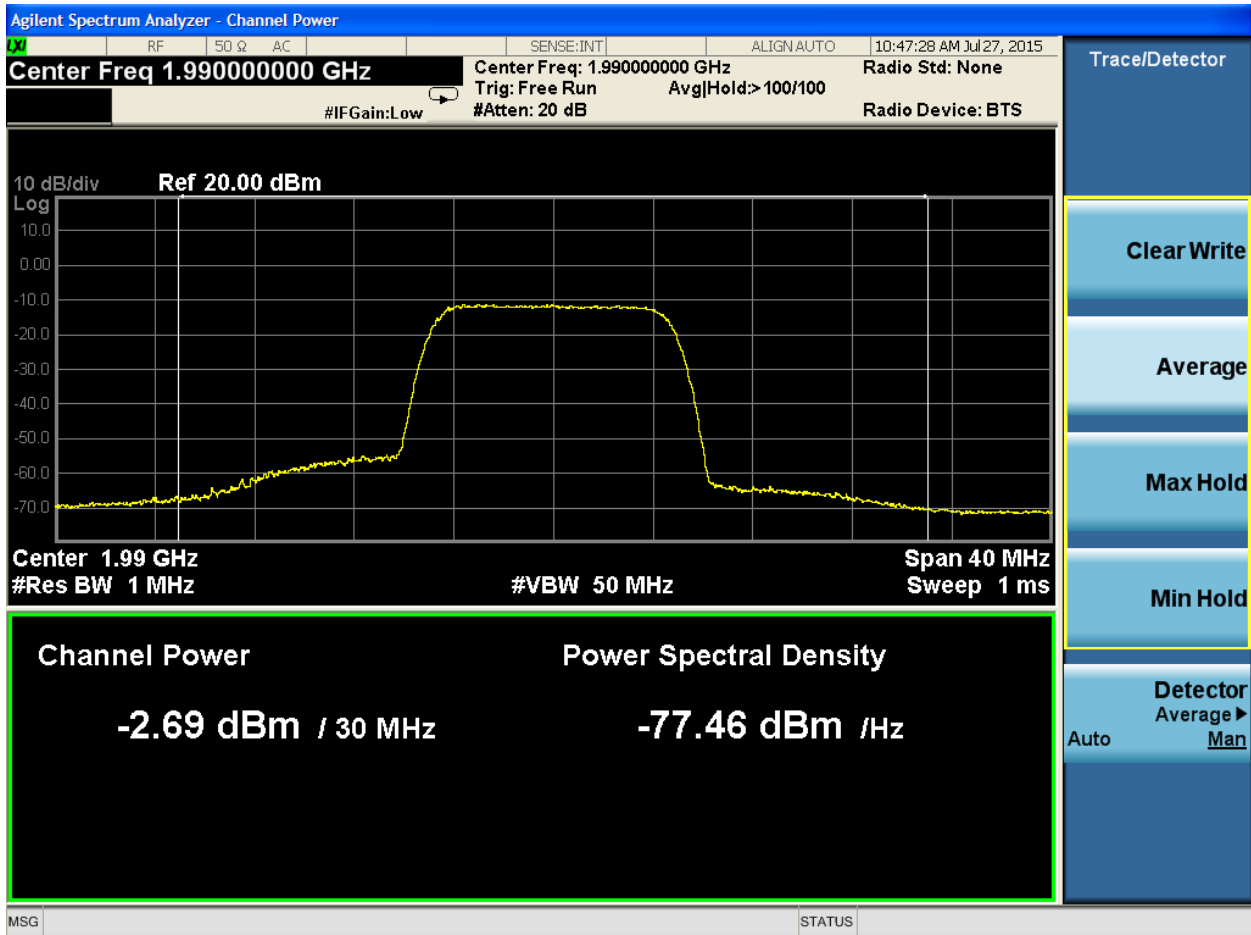


Band 25, High Channel, 16QAM



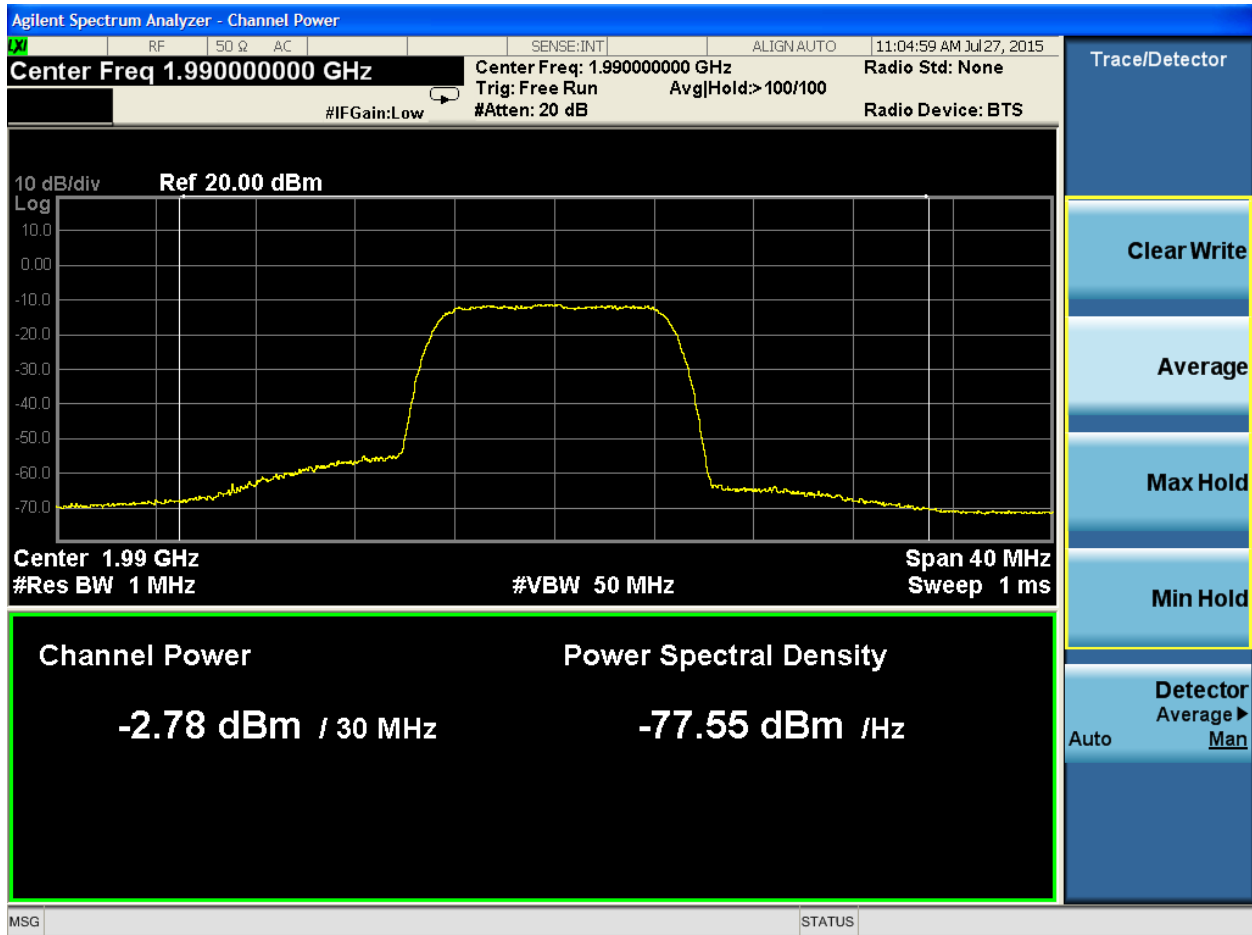


Band 25, High Channel, 64QAM



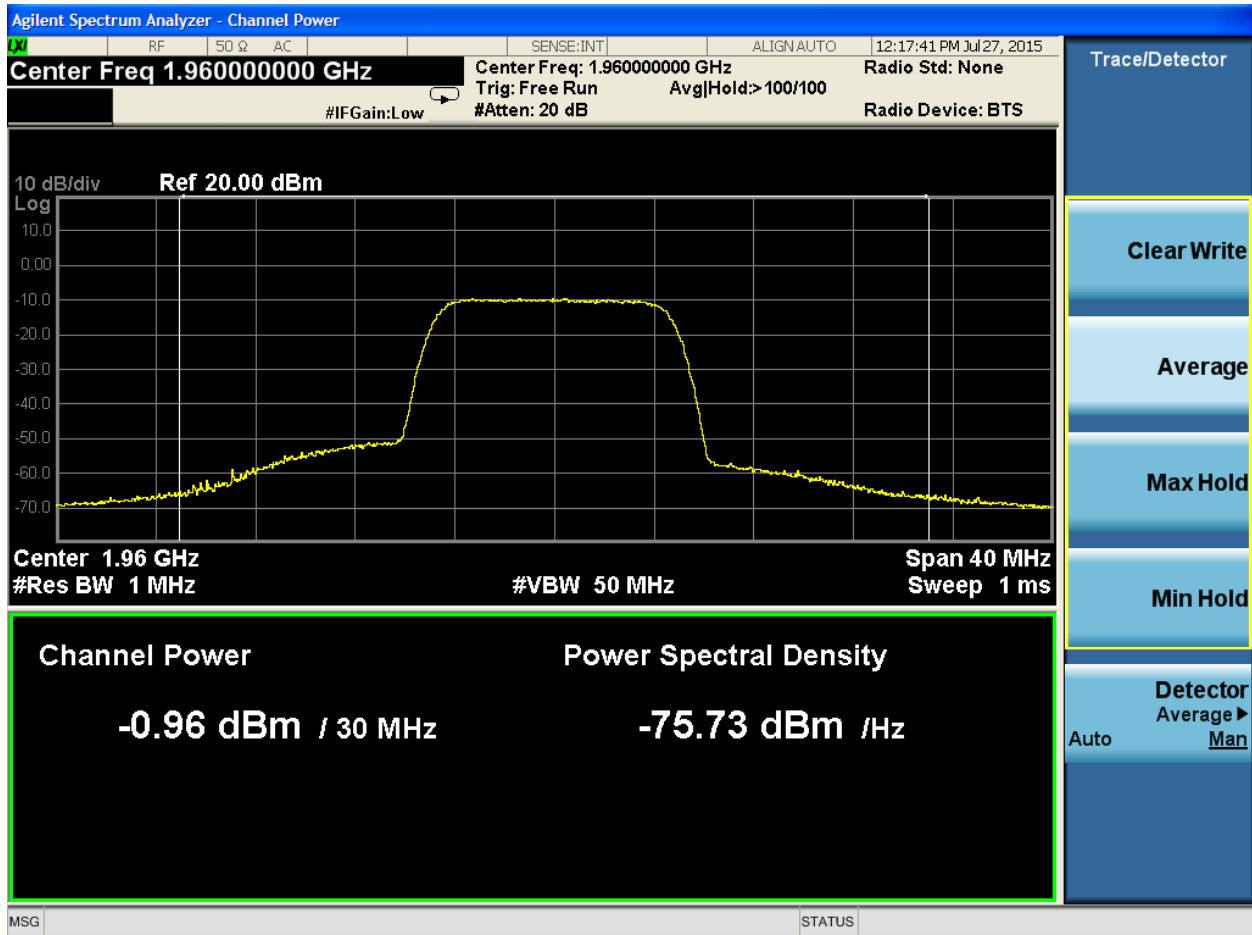


Band 2, Mid Channel, QPSK



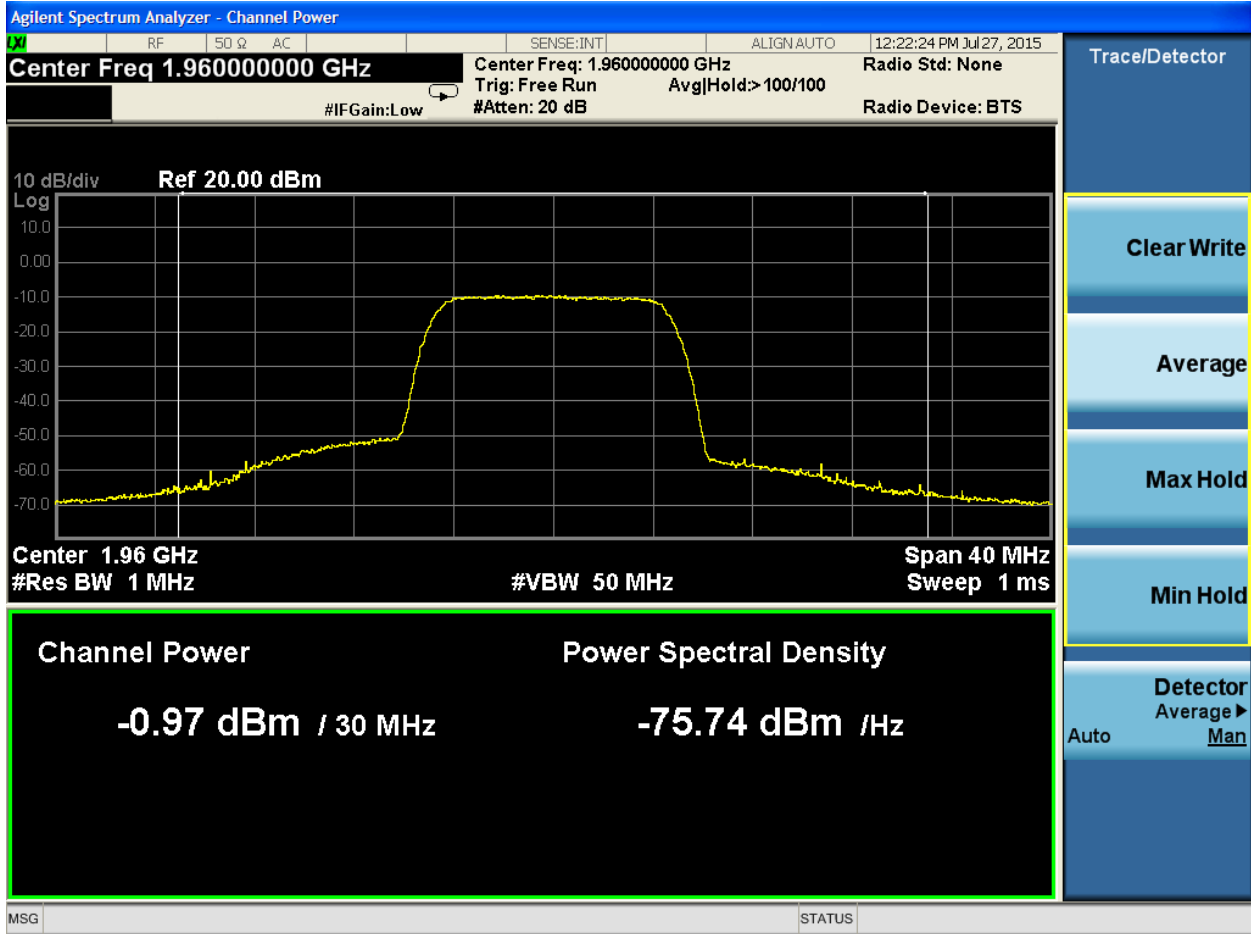


Band 2, Mid Channel, 16QAM



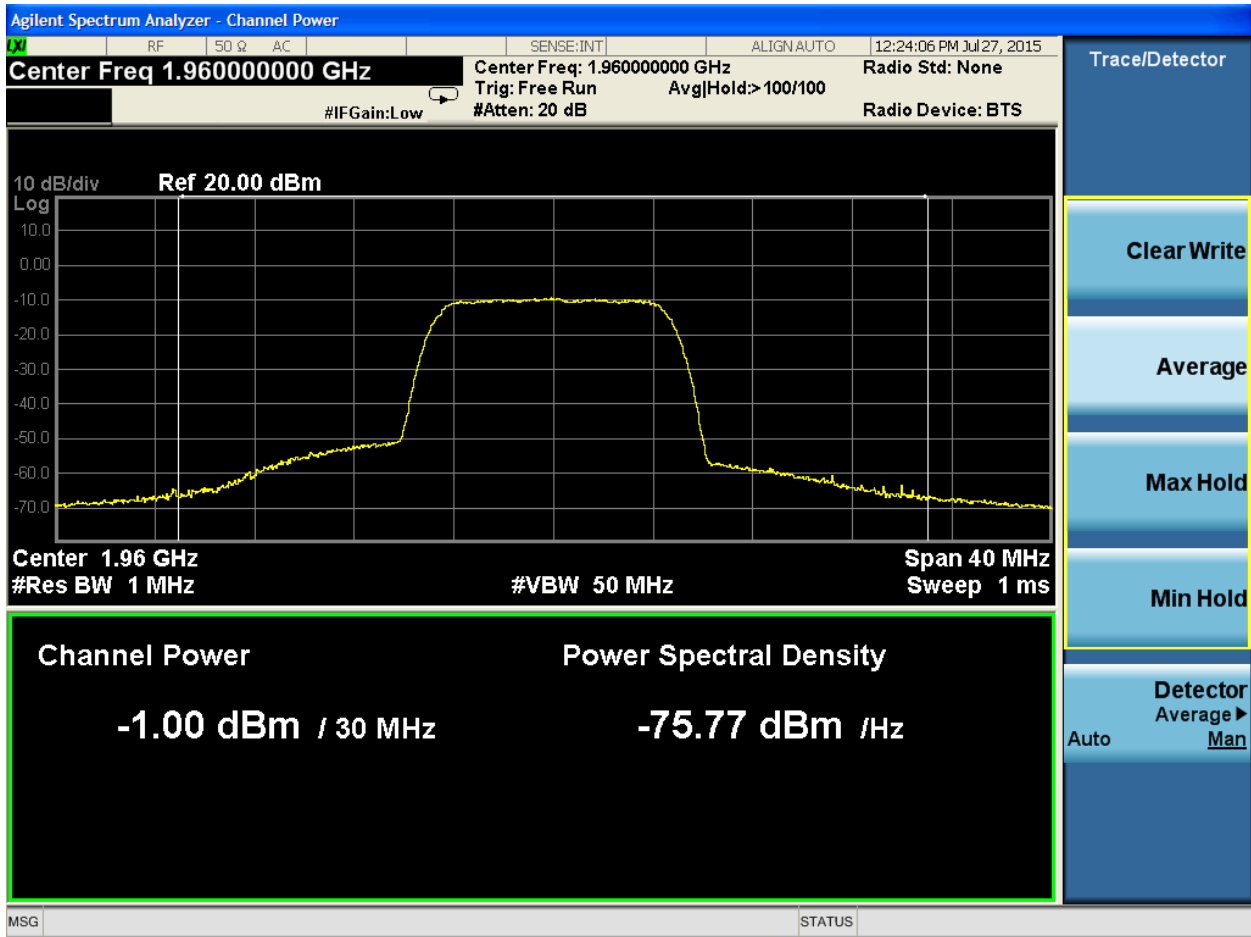


Band 2, Mid Channel, 64QAM



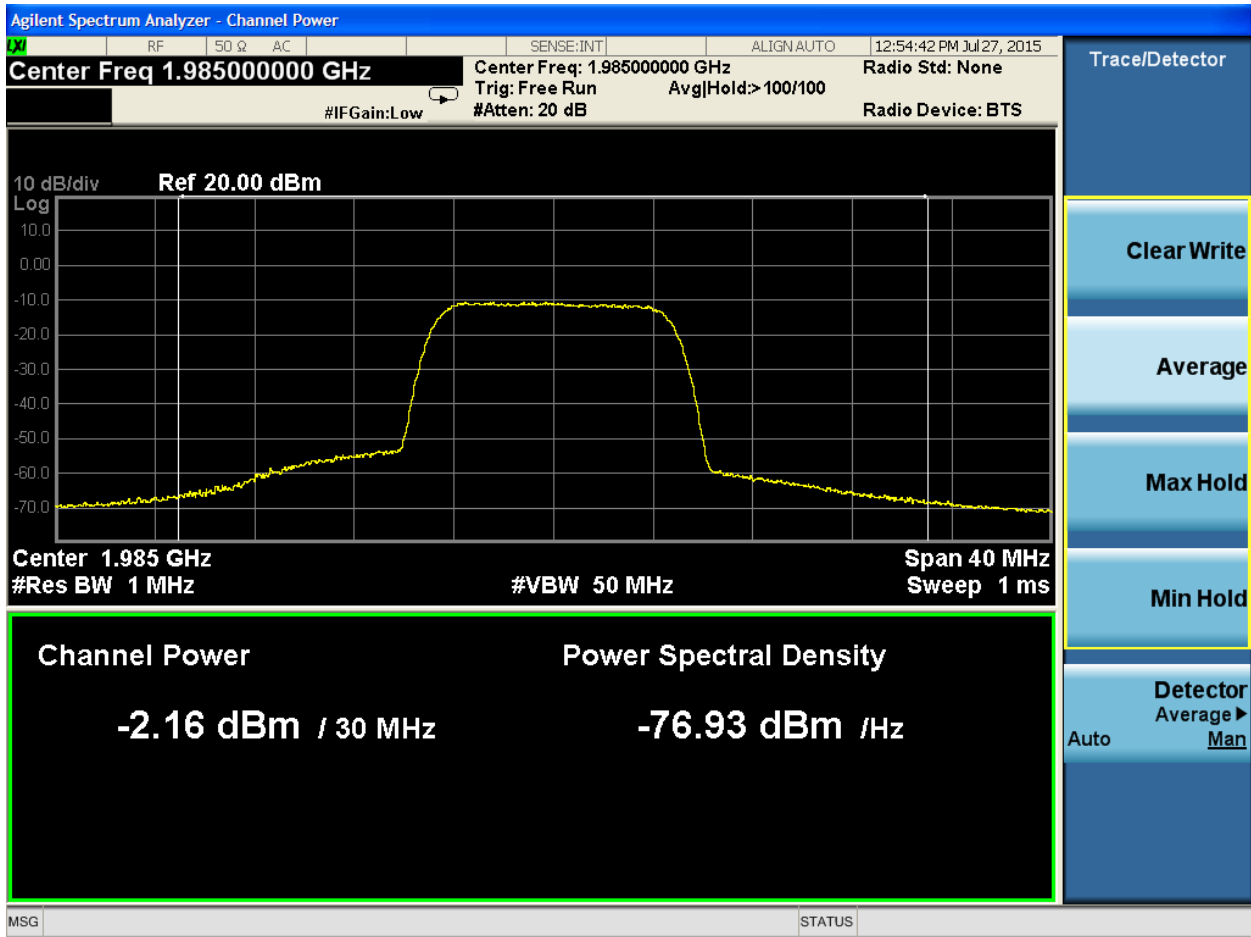


Band 2, High Channel, QPSK



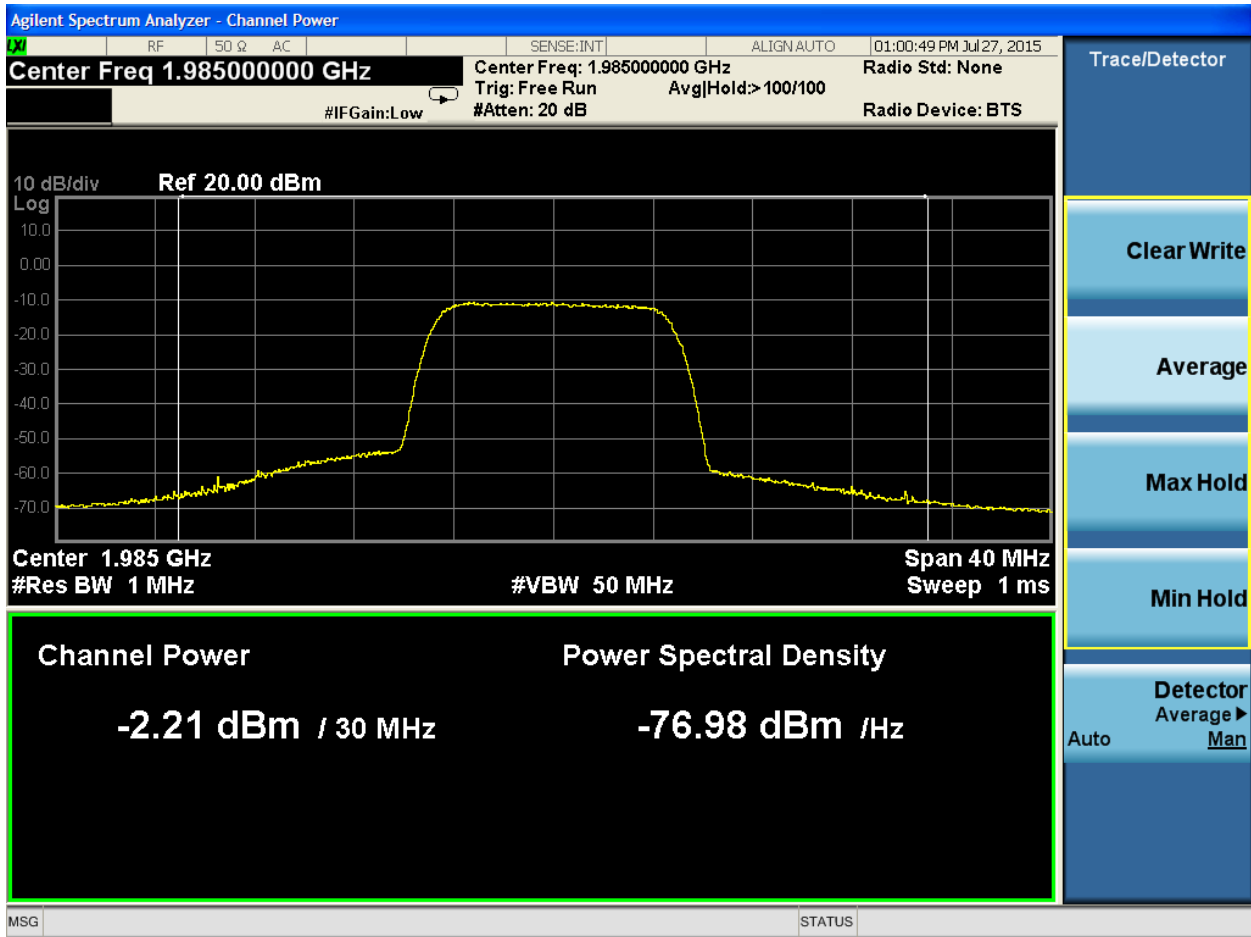

Band 2, High Channel, 16QAM



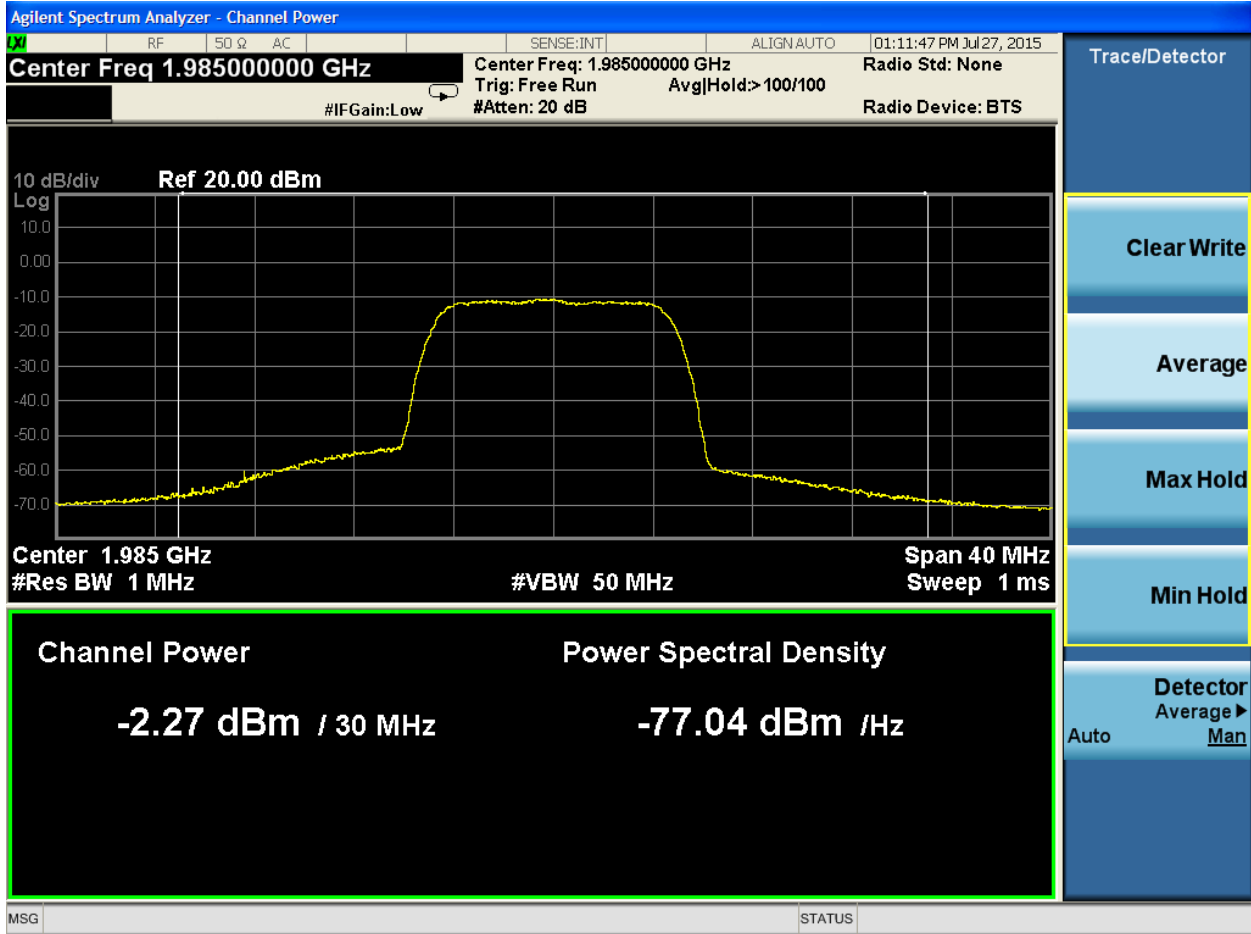

Band 2, High Channel, 64QAM



Band Edge Measurements

LIMITS

FCC 24.238:

(a) *Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.*

(b) *Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.*

MEASUREMENTS / RESULTS

Spectrum analyzer screen plots are shown on the following pages. Corrections for the external attenuator and RF cable are included in the displayed values. The mask lines in the plots are set to -13dBm at 1930MHz and 1990MHz. This value is calculated from:

$$\text{Limit} = 10 \cdot \log(P[\text{mW}]) - (43 + 10 \cdot \log(P[\text{W}])) = -13\text{dBm}$$

Note that the measurements were taken at 30kHz resolution bandwidth. To meet the requirement of section 24.238(b), the measured power may be integrated over the required bandwidth, 1% of the 26dB bandwidth. Worst-case calculations for the two operating bandwidths, 5MHz & 10MHz, are as follows.

Correction Factor for RBW in dB: 10log(required RBW divided by measurement RBW)


Required RBW: 1% of the 26dB bandwidth (see Occupied Bandwidth results)

The correction factor is added to the highest measurement in the 1MHz range above and below the band edges.


For the 5MHz operating bandwidth, the largest 26dB bandwidth is 4.986MHz. The correction factor is 2.21dB. The highest measurement within 1MHz of the band edges is -19.88dBm, from the following spectrum plots. The sum, -17.67dBm, is below the -13dBm limit.

For the 10MHz operating bandwidth, the largest 26dB bandwidth is 23.191MHz. The correction factor is 8.88dB. The highest measurement within 1MHz of the band edges is -25.79dBm, from the following spectrum plots. The sum, -16.91dBm, is below the -13dBm limit.



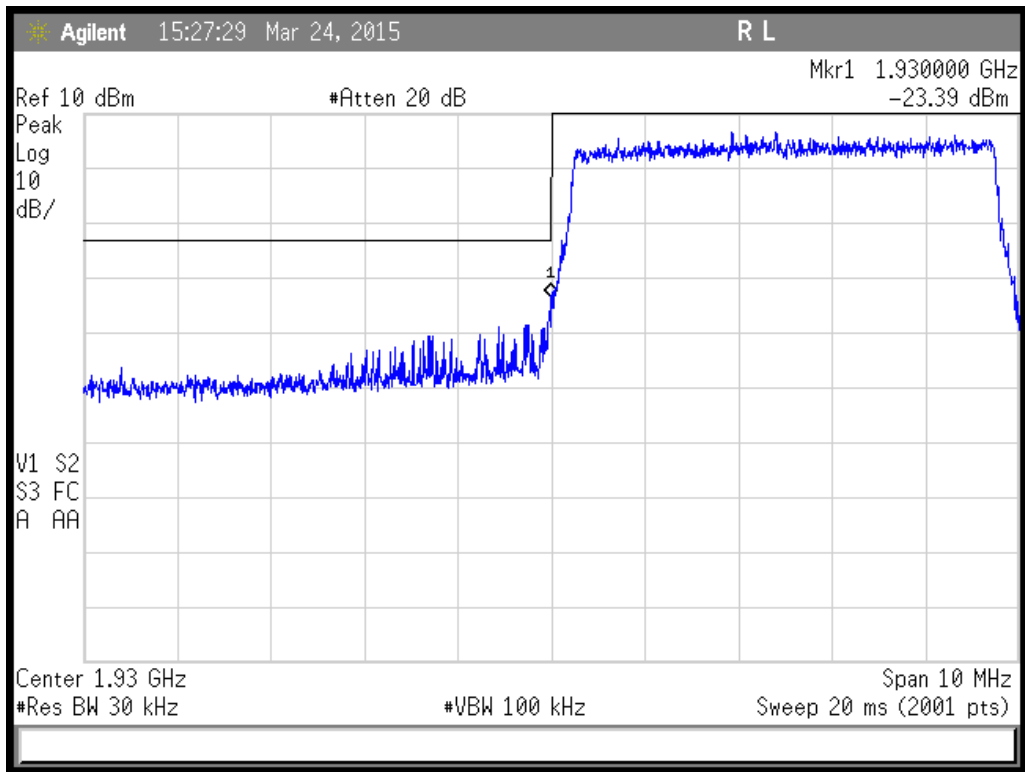


Lower Band Edge - Band 2 – 5MHz BW – QPSK – Port J1

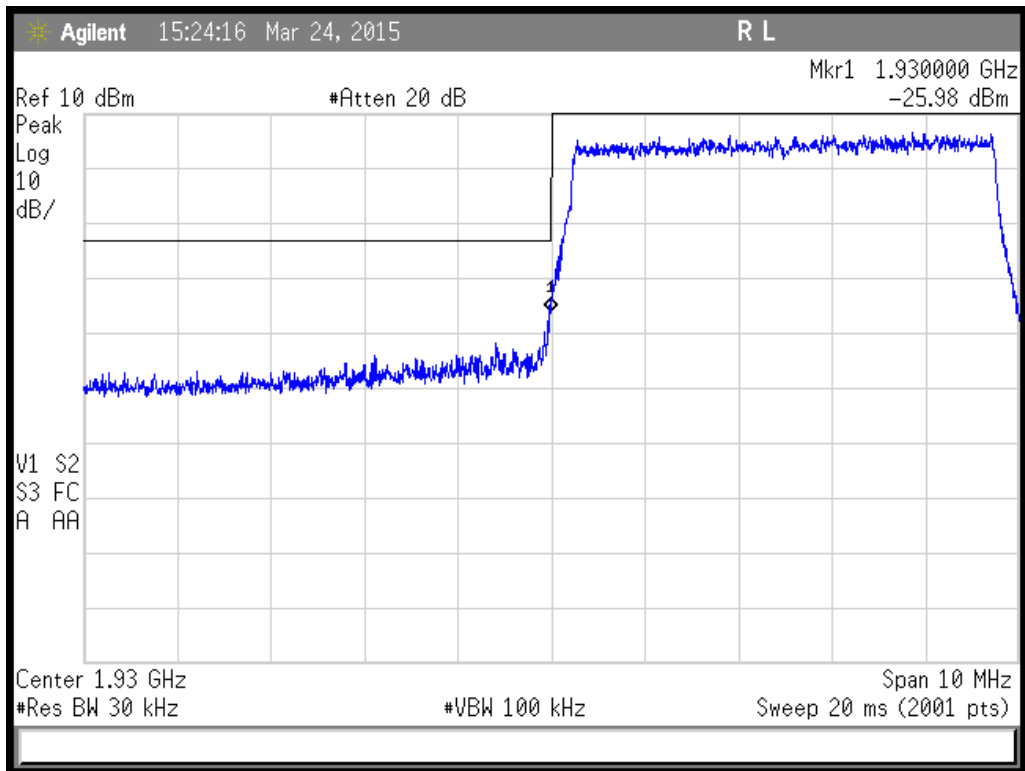


Lower Band Edge - Band 2 – 5MHz BW – 16QAM – Port J1



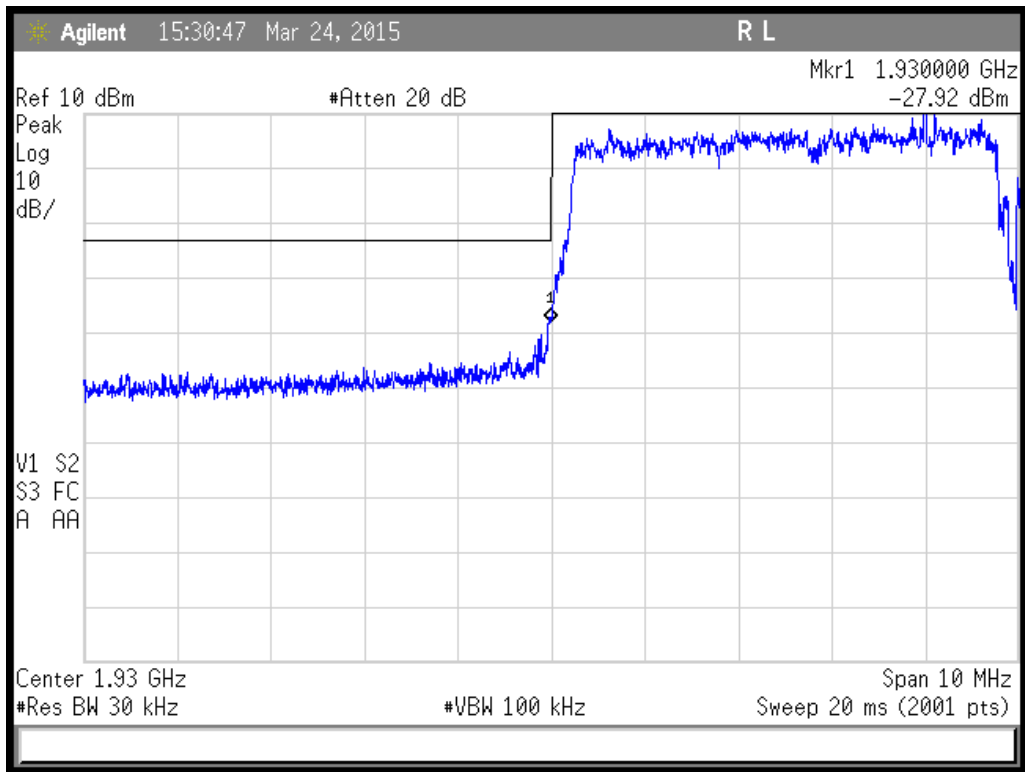


Lower Band Edge - Band 2 – 5MHz BW – 64QAM – Port J1

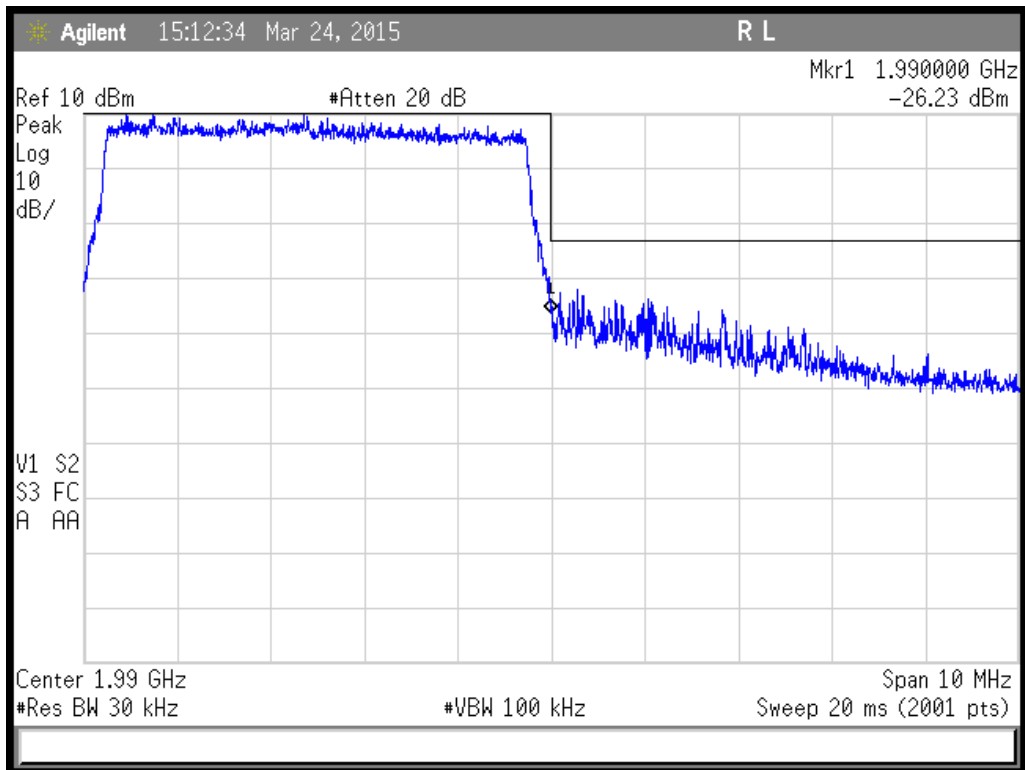


Upper Band Edge - Band 2 – 5MHz BW – QPSK – Port J1



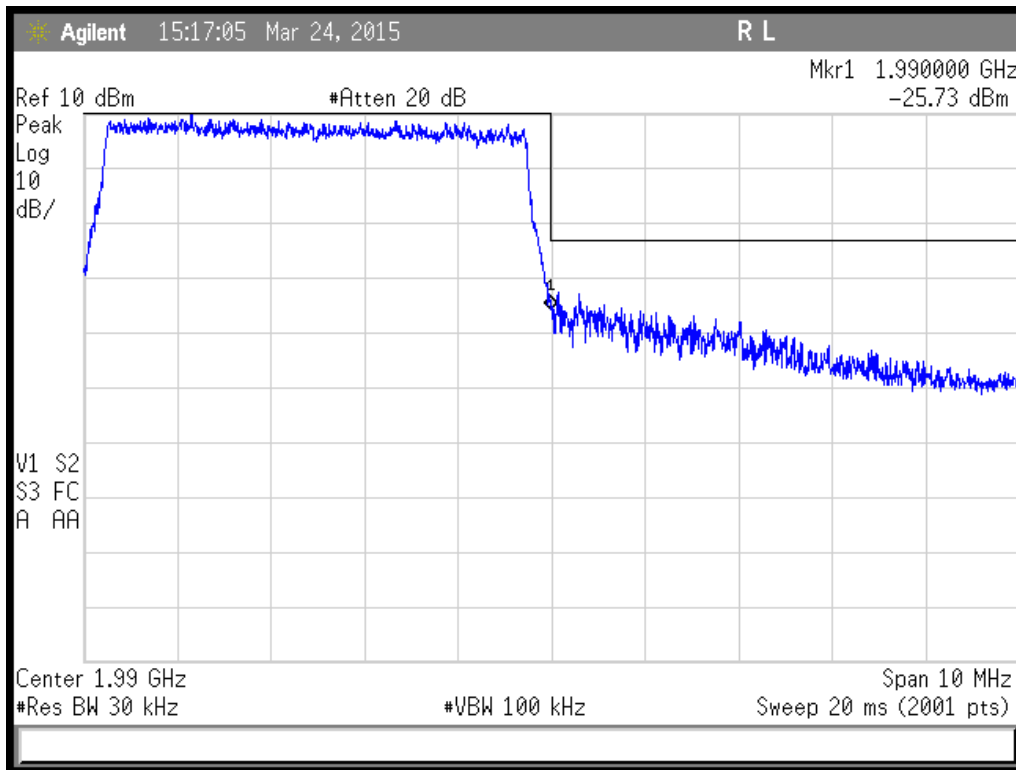


Upper Band Edge - Band 2 – 5MHz BW – 16QAM – Port J1

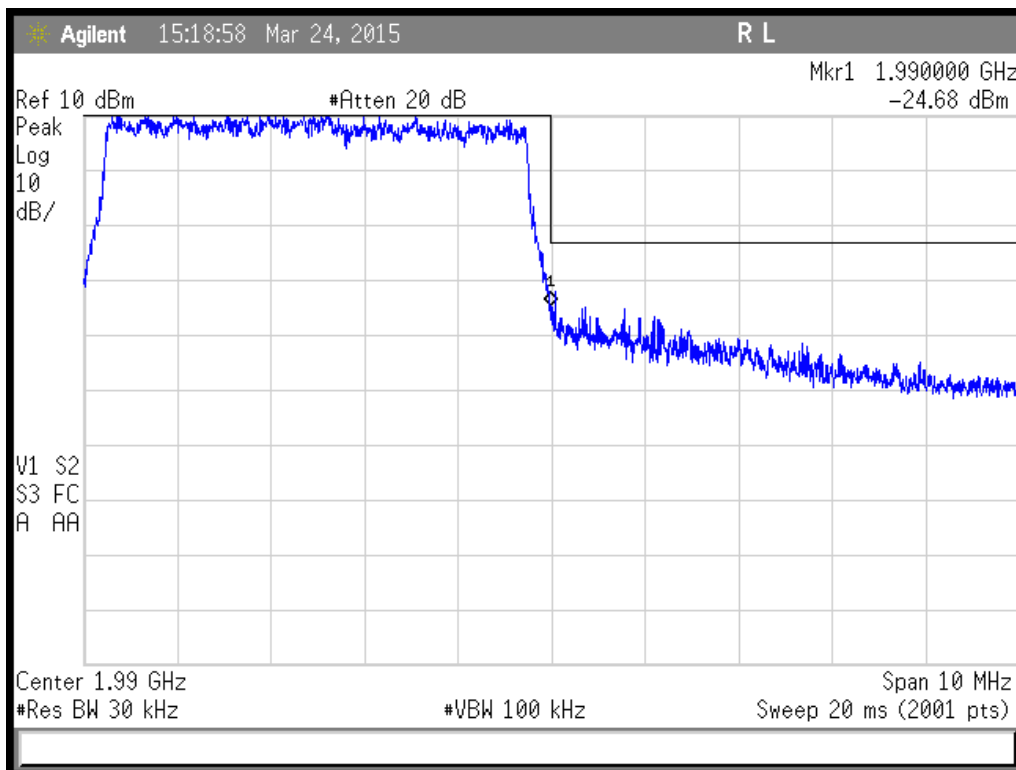


Upper Band Edge - Band 2 – 5MHz BW – 64QAM – Port J1



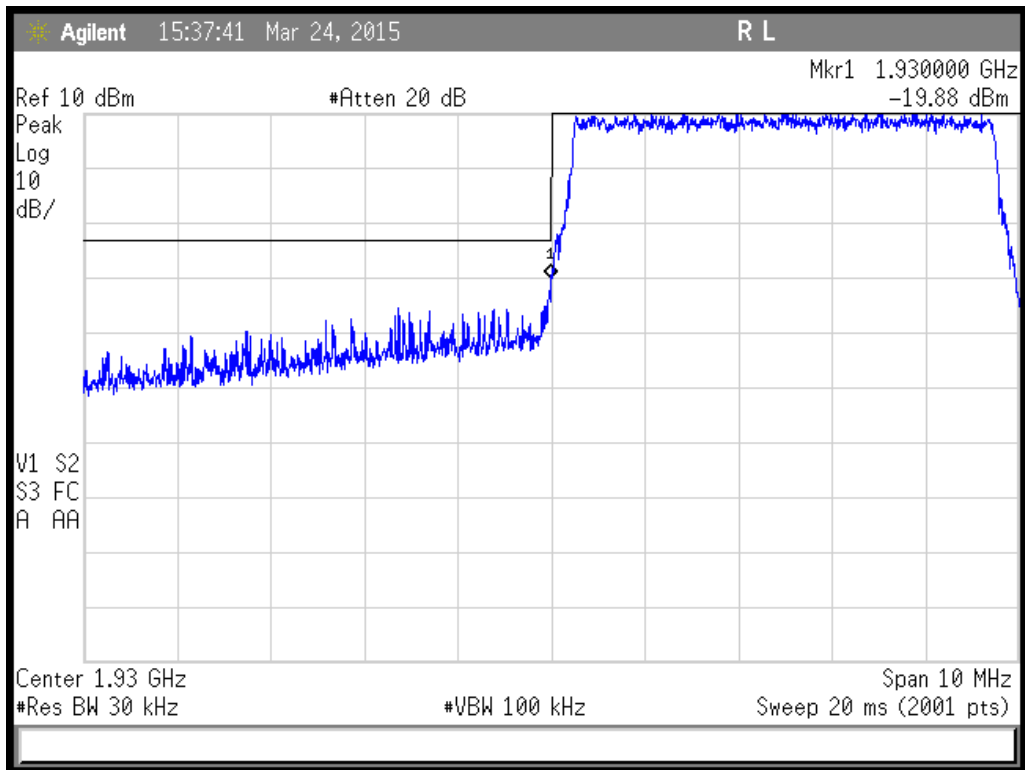


Lower Band Edge - Band 2 – 5MHz BW – QPSK – Port J2

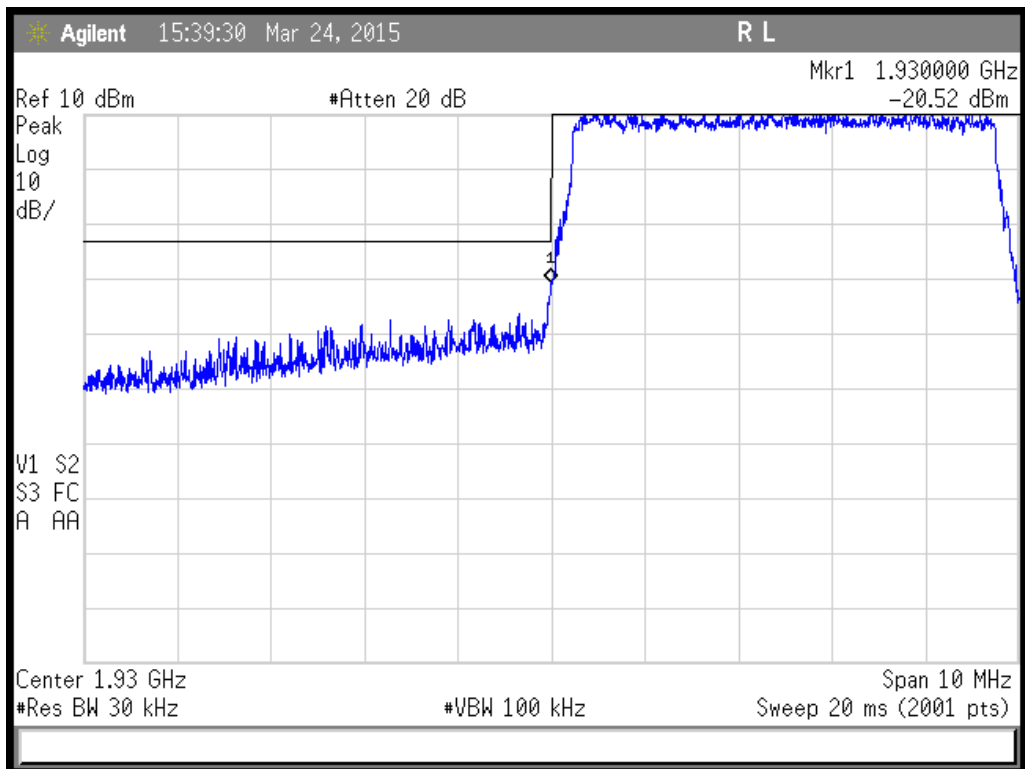


Lower Band Edge - Band 2 – 5MHz BW – 16QAM – Port J2



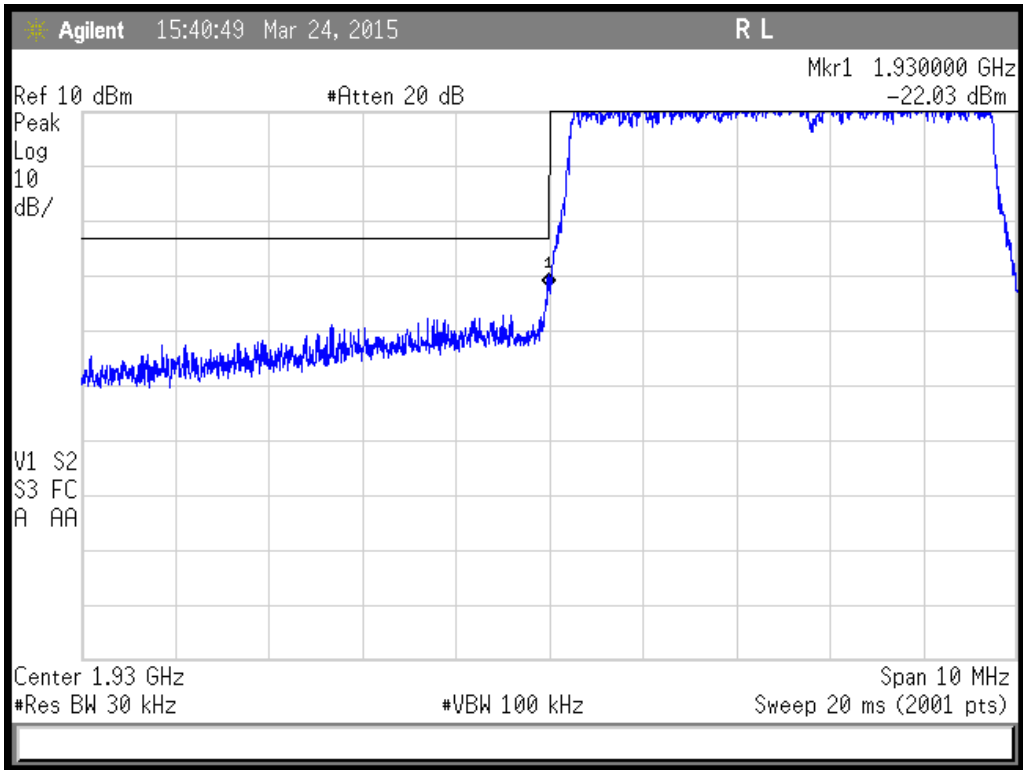


Lower Band Edge - Band 2 – 5MHz BW – 64QAM – Port J2

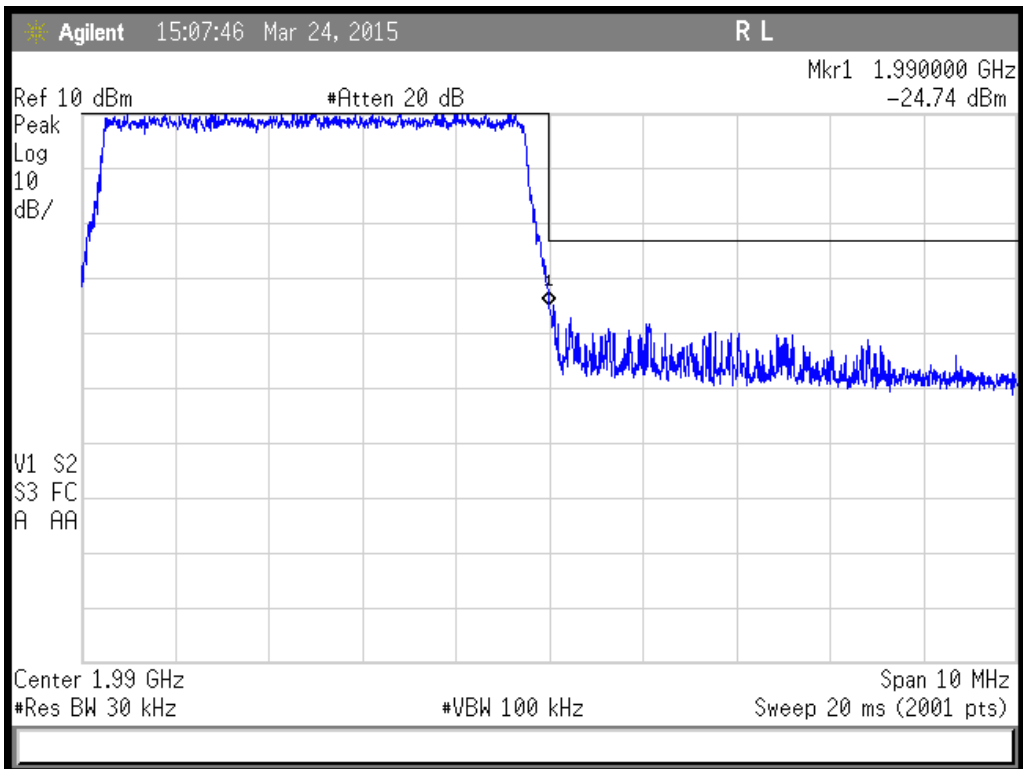


Upper Band Edge - Band 2 – 5MHz BW – QPSK – Port J2



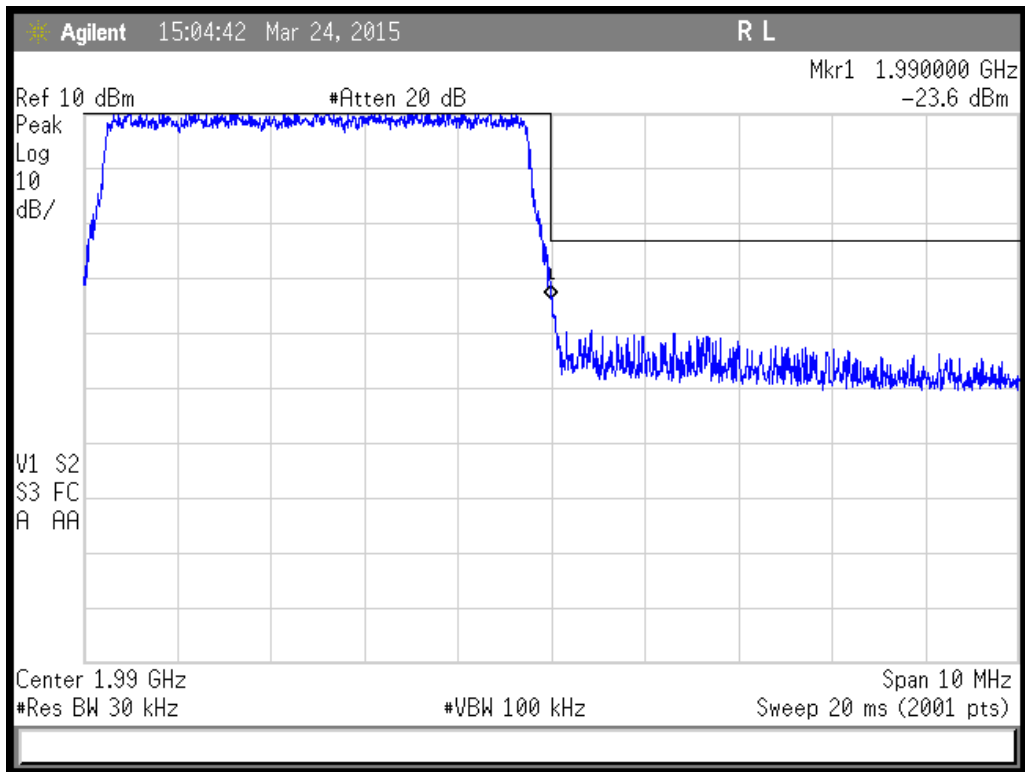


Upper Band Edge - Band 2 – 5MHz BW – 16QAM – Port J2

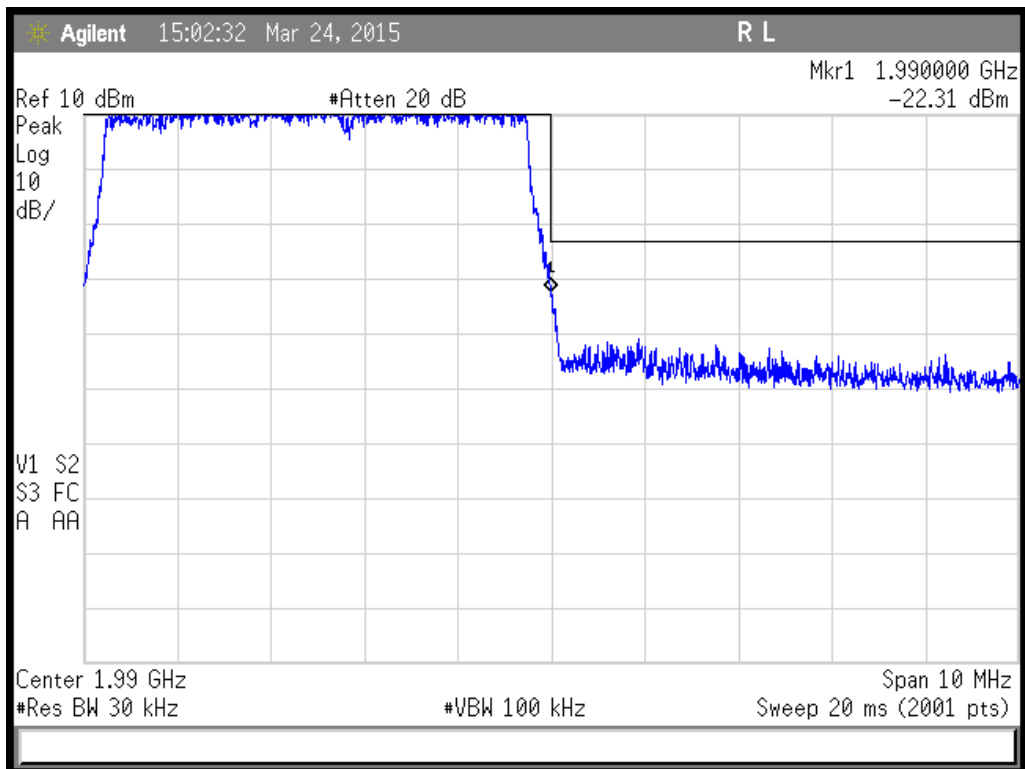


Upper Band Edge - Band 2 – 5MHz BW – 64QAM – Port J2



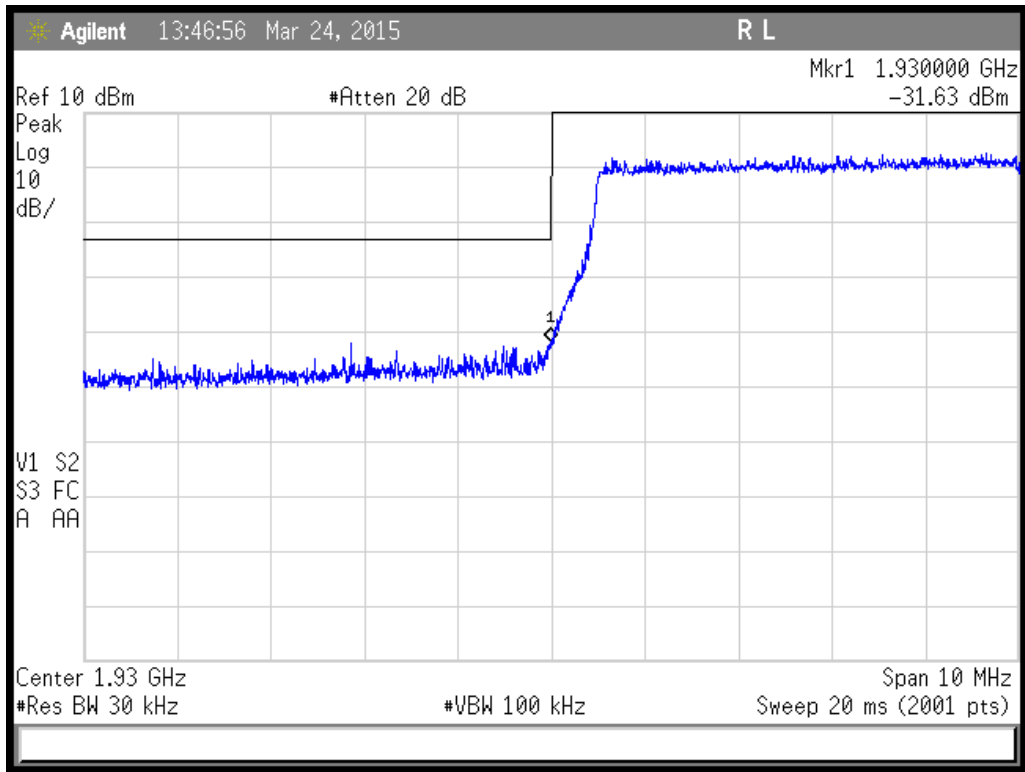


Lower Band Edge - Band 2 – 10MHz BW – QPSK – Port J1

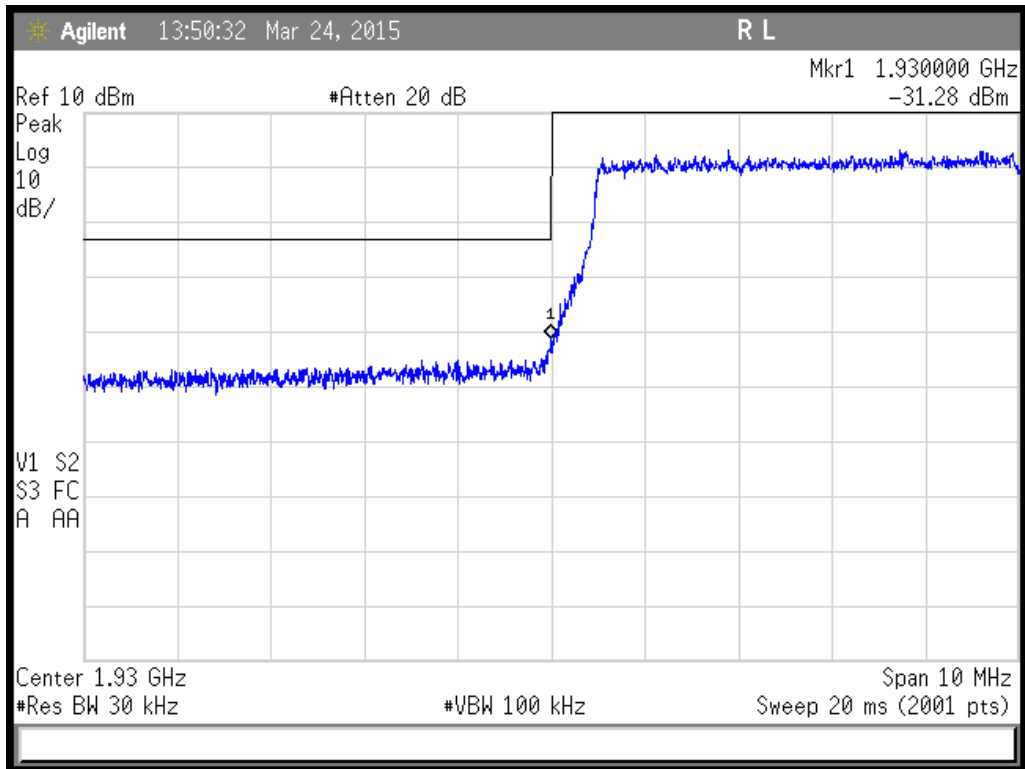


Lower Band Edge - Band 2 – 10MHz BW – 16QAM – Port J1



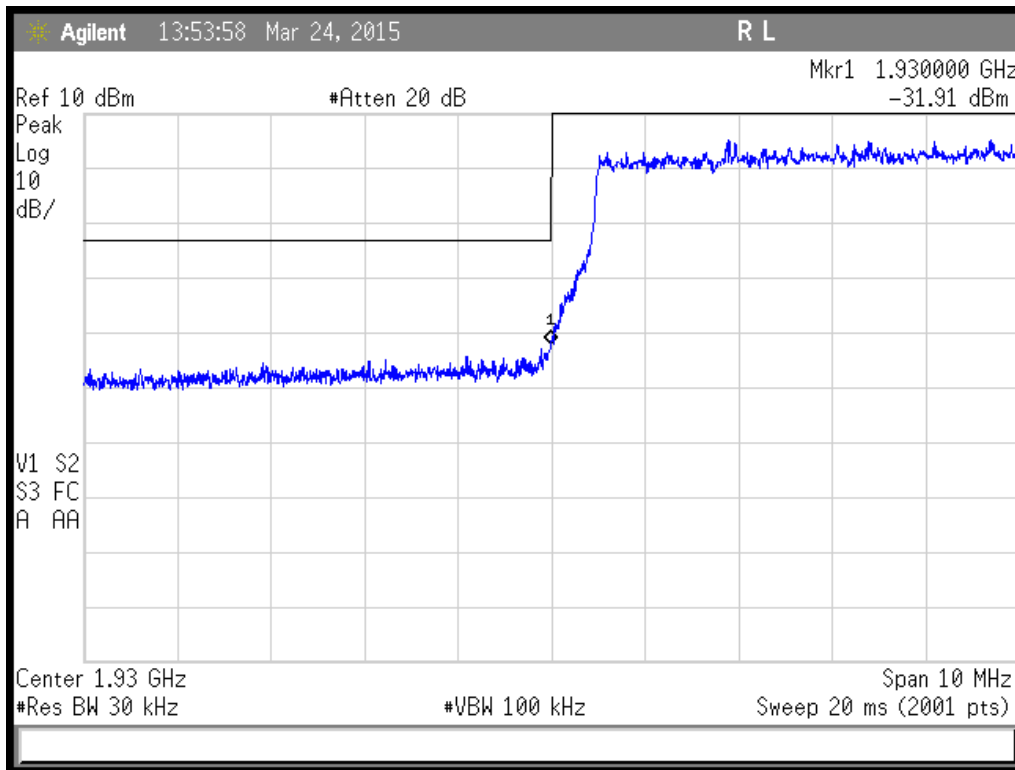


Lower Band Edge - Band 2 – 10MHz BW – 64QAM – Port J1

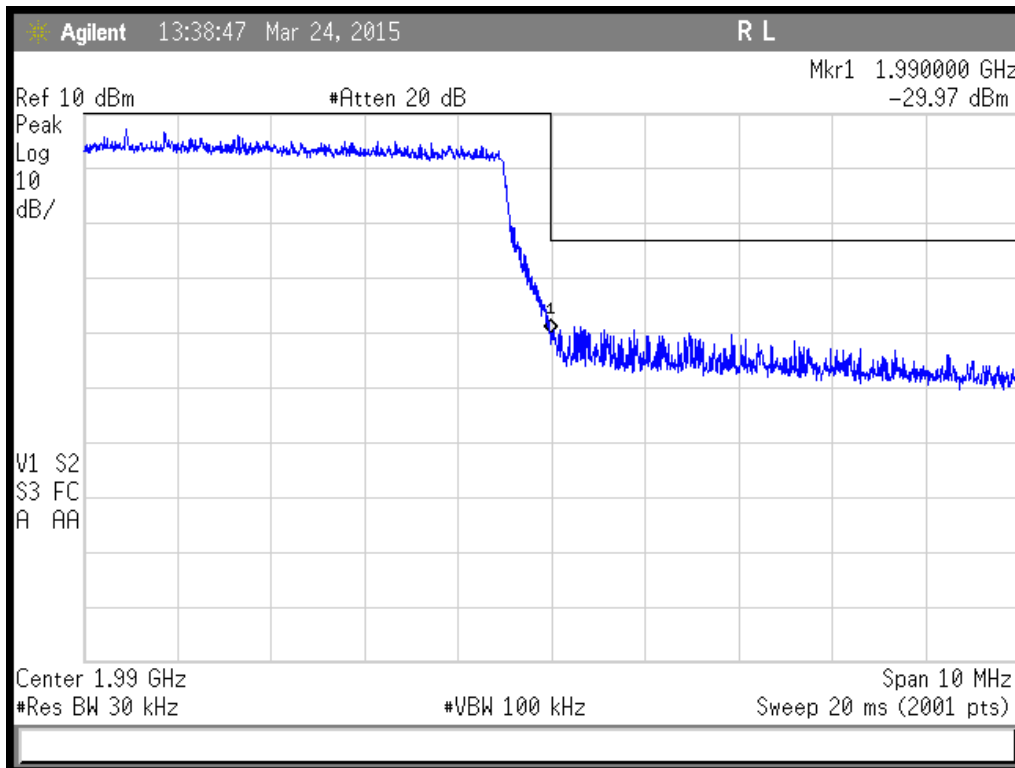


Upper Band Edge - Band 2 – 10MHz BW – QPSK – Port J1



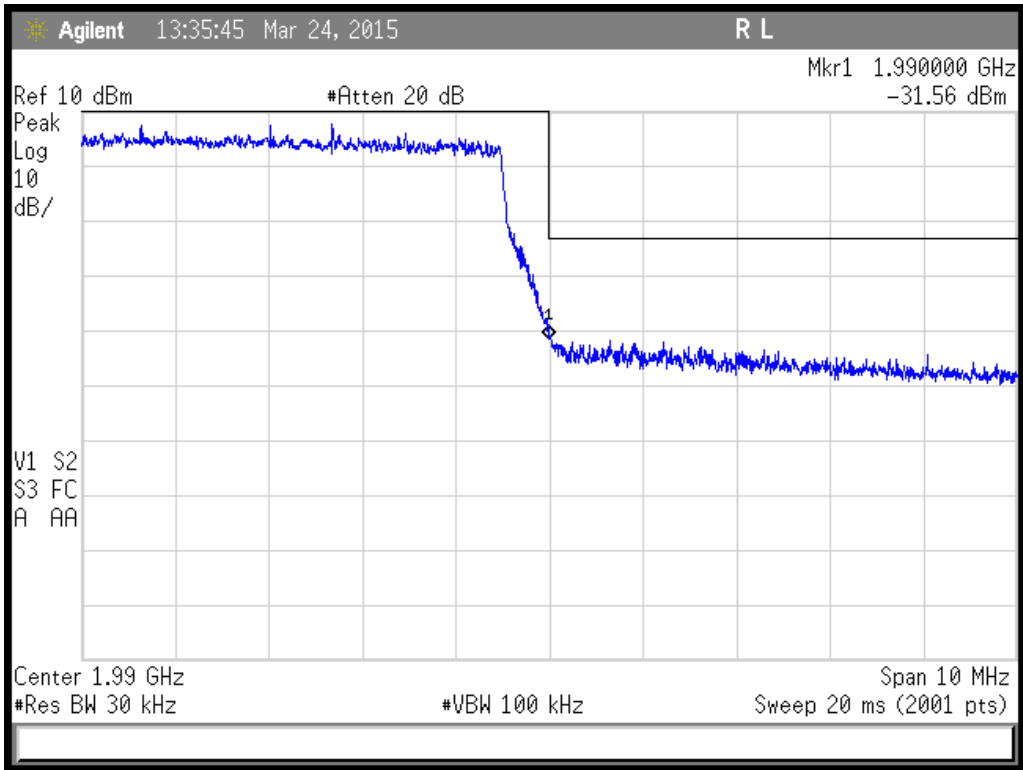


Upper Band Edge - Band 2 – 10MHz BW – 16QAM – Port J1

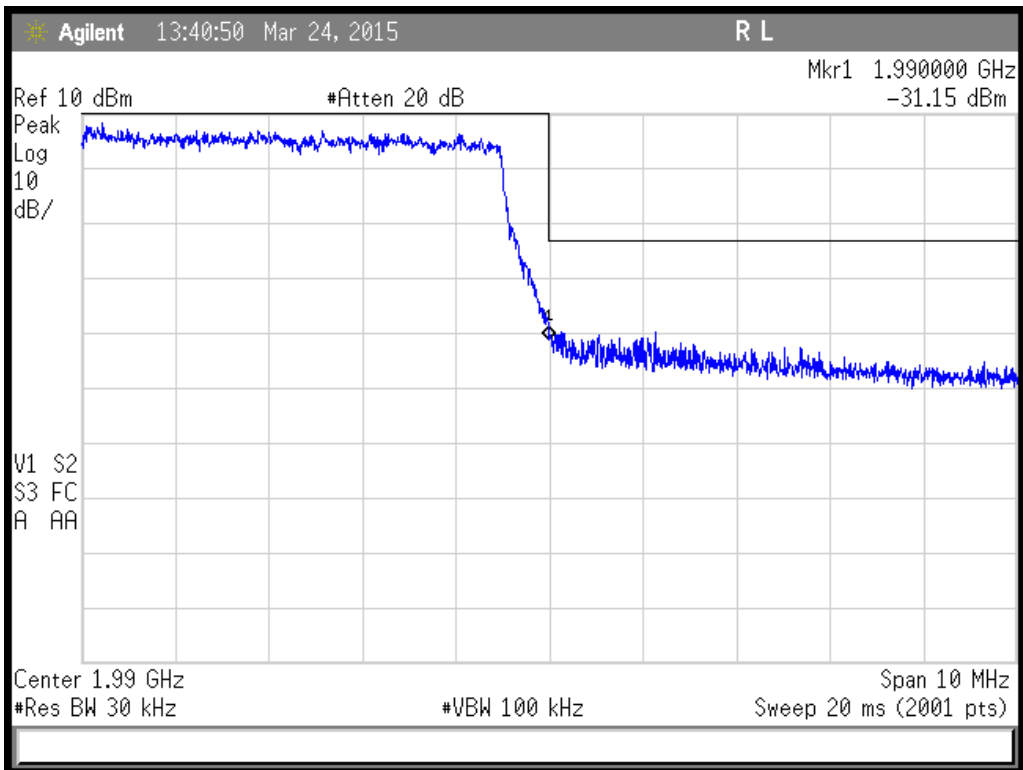


Upper Band Edge - Band 2 – 10MHz BW – 64QAM – Port J1



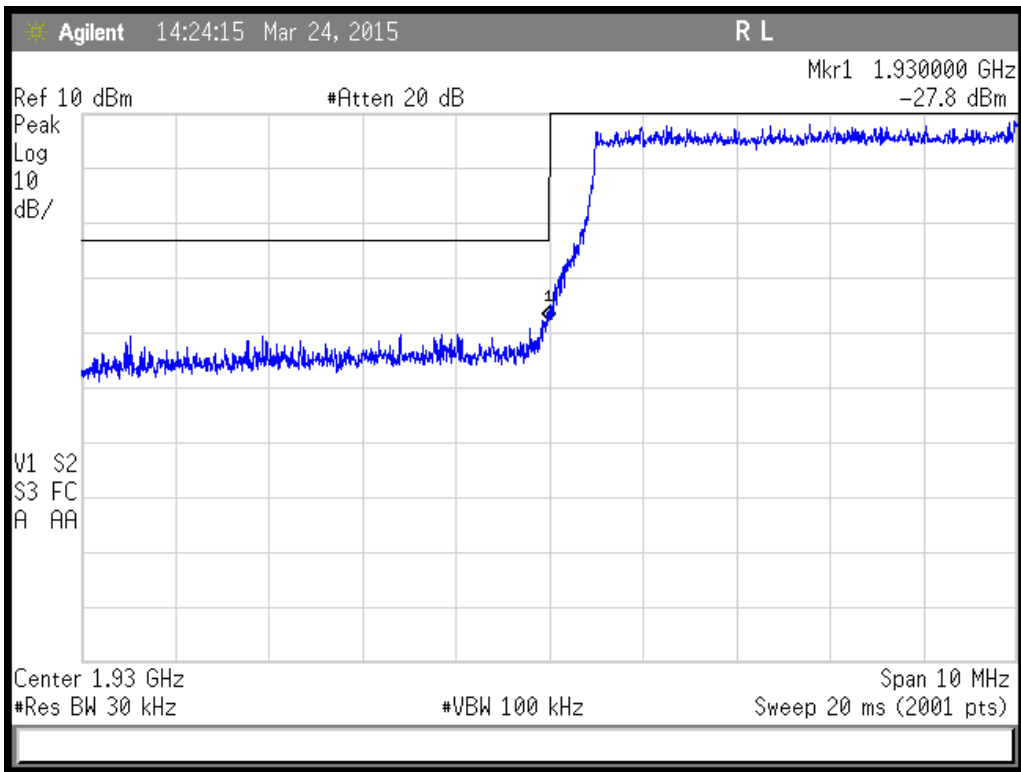


Lower Band Edge - Band 2 – 10MHz BW – QPSK – Port J2

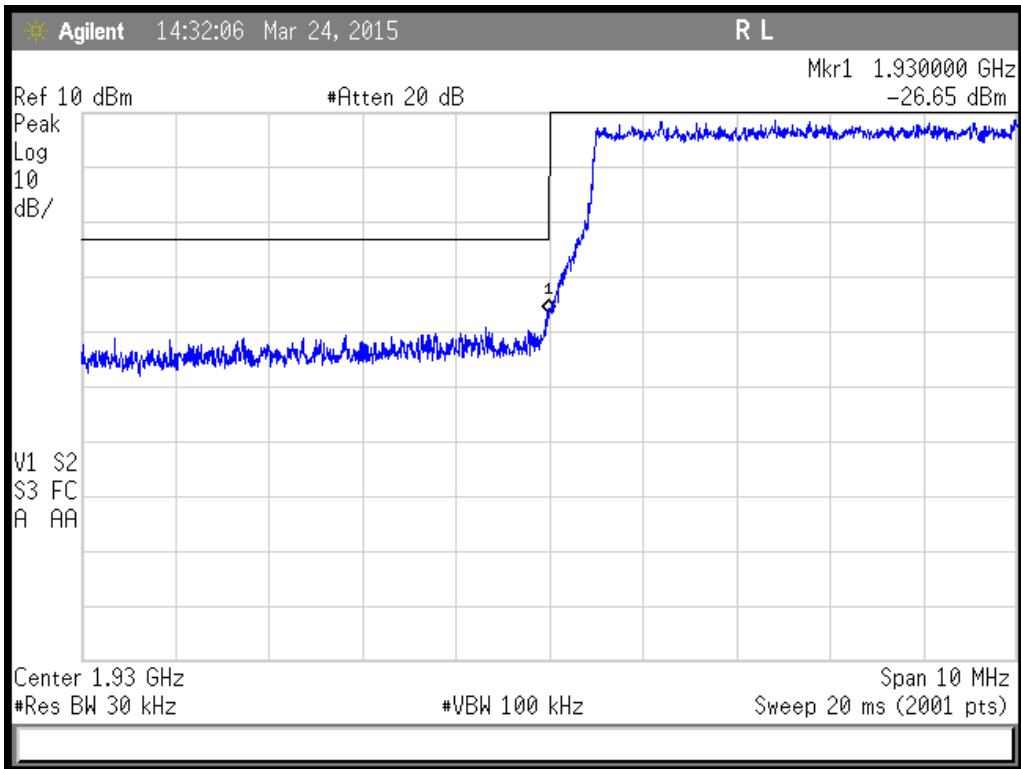


Lower Band Edge - Band 2 – 10MHz BW – 16QAM – Port J2



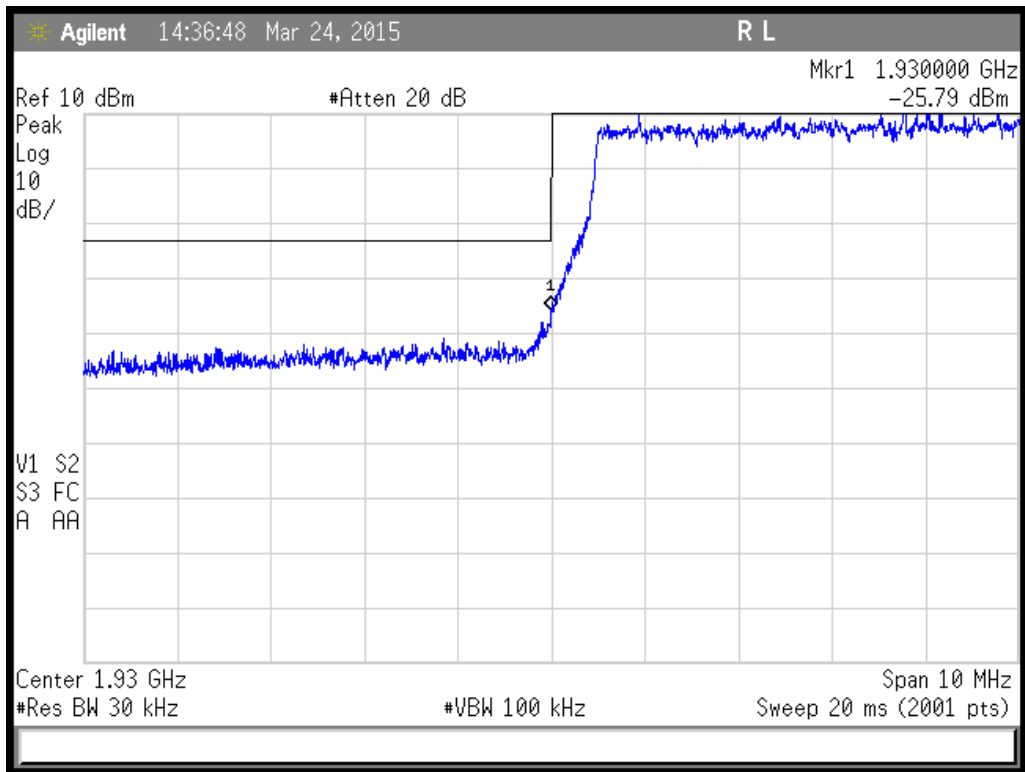


Lower Band Edge - Band 2 – 10MHz BW – 64QAM – J2

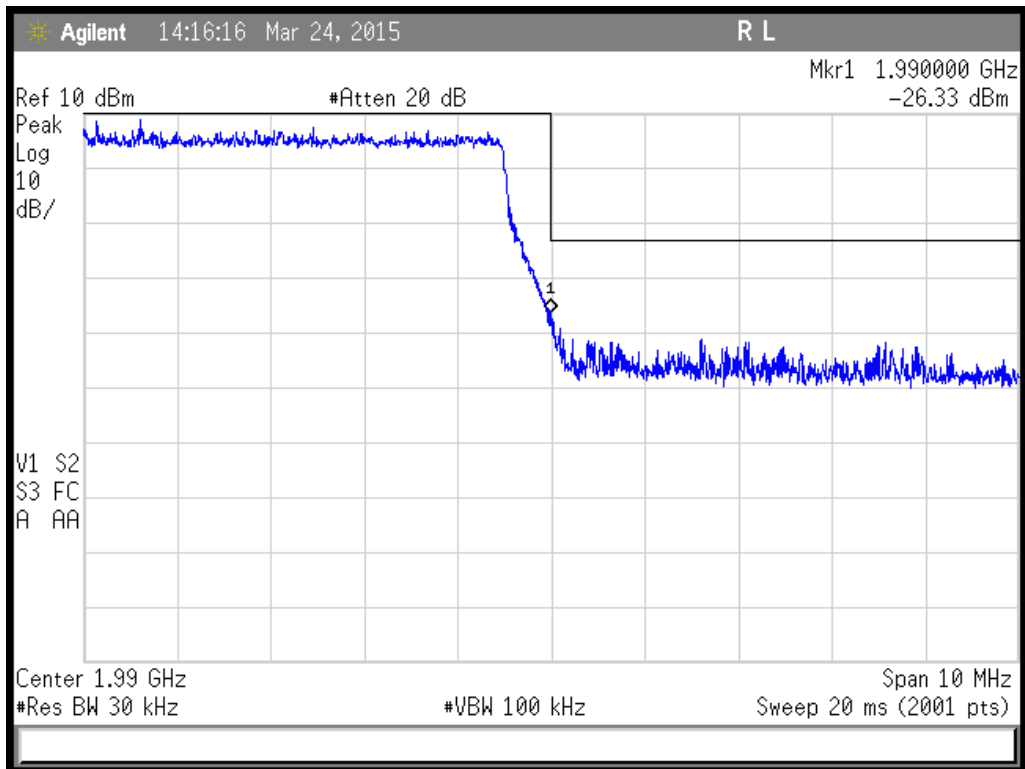


Upper Band Edge - Band 2 – 10MHz BW – QPSK – Port J2



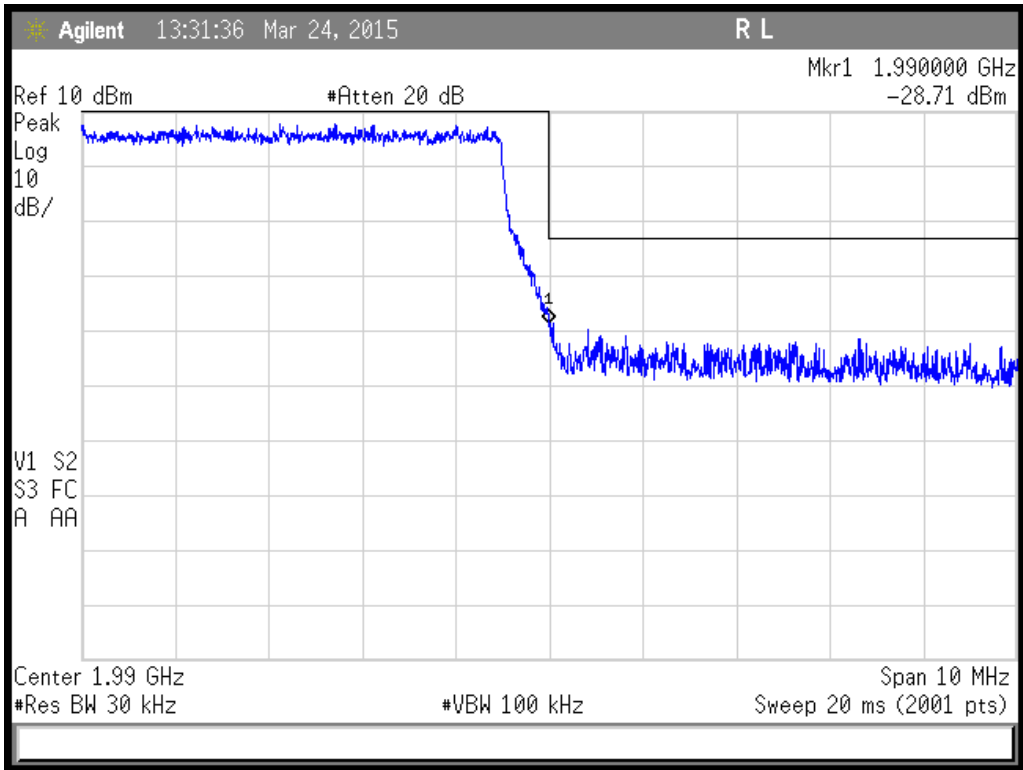


Upper Band Edge - Band 2 – 10MHz BW – 16QAM – Port J2

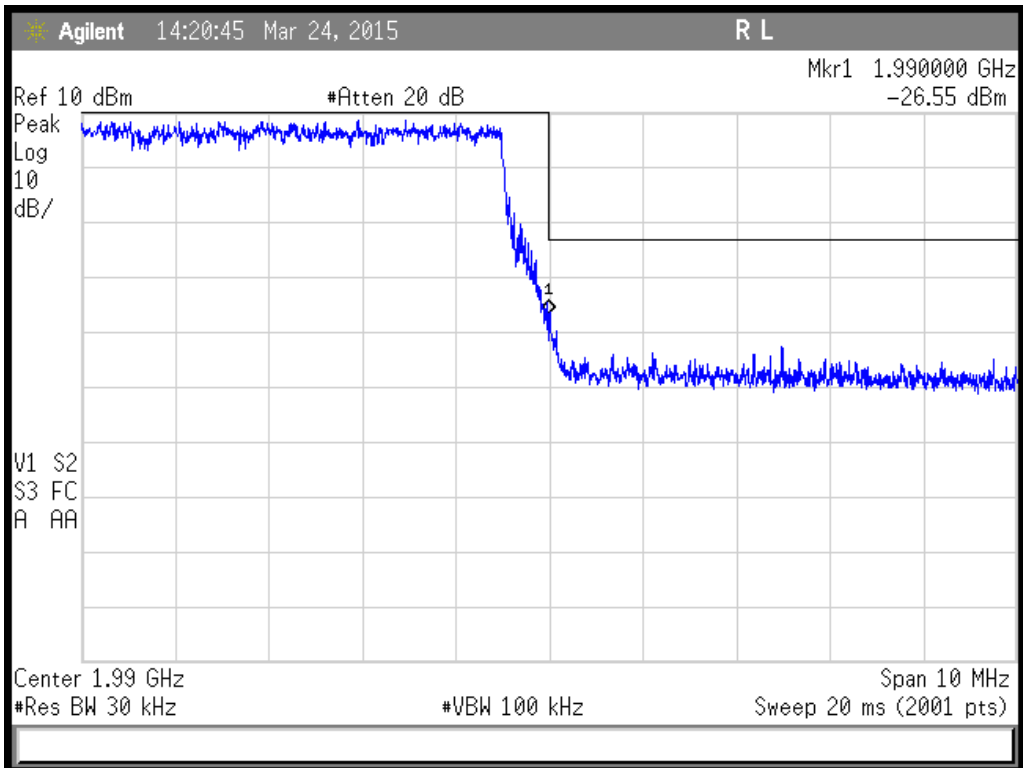


Upper Band Edge - Band 2 – 10MHz BW – 64QAM – Port J2



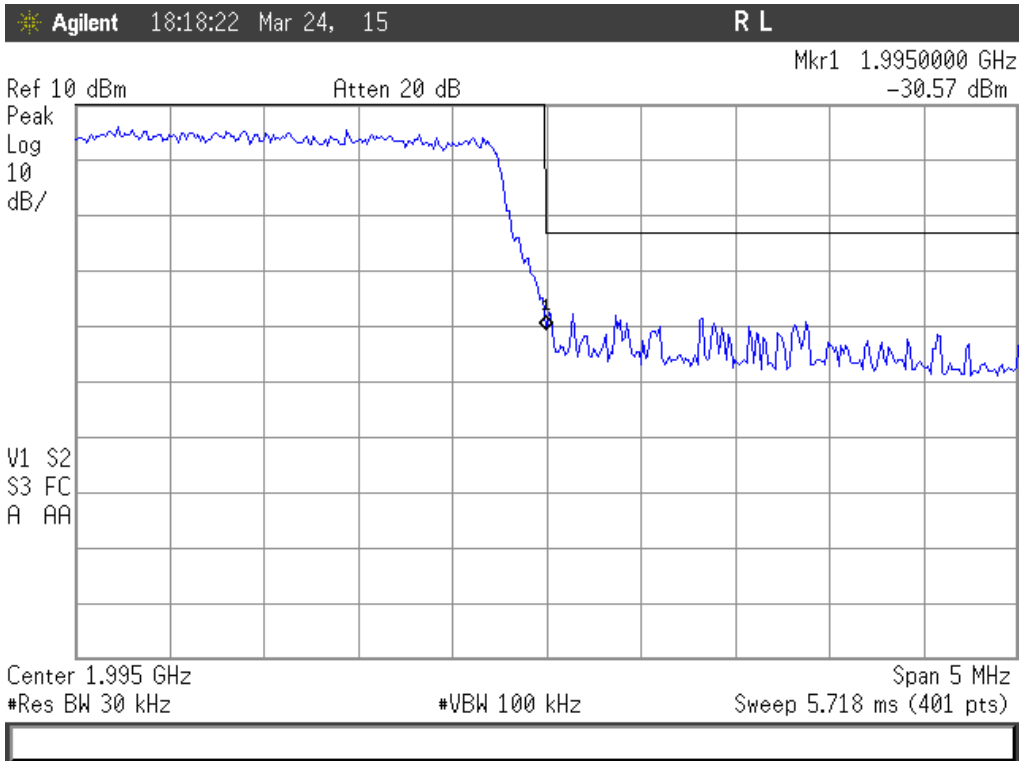


Band 25, Upper Band Edge, 5MHz BW, QPSK, Port J1

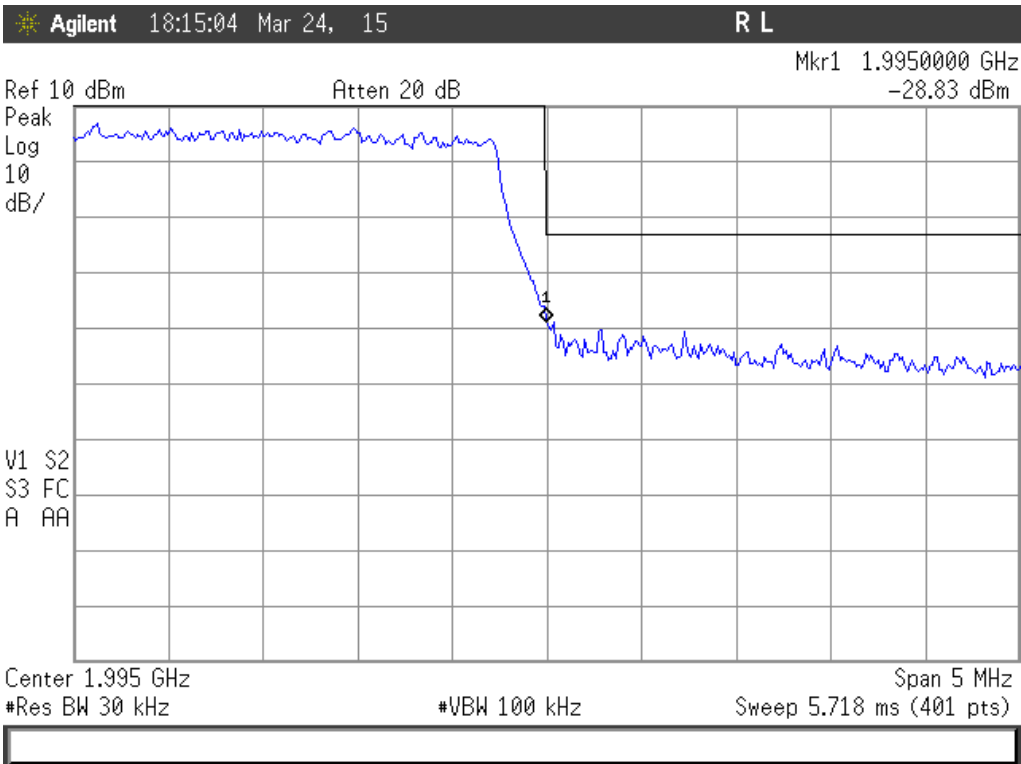


Band 25, Upper Band Edge, 5MHz BW, 16QAM, Port J1



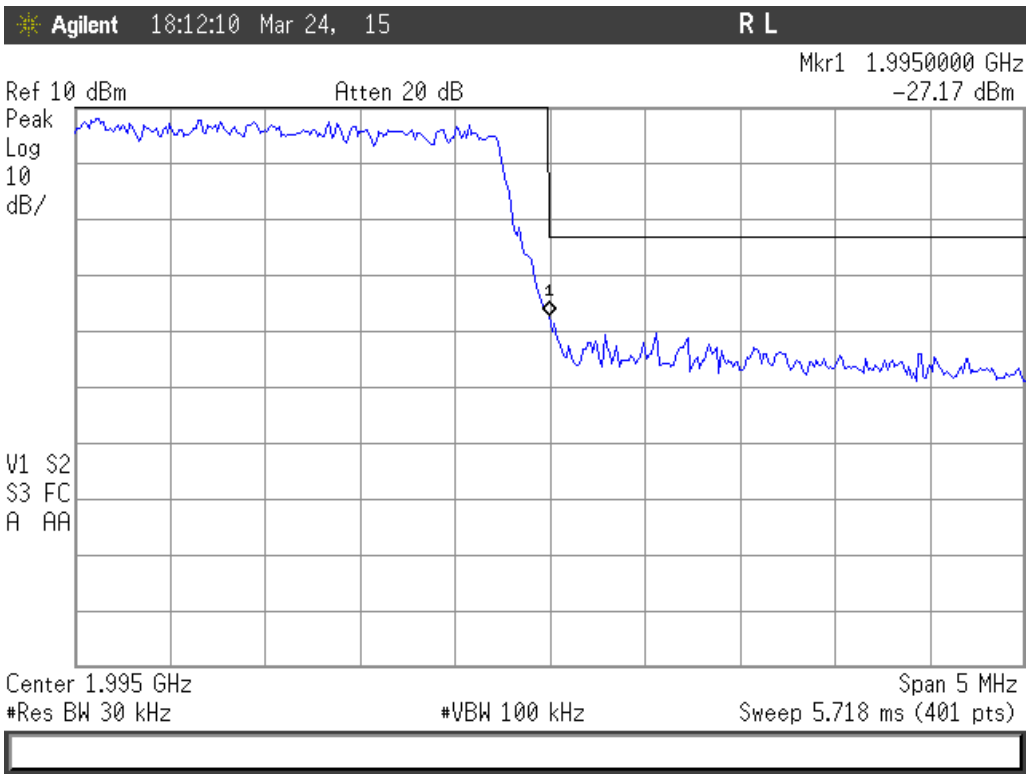


Band 25, Upper Band Edge, 5MHz BW, 64QAM, Port J1

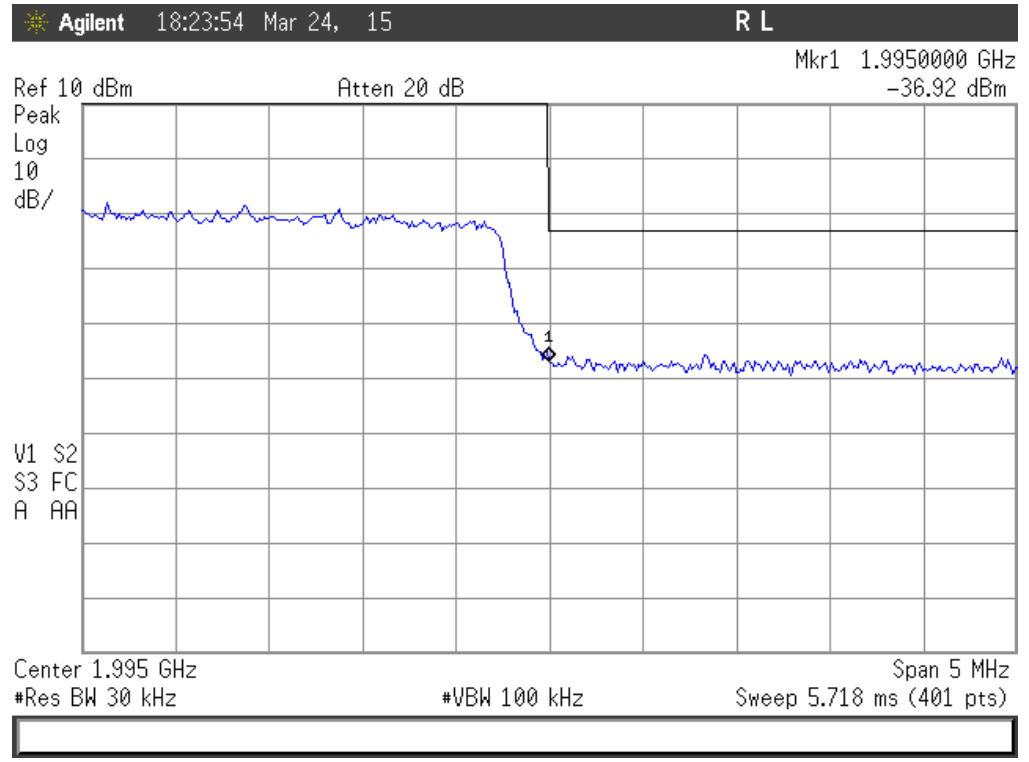


Band 25, Upper Band Edge, 5MHz BW, QPSK, Port J2



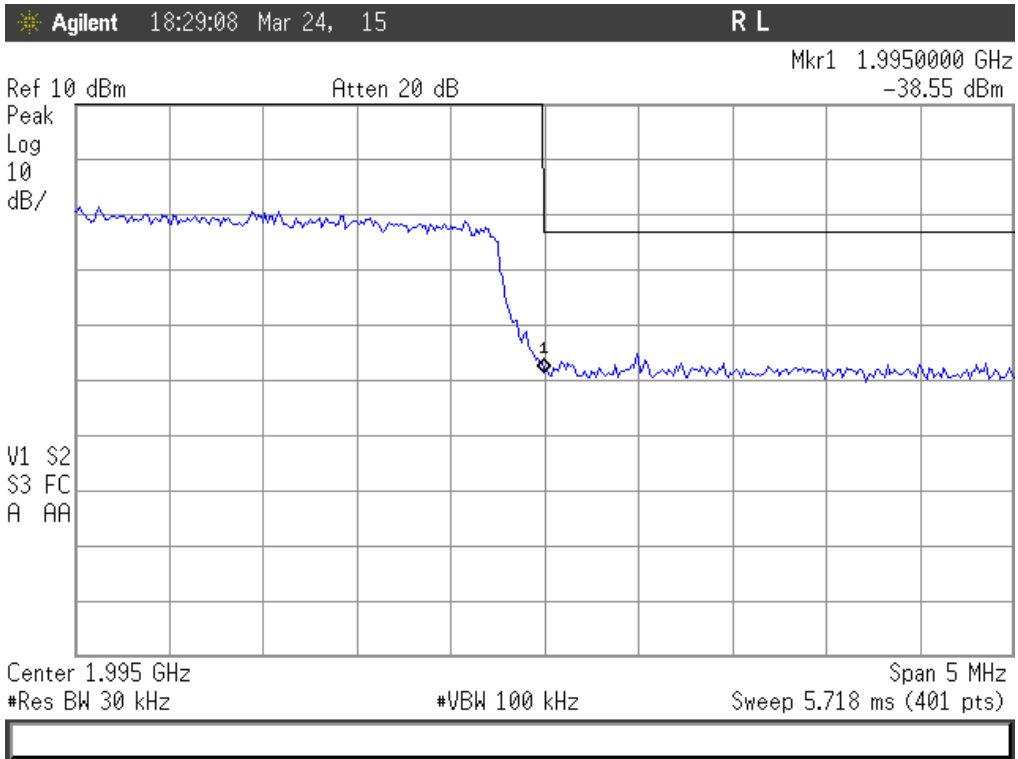


Band 25, Upper Band Edge, 5MHz BW, 16QAM, Port J2

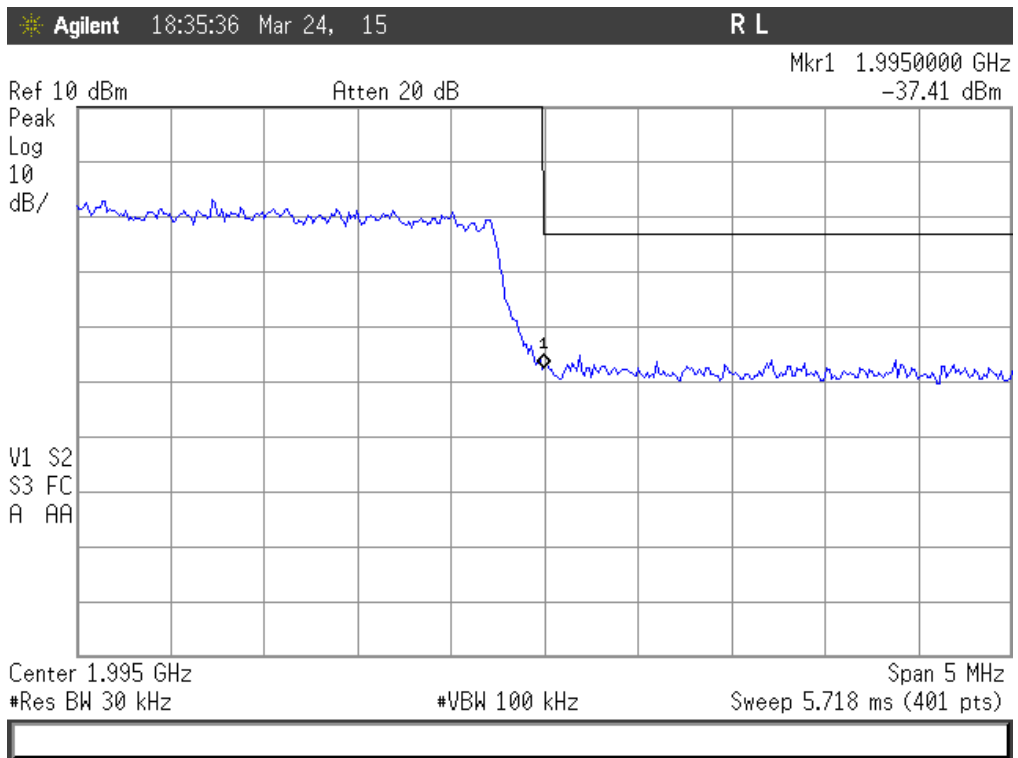


Band 25, Upper Band Edge, 5MHz BW, 64QAM, Port J2



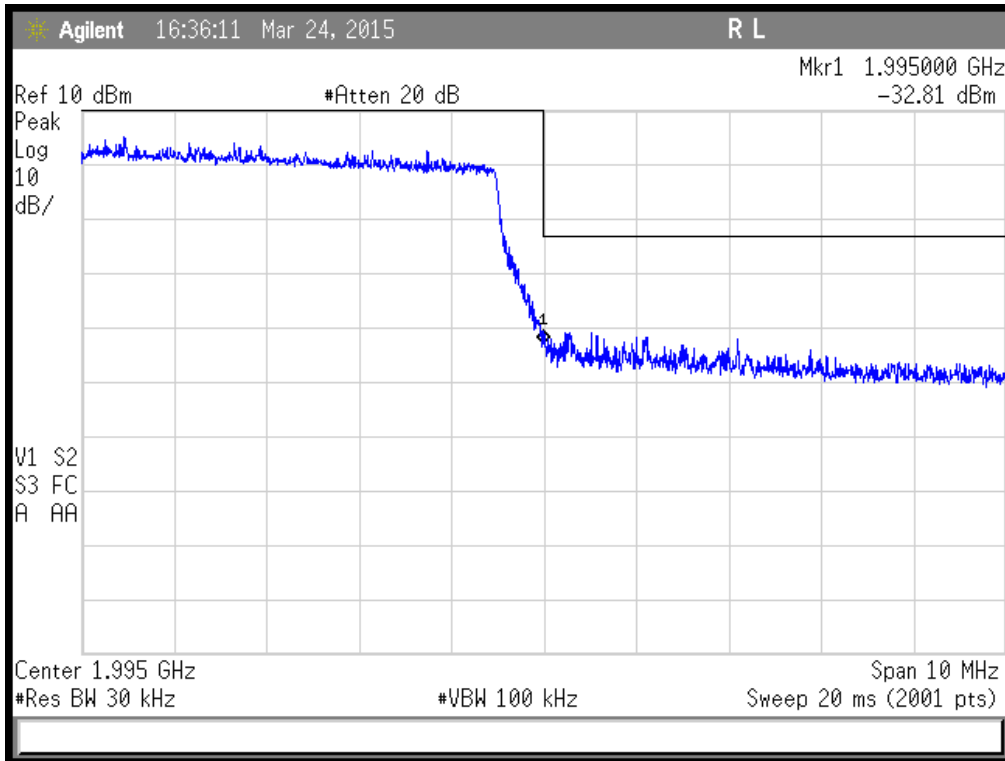


Band 25, Upper Band Edge, 10MHz BW, QPSK, Port J1

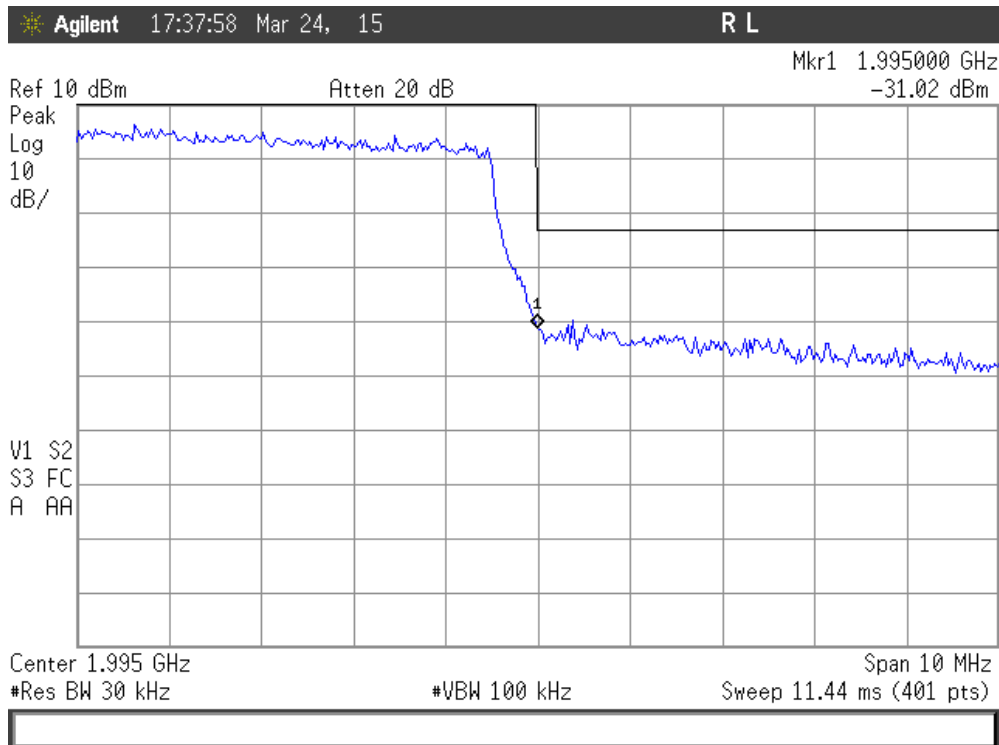


Band 25, Upper Band Edge, 10MHz BW, 16QAM, Port J1



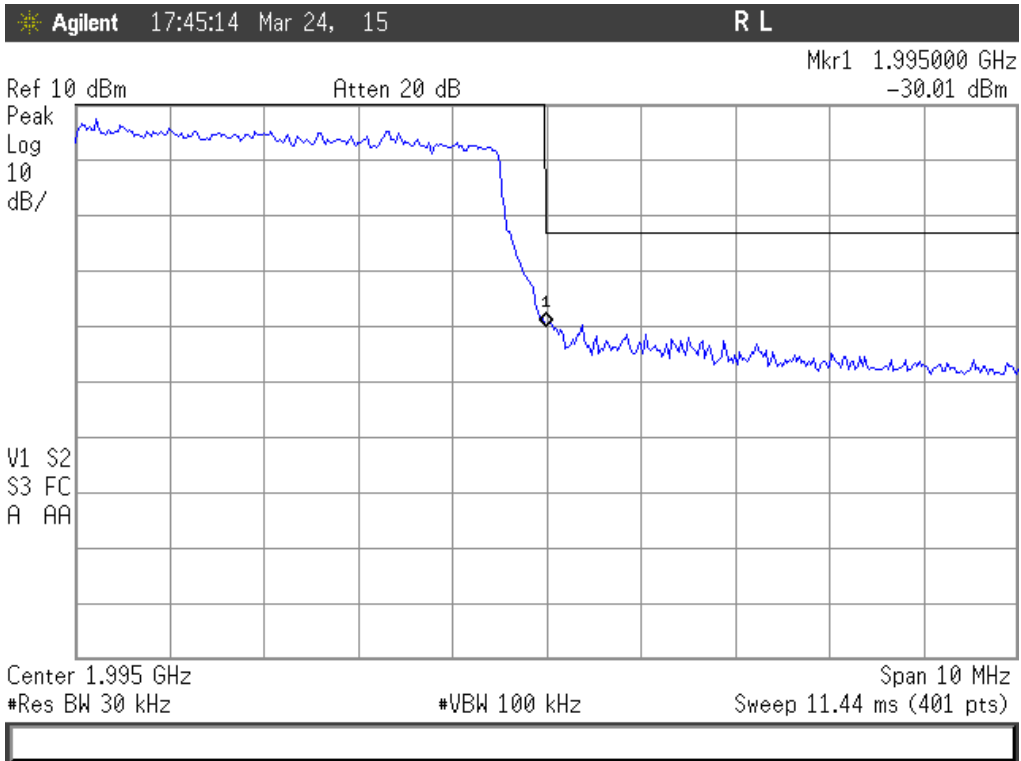


Band 25, Upper Band Edge, 10MHz BW, 64QAM, Port J1

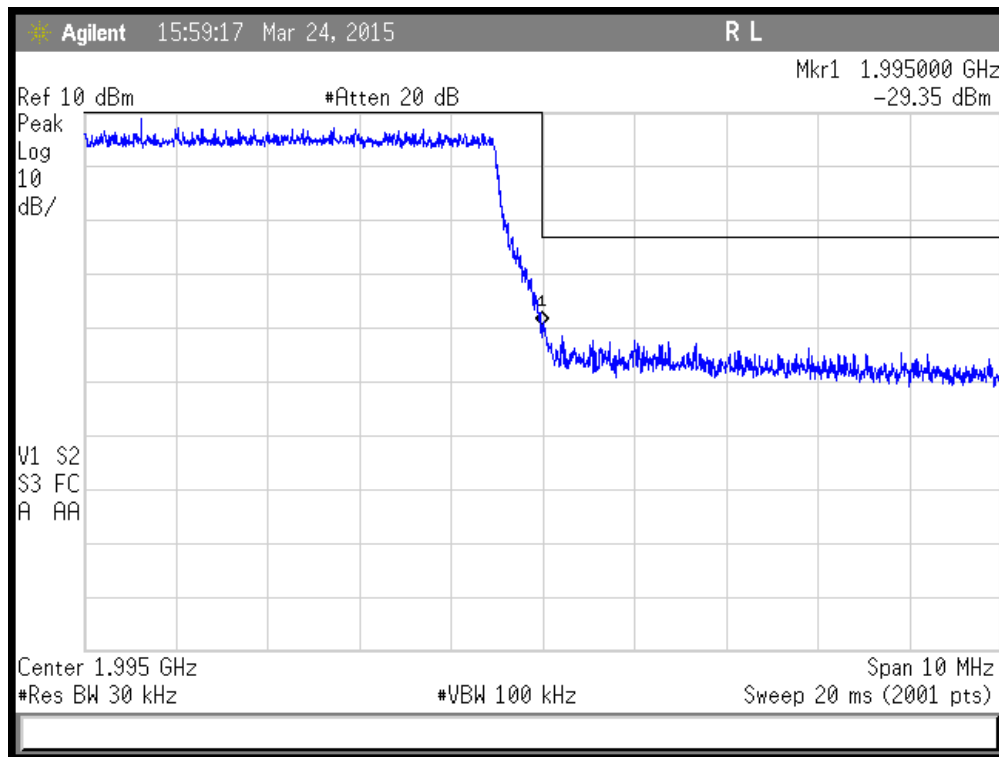


Band 25, Upper Band Edge, 10MHz BW, QPSK, Port J2



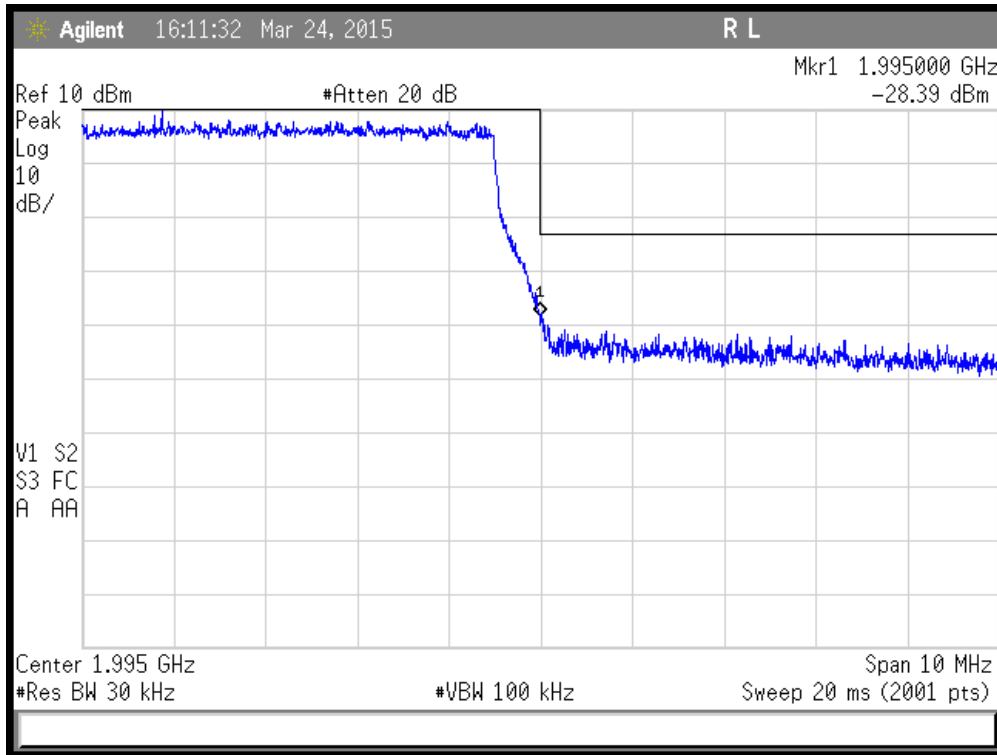

Band 25, Upper Band Edge, 10MHz BW, 16QAM, Port J2

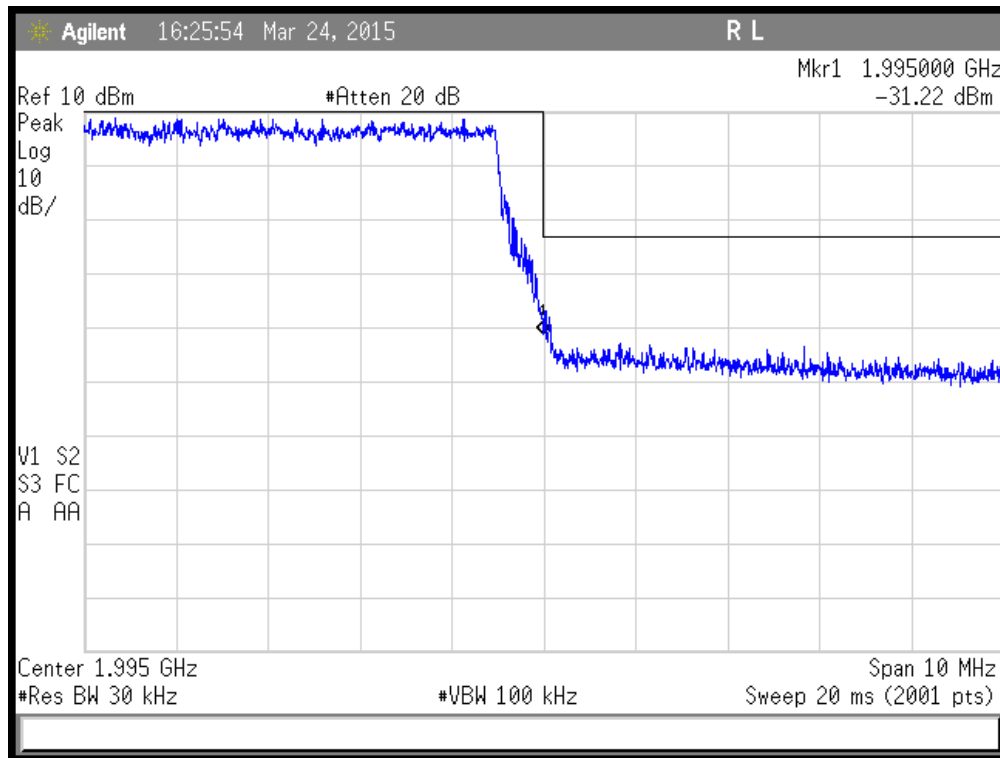

Band 25, Upper Band Edge, 10MHz BW, 64QAM, Port J2



Conducted Spurious Emissions at Antenna Port

LIMITS

“The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

[24.238(a)]

$$\text{Limit} = 10 \cdot \log(P[\text{mW}]) - (43 + 10 \cdot \log(P[\text{W}])) = -13\text{dBm}$$


Spectrum analyzer screen plots for LTE Bands 25 & 2 are shown on the following pages. The operating frequencies were 1962.5MHz (Band 25) and 1960MHz (Band 2), which were taken to represent both bands as Band 2 is a subset of Band 25.







PLOTS



LTE Band 2 – Antenna port J1

Agilent 09:16:09 Mar 25, 15 R L

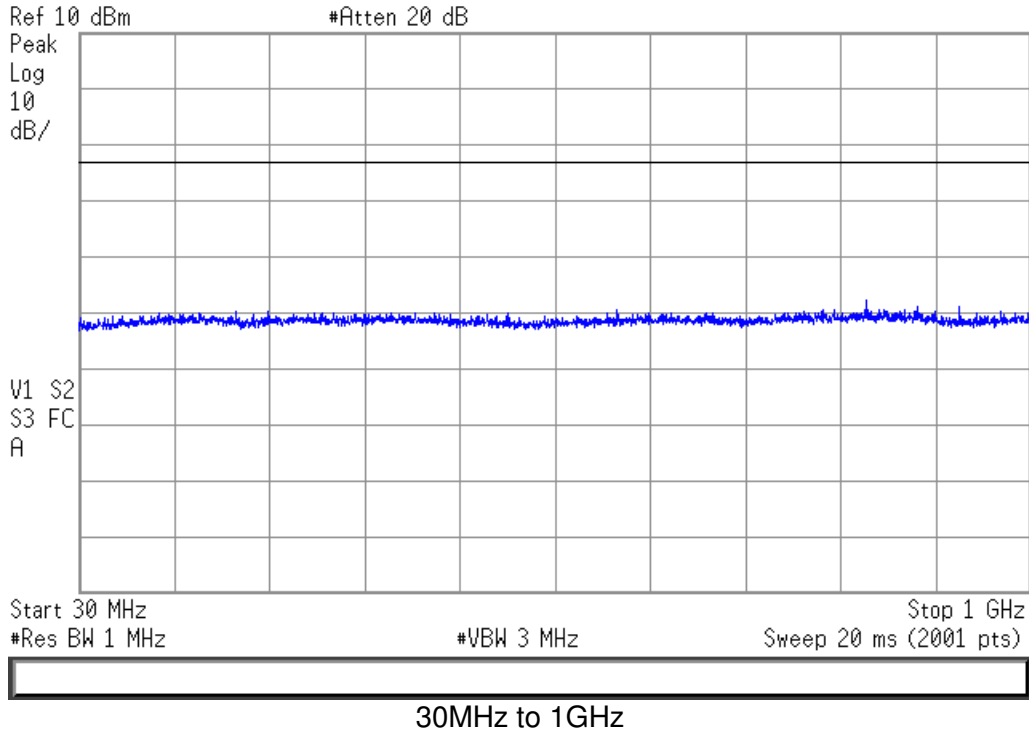


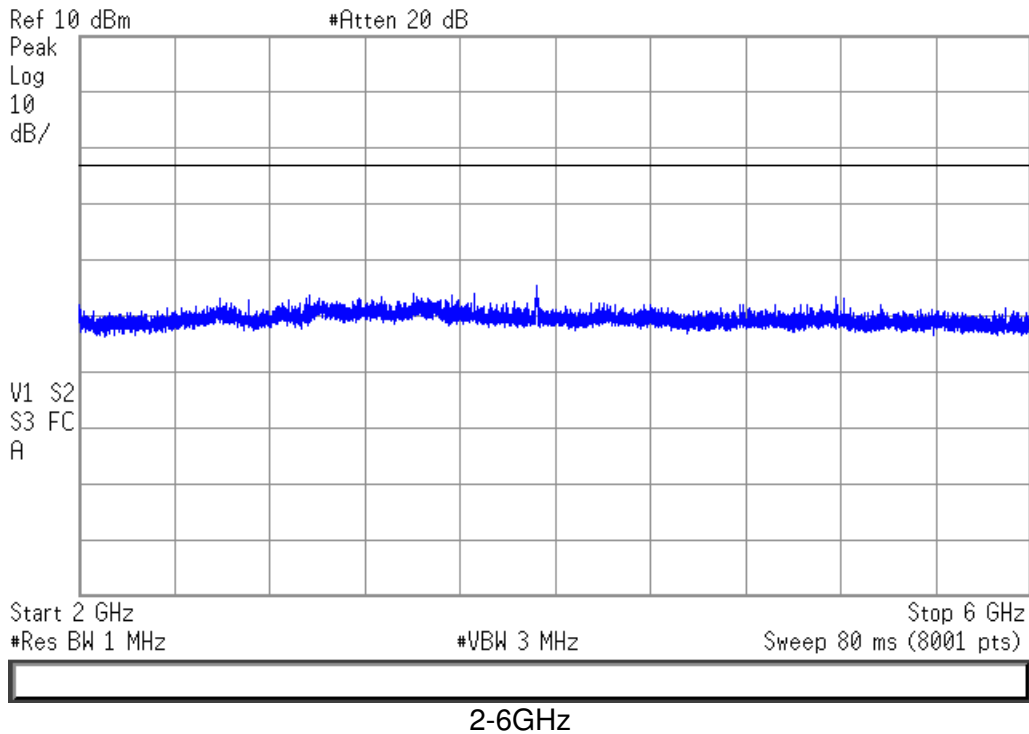
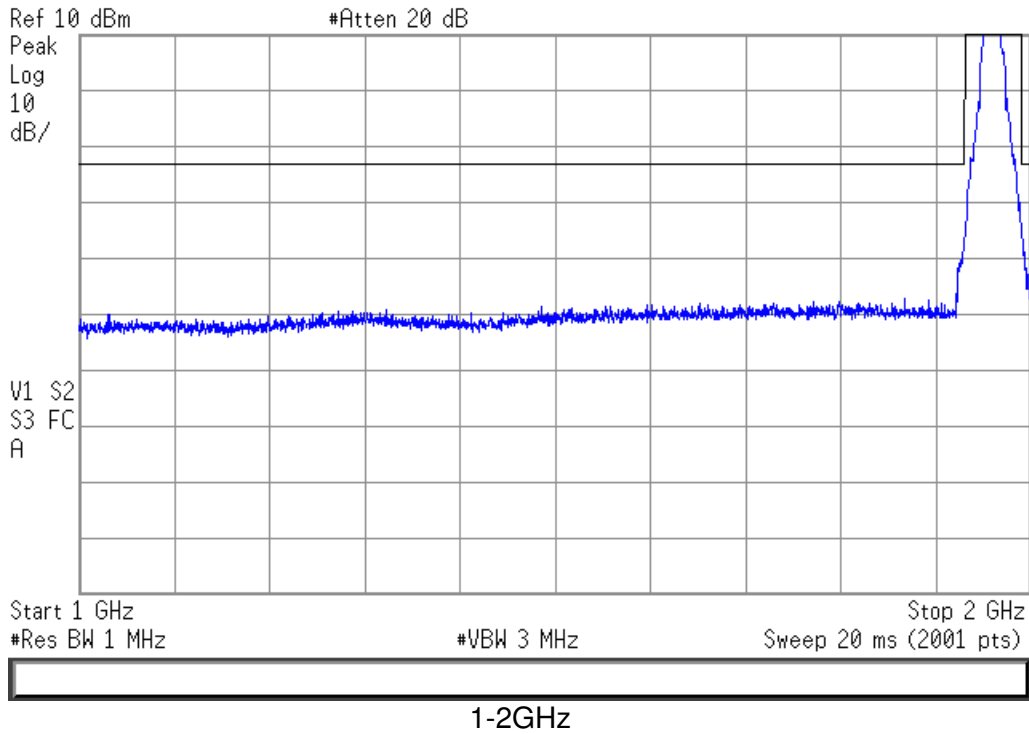


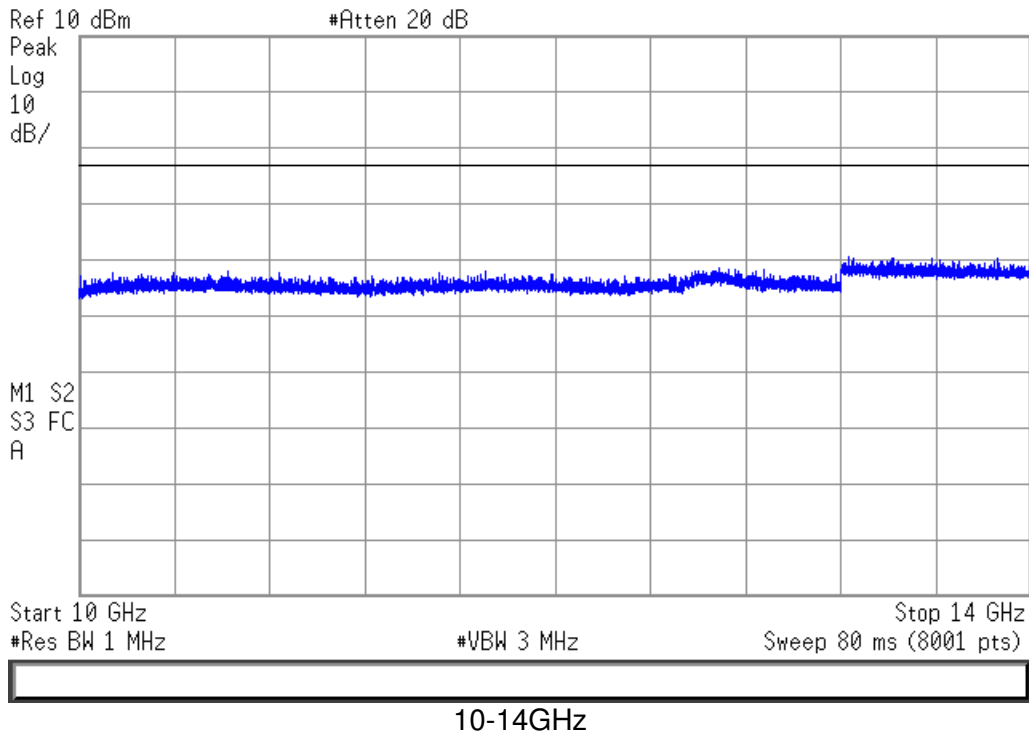
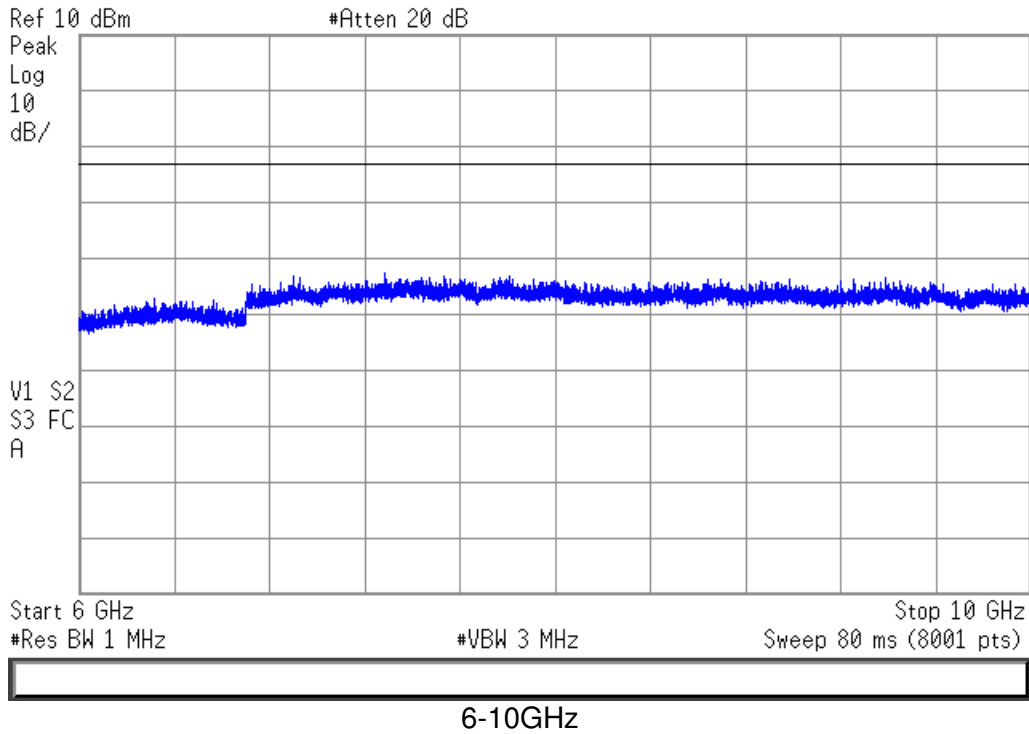


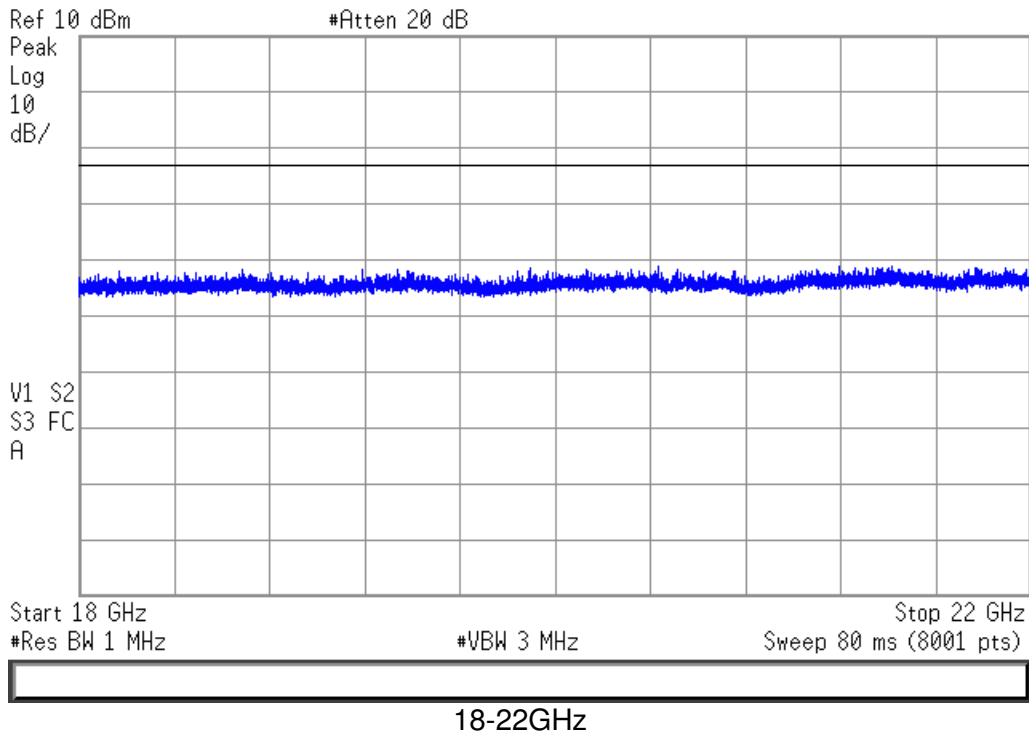
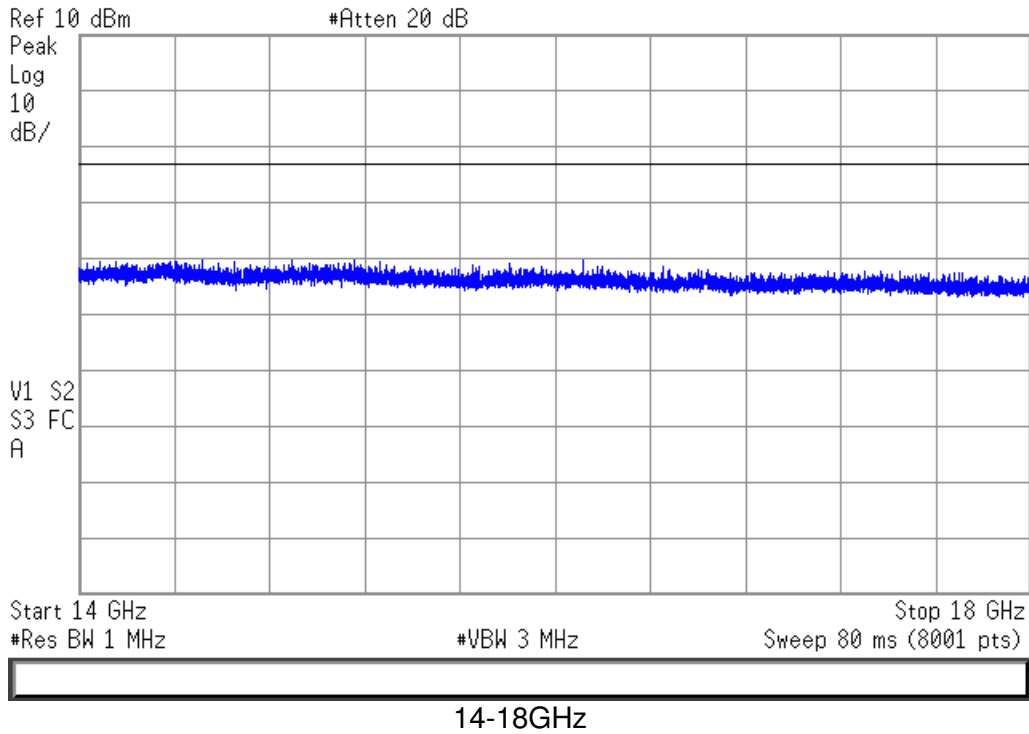


LTE Band 2 – Antenna port J2

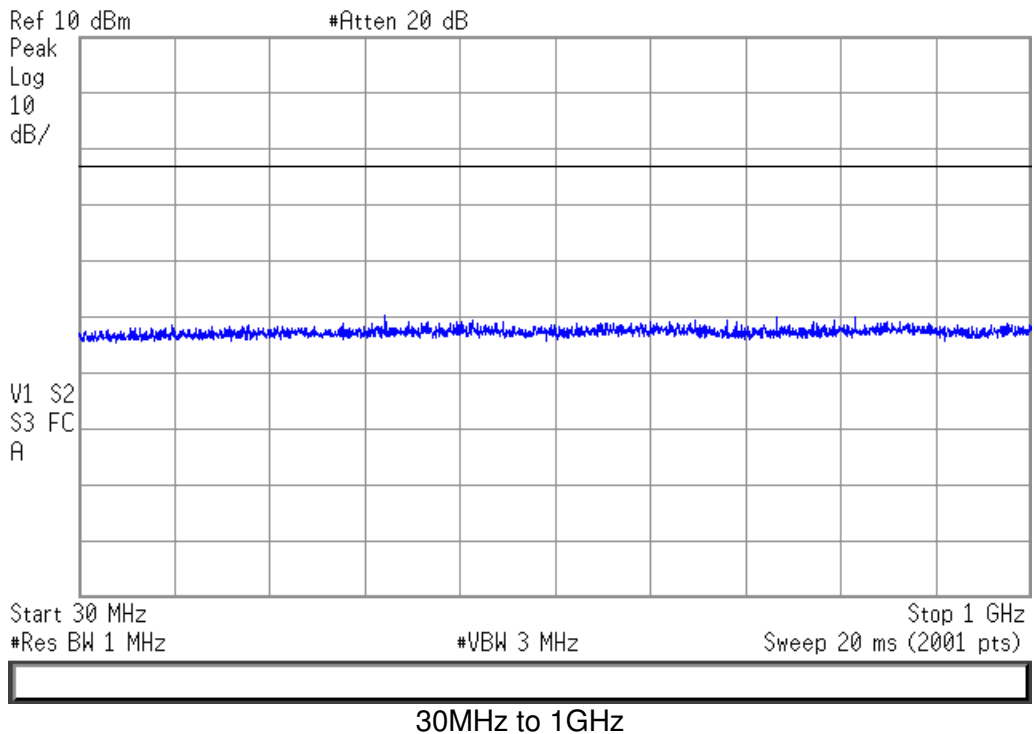

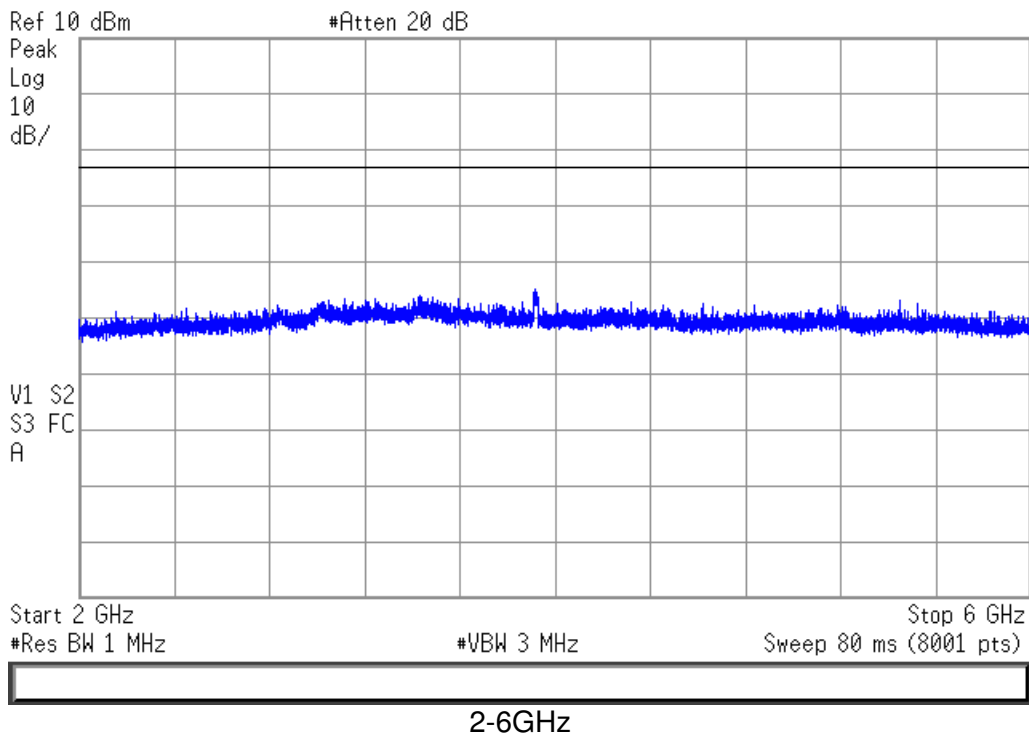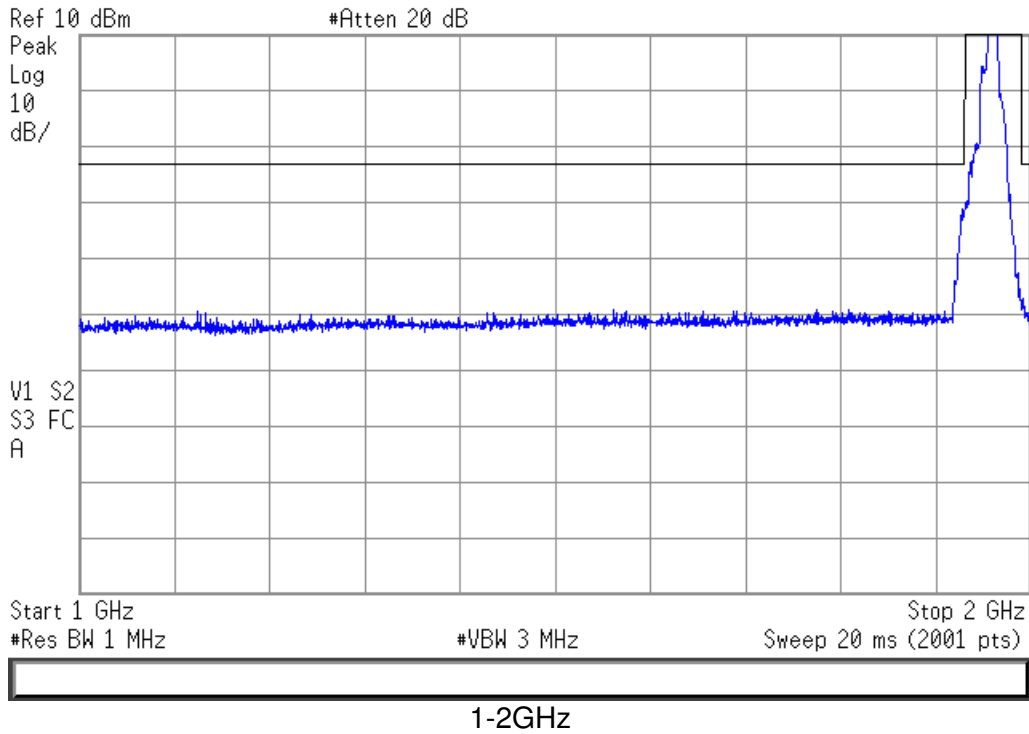

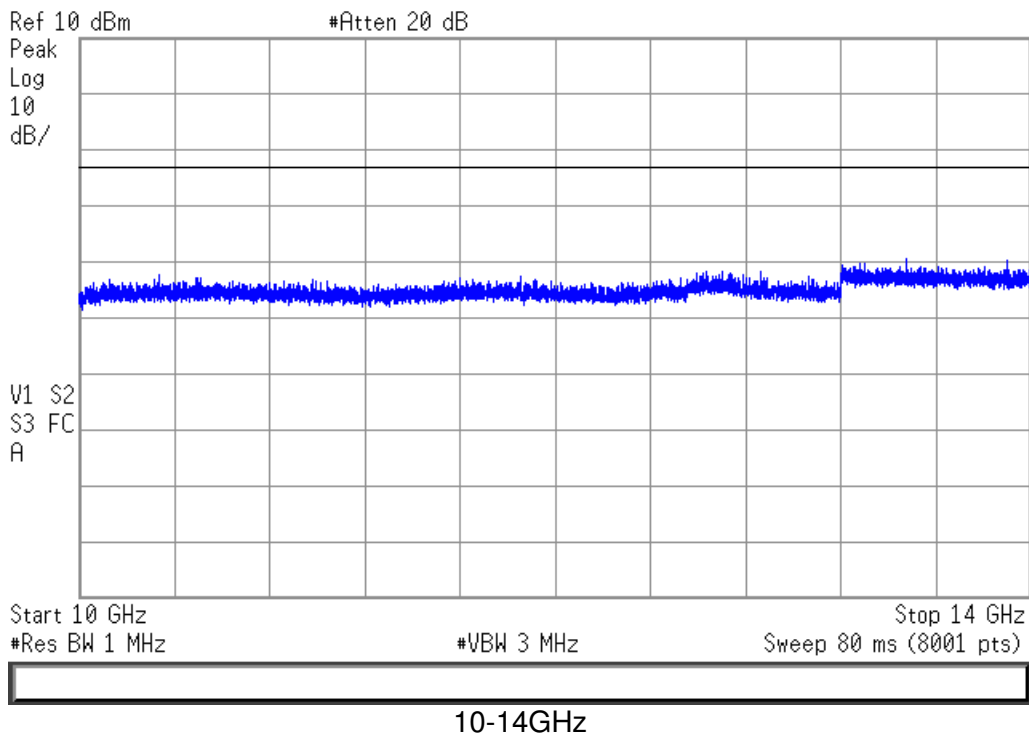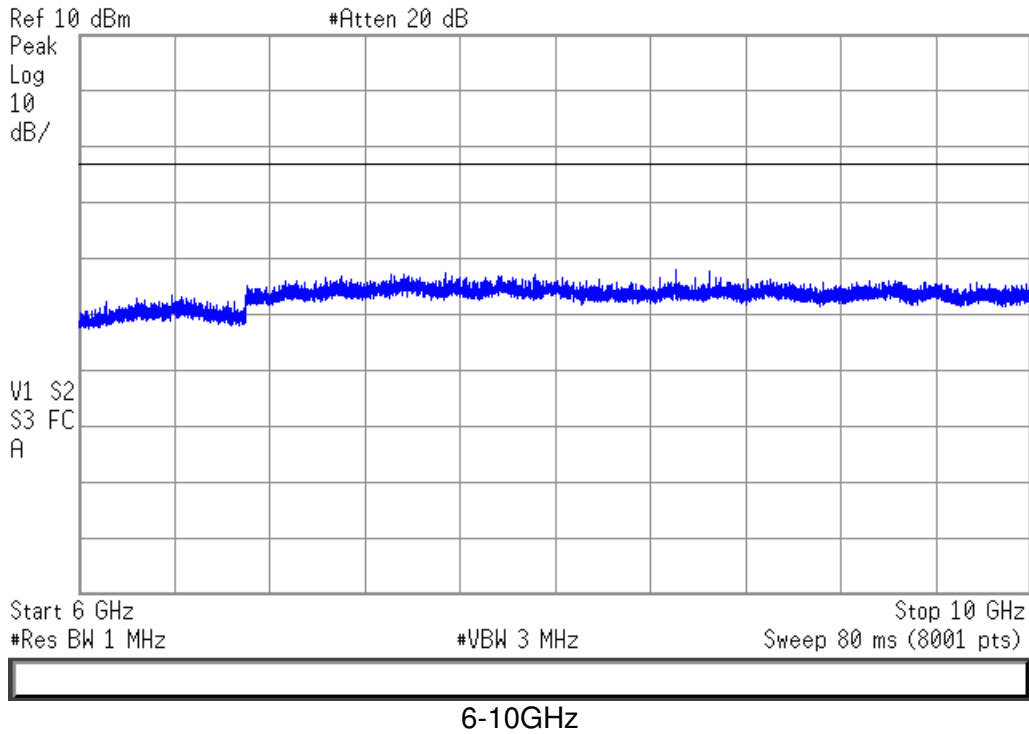

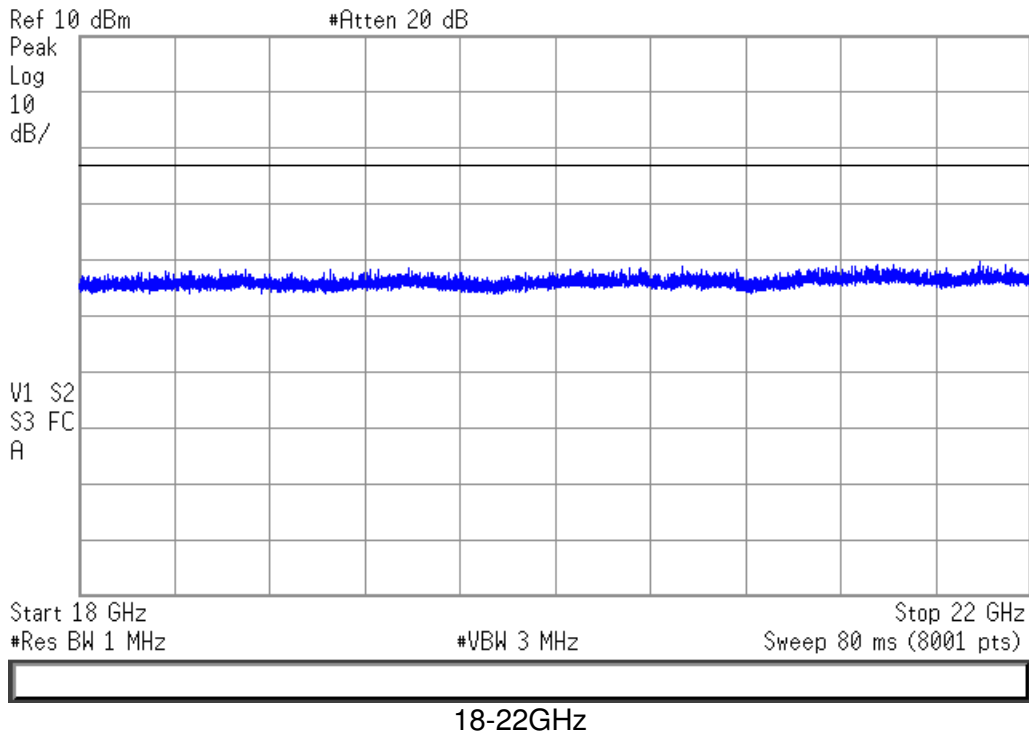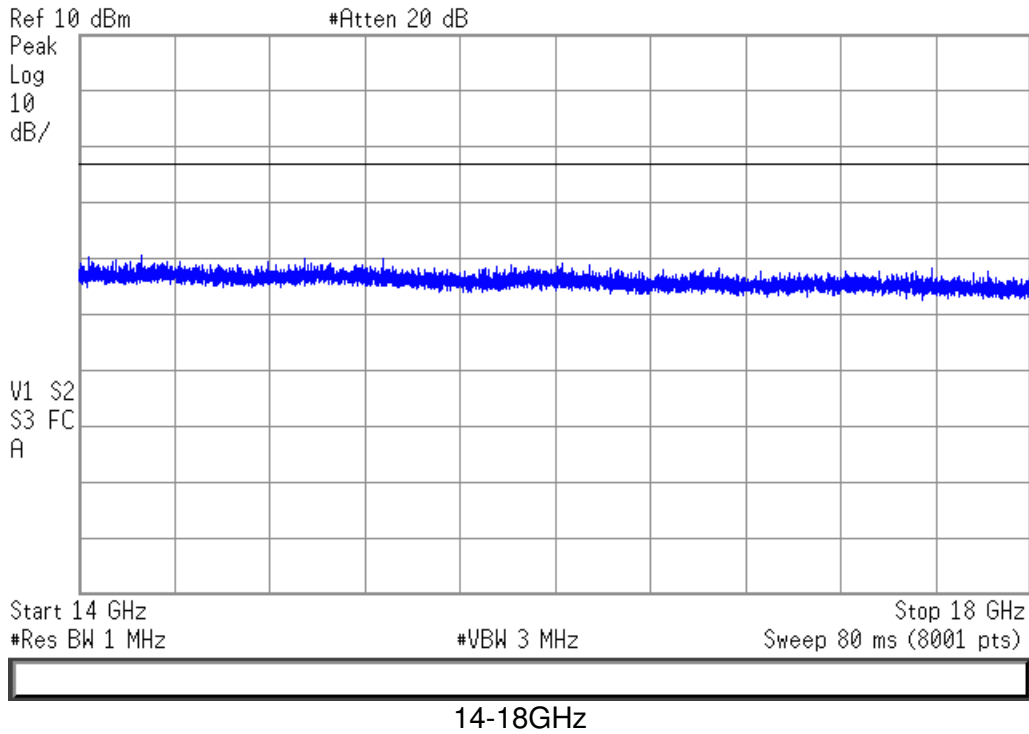

Radiated Spurious Emissions Measurements

MEASUREMENTS / RESULTS

Note that the EUT passes the FCC Class B limit, which is much lower than the -13dBm limit for licensed transmitter spurious emissions.

The EIRP to field strength conversion at the 3 meter measurement distance results in a limit of 82.2dBμV/m, from the equation:

$$E_0(\text{dB}\mu\text{V}/\text{m}) = \text{EIRP}(\text{dBm}) - 20\log(\text{distance, meters}) + 104.77\text{dB}.$$

Only worst-case radiated spurious data is presented.

Radiated Emissions Table										
Date: 25-Mar-15			Company: Airvana				Work Order: P0152			
Engineer: Tuyen Truong			EUT Desc: Switched IQ Radio Point Domestic				EUT Operating Voltage/Frequency: POE			
Temp: 24°C			Humidity: 10%				Pressure: 1015mBar			
Frequency Range: 30-1000MHz						Measurement Distance: 3 m				
Notes: BW = 10MHz, Band 2, 16QAM , Mid Channel (1960MHz)						EUT Max Freq: 200MHz				
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)	FCC Class B			
							Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	
v	62.77	46.0	25.4	8.0	1.5	30.1	40.0	-9.9	Pass	
v	33.77	32.2	25.3	19.2	1.6	27.7	40.0	-12.3	Pass	
v	177.8	40.6	24.2	11.7	2.5	30.6	43.5	-12.9	Pass	
h	200.0	45.7	24.9	13.4	2.7	36.9	43.5	-6.6	Pass	
v	250.0	42.1	25.1	12.2	2.8	32.0	46.0	-14.0	Pass	
v	333.125	49.5	25.2	14.7	3.0	42.0	46.0	-4.0	Pass	
h	333.3	48.7	25.2	14.7	3.0	41.2	46.0	-4.8	Pass	
v	500.0	50.2	25.5	17.8	2.7	45.2	46.0	-0.8	Pass	
v	600.0	42.9	25.1	19.3	3.1	40.2	46.0	-5.8	Pass	
h	625.0	40.2	25.5	19.8	3.0	37.5	46.0	-8.5	Pass	
v	750.0	42.3	24.7	21.2	3.8	42.6	46.0	-3.4	Pass	
h	750.0	41.0	24.7	21.2	3.8	41.3	46.0	-4.7	Pass	
v	875.0	36.6	25.7	22.5	3.6	37.0	46.0	-9.0	Pass	
h	875.0	35.1	25.7	22.5	3.6	35.5	46.0	-10.5	Pass	
Table Result: Pass by -0.8 dB							Worst Freq: 500.0 MHz			
Test Site: EMI Chamber 2		Cable 1: Asset #2052			Cable 2: Asset #2054			Cable 3: ---		
Analyzer: Rental SA#2		Preamp: Blue-Blk			Antenna: Red-White			Preselector: 1511		



Radiated Emissions Table

Date: 4/17/2015 & 4/23/2015		Company: Airvana		Work Order: P0152											
Engineer: Tuyen Truong		EUT Desc: Switched IQ Radio Point Domestic		EUT Operating Voltage/Frequency: POE											
Temp: 22°C		Humidity: 24%		Pressure: 1011mBar											
(April 23) Temp: 23°C		Humidity: 23%		Pressure: 994mBar											
Frequency Range: 1-18GHz				Measurement Distance: 3m (1-6GHz) & 1m (6-18GHz)											
Notes: EUT Max Freq: 200MHz															
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dB μ V)	Average Reading (dB μ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dB μ V/m)	Adjusted Avg Reading (dB μ V/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average			
									Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)	
BW = 10MHz, Band 2, 16QAM, Mid Channel (1960MHz)															
h, nf	3920.0	36.54	22.9	20.5	33.6	4.7	54.3	40.7	74.0	-19.7	Pass	54.0	-13.3	Pass	
h, nf	5880.0	31.73	19.3	19.4	35.4	6.2	53.9	41.5	74.0	-20.1	Pass	54.0	-12.5	Pass	
h, nf	7840.0	32.1	20.9	18.9	36.2	7.1	56.5	45.3	83.5	-27.0	Pass	63.5	-18.2	Pass	
BW = 5MHz, Band 2, 16QAM, Mid Channel (1960MHz)															
v, nf	3920.0	35.69	24.5	20.5	33.6	4.3	53.1	41.9	74.0	-20.9	Pass	54.0	-12.1	Pass	
h	3920.0	42.71	29.3	20.5	33.6	4.3	60.1	46.7	74.0	-13.9	Pass	54.0	-7.3	Pass	
vh, nf	7840.0	35.65	24.1	18.9	36.2	5.7	58.7	47.1	83.5	-24.8	Pass	63.5	-16.4	Pass	
BW = 10MHz, Band 2, 16QAM, High Channel (1985MHz)															
v, nf	3970.0	28.4	21.6	20.5	33.6	4.3	45.8	39.0	74.0	-28.2	Pass	54.0	-15.0	Pass	
h	3970.0	37.57	24.6	20.5	33.6	4.3	55.0	42.0	74.0	-19.0	Pass	54.0	-12.0	Pass	
h, nf	5955.0	33.36	20.8	19.4	35.5	5.1	54.6	42.0	74.0	-19.4	Pass	54.0	-12.0	Pass	
BW = 10MHz, Band 2, 16QAM, Low Channel (1935MHz)															
v	3870.0	34.27	23.9	20.6	33.5	4.2	51.4	41.0	74.0	-22.6	Pass	54.0	-13.0	Pass	
h	3870.0	42.73	28.4	20.6	33.5	4.2	59.8	45.5	74.0	-14.2	Pass	54.0	-8.5	Pass	
BW = 10MHz, Band 2, QPSK, Mid Channel (1960MHz)															
h	3920.0	40.34	27.2	20.5	33.6	4.3	57.7	44.6	74.0	-16.3	Pass	54.0	-9.4	Pass	
BW = 10MHz, Band 2, 64QAM, Mid Channel (1960MHz)															
h	3920.0	40.61	27.3	20.5	33.6	4.3	58.0	44.7	74.0	-16.0	Pass	54.0	-9.3	Pass	
Table Result: Pass by -8.5 dB						Worst Freq: 3870.0 MHz									
Test Site: 1DCC-OATS-3M-I		Cable 1: EMIR-HIGH-22		Cable 2: ---		Cable 3: ---									
Analyzer: Rental SA#1		Preamp: Asset #1517		Antenna: Blue Horn		Preselector: ---									
Test Site: EMI Chamber 2		Cable 1: Asset #2052		Cable 2: Asset #2054		Cable 3: ---									
Analyzer: Rental SA#1		Preamp: Asset #1517		Antenna: Blue Horn		Preselector: ---									

Radiated Emissions Table

Date: 25-Mar-15		Company: Airvana		Work Order: P0152										
Engineer: Tuyen Truong		EUT Desc: Switched IQ Radio Point Domestic		EUT Operating Voltage/Frequency: POE										
Temp: 24°C		Humidity: 10%		Pressure: 1015mBar										
Frequency Range: 18-20GHz				Measurement Distance: 0.1 m										
Notes: EUT Max Freq: 200MHz														
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dB μ V)	Average Reading (dB μ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dB μ V/m)	Adjusted Avg Reading (dB μ V/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
									Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)	Limit (dB μ V/m)	Margin (dB)	Result (Pass/Fail)
NO EMISSIONS FOUND WITHIN 10dB OF THE LIMIT														
Table Result: --- by --- dB						Worst Freq: --- MHz								
Test Site: EMI Chamber 2		Cable 1: Asset #1507		Cable 2: ---		Cable 3: ---								
Analyzer: Rental SA#2		Preamp: Asset #1517		Antenna: 18-26.5GHz Horn		Preselector: ---								



Conducted Spurious Emissions on AC Mains

AC Conducted Emissions Data Table															
Date: 06-Apr-15				Company: Airvana				Work Order: P0152							
Engineer: Tuyen Truong				EUT Desc: Switched IQ Radio Point Domestic				Pressure: 1019mBar							
Temp: 21.0 °C				Humidity: 27%											
Notes: Tested AC side of DC Power Brick of support POE Linksys Switch (checked both power, 120Vac/60Hz and 230Vac/50Hz) Peak readings.															
Frequency Range: 0.15-30MHz EUT Input Voltage/Frequency: POE															
Frequency (MHz)	Quasi-Peak Readings		Average Readings		LISN Factors		Cable Factor (dB)	ATTN Factor (dB)	FCC/CISPR Class B			FCC/CISPR Class B			
	QP1 (dBµV)	QP2 (dBµV)	AVG1 (dBµV)	AVG2 (dBµV)	L1 (dB)	L2 (dB)			QP Limit (dBµV)	Margin (dB)	Result (Pass/Fail)	AVG Limit (dBµV)	Margin (dB)	Result (Pass/Fail)	
BW = 10MHz, Band 2, 16QAM, Mid Channel (1960MHz)															
0.33	13.0	12.1	13.0	12.1	0.0	0.0	0.0	-20.4	59.4	-26.0	Pass	49.4	-16.0	Pass	
1.34	10.6	11.5	10.6	11.5	0.0	0.0	0.0	-20.4	56.0	-24.1	Pass	46.0	-14.1	Pass	
4.85	10.3	9.7	10.3	9.7	0.0	-0.1	-0.1	-20.4	56.0	-25.2	Pass	46.0	-15.2	Pass	
11.94	9.6	10.9	9.6	10.9	-0.1	-0.1	-0.2	-20.3	60.0	-28.5	Pass	50.0	-18.5	Pass	
16.19	9.9	10.2	9.9	10.2	-0.1	-0.1	-0.2	-20.4	60.0	-29.1	Pass	50.0	-19.1	Pass	
22.61	9.7	8.4	9.7	8.4	-0.1	-0.1	-0.3	-20.4	60.0	-29.5	Pass	50.0	-19.5	Pass	
Result: Pass							Worst Margin: -14.1 dB			Frequency: 1.340 MHz					
Measurement Device: LISN ASSET 1726(Line 1) LISN ASSET 1727(Line 2)				Cable: CEMI-09				Spectrum Analyzer: SA EMI Chamber (1328)							
				Attenuator: 20dB Atten-4				Site: CEMI3							



Frequency Stability

REQUIREMENTS

Part 24:

“The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.” [24.235]

MEASUREMENTS / RESULTS

Note that measurements were done on port J1, since the same frequency-generating circuit is used for J1 and J2.



-30°C, Low Frequency Edge





-30°C, High Frequency Edge



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880





-20°C, Low Frequency Edge



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880





-20°C, High Frequency Edge





-10°C, Low Frequency Edge



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8887





-10°C, High Frequency Edge




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880





0°C, Low Frequency Edge



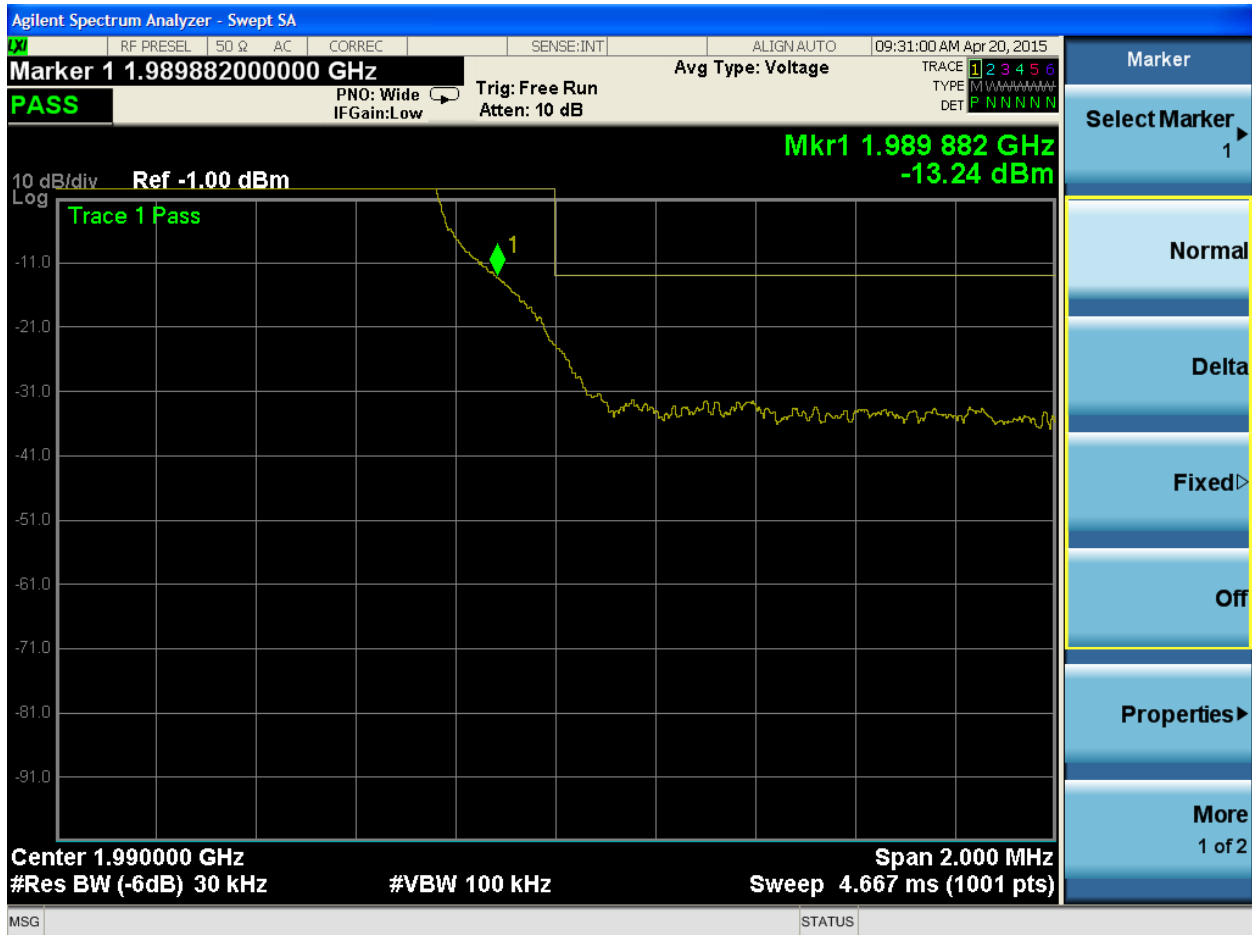

0°C, High Frequency Edge



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880





10°C, Low Frequency Edge



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880






10°C, High Frequency Edge



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



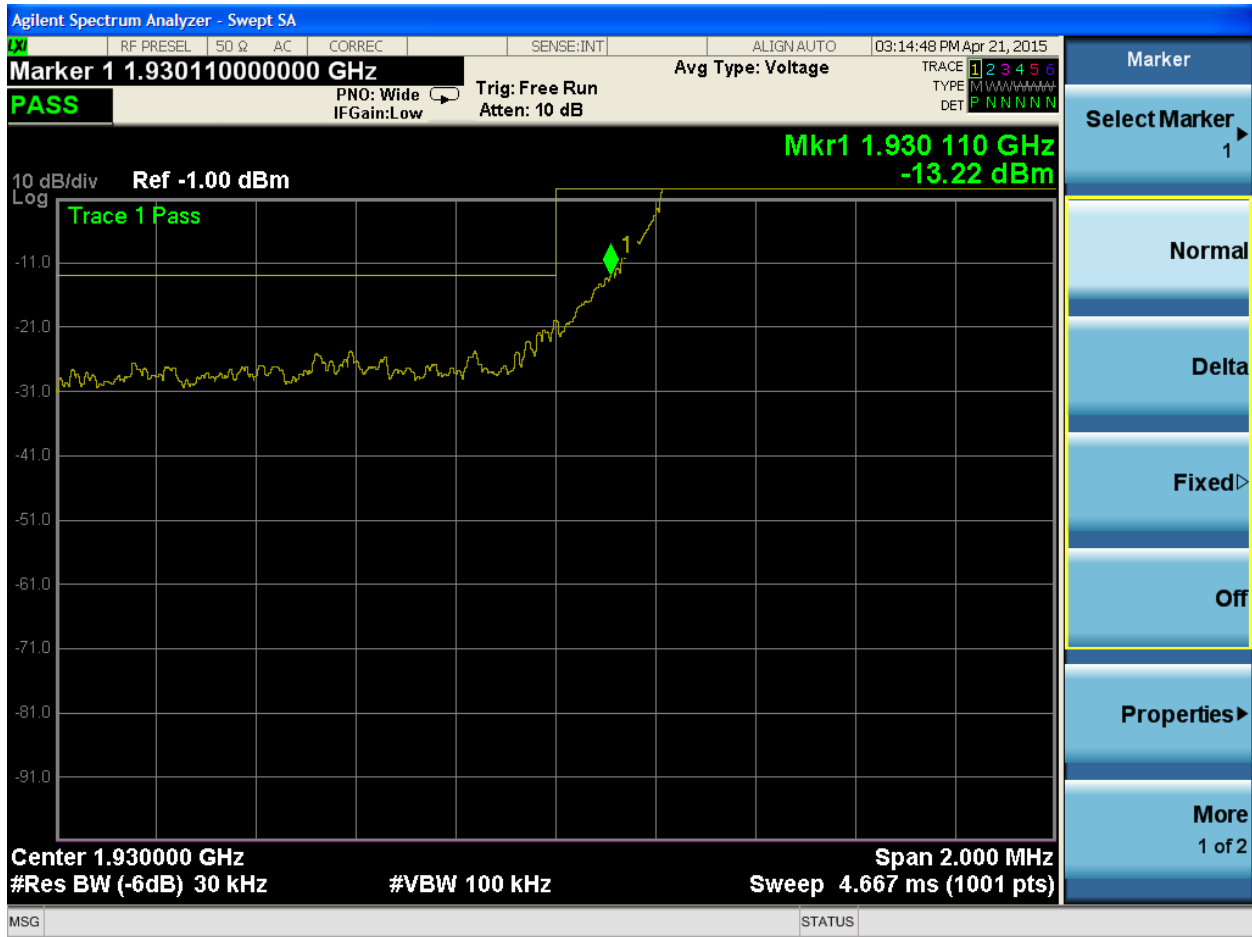


20°C, Low Frequency Edge, 120Vac



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



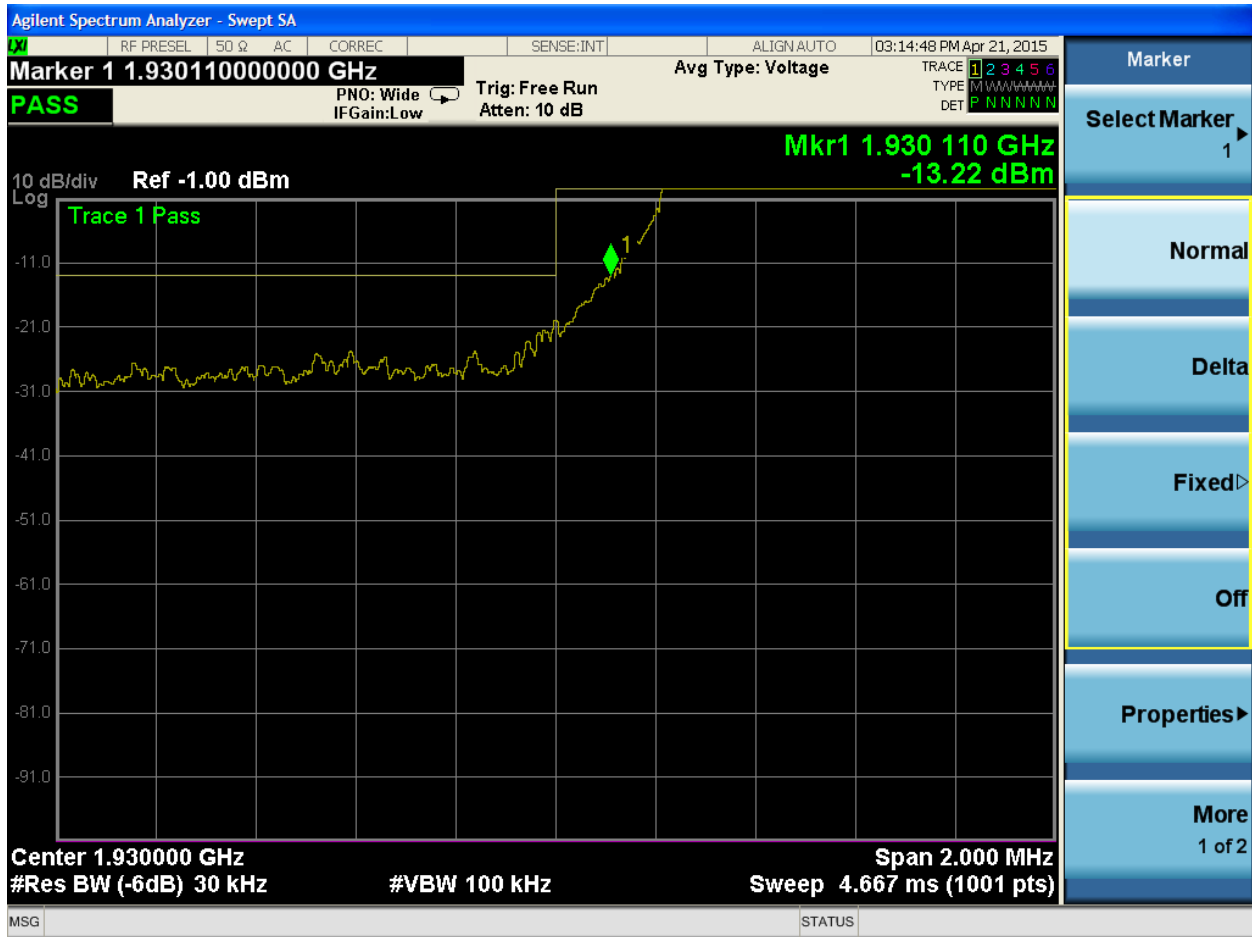


20°C, High Frequency Edge, 120Vac



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



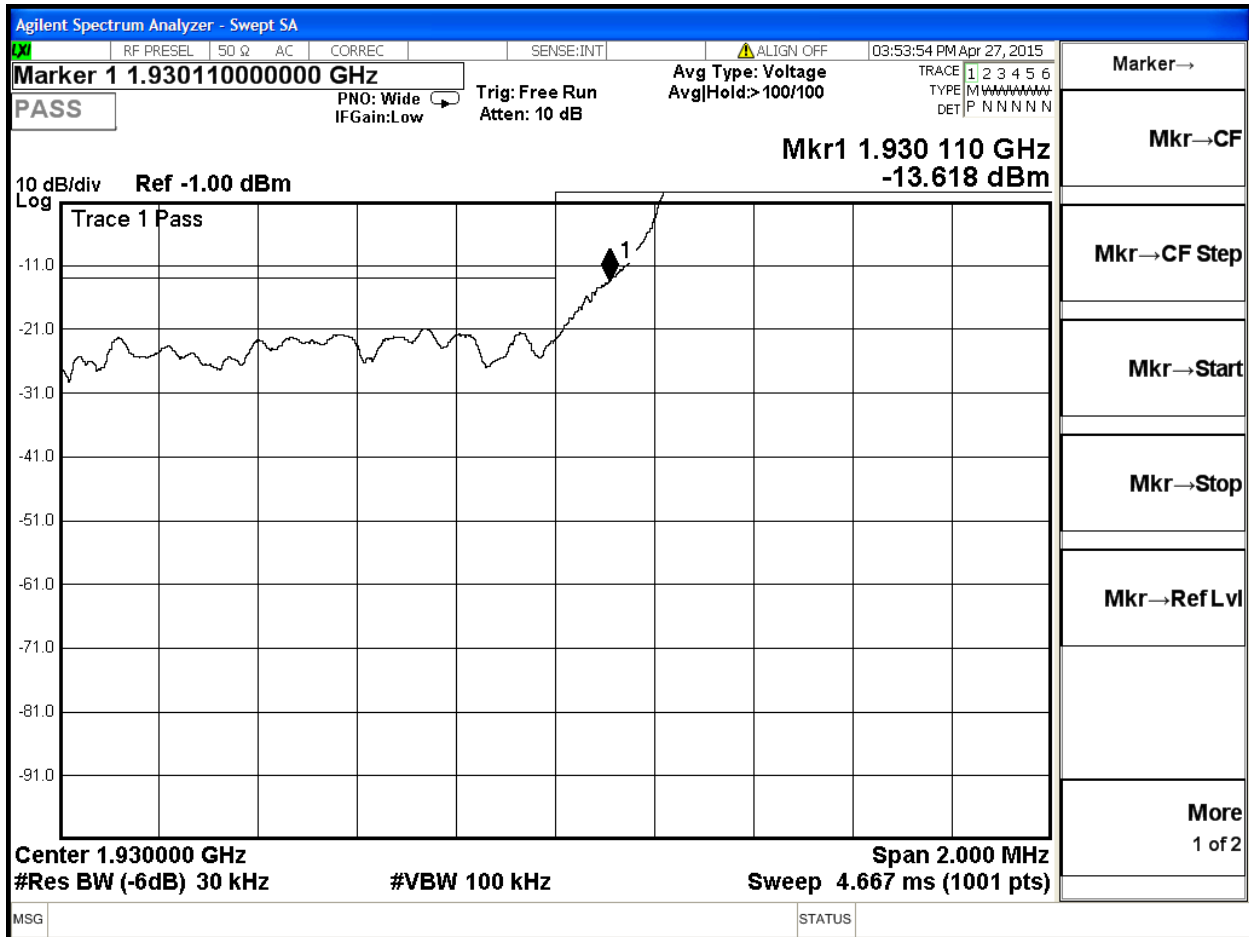


20°C, Low Frequency Edge, 102Vac (-15% from nominal)



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



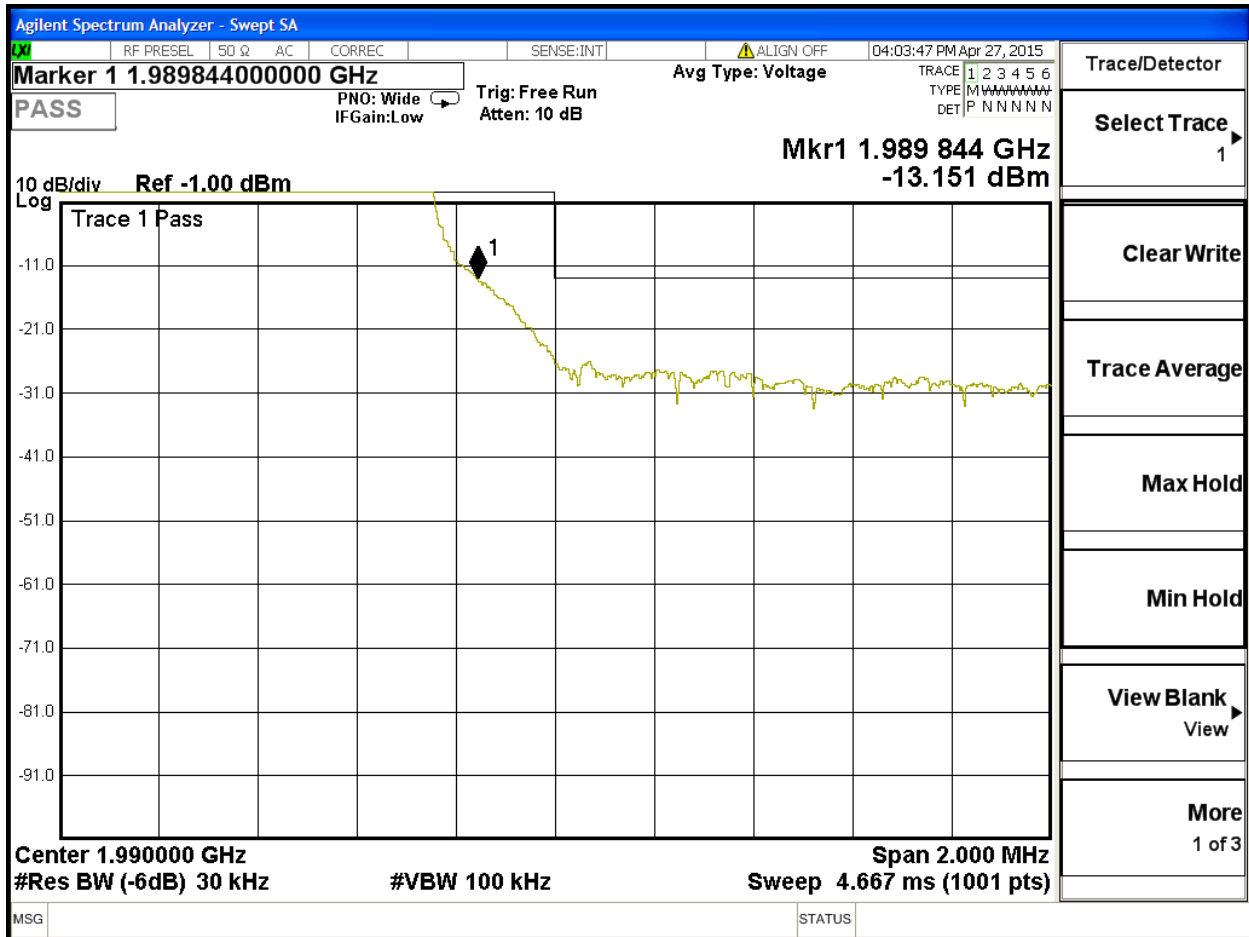


20°C, High Frequency Edge, 102Vac (-15% from nominal)



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



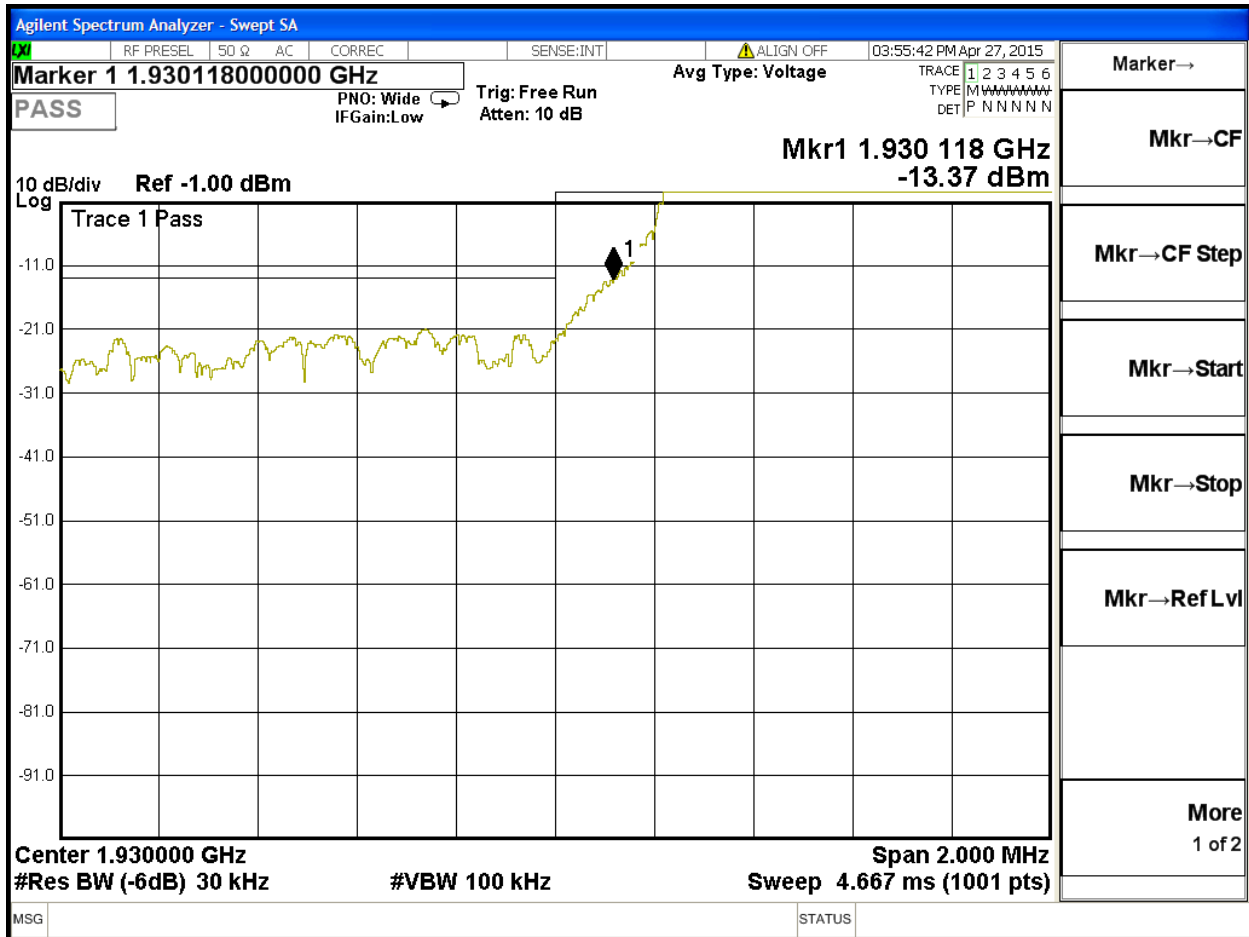


20°C, Low Frequency Edge, 138Vac (+15% from nominal)



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



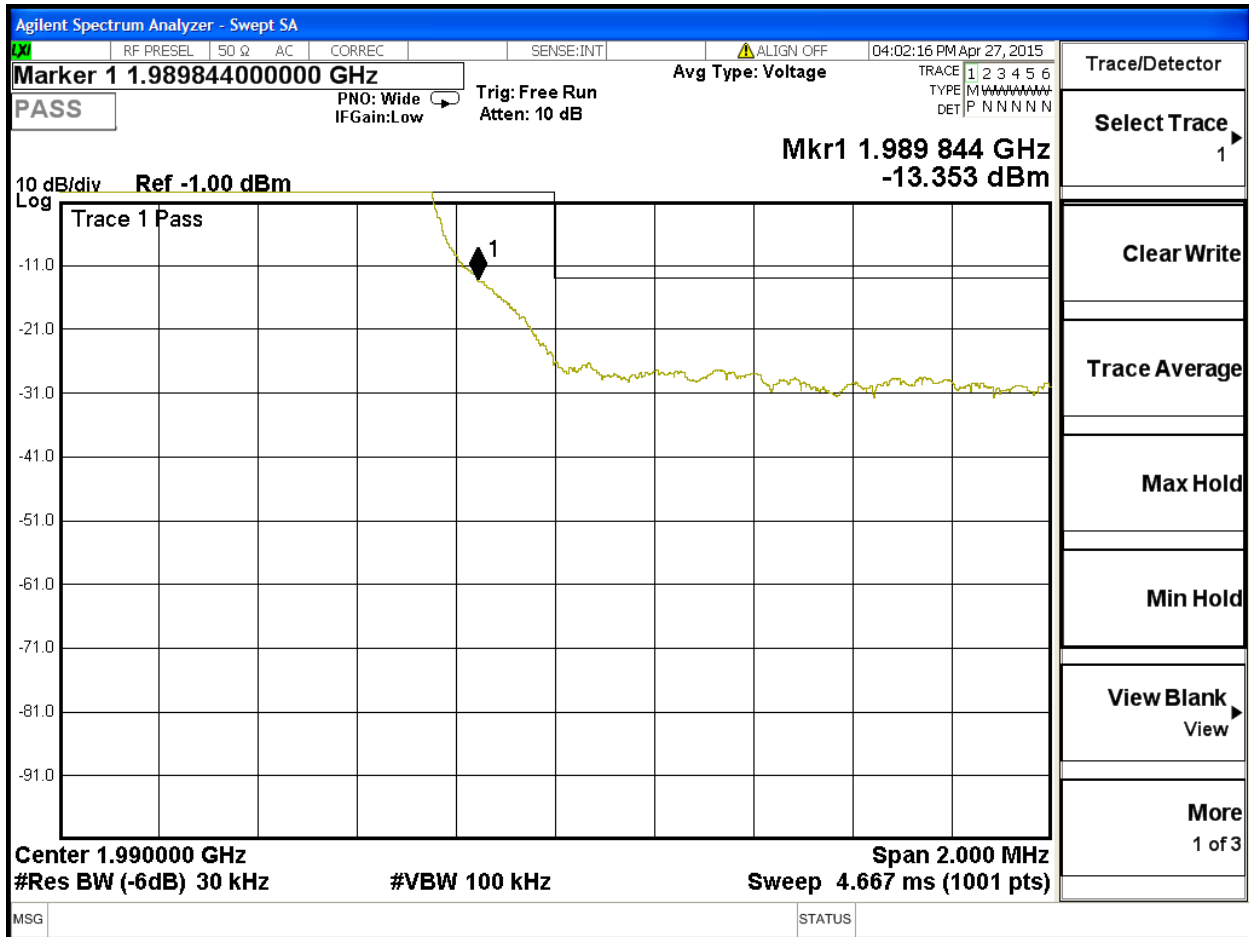


20°C, High Frequency Edge, 138Vac (+15% from nominal)



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



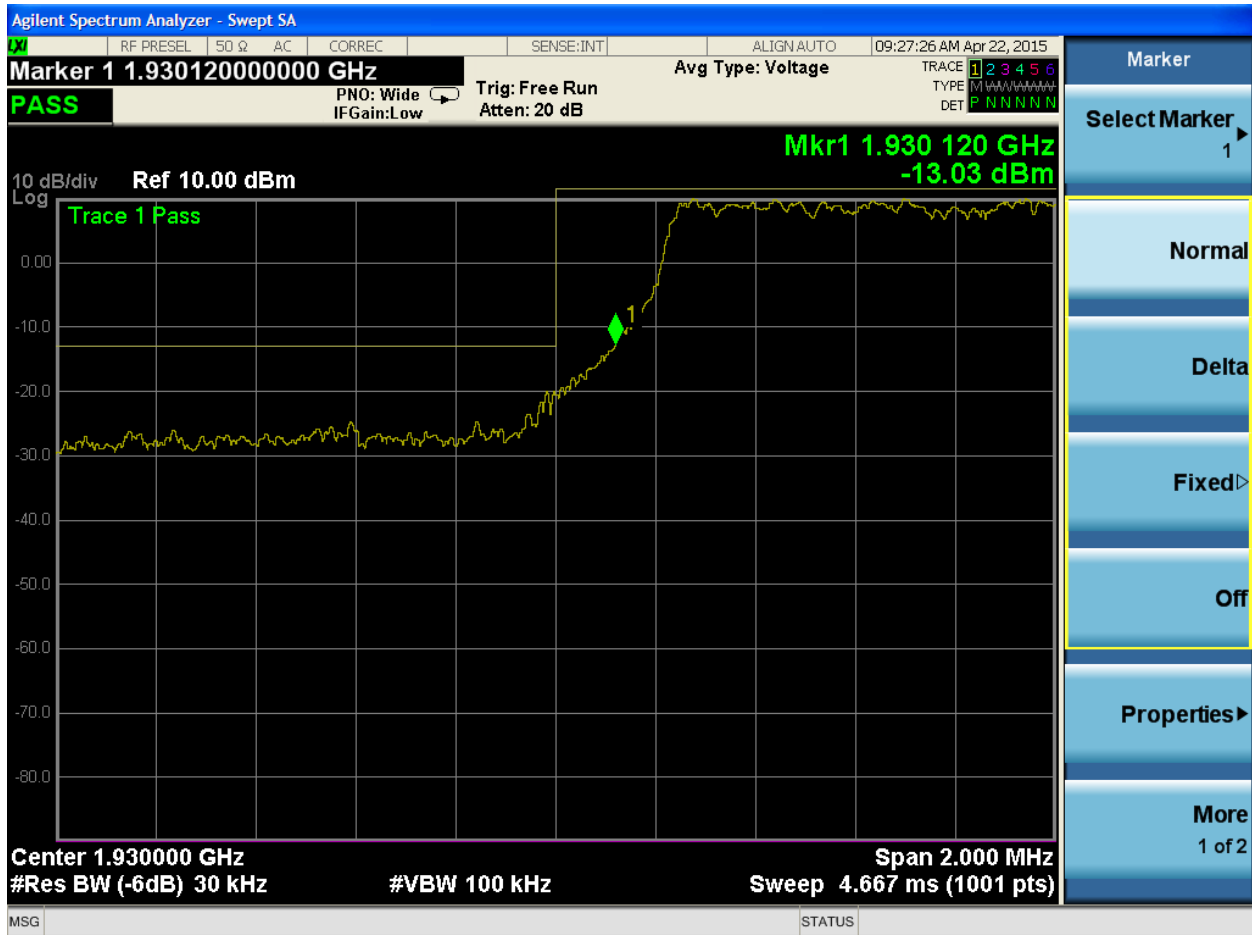

30°C, Low Frequency Edge



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8887






30°C, High Frequency Edge



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



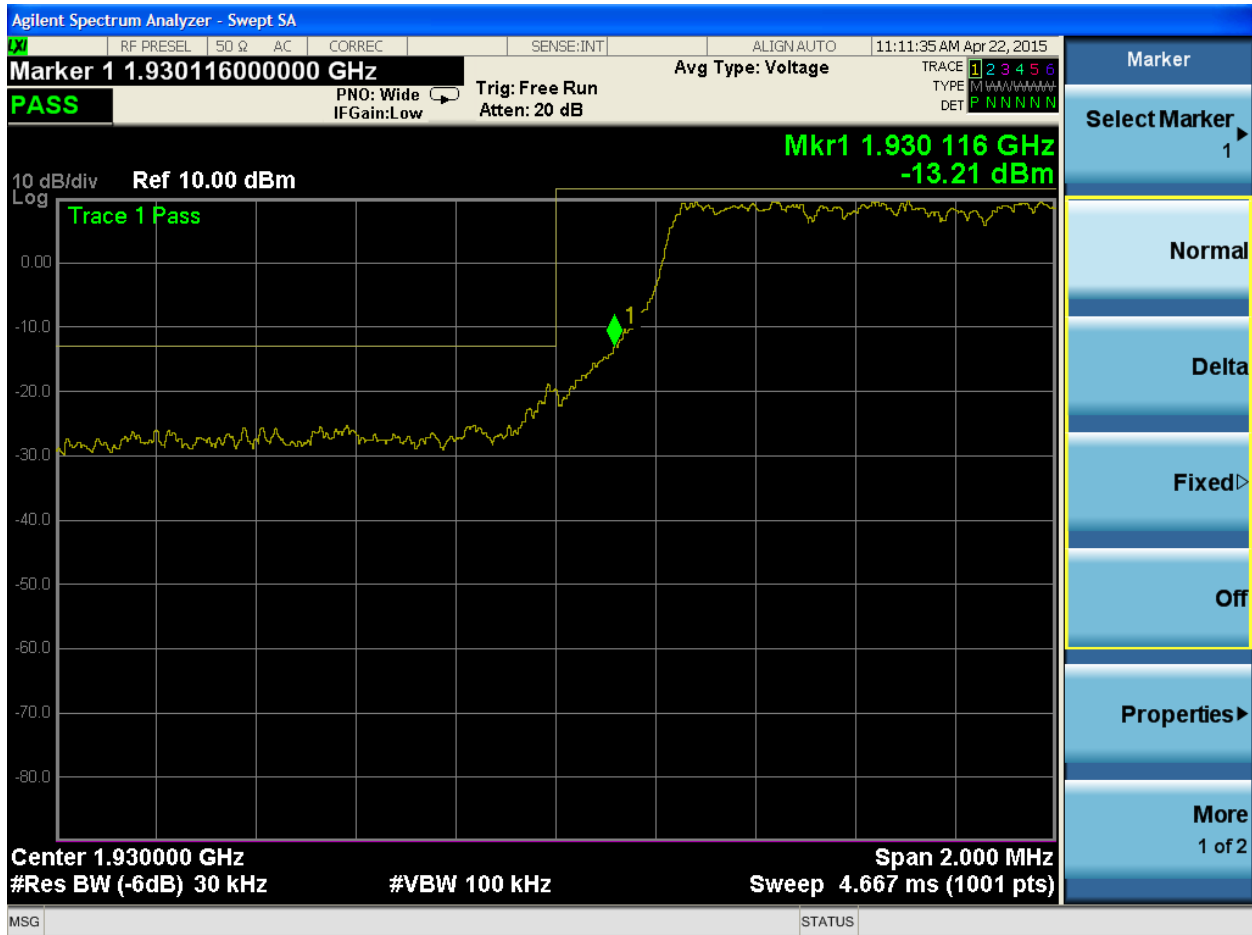

40°C, Low Frequency Edge






40°C, High Frequency Edge



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



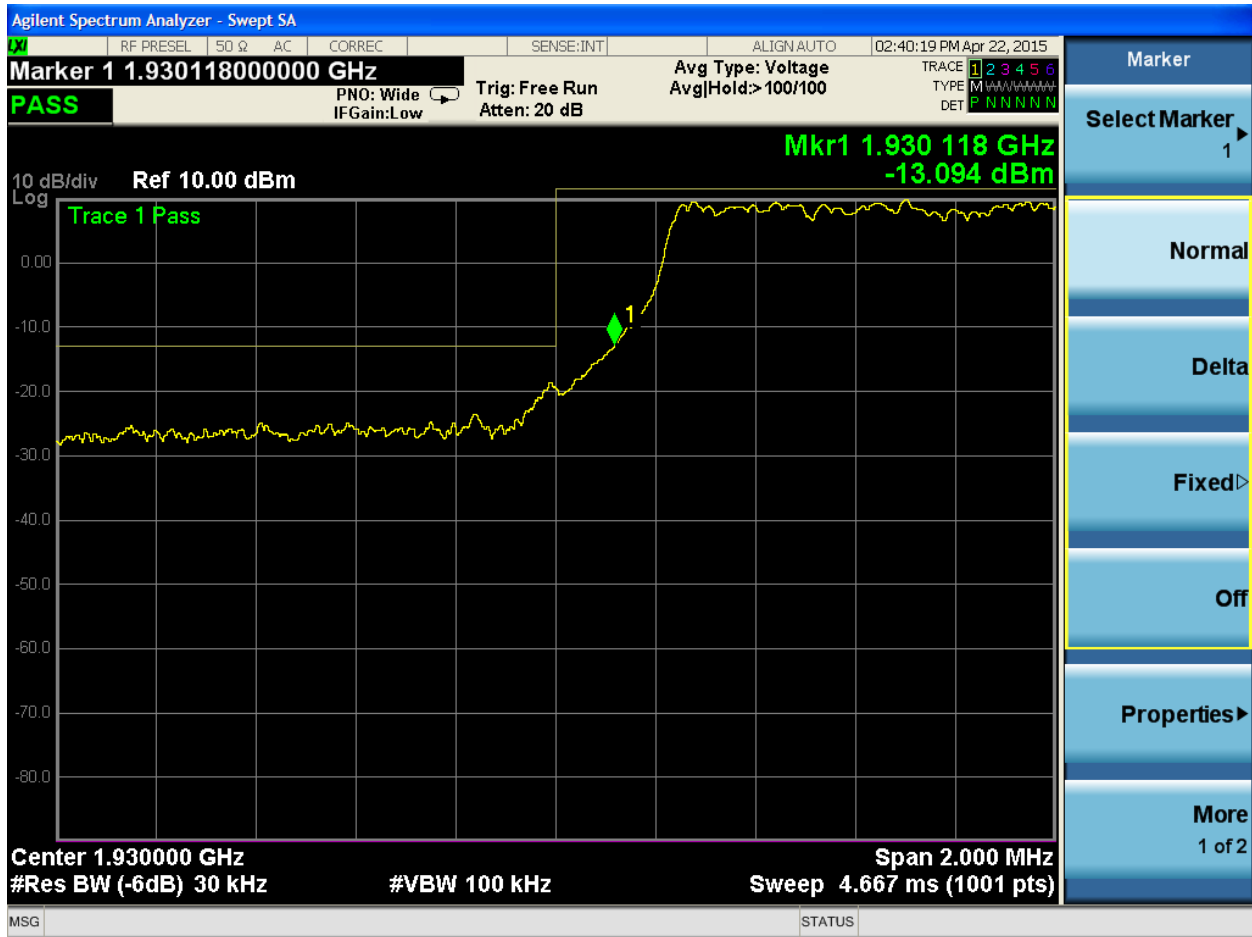


50°C, Low Frequency Edge



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



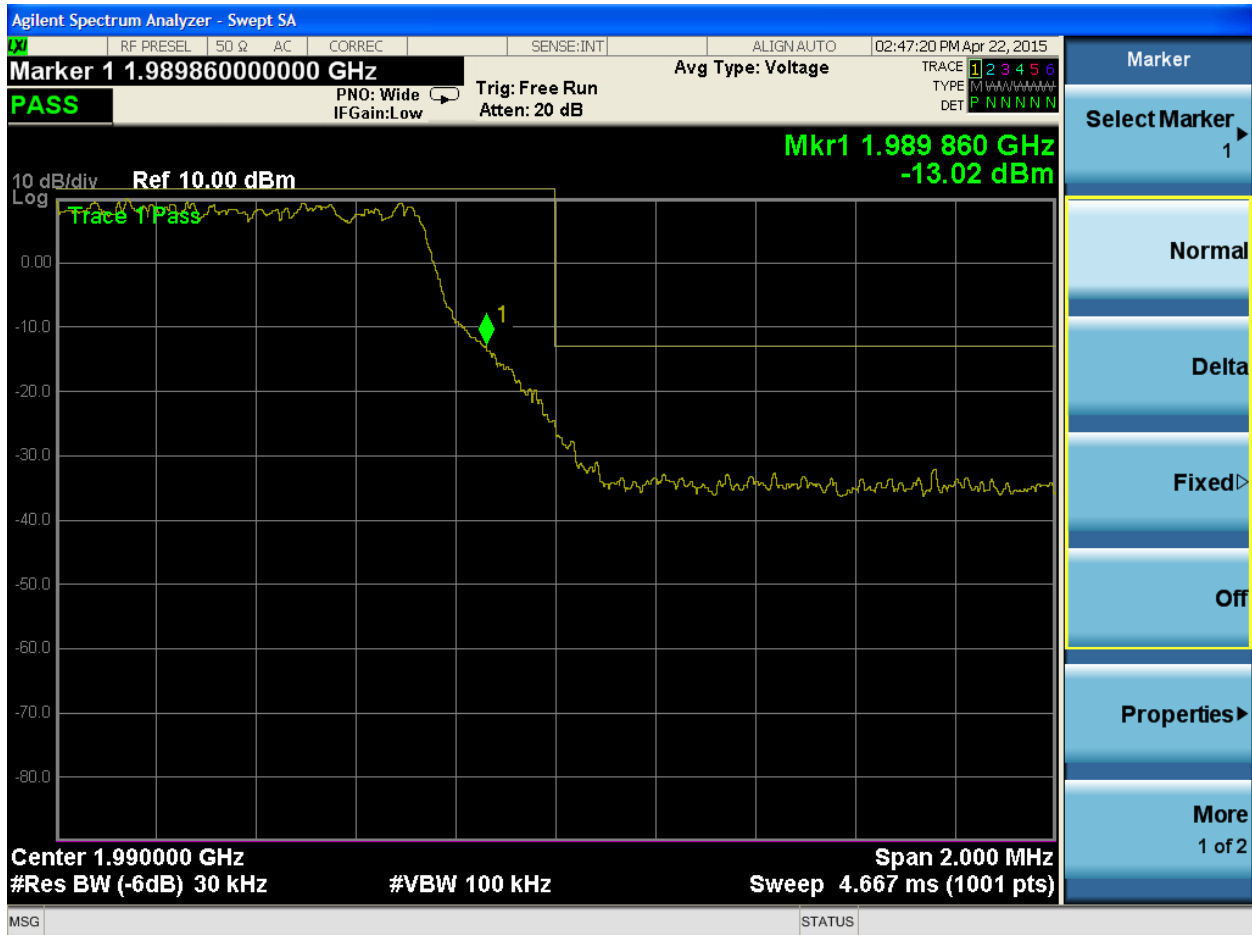

50°C, High Frequency Edge



LTE Bands 12 & 17 (FCC Part 27)

Occupied Bandwidth

LIMIT

“The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.” [27.53(a)(5)]



MEASUREMENTS / RESULTS

Occupied Bandwidth

Date: 17-Mar-15	Company: Airvana
Engineer: Tuyen Truong	EUT: Switched IQ Radio Point Domestic (750748)
WO#: P0152	EUT Operating Voltage: POE
Temp: 22°C	Humidity: 33% Pressure: 1005mBar

Note: FCC part 27.53(a)(5)

Modulation	Bandwidth		Channel	Frequency	
	Setting (MHz)	Band		(MHz)	26 dB BW (MHz)
QPSK	5	12	Low	730.5	4.996
QPSK	5	12	Mid	737	4.914
QPSK	5	12	High	743.5	5.017
16QAM	5	12	Low	730.5	4.970
16QAM	5	12	Mid	737	4.923
16QAM	5	12	High	743.5	4.942
64QAM	5	12	Low	730.5	4.939
64QAM	5	12	Mid	737	4.890
64QAM	5	12	High	743.5	4.864
QPSK	10	12	Low	733	17.231
QPSK	10	12	Mid	737	16.184
QPSK	10	12	High	741	17.015
16QAM	10	12	Low	733	16.872
16QAM	10	12	Mid	737	16.288
16QAM	10	12	High	741	16.867
64QAM	10	12	Low	733	16.800
64QAM	10	12	Mid	737	15.259
64QAM	10	12	High	741	18.501
QPSK	5	17	Low	736.5	4.966
QPSK	5	17	Mid	740	4.963
QPSK	5	17	High	743.5	see band 12
16QAM	5	17	Low	736.5	4.935
16QAM	5	17	Mid	740	4.939
16QAM	5	17	High	743.5	see band 12
64QAM	5	17	Low	736.5	4.891
64QAM	5	17	Mid	740	4.906
64QAM	5	17	High	743.5	see band 12
QPSK	10	17	Low	739	15.348
QPSK	10	17	Mid	740	15.342
QPSK	10	17	High	741	see band 12
16QAM	10	17	Low	739	15.156
16QAM	10	17	Mid	740	15.711
16QAM	10	17	High	741	see band 12
64QAM	10	17	Low	739	11.137
64QAM	10	17	Mid	740	11.367
64QAM	10	17	High	741	see band 12



Power and PAPR: 5MHz Operating Bandwidth


FCC 27.50(c)(9): "Control and mobile stations in the 698-746MHz band are limited to 30 watts ERP."

Output Power (E.R.P.)															
Date: 16-Mar-15		Company: Airvana						Work Order: P0152							
Engineer: Tuyen Truong		EUT Desc: Switched IQ Radio Point Domestic						EUT Operating Voltage/Frequency: POE							
Temp: 22°C		Humidity: 33%						Pressure: 1005mBar							
Frequency Range: Low, Mid and High Channels															
Notes: 30W = 44.77dBm. Multiple antenna calculations using formula from FCC KDB 662911 Section (2)(a)(i). ERP = EIRP - 2.15dB Two antennas each with gain 0dBi in this range are installed on the EUT. For MIMO calculations, N(ant.)-2 is used to calculate overall directional gain: 0dBi + 10log(N)dBi - 0dBi + 3.0dB = 3.0dBi.															
FCC Part 27.50(c)(9); Limit: 30W = 44.77dBm															
Band	Bandwidth (MHz)	Modulation	Channel (MHz)	Frequency (MHz)	Peak Power Reading (dBm)	Power Combiner (dB)	20dB Attenuator (dB)	Cable Factor (dB)	Adjusted Peak Power Reading (dBm)	Directional Antenna Gain (dB)	ERP (dBm)	Limit (dBm)	ERP (dB)	Margin (dB)	Result (Pass/Fail)
12	5	QPSK	Low	730.5	12.1	4.0	19.5	0.6	36.2	3.0	39.2	44.77	37.1	-7.7	Pass
12	5	QPSK	Mid	737.0	12.0	4.0	19.5	0.6	36.1	3.0	39.1	44.77	37.0	-7.8	Pass
12	5	QPSK	High	743.5	11.1	4.0	19.5	0.6	35.2	3.0	38.2	44.77	36.1	-8.7	Pass
12	5	16QAM	Low	730.5	12.3	4.0	19.5	0.6	36.4	3.0	39.4	44.77	37.3	-7.5	Pass
12	5	16QAM	Mid	737.0	12.5	4.0	19.5	0.6	36.6	3.0	39.6	44.77	37.5	-7.3	Pass
12	5	16QAM	High	743.5	11.1	4.0	19.5	0.6	35.2	3.0	38.2	44.77	36.1	-8.7	Pass
12	5	64QAM	Low	730.5	12.2	4.0	19.5	0.6	36.3	3.0	39.3	44.77	37.2	-7.6	Pass
12	5	64QAM	Mid	737.0	12.1	4.0	19.5	0.6	36.2	3.0	39.2	44.77	37.1	-7.7	Pass
12	5	64QAM	High	743.5	11.1	4.0	19.5	0.6	35.2	3.0	38.2	44.77	36.1	-8.7	Pass
17	5	QPSK	Low	736.5	11.2	4.0	19.5	0.6	35.3	3.0	38.3	44.77	36.2	-8.6	Pass
17	5	QPSK	Mid	740.0	11.1	4.0	19.5	0.6	35.2	3.0	38.2	44.77	36.1	-8.7	Pass
17	5	QPSK	High	743.5	See Band 12										
17	5	16QAM	Low	736.5	11.5	4.0	19.5	0.6	35.6	3.0	38.6	44.77	36.5	-8.3	Pass
17	5	16QAM	Mid	740.0	11.8	4.0	19.5	0.6	35.9	3.0	38.9	44.77	36.8	-8.0	Pass
17	5	16QAM	High	743.5	See Band 12										
17	5	64QAM	Low	736.5	11.4	4.0	19.5	0.6	35.5	3.0	38.5	44.77	36.4	-8.4	Pass
17	5	64QAM	Mid	740.0	11.6	4.0	19.5	0.6	35.7	3.0	38.7	44.77	36.6	-8.2	Pass
17	5	64QAM	High	743.5	See Band 12										
Table Result: Pass															
Test Site: EMI Chamber 1		Cable: Asset# 1787				20dB Attenuator: Asset #2053				Asset#791					
Analyzer: Rental SA#2		Power Combiner: Asset# 1939													


PEAK TO AVERAGE RATIO													
Date: March 20, 24, 2015		Company: Airvana						Work Order: P0152					
Engineer: Tuyen Truong / Ryan Brown		EUT Desc: Switched IQ Radio Point Domestic						EUT Operating Voltage/Frequency: POE					
Temp: 22°C		Humidity: 33%						Pressure: 1005mBar					
(March 24) Temp: 24°C		Humidity: 10%						Pressure: 1011mBar					
Test Equipments: Brown SA, Cable (#1787), 20dB Attenuation (#791), Mini Circuit (#1939), 3m Indoor													
Note:													
Band	BW (MHz)	Channel (MHz)	Frequency (MHz)	0.1% Peak to Average Ratio (dB)			Limit (dB)	Margin (dB)			Result Pass / Fail		
				QPSK	16QAM	64QAM		QPSK	16QAM	64QAM			
12	5	Low	730.5	8.66	8.75	8.61	13	-4.34	-4.25	-4.39	Pass		
12	5	Mid	737	8.49	8.61	8.47	13	-4.51	-4.39	-4.53	Pass		
12	5	High	743.5	8.45	8.57	8.42	13	-4.55	-4.43	-4.58	Pass		
17	5	Low	736.5	8.47	8.55	8.51	13	-4.53	-4.45	-4.49	Pass		
17	5	Mid	740	8.61	8.62	8.53	13	-4.39	-4.38	-4.47	Pass		
17	5	High	See band 12	na	na	na	13	na	na	na	na		



PLOTS

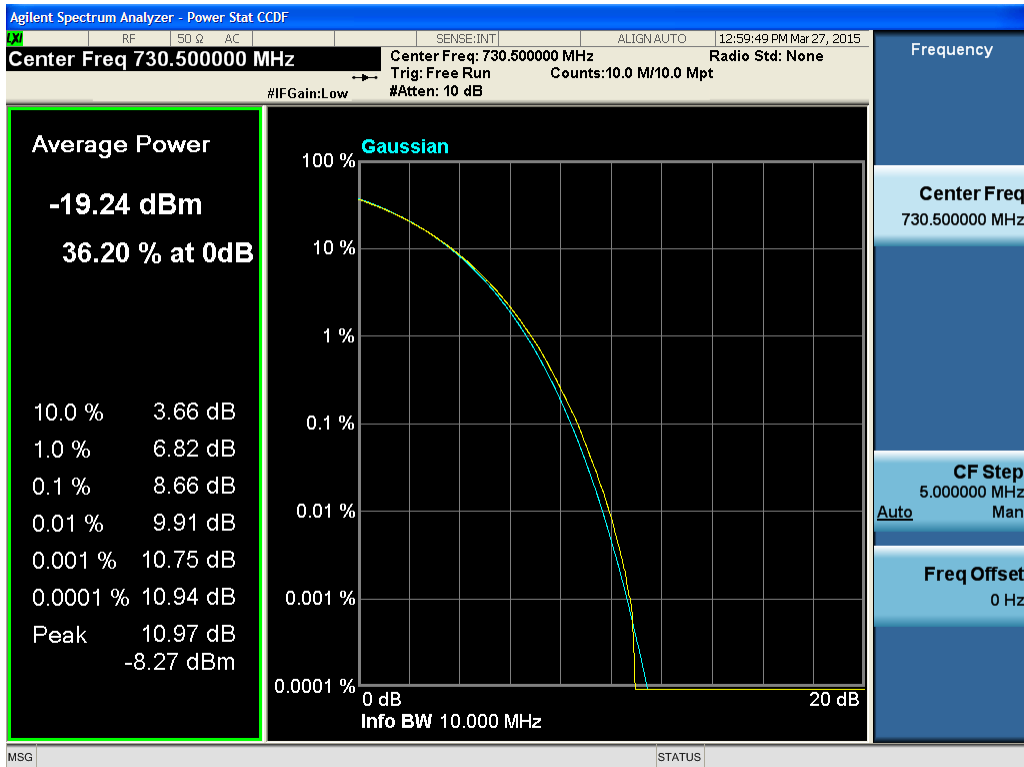

Band 12 - 5MHz BW – Low Channel – QPSK

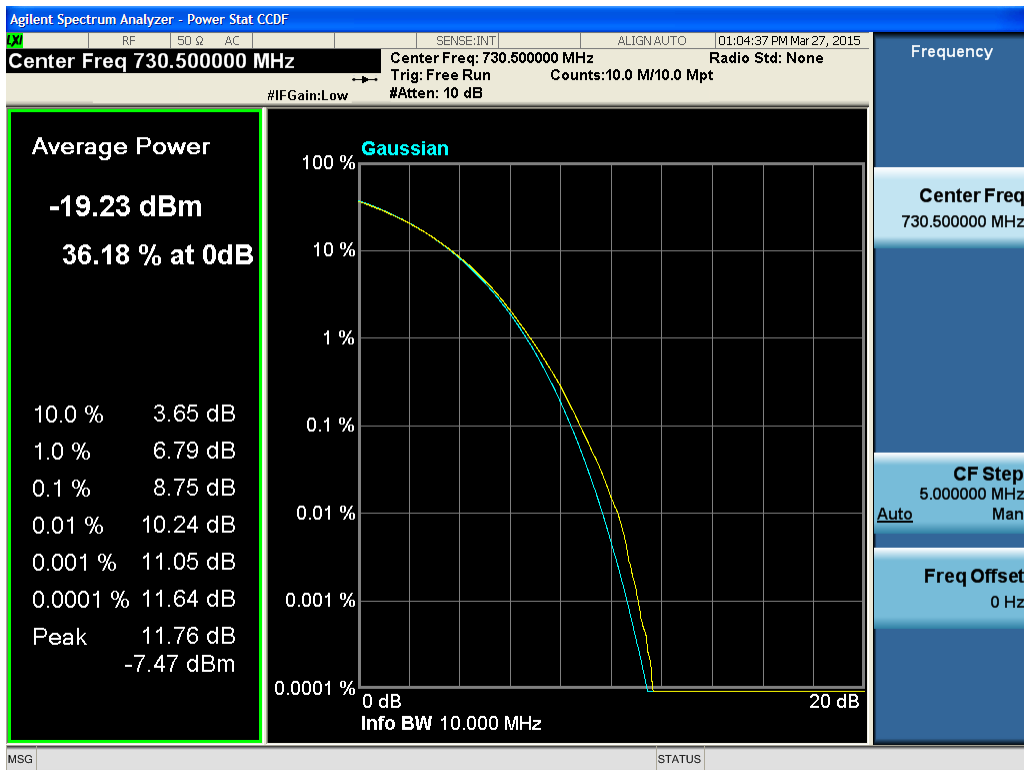


Band 12 - 5MHz BW – Low Channel – 16QAM




Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8880



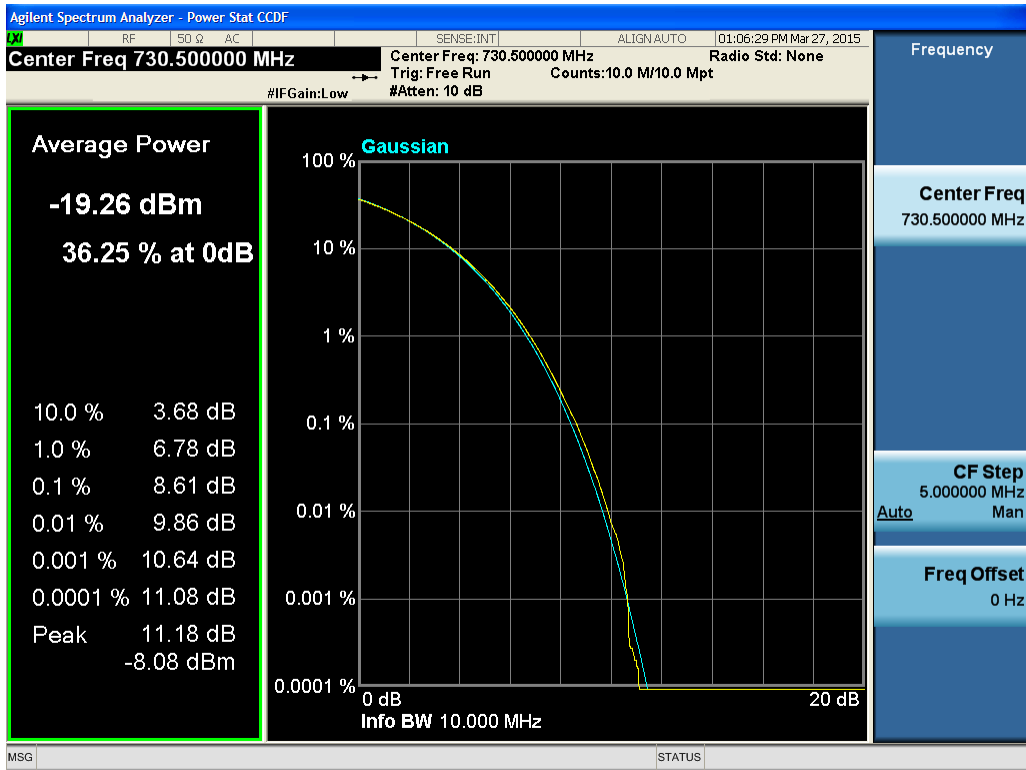


Band 12 - 5MHz BW – Low Channel – 64QAM

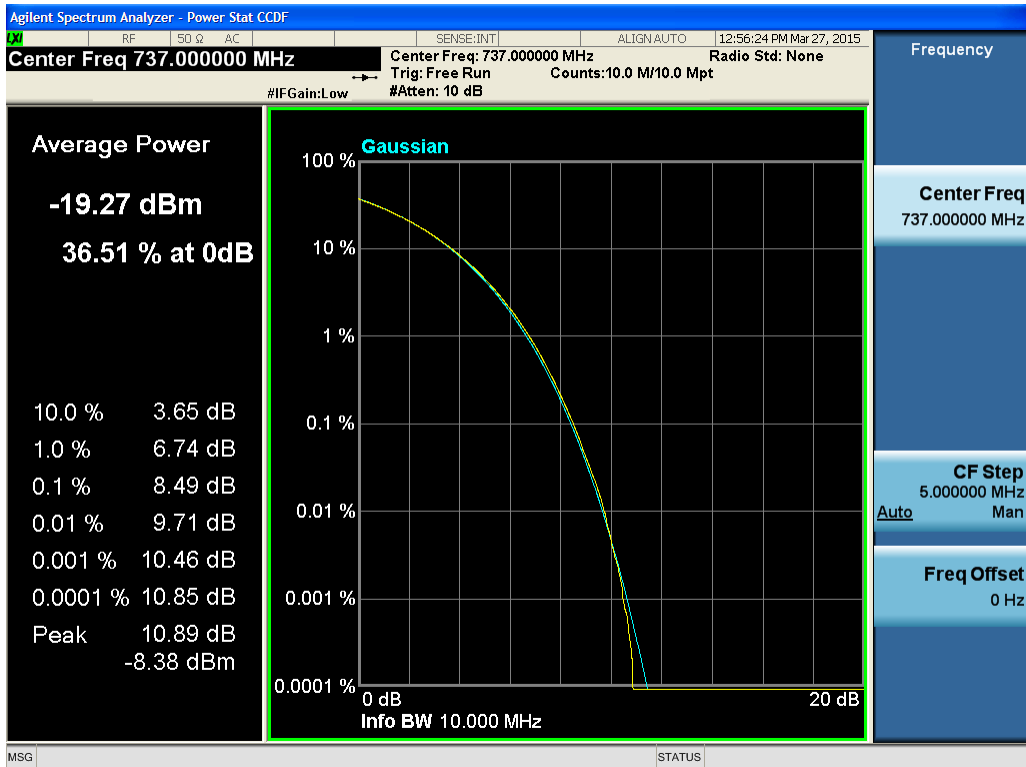


Band 12 - 5MHz BW – Mid Channel - QPSK



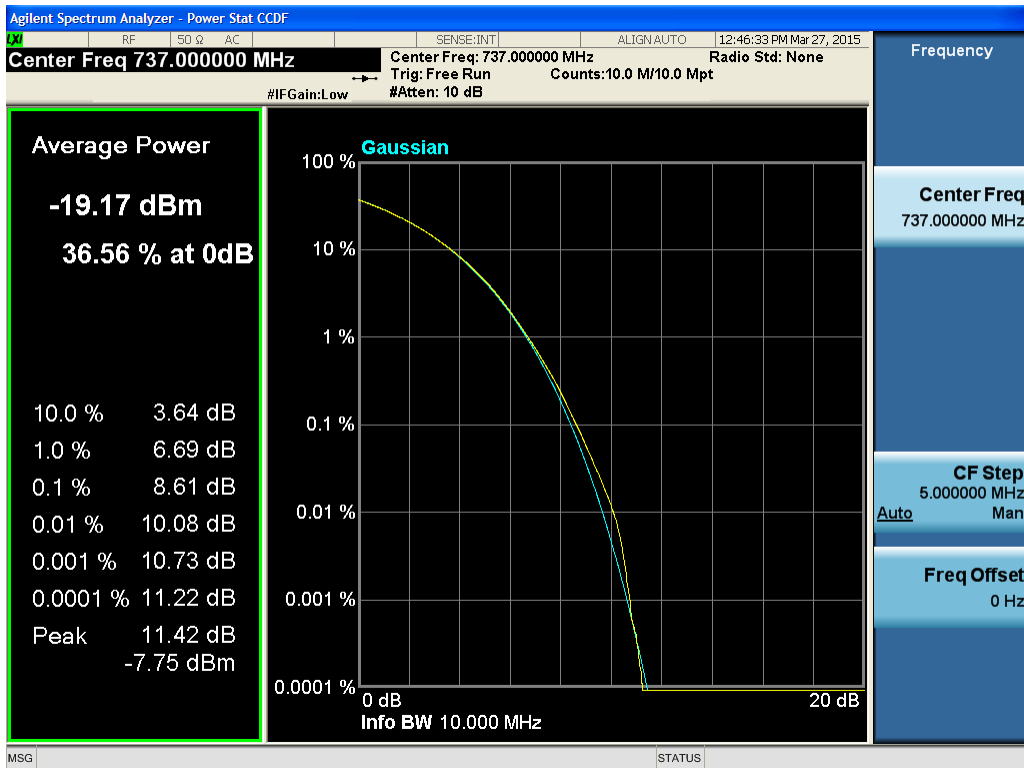

Band 12 - 5MHz BW – Mid Channel – 16QAM

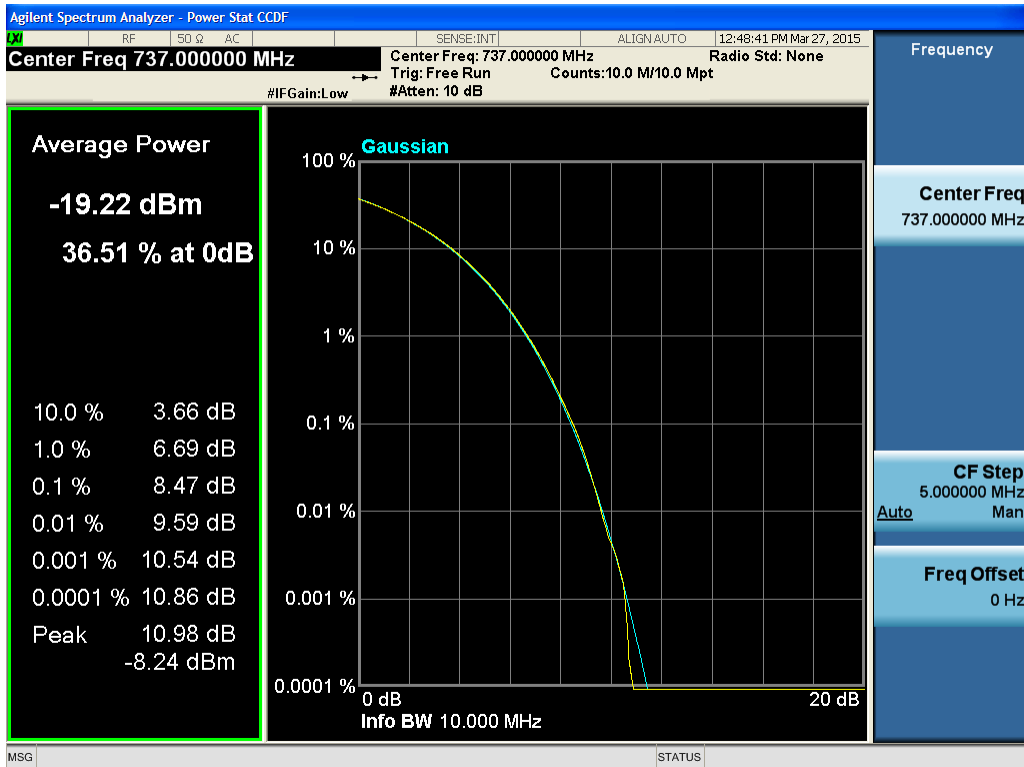

Band 12 - 5MHz BW – Mid Channel – 64QAM

