

CommScope Technologies, LLC TEST REPORT

SCOPE OF WORK

EMISSIONS TESTING – Legacy RPM-A5A11-B02 with W/5G NR waveform With OneCell® RP5100

REPORT NUMBER 104844468BOX-001

ISSUE DATE 12/03/2021

[REVISED DATE]

01/06/202<mark>2</mark> 02/07/2022

PAGES

313

DOCUMENT CONTROL NUMBER

Non-Specific Radio Report Shell Rev. December 20 © 2017 INTERTEK





EMISSIONS TEST REPORT

(Class II Permissive Change)

Report Number: 104844468BOX-001 Project Number: G104844468

Report Issue Date: 12/03/2021 Report Revision Date: 01/06/2022 Report Revision Date: 02/04/2022

Model(s) Tested: Legacy RPM-A5A11-B02 with W/ 5G

NR waveform With OneCell® RP5100

Model(s) Partially Tested: None

Model(s) Not Tested but declared equivalent by the client: None

Standards: CFR47 FCC Part 24 (12/2021)

Tested by:
Intertek Testing Services NA, Inc.
70 Codman Hill Road
Boxborough, MA 01719
USA

Client:
CommScope Technologies LLC
900 Chelmsford St.
Lowell, MA 01851
USA

Report prepared by

Report reviewed by

Vathana Ven / EMC Engineering Supervisor

Kouma Sinn / EMC Engineering Supervisor

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek

Report Number: 104844468BOX-001

Issued: 12/03/2021 Revised: 02/07/2022

Table of Contents

1	Introduction and Conclusion	
	Test Summary	
	Client Information	
4	Description of Equipment Under Test and Variant Models	
5	System Setup and Method	6
6	Maximum Peak Output Power and Human RF exposure	8
7	Peak-to-Average Power Ratio (PAPR)	65
8	26 dB Bandwidth and Occupied Bandwidth	119
9	Band Edge Compliance	222
10	Frequency Stability	259
11	Transmitter spurious emissions	289
12	Revision History	313

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 4.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

2 Test Summary

Section	Test full name	Result
3	Client Information	
4	Description of Equipment Under Test and Variant Models	
5	System Setup and Method	
6	Maximum Peak Output Power and Human RF exposure CFR47 FCC Parts 2.1046 and 24.232(a-b)	Pass
7	Peak-to-Average Power Ratio (PAPR) CFR47 FCC Part 24.232(d)	Pass
8	26 dB Bandwidth and Occupied Bandwidth CFR47 FCC Parts 2.1049 and 24.238(b)	Pass
9	Band Edge Compliance CFR47 FCC Parts 2.1051, 2.1053, and 24.238(a-b)	Pass
10	Frequency Stability CFR47 FCC Parts 2.1055 and 24.235	Pass
11	Transmitter Spurious Emissions CFR47 FCC Parts 2.1051, 2.1053, 2.1057 and 24.238(a-b)	Pass
12	Revision History	

Non-Specific Radio Report Shell Rev. December 2017 Page 4 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

3 Client Information

This EUT was tested at the request of:

Client: CommScope Technologies LLC

900 Chelmsford St. Lowell, MA 01851

USA

Contact: Mr. Kevin Craig **Telephone:** (978) 250-2678

Fax: None

Email: kevin.craig@commscope.com

4 Description of Equipment Under Test and Variant Models

Manufacturer: CommScope Telecommunications (China) Ltd.

68 Su Hong Xi Lu, Suzhou Industrial Park.

Suzhou, Jiangsu, 215021, China

Equipment Under Test				
Description	Manufacturer	Mod	el Number	Serial Number
Legacy Band 2 Radio Module With OneCell® RP5100 host	CommScope Technol	ogies LLC	RPM-A5A11-B02	BOX2111101459-002 (Intertek Assigned)
OneCell® RP5100	CommScope Technol	ogies LLC	RP-A51xxi	19198000019

Receive Date:	07/30/2021
Received Condition:	Good
Type:	Production

Description of Equipment Under Test (provided by client)

The Radio Module is band specific using the Analog devices RF Agile Transceiver IC, AD936x. The device combines an RF front end with a flexible mixed-signal baseband section and integrated frequency synthesizers providing a configurable digital interface to the processor. The Radio Module also contains a band specific front end, band specific antenna and required power rails. All power rails required are derived from the 12 VDC bus supplied by the Baseband card. The reference frequency for the radio IC is 38.4 MHz is derived from the from an OCXO which is disciplined from a 1588 reference clock.

The original LTE radio has included the 5G NR capabilities for this permissive change.

It supports bandwidths of 5, 10, 15, and 20 MHz with four modulations; TM1.1-QPSK, TM3.2-16QAM, TM3.1-64QAM, and TM3.1a-256QAM. The radio is fixed.

Description of Radio Host (provided by client)

The OneCell® RP5100 family is factory configurable with 2 – 4 Radios Modules mounted to a Baseband card. The same PCB's will be used in both indoor and outdoor version of the radio point. The device is fixed.

The baseband card is the host for the modular radios. It contains a two ethernet PHY's with one supporting 100M/1G/2.5G/5G/10G ethernet and the other supporting 100M/1G. The main processor is Zylinx Ultrascale+ MPSoC with 2 GB DDR3 and 4 GB Flash memory. The baseband PCBA converts POE power to +12 VDC bus voltage require as input to the radio modules.

Equipment Under Test Power Configuration				
Rated Voltage Rated Current Rated Frequency Number of Phases				
48 VDC	0.960 mA per pair max	DC	N/A	

Operating modes of the EUT:

No.	o. Descriptions of EUT Exercising				
	Pre-programmed to transmit at Low, Mid, and High channels at four different modulations, TM1.1-QPSK, TM3.2-16QAM, TM3.1-64QAM, and TM3.1a-256QAM.				

Software used by the EUT:

No	Descriptions of EUT Exercis	ing
1	RP5100 Diagnostics Ver 10	09

Radi	Radio/Receiver Characteristics			
Frequency Band(s)	1930-1990 MHz			
Modulation Type(s)	TM1.1-QPSK, TM3.2-16QAM, TM3.1-64 QAM, TM3.1a- 256QAM			
Maximum Output Power (conducted):	23.50 dBm, Conducted (worst-case)			
Test Channels	Low, Middle, High Channels of 5 MHz, 10 MHz, 15 MHz, and 20 MHz Bandwidths, Single Channel operation only			
Occupied Bandwidth	Bandwidth 18.99 MHz (Worst-case)			
MIMO Information (# of Transmit and Receive antenna ports)	2x2 MIMO using cross polarized antennas and uncorrelated data streams			
Equipment Type	Module in a host			
Antenna Type and Gain Detachable Antenna: +4 dBi (as provided by the client. Intertek takes no responsibility for the accuracy of this information. Actual antenna gain will be determined at the of licensing)				

Variant Models:

The following variant models were not tested as part of this evaluation, but have been identified by the manufacturer as being electrically identical models, depopulated models, or with reasonable similarity to the model(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

None

5 System Setup and Method

	Cables						
ID	Description	Length (m)	Shielding	Ferrites	Termination		
	LAN (POE Power Cable)	2.58	Shielded	None	POE P/S		
	LAN (Communication)	9.00	Shielded	None	Laptop		

Support Equipment				
Description	Manufacturer	Model Number	Serial Number	
Laptop	Dell	LATITUDE	None	
Power Device Analzyer	Sifos Technologies	PDA-604A	604A0033	


Non-Specific Radio Report Shell Rev. December 2017 Page 6 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

Revised: 02/07/2022

5.1 Method:

Configuration as required by ANSI C63.26-2015, KDB 662911, and CFR47 FCC Part 24 (12/2021).

5.2 EUT Block Diagram:

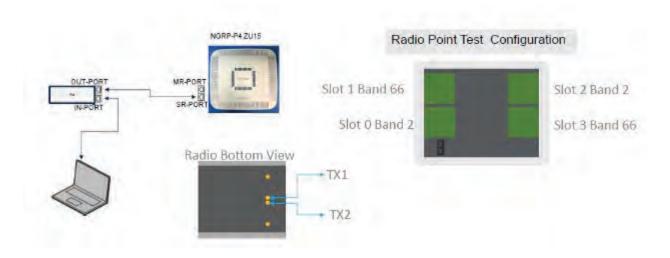

Revised: 02/07/2022

6 Maximum Peak Output Power and Human RF exposure

6.1 Method

Tests are performed in accordance with CFR47 FCC Parts 2.1046 and 24, KDB662911, and ANSI C63.26 Section 5.2.4.4.

TEST SITE: EMC Lab

<u>The EMC Lab</u> has one Semi-anechoic Chamber and one Shielded Chamber. AC Mains Power is available at 120, 230, and 277 Single Phase; 208, 400, and 480 3-Phase. Large reference ground-planes are installed in the general lab area to facilitate EMC work not requiring a shielded environment.

6.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
CEN001'	DC-40GHz attenuator 20dB	Centric RF	C411-20	CEN001	01/22/2021	01/22/2022
CBLSHF204'	Cable, SMA - SMA, 9kHz -40GHz, (Cable Kit 5)	Huber + Suhner	Sucoflex 102EA	234714001	02/03/2021	02/03/2022
ROS005-1'	Signal and Spectrum Analyzer	Rohde and Shwartz	FSW43	100646	11/02/2021	11/02/2022
DAV005'	Weather Station	Davis	6250	MS191218083	02/07/2021	02/07/2022

Software Utilized:

Name	Manufacturer	Version
None		

6.3 Results:

The maximum conducted output power was measured to be 23.50 dBm, which is much less than the EIRP limit of 24.232(a-b). The sample tested was found to Comply. Antenna gain limitations will depend on geographical locations and Height Above Average Terrain (HAAT). Output power from the two antenna ports was not summed since the data streams are uncorrelated and the antennas are cross polarized.

Non-Specific Radio Report Shell Rev. December 2017 Page 8 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

§24.232(a-b):

- (a)(1) Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.
- (2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.
- (3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; seeTables 1 and 2 of this section.
- (4) The service area boundary limit and microwave protection criteria specified in §§24.236 and 24.237 apply.

TABLE 1—REDUCED POWER FOR BASE STATION ANTENNA HEIGHTS OVER 300 METERS, WITH **EMISSION BANDWIDTH OF 1 MHz OR LESS**

HAAT in meters	Maximum EIRP watts
≤300	1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

TABLE 2—REDUCED POWER FOR BASE STATION ANTENNA HEIGHTS OVER 300 METERS, WITH **EMISSION BANDWIDTH GREATER THAN 1 MHz**

HAAT in meters	Maximum EIRP watts/MHz
≤300	1640
≤500	1070
≤1000	490
≤1500	270
≤2000	160

- (b)(1) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth of 1 MHz or less are limited to 3280 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.
- (2) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth greater than 1 MHz are limited to 3280 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.
- (3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; seeTables 3 and 4 of this section.

(4) The service area boundary limit and microwave protection criteria specified in §§24.236 and 24.237 apply.

(5) Operation under this paragraph (b) at power limits greater than permitted under paragraph (a) of this section must be coordinated in advance with all broadband PCS licensees authorized to operate on adjacent frequency blocks within 120 kilometers (75 miles) of the base station and is limited to base stations located more than 120 kilometers (75 miles) from the Canadian border and more than 75 kilometers (45 miles) from the Mexican border.

TABLE 3—REDUCED POWER FOR BASE STATION ANTENNA HEIGHTS OVER 300 METERS, WITH **EMISSION BANDWIDTH OF 1 MHz OR LESS**

HAAT in meters	Maximum EIRP watts
≤300	3280
≤500	2140
≤1000	980
≤1500	540
≤2000	320

TABLE 4—REDUCED POWER FOR BASE STATION ANTENNA HEIGHTS OVER 300 METERS, WITH **EMISSION BANDWIDTH GREATER THAN 1 MHz**

HAAT in meters	Maximum EIRP watts/MHz
≤300	3280
≤500	2140
≤1000	980
≤1500	540
≤2000	320

Non-Specific Radio Report Shell Rev. December 2017 Page 10 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

Slot 0 (Band 2), Bandwidth: 5 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1932.50	ANT0	22.30
		ANT1	22.06
Mid	1960.00	ANT0	23.11
		ANT1	22.44
High	1987.50	ANT0	23.08
_		ANT1	22.54

Slot 0 (Band 2), Bandwidth: 10 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1935.00	ANT0	22.56
		ANT1	22.34
Mid	1960.00	ANT0	23.11
		ANT1	22.12
High	1985.00	ANT0	22.74
_		ANT1	22.34

Slot 0 (Band 2), Bandwidth: 15 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1937.50	ANT0	23.08
		ANT1	22.83
Mid	1960.00	ANT0	23.57
		ANT1	22.62
High	1982.50	ANT0	23.28
		ANT1	22.79

Slot 0 (Band 2), Bandwidth: 20 MHz, Modulation: TM1.1-QPSK

0.010 (20.10 2), 20.10 11.01 20 11.12, 11.00 0.10 11.11 11.11 4.1 0.11			
Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1940.00	ANT0	23.05
		ANT1	22.88
Mid	1960.00	ANT0	23.22
		ANT1	22.33
High	1980.00	ANT0	23.31
		ANT1	22.76

Slot 0 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1932.50	ANT0	21.91
		ANT1	21.59
Mid	1960.00	ANT0	22.91
		ANT1	22.23
High	1987.50	ANT0	22.90
_		ANT1	22.15

Slot 0 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1935.00	ANT0	22.84
		ANT1	22.55
Mid	1960.00	ANT0	23.07
		ANT1	22.24
High	1985.00	ANT0	22.82
		ANT1	22.43

Non-Specific Radio Report Shell Rev. December 2017 Page 11 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

Slot 0 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1937.50	ANT0	23.39
		ANT1	23.05
Mid	1960.00	ANT0	23.30
		ANT1	22.33
High	1982.50	ANT0	22.94
_		ANT1	22.35

Slot 0 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)	
Low	1940.00	ANT0	23.27	
		ANT1	23.12	
Mid	1960.00	ANT0	23.30	
		ANT1	22.50	
High	1980.00	ANT0	23.23	
		ANT1	22.53	

Slot 0 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1932.50	ANT0	22.52
		ANT1	22.29
Mid	1960.00	ANT0	23.12
		ANT1	22.37
High	1987.50	ANT0	22.76
		ANT1	22.29

Slot 0 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1935.00	ANT0	23.12
		ANT1	22.37
Mid	1960.00	ANT0	23.12
		ANT1	22.37
High	1985.00	ANT0	22.76
		ANT1	22.29

Slot 0 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1937.50	ANT0	23.50
		ANT1	23.10
Mid	1960.00	ANT0	23.36
		ANT1	22.41
High	1982.50	ANT0	23.16
		ANT1	22.42

Slot 0 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1940.00	ANT0	23.30
		ANT1	23.09
Mid	1960.00	ANT0	23.23
		ANT1	22.39
High	1980.00	ANT0	23.07
		ANT1	22.46

Non-Specific Radio Report Shell Rev. December 2017 Page 12 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

Slot 0 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.1a-256QAM_

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)	
Low	1932.50	ANT0	22.56	
		ANT1	22.04	
Mid	1960.00	ANT0	23.14	
		ANT1	22.39	
High	1987.50	ANT0	23.04	
		ANT1	22.58	

Slot 0 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.1a-256QAM_

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1935.00	ANT0	22.86
		ANT1	22.56
Mid	1960.00	ANT0	23.05
		ANT1	22.18
High	1985.00	ANT0	22.93
•		ANT1	22.33

Slot 0 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1937.500	ANT0	23.44
		ANT1	22.84
Mid	1960.00	ANT0	23.31
		ANT1	22.32
High	1982.50	ANT0	23.12
		ANT1	22.65

Slot 0 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.1a-256QAM

0.000 (2.000 2), 2.000 0.			
Channel	Frequency (MHz)	Antenna Port	Output Power (dBm)
Low	1940	ANT0	23.09
		ANT1	22.97
Mid	1960	ANT0	23.36
		ANT1	22.36
High	1980	ANT0	23.37
		ANT1	22.83

Non-Specific Radio Report Shell Rev. December 2017 Page 13 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

Intertek

Report Number: 104844468BOX-001 Issued: 12/03/2021 Revised: 02/07/2022


6.4 Setup Photograph:

Confidential – Test setup photo not included in this report


Non-Specific Radio Report Shell Rev. December 2017 Page 14 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

6.5 Plots/Data:

TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1932.5 MHz, Output Power = 22.30 dBm

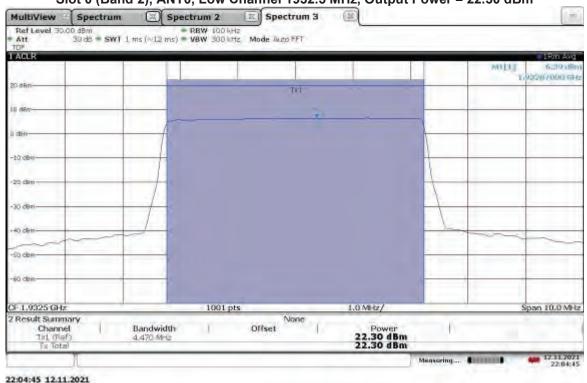


TM1.1-QPSK_5 MHz Bandwidth

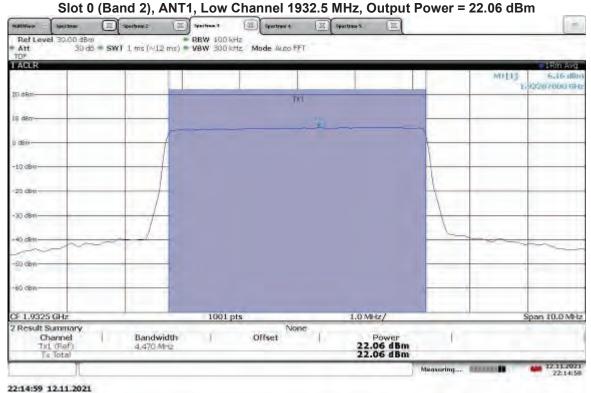


Non-Specific Radio Report Shell Rev. December 2017 Page 15 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM1.1-QPSK_5 MHz Bandwidth Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.11 dBm

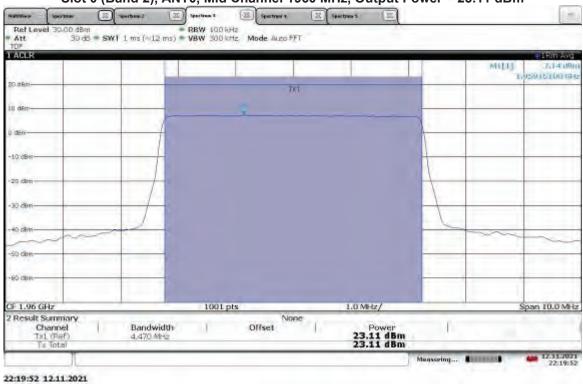


TM1.1-QPSK_5 MHz Bandwidth Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.44 dBm

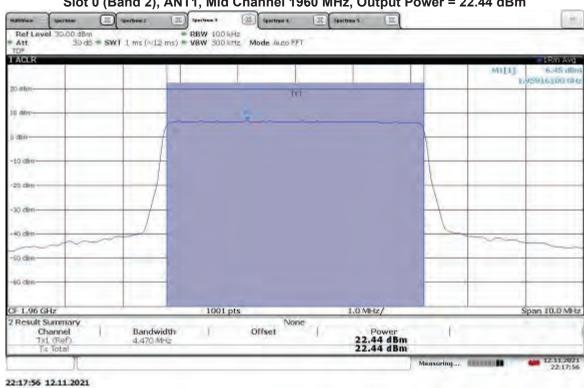


Non-Specific Radio Report Shell Rev. December 2017 Page 16 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

> TM1.1-QPSK_5 MHz Bandwidth Slot 0 (Band 2), ANT0, High Channel 1987.5 MHz, Output Power = 23.08 dBm

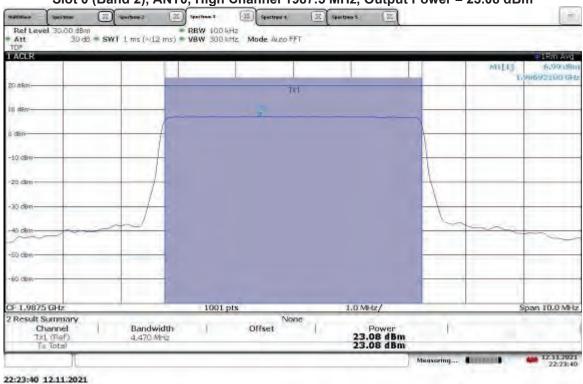


TM1.1-QPSK_5 MHz Bandwidth Slot 0 (Band 2), ANT1, High Channel 1987.5 MHz, Output Power = 22.54 dBm

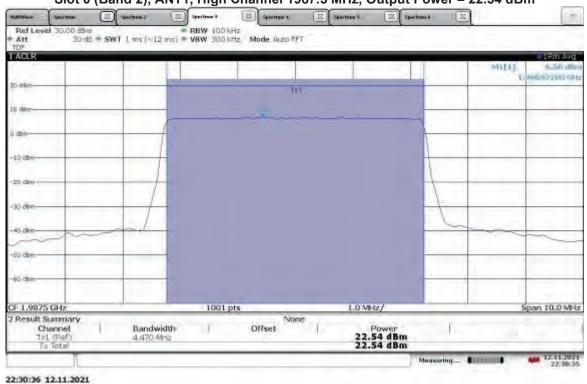


Non-Specific Radio Report Shell Rev. December 2017 Page 17 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1935 MHz, Output Power = 22.56 dBm

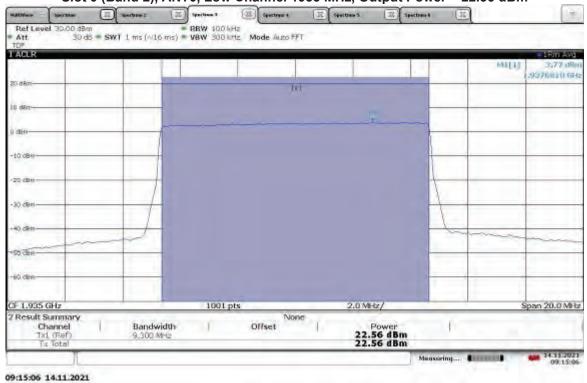


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 2), ANT1, Low Channel 1935 MHz, Output Power = 22.34 dBm

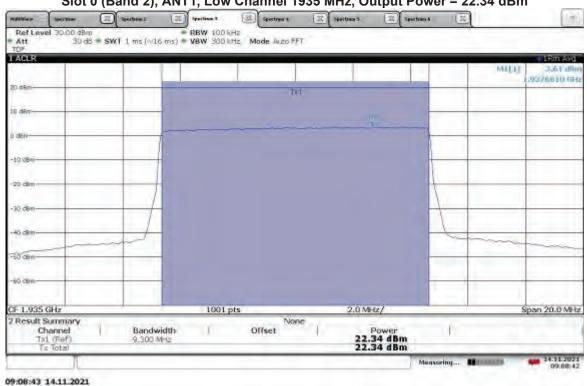


Non-Specific Radio Report Shell Rev. December 2017 Page 18 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.11 dBm

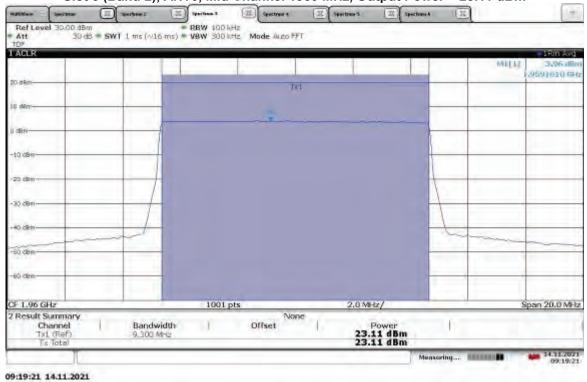


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.12 dBm

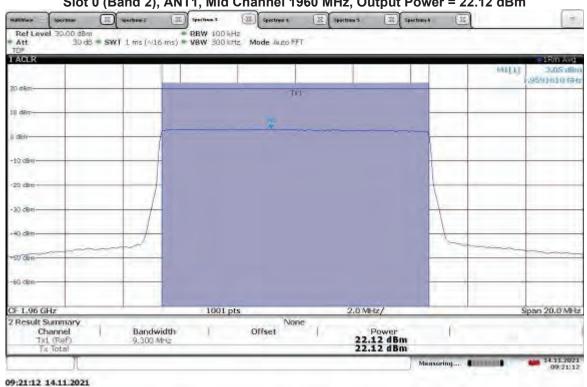


Non-Specific Radio Report Shell Rev. December 2017 Page 19 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1985 MHz, Output Power = 22.74 dBm

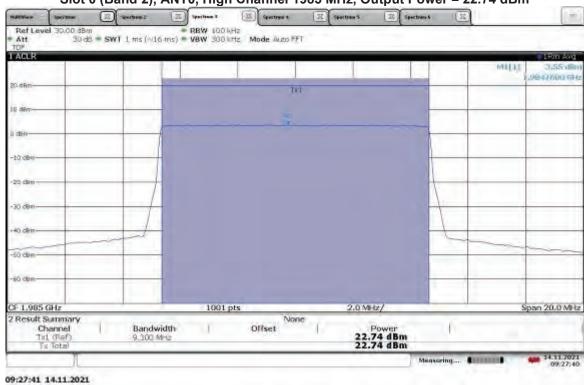


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1985 MHz, Output Power = 22.34 dBm

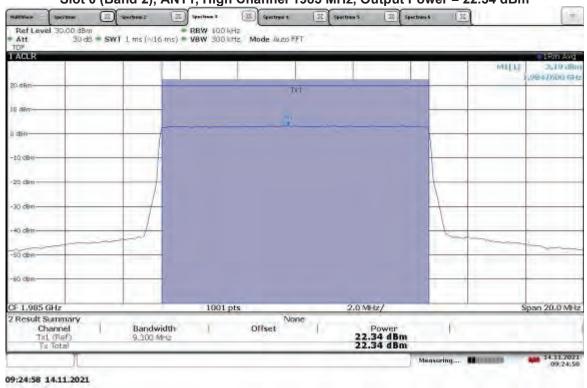


Non-Specific Radio Report Shell Rev. December 2017 Page 20 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1937.5 MHz, Output Power = 23.08 dBm

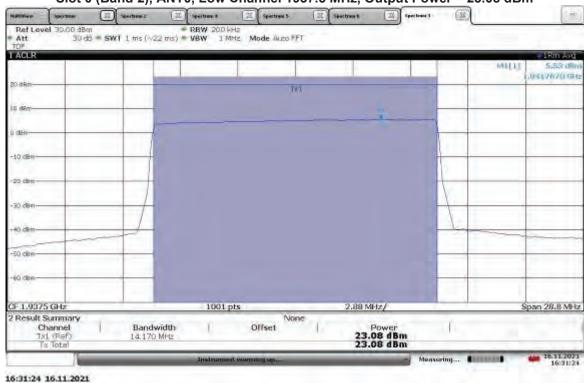


TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 2), ANT1, Low Channel 1937.5 MHz, Output Power = 22.83 dBm

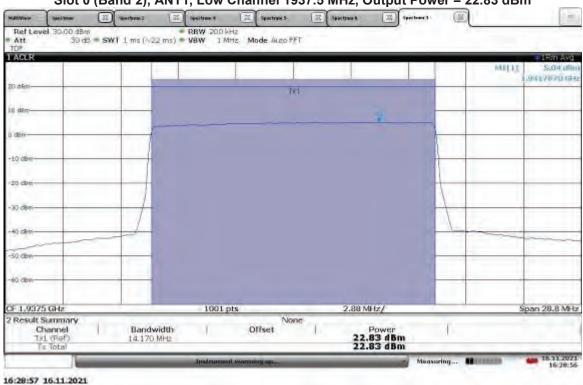


Non-Specific Radio Report Shell Rev. December 2017 Page 21 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.57 dBm

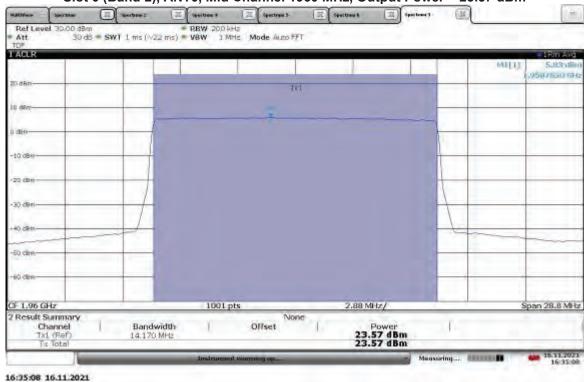


TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.62 dBm

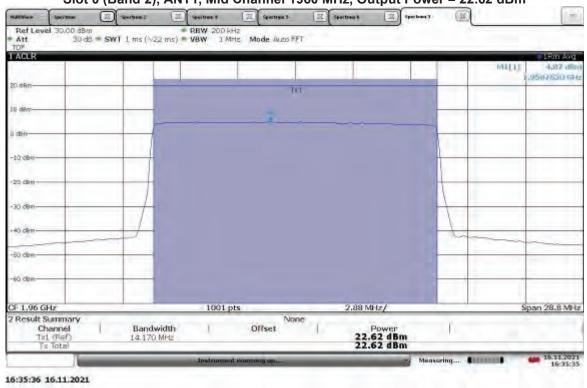


Non-Specific Radio Report Shell Rev. December 2017 Page 22 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM1.1-QPSK_15 MHz Bandwidth Slot 0 (Band 2), ANT0, High Channel 1982.5 MHz, Output Power = 23.28 dBm

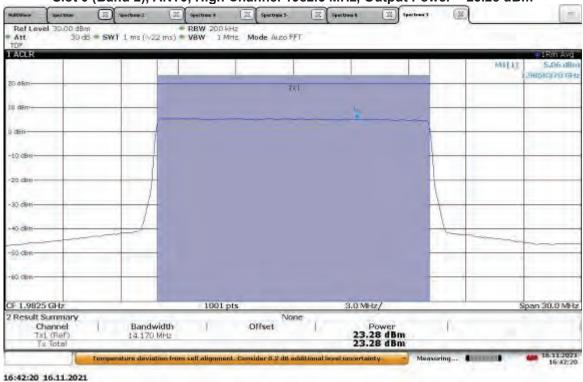


TM1.1-QPSK_15 MHz Bandwidth Slot 0 (Band 2), ANT1, High Channel 1982.5 MHz, Output Power = 22.79 dBm

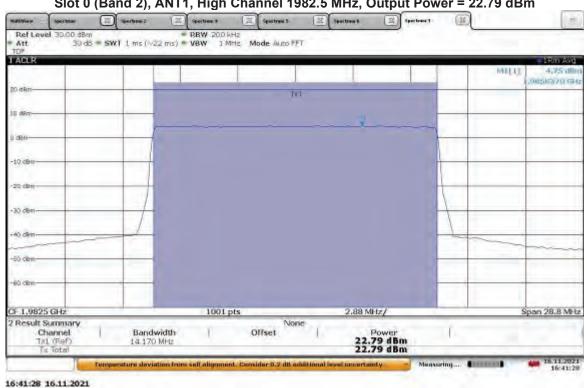


Non-Specific Radio Report Shell Rev. December 2017 Page 23 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

> TM1.1-QPSK_20 MHz Bandwidth Slot 0 (Band 2), ANT0, Low Channel 1940 MHz, Output Power = 23.05 dBm

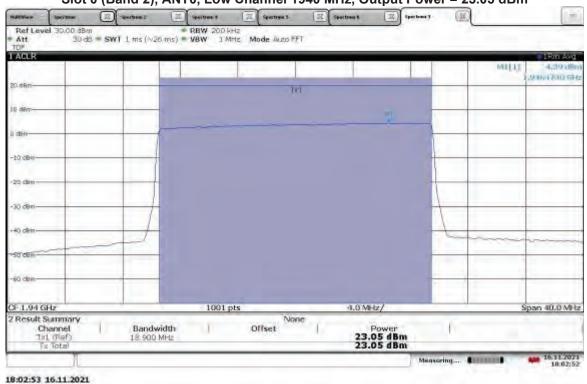


TM1.1-QPSK_20 MHz Bandwidth Slot 0 (Band 2), ANT1, Low Channel 1940 MHz, Output Power = 22.88 dBm

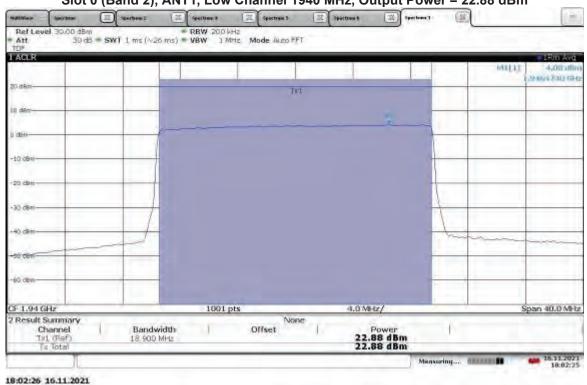


Non-Specific Radio Report Shell Rev. December 2017 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM1.1-QPSK_20 MHz Bandwidth Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.22 dBm

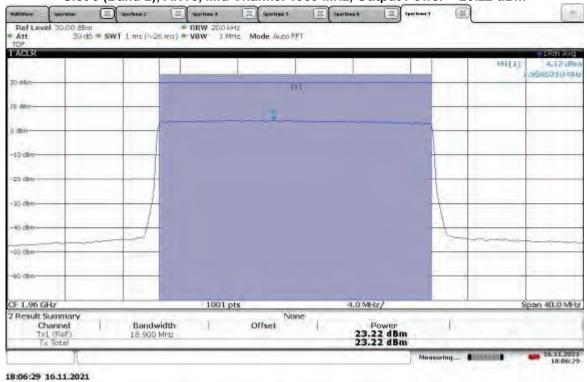


TM1.1-QPSK_20 MHz Bandwidth Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.33 dBm

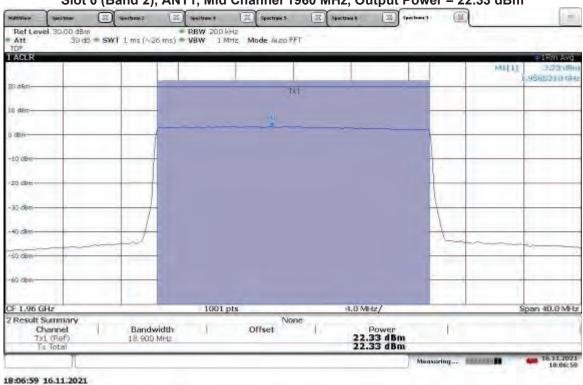


Non-Specific Radio Report Shell Rev. December 2017 Page 25 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1980 MHz, Output Power = 23.31 dBm

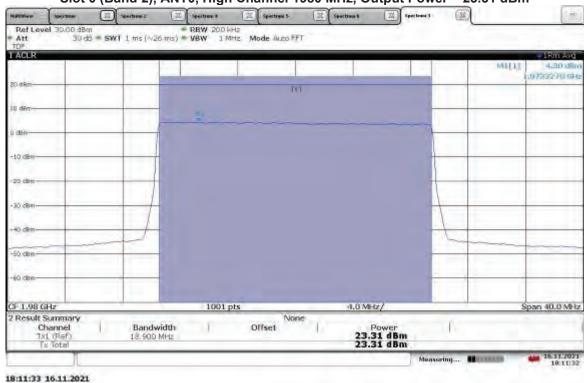


TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1980 MHz, Output Power = 22.76 dBm

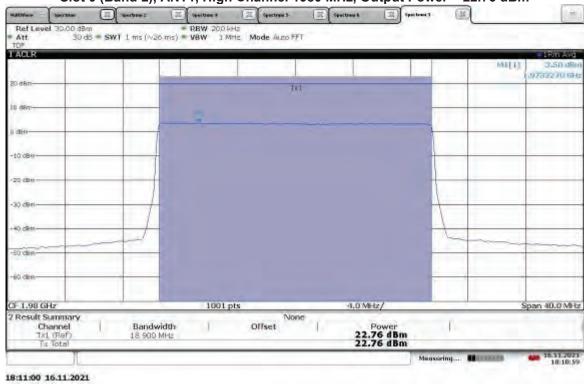


Non-Specific Radio Report Shell Rev. December 2017 Page 26 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1932.5 MHz, Output Power = 21.91 dBm

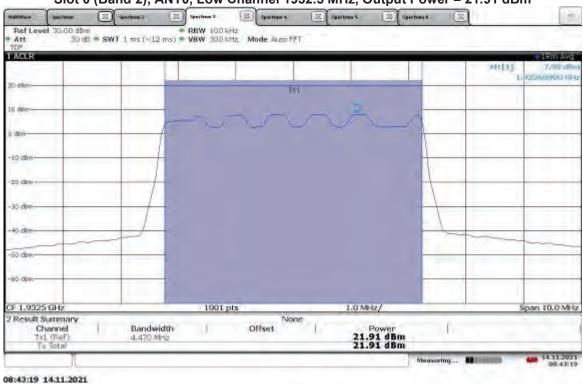


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 2), ANT1, Low Channel 1932.5 MHz, Output Power = 21.59 dBm

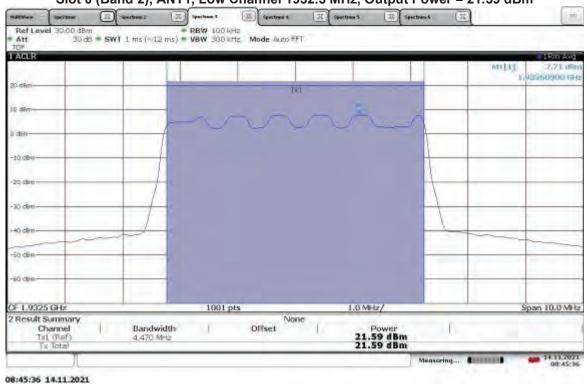


Non-Specific Radio Report Shell Rev. December 2017

TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 22.91 dBm

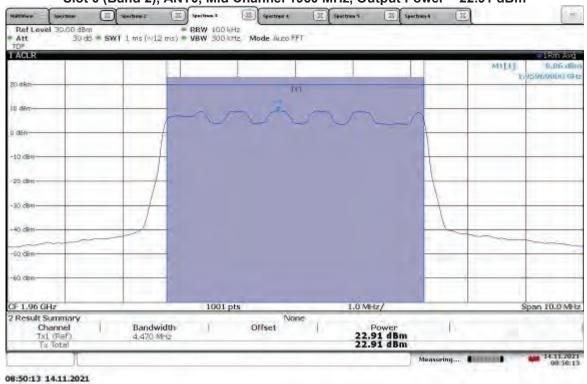


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.23 dBm

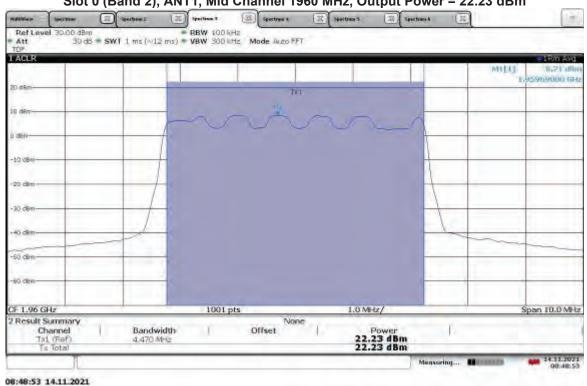


Non-Specific Radio Report Shell Rev. December 2017 Page 28 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1987.5 MHz, Output Power = 22.90 dBm

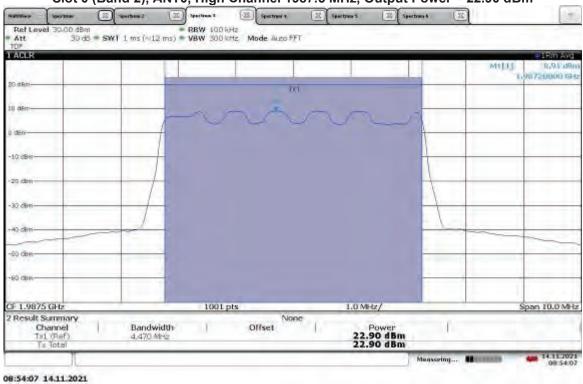


TM3.2-16QAM_5 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1987.5MHz, Output Power = 22.15 dBm

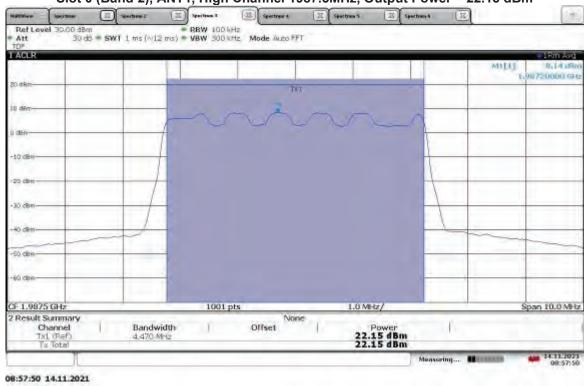


Non-Specific Radio Report Shell Rev. December 2017 Page 29 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100


TM3.2-16QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT0, Low Channel 1935 MHz, Output Power = 22.84 dBm

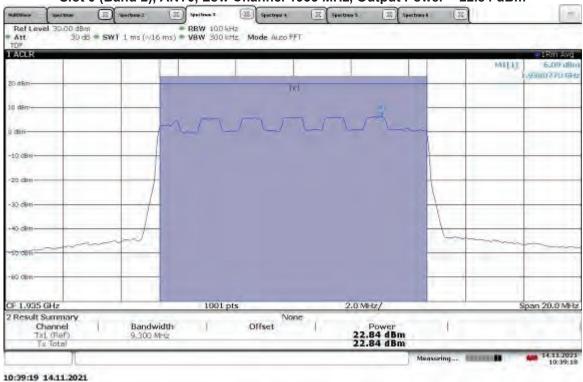


TM3.2-16QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT1, Low Channel 1935 MHz, Output Power = 22.55 dBm

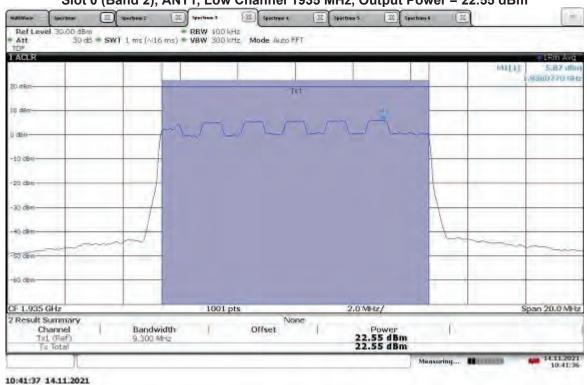

> TM3.2-16QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.07 dBm

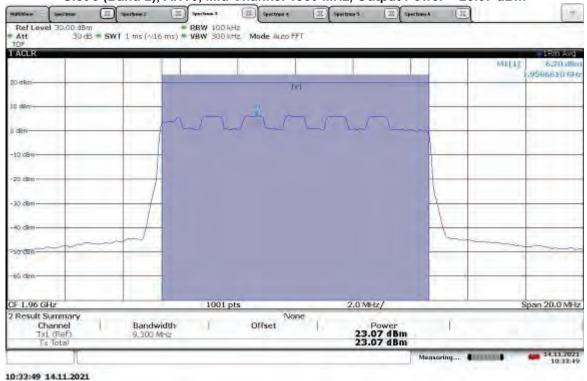


TM3.2-16QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.24 dBm

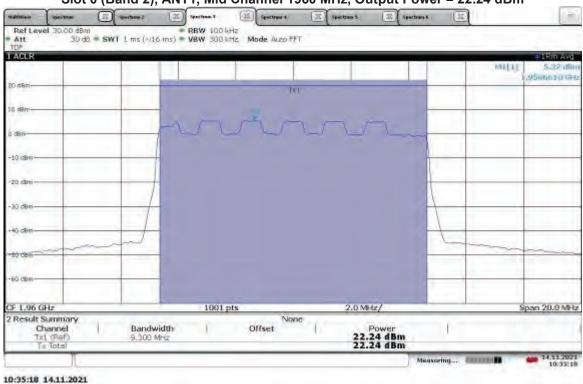


Non-Specific Radio Report Shell Rev. December 2017 Page 31 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

> TM3.2-16QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT0, High Channel 1985 MHz, Output Power = 22.82 dBm

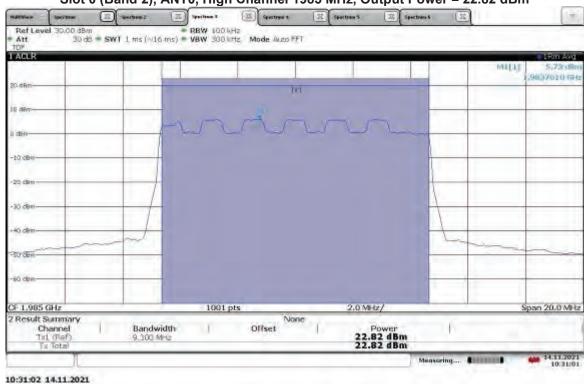


TM3.2-16QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT1, High Channel 1985 MHz, Output Power =22.43 dBm

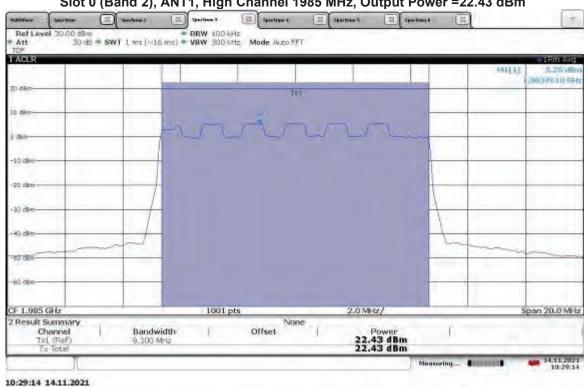


Non-Specific Radio Report Shell Rev. December 2017 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100


> TM3.2-16QAM_15 MHz Bandwidth Slot 0 (Band 2), ANT0, Low Channel 1937.5 MHz, Output Power = 23.39 dBm

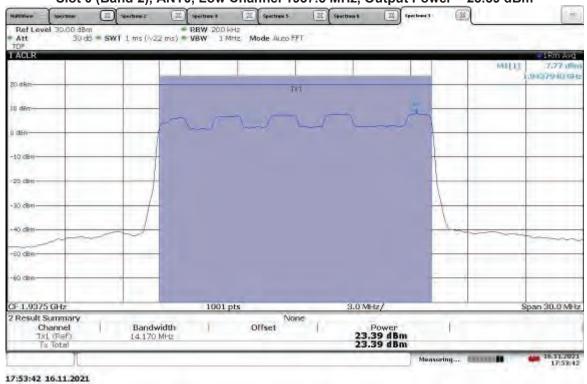


TM3.2-16QAM_15 MHz Bandwidth Slot 0 (Band 2), ANT1, Low Channel 1937.5 MHz, Output Power = 23.05 dBm

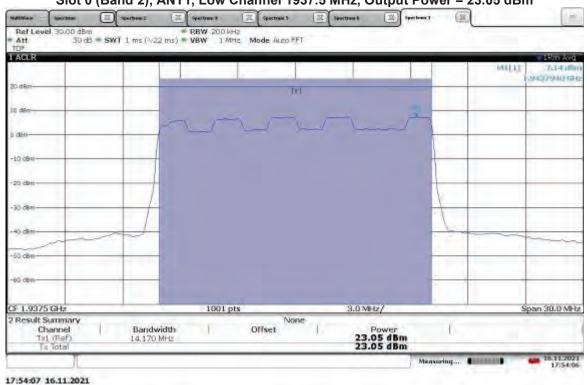

TM3.2-16QAM_15 MHz Bandwidth Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.30 dBm

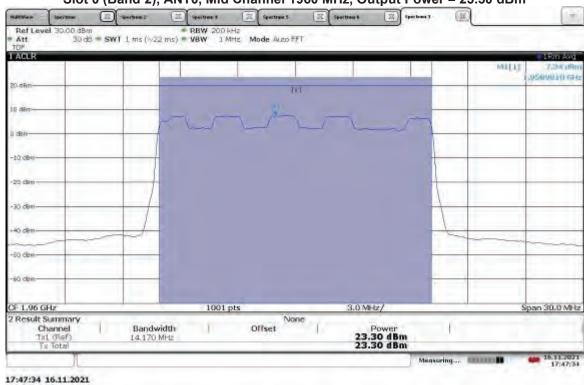


TM3.2-16QAM_15 MHz Bandwidth Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.33 dBm

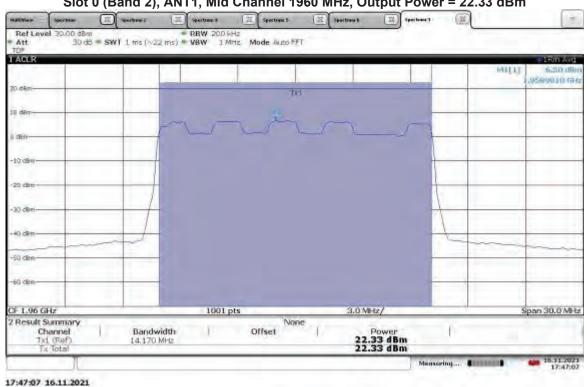


Non-Specific Radio Report Shell Rev. December 2017 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

> TM3.2-16QAM_15 MHz Bandwidth Slot 0 (Band 2), ANT0, High Channel 1982 MHz, Output Power =22.94 dBm

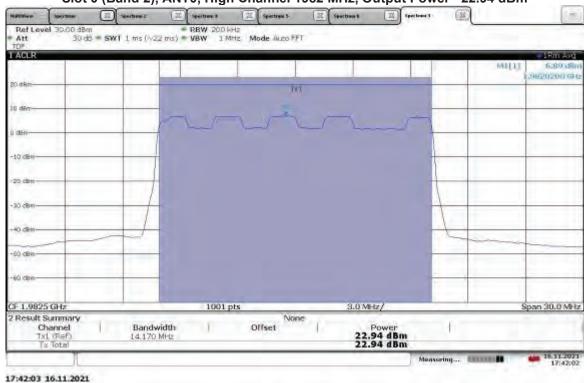


TM3.2-16QAM_15 MHz Bandwidth Slot 0 (Band 2), ANT1, High Channel 1982.5 MHz, Output Power = 22.35 dBm

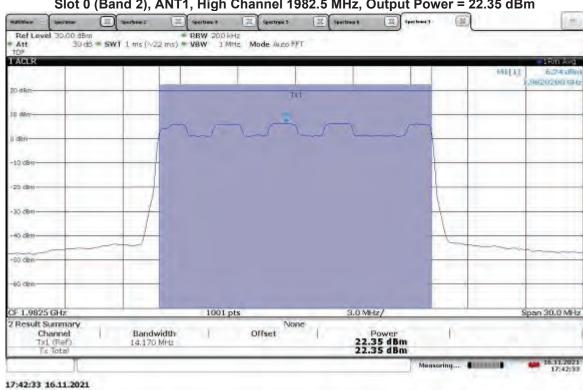


Non-Specific Radio Report Shell Rev. December 2017 Page 35 of 313

TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1940 MHz, Output Power = 23.27 dBm

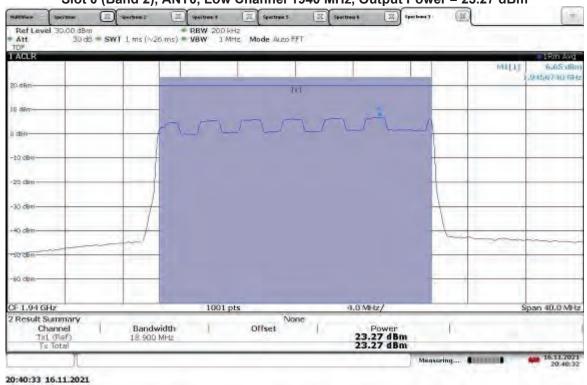


TM3.2-16QAM_20 MHz Bandwidth

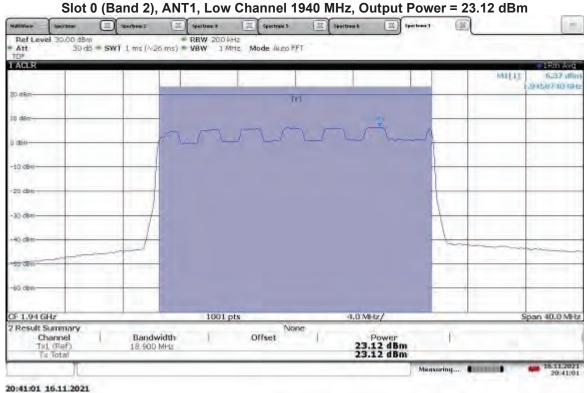


Non-Specific Radio Report Shell Rev. December 2017 Page 36 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.30 dBm

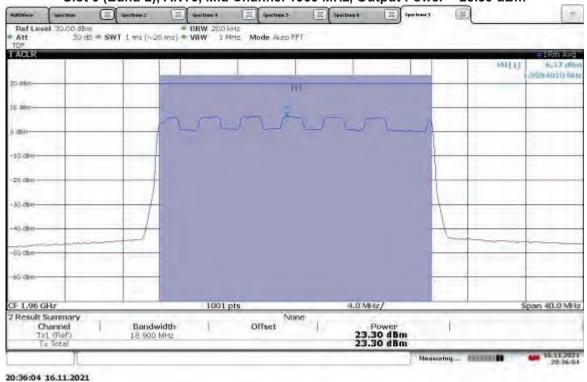


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.50 dBm

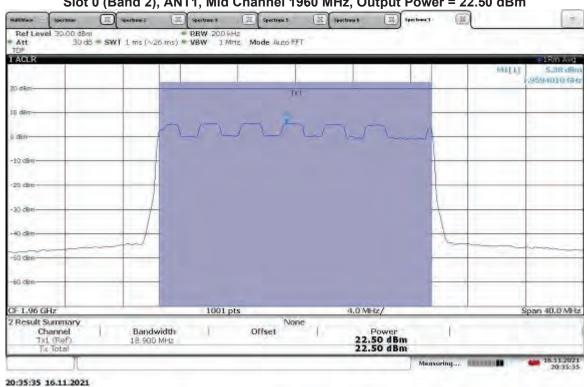


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1980 MHz, Output Power = 23.23 dBm

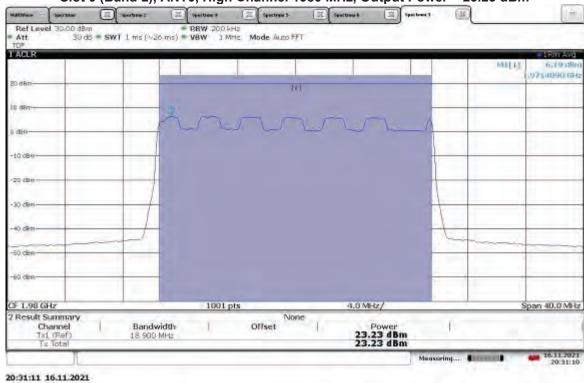


TM3.2-16QAM_20 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1980 MHz, Output Power = 22.53 dBm

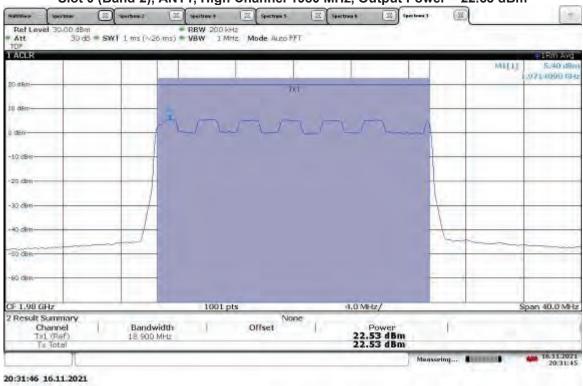


> TM3.1-64QAM_5 MHz Bandwidth Slot 0 (Band 2), ANT0, Low Channel 1932.5 MHz, Output Power = 22.52 dBm

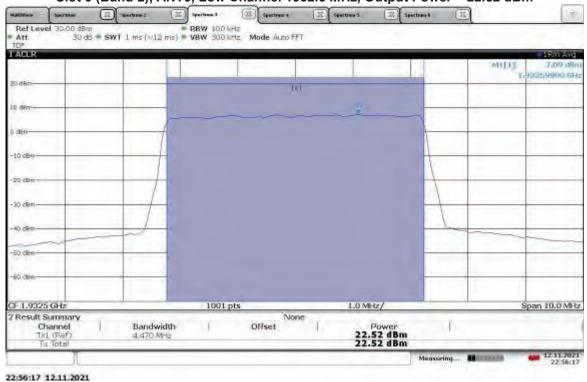


TM3.1-64QAM_5 MHz Bandwidth Slot 0 (Band 2), ANT1, Low Channel 1932.5 MHz, Output Power = 22.29 dBm

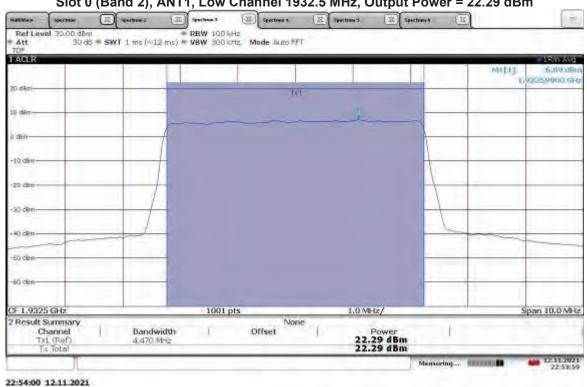


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.12 dBm

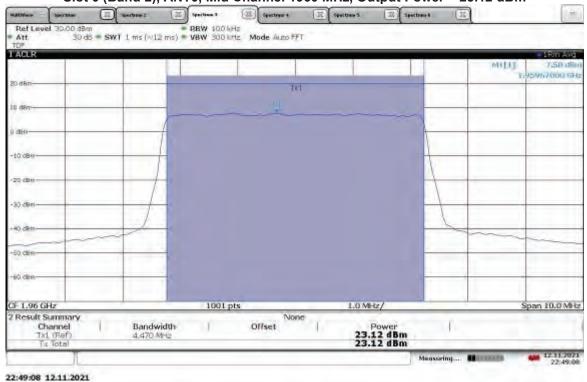

TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.37 dBm

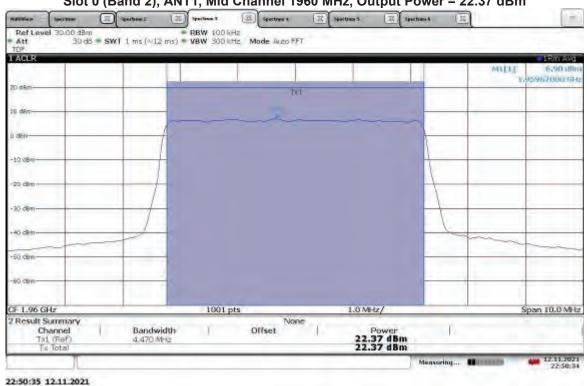


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1987.5 MHz, Output Power = 22.76 dBm

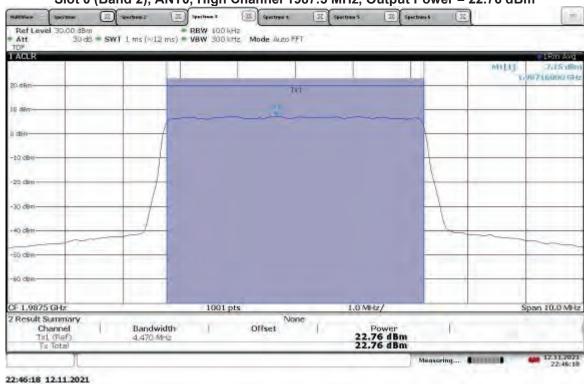


22.40.10 12.11.2021


TM3.1-64QAM_5 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1987.5 MHz, Output Power = 22.29 dBm

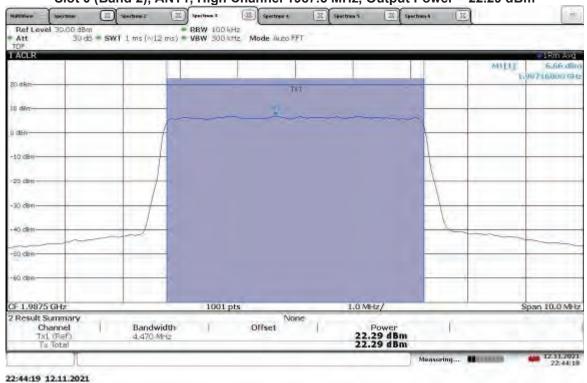


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1935 MHz, Output Power = 22.88 dBm

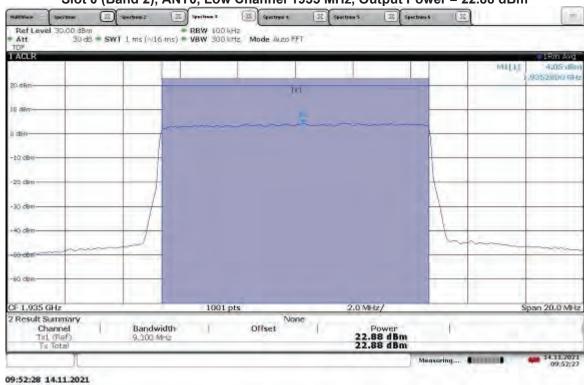


TM3.1-64QAM_10 MHz Bandwidth
Slot 0 (Band 2), ANT1, Low Channel 1935 MHz, Output Power = 22.55 dBm

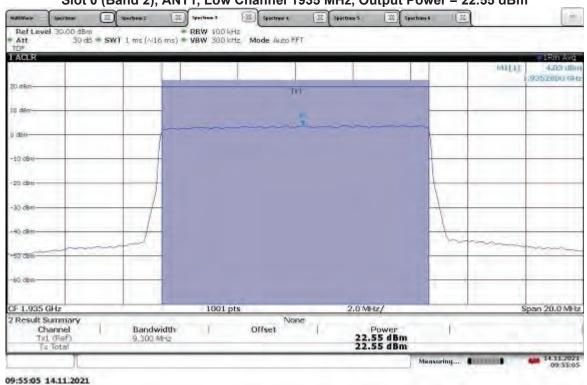


> TM3.1-64QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.09 dBm

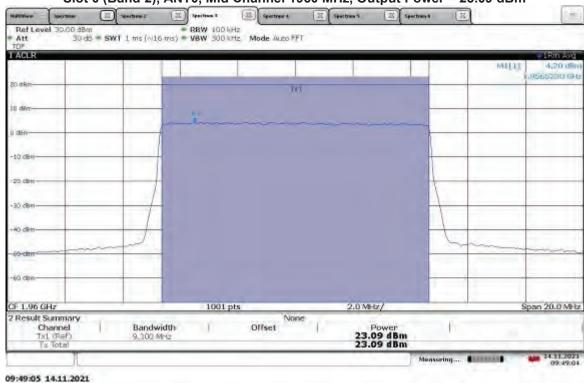


TM3.1-64QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.15 dBm

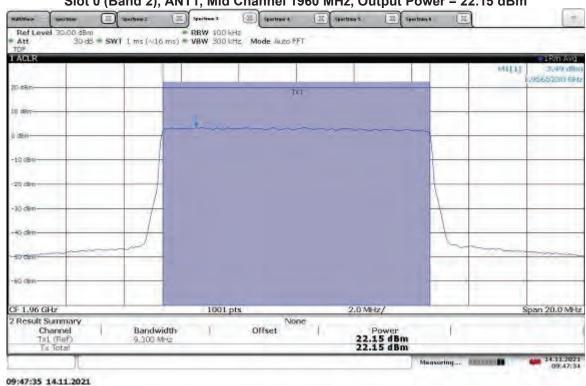


> TM3.1-64QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT0, High Channel 1985 MHz, Output Power = 22.79 dBm

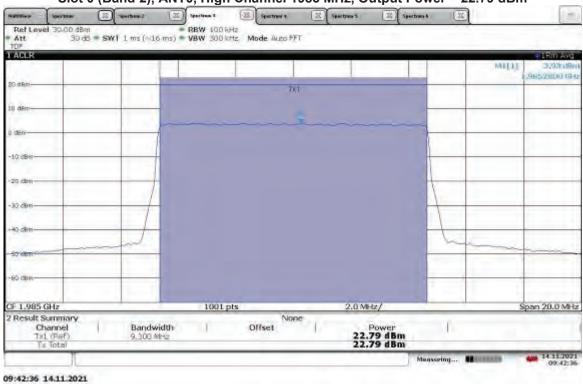


TM3.1-64QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT1, High Channel 1985 MHz, Output Power = 22.32 dBm

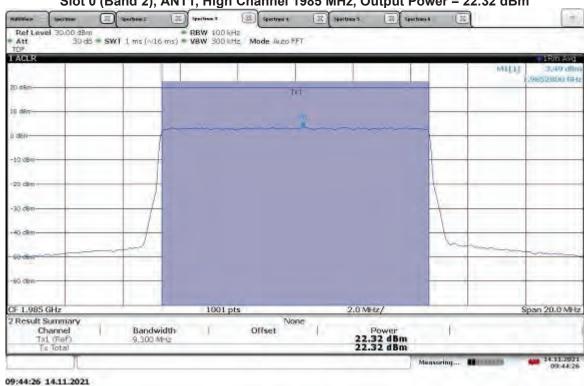


> TM3.1-64QAM_15 MHz Bandwidth Slot 0 (Band 2), ANT0, Low Channel 1937.5 MHz, Output Power = 23.50 dBm

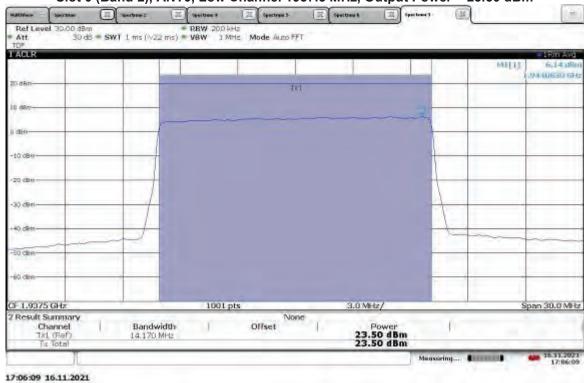


TM3.1-64QAM_15 MHz Bandwidth Slot 0 (Band 2), ANT1, Low Channel 1937.5 MHz, Output Power = 23.10 dBm

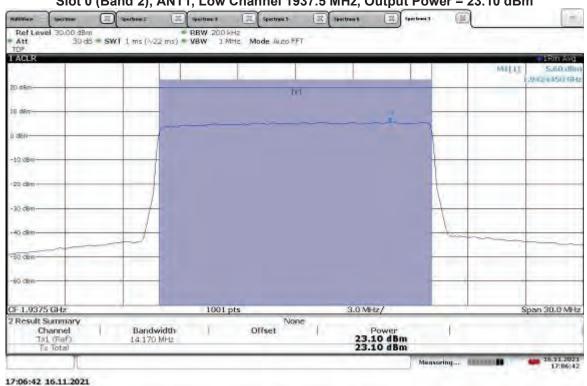


TM3.1-64QAM_15 MHz Bandwidth Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.36 dBm

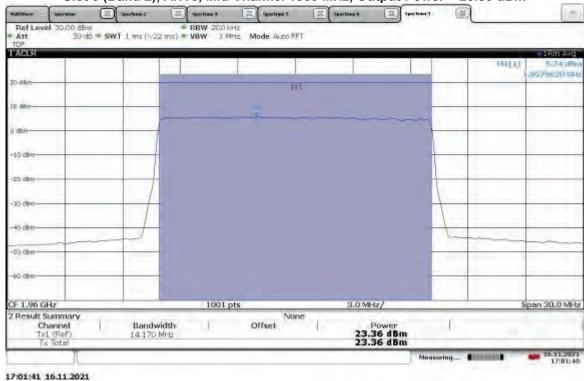


TM3.1-64QAM_15 MHz Bandwidth Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.41 dBm

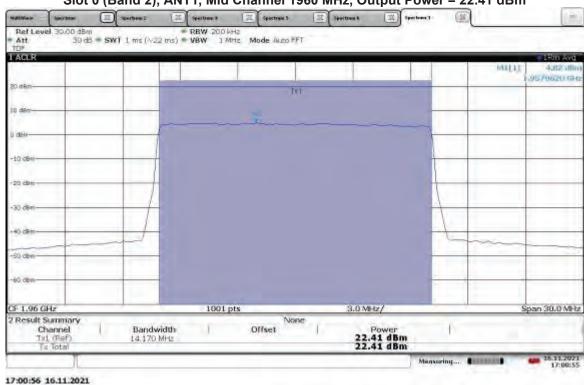


TM3.1-64QAM_15 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1982.5 MHz, Output Power = 23.16 dBm

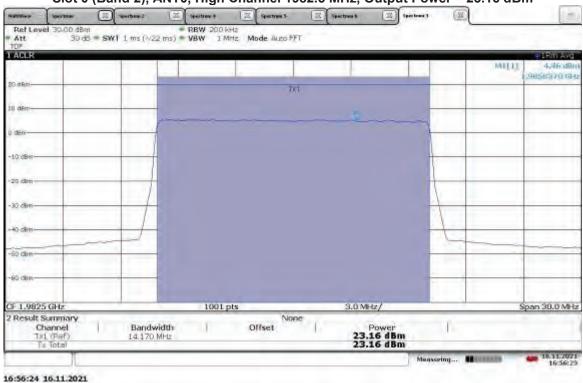


TM3.1-64QAM_15 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1982.5 MHz, Output Power = 22.41 dBm

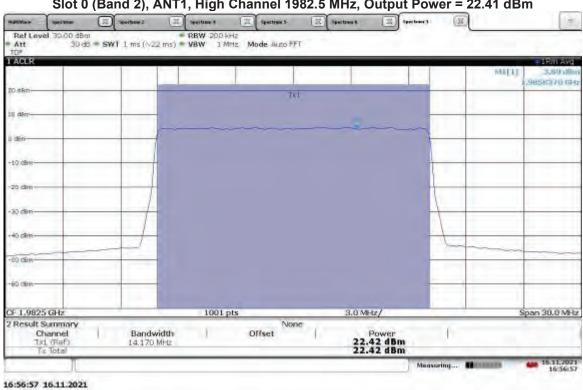


TM3.1-64QAM_20 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1940 MHz, Output Power = 23.30 dBm

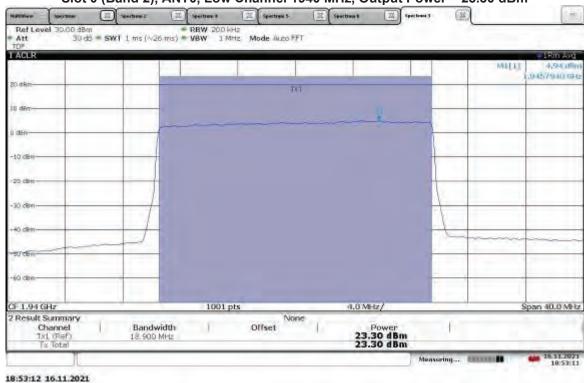


TM3.1-64QAM_20 MHz Bandwidth
Slot 0 (Band 2), ANT1, Low Channel 1940 MHz, Output Power = 23.09 dBm

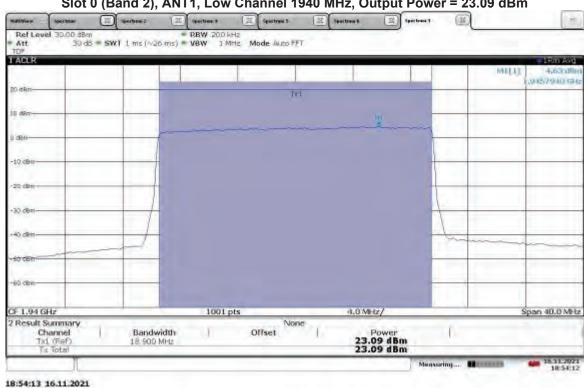


TM3.1-64QAM_20 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.23 dBm

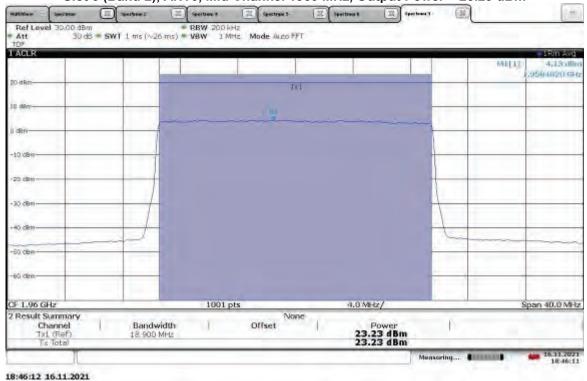


TM3.1-64QAM_20 MHz Bandwidth
Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.39 dBm

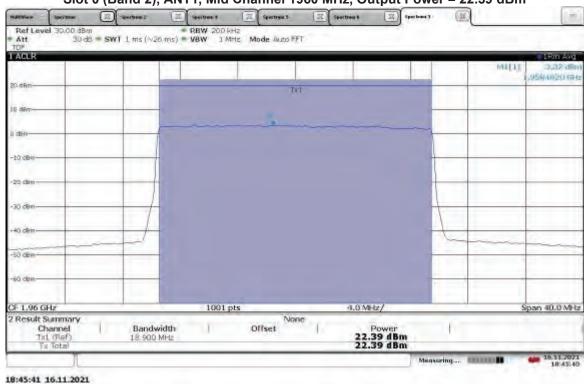


TM3.1-64QAM_20 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1980 MHz, Output Power = 23.07 dBm

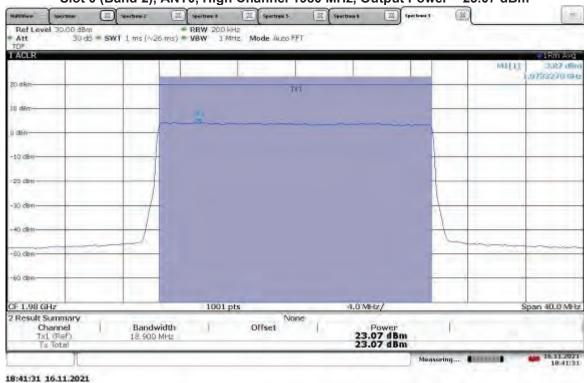


TM3.1-64QAM_20 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1980 MHz, Output Power = 22.46 dBm

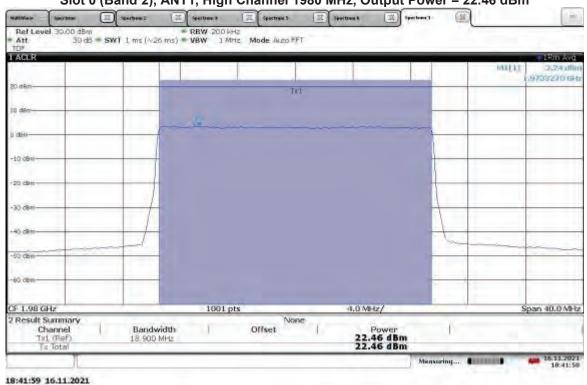


> TM3.1a-256QAM _5 MHz Bandwidth Slot 0 (Band 2), ANT0, Low Channel 1932.5 MHz, Output Power = 22.56 dBm

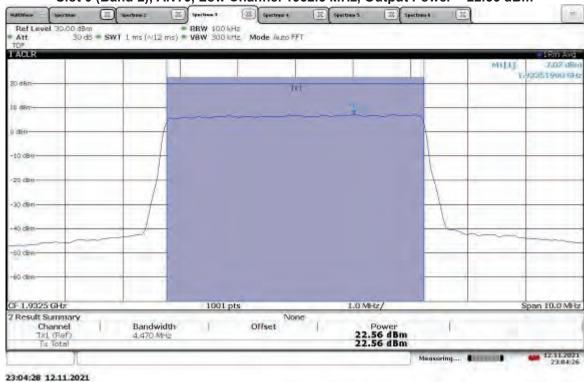


TM3.1a-256QAM _5 MHz Bandwidth

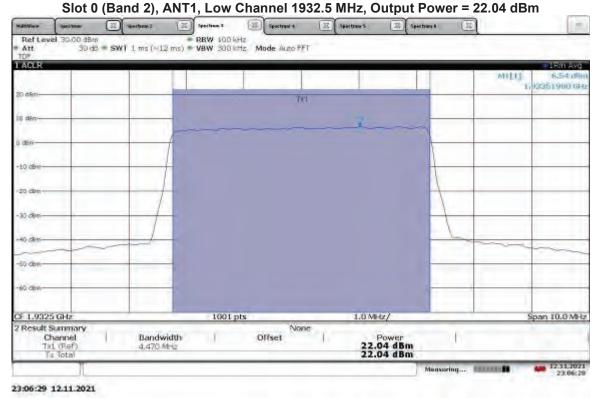


TM3.1a-256QAM _5 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.14 dBm

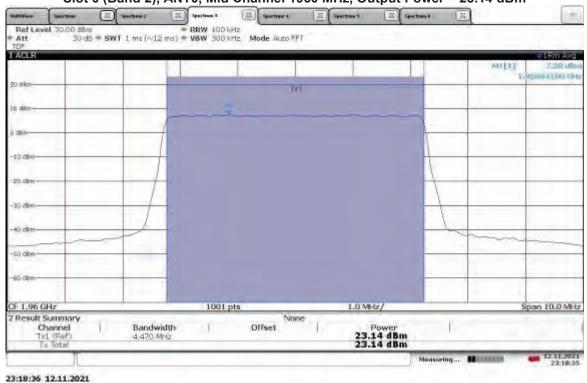


TM3.1a-256QAM _5 MHz Bandwidth
Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.39 dBm

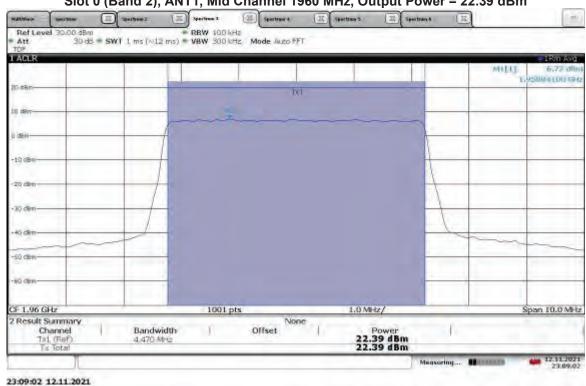

> TM3.1a-256QAM _5 MHz Bandwidth Slot 0 (Band 2), ANT0, High Channel 1987.5 MHz, Output Power = 23.04 dBm

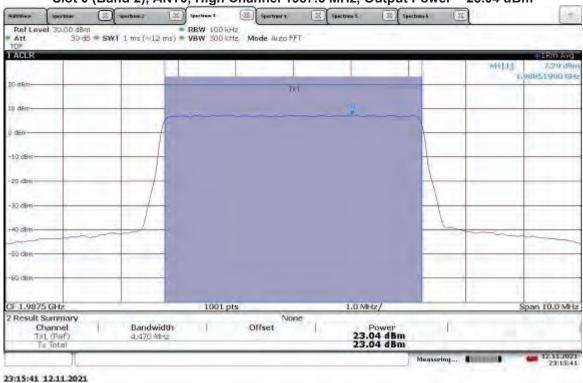


TM3.1a-256QAM _5 MHz Bandwidth Slot 0 (Band 2), ANT1, High Channel 1987.5 MHz, Output Power = 22.58 dBm

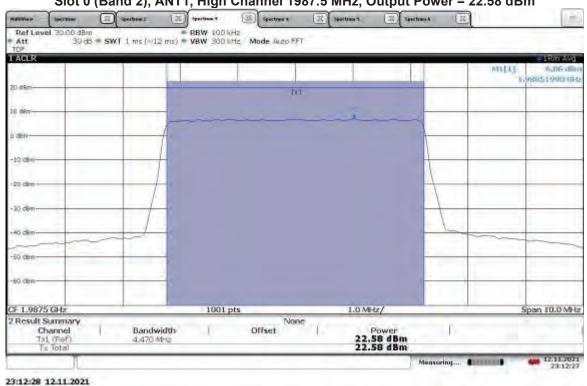


Non-Specific Radio Report Shell Rev. December 2017


> TM3.1a-256QAM _10 MHz Bandwidth Slot 0 (Band 2), ANT0, Low Channel 1935 MHz, Output Power = 22.86 dBm

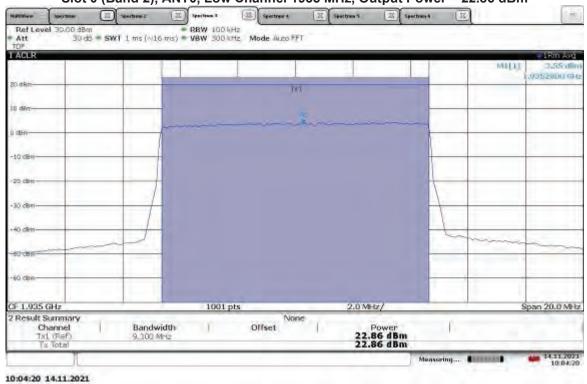


TM3.1a-256QAM _10 MHz Bandwidth Slot 0 (Band 2), ANT1, Low Channel 1935 MHz, Output Power = 22.56 dBm

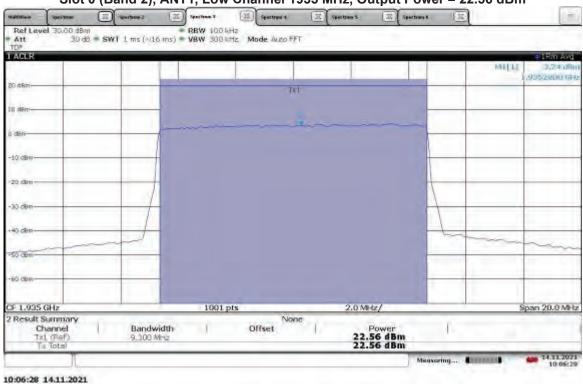


TM3.1a-256QAM _10 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.05 dBm

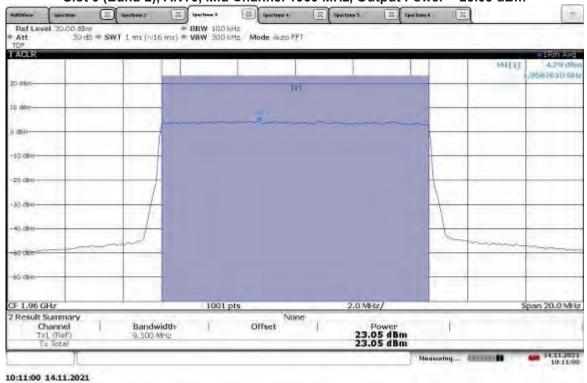


TM3.1a-256QAM _10 MHz Bandwidth
Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.18 dBm

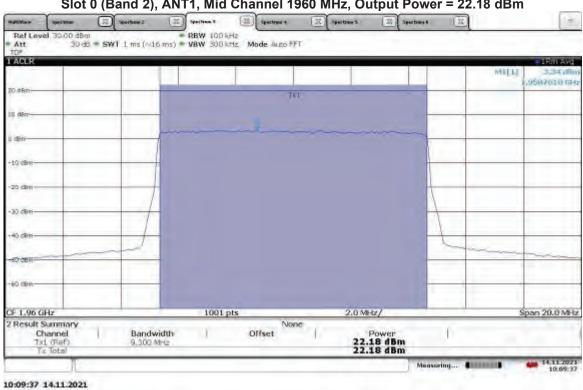


> TM3.1a-256QAM _10 MHz Bandwidth Slot 0 (Band 2), ANT0, High Channel 1985 MHz, Output Power = 22.93 dBm

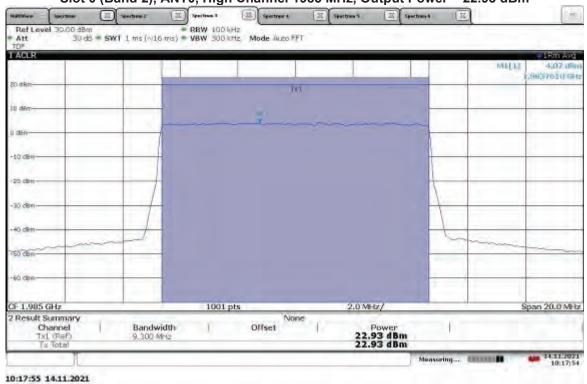


TM3.1a-256QAM _10 MHz Bandwidth Slot 0 (Band 2), ANT1, High Channel 1985 MHz, Output Power = 22.33 dBm

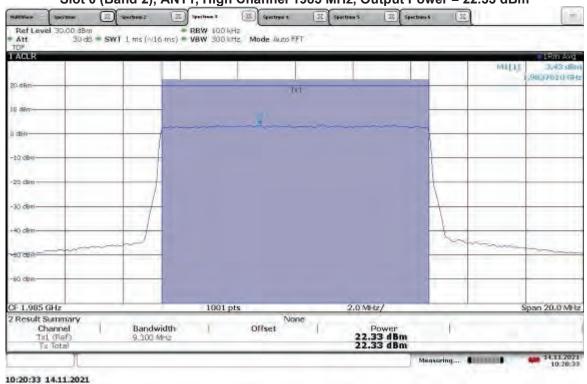


TM3.1a-256QAM _15 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1937.5 MHz, Output Power = 23.44 dBm

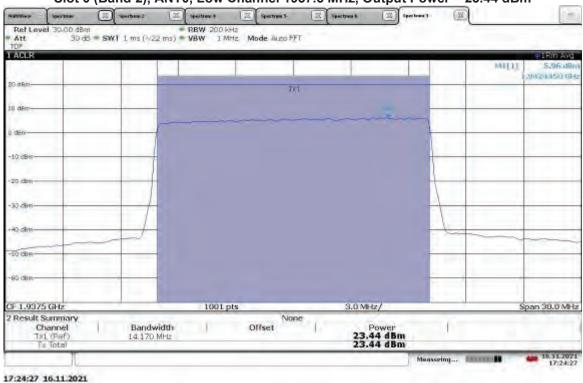


TM3.1a-256QAM _15 MHz Bandwidth
Slot 0 (Band 2), ANT1, Low Channel 1937.5 MHz, Output Power = 22.84 dBm

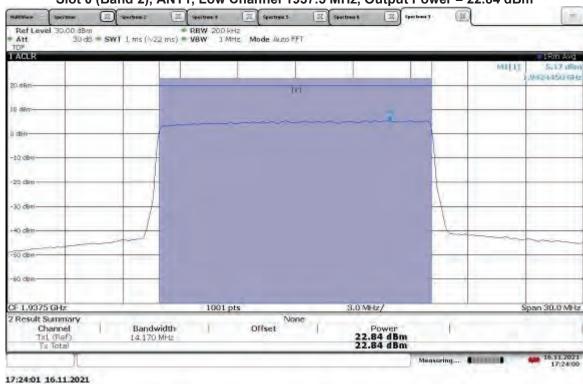


> TM3.1a-256QAM _15 MHz Bandwidth Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.31 dBm

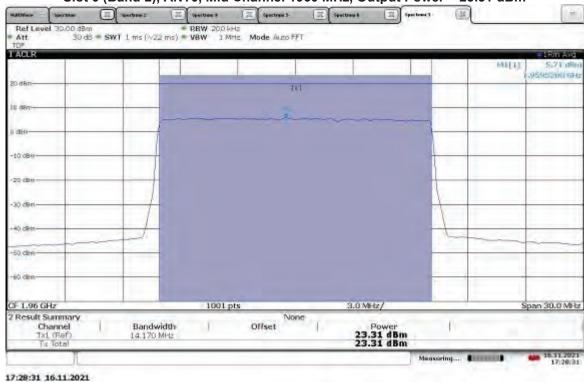


TM3.1a-256QAM _15 MHz Bandwidth Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.32 dBm

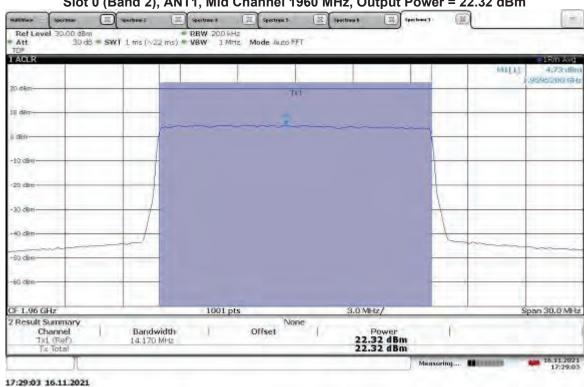


TM3.1a-256QAM _15 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1932.5 MHz, Output Power = 23.12 dBm

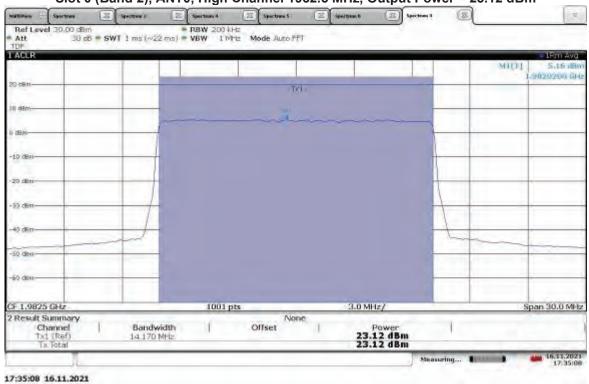


TM3.1a-256QAM _15 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1982.5 MHz, Output Power = 22.65 dBm

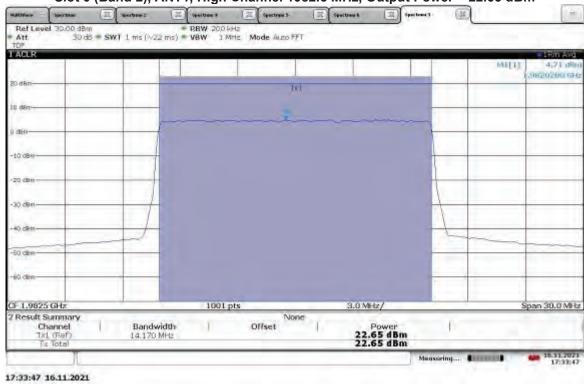


> TM3.1a-256QAM _20 MHz Bandwidth Slot 0 (Band 2), ANT0, Low Channel 1940 MHz, Output Power = 23.09dBm

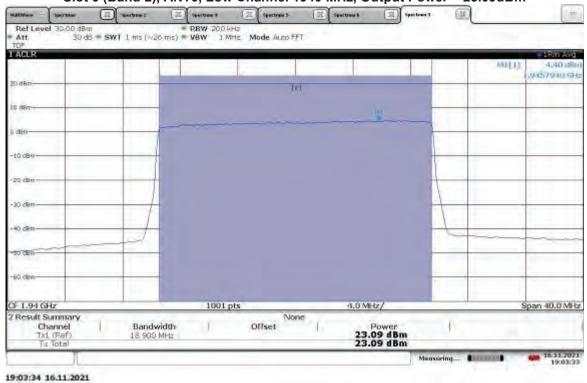


TM3.1a-256QAM _20 MHz Bandwidth Slot 0 (Band 2), ANT1, Low Channel 1940 MHz, Output Power = 22.97 dBm

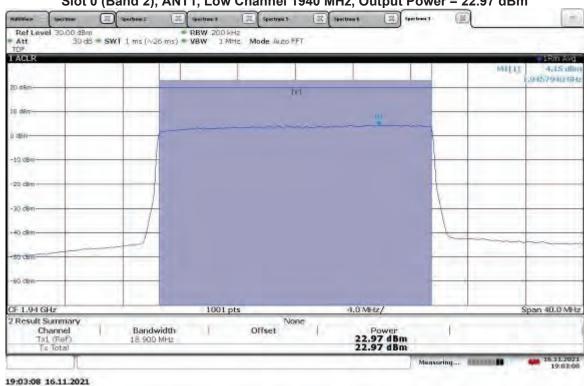


TM3.1a-256QAM _20 MHz Bandwidth Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, Output Power = 23.26 dBm

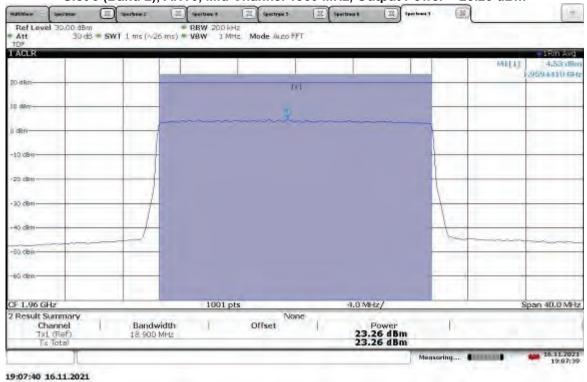


TM3.1a-256QAM _20 MHz Bandwidth Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 22.36 dBm

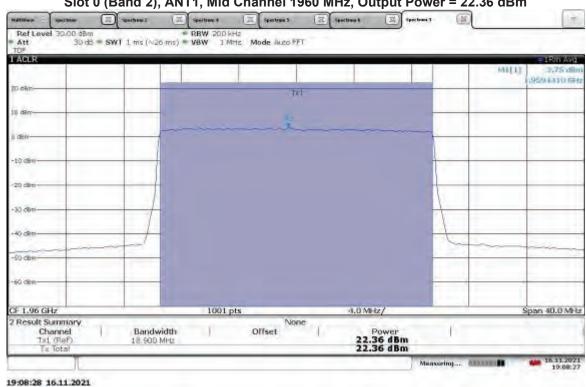

TM3.1a-256QAM _20 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1980 MHz, Output Power = 23.37 dBm

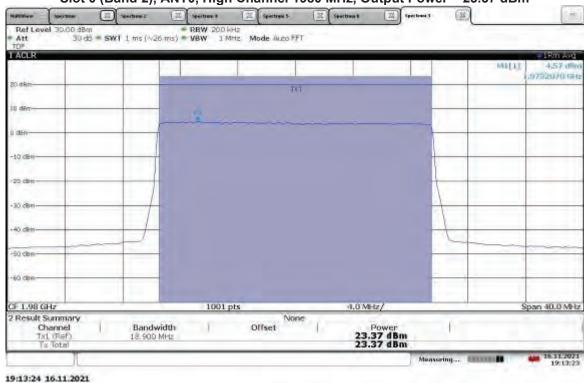

TM3.1a-256QAM _20 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1980 MHz, Output Power = 22.83 dBm

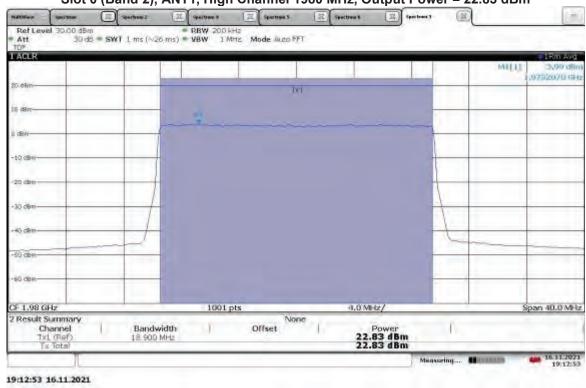

Limit for Maximum Permissible Exposure (MPE)

FCC Human RF Exposure Limits:

The FCC §1.1310 The criteria listed in table 1 was used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices shall be evaluated according to the provisions of §2.1093 of this chapter.

Part §1.1310 Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
	(A) Limits for Oc	cupational/Controlled Expo	sure	
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f²	6
30-300	61.4	0.163	1.0	- 6
300-1,500			f/300	6
1,500-100,000		_	5	
	(B) Limits for Genera	al Population/Uncontrolled E	xposure	
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	-30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

⁽¹⁾ Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when a person is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure. The phrase fully aware in the context of applying these exposure limits means that an exposed person has received written and/or verbal information fully explaining the potential for RF exposure resulting from his or her employment. With the exception of transient persons, this phrase also means that an exposed person has received appropriate training regarding work practices relating to controlling or mitigating his or her exposure. Such training is not required for transient persons, but they must receive written and/or verbal information and notification (for example, using signs) concerning their exposure potential and appropriate means available to mitigate their exposure. The phrase exercise control means that an exposed person is allowed to and knows how to reduce or avoid exposure by administrative or engineering controls and work practices, such as use of personal protective equipment or time averaging of exposure.

⁽²⁾ General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

Test Procedure

RF exposure for licensed transmitter is handled at the time of licensing, however, an MPE calculation was performed in order to show the distance at which the device is compliant with the limits of §1.1310, assuming antenna gains of 0 dBi and 4 dBi. The highest measured conducted output power was used, adjusted by +3dB to account for two antenna MIMO operation.

FCC Limit For General Population/Uncontrolled Exposure at 1.985 GHz = 1 mW/cm²

Power Density = $[EIRP] / [4\pi \times (D_{cm})^2]$

Where EIRP is in milliwatts and D is in centimeters. Setting the power density equal to the limit of 1 mW/cm² and solving for D_{cm} yields the following results.

Results:

EUT EIRP = Conducted power + Array Gain + Antenna gain in dBi

Power Density Limit = [EIRP] / $[4\pi \text{ x } (D_{cm})^2]$ 1 mW/cm² = [EIRP] / $[4\pi \text{ x } (D_{cm})^2]$ D_{cm} = ([EIRP] / $[4\pi]$)^{1/2}

For Gain = 0 dBi,

EIRP = 23.50 dBm + 10*LOG(2) + 0 dBi = 23.50 dBm + 3 dB + 0 dBi

EIRP = 26.50 dBm or 446.68359215 mW

Therefore, the minimum safe distance D_{cm} is $D_{cm} = ([446.68359215] / [4\pi])^{1/2}$

D_{cm} = 5.96 cm at 0 dBi gain two antenna MIMO

For Gain = 4 dBi,

EIRP = 23.50 dBm + 10*LOG(2) + 4 dBi = 23.50 dBm + 3 dB + 4 dBi

EIRP = 30.50 dBm or 1122.0184543 mW

Therefore, the minimum safe distance D_{cm} is $D_{cm} = ([1122.0184543] / [4\pi])^{1/2}$

D_{cm} = 9.45 cm at 4 dBi gain two antenna MIMO

For Gain = X dBi.

EIRP = 23.50 dBm + 10*LOG(2) + X dBi = 23.50 dBm + 3 dB + X dBi

EIRP = 26.50+X dBm or $446.68359215 + <math>10^{(X/10)}$ mW

Therefore, the minimum safe distance D_{cm} is $D_{cm} = ([446.68359215 + 10^{(X/10)}] / [4\pi])^{1/2}$

 $D_{cm} = 0.282 * (446.68359215 + 10^{(X/10)})^{1/2}$ cm at X dBi gain two antenna MIMO

Vathana Ven Test Personnel: Test Date: 11/12/2021, 11/14/2021, 11/16/2021 Supervising/Reviewing Engineer: Kouma Sinn 43 (Where Applicable) Product Standard: FCC Part 24 Limit Applied: See report section 6.3 Input Voltage: 48 VDC (POE) Ambient Temperature: 23, 22, 23 °C Pretest Verification w/ Ambient Signals or BB Source: N/A Relative Humidity: 42, 28, 42, 47 % Atmospheric Pressure: 1004, 1002, 1009 mbars

Deviations, Additions, or Exclusions: None

Report Number: 104844468BOX-001 Issued: 12/03/2021

Revised: 02/07/2022

7 Peak-to-Average Power Ratio (PAPR)

7.1 Method

Tests are performed in accordance with CFR47 FCC Part 24 and ANSI C63.26:2015.

TEST SITE: EMC Lab

<u>The EMC Lab</u> has one Semi-anechoic Chamber and one Shielded Chamber. AC Mains Power is available at 120, 230, and 277 Single Phase; 208, 400, and 480 3-Phase. Large reference ground-planes are installed in the general lab area to facilitate EMC work not requiring a shielded environment.

7.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
CEN001'	DC-40GHz attenuator 20dB	Centric RF	C411-20	CEN001	01/22/2021	01/22/2022
CBLSHF204'	Cable, SMA - SMA, 9kHz -40GHz, (Cable Kit 5)	Huber + Suhner	Sucoflex 102EA	234714001	02/03/2021	02/03/2022
ROS005-1'	Signal and Spectrum Analyzer	Rohde and Shwartz	FSW43	100646	11/02/2021	11/02/2022
DAV005'	Weather Station	Davis	6250	MS191218083	02/07/2021	02/07/2022

Software Utilized:

Name	Manufacturer	Version
None		

7.3 Results:

The sample tested was found to Comply.

§24.232(d) The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Slot 0 (Band 2), Bandwidth: 5 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1932.50	ANT0	10.13
		ANT1	9.95
Mid	1960.00	ANT0	10.02
		ANT1	10.21
High	1987.50	ANT0	9.73
_		ANT1	9.84

Slot 0 (Band 2), Bandwidth: 10 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1935.00	ANT0	10.80
		ANT1	10.75
Mid	1960.00	ANT0	10.72
		ANT1	11.19
High	1985.00	ANT0	10.55
_		ANT1	10.73

Slot 0 (Band 2), Bandwidth: 15 MHz, Modulation: TM1.1-QPSK

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1937.50	ANT0	11.31
		ANT1	11.29
Mid	1960.00	ANT0	10.79
		ANT1	11.32
High	1982.50	ANT0	10.52
		ANT1	10.68

Slot 0 (Band 2), Bandwidth: 20 MHz, Modulation: TM1.1-QPSK

0.000 (20.00 2), 20.000.000.000.000.000.000.000.000.000.			
Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1940.00	ANT0	10.43
		ANT1	10.10
Mid	1960.00	ANT0	10.13
		ANT1	10.52
High	1980.00	ANT0	10.02
		ANT1	10.01

Slot 0 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1932.50	ANT0	9.71
		ANT1	9.59
Mid	1960.00	ANT0	9.57
		ANT1	9.63
High	1987.50	ANT0	9.37
		ANT1	9.52

Slot 0 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1935.00	ANT0	9.72
		ANT1	9.62
Mid	1960.00	ANT0	9.85
		ANT1	10.06
High	1985.00	ANT0	9.78
		ANT1	9.84

Slot 0 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.2-16QAM

	, , , , , , , , , , , , , , , , , , , ,		
Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1937.50	ANT0	10.40
		ANT1	10.43
Mid	1960.00	ANT0	10.91
		ANT1	10.56
High	1982.50	ANT0	10.33
_		ANT1	10.23

Slot 0 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.2-16QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1940.00	ANT0	9.86
		ANT1	9.87
Mid	1960.00	ANT0	10.22
		ANT1	10.55
High	1980.00	ANT0	10.19
_		ANT1	10.28

Slot 0 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1932.50	ANT0	9.87
		ANT1	9.69
Mid	1960.00	ANT0	9.81
		ANT1	9.95
High	1987.50	ANT0	9.68
		ANT1	9.72

Slot 0 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.1-64QAM

0.010 (24.14 2), 24.14.14.11.10 11.12, 11.04.44.41.11.11.11.11.11.11.11.11.11.11.11			
Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1935.00	ANT0	9.75
		ANT1	9.39
Mid	1960.00	ANT0	9.36
		ANT1	10.17
High	1985.00	ANT0	9.35
		ANT1	9.65

Slot 0 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1937.50	ANT0	9.74
		ANT1	10.08
Mid	1960.00	ANT0	9.76
		ANT1	10.78
High	1982.50	ANT0	9.79
_		ANT1	9.72

Slot 0 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.1-64QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1940.00	ANT0	10.34
		ANT1	9.58
Mid	1960.00	ANT0	9.94
		ANT1	10.41
High	1980.00	ANT0	9.92
		ANT1	10.10

Slot 0 (Band 2), Bandwidth: 5 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1932.50	ANT0	9.55
		ANT1	9.33
Mid	1960.00	ANT0	9.54
		ANT1	9.67
High	1987.50	ANT0	9.35
•		ANT1	9.29

Slot 0 (Band 2), Bandwidth: 10 MHz, Modulation: TM3.1a-256QAM_

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1935.00	ANT0	9.84
		ANT1	9.85
Mid	1960.00	ANT0	9.97
		ANT1	10.23
High	1985.00	ANT0	9.80
		ANT1	9.95

Slot 0 (Band 2), Bandwidth: 15 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1937.500	ANT0	9.59
		ANT1	9.85
Mid	1960.00	ANT0	9.90
		ANT1	10.00
High	1982.50	ANT0	9.92
_		ANT1	10.03

Slot 0 (Band 2), Bandwidth: 20 MHz, Modulation: TM3.1a-256QAM

Channel	Frequency (MHz)	Antenna Port	PAPR (dB)
Low	1940	ANT0	9.94
		ANT1	9.79
Mid	1960	ANT0	9.90
		ANT1	10.05
High	1980	ANT0	9.92
		ANT1	9.88

Intertek


Report Number: 104844468BOX-001 Issued: 12/03/2021 Revised: 02/07/2022

7.4 Setup Photograph:

Confidential – Test setup photo not included in this report


7.5 Plots/Data:

TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1932.5 MHz, PAPR = 10.13 dB

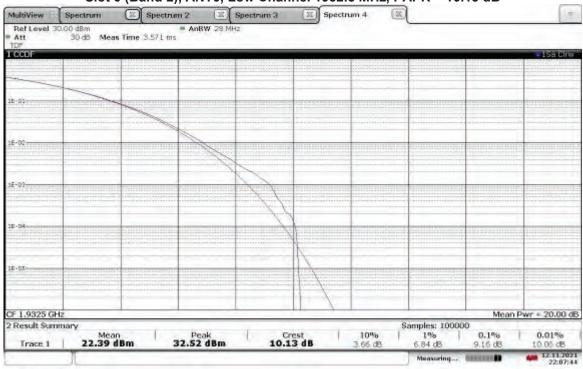


22:07:45 12:11:2021

TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 2), ANT1, Low Channel 1932.5 MHz, PAPR = 9.95 dB

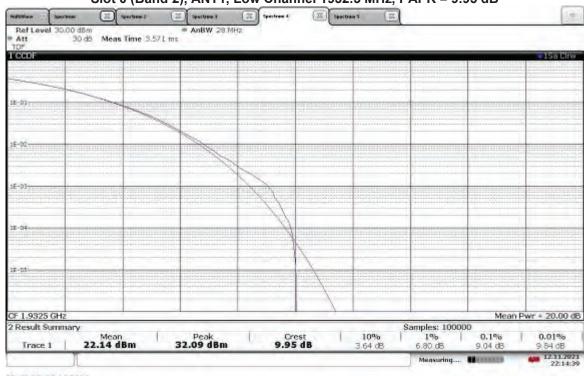


22:14:40 12.11.2021

TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, PAPR = 10.02 dB

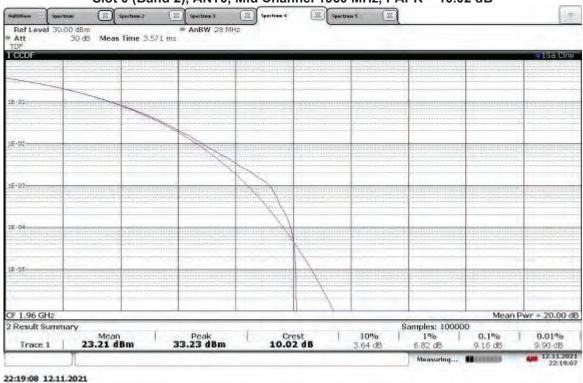


TM1.1-QPSK_5 MHz Bandwidth

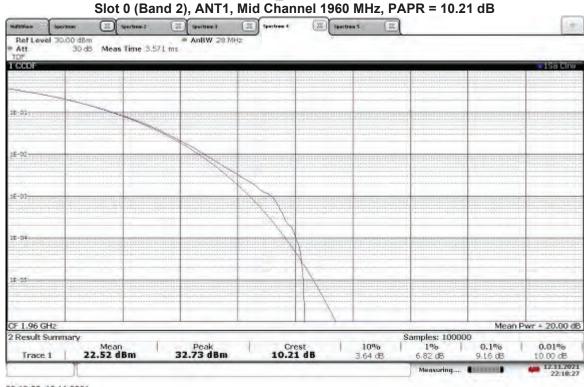


22:18:28 12.11.2021

TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1987.5 MHz, PAPR = 9.73 dB

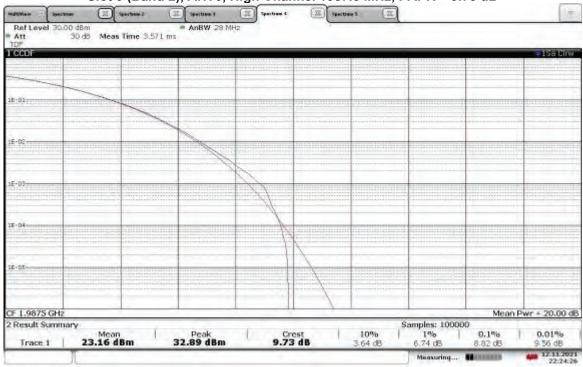


22:24:26 12:11:2021

TM1.1-QPSK_5 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1987.5 MHz, PAPR = 9.84 dB

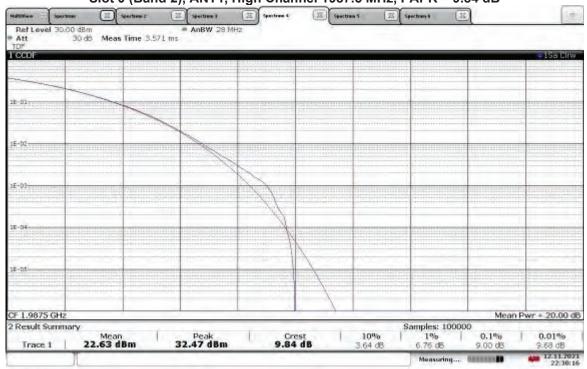


22:30:17 12:11:2021

TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1935 MHz, PAPR = 10.80 dB

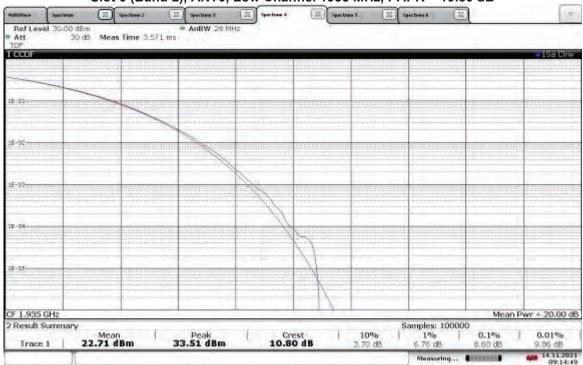


09:14:49 14.11.2021

TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 2), ANT1, Low Channel 1935 MHz, PAPR = 10.75 dB

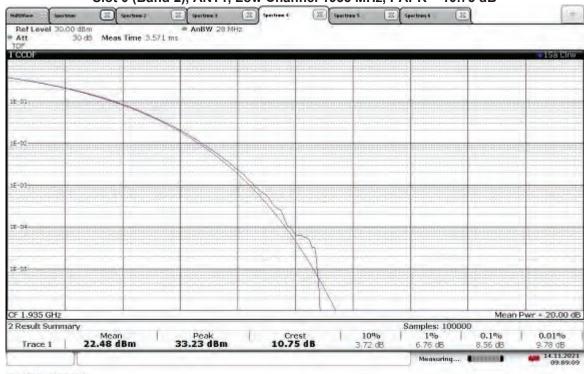


09:09:09 14.11.2021

TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, PAPR = 10.72 dB

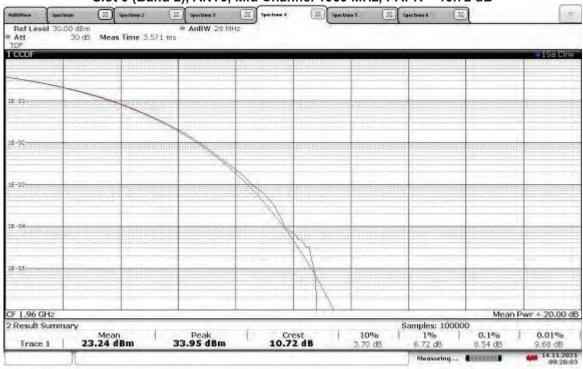


09:20:03 14.11.2021

TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, PAPR = 11.19 dB

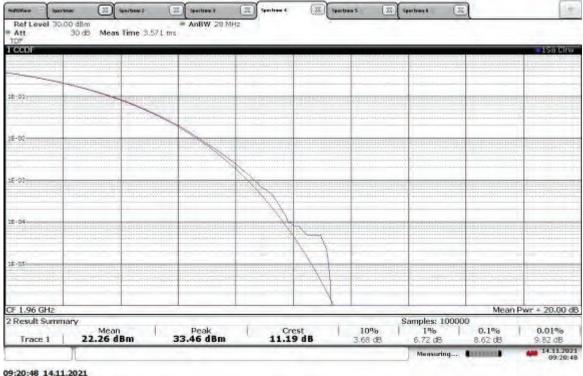


09:20:48 14.11.202

TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1985 MHz, PAPR = 10.55 dB

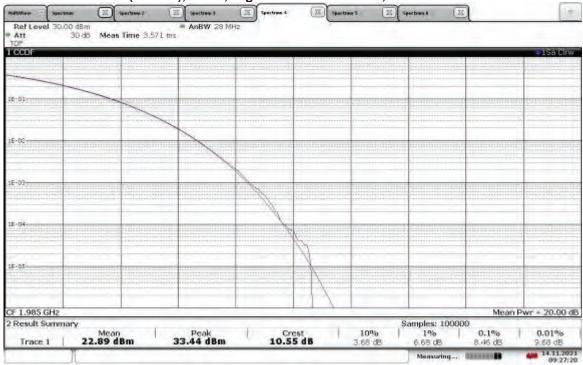

09:27:21 14.11.2021


TM1.1-QPSK_10 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1985 MHz, PAPR = 10.73 dB

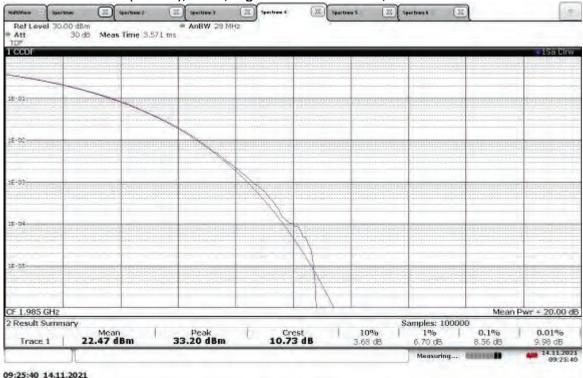

Non-Specific Radio Report Shell Rev. December 2017


Page 75 of 313

TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1937.5 MHz, PAPR = 11.31 dB

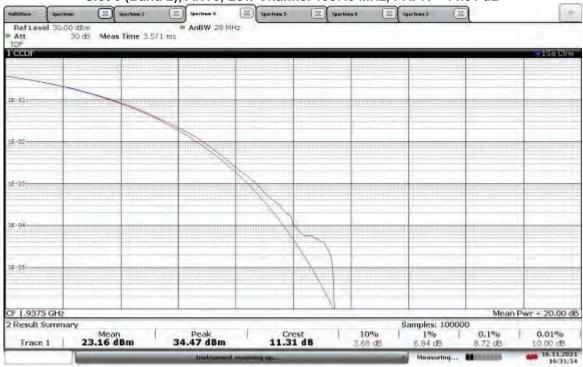

16:31:55 16.11.2021


TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 2), ANT1, Low Channel 1937.5 MHz, PAPR = 11.29 dB

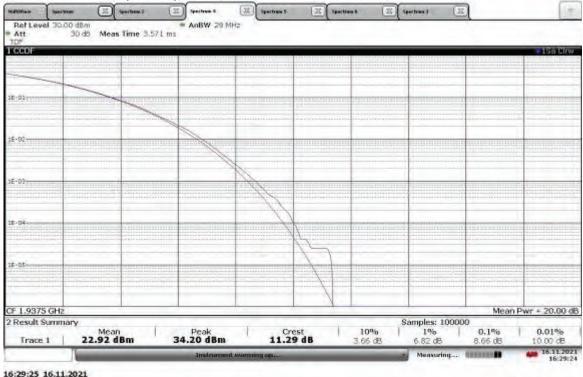


Non-Specific Radio Report Shell Rev. December 2017

Page 76 of 313

TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, PAPR = 10.79 dB

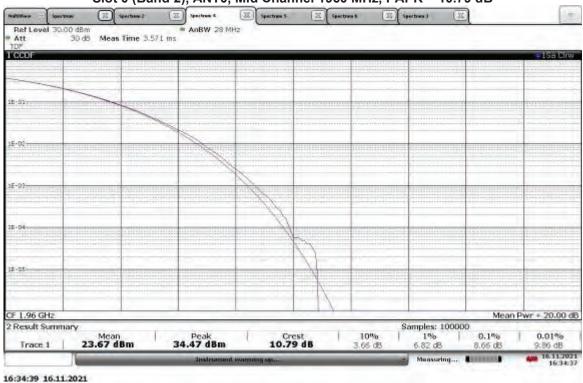


TM1.1-QPSK_15 MHz Bandwidth
Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, PAPR = 11.32 dB

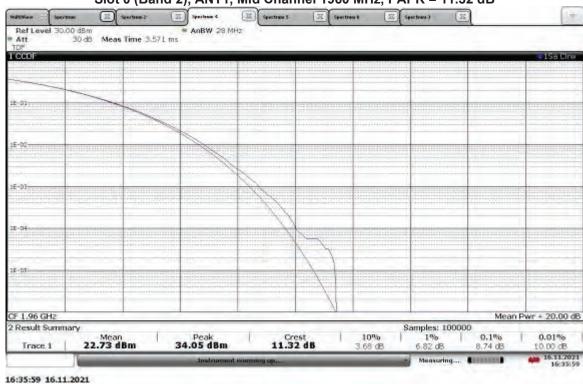


Non-Specific Radio Report Shell Rev. December 2017

> TM1.1-QPSK_15 MHz Bandwidth Slot 0 (Band 2), ANT0, High Channel 1982.5 MHz, PAPR = 10.52 dB

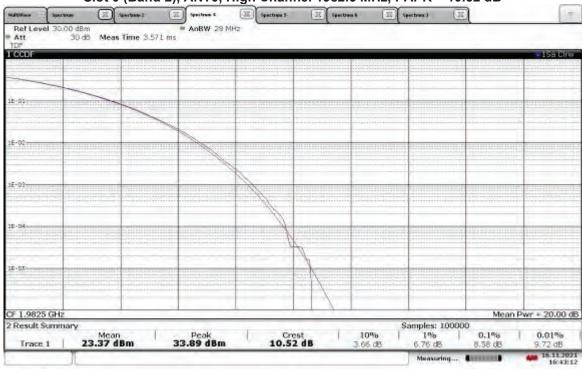


16:43:12 16.11.2021

TM1.1-QPSK_15 MHz Bandwidth Slot 0 (Band 2), ANT1, High Channel 1982.5 MHz, PAPR = 10.68 dB

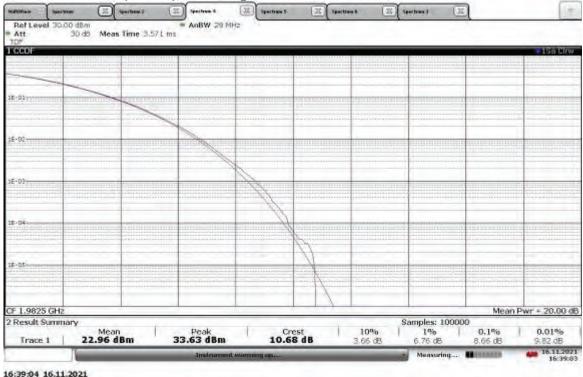


Non-Specific Radio Report Shell Rev. December 2017 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1940 MHz, PAPR = 10.43 dB

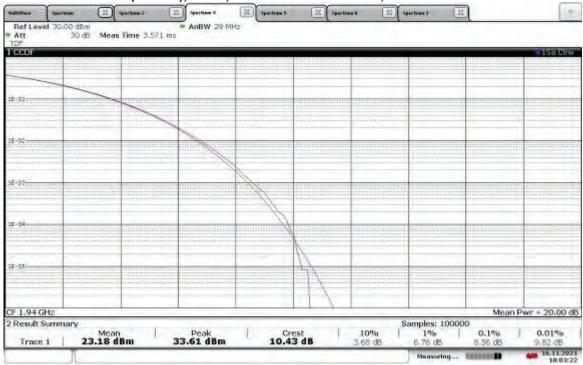


18:03:23 16.11.2021

TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 2), ANT1, Low Channel 1940 MHz, PAPR = 10.10 dB

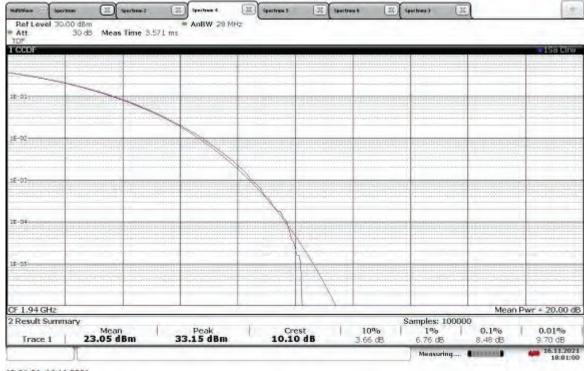


18:01:01 16:11:2021

TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, PAPR = 10.13 dB

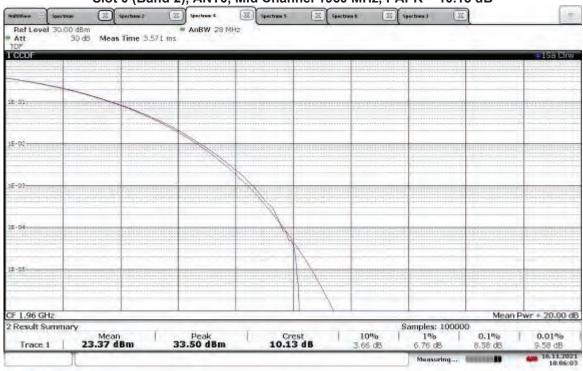


18:06:03 16.11.2021

TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, Output Power = 10.52 dB

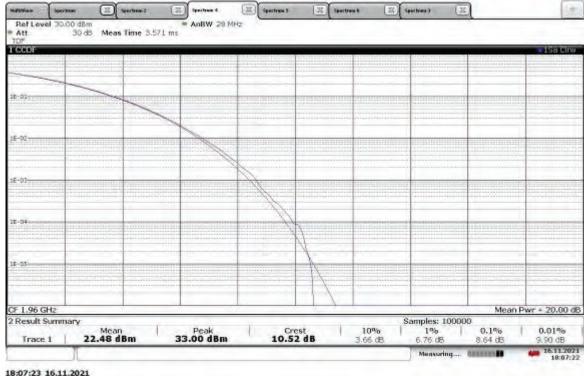


18:07:23 16.11.202

TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1980 MHz, PAPR = 10.02 dB

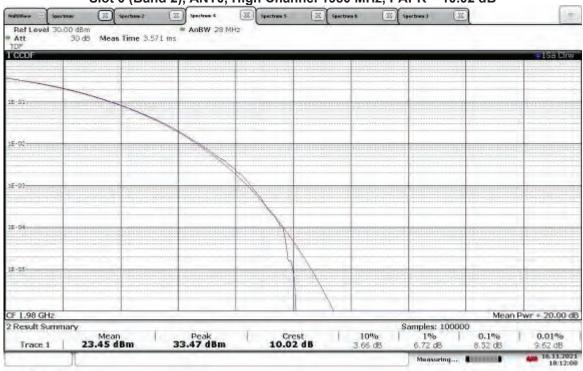


18:12:08 16.11.2021

TM1.1-QPSK_20 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1980 MHz, PAPR = 10.01 dB

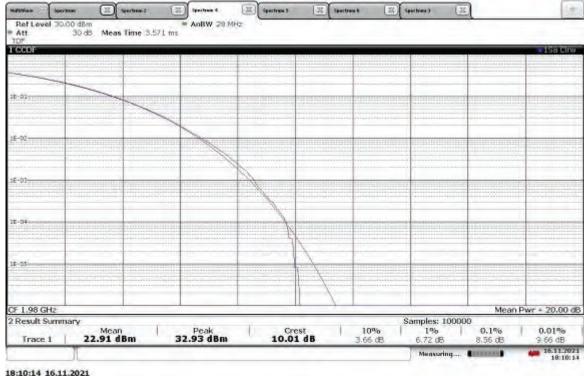


18:10:14 16.11.202

TM3.2 - 16QAM_5MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1932.5 MHz, PAPR = 9.71 dB

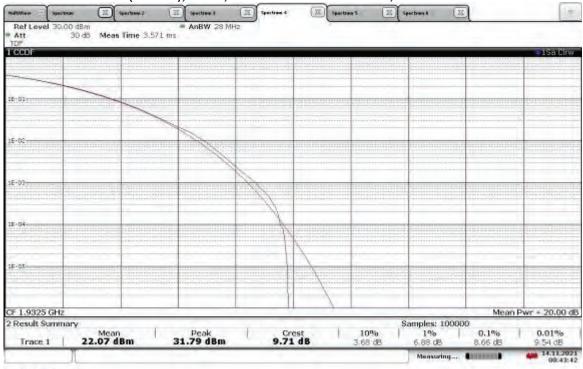


08:43:42 14.11.2021

TM3.2 - 16QAM_5MHz Bandwidth
Slot 0 (Band 2), ANT1, Low Channel 1932.5 MHz, PAPR = 9.59 dB

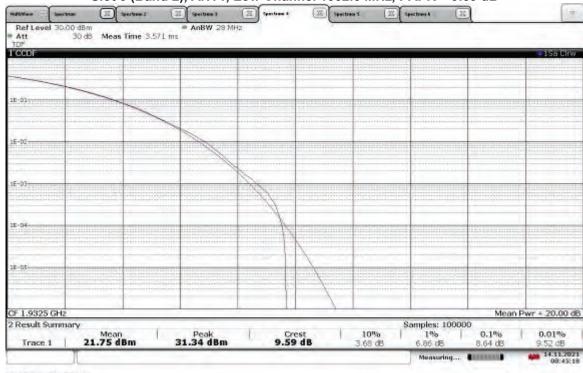


08:45:19 14.11.2021

TM3.2 - 16QAM_5MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, PAPR = 9.57 dB

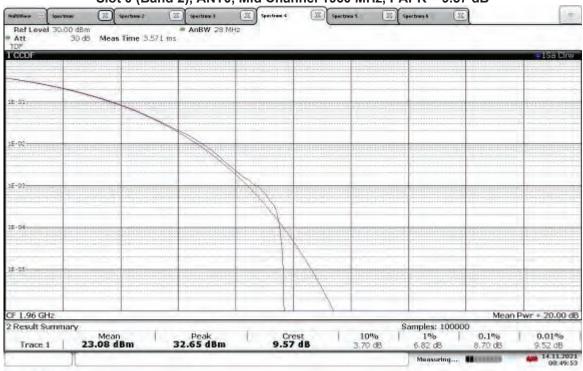


TM3.2 - 16QAM_5MHz Bandwidth

08:49:53 14.11.2021

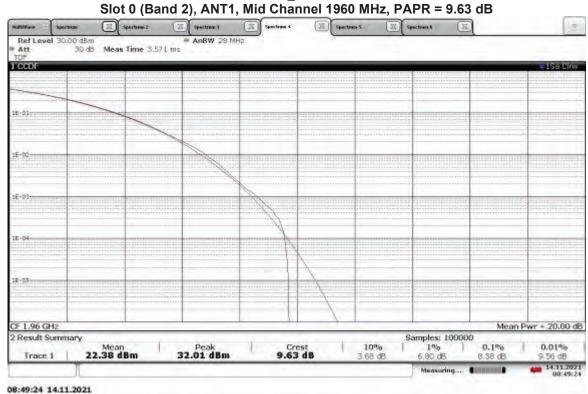


Non-Specific Radio Report Shell Rev. December 2017 Page 83 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM3.2 - 16QAM_5MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1987.5 MHz, PAPR = 9.37 dB

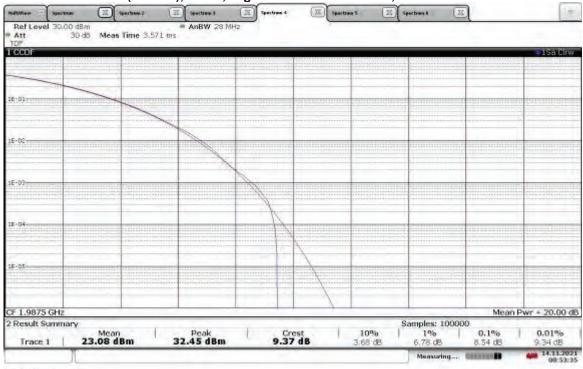

08:53:35 14.11.2021


TM3.2 - 16QAM_5MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1987.5 MHz, PAPR = 9.52 dB

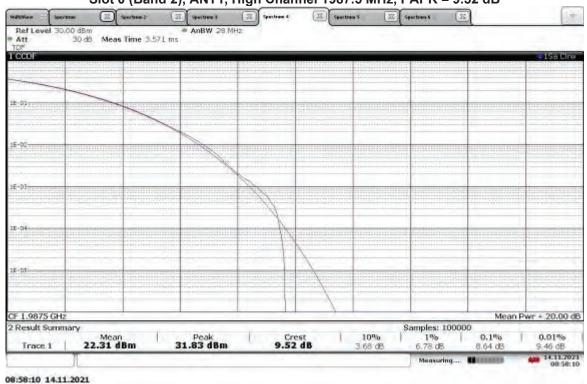


Non-Specific Radio Report Shell Rev. December 2017

Page 84 of 313


> TM3.2 - 16QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT0, Low Channel 1935 MHz, PAPR = 9.72 dB

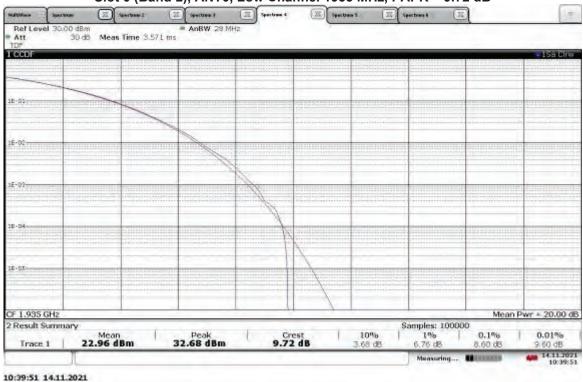


TM3.2 - 16QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT1, Low Channel 1935 MHz, PAPR = 9.62 dB

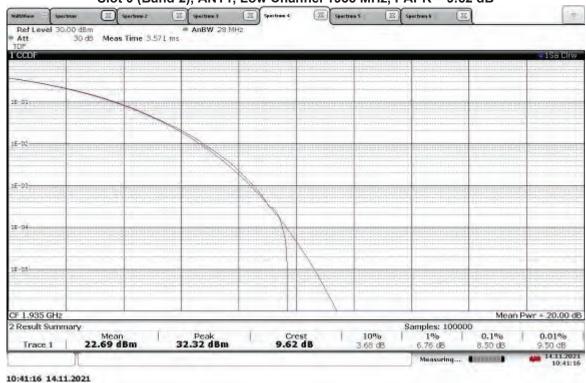

TM3.2 - 16QAM_10 MHz Bandwidth Slot 0 (Band 2), ANTO, Mid Channel 1960 MHz, PAPR = 9.85 dB

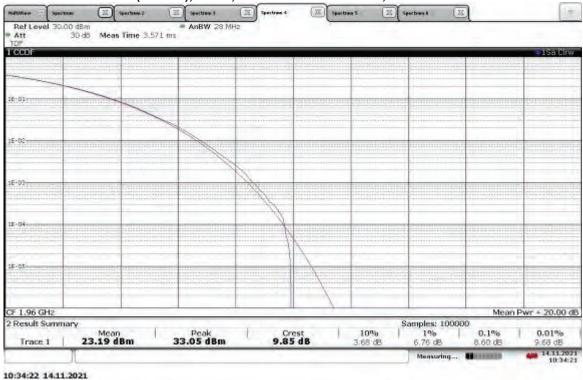


TM3.2 - 16QAM_10 MHz Bandwidth Slot 0 (Band 2), ANT1, Mid Channel 1935 MHz, PAPR = 10.06 dB

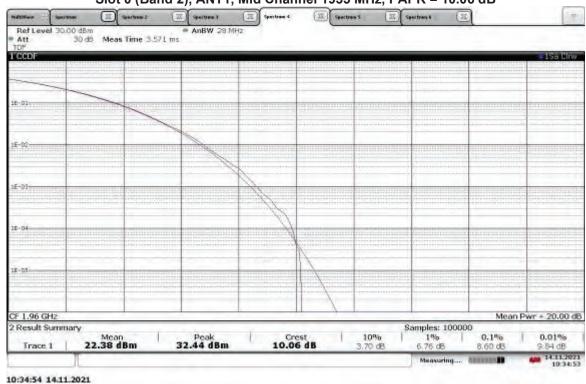


Non-Specific Radio Report Shell Rev. December 2017 Page 86 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100

TM3.2 - 16QAM_10 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1985 MHz, PAPR = 9.78 dB

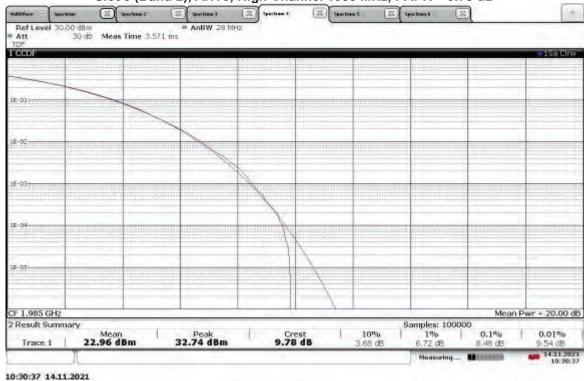


TM3.2 - 16QAM_10 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1985 MHz, PAPR = 9.84 dB

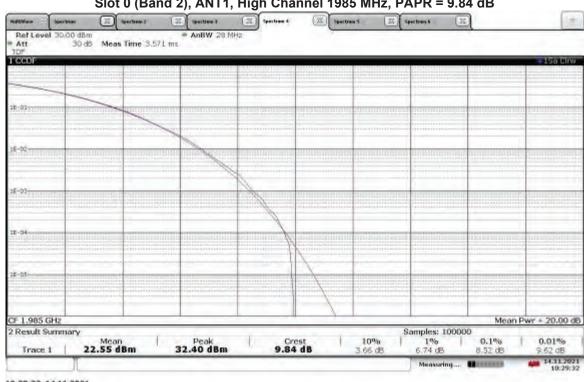


10:29:33 14.11.2021

TM3.2 - 16QAM_15 MHz Bandwidth
Slot 0 (Band 2), ANT0, Low Channel 1937.5 MHz, PAPR = 10.40 dB

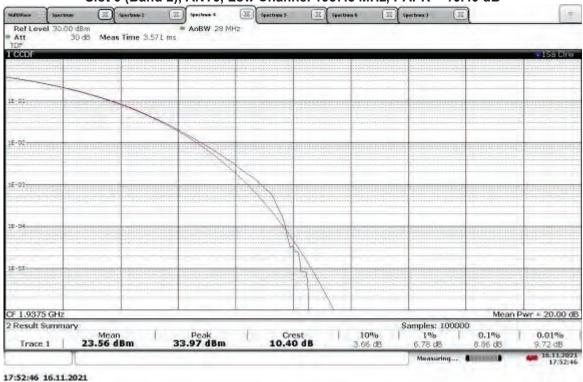


TM3.2 - 16QAM_15 MHz Bandwidth
Slot 0 (Band 2), ANT1, Low Channel 1937.5 MHz, PAPR = 10.43 dB

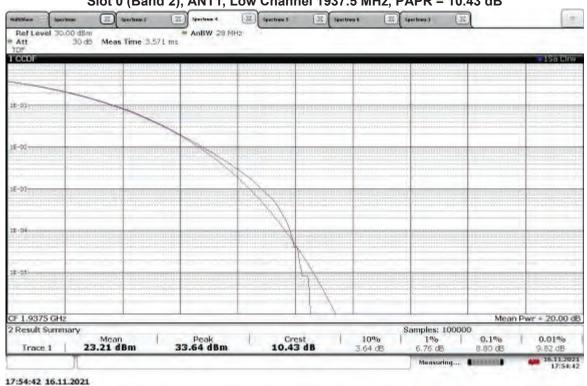


17:54:42 16:11:2021

TM3.2 - 16QAM_15 MHz Bandwidth
Slot 0 (Band 2), ANT0, Mid Channel 1960 MHz, PAPR = 10.91 dB

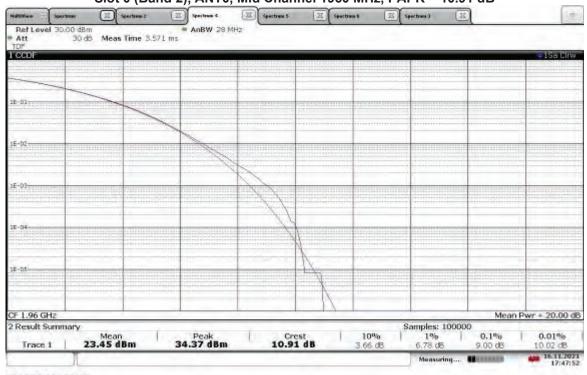

17:47:52 16.11.2021

TM3.2 - 16QAM_15 MHz Bandwidth
Slot 0 (Band 2), ANT1, Mid Channel 1960 MHz, PAPR = 10.56 dB

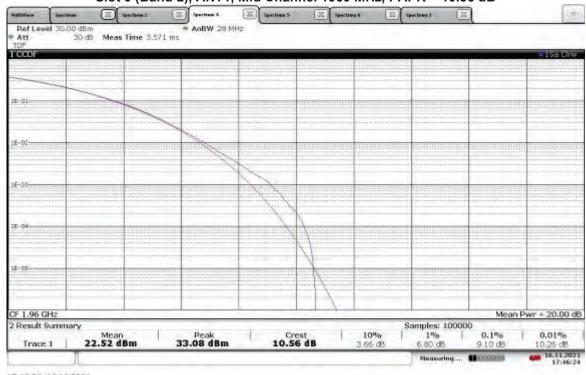


17:46:24 16.11.2021

TM3.2 - 16QAM_15 MHz Bandwidth
Slot 0 (Band 2), ANT0, High Channel 1982.5 MHz, PAPR = 10.33 dB



TM3.2 - 16QAM_15 MHz Bandwidth
Slot 0 (Band 2), ANT1, High Channel 1982.5 MHz, PAPR = 10.23 dB

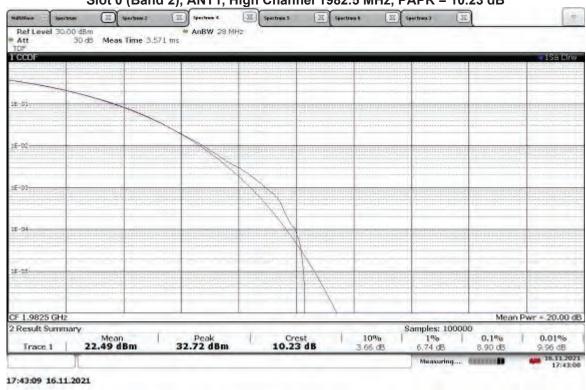

Non-Specific Radio Report Shell Rev. December 2017 Page 90 of 313 Client: CommScope Technologies LLC / Model: Legacy RPM-A5A11-B02 W/ 5G NR waveform With OneCell® RP5100