



Test report No.: 2330006R-RFUSV01S-A

TEST REPORT

Product Name	5G Enterprise Router
Trademark	BEC, Billion
Model and /or type reference	AirConnect® 8112, BEC AirConnect® 8112, BEC 8112
FCC ID	QI3BEC-8112
Applicant's name / address	Billion Electric Co., Ltd. 8F., No.192, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C.)
Manufacturer's name	Billion Electric Co., Ltd.
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Verdict Summary	IN COMPLIANCE
Documented By (Supervisor / Jinn Chen)	<i>Jinn Chen</i>
Tested By (Senior Engineer / Ivan Chuang)	<i>Ivan Chuang</i>
Approved By (Senior Engineer / Jack Hsu)	<i>Jack Hsu</i>
Date of Receipt	2023/03/01
Date of Issue	2023/06/21
Report Version	V1.0

INDEX

Page

1. General Information	5
1.1. EUT Description	5
1.2. Tested System Details	7
1.3. Configuration of Tested System	7
1.4. EUT Exercise Software	7
1.5. Test Facility	8
1.6. List of Test Item and Equipment	9
1.7. Uncertainty	10
2. Conducted Emission.....	11
2.1. Test Setup	11
2.2. Limits	11
2.3. Test Procedure	11
2.4. Test Result of Conducted Emission.....	12
3. Maximum Power Output.....	13
3.1. Test Setup	13
3.2. Limits	13
3.3. Test Procedure	13
3.4. Test Result of Maximum Power Output.....	14
4. Radiated Emission.....	18
4.1. Test Setup	18
4.2. Limits	19
4.3. Test Procedure	20
4.4. Test Result of Radiated Emission.....	22
5. RF Antenna Conducted Test.....	31
5.1. Test Setup	31
5.2. Limits	31
5.3. Test Procedure	31
5.4. Test Result of RF antenna conducted test	32
6. Band Edge.....	36
6.1. Test Setup	36
6.2. Limits	37
6.3. Test Procedure	37
6.4. Test Result of Band Edge	39
7. 6dB Bandwidth.....	59
7.1. Test Setup	59
7.2. Limits	59
7.3. Test Procedure	59
7.4. Test Result of 6dB Bandwidth	60
8. Power Density.....	64
8.1. Test Setup	64

8.2.	Limits	64
8.3.	Test Procedure	64
8.4.	Test Result of Power Density	65
9.	Duty Cycle.....	69
9.1.	Test Setup	69
9.2.	Test Procedure	69
9.3.	Test Result of Duty Cycle	70

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 2330006R-Product Photos

Revision History

Report No.	Version	Description	Issued Date
2330006R-RFUSV01S-A	V1.0	Initial issue of report.	2023/06/21

1. General Information

1.1. EUT Description

Product Name	5G Enterprise Router
Trademark	BEC, Billion
Model and /or type reference	AirConnect® 8112, BEC AirConnect® 8112, BEC 8112
EUT Rated Voltage	AC 100-240V / 50-60Hz
EUT Test Voltage	AC 120V / 60Hz
Frequency Range	802.11b/g/n-20: 2412-2462 MHz, 802.11n-40: 2422-2452 MHz
Number of Channels	802.11b/g/n-20 MHz: 11CH, 802.11n-40 MHz: 7CH
Data Speed	802.11b: 1-11 Mbps, 802.11g: 6-54 Mbps, 802.11n: up to 450 Mbps
Channel separation	802.11b/g/n: 5 MHz
Type of Modulation	DSSS, DBPSK, DQPSK, CCK OFDM, BPSK, QPSK, 16QAM, 64QAM, 256QAM
Channel Control	Auto
Adapter	MFR: BILLION, M/N: PA1024-150HUB200 Input: AC 100-240V~0.6A 50-60Hz Output: 15V $\overline{\text{---}}$ 2A 30W Cable out: Non-shielded, 1.5 m

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	GRAND-TEK TECHNOLOGY CO.,LTD	OA-5G-EB-01-BL (ANT5)	PCB	2.7 dBi for 2400 MHz
2	GRAND-TEK TECHNOLOGY CO.,LTD	OA-5G-EB-01-BL (ANT6)	PCB	2.4 dBi for 2400 MHz
3	GRAND-TEK TECHNOLOGY CO.,LTD	OA-5G-EB-01-BL (ANT8)	PCB	2.4 dBi for 2400 MHz

Note: The antenna of EUT is conforming to FCC 15.203.

802.11b/g/n-20 MHz Center Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422	04	2427
05	2432	06	2437	07	2442	08	2447
09	2452	10	2457	11	2462	--	--

802.11n-40 MHz Center Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432	06	2437
07	2442	08	2447	09	2452	--	--

Note:

1. The EUT is a 5G Enterprise Router with a built-in WLAN transceiver, this report for 2.4GHz WLAN.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test. The other channels are for reference only.
3. Lowest data rates are tested in each mode. Only worst case is shown in the report. (802.11b is 1 Mbps, 802.11g is 6 Mbps, 802.11n-20MHz/40MHz is MCS 16)
4. The spectrum plot against conducted item only shows the worst case.
5. It's declared by manufacture about all models are electrically identical, different model names for marketing purpose.
6. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11b/g/n transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.

Test Mode	Mode 1	Transmit (802.11b)
		Transmit (802.11g)
		Transmit (802.11n-20 MHz)
		Transmit (802.11n-40 MHz)
	Mode 2	Co-location


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Power Adapter	BILLION	PA1024-150HUB200	N/A	N/A
2 FLASH	Kingston	DT100G3/8GB	N/A	N/A
3 LAN Hub	TP-LINK	TL-SG108	2161597000480	Non-shielded, 1.5m
4 Notebook PC	Lenovo	TP00067C	PF-0EW0C3	N/A

Cable Type	Cable Description
A Power Cable	Non-shielded, 1.5m
B LAN Cable	Non-shielded, 3m, 4 PCS.
C LAN Cable	Non-shielded, 2m

1.3. Configuration of Tested System

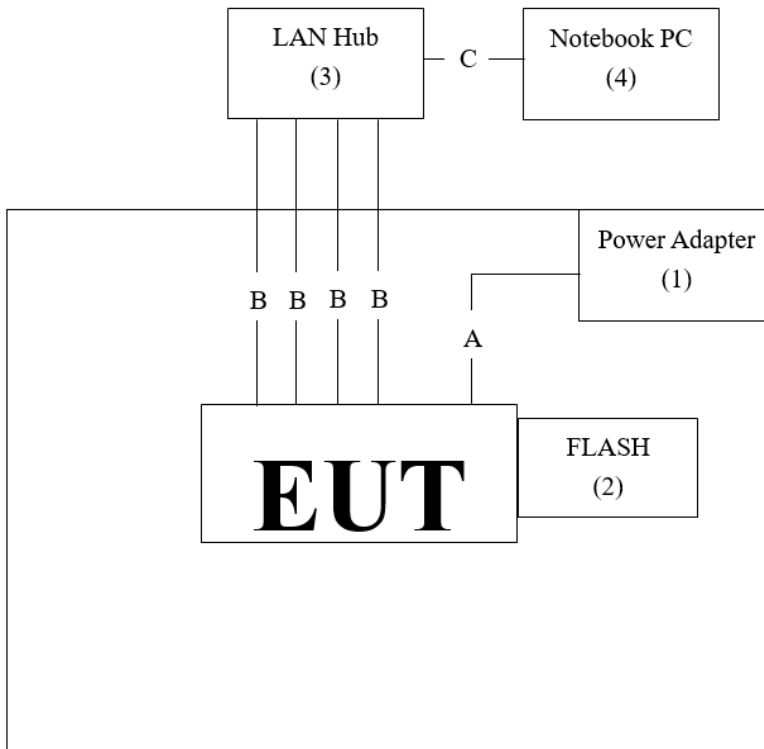

1.4. EUT Exercise Software

1.	Setup the EUT as shown in Section 1.3.
2.	Execute software “QATool Version 0.0.1.71” on the Notebook PC.
3.	Configure the test mode, the test channel, and the data rate.
4.	Press “OK” to start the continuous transmit.
5.	Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	21.5 °C
	Humidity (%RH)	10~90 %	47.6 %
Radiated Emission	Temperature (°C)	10~40 °C	23.5 °C
	Humidity (%RH)	10~90 %	65.3 %
Conductive	Temperature (°C)	10~40 °C	22.0 °C
	Humidity (%RH)	10~90 %	55.0 %

USA	FCC Registration Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
	Linkou Laboratory
Address	No.5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan, R.O.C.
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

1.6. List of Test Item and Equipment

For Conduction Measurements / HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2022/06/23	2023/06/22
V	Two-Line V-Network	R&S	ENV216	101306	2022/05/23	2023/05/22
V	Two-Line V-Network	R&S	ENV216	101307	2022/07/04	2023/07/03
V	Coaxial Cable	SUHNER	RG400 BNC	RF001	2022/05/24	2023/05/23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: e3 210616 dekra V9.

For Conducted Measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103466	2022/12/22	2023/12/21
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000539	2022/05/27	2023/05/26
V	Power Sensor	KEYSIGHT	N1923A	MY59240002	2022/05/19	2023/05/18
V	Power Sensor	KEYSIGHT	N1923A	MY59240003	2022/05/19	2023/05/18

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: RF Conducted Test Tools R3 V3.0.0.14.

For Radiated Measurements / HY-CB03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	AMETEK	HLA6121	56736	2022/05/14	2023/05/13
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021/08/11	2023/08/10
V	Horn Antenna	Com-Power	AH-840	101100	2021/10/04	2023/10/03
V	Horn Antenna	RF SPIN	DRH18-E	210508A18ES	2022/06/08	2023/06/07
V	Horn Antenna	RF SPIN	DRH18-E	210507A18ES	2023/05/11	2024/05/10
V	Pre-Amplifier	SGH	0301	20211007-10	2023/01/10	2024/01/09
V	Pre-Amplifier	SGH	PRAMP118	20200701	2023/01/10	2024/01/09
V	Pre-Amplifier	EMCI	EMC05820SE	980310	2023/01/10	2024/01/09
V	Pre-Amplifier	EMCI	EMC184045SE	980369	2023/01/10	2024/01/09
	Coaxial Cable	EMCI	EMC102-KM-K M-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-K M-7000	170242		
V	Filter	MICRO TRONICS	BRM50702	G269	2023/01/05	2024/01/04
	Filter	MICRO TRONICS	BRM50716	G196	2023/01/05	2024/01/04
V	EMI Test Receiver	R&S	ESR3	102793	2022/12/05	2023/12/04
V	Spectrum Analyzer	R&S	FSV3044	101114	2023/02/16	2024/02/15
V	Coaxial Cable	SGH	SGH18	2021005-1	2023/01/10	2024/01/09
	Coaxial Cable	SGH	SGH18	202108-4		
	Coaxial Cable	SGH	SGH18	GD20110223-1		
	Coaxial Cable	SGH	HA800	GD20110222-3		

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: e3 210616 dekra V9.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Item	Uncertainty
Conducted Emission	± 3.50 dB
Maximum Power Output	Spectrum Analyzer: ± 2.14 dB Power Meter: ± 1.05 dB
Radiated Emission	9 kHz~30 MHz: ± 3.88 dB 30 MHz~1 GHz: ± 4.42 dB 1 GHz~18 GHz: ± 4.28 dB 18 GHz~40 GHz: ± 3.90 dB
RF Antenna Conducted Test	± 2.14 dB
Band Edge	9 kHz~30 MHz: ± 3.88 dB 30 MHz~1 GHz: ± 4.42 dB 1 GHz~18 GHz: ± 4.28 dB 18 GHz~40 GHz: ± 3.90 dB
6dB Bandwidth	± 1580.61 Hz
Power Density	± 2.14 dB
Duty Cycle	± 0.53 %

2. Conducted Emission

2.1. Test Setup

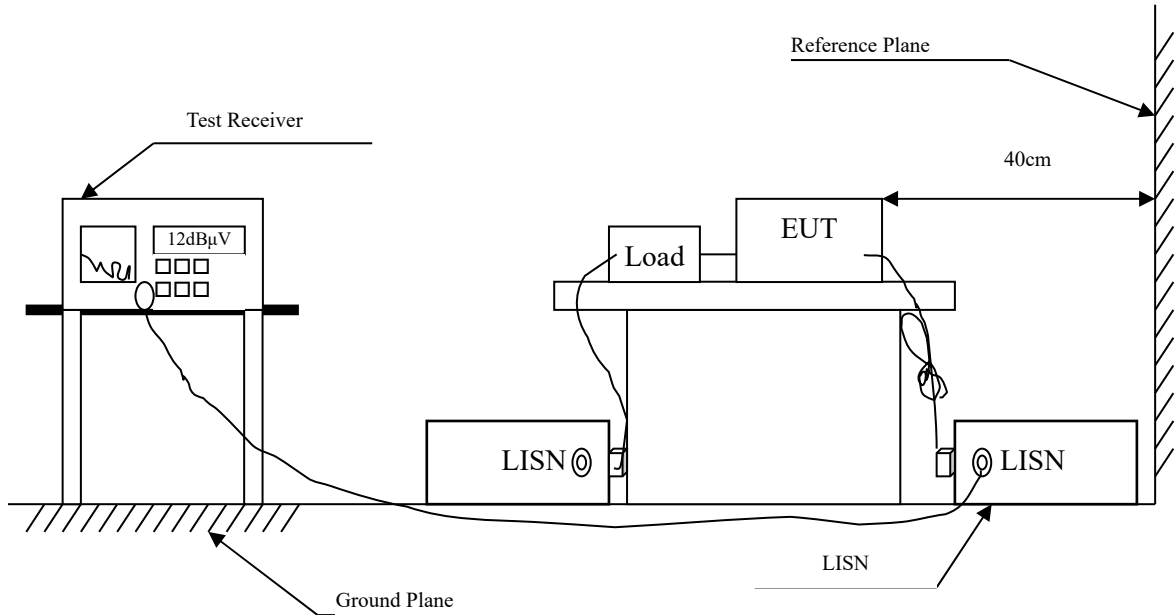

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50 - 5.0	56	46
5.0 - 30	60	50


2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm / 50 μ H coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm /50 μ H coupling impedance with 50 ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.


Conducted emissions were invested over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.

2.4. Test Result of Conducted Emission

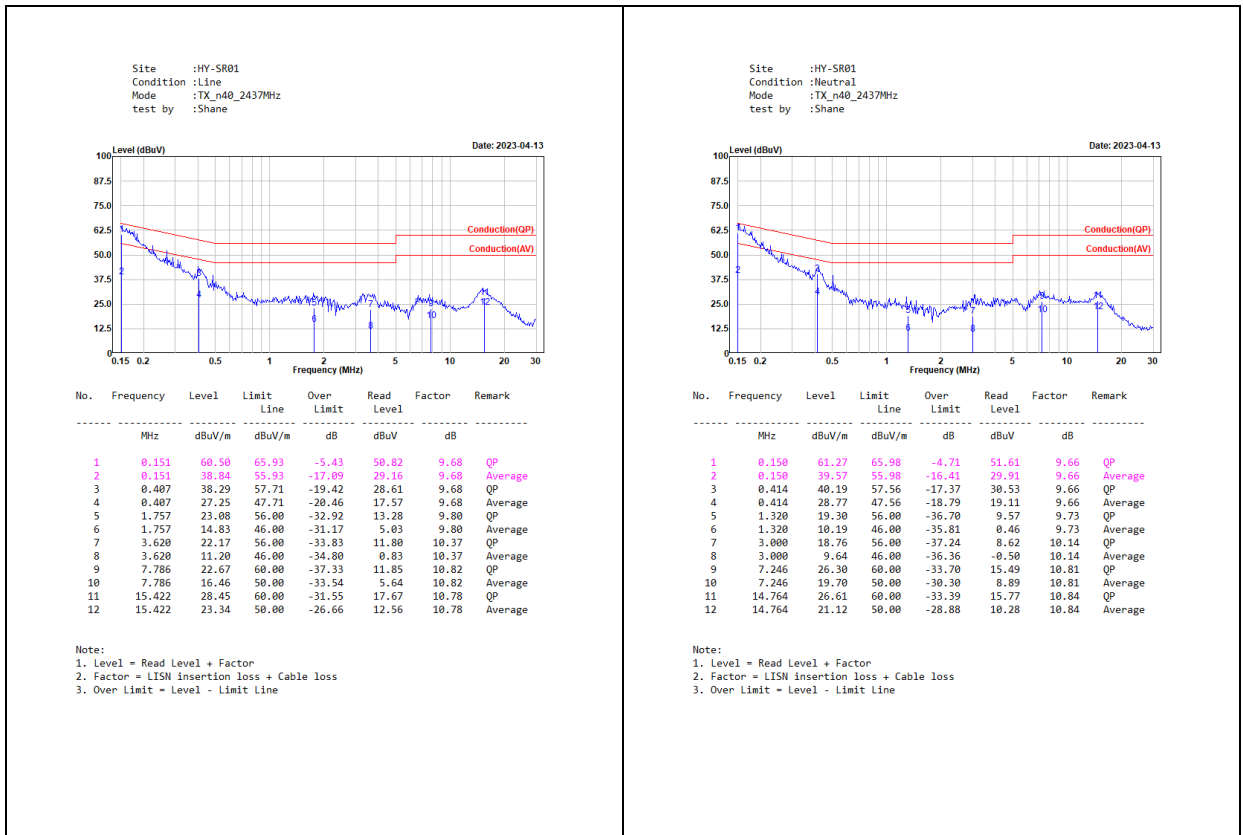

3. Maximum Power Output

3.1. Test Setup

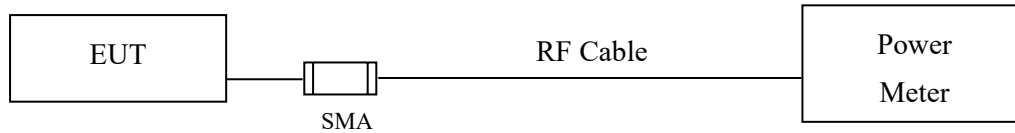

3.2. Limits

The maximum peak power shall be less 1 Watt.

3.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method. The maximum average conducted output power using C63.10:2013 Section 11.9.2.3 Measurement using a power meter (PM). (Measurement using a gated RF average-reading power meter). The maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.4. Test Result of Maximum Power Output

Product : 5G Enterprise Router
Test Item : Maximum Power Output Data
Test Mode : Transmit (802.11b)
Test Date : 2023/04/12

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Limit (dBm)	Result
01	2412	1	19.37	<30	Pass
06	2437	1	20.05	<30	Pass
11	2462	1	19.11	<30	Pass

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Peak Power (dBm)	Limit (dBm)	Result
01	2412	1	21.93	<30	Pass
06	2437	1	22.46	<30	Pass
11	2462	1	21.34	<30	Pass

Product : 5G Enterprise Router
Test Item : Maximum Power Output Data
Test Mode : Transmit (802.11g)
Test Date : 2023/04/12

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Limit (dBm)	Result
1	2412	6	19.82	<30	Pass
2	2417	6	23.23	<30	Pass
6	2437	6	21.33	<30	Pass
10	2457	6	20.84	<30	Pass
11	2462	6	21.67	<30	Pass

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Peak Power (dBm)	Limit (dBm)	Result
1	2412	6	28.32	<30	Pass
2	2417	6	29.94	<30	Pass
6	2437	6	29.58	<30	Pass
10	2457	6	28.79	<30	Pass
11	2462	6	29.31	<30	Pass

Product : 5G Enterprise Router
 Test Item : Maximum Power Output Data
 Test Mode : Transmit (802.11n-20 MHz)
 Test Date : 2023/04/12

Average Power

Channel No.	Frequency (MHz)	Data Rate	Chain A Power (dBm)	Chain B Power (dBm)	Chain C Power (dBm)	Chain A+B+C Power (dBm)	Limit (dBm)	Result
1	2412	HT16	17.07	16.44	16.44	21.43	<30	Pass
2	2417	HT16	16.77	16.22	16.26	21.20	<30	Pass
3	2422	HT16	16.69	16.11	16.15	21.10	<30	Pass
6	2437	HT16	16.67	16.11	16.06	21.06	<30	Pass
10	2457	HT16	16.33	16.01	15.98	20.88	<30	Pass
11	2462	HT16	15.65	15.98	16.32	20.76	<30	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW) + Chain B (mW) + Chain C (mW))

Peak Power

Channel No.	Frequency (MHz)	Data Rate	Chain A Power (dBm)	Chain B Power (dBm)	Chain C Power (dBm)	Chain A+B+C Power (dBm)	Limit (dBm)	Result
1	2412	HT16	24.66	24.55	24.98	29.51	<30	Pass
2	2417	HT16	24.96	24.74	24.95	29.66	<30	Pass
3	2422	HT16	24.55	25.42	25.22	29.85	<30	Pass
6	2437	HT16	25.05	25.31	25.03	29.90	<30	Pass
10	2457	HT16	24.56	25.04	24.59	29.51	<30	Pass
11	2462	HT16	24.66	24.78	24.89	29.55	<30	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW) + Chain B (mW) + Chain C (mW))

Product : 5G Enterprise Router
 Test Item : Maximum Power Output Data
 Test Mode : Transmit (802.11n-40 MHz)
 Test Date : 2023/04/12

Average Power

Channel No.	Frequency (MHz)	Data Rate	Chain A Power (dBm)	Chain B Power (dBm)	Chain C Power (dBm)	Chain A+B+C Power (dBm)	Limit (dBm)	Result
3	2422	HT16	16.55	15.94	16.08	20.97	<30	Pass
4	2427	HT16	16.56	15.99	16.01	20.97	<30	Pass
5	2432	HT16	16.61	16.05	16.02	21.01	<30	Pass
6	2437	HT16	16.56	15.99	15.98	20.96	<30	Pass
8	2447	HT16	16.41	16.12	16.25	21.03	<30	Pass
9	2452	HT16	16.30	16.15	16.19	20.99	<30	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW) + Chain B (mW) + Chain C (mW))

Peak Power


Channel No.	Frequency (MHz)	Data Rate	Chain A Power (dBm)	Chain B Power (dBm)	Chain C Power (dBm)	Chain A+B+C Power (dBm)	Limit (dBm)	Result
3	2422	HT16	25.11	24.69	24.70	29.61	<30	Pass
4	2427	HT16	24.72	24.68	24.81	29.51	<30	Pass
5	2432	HT16	24.95	24.88	25.12	29.76	<30	Pass
6	2437	HT16	24.92	24.66	24.79	29.56	<30	Pass
8	2447	HT16	24.88	25.08	24.83	29.70	<30	Pass
9	2452	HT16	25.30	24.90	24.66	29.73	<30	Pass

Note: Peak Power Output Value (dBm) = 10*LOG (Chain A (mW) + Chain B (mW) + Chain C (mW))


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30 MHz

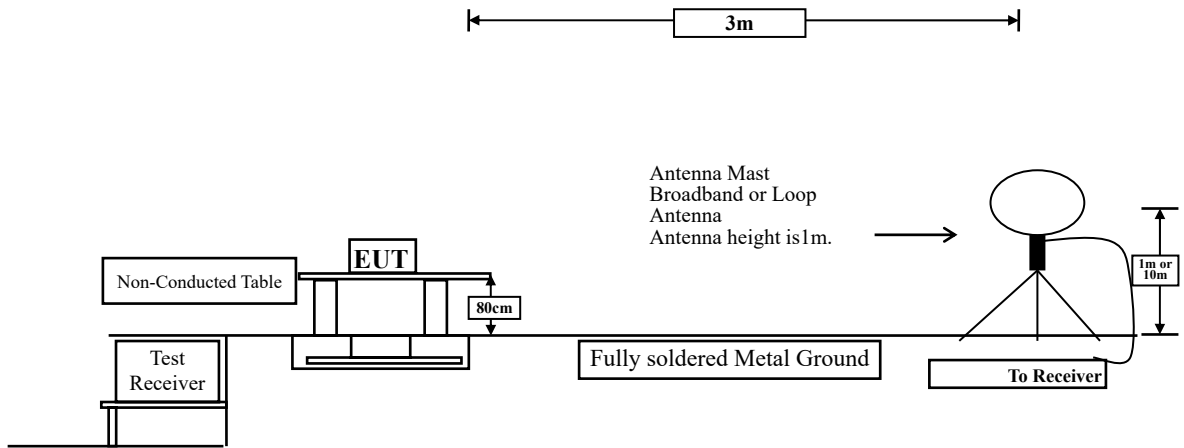

Radiated Emission Below 1 GHz

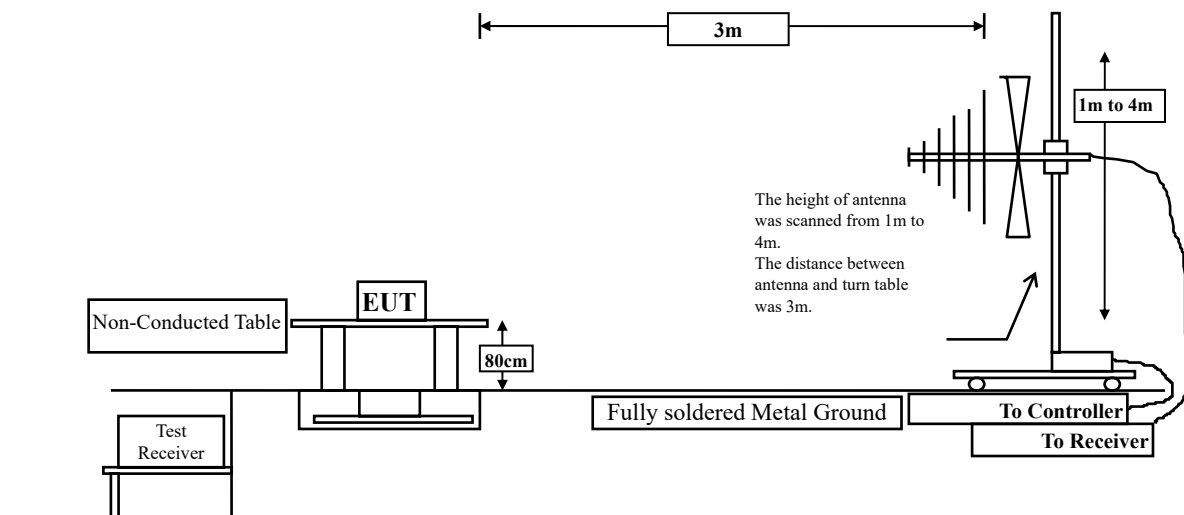

Radiated Emission Above 1 GHz

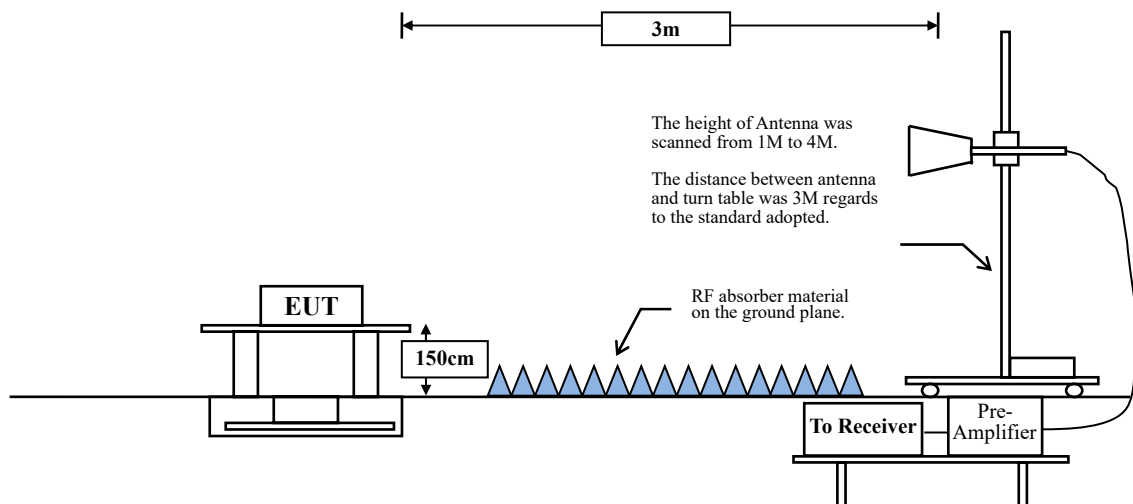

4.2. Limits

➤ **General Radiated Emission Limits**

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks:

1. RF Voltage (dB μ V) = 20 log RF Voltage (μ V)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

VBW \geq 3 x RBW.

Table 1 - RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle \geq 98 %

VBW \geq 1/T, when duty cycle < 98 %





(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)





2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11b	96.59	8.5000	118	200
802.11g	78.41	1.3800	725	1000
802.11n-20 MHz	65.70	0.6800	1471	2000
802.11n-40 MHz	48.95	0.3500	2857	3000

Note: Duty Cycle Refer to Section 9.





4.4. Test Result of Radiated Emission





<p>Site :HY-CB03 Condition :3m ,HORIZONTAL Mode :TX_b_2412MHz Test BY :Ashton</p> <p style="text-align: right;">Date: 2023-03-21</p> <p>The graph shows a single peak at 4824.000 MHz. The y-axis is Level (dBuV/m) from 0 to 100. The x-axis is Frequency (MHz) from 0 to 25000. Two horizontal red lines represent limits: FCC_15.247_PK at approximately 75 dBuV/m and FCC_15.247_AV at approximately 55 dBuV/m. The peak at 4824.000 MHz reaches a level of 47.23 dBuV/m.</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.000</td> <td>47.23</td> <td>74.00</td> <td>-26.77</td> <td>61.15</td> <td>-13.92</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	4824.000	47.23	74.00	-26.77	61.15	-13.92	Peak	<p>Site :HY-CB03 Condition :3m ,VERTICAL Mode :TX_b_2412MHz Test BY :Ashton</p> <p style="text-align: right;">Date: 2023-03-21</p> <p>The graph shows a single peak at 4824.000 MHz. The y-axis is Level (dBuV/m) from 0 to 100. The x-axis is Frequency (MHz) from 0 to 25000. Two horizontal red lines represent limits: FCC_15.247_PK at approximately 75 dBuV/m and FCC_15.247_AV at approximately 55 dBuV/m. The peak at 4824.000 MHz reaches a level of 50.05 dBuV/m.</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.000</td> <td>50.05</td> <td>74.00</td> <td>-23.95</td> <td>63.97</td> <td>-13.92</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	4824.000	50.05	74.00	-23.95	63.97	-13.92	Peak
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																										
1	4824.000	47.23	74.00	-26.77	61.15	-13.92	Peak																										
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																										
1	4824.000	50.05	74.00	-23.95	63.97	-13.92	Peak																										
<p>Site :HY-CB03 Condition :3m ,HORIZONTAL Mode :TX_b_2437MHz Test BY :Ashton</p> <p style="text-align: right;">Date: 2023-03-21</p> <p>The graph shows a single peak at 4874.000 MHz. The y-axis is Level (dBuV/m) from 0 to 100. The x-axis is Frequency (MHz) from 0 to 25000. Two horizontal red lines represent limits: FCC_15.247_PK at approximately 75 dBuV/m and FCC_15.247_AV at approximately 55 dBuV/m. The peak at 4874.000 MHz reaches a level of 44.71 dBuV/m.</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.000</td> <td>44.71</td> <td>74.00</td> <td>-29.29</td> <td>58.72</td> <td>-14.01</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	4874.000	44.71	74.00	-29.29	58.72	-14.01	Peak	<p>Site :HY-CB03 Condition :3m ,VERTICAL Mode :TX_b_2437MHz Test BY :Ashton</p> <p style="text-align: right;">Date: 2023-03-21</p> <p>The graph shows a single peak at 4874.000 MHz. The y-axis is Level (dBuV/m) from 0 to 100. The x-axis is Frequency (MHz) from 0 to 25000. Two horizontal red lines represent limits: FCC_15.247_PK at approximately 75 dBuV/m and FCC_15.247_AV at approximately 55 dBuV/m. The peak at 4874.000 MHz reaches a level of 47.88 dBuV/m.</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.000</td> <td>47.88</td> <td>74.00</td> <td>-26.12</td> <td>61.89</td> <td>-14.01</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	4874.000	47.88	74.00	-26.12	61.89	-14.01	Peak
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																										
1	4874.000	44.71	74.00	-29.29	58.72	-14.01	Peak																										
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																										
1	4874.000	47.88	74.00	-26.12	61.89	-14.01	Peak																										

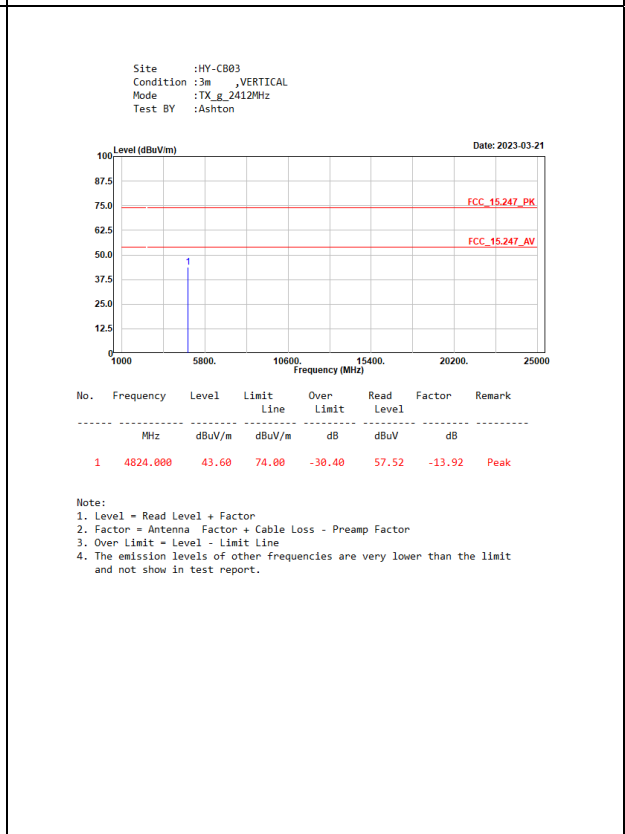
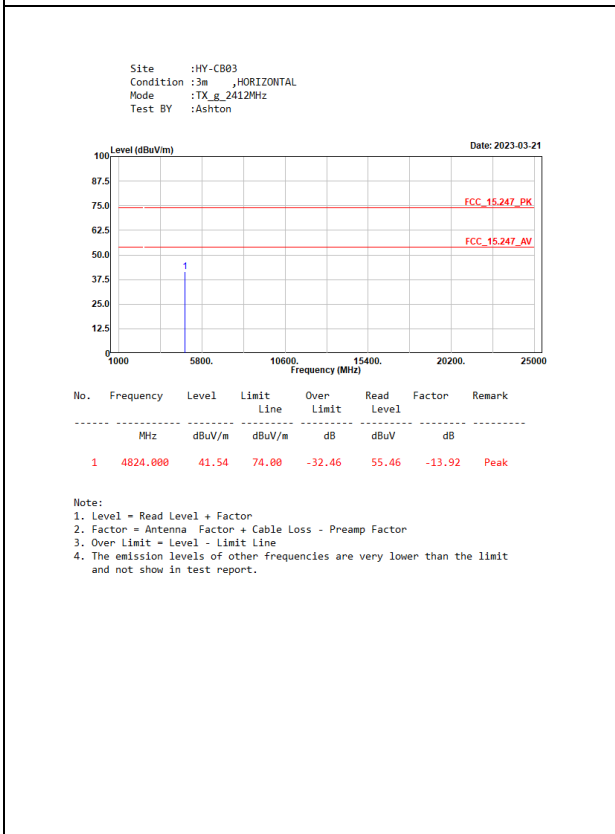
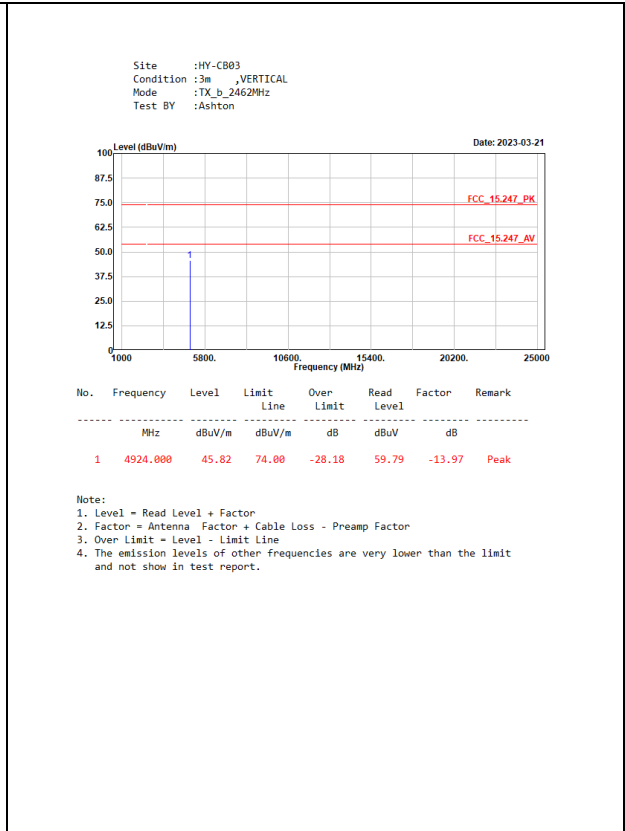
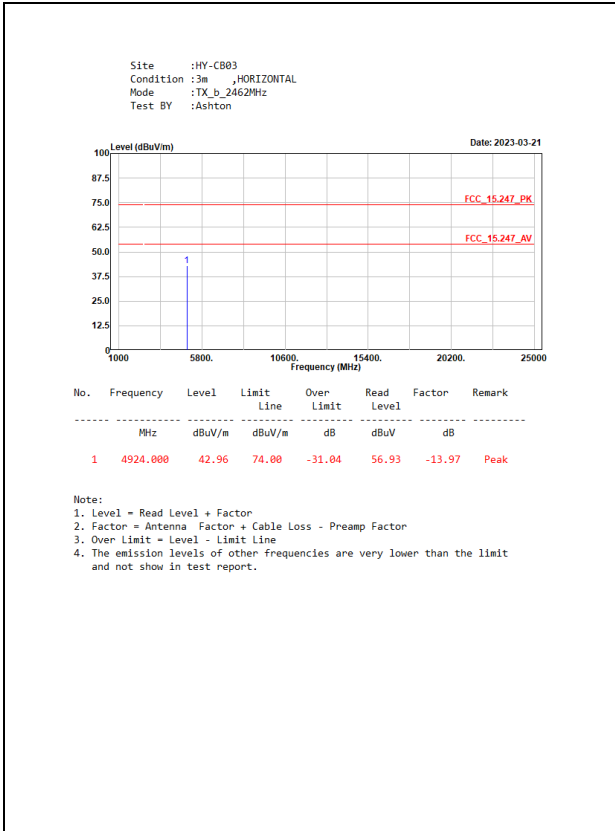


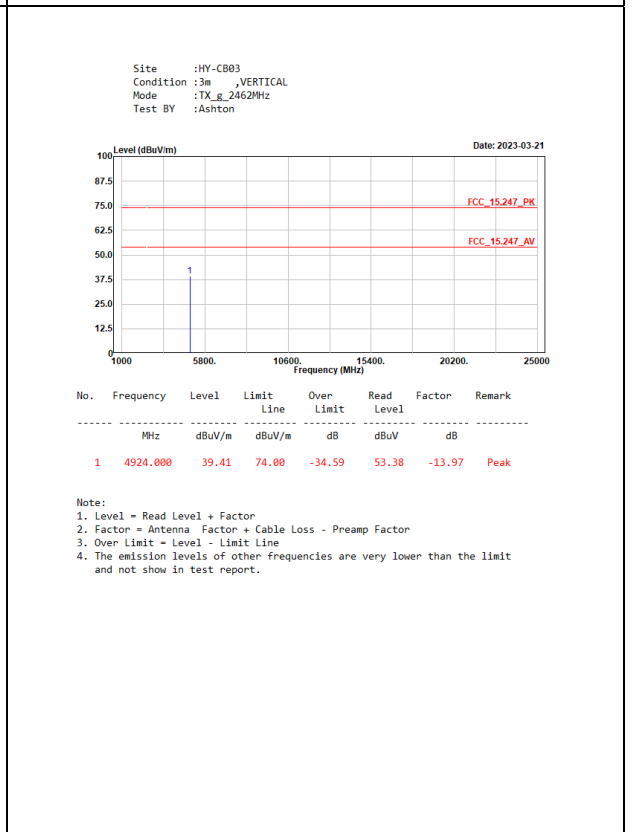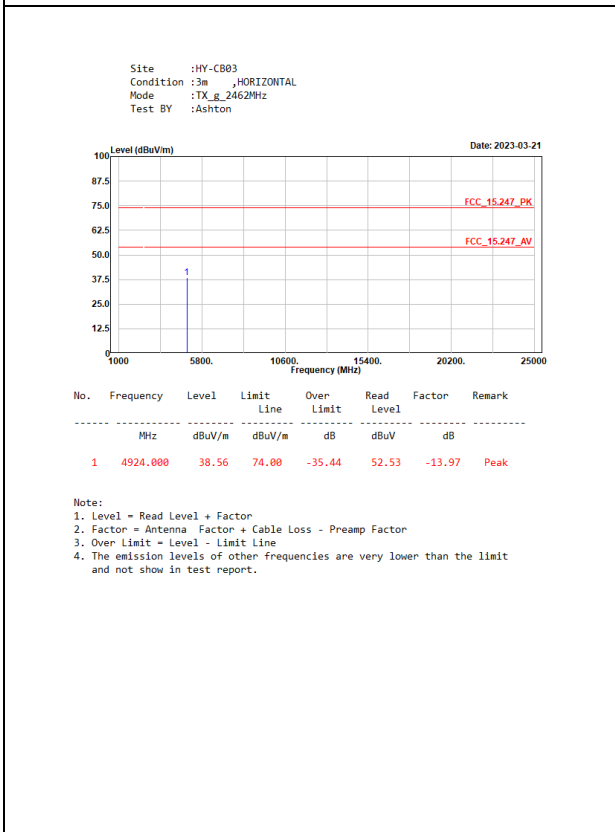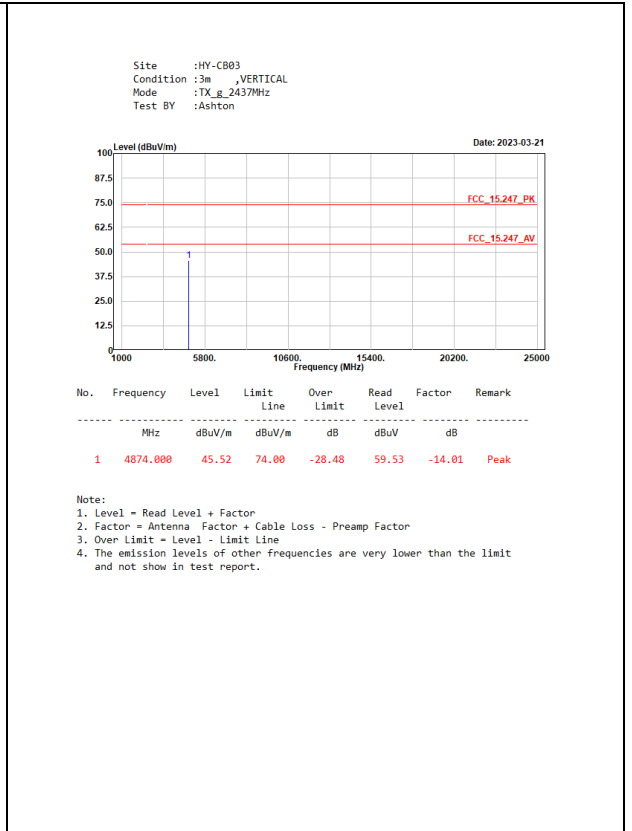
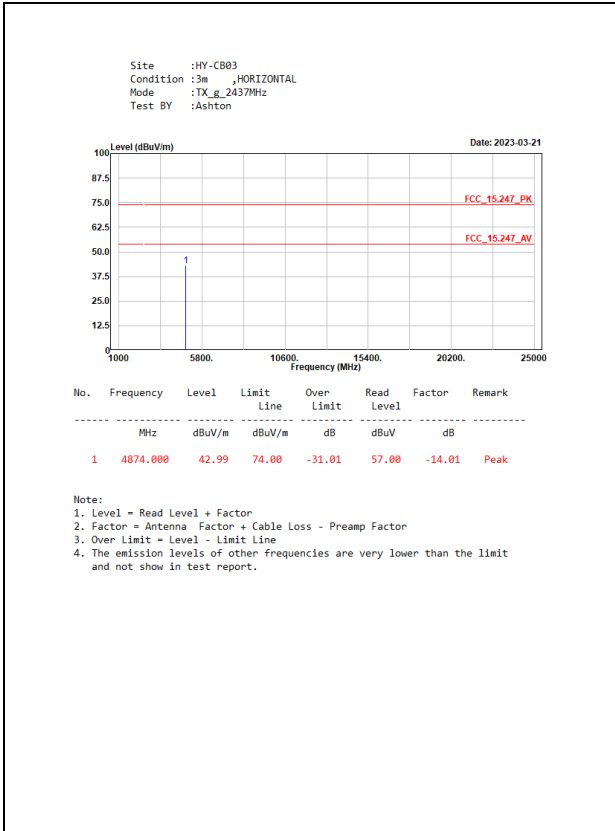


MIMO

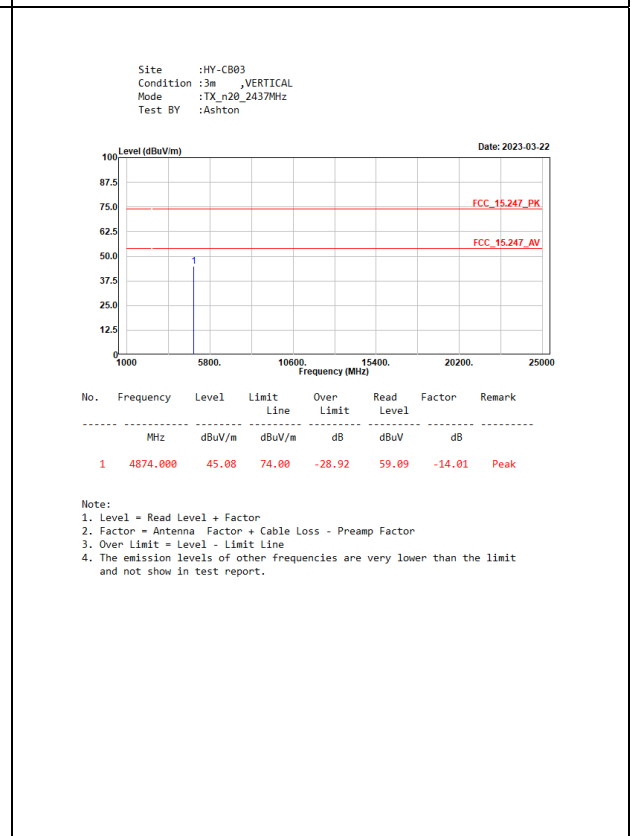
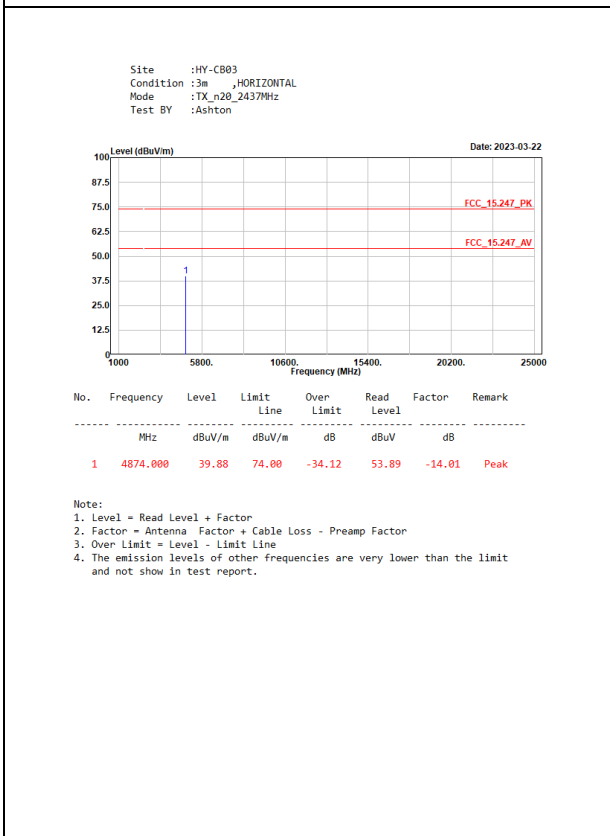
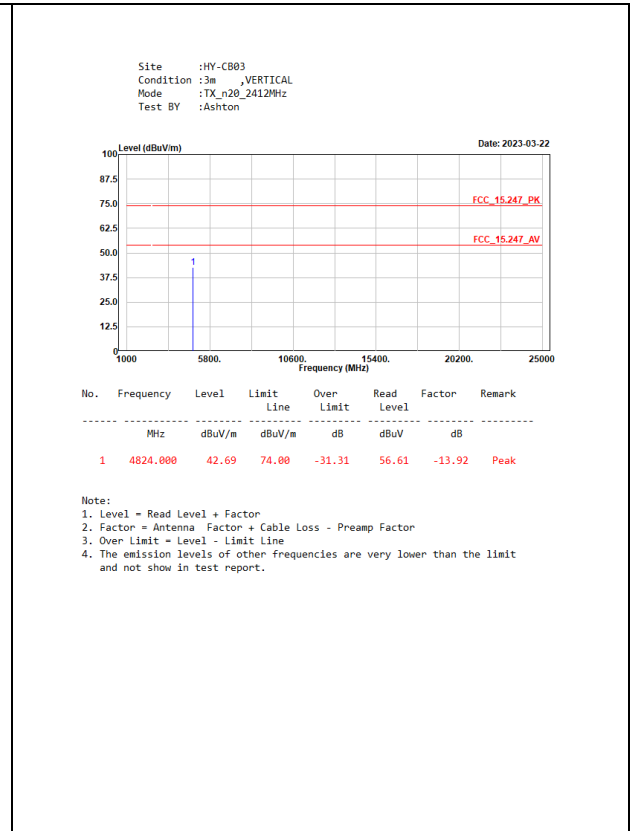
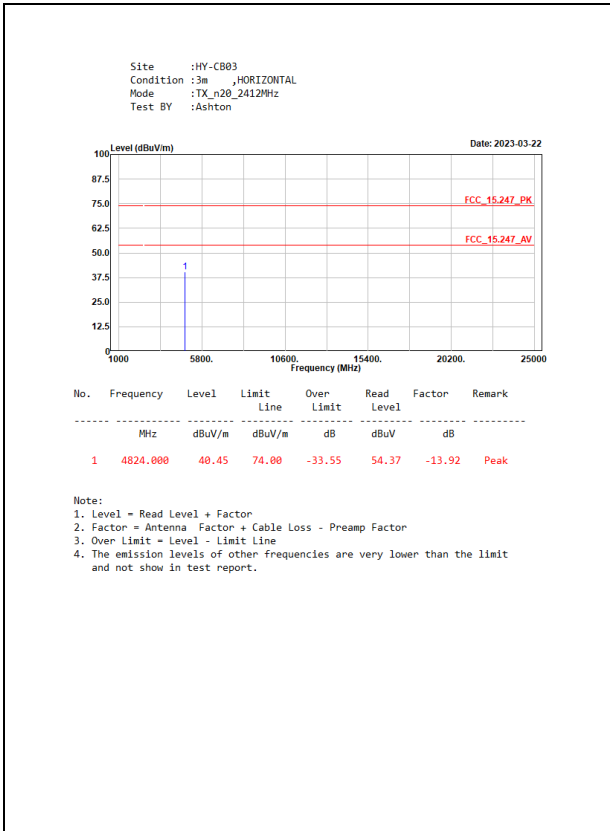


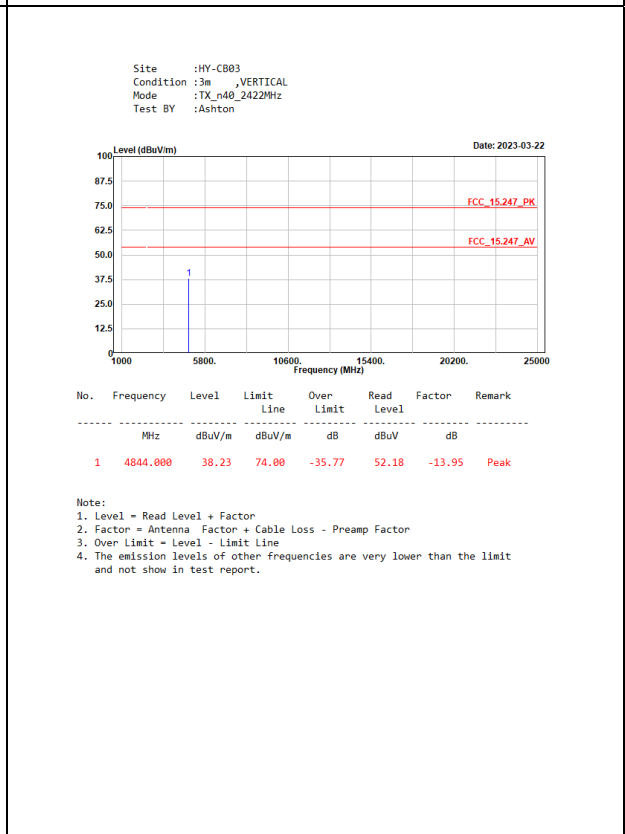
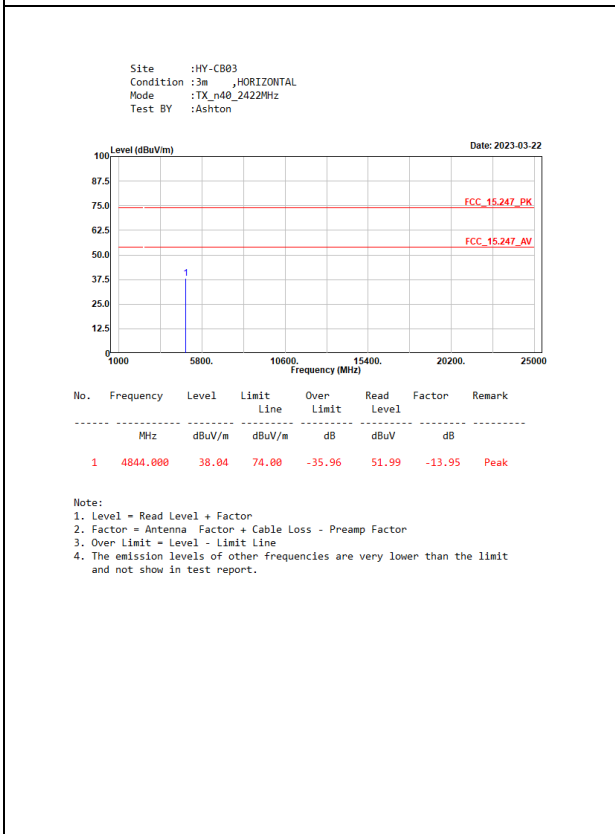
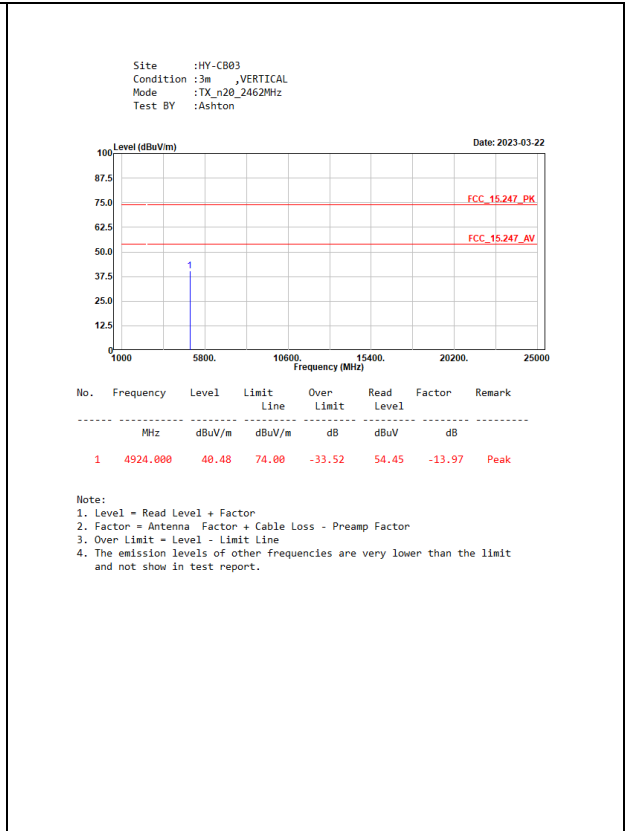
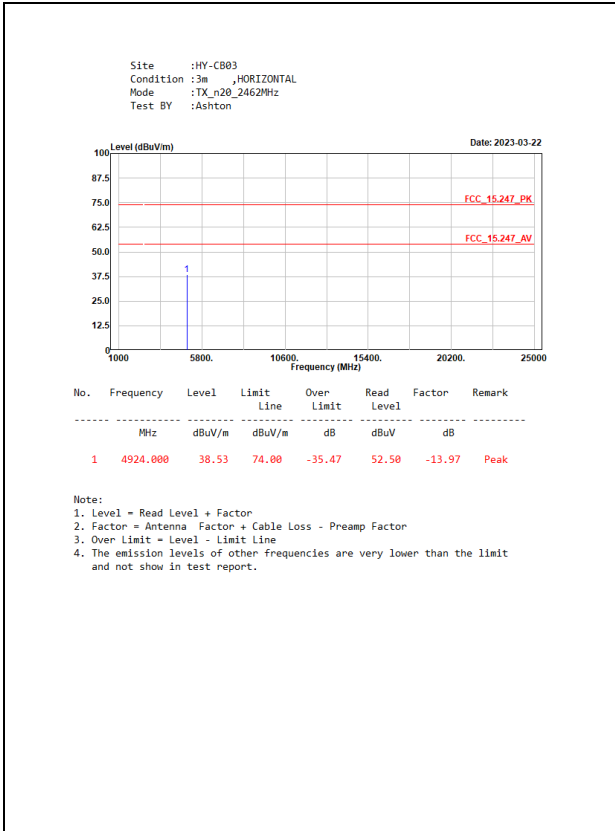


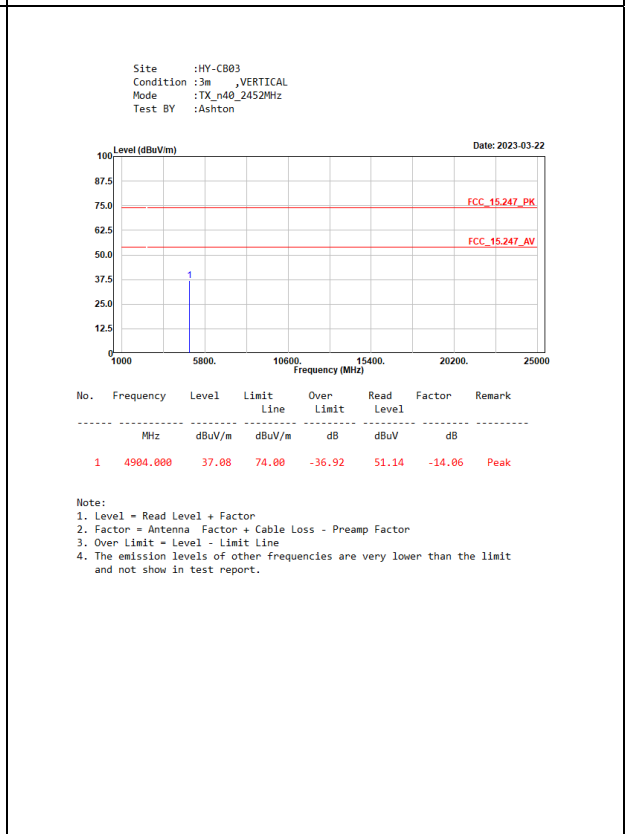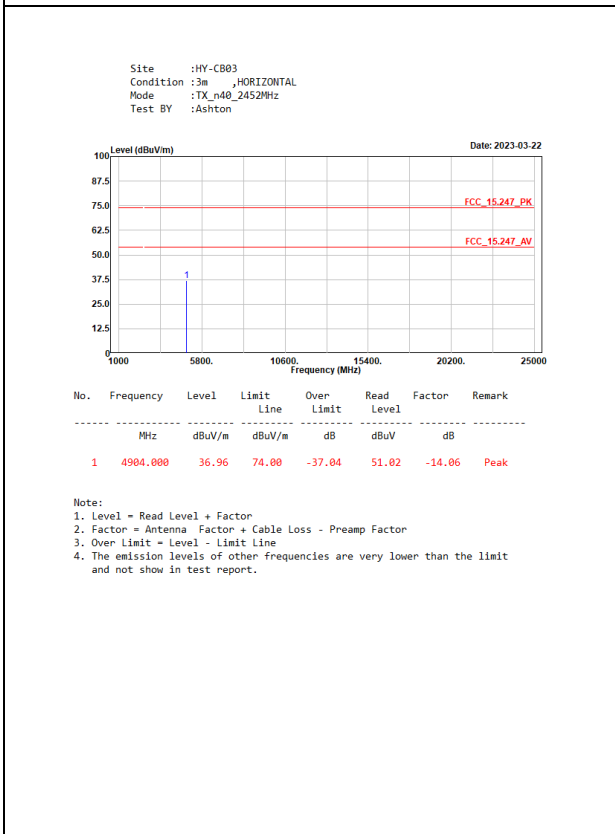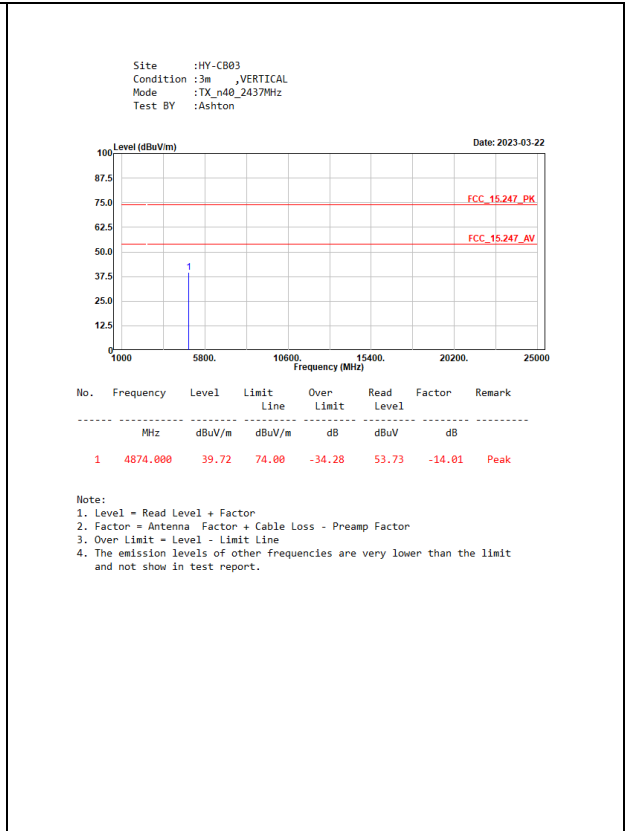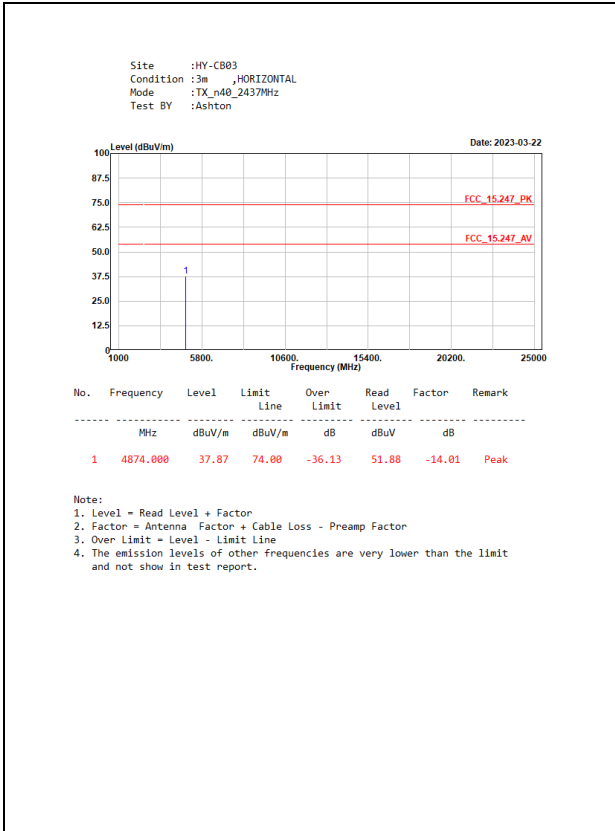

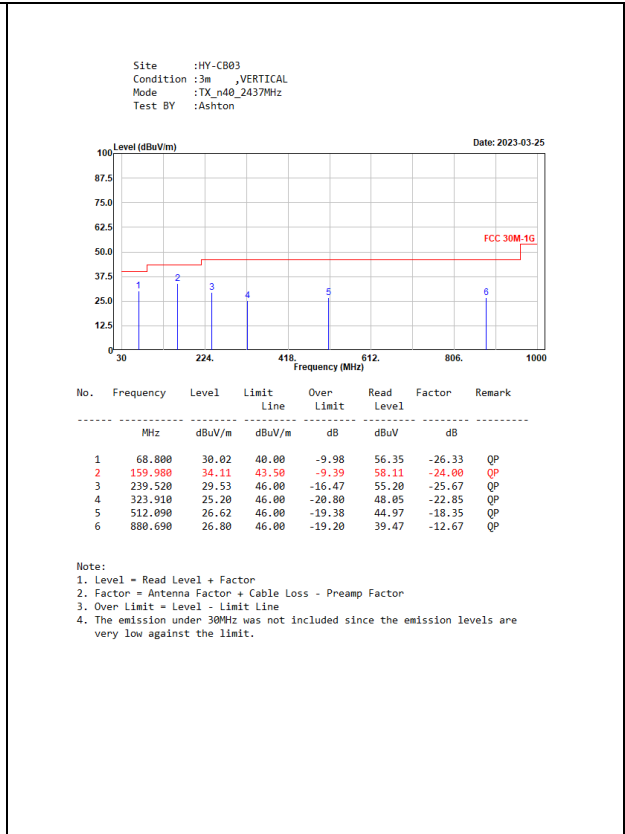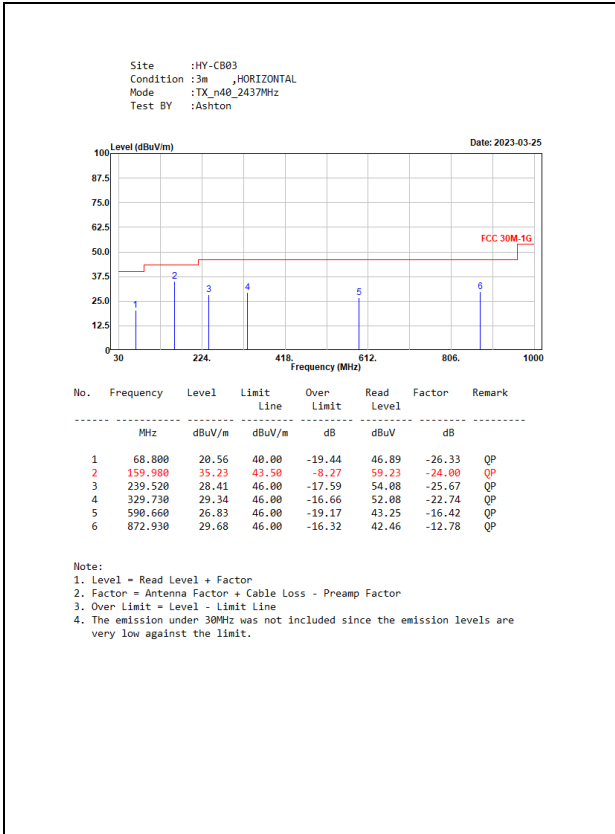

Co-location

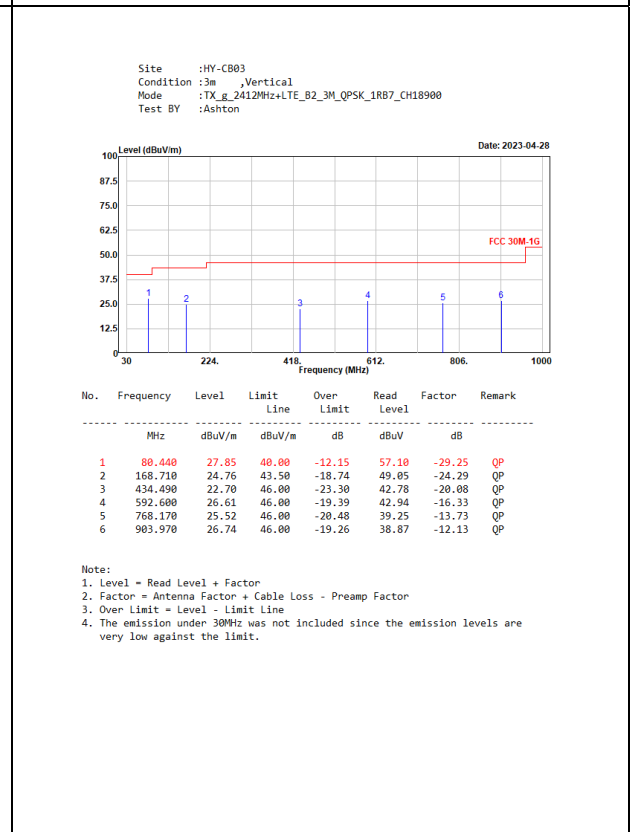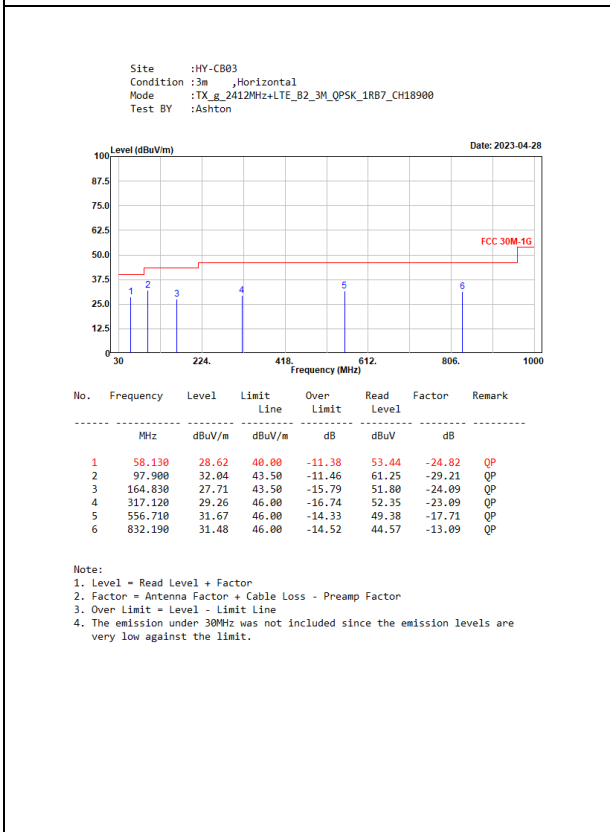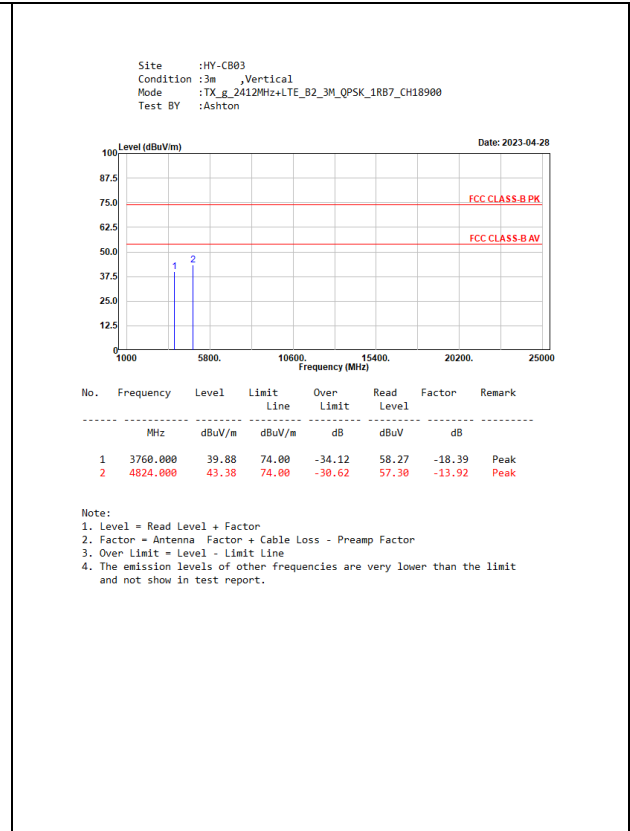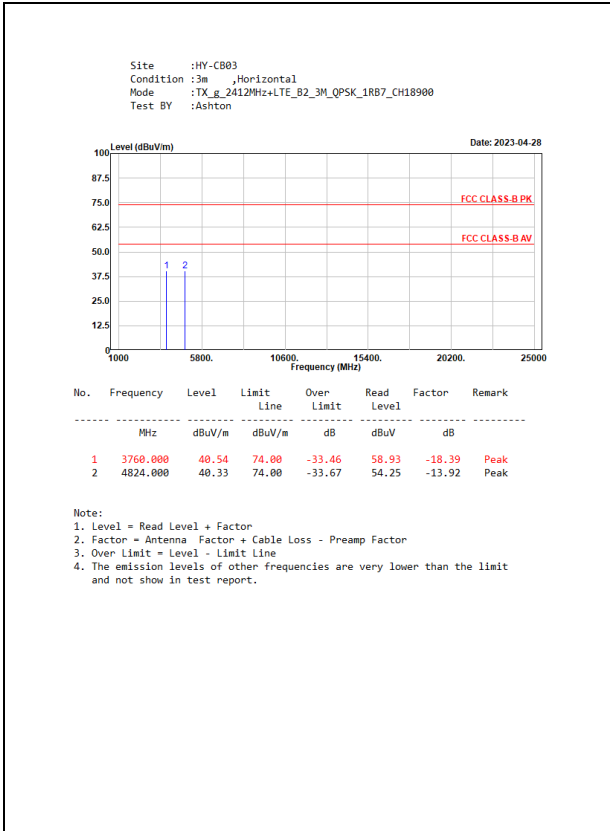


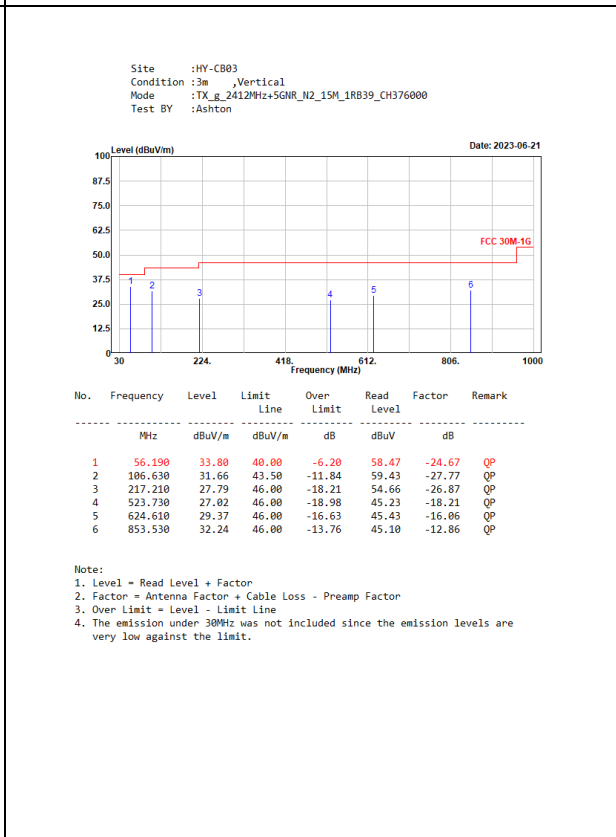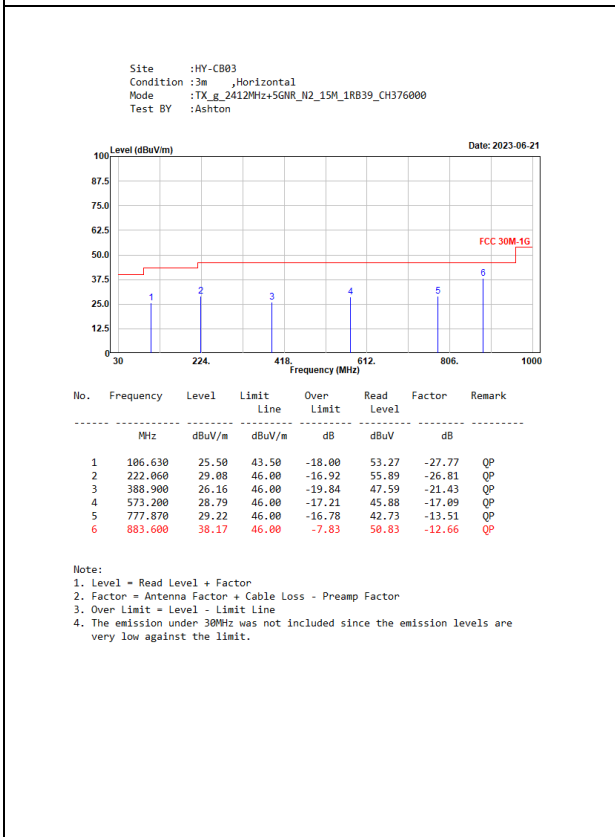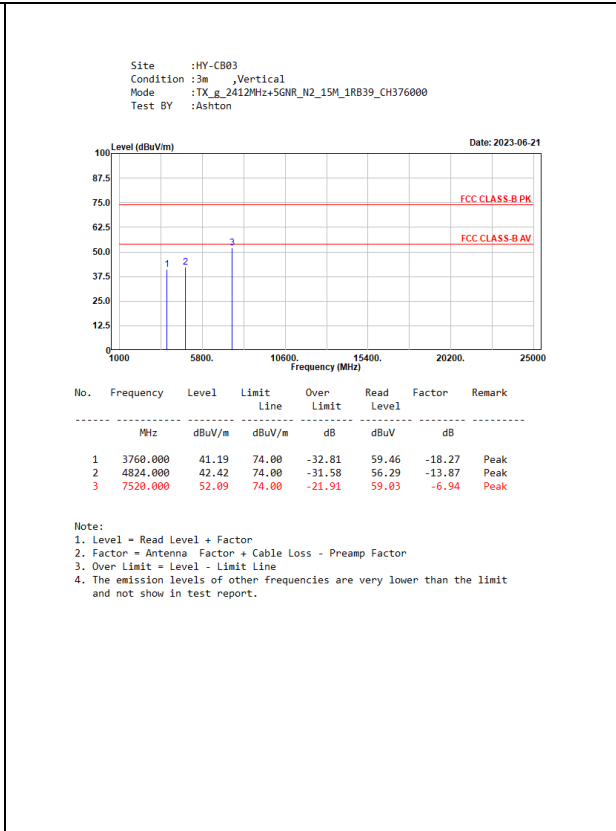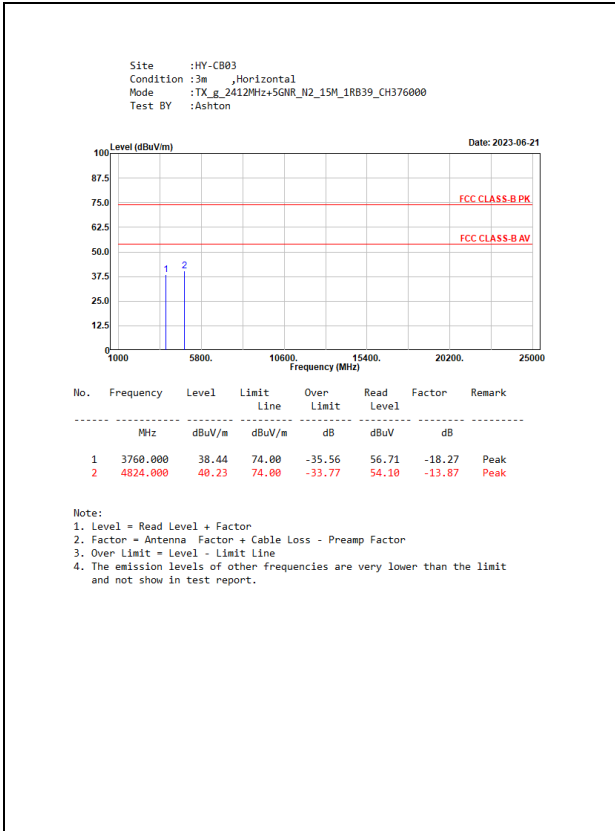

5. RF Antenna Conducted Test

5.1. Test Setup

RF antenna Conducted Measurement:

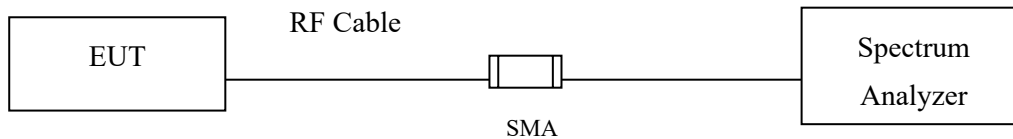

5.2. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.3. Test Procedure


The EUT was tested according to C63.10:2013 Section 11.11 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.4. Test Result of RF antenna conducted test

Product : 5G Enterprise Router
 Test Item : RF antenna conducted test
 Test Mode : Transmit (802.11b)
 Test Date : 2023/04/12


Channel 11 (2462 MHz)

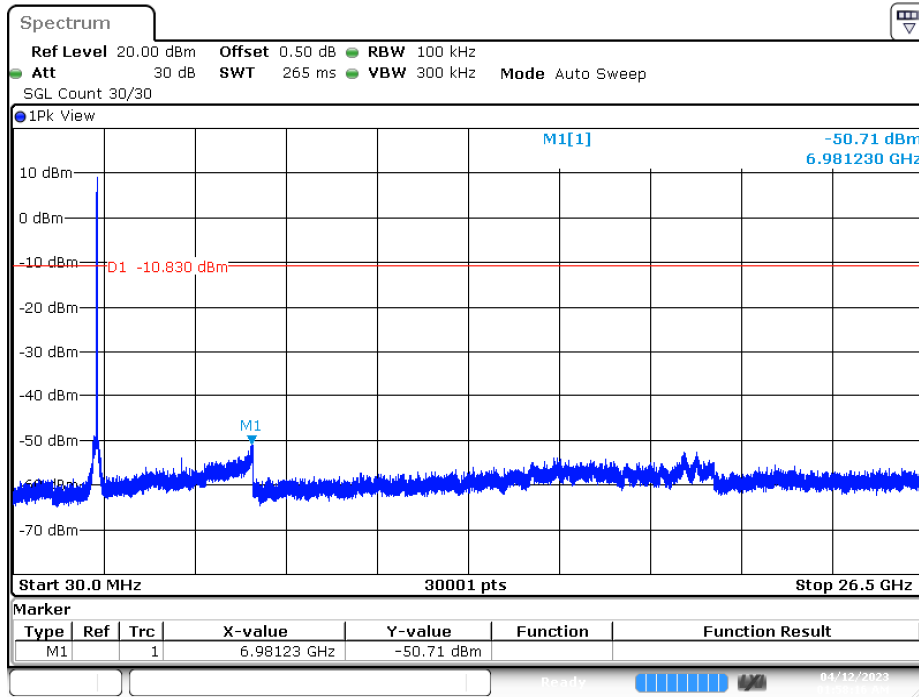

Date: 12.APR.2023 01:58:15

Product : 5G Enterprise Router
 Test Item : RF Antenna Conducted Spurious
 Test Mode : Transmit (802.11g)
 Test Date : 2023/04/12


Channel 11 (2462MHz)

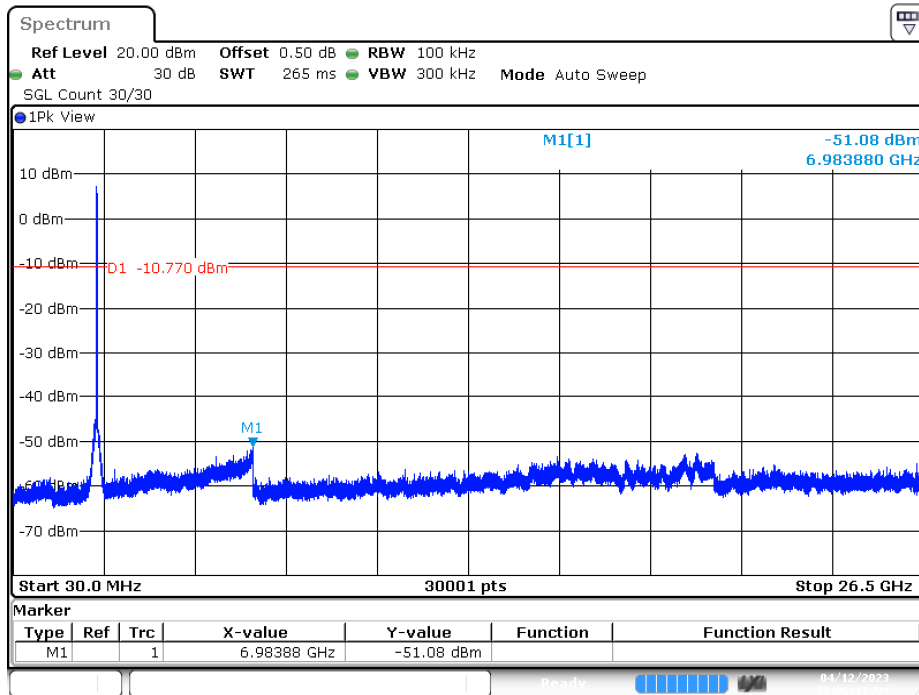

Date: 12.APR.2023 02:06:44

Product : 5G Enterprise Router
 Test Item : RF Antenna Conducted Spurious
 Test Mode : Transmit (802.11n-20 MHz)
 Test Date : 2023/04/12


Channel 01 (2412MHz)

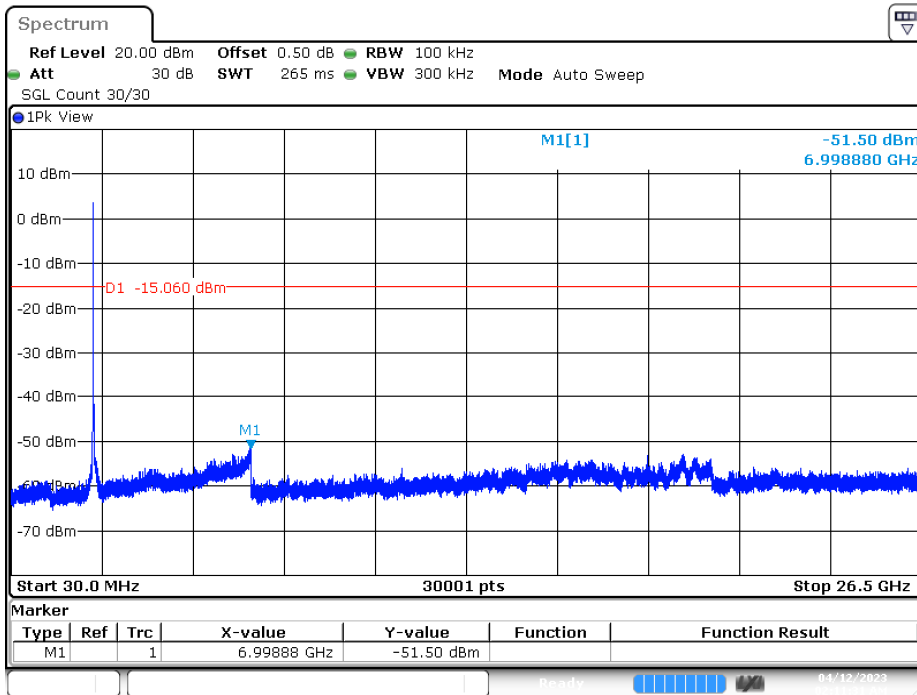

Date: 12.APR.2023 02:11:31

Product : 5G Enterprise Router
 Test Item : RF Antenna Conducted Spurious
 Test Mode : Transmit (802.11n-40 MHz)
 Test Date : 2023/04/12

Channel 09 (2452MHz)

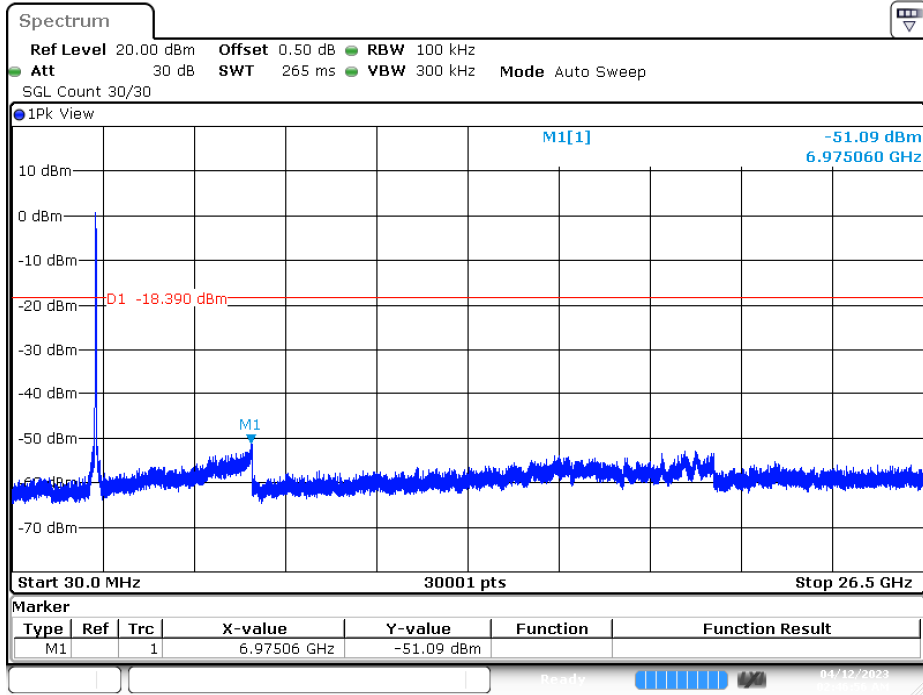


Date: 12.APR.2023 02:46:57

6. Band Edge


6.1. Test Setup

RF Conducted Measurement

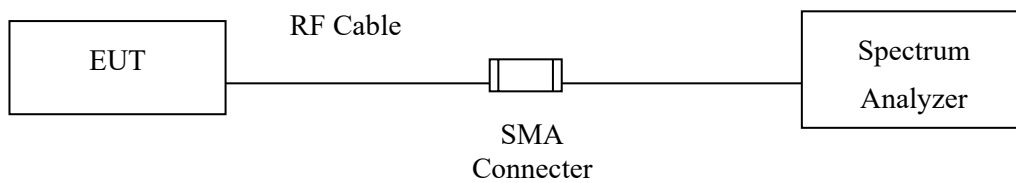

RF Radiated Measurement:

Above 1GHz

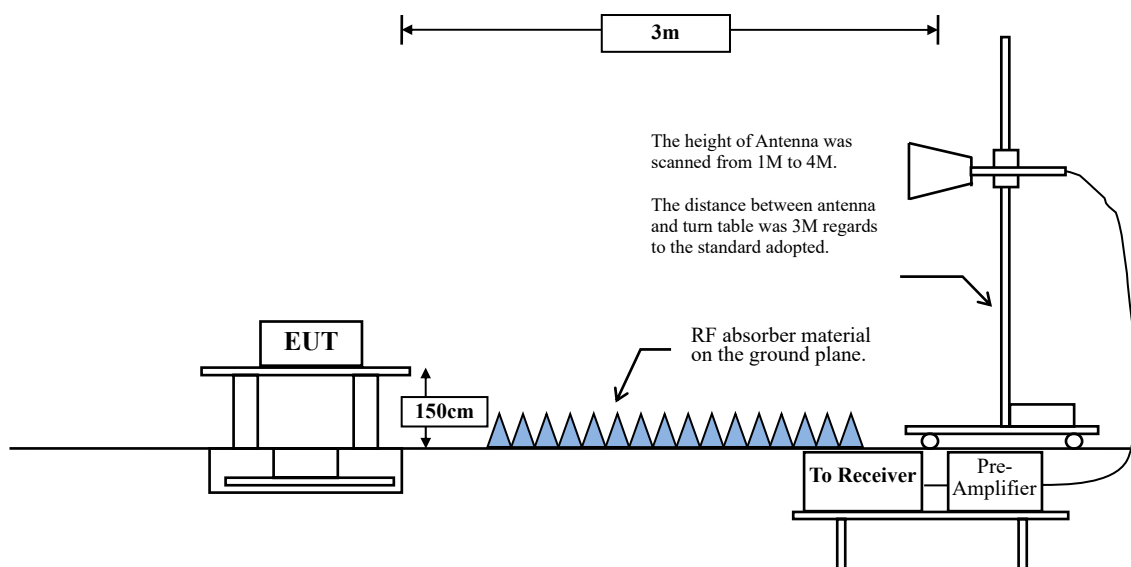

6.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

VBW \geq 3 x RBW.

Table 1 - RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle \geq 98 %





VBW \geq 1/T, when duty cycle < 98 %





(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)





2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11b	96.59	8.5000	118	200
802.11g	78.41	1.3800	725	1000
802.11n-20 MHz	65.70	0.6800	1471	2000
802.11n-40 MHz	48.95	0.3500	2857	3000





Note: Duty Cycle Refer to Section 9.





6.4. Tst Result of Band Edge

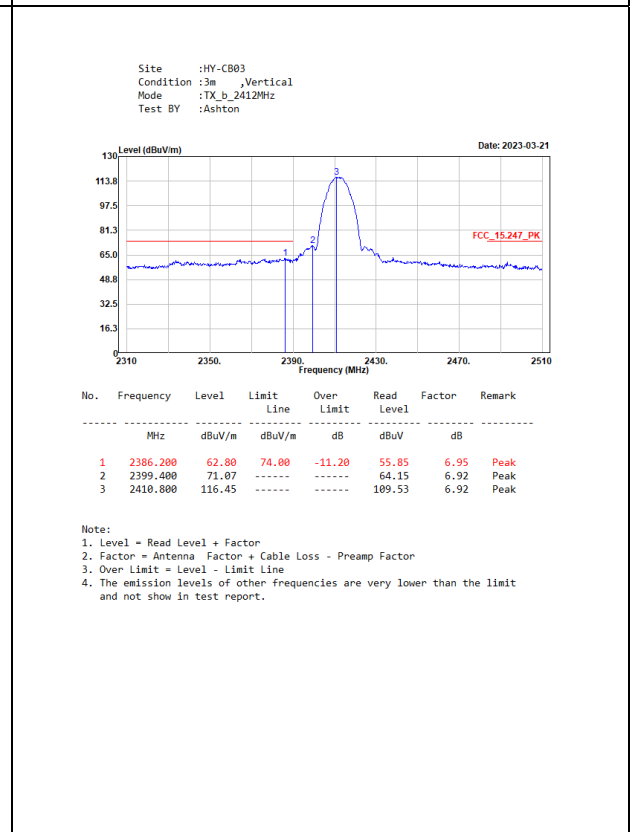
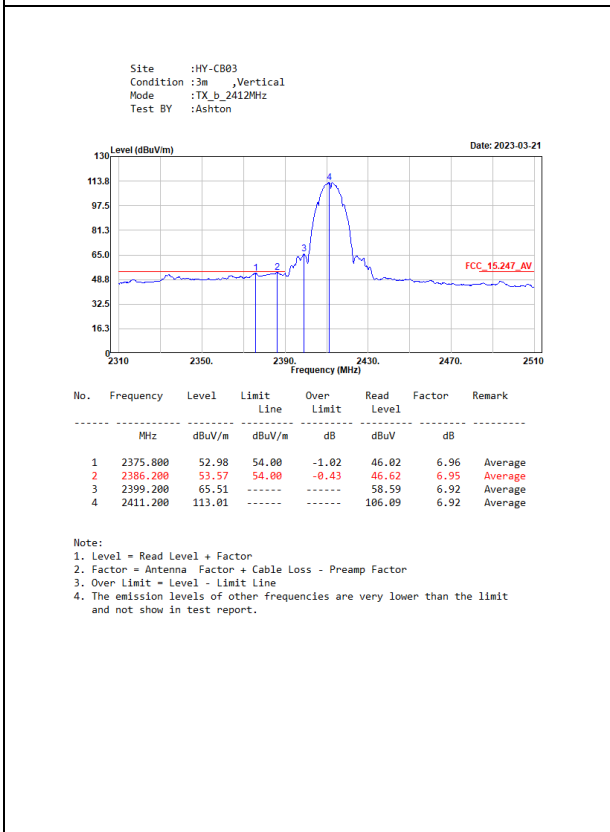
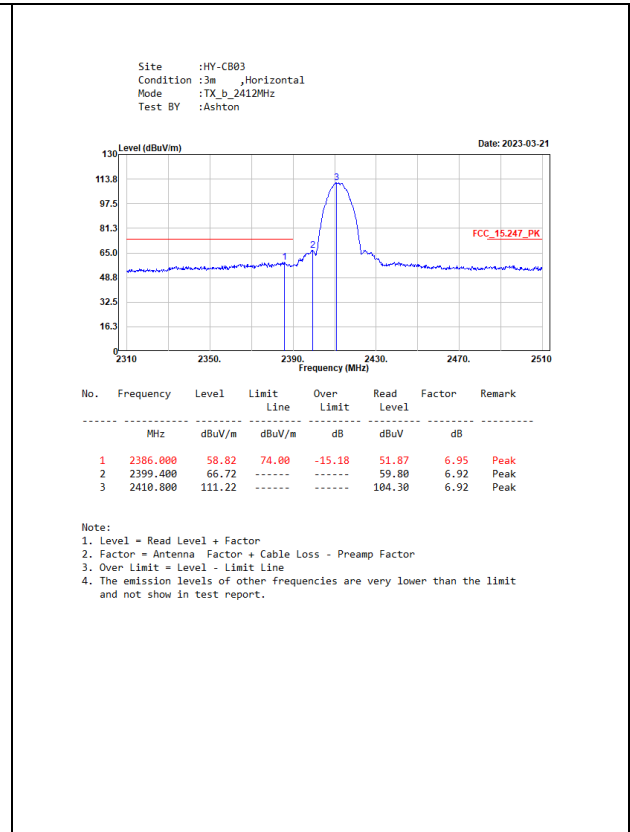
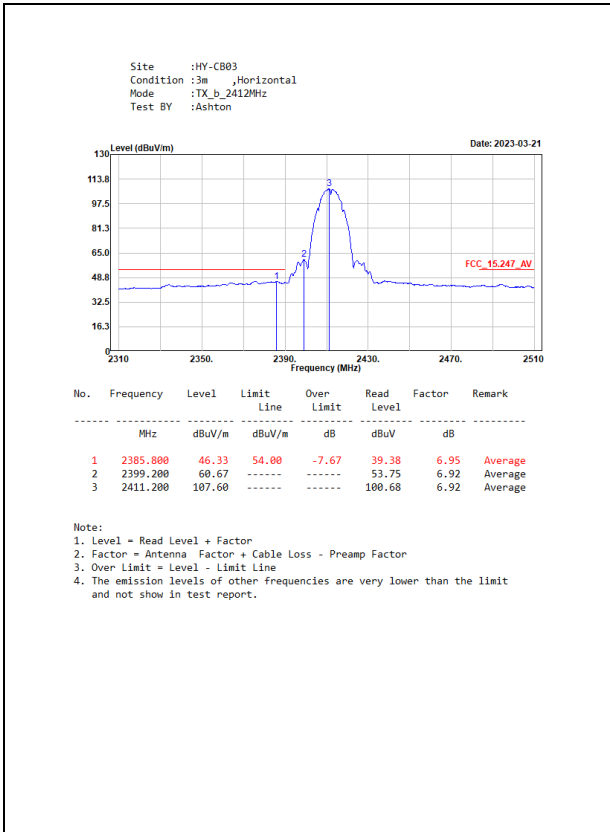


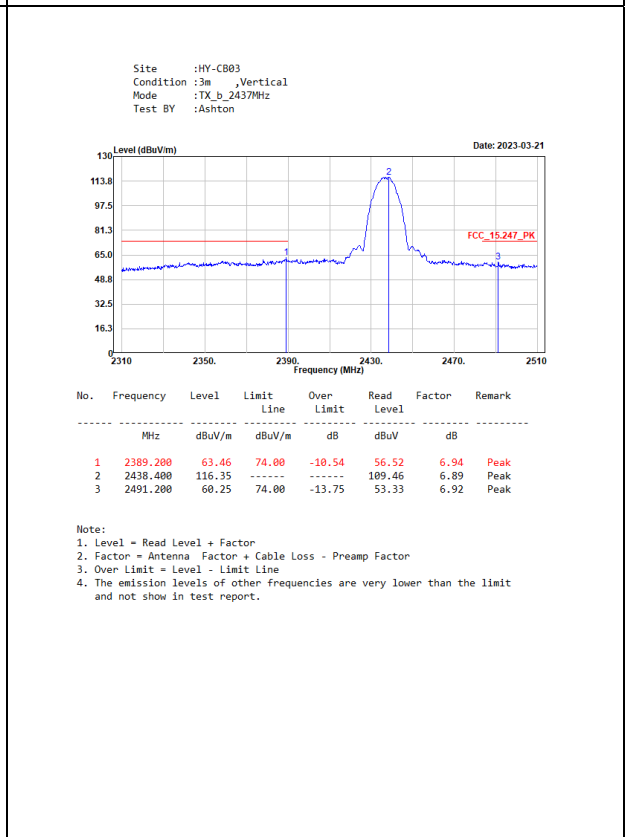
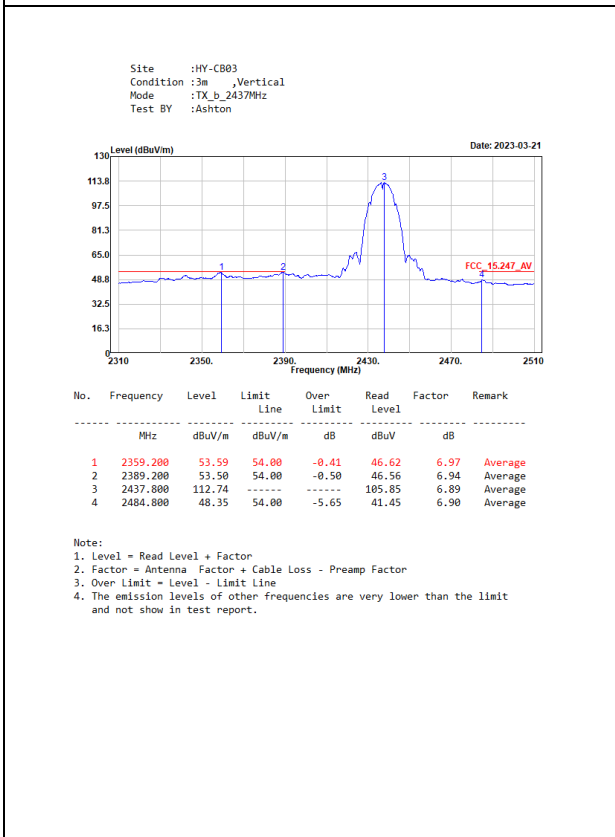
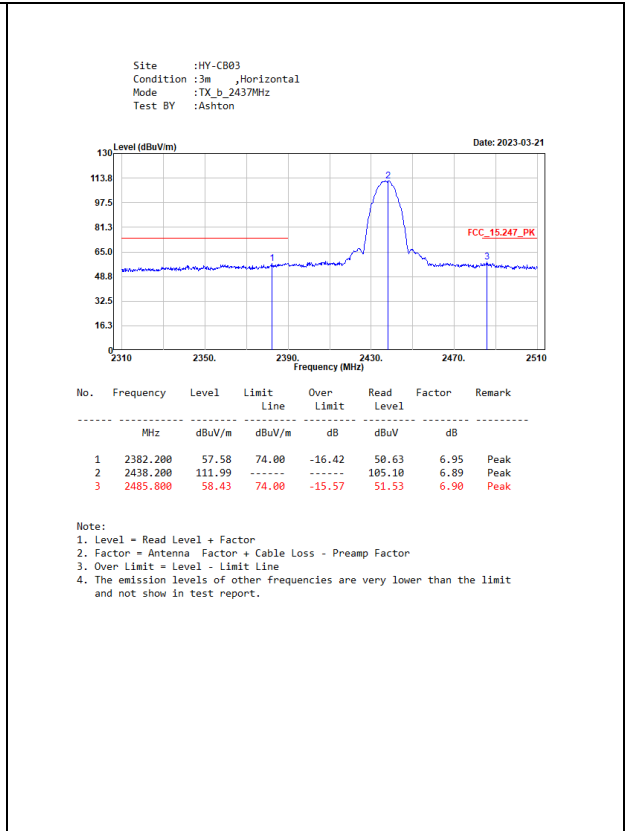
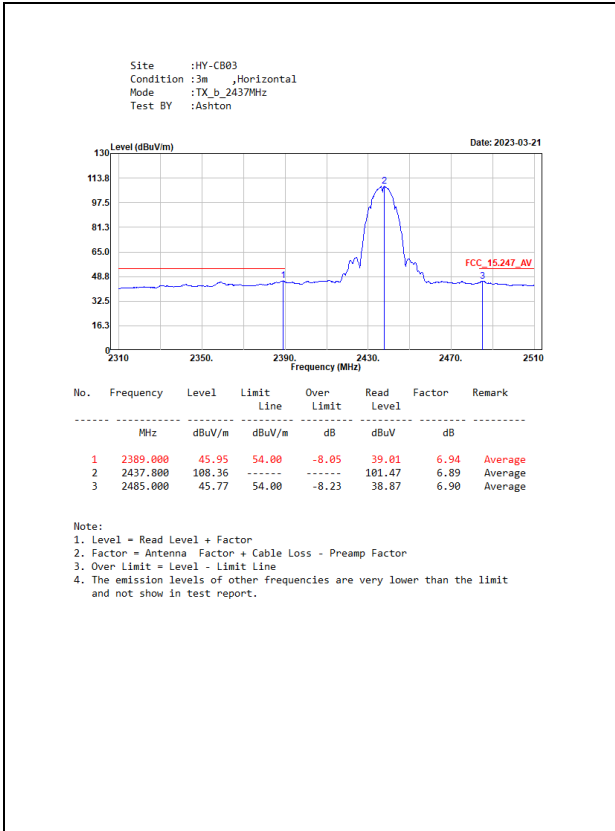


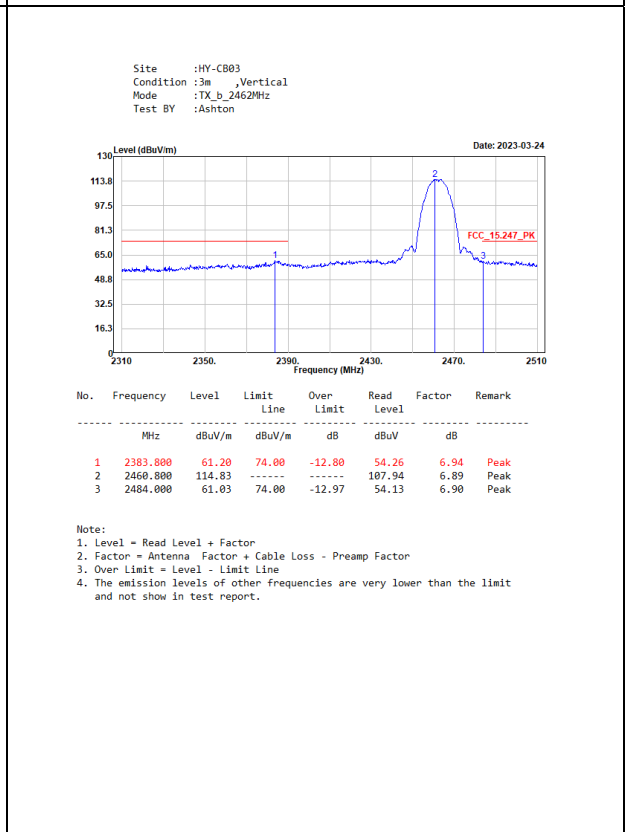
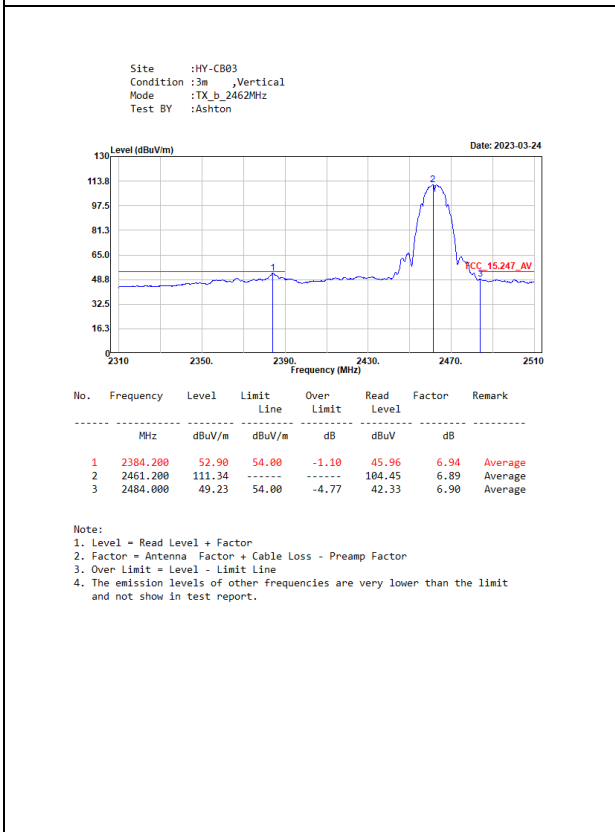
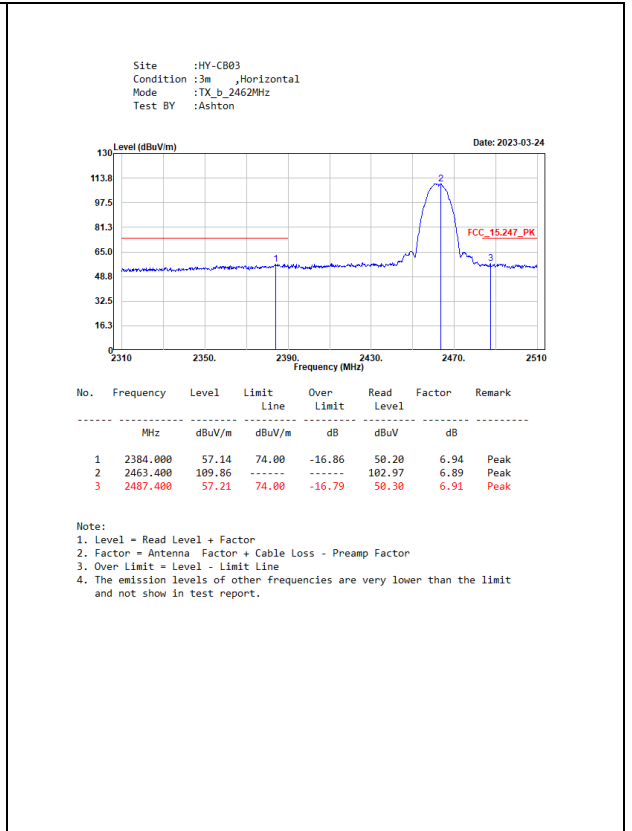
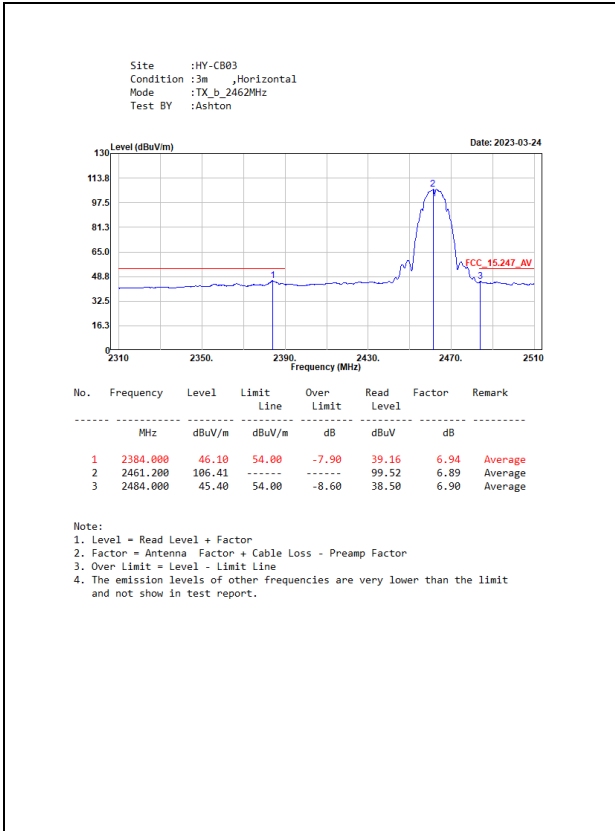


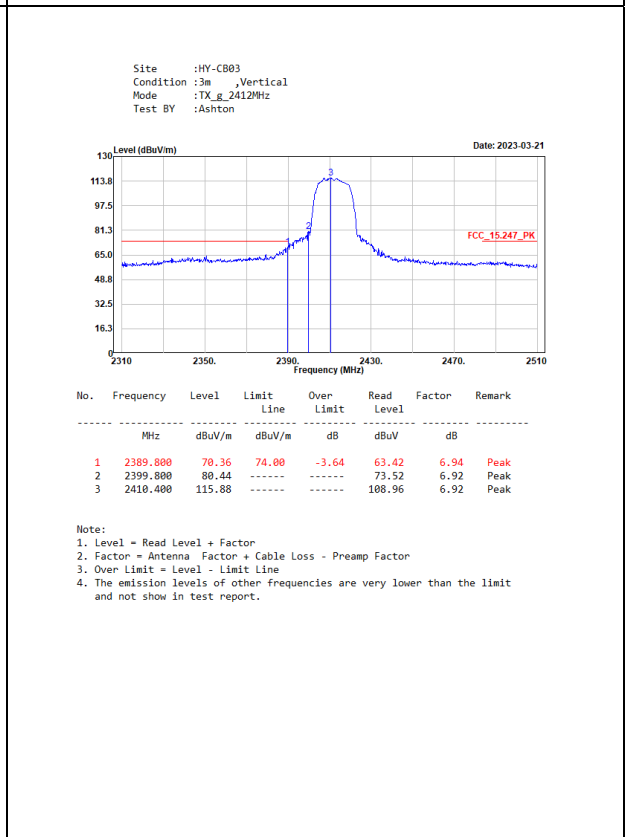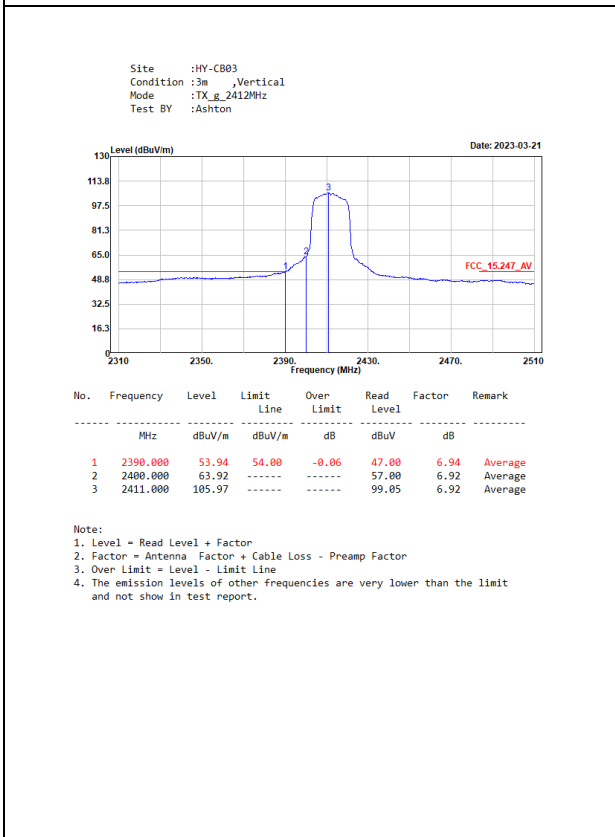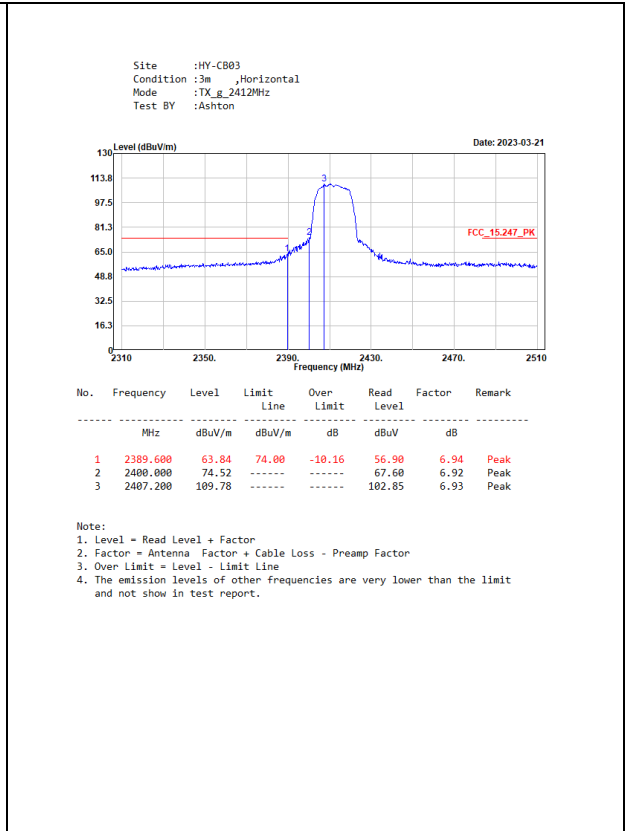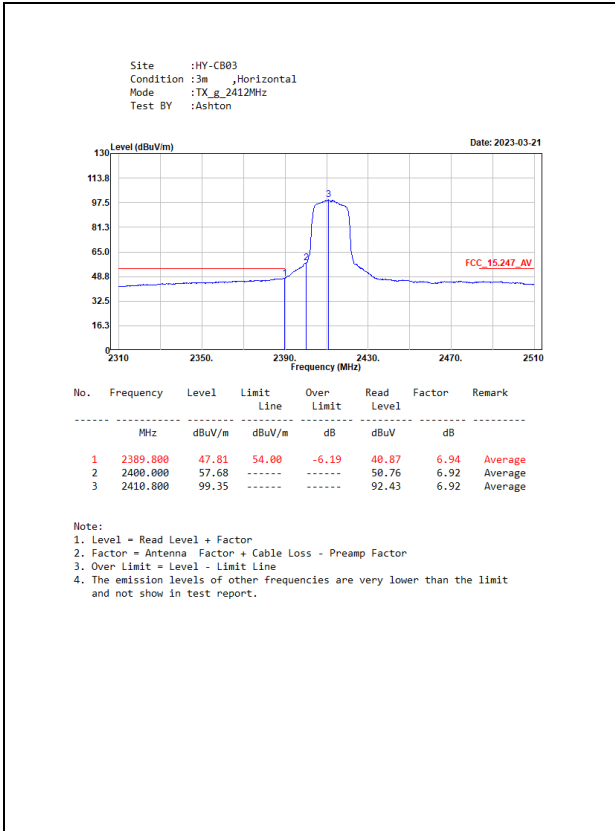

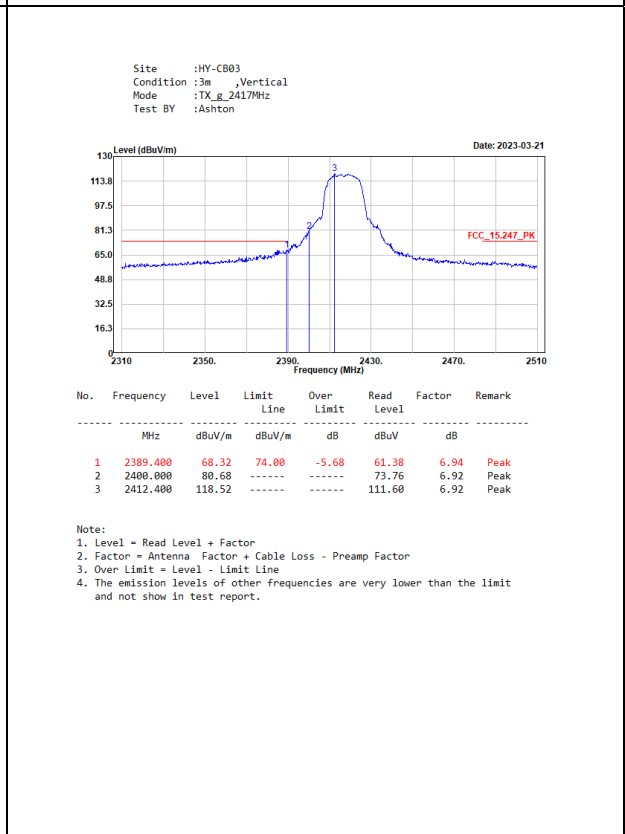
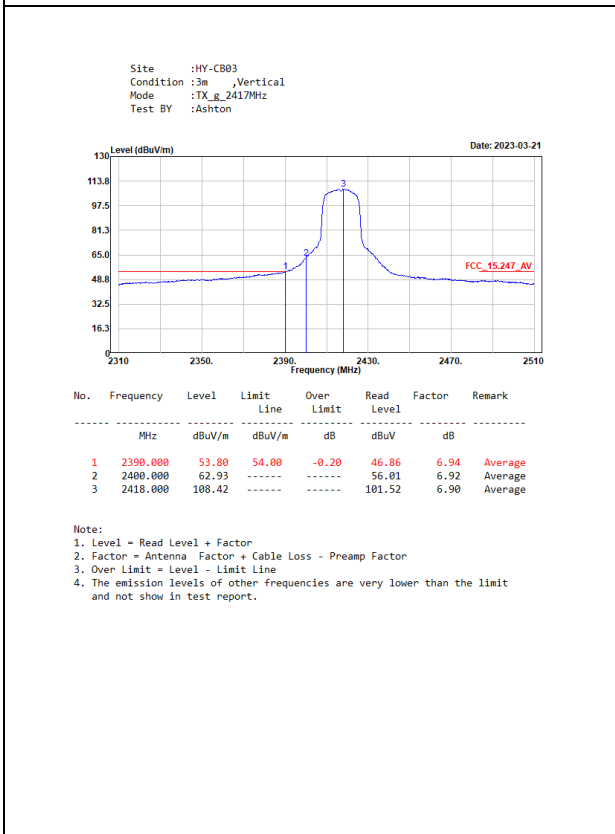
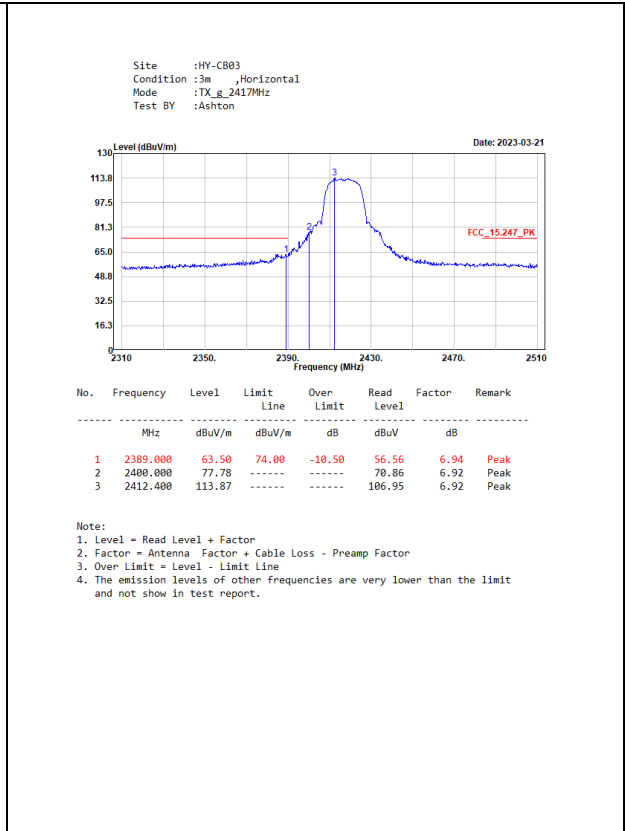
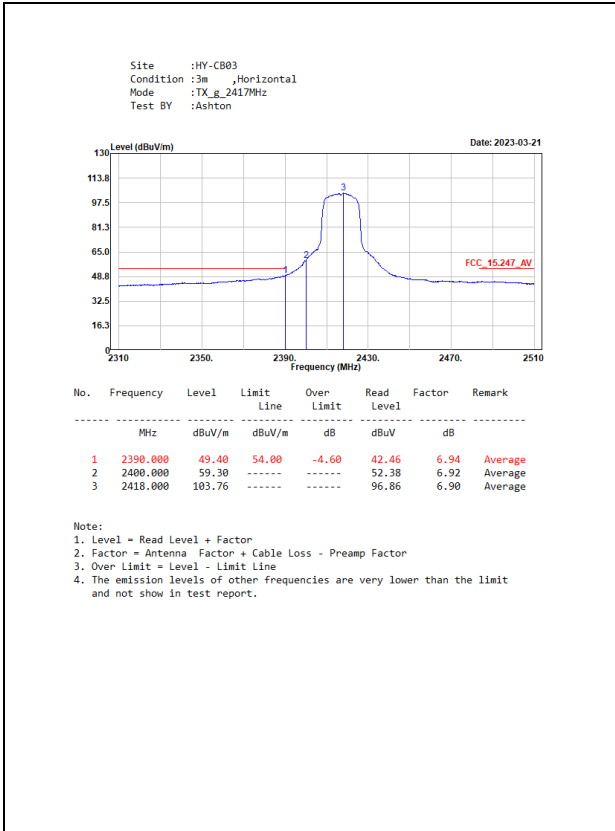


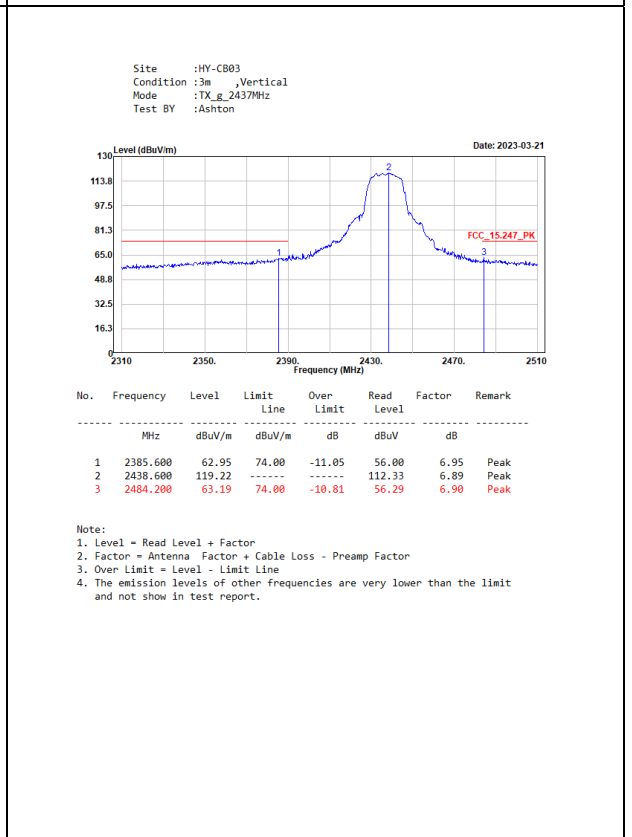
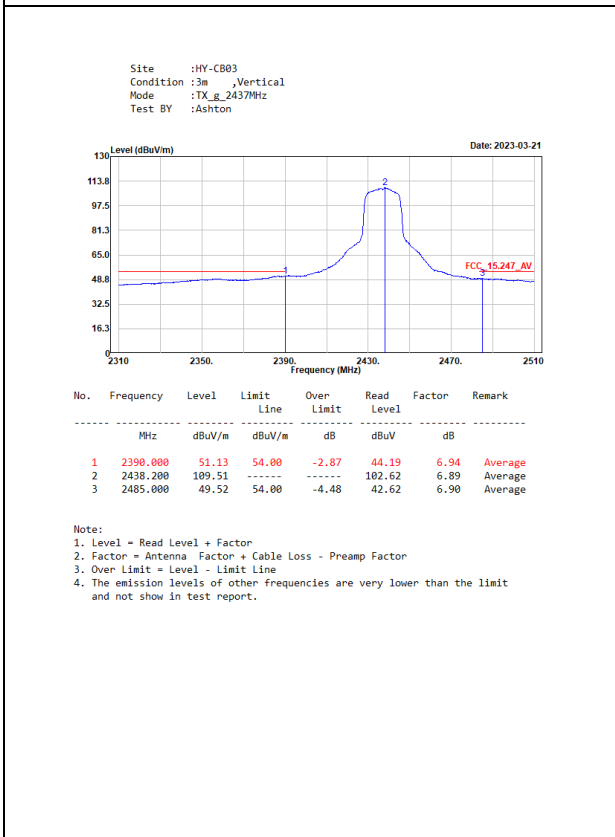
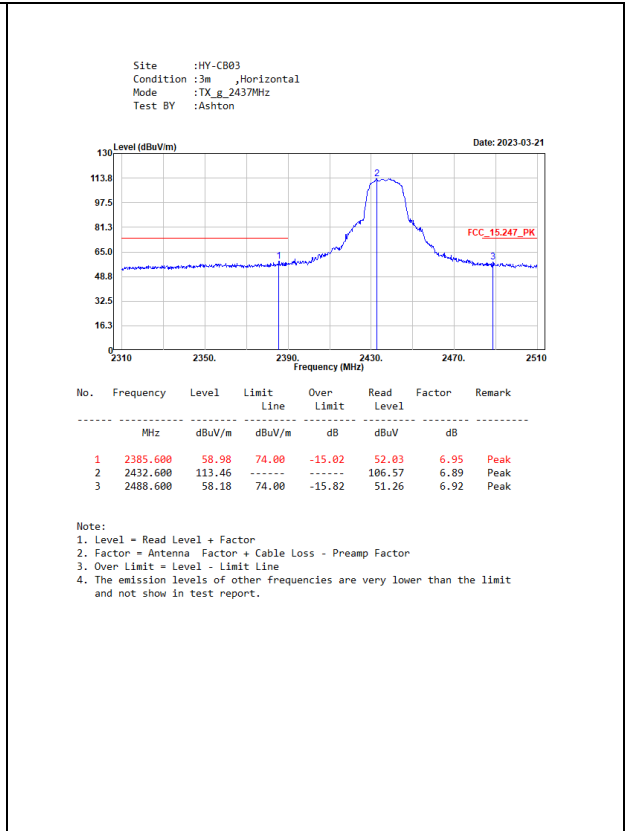
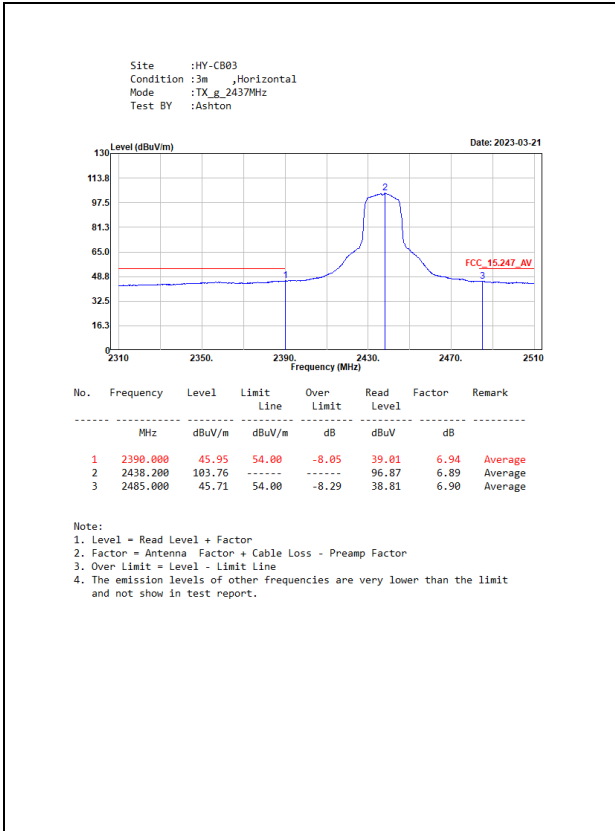


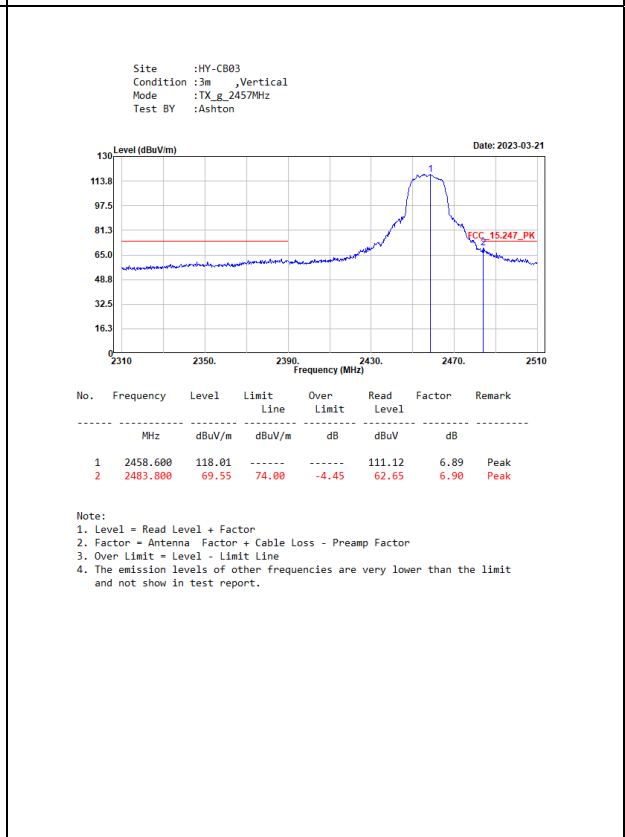
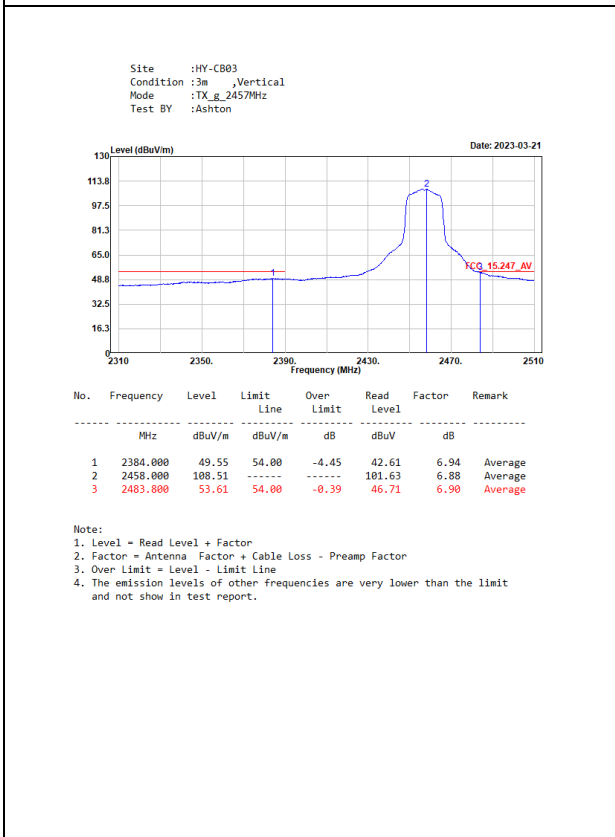
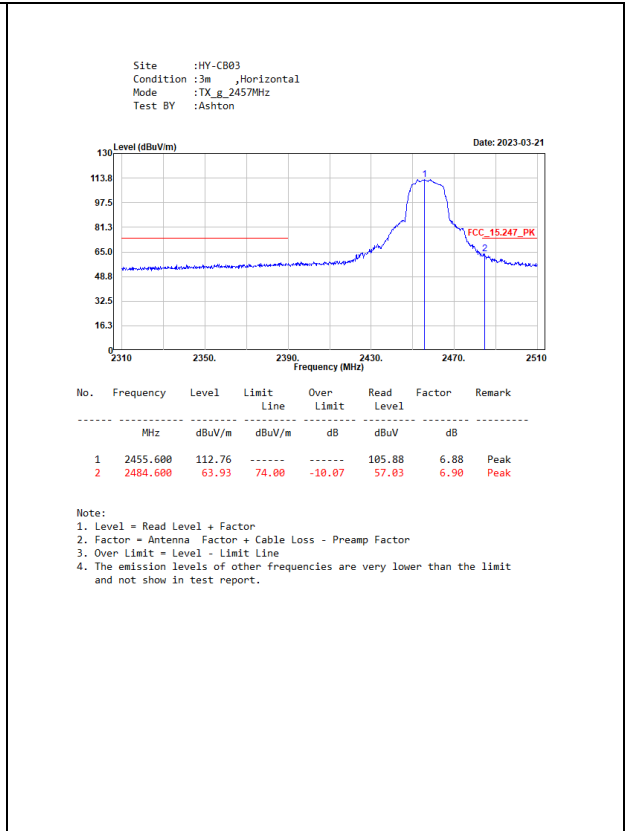
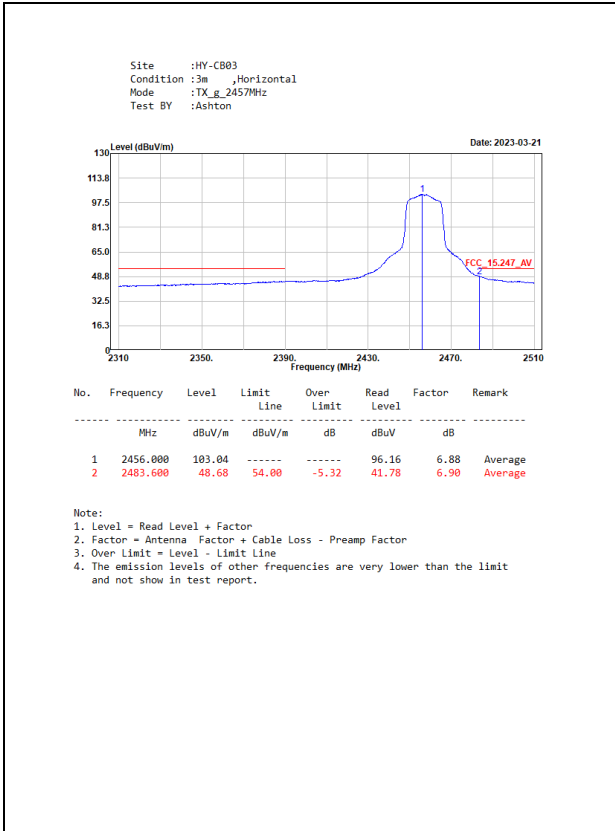


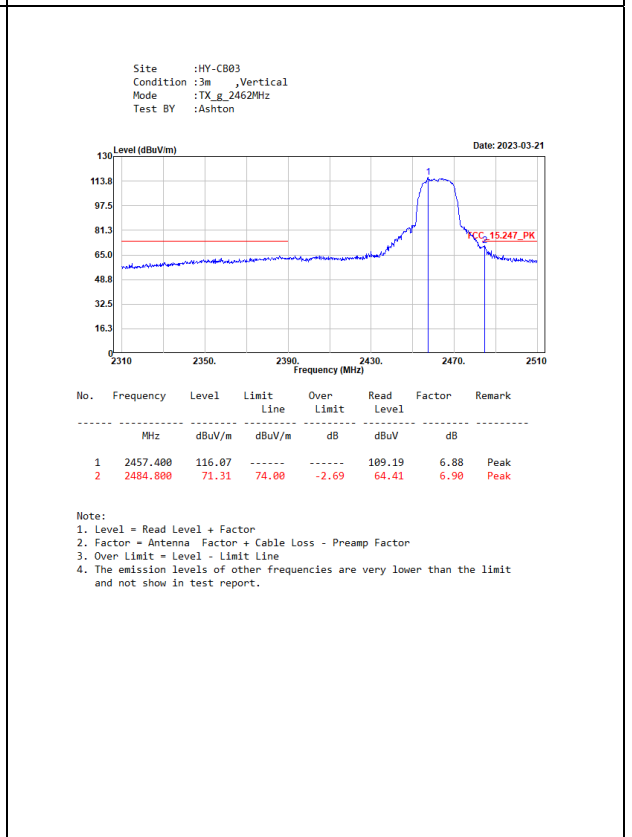
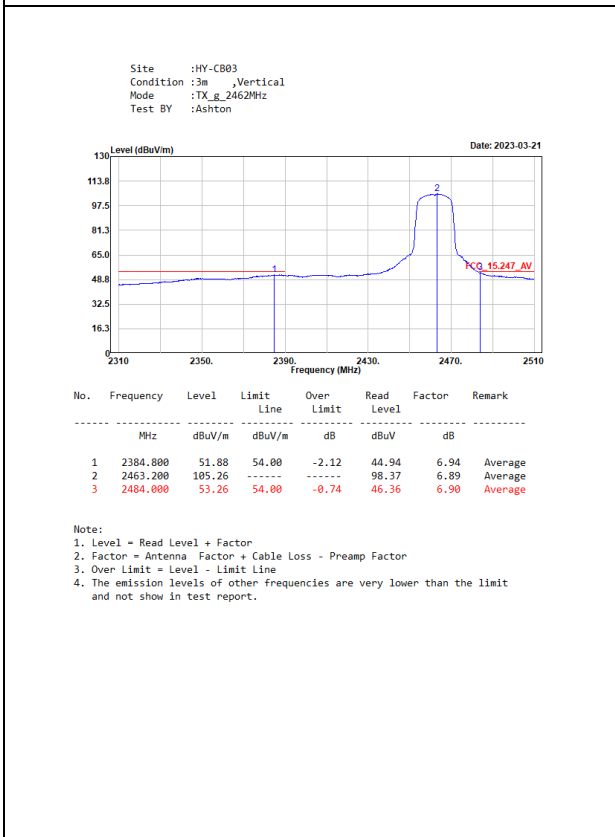
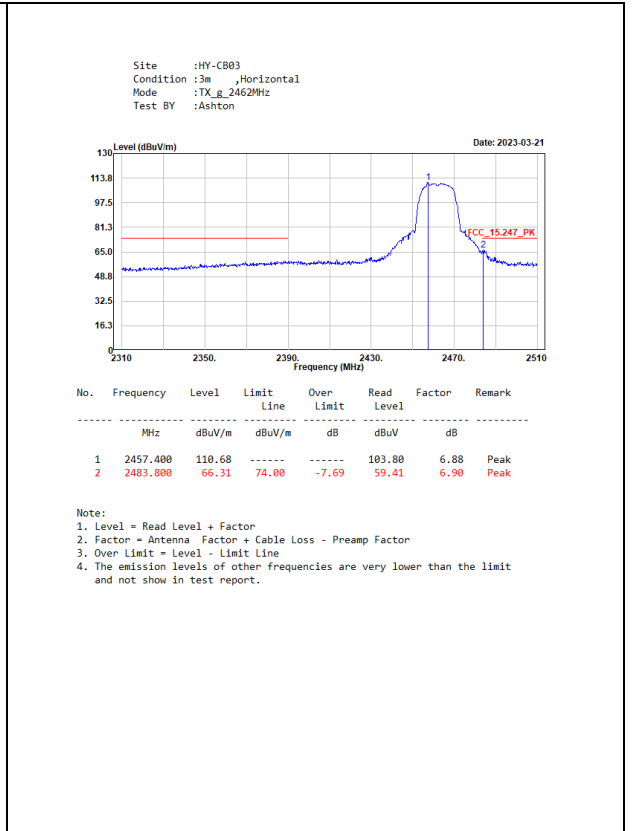
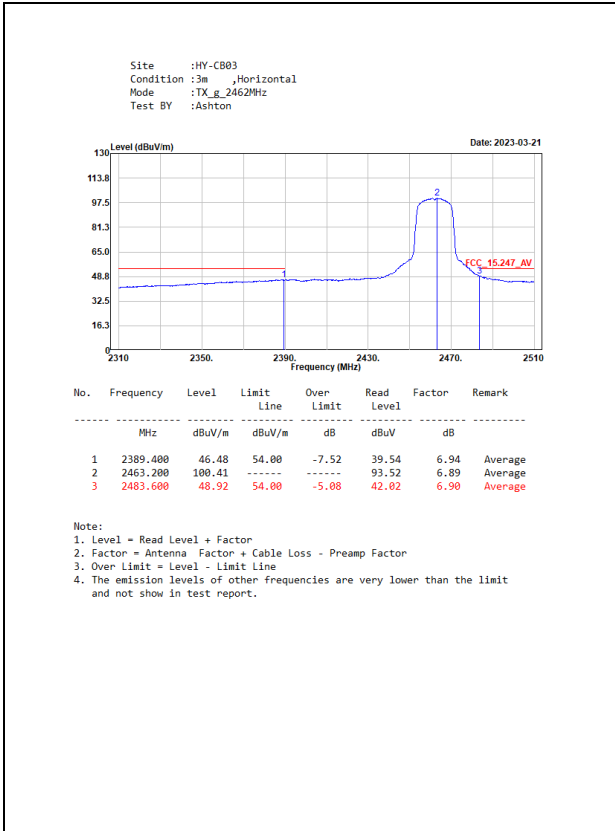






MIMO

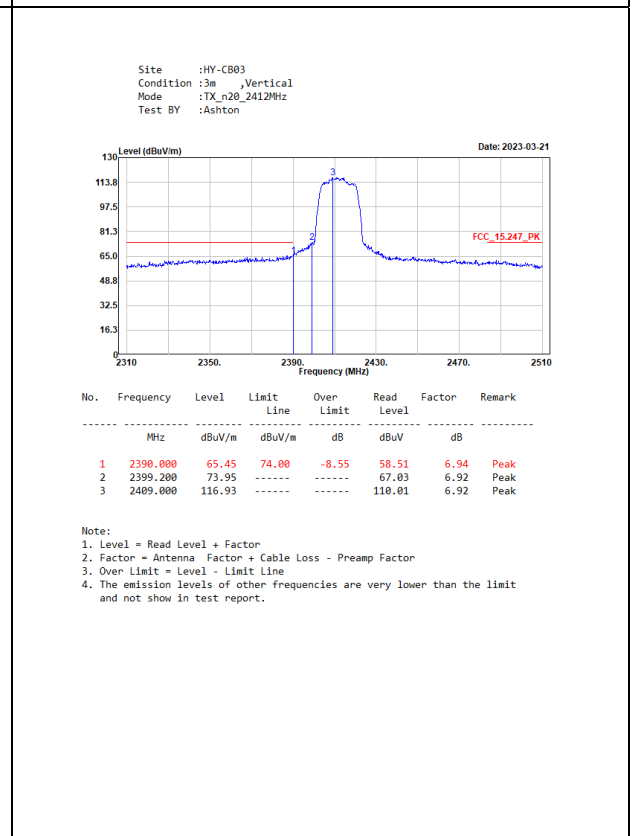
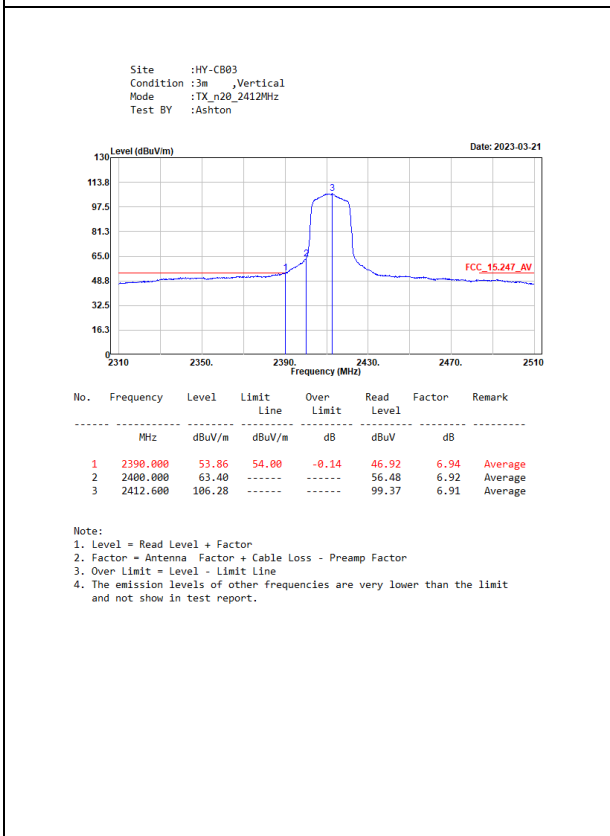
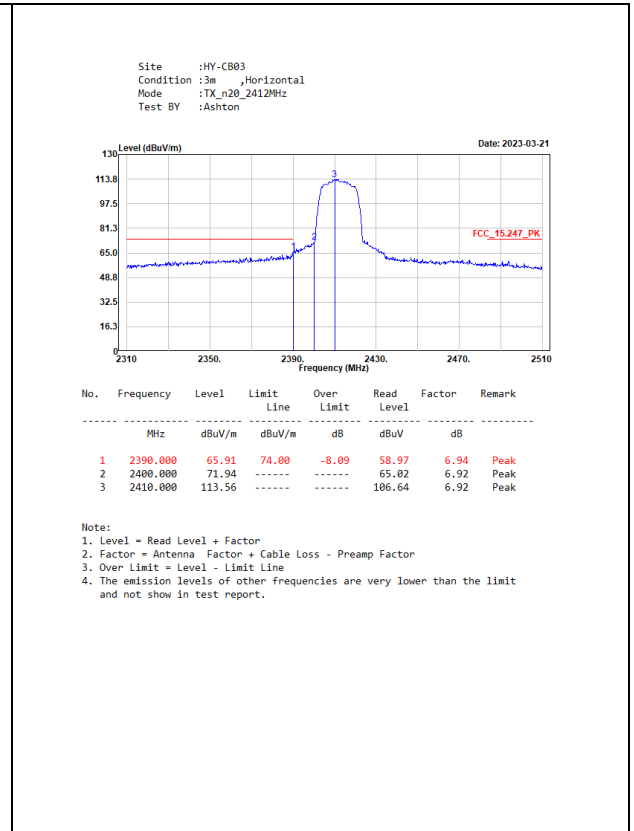
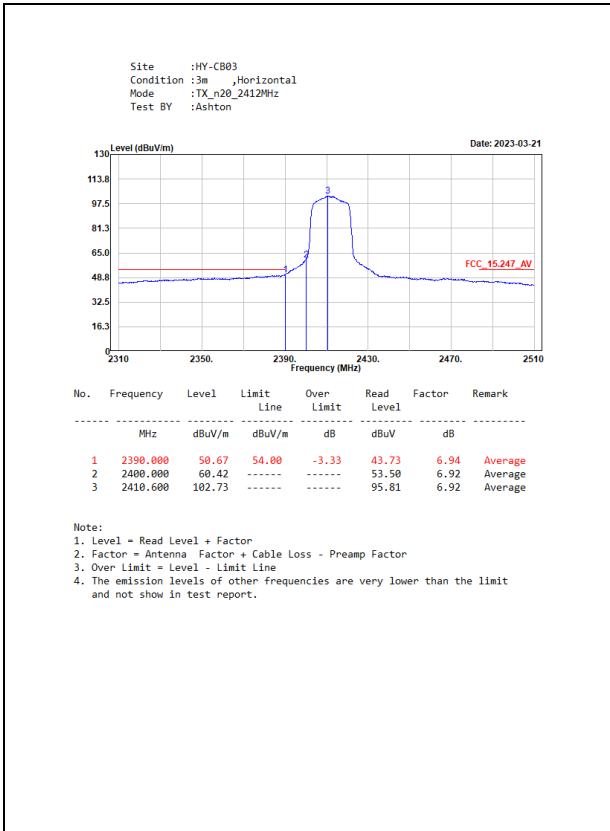


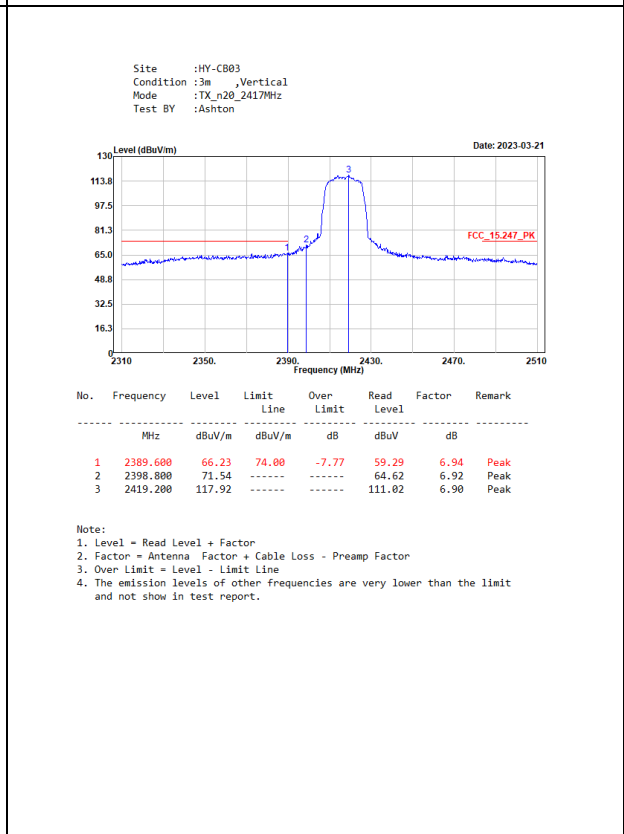
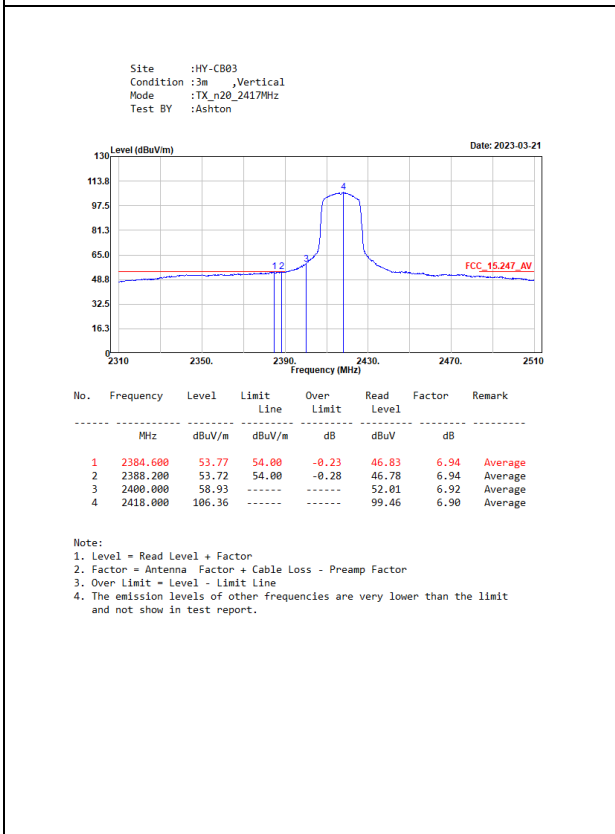
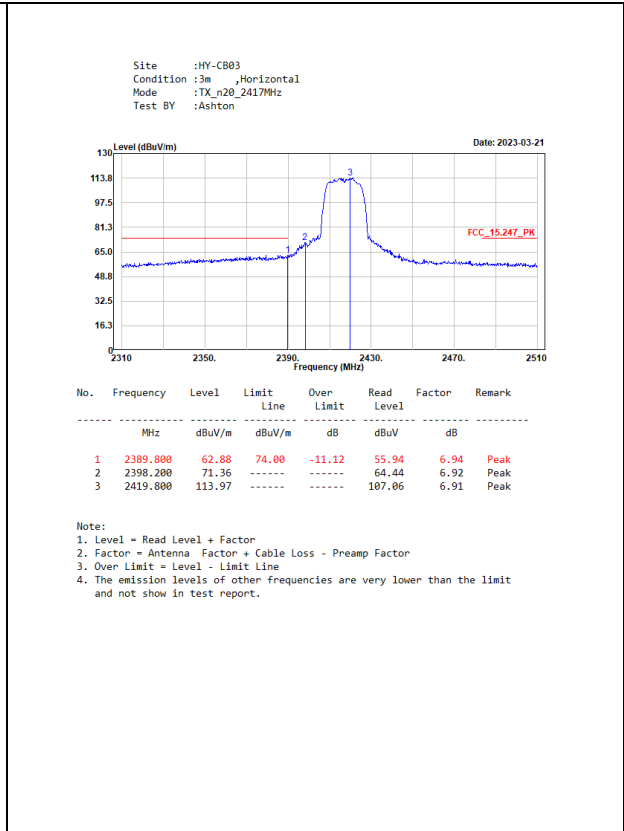
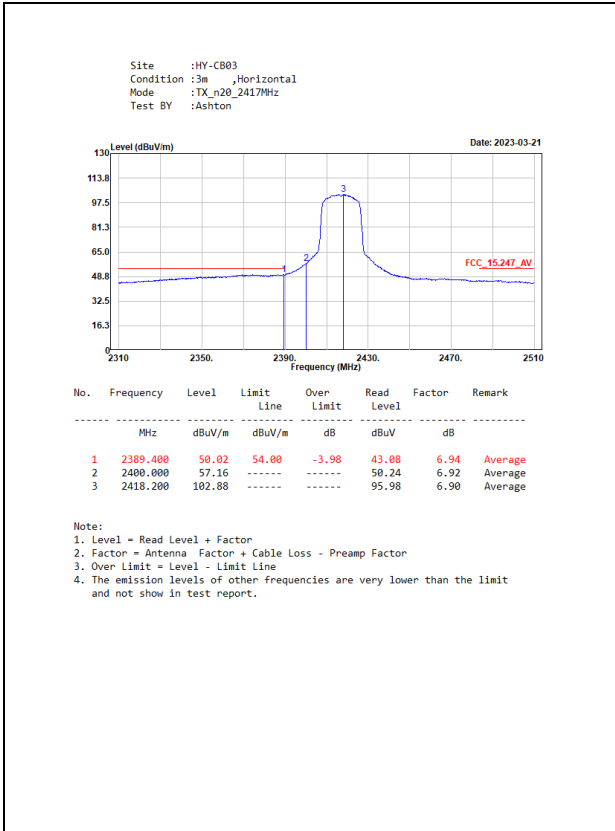


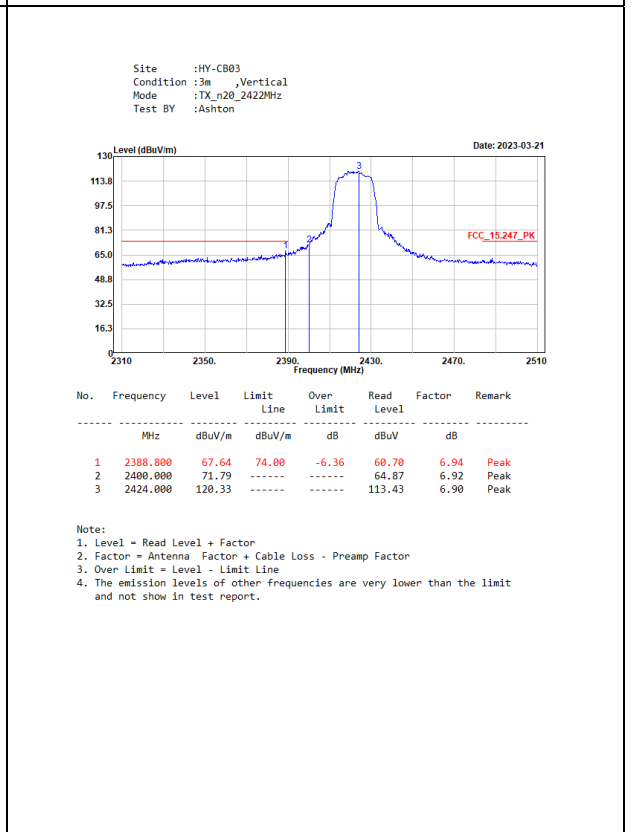
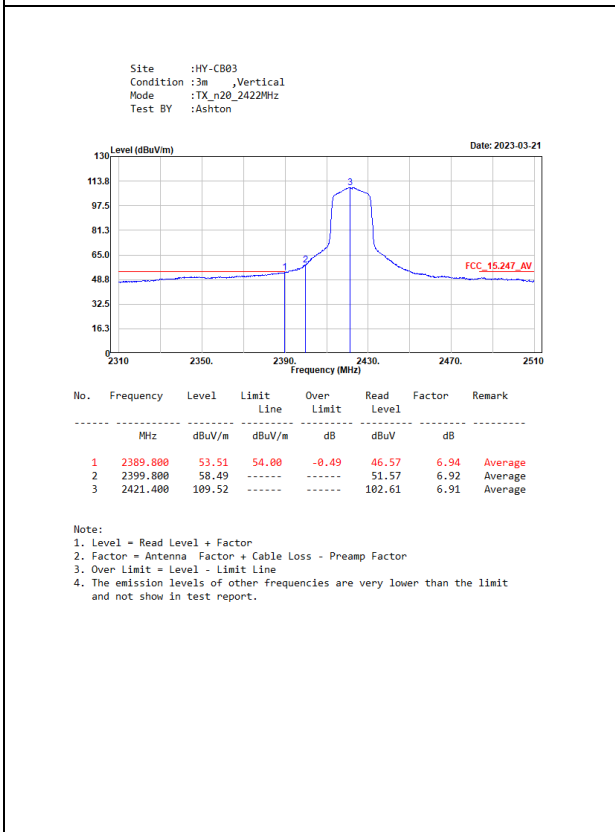
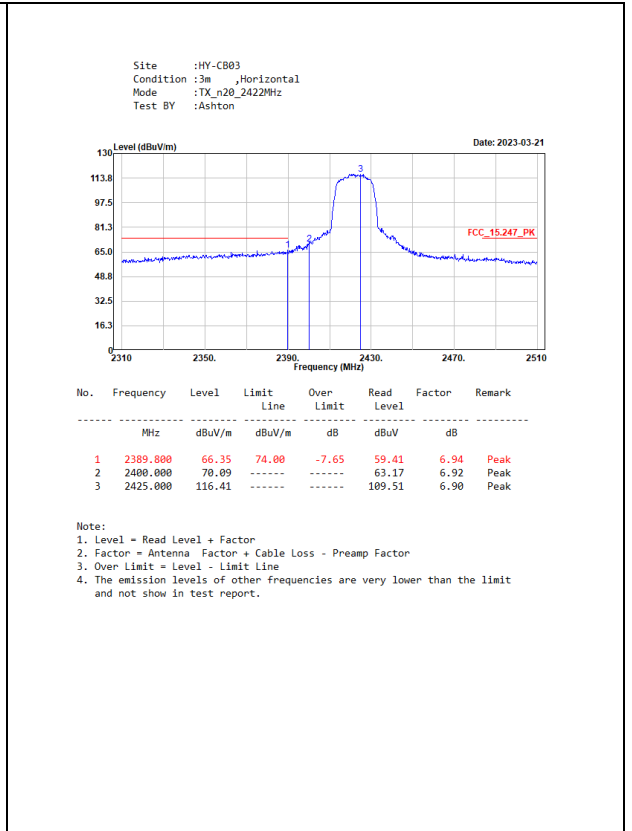
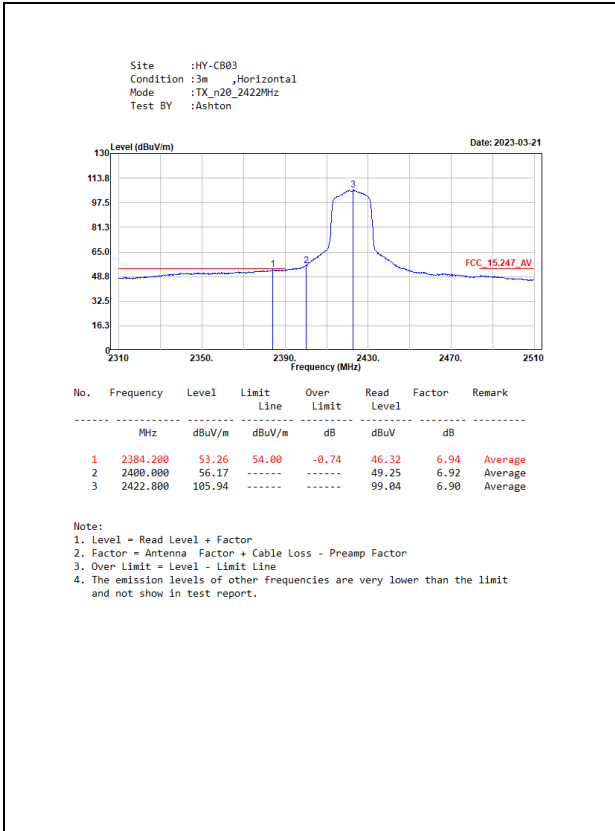


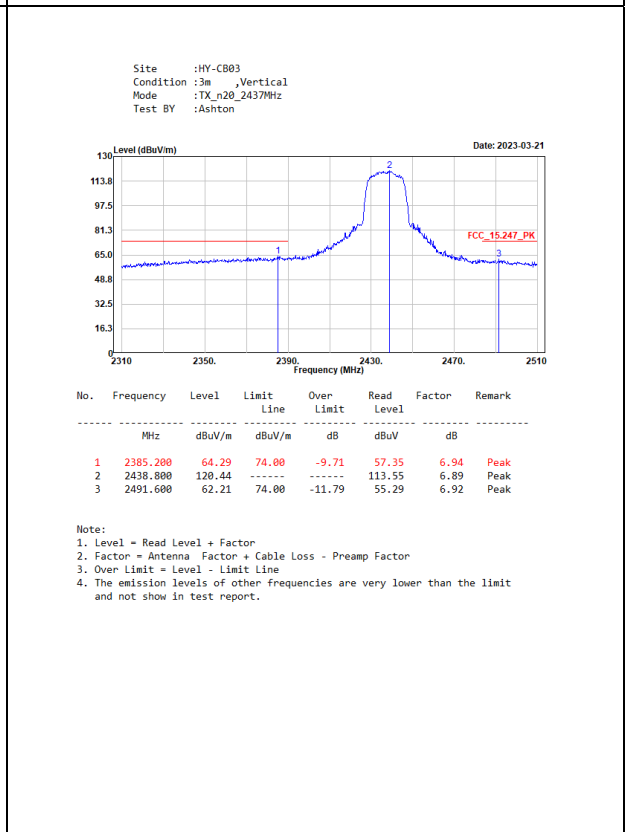
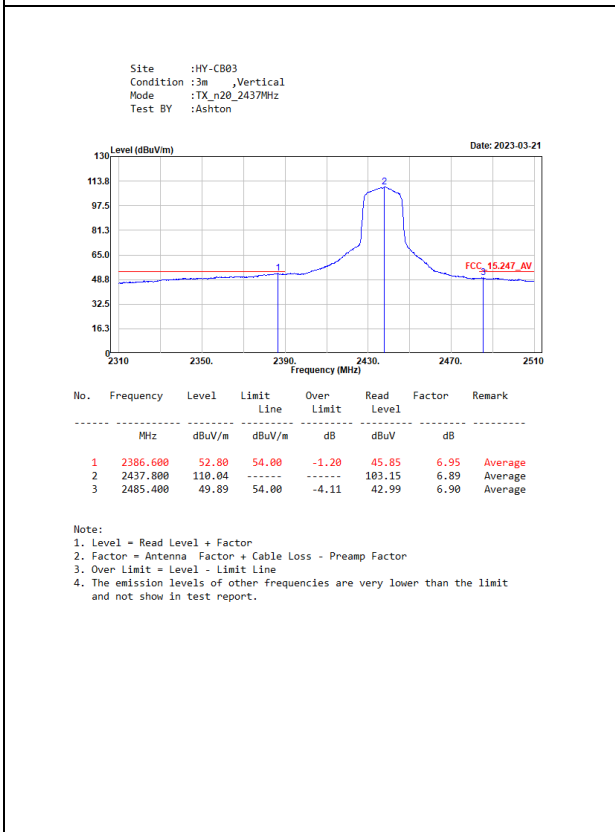
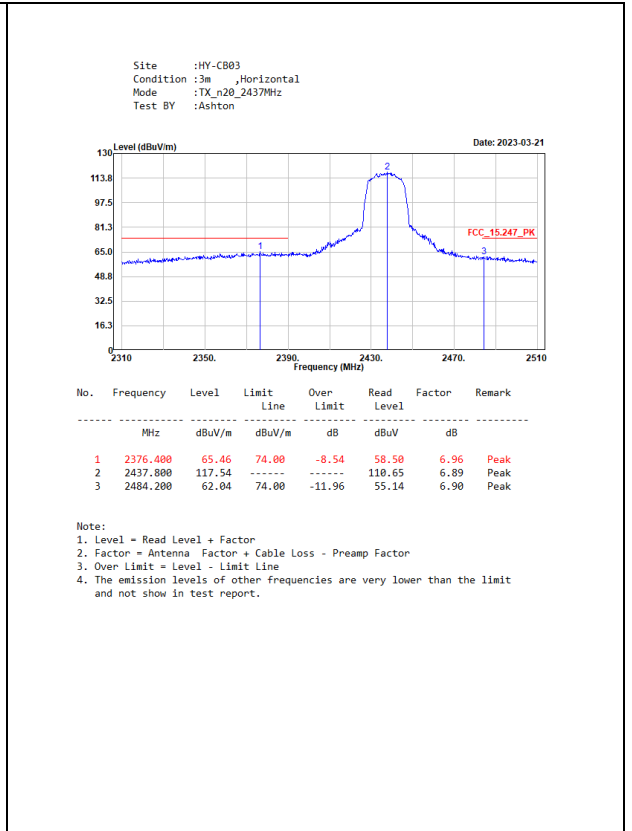
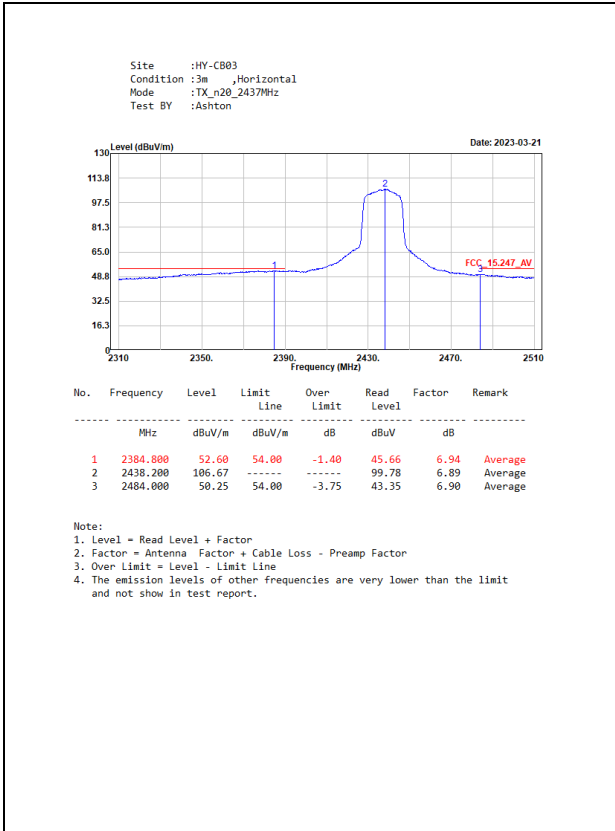


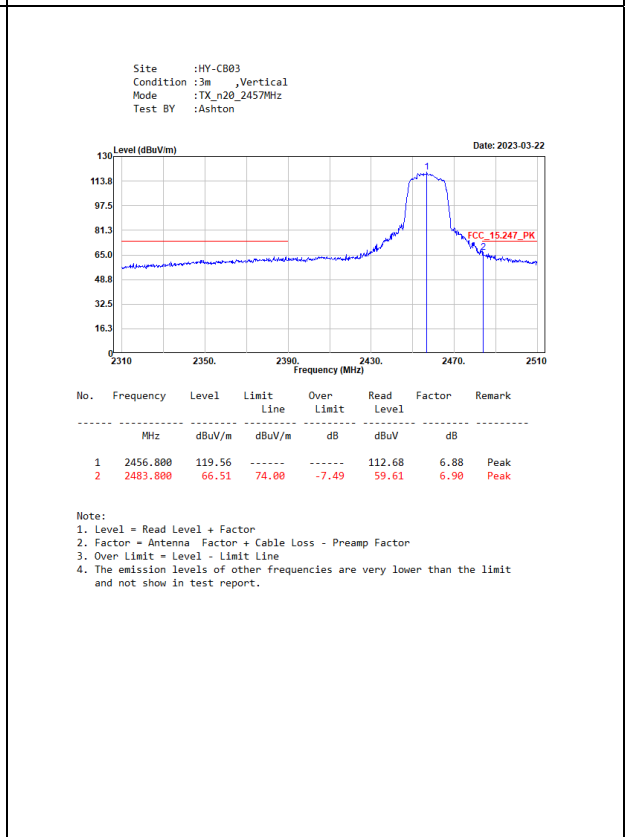
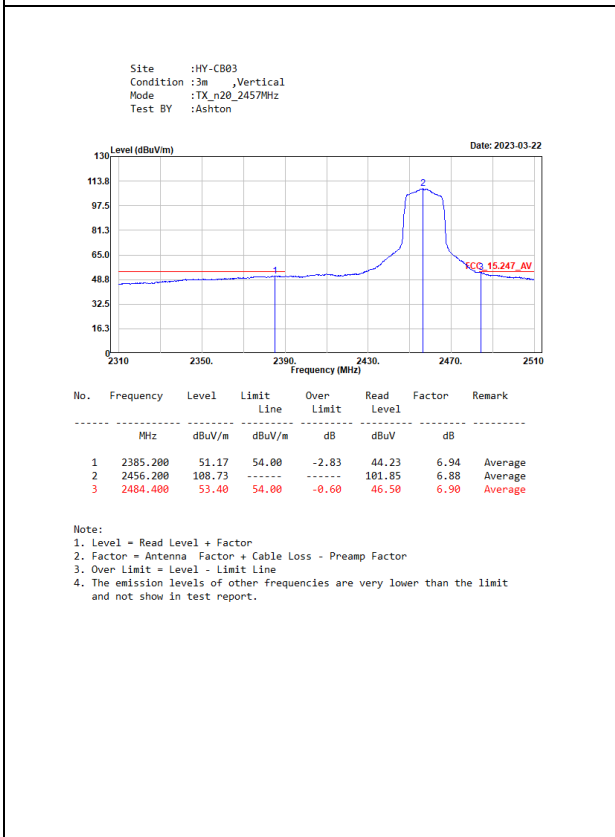
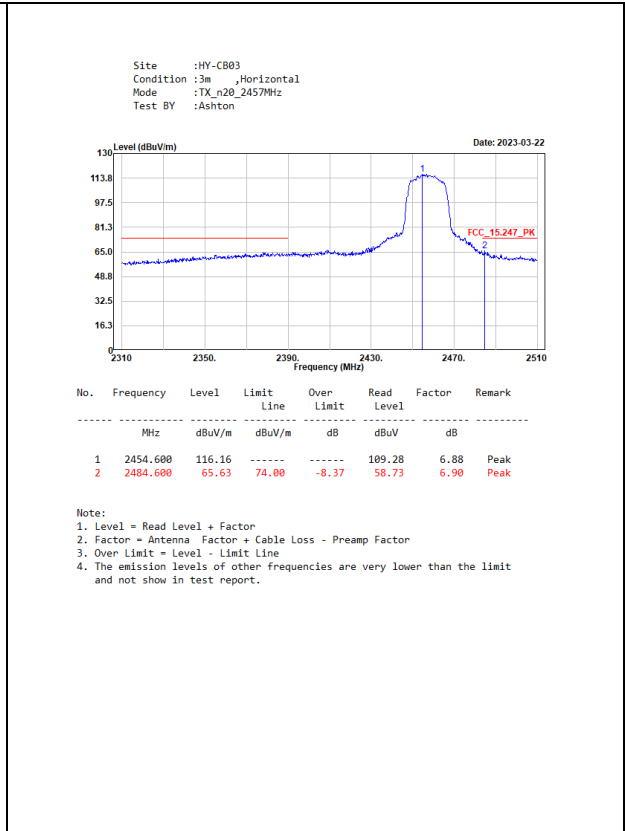
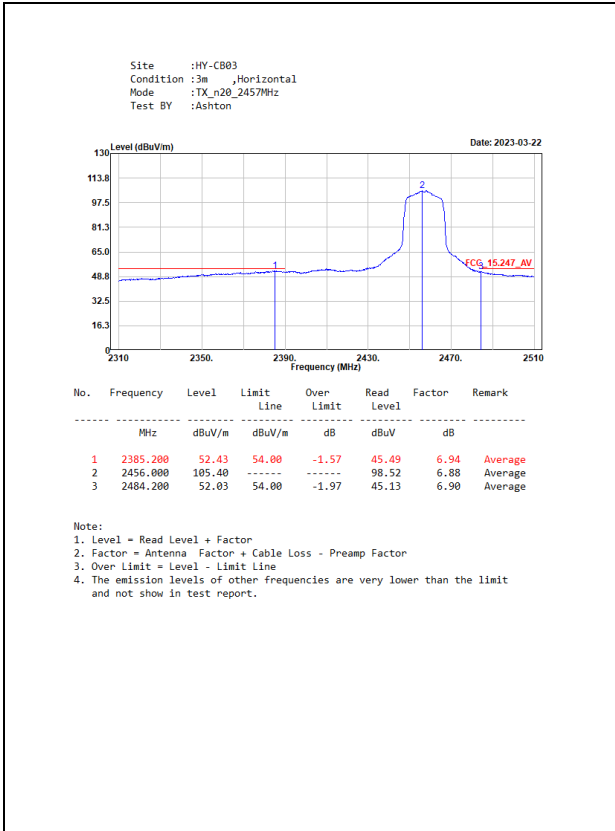


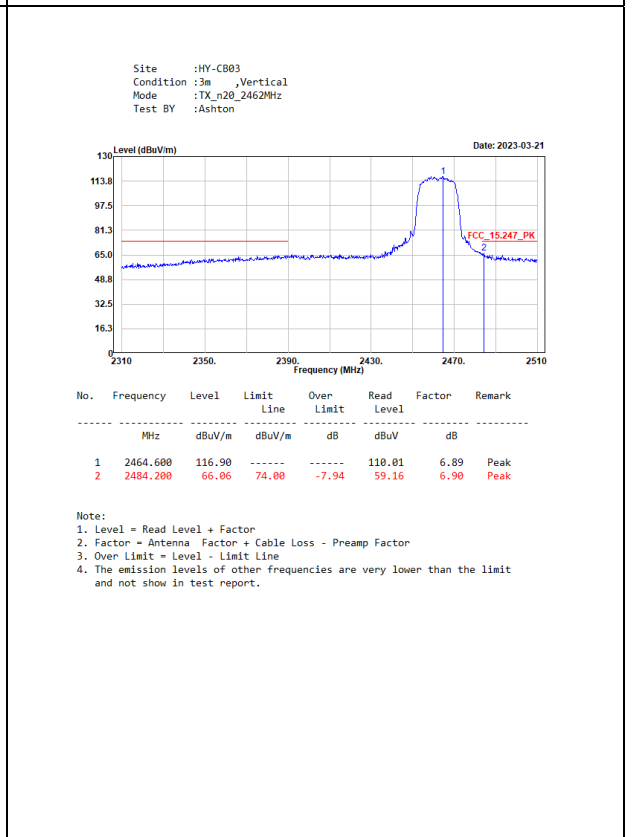
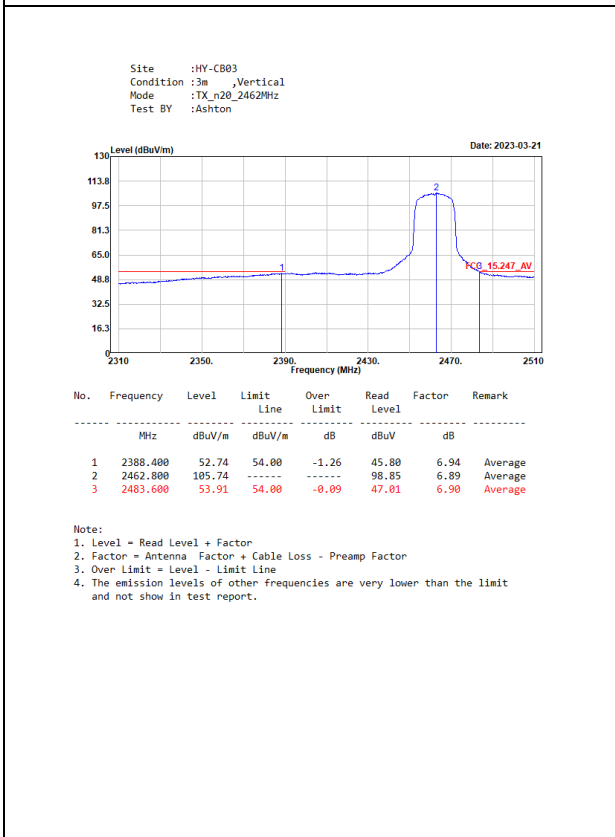
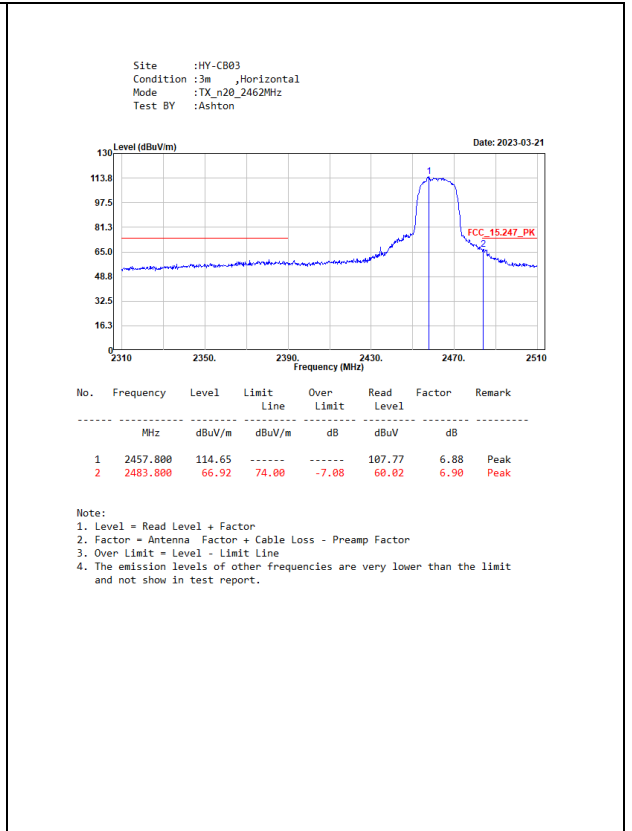
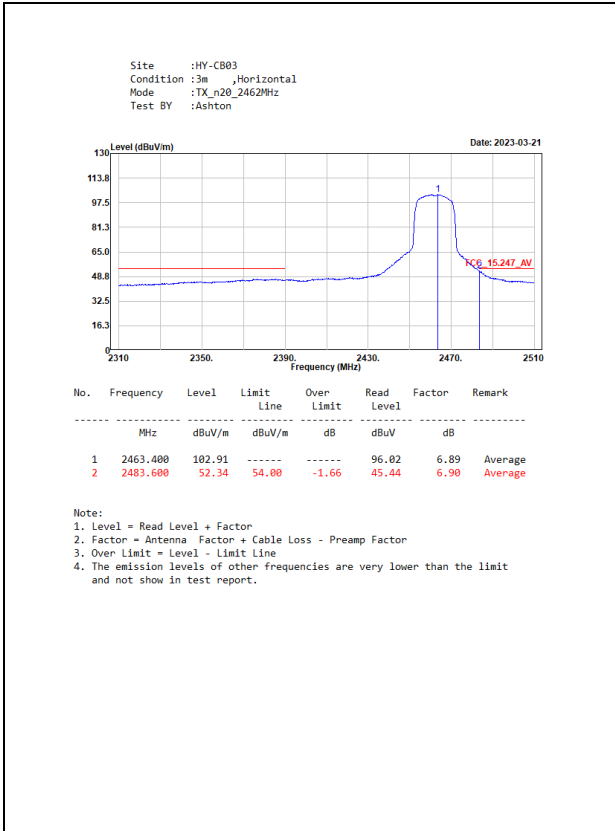


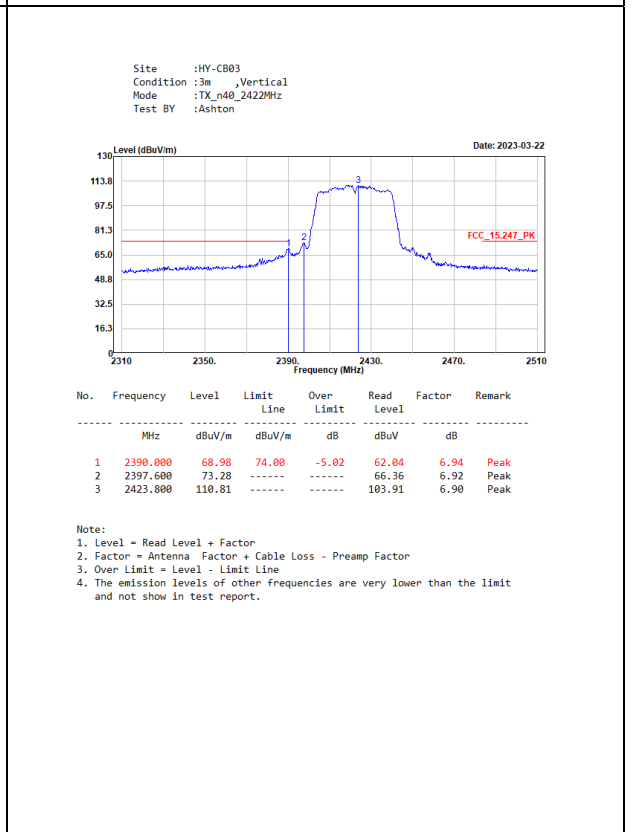
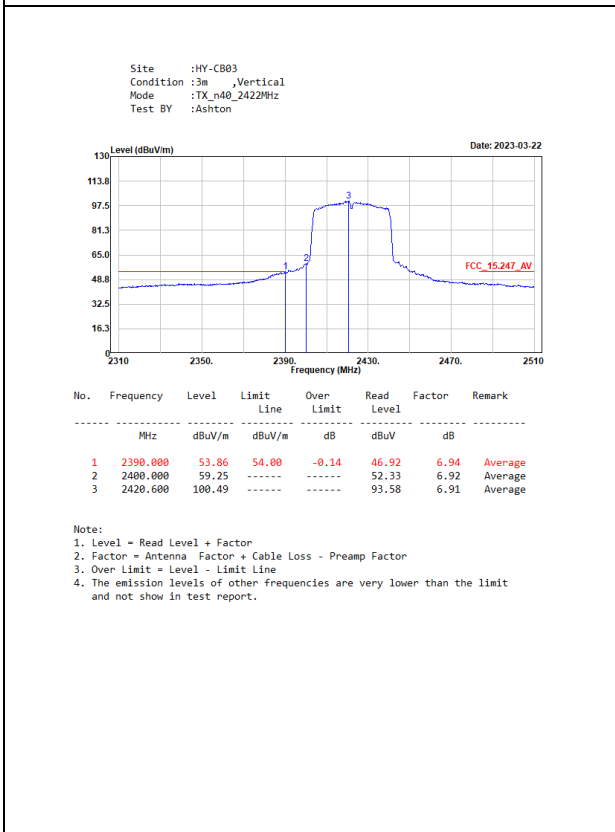
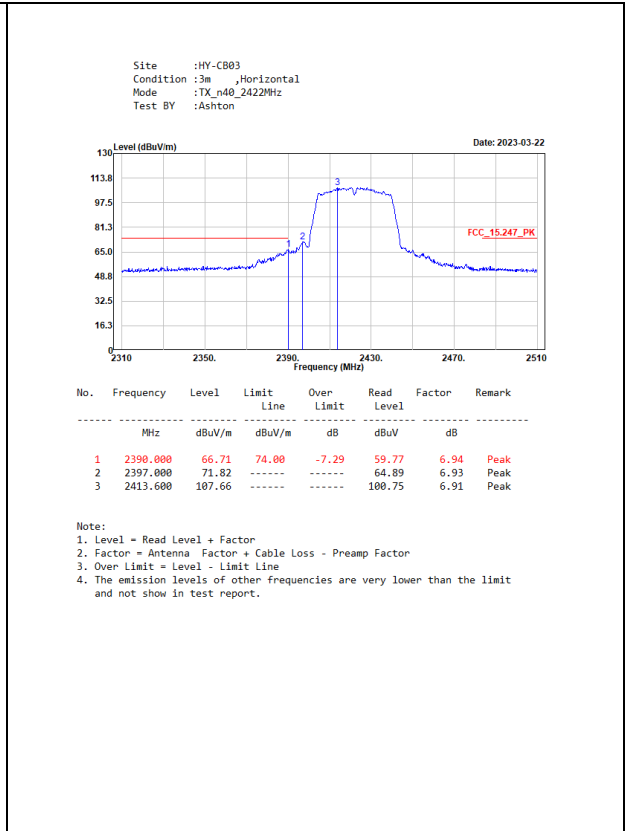
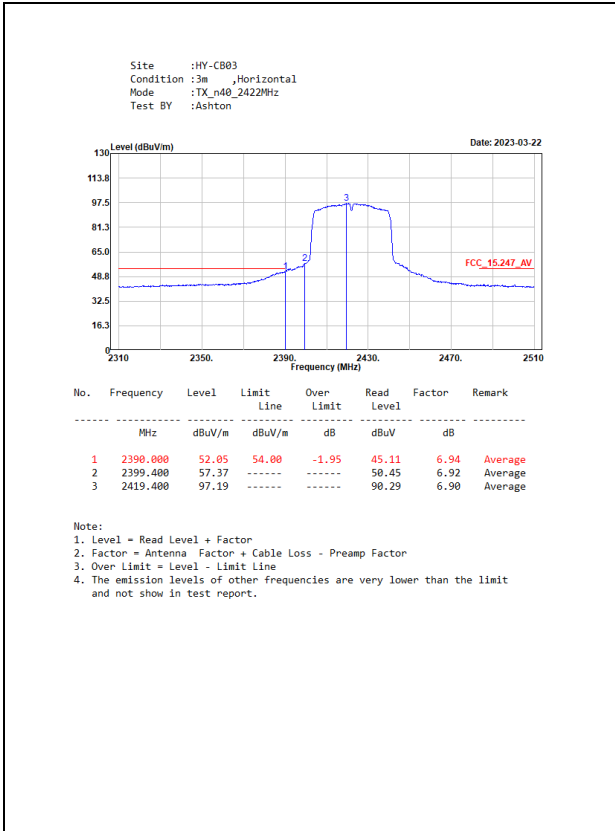


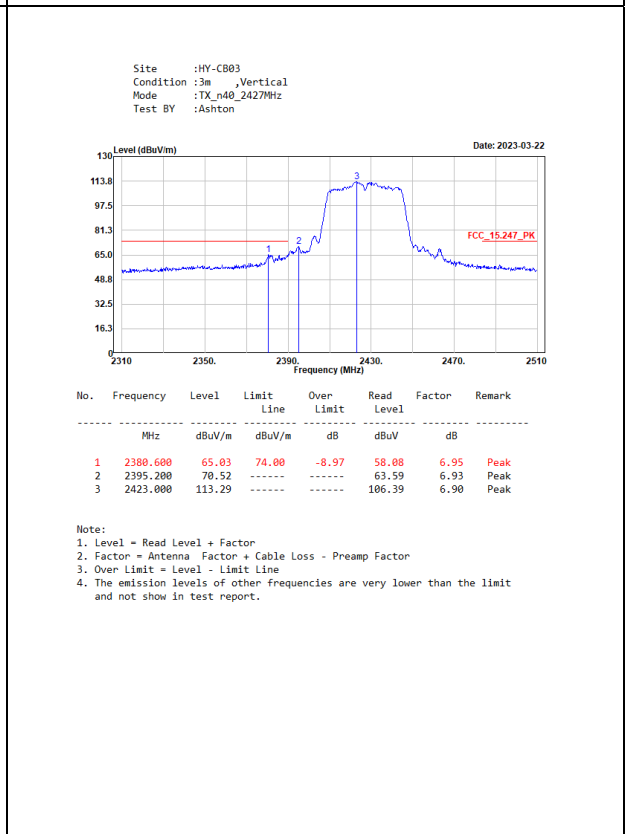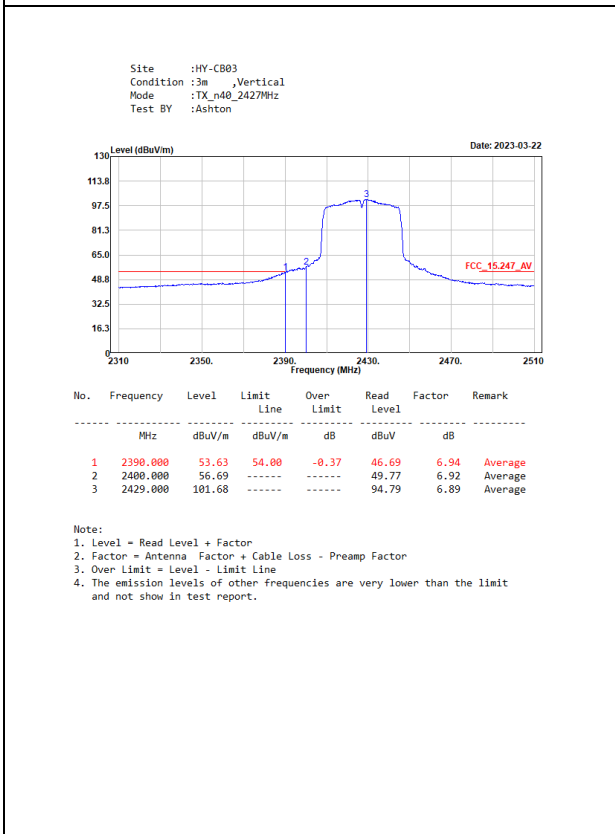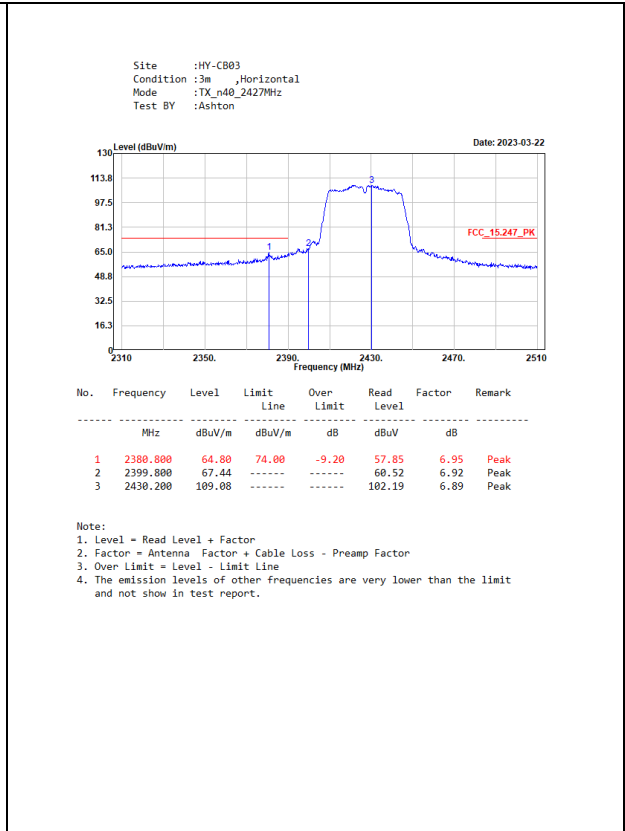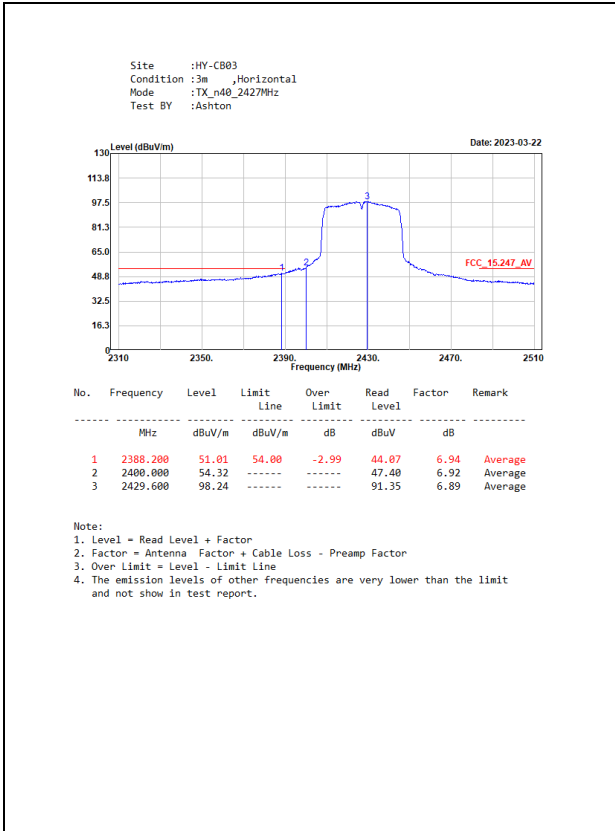

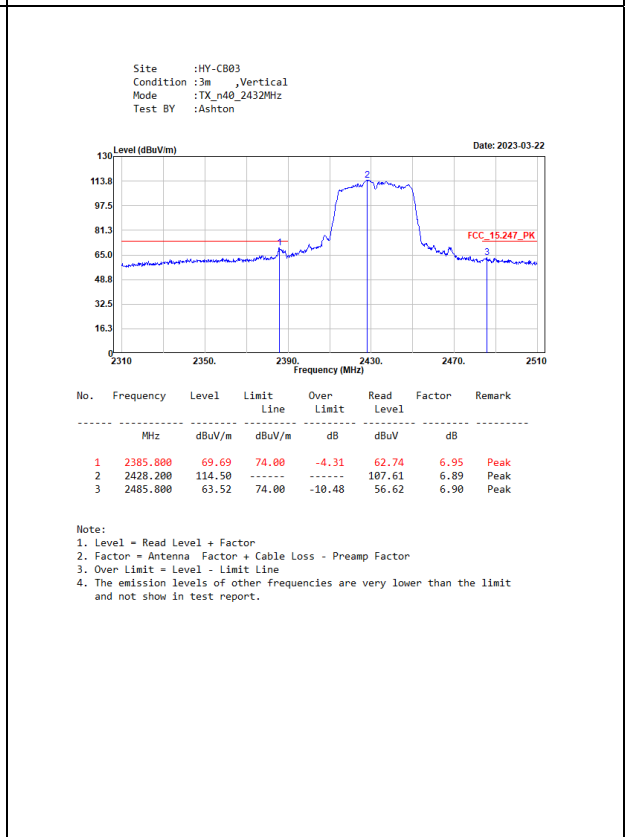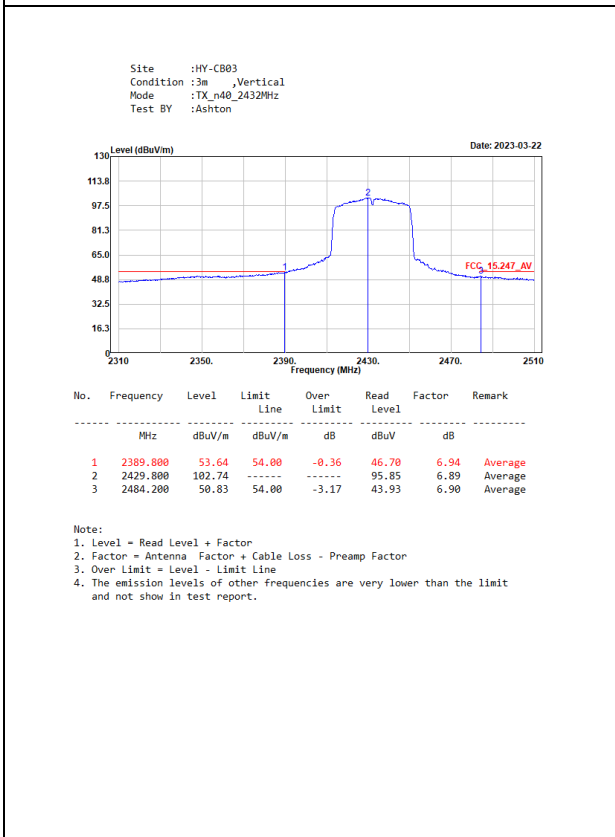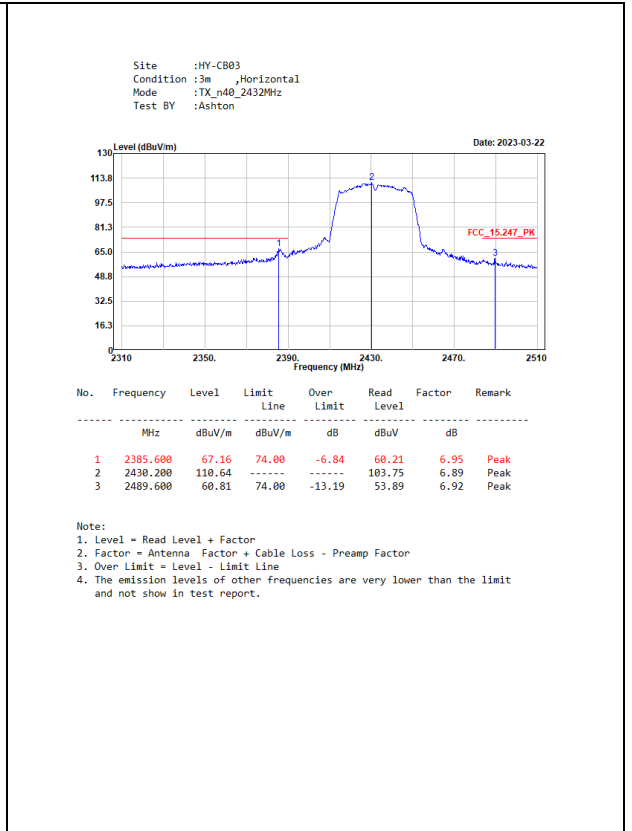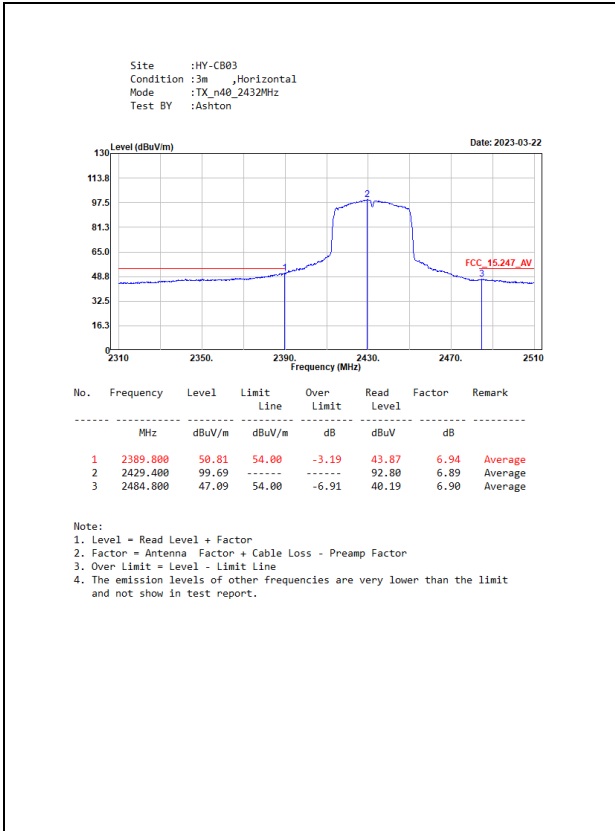

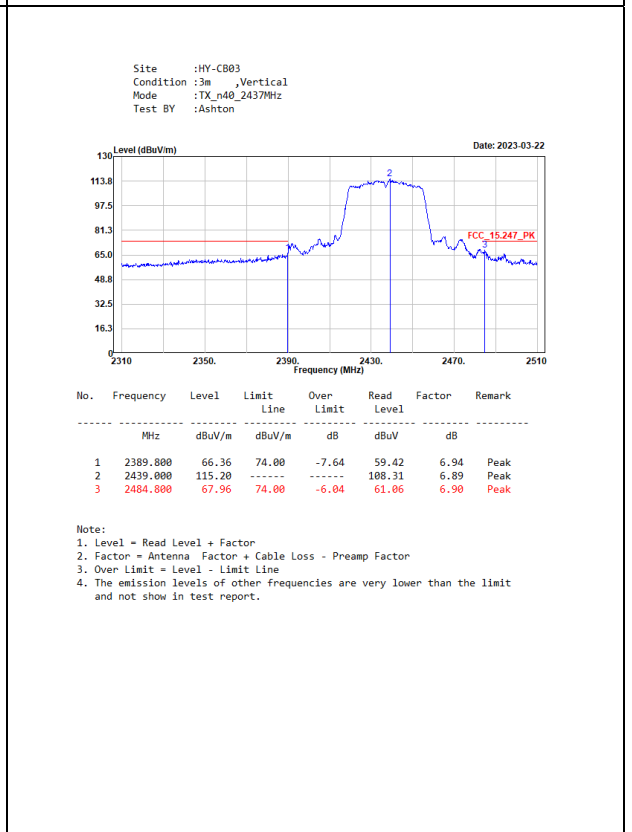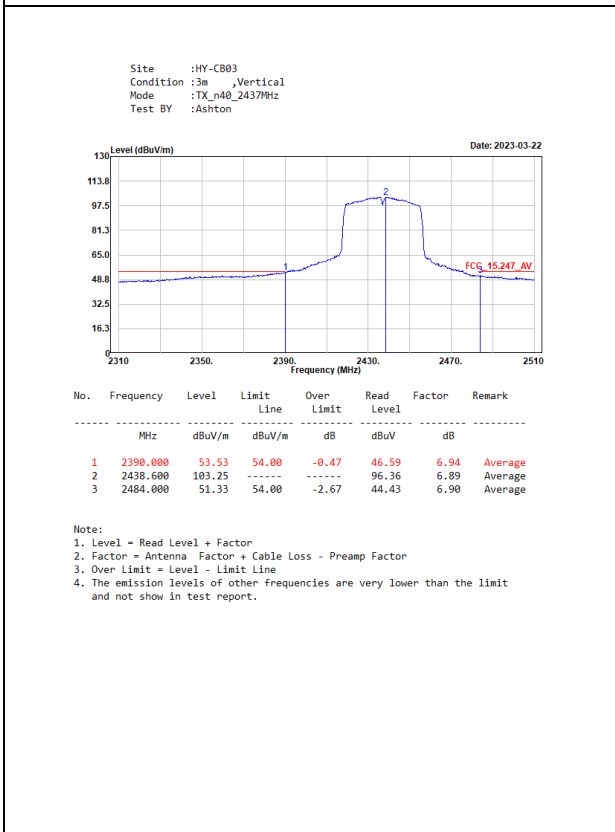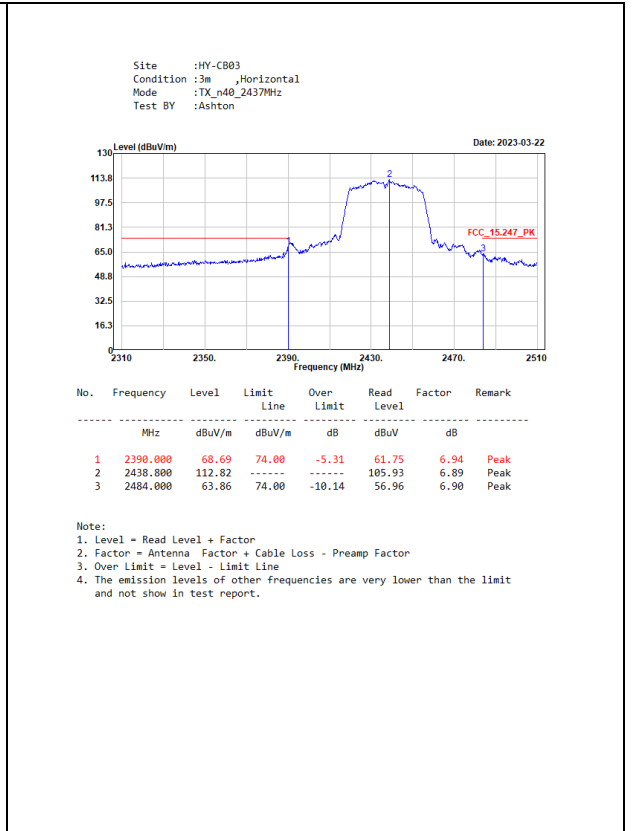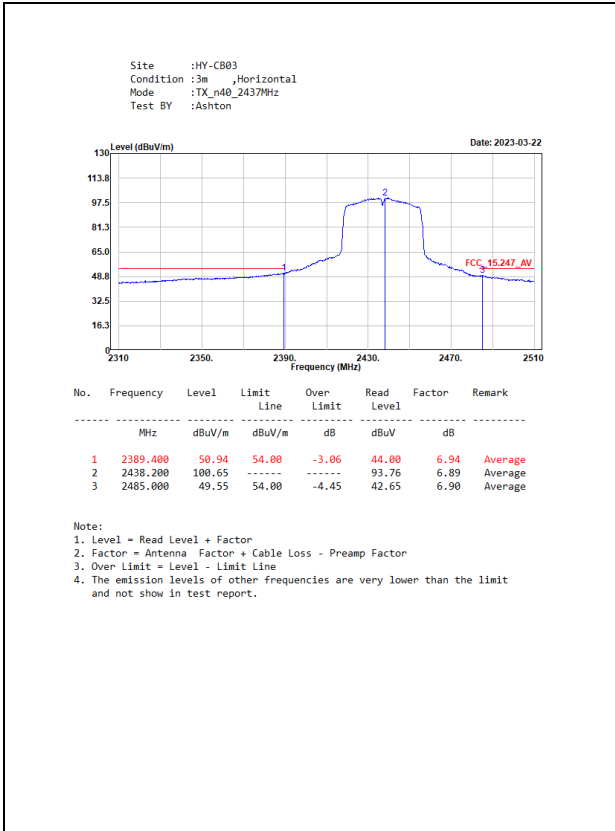


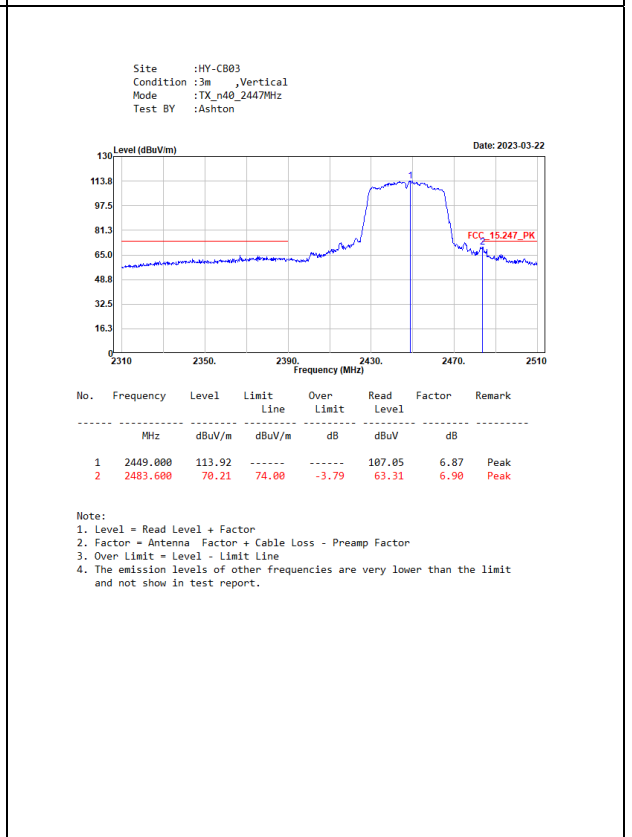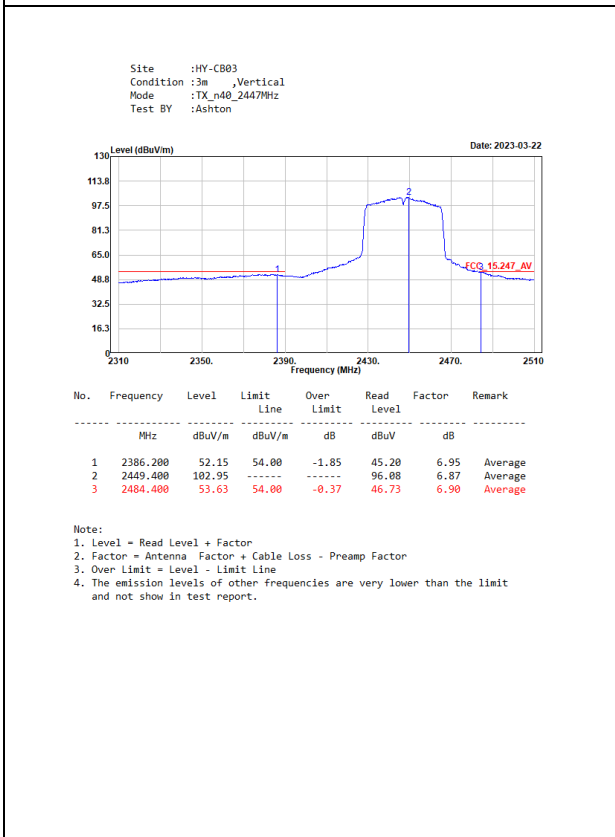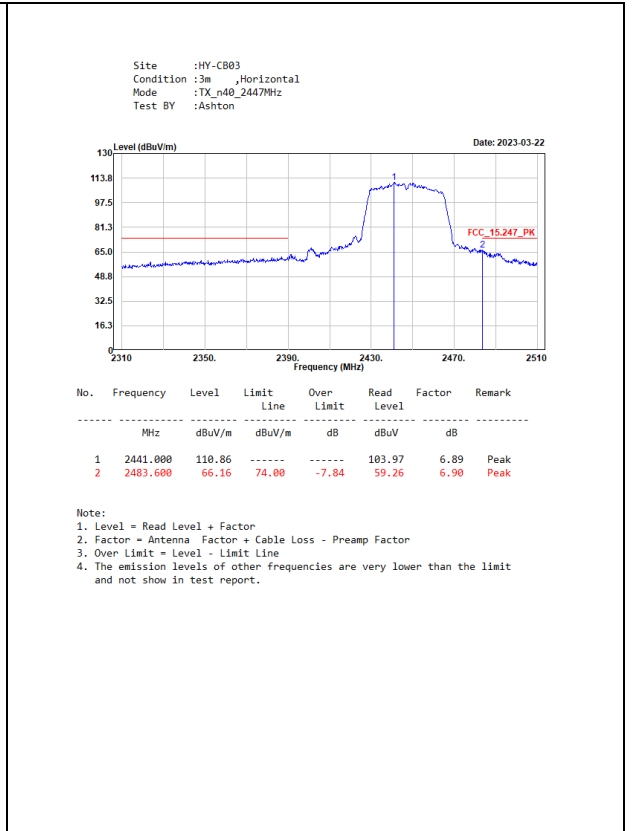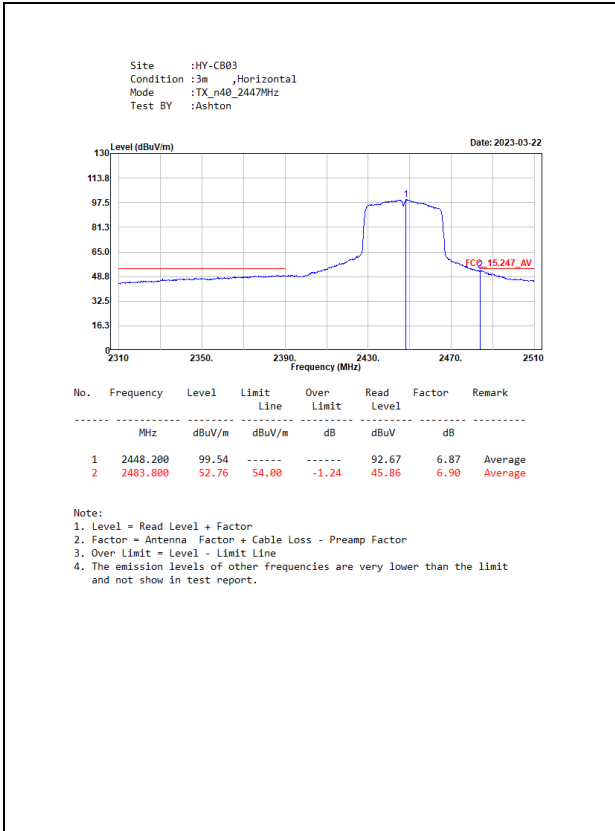

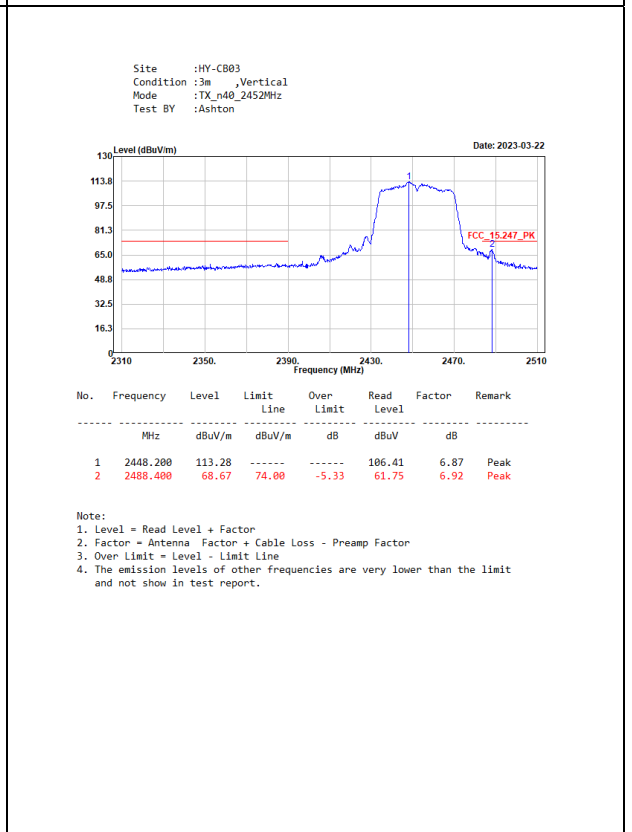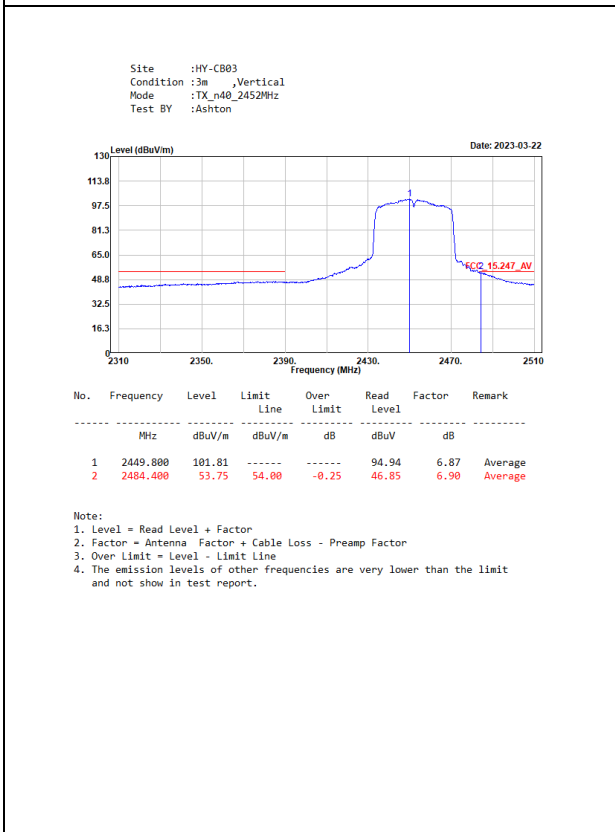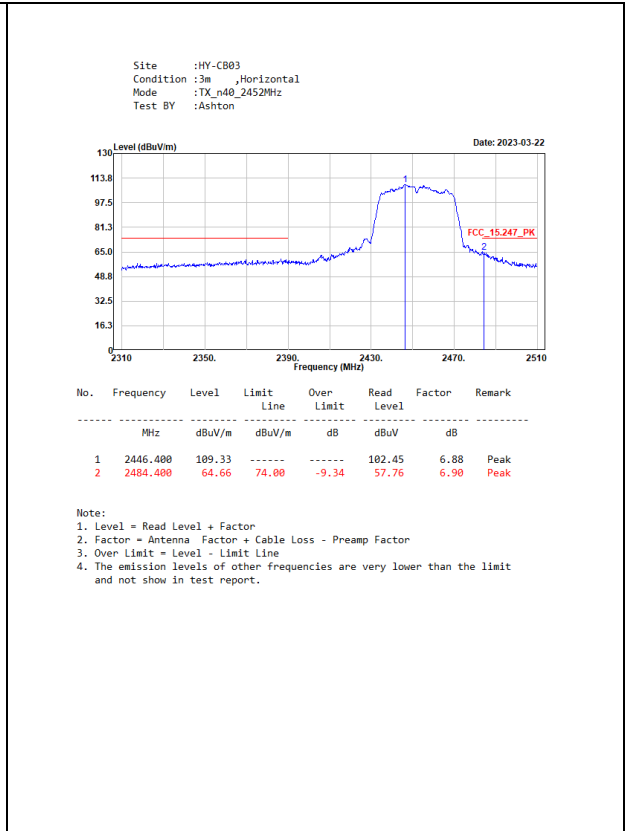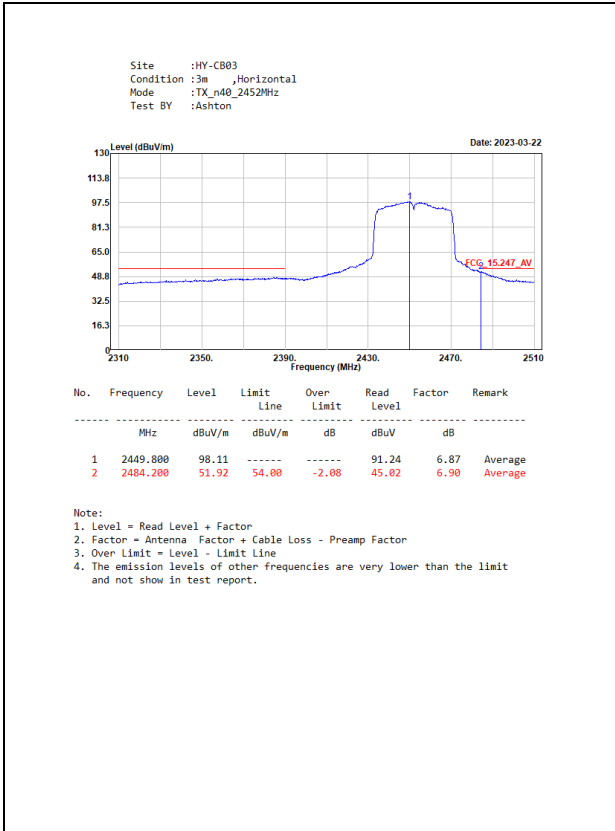

7. 6dB Bandwidth

7.1. Test Setup

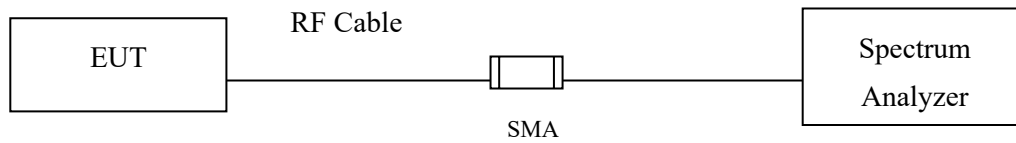

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure


The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 11.8 for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Result of 6dB Bandwidth

Product : 5G Enterprise Router
 Test Item : 6dB Bandwidth Data
 Test Mode : Transmit (802.11b)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	7752	>500	Pass
06	2437	8032	>500	Pass
11	2462	7792	>500	Pass

Figure Channel 11:

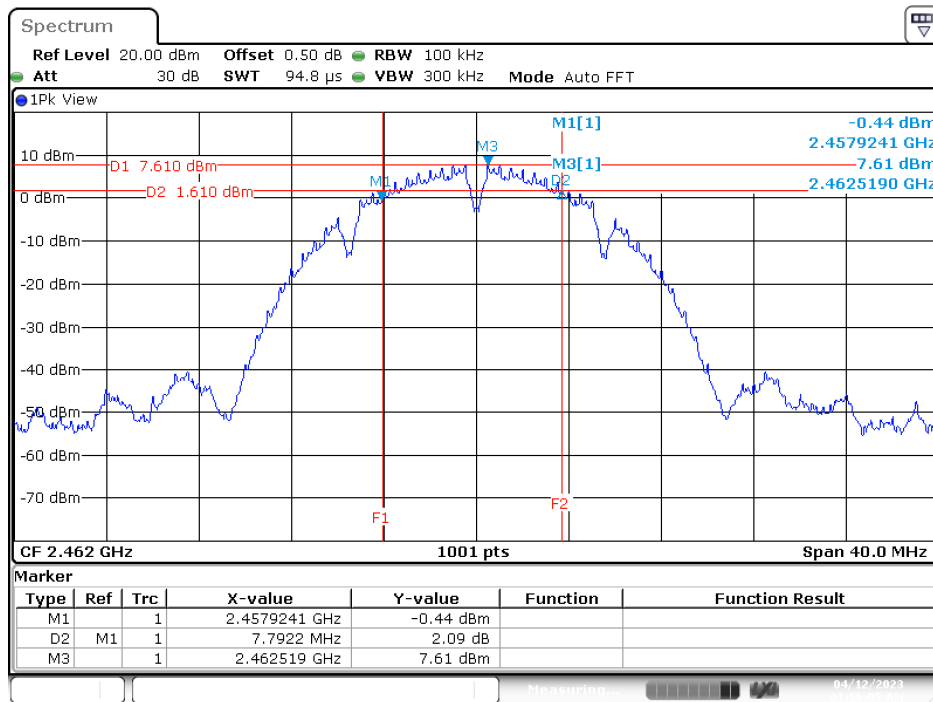


Date: 12.APR.2023 01:56:05

Product : 5G Enterprise Router
 Test Item : 6dB Bandwidth Data
 Test Mode : Transmit (802.11g)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	15105	>500	Pass
06	2437	15784	>500	Pass
11	2462	15105	>500	Pass

Figure Channel 11:

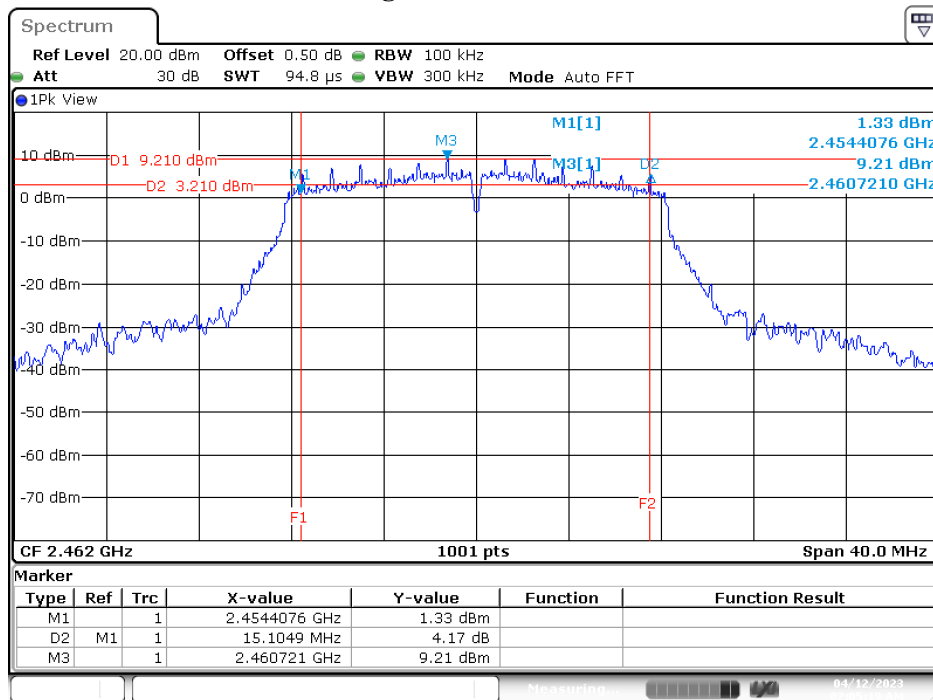

Date: 12.APR.2023 02:05:19

Product : 5G Enterprise Router
 Test Item : 6dB Bandwidth Data
 Test Mode : Transmit (802.11n-20 MHz)

Chain A

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	15105	>500	Pass
06	2437	15105	>500	Pass
11	2462	15105	>500	Pass


Chain B

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	15105	>500	Pass
06	2437	15105	>500	Pass
11	2462	15105	>500	Pass

Chain C

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	15105	>500	Pass
06	2437	15105	>500	Pass
11	2462	15105	>500	Pass

Figure Channel 01:

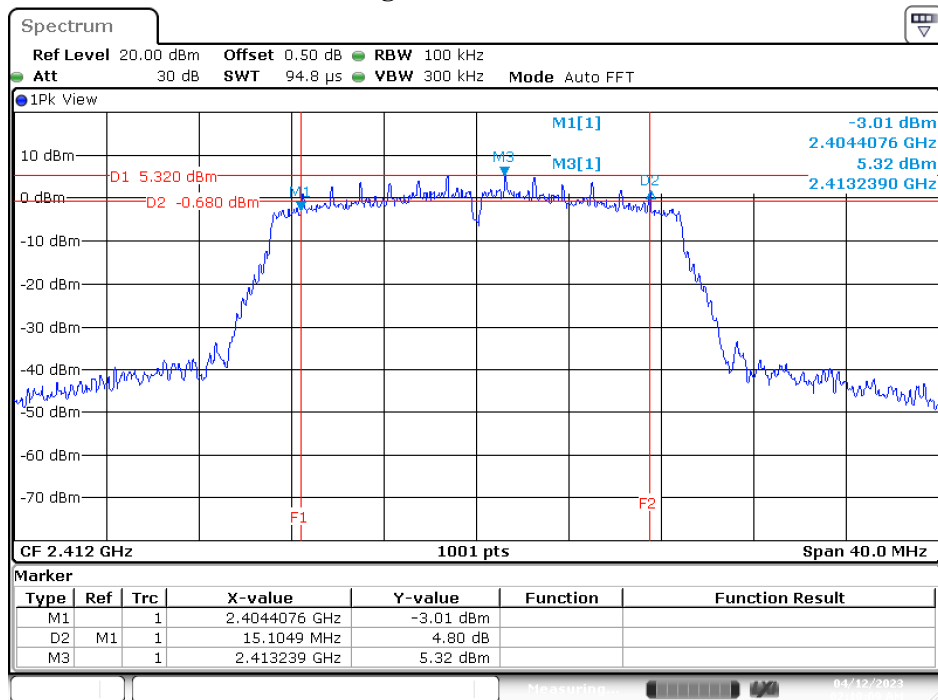

Date: 12.APR.2023 02:10:09

Product : 5G Enterprise Router
 Test Item : 6dB Bandwidth Data
 Test Mode : Transmit (802.11n-40 MHz)

Chain A

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
03	2422	35085	>500	Pass
06	2437	35085	>500	Pass
09	2452	35085	>500	Pass


Chain B

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
03	2422	35085	>500	Pass
06	2437	35005	>500	Pass
09	2452	35085	>500	Pass

Chain C

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
03	2422	35085	>500	Pass
06	2437	35005	>500	Pass
09	2452	35085	>500	Pass


Figure Channel 09:

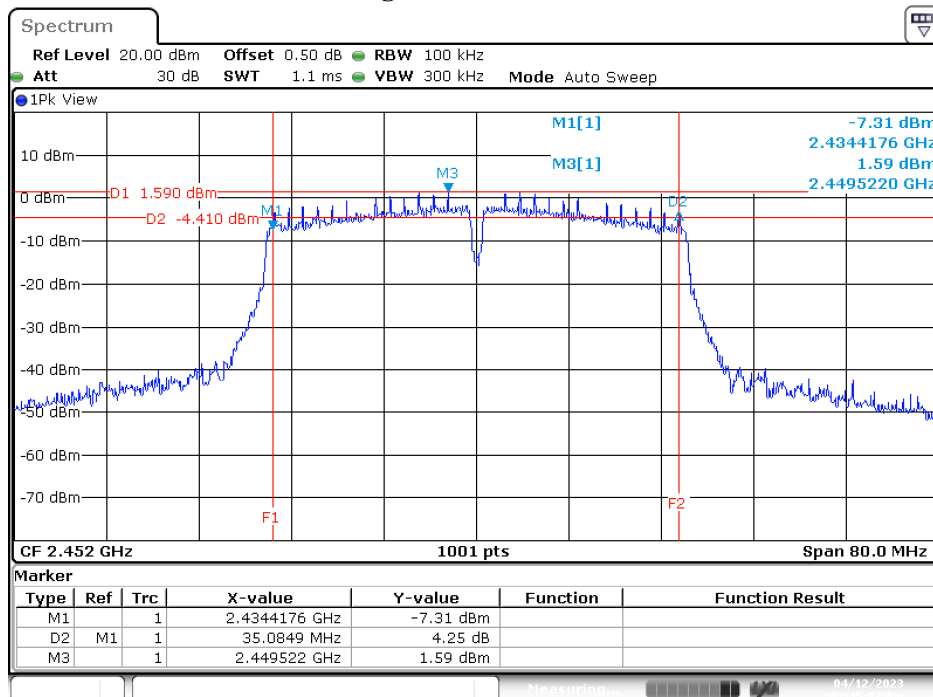

Date: 12.APR.2023 02:45:37

8. Power Density

8.1. Test Setup

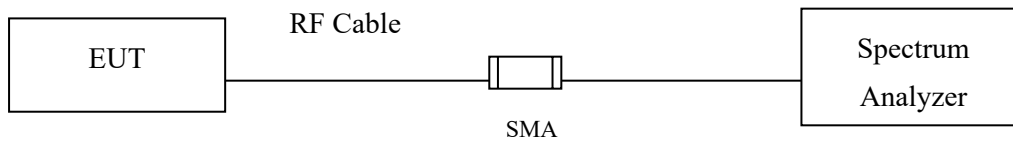

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8 dBm in any 3 kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The maximum power spectral density using C63.10 Section 11.10.2 Method PKPSD (peak PSD)

The maximum power density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


8.4. Test Result of Power Density

Product : 5G Enterprise Router
 Test Item : Power Density Data
 Test Mode : Transmit (802.11b)

Channel No.	Frequency (MHz)	Data Rate (Mbps)	PPSD/MHz (dBm)	Limit (dBm)	Result
01	2412	1	7.54	8	Pass
06	2437	1	7.62	8	Pass
11	2462	1	7.91	8	Pass

Note: Total PPSD/MHz = 10*log(Chain A (mW) + Chain B (mW)) + Duty factor.

Figure Channel 11:

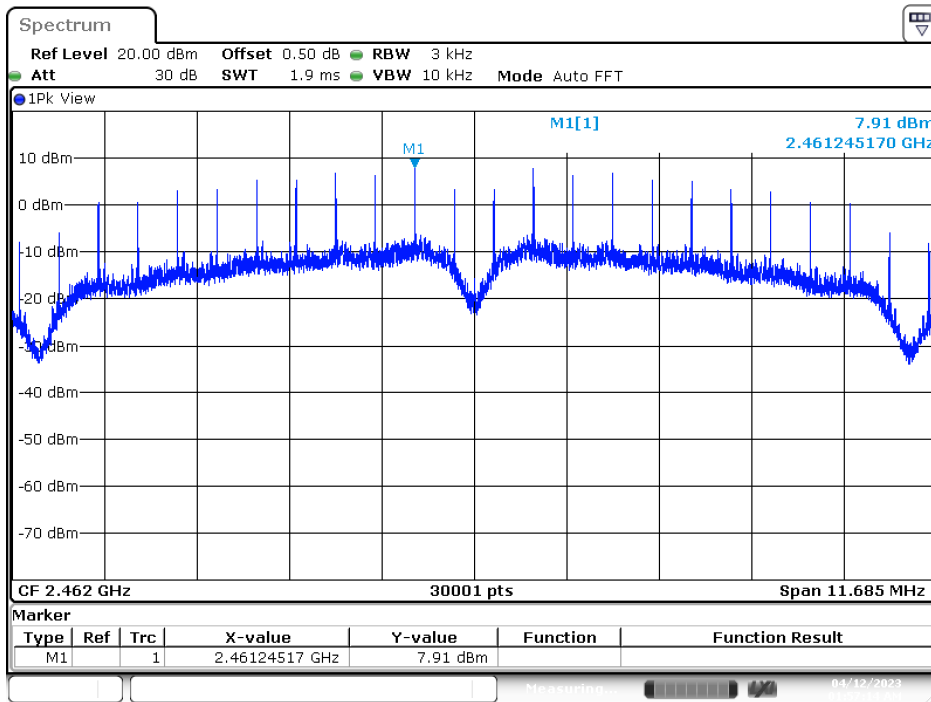


Date: 12.APR.2023 01:57:14

Product : 5G Enterprise Router
 Test Item : Power Density Data
 Test Mode : Transmit (802.11g)

Channel No.	Frequency (MHz)	Data Rate (Mbps)	PPSD/MHz (dBm)	Limit (dBm)	Result
01	2412	6	-7.72	8	Pass
06	2437	6	-5.86	8	Pass
11	2462	6	-5.50	8	Pass

Note: Total PPSD/MHz = 10*log(Chain A (mW) + Chain B (mW)) + Duty factor.

Figure Channel 11:

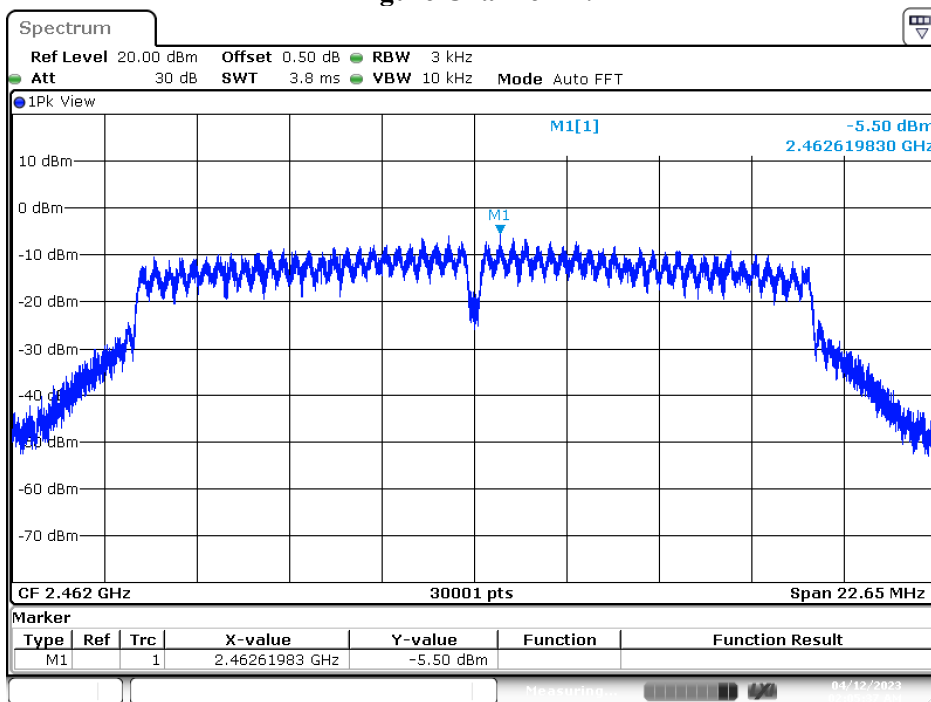

Date: 12.APR.2023 02:05:37


Product : 5G Enterprise Router
 Test Item : Power Density Data
 Test Mode : Transmit (802.11n-20 MHz)

Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
01	2412	HT8	A	-10.170	-5.399	8	Pass
			B	-11.080	-6.309		
			C	-11.000	-6.229		
06	2437	HT8	A	-11.050	-6.279	8	Pass
			B	-11.420	-6.649		
			C	-12.230	-7.459		
11	2462	HT8	A	-11.460	-6.689	8	Pass
			B	-11.670	-6.899		
			C	-11.430	-6.659		

Note :

The quantity $10 \cdot \log 2$ (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 01:

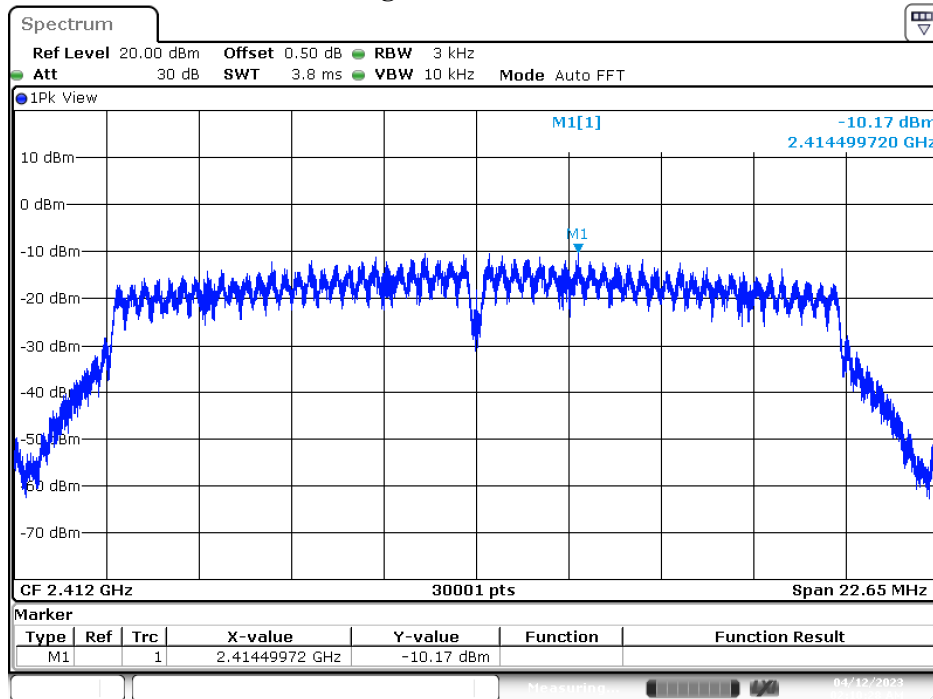

Date: 12.APR.2023 02:10:28


Product : 5G Enterprise Router
 Test Item : Power Density Data
 Test Mode : Transmit (802.11n-40 MHz)

Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
03	2422	HT8	A	-12.890	-8.119	8	Pass
			B	-14.460	-9.689		
			C	-13.750	-8.979		
06	2437	HT8	A	-12.990	-8.219	8	Pass
			B	-14.800	-10.029		
			C	-13.590	-8.819		
09	2452	HT8	A	-12.860	-8.089	8	Pass
			B	-14.630	-9.859		
			C	-13.550	-8.779		

Note :

The quantity 10*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.


Figure Channel 09:

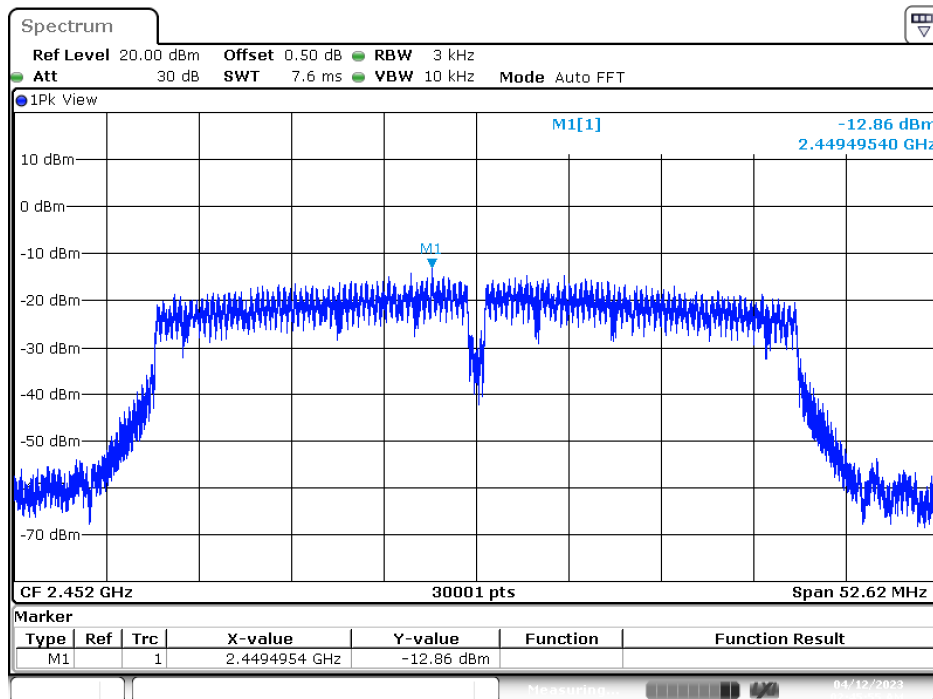

Date: 12.APR.2023 02:45:56

9. Duty Cycle

9.1. Test Setup

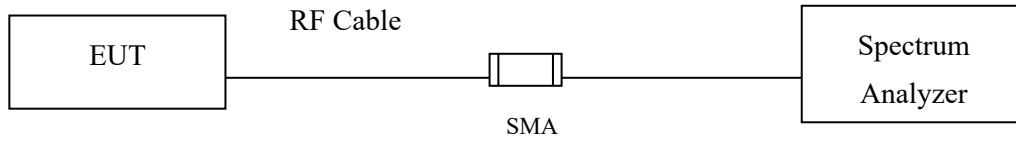

9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

9.3. Test Result of Duty Cycle

Product : 5G Enterprise Router
Test Item : Duty Cycle
Test Mode : Transmit

Duty Cycle Formula:


Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)


Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11b	8.5000	8.8000	96.59	0.15
802.11g	1.3800	1.7600	78.41	1.06
802.11n-20 MHz	0.6800	1.0350	65.70	1.82
802.11n-40 MHz	0.3500	0.7150	48.95	3.10


802.11b

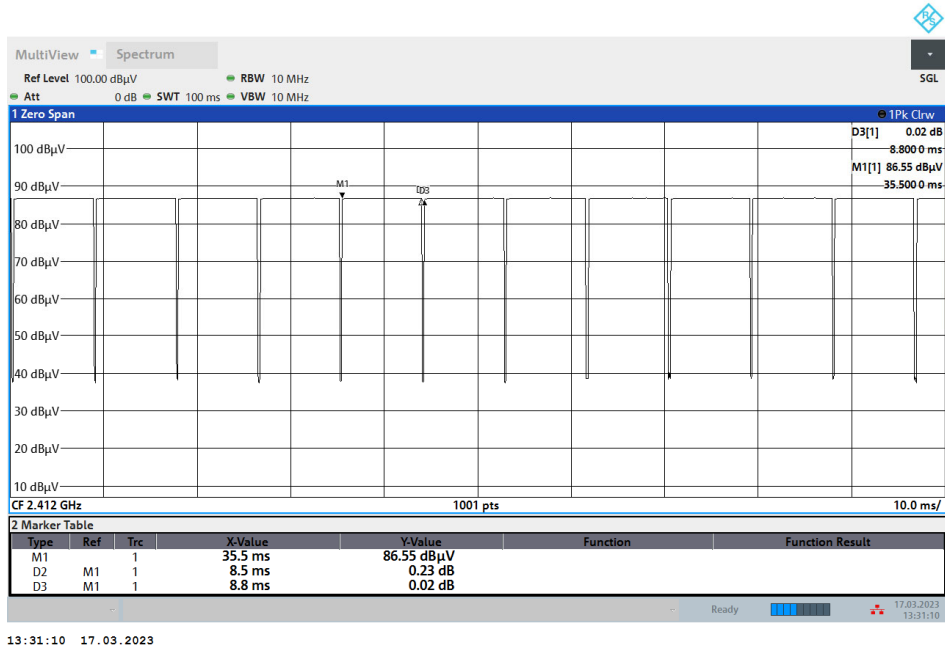

802.11g

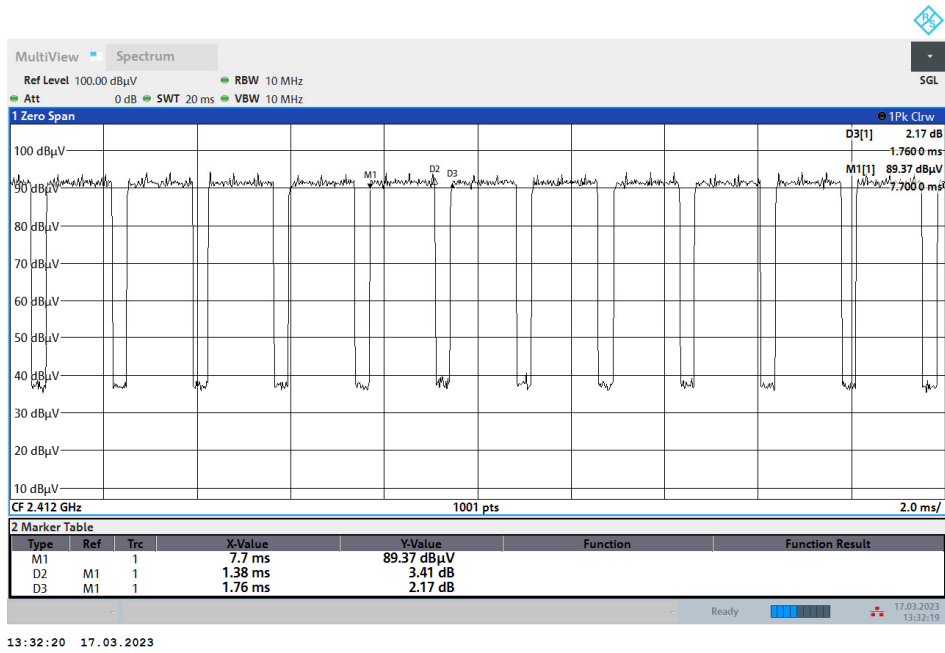


802.11n-20 MHz

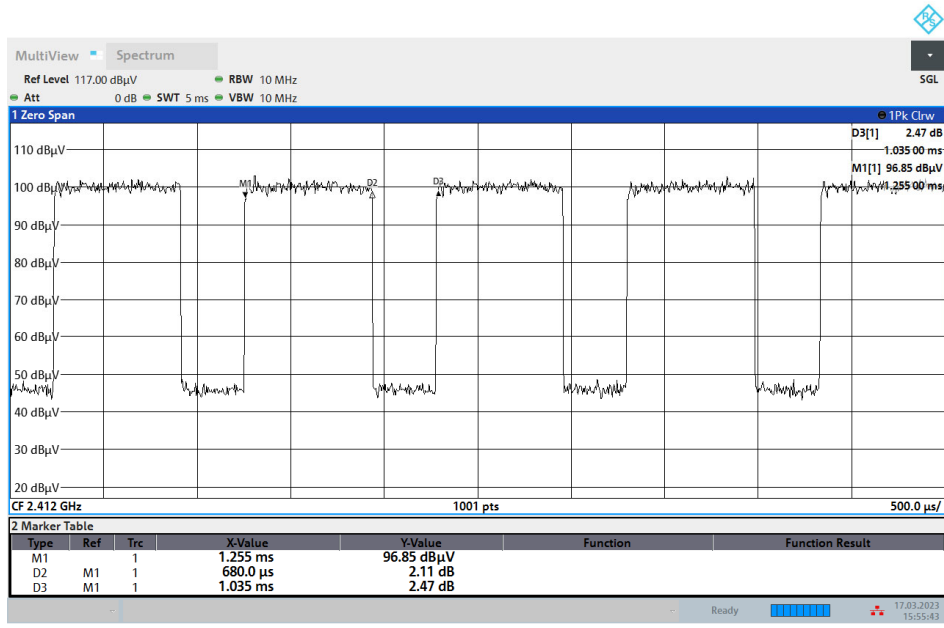

15:55:43 17.03.2023

802.11n-40 MHz

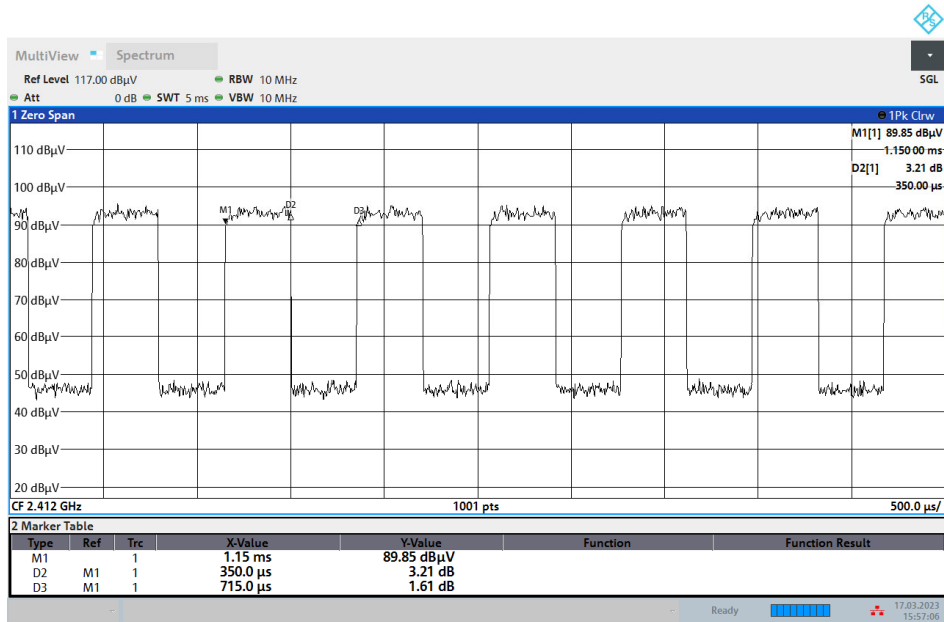

15:57:06 17.03.2023