

RF TEST REPORT

Test item : Medical Image Processing Unit
Model No. : 1012WGB
Order No. : DTNC1507-03747, DTNC1507-03750
Date of receipt : 2015-07-28
Test duration : 2015-07-29 ~ 2015-08-24
Date of issue : 2015-09-07
Use of report : FCC & IC Original Grant


Applicant : Rayence Co., Ltd.
1F, 2F, 3F, #402, 14, Samsung 1ro 1-gil, Hwaseong-si, Gyeonggi-do,
445-170, Korea

Test laboratory : DT&C Co., Ltd.
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
449-935

Test specification : FCC Part 15.407 Subpart E
RSS-247 Issue 1: 2015
RSS-Gen Issue 4: 2014
Test environment : See appended test report
Test result : Pass Fail

The test results presented in this test report are limited only to the sample supplied by applicant and
the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full,
without the written approval of DT&C Co., Ltd.

Tested by:



Engineer
HyunSu Son

Reviewed by:



Technical Manager
Geunki Son

Test Report Version

Test Report No.	Date	Description
DRTFCC1509-0188	Sep. 07, 2015	Initial issue

CONTENTS

1. EUT DESCRIPTION	4
2. INFORMATION ABOUT TESTING.....	5
2.1 Test mode.....	5
2.2 Tested channel information.....	5
2.3 Auxiliary equipment	5
2.4 Tested environment	5
2.5 EMI Suppression Device(s) / Modifications	5
3. SUMMARY OF TESTS	6
4. TEST METHODOLOGY	7
4.1 EUT configuration.....	7
4.2 EUT exercise.....	7
4.3 General test procedures	7
4.4 Description of test modes	7
5. INSTRUMENT CALIBRATION	8
6. FACILITIES AND ACCREDITATIONS	8
6.1 Facilities	8
6.2 Equipment.....	8
7. ANTENNA REQUIREMENTS	8
8. TEST RESULT	9
8.1 Emission Bandwidth(26 dB Bandwidth)	9
8.2 Minimum Emission Bandwidth (6 dB Bandwidth).....	10
8.3 Maximum Conducted Output Power.....	11
8.4 Peak Power Spectral Density	14
8.5 Frequency Stability.....	16
8.6 Radiated Spurious Emission Measurements	17
8.7 AC Conducted Emissions	23
8.8 Occupied Bandwidth	24
9. LIST OF TEST EQUIPMENT	35
APPENDIX I	36

1. EUT DESCRIPTION

FCC Equipment Class	Unlicensed National Information Infrastructure (UNII)
Product	Medical Image Processing Unit
Model Name	1012WGB
Add Model Name	N/A
Hardware version	V9.0
Software version	V3.4
Power Supply	DC 11.1 V
Frequency Range	Band I(5150 ~ 5250MHz) <ul style="list-style-type: none">▪ 802.11a/n(HT20): 5180 ~ 5240 MHz▪ 802.11n(HT40): 5190 ~ 5230 MHz
Modulation type	▪ 802.11a/n: OFDM
Transmissions category	Completely uncorrelated signal
Antenna Specification	Antenna type: Internal Antenna Antenna gain <ul style="list-style-type: none">▪ Band I: ANT 1 : - 9.270 dBi & ANT 2 : - 7.510 dBi Antenna configuration <ul style="list-style-type: none">▪ 802.11a: Multiple Transmitting (ANT 1 and ANT 2)▪ 802.11n(MCS0 ~ 7) : Multiple Transmitting (ANT 1 and ANT 2)

2. INFORMATION ABOUT TESTING

2.1 Test mode

5GHz Band	Mode	Worst data rate
Band I	802.11a	6 Mbps
	802.11n(HT20)	MCS 0
	802.11n(HT40)	MCS 0

The worst case data rate for each modulation is determined as above test mode. And all tests conducted in this report were made at the worst case data rate of each modulation.

2.2 Tested channel information

5GHz Band	802.11a/n(HT20)		802.11n(HT40)	
	Channel	Frequency [MHz]	Channel	Frequency [MHz]
Band I	36	5180	38	5190
	40	5200	-	-
	48	5240	46	5230

2.3 Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
Laptop	PP22L	H7R1GBX	DELL	FCC DoC
-	-	-	-	-

2.4 Tested environment

Temperature	: 22 ~ 24 °C
Relative humidity content	: 38 ~ 42 % R.H.
Details of power supply	: DC 11.1 V

2.5 EMI Suppression Device(s) / Modifications

EMI suppression device(s) added and/or modifications made during testing
→ None

3. SUMMARY OF TESTS

FCC Part Section(s)	RSS Section(s)	Parameter	Limit	Test Condition	Status Note 1
I. Transmitter Mode (TX)					
15.407(a)	N/A	Emission Bandwidth (26 dB Bandwidth)	N/A		NT Note 3
15.407(e)	N/A	Minimum Emission Bandwidth (6 dB Bandwidth)	> 500 kHz in 5725 ~ 5850MHz		NA
15.407(a)	RSS-247 [6.2]	Maximum Conducted Output Power	5150 ~ 5250MHz For FCC: < 30 dBm or < 23.97 dBm 5150 ~ 5250MHz For IC: 200mW or <10 + 10log ₁₀ (B) dBm, whichever power is less. 5250 ~ 5350MHz&5470 ~ 5725MHz For FCC & IC: 250mW or <11 + 10log ₁₀ (B) dBm, whichever power is less. 5725 ~ 5850MHz For FCC: < 30 dBm.	Conducted	C
15.407(a)	RSS-247 [6.2]	Peak Power Spectral Density	5150 ~ 5250MHz For FCC:11dBm/MHz or 17dBm/MHz 5150 ~ 5250MHz For IC: 10dBm/MHz 5250 ~ 5350MHz&5470 ~ 5725MHz For FCC & IC: 11dBm/MHz 5725 ~ 5850MHz For FCC: 30dBm/500kHz		NT Note 3
15.407(g)	N/A	Frequency Stability	N/A		NT Note 3
-	RSS Gen [6.6]	Occupied Bandwidth (99%)	N/A		C
15.407(b)	RSS-247 [6.2]	Undesirable Emissions	5150 ~ 5725MHz: < -27 dBm/MHz EIRP 5725 ~ 5850MHz: < -17 dBm/MHz EIRP or < -27 dBm/MHz EIRP	Radiated	C Note 4
15.205 15.209 15.407(b)	RSS-Gen [8.9&8.10]	General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		C Note 4
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS test report	-	NA
15.207	RSS-Gen [8.8]	AC Conducted Emissions	FCC 15.207	AC Line Conducted	NA Note 5
15.203	RSS-Gen [6.7]	Antenna Requirements	FCC 15.203	-	C

Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable

Note 2: The test items were performed according to the KDB789033 and ANSI C63.10.

Note 3: These test items were not performed because this device uses the granted module.

(FCCID: PPD-AR5BHB116)

Please refer to the test report of the granted module.

The module test report number:

FR080603B (By SPORTON INTERNATIONAL INC.)

Note 4: These test items were performed in each axis and the worst case data was reported.

Note 5: The EUT use only battery operating.

4. TEST METHODOLOGY

Generally the tests were performed according to the KDB789033 D02 v01. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing

4.1 EUT configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart C.

4.3 General test procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB789033 D02 v01. So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10.

The EUT is placed on the turntable, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15MHz and 30MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB789033 D02 v01. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10 as stated on KDB789033 D02 v01.

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axis.

4.4 Description of test modes

A test program is used to control the EUT for staying in continuous transmitting mode with maximum fixed duty cycle.

5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

6. FACILITIES AND ACCREDITATIONS

6.1 Facilities

The open area test site(OATS) or semi anechoic chamber and conducted measurement facility used to collect the radiated and conducted test data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935. The site is constructed in conformance with the requirements.

- Semi anechoic chamber registration Number : 165783 (FCC) / 5740A-3 (IC)

6.2 Equipment

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

7. ANTENNA REQUIREMENTS

7.1 According to FCC 47 CFR §15.203& RSS-Gen [6.7]:

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antennas of this E.U.T are permanently attached using the unique connectors.
(Please refer to the internal photo.)**

Therefore this E.U.T Complies with the requirement of §15.203

7.2 Directional antenna gain for MIMO :

Bands	ANT 1 [dBi]	ANT 2 [dBi]	Directional Gain for uncorrelated signals [dBi]
Band I	- 9.270	- 7.510	- 8.301

Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}]$ dBi for MIMO uncorrelated signal


8. TEST RESULT

8.1 Emission Bandwidth(26 dB Bandwidth)

■ Test Requirements

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The 26dB bandwidth is used to determine the conducted output power limit.

■ Test Configurations

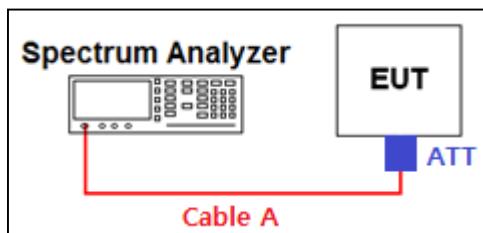

■ Test Procedure

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB789033**.

1. Set resolution bandwidth (RBW) = approximately **1 %** of the **EBW**
2. Set the video bandwidth (VBW) > **RBW**.
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.


■ TEST RESULTS: **N/T**

8.2 Minimum Emission Bandwidth (6 dB Bandwidth)

■ Test Requirements

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz..

■ Test Configuration

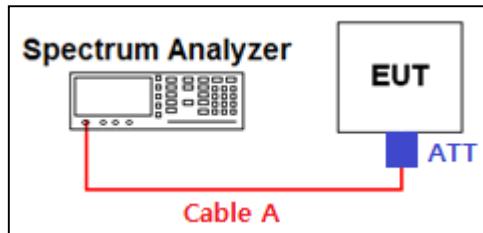

■ Test Procedure

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB789033 D02 V01**.

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth $\geq 3 \times \text{RBW}$.
3. Detector = **Peak**.
4. Trace mode = **max hold**.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

■ Test Results: **NT**

8.3 Maximum Conducted Output Power

■ FCC Requirements

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 + 10 \log_{10} B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

■ IC Requirements

(1) For band 5150 ~ 5250 MHz, The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99 % emission bandwidth in MHz.

(2) For band 5250 ~ 5350 MHz, The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99 % emission bandwidth in MHz.

(3) For band 5470 ~ 5600 MHz & 5650 ~ 5725 MHz, The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99 % emission bandwidth in MHz.

(4) For band 5725 ~ 5850 MHz, The maximum conducted output power shall not exceed 1 W.


Maximum conducted Output power Limit Calculation

Bands	Mode	Power Limit [mW]		Determined Limit [dBm]
		Least 99% BW [MHz]	Calculation Limit [dBm]	
Band I	802.11a	200	23.01	16.43
		17.506	16.43	
	802.11n HT20	200	23.01	16.64
		18.394	16.64	
	802.11n HT40	200	23.01	19.72
		37.390	19.72	

Note 1: The directional gain does not exceed 6 dBi. Please refer to clause 7.2.

Note 2: The IC limit was used.

Test Configuration

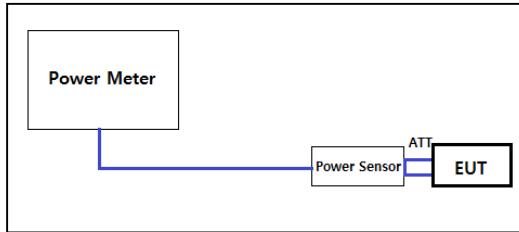

Test Procedure

Maximum Conducted Output Power is measured using Measurement Procedure **Method PM-G** of **KDB789033**

Test Results: Comply

Mode	CH	Freq. [MHz]	Test Result		
			ANT 1 [dBm]	ANT 2 [dBm]	SUM Power ^{Note1}
					[dBm]
802.11a	36	5180	11.48	11.50	14.50 0.02819
	40	5200	11.34	11.56	14.46 0.02794
	48	5240	12.04	12.10	15.08 0.03221
802.11n HT20	36	5180	12.05	11.96	15.02 0.03174
	40	5200	12.35	11.91	15.15 0.03270
	48	5240	13.98	12.32	16.24 0.04206
802.11n HT40	38	5190	9.62	8.08	11.93 0.01559
	46	5230	14.63	12.99	16.90 0.04895

Note 1: SUM power = $10 \log(10^{\frac{\text{ANT 1 Result}}{10}} + 10^{\frac{\text{ANT 2 Result}}{10}})$

8.4 Peak Power Spectral Density

■ FCC Requirements

- (1) For the band 5.15-5.25 GHz.
 - (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}
 - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}
 - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
 - (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band.
- (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.


■ IC Requirements

- (1) For band 5150 ~ 5250 MHz,
The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.
- (2) For band 5250 ~ 5350 MHz
The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.
- (3) For band 5470 ~ 5600 MHz & 5650 ~ 5725 MHz
The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.
- (4) For band 5725 ~ 5850 MHz
The power spectral density shall not exceed 30 dBm in any 500 kHz band.

■ Peak Power Spectral Density Limit Calculation

Note 1: The directional gain does not exceed 6 dBi. Please refer to clause 7.2.

■ Test Configuration

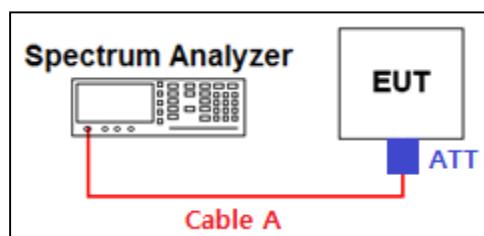

■ Test Procedure

Maximum Power Spectral Density is measured using Measurement Procedure of **KDB789033**

- 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- 2) Use the peak search function on the instrument to find the peak of the spectrum and record its value.

- 3) Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) **If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.**
 - b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- 4) The result is the Maximum PSD over 1 MHz reference bandwidth.
- 5) For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in §15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - a) Set RBW $\geq 1/T$, where T is defined in section II.B.1.a). (Refer to Appendix II)
 - b) Set VBW ≥ 3 RBW.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 kHz is available on nearly all spectrum analyzers.

TEST RESULTS : NT

8.5 Frequency Stability

Test requirements

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

Test Procedure

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 0°C and +70°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

Test Result : NT

8.6 Radiated Spurious Emission Measurements

■ Test Procedure

• FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

• FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	160.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	160.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	160.7 ~ 160.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240	3600 ~ 4000		
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

• FCC Part 15.205(b): The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

• FCC Part 15.407 (b): Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the **5.15-5.25 GHz band**: all emissions outside of the **5.15-5.35 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (2) For transmitters operating in the **5.25-5.35 GHz band**: all emissions outside of the **5.15-5.35 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (3) For transmitters operating in the **5.47-5.725 GHz band**: all emissions outside of the **5.47-5.725 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (4) For transmitters operating in the **5.725-5.85 GHz band**: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions **below 1 GHz** must comply with the general field strength limits set forth in **Section 15.209**. Further, any U-NII devices using an **AC power line** are required to comply also with the conducted limits set forth in **Section 15.207**.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

■ Test Procedure

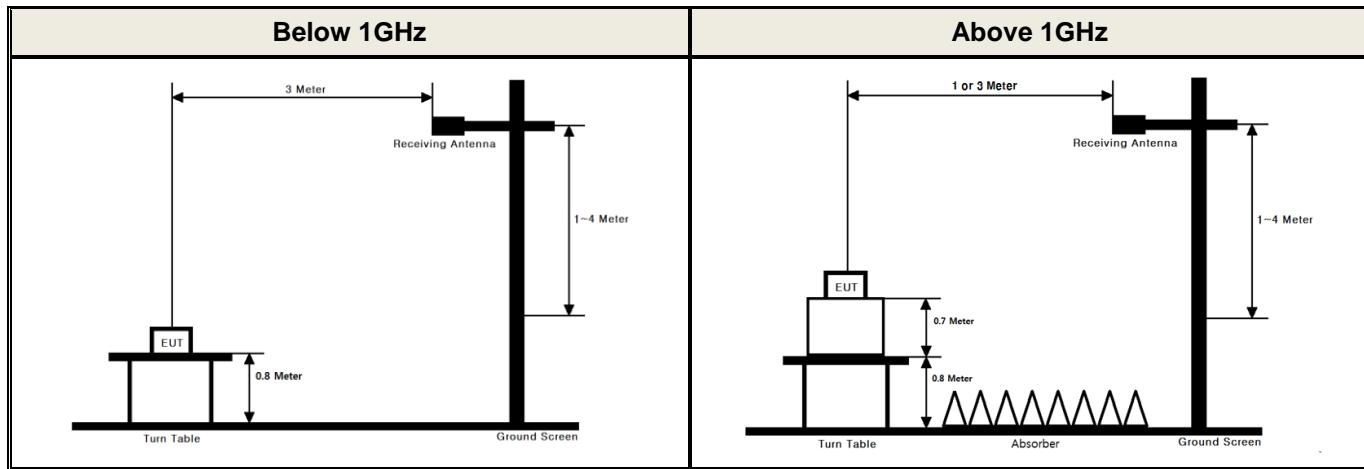

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
2. The turn table shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Radiated spurious emission measured using following Measurement Procedure **of KDB789033 D02 V01**

► General Requirements for Unwanted Emissions Measurements

The following requirements apply to all unwanted emissions measurements, both in and outside of the restricted bands:

- EUT Duty Cycle
 - (1) The EUT shall be configured or modified to **transmit continuously** except as stated in (ii), below. The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (**to no lower than 98 percent**) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.
 - (2) If **continuous transmission (or at least 98 percent duty cycle)** cannot be achieved due to hardware limitations of the EUT (e.g., overheating), the following additions to the measurement and reporting procedures are required:
 - The EUT shall be configured to operate at the maximum achievable duty cycle.
 - Measure the duty cycle, x, of the transmitter output signal.
 - Adjustments to measurement procedures (e.g., increasing test time and number of traces averaged) shall be performed as described in the procedures below.
 - The test report shall include the following additional information:
 - The reason for the duty cycle limitation.
 - The duty cycle achieved for testing and the associated transmit duration and interval between transmissions.
 - The sweep time and the amount of time used for trace stabilization during max-hold measurements for peak emission measurements.
 - (3) **Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.**

► Measurements below 1000 MHz

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Compliance shall be demonstrated using **CISPR quasi-peak detection**; however, **peak detection** is permitted as an alternative to quasi-peak detection.

► Measurements Above 1000MHz(Peak)

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Peak emission levels are measured by setting the analyzer as follows:
 - (1) **RBW = 1 MHz.**
 - (2) **VBW \geq 3 MHz.**
 - (3) **Detector = Peak.**
 - (4) Sweep time = auto.
 - (5) Trace mode = max hold.
 - (6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

► Measurements Above 1000MHz(Method AD)

- (1) **RBW = 1 MHz.**
- (2) **VBW \geq 3 MHz.**
- (3) **Detector = RMS**, if $\text{span}/(\# \text{ of points in sweep}) \leq \text{RBW}/2$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.
- (4) Averaging type = power (i.e., RMS)
 - As an alternative, the detector and averaging type may be set for linear voltage averaging. Some analyzers require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- (5) Sweep time = auto.
- (6) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of $1/x$, where x is the duty cycle. For example, with 50 percent duty cycle, at least 200 traces should be averaged.
- (7) If tests are performed with the EUT transmitting at a duty cycle less than 98 percent, a correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - **If power averaging (RMS) mode was used in step (iv) above, the correction factor is $10 \log(1/x)$, where x is the duty cycle.**
For example, if the transmit duty cycle was 50 percent, then 3 dB must be added to the measured emission levels.
 - If linear voltage averaging mode was used in step (iv) above, the correction factor is $20 \log(1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50 percent, then 6 dB must be added to the measured emission levels.
 - If a specific emission is demonstrated to be continuous (100 percent duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

Radiated Spurious Emissions data(9kHz ~ 40GHz) : 802.11a & Band I

Tested ANT	Tested Channel	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
ANT 1 + ANT 2	36 (5180MHz)	5149.960	H	Z	PK	47.51	11.70	N/A	N/A	59.21	74.00	14.79
		5149.940	H	Z	AV	38.26	11.70	0.18	N/A	50.14	54.00	3.86
		10360.140	H	Z	PK	49.43	13.91	N/A	-9.54	53.80	68.20	14.40
		-	-	-	-	-	-	-	-	-	-	-
	40 (5200MHz)	10400.090	H	Z	PK	50.63	14.02	N/A	-9.54	55.11	68.00	12.89
		-	-	-	-	-	-	-	-	-	-	-
		-	-	-	-	-	-	-	-	-	-	-
	48 (5240MHz)	10480.140	H	Z	PK	48.94	14.25	N/A	-9.54	53.65	68.20	14.55
		-	-	-	-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
3. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
 Therefore Distance Correction Factor(DCF) : - 9.54 dB = $20 \times \log(1m/3m)$
4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$
5. If peak measurement satisfy the average limit, then average measurement are not required.

Radiated Spurious Emissions data(9kHz ~ 40GHz) : 802.11n HT20 & Band I

Tested ANT	Tested Channel	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
ANT 1 + ANT 2	36 (5180MHz)	5149.940	H	Z	PK	46.99	11.70	N/A	N/A	58.69	74.00	15.31
		5149.990	H	Z	AV	38.37	11.70	0.18	N/A	50.25	54.00	3.75
		10359.850	H	Z	PK	48.94	13.91	N/A	-9.54	53.31	68.20	14.89
		-	-	-	-	-	-	-	-	-	-	-
	40 (5200MHz)	10400.310	H	Z	PK	49.43	14.02	N/A	-9.54	53.91	68.20	14.29
		-	-	-	-	-	-	-	-	-	-	-
		-	-	-	-	-	-	-	-	-	-	-
	48 (5240MHz)	10479.830	H	Z	PK	48.31	14.25	N/A	-9.54	53.02	68.20	15.18
		-	-	-	-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
3. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
 Therefore Distance Correction Factor(DCF) : - 9.54 dB = $20 \times \log(1m/3m)$
4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$
5. If peak measurement satisfy the average limit, then average measurement are not required.

Radiated Spurious Emissions data(9kHz ~ 40GHz) : 802.11n HT40 & Band I

Tested ANT	Tested Channel	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
ANT 1 + ANT 2	38 (5190MHz)	5149.890	H	Z	PK	50.64	11.70	N/A	N/A	62.34	74.00	11.66
		5149.930	H	Z	AV	39.23	11.70	0.27	N/A	51.20	54.00	2.80
		10458.960	H	Z	PK	51.36	13.97	N/A	-9.54	55.79	68.20	12.41
		-	-	-	-	-	-	-	-	-	-	-
	46 (5230MHz)	10460.160	H	Z	PK	49.86	14.20	N/A	-9.54	54.52	68.20	13.68
		-	-	-	-	-	-	-	-	-	-	-
		-	-	-	-	-	-	-	-	-	-	-

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.
2. Sample Calculation.
Margin = Limit – Result / Result = Reading + T.F+ DCCF + DCF / T.F = AF + CL – AG
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
3. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
Therefore Distance Correction Factor(DCF) : - 9.54 dB = $20 \log(1m/3m)$
4. The limit is converted to field strength.
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$
5. If peak measurement satisfy the average limit, then average measurement are not required.

8.7 AC Conducted Emissions

Test Procedure :

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) and average mode (AV) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: N/A

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 60 *	60 to 46 *
0.5 ~ 5	60	46
5 ~ 30	60	50


* Decreases with the logarithm of the frequency

8.8 Occupied Bandwidth

■ Test Requirements

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured

■ Test Configuration

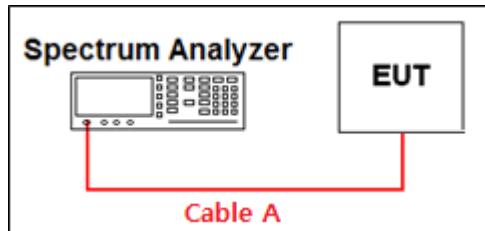

■ Test Procedure :

- Procedure: (RSS-Gen Issue 4)

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.


■ Test Result : Comply

Mode	Band	Channel	Frequency [MHz]	Test Result [MHz]	
				ANT 1	ANT 2
802.11a	Band I	36	5180	17.506	17.605
		40	5200	17.532	17.616
		48	5240	17.709	17.589
802.11n (HT20)	Band I	36	5180	18.445	18.413
		40	5200	18.394	18.421
		48	5240	18.472	18.373
802.11n (HT40)	Band I	38	5190	37.525	37.514
		46	5230	37.390	37.441

RESULT PLOTS


Occupied Bandwidth 99%

Test Mode: ANT 1 & 802.11a & Ch.36

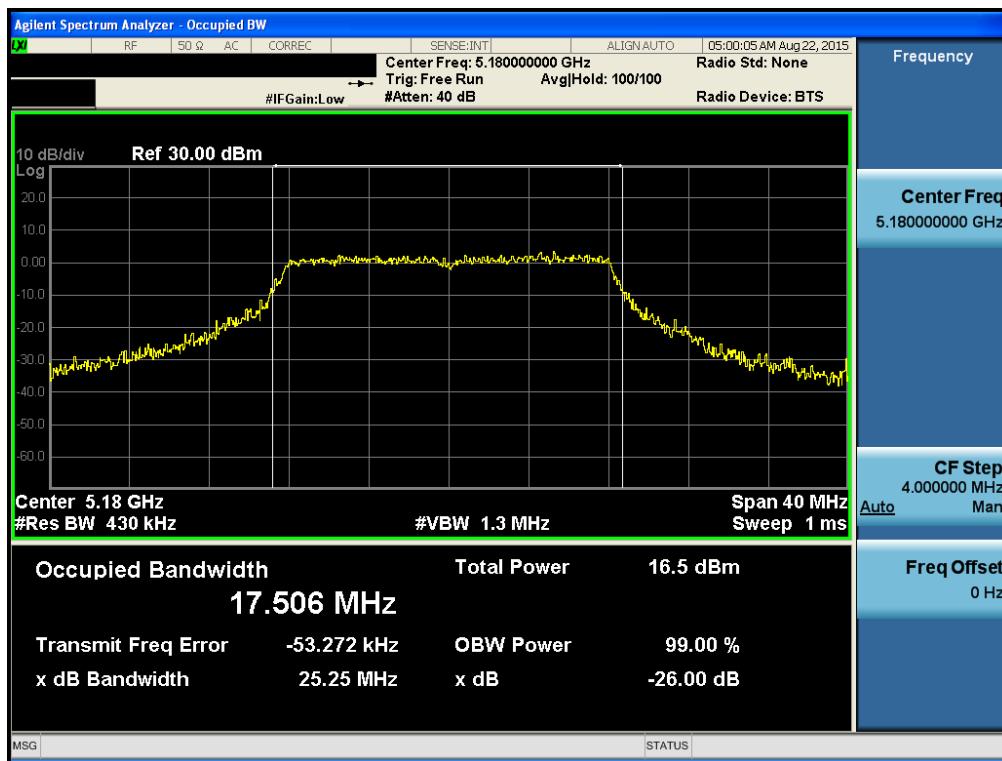


Occupied Bandwidth 99%

Test Mode: ANT 1 & 802.11a & Ch.40

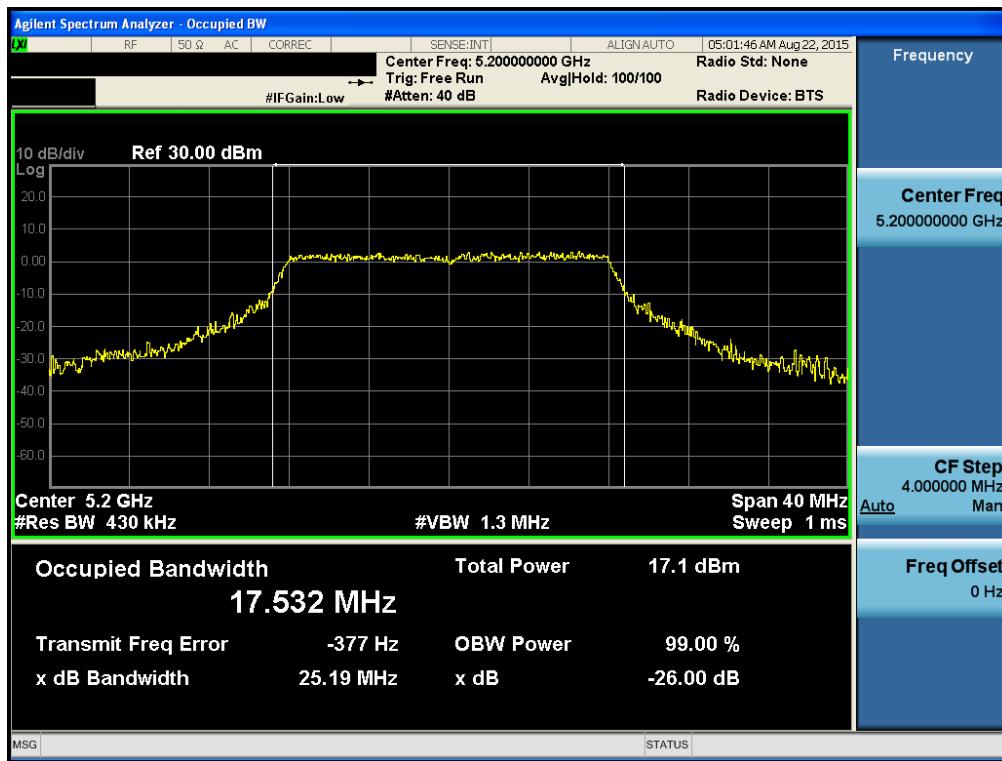

Occupied Bandwidth 99%

Test Mode: ANT 1 & 802.11a & Ch.48

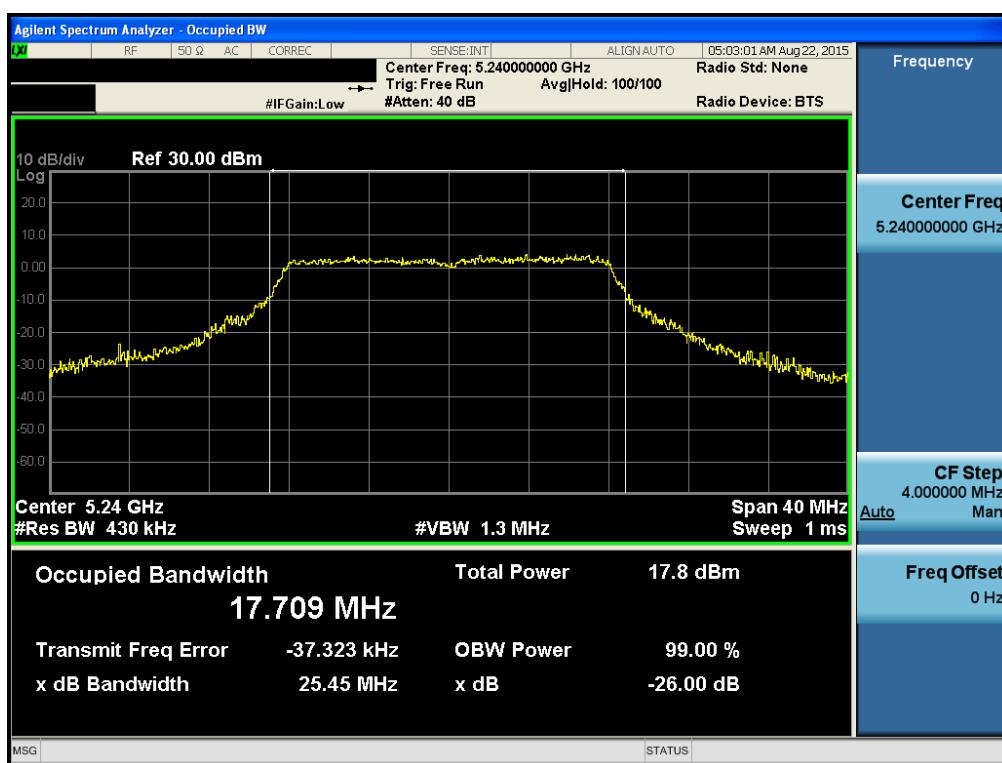


Occupied Bandwidth 99%

Test Mode: ANT 1 & 802.11n HT20 & Ch.36



Occupied Bandwidth 99%

Test Mode: ANT 1 & 802.11n HT20 & Ch.40

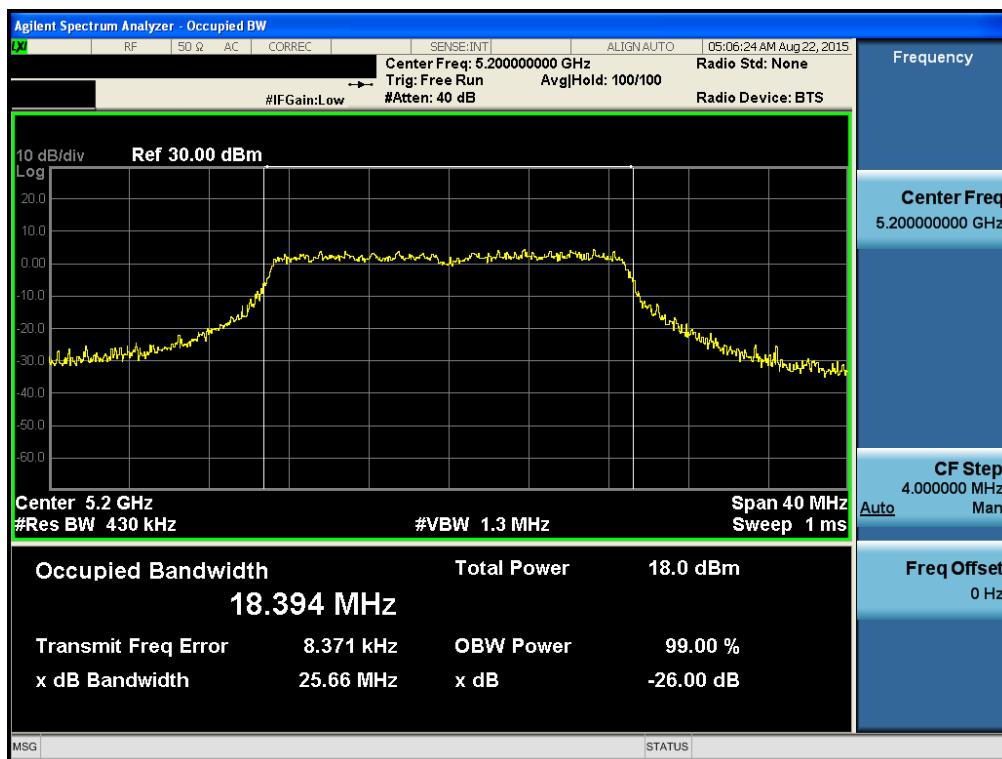


Occupied Bandwidth 99%

Test Mode: ANT 1 & 802.11n HT20 & Ch.48




Occupied Bandwidth 99%

Test Mode: ANT 1 & 802.11n HT40 & Ch.38

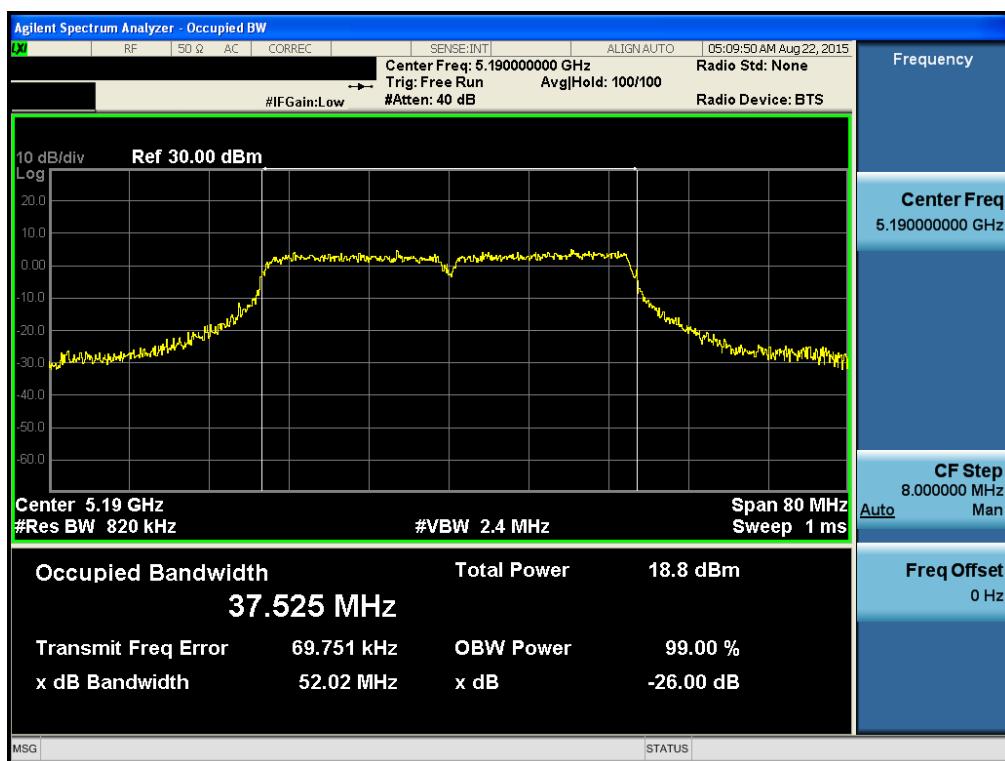


Occupied Bandwidth 99%

Test Mode: ANT 1 & 802.11n HT40 & Ch.46

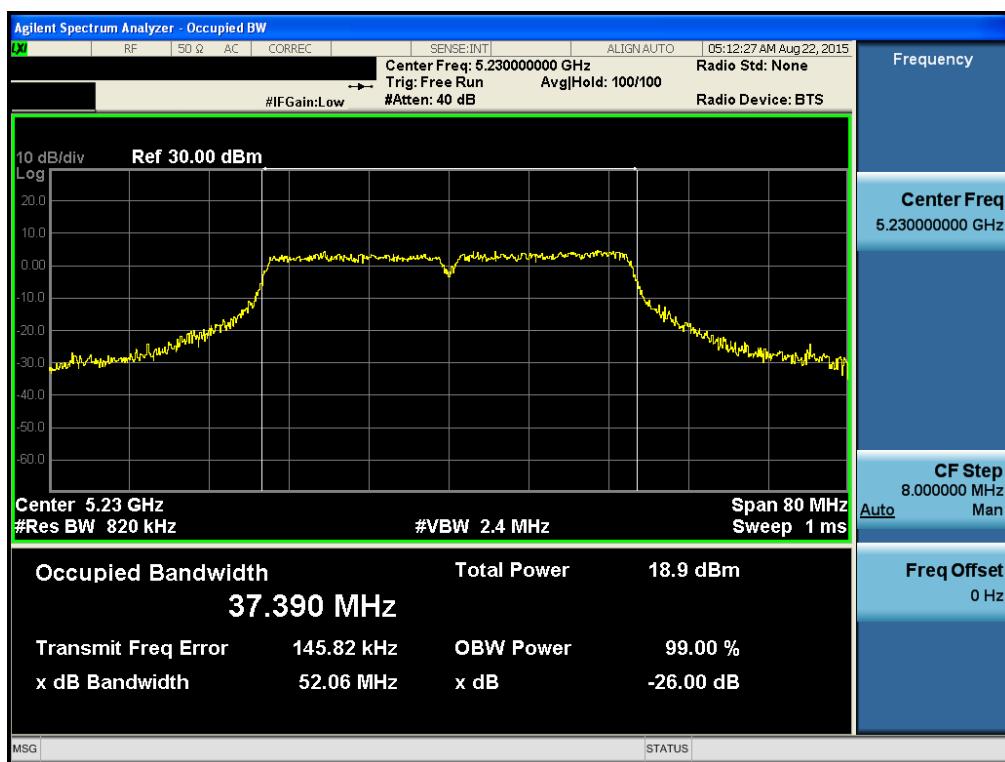


Occupied Bandwidth 99%

Test Mode: ANT 2 & 802.11a & Ch.36

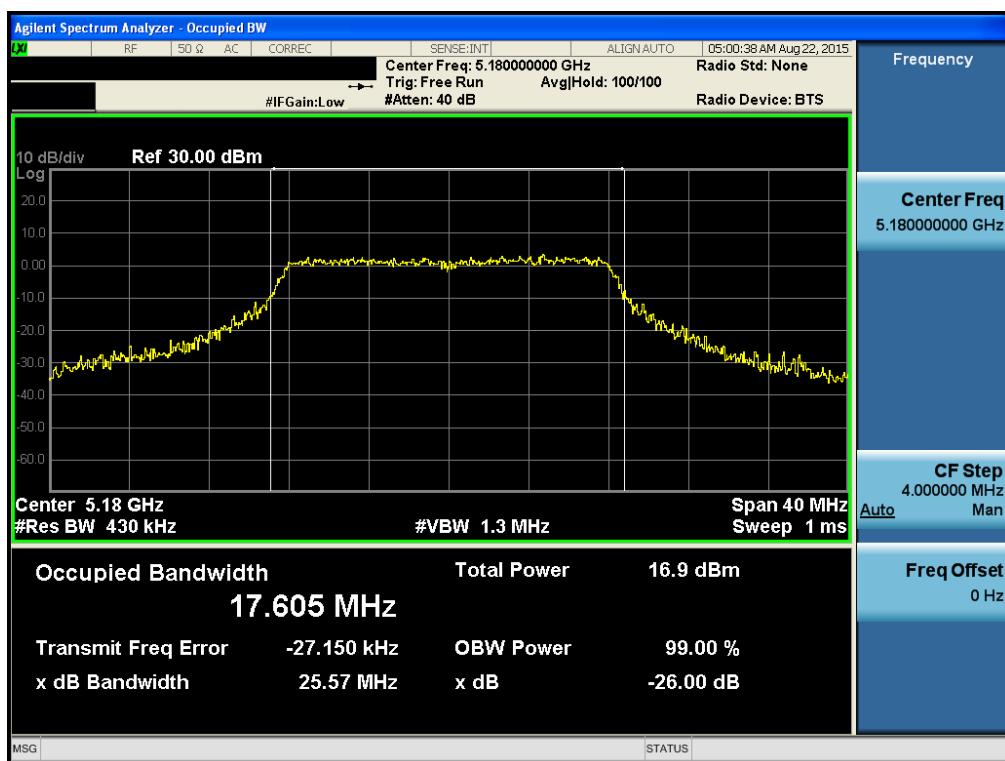


Occupied Bandwidth 99%

Test Mode: ANT 2 & 802.11a & Ch.40

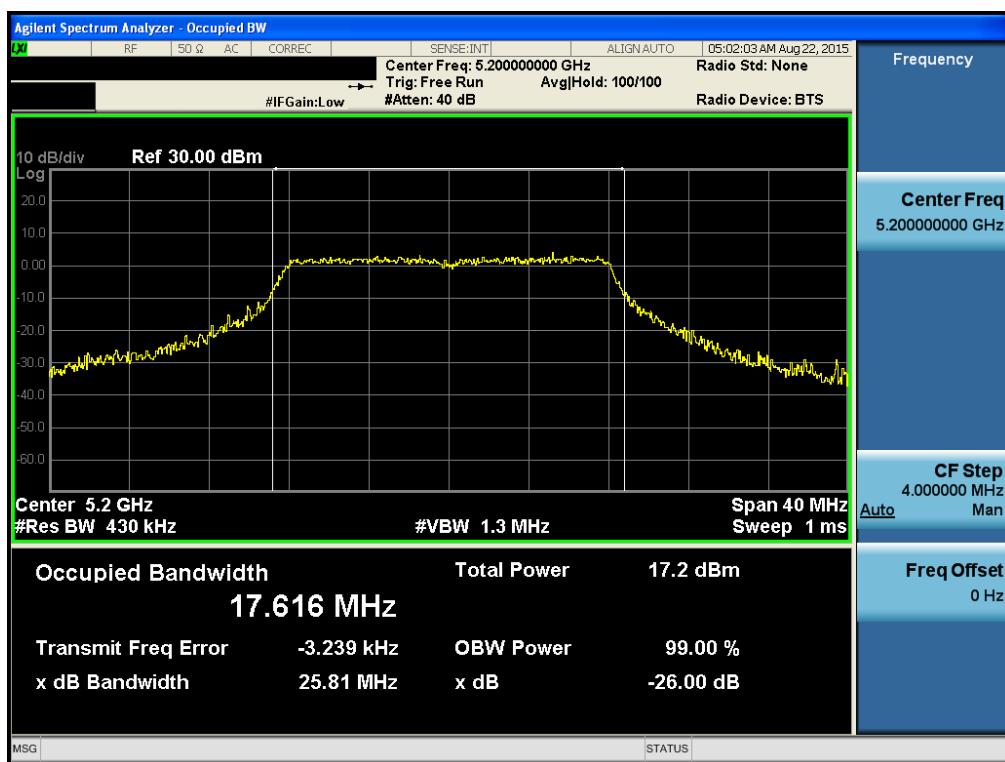


Occupied Bandwidth 99%

Test Mode: ANT 2 & 802.11a & Ch.48

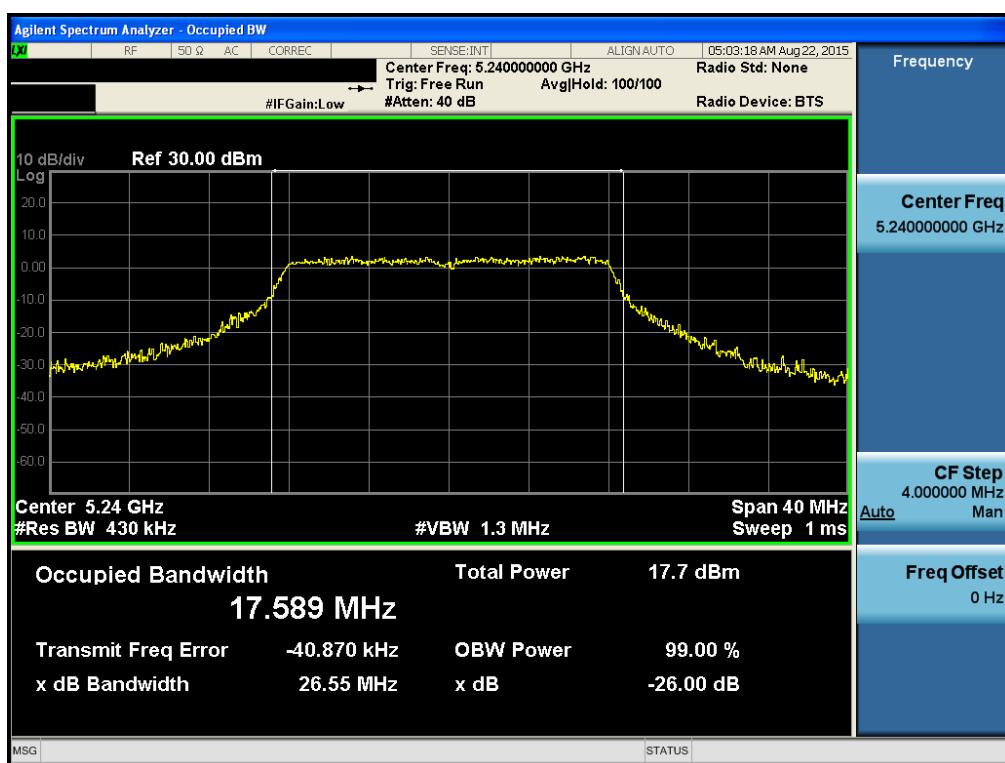


Occupied Bandwidth 99%

Test Mode: ANT 2 & 802.11n HT20 & Ch.36

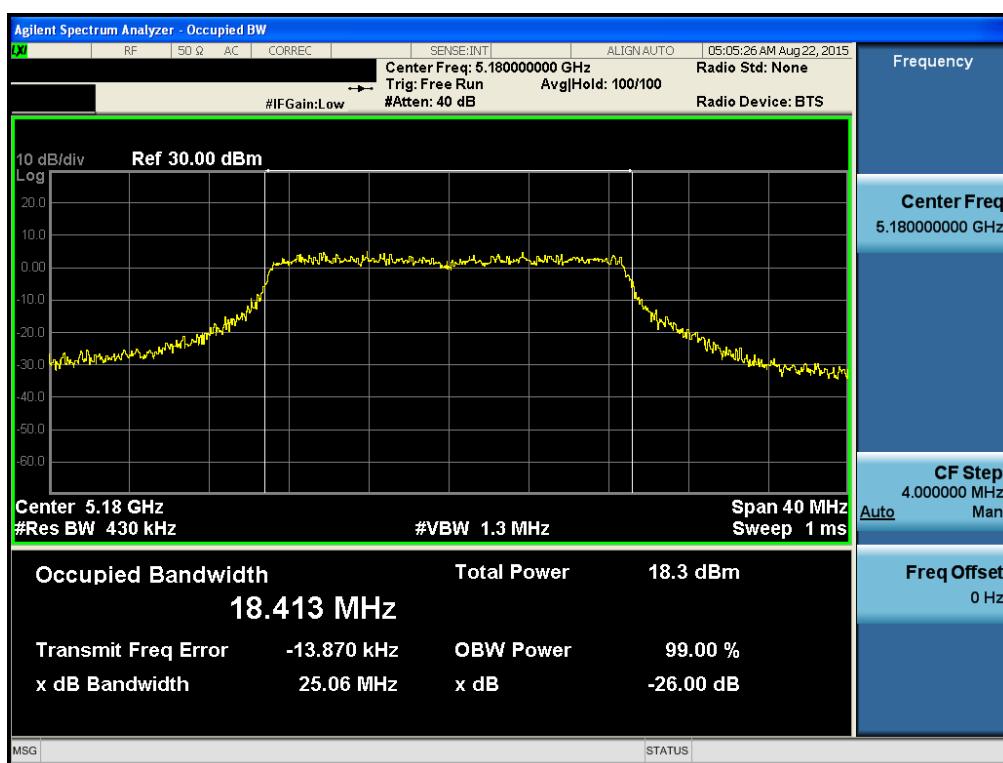


Occupied Bandwidth 99%

Test Mode: ANT 2 & 802.11n HT20 & Ch.40

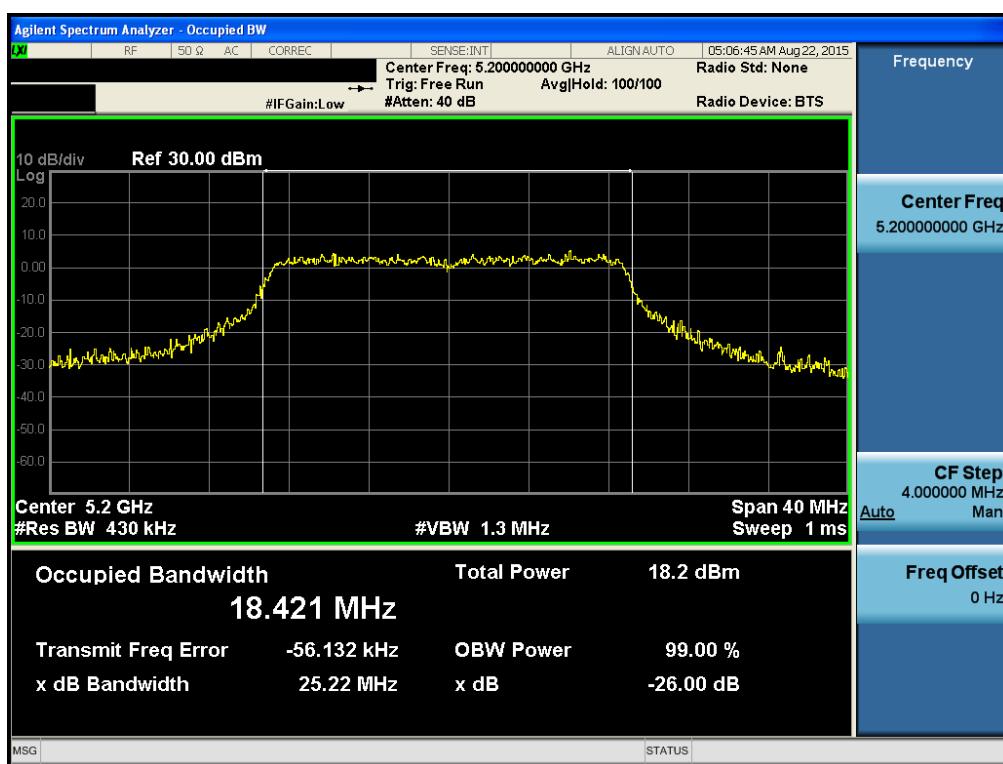


Occupied Bandwidth 99%

Test Mode: ANT 2 & 802.11n HT20 & Ch.48

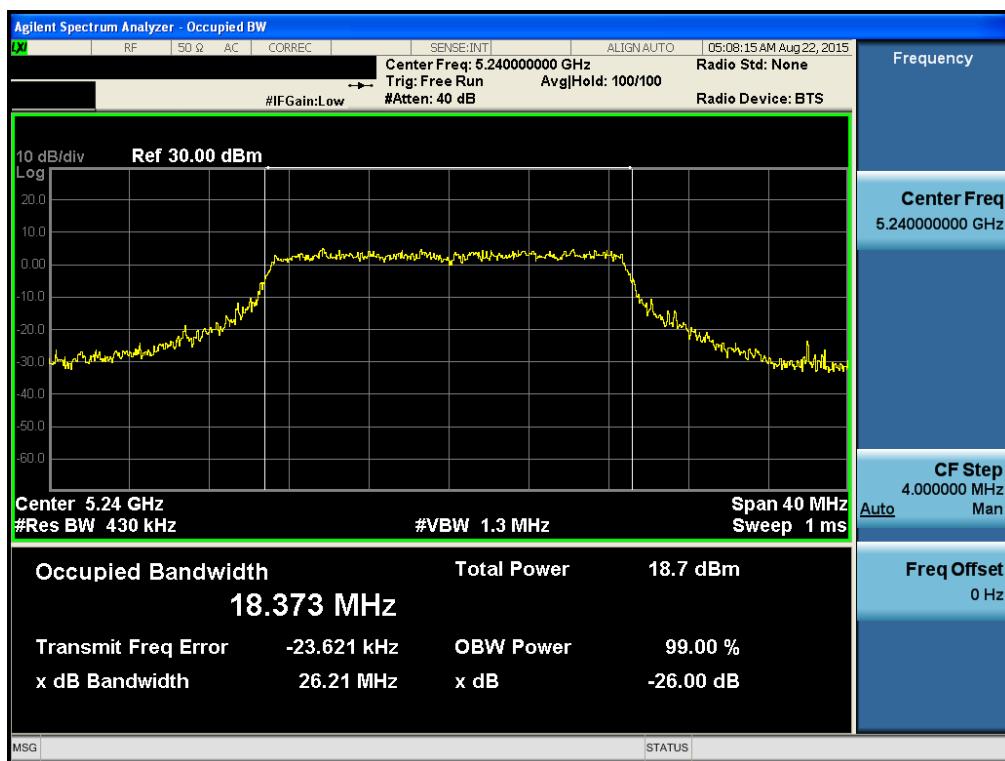

Occupied Bandwidth 99%

Test Mode: ANT 2 & 802.11n HT40 & Ch.38

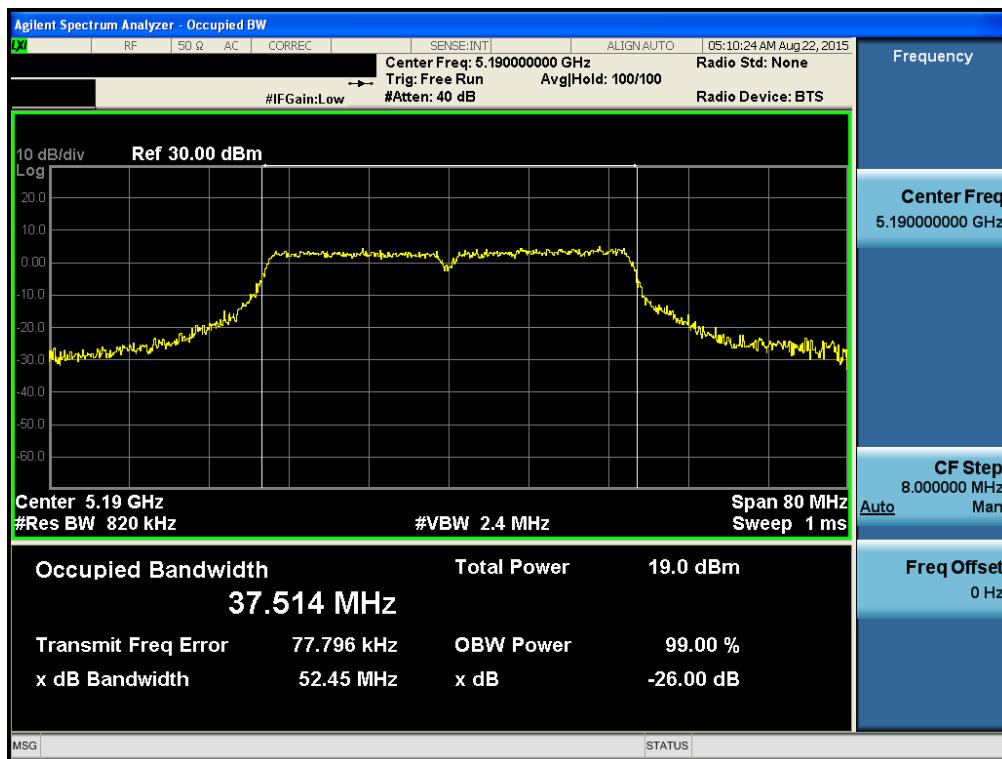

Occupied Bandwidth 99%

Test Mode: ANT 2 & 802.11n HT40 & Ch.46



9. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
MXA Signal Analyzer	Agilent	N9020A	14/09/15	15/09/15	MY50200834
PXA Signal Analyzer	Agilent Technologies	N9030A	14/10/21	15/10/21	MY53310140
DIGITAL MULTIMETER	Agilent	34401A	15/01/06	16/01/06	US36099541
Vector Signal Generator	Rohde Schwarz	SMBV100A	15/01/06	16/01/06	255571
Signal Generator	Rohde Schwarz	SMF100A	15/06/29	16/06/29	102341
10dB Attenuator	Aeroflex/Weinschel	86-10-11	14/09/12	15/09/12	446
Thermohygrometer	BODYCOM	BJ5478	15/05/08	16/05/08	120612-2
PreAmplifier	Agilent	8449B	15/02/26	16/02/26	3008A00370
Low Noise Pre Amplifier	tsj	MLA-010K01-B01-27	15/04/09	16/04/09	1844538
PreAmplifier	A.H. SYSTEMS	PAM-1840VH	14/12/12	15/12/12	163
LOOP Antenna	Schwarzbeck	FMZB1513	14/04/29	16/04/29	1513-128
TRILOG Broadband Test-Antenna(30MHz-1GHz)	Schwarzbeck	VULB 9160	14/04/30	16/04/30	3358
Double-Ridged Guide Antenna	ETS	3117	14/05/12	16/05/12	140394
Horn Antenna	A.H.Systems	SAS-574	15/04/30	17/04/30	154
EMI TEST RECEIVER	R&S	ESR7	14/10/21	15/10/21	101109
Highpass Filter (8GHz)	Wainwright Instruments	WHNX6-6320-8000-26500-40CC	14/10/17	15/10/17	1
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2495A MA2490A	15/03/26	16/03/26	1306007 1249001

APPENDIX I

Duty Cycle Information

TEST PROCEDURE

Duty Cycle [X = On Time / (On + Off time)] is measured using Measurement Procedure of **KDB789033**

1. Set the center frequency of the spectrum analyzer to the center frequency of the transmission.
2. Set RBW \geq EBW if possible; otherwise, set RBW to the largest available value.
3. Set VBW \geq RBW.
4. Set detector = peak.
5. Note : The zero-span measurement method shall not be used unless both **RBW and VBW are $> 50/T$** , where T is defined in section B)1)a), and **the number of sweep points across duration T exceeds 100**. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

T : The minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

(**T = On time** of the above table since the EUT operates with above fixed Duty Cycle and it is the minimum On time)


TEST DATA

Mode	Tested ANT	Channel	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor [dB]
				On Time [ms]	On+Off Time [ms]	x	
802.11a	ANT 1	40	5200	1.360	1.405	0.960	0.180
802.11n (HT20)		40	5200	1.270	1.320	0.960	0.180
802.11n (HT40)		38	5190	0.630	0.669	0.940	0.270

Mode	Tested ANT	Channel	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor [dB]
				On Time [ms]	On+Off Time [ms]	x	
802.11a	ANT 2	40	5200	1.360	1.405	0.960	0.180
802.11n (HT20)		40	5200	1.270	1.320	0.960	0.180
802.11n (HT40)		38	5190	0.630	0.669	0.940	0.270


Duty Cycle

Test Mode: ANT 1 & 802.11a & Ch.40

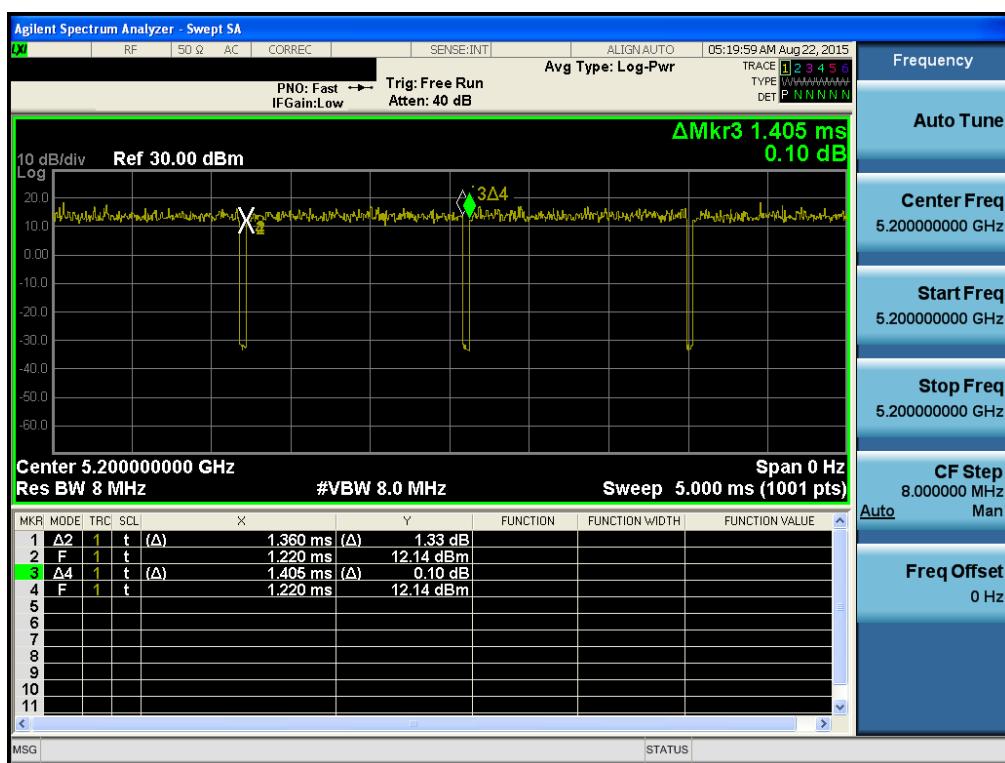

Duty Cycle

Test Mode: ANT 1 & 802.11n HT20 & Ch.40

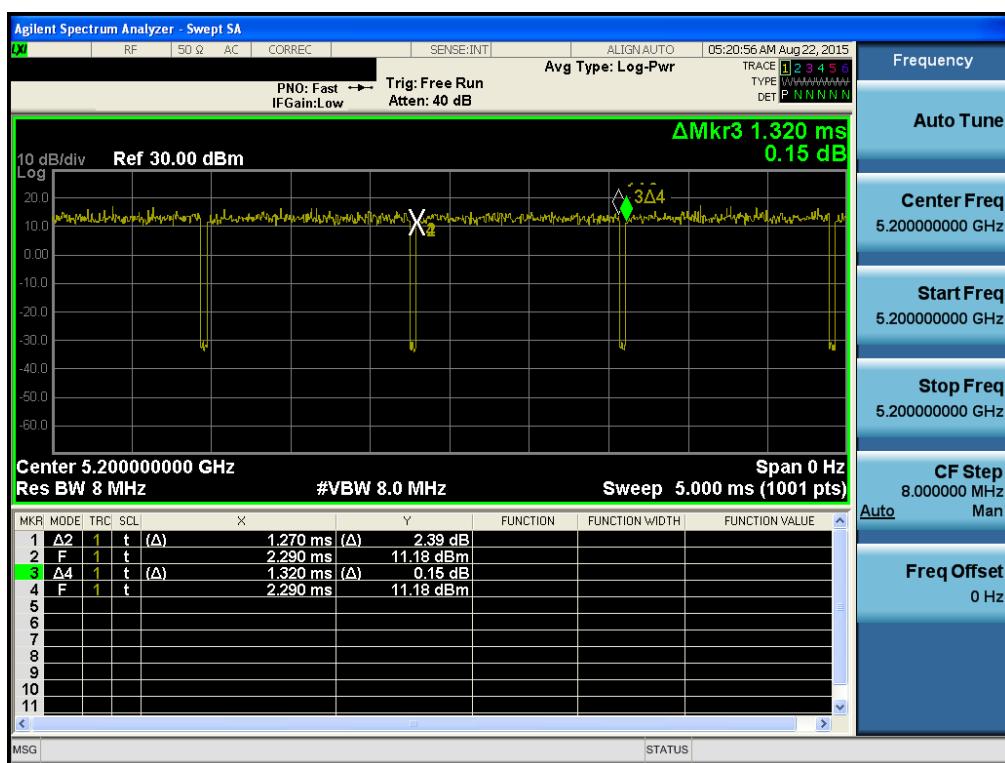


Duty Cycle

Test Mode: ANT 1 & 802.11n HT40 & Ch.38




Duty Cycle

Test Mode: ANT 2 & 802.11a & Ch.40

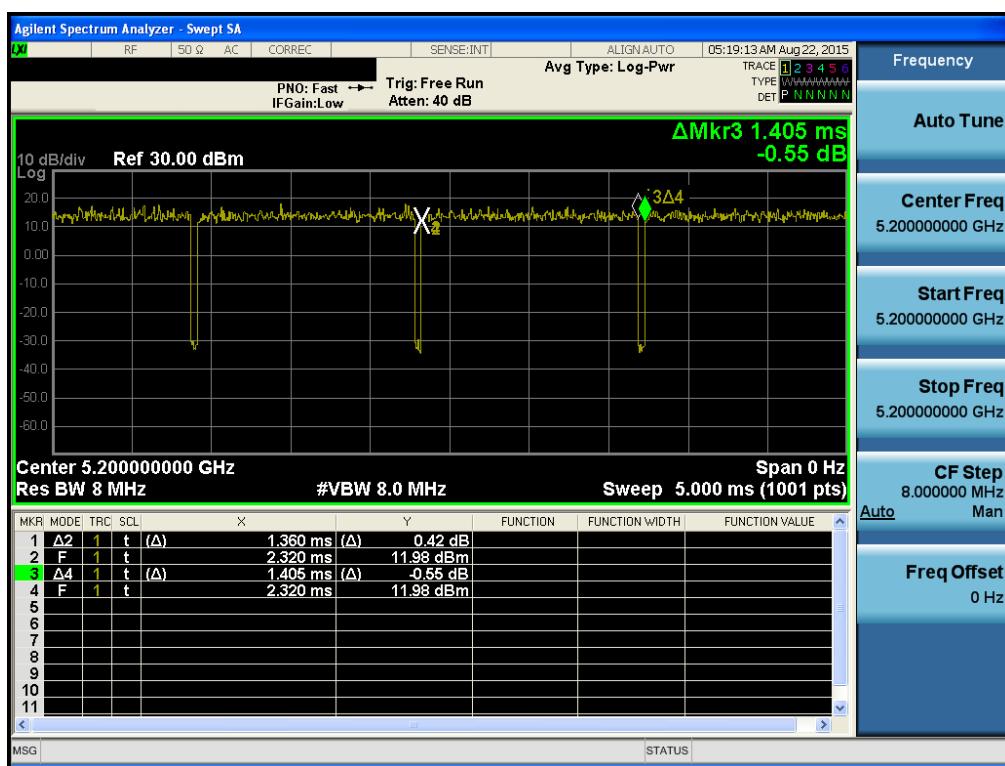

Duty Cycle

Test Mode: ANT 2 & 802.11n HT20 & Ch.40

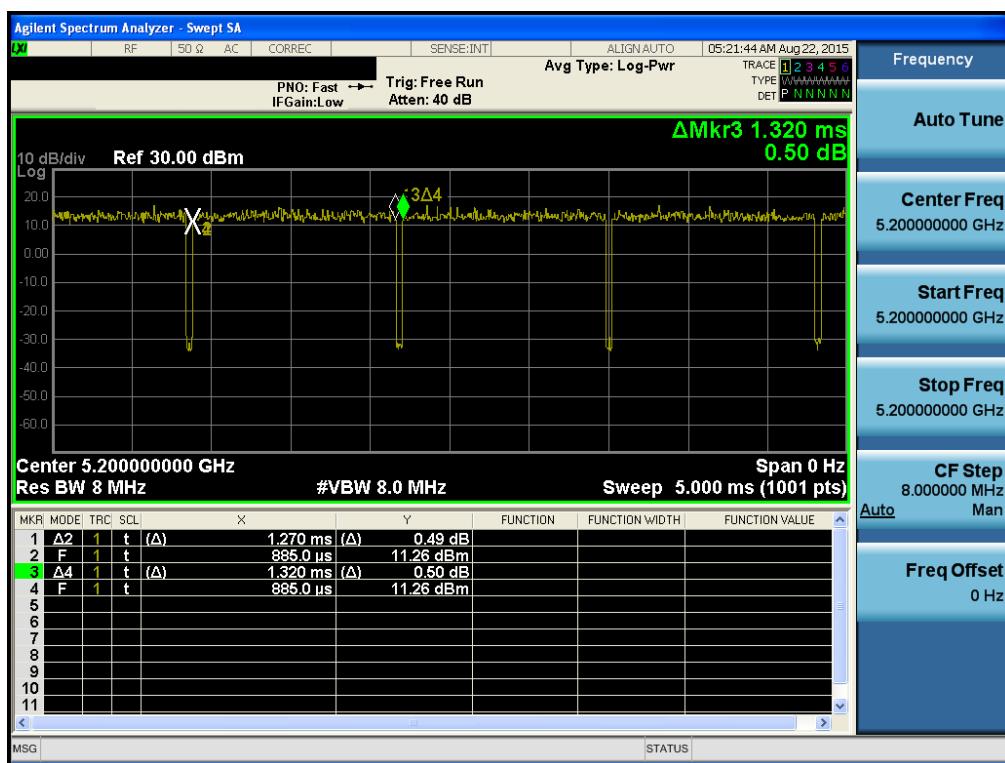

Duty Cycle

Test Mode: ANT 2 & 802.11n HT40 & Ch.38

