

PARTIAL TEST REPORT
No.: 6-0744/15-3-1a

According to:
FCC Regulations:
Part 22, Part 24, Part27

IC-Regulations:
RSS-130, Issue 1, RSS-132 Issue 3
RSS-133 Issue 6, RSS-139 Issue 3
RSS-Gen Issue 4

for

Gemalto M2M GmbH

Wireless Module ALS3-US R3
FCC-ID: QIPALS3-USR3
IC: 7830A-ALS3USR3
PMN: Cinterion ALS3-US R3, HVIN: ALS3-US R3







Laboratory Accreditation and Listings			
 Deutsche Akkreditierungsstelle D-PL-12047-01-01	 FEDERAL COMMUNICATIONS COMMISSION FCC USA MRA US-EU 0003	 Industry Canada Reg. No.: 3462D-1 Reg. No.: 3462D-2 Reg. No.: 3462D-3	 Voluntary Controls for Electromagnetic Emissions Reg. No.: R-2666 C-2914, T-1967, G-301
 WiFi ALLIANCE AUTHORIZED RF LABORATORY	 CTIA Authorized Test Lab LAB CODE 20011130-00		
accredited according to DIN EN ISO/IEC 17025			
<p>CETECOM GmbH Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com</p>			

Table of contents

1. SUMMARY OF TEST RESULTS.....	3
1.1. TX mode, Test overview of FCC and Canada IC (RSS) Standards.....	3
1.2. Attestation:.....	4
2. ADMINISTRATIVE DATA	5
2.1. Identification of the testing laboratory.....	5
2.2. Test location	5
2.3. Organizational items.....	5
2.4. Applicant’s details	5
2.5. Manufacturer’s details	5
3. EQUIPMENT UNDER TEST (EUT).....	6
3.1. LTE Technical data of main EUT declared by applicant.....	6
3.2. EUT: Type, S/N etc. and short descriptions used in this test report	7
3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions.....	7
3.4. EUT set-ups	8
3.5. EUT operating modes	8
3.6. Additional declaration and description of EUT	9
3.7. Configuration of cables used for testing	10
4. DESCRIPTION OF TEST SYSTEM SET-UP’S	11
4.1. Test system set-up for radiated spurious emission measurements.....	11
5. MEASUREMENTS	12
5.1. RF-Parameter - RF Peak power output radiated	12
5.2. RF-Parameter - Radiated out of Band RF emissions and Band Edge.....	15
5.3. Measurement uncertainties	23
6. ABBREVIATIONS USED IN THIS REPORT	24
7. ACCREDITATION DETAILS OF CETECOM’S LABORATORIES AND TEST SITES	24
8. INSTRUMENTS AND ANCILLARY.....	25
8.1. Used equipment “CTC”	25
9. VERSIONS OF TEST REPORTS (CHANGE HISTORY)	28

Table of annex

Total pages

Separate document annex 1: Measurement diagrams	26
Separate document annex 2: External photographs of EUT	6
Separate document annex 3: Internal photographs of EUT	TO BE SUPPLIED BY APPLICANT
Separate document annex 4: Test set-up photographs	3

The listed attachments are an integral part of this report.

1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency technologies. This test report shows results for LTE technologies only. Other implemented wireless technologies were not considered within this test report. A reduced testplan applied due PC2 compared to product PLS8-X with FCC-ID: QIPPLS8-X and IC 7830A-PLS8X.

Following tests have been performed to show compliance with applicable FCC Part 2, Part 22, Subpart H, Part 24, Subpart E (Broadband PCS) and Part 27, Subpart C of the FCC CFR Title 47, Edition 4th November 2014 and Canada RSS-132 Issue 3, RSS-133 Issue 6, RSS-130, Issue 1, RSS-139, Issue 3 and RSS-Gen Issue 4 standards.

1.1. TX mode, Test overview of FCC and Canada IC (RSS) Standards

No. of Diagram group	Test Cases	Port	References & Limits			EUT set-up	EUT mode	Result
			FCC Standard		Test limit			
1	Emissions AC-Power lines conducted (0,15 to 30 MHz)	AC-Power lines	§15.207	RSS-Gen, Issue 4: Chapter 8.8	§15.207 limits IC: Table 3, Chapter 8.8	--	--	Remark 1.)
2	General field strength emissions radiated - (9 kHz to 30 MHz)	Enclosure + inter-connecting cables (radiated)	§15.209(a)	RSS-Gen, Issue 4: Chapter 8.9, Table 5	2400/F(kHz) μ V/m 24000/F(kHz) μ V/m 30 μ V/m	--	--	Not performed
7	RF-Power (ERP/EIRP) radiated		§2.1046	RSS-132: 5.4 SRSP-503: 5.1.3	< 11.5 Watt (EIRP) (mobile stations) < 2 Watt (EIRP) < 1 Watt (EIRP) < 3 Watt (ERP)	1	1-2-3-4	passed
			§22.913(a)(2)	RSS-133: 6.4 SRSP-510: 5.1.2				
			§24.232(c)	RSS-130, Issue 1: 4.4 + SRSP-518				
8	Spurious emissions radiated (30 MHz to... *tenth-times of the fundamental frequency)		§2.1053(a) §2.1057	RSS-132: 5.5(i)(ii)	Required attenuation below P(dBW): 43+10log(P) dBc	1	1+2+3+4	passed
		§22.917(a)(b) §24.238(a)(b)	RSS-133: 6.5.1(i)(ii)					
9	Band-Edge compliance	§27.53(h)(1)(3) (i)(ii)(iii)	RSS-130, Issue 1: 4.6.1		1	1+2+3+4	passed	
		§27.53(g)	RSS-139, Issue 3, 6.6(i)(ii)					

30	RF Power	Antenna terminal	§2.1046	RSS-132: 5.4 SRSP-503: 5.1.3 RSS-133: 6.4 SRSP-510: 5.1.2 RSS-130, Issue 1: 4.4 + SRSP-518 RSS-139, Issue 3, 6.5 SRSP-513	< 11.5 Watt (EIRP) (mobile stations) < 2 Watt (EIRP) < 1 Watt (EIRP) < 3 Watt (ERP)	--	--	Not performed
34	26dB Emission bandwidth		§2.1049(h)	RSS-Gen, Issue 4: 6.6	99% Power	--	--	Not performed
35	99% Occupied bandwidth							
36	Spurious emissions		§2.1051 §2.1057	RSS-132: 5.5(i)(ii)				
37	Band-Edge compliance		§22.917(a)(b) §24.238(a)(b) §27.53	RSS-133: 6.5.1(i)(ii) RSS-130, Issue 1: 4.6.1 RSS-139, Issue 3, 6.6(i)(ii)	Required attenuation below P(dBW): 43+10log(P) dBc	--	--	Not performed
38	Frequency stability		§2.1055(a)(2) §22.355 table C-1 §24.235 §27.54	RSS-132: 5.3 RSS-133: 6.3 RSS-130, Issue 1: 4.3 RSS-139, Issue 3, 6.4	< ±2.5ppm <±0.1 ppm	--	--	Not performed

Remarks: 1.) EUT DC powered only, test to be performed on OEM side if applicable

1.2. Attestation:

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All requirements as shown in above table are met in accordance with enumerated standards.

.....
Dipl.-Ing. Rachid Acharkaoui
Responsible for test section

.....
Dipl.-Ing. N. Perez
Responsible for test report

2. Administrative Data

2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Rachid Acharkaoui
Deputy:	Dipl.-Ing. Niels Jeß

2.2. Test location

2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	-----------------------------------------------------------

2.3. Organizational items

Project leader:	Dipl.-Ing. C. Lorenz
Responsible for test report	Dip.-Ing. N. Perez
Receipt of EUT:	2015-07-09
Date(s) of test:	2015-07-10 to 2015-07-13
Date of report:	2015-07-23

Version of template:	13.02

2.4. Applicant's details

Applicant's name:	Gemalto M2M GmbH
Address:	Siemensdamm 50 13629 Berlin Germany
Contact person:	Mr. Thorsten Liebig

2.5. Manufacturer's details

Manufacturer's name:	please see Applicant's details
Address:	please see Applicant's details

3. Equipment under test (EUT)

3.1. LTE Technical data of main EUT declared by applicant

Main function	Wireless Module		
Type	ALS3-US R3		
TX-frequency range (E-UTRA operating bands)	LTE Band 2: 1850 - 1910 MHz (Uplink), 1930-1990 MHz (Downlink) LTE Band 4: 1710 - 1755 MHz (Uplink), 2110 - 2155 MHz (Downlink) LTE Band 5: 824 - 849 MHz (Uplink), 869-894 MHz (Downlink) LTE Band 17: 704 - 716 MHz (Uplink), 734 - 746 MHz (Downlink)		
Type of modulation	QPSK, 16-QAM		
Data rates	Cat3, Downlink: max. 100Mbps, Uplink: max. 50Mbps		
Number of channels – Table 5.4.4-1 accord. 3GPP TS36.521-1	LTE Band 2: UARFCN range 18600 - 19199 LTE Band 4: UARFCN range 19950 - 20399 LTE Band 5: UARFCN range 20400 - 20649 LTE Band 17: UARFCN range 23730 - 23849		See Note about channels not to be used depending on channel bandwidths
Emission designator(s) (Max. Value across all operating bands)	Channel bandwidth	QPSK Modulation:	16-QAM Modulation
LTE Band 2 (values from report 1-9521/15-01-03-A)	1.4 MHz 3 MHz 5 MHz 10 MHz 15 MHz 20 MHz	1M09G7D 2M73G7D 4M53G7D 9M05G7D 13M4G7D 17M9G7D	1M09W7D 2M73W7D 4M51W7D 9M04W7D 13M4W7D 17M9W7D
LTE Band 4 (values from report 1-9521/15-01-04-A)	1.4 MHz 3 MHz 5 MHz 10 MHz 15 MHz 20 MHz	1M09G7D 2M74G7D 4M51G7D 9M05G7D 13M4G7D 17M9G7D	1M10W7D 2M73W7D 4M50W7D 9M05W7D 13M4W7D 17M9W7D
LTE Band 5 (values from report 1-9521/15-01-02-A)	1.4 MHz 3 MHz 5 MHz 10 MHz	1M09G7D 2M73G7D 4M50G7D 9M05G7D	1M09W7D 2M73W7D 4M49W7D 9M05W7D
LTE Band 17 (values from report 1-9521/15-01-04-A)	5 MHz 10 MHz	4M51G7D 9M06G7D	4M50W7D 9M05W7D
Antenna Gain	<input checked="" type="checkbox"/> Value: 0 dBd (from data sheet) No information from customer		
MAX PEAK Output Power: Radiated	LTE-Mode 2 LTE-Mode 4 LTE-Mode 5 LTE-Mode 17	18.97 dBm (AV) 17.74 dBm (AV) 13.28 dBm (AV) 9.96 dBm (AV)	
MAX PEAK Output Power: Conducted	LTE-Mode 2 LTE-Mode 4 LTE-Mode 5 LTE-Mode 17	values from report 1-9521/15-01-03-A values from report 1-9521/15-01-04-A values from report 1-9521/15-01-02-A values from report 1-9521/15-01-04-A	
FCC-ID	QIPALS3-USR3		
IC	7830A-ALS3USR3		

Installed option			
Power supply	<input checked="" type="checkbox"/> DC over AE1: range 3.5V to 4.2V over AE4		
Special EMI components	--		
Does EUT contain devices susceptible to magnetic fields, e.g. Hall elements, electrodynamic microphones, etc.?	<input type="checkbox"/> yes <input checked="" type="checkbox"/> no		
EUT sample type	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering
FCC label attached	<input type="checkbox"/> yes	<input checked="" type="checkbox"/> no	

3.2. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	Wireless Module	ALS3-US R3	IMEI: 004401081453 421	R3 (Rev. 2.3)	Rev. 03.004

*) EUT short description is used to simplify the identification of the EUT in this test report.

3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	SMARTEQ MiniMag. mount antenna 1	2.6m RG174, SMA-m 0dBd, 824-960 / 1710-2170MHz	59801B	1140.26 SMA	--
AE 2	SMARTEQ MiniMag. mount antenna 2	2.6m RG174, SMA-m 0dBd, 824-960 / 1710-2170MHz	59801B	1140.26 SMA	--
AE 3	SMARTEQ MiniMag. mount antenna 3	2.6m RG174, SMA-m 0dBd, 824-960 / 1710-2170MHz	59801B	1140.26 SMA	--
AE 4	DSB75-Adapter	DSB75	W30880-Q9812-X-2	AH6-DSB75-1	--
AE 5	Handset Votronic	Telephone receiver with RJ11 connector	4017953211 311	HH-SI-30.3/V3.0/0	--
AE 6	USB cable	1m	--	--	--
AE 7	CETECOM Notebook	Dell Latitude E6420	CTC01034	--	Windows 7 + Terminal Program + Driver USB

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

3.4. EUT set-ups

EUT set-up no. *)	Combination of EUT and AE	Remarks
set. 1	EUT A + AE 1 + AE 2 + AE 3 +AE 4 + AE 5 + AE 6 (+ AE 7)	Set-up for radiated RF-tests. AE 7 used only temporary for setting up right AT-commands

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

3.5. EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
1	LTE-Band 2 RMC Mode	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 23dBm nominal. The input signal to the receiver is modulated with normal test modulation: QPSK or 16-QAM Modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
2	LTE-Band 4 RMC Mode	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 23dBm nominal. The input signal to the receiver is modulated with normal test modulation: QPSK or 16-QAM Modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
3	LTE-Band 5 RMC Mode	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 23dBm nominal. The input signal to the receiver is modulated with normal test modulation: QPSK or 16-QAM Modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
4	LTE-Band 17 RMC Mode	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 23dBm nominal. The input signal to the receiver is modulated with normal test modulation: QPSK or 16-QAM Modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.

*) EUT operating mode no. is used to simplify the test report.

3.6. Additional declaration and description of EUT

(Applicant's declaration, = not selected, = selected)

EUT A		<input type="checkbox"/> table-top <input type="checkbox"/> floor-standing <input type="checkbox"/> wall-mounted <input checked="" type="checkbox"/> not defined	typical use <input type="checkbox"/> portable use <input type="checkbox"/> fixed use <input type="checkbox"/> vehicular use <input checked="" type="checkbox"/> general	typical operating cycle of EUT. <input checked="" type="checkbox"/> < 0,5 sec. <input type="checkbox"/> :
Place of use		<input type="checkbox"/> Residential, commercial and light industry <input type="checkbox"/> Industrial environment <input type="checkbox"/> vehicular use <input checked="" type="checkbox"/> general		
Highest frequency generated or used in the device or on which the device operates or tunes		<input type="checkbox"/> below 1.705 MHz -> up to 30 MHz <input type="checkbox"/> 1.705 MHz – 108 MHz -> up to 1 GHz <input type="checkbox"/> 108 MHz -500 MHz -> up to 2 GHz <input type="checkbox"/> 500MHz 1000 MHz -> up to 5 GHz <input checked="" type="checkbox"/> Above 1000 MHz -> 5 th harmonic or 40 GHz		
Power line: <input type="checkbox"/> AC <input type="checkbox"/> L1, <input type="checkbox"/> L2, <input type="checkbox"/> L3, <input type="checkbox"/> N _____ Hz <input type="checkbox"/> 12V, <input type="checkbox"/> 24V, <input type="checkbox"/> 230V, <input type="checkbox"/> 400V <input checked="" type="checkbox"/> DC <input checked="" type="checkbox"/> Range 3.5 to 4.2 V over AE4 Tested at 4.2V DC Internally regulated		EUT-grounding: <input checked="" type="checkbox"/> none <input type="checkbox"/> with power supply <input type="checkbox"/> additional: <p style="text-align: right; font-size: small;">(in case of deviation during tests the single details are described on chapter 4)</p>		
Other Ports		possible total cable length	shielding	connected during test
(description of interconnecting cables)				
Connector				
1. Antenna Main	SMA	<input checked="" type="checkbox"/> < 3m <input type="checkbox"/> > 3m <input type="checkbox"/> : other	<input checked="" type="checkbox"/> screened <input type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
2. Antenna Second	SMA	<input checked="" type="checkbox"/> < 3m <input type="checkbox"/> > 3m <input type="checkbox"/> : other	<input checked="" type="checkbox"/> screened <input type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
3. GPS -line	SMA	<input checked="" type="checkbox"/> < 3m <input type="checkbox"/> > 3m <input type="checkbox"/> : other	<input checked="" type="checkbox"/> screened <input type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
4. USB-line	Mini-USB	<input checked="" type="checkbox"/> < 3m <input type="checkbox"/> > 3m <input type="checkbox"/> : other	<input checked="" type="checkbox"/> screened <input type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
5. Handset Line	RJ11	<input checked="" type="checkbox"/> < 3m <input type="checkbox"/> > 3m <input type="checkbox"/> : other	<input type="checkbox"/> screened <input checked="" type="checkbox"/> unscreened	<input checked="" type="checkbox"/> yes <input type="checkbox"/> no
Does EUT contain devices susceptible to magnetic fields, e.g. Hall elements, electrodynamics microphones, etc.?				<input type="checkbox"/> yes <input checked="" type="checkbox"/> no
Is mounting position / usual operating position defined?				<input type="checkbox"/> yes <input checked="" type="checkbox"/> no

3.7. Configuration of cables used for testing

Cable number	Item	Type	S/N serial number	HW hardware status	Cable length
Cable 1	USB Port	--	--	--	1 m
Cable 2	RJ11 handset line	--	--	--	1.5 m
Cable 3	RF-antenna port 1 (main)	--	--	--	1.5 m
Cable 4	RF-antenna port 2 (secondary)	--	--	--	1.5 m
Cable 5	RF-antenna port 3 (GPS)	--	--	--	1.5 m

4. Description of test system set-up's

4.1. Test system set-up for radiated spurious emission measurements


Specification:

ANSI C63.4-2009 chapter 8, ANSI C63.10-2009 chapter 6.5&6.6

General Description:

Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-4 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 20 GHz and 1 meter above 20 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. The horn antenna is used for frequency range 1 GHz to 40 GHz. Due to use of a fully anechoic room the measurement antennas are set to fixed antenna height of 1.55 m (no height scan necessary) and the site validation criteria accord. ANSI63.10:2009 is fulfilled. The EUT is aligned within 3 dB beam width of the measurement antenna, on big EUTs several surface measurements are performed.

Schematic:

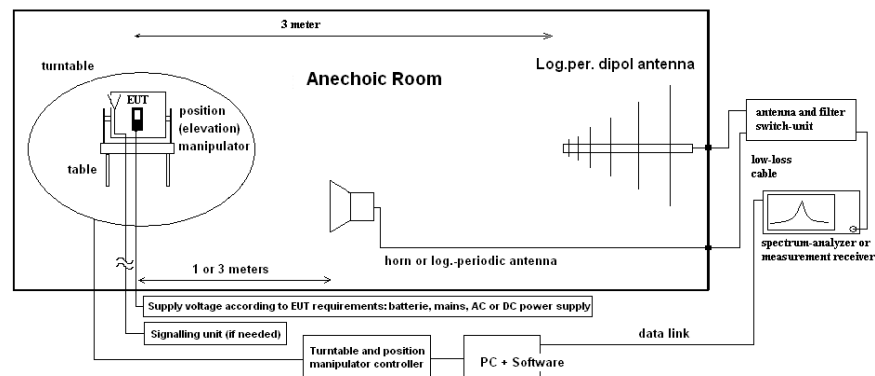

Testing method:

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined. Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height is fixed to 1.55 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

The readings on the spectrum analyzer are corrected with conversion value between field strength and E(I)RP, so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603 C/D

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$E_{C(E)IRP} = E_C - 95.2 \text{ dB}$$

$$M = L_T - E_{C(E)IRP}$$

E_C = Electrical field – corrected value

E_R = Receiver reading

M = Margin

L_T = Limit

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

G_A = Gain of pre-amplifier (if used)

$E_{C(E)IRP}$ = Electrical field corrected for E(I)RP

All units are dB-units, positive margin means value is below limit.

5. Measurements

5.1. RF-Parameter - RF Peak power output radiated

5.1.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input checked="" type="checkbox"/> 443 FAR
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU 40
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input checked="" type="checkbox"/> 264 FSEK
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170
signalling	<input checked="" type="checkbox"/> 594 CMW500	<input type="checkbox"/> 436 CMU	<input type="checkbox"/> 546 CMU
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL
DC power	<input checked="" type="checkbox"/> 611 E3632A	<input type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 459 EA 2032-50
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input type="checkbox"/> 060 110 V/ 60 Hz via PAS 5000

5.1.2. Requirements and limits

FCC	§2.1046(a) §22.913 § 24.232(c) §27.50(d)(4) §27.50(c)(10)
IC	RSS-132: 5.4 + SRSP 503: 5.1.3 RSS-133: 6.4 + SRSP-510: 5.1.2 RSS-130, Issue 1:4.4 + SRSP-518 RSS-139, Issue 3: 6.5 + SRSP-513
Limit	Maximum Power Output of the mobile phone should be determined while measured radiated E(I)RP. Limit LTE Band 5: 7 Watt ERP (38.4 dBm) Limit LTE Band 2: 2 Watt EIRP (33.0 dBm) Limit LTE Band 4: 1 Watt EIRP (30.0 dBm) Limit LTE Band 17: 3 Watt ERP (34.7 dBm)

5.1.3. Test condition and test set-up

link to test system (if used):	<input checked="" type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input type="checkbox"/>
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top		<input type="checkbox"/> floor standing
Climatic conditions	Temperature: (22±3°C)		Rel. humidity: (40±20)%
Test system set-up	Please see chapter "Test system set-up for radiated spurious emission measurements up to 20 GHz"		
Spectrum Analyzer Settings	Parameter: Scan Mode Span RBW VBW Sweep time Sweep mode Detector	Spectrum analyser mode 100 MHz 10 MHz 10 MHz Coupled repetitive Peak	
Measurement method	<p>The measurements were performed by using the substitution method (ANSI/TIA/EIA 603C/D) with a spectrum-analyzer. This method can be described like follows:</p> <ol style="list-style-type: none"> choosing of suitable spectrum-analyzer settings for performing the measurements. This settings of the spectrum analyzer must be maintained for both stages of the measurements: EUT emission measurements and also for measurements of the substituted level. The maximum level of the peak power was recorded, while the emissions were maximized by rotating the EUT in three orthogonal axes, which was situated on a non-conductive turntable of 1.55 m height ($P_{MEAS,1}$). This was performed for both measuring antenna polarisations (vertical/horizontal), the maximum of both values is used for further measurements and final substitution ($P_{MEAS,1,MAX}$). As the maximum emission is recorded, the EUT is replaced by a frequency dependant suitable antenna, which is connected to a RF-signal generator, which is transmitting on the determined worst-case frequency as determined in step 2. The RF-signal level of the signal generator is adjusted as long the same worst-case level determined first step is measured at the spectrum analyzer ($P_{SMHU}=P_{MEAS,1,MAX}$) Then the RF-signal cable is disconnected from the antenna and connected to a power-level meter. The level is determined ($P_{MEAS,2}$). The final result is calculated by adding the ERP/EIRP gain of the antenna which substitutes the EUT. $P_{EUT,SUBST} = P_{MEAS,2} + G_{ANTENNA}$ 		

Mobile phone settings	<p>A call was established on highest power transmit conditions in RMC mode. MPR was deactivated.</p> <p>The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band within the designated range within the allowed channel bandwidths. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.</p>
-----------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

5.1.4. Results

Worst-Case channel, Signal bandwidth and resource block configuration tested in order to have ERP and EIRP values. Peak and Average detector were activated same time.

EUT				Set-up 1, Op.Mode 1				
Operating Mode	Channel			Peak Output Power [dBm]			Antenna Polarisation for maximum Power	Result
	Range	Modulation	No.	PK	AV			
LTE Band 2	Low	1.)	18615	1.)	1.)	EIRP-Value	V/H	passed
	Middle	QPSK	18900 1.4MHz Signal-BW, 1RB low	23.90	18.97			
		16-QAM	18900 1.4MHz Signal-BW, 1RB high	23.80	18.18			
	High	1.)	19100	1.)	1.)			

Remark:

) According test report 1-9521/15-01-03 only worst-case channel and corresponding settings tested

EUT				Set-up 1, Op.Mode 2				
Operating Mode	Channel			Peak Output Power [dBm]			Antenna Polarisation for maximum Power	Result
	Range	Modulation	No.	PK	AV			
LTE Band 4	Low	1.)	20025	1.)	1.)	EIRP-Value	V/H	passed
	Middle	QPSK	20175 1.4MHz Signal-BW, 1RB low	24.10	19.72			
			16-QAM	20175 1.4MHz Signal-BW, 1RB low	24.00			
	High	1.)	20325	1.)	1.)			

Remark:

1.) According test report 1-9521/15-01-04 only worst-case channel and corresponding settings tested

EUT				Set-up 1, Op.Mode 3				
Operating Mode	Channel			Peak Output Power [dBm]			Antenna Polarisation for maximum Power	Result
	Range	Modulation	No.	PK	AV			
LTE Band 5	Low	1.)	20525	1.)	1.)	ERP-Value	V/H	passed
	Middle	1.)	20635	1.)	1.)			
	High	QPSK	20643 1.4MHz Signal-BW, 1RB high	22.10	13.28			
			16-QAM	20643 1.4MHz Signal-BW, 1RB low	21.76			

Remark: 1.) 1.) According test report 1-9521/15-01-02 only worst-case channel and corresponding settings tested

EUT				Set-up 1, Op.Mode 4				
Operating Mode	Channel			Peak Output Power [dBm]			Antenna Polarisation for maximum Power	Result
	Range	Modulation	No.	PK	AV			
LTE Band 17	Low	QPSK	23755, 5MHz Signal-BW, 1RB high	19.39	9.96	ERP-Value	V/H	passed
			16-QAM	23755 5MHz Signal-BW, 1RB high	19.17			
	Middle	1.)	23790	1.)	1.)			
	High	1.)	23825	1.)	1.)			

Remark:

1.) According test report 1-9521/15-01-04 only worst-case channel and corresponding settings tested

5.2. RF-Parameter - Radiated out of Band RF emissions and Band Edge

5.2.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)		<input type="checkbox"/> Please see Chapter. 2.2.2		<input type="checkbox"/> Please see Chapter. 2.2.3	
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input checked="" type="checkbox"/> 443 FAR	<input type="checkbox"/> 347 Radio.lab.1	<input type="checkbox"/> 347 Radio.lab.2	
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU 40	<input type="checkbox"/> ESU 26		
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input checked="" type="checkbox"/> 264 FSEK			
antenna	<input checked="" type="checkbox"/> 608 HL 562	<input type="checkbox"/> 549 HL 025	<input type="checkbox"/> 302 BBHA9170	<input type="checkbox"/> 289 CBL 6141	<input type="checkbox"/> 030 HFH-Z2	<input checked="" type="checkbox"/> 020 EMCO3115
signaling	<input type="checkbox"/> 017 CMD 65	<input type="checkbox"/> 323 CMD 55	<input type="checkbox"/> 340 CMD 55			
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 546 CMU	<input type="checkbox"/> 547 CMU	<input checked="" type="checkbox"/> 642 CMW500		
power supply	<input checked="" type="checkbox"/> 611 E3632A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50	<input type="checkbox"/> 268 EA- 3050	<input type="checkbox"/> 494 AG6632A	<input type="checkbox"/> 498 NGPE 40
otherwise	<input type="checkbox"/> 529 6dB divider	<input type="checkbox"/> 530 6dB Att.	<input type="checkbox"/> 110 USB LWL	<input type="checkbox"/> 482 Filter Matrix	<input type="checkbox"/> 431 Near field	
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input checked="" type="checkbox"/> 060 110 V/ 60 Hz via PAS 5000			

5.2.2. Requirements and limits

FCC	§2.1053(a)-radiated , §2.1057(a)(a) §22.917(a)(b) §24.238(a)(b) §27.53(h)(1)(3)(i)(ii)(iii) §27.53(g)
IC	RSS-130, Issue 1: 4.6.1 RSS-132, Issue 3: 5.5(i)(ii) RSS-133, Issue 6: 6.5.1(i)(ii) RSS-139, Issue 3: 6.6 (i)(ii)
Limit	„the power of emissions shall be attenuated below the transmitter output power (p) by at least 43+10Log(P) dB“ -> Resulting limits for all power levels of the Mobile Phone: -13dBm

5.2.3. Test condition and test set-up

link to test system (if used):	<input checked="" type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input type="checkbox"/> none
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top		<input type="checkbox"/> floor standing
Climatic conditions	Temperature: (22±3°C)		Rel. humidity: (40±20)%
Test system set-up	Please see chapter “Test system set-up for radiated spurious emission measurements up to 20 GHz”		
Spectrum Analyzer Settings	Parameter: Scan Mode RBW VBW Sweep time Sweep mode Detector	Spectrum analyser mode 1 MHz 10 MHz Coupled (Auto) repetitive Peak	
Measurement method	The spectrum was scanned from 9 kHz to the 10th harmonic of the highest frequency generated within the equipment. A PEAK detector was used except measurements near the Band-Edge where a AVERAGE detector applied when results are critical (low margin or limit exceed). Tests have been performed in various settings for the device regarding allocated ressource blocks and channels in order to find worst-case configuration. Due to very big amount of possible combinations only certain combinations have been tested.		
Mobile phone settings	A call was established on highest power transmit conditions in RMC mode. MPR was deactivated. The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band within the designated range within the allowed channel bandwidths. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.		

Spectrum-Analyzer settings for LTE band 2

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att. [dB]	Detector
Sweep 1 (subrange 1)	30	1000	1	10	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	10	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	20000	1	10	60	10	MaxH-PK
Sweep 2a (Band-Edge)	1849	1850	0.02	0.3	30	35	MaxH-PK LTE Signal- BW=1.4MHz
Sweep 2b (Band-Edge)	1849	1850	0.2	1	30	35	MaxH-PK LTE-Signal- BW=20MHz
Sweep 3a (Band-Edge)	1910	1911	0.02	0.3	30	35	MaxH-PK LTE-Signal- BW=1.4MHz
Sweep 3b (Band-Edge)	1910	1911	0.2	1	30	35	MaxH-PK LTE-Signal- BW=20MHz

Spectrum-analyzer settings for FDD Band 4

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	1	10	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	10	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	18000	1	10	160	10	MaxH-PK
Sweep 2a (Band-Edge)	1709	1710	0.02	0.3	30	35	MaxH-PK LTE Signal- BW=1.4MHz
Sweep 2b (Band-Edge)	1709	1710	0.2	1	30	35	MaxH-PK LTE-Signal- BW=20MHz
Sweep 3a (Band-Edge)	1755	1756	0.02	0.3	30	35	MaxH-PK LTE-Signal- BW=1.4MHz
Sweep 3b (Band-Edge)	1755	1756	0.2	1	30	35	MaxH-PK LTE-Signal- BW=20MHz

Spectrum-analyzer settings for LTE Band 5

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	1	10	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	10	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	9000	1	10	160	10	MaxH-PK
Sweep 2a (Band-Edge)	823	824	0.02	0.2	30	35	MaxH-PK LTE Signal- BW=1.4MHz
Sweep 2b (Band-Edge)	823	824	0.1	1	30	35	MaxH-PK LTE-Signal- BW=10MHz
Sweep 3a (Band-Edge)	850	851	0.02	0.2	30	35	MaxH-PK LTE-Signal- BW=1.4MHz
Sweep 3b (Band-Edge)	850	851	0.1	1	30	35	MaxH-PK LTE-Signal- BW=10MHz

Spectrum-analyzer settings for LTE Band 17

	Start freq. MHz	Stop freq. MHz	R-BW kHz	V-BW kHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	100	300	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	100	300	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	9000	100	300	160	10	MaxH-PK
Sweep 2a (Band-Edge)	703	704	50	300	30	35	MaxH-PK LTE Signal- BW=5MHz
Sweep 2b (Band-Edge)	703	704	100	300	30	35	MaxH-PK LTE-Signal- BW=10MHz
Sweep 3a (Band-Edge)	716	717	500	300	30	35	MaxH-PK LTE-Signal- BW=5MHz
Sweep 3b (Band-Edge)	716	717	100	300	30	35	MaxH-PK LTE-Signal- BW=10MHz

5.2.4. Results

The results are presented below in summary form only. For more information please see the diagrams enclosed in annex 4.

5.2.4.1. LTE Band 2: Op. Mode 1, Set-up 1

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
9.202a	Low	18607	1849 – 1850 MHz	1	Band Edge Compliance QPSK modulation, remark 2, LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.202b	Low	18607	1849 – 1850 MHz	1	Band Edge Compliance 16-QAM modulation LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.212a	Low	18700	1849 – 1850 MHz	1	Band Edge Compliance QPSK modulation, remark 2, LTE signal bandwidth 20MHz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	passed
9.212b	Low	18700	1849 – 1850 MHz	1	Band Edge Compliance 16-QAM modulation LTE signal bandwidth 20MHz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	passed
8.03	Middle	18900	30 MHz to 20 GHz	1	Carrier visible on diagram. Not relevant for results. QPSK-Modulation, 10MHz LTE signal bandwidth, Full RBs	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.04	Middle	18900	30 MHz to 20 GHz	1	Carrier visible on diagram. Not relevant for results 16-QAM Modulation, 10MHz LTE signal bandwidth, Full RBs	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.214a	High	19193	1910 – 1911 MHz	1	Band Edge Compliance QPSK modulation, remark 2, LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	passed
9.214b	High	19193	1910 – 1911 MHz	1	Band Edge Compliance 16-QAM modulation LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	passed
9.224a	High	19100	1910 – 1911 MHz	1	Band Edge Compliance QPSK modulation, remark 2, LTE signal bandwidth 20MHz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	passed
9.224b	High	19100	1910 – 1911 MHz	1	Band Edge Compliance 16-QAM modulation LTE signal bandwidth 20MHz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	passed

Remark1:

- 1.) for channel bandwidth of 1.4 MHz used for measurements, RBW=20kHz (correction factor of $10\log(\text{measurement BW}=20\text{kHz}/14\text{kHz}) = -1.54$ dB applies to results
- 2.) middle channel for radiated spurious tested only
- 3.) Band-Edge tested on lowest and highest LTE signal bandwidth, with full resource blocks allocation

5.2.4.2. LTE Band 4: Op. Mode 2, Set-up 1

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
9.519a	Low	19957	1709 - 1710 MHz	2	Band Edge Compliance QPSK modulation, remark 2, LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.519b	Low	19957	1709 - 1710 MHz	2	Band Edge Compliance 16-QAM modulation LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.529a	Low	20050	1709 - 1710 MHz	2	Band Edge Compliance QPSK modulation, remark 2, LTE signal bandwidth 20MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.529b	Low	20050	1709 - 1710 MHz	2	Band Edge Compliance 16-QAM modulation LTE signal bandwidth 20MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.05	Middle	20175	30 MHz to 20 GHz	2	Carrier visible on diagram. Not relevant for results QPSK Modulation, LTE Signal bandwidth 10MHz, full RBs	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.06	Middle	20175	30 MHz to 20 GHz	2	Carrier visible on diagram. Not relevant for results 16-QAM Modulation, LTE Signal bandwidth 10MHz, full RBs	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.530a	High	20393	1755 – 1756 MHz	2	Band Edge Compliance QPSK modulation, remark 2, LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.530b	High	20393	1755 – 1756 MHz	2	Band Edge Compliance 16-QAM modulation LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.541a	High	20300	1755 – 1756 MHz	2	Band Edge Compliance QPSK modulation, remark 2, LTE signal bandwidth 20MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.541b	High	20300	1755 – 1756 MHz	2	Band Edge Compliance 16-QAM modulation LTE signal bandwidth 20MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark1:

- 1.) for channel bandwidth of 1.4 MHz used for measurements, $RBW=20kHz$ (correction factor of $10\log(\text{measurement BW}=20kHz/14kHz)=-1.54$ dB applies to results
- 2.) middle channel for radiated spurious tested only
- 3.) Band-Edge tested on lowest and highest LTE signal bandwidth, with full resource blocks allocation

5.2.4.3. LTE Band 5: Op. Mode 3, Set-up 1

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
9.510a	Low	20407	823 – 824 MHz	3	Band Edge Compliance QPSK modulation, remark 2, LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	passed
9.510b	Low	20407	823 – 824 MHz	3	Band Edge Compliance 16-QAM modulation LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.517a	Low	20450	823 – 824 MHz	3	Band Edge Compliance QPSK modulation, LTE signal bandwidth 10MHz	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	passed
9.517b	Low	20450	823 – 824 MHz	3	Band Edge Compliance 16-QAM modulation LTE signal bandwidth 10MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.01	Middle	20525	30 MHz to 12 GHz	3	Carrier visible on diagram. Not relevant for results QPSK Modulation, LTE Signal bandwidth 10MHz, full RBs	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.02	Middle	20525	30 MHz to 12 GHz	3	Carrier visible on diagram. Not relevant for results 16-QAM Modulation, LTE Signal bandwidth 10MHz, full RBs	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.502a	High	20643	849 - 850 MHz	3	Band Edge Compliance QPSK modulation, remark 2, LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.502b	High	20643	849 - 850 MHz	3	Band Edge Compliance 16-QAM modulation LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.509a	High	20600	849 - 850 MHz	3	Band Edge Compliance QPSK modulation, remark 2, LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.509b	High	20600	849 - 850 MHz	3	Band Edge Compliance 16-QAM modulation LTE signal bandwidth 1.4MHz, remark 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark:

- 1.) for channel bandwidth of 1.4 MHz used for measurements, RBW=20kHz (correction factor of $10\log(\text{measurement BW}=20\text{kHz}/14\text{kHz}) = -1.54$ dB applies to results
- 2.) middle channel for radiated spurious tested only
- 3.) Band-Edge tested on lowest and highest LTE signal bandwidth, with full resource blocks allocation

5.2.4.4. LTE Band 17: Op. Mode 4, Set-up 1

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
9.172a	Low	23755	703 - 704 MHz	4	Band Edge Compliance QPSK modulation LTE Signal bandwidth 5MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.172b	Low	23755	703 - 704 MHz	4	Band Edge Compliance 16-QAM modulation LTE Signal bandwidth 5MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.174a	Low	23870	703 - 704 MHz	4	Band Edge Compliance QPSK modulation LTE Signal bandwidth 10MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.174b	Low	23870	703 - 704 MHz	4	Band Edge Compliance 16-QAM modulation LTE Signal bandwidth 10MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.07	Middle	23790	30 MHz to 12 GHz	4	Carrier visible on diagram. Not relevant for results QPSK, LTE signal bandwidth=10MHz, full RBs	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.08	Middle	23790	30 MHz to 12 GHz	4	Carrier visible on diagram. Not relevant for results 16-QAM, LTE signal bandwidth=10MHz, full RBs	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.176a	High	23825	716 – 717 MHz	4	Band Edge Compliance QPSK modulation LTE Signal bandwidth 5MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.176b	High	23825	716 – 717 MHz	4	Band Edge Compliance 16-QAM modulation LTE Signal bandwidth 5MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.178a	High	23800	716 – 717 MHz	4	Band Edge Compliance QPSK modulation LTE Signal bandwidth 10MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.178b	High	23800	716 – 717 MHz	4	Band Edge Compliance 16-QAM modulation LTE Signal bandwidth 10MHz	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark:

- 1.) middle channel for radiated spurious tested only
- 2.) Band-Edge tested on lowest and highest LTE signal bandwidth, with full resource blocks allocation

5.3. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%						Remarks
Conducted emissions (U _{CISPR})	CISPR 16-2-1	9 kHz - 150 kHz	4.0 dB						-
		150 kHz - 30 MHz	3.6 dB						
Radiated emissions Enclosure	CISPR 16-2-3	30 MHz - 1 GHz	4.2 dB						E-Field
		1 GHz - 18 GHz	5.1 dB						
Disturbance power	CISPR 16-2-2	30 MHz - 300 MHz	-						-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB						Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2		
		9 kHz - 12.75 GHz	N/A	0.60	--	--	--		-
		12.75 - 26.5GHz	N/A	0.82	--	--	--		
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	--	--	--		N/A - not applicable
		2.8 GHz - 12.75GHz	1.48	N/A	--	--	--		
		12.75 GHz - 18GHz	1.81	N/A	--	--	--		
		18 GHz - 26.5GHz	1.83	N/A	--	--	--		
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
			1.0 dB						Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
			See above: 0.70 dB						Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm						-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.0 dB						Magnetic field E-field Substitution
		30 MHz - 1 GHz	4.2 dB						
		1 GHz - 20 GHz	3.17 dB						

Table: measurement uncertainties, valid for conducted/radiated measurements

6. Abbreviations used in this report

The abbreviations	
ANSI	American National Standards Institute
AV , AVG, CAV	Average detector
EIRP	Equivalent isotropically radiated power, determined within a separate measurement
EGPRS	Enhanced General Packet Radio Service
EUT	Equipment Under Test
FCC	Federal Communications Commission, USA
IC	Industry Canada
n.a.	not applicable
Op-Mode	Operating mode of the equipment
PK	Peak
RBW	resolution bandwidth
RF	Radio frequency
RSS	Radio Standards Specification, Dokuments from Industry Canada
Rx	Receiver
TCH	Traffic channel
Tx	Transmitter
QP	Quasi peak detector
VBW	Video bandwidth
ERP	Effective radiated power

7. Accreditation details of CETECOM's laboratories and test sites

Ref.-No.	Accreditation Certificate	Valid for laboratory area or test site	Accreditation Body
-	D-PL-12047-01-01	All laboratories and test sites of CETECOM GmbH, Essen	DAkkS, Deutsche Akkreditierungsstelle GmbH
337 487 558 348 348	(MRA US-EU 0003)	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	FCC, Federal Communications Commission Laboratory Division, USA
337 487 550 558	3462D-1 3462D-2 3462D-2 3462D-3	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR)	IC, Industry Canada Certification and Engineering Bureau
487 550 348 348	R-2666 G-301 C-2914 T-1967	Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan
OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room			

8. Instruments and Ancillary

8.1. Used equipment “CTC”

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

8.1.1. Test software and firmware of equipment

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
001	EMI Test Receiver	ESS	825132/017	Firm.= 1.21 , OTP=2.0, GRA=2.0
012	Signal Generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02
013	Power Meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51
017	Digital Radiocommunication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99
053	Audio Analyzer	UPA3	860612/022	Firm. V 4.3
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	Firm.= V 3.1DHG
140	Signal Generator	SMHU	831314/006	Firm.= 3.21
261	Thermal Power Sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B
262	Power Meter	NRV-S	825770/0010	Firm.= 2.6
263	Signal Generator	SMP 04	826190/0007	Firm.=3.21
264	Spectrum Analyzer	FSEK 30	826939/005	Bios=2.1, Analyzer= 3.20
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02
298	Univ. Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used
323	Digital Radiocommunication Tester	CMD 55	825878/0034	Firm.= 3.52 .22.01.99
331	Climatic Test Chamber -40/+80 Grad	HC 4055	43146	TSI 1.53
335	CTC-EMS-Conducted	System EMS Conducted	-	EMC 32 V 8.52
340	Digital Radiocommunication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99
355	Power Meter	URV 5	891310/027	Firm.= 1.31
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Eprom Data = 31.03.08
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10
371	Bluetooth Tester	CBT32	100153	CBT V5.30+ SW-Option K55, K57
377	EMI Test Receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36
378	Broadband RF Field Monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13
389	Digital Multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)
392	Radio Communication Tester	MT8820A	6K00000788	Firm.= 4.50 #005, IPL=4.01#001, OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002
436	Univ. Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR)	-	EMC 32 Version 8.52
442	CTC-SAR-EMS	System EMS field (SAR)	-	EMC 32 Version 8.40
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	Spuri 7.2.5 or EMC 32 Ver. 9.15.00
444	CTC-FAR-EMS field	System-EMS-Field (FAR)	-	EMC 32 Version 9.15.00
460	Univ. Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used,
489	EMI Test Receiver	ESU40	1000-30	Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00
491	ESD Simulator dito	ESD dito	dito307022	V 2.30
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr: 000037 Version V4.20a01
526	Burst Generator	EFT 200 A	0496-06	Software Nr. 000034 Version V2.32
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01
546	Univ. Radio Communication Tester	CMU 200	106436	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used
547	Univ. Radio Communication Tester	CMU 200	835390/014	R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14
584	Spectrum Analyzer	FSU 8	100248	2.82_SP3
597	Univ. Radio Communication Tester	CMU 200	100347	R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Firmware Bios 3.40 , Analyzer 3.40 Sp 2
620	EMI Test Receiver	ESU 26	100362	4.43_SP3
642	Wideband Radio Communication Tester	CMW 500	126089	Setup V03.26, Test programm component V03.02.20
692	Bluetooth Tester	CBT 32	100236	CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF)

8.1.2. Single instruments and test systems

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
001	EMI Test Receiver	ESS	825132/017	Rohde & Schwarz	12 M	-	30.04.2016
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz	12 M	-	30.04.2016
007	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz	12 M	-	30.04.2016
009	Power Meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz	24 M	-	30.04.2017
016	Line Impedance Simulating Network	Op. 24-D	B6366	Spitzenberger+Spies	36 M	-	31.03.2016
020	Horn Antenna 18 GHz (Subst 1)	3115	9107-3699	EMCO	36/12 M	-	31.03.2017
021	Loop Antenna (H-Field)	6502	9206-2770	EMCO	36 M	-	30.04.2018
030	Loop Antenna (H-field)	HFH-Z2	879604/026	Rohde & Schwarz	36 M	-	30.04.2018
033	RF-current probe (100kHz-30MHz)	ESH2-Z1	879581/18	Rohde & Schwarz	24 M	-	30.04.2017
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz	pre-m	1a	
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies	-	3	
066	notch filter (WCDMA; FDD1)	WRCT 1900/2200-5/40-10EEK	5	Wainwright GmbH	12 M	1g	31.07.2015
086	DC - power supply, 0 -10 A	LNG 50-10	-	Heinzinger Electronic	pre-m	2	
087	DC - power supply, 0 -5 A	EA-3013 S	-	Elektro Automatik	pre-m	2	
090	Helmholtz coil: 2x10 coils in series	Helmholtz coil: 2x10 coils in	-	RWTÜV	24 M	4	31.03.2016
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba	-	4	
099	passive voltage probe	ESH2-Z3	299.7810.52	Rohde & Schwarz	36 M	-	30.04.2018
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck	36 M	-	30.04.2018
110	USB-LWL-Converter	OLS-1	-	Ing. Büro Scheiba	-	4	
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	BOCONSULT	36 M	-	31.03.2016
136	adjustable dipole antenna (Dipole 1)	3121C-DB4	9105-0697	EMCO	36 M	-	30.04.2018
140	Signal Generator	SMHU	831314/006	Rohde & Schwarz	24 M	-	31.03.2016
248	attenuator	SMA 6dB 2W	-	Radiall	pre-m	2	
249	attenuator	SMA 10dB 10W	-	Radiall	pre-m	2	
252	attenuator	N 6dB 12W	-	Radiall	pre-m	2	
256	attenuator	SMA 3dB 2W	-	Radiall	pre-m	2	
257	hybrid	4031C	04491	Narda	pre-m	2	
260	hybrid coupler	4032C	11342	Narda	pre-m	2	
261	Thermal Power Sensor	NRV-Z55	825083/0008	Rohde & Schwarz	24 M	-	31.03.2016
262	Power Meter	NRV-S	825770/0010	Rohde & Schwarz	24 M	-	31.03.2016
263	Signal Generator	SMP 04	826190/0007	Rohde & Schwarz	36 M	-	31.03.2016
264	Spectrum Analyzer	FSEK 30	826939/005	Rohde & Schwarz	12 M	-	30.04.2016
265	peak power sensor	NRV-Z33, Model 04	840414/009	Rohde & Schwarz	24 M	-	31.03.2016
266	Peak Power Sensor	NRV-Z31, Model 04	843383/016	Rohde & Schwarz	24 M	-	31.03.2016
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH	pre-m	2	
270	termination	1418 N	BB6935	Weinschel	pre-m	2	
271	termination	1418 N	BE6384	Weinschel	pre-m	2	
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel	pre-m	2	
273	attenuator (10 dB) 100 W	Model 48	BF9229	Weinschel	pre-m	2	
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel	pre-m	2	
275	DC-Block	Model 7003 (N)	C5129	Weinschel	pre-m	2	
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel	pre-m	2	
279	power divider	1515 (SMA)	LH855	Weinschel	pre-m	2	
287	pre-amplifier 25MHz - 4GHz	AMF-2D-100M4G-35-10P	379418	Miteq	12 M	1c	31.07.2015
291	high pass filter GSM 850/900	WHJ 2200-4EE	14	Wainwright GmbH	12 M	1c	31.07.2015
298	Univ. Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz	pre-m	3	
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz	12 M	-	30.04.2016
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel	pre-m	2	
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck	36 M	-	31.03.2017
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck	36 M	-	31.03.2017
331	Climatic Test Chamber -40/+80 Grad	HC 4055	43146	Heraeus Vötsch	24 M	-	30.11.2014
341	Digital Multimeter	Fluke 112	81650455	Fluke	24 M	-	31.03.2016
342	Digital Multimeter	Voltcraft M-4660A	IB 255466	Voltcraft	24 M	-	30.04.2017
347	laboratory site	radio lab.	-	-	-	5	
348	laboratory site	EMI conducted	-	-	-	5	
354	DC - Power Supply 40A	NGPE 40/40	448	Rohde & Schwarz	pre-m	2	
355	Power Meter	URV 5	891310/027	Rohde & Schwarz	24 M	-	31.03.2016
356	power sensor	NRV-Z1	882322/014	Rohde & Schwarz	24 M	-	31.03.2015
357	power sensor	NRV-Z1	861761/002	Rohde & Schwarz	24 M	-	30.04.2017
371	Bluetooth Tester	CBT32	100153	R&S	24 M	-	31.03.2016
373	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	100535	Rohde & Schwarz	24 M	-	30.04.2017
377	EMI Test Receiver	ESCS 30	100160	Rohde & Schwarz	12 M	-	30.04.2016
389	Digital Multimeter	Keithley 2000	0583926	Keithley	24 M	-	30.04.2017
392	Radio Communication Tester	MT8820A	6K00000788	Anritsu	12 M	-	30.04.2016
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO	-	4	
436	Univ. Radio Communication Tester	CMU 200	103083	Rohde & Schwarz	12 M	-	30.04.2016
439	UltraLog-Antenna	HL 562	100248	Rohde & Schwarz	36 M	-	31.03.2017
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR) Cable	-	CETECOM	12 M	5	30.01.2016
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-	-	ETS-Lindgren /	12 M	5	31.07.2015

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
		RSE		CETECOM			
448	notch filter WCDMA_FDD II	WRCT 1850.0/2170.0-5/40-	5	Wainwright Instruments GmbH	12 M	1c	31.07.2015
449	notch filter WCDMA FDD V	WRCT 824.0/894.0-5/40-8SSK	1	Wainwright	12 M	1c	31.07.2015
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg	-	4	
456	DC-Power supply 0-5 A	EA 3013 S	207810	Elektro Automatik	pre-m	2	
459	DC -Power supply 0-5 A , 0-32 V	EA-PS 2032-50	910722	Elektro Automatik	pre-m	2	
460	Univ. Radio Communication Tester	CMU 200	108901	Rohde & Schwarz	12 M	-	30.04.2016
463	Universal source	HP3245A	2831A03472	Agilent	-	4	
466	Digital Multimeter	Fluke 112	89210157	Fluke USA	24 M	-	31.03.2016
467	Digital Multimeter	Fluke 112	89680306	Fluke USA	36 M	-	30.04.2018
468	Digital Multimeter	Fluke 112	90090455	Fluke USA	36 M	-	30.04.2018
477	ReRadiating GPS-System	AS-47	-	Automotive Cons. Fink	-	3	
480	power meter (Fula)	NRVS	838392/031	Rohde & Schwarz	24 M	-	30.04.2017
482	filter matrix	Filter matrix SAR 1	-	CETECOM (Brl)	-	1d	
484	pre-amplifier 2,5 - 18 GHz	AMF-5D-02501800-25-10P	1244554	Miteq	12 M	-	31.07.2015
487	System CTC NSA-Verification SAR-EMI	System EMI field (SAR) NSA	-	ETS Lindgren / CETECOM	24 M	-	30.06.2015
489	EMI Test Receiver	ESU40	1000-30	Rohde & Schwarz	12 M	-	30.04.2016
502	band reject filter	WRCG 1709/1786-1699/1796-	SN 9	Wainwright	pre-m	2	
503	band reject filter	WRCG 824/849-814/859-	SN 5	Wainwright	pre-m	2	
512	notch filter GSM 850	WRCA 800/960-02/40-6EEK	SN 24	Wainwright	12 M	1c	31.07.2015
517	relais switch matrix	HF Relais Box Keithley	SE 04	Keithley	pre-m	2	
523	Digital Multimeter	L4411A	MY46000154	Agilent	24 M	-	30.04.2017
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel	pre-m	2	
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-	pre-m	2	
546	Univ. Radio Communication Tester	CMU 200	106436	R&S	12 M	-	30.04.2016
547	Univ. Radio Communication Tester	CMU 200	835390/014	Rohde & Schwarz	12 M	-	30.04.2016
548	Digital-Barometer	GBP 2300	without	Greisinger GmbH	36 M	-	30.06.2015
549	Log-Per-Antenna	HL025	1000060	Rohde & Schwarz	36/12 M	-	30.06.2015
552	high pass filter 2,8-18GHz	WHKX 2.8/18G-10SS	4	Wainwright	12 M	1c	31.07.2015
557	System CTC-OTA-2	R&S TS8991	-	Rohde & Schwarz	12 M	5	30.09.2015
558	System CTC FAR S-VSWR	System CTC FAR S-VSWR	-	CTC	24 M	-	31.07.2015
574	Biconilog Hybrid Antenna	BTA-L	980026L	Frankonia	36/12 M	-	31.03.2016
584	Spectrum Analyzer	FSU 8	100248	Rohde & Schwarz	pre-m	-	
594	Wideband Radio Communication Tester	CMW 500	101757	Rohde & Schwarz	12 M	-	30.04.2016
597	Univ. Radio Communication Tester	CMU 200	100347	Rohde & Schwarz	36 M	-	31.03.2016
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Rohde & Schwarz	24 M	-	30.04.2017
600	power meter	NRVD (Reserve)	834501/018	Rohde & Schwarz	24 M	-	30.04.2017
601	medium-sensitivity diode sensor	NRV-Z5 (Reserve)	8435323/003	Rohde & Schwarz	24 M	-	30.04.2017
602	peak power sensor	NRV-Z32 (Reserve)	835080	Rohde & Schwarz	24 M	-	
611	DC power supply	E3632A	KR 75305854	Agilent	pre-m	2	
612	DC power supply	E3632A	MY 40001321	Agilent	pre-m	2	
613	Attenuator	R416120000 20dB 10W	Lot. 9828	Radiall	pre-m	2	
616	Digitalmultimeter	Fluke 177	88900339	Fluke	24 M	-	31.03.2016
617	Power Splitter/Combiner	ZFSC-2-2-S+	S F987001108	Mini Circuits	-	2	
618	Power Splitter/Combiner	50PD-634	600994	JFW Industries USA	-	2	
619	Power Splitter/Combiner	50PD-634	600995	JFW Industries, USA	-	3	
620	EMI Test Receiver	ESU 26	100362	Rohde-Schwarz	12 M	-	01.12.2015
621	Step Attenuator 0-139 dB	RSP	100017	Rohde & Schwarz	pre-m	2	
625	Generic Test Load USB	Generic Test Load USB	-	CETECOM	-	2	
627	data logger	OPUS 1	201.0999.9302.6.4.1.4 3	G. Lufft GmbH	24 M	-	30.04.2017
634	Spectrum Analyzer	FSM (HF-Unit)	826188/010	Rohde & Schwarz	pre-m	2	
636	Thermal Imaging camera	Ti32	Ti32-12060213	Fluke Corporation	36 M	-	31.07.2015
637	High Speed HDMI with Ethernet 1m	HDMI cable with Ethernet 1m	-	KogiLink	-	2	
638	HDMI Kabel with Ethernet 1,5 m flach	HDMI cable with Ethernet	-	Reichelt	-	2	
640	HDMI cable 2m rund	HDMI cable 2m rund	-	Reichelt	-	2	
641	HDMI cable with Ethernet	Certified HDMI cable with	-	PureLink	-	2	
642	Wideband Radio Communication Tester	CMW 500	126089	Rohde&Schwarz	12 M	-	30.04.2016
644	Amplifierer	ZX60-2534M+	SN865701299	Mini-Circuits	-	-	
670	Univ. Radio Communication Tester	CMU 200	106833	Rohde & Schwarz	24 M	-	31.03.2016
671	DC-power supply 0-5 A	EA-3013S	-	Elektro Automatik	pre-m	2	
678	Power Meter	NRP	101638	Rohde&Schwarz	pre-m	-	
683	Spectrum Analyzer	FSU 26	200571	Rohde & Schwarz	12 M	-	30.04.2016
686	Field Analyzer	EHP-200A	160WX30702	Narda Safety Test Solutions	24 M	-	30.04.2017
687	Signal Generator	SMF 100A	102073	Rohde&Schwarz	12 M	-	30.04.2016
688	Pre Amp	JS-18004000-40-8P	1750117	Miteq	pre-m	-	

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
692	Bluetooth Tester	CBT 32	100236	Rohde & Schwarz	24 M	-	31.03.2016
693	TS8997	CTC-Radio Lab 1_TS8997	-	Rohde&Schwarz	12 M	5	01.05.2015
697	Power Splitter	ZN4PD-642W-S+	165001445	Mini-Circuits	-	2	

8.1.3. Legend

Note / remarks		Calibrated during system calibration:
	1a	System CTC-SAR-EMS (Ref.-No. 442)
	1b	System-CTC-EMS-Conducted (Ref.-No. 335)
	1c	System CTC-FAR-EMI-RSE (Ref.-No . 443)
	1d	System CTC-SAR-EMI (Ref.-No . 441)
	1e	System CTC-OATS (EMI radiated) (Ref.-No. 337)
	1 f	System CTC-CTIA-OTA (Ref.-No . 420)
	1 g	System CTC-FAR-EMS (Ref.-No . 444)
	2	Calibration or equipment check immediately before measurement
	3	Regulatory maintained equipment for functional check or support purpose
	4	Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment
	5	Test System

Interval of calibration	12 M	12 month
	24 M	24 month
	36 M	36 month
	24/12 M	Calibration every 24 months, between this every 12 months internal validation
	36/12 M	Calibration every 36 months, between this every 12 months internal validation
	Pre-m	Check before starting the measurement
	-	Without calibration

9. Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2015-07-23
--	--	--