Page 34 of 296

Report No.: 200722022RFM-2

Item	Band		Ba	ndwid	lth(MF	łz)			Modulatio	n		RB		Tes	t Chai	nnel
item	Бапа	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	Н
	2	\square	\boxtimes	\square	\square	\boxtimes	\boxtimes	\boxtimes	\square	\boxtimes			\boxtimes	\square	\square	\square
	4	\boxtimes			\boxtimes	\boxtimes	\boxtimes	\square								
	5	\boxtimes	\boxtimes	\boxtimes	\boxtimes	1	1	\boxtimes	\boxtimes	\boxtimes			\boxtimes	\boxtimes	\boxtimes	\boxtimes
	12	\boxtimes	\boxtimes	\boxtimes	\boxtimes	-	•	\boxtimes	\square	\boxtimes			\boxtimes	\boxtimes	\boxtimes	\boxtimes
99%&26dB Bandwidth	13	-			\boxtimes	-	-	\boxtimes	\square	\boxtimes			\boxtimes	\boxtimes	\boxtimes	\boxtimes
	25	\boxtimes	\boxtimes	\boxtimes	\square	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes			\boxtimes	\boxtimes	\boxtimes	\square
	26	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes	1	\boxtimes	\boxtimes	\boxtimes			\boxtimes	\boxtimes	\boxtimes	\boxtimes
	66	\boxtimes			\boxtimes	\boxtimes	\boxtimes	\boxtimes								
	71	-	1	\boxtimes			\boxtimes	\boxtimes	\boxtimes	\square						
	2						\boxtimes	\boxtimes	\boxtimes	\boxtimes	\square		\boxtimes	\boxtimes		\boxtimes
	4						\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes		\boxtimes	\boxtimes		\square
	5				\square			\boxtimes	\boxtimes	\boxtimes	\boxtimes		\boxtimes	\boxtimes		\square
peak-to-av	12				\boxtimes	-	-	\boxtimes	\boxtimes	\boxtimes	\square		\boxtimes	\boxtimes		\square
erage ratio	13	-	•		\boxtimes	-	•	\boxtimes	\boxtimes	\boxtimes	\square		\boxtimes	\boxtimes		\boxtimes
Tatio	25						\boxtimes	\boxtimes	\square	\boxtimes			\boxtimes			\boxtimes
	26					\boxtimes	-	\boxtimes	\boxtimes	\boxtimes			\boxtimes			\boxtimes
	66						\boxtimes	\boxtimes		\boxtimes			\boxtimes			\boxtimes
	71	-	-				\boxtimes	\boxtimes	\boxtimes	\boxtimes			\boxtimes			\boxtimes

Shenzhen UnionTrust Quality and Technology Co., Ltd.

 Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

 Tel: +86-755-28230888
 Fax: +86-755-28230886
 E-mail: info@uttlab.com
 http://www.uttlab.com

 UTTR-RF-FCC4G-V1.1
 http://www.uttlab.com
 http://www.uttlab.com

Page 35 of 296

Report No.: 200722022RFM-2

Item	Band		Ba	ndwic	lth(MF	łz)			Modulatio	n		RB		Test Channel		
nem	Danu	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	м	н
	2	\boxtimes	\square	\boxtimes	\square	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\square		\boxtimes	\square		\square
	4	\boxtimes		\boxtimes	\boxtimes		\square									
	5	\boxtimes	\boxtimes	\boxtimes	\boxtimes	1	1	\boxtimes	\boxtimes	\boxtimes	\boxtimes		\boxtimes	\boxtimes		\square
Band Edge	12	\boxtimes	\boxtimes	\boxtimes	\boxtimes	•	•	\boxtimes	\boxtimes	\boxtimes	\boxtimes		\boxtimes	\boxtimes		\boxtimes
at antenna terminals	13	1		\boxtimes	\bowtie	•	-	\boxtimes	\boxtimes	\boxtimes	\boxtimes		\boxtimes	\boxtimes		\square
terminais	25	\boxtimes	\square	\boxtimes	\square	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes		\boxtimes	\boxtimes		\square
	26	\boxtimes	\square		\boxtimes	\square		\boxtimes	\boxtimes	\boxtimes	\boxtimes		\square	\boxtimes		\boxtimes
	66	\square	\square	\boxtimes		\boxtimes	\boxtimes		\square							
	71	-	-	\square	\square	\boxtimes	\square	\boxtimes	\boxtimes	\boxtimes	\boxtimes		\boxtimes	\boxtimes		\boxtimes
	2	\boxtimes	\square	\boxtimes	\square	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes			\boxtimes	\boxtimes	\square
	4	\square	\square	\square	\boxtimes	\square	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes					\boxtimes
	5	\boxtimes	\square	\boxtimes	\boxtimes			\boxtimes	\boxtimes	\boxtimes	\boxtimes			\boxtimes	\boxtimes	\square
Spurious	12	\boxtimes	\square	\boxtimes	\square	-	-	\boxtimes	\boxtimes	\boxtimes	\boxtimes			\boxtimes	\boxtimes	\square
emissions at antenna	13	-	-	\boxtimes	\square	-	-	\boxtimes	\boxtimes	\boxtimes	\boxtimes			\boxtimes	\boxtimes	\square
terminals	25	\square	\square	\boxtimes	\square	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes	\boxtimes			\boxtimes	\boxtimes	\square
	26	\boxtimes	\square	\boxtimes	\boxtimes	\boxtimes		\boxtimes	\boxtimes	\boxtimes	\boxtimes			\boxtimes	\boxtimes	\square
	66	\boxtimes			\boxtimes	\boxtimes	\square									
	71	-	-	\square	\square	\square	\square	\square	\boxtimes	\boxtimes	\boxtimes			\boxtimes	\boxtimes	\square

Shenzhen UnionTrust Quality and Technology Co., Ltd.

 Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

 Tel: +86-755-28230888
 Fax: +86-755-28230886
 E-mail: info@uttlab.com
 http://www.uttlab.com

 UTTR-RF-FCC4G-V1.1
 http://www.uttlab.com
 http://www.uttlab.com

Page 36 of 296

Report No.: 200722022RFM-2

Item	Band		Ba	ndwic	lth(MF	łz)			Modulatio	n		RB		Test Channel		
item	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	Н
	2						\boxtimes	\boxtimes			\square			\square	\boxtimes	\boxtimes
	4						\boxtimes	\boxtimes			\boxtimes			\boxtimes	\boxtimes	\boxtimes
	5				\boxtimes			\boxtimes			\boxtimes			\boxtimes	\boxtimes	\boxtimes
Field	12				\boxtimes	-	-	\boxtimes			\boxtimes			\boxtimes	\boxtimes	\boxtimes
strength of spurious	13	•	-		\boxtimes	-	-	\boxtimes			\boxtimes			\boxtimes	\boxtimes	\boxtimes
radiation	25						\boxtimes	\boxtimes			\square				\boxtimes	\boxtimes
	26					\boxtimes	-	\boxtimes			\boxtimes				\boxtimes	\boxtimes
	66						\boxtimes	\boxtimes			\boxtimes			\boxtimes	\boxtimes	\boxtimes
	71	-	-				\boxtimes	\boxtimes			\square			\boxtimes	\boxtimes	\boxtimes
	2						\boxtimes	\boxtimes					\boxtimes		\boxtimes	
	4						\boxtimes	\boxtimes					\boxtimes		\boxtimes	
	5				\boxtimes	1	I	\boxtimes					\boxtimes		\boxtimes	
	12				\boxtimes	-	-	\boxtimes					\boxtimes		\boxtimes	
Frequency stability	13	-	-		\boxtimes	-	-	\boxtimes					\boxtimes		\boxtimes	
	25						\boxtimes	\boxtimes					\boxtimes		\boxtimes	
	26					\boxtimes		\boxtimes					\boxtimes		\boxtimes	
	66						\boxtimes	\boxtimes					\boxtimes		\boxtimes	
	71	-	-				\boxtimes	\boxtimes					\boxtimes		\boxtimes	
Remark: The mark "⊠ The mark "-" r	" mean neans	s is c is not	hose t supp	n for ported	testir d ban	ig; Tł dwid	ne ma th	ark "□"	means is	not chose	en for	testing	g;			

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION 5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title					
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations					
2	FCC 47 CFR Part 22	Public Mobile Services					
3	FCC 47 CFR Part 27	Miscellaneous Wireless Communications Services					
4	FCC 47 CFR Part 24	Personal Communications Services					
5	FCC 47 CFR Part 90	Private Land Mobile Radio Services					
6	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services					
7	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus					
8	RSS-130 Issue 2	Equipment Operating in the Frequency Bands 617-652 MHz, 663-698 MHz, 698-756 MHz and 777-787 MHz					
9	RSS-132 Issue 4	Cellular Systems Operating in the Bands 824-849 MHz and 869-894 MHz					
10	RSS-133 Issue 6,Amendment 1	2 GHz Personal Communications Services					
11	RSS-139 Issue 4	Advanced Wireless Services Equipment Operating in the Bands 1710-1780 MHz and 2110-2200 MHz					
12	RSS-199 Issue 3	Broadband Radio Service (BRS) Equipment Operating in the Band 2500– 2690 MHz					
13	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01					

5.2ERP OR EIRP

Test Requirement: FCC 47 CFR Part 2.1046(a)

LTE Band 2 & LTE Band 25: FCC 47 CFR Part 24.232(c), RSS-133 Issue 6,Amendment 1, Section 6.4

LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.50(d)(4), RSS-139 Issue 4, Section 6.5

LTE Band 5 & LTE Band 26: FCC 47 CFR Part 22.913(a), RSS-132 Issue 4, Section 5.4

LTE Band 12 & Band 71: FCC 47 CFR Part 27.50(c)(10), RSS-130 Issue 2, Section 4.6

LTE Band 13: FCC 47 CFR Part 27.50(b)(10), RSS-130 Issue 2, Section 4.6 LTE Band 26: FCC 47 CFR Part 90.635

Test Method: KDB 971168 D01v03r01 Section 5.6 & ANSI C63.26-2015

Limit:

RSS-130 Issue 2, Section 4.6,

4.6.2 Frequency bands 617-652 MHz and 663-698 MHz

The e.r.p. shall not exceed 3 watts for mobile equipment, fixed subscriber equipment and portable equipment.

4.6.3 Frequency bands 698-756 MHz and 777-787 MHz

The e.r.p. shall not exceed 30 watts for mobile equipment and outdoor fixed subscriber equipment. The e.r.p. shall not exceed 3 watts for portable equipment and indoor fixed subscriber equipment.

RSS-132 Issue 4, Section 5.4,

The transmitter output power shall be measured in terms of average power. The equivalent radiated power (e.r.p.) shall not exceed 7 watts for mobile equipment and 3 watts for portable equipment.

RSS-133 Issue 6, Amendment 1, Section 6.4

The equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in

Shenzhen UnionTrust Quality and Technology Co., Ltd.

 Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

 Tel: +86-755-28230888
 Fax: +86-755-28230886
 E-mail: info@uttlab.com
 http://www.uttlab.com

 UTTR-RF-FCC4G-V1.1



SRSP-510.

RSS-139 Issue 4, Section 5.5

The maximum output power of the equipment shall comply with the limits specified below. In the tables, maximum power refers to the equivalent isotropically radiated power (e.i.r.p.) or total radiated power (TRP), measured in terms of average values.

Table 3: Maximum power of equipment in the band 1710-1780 MHz

Equipment type	Maximum power
Fixed station and base station	30 dBm e.i.r.p./channel bandwidth
Subscriber equipment	30 dBm e.i.r.p./channel bandwidth

Table 4: Maximum power of equipment in the band 2110-2180 MHz

Equipment type	Maximum power
Non-AAS fixed station and base station	65 dBm e.i.r.p./MHz
AAS fixed station and base station	46 dBm TRP/MHz
Subscriber equipment	30 dBm e.i.r.p./channel bandwidth

Table 5: Maximum power of equipment in the band 2180-2200 MHz

Equipment type	Maximum power
Non-AAS base station	65 dBm e.i.r.p./MHz
AAS base station	46 dBm TRP/MHz

Test Procedure:

ERP or EIRP = P_{Meas} + G_T - L_C

where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

 G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

1) Lc = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup: Refer to section 4.2.1 for details.

-					
Instruments Used:	Refer to section 3 for details				
Test Mode:	Link mode				
Test Results:	Pass				
Test Data:	See table below				

5.2.1 LTE Band 2

		LTE Band 2 Maxi	mum EIRP (dBm)						
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result				
		Channel Band	lwidth: 1.4MHz						
Lowest	23.36	23.03	/	33.01	Pass				
Middle	23.24	22.91	/	33.01	Pass				
Highest	23.03	22.94	/	33.01	Pass				
Channel Bandwidth: 3MHz									
Lowest	23.44	22.73	/	33.01	Pass				
Middle	23.17	22.39	/	33.01	Pass				
Highest	22.95	22.14	/	33.01	Pass				
Channel Bandwidth: 5MHz									
Lowest	23.29	22.89	1	33.01	Pass				
Middle	23.23	22.56	1	33.01	Pass				
Highest	22.96	22.16	1	33.01	Pass				
		Channel Band	width: 10MHz		•				
Lowest	23.40	22.80	1	33.01	Pass				
Middle	23.34	22.37	1	33.01	Pass				
Highest	23.04	22.11	1	33.01	Pass				
		Channel Band	width: 15MHz		•				
Lowest	23.26	22.88	1	33.01	Pass				
Middle	23.30	22.56	1	33.01	Pass				
Highest	22.87	22.17	1	33.01	Pass				
		Channel Band	width: 20MHz						
Lowest	23.46	22.89	1	33.01	Pass				
Middle	23.35	22.57	1	33.01	Pass				
Highest	23.06	22.29	1	33.01	Pass				

5.2.2 LTE Band 4

		LTE Band 4 Maxi	mum EIRP (dBm)							
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result					
		Channel Band	width: 1.4MHz							
Lowest	22.59	21.75	/	30.00	Pass					
Middle	22.95	21.80	/	30.00	Pass					
Highest	22.60	21.99	/	30.00	Pass					
Channel Bandwidth: 3MHz										
Lowest	23.00	21.47	/	30.00	Pass					
Middle	22.99	21.54	/	30.00	Pass					
Highest	22.90	21.85	/	30.00	Pass					
	Channel Bandwidth: 5MHz									
Lowest	23.01	21.47	/	30.00	Pass					
Middle	22.92	21.63	1	30.00	Pass					
Highest	22.82	21.87	1	30.00	Pass					
		Channel Band	width: 10MHz							
Lowest	22.66	21.38	/	30.00	Pass					
Middle	22.90	21.48	1	30.00	Pass					
Highest	22.57	21.75	1	30.00	Pass					
	•	Channel Band	width: 15MHz		<u>.</u>					
Lowest	22.90	21.48	/	30.00	Pass					
Middle	23.08	21.63	/	30.00	Pass					
Highest	22.91	21.80	1	30.00	Pass					
		Channel Band	width: 20MHz							
Lowest	23.18	22.20	1	30.00	Pass					
Middle	23.38	22.14	1	30.00	Pass					
Highest	23.32	21.45	1	30.00	Pass					

5.2.3 LTE Band 5

		LTE Band 5 Maxi	mum ERP (dBm)						
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result				
		Channel Band	width: 1.4MHz						
Lowest	20.93	19.75	/	38.45	Pass				
Middle	20.50	19.64	/	38.45	Pass				
Highest	20.71	20.06	/	38.45	Pass				
Channel Bandwidth: 3MHz									
Lowest	20.92	19.86	/	38.45	Pass				
Middle	20.64	19.56	/	38.45	Pass				
Highest	20.76	19.98		38.45	Pass				
		Channel Ban	dwidth: 5MHz						
Lowest	20.91	19.68	1	38.45	Pass				
Middle	20.68	19.50	/	38.45	Pass				
Highest	20.84	20.05	1	38.45	Pass				
		Channel Band	lwidth: 10MHz						
Lowest	21.10	19.86	1	38.45	Pass				
Middle	20.69	19.65	1	38.45	Pass				
Highest	20.87	20.10	1	38.45	Pass				

5.2.4 LTE Band 12

		LTE Band 12 Max	imum ERP (dBm)								
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result						
		Channel Band	width: 1.4MHz								
Lowest	21.19	20.09	1	34.77	Pass						
Middle	21.13	20.67	1	34.77	Pass						
Highest	21.01	19.99	1	34.77	Pass						
	Channel Bandwidth: 3MHz										
Lowest	21.10	20.12	1	34.77	Pass						
Middle	21.17	20.76	1	34.77	Pass						
Highest	20.90	20.01	1	34.77	Pass						
		Channel Ban	dwidth: 5MHz								
Lowest	21.13	20.12	1	34.77	Pass						
Middle	21.18	20.68	1	34.77	Pass						
Highest	20.99	20.01	1	34.77	Pass						
		Channel Banc	width: 10MHz								
Lowest	21.25	20.18	1	34.77	Pass						
Middle	21.23	20.78	1	34.77	Pass						
Highest	21.07	20.05	/	34.77	Pass						

5.2.5 LTE Band 13

LTE Band 13 Maximum ERP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
		Channel Band	dwidth: 5MHz		
Lowest	21.10	20.23	/	34.77	Pass
Middle	21.17	20.39	/	34.77	Pass
Highest	21.18	20.34	/	34.77	Pass
Channel Bandwidth: 10MHz					
Lowest	1	/	/	34.77	Pass
Middle	21.20	20.39	/	34.77	Pass
Highest	1	1	/	34.77	Pass

5.2.6 LTE Band 25

LTE Band 25 Maximum EIRP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
		Channel Band	width: 1.4MHz		
Lowest	22.59	21.75	/	33.01	Pass
Middle	22.95	21.80	/	33.01	Pass
Highest	22.60	21.99	/	33.01	Pass
		Channel Ban	dwidth: 3MHz		
Lowest	23.00	21.47	/	33.01	Pass
Middle	22.99	21.54	/	33.01	Pass
Highest	22.90	21.85	/	33.01	Pass
		Channel Ban	dwidth: 5MHz	•	
Lowest	23.01	21.47	1	33.01	Pass
Middle	22.92	21.63	/	33.01	Pass
Highest	22.82	21.87	1	33.01	Pass
		Channel Banc	width: 10MHz	•	
Lowest	22.86	21.38	1	33.01	Pass
Middle	23.02	21.48	/	33.01	Pass
Highest	22.87	21.75	1	33.01	Pass
		Channel Banc	width: 15MHz	•	
Lowest	22.90	21.48	1	33.01	Pass
Middle	23.08	21.63	1	33.01	Pass
Highest	22.91	21.80	1	33.01	Pass
		Channel Banc	width: 20MHz		
Lowest	23.01	21.55	1	33.01	Pass
Middle	23.11	21.63	1	33.01	Pass
Highest	22.96	21.89	1	33.01	Pass

5.2.7 LTE Band 26

LTE Band 26 Maximum ERP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
		Channel Band	width: 1.4MHz		
Lowest	20.94	19.46	/	38.45	Pass
Middle	20.81	19.22	/	38.45	Pass
Highest	20.40	19.65	/	38.45	Pass
		Channel Ban	dwidth: 3MHz		
Lowest	20.88	19.48	/	38.45	Pass
Middle	20.94	19.32	/	38.45	Pass
Highest	20.33	19.59	/	38.45	Pass
		Channel Ban	dwidth: 5MHz		
Lowest	20.81	19.36	1	38.45	Pass
Middle	20.79	19.28	1	38.45	Pass
Highest	20.40	19.66	1	38.45	Pass
		Channel Banc	width: 10MHz		
Lowest	20.95	19.30	1	38.45	Pass
Middle	20.77	19.23	1	38.45	Pass
Highest	20.29	19.60	1	38.45	Pass
Channel Bandwidth: 15MHz					
Lowest	20.98	19.49	1	38.45	Pass
Middle	20.95	19.38	1	38.45	Pass
Highest	20.49	19.68	1	38.45	Pass

5.2.8 LTE Band 26 (Part 90S)

LTE Band 26 Maximum ERP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
		Channel Band	width: 1.4MHz		
Lowest	20.91	19.43	1	50	Pass
Middle	20.78	19.19	1	50	Pass
Highest	20.37	19.62	1	50	Pass
Channel Bandwidth: 3MHz					
Lowest	20.85	19.45	/	50	Pass
Middle	20.91	19.29	1	50	Pass
Highest	20.30	19.56	1	50	Pass
	Channel Bandwidth: 5MHz				
Lowest	20.78	19.33	/	50	Pass
Middle	20.76	19.25	1	50	Pass
Highest	20.37	19.63	/	50	Pass
Channel Bandwidth: 10MHz					
Middle	20.74	19.26	/	50	Pass

5.2.9 LTE Band 66

LTE Band 66 Maximum EIRP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
		Channel Band	width: 1.4MHz		-
Lowest	23.24	22.51	/	30.00	Pass
Middle	23.40	22.71	/	30.00	Pass
Highest	23.45	22.14	/	30.00	Pass
	-	Channel Ban	dwidth: 3MHz		-
Lowest	23.20	22.47	/	30.00	Pass
Middle	23.49	22.47	/	30.00	Pass
Highest	23.58	22.31	/	30.00	Pass
		Channel Ban	dwidth: 5MHz		
Lowest	23.24	22.31	/	30.00	Pass
Middle	23.37	22.65	1	30.00	Pass
Highest	23.50	22.25	1	30.00	Pass
		Channel Band	width: 10MHz		
Lowest	23.24	22.34	1	30.00	Pass
Middle	23.37	22.50	1	30.00	Pass
Highest	23.47	22.37	1	30.00	Pass
	•	Channel Band	width: 15MHz		-
Lowest	23.28	22.49	1	30.00	Pass
Middle	23.48	22.50	/	30.00	Pass
Highest	23.44	22.30	1	30.00	Pass
		Channel Band	width: 20MHz		
Lowest	23.32	22.49	1	30.00	Pass
Middle	23.53	22.65	1	30.00	Pass
Highest	23.61	22.42	1	30.00	Pass

5.2.10 LTE 71

LTE Band 71 Maximum ERP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
		Channel Ban	dwidth: 5MHz		
Lowest	20.88	19.97	/	33.01	Pass
Middle	20.56	20.29	/	33.01	Pass
Highest	21.08	19.80	/	33.01	Pass
		Channel Banc	width: 10MHz		
Lowest	20.93	19.98	/	33.01	Pass
Middle	20.59	20.14	/	33.01	Pass
Highest	21.04	19.83	/	33.01	Pass
		Channel Banc	width: 15MHz		
Lowest	20.75	20.14	/	33.01	Pass
Middle	20.70	20.21	1	33.01	Pass
Highest	21.03	19.83	1	33.01	Pass
Channel Bandwidth: 20MHz					
Lowest	20.95	20.16	1	33.01	Pass
Middle	20.74	20.32	1	33.01	Pass
Highest	21.14	19.87	1	33.01	Pass

Page 47 of 296

5.3 CONDUCTED OUTPUT POWER

	FCC 47 CFR Part 2.1046(a),
	LTE Band 2 & LTE Band 25: FCC 47 CFR Part 24.232(c), RSS-133 Issue
	6,Amendment 1, Section 6.4
	LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.50(d)(4), RSS-139 Issue 4, Section
	6.5
Test Requirement:	LTE Band 5 & LTE Band 26: FCC 47 CFR Part 22.913(a), RSS-132 Issue 4, Section
	5.4
	LTE Band 12 & Band 71: FCC 47 CFR Part 27.50(c)(10), RSS-130 Issue 2, Section
	4.6
	LTE Band 13: FCC 47 CFR Part 27.50(b)(10), RSS-130 Issue 2, Section 4.6
	LTE Band 26: FCC 47 CFR Part 90.635
Test Method:	KDB 971168 D01v03r01 & ANSI C63.26-2015
Limit:	
FCC 47 CFR Part 22.	913(a):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c):

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4):

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

FCC 47 CFR Part 27.50(c)(10):

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

FCC 47 CFR Part 27.50(h)(2):

Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

FCC 47 CFR Part 27.50(b)(10):

Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

FCC 47 CFR Part 27.1507(a)(3):

Mobile, control and auxiliary test stations. Mobile, control and auxiliary test stations must not exceed 10 watts ERP.

FCC 47 CFR Part 90.635:

(a) The effective radiated power and antenna height for base stations may not exceed 1 kilowatt (30 dBw) and 304 m. (1,000 ft.) above average terrain (AAT), respectively, or the equivalent thereof as determined from the Table. These are maximum values, and applicants will be required to justify power levels and antenna heights requested.

(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

Table—Equivalent Power and Antenna Heights for Base Stations in the 851–869 MHz and 935–940 MHz

- 1. Power is given in terms of effective radiated power (ERP).
- 2. Applicants in the Los Angeles, CA, area who demonstrate a need to serve both the downtown and fringe areas will be permitted to utilize an ERP of 1 kw at the following mountaintop sites: Santiago Park, Sierra Peak, Mount Lukens, and Mount Wilson.
- 3. Stations with antennas below 305 m (1,000 ft) (AAT) will be restricted to a maximum power of 1 kw (ERP).
- 4. Licensees in San Diego, CA, will be permitted to utilize an ERP of 500 watts at the following mountaintop



sites: Palomar, Otay, Woodson and Miguel.

RSS-130 Issue 2, Section 4.6,

4.6.2 Frequency bands 617-652 MHz and 663-698 MHz

The e.r.p. shall not exceed 3 watts for mobile equipment, fixed subscriber equipment and portable equipment.

4.6.3 Frequency bands 698-756 MHz and 777-787 MHz

The e.r.p. shall not exceed 30 watts for mobile equipment and outdoor fixed subscriber equipment. The e.r.p. shall not exceed 3 watts for portable equipment and indoor fixed subscriber equipment.

RSS-132 Issue 4, Section 5.4,

The transmitter output power shall be measured in terms of average power. The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts.

RSS-133 Issue 6, Amendment 1, Section 6.4

The equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in SRSP-510. Moreover, base station transmitters operating in the band 1930-1995 MHz shall not have output power exceeding 100 watts.

RSS-139 Issue 4, Section 5.5

The maximum output power of the equipment shall comply with the limits specified below. In the tables, maximum power refers to the equivalent isotropically radiated power (e.i.r.p.) or total radiated power (TRP), measured in terms of average values.

Table 3: Maximum power of equipment in the band 1710-1780 MHz

Equipment type	Maximum power
Fixed station and base station	30 dBm e.i.r.p./channel bandwidth
Subscriber equipment	30 dBm e.i.r.p./channel bandwidth

Table 4: Maximum power of equipment in the band 2110-2180 MHz

Equipment type	Maximum power
Non-AAS fixed station and base station	65 dBm e.i.r.p./MHz
AAS fixed station and base station	46 dBm TRP/MHz
Subscriber equipment	30 dBm e.i.r.p./channel bandwidth

Table 5: Maximum power of equipment in the band 2180-2200 MHz

Equipment type	Maximum power
Non-AAS base station	65 dBm e.i.r.p./MHz
AAS base station	46 dBm TRP/MHz

Test Procedure:

The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup:	Refer to section 4.2.2 for details.		
Instruments Used:	Refer to section 3 for details		
Test Mode:	Link mode		
Test Results:	Pass		
Test Data:	The full result refer to section 4.5 for details.		

Page 49 of 296

5.4 PEAK-TO-AVERAGE RATIO

	LTE Band 2 & LTE Band 25: FCC 47 CFR Part 24.232(d), RSS-133 Issue
	6,Amendment 1, Section 6.4
	LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.50(d)(5), RSS-139 Issue 4, Section
Test Requirement:	6.5
rest negationent.	LTE Band 5 & LTE Band 26: FCC 47 CFR Part 22.913(a), RSS-132 Issue 4, Section
	5.4
	LTE Band 12: FCC 47 CFR Part 27.50(d)(5), RSS-130 Issue 2, Section 4.6
	LTE Band 13: FCC 47 CFR Part 27.50(d)(5), RSS-130 Issue 2, Section 4.6
Test Method:	KDB 971168 D01v03r01 Section 5.7
Limit:	In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB
Test Desserves	

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.


- a) Set resolution/measurement bandwidth ≥ signal's occupied bandwidth
- b) Set the number of counts to a value that stabilizes the measured CCDF curve
- c) Record the maximum PAPR level associated with a probability of 0.1 %

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset. **Test Setup:** Refer to section 4.2.2 for details.

lesi Seiup.	
Instruments Used:	Refer to section 3 for details
Test Mode:	Link mode
Test Results:	Pass
Test Data:	See table below

5.4.1 LTE Band 2

LTE Band 2 Peak-to-average ratio (dB)						
Channel	RB	Channel Bandwidth: 20 MHz			Limit	Result
	Configuration	QPSK	16QAM	64QAM	(dB)	Result
Lowest	1 RB	3.35	4.34	1	13	Pass
	Full RB	4.55	5.34	/	13	Pass
Middle	1 RB	3.35	4.29	1	13	Pass
	Full RB	4.69	5.48	1	13	Pass
Highest	1 RB	3.29	4.34	1	13	Pass
	Full RB	4.77	5.53	1	13	Pass

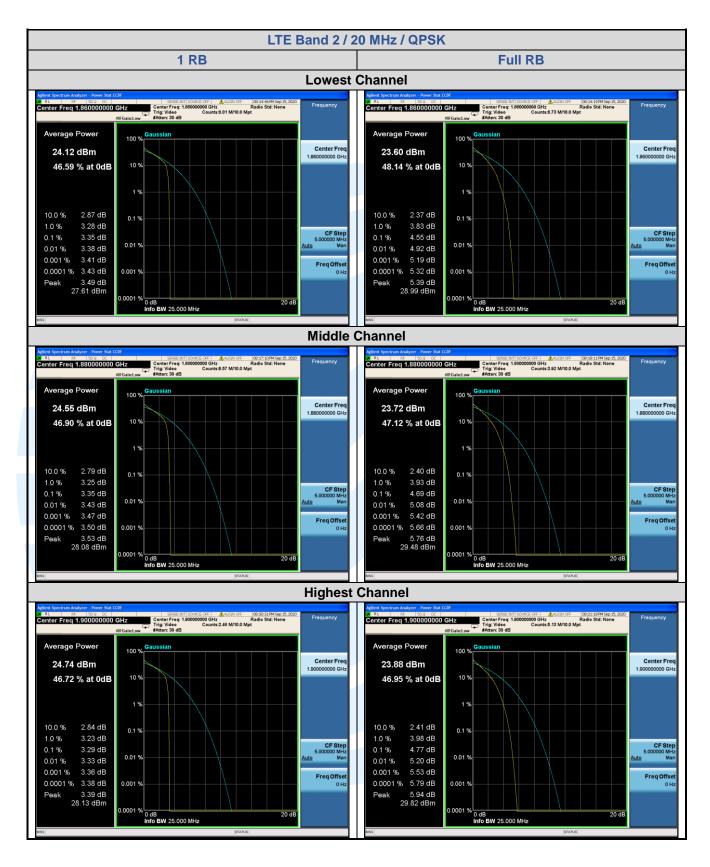


Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <u>http://www.uttlab.com</u> <u>UTTR-RF-FCC4G-V1.1</u>

Page 51 of 296

Report No.: 200722022RFM-2

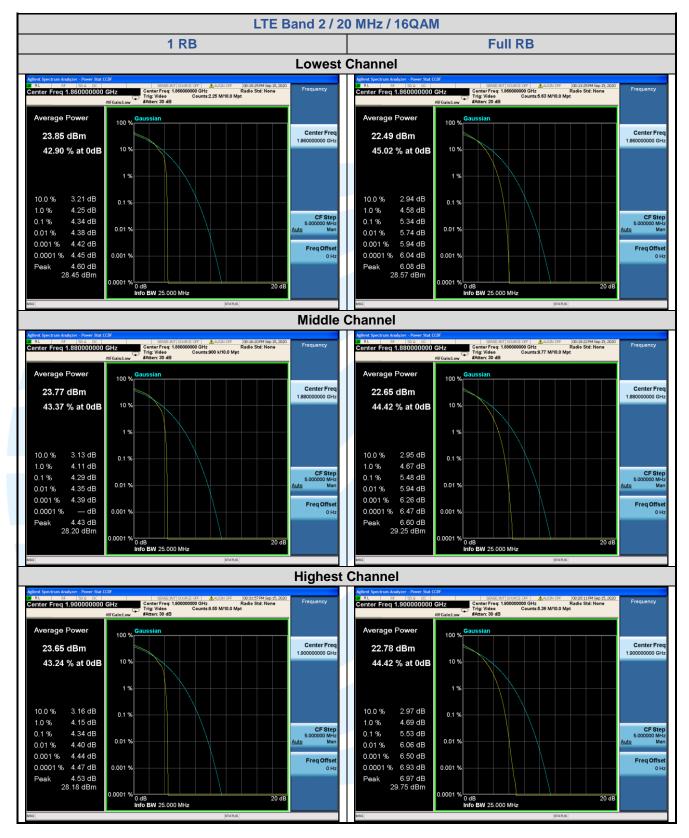

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <u>http://www.uttlab.com</u> <u>UTTR-RF-FCC4G-V1.1</u>

5.4.2 LTE Band 4

LTE Band 4 Peak-to-average ratio (dB)						
Channel	RB	Channel Bandwidth: 20 MHz			Limit	Result
	Configuration	QPSK	16QAM	64QAM	(dB)	Result
Lowest	1 RB	3.11	3.89	/	13	Pass
	Full RB	4.42	5.26	/	13	Pass
Middle	1 RB	3.35	4.00	/	13	Pass
	Full RB	4.66	5.42	/	13	Pass
Highest	1 RB	3.96	4.30	/	13	Pass
	Full RB	4.63	5.43	/	13	Pass




 Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

 Tel: +86-755-28230888
 Fax: +86-755-28230886
 E-mail: info@uttlab.com
 http://www.uttlab.com

 UTTR-RF-FCC4G-V1.1
 http://www.uttlab.com
 http://www.uttlab.com

Page 53 of 296

Report No.: 200722022RFM-2

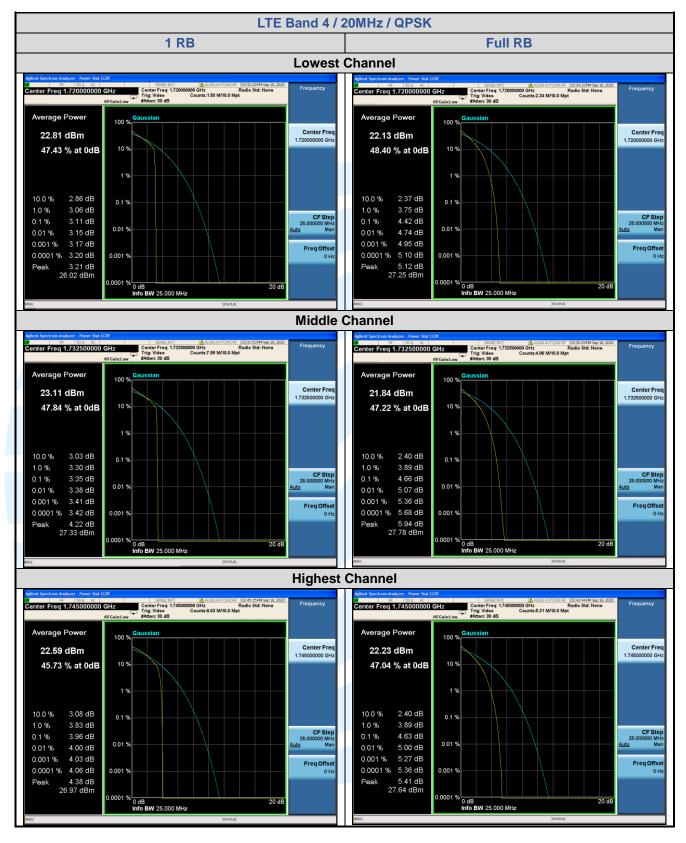


Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <u>http://www.uttlab.com</u> <u>UTTR-RF-FCC4G-V1.1</u>

Page 54 of 296

Report No.: 200722022RFM-2

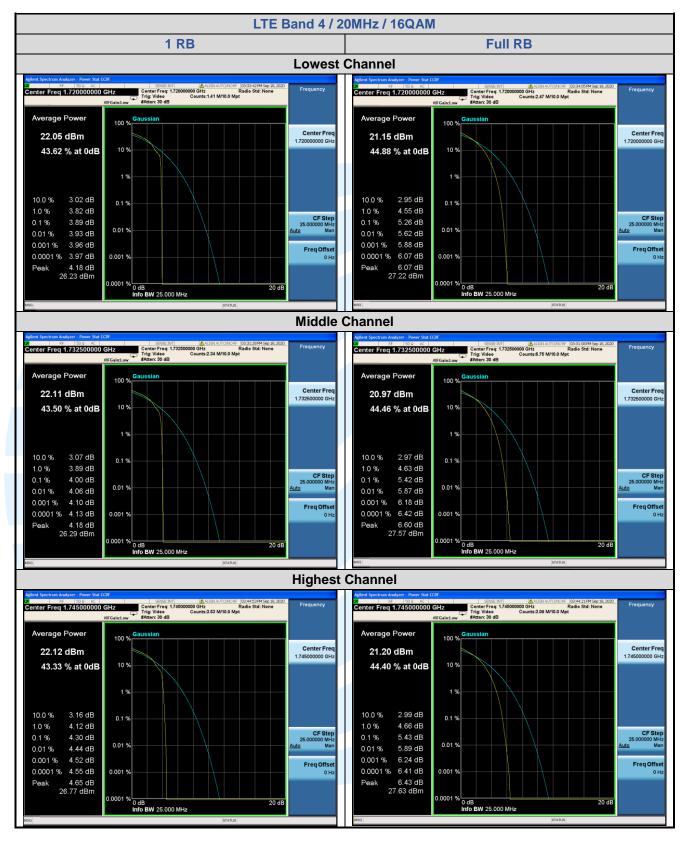

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <u>http://www.uttlab.com</u> <u>UTTR-RF-FCC4G-V1.1</u>

5.4.3 LTE Band 5


LTE Band 5 Peak-to-average ratio (dB)						
Channel	RB	Channel Bandwidth: 10 MHz			Limit	Result
	Configuration	QPSK	16QAM	64QAM	(dB)	Result
Lowest	1 RB	5.02	5.79	/	13	Pass
	Full RB	5.26	6.08	/	13	Pass
Middle	1 RB	4.27	5.13	/	13	Pass
	Full RB	5.67	6.47	/	13	Pass
Highest	1 RB	5.21	6.15	/	13	Pass
	Full RB	5.37	6.28	/	13	Pass



 Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

 Tel: +86-755-28230888
 Fax: +86-755-28230886
 E-mail: info@uttlab.com
 http://www.uttlab.com


 UTTR-RF-FCC4G-V1.1
 http://www.uttlab.com
 http://www.uttlab.com

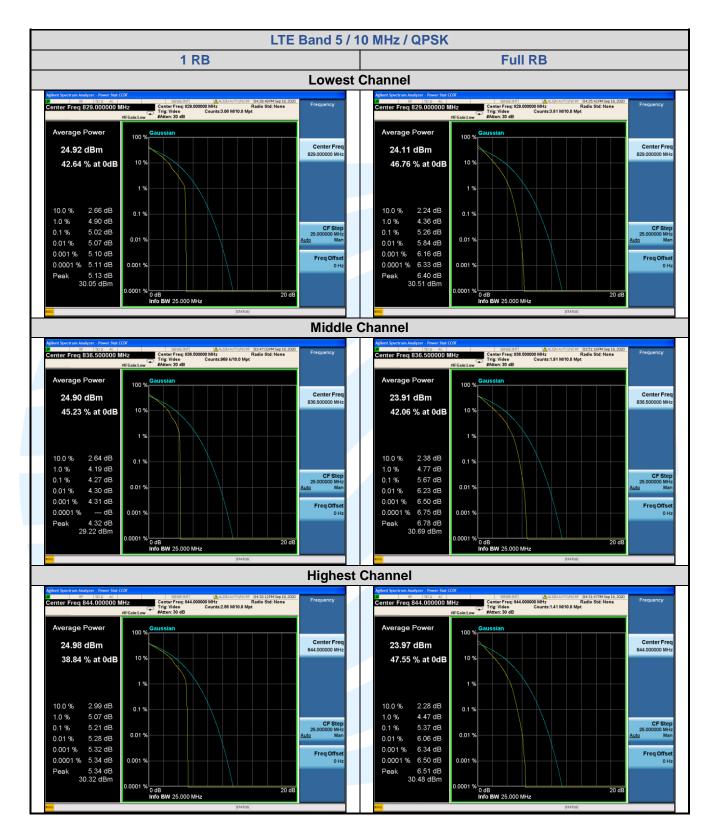

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <u>http://www.uttlab.com</u> <u>UTTR-RF-FCC4G-V1.1</u>

Page 57 of 296

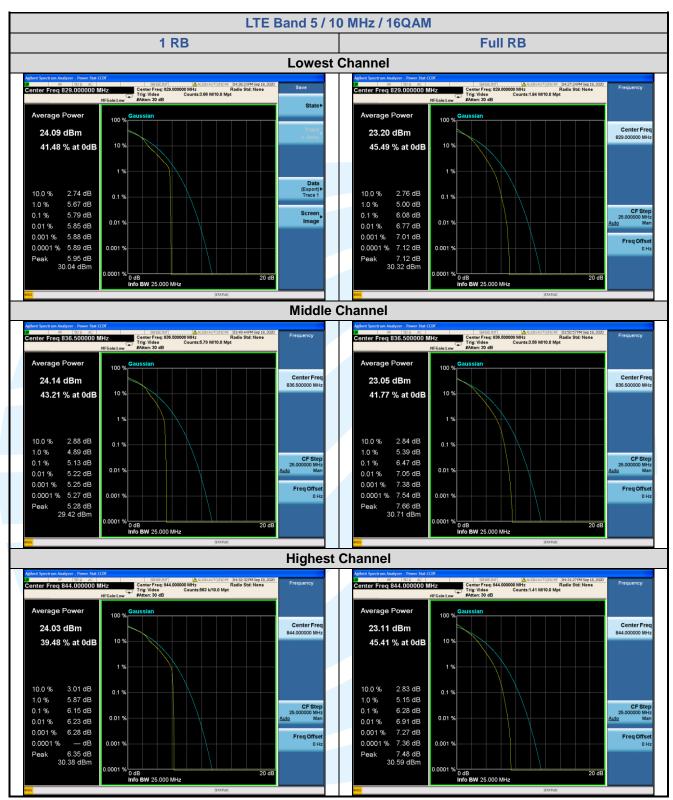

Shenzhen UnionTrust Quality and Technology Co., Ltd.

 Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

 Tel: +86-755-28230888
 Fax: +86-755-28230886
 E-mail: info@uttlab.com
 http://www.uttlab.com

 UTTR-RF-FCC4G-V1.1

5.4.4 LTE Band 12

LTE Band 12 Peak-to-average ratio (dB)						
Channel	RB	Channel Bandwidth: 10 MHz			Limit	Result
	Configuration	QPSK	16QAM	64QAM	(dB)	Result
Lowest	1 RB	3.75	4.63	/	13	Pass
	Full RB	4.95	5.80	/	13	Pass
Middle	1 RB	3.55	4.38	/	13	Pass
	Full RB	5.04	5.81	/	13	Pass
Highest	1 RB	3.11	3.93	/	13	Pass
	Full RB	5.16	5.99	/	13	Pass




 Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

 Tel: +86-755-28230888
 Fax: +86-755-28230886
 E-mail: info@uttlab.com
 http://www.uttlab.com

 UTTR-RF-FCC4G-V1.1
 http://www.uttlab.com
 http://www.uttlab.com

Page 59 of 296

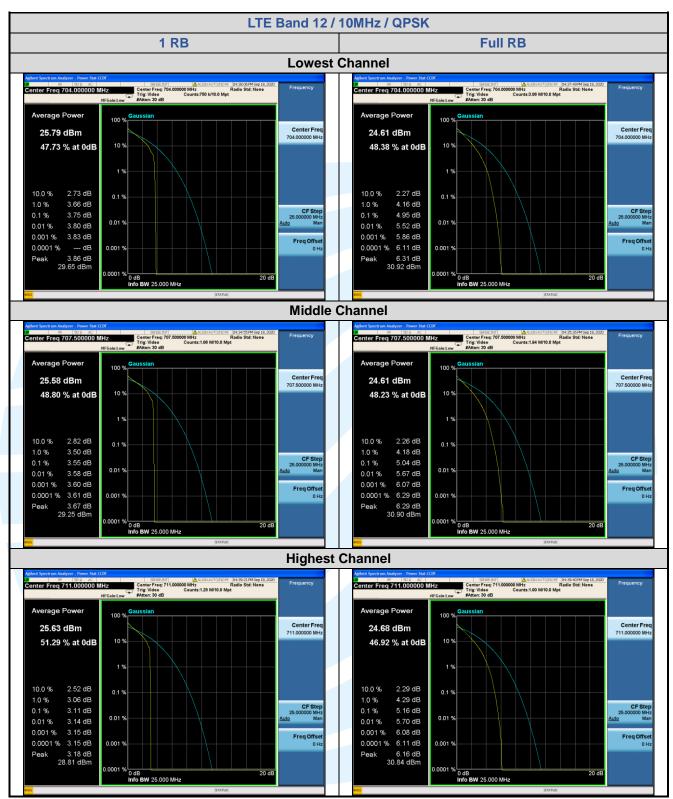

Shenzhen UnionTrust Quality and Technology Co., Ltd.

 Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

 Tel: +86-755-28230888
 Fax: +86-755-28230886
 E-mail: info@uttlab.com
 http://www.uttlab.com

 UTTR-RF-FCC4G-V1.1