



Inter**Lab**<sup>®</sup>  
Final Report on  
Cinterion Wireless Module PXS8  
HW: B2  
SW: Revision 02.820

**Report Reference:** MDE\_CINTE\_1203\_FCC90a\_V1

acc. Title 47 CFR chapter I part 90 subpart I & S

**Date:** December 19, 2012

**Test Laboratory:**

7Layers AG  
Borsigstr. 11  
40880 Ratingen  
Germany



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
www.7Layers.com

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Ralf Mertens  
Vorstand • Board:  
Dr. H.-J. Meckelburg

Registergericht • registered in:  
Düsseldorf, HRB 44096  
USt-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385

## 1 Administrative Data

### 1.1 Project Data

*Project Responsible:* Mr. Pascal Jordan  
*Date Of Test Report:* 2012/12/19  
*Date of first test:* 2012/11/29  
*Date of last test:* 2012/12/17

### 1.2 Applicant Data

*Company Name:* Cinterion Wireless Modules GmbH  
*Street:* Siemensdamm 50  
*City:* 13629 Berlin  
*Country:* Germany  
*Contact Person:* Mr. Thorsten Liebig  
*Function:* Manager Approval  
*Department:* Approvals & Standardization  
*Phone:* +49 (30) 31102-8241  
*Mobile:* +49 (160) 7074027  
*E-Mail:* thorsten.liebig@cinterion.com

### 1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

#### 7 layers DE

---

*Company Name :* 7 layers AG  
*Street :* Borsigstrasse 11  
*City :* 40880 Ratingen  
*Country :* Germany  
*Contact Person :* Mr. Michael Albert  
*Phone :* +49 2102 749 201  
*Fax :* +49 2102 749 444  
*E Mail :* michael.albert@7Layers.de

#### Laboratory Details

<i>Lab ID</i>	<i>Identification</i>	<i>Responsible</i>	<i>Accreditation Info</i>
Lab 1	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkKS-Registration no. D-PL-12140-01-01
Lab 2	Radio Lab	Mr. Robert Machulec Mr. Andreas Petz	DAkKS-Registration no. D-PL-12140-01-01

## 1.4 Signature of the Testing Responsible




Marco Kullik

responsible for tests performed in: Lab 1, Lab 2

## 1.5 Signature of the Accreditation Responsible



Accreditation scope responsible person  
responsible for Lab 1, Lab 2



7layers AG, Börsenstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 747 9

## 2 Test Object Data

### 2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

#### OUT: PXS8\_BC10

<i>Type / Model / Family:</i>	Cinterion Wireless Module PXS8 HW: B2 SW: Revision 02.820
<i>Product Category:</i>	Module
<b>Manufacturer:</b>	
<i>Company Name:</i>	Cinterion Wireless Modules GmbH
<i>Street:</i>	Siemensdamm 50
<i>City:</i>	13629 Berlin
<i>Country:</i>	Germany
<i>Contact Person:</i>	Mr. Thorsten Liebig
<i>Function:</i>	Manager Approval
<i>Department:</i>	Approvals & Standardization
<i>Phone:</i>	+49 (30) 31102-8241
<i>Mobile:</i>	+49 (160) 7074027
<i>E-Mail:</i>	thorsten.liebig@cinterion.com

#### Parameter List:

<i>Parameter name</i>	<i>Value</i>
<b>Parameter for Scope FCC_v2:</b>	
Antenna gain 1900 band	not specified (dBi)
Antenna gain 850 band	not specified (dBi)
DC Power Supply	4.2 (V)
highest channel	251 (848.8MHz) for GSM850, 810 (1909.8MHz) for GSM1900, 4233 (846.6MHz) for FDD5, 9538 (1907.6MHz) for FDD2, 1013 (824.7MHz) for BC0, 1175 (1908.75MHz) for BC1, 684 (823.1MHz) for BC10
lowest channel	128 (824.2MHz) for GSM850, 512 (1850.2MHz) for GSM1900, 4132 (826.4MHz) for FDD5, 262 (1852.4MHz) for FDD2, 384 (836.5MHz) for BC0, 25 (1851.25MHz) for BC1, 476 (817.9MHz) for BC10
mid channel	190 (836.6MHz) for GSM850, 661 (1880.0MHz) for GSM1900, 4183 (836.6MHz) for FDD5, 9400 (1880MHz) for FDD2, 777 (848.3MHz) for BC0, 600 (1880.0MHz) for BC1, 580 (820.5MHz) for BC10



## 2.2 Detailed Description of OUT Samples

### **Sample : a01 bc10**

<i>OUT Identifier</i>	PXS8_BC10		
<i>Sample Description</i>	Sample #01_BC10_CDMA		
<i>HW Status</i>	B2		
<i>SW Status</i>	REVISION 02.800		
<i>Date of Receipt</i>	2012/11/12		
<i>Low Voltage</i>	3.3 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.2 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	4.2 V	<i>Normal Temp.</i>	+23 °C

#### **Parameter List:**

<i>Parameter Description</i>	<i>Value</i>
<b>Parameter for Scope FCC_v2</b>	
IMEI	990002189992868

### **Sample : b01 bc10**

<i>OUT Identifier</i>	PXS8_BC10		
<i>Sample Description</i>	Sample #02_BC10_EV-DO		
<i>HW Status</i>	B2		
<i>SW Status</i>	REVISION 02.800		
<i>Date of Receipt</i>	2012/11/12		
<i>Low Voltage</i>	3.3 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.2 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	4.2 V	<i>Normal Temp.</i>	+23 °C

#### **Parameter List:**

<i>Parameter Description</i>	<i>Value</i>
<b>Parameter for Scope FCC_v2</b>	
IMEI	990002189996471



**Sample : c02 bc10**

<i>OUT Identifier</i>	PXS8_BC10		
<i>Sample Description</i>	Sample #03_BC10_EV-DO		
<i>HW Status</i>	B2		
<i>SW Status</i>	REVISION 02.820		
<i>Date of Receipt</i>	2012/11/12		
<i>Low Voltage</i>	3.3 V	<i>Low Temp.</i>	-20 °C
<i>High Voltage</i>	4.2 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	4.2 V	<i>Normal Temp.</i>	+23 °C

**Parameter List:**

<i>Parameter Description</i>	<i>Value</i>
<b>Parameter for Scope FCC_v2</b>	
IMEI	990002189996000

### 2.3 OUT Features

#### Features for OUT: PXS8\_BC10

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
<b>Features for scope: FCC_v2</b>			
AC	The OUT is powered by or connected to AC Mains		
CDMA2000_BC0	EUT supports CDMA2000 in band 824.7MHz - 848.3MHz (BC0)		
CDMA2000_BC1	EUT supports CDMA2000 in band 1851.25MHz - 1908.75MHz (BC1)		
CDMA2000_BC10	EUT supports CDMA2000 in BC10 (Band subclasses 2 & Band subclasses 3)		
CDMA2000_EV-DO_BC0	EUT supports CDMA2000 EV-DO in band 824.7MHz - 848.3MHz (BC0)		
CDMA2000_EV-DO_BC1	EUT supports CDMA2000 EV-DO in band 1851.25MHz - 1908.75MHz (BC1)		
CDMA2000_EV-DO_BC10	EUT supports CDMA2000_EV-DO in BC10 (Band subclasses 2 & Band subclasses 3)		
DC	The OUT is powered by or connected to DC Mains		
EDGE850	EUT supports EDGE in the band 824 MHz - 849 MHz		
EDGE1900	EUT supports EDGE in the band 1850 MHz - 1910 MHz		
FDD2	EUT supports UMTS FDD2 in the band 1850 MHz - 1910 MHz		
FDD5	EUT supports UMTS FDD5 in the band 824 MHz - 849 MHz		
GSM850	EUT supports GSM850 band 824MHz - 849MHz		
HSDPA-FDD2	EUT supports UMTS FDD2 HSDPA in the band 1850 MHz - 1910 MHz		
HSDPA-FDD5	EUT supports UMTS FDD5 HSDPA in the band 824 MHz - 849 MHz		
HSUPA-FDD2	EUT supports UMTS FDD2 HSUPA in the band 1850 MHz - 1910 MHz		
HSUPA-FDD5	EUT supports UMTS FDD5 HSUPA in the band 824 MHz - 849 MHz		
PantC	permanent fixed antenna connector, which may be built-in, designed as an indispensable part of the equipment		
PCS1900	EUT supports PCS1900 band 1850MHz - 1910MHz		

### 2.4 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE 02	-	-	-	-	Flex cable
AE Ant1	-	-	-	-	GSM/UMTS antenna
AE 03	-	-	-	-	Shielded housing
AE Ant2	-	-	-	-	UMTS antenna
AE Ant3	ANN-MS-0-005 M827B	601657	-	-	GPS antenna
AE 01	DSB75_B1.1_0152	-	-	-	Evaluation board



## 2.5 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No.</i>	<i>List of OUT samples</i>	<i>List of auxiliary equipment</i>	
<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>
<b>A01_BC10_cond (Conducted setup #01_BC10_CDMA)</b>			
<i>Sample: a01_bc10</i>	<i>Sample #01_BC10_CDMA</i>	AE 02	Flex cable
		AE 01	Evaluation board
<b>A01_BC10_rad (Radiated setup #01_BC10_CDMA)</b>			
<i>Sample: a01_bc10</i>	<i>Sample #01_BC10_CDMA</i>	AE 02	Flex cable
		AE Ant1	GSM/UMTS antenna
		AE 03	Shielded housing
		AE Ant2	UMTS antenna
		AE Ant3	GPS antenna
		AE 01	Evaluation board
<b>B01_BC10_cond (Conducted setup #02_BC10_EV-DO)</b>			
<i>Sample: b01_bc10</i>	<i>Sample #02_BC10_EV-DO</i>	AE 02	Flex cable
		AE 01	Evaluation board
<b>B01_BC10_rad (Radiated setup #02_BC10_EV-DO)</b>			
<i>Sample: b01_bc10</i>	<i>Sample #02_BC10_EV-DO</i>	AE 02	Flex cable
		AE Ant1	GSM/UMTS antenna
		AE Ant2	UMTS antenna
		AE Ant3	GPS antenna
		AE 01	Evaluation board
<b>C02_BC10_cond (Conducted setup #03_BC10_EV-DO)</b>			
<i>Sample: c02_bc10</i>	<i>Sample #03_BC10_EV-DO</i>	AE 02	Flex cable
		AE 01	Evaluation board



### 3 Results

#### 3.1 General

**Documentation of tested devices:**

Available at the test laboratory.

**Interpretation of the test results:**

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

#### 3.2 List of Test Specification

*Test Specification:* **FCC part 90**  
*Version* 10-1-11 Edition  
*Title:* PART 90 - GENERAL RULES AND REGULATIONS



### 3.3 Summary

<i>Test Case Identifier / Name Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
<b>90.1 Maximum Channel Power, §2.1046, §90.205&amp;90.635</b>				
90.1; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/12/17	Lab 2	A01_BC10_con d
90.1; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/12/17	Lab 2	A01_BC10_con d
90.1; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/12/17	Lab 2	A01_BC10_con d
90.1; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/12/17	Lab 2	A01_BC10_con d
90.1; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/12/17	Lab 2	A01_BC10_con d
90.1; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/12/17	Lab 2	A01_BC10_con d
90.1; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/12/17	Lab 2	B01_BC10_con d
90.1; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/12/17	Lab 2	B01_BC10_con d
90.1; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/12/17	Lab 2	C02_BC10_con d
90.1; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/12/17	Lab 2	B01_BC10_con d
90.1; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/12/17	Lab 2	B01_BC10_con d
90.1; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/12/17	Lab 2	C02_BC10_con d



<i>Test Case Identifier / Name</i> <i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i> <i>Ref.</i>	<i>Setup</i>
<b>90.2 Occupied Bandwidth, §2.1049, §90.209</b>				
90.2; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
90.2; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
90.2; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
90.2; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
90.2; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
90.2; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
90.2; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/12/06	Lab 2	B01_BC10_con d
90.2; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/12/06	Lab 2	B01_BC10_con d
90.2; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/12/12	Lab 2	C02_BC10_con d
90.2; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/12/06	Lab 2	B01_BC10_con d
90.2; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/12/06	Lab 2	B01_BC10_con d
90.2; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/12/12	Lab 2	C02_BC10_con d



<i>Test Case Identifier / Name Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
<b>90.3 Band Edges Compliance, §2.1051, §90691</b>				
90.3; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
90.3; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
90.3; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
90.3; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
90.3; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/12/06	Lab 2	B01_BC10_con d
90.3; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/12/12	Lab 2	C02_BC10_con d
90.3; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/12/06	Lab 2	B01_BC10_con d
90.3; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/12/12	Lab 2	C02_BC10_con d



<i>Test Case Identifier / Name</i> <i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i> <i>Ref.</i>	<i>Setup</i>
<b>90.4 Spurious Emissions at Antenna Terminal, §2.1051, §90.210&amp;§90.669</b>				
90.4; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
	No values have been found with a margin of less than 20 dB to the limit.			
90.4; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
	No values have been found with a margin of less than 20 dB to the limit.			
90.4; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
	No values have been found with a margin of less than 20 dB to the limit.			
90.4; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
	No values have been found with a margin of less than 20 dB to the limit.			
90.4; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
	No values have been found with a margin of less than 20 dB to the limit.			
90.4; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/11/29	Lab 2	A01_BC10_con d
	No values have been found with a margin of less than 20 dB to the limit.			
90.4; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/12/06	Lab 2	B01_BC10_con d
	No values have been found with a margin of less than 20 dB to the limit.			
90.4; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/12/06	Lab 2	B01_BC10_con d
	No values have been found with a margin of less than 20 dB to the limit.			
90.4; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/12/12	Lab 2	C02_BC10_con d
	No values have been found with a margin of less than 20 dB to the limit.			
90.4; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted	Passed	2012/12/06	Lab 2	B01_BC10_con d
	No values have been found with a margin of less than 20 dB to the limit.			



<i>Test Case Identifier / Name Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
<b>90.4 Spurious Emissions at Antenna Terminal, §2.1051, §90.210&amp;§90.669</b>				
90.4; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/12/06	Lab 2	B01_BC10_con d
	No values have been found with a margin of less than 20 dB to the limit.			
90.4; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted	Passed	2012/12/12	Lab 2	C02_BC10_con d
	No values have been found with a margin of less than 20 dB to the limit.			
<b>90.5 Radiated Spurious Emission, §2.1055, §90.210</b>				
90.5; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 580, Frequency = 820.5 MHz, Method = radiated	Passed	2012/11/30	Lab 1	A01_BC10_rad
90.5; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 580, Frequency = 820.5 MHz, Method = radiated	Passed	2012/12/07	Lab 1	B01_BC10_rad
<b>90.6 Frequency Stability, §2.1055, §90.213</b>				
90.6; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/12/08	Lab 2	A01_BC10_con d
90.6; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/12/08	Lab 2	A01_BC10_con d
90.6; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = BPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/12/08	Lab 2	B01_BC10_con d
90.6; Frequency Band = BC10, Mode = CDMA2000_EV-DO, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted	Passed	2012/12/08	Lab 2	B01_BC10_con d



### 3.4 Detailed Results

#### 3.4.1 90.1 Maximum Channel Power, §2.1046, §90.205&90.635

**Test: 90.1; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_BC10\_cond  
*Date of Test:* 2012/12/17 14:06  
*Body:* FCC Part 90  
*Test Specification:* FCC part 90

**Detailed Results:**

conducted value /dBm	Limit /dBm	verdict
24.2	50	passed

**Test: 90.1; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_BC10\_cond  
*Date of Test:* 2012/12/17 14:07  
*Body:* FCC Part 90  
*Test Specification:* FCC part 90

**Detailed Results:**

conducted value /dBm	Limit /dBm	verdict
24.2	50	passed

**Test: 90.1; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_BC10\_cond  
*Date of Test:* 2012/12/17 14:07  
*Body:* FCC Part 90  
*Test Specification:* FCC part 90

**Detailed Results:**

conducted value /dBm	Limit /dBm	verdict
24.2	50	passed



**Test: 90.1; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_BC10\_cond  
*Date of Test:* 2012/12/17 14:04  
*Body:* FCC Part 90  
*Test Specification:* FCC part 90

**Detailed Results:**

conducted value /dBm	Limit /dBm	verdict
24.2	50	passed

**Test: 90.1; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_BC10\_cond  
*Date of Test:* 2012/12/17 14:05  
*Body:* FCC Part 90  
*Test Specification:* FCC part 90

**Detailed Results:**

conducted value /dBm	Limit /dBm	verdict
24.2	50	passed

**Test: 90.1; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* A01\_BC10\_cond  
*Date of Test:* 2012/12/17 14:06  
*Body:* FCC Part 90  
*Test Specification:* FCC part 90

**Detailed Results:**

conducted value /dBm	Limit /dBm	verdict
24.2	50	passed

**Test: 90.1; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* B01\_BC10\_cond  
*Date of Test:* 2012/12/17 14:13  
*Body:* FCC Part 90  
*Test Specification:* FCC part 90





**Detailed Results:**

conducted value /dBm	Limit /dBm	verdict
24.3	50	passed

**Test: 90.1; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* B01\_BC10\_cond  
*Date of Test:* 2012/12/17 14:15  
*Body:* FCC Part 90  
*Test Specification:* FCC part 90

**Detailed Results:**

conducted value /dBm	Limit /dBm	verdict
24.4	50	passed

**Test: 90.1; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* C02\_BC10\_cond  
*Date of Test:* 2012/12/17 14:08  
*Body:* FCC Part 90  
*Test Specification:* FCC part 90

**Detailed Results:**

conducted value /dBm	Limit /dBm	verdict
24.5	50	passed

**Test: 90.1; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* B01\_BC10\_cond  
*Date of Test:* 2012/12/17 14:14  
*Body:* FCC Part 90  
*Test Specification:* FCC part 90

**Detailed Results:**

conducted value /dBm	Limit /dBm	verdict
24.3	50	passed



**Test: 90.1; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* B01\_BC10\_cond  
*Date of Test:* 2012/12/17 14:15  
*Body:* FCC Part 90  
*Test Specification:* FCC part 90

**Detailed Results:**

conducted value /dBm	Limit /dBm	verdict
24.4	50	passed

**Test: 90.1; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

*Result:* Passed  
*Setup No.:* C02\_BC10\_cond  
*Date of Test:* 2012/12/17 14:09  
*Body:* FCC Part 90  
*Test Specification:* FCC part 90

**Detailed Results:**

conducted value /dBm	Limit /dBm	verdict
24.4	50	passed




**3.4.2 90.2 Occupied Bandwidth, §2.1049, §90.209**

**Test: 90.2; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

Result: Passed  
 Setup No.: A01\_BC10\_cond  
 Date of Test: 2012/11/29 12:02  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

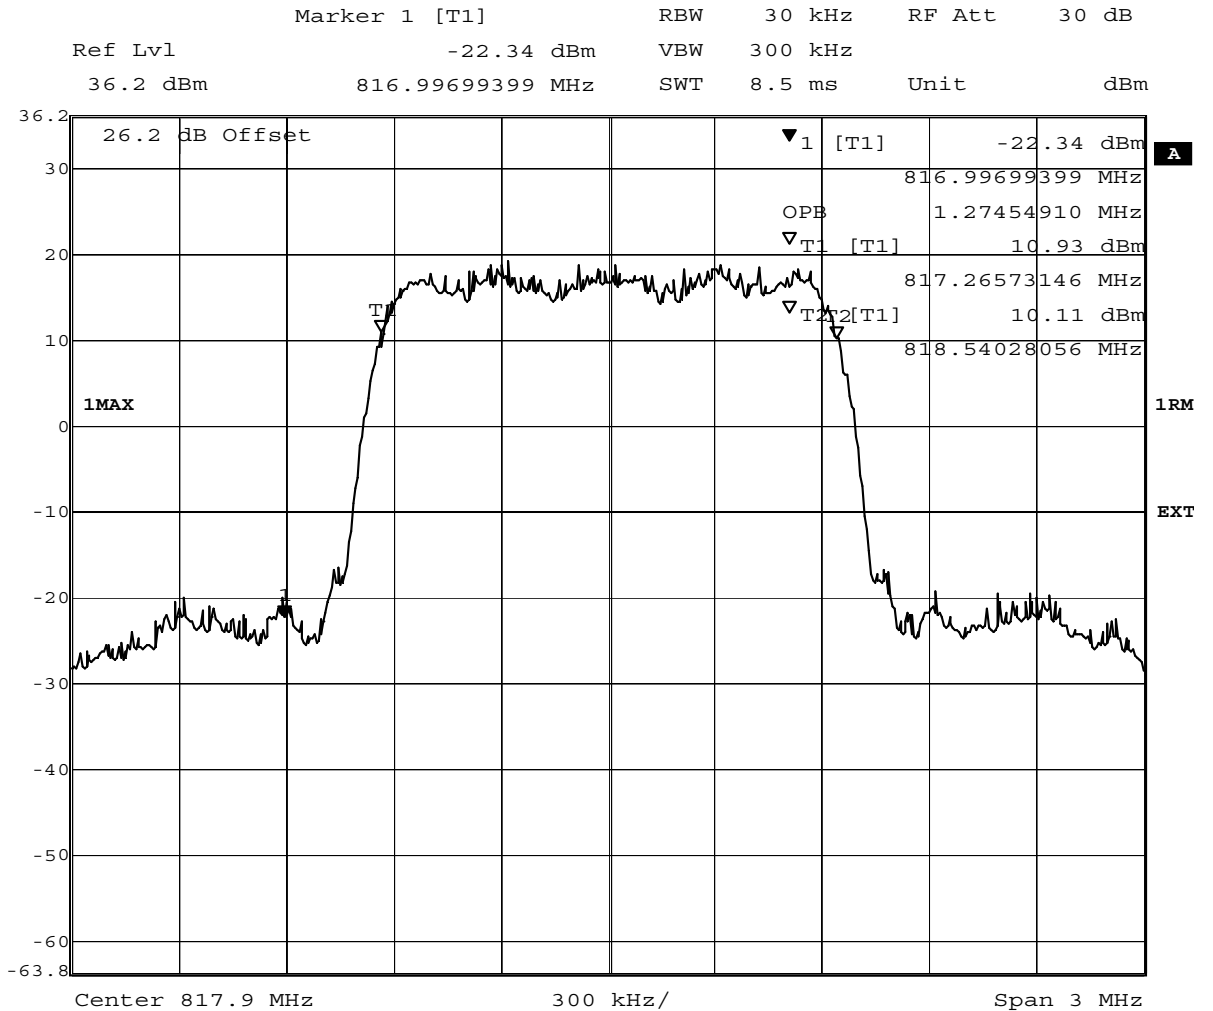

Date: 29.NOV.2012 17:25:05


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	Limit / kHz	verdict
RMS	maxhold	30	conducted	1274.5		passed



**Test: 90.2; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

Result: Passed  
 Setup No.: A01\_BC10\_cond  
 Date of Test: 2012/11/29 12:02  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

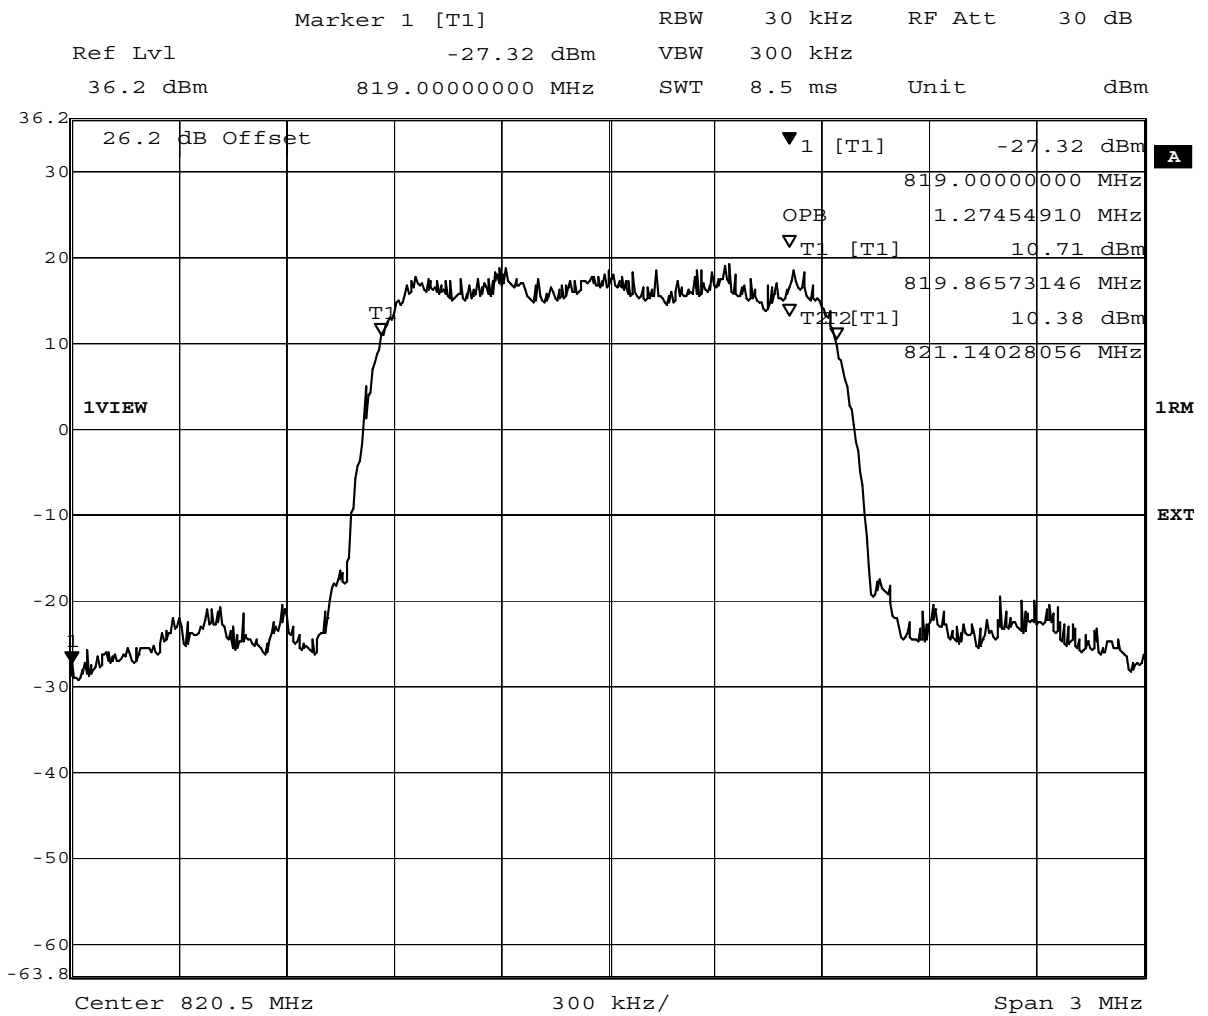


Date: 29.NOV.2012 17:28:19

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	Limit / kHz	verdict
RMS	maxhold	30	conducted	1274.5		passed

**Test: 90.2; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

Result: Passed  
 Setup No.: A01\_BC10\_cond  
 Date of Test: 2012/11/29 12:02  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

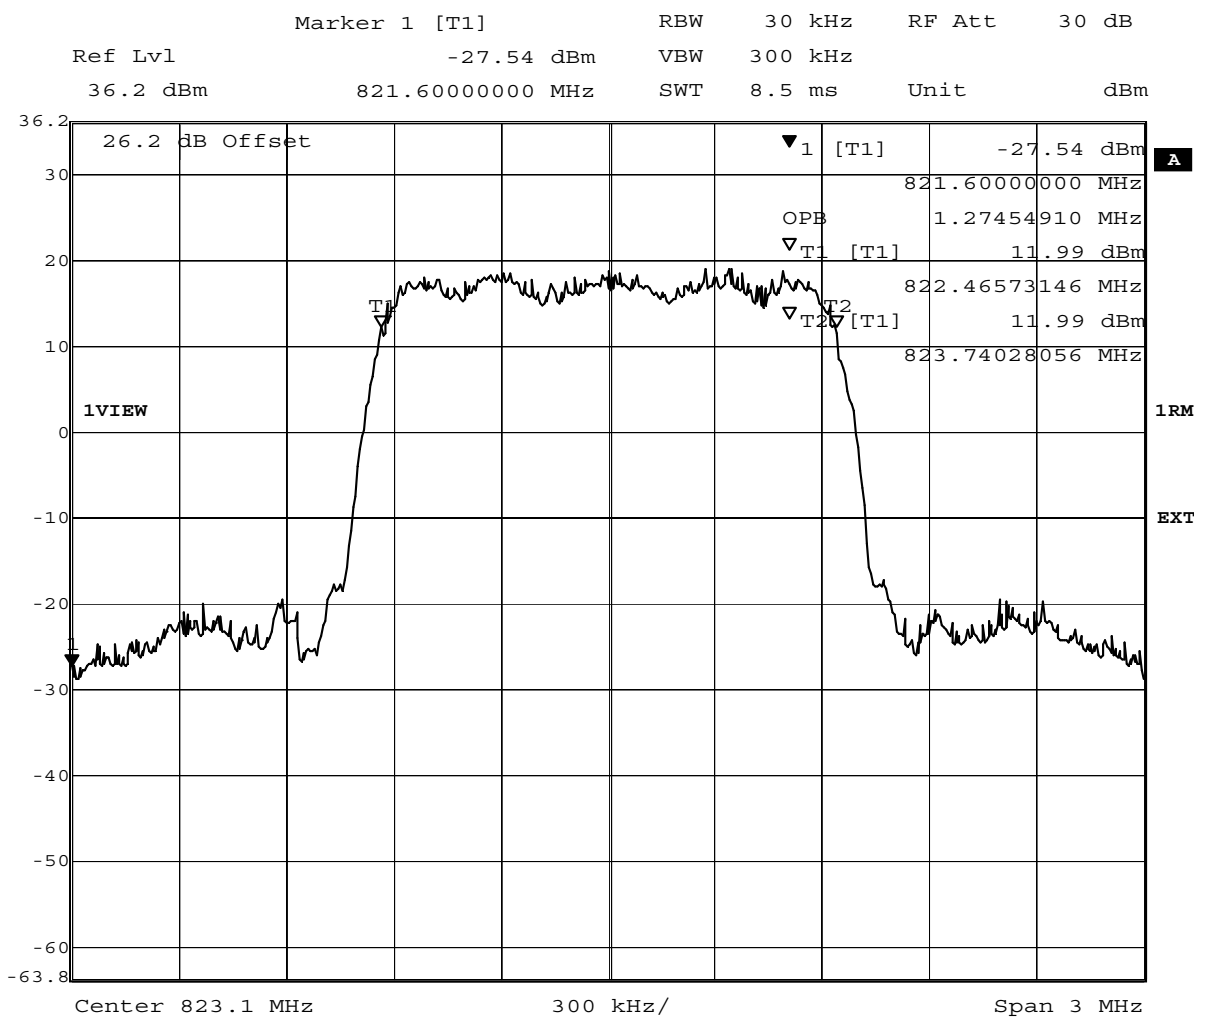


Date: 29.NOV.2012 17:33:39

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	Limit / kHz	verdict
RMS	maxhold	30	conducted	1274.5		passed

**Test: 90.2; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

Result: Passed  
 Setup No.: A01\_BC10\_cond  
 Date of Test: 2012/11/29 12:03  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

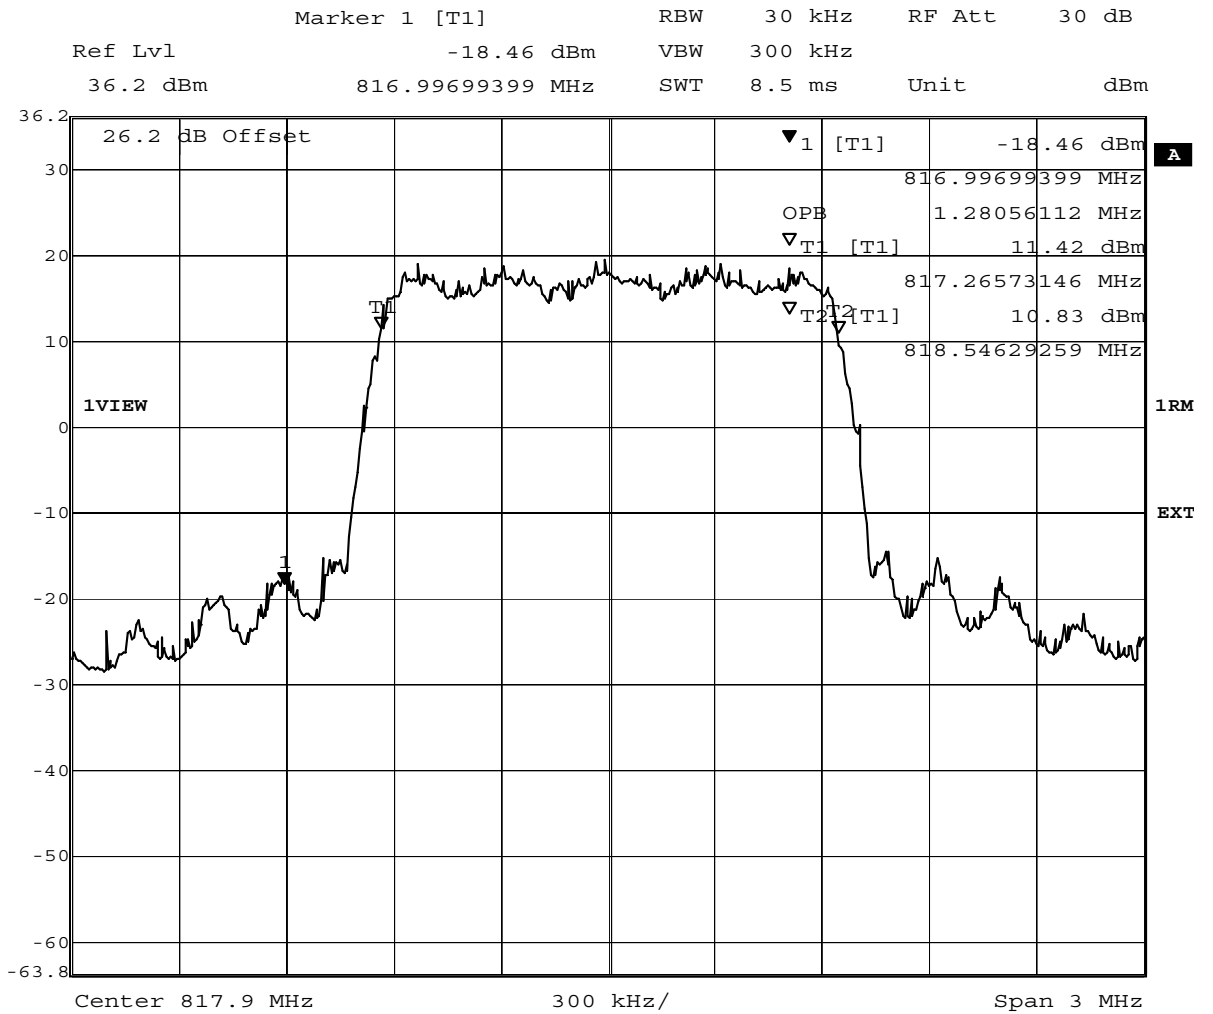

Date: 29.NOV.2012 17:20:08


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	Limit / kHz	verdict
RMS	maxhold	30	conducted	1280.5		passed



**Test: 90.2; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

Result: Passed  
 Setup No.: A01\_BC10\_cond  
 Date of Test: 2012/11/29 12:03  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

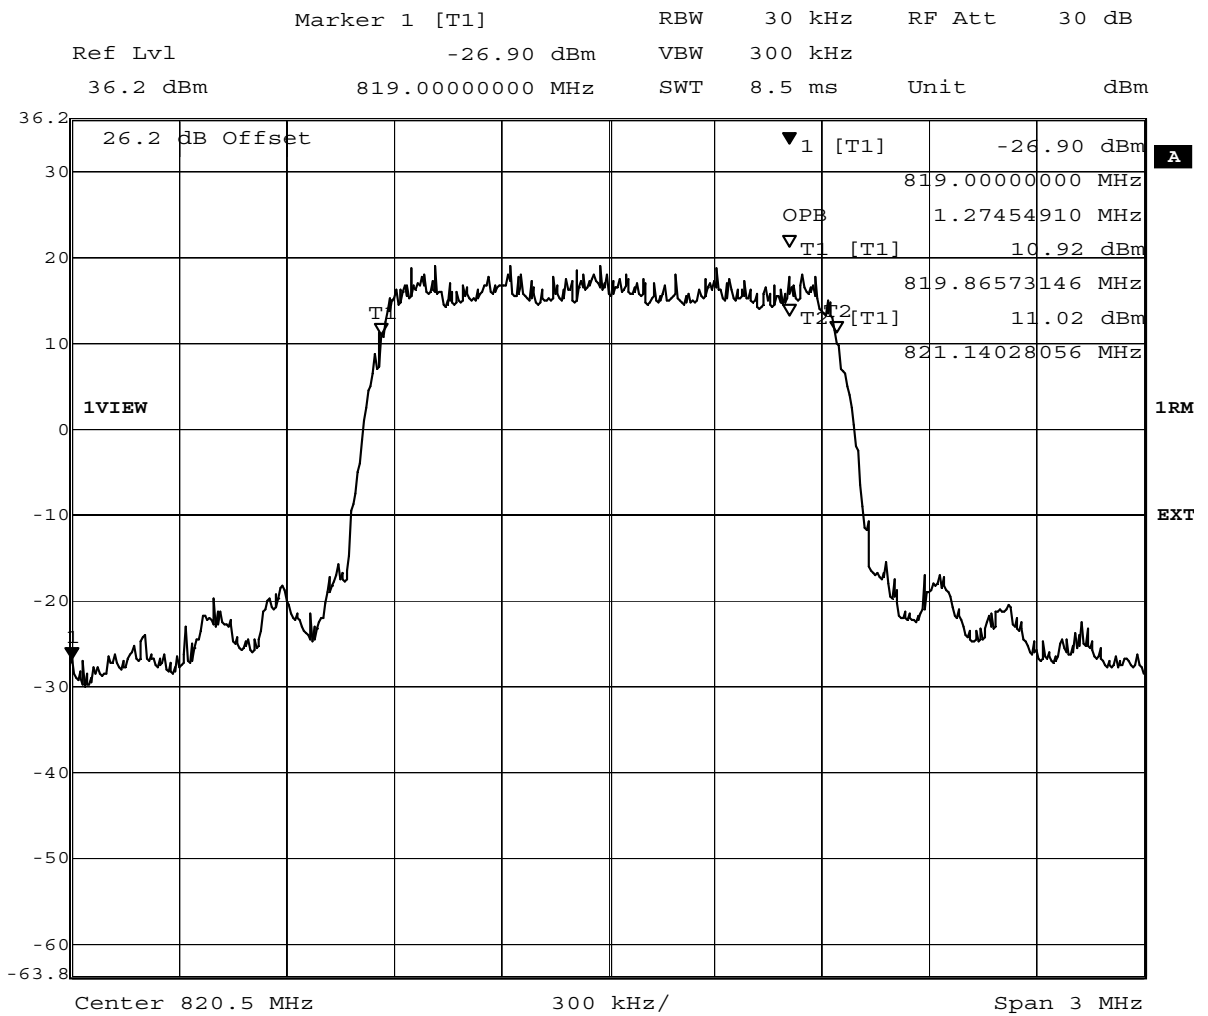

Date: 29.NOV.2012 17:29:22


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	Limit / kHz	verdict
RMS	maxhold	30	conducted	1274.5		passed



**Test: 90.2; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

Result: Passed  
 Setup No.: A01\_BC10\_cond  
 Date of Test: 2012/11/29 12:03  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

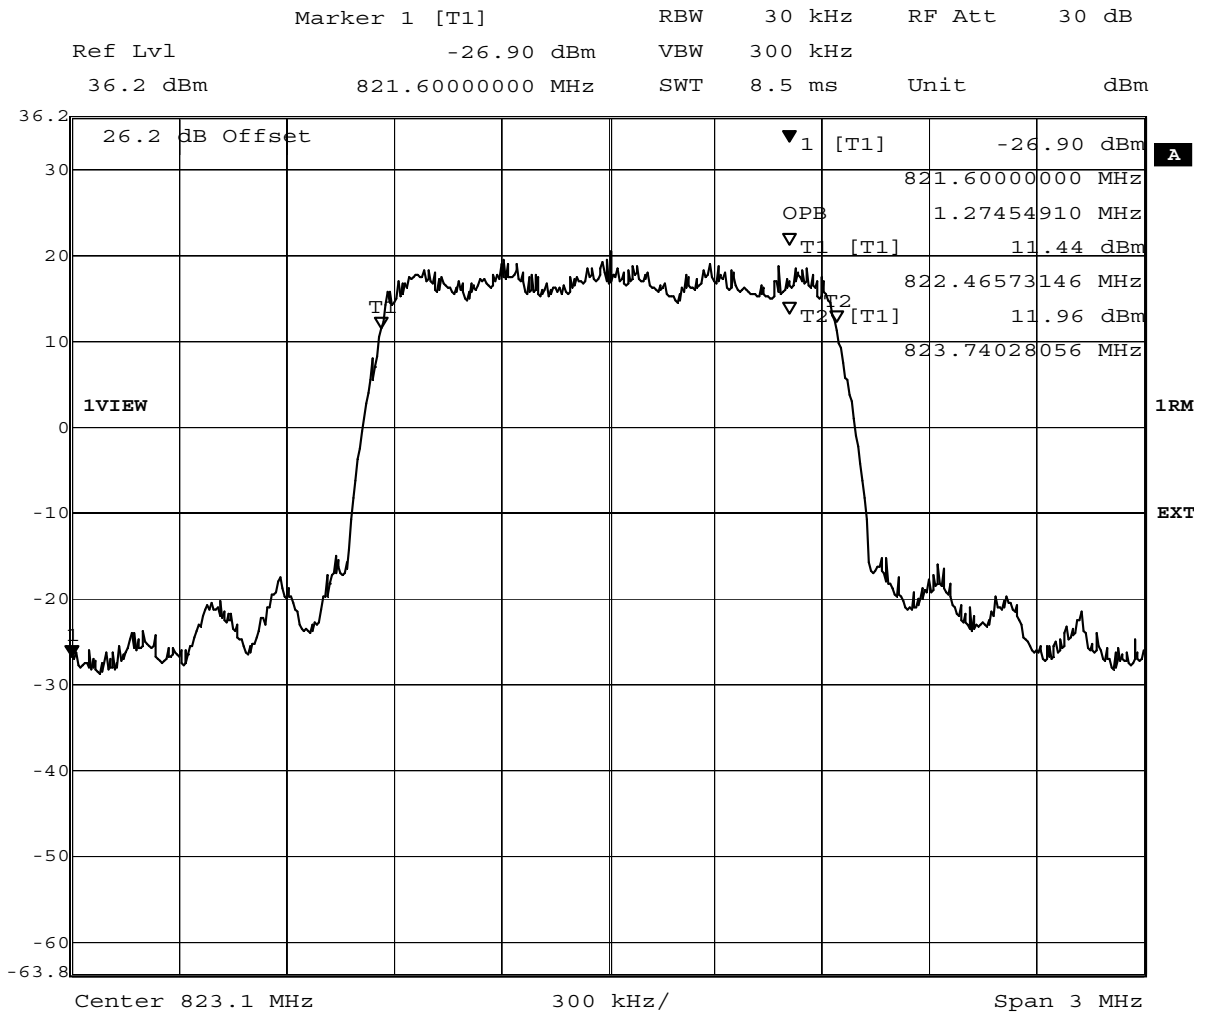

Date: 29.NOV.2012 17:31:33

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	Limit / kHz	verdict
RMS	maxhold	30	conducted	1274.5		passed






**Test: 90.2; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

Result: Passed  
 Setup No.: B01\_BC10\_cond  
 Date of Test: 2012/12/06 13:52  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

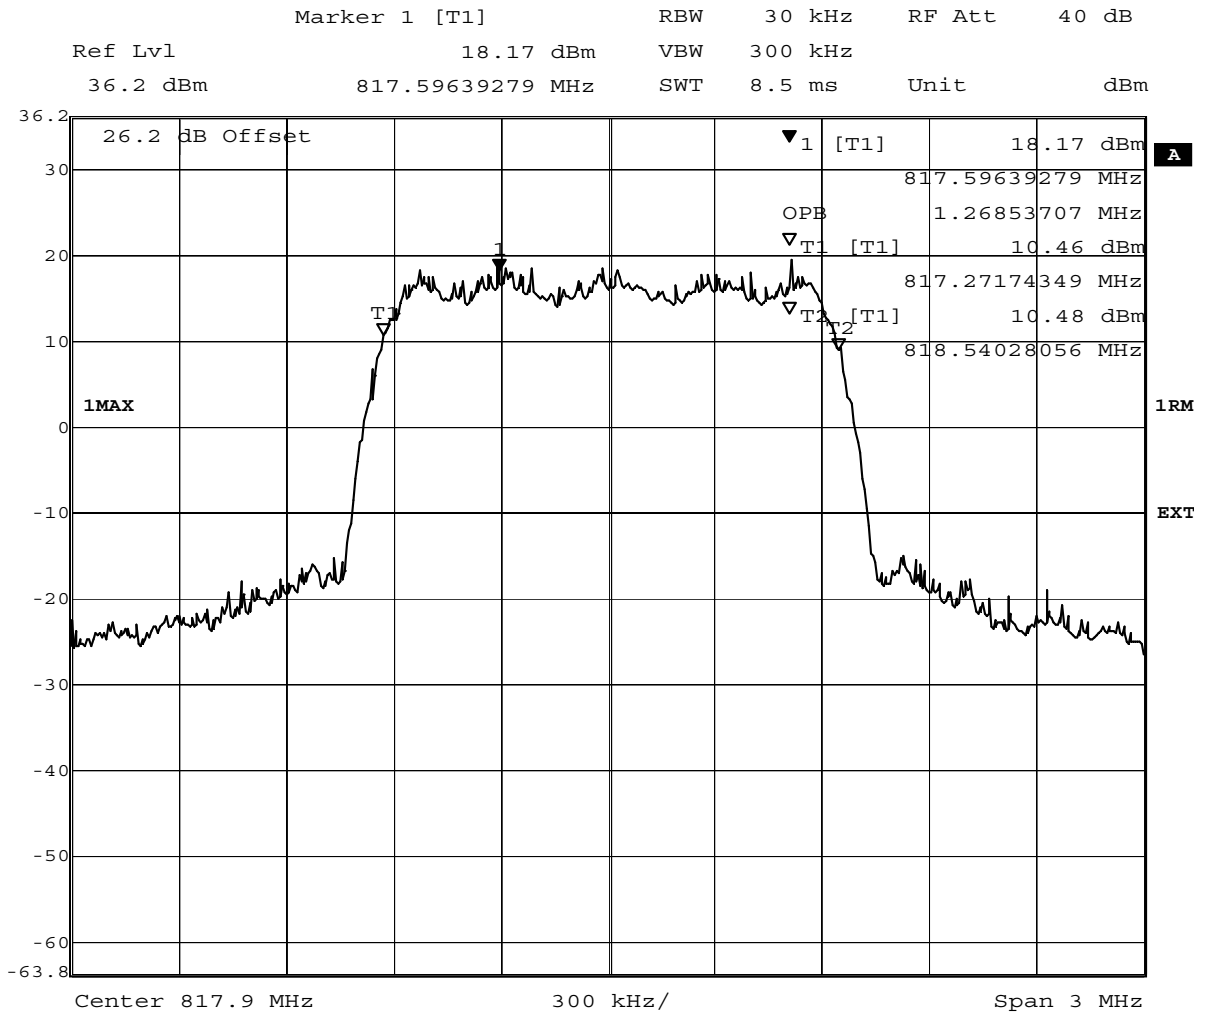


Date: 6 DEC 2012 22:13:23

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	Limit / kHz	verdict
RMS	maxhold	30	conducted	1268.5		passed

**Test: 90.2; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

Result: Passed  
 Setup No.: B01\_BC10\_cond  
 Date of Test: 2012/12/06 13:52  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

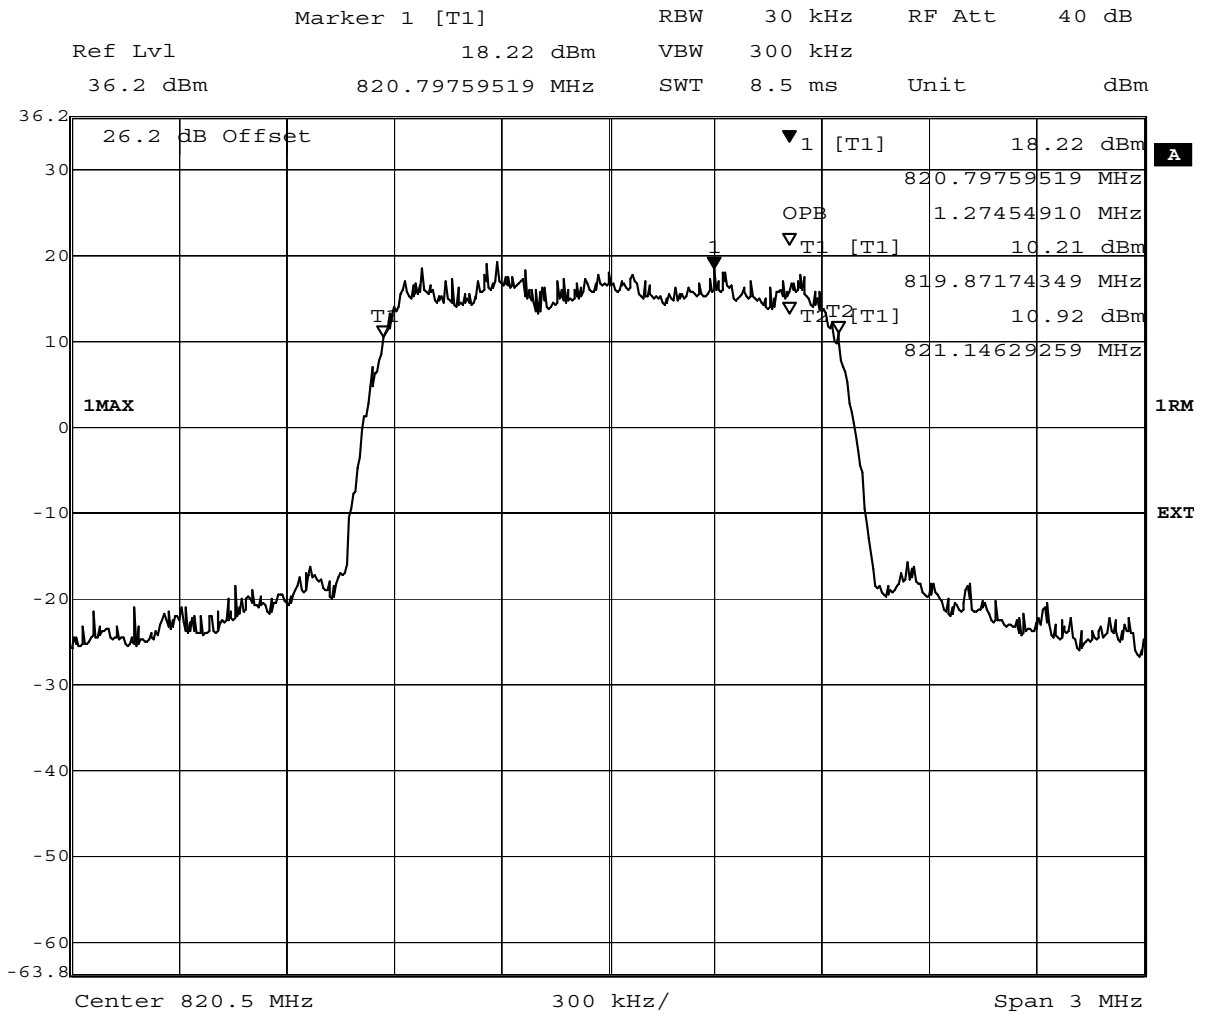

Date: 6.DEC.2012 22:15:04


detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	Limit / kHz	verdict
RMS	maxhold	30	conducted	1274.5		passed



**Test: 90.2; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

Result: Passed  
 Setup No.: C02\_BC10\_cond  
 Date of Test: 2012/12/12 11:32  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

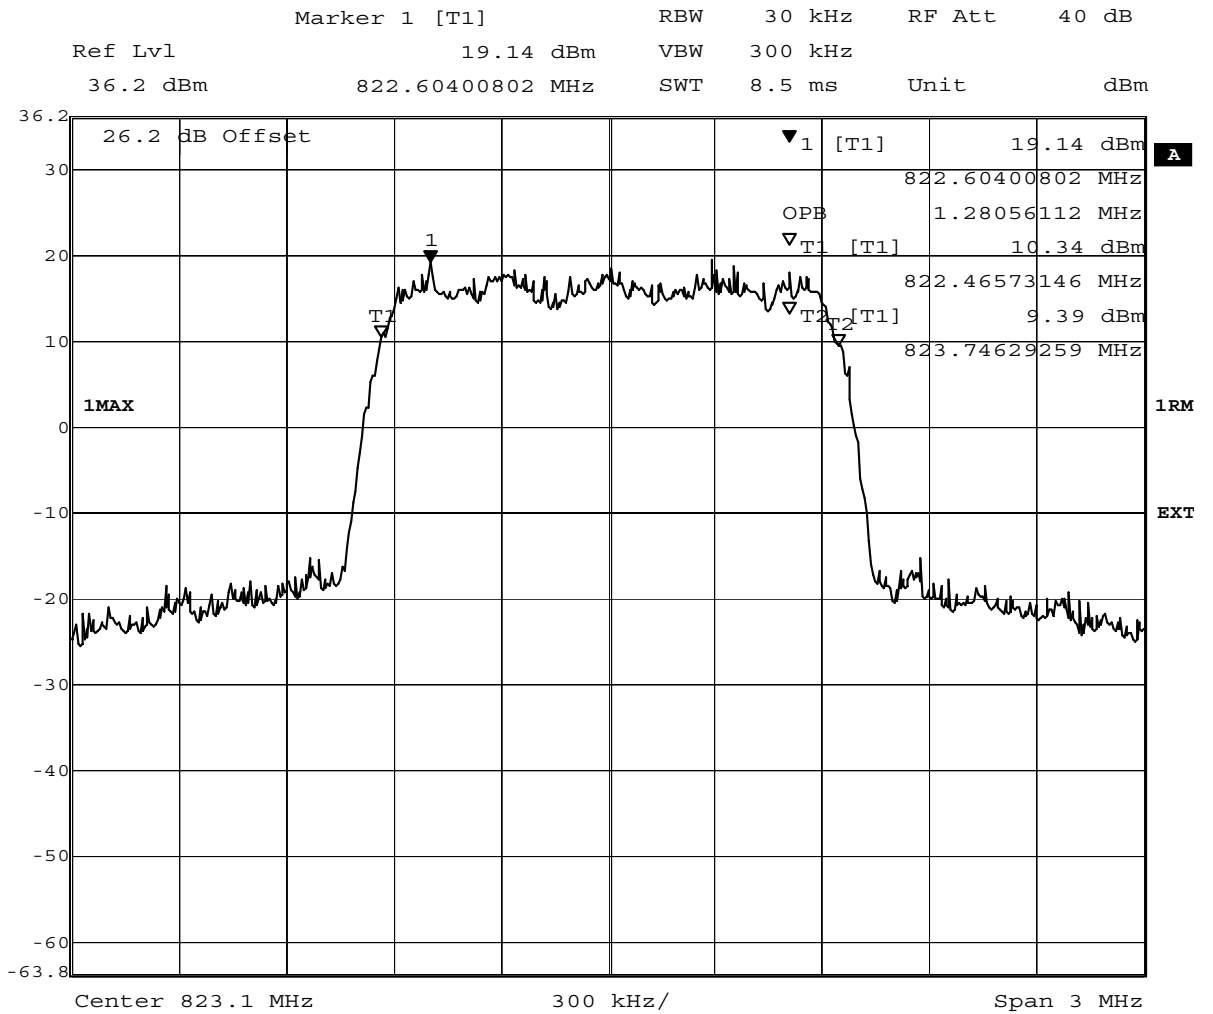


Date: 12.DEC.2012 20:09:19

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	Limit / kHz	verdict
RMS	maxhold	30	conducted	1280.06		passed

**Test: 90.2; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

Result: Passed  
 Setup No.: B01\_BC10\_cond  
 Date of Test: 2012/12/06 13:52  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

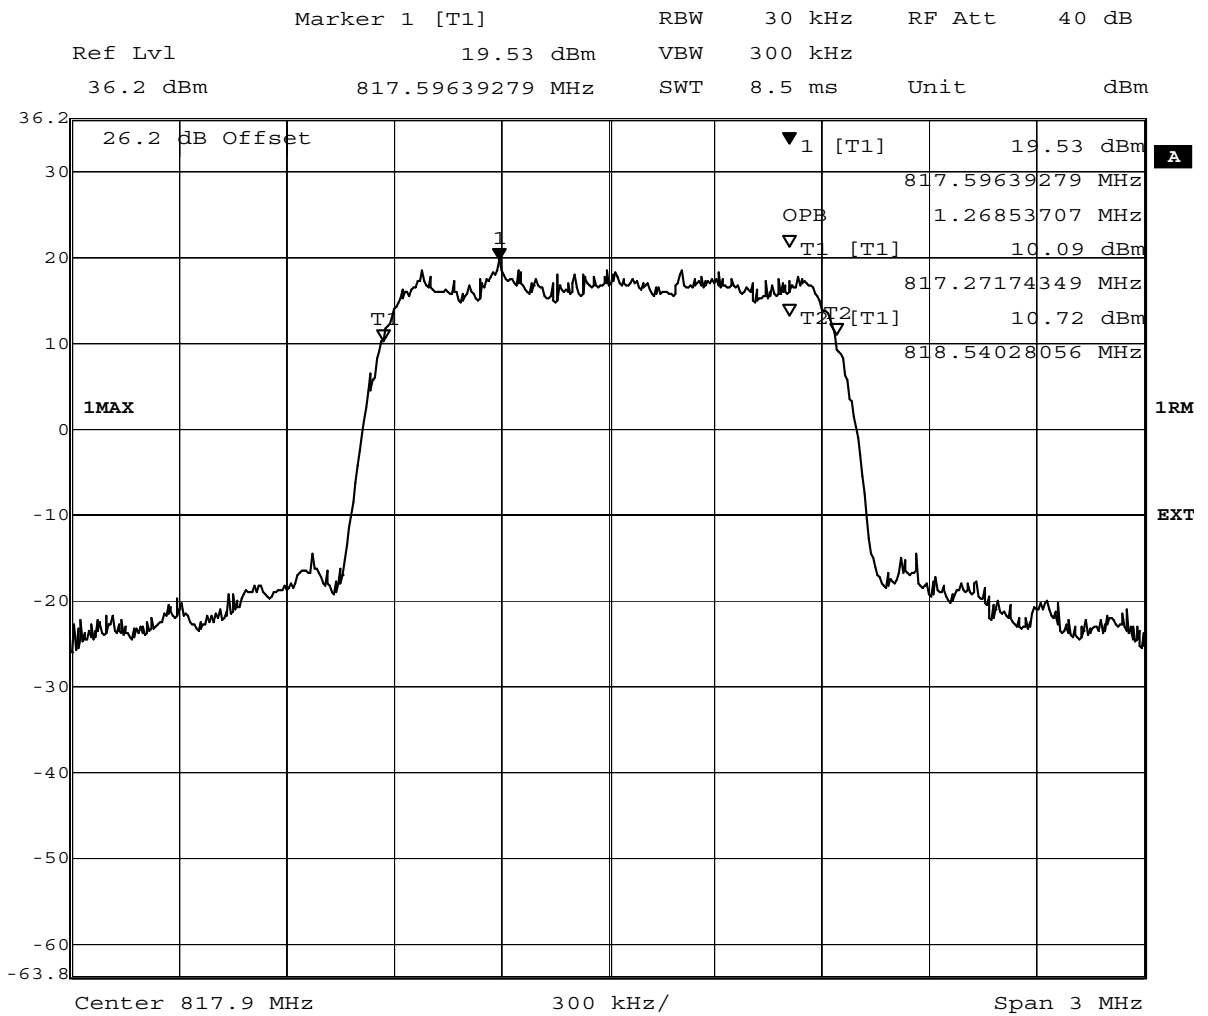


Date: 6.DEC.2012 22:11:31

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	Limit / kHz	verdict
RMS	maxhold	30	conducted	1268.5		passed

**Test: 90.2; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

Result: Passed  
 Setup No.: B01\_BC10\_cond  
 Date of Test: 2012/12/06 13:51  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

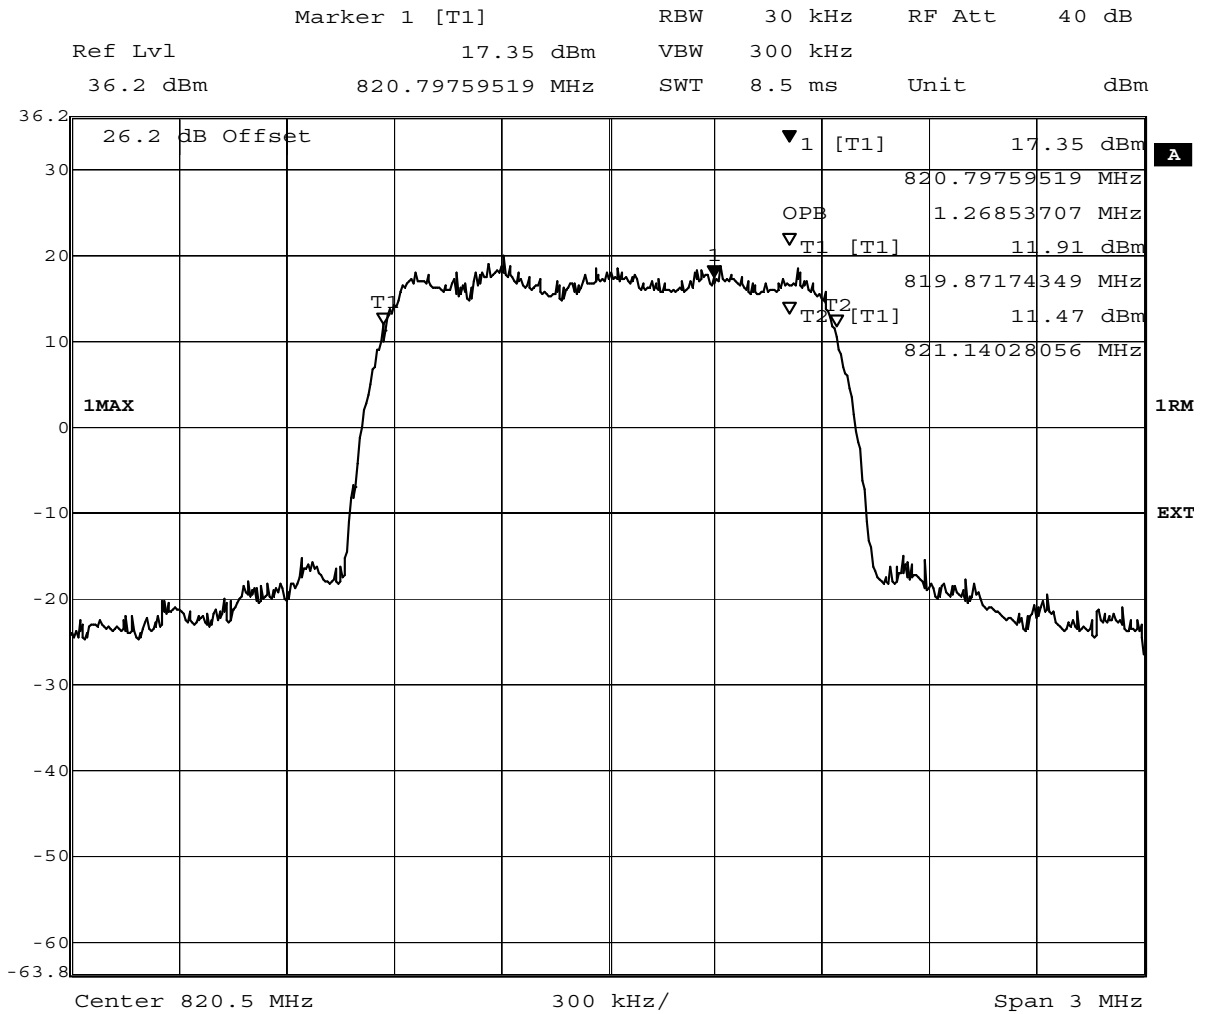


Date: 6.DEC.2012 22:18:18

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	Limit / kHz	verdict
RMS	maxhold	30	conducted	1268.5		passed

**Test: 90.2; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

Result: Passed  
 Setup No.: C02\_BC10\_cond  
 Date of Test: 2012/12/12 12:00  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

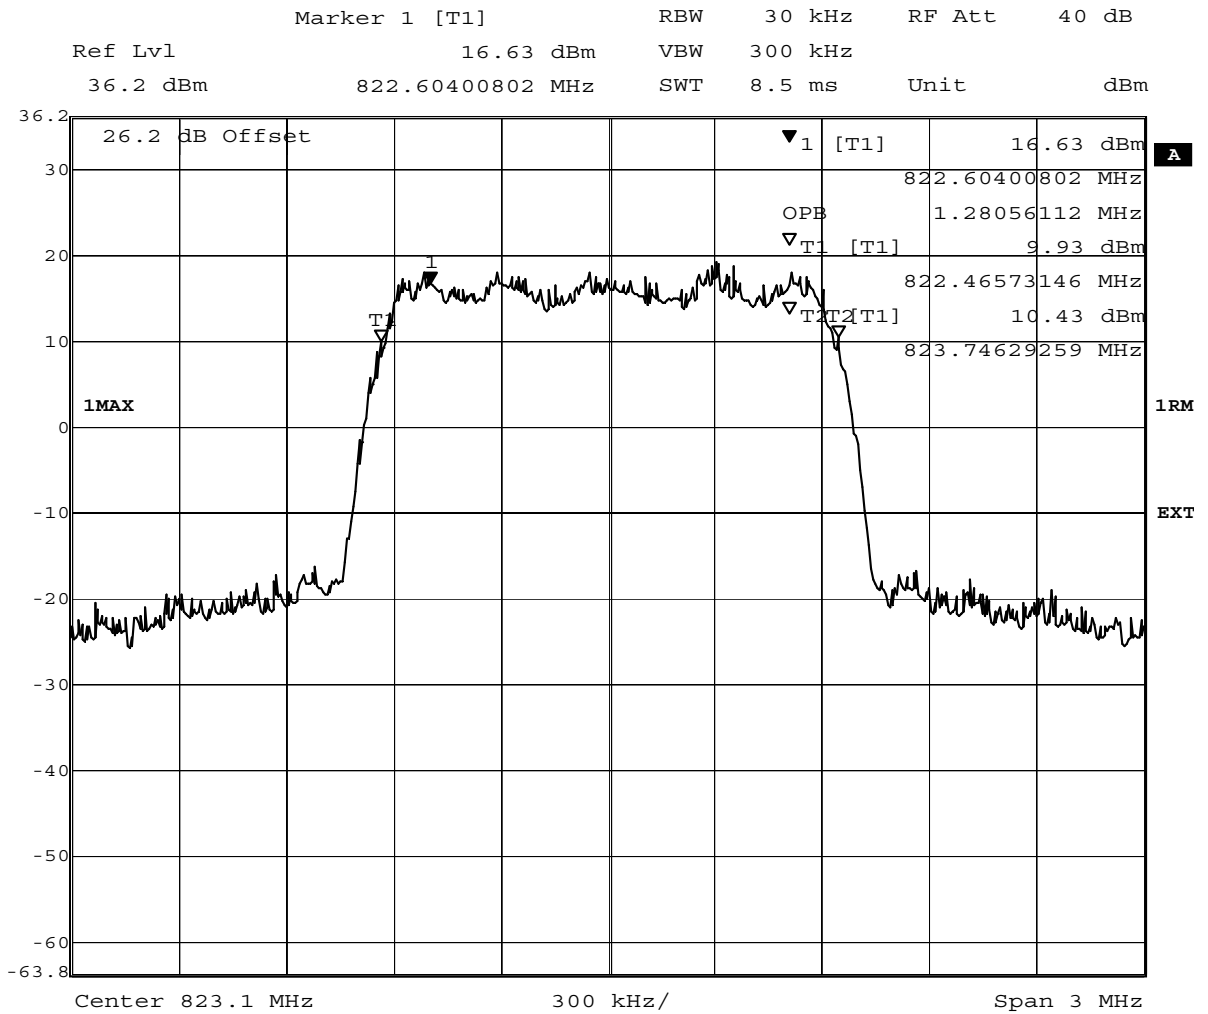

Date: 12.DEC.2012 20:10:28

detector	trace	resolution bandwidth /kHz	type of measurement	measured value /kHz	Limit / kHz	verdict
RMS	maxhold	30	conducted	1280.6		passed




### **3.4.3 90.3 Band Edges Compliance, §2.1051, §90691**

**Test: 90.3; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01_BC10_cond
<i>Date of Test:</i>	2012/11/29 14:19
<i>Body:</i>	FCC Part 90
<i>Test Specification:</i>	FCC part 90

**Detailed Results:**

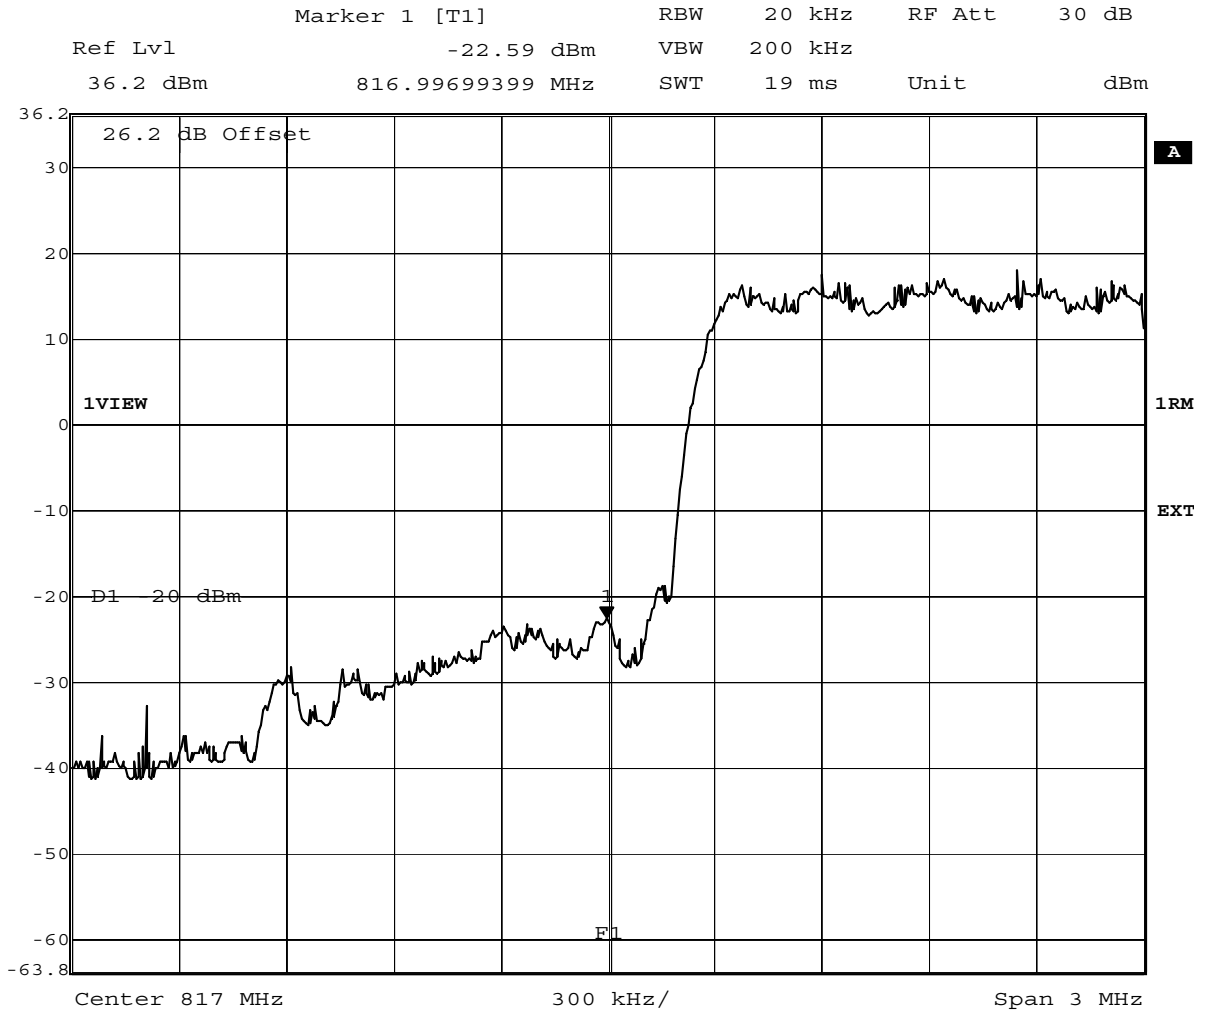

Date: 29.NOV.2012 16:56:52

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	Limit /dBm rated Power [dBm] - (50 + 10log(rated power[W]))	verdict
RMS	maxhold	20	816.99	-22.6	2.6	-20	passed

Rated Power: 24 dBm  
0.25 W


**Test: 90.3; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

Result: Passed  
 Setup No.: A01\_BC10\_cond  
 Date of Test: 2012/11/29 14:20  
 Body: FCC Part 90  
 Test Specification: FCC part 90





**Detailed Results:**

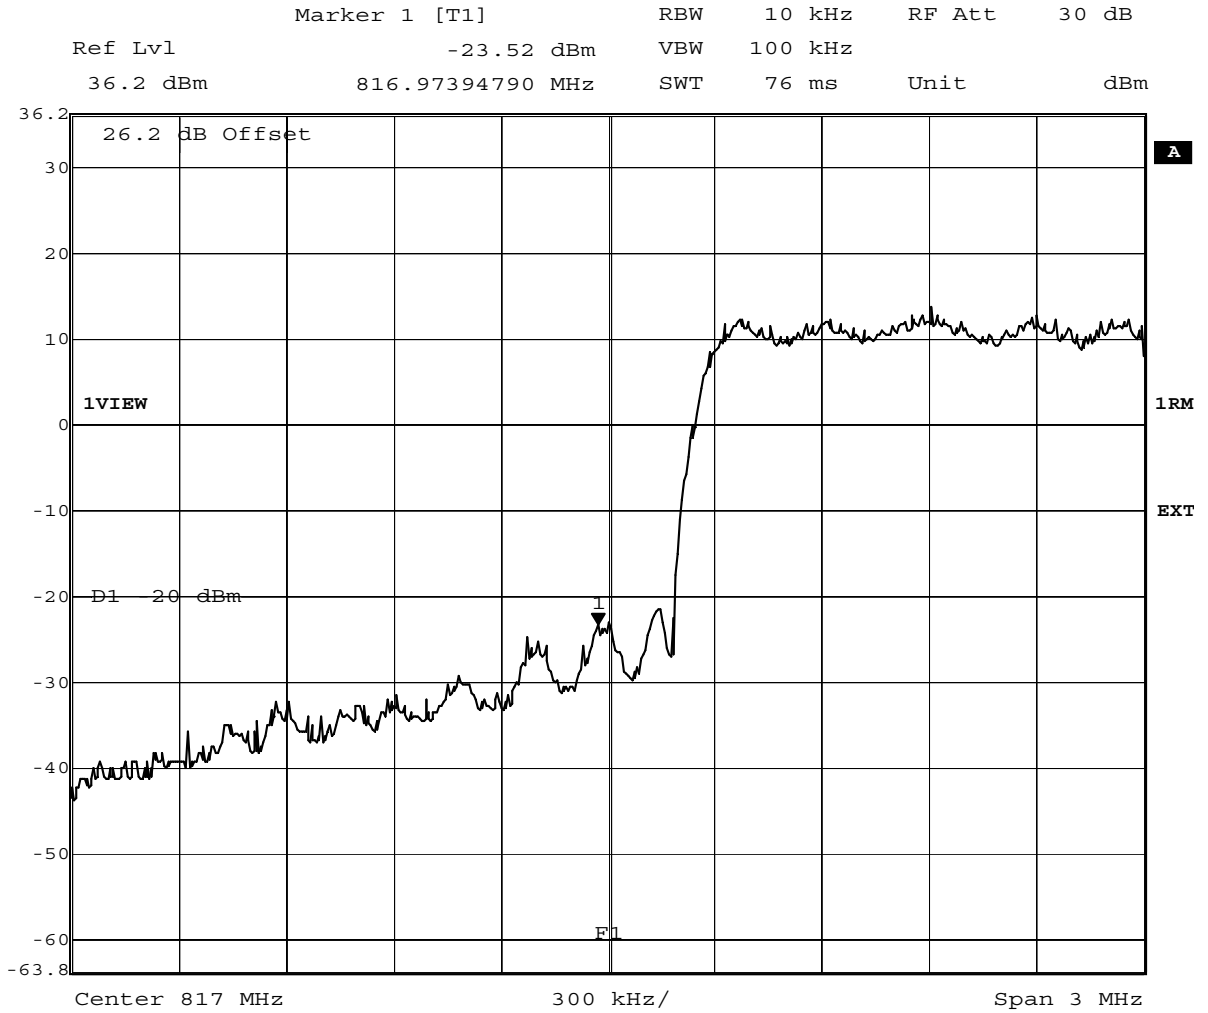

Date: 29.NOV.2012 16:41:43

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	Limit /dBm rated Power [dBm] - (50 + 10log(rated power[W]))	verdict
RMS	maxhold	10	816.97	-22.5	2.5	-20	passed

Rated Power: 24 dBm  
0.25 W


Measured Level was corrected by 1 dB to correct measurement bandwidth to 12.5 kHz

**Test: 90.3; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

Result: Passed  
 Setup No.: A01\_BC10\_cond  
 Date of Test: 2012/11/29 14:21  
 Body: FCC Part 90  
 Test Specification: FCC part 90



**Detailed Results:**

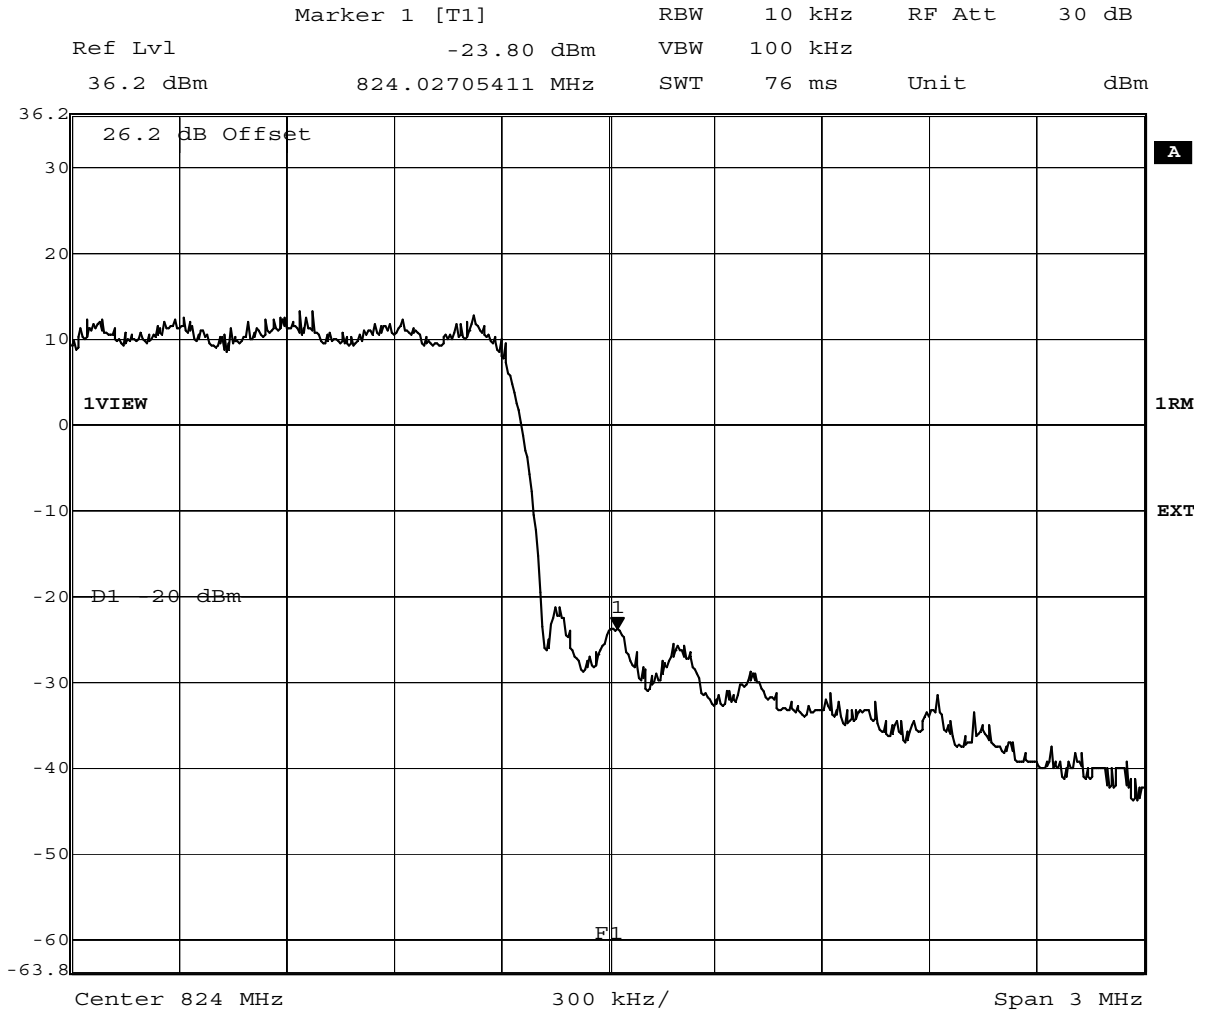

Date: 29.NOV.2012 16:47:55

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	Limit /dBm rated Power [dBm] - (50 + 10log(rated power[W]))	verdict
RMS	maxhold	10	824.03	-22.8	2.8	-20	passed


Rated Power: 24 dBm  
0.25 W

Measured Level was corrected by 1 dB to correct measurement bandwidth to 12.5 kHz

**Test: 90.3; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

Result: Passed  
Setup No.: B01\_BC10\_cond  
Date of Test: 2012/12/06 14:40  
Body: FCC Part 90  
Test Specification: FCC part 90

**Detailed Results:**

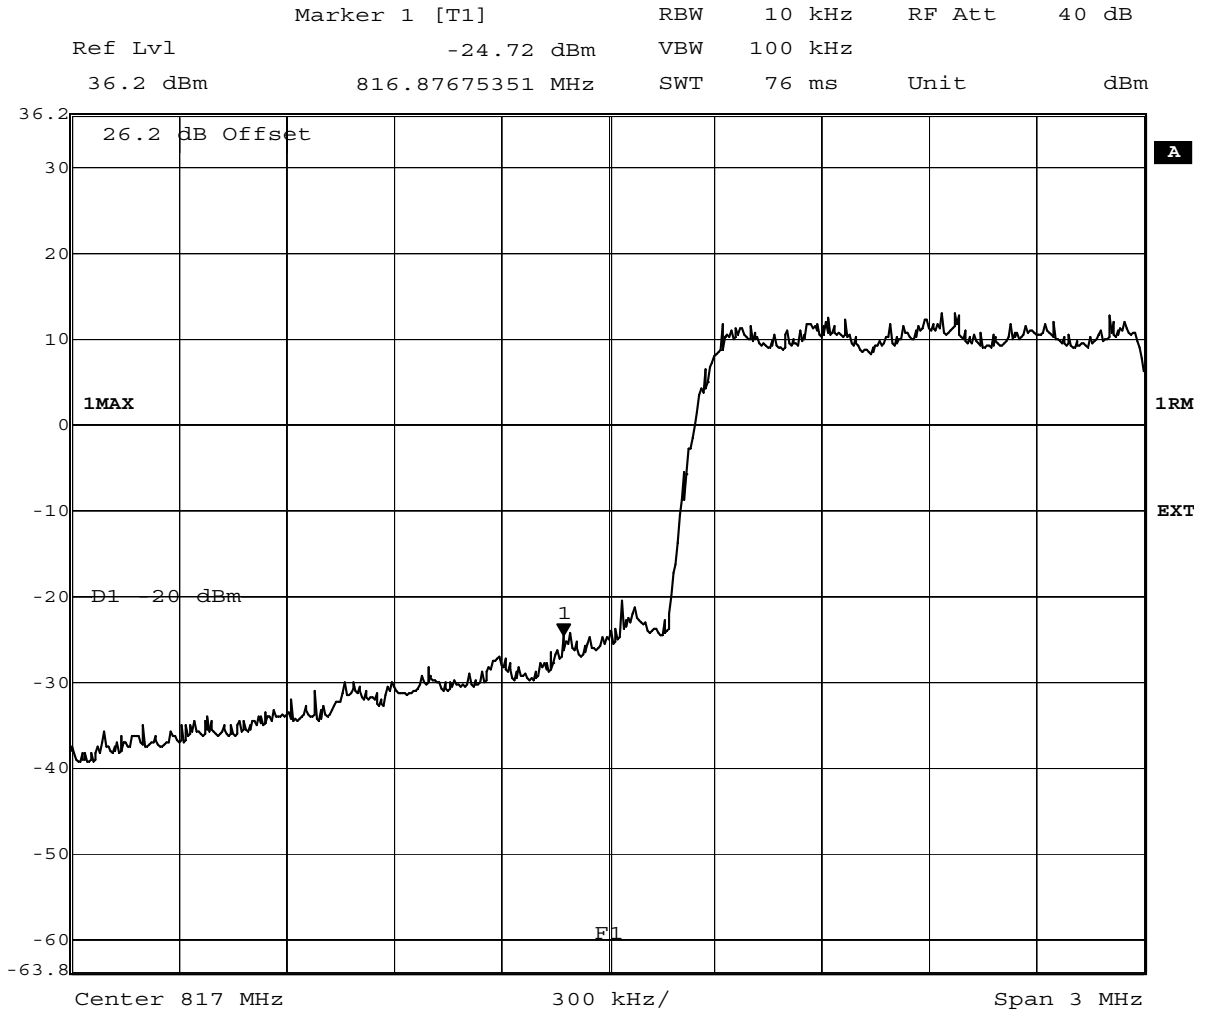

Date: 6.DEC.2012 22:04:58

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	Limit /dBm rated Power [dBm] - (50 + 10log(rated power[W]))	verdict
RMS	maxhold	20	816.99	-23.7	3.7	-20	passed


Rated Power: 24 dBm  
0.25 W

Measured Level was corrected by 1 dB to correct measurement bandwidth to 12.5 kHz

**Test: 90.3; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

Result: Passed  
Setup No.: C02\_BC10\_cond  
Date of Test: 2012/12/12 14:38  
Body: FCC Part 90  
Test Specification: FCC part 90

**Detailed Results:**

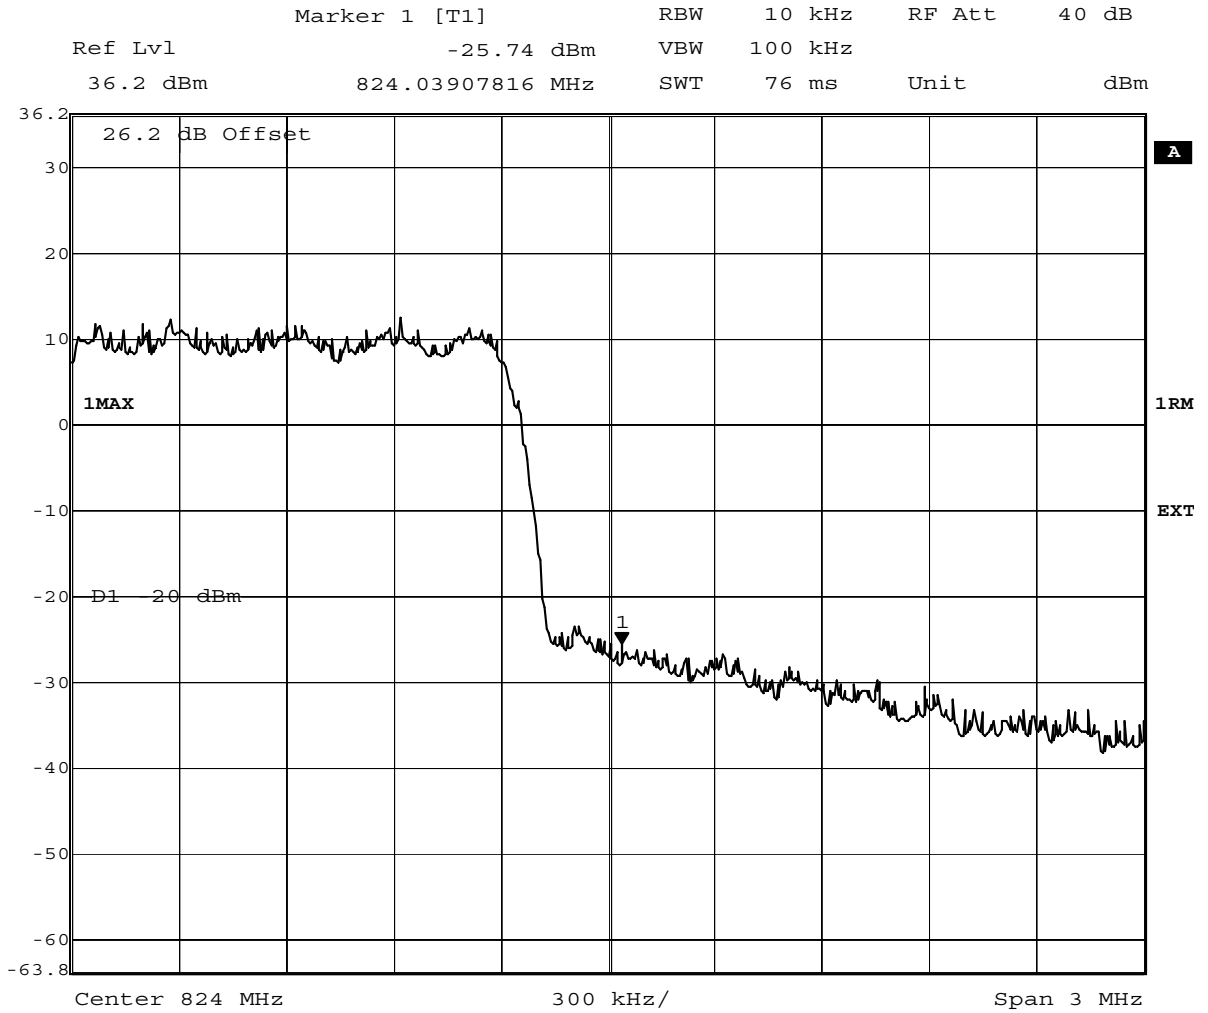

Date: 12.DEC.2012 20:07:10

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	Limit /dBm rated Power [dBm] - (50 + 10log(rated power[W]))	verdict
RMS	maxhold	20	824.04	-24.7	4.7	-20	passed


Rated Power: 24 dBm  
0.25 W

Measured Level was corrected by 1 dB to correct measurement bandwidth to 12.5 kHz

**Test: 90.3; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

Result: Passed  
Setup No.: B01\_BC10\_cond  
Date of Test: 2012/12/06 14:29  
Body: FCC Part 90  
Test Specification: FCC part 90

**Detailed Results:**

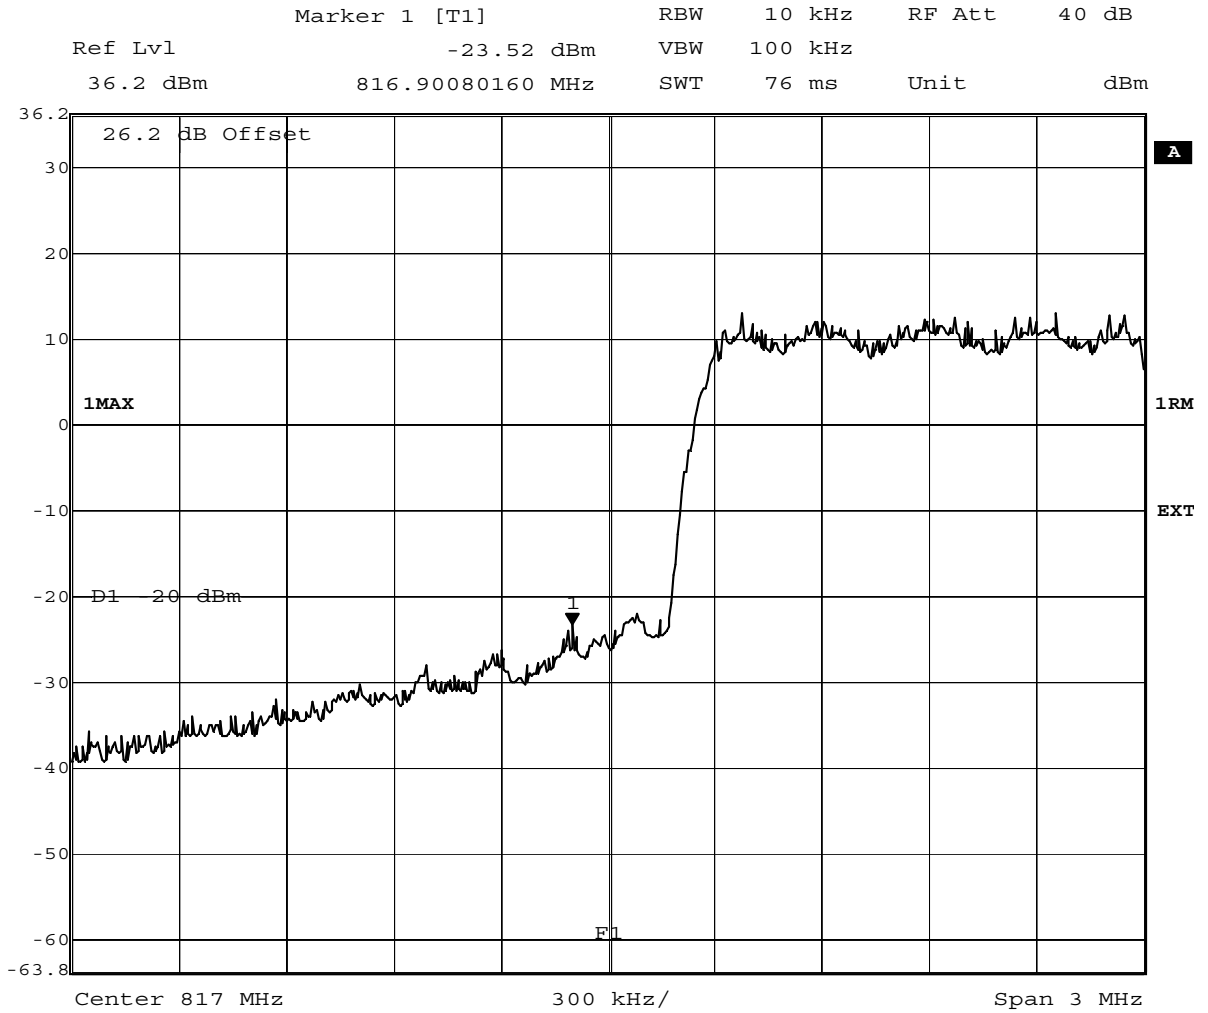

Date: 6.DEC.2012 22:08:16

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	margin to limit /dB	Limit /dBm rated Power [dBm] - (50 + 10log(rated power[W]))	verdict
RMS	maxhold	10	816.9	-22.5	2.5	-20	passed

Rated Power: 24 dBm  
0.25 W

Measured Level was corrected by 1 dB to correct measurement bandwidth to 12.5 kHz

**Test: 90.3; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

Result: Passed  
 Setup No.: C02\_BC10\_cond  
 Date of Test: 2012/12/12 14:34  
 Body: FCC Part 90  
 Test Specification: FCC part 90





**3.4.4 90.4 Spurious Emissions at Antenna Terminal, §2.1051, §90.210&§90.669**

**Test: 90.4; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

*Result:* Passed  
No values have been found with a margin of less than 20 dB to the limit.

*Setup No.:* A01\_BC10\_cond

*Date of Test:* 2012/11/29 10:07

*Body:* FCC Part 90

*Test Specification:* FCC part 90

**Test: 90.4; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

*Result:* Passed  
No values have been found with a margin of less than 20 dB to the limit.

*Setup No.:* A01\_BC10\_cond

*Date of Test:* 2012/11/29 10:06

*Body:* FCC Part 90

*Test Specification:* FCC part 90

**Test: 90.4; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

*Result:* Passed  
No values have been found with a margin of less than 20 dB to the limit.

*Setup No.:* A01\_BC10\_cond

*Date of Test:* 2012/11/29 10:05

*Body:* FCC Part 90

*Test Specification:* FCC part 90

**Test: 90.4; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

*Result:* Passed  
No values have been found with a margin of less than 20 dB to the limit.

*Setup No.:* A01\_BC10\_cond

*Date of Test:* 2012/11/29 10:07

*Body:* FCC Part 90

*Test Specification:* FCC part 90



**Test: 90.4; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

*Result:* Passed  
No values have been found with a margin of less than 20 dB to the limit.

*Setup No.:* A01\_BC10\_cond

*Date of Test:* 2012/11/29 10:07

*Body:* FCC Part 90

*Test Specification:* FCC part 90

**Test: 90.4; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

*Result:* Passed  
No values have been found with a margin of less than 20 dB to the limit.

*Setup No.:* A01\_BC10\_cond

*Date of Test:* 2012/11/29 10:06

*Body:* FCC Part 90

*Test Specification:* FCC part 90

**Test: 90.4; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

*Result:* Passed  
No values have been found with a margin of less than 20 dB to the limit.

*Setup No.:* B01\_BC10\_cond

*Date of Test:* 2012/12/06 11:27

*Body:* FCC Part 90

*Test Specification:* FCC part 90

**Test: 90.4; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

*Result:* Passed  
No values have been found with a margin of less than 20 dB to the limit.

*Setup No.:* B01\_BC10\_cond

*Date of Test:* 2012/12/06 11:27

*Body:* FCC Part 90

*Test Specification:* FCC part 90

**Test: 90.4; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

*Result:* Passed  
No values have been found with a margin of less than 20 dB to the limit.

*Setup No.:* C02\_BC10\_cond

*Date of Test:* 2012/12/12 11:23

*Body:* FCC Part 90

*Test Specification:* FCC part 90



**Test: 90.4; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = HPSK, Channel = 476, Frequency = 817.9 MHz, Method = conducted**

*Result:* Passed  
No values have been found with a margin of less than 20 dB to the limit.

*Setup No.:* B01\_BC10\_cond

*Date of Test:* 2012/12/06 11:25

*Body:* FCC Part 90

*Test Specification:* FCC part 90

**Test: 90.4; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

*Result:* Passed  
No values have been found with a margin of less than 20 dB to the limit.

*Setup No.:* B01\_BC10\_cond

*Date of Test:* 2012/12/06 11:25

*Body:* FCC Part 90

*Test Specification:* FCC part 90

**Test: 90.4; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = HPSK, Channel = 684, Frequency = 823.1 MHz, Method = conducted**

*Result:* Passed  
No values have been found with a margin of less than 20 dB to the limit.

*Setup No.:* C02\_BC10\_cond

*Date of Test:* 2012/12/12 11:23

*Body:* FCC Part 90

*Test Specification:* FCC part 90

### 3.4.5 90.5 Radiated Spurious Emission, §2.1055, §90.210


**Test: 90.5; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 580, Frequency = 820.5 MHz, Method = radiated**

Result: Passed  
 Setup No.: A01\_BC10\_rad  
 Date of Test: 2012/11/30 15:13  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	816.0	-31.04	-13.00	18.04	90.0	horizontal	vertical	passed
peak	maxhold	1000	825.0	-30.76	-13.00	17.76	90.0	horizontal	vertical	passed

no further values have been found with a margin of less than 20 dB

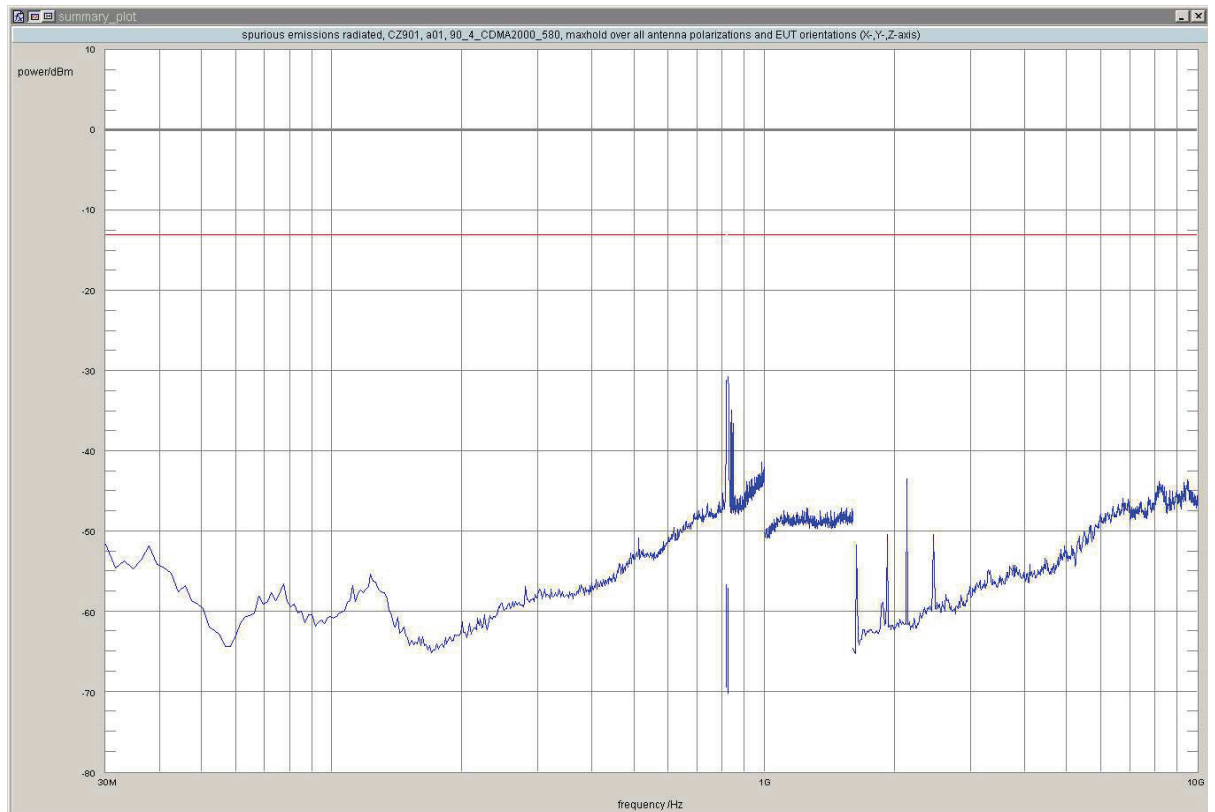


**Test: 90.5; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 580, Frequency = 820.5 MHz, Method = radiated**

Result: Passed  
 Setup No.: B01\_BC10\_rad  
 Date of Test: 2012/12/07 15:14  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

detector	trace	resolution bandwidth /kHz	frequency /MHz	peak value /dBm	limit /dBm	margin to limit /dB	azimuth /°	antenna polarization	EUT orientation	verdict
peak	maxhold	1000	812.8	-27.84	-13.00	14.84	0.0	vertical	horizontal	passed
peak	maxhold	1000	816.0	-25.04	-13.00	12.04	90.0	horizontal	vertical	passed
peak	maxhold	1000	825.4	-19.01	-13.00	6.01	-90.0	vertical	vertical	passed
peak	maxhold	1000	829.6	-31.54	-13.00	18.54	0.0	horizontal	horizontal	passed
peak	maxhold	1000	833.1	-27.47	-13.00	14.47	-180.0	vertical	horizontal	passed
peak	maxhold	1000	834.5	-30.03	-13.00	17.03	0.0	vertical	horizontal	passed
peak	maxhold	1000	836.9	-29.79	-13.00	16.79	-90.0	vertical	vertical	passed
peak	maxhold	1000	838.7	-30.08	-13.00	17.08	90.0	vertical	vertical	passed

no further values have been found with a margin of less than 20 dB

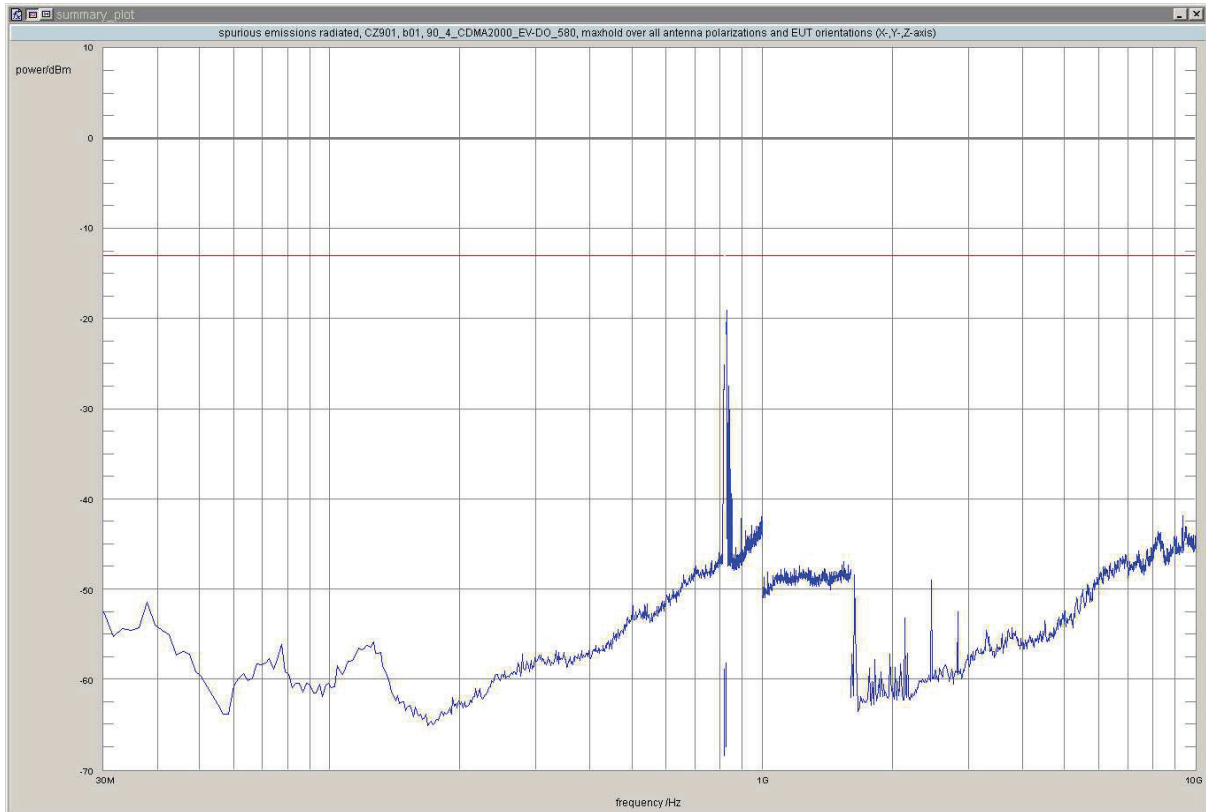



**3.4.6 90.6 Frequency Stability, §2.1055, §90.230**

**Test: 90.6; Frequency Band = BC10, Mode = CDMA2000, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

Result: Passed  
 Setup No.: A01\_BC10\_cond  
 Date of Test: 2012/12/08 14:52  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	2095.5	-0.15	-4.69	passed
-30	5			-1.83	-6.37	passed
-30	10			-2.42	-5.49	passed
-20	0	normal	2095.5	-1.83	-5.57	passed
-20	5			-2.34	-5.49	passed
-20	10			-2.05	-6.05	passed
-10	0	normal	2095.5	-2.2	-6.96	passed
-10	5			-1.98	-7.32	passed
-10	10			-1.32	-7.32	passed
0	0	normal	2095.5	-1.68	-8.79	passed
0	5			-4.83	-7.69	passed
0	10			-0.44	-4.47	passed
10	0	normal	2095.5	-2.93	-5.71	passed
10	5			0.89	3.52	passed
10	10			0.77	-4.83	passed
20	0	low	2095.5	-2.27	-8.72	passed
20	5			-1.32	-12.6	passed
20	10			1.03	10.25	passed
20	0	normal = high <sup>1)</sup>	2095.5	1.61	6.65	passed
20	5			1.76	5.71	passed
20	10			2.27	6.59	passed
30	0	normal	2095.5	0.37	4.29	passed
30	5			0.22	7.76	passed
30	10			1.46	4.17	passed
40	0	normal	2095.5	-0.15	-5.34	passed
40	5			1.03	5.42	passed
40	10			1.83	7.32	passed
50	0	normal	2095.5	-0.59	-5.86	passed
50	5			0.66	-5.35	passed
50	10			0.73	8.28	passed



**Test: 90.6; Frequency Band = BC10, Mode = CDMA2000, Modulation = QPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

Result: Passed  
 Setup No.: A01\_BC10\_cond  
 Date of Test: 2012/12/08 14:54  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	2095.5	2.71	11.65	passed
-30	5			-1.25	-10.77	passed
-30	10			-1.9	-9.81	passed
-20	0	normal	2095.5	-1.68	-17.14	passed
-20	5			-2.64	-11.43	passed
-20	10			-1.9	-11.65	passed
-10	0	normal	2095.5	-2.05	-10.77	passed
-10	5			-1.76	-9.74	passed
-10	10			-1.61	-12.96	passed
0	0	normal	2095.5	-2.2	-8.86	passed
0	5			-2.42	-10.47	passed
0	10			-0.29	-8.42	passed
10	0	normal	2095.5	-2.2	-12.83	passed
10	5			1.36	8.79	passed
10	10			0.88	-9.59	passed
20	0	low	2095.5	-1.61	-10.91	passed
20	5			0.15	4.17	passed
20	10			0.95	3.96	passed
20	0	normal = high <sup>1)</sup>	2095.5	0.81	13.99	passed
20	5			1.32	14.06	passed
20	10			2.21	12.3	passed
30	0	normal	2095.5	1.06	8.12	passed
30	5			0.15	12.08	passed
30	10			0.73	16.77	passed
40	0	normal	2095.5	-1.34	-13.14	passed
40	5			0.51	10.62	passed
40	10			0.95	12.3	passed
50	0	normal	2095.5	1.25	-14.87	passed
50	5			1.32	12.64	passed
50	10			1.03	13.62	passed



**Test: 90.6; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = BPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

Result: Passed  
 Setup No.: B01\_BC10\_cond  
 Date of Test: 2012/12/08 14:57  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	2095.5	-1.25	-7.69	passed
-30	5			-2.12	-9.38	passed
-30	10			-2.2	-9.01	passed
-20	0	normal	2095.5	-1.25	-7.76	passed
-20	5			-2.34	-9.3	passed
-20	10			-2.34	-9.67	passed
-10	0	normal	2095.5	-2.2	-7.76	passed
-10	5			-1.3	-7.18	passed
-10	10			-1.54	-7.03	passed
0	0	normal	2095.5	-1.46	-7.47	passed
0	5			-0.73	-7.69	passed
0	10			-0.81	-7.76	passed
10	0	normal	2095.5	-1.25	-8.2	passed
10	5			-0.15	6.29	passed
10	10			-0.59	-6.81	passed
20	0	low	2095.5	-0.51	7.25	passed
20	5			0.07	9.16	passed
20	10			0.22	-8.42	passed
20	0	normal = high <sup>1)</sup>	2095.5	-0.37	-10.11	passed
20	5			0.51	6.52	passed
20	10			0.29	7.4	passed
30	0	normal	2095.5	1.1	5.27	passed
30	5			1.32	5.64	passed
30	10			0.81	4.76	passed
40	0	normal	2095.5	0.59	9.42	passed
40	5			1.46	9.89	passed
40	10			1.76	8.86	passed
50	0	normal	2095.5	1.39	10.11	passed
50	5			1.76	10.14	passed
50	10			1.61	10.55	passed



**Test: 90.6; Frequency Band = BC10, Mode = CDMA2000\_EV-DO, Modulation = HPSK, Channel = 580, Frequency = 820.5 MHz, Method = conducted**

Result: Passed  
 Setup No.: B01\_BC10\_cond  
 Date of Test: 2012/12/08 14:58  
 Body: FCC Part 90  
 Test Specification: FCC part 90

**Detailed Results:**

Temp. °C	Duration min	Voltage	Limit Hz	Freq. error Average (Hz)	Freq. error Max. (Hz)	Verdict
-30	0	normal	2095.5	-1.68	-8.42	passed
-30	5			-1.9	-9.52	passed
-30	10			-2.2	-8.2	passed
-20	0	normal	2095.5	-1.9	-9.3	passed
-20	5			-1.76	-8.49	passed
-20	10			-2.64	-9.23	passed
-10	0	normal	2095.5	-1.9	-10.62	passed
-10	5			-1.8	-8.57	passed
-10	10			-1.54	-8.86	passed
0	0	normal	2095.5	-1.17	-7.4	passed
0	5			-1.17	-9.01	passed
0	10			-0.37	-7.18	passed
10	0	normal	2095.5	-1.03	-7.47	passed
10	5			-0.66	6.37	passed
10	10			-0.22	7.84	passed
20	0	low	2095.5	-0.37	-5.74	passed
20	5			0.73	-6.96	passed
20	10			0.44	-7.47	passed
20	0	normal = high <sup>1)</sup>	2095.5	-0.22	-8.35	passed
20	5			0.44	4.32	passed
20	10			0.37	6.96	passed
30	0	normal	2095.5	0.73	3.44	passed
30	5			1.54	4.91	passed
30	10			1.1	5.42	passed
40	0	normal	2095.5	1.17	8.64	passed
40	5			1.68	9.74	passed
40	10			2.42	11.35	passed
50	0	normal	2095.5	1.25	10.99	passed
50	5			1.98	9.16	passed
50	10			1.76	10.03	passed



## 4 Test Equipment Details

### 4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

#### Test Equipment Anechoic Chamber

<b>Lab ID:</b>	<b>Lab 1</b>
<b>Manufacturer:</b>	Frankonia
<b>Description:</b>	Anechoic Chamber for radiated testing
<b>Type:</b>	10.58x6.38x6.00 m <sup>3</sup>

#### Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup>	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	FCC listing 96716 3m Part15/18		2011/01/11 2014/01/10
	IC listing 3699A-1 3m		2011/02/07 2014/02/06
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1	-	Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

#### Test Equipment Auxiliary Equipment for Radiated emissions

<b>Lab ID:</b>	<b>Lab 1</b>
<b>Description:</b>	Equipment for emission measurements
<b>Serial Number:</b>	see single devices

#### Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AS 620 P	620/37	HD GmbH
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2008/10/27 2013/10/26
	Standard Calibration		2012/01/18 2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01- 2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02- 2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/05/18 2015/05/17

**Single Devices for Auxiliary Equipment for Radiated emissions (continued)**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2012/06/26 2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170		
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/10/27 2014/10/26
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/379070 9	Maturo GmbH



**Test Equipment Auxiliary Test Equipment**

**Lab ID:** Lab 1, Lab 2  
**Manufacturer:** see single devices  
**Description:** Single Devices for various Test Equipment  
**Type:** various  
**Serial Number:** none

**Single Devices for Auxiliary Test Equipment**

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2011/10/19 2013/10/18
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

**Test Equipment Digital Signalling Devices**

**Lab ID:** Lab 1, Lab 2  
**Description:** Signalling equipment for various wireless technologies.

**Single Devices for Digital Signalling Devices**

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/24   2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial factory calibration		2012/01/26   2014/01/25
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware: V.2.01.25		2012/10/29
	3G :	KC42x 12.23.00	
	LTE:	KC501 1.7.0 up to 2.0.0	
		KC503 1.7.2 up to 2.0.0	
		KC506 1.9.8 up to 2.0.0	
		KC507 1.7.0	
	KC508 1.8.5 up to 2.0.0		
	KC551 1.4.9 up to 2.0.0		
	KC553 1.7.0 up to 2.0.0		
	KC556 2.0.0		
	KC571 1.8.5 up to 2.0.0		
	KC572 1.8.5 up to 2.0.0		
	Firmware: V.3.00.11		
	LTE: KC501 2.2.0		
	KC503 2.2.0		
	KC506 2.2.0		
	KC508 2.2.0		
	KC551 2.2.0		
	KC553 2.2.0		
	KC556 2.2.0		
	KC571 2.2.0		
	KC572 2.2.0		
	---		
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/05/26   2013/05/25
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware:		2007/07/16
	B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04		
	Software:		
	K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22		
	Firmware:		
	µP1 8v50 02.05.06		
	---		
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/12/07   2014/12/06
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>

**Single Devices for Digital Signalling Devices (continued)**

Single Device Name	Type	Serial Number	Manufacturer
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03

**Test Equipment Emission measurement devices**

**Lab ID:** Lab 1  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

**Single Devices for Emission measurement devices**

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2012/05/22 2013/05/21
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2012/05/21 2013/05/20
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	standard calibration		2011/05/12 2014/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2011/12/05 2013/12/04
	<i>HW/SW Status</i>		<i>Date of Start Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03



**Test Equipment Radio Lab Test Equipment**

**Lab ID:** Lab 2  
**Description:** Radio Lab Test Equipment

**Single Devices for Radio Lab Test Equipment**

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Rosenberger Micro-Coax
Coax Cable Rosenberger Micro Coax FA210A0010003030 SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2012/05/22 2013/05/21
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
Rubidium Frequency Standard	Datum, Model: MFL	2689/001	Datum-Beverly
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2012/06/21 2013/06/20
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2012/05/21 2013/05/20
Signal Generator	SMY02	829309/018	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2011/11/04 2014/11/03
Signal Generator SME	SME03	827460/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2011/11/25 2014/11/24
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG
Spectrum Analyser	FSIQ26	840061/005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2011/02/10 2013/02/09
Temperature Chamber Vötsch 03	VT 4002	58566002150010	Vötsch
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Customized calibration		2012/03/12 2014/03/11



**5 Annex**

**5.1 Additional Information for Report**



Summary of Test Results

---

---

The EUT complied with all performed tests as listed in the summary section of this report.

---

Technical Report Summary

---

---

Type of Authorization :

Certification for a CDMA2000 cellular radiotelephone device

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations.  
The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

- § 2.1046 Measurement required: RF power output
- § 2.1049 Measurement required: Occupied bandwidth
- § 2.1051 Measurement required: Band Edge Compliance
- § 2.1051 Measurement required: Spurious emissions at antenna terminals
- § 2.1053 Measurement required: Field strength of spurious radiation
- § 2.1055 Measurement required: Frequency stability
- § 2.1057 Frequency spectrum to be investigated

Part 90, Subpart I - General Technical Standards & Subpart S - Regulations Governing Licensing and Use of Frequencies in the 806-824, 851-869, 896-901, and 935-940 MHz Bands

- § 90.205/90.635 Maximum Channel Power
- § 90.209 Occupied Bandwidth
- § 90.691 Band Edge Compliance
- § 90.210/90.669 Spurious Emissions At Antenna Terminal
- § 90.210 Radiated Spurious Emissions
- § 90.213 Frequency stability

additional documents

ANSI TIA-603-C-2004

Description of Methods of Measurements

---

---

Maximum Channel Power

---

Standard: FCC Part 90, Subpart I & S

The test was performed according to: FCC §2.1046



#### Test Description (conducted measurement procedure)

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
  - 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
  - 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Channel (Frequency): please refer to the detailed results
- 4) The transmitted power of the EUT was recorded by using a CMW500.

#### Test Description (radiated measurement procedure)

- 1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.
  - 2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
  - Channel: please refer to the detailed results
- 3) A substitution procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a  $\lambda/2$  dipole).
  - 4) The output power was measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case power all orientations (X, Y, Z) of the EUT have been measured.
  - 5) The test procedure according to TIA-603-C-2004 has been considered.

#### Test Requirements / Limits

##### §2.1046 Measurements Required: RF Power Output

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the output terminals when this test is made shall be stated.

§90.205 Power and antenna height limits

(k) (...) Power and height limitations are specified in § 90.635

§90.635 Limitations on power and antenna height

(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw)

---

#### Emission and Occupied Bandwidth

---

Standard: FCC Part 90, Subpart I & S

The test was performed according to: FCC §2.1049

#### Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
  - 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
  - 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
  - Channel: please refer to the detailed results
- 4) Important Analyser Settings:
    - Resolution Bandwidth: >1% of the manufacturer's stated occupied bandwidth
  - 5) The maximum spectral level of the modulated signal was recorded as the reference.
  - 6) The emission bandwidth is measured as follows:  
the two furthest frequencies above and below the frequency of the maximum reference level where the spectrum is -26 dB down have to be found.
  - 7) The occupied bandwidth (99% Bandwidth) is measured as follows:

acc. Title 47 CFR chapter I part 90 subpart I & S  
the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 percent of the total mean power.

#### Test Requirements / Limits

##### § 2.1049 Measurements required: Occupied bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions (as applicable):

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

---

#### Band Edge Compliance

---

Standard: FCC Part 90, Subpart I & S

The test was performed according to: FCC §90.691

#### Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to correct the readings from the Spectrum Analyser and the Digital Communication Tester.
- 3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.  
Important Settings:
  - Output Power: Maximum
  - Channel: please refer to the detailed results
- 4) Important Analyser Settings:
  - Resolution Bandwidth = Video Bandwidth: >1% of the manufacturer's stated occupied bandwidth

#### Test Requirements / Limits

§ 90.691 Emission mask requirements for EA-based systems  
(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

---

#### Spurious Emissions At Antenna Terminal

---

Standard: FCC Part 90, Subpart I & S

The test was performed according to FCC §2.1051

#### Test Description

- 1) The EUT was coupled to a Spectrum Analyser and a Digital Communication Tester through a Power Divider. Refer to chapter "Setup Drawings".
- 2) The total insertion losses for signal path 1 and signal path 2 were measured. The values were used to

acc. Title 47 CFR chapter I part 90 subpart I & S

correct the readings from the Spectrum Analyser and the Digital Communication Tester.

3) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

Important Settings:

- Output Power: Maximum

- Channel: please refer to the detailed results

4) Important Analyser Settings

- [Resolution Bandwidth]:

a) [ $\geq 1\%$  of wanted signal bandwidth] in the Span of 1 MHz directly below and above the Band,

b) otherwise [1 MHz]

c) [reduced resolution bandwidth] in case the curve of the analyser IF-Filter or the wanted EUT signal leads to an exceeding of the limit, in this case a correction factor was used

- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth

5) The spurious emissions peaks were measured in the frequency range from 9 kHz to 20 GHz (up to the 10th harmonic) during the call was established

#### Test Requirements / Limits

##### § 2.1051 Spurious emissions at antenna terminals

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in Sec. 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

##### § 2.1057 Frequency spectrum to be investigated.

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

##### § 90.691 Emission mask requirements for EA-based systems

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10\log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

---

#### Radiated Spurious Emissions

---

Standard: FCC Part 90, Subpart I & S

The test was performed according to: FCC §2.1053

#### Test Description

1) The EUT was placed inside an anechoic chamber. Refer to chapter "Setup Drawings". The EUT was coupled to a Digital Communication Tester which was located outside the chamber via a small signalling antenna.

2) A call was established on a Traffic Channel between the EUT and the Digital Communication Tester.

acc. Title 47 CFR chapter I part 90 subpart I &amp; S

**Important Settings:**

- Output Power: Maximum

- Channel: please refer to the detailed results

3) A pre-calibration procedure is used so that the readings from the spectrum analyser are corrected and represent directly the equivalent radiated power (related to a  $\lambda/2$  dipole).

4) All spurious radiation measurements were made with spectrum analyser and the appropriate calibrated antennas for the frequency range of 30 MHz to 20 GHz (up to the 10th harmonic of the transmit frequency). The frequency range from 9 kHz to 30 MHz has been examined during the conducted spurious emission measurements.

**5) Important Analyser Settings**

- [Resolution Bandwidth / Video Bandwidth]:

a) [3 kHz / 10 kHz] in the Span of 1 MHz directly below and above the Band,

b) [10 kHz / 30 kHz] in case the curve of the analyser IF-Filter leads to an exceeding of the limit, in this case a worst case correction factor of 20 dB (1 MHz  $\rightarrow$  10 kHz) was used

c) [1 MHz / 3 MHz] otherwise

- Sweep Time: depending on the transmitting signal, the span and the resolution bandwidth

6) The spurious emissions peaks were measured in both vertical and horizontal antenna polarisation during the call is established on the lowest channel, mid channel and on the highest channel. To find the worst case peaks all orientations (X, Y, Z) of the EUT have been measured.

**Test Requirements / Limits****§ 2.1053 Measurements required: Field strength of spurious radiation.**

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of Sec. 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required, with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from halfwave dipole antennas.

(b) The measurements specified in paragraph (a) of this section shall be made for the following equipment:

(2) All equipment operating on frequencies higher than 25 MHz.

**§ 2.1057 Frequency spectrum to be investigated.**

(a) In all of the measurements set forth in Secs. 2.1051 and 2.1053, the spectrum shall be investigated from the lowest radio frequency signal generated in the equipment, without going below 9 kHz, up to at least the frequency shown below:

(1) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) Particular attention should be paid to harmonics and subharmonics of the carrier frequency as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

(c) The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

(d) Unless otherwise specified, measurements above 40 GHz shall be performed using a minimum resolution bandwidth of 1 MHz.

**§ 90.210 Radiated Spurious Emissions**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

This is calculated to be -13 dBm (effective radiated power) which corresponds to 84.6 dB $\mu$ V/m (field strength) in a distance of 3 m.

For reporting only spurious emission levels reaching to the 20dB margin to limit were noted.

---

Frequency stability

Standard: FCC Part 90, Subpart I & S

The test was performed according to FCC §2.1055

#### Test Description

- 1) The EUT was placed inside a temperature chamber.
  - 2) The EUT was coupled to a Digital Communication Tester. Refer to chapter "Setup Drawings".
  - 3) The climatic chamber was cycled down/up to a certain temperature, starting with the EUT minimum temperature.
  - 4) After the temperature was stabilized the EUT was switched on and a call was established on a Traffic Channel between the EUT and the Digital Communication Tester.
- Important Settings:
- Output Power: Maximum
  - Mid Channel
- 5) The frequency error of the EUT was recorded by using an internal measurement function of the Digital Communication Tester immediately after the call was established, five minutes after the call was established and ten minutes after the call was established.
  - 6) This measurement procedure was performed for temperature variation from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  in increments of  $10^{\circ}\text{C}$ , if not otherwise stated in the detailed results.
- When the EUT did not operate at certain temperature levels, these measurements were left out.

#### Test Requirements / Limits


§2.1055 Measurements required: Frequency stability

- (a) The frequency stability shall be measured with variation of ambient temperature as follows:
- (1) From  $-30^{\circ}$  to  $+50^{\circ}$  centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
  - (b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than  $10^{\circ}$  centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.
  - (d) The frequency stability shall be measured with variation of primary supply voltage as follows:
    - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
    - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
    - (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

§ 90.213 Frequency stability


According table "MINIMUM FREQUENCY STABILITY" Mobile stations, working in the frequency range 809 - 824 MHz, with an output power  $< 2$  watts, must be within a frequency tolerance of 2.5 ppm.

Setup Drawings

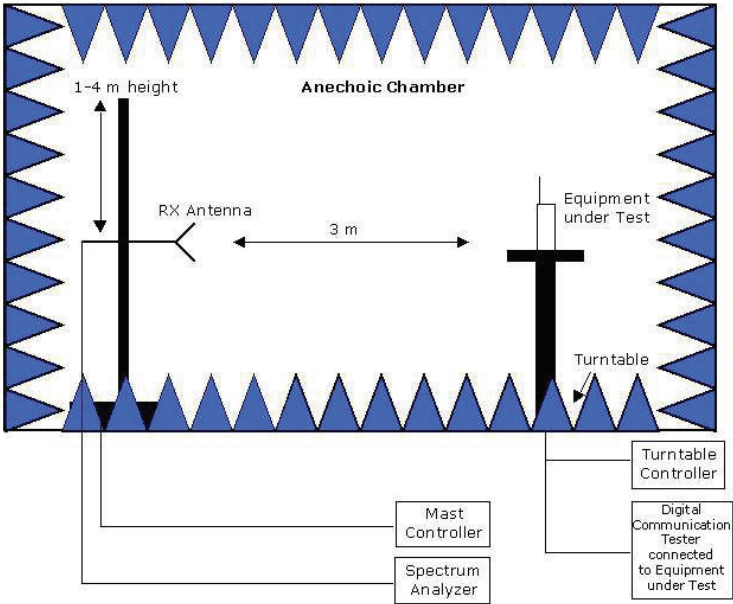


Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Principle set-up for radiated measurements

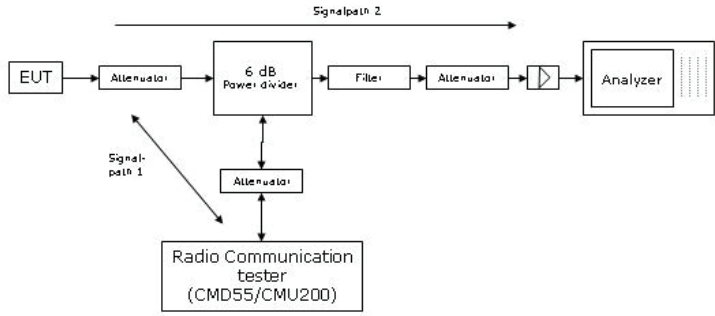

**Remark:** Depending on the frequency range suitable attenuators and/or filters and/or amplifiers are used.

Principle set-up for conducted measurements under nominal conditions

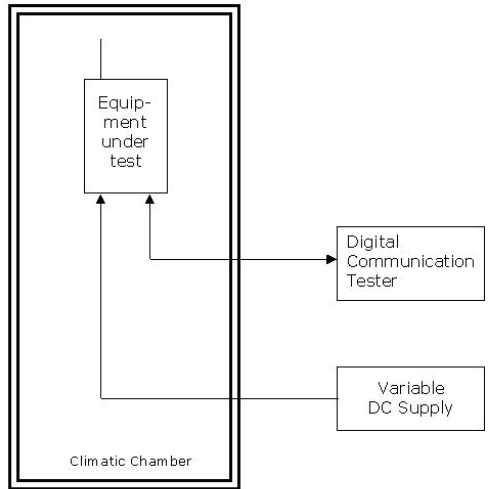

Principle set-up for tests under extreme test conditions



## 6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	3
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	4
2.1	General OUT Description	4
2.2	Detailed Description of OUT Samples	5
2.3	OUT Features	7
2.4	Auxiliary Equipment	7
2.5	Setups used for Testing	8
3	Results	9
3.1	General	9
3.2	List of Test Specification	9
3.3	Summary	10
3.4	Detailed Results	15
3.4.1	90.1 Maximum Channel Power, §2.1046, §90.205&90.635	15
3.4.2	90.2 Occupied Bandwidth, §2.1049, §90.209	19
3.4.3	90.3 Band Edges Compliance, §2.1051, §90691	31
3.4.4	90.4 Spurious Emissions at Antenna Terminal, §2.1051, §90.210&§90.669	40
3.4.5	90.5 Radiated Spurious Emission, §2.1055, §90.210	43
3.4.6	90.6 Frequency Stability, §2.1055, §90.213	45
4	Test Equipment Details	49
4.1	List of Used Test Equipment	49
5	Annex	55
5.1	Additional Information for Report	55
6	Index	64