


white label with black lettering

A

B

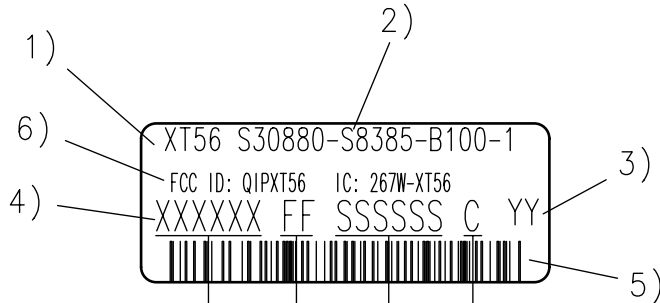

Barcode:
Type 128, table C und B

Characteristic:
IMEI-no. has 15 digits
Digit 1-14 is generated
as Barcode with table C.
Digit 15 is printed with
table B

CHECK DIGIT
15. digit

current serial number (6 digits)
assigned by PICS

Final Assembly Code: XX
FAC

Type Approval Code
TAC

C

D

Label: Z30880-Z9999-Z72-*

Ink ribbon: TTR-Bad Ricoh 110-A

Font: Titel blocks concentric

E

- 1) Product name: Font D size 4
- 2) Product number: Font D size 4
- 3) Code of date: Font D size 4 according to IEC 62
- 4) IMEI-No. (plain writing) Font D size 4
- 5) Barcode IMEI-no. Code 128 size:1 ratio:2 height:3mm
- 6) Canada and FCC Font A2.2 high 1.2mm

ALS BETRIEBSGEHEIMNIS ANVERTRAUT. ALLE RECHTE VORBEHALTEN
 PROPRIETARY DATA, COMPANY CONFIDENTIAL. ALL RIGHTS RESERVED

				Datum	17.12.04	<h1>XT56 cellular engine</h1> <h2>Zulassung / IMEI</h2>
				Bearb.	Boelcke	
				Gepr.		
				Norm.		
				ICM WM RD HW3		
				Siemens AG		
1	20968	17.12.04	Boe	DIS 130592		Blatt 1-
Zust.	Mitteilung	Datum	Name			X BI.