



RF TEST REPORT

Applicant Huawei Technologies Co., Ltd.
FCC ID QISAGRK-L09
Product Tablet
Model AGRK-L09
Report No. R2201A0045-R2
Issue Date January 13, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2020)/ FCC CFR 47 Part 24E (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report	4
1.2. Test facility	4
1.3. Testing Location	4
2. General Description of Equipment under Test	5
2.1. Applicant and Manufacturer Information	5
2.2. General information	5
3. Applied Standards	6
4. Test Configuration	8
5. Test Case Results	10
5.1. RF Power Output and Effective Isotropic Radiated Power	10
5.2. Occupied Bandwidth	16
5.3. Band Edge Compliance	30
5.4. Peak-to-Average Power Ratio (PAPR)	45
5.5. Frequency Stability	48
5.6. Spurious Emissions at Antenna Terminals	54
5.7. Radiates Spurious Emission	60
6. Main Test Instruments	66
ANNEX A: The EUT Appearance	67
ANNEX B: Test Setup Photos	68

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Isotropic Radiated Power	2.1046 24.232(c)	PASS
2	Occupied Bandwidth	2.1049	PASS
3	Band Edge Compliance	2.1051 /24.238(a)	PASS
4	Peak-to-Average Power Ratio	24.232/KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 24.235	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 24.238(a)	PASS
7	Radiates Spurious Emission	2.1053 / 24.238(a)	PASS
Date of Testing: November 25, 2021 ~ December 8, 2021			
Date of Sample Received: November 22, 2021			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Huawei Technologies Co., Ltd.
Applicant address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Manufacturer	Huawei Technologies Co., Ltd.
Manufacturer address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

2.2. General information

EUT Description	
Model	AGRK-L09
SN	9JVYD21A13200045
Hardware Version	SH1AGS3LM
Software Version	10.1.0.115(SP5C605E2R1P1)
Power Supply	Battery / AC adapter
Antenna Type	Internal Antenna
Antenna Gain	GSM 1900: -0.5dBi
	WCDMA Band II: 1.4dBi
	LTE Band 2: 1.4dBi
Test Mode(s)	GSM1900; WCDMA Band II; LTE Band 2;
Test Modulation	(GSM/GPRS)GMSK, (EGPRS) GMSK/ 8PSK; (WCDMA) BPSK, QPSK,16QAM; (LTE)QPSK,16QAM
GPRS Multislot Class	12
EGPRS Multislot Class	12
HSDPA UE Release	R9
HSUPA UE Release	R9
LTE Category	5
Maximum E.I.R.P	GSM 1900: 28.74dBm
	WCDMA Band II: 25.04dBm
	LTE Band 2: 24.76dBm
Rated Power Supply Voltage	3.82V
Operating Voltage	Minimum: 3.6V Maximum: 4.4V
Operating Temperature	Lowest: 0°C Highest: +35°C
Testing Temperature	Lowest: -20°C Highest: +55°C



Operating Frequency Range(s)		Band	Tx (MHz)	Rx (MHz)
		GSM1900	1850 ~ 1910	1930 ~ 1990
		WCDMA Band II	1850 ~ 1910	1930 ~ 1990
		LTE Band 2	1850 ~ 1910	1930 ~ 1990
EUT Accessory				
Accessory	Model	Manufacture		No.
Adapter	HW-050100U01	HuaweiTechnologies Co., Ltd. (Manufacturer: Huizhou BYD Electronic Co., Ltd.)		1
		HuaweiTechnologies Co., Ltd. (Manufacturer: Shenzhen HUNTKEY Electric Co., Ltd.)		2
Battery	HB2899C0ECW-C	SCUD (Fujian) Electronics Co.,Ltd		1
USB Cable	WA0072	NINGBO BROAD TELECOMMUNICATION CO.,LTD		1
	L99UC154-CS-H	Luxshare Precision Industry Co.,LTD		2
	CUDU01B-HC450-EH	FOXCONN INTERCONNECT TECHNOLOGY LIMITED		3
<p>Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.</p> <p>2. There are more than one Adapter and USB Cable, each one should be applied throughout the compliance test respectively, however, only the worst case (Adapter 2 and USB Cable 3) will be recorded in this report.</p>				



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 24E (2020)

FCC CFR47 Part 2 (2020)

Reference standard:

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position GSM/WCDMA for (Z axis, vertical polarization) ; LTE for (X, Y axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 1900	WCDMA Band II
RF Power Output and Effective Isotropic Radiated Power	GSM GPRS EGPRS	RMC/ AMR HSDPA/HSUPA DC-HSDPA/HSPA+
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC



Test modes are chosen to be reported as the worst case configuration below for LTE Band 2:

Test items	Bandwidth (MHz)						Modulation		RB			Test Channel		
	1.4	3	5	10	15	20	QPSK	16QAM/ 64QAM	1	50%	100%	L	M	H
RF Power Output and Effective Isotropic Radiated Power	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	O	O	-	-	-	O	-
Spurious Emissions at Antenna Terminals	O	O	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	O	-	-	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

5. Test Case Results

5.1.RF Power Output and Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where:dBd refers to gain relative to an ideal dipole.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB.)}$$

Test Setup

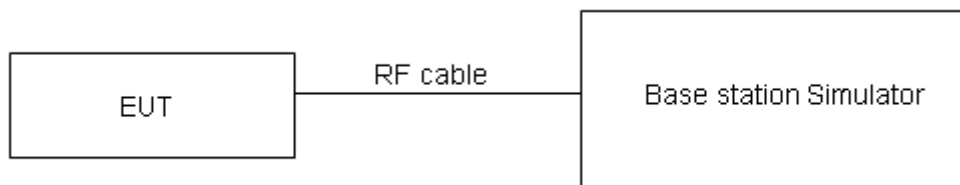

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Limit	$\leq 2 \text{ W}$ (33 dBm)
-------	-----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4 \text{ dB}$ for RF power output, $k = 2$, $U = 1.19 \text{ dB}$ for EIRP.

Test Results

GSM 1900		Maximum Output Power (dBm)			EIRP (dBm)		
		Channel 512	Channel 661	Channel 810	Channel 512	Channel 661	Channel 810
		1850.2 (MHz)	1880 (MHz)	1909.8 (MHz)	1850.2 (MHz)	1880 (MHz)	1909.8 (MHz)
GSM(GMSK)	Results	29.23	29.15	28.96	28.73	28.65	28.46
GPRS (GMSK)	1TXslot	29.24	29.12	29.04	28.74	28.62	28.54
	2TXslots	26.78	26.41	26.67	26.28	25.91	26.17
	3TXslots	25.96	25.72	25.53	25.46	25.22	25.03
	4TXslots	23.94	23.78	23.66	23.44	23.28	23.16
EGPRS (8PSK)	1TXslot	25.71	25.43	25.34	25.21	24.93	24.84
	2TXslots	22.68	22.37	22.35	22.18	21.87	21.85
	3TXslots	20.92	20.67	20.57	20.42	20.17	20.07
	4TXslots	19.42	19.28	19.60	18.92	18.78	19.10

WCDMA Band II		Maximum Output Power (dBm)			EIRP (dBm)		
		Channel 9262	Channel 9400	Channel 9538	Channel 9262	Channel 9400	Channel 9538
		1852.4 (MHz)	1880 (MHz)	1907.6 (MHz)	1852.4 (MHz)	1880 (MHz)	1907.6 (MHz)
RMC		23.43	23.54	23.48	24.83	24.94	24.88
AMR		23.37	23.50	23.64	24.77	24.90	25.04
HSDPA	Sub - Test 1	22.89	22.96	22.94	24.29	24.36	24.34
	Sub - Test 2	21.99	21.88	22.04	23.39	23.28	23.44
	Sub - Test 3	21.59	21.80	21.70	22.99	23.20	23.10
	Sub - Test 4	21.47	21.60	21.58	22.87	23.00	22.98
HSUPA	Sub - Test 1	20.31	20.34	20.32	21.71	21.74	21.72
	Sub - Test 2	19.09	19.24	19.34	20.49	20.64	20.74
	Sub - Test 3	19.87	19.86	19.72	21.27	21.26	21.12
	Sub - Test 4	18.99	18.92	19.08	20.39	20.32	20.48
	Sub - Test 5	21.39	21.68	21.58	22.79	23.08	22.98
DC-HSDPA	Sub - Test 1	23.01	22.90	22.88	24.41	24.30	24.28
	Sub - Test 2	21.91	22.08	21.98	23.31	23.48	23.38
	Sub - Test 3	21.37	21.72	21.66	22.77	23.12	23.06
	Sub - Test 4	21.37	21.38	21.46	22.77	22.78	22.86
HSPA+	16QAM	20.92	21.05	20.99	22.32	22.45	22.39



LTE Band 2				Maximum Output Power(dBm)			EIRP (dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				18607/1850.7	18900/1880	19193/1909.3	18607/1850.7	18900/1880	19193/1909.3
1.4MHz	QPSK	1	0	23.22	23.27	23.21	24.62	24.67	24.61
		1	2	23.21	23.22	23.16	24.61	24.62	24.56
		1	5	23.12	23.18	23.15	24.52	24.58	24.55
		3	0	23.26	23.30	23.26	24.66	24.70	24.66
		3	2	23.25	23.36	23.29	24.65	24.76	24.69
		3	3	23.17	23.29	23.32	24.57	24.69	24.72
		6	0	22.23	22.35	22.34	23.63	23.75	23.74
	16QAM	1	0	22.34	22.37	22.42	23.74	23.77	23.82
		1	2	22.32	22.26	22.37	23.72	23.66	23.77
		1	5	22.34	22.28	22.43	23.74	23.68	23.83
		3	0	22.18	22.11	22.25	23.58	23.51	23.65
		3	2	22.13	22.04	22.25	23.53	23.44	23.65
		3	3	22.04	21.99	22.14	23.44	23.39	23.54
		6	0	21.14	21.09	21.28	22.54	22.49	22.68
	64QAM	1	0	22.25	22.17	22.37	23.65	23.57	23.77
		1	2	22.22	22.16	22.29	23.62	23.56	23.69
		1	5	22.01	22.00	22.14	23.41	23.40	23.54
		3	0	22.19	22.12	22.26	23.59	23.52	23.66
		3	2	22.26	22.17	21.98	23.66	23.57	23.38
		3	3	22.05	22.00	22.15	23.45	23.40	23.55
		6	0	21.22	21.17	21.36	22.62	22.57	22.76
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				18615/1851.5	18900/1880	19185/1908.5	18615/1851.5	18900/1880	19185/1908.5
3MHz	QPSK	1	0	23.24	23.31	23.24	24.64	24.71	24.64
		1	7	23.19	23.25	23.20	24.59	24.65	24.60
		1	14	23.15	23.23	23.19	24.55	24.63	24.59
		8	0	22.36	22.42	22.39	23.76	23.82	23.79
		8	4	22.37	22.46	22.41	23.77	23.86	23.81
		8	7	22.27	22.40	22.42	23.67	23.80	23.82
		15	0	22.23	22.39	22.37	23.63	23.79	23.77
	16QAM	1	0	22.37	22.39	22.45	23.77	23.79	23.85



		1	7	22.35	22.26	22.41	23.75	23.66	23.81
		1	14	22.36	22.32	22.46	23.76	23.72	23.86
		8	0	21.29	21.24	21.37	22.69	22.64	22.77
		8	4	21.24	21.17	21.37	22.64	22.57	22.77
		8	7	21.14	21.11	21.27	22.54	22.51	22.67
		15	0	21.17	21.13	21.31	22.57	22.53	22.71
	64QAM	1	0	22.28	22.19	22.40	23.68	23.59	23.80
		1	7	22.25	22.16	22.31	23.65	23.56	23.71
		1	14	22.03	21.99	22.17	23.43	23.39	23.57
		8	0	21.30	21.25	21.38	22.70	22.65	22.78
		8	4	21.37	21.30	21.10	22.77	22.70	22.50
		8	7	21.15	21.12	21.28	22.55	22.52	22.68
		15	0	21.25	21.21	21.39	22.65	22.61	22.79
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				18625/ 1852.5	18900/ 1880	19175/ 1907.5	18625/ 1852.5	18900/ 1880	19175/ 1907.5
5MHz	QPSK	1	0	23.21	23.29	23.20	24.61	24.69	24.60
		1	13	23.17	23.21	23.17	24.57	24.61	24.57
		1	24	23.12	23.18	23.15	24.52	24.58	24.55
		12	0	22.33	22.37	22.35	23.73	23.77	23.75
		12	6	22.35	22.42	22.36	23.75	23.82	23.76
		12	13	22.25	22.38	22.38	23.65	23.78	23.78
		25	0	22.23	22.38	22.35	23.63	23.78	23.75
	16QAM	1	0	22.34	22.35	22.42	23.74	23.75	23.82
		1	13	22.32	22.24	22.38	23.72	23.64	23.78
		1	24	22.33	22.30	22.42	23.73	23.70	23.82
		12	0	21.27	21.20	21.34	22.67	22.60	22.74
		12	6	21.21	21.12	21.33	22.61	22.52	22.73
		12	13	21.11	21.06	21.23	22.51	22.46	22.63
		25	0	21.15	21.09	21.26	22.55	22.49	22.66
	64QAM	1	0	22.25	22.19	22.37	23.65	23.59	23.77
		1	13	22.22	22.18	22.28	23.62	23.58	23.68
		1	24	22.04	21.97	22.13	23.44	23.37	23.53
		12	0	21.28	21.21	21.39	22.68	22.61	22.79
		12	6	21.34	21.25	21.06	22.74	22.65	22.46
		12	13	21.12	21.07	21.24	22.52	22.47	22.64
		25	0	21.23	21.17	21.34	22.63	22.57	22.74



BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				18650/1855	18900/1880	19150/1905	18650/1855	18900/1880	19150/1905
10MHz	QPSK	1	0	23.23	23.30	23.23	24.63	24.70	24.63
		1	25	23.20	23.26	23.21	24.60	24.66	24.61
		1	49	23.14	23.22	23.18	24.54	24.62	24.58
		25	0	22.36	22.42	22.39	23.76	23.82	23.79
		25	13	22.38	22.47	22.40	23.78	23.87	23.80
		25	25	22.27	22.42	22.43	23.67	23.82	23.83
		50	0	22.27	22.40	22.39	23.67	23.80	23.79
	16QAM	1	0	22.36	22.38	22.44	23.76	23.78	23.84
		1	25	22.35	22.28	22.41	23.75	23.68	23.81
		1	49	22.36	22.32	22.45	23.76	23.72	23.85
		25	0	21.30	21.25	21.38	22.70	22.65	22.78
		25	13	21.23	21.16	21.36	22.63	22.56	22.76
		25	25	21.14	21.11	21.27	22.54	22.51	22.67
		50	0	21.18	21.14	21.30	22.58	22.54	22.70
	64QAM	1	0	22.27	22.18	22.39	23.67	23.58	23.79
		1	25	22.25	22.18	22.31	23.65	23.58	23.71
		1	49	22.03	21.99	22.16	23.43	23.39	23.56
		25	0	21.31	21.26	21.39	22.71	22.66	22.79
		25	13	21.36	21.29	21.09	22.76	22.69	22.49
		25	25	21.15	21.12	21.28	22.55	22.52	22.68
		50	0	21.26	21.22	21.38	22.66	22.62	22.78
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
				18675/1857.5	18900/1880	19125/1902.5	18675/1857.5	18900/1880	19125/1902.5
15MHz	QPSK	1	0	23.22	23.26	23.21	24.62	24.66	24.61
		1	38	23.18	23.25	23.18	24.58	24.65	24.58
		1	74	23.11	23.17	23.14	24.51	24.57	24.54
		36	0	22.34	22.38	22.36	23.74	23.78	23.76
		36	18	22.35	22.42	22.36	23.75	23.82	23.76
		36	39	22.24	22.39	22.39	23.64	23.79	23.79
		75	0	22.25	22.36	22.34	23.65	23.76	23.74
	16QAM	1	0	22.31	22.36	22.42	23.71	23.76	23.82
		1	38	22.33	22.25	22.39	23.73	23.65	23.79
		1	74	22.33	22.28	22.42	23.73	23.68	23.82



		36	0	21.27	21.23	21.35	22.67	22.63	22.75	
		36	18	21.20	21.11	21.32	22.60	22.51	22.72	
		36	39	21.12	21.07	21.24	22.52	22.47	22.64	
		75	0	21.15	21.09	21.26	22.55	22.49	22.66	
	64QAM	1	0	22.22	22.16	22.37	23.62	23.56	23.77	
		1	38	22.23	22.15	22.29	23.63	23.55	23.69	
		1	74	22.04	21.98	22.17	23.44	23.38	23.57	
		36	0	21.30	21.28	21.40	22.70	22.68	22.80	
		36	18	21.34	21.26	21.08	22.74	22.66	22.48	
		36	39	21.13	21.08	21.25	22.53	22.48	22.65	
		75	0	21.23	21.17	21.34	22.63	22.57	22.74	
	BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)					
					18700/1860	18900/1880	19100/1900	18700/1860	18900/1880	19100/1900
20MHz	QPSK	1	0	23.19	23.22	23.18	24.59	24.62	24.58	
		1	50	23.17	23.21	23.16	24.57	24.61	24.56	
		1	99	23.09	23.16	23.11	24.49	24.56	24.51	
		50	0	22.31	22.33	22.32	23.71	23.73	23.72	
		50	25	22.33	22.38	22.33	23.73	23.78	23.73	
		50	50	22.21	22.34	22.35	23.61	23.74	23.75	
		100	0	22.22	22.31	22.30	23.62	23.71	23.70	
	16QAM	1	0	22.40	22.32	22.37	23.80	23.72	23.77	
		1	50	22.29	22.23	22.35	23.69	23.63	23.75	
		1	99	22.31	22.25	22.40	23.71	23.65	23.80	
		50	0	21.24	21.19	21.32	22.64	22.59	22.72	
		50	25	21.17	21.09	21.29	22.57	22.49	22.69	
		50	50	21.09	21.02	21.20	22.49	22.42	22.60	
		100	0	21.13	21.05	21.23	22.53	22.45	22.63	
	64QAM	1	0	22.20	22.12	22.32	23.60	23.52	23.72	
		1	50	22.19	22.13	22.25	23.59	23.53	23.65	
		1	99	21.98	21.92	22.11	23.38	23.32	23.51	
		50	0	21.25	21.20	21.33	22.65	22.60	22.73	
		50	25	21.30	21.22	21.02	22.70	22.62	22.42	
		50	50	21.10	21.03	21.21	22.50	22.43	22.61	
		100	0	21.21	21.13	21.31	22.61	22.53	22.71	

5.2.Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to $\geq 1\%EBW$, VBW is set to 3x RBW.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

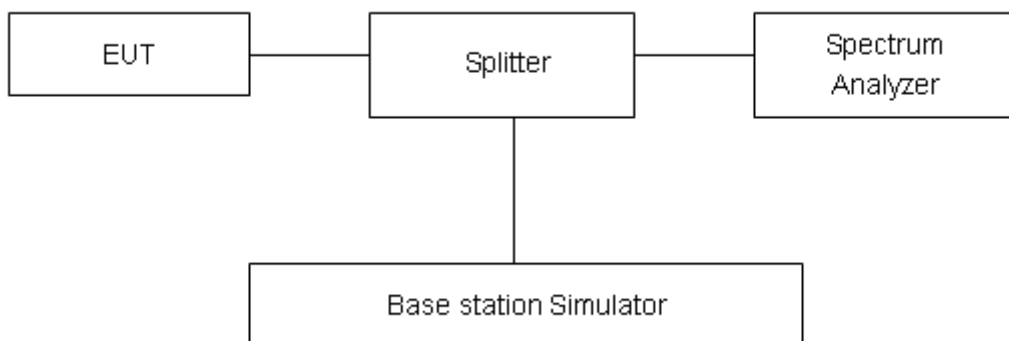

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.








Test Result







Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GSM 1900 (GMSK)	512	1850.2	0.244	0.307
	661	1880.0	0.247	0.309
	810	1909.8	0.248	0.303
GPRS 1900 (GMSK)	512	1850.2	0.251	0.309
	661	1880.0	0.244	0.321
	810	1909.8	0.247	0.310
EGPRS 1900 (8PSK)	512	1850.2	0.253	0.317
	661	1880.0	0.250	0.315
	810	1909.8	0.255	0.309
WCDMA Band II (RMC)	9262	1852.4	4.172	4.689
	9400	1880	4.179	4.684
	9538	1907.6	4.178	4.751

LTE Band 2						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	18607	1850.7	1.096	1.241
			18900	1880.0	1.103	1.243
			19193	1909.3	1.099	1.233
		3	18615	1851.5	2.702	2.956
			18900	1880	2.696	2.950
			19185	1908.5	2.703	2.993
		5	18625	1852.5	4.506	4.975
			18900	1880	4.541	4.948
			19175	1907.5	4.509	4.944
		10	18650	1855	9.000	9.840
			18900	1880	9.013	9.850
			19150	1905	8.994	9.743
		15	18675	1857.5	13.488	14.790
			18900	1880	13.480	14.950
			19125	1902.5	13.457	14.672
		20	18700	1860	17.894	19.466
			18900	1880	17.968	19.818
			19100	1900	17.918	19.452




	16QAM	1.4	18607	1850.7	1.104	1.245
			18900	1880.0	1.097	1.251
			19193	1909.3	1.100	1.255
		3	18615	1851.5	2.700	2.974
			18900	1880	2.707	2.961
			19185	1908.5	2.701	2.983
		5	18625	1852.5	4.511	4.968
			18900	1880	4.529	4.935
			19175	1907.5	4.519	4.943
		10	18650	1855	9.009	9.832
			18900	1880	9.015	9.814
			19150	1905	9.023	9.807
	15	18675	1857.5	13.488	14.685	
		18900	1880	13.455	14.707	
		19125	1902.5	13.430	14.880	
	20	18700	1860	17.933	19.677	
		18900	1880	17.992	19.551	
		19100	1900	17.930	19.474	
	64QAM	1.4	18607	1850.7	1.096	1.238
			18900	1880.0	1.094	1.241
			19193	1909.3	1.093	1.242
		3	18615	1851.5	2.714	2.980
			18900	1880	2.700	2.990
			19185	1908.5	2.705	2.982
5		18625	1852.5	4.524	4.918	
		18900	1880	4.516	4.948	
		19175	1907.5	4.512	4.910	
10		18650	1855	9.000	9.790	
		18900	1880	8.990	9.934	
		19150	1905	9.031	9.847	
15	18675	1857.5	13.501	14.812		
	18900	1880	13.493	14.945		
	19125	1902.5	13.460	14.841		
20	18700	1860	17.962	19.633		
	18900	1880	18.005	19.758		
	19100	1900	17.960	19.537		

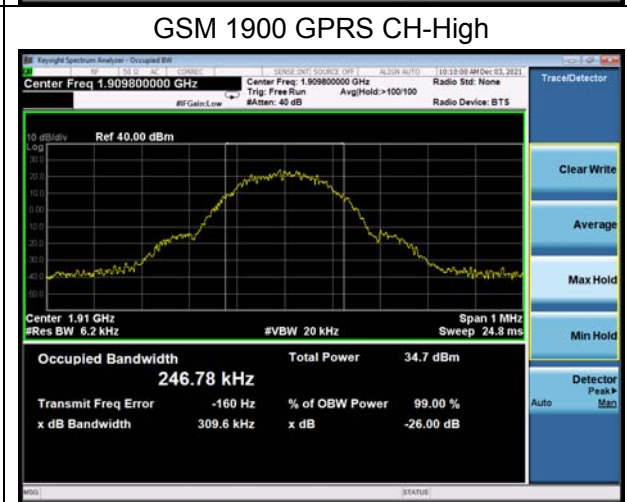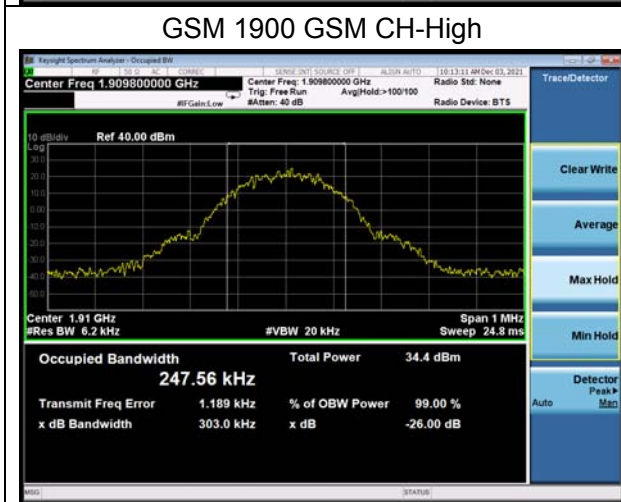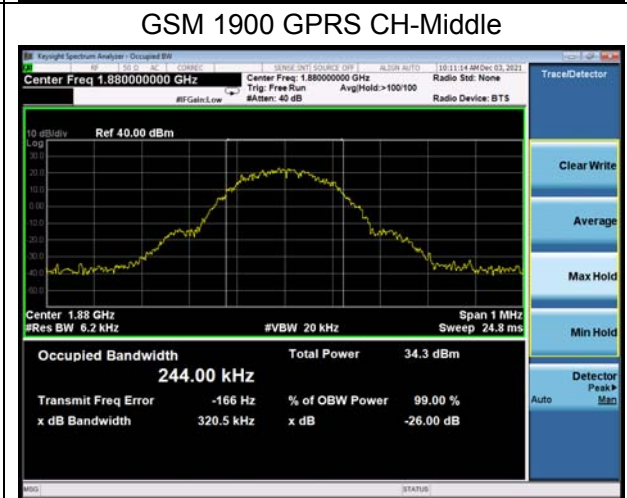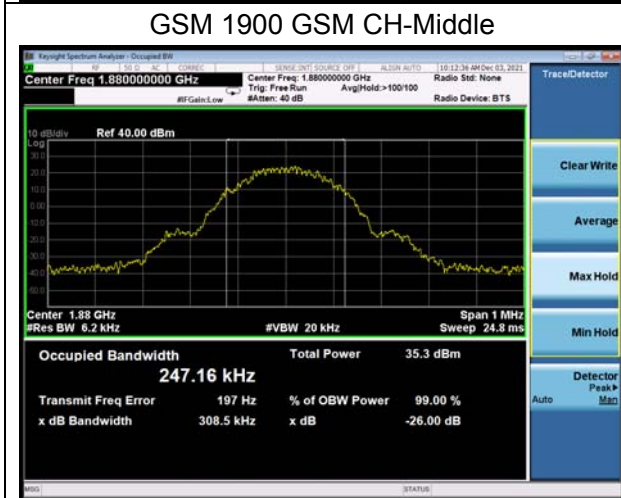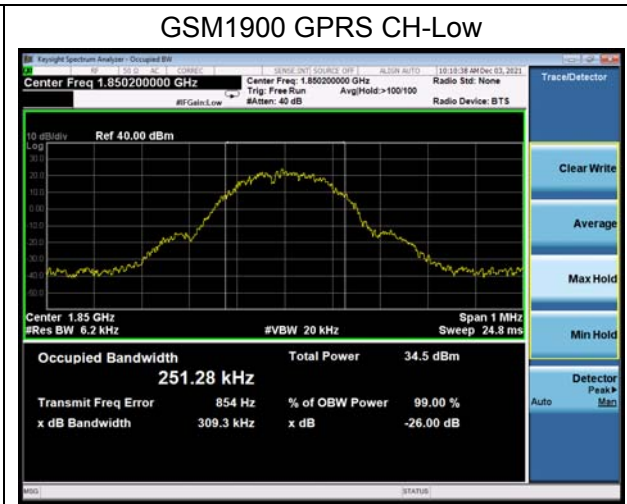

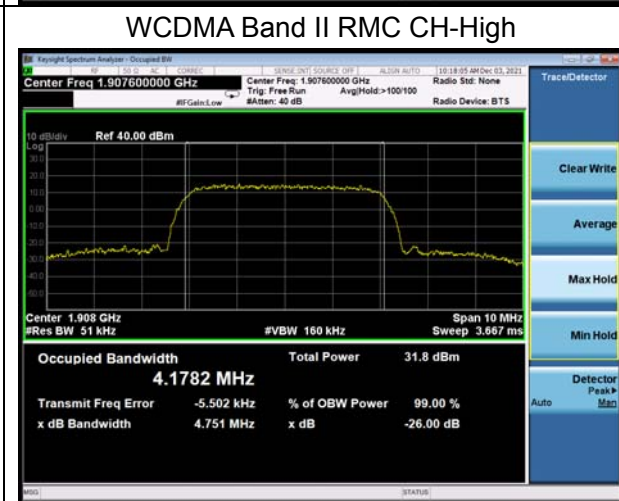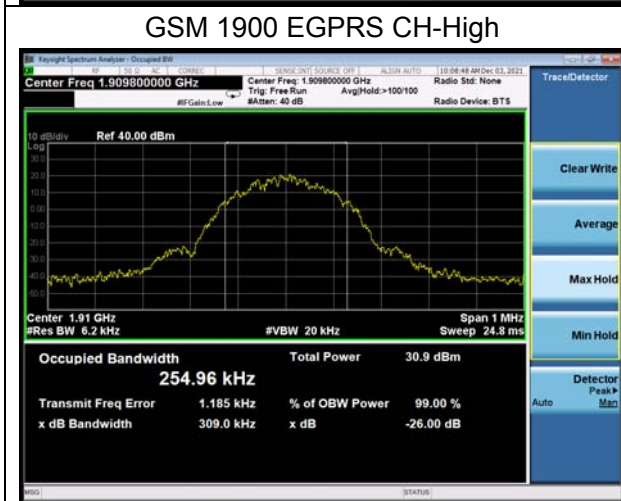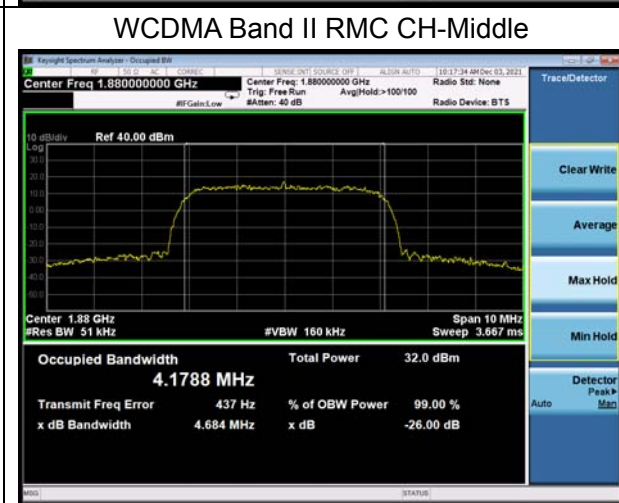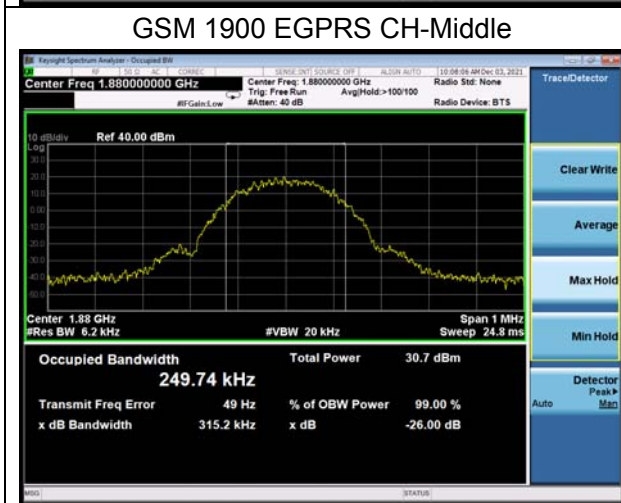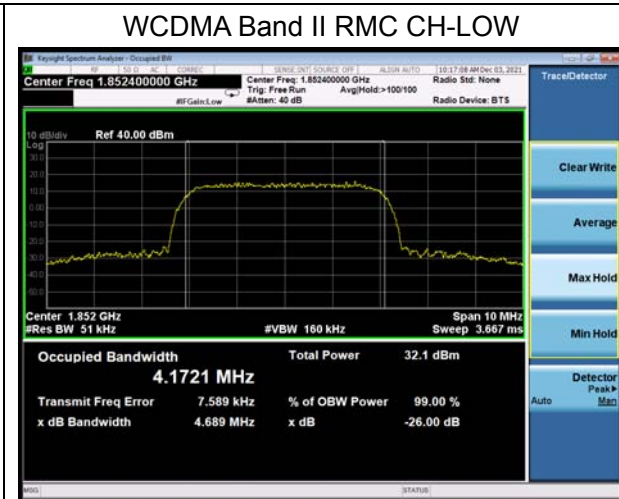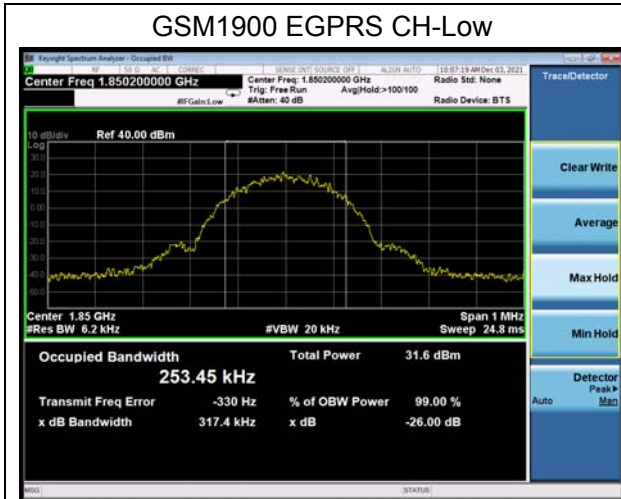





LTE Band 2 1.4MHz QPSK CH-Low

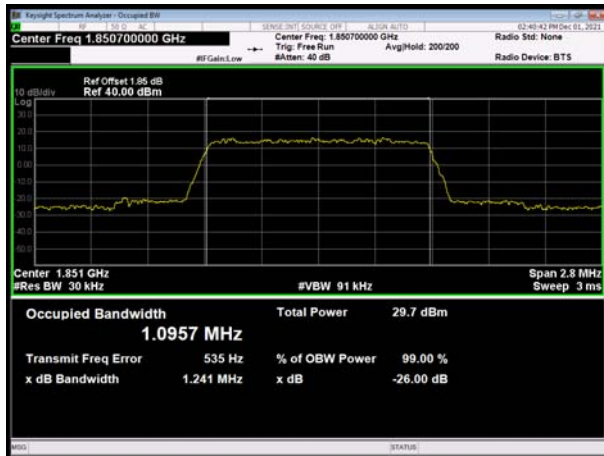

LTE Band 2 3MHz QPSK CH-Low

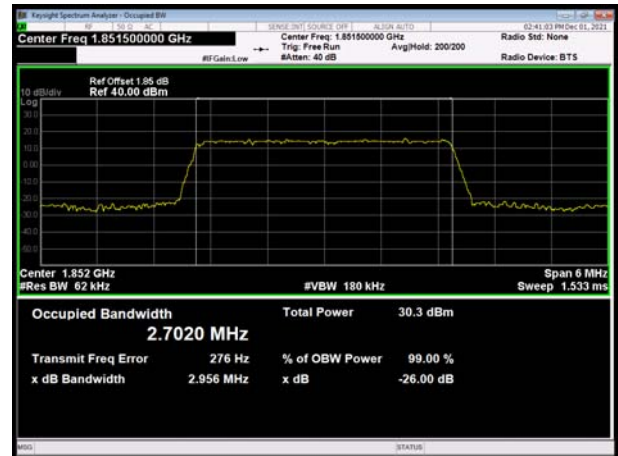


LTE Band 2 1.4MHz QPSK CH-Middle

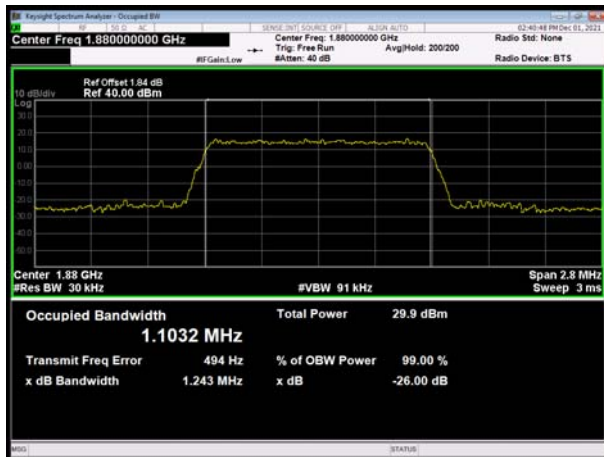


LTE Band 2 3MHz QPSK CH-Middle















LTE Band 2 1.4MHz QPSK CH-High






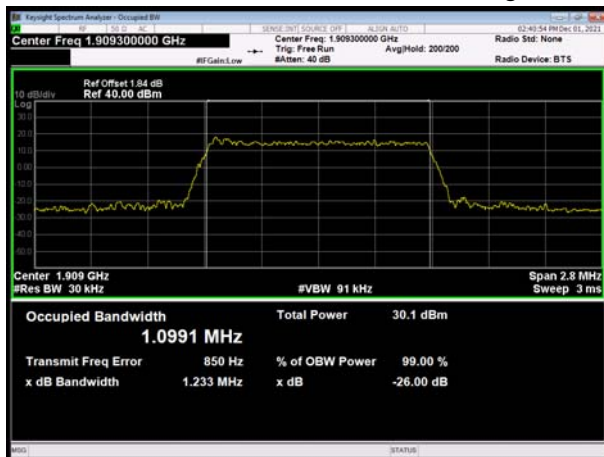








LTE Band 2 3MHz QPSK CH-High

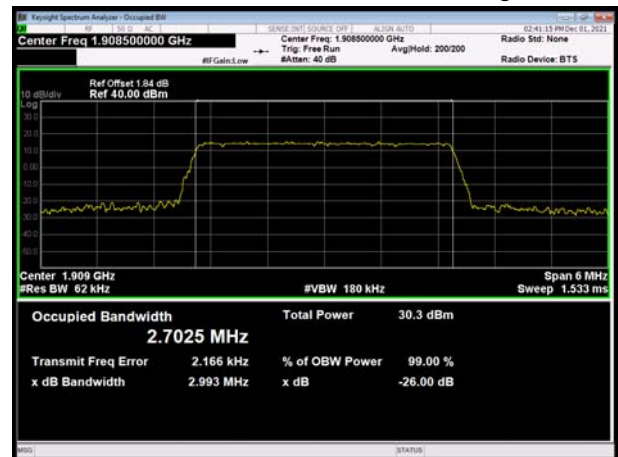

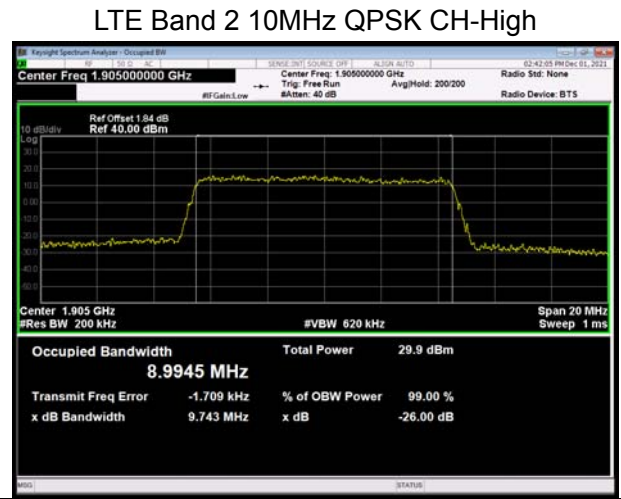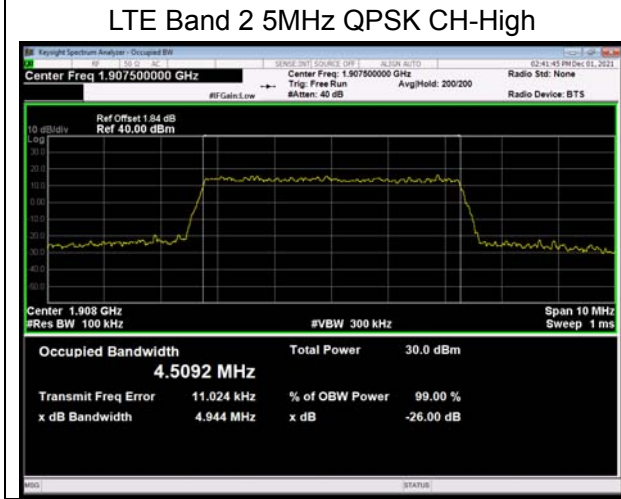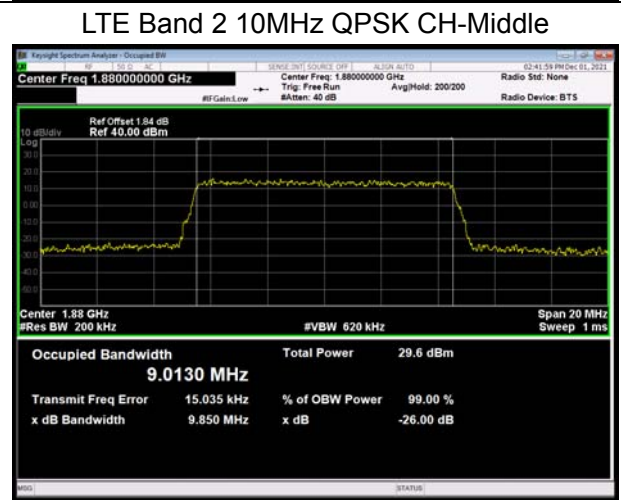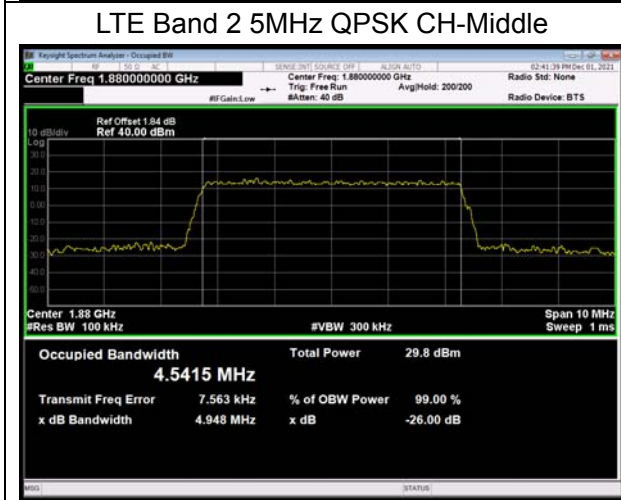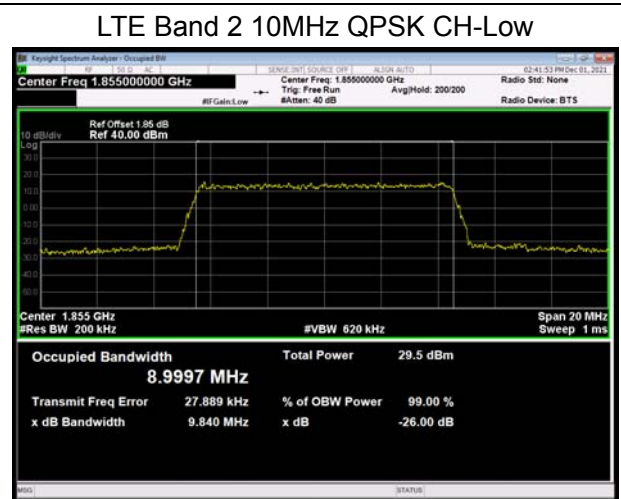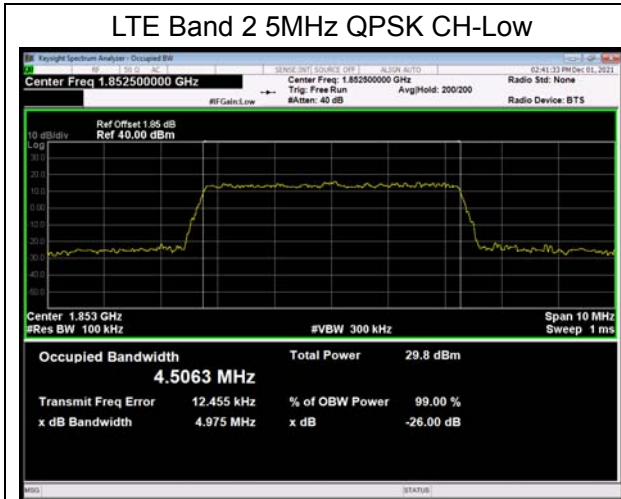

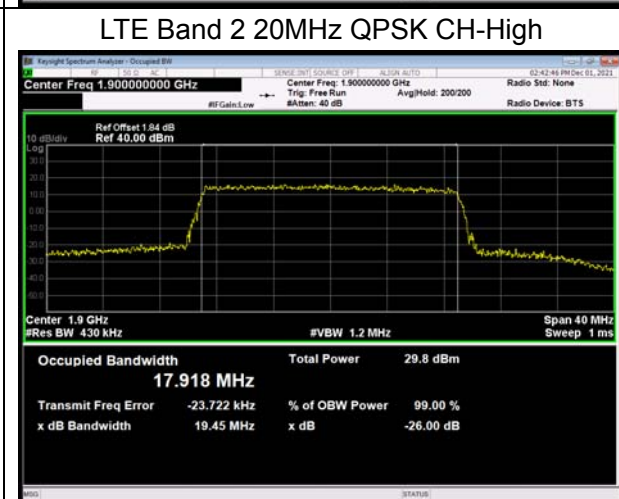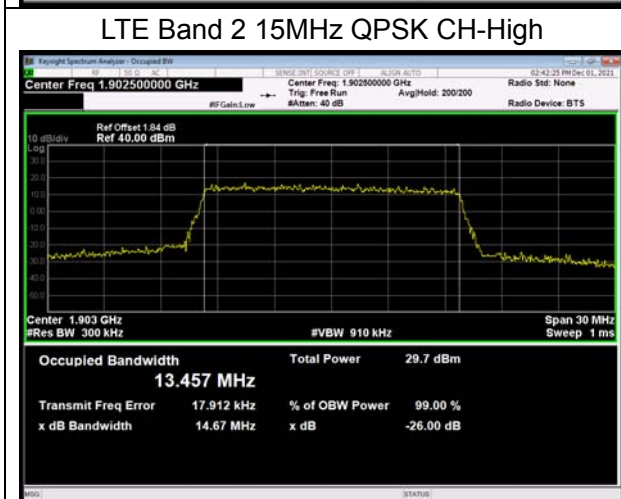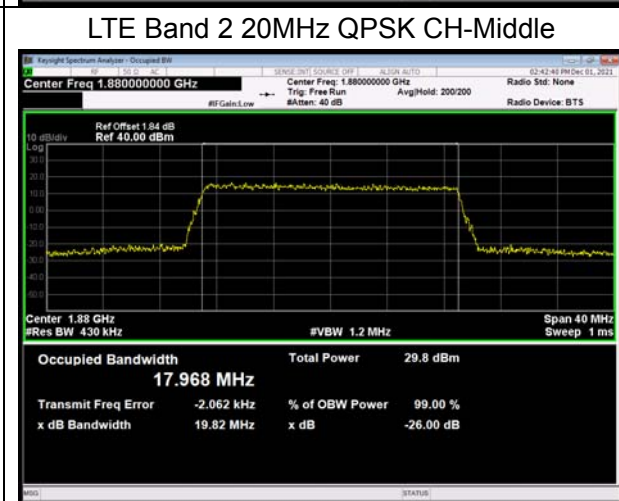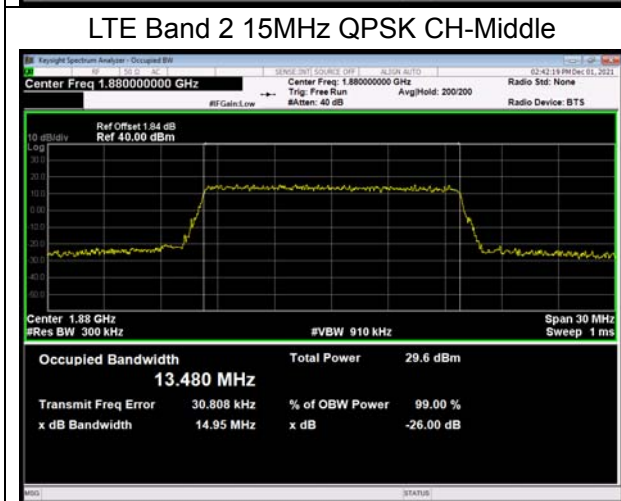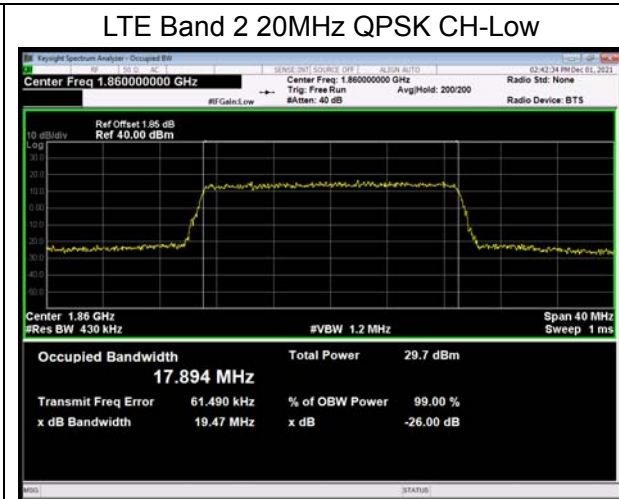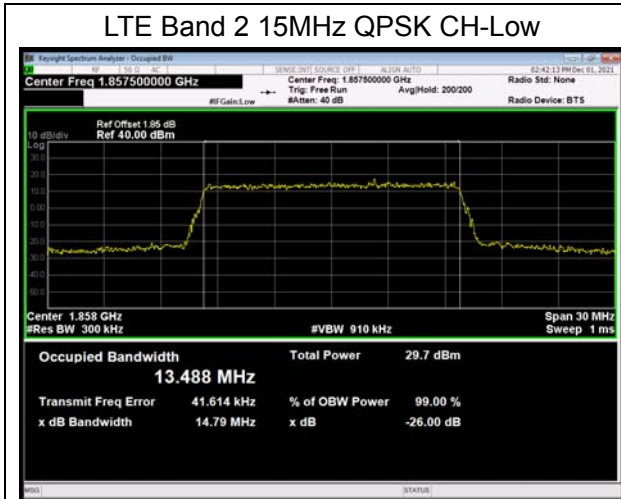


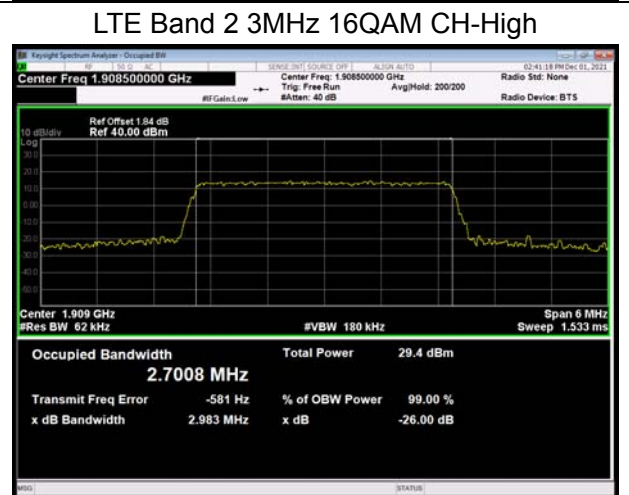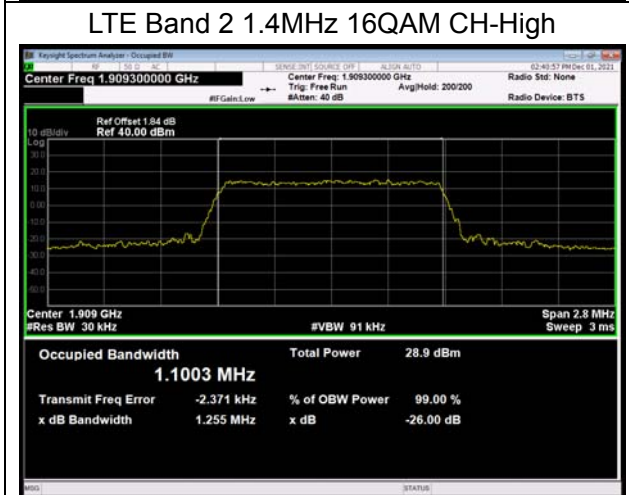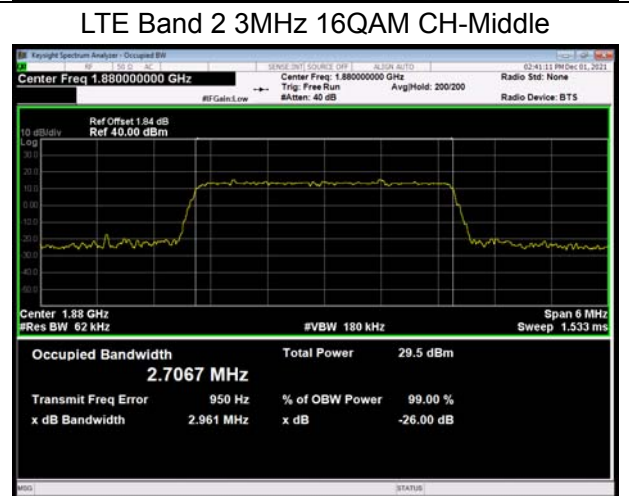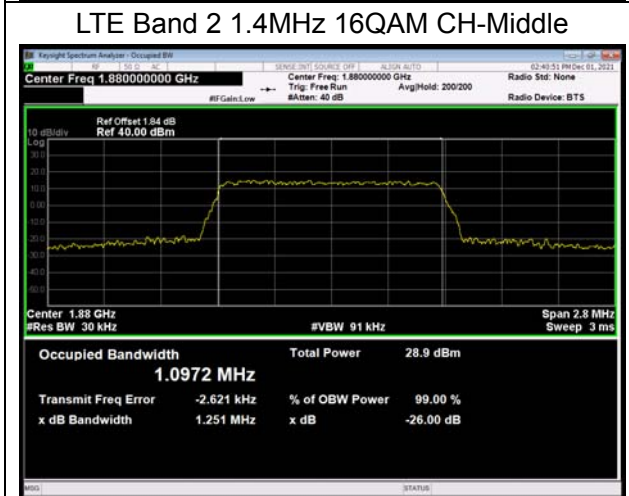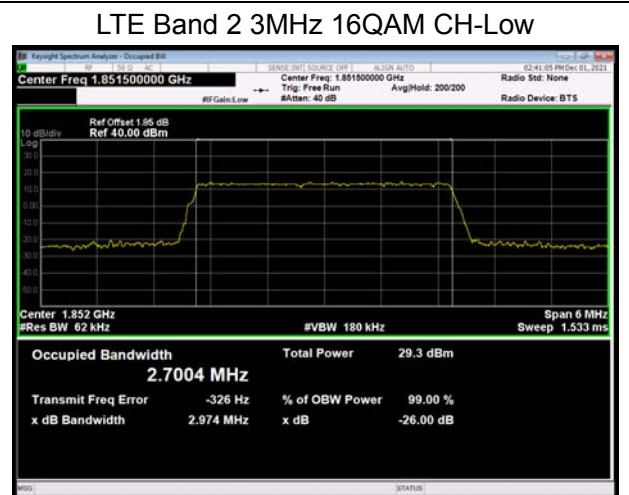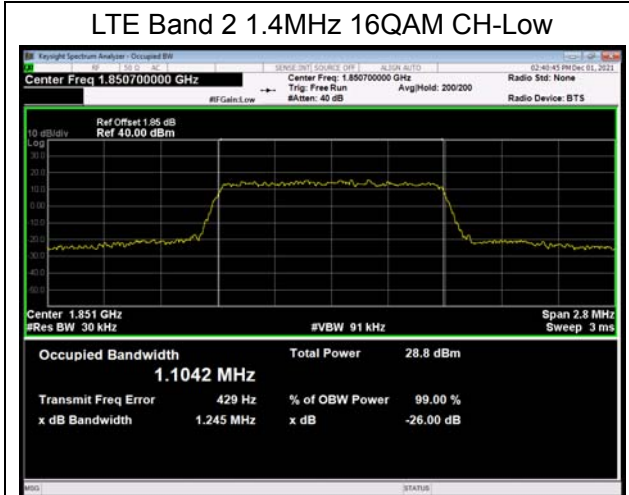

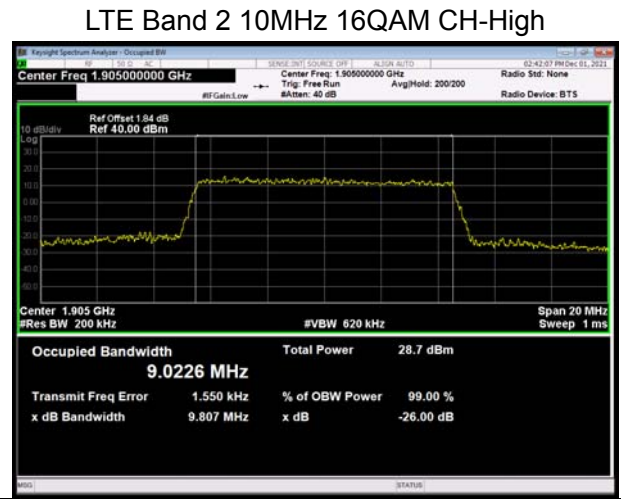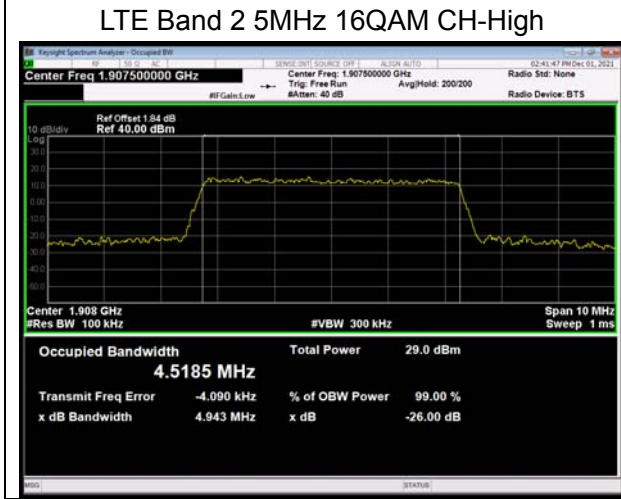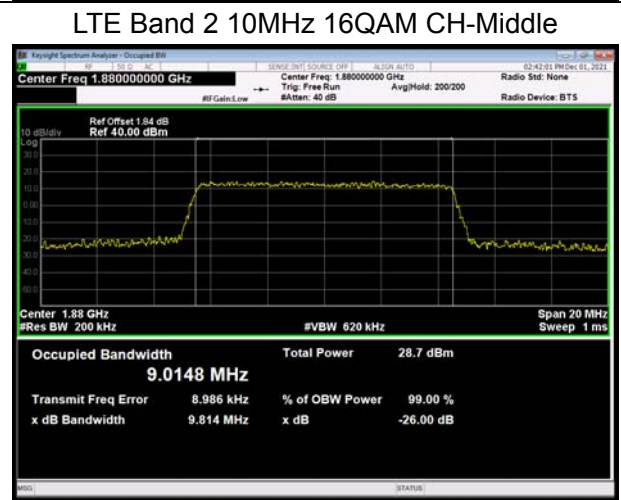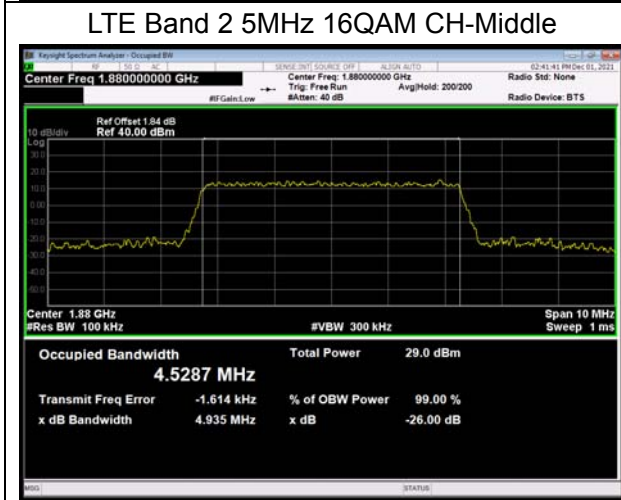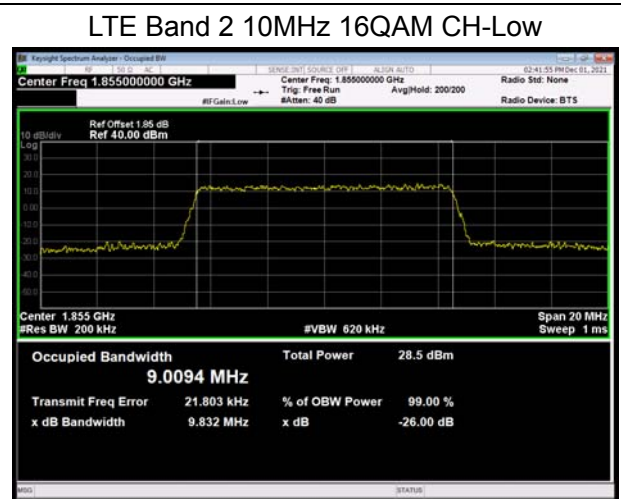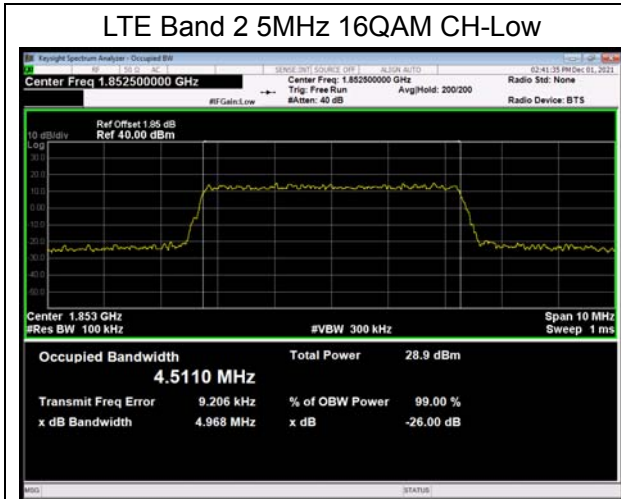





LTE Band 2 15MHz 16QAM CH-Low

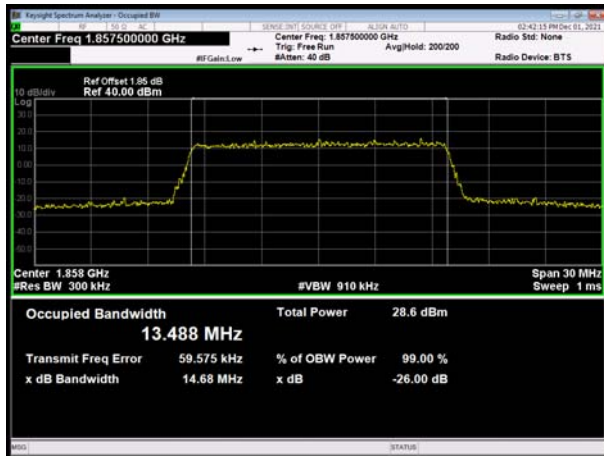


LTE Band 2 20MHz 16QAM CH-Low

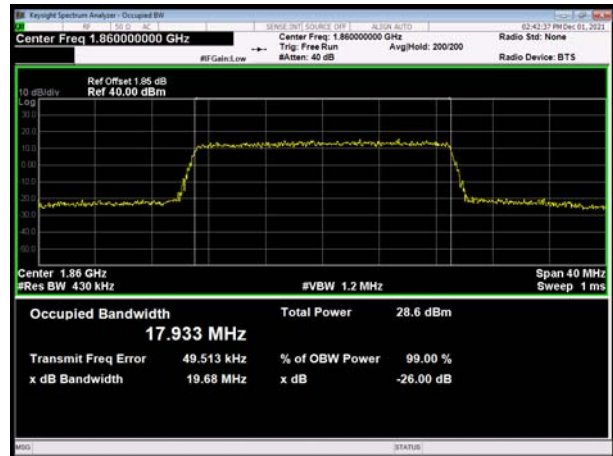


LTE Band 2 15MHz 16QAM CH-Middle

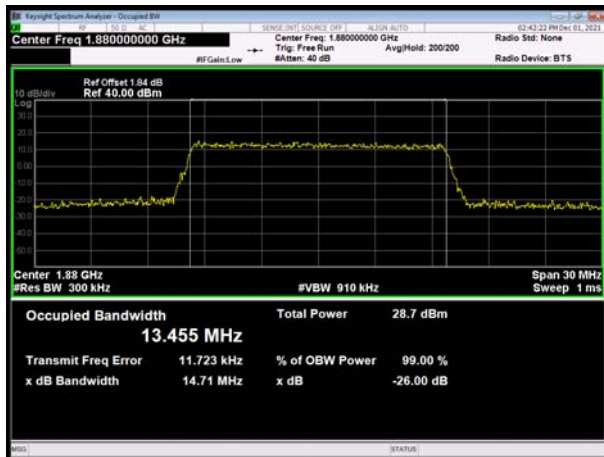


LTE Band 2 20MHz 16QAM CH-Middle






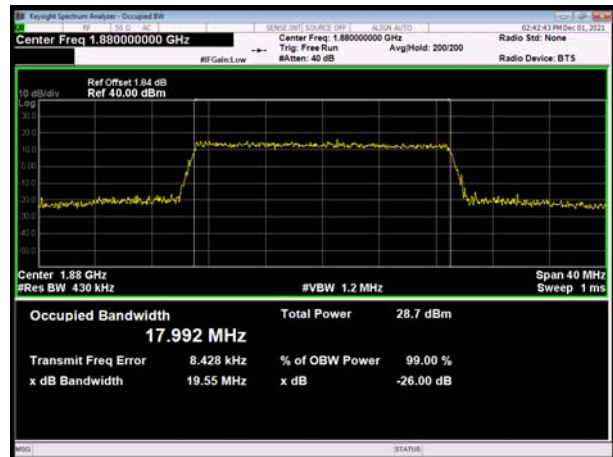








LTE Band 2 15MHz 16QAM CH-High






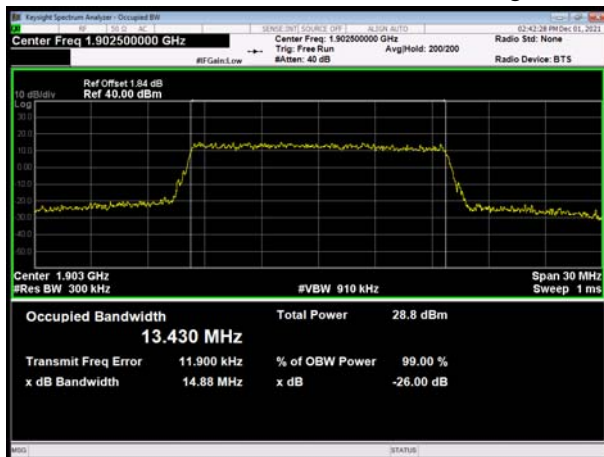


LTE Band 2 20MHz 16QAM CH-High

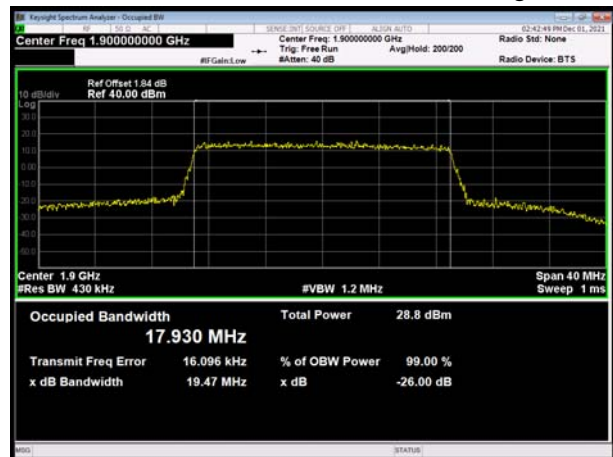

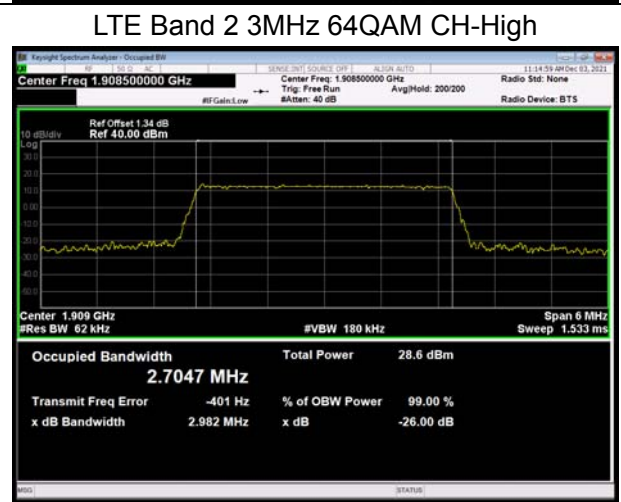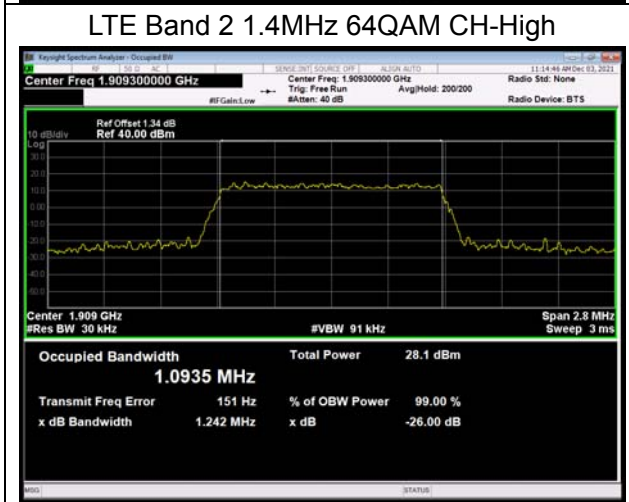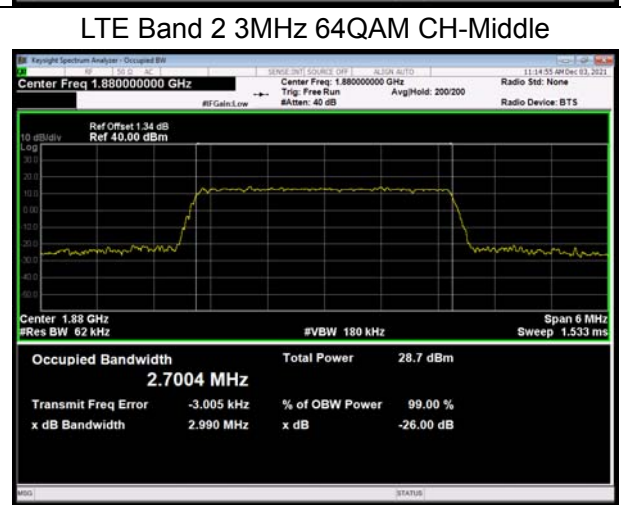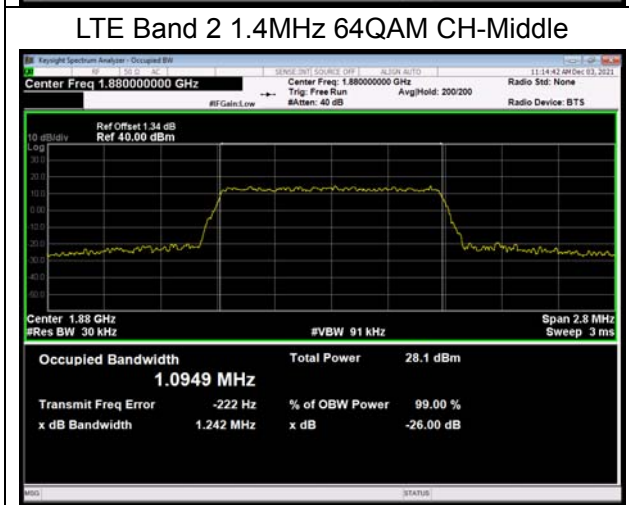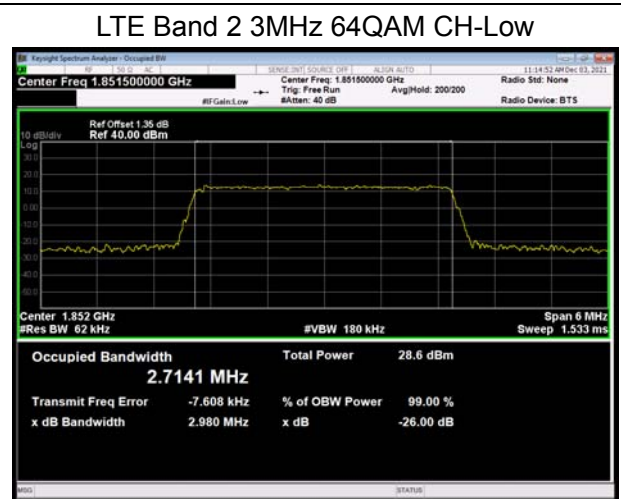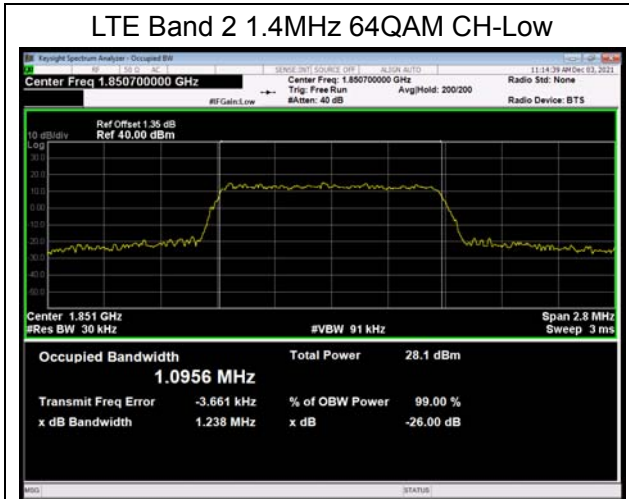

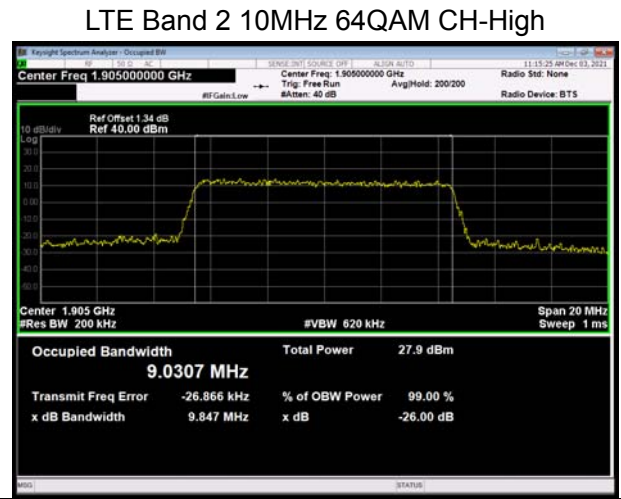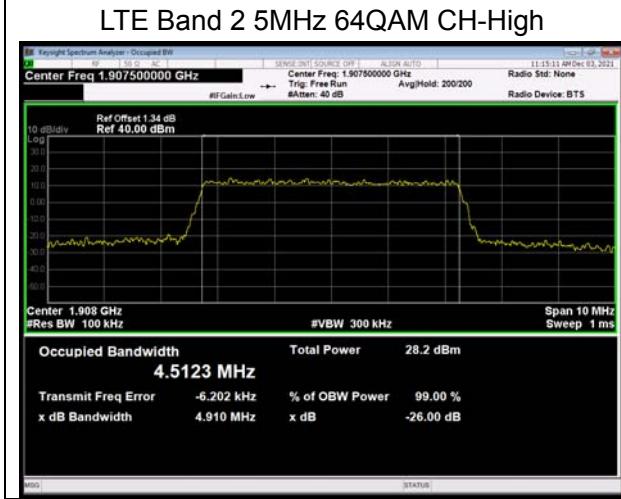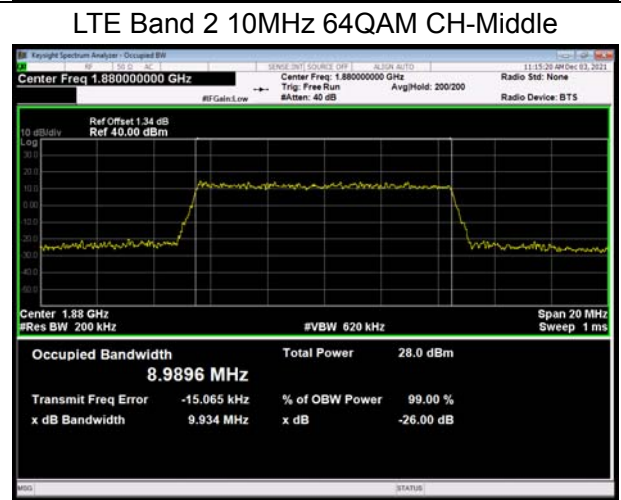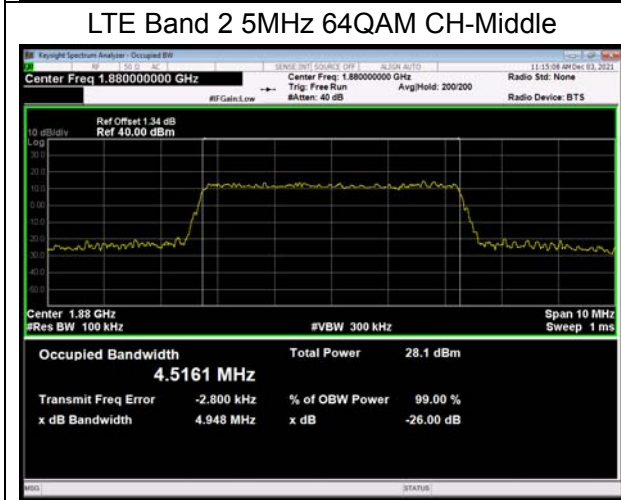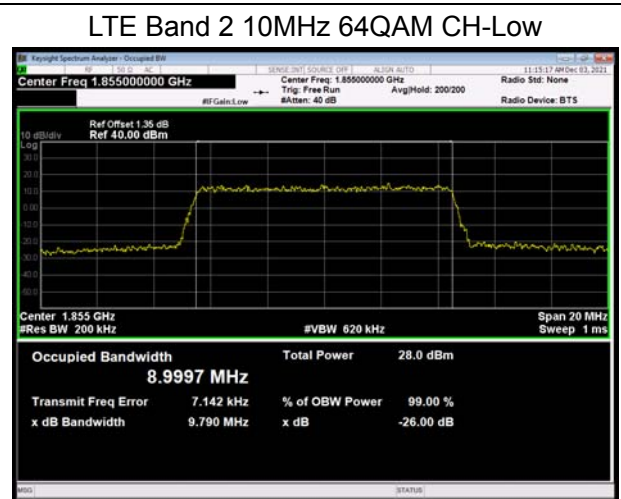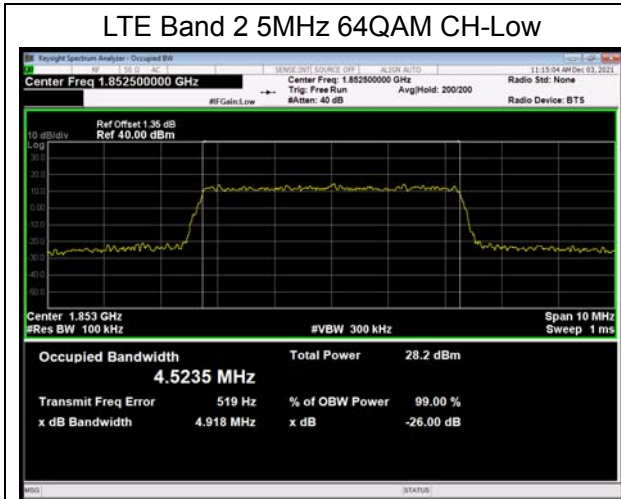

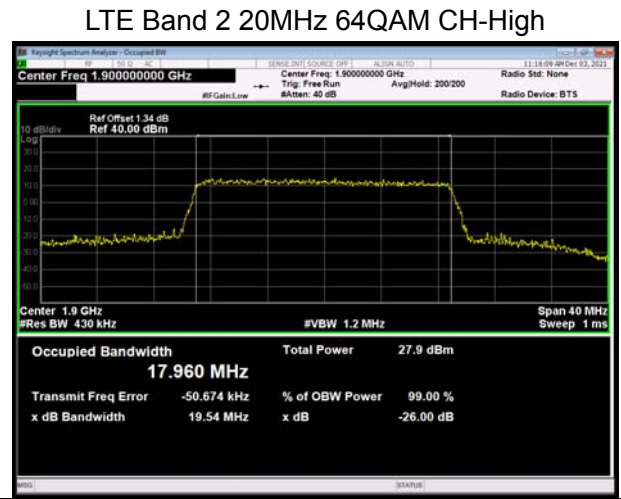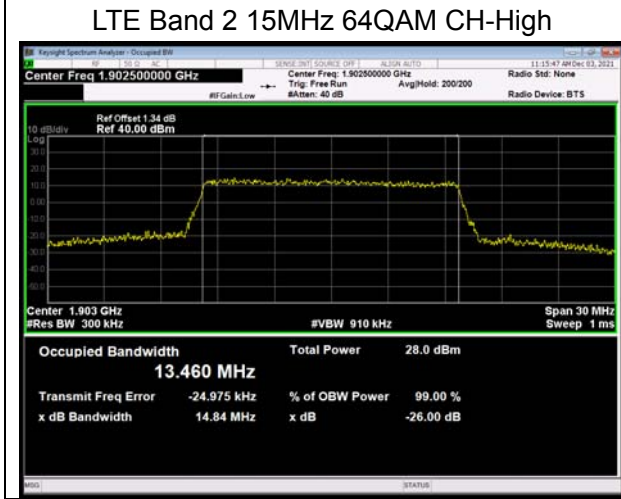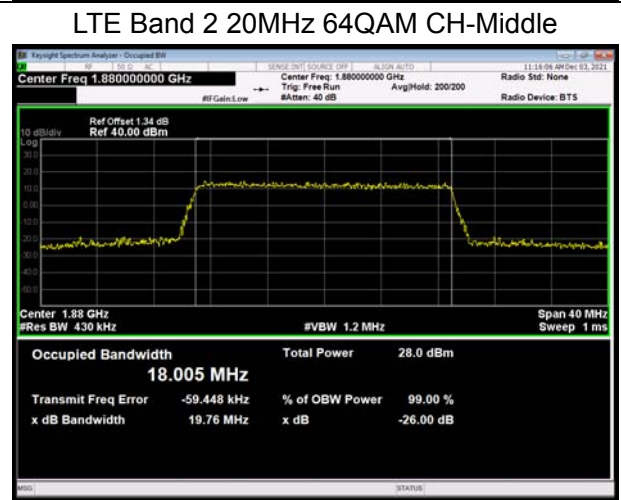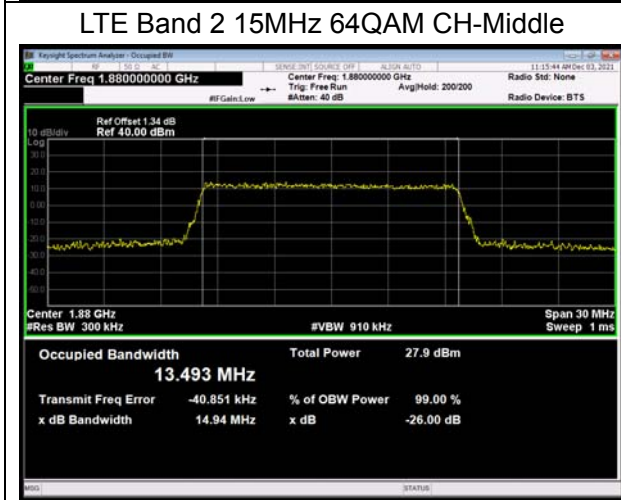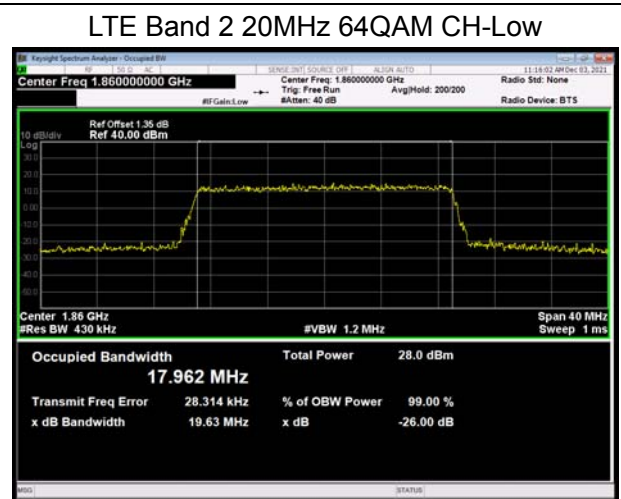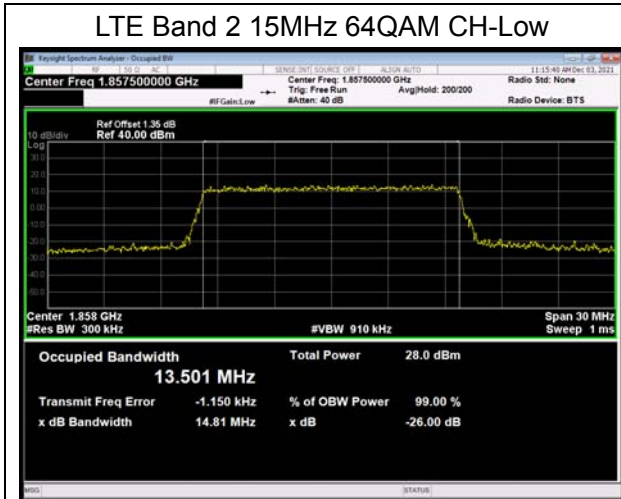

5.3. Band Edge Compliance

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to $\geq 1\%EBW$, VBW is set to 3x RBW.

Spectrum analyzer plots are included on the following pages.

Test Setup

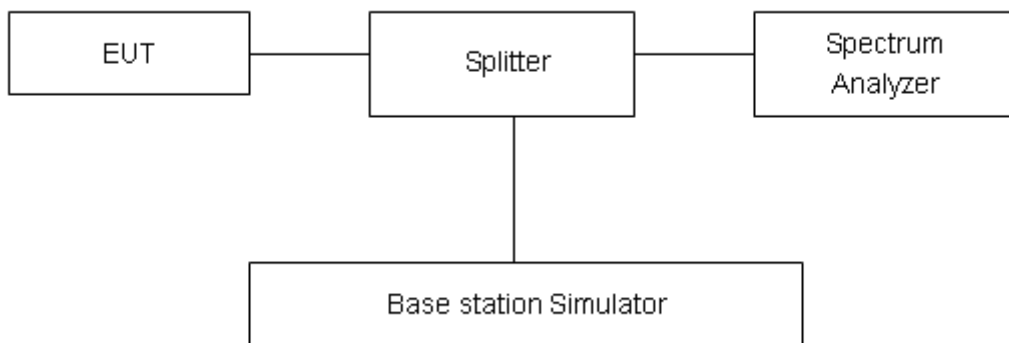

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684dB$.



Test Result:

GSM1900 GSM CH-Low




GSM 1900 GSM CH-High



GSM1900 GPRS CH-Low



GSM 1900 GPRS CH-High

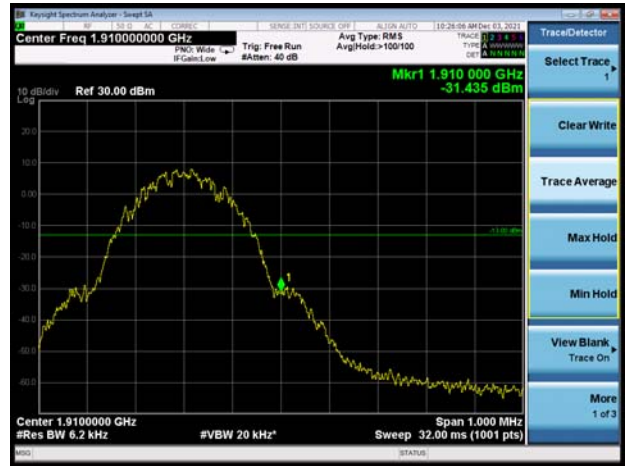

GSM1900 EGPRS CH-Low




GSM 1900 EGPRS CH-High





WCDMA Band II RMC CH-Low

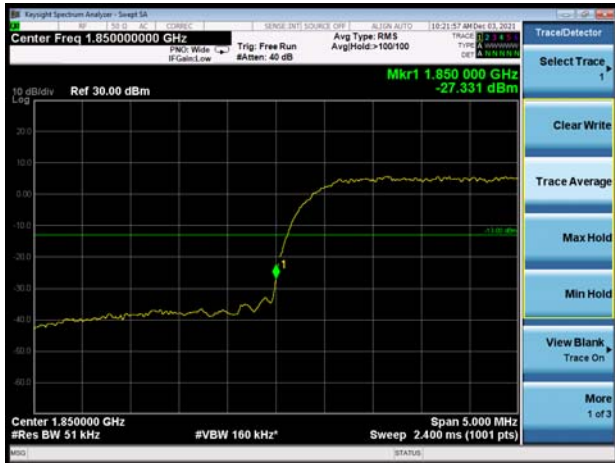

WCDMA Band II RMC CH-High





LTE Band 2 1.4MHz QPSK 1RB CH-Low



LTE Band 2 1.4MHz QPSK 1RB CH-High




LTE Band 2 1.4MHz QPSK 100%RB CH-Low




LTE Band 2 1.4MHz QPSK 100%RB CH-High



LTE Band 2 3MHz QPSK 1RB CH-Low

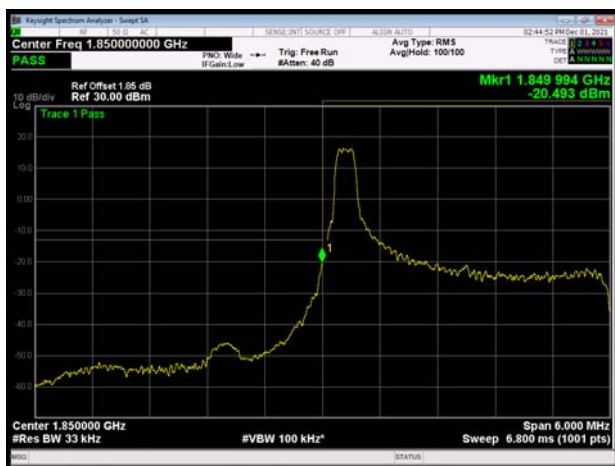

LTE Band 2 3MHz QPSK 1RB CH-High

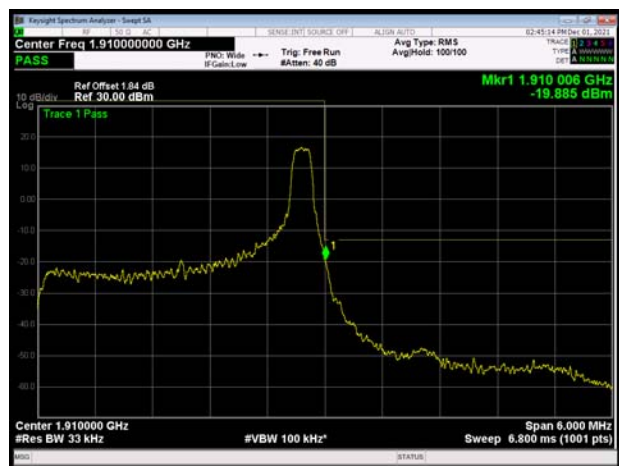





LTE Band 2 3MHz QPSK 100%RB CH-Low




LTE Band 2 3MHz QPSK 100%RB CH-High

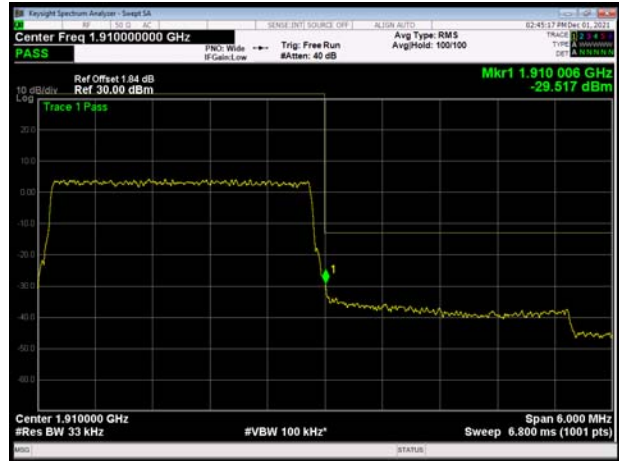


LTE Band 2 5MHz QPSK 1RB CH-Low

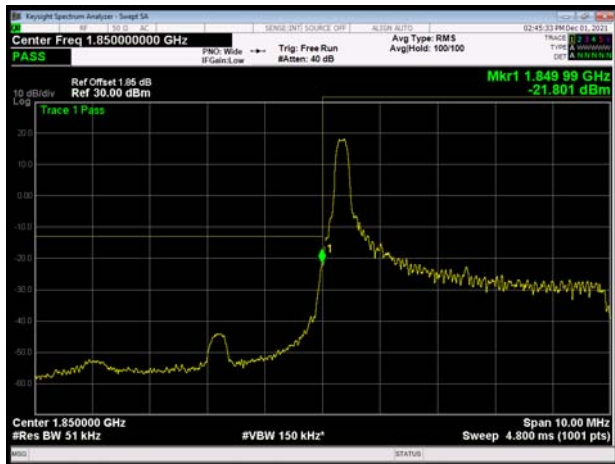

LTE Band 2 5MHz QPSK 1RB CH-High

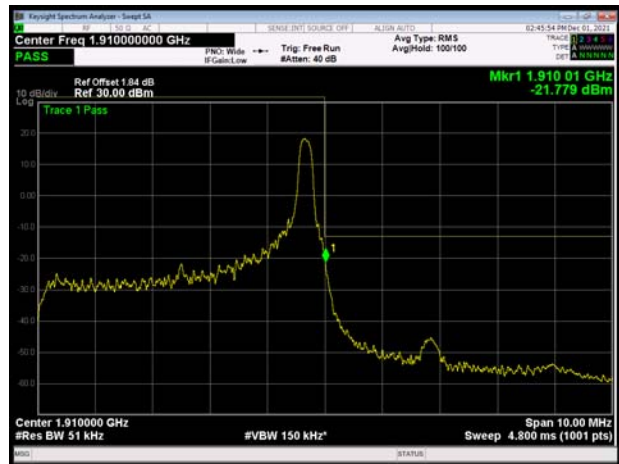

LTE Band 2 5MHz QPSK 100%RB CH-Low

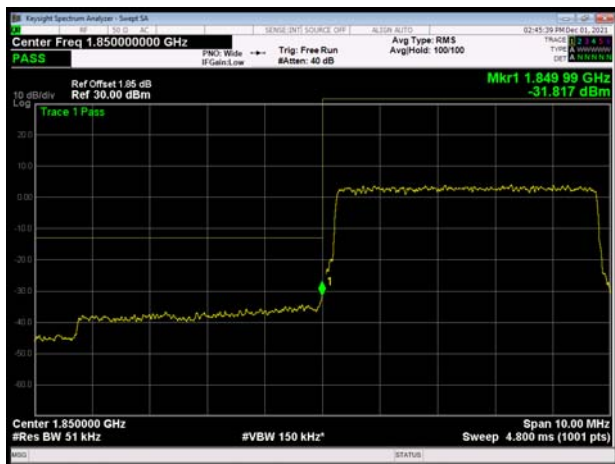


LTE Band 2 5MHz QPSK 100%RB CH-High







LTE Band 2 10MHz QPSK 1RB CH-Low

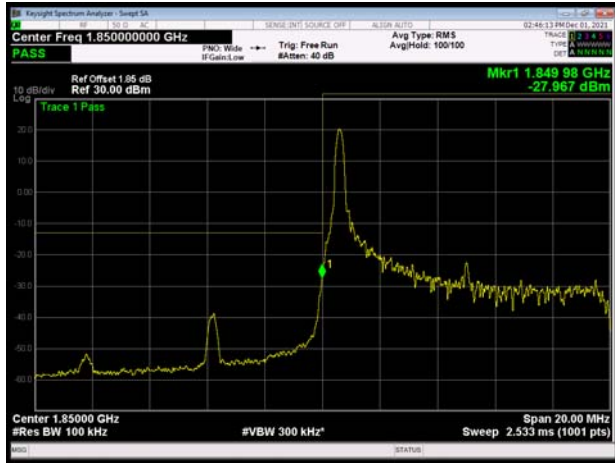


LTE Band 2 10MHz QPSK 1RB CH-High

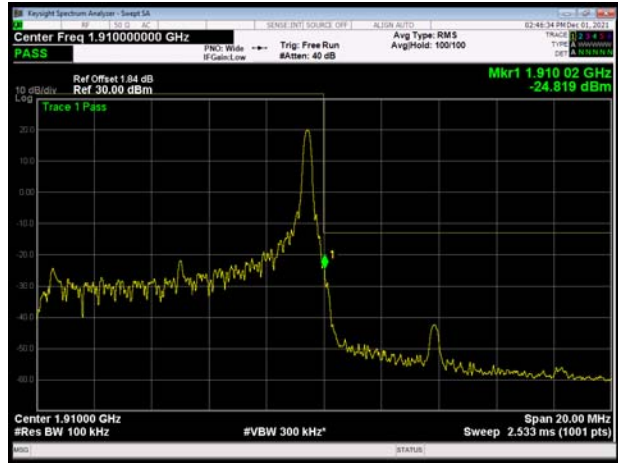


LTE Band 2 10MHz QPSK 100%RB CH-Low

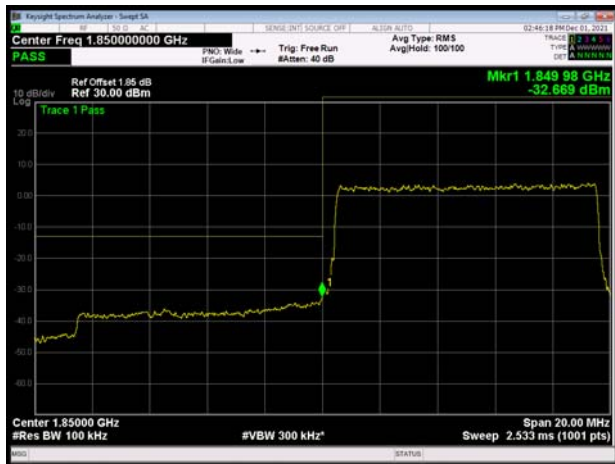


LTE Band 2 10MHz QPSK 100%RB CH-High

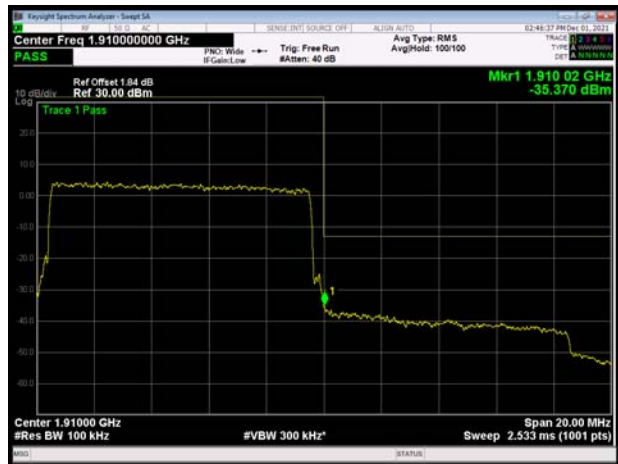

LTE Band 2 15MHz QPSK 1RB CH-Low

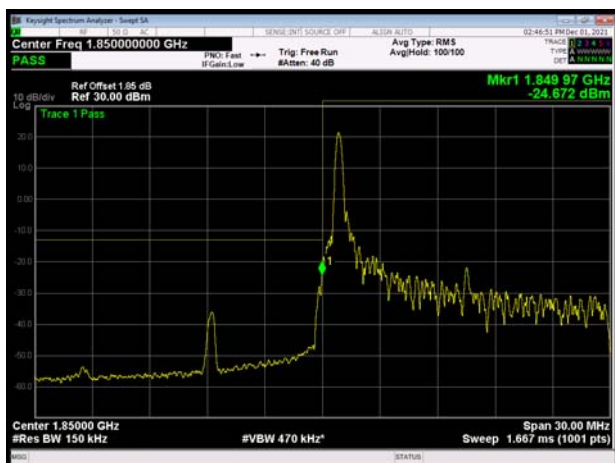

LTE Band 2 15MHz QPSK 1RB CH-High

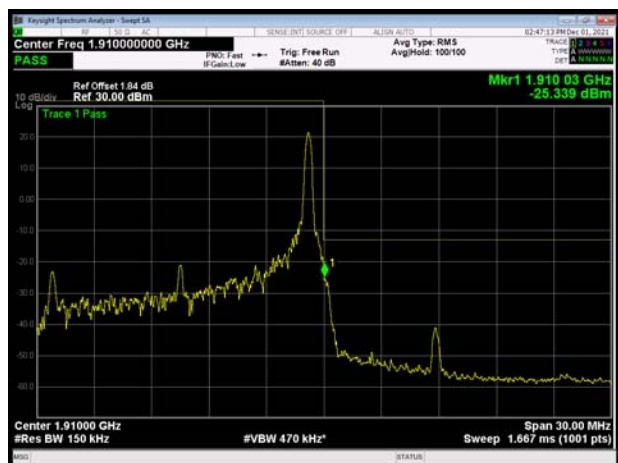




LTE Band 2 15MHz QPSK 100%RB CH-Low




LTE Band 2 15MHz QPSK 100%RB CH-High



LTE Band 2 20MHz QPSK 1RB CH-Low

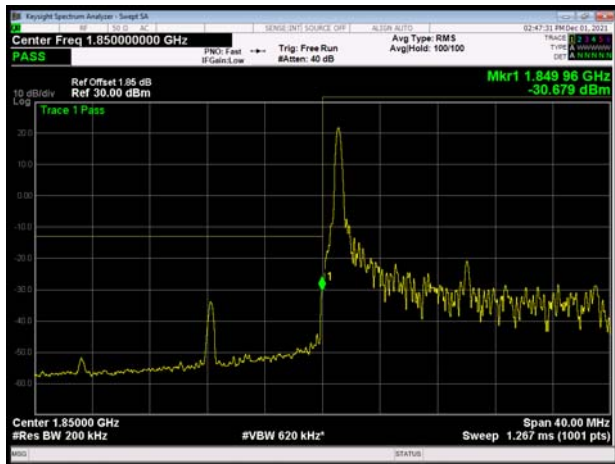

LTE Band 2 20MHz QPSK 1RB CH-High

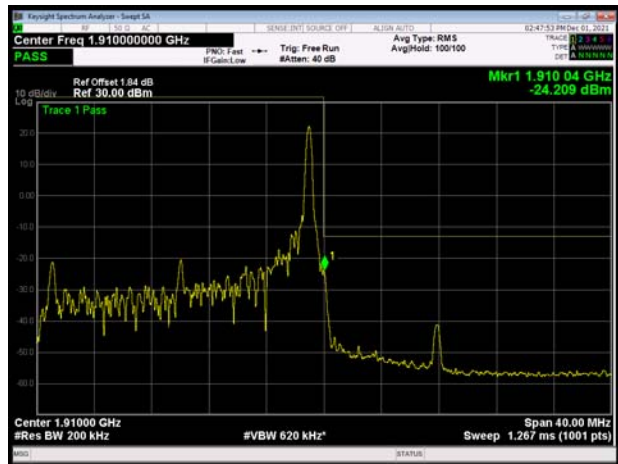

LTE Band 2 20MHz QPSK 100%RB CH-Low




LTE Band 2 20MHz QPSK 100%RB CH-High





LTE Band 2 1.4MHz 16QAM 1RB CH-Low

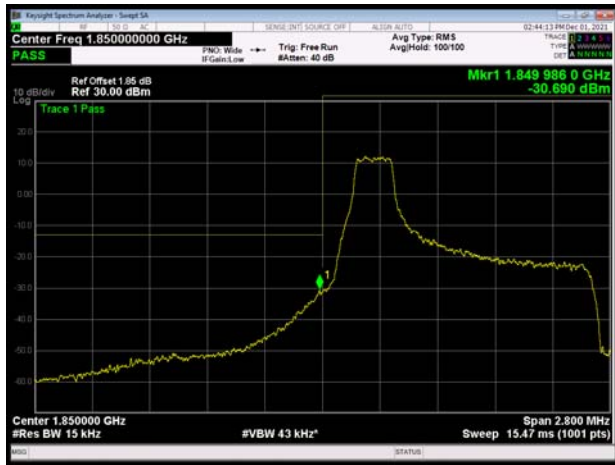

LTE Band 2 1.4MHz 16QAM 1RB CH-High




LTE Band 2 1.4MHz 16QAM 100%RB CH-Low




LTE Band 2 1.4MHz 16QAM 100%RB CH-High



LTE Band 2 3MHz 16QAM 1RB CH-Low

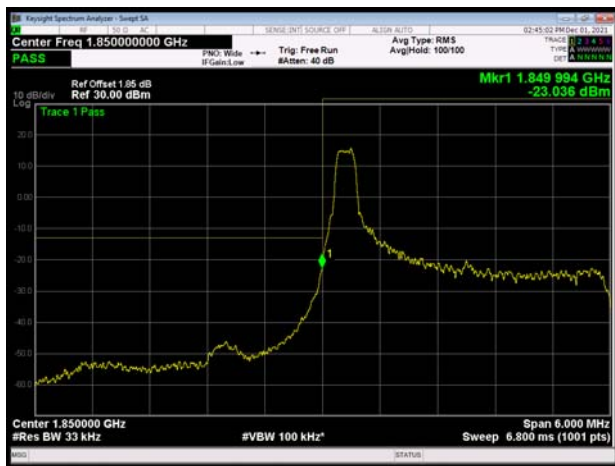


LTE Band 2 3MHz 16QAM 1RB CH-High

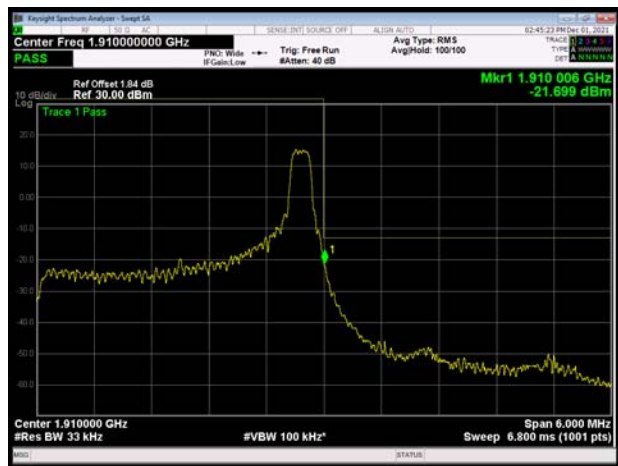




LTE Band 2 3MHz 16QAM 100%RB CH-Low

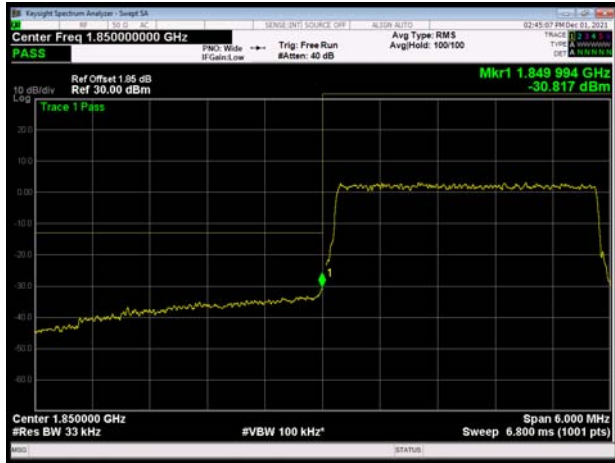


LTE Band 2 3MHz 16QAM 100%RB CH-High



LTE Band 2 5MHz 16QAM 1RB CH-Low

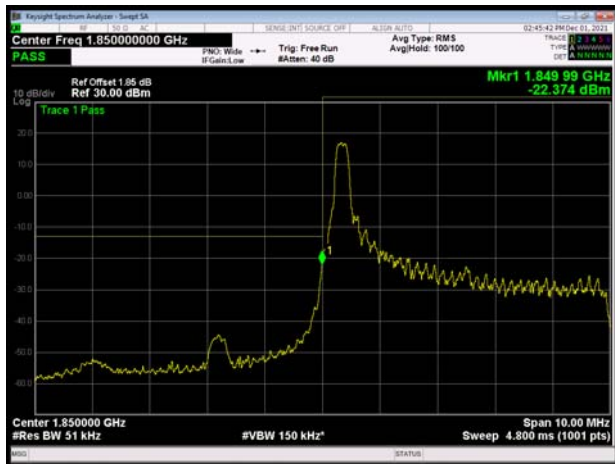


LTE Band 2 5MHz 16QAM 1RB CH-High

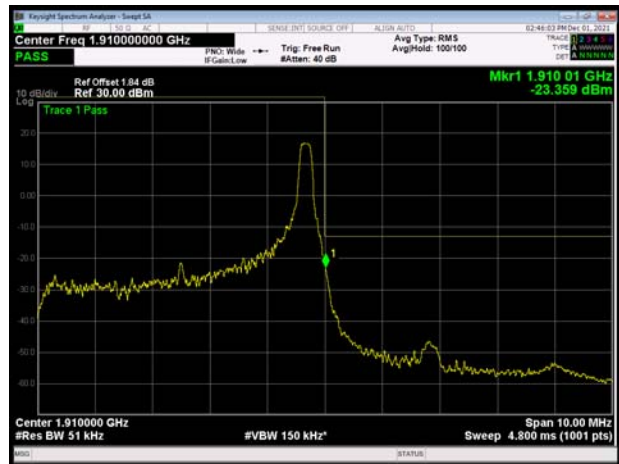

LTE Band 2 5MHz 16QAM 100%RB CH-Low




LTE Band 2 5MHz 16QAM 100%RB CH-High

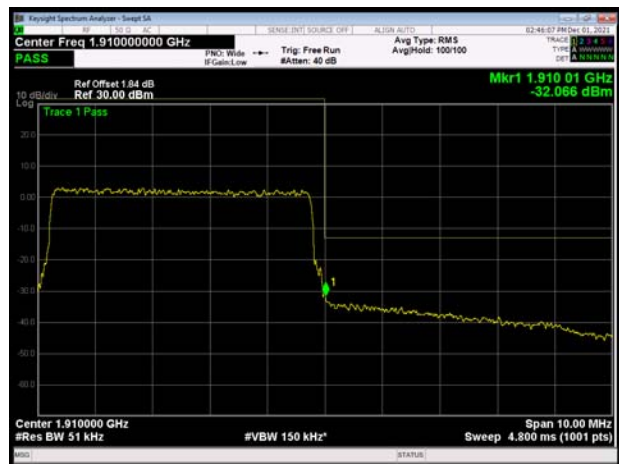





LTE Band 2 10MHz 16QAM 1RB CH-Low

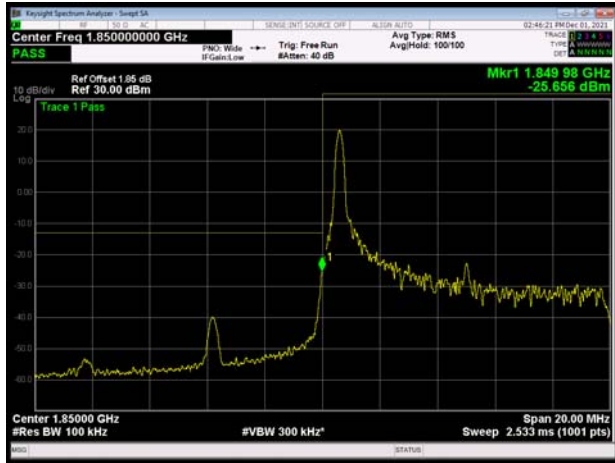

LTE Band 2 10MHz 16QAM 1RB CH-High

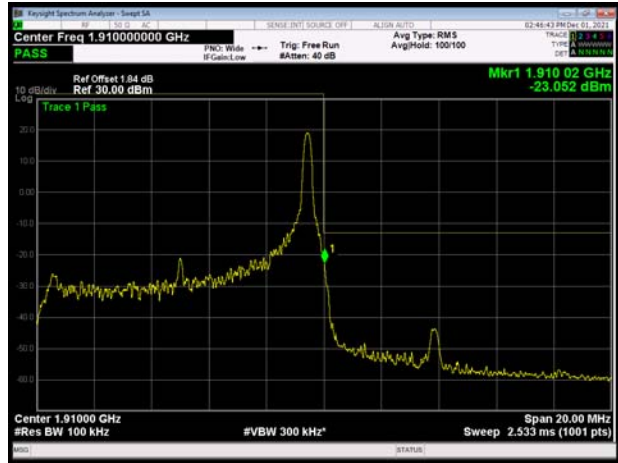


LTE Band 2 10MHz 16QAM 100%RB CH-Low

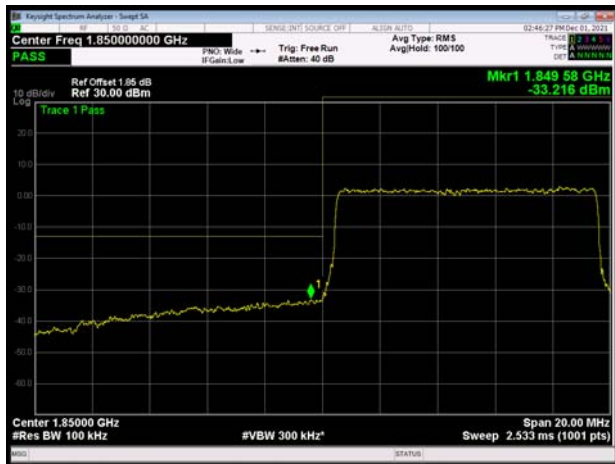


LTE Band 2 10MHz 16QAM 100%RB CH-High



LTE Band 2 15MHz 16QAM 1RB CH-Low

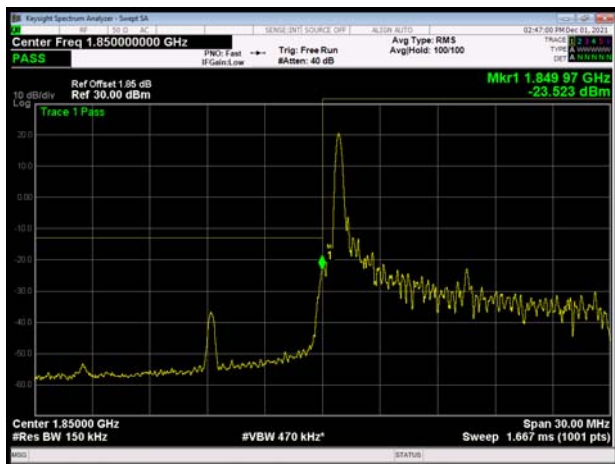

LTE Band 2 15MHz 16QAM 1RB CH-High

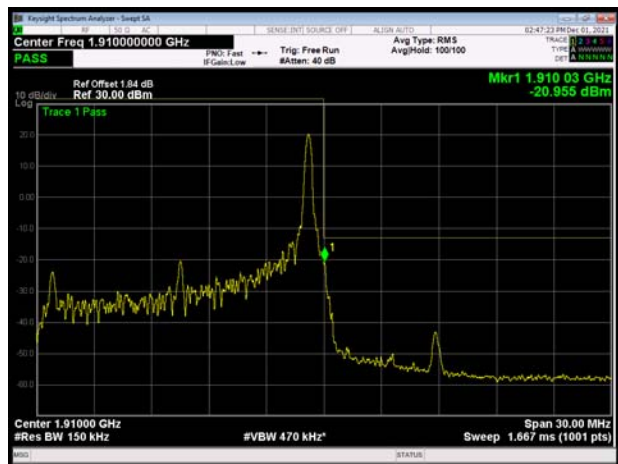





LTE Band 2 15MHz 16QAM 100%RB CH-Low




LTE Band 2 15MHz 16QAM 100%RB CH-High

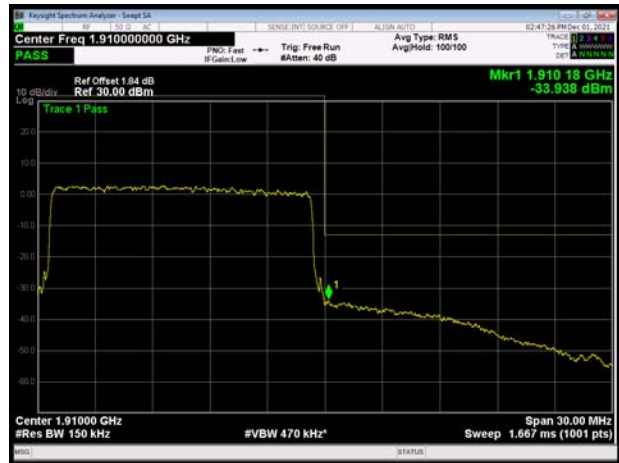

LTE Band 2 20MHz 16QAM 1RB CH-Low

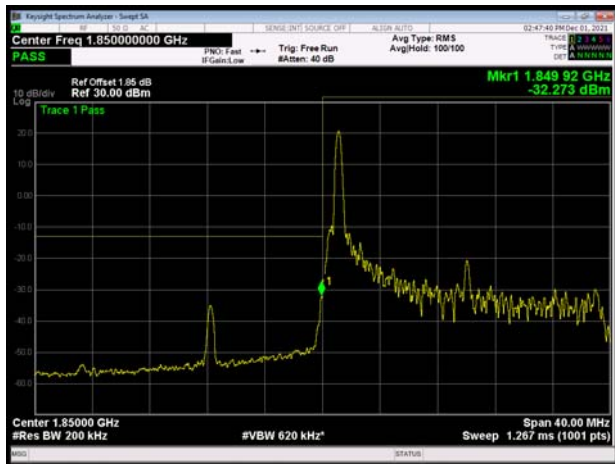


LTE Band 2 20MHz 16QAM 1RB CH-High

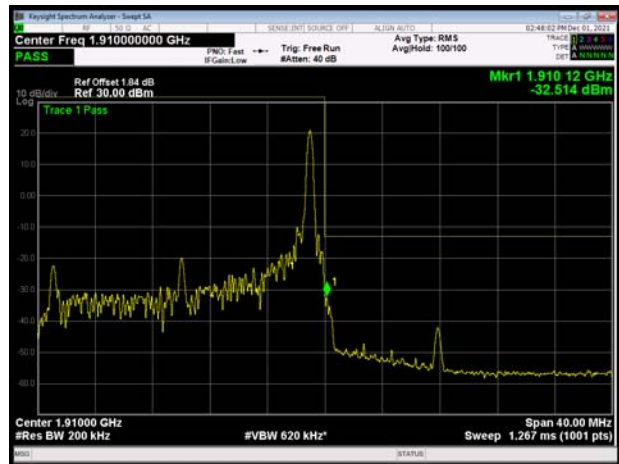


LTE Band 2 20MHz 16QAM 100%RB CH-Low




LTE Band 2 20MHz 16QAM 100%RB CH-High

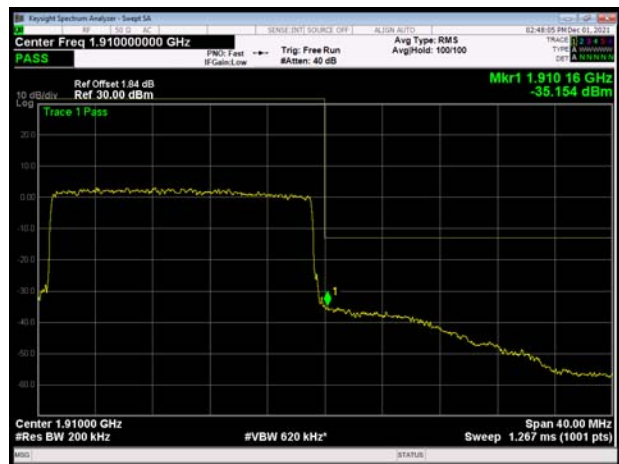

LTE Band 2 1.4MHz 64QAM 1RB CH-Low

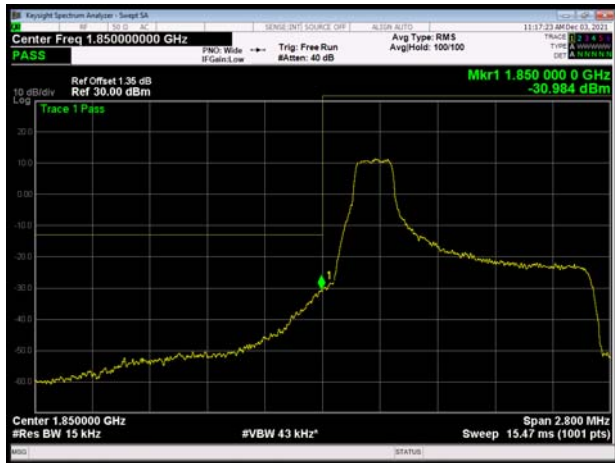

LTE Band 2 1.4MHz 64QAM 1RB CH-High

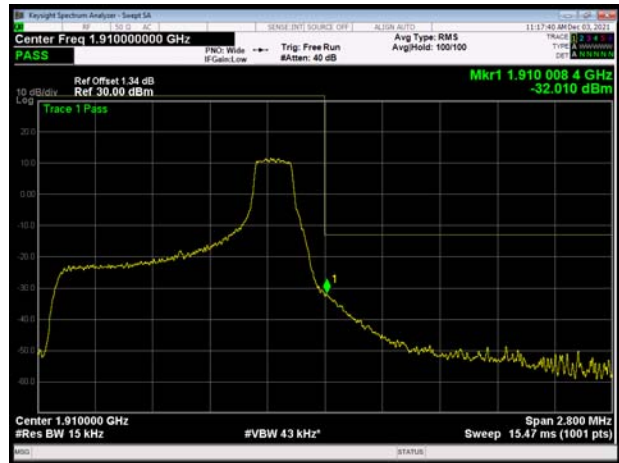


LTE Band 2 1.4MHz 64QAM 100%RB CH-Low




LTE Band 2 1.4MHz 64QAM 100%RB CH-High



LTE Band 2 3MHz 64QAM 1RB CH-Low

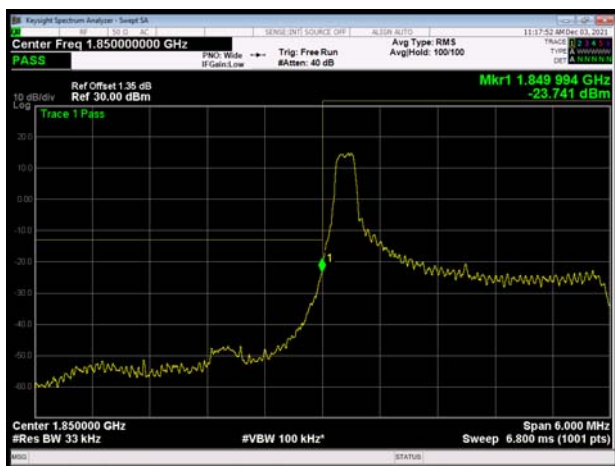


LTE Band 2 3MHz 64QAM 1RB CH-High

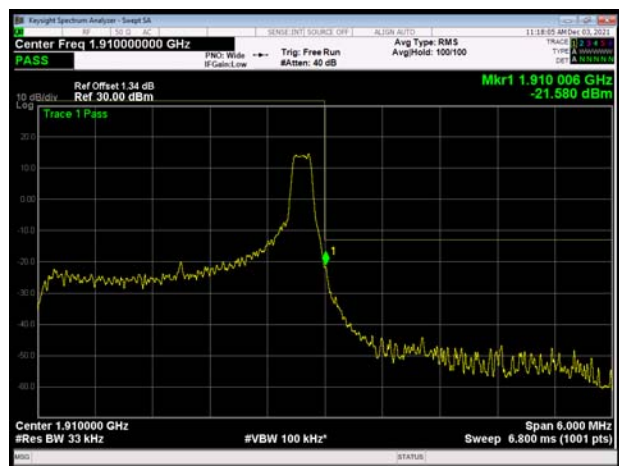





LTE Band 2 3MHz 64QAM 100%RB CH-Low

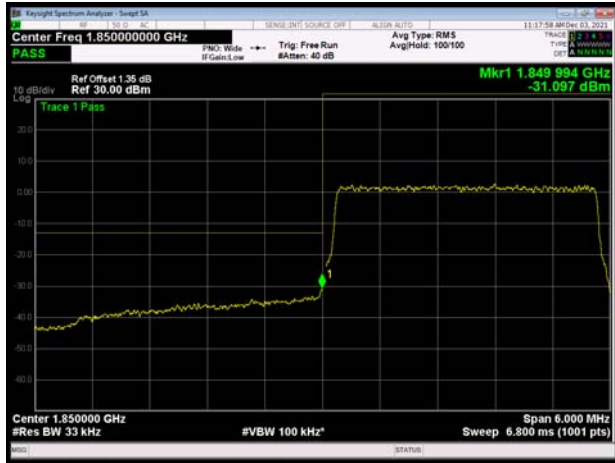


LTE Band 2 3MHz 64QAM 100%RB CH-High

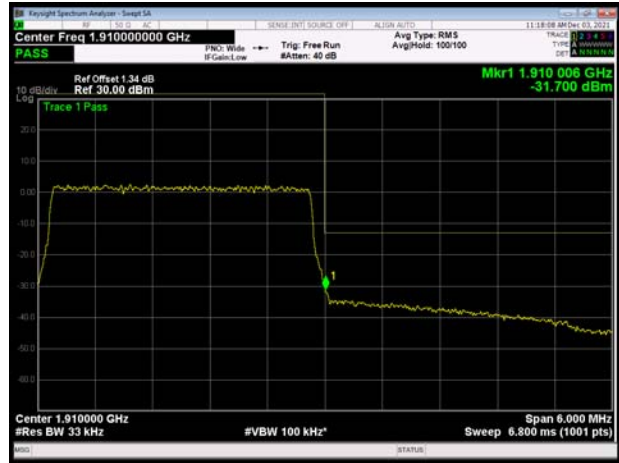


LTE Band 2 5MHz 64QAM 1RB CH-Low

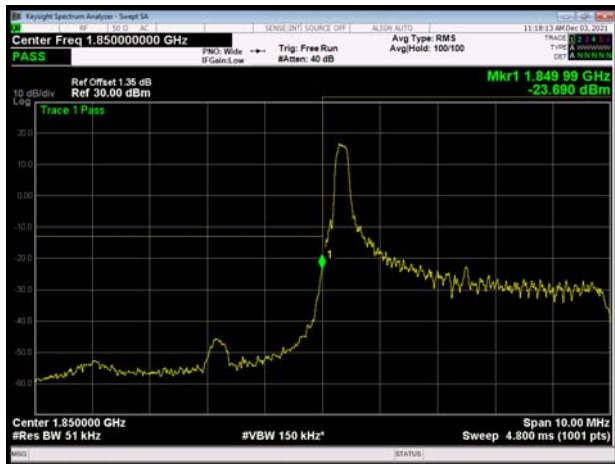


LTE Band 2 5MHz 64QAM 1RB CH-High

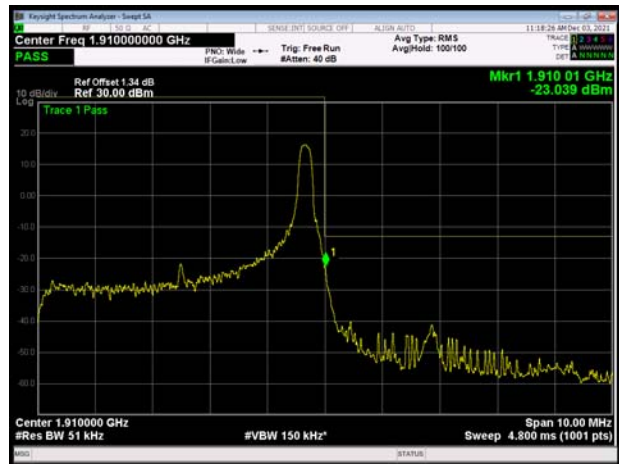

LTE Band 2 5MHz 64QAM 100%RB CH-Low

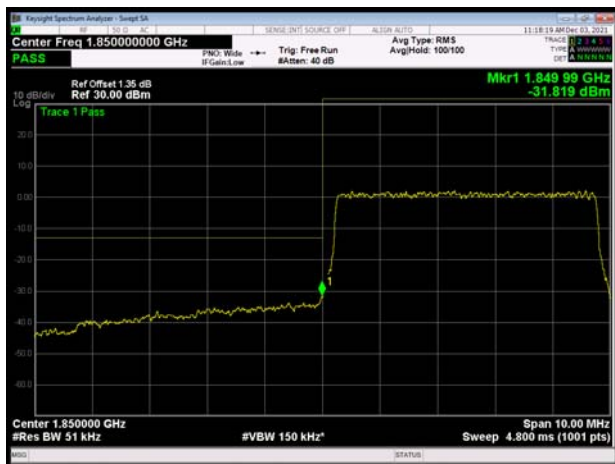


LTE Band 2 5MHz 64QAM 100%RB CH-High

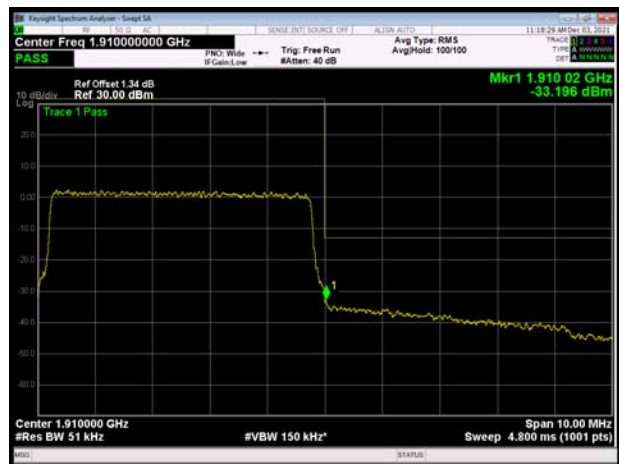





LTE Band 2 10MHz 64QAM 1RB CH-Low

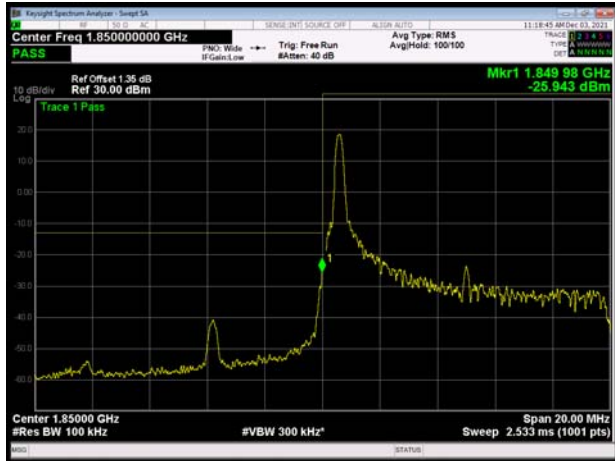


LTE Band 2 10MHz 64QAM 1RB CH-High

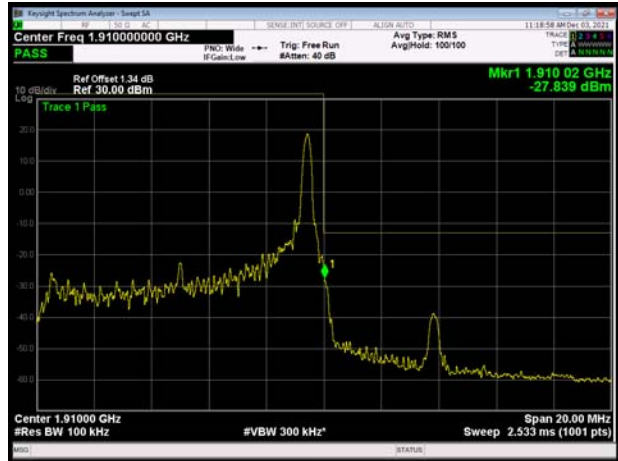


LTE Band 2 10MHz 64QAM 100%RB CH-Low

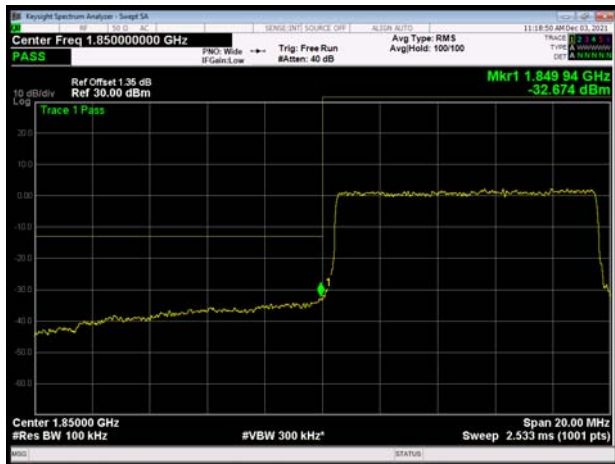


LTE Band 2 10MHz 64QAM 100%RB CH-High

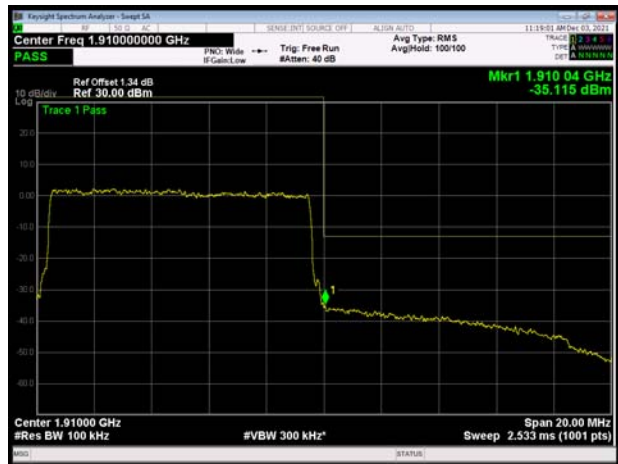

LTE Band 2 15MHz 64QAM 1RB CH-Low

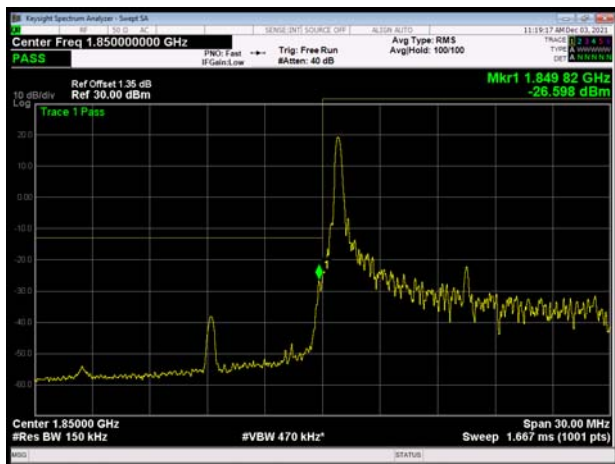

LTE Band 2 15MHz 64QAM 1RB CH-High

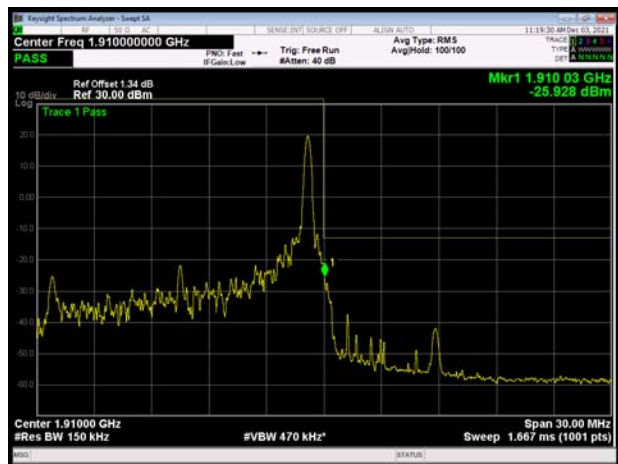




LTE Band 2 15MHz 64QAM 100%RB CH-Low




LTE Band 2 15MHz 64QAM 100%RB CH-High



LTE Band 2 20MHz 64QAM 1RB CH-Low

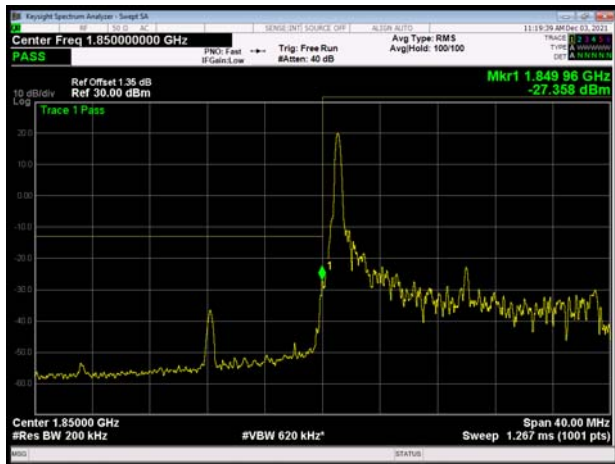


LTE Band 2 20MHz 64QAM 1RB CH-High

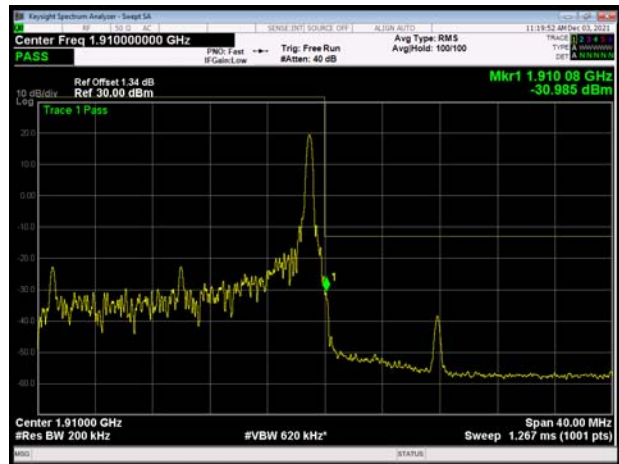

LTE Band 2 20MHz 64QAM 100%RB CH-Low



LTE Band 2 20MHz 64QAM 100%RB CH-High

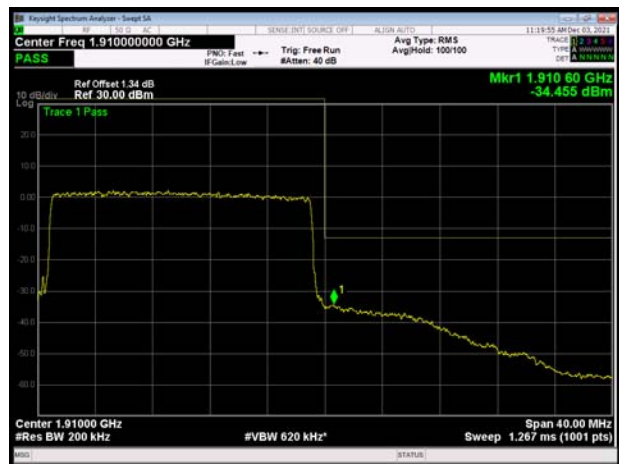

5.4. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = PPk (dBm) - PAvg (dBm).$$

Test Setup

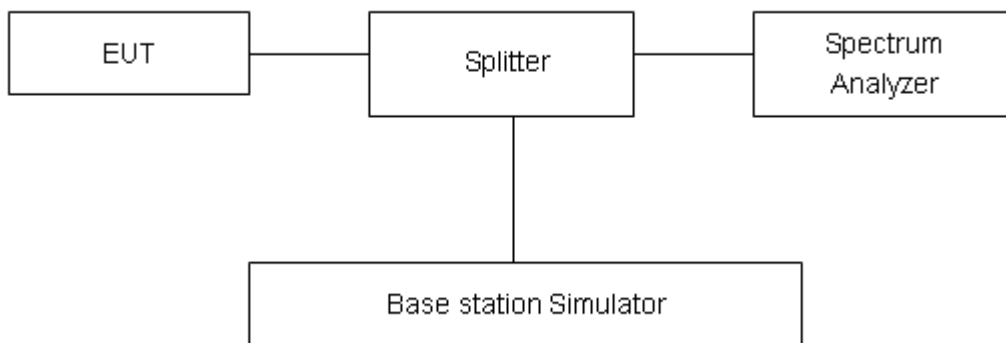

Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.



Test Results

Mode	Channel	Frequency (MHz)	Peak(dBm)	Avg(dBm)	PAPR(dB)	Limit(dB)	Conclusion
GSM 1900 (GMSK)	512	1850.2	29.33	26.49	2.84	≤13	PASS
	661	1880	29.10	26.27	2.83	≤13	PASS
	810	1909.8	29.01	26.18	2.83	≤13	PASS
GPRS 1900 (GMSK)	512	1850.2	29.34	26.50	2.84	≤13	PASS
	661	1880	29.04	26.21	2.83	≤13	PASS
	810	1909.8	28.99	26.17	2.82	≤13	PASS
EGPRS 1900 (8PSK)	512	1850.2	28.42	22.72	5.70	≤13	PASS
	661	1880	28.12	22.42	5.70	≤13	PASS
	810	1909.8	28.06	22.33	5.73	≤13	PASS
WCDMA Band II (RMC)	9262	1852.4	26.25	23.37	2.88	≤13	PASS
	9400	1880	26.00	23.25	2.75	≤13	PASS
	9538	1907.6	25.67	23.20	2.47	≤13	PASS

LTE Band 2								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	18607	1850.7	26.98	21.73	5.25	≤13	PASS
		18900	1880.0	26.95	21.79	5.16	≤13	PASS
		19193	1909.3	26.80	21.74	5.06	≤13	PASS
	3	18615	1851.5	27.15	21.80	5.35	≤13	PASS
		18900	1880	27.03	21.88	5.15	≤13	PASS
		19185	1908.5	26.82	21.82	5.00	≤13	PASS
	5	18625	1852.5	27.16	21.79	5.37	≤13	PASS
		18900	1880	27.06	21.88	5.18	≤13	PASS
		19175	1907.5	26.91	21.87	5.04	≤13	PASS
	10	18650	1855	27.26	21.81	5.45	≤13	PASS
		18900	1880	27.09	21.85	5.24	≤13	PASS
		19150	1905	26.98	21.89	5.09	≤13	PASS
	15	18675	1857.5	27.52	21.82	5.70	≤13	PASS
		18900	1880	27.35	21.85	5.50	≤13	PASS
		19125	1902.5	27.28	21.83	5.45	≤13	PASS
	20	18700	1860	27.23	21.81	5.42	≤13	PASS
		18900	1880	27.21	21.82	5.39	≤13	PASS
		19100	1900	26.93	21.81	5.12	≤13	PASS
16QAM	1.4	18607	1850.7	26.35	20.67	5.68	≤13	PASS
		18900	1880.0	26.27	20.72	5.55	≤13	PASS



	3	19193	1909.3	26.14	20.73	5.41	≤13	PASS	
		18615	1851.5	26.57	20.75	5.82	≤13	PASS	
		18900	1880	26.41	20.79	5.62	≤13	PASS	
		19185	1908.5	26.28	20.75	5.53	≤13	PASS	
	5	18625	1852.5	26.63	20.77	5.86	≤13	PASS	
		18900	1880	26.44	20.82	5.62	≤13	PASS	
		19175	1907.5	26.39	20.81	5.58	≤13	PASS	
	10	18650	1855	26.65	20.73	5.92	≤13	PASS	
		18900	1880	26.46	20.84	5.62	≤13	PASS	
		19150	1905	26.43	20.82	5.61	≤13	PASS	
	15	18675	1857.5	26.81	20.78	6.03	≤13	PASS	
		18900	1880	26.58	20.78	5.80	≤13	PASS	
		19125	1902.5	26.63	20.77	5.86	≤13	PASS	
	20	18700	1860	26.70	20.70	6.00	≤13	PASS	
		18900	1880	26.65	20.80	5.85	≤13	PASS	
		19100	1900	26.40	20.80	5.60	≤13	PASS	
	64QAM	1.4	18607	1850.7	25.61	19.90	5.71	≤13	PASS
			18900	1880.0	25.57	20.00	5.57	≤13	PASS
			19193	1909.3	25.47	19.89	5.58	≤13	PASS
		3	18615	1851.5	25.78	19.97	5.81	≤13	PASS
			18900	1880	25.67	20.09	5.58	≤13	PASS
			19185	1908.5	25.53	20.00	5.53	≤13	PASS
		5	18625	1852.5	25.86	20.02	5.84	≤13	PASS
			18900	1880	25.70	20.10	5.60	≤13	PASS
19175			1907.5	25.63	20.04	5.59	≤13	PASS	
10		18650	1855	25.96	20.00	5.96	≤13	PASS	
		18900	1880	25.68	19.99	5.69	≤13	PASS	
		19150	1905	25.71	20.03	5.68	≤13	PASS	
15		18675	1857.5	26.06	19.95	6.11	≤13	PASS	
		18900	1880	25.82	19.95	5.87	≤13	PASS	
		19125	1902.5	25.51	19.98	5.53	≤13	PASS	
20		18700	1860	25.88	19.83	6.05	≤13	PASS	
		18900	1880	25.88	19.90	5.98	≤13	PASS	
		19100	1900	25.62	19.94	5.68	≤13	PASS	

5.5. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -20°C to +55°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -20°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.


Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.4V, with a nominal voltage of 3.82V.

Test setup

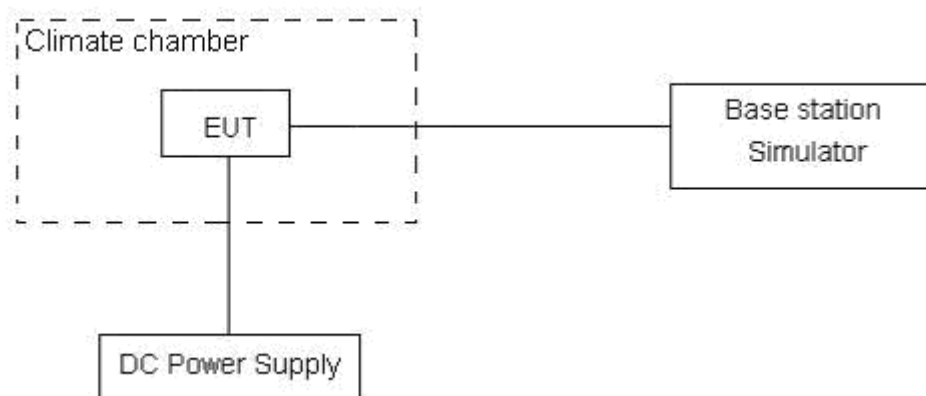

**Limits**

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Result

GSM1900						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	GMSK	8PSK	GMSK	8PSK	
Normal (25°C)	Normal	17.72	16.87	0.00943	0.00898	PASS
Extreme (55°C)		1.44	14.58	0.00077	0.00776	PASS
Extreme (50°C)		6.95	17.00	0.00370	0.00904	PASS
Extreme (40°C)		6.00	13.46	0.00319	0.00716	PASS
Extreme (30°C)		2.43	6.52	0.00129	0.00347	PASS
Extreme (20°C)		6.52	17.72	0.00347	0.00942	PASS
Extreme (10°C)		10.06	3.26	0.00535	0.00173	PASS
Extreme (0°C)		14.34	10.59	0.00763	0.00563	PASS
Extreme (-10°C)		3.35	4.10	0.00178	0.00218	PASS
Extreme (-20°C)		7.27	9.11	0.00387	0.00485	PASS
25°C	LV	15.20	16.19	0.00809	0.00861	PASS
	HV	7.82	8.91	0.00416	0.00474	PASS

WCDMA Band II						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	QPSK	BPSK	QPSK	BPSK	
Normal (25°C)	Normal	1.76	10.51	0.00093	0.00559	PASS
Extreme (55°C)		7.57	17.88	0.00403	0.00951	PASS
Extreme (50°C)		9.94	6.62	0.00529	0.00352	PASS
Extreme (40°C)		10.05	1.01	0.00534	0.00054	PASS
Extreme (30°C)		16.49	7.50	0.00877	0.00399	PASS
Extreme (20°C)		5.61	15.58	0.00298	0.00829	PASS
Extreme (10°C)		12.19	6.86	0.00648	0.00365	PASS
Extreme (0°C)		5.90	8.66	0.00314	0.00461	PASS
Extreme (-10°C)		13.47	16.60	0.00717	0.00883	PASS
Extreme (-20°C)		3.55	1.52	0.00189	0.00081	PASS
25°C	LV	9.24	17.50	0.00492	0.00931	PASS
	HV	7.35	1.33	0.00391	0.00071	PASS



LTE Band 2								
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	8.84	13.25	12.22	0.00470	0.00705	0.00650	PASS
Extreme (55°C)		15.31	5.27	16.73	0.00814	0.00280	0.00890	PASS
Extreme (50°C)		7.81	16.69	13.03	0.00416	0.00888	0.00693	PASS
Extreme (40°C)		4.11	10.76	1.35	0.00219	0.00572	0.00072	PASS
Extreme (30°C)		4.24	17.00	15.24	0.00226	0.00904	0.00811	PASS
Extreme (20°C)		9.28	9.02	2.35	0.00494	0.00480	0.00125	PASS
Extreme (10°C)		6.11	5.11	4.55	0.00325	0.00272	0.00242	PASS
Extreme (0°C)		12.03	14.02	14.17	0.00640	0.00746	0.00754	PASS
Extreme (-10°C)		14.17	14.82	3.15	0.00754	0.00788	0.00168	PASS
Extreme (-20°C)		9.28	14.05	2.02	0.00494	0.00748	0.00107	PASS
25°C	LV	8.10	5.96	11.99	0.00431	0.00317	0.00638	PASS
	HV	14.02	7.68	3.46	0.00746	0.00409	0.00184	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	3.46	6.16	13.58	0.00184	0.00327	0.00722	PASS
Extreme (55°C)		7.71	17.08	9.53	0.00410	0.00909	0.00507	PASS
Extreme (50°C)		7.86	10.73	8.59	0.00418	0.00571	0.00457	PASS
Extreme (40°C)		5.52	1.89	17.65	0.00294	0.00101	0.00939	PASS
Extreme (30°C)		13.11	4.89	1.74	0.00697	0.00260	0.00093	PASS
Extreme (20°C)		11.90	3.79	14.42	0.00633	0.00202	0.00767	PASS
Extreme (10°C)		16.90	3.42	3.86	0.00899	0.00182	0.00205	PASS
Extreme (0°C)		17.16	4.77	3.78	0.00913	0.00254	0.00201	PASS
Extreme (-10°C)		11.09	7.07	8.94	0.00590	0.00376	0.00475	PASS
Extreme (-20°C)		16.48	10.61	16.68	0.00877	0.00564	0.00887	PASS
25°C	LV	5.97	17.38	2.01	0.00317	0.00925	0.00107	PASS
	HV	6.37	4.76	3.27	0.00339	0.00253	0.00174	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	8.73	1.94	9.55	0.00465	0.00103	0.00508	PASS
Extreme (55°C)		2.84	6.44	9.91	0.00151	0.00343	0.00527	PASS



Extreme (50°C)		15.67	7.17	1.08	0.00833	0.00381	0.00057	PASS
Extreme (40°C)		11.60	9.43	10.84	0.00617	0.00501	0.00577	PASS
Extreme (30°C)		2.19	17.32	6.63	0.00116	0.00921	0.00353	PASS
Extreme (20°C)		13.83	7.80	17.45	0.00736	0.00415	0.00928	PASS
Extreme (10°C)		6.86	2.76	3.40	0.00365	0.00147	0.00181	PASS
Extreme (0°C)		3.50	10.46	2.62	0.00186	0.00557	0.00140	PASS
Extreme (-10°C)		4.22	5.24	13.87	0.00225	0.00279	0.00738	PASS
Extreme (-20°C)		4.69	17.15	7.33	0.00249	0.00912	0.00390	PASS
25°C	LV	7.85	13.99	5.93	0.00417	0.00744	0.00315	PASS
	HV	10.56	16.82	17.10	0.00562	0.00895	0.00910	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	3.32	17.31	7.46	0.00177	0.00921	0.00397	PASS
Extreme (55°C)		13.05	9.21	5.45	0.00694	0.00490	0.00290	PASS
Extreme (50°C)		11.81	1.87	16.39	0.00628	0.00099	0.00872	PASS
Extreme (40°C)		10.32	17.60	13.64	0.00549	0.00936	0.00726	PASS
Extreme (30°C)		2.87	5.69	15.67	0.00153	0.00303	0.00833	PASS
Extreme (20°C)		16.11	12.52	14.83	0.00857	0.00666	0.00789	PASS
Extreme (10°C)		17.45	15.87	7.28	0.00928	0.00844	0.00387	PASS
Extreme (0°C)		14.75	1.99	3.36	0.00784	0.00106	0.00178	PASS
Extreme (-10°C)		2.19	1.70	2.63	0.00116	0.00090	0.00140	PASS
Extreme (-20°C)		7.82	12.59	3.35	0.00416	0.00670	0.00178	PASS
25°C	LV	7.64	4.38	4.64	0.00406	0.00233	0.00247	PASS
	HV	17.93	2.20	16.90	0.00954	0.00117	0.00899	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	6.89	7.07	7.02	0.00366	0.00376	0.00373	PASS
Extreme (55°C)		17.78	12.40	9.61	0.00946	0.00660	0.00511	PASS
Extreme (50°C)		4.90	3.22	8.32	0.00261	0.00171	0.00443	PASS
Extreme (40°C)		2.53	11.93	14.85	0.00134	0.00634	0.00790	PASS
Extreme (30°C)		14.88	7.80	6.22	0.00792	0.00415	0.00331	PASS
Extreme (20°C)		6.47	5.16	14.44	0.00344	0.00275	0.00768	PASS
Extreme (10°C)		8.88	6.85	10.66	0.00472	0.00364	0.00567	PASS
Extreme (0°C)		7.49	8.46	11.69	0.00398	0.00450	0.00622	PASS
Extreme (-10°C)		8.35	15.11	2.77	0.00444	0.00804	0.00147	PASS
Extreme (-20°C)		14.30	16.21	7.51	0.00761	0.00862	0.00400	PASS
25°C	LV	5.98	13.43	7.86	0.00318	0.00714	0.00418	PASS



	HV	13.78	1.94	11.64	0.00733	0.00103	0.00619	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	20MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25°C)	Normal	13.68	7.34	4.39	0.00728	0.00390	0.00233	PASS
Extreme (55°C)		4.93	6.16	3.85	0.00262	0.00328	0.00205	PASS
Extreme (50°C)		10.45	9.54	6.75	0.00556	0.00508	0.00359	PASS
Extreme (40°C)		4.48	12.41	5.84	0.00238	0.00660	0.00311	PASS
Extreme (30°C)		8.18	11.55	13.59	0.00435	0.00614	0.00723	PASS
Extreme (20°C)		6.47	2.53	11.71	0.00344	0.00135	0.00623	PASS
Extreme (10°C)		17.31	11.22	5.85	0.00921	0.00597	0.00311	PASS
Extreme (0°C)		1.23	5.40	12.95	0.00066	0.00287	0.00689	PASS
Extreme (-10°C)		8.98	16.77	3.01	0.00477	0.00892	0.00160	PASS
Extreme (-20°C)		15.73	12.47	8.48	0.00837	0.00663	0.00451	PASS
25°C	LV	14.72	6.76	16.86	0.00783	0.00360	0.00897	PASS
	HV	1.23	16.17	10.05	0.00065	0.00860	0.00535	PASS

5.6. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),


RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

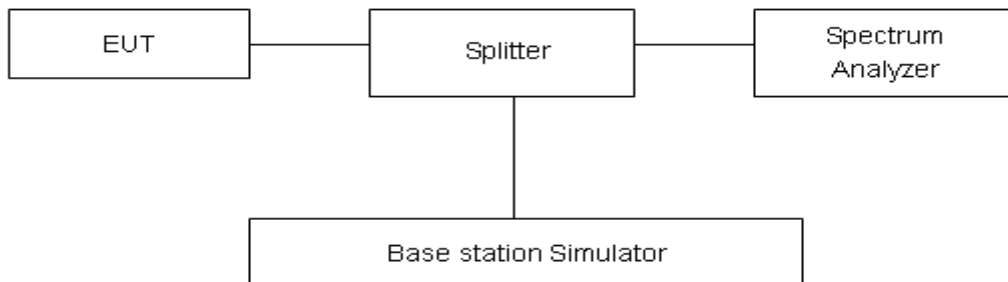

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log₁₀ (P) dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB




Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.


GSM 1900 CH-Low 9kHz ~ 20GHz

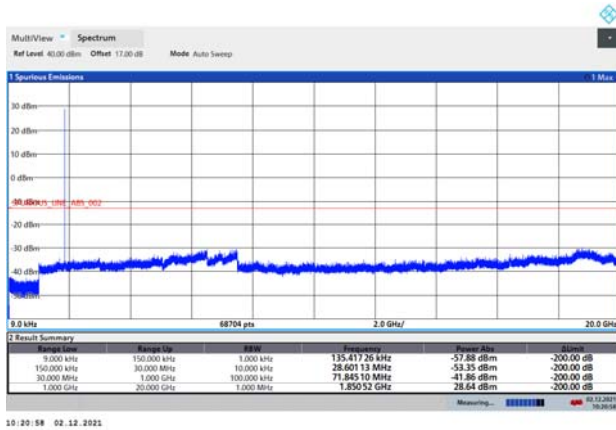


GPRS 1900 CH-Low 9kHz ~ 20GHz

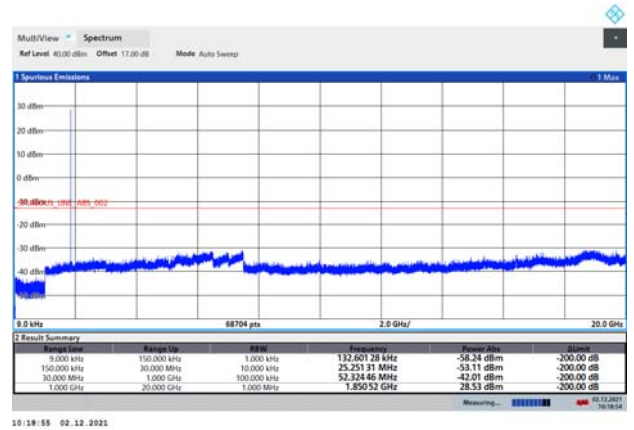


GSM 1900 CH- Middle 9kHz ~ 20GHz

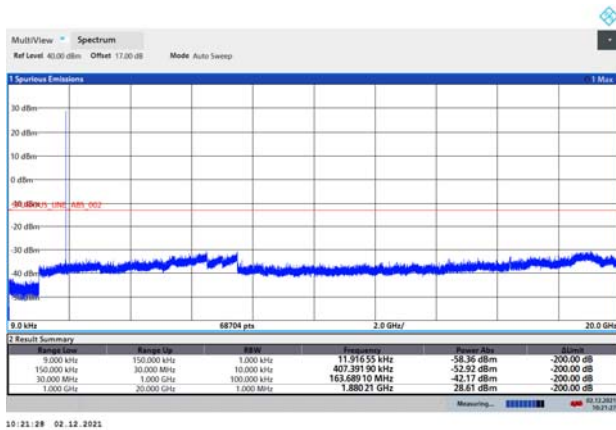


GPRS 1900 CH- Middle 9kHz ~ 20GHz

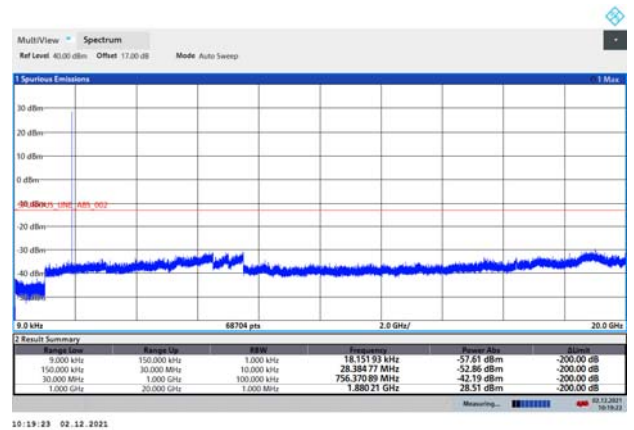

GSM 1900 CH-High 9kHz ~ 20GHz

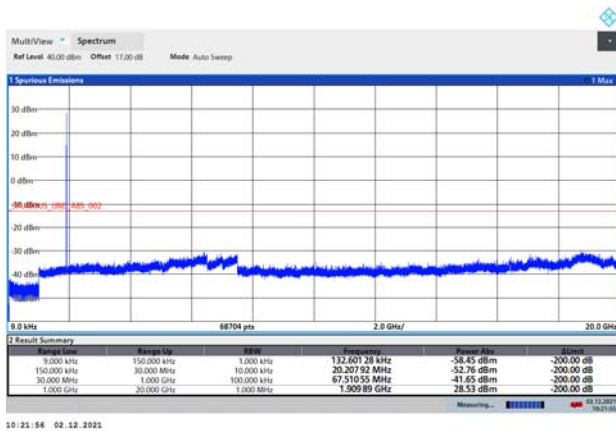


GPRS 1900 CH-High 9kHz ~ 20GHz

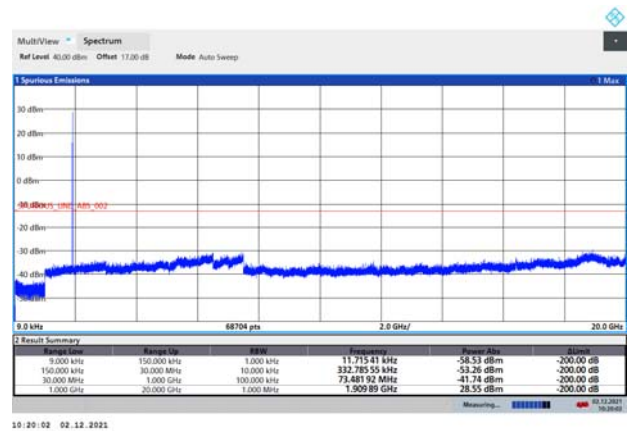




EGPRS 1900 CH-Low 9kHz ~ 20GHz

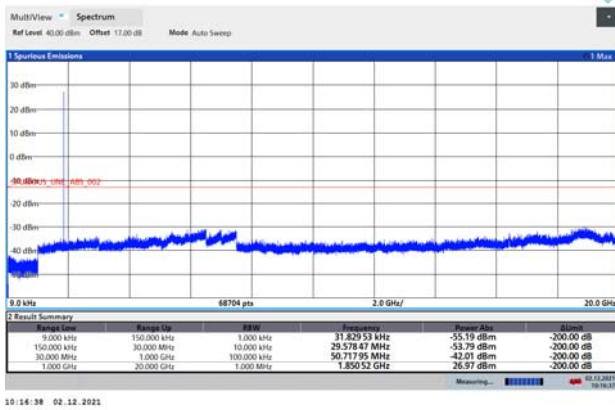


10:14:38 02.12.2021

WCDMA BAND II CH-Low 9kHz ~ 20GHz

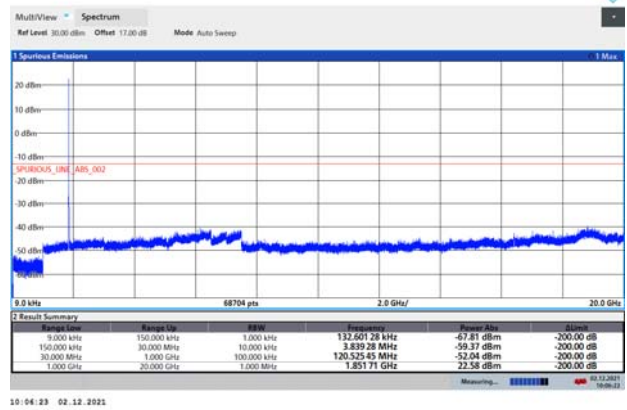


10:04:23 02.12.2021

EGPRS 1900 CH- Middle 9kHz ~ 20GHz

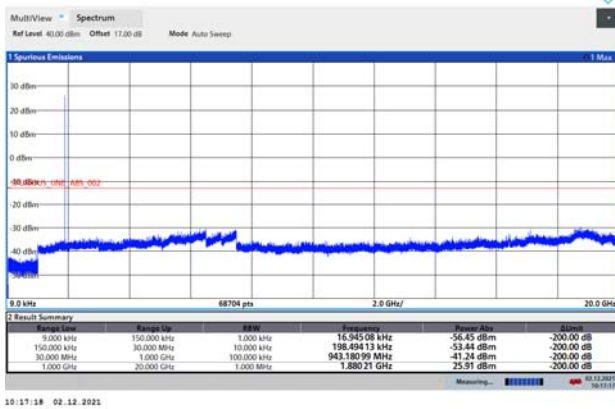


10:17:18 02.12.2021

WCDMA BAND II CH- Middle 9kHz ~ 20GHz

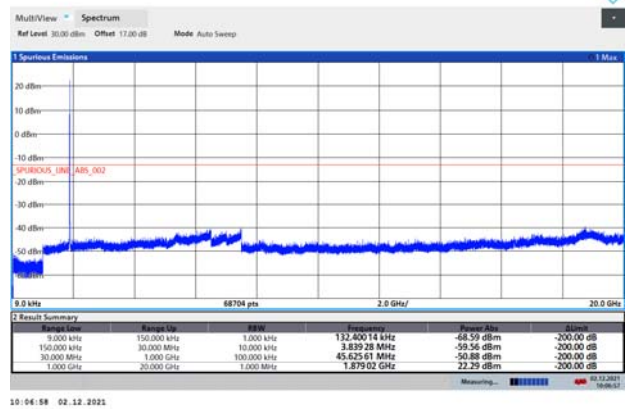


10:04:58 02.12.2021

EGPRS 1900 CH-High 9kHz ~ 20GHz

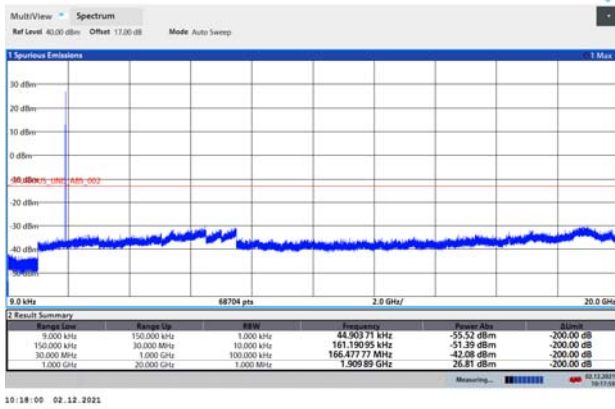


10:18:00 02.12.2021

WCDMA BAND II CH-High 9kHz ~ 20GHz

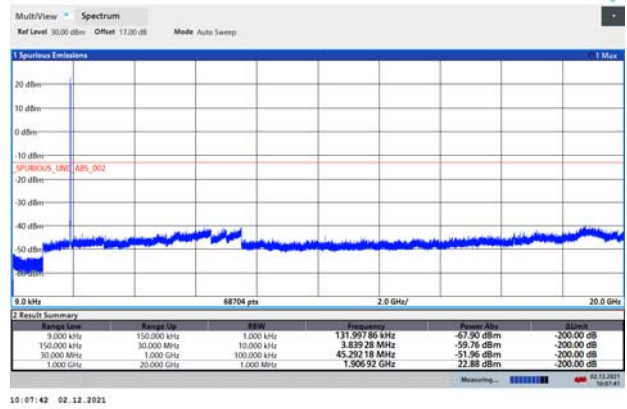


10:07:42 02.12.2021


LTE Band 2 1.4MHz CH-Low 9kHz~20GHz

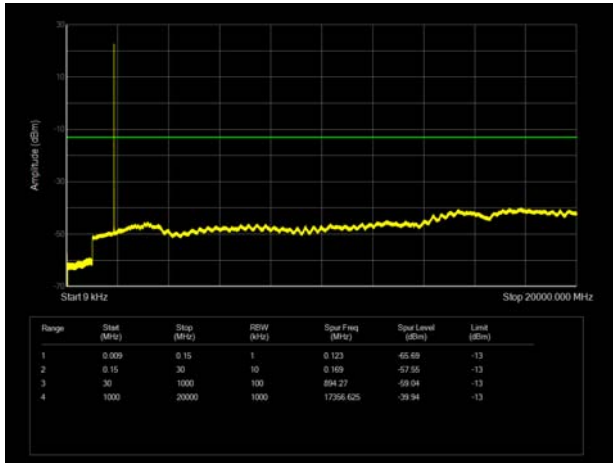


LTE Band 2 3MHz CH-Low 9kHz~20GHz

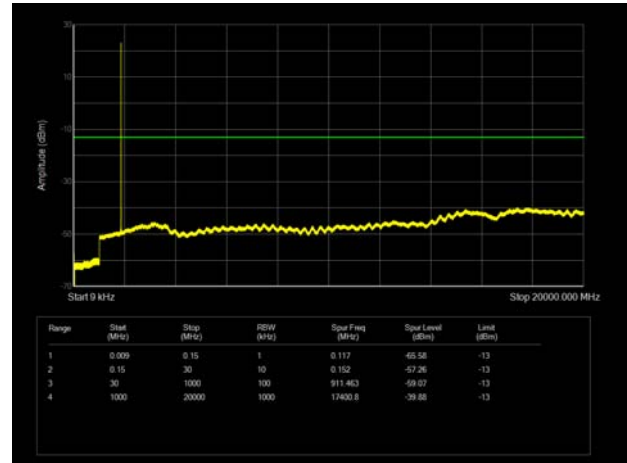


LTE Band 2 1.4MHz CH-Middle 9kHz~20GHz

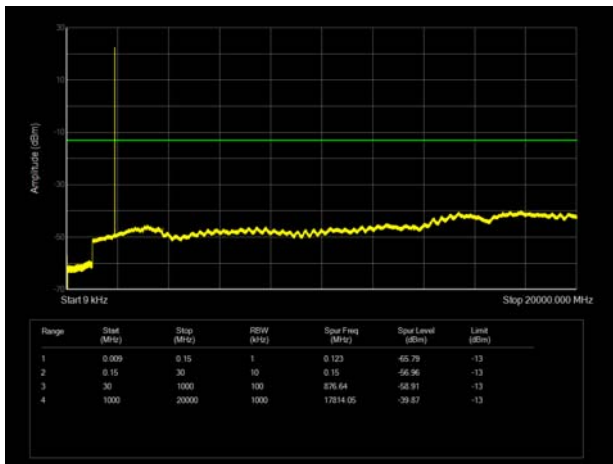


LTE Band 2 3MHz CH-Middle 9kHz~20GHz

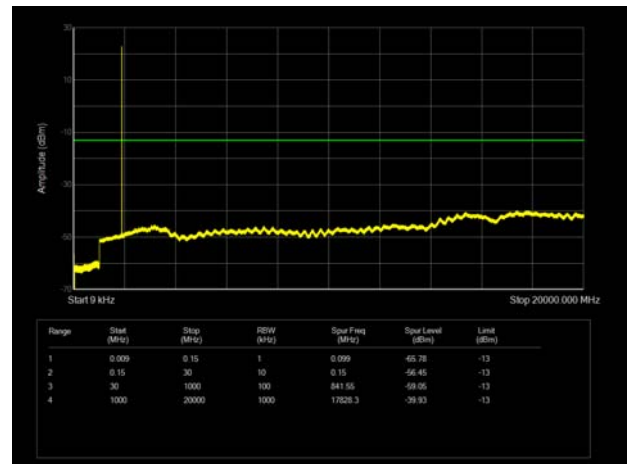


LTE Band 2 1.4MHz CH-High 9kHz~20GHz

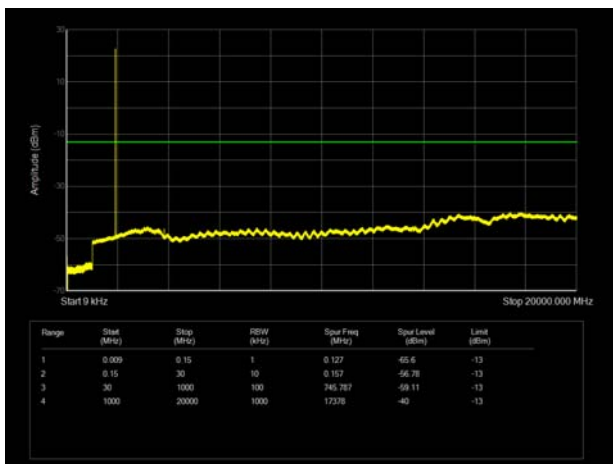


LTE Band 2 3MHz CH-High 9kHz~20GHz

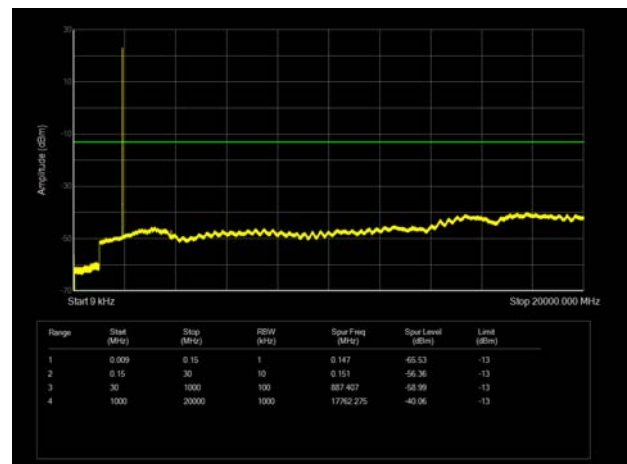


LTE Band 2 5MHz CH-Low 9kHz~20GHz

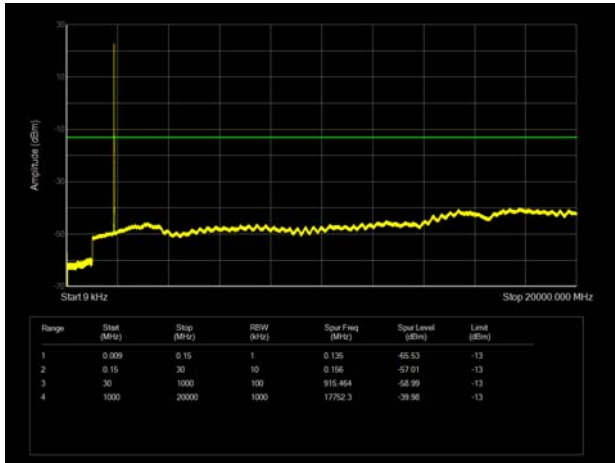


LTE Band 2 10MHz CH-Low 9kHz~20GHz

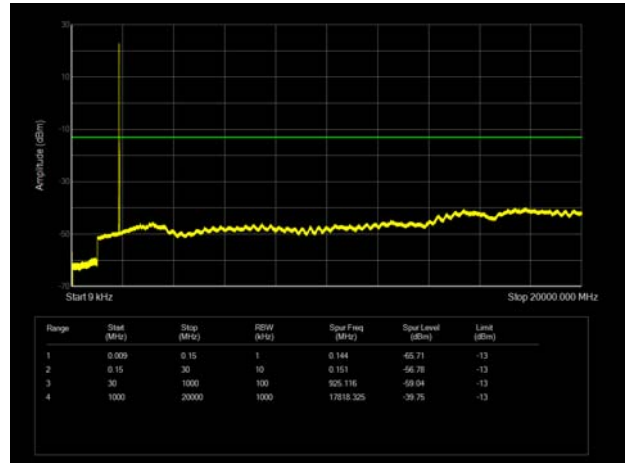


LTE Band 2 5MHz CH-Middle 9kHz~20GHz

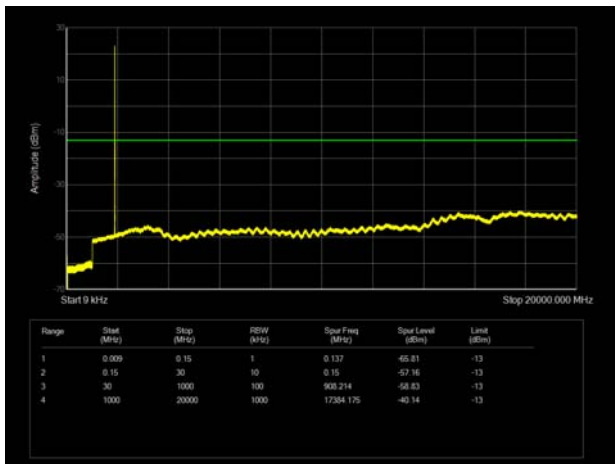


LTE Band 2 10MHz CH-Middle 9kHz~20GHz

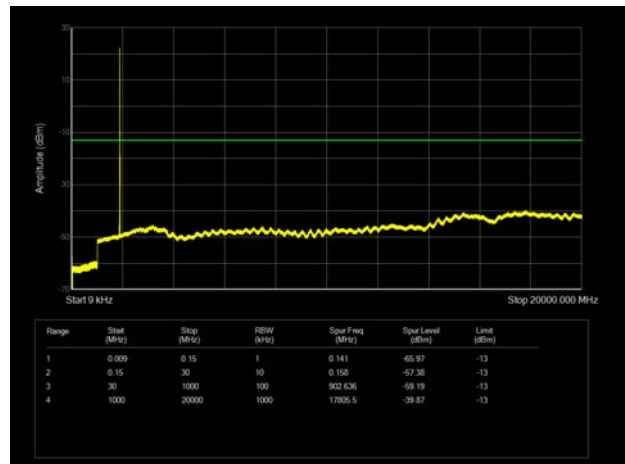


LTE Band 2 5MHz CH-High 9kHz~20GHz

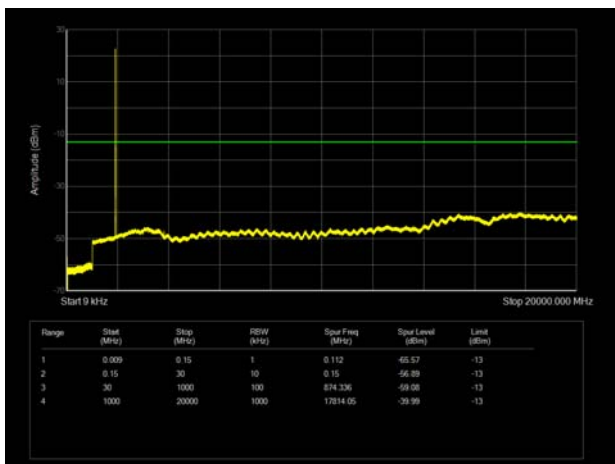


LTE Band 2 10MHz CH-High 9kHz~20GHz

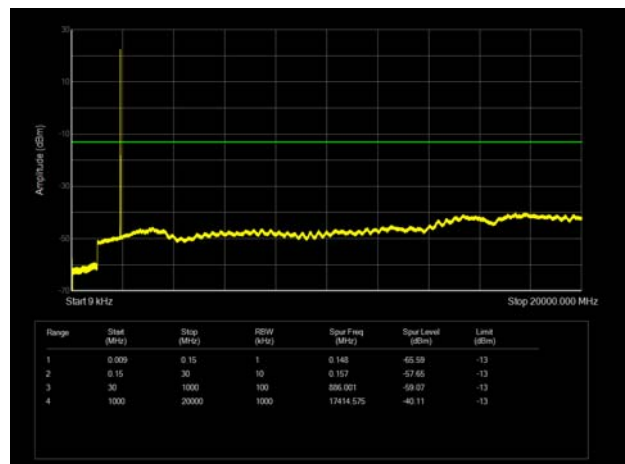


LTE Band 2 15MHz CH-Low 9kHz~20GHz

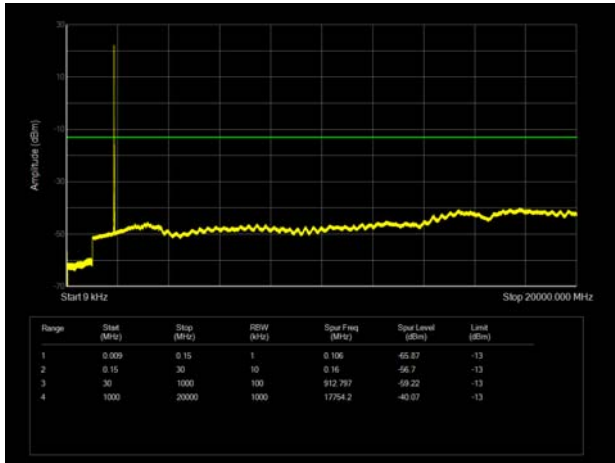


LTE Band 2 20MHz CH-Low 9kHz~20GHz

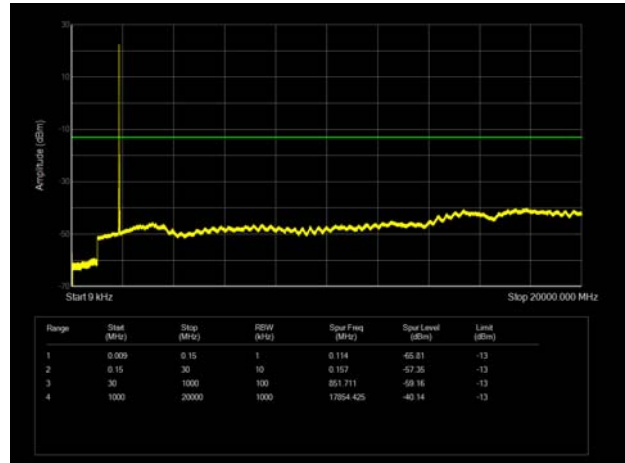


LTE Band 2 15MHz CH-Middle 9kHz~20GHz

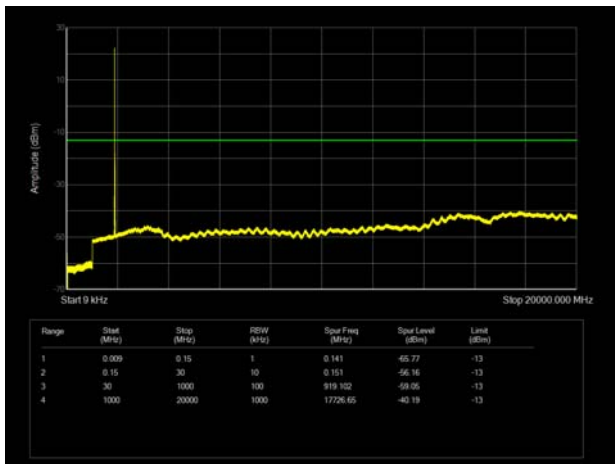


LTE Band 2 20MHz CH-Middle 9kHz~20GHz

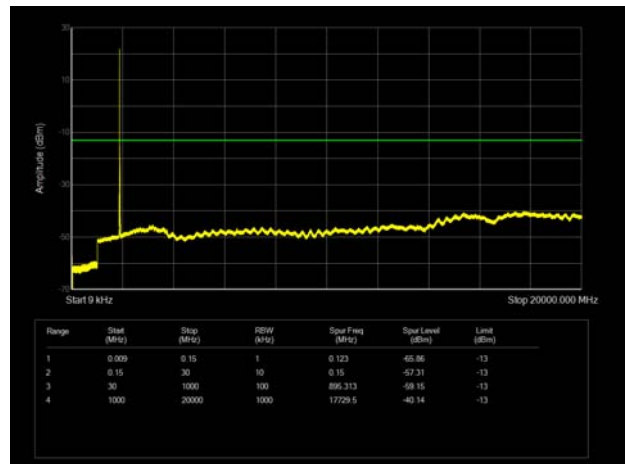

LTE Band 2 15MHz CH-High 9kHz~20GHz

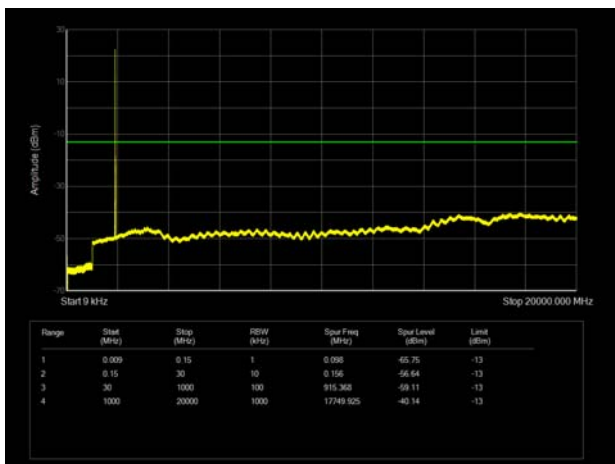

LTE Band 2 20MHz CH-High 9kHz~20GHz

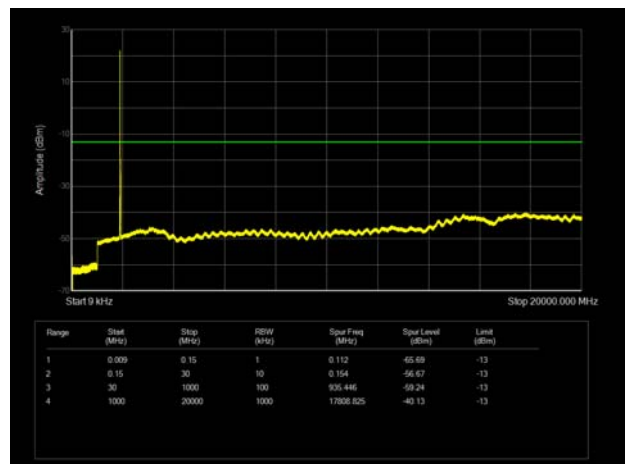

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dB.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

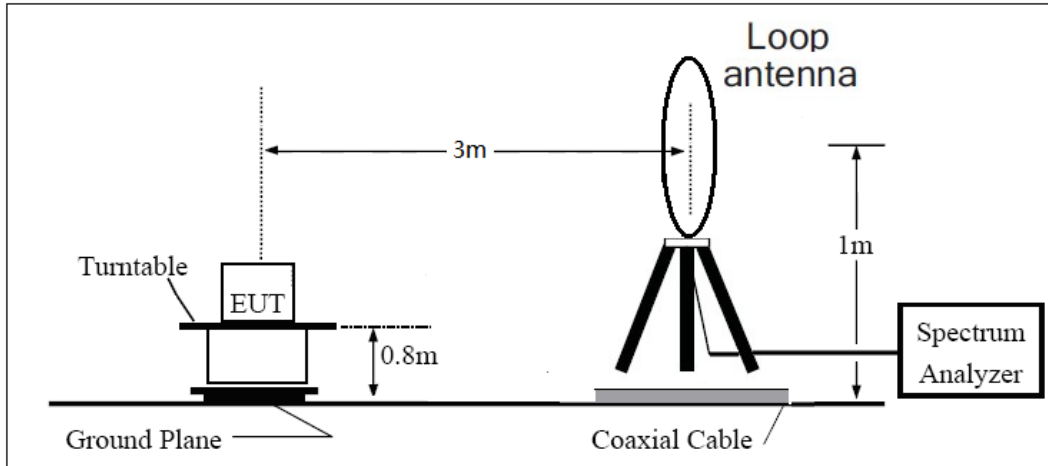

30MHz ~ 1GHz

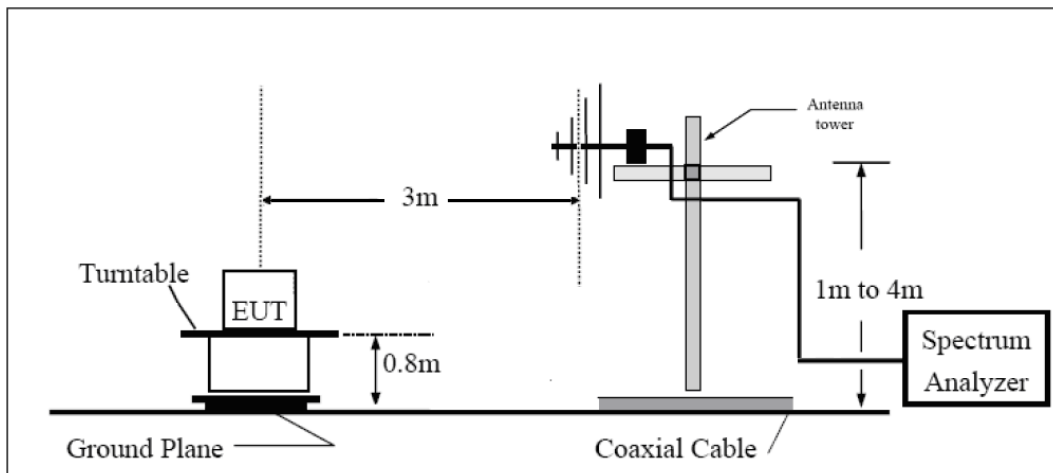

Above 1GHz

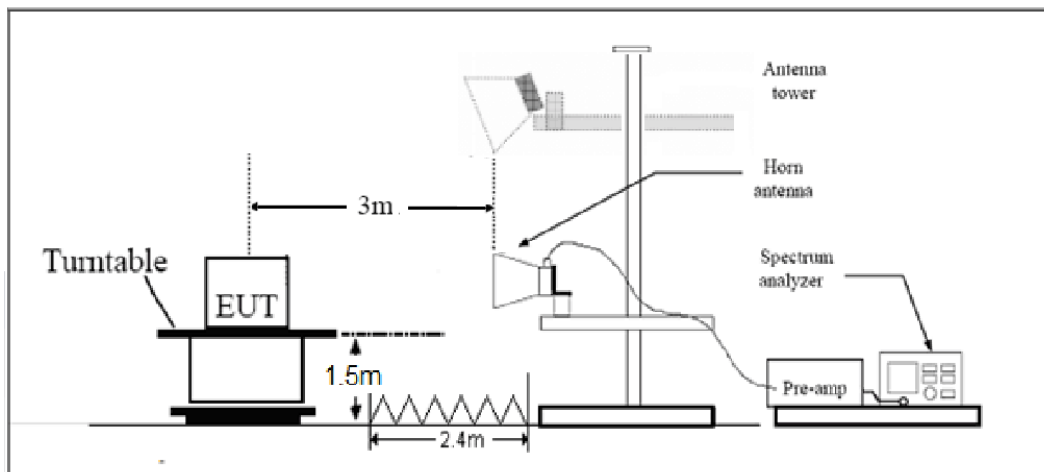

Note: Area side: 2.4mX3.6m

**Limits**

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

GSM 1900 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.00	-40.29	2.60	12.50	Vertical	-30.39	-13.00	17.39	225
3	5640.00	-56.24	3.30	12.50	Vertical	-47.04	-13.00	34.04	135
4	7520.00	-62.88	4.20	12.20	Vertical	-54.88	-13.00	41.88	90
5	9400.00	-69.78	4.30	11.10	Vertical	-62.98	-13.00	49.98	270
6	11280.00	-73.72	5.90	11.90	Vertical	-67.72	-13.00	54.72	0
7	13160.00	-73.54	5.70	14.00	Vertical	-65.24	-13.00	52.24	180
8	15040.00	-77.29	5.80	13.10	Vertical	-69.99	-13.00	56.99	90
9	16920.00	-73.23	6.10	14.60	Vertical	-64.73	-13.00	51.73	315
10	18800.00	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Vertical position.

WCDMA Band II CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.00	-66.64	2.60	12.50	Vertical	-56.74	-13.00	43.74	225
3	5640.00	-63.97	3.30	12.50	Vertical	-54.77	-13.00	41.77	180
4	7520.00	-59.43	4.20	12.20	Vertical	-51.43	-13.00	38.43	45
5	9400.00	-55.39	4.30	11.10	Vertical	-48.59	-13.00	35.59	315
6	11280.00	-51.92	5.90	11.90	Vertical	-45.92	-13.00	32.92	270
7	13160.00	-53.90	5.70	14.00	Vertical	-45.60	-13.00	32.60	0
8	15040.00	-55.43	5.80	13.10	Vertical	-48.13	-13.00	35.13	135
9	16920.00	-51.16	6.10	14.60	Vertical	-42.66	-13.00	29.66	45
10	18800.00	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Vertical position.

LTE Band 2 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.00	-66.49	2.60	12.50	Horizontal	-56.59	-13.00	43.59	225
3	5638.88	-63.49	3.30	12.50	Horizontal	-54.29	-13.00	41.29	90
4	7520.00	-57.84	4.20	12.20	Horizontal	-49.84	-13.00	36.84	45
5	9400.00	-55.93	4.30	11.10	Horizontal	-49.13	-13.00	36.13	270
6	11280.00	-50.42	5.90	11.90	Horizontal	-44.42	-13.00	31.42	45
7	13160.00	-52.38	5.70	14.00	Horizontal	-44.08	-13.00	31.08	0
8	15040.00	-53.49	5.80	13.10	Horizontal	-46.19	-13.00	33.19	315
9	16920.00	-50.01	6.10	14.60	Horizontal	-41.51	-13.00	28.51	90
10	18800.00	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3755.63	-65.70	2.60	12.50	Horizontal	-55.80	-13.00	42.80	45
3	5633.63	-64.31	3.30	12.50	Horizontal	-55.11	-13.00	42.11	225
4	7520.00	-58.05	4.20	12.20	Horizontal	-50.05	-13.00	37.05	0
5	9400.00	-53.99	4.30	11.10	Horizontal	-47.19	-13.00	34.19	0
6	11280.00	-50.80	5.90	11.90	Horizontal	-44.80	-13.00	31.80	90
7	13160.00	-53.28	5.70	14.00	Horizontal	-44.98	-13.00	31.98	45
8	15040.00	-52.44	5.80	13.10	Horizontal	-45.14	-13.00	32.14	315
9	16920.00	-49.37	6.10	14.60	Horizontal	-40.87	-13.00	27.87	90
10	18800.00	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3742.13	-66.39	2.60	12.50	Horizontal	-56.49	-13.00	43.49	90
3	5613.38	-63.88	3.30	12.50	Horizontal	-54.68	-13.00	41.68	45
4	7484.63	-57.83	4.20	12.20	Horizontal	-49.83	-13.00	36.83	135
5	9400.00	-53.92	4.30	11.10	Horizontal	-47.12	-13.00	34.12	180
6	11280.00	-50.04	5.90	11.90	Horizontal	-44.04	-13.00	31.04	45
7	13160.00	-53.11	5.70	14.00	Horizontal	-44.81	-13.00	31.81	45
8	15040.00	-53.62	5.80	13.10	Horizontal	-46.32	-13.00	33.32	270
9	16920.00	-48.74	6.10	14.60	Horizontal	-40.24	-13.00	27.24	90
10	18800.00	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Horn Antenna	Schwarzbeck	BBHA 9120D	1594	2020-12-17	2021-12-16
Signal Analyzer	R&S	FSV30	104028	2021-05-15	2022-05-14
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	01111	2019-09-12	2022-09-11
Software	R&S	EMC32	10.35.10	/	/
Climate Chamber	WEISS	VT 4002	582261194500 10	2021-05-15	2022-05-14
Universal Radio Communication Tester	R&S	CMW500	150415	2021-05-15	2022-05-14
Spectrum Analyzer	Keysight	N9020A	MY52330084	2021-05-15	2022-05-14
Universal Radio Communication Tester	Agilent	E5515C	GB44400275	2021-05-15	2022-05-14
Spectrum Analyzer	R&S	FSV3030	101411	2020-12-13	2021-12-12

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.