

FCC Test Report

FCC ID: QISAGS-L03

Project No. : 1705C003
Equipment : Huawei MediaPad T3 10 (MediaPad T3 10 for short)
Model Name : AGS-L03
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : May 02, 2017
Date of Test : May 02, 2017 ~ May 16, 2017
Issued Date : May 17, 2017
Tested by : BTL Inc.

Testing Engineer : Kevin Li
(Kevin Li)

Technical Manager : Bill Zhang
(Bill Zhang)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . CERIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 EUT OPERATING CONDITIONS	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	37
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	37
4.2.2 MEASUREMENT INSTRUMENTS LIST	38
4.2.3 TEST PROCEDURE	39
4.2.4 DEVIATION FROM TEST STANDARD	39
4.2.5 TEST SETUP	40
4.2.6 TEST RESULTS-BELOW 1GHZ	40
4.2.7 TEST RESULTS-ABOVE 1GHZ	63

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1705C003	Original Issue.	May 17, 2017

1. CERIFICATION

Equipment : Huawei MediaPad T3 10 (MediaPad T3 10 for short)
Brand Name : HUAWEI
Model Name : AGS-L03
Applicant : Huawei Technologies Co., Ltd.
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Factory : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Test : May 02, 2017 ~ May 16, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1705C003) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE(2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Huawei MediaPad T3 10 (MediaPad T3 10 for short)
Brand Name	HUAWEI
Model Name	AGS-L03
Model Difference	N/A
Operation Frequency	GPS GSM 850/1900 WCDMA 850/1700/1900 LTE B2/4/5/7/12/17/25/26/41 WIFI 2.4/5G Bluetooth
Power Source	#1 DC voltage supplied from adapter. #2 Supplied from battery.
Power Rating	#1 100-240V~ 50/60Hz 0.2A #2 DC 3.8V 4650mAh
HW Version	SH1AGSL09M
SW Version	AGS-L03C331B005-log

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT contains following accessory devices:

Item	Mfr/Brand	Model.
Battery	Sunwoda Electronic Co., LTD	HB3080G1EBC/
	Harbin Coslight Power Co.,Ltd.	HB3080G1EBW
Earphone	JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD	22040150
	BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD	22040150
	Goer Tek Inc	22040150
USB Cable	Shenzhen Luxshare Precision Industry Co.,Ltd.	L99U2017-CS-H
	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUBB01M-HC304-DH
	HONGLIN TECHNOLOGY CO.,LTD	130-26988
Adapter	DONGGUAN PHITEK ELECTRONICS CO.,LTD.	HW-050100U01
	SHENZHEN HUNTKEY ELECTRONIC CO.,LTD.	HW-050100A01 HW-050100E01
	HUIZHOU BYD ELECTRONIC CO., LTD.	HW-050100B01

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone
Mode 4	Adapter+Idle+Playing+Speaker
Mode 5	Adapter+Traffic (GSM)+ Earphone
Mode 6	Adapter+Traffic (WCDMA)
Mode 7	Adapter+Traffic (LTE)


For Conducted Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone
Mode 4	Adapter+Idle+Playing+Speaker
Mode 5	Adapter+Traffic (GSM)+ Earphone
Mode 6	Adapter+Traffic (WCDMA)
Mode 7	Adapter+Traffic (LTE)

For Radiated Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone
Mode 4	Adapter+Idle+Playing+Speaker
Mode 5	Adapter+Traffic (GSM)+ Earphone
Mode 6	Adapter+Traffic (WCDMA)
Mode 7	Adapter+Traffic (LTE)


3.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

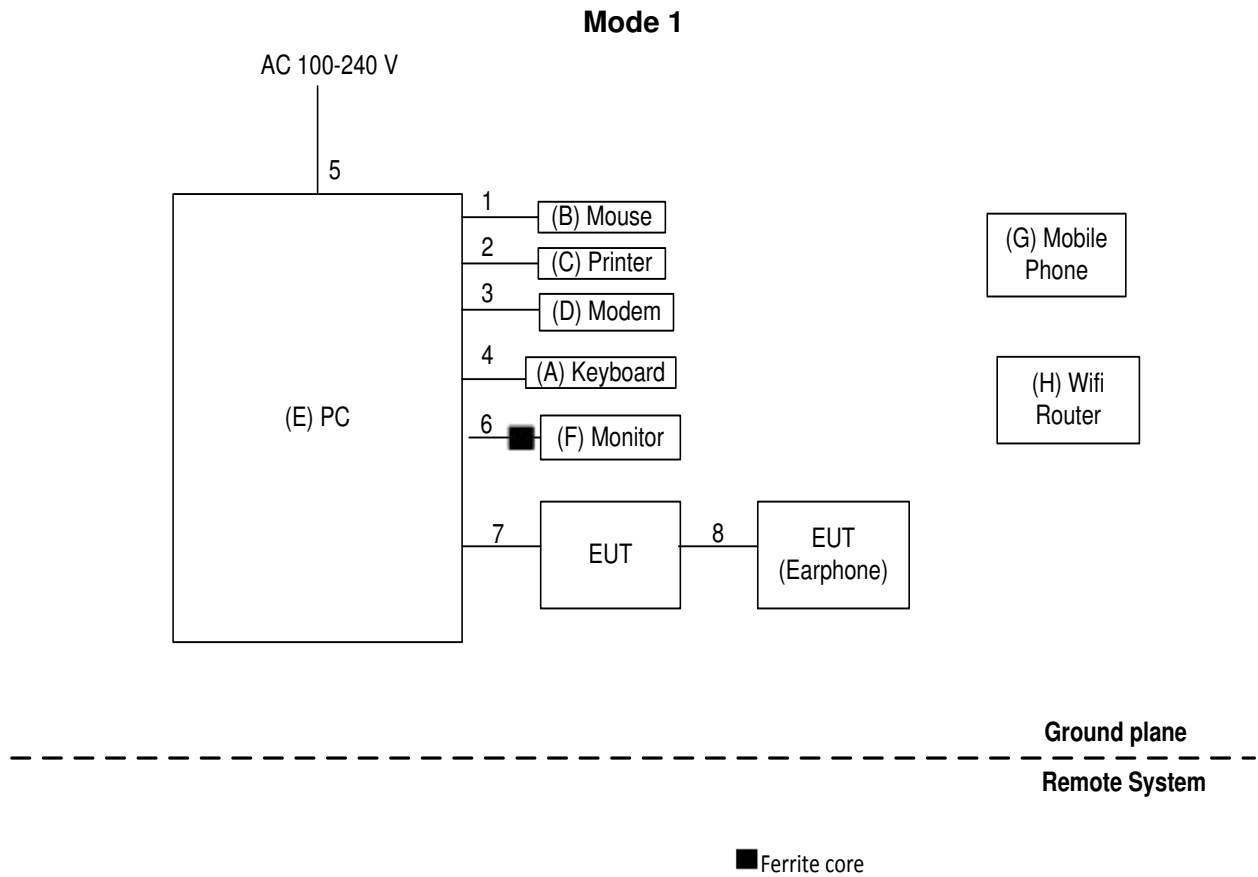

Mode 2-7

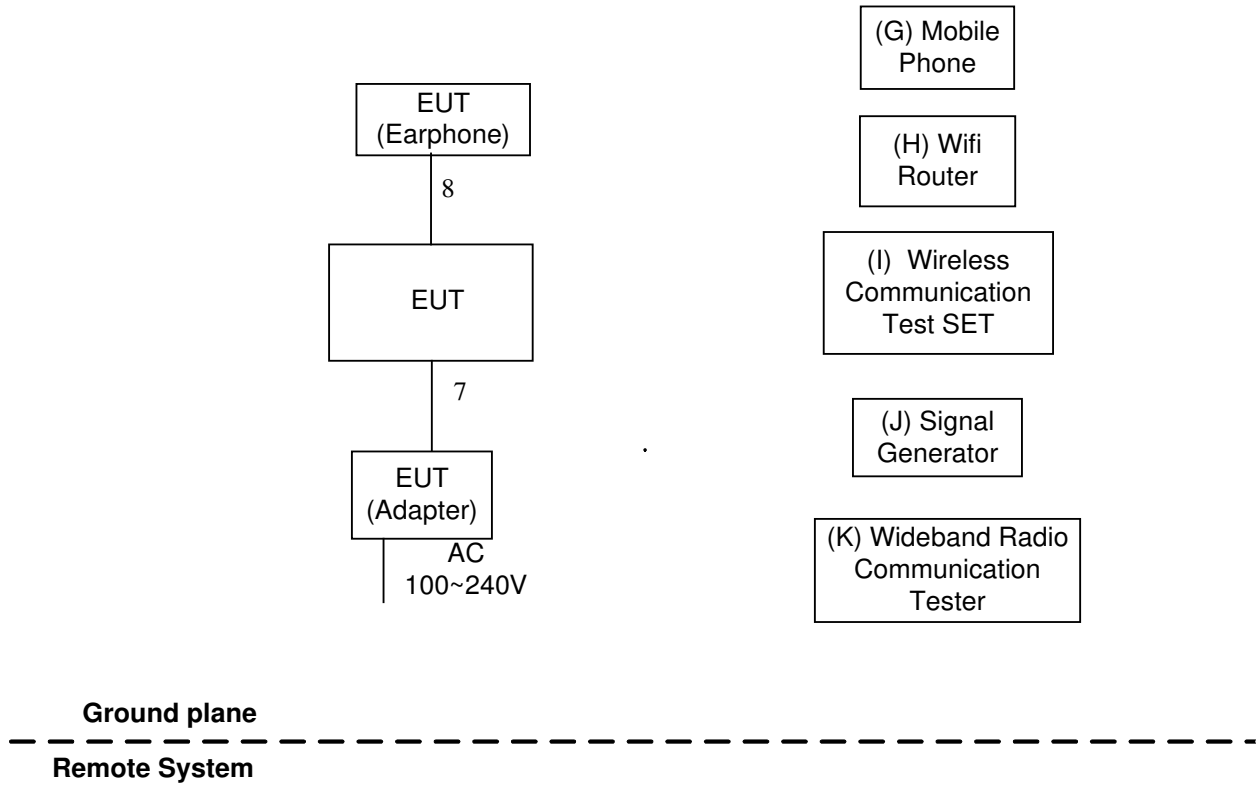

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	PC	Dell	DCSM 745	DOC	G7K832X
F	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6AG-1WNS
G	Mobile phone	samsung	SGH-1747	A3LSGH1747	R31C208VLDB
H	Wireless Router	ASUS	RT-AC66U	MSQ-RTAC66U	E8ICGG000138
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183
J	Signal Generator	Agilent	E4438C	N/A	MY49071316
K	Wideband Radio Communication Tester	RS	CMW500	N/A	122125

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.2m	Earphone Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
2	LISN	EMCO	3816/2	00052765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Cable	emci	RG223(9K Hz-30MHz) (5m)	N/A	Mar. 07, 2018
6	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

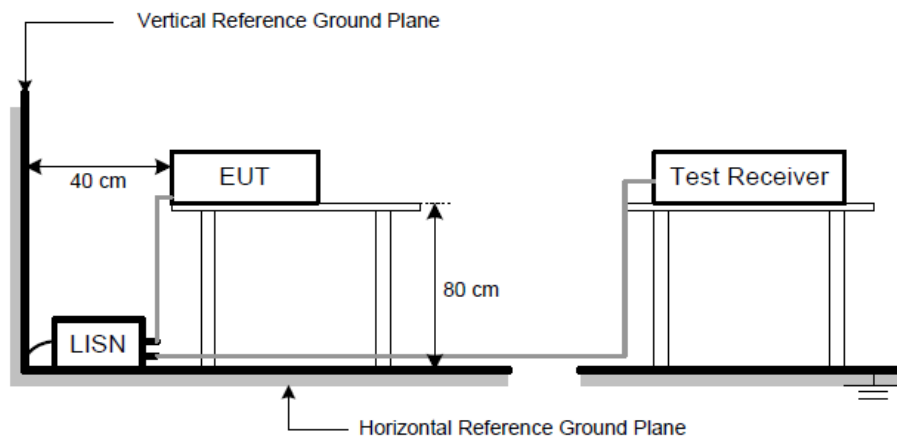


4.1.6 TEST RESULTS

Remark


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

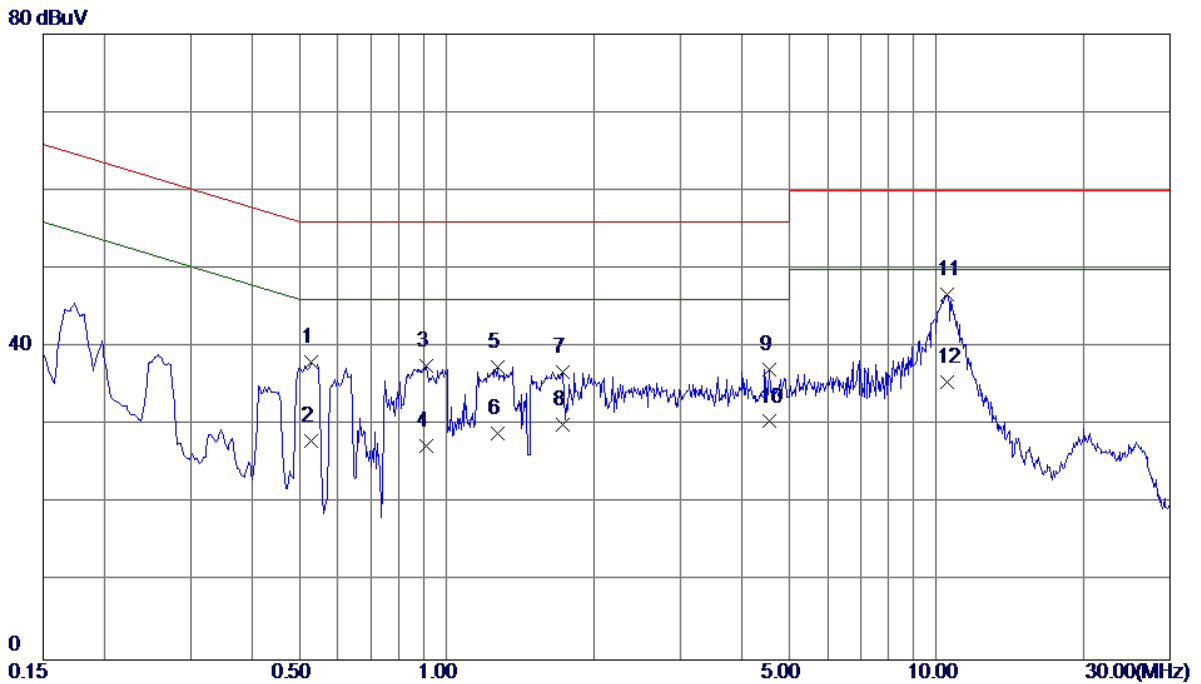


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.5299	28.34	9.76	38.10	56.00	-17.90	QP
2	0.5299	18.30	9.76	28.06	46.00	-17.94	AVG
3	0.9100	27.75	9.78	37.53	56.00	-18.47	QP
4	0.9100	17.61	9.78	27.39	46.00	-18.61	AVG
5	1.2700	27.66	9.80	37.46	56.00	-18.54	QP
6	1.2700	19.20	9.80	29.00	46.00	-17.00	AVG
7	1.7300	27.06	9.81	36.87	56.00	-19.13	QP
8	1.7300	20.29	9.81	30.10	46.00	-15.90	AVG
9	4.5500	27.27	9.88	37.15	56.00	-18.85	QP
10	4.5500	20.60	9.88	30.48	46.00	-15.52	AVG
11 *	10.5500	36.65	10.06	46.71	60.00	-13.29	QP
12	10.5500	25.41	10.06	35.47	50.00	-14.53	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

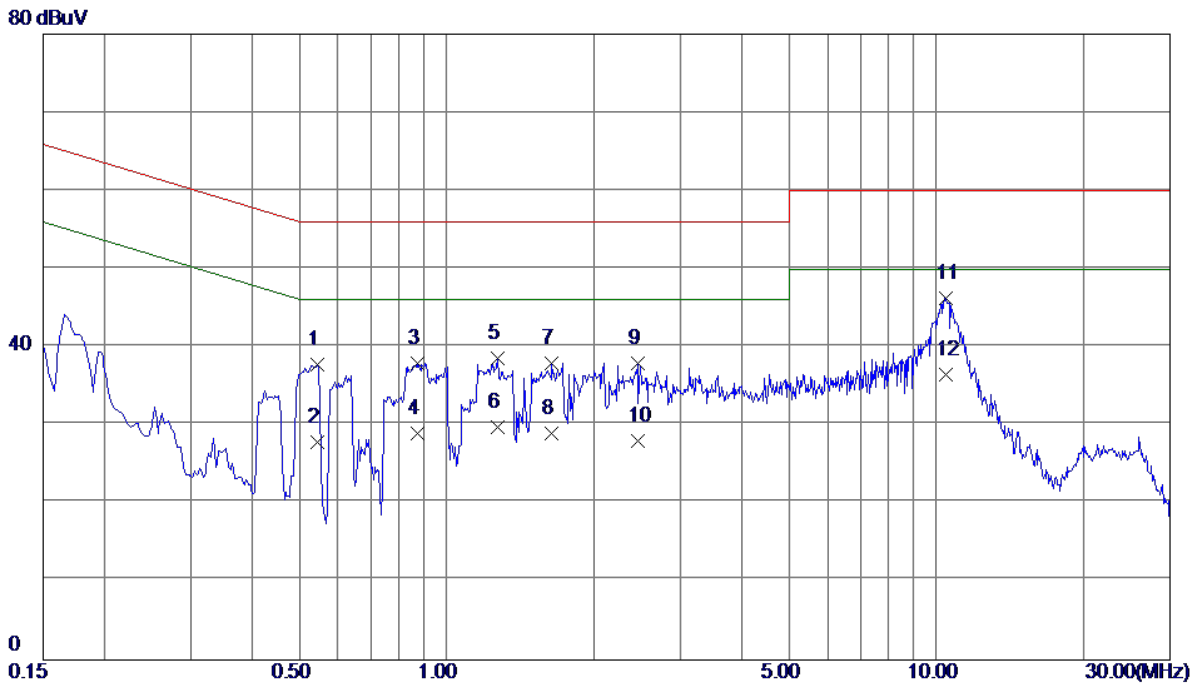


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.5460	28.16	9.66	37.82	56.00	-18.18	QP
2	0.5460	18.20	9.66	27.86	46.00	-18.14	AVG
3	0.8700	28.21	9.67	37.88	56.00	-18.12	QP
4	0.8700	19.30	9.67	28.97	46.00	-17.03	AVG
5	1.2740	28.90	9.68	38.58	56.00	-17.42	QP
6	1.2740	20.10	9.68	29.78	46.00	-16.22	AVG
7	1.6380	28.28	9.70	37.98	56.00	-18.02	QP
8	1.6380	19.30	9.70	29.00	46.00	-17.00	AVG
9	2.4580	28.18	9.73	37.91	56.00	-18.09	QP
10	2.4580	18.30	9.73	28.03	46.00	-17.97	AVG
11	10.4819	36.26	10.02	46.28	60.00	-13.72	QP
12 *	10.4819	26.49	10.02	36.51	50.00	-13.49	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Foxconn+Battery:Coslight+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

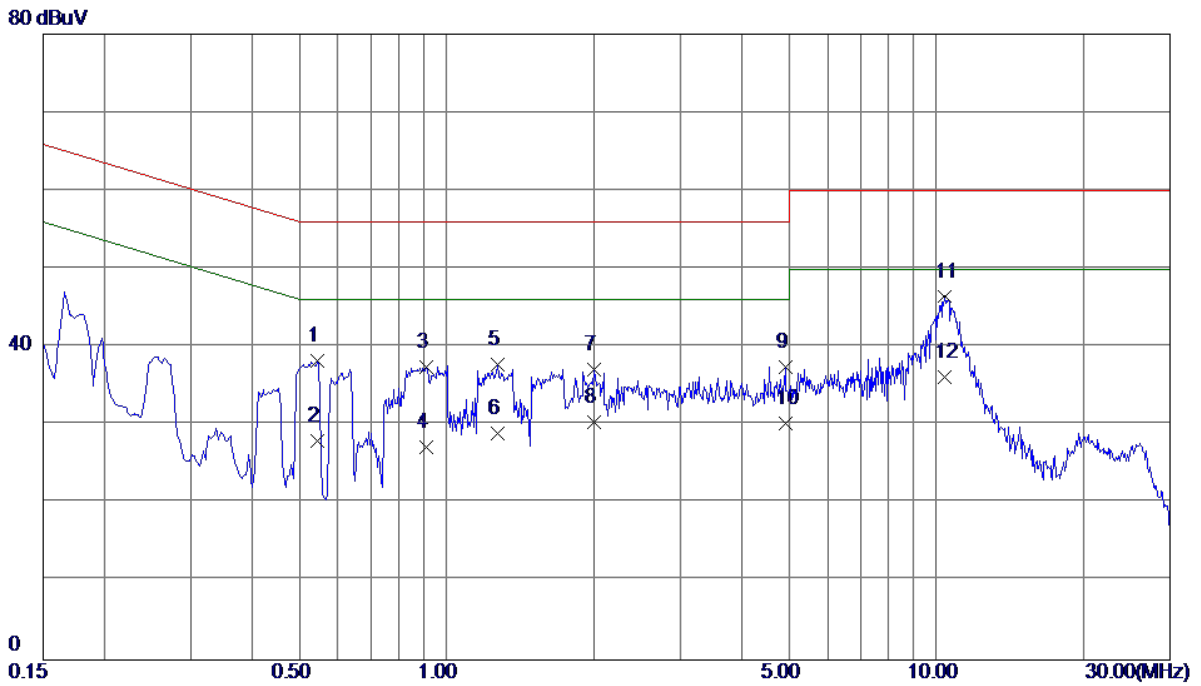


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.5460	28.46	9.76	38.22	56.00	-17.78	QP
2	0.5460	18.30	9.76	28.06	46.00	-17.94	AVG
3	0.9100	27.72	9.78	37.50	56.00	-18.50	QP
4	0.9100	17.41	9.78	27.19	46.00	-18.81	AVG
5	1.2740	27.90	9.80	37.70	56.00	-18.30	QP
6	1.2740	19.20	9.80	29.00	46.00	-17.00	AVG
7	2.0020	27.34	9.80	37.14	56.00	-18.86	QP
8	2.0020	20.60	9.80	30.40	46.00	-15.60	AVG
9	4.9140	27.60	9.89	37.49	56.00	-18.51	QP
10	4.9140	20.40	9.89	30.29	46.00	-15.71	AVG
11 *	10.4180	36.42	10.06	46.48	60.00	-13.52	QP
12	10.4180	26.09	10.06	36.15	50.00	-13.85	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Foxconn+Battery:Coslight+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

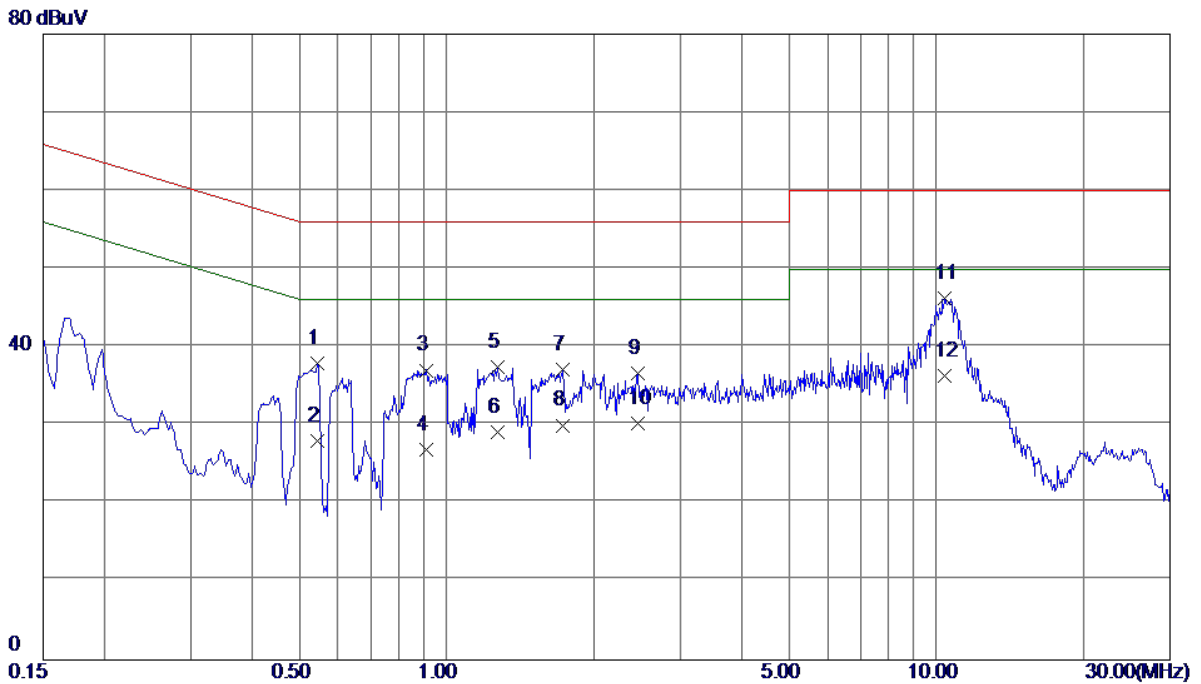


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.5460	28.28	9.66	37.94	56.00	-18.06	QP
2	0.5460	18.40	9.66	28.06	46.00	-17.94	AVG
3	0.9100	27.36	9.68	37.04	56.00	-18.96	QP
4	0.9100	17.20	9.68	26.88	46.00	-19.12	AVG
5	1.2740	27.79	9.68	37.47	56.00	-18.53	QP
6	1.2740	19.40	9.68	29.08	46.00	-16.92	AVG
7	1.7300	27.35	9.71	37.06	56.00	-18.94	QP
8	1.7300	20.29	9.71	30.00	46.00	-16.00	AVG
9	2.4580	26.86	9.73	36.59	56.00	-19.41	QP
10	2.4580	20.50	9.73	30.23	46.00	-15.77	AVG
11	10.4260	36.22	10.02	46.24	60.00	-13.76	QP
12 *	10.4260	26.29	10.02	36.31	50.00	-13.69	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:HONGLIN+Battery:SCUD+Earphone:GoerTek		
Test Engineer	Kevin Li		

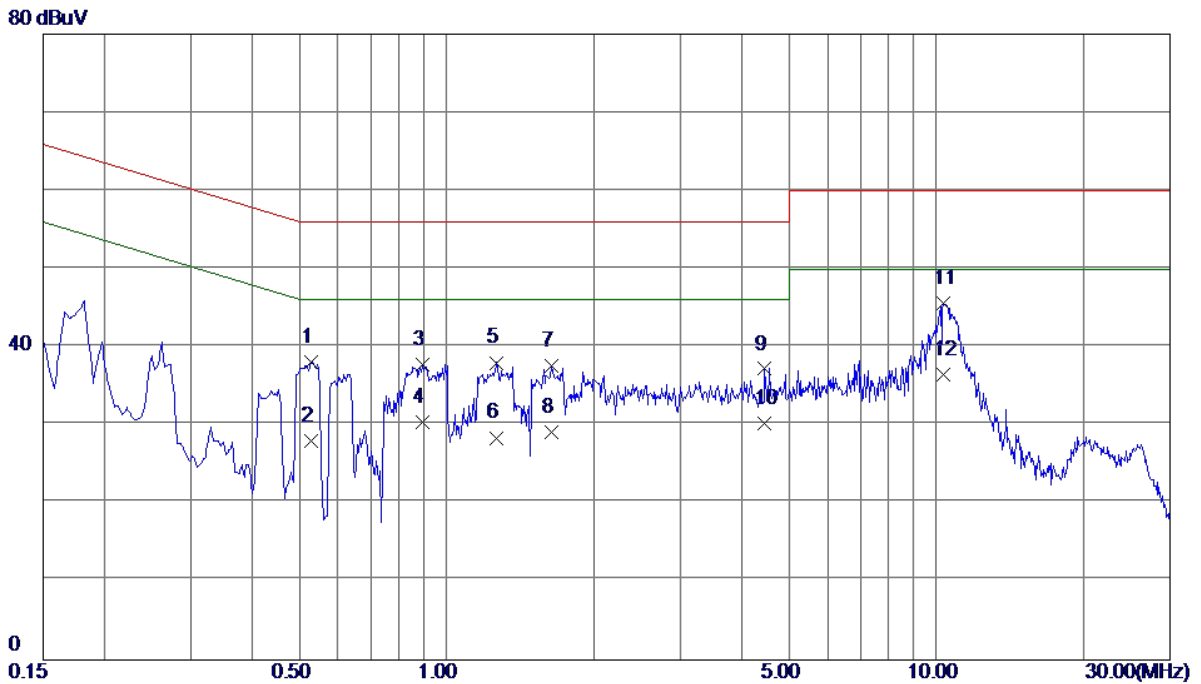


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.5299	28.29	9.76	38.05	56.00	-17.95	QP
2	0.5299	18.30	9.76	28.06	46.00	-17.94	AVG
3	0.8940	28.01	9.78	37.79	56.00	-18.21	QP
4	0.8940	20.60	9.78	30.38	46.00	-15.62	AVG
5	1.2660	28.20	9.80	38.00	56.00	-18.00	QP
6	1.2660	18.60	9.80	28.40	46.00	-17.60	AVG
7	1.6380	27.86	9.81	37.67	56.00	-18.33	QP
8	1.6380	19.29	9.81	29.10	46.00	-16.90	AVG
9	4.4660	27.33	9.87	37.20	56.00	-18.80	QP
10	4.4660	20.40	9.87	30.27	46.00	-15.73	AVG
11	10.3580	35.53	10.06	45.59	60.00	-14.41	QP
12 *	10.3580	26.49	10.06	36.55	50.00	-13.45	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:HONGLIN+Battery:SCUD+Earphone:GoerTek		
Test Engineer	Kevin Li		

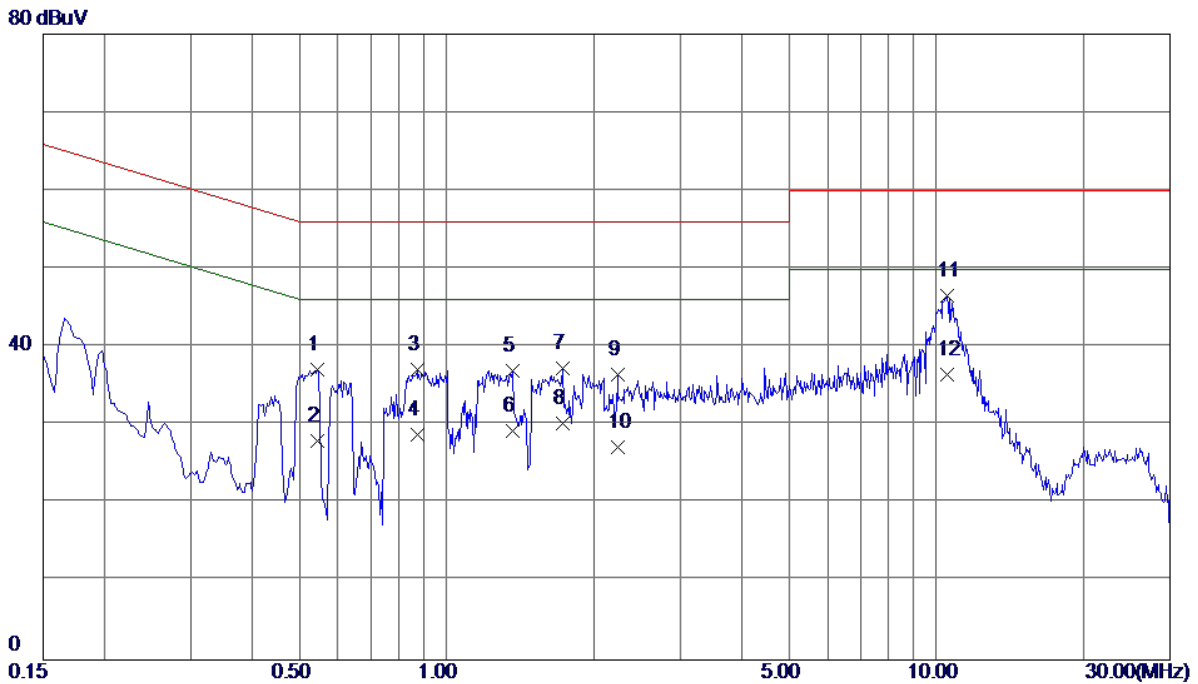


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.5460	27.45	9.66	37.11	56.00	-18.89	QP
2	0.5460	18.30	9.66	27.96	46.00	-18.04	AVG
3	0.8700	27.44	9.67	37.11	56.00	-18.89	QP
4	0.8700	19.20	9.67	28.87	46.00	-17.13	AVG
5	1.3660	27.29	9.68	36.97	56.00	-19.03	QP
6	1.3660	19.61	9.68	29.29	46.00	-16.71	AVG
7	1.7300	27.50	9.71	37.21	56.00	-18.79	QP
8	1.7300	20.59	9.71	30.30	46.00	-15.70	AVG
9	2.2340	26.72	9.73	36.45	56.00	-19.55	QP
10	2.2340	17.51	9.73	27.24	46.00	-18.76	AVG
11 *	10.4900	36.49	10.02	46.51	60.00	-13.49	QP
12	10.4900	26.39	10.02	36.41	50.00	-13.59	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

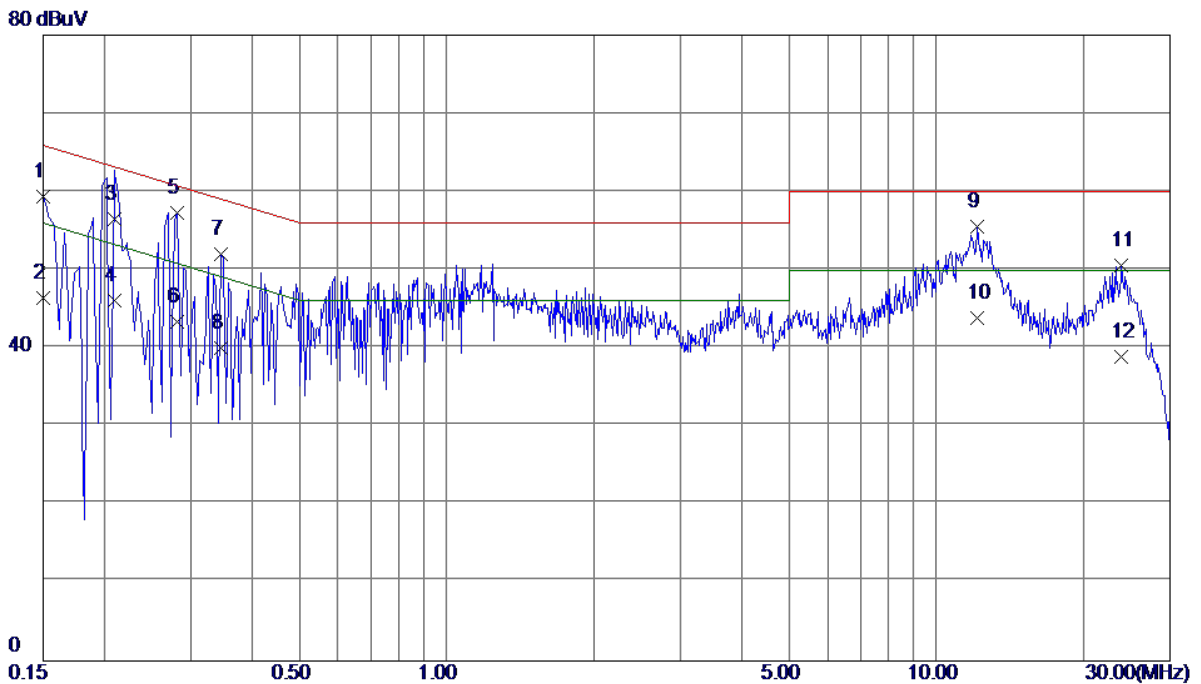


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	49.57	9.75	59.32	66.00	-6.68	QP
2	0.1500	36.70	9.75	46.45	56.00	-9.55	AVG
3	0.2100	46.80	9.72	56.52	63.21	-6.69	QP
4	0.2100	36.40	9.72	46.12	53.21	-7.09	AVG
5 *	0.2819	47.60	9.72	57.32	60.76	-3.44	QP
6	0.2819	33.60	9.72	43.32	50.76	-7.44	AVG
7	0.3460	42.29	9.75	52.04	59.06	-7.02	QP
8	0.3460	30.20	9.75	39.95	49.06	-9.11	AVG
9	12.1260	45.39	10.13	55.52	60.00	-4.48	QP
10	12.1260	33.70	10.13	43.83	50.00	-6.17	AVG
11	23.9100	40.16	10.33	50.49	60.00	-9.51	QP
12	23.9100	28.60	10.33	38.93	50.00	-11.07	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

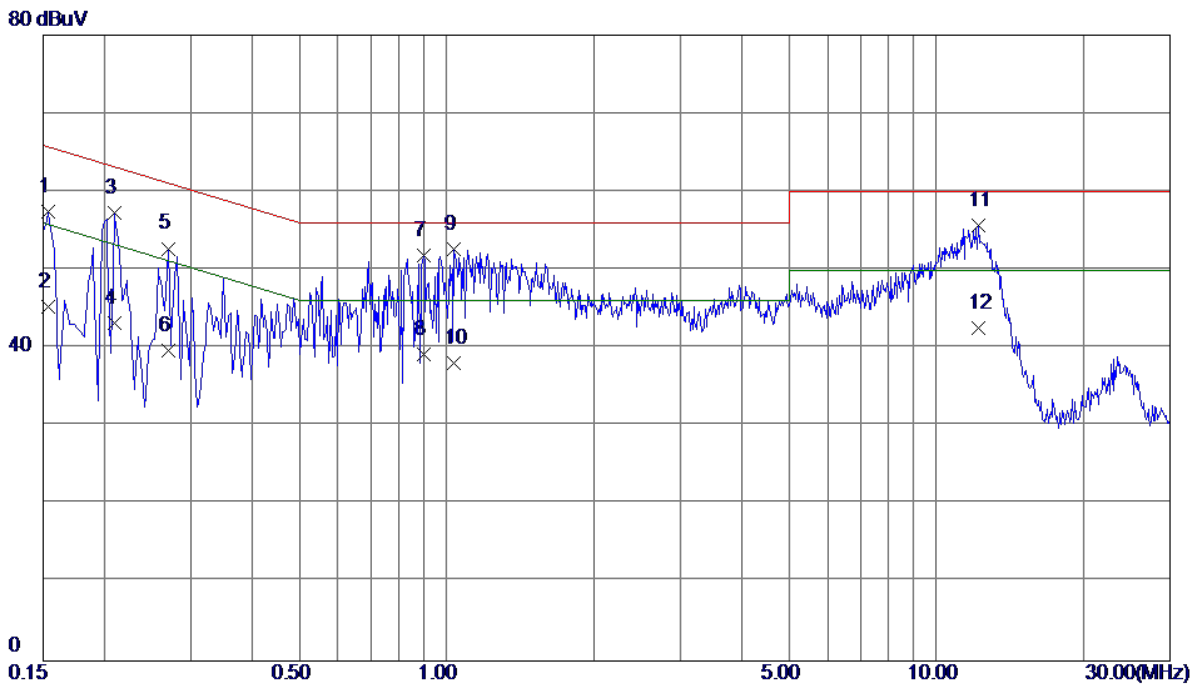


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	47.73	9.64	57.37	65.79	-8.42	QP
2	0.1539	35.60	9.64	45.24	55.79	-10.55	AVG
3	0.2100	47.60	9.65	57.25	63.21	-5.96	QP
4	0.2100	33.60	9.65	43.25	53.21	-9.96	AVG
5	0.2700	43.08	9.64	52.72	61.12	-8.40	QP
6	0.2700	30.10	9.64	39.74	51.12	-11.38	AVG
7	0.8980	42.21	9.67	51.88	56.00	-4.12	QP
8	0.8980	29.60	9.67	39.27	46.00	-6.73	AVG
9 *	1.0339	42.97	9.68	52.65	56.00	-3.35	QP
10	1.0339	28.40	9.68	38.08	46.00	-7.92	AVG
11	12.1540	45.49	10.12	55.61	60.00	-4.39	QP
12	12.1540	32.40	10.12	42.52	50.00	-7.48	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

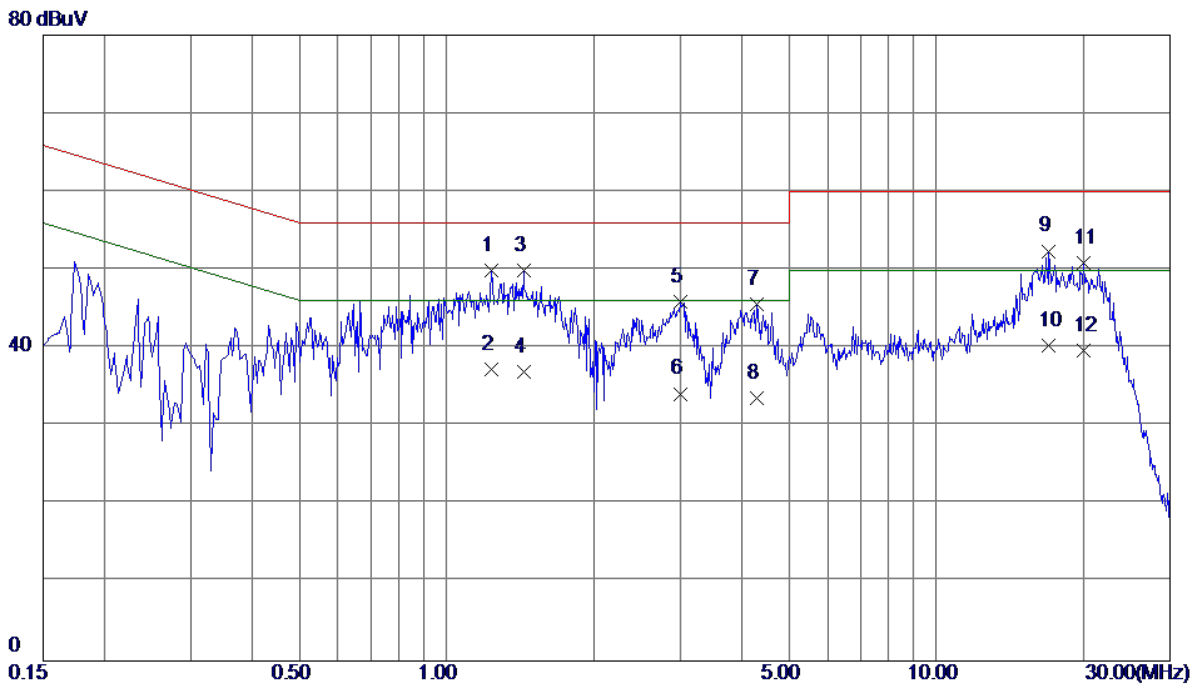


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	1.2340	40.07	9.80	49.87	56.00	-6.13	QP
2	1.2340	27.49	9.80	37.29	46.00	-8.71	AVG
3 *	1.4380	40.17	9.81	49.98	56.00	-6.02	QP
4	1.4380	27.10	9.81	36.91	46.00	-9.09	AVG
5	2.9980	36.05	9.86	45.91	56.00	-10.09	QP
6	2.9980	24.30	9.86	34.16	46.00	-11.84	AVG
7	4.3020	35.65	9.87	45.52	56.00	-10.48	QP
8	4.3020	23.80	9.87	33.67	46.00	-12.33	AVG
9	16.9700	42.14	10.26	52.40	60.00	-7.60	QP
10	16.9700	30.10	10.26	40.36	50.00	-9.64	AVG
11	19.9500	40.63	10.26	50.89	60.00	-9.11	QP
12	19.9500	29.40	10.26	39.66	50.00	-10.34	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

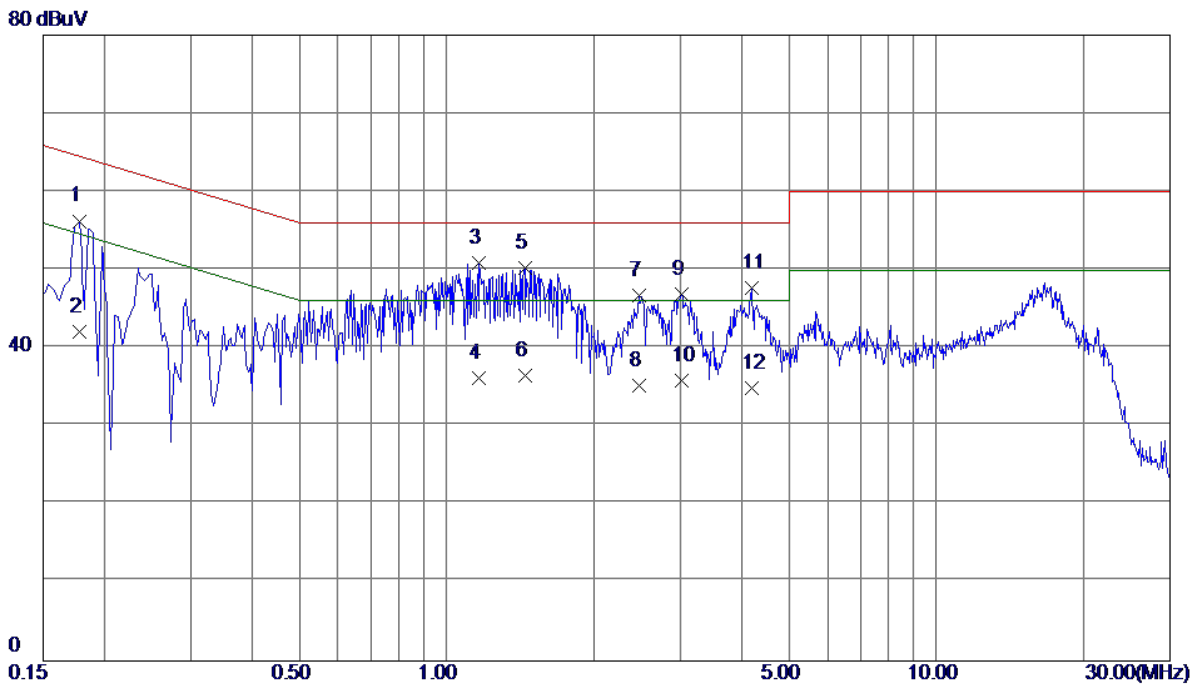


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1780	46.60	9.64	56.24	64.58	-8.34	QP
2	0.1780	32.40	9.64	42.04	54.58	-12.54	AVG
3 *	1.1660	41.28	9.67	50.95	56.00	-5.05	QP
4	1.1660	26.50	9.67	36.17	46.00	-9.83	AVG
5	1.4460	40.59	9.69	50.28	56.00	-5.72	QP
6	1.4460	26.80	9.69	36.49	46.00	-9.51	AVG
7	2.4660	37.01	9.73	46.74	56.00	-9.26	QP
8	2.4660	25.40	9.73	35.13	46.00	-10.87	AVG
9	3.0140	37.09	9.76	46.85	56.00	-9.15	QP
10	3.0140	26.10	9.76	35.86	46.00	-10.14	AVG
11	4.1940	37.91	9.80	47.71	56.00	-8.29	QP
12	4.1940	25.09	9.80	34.89	46.00	-11.11	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

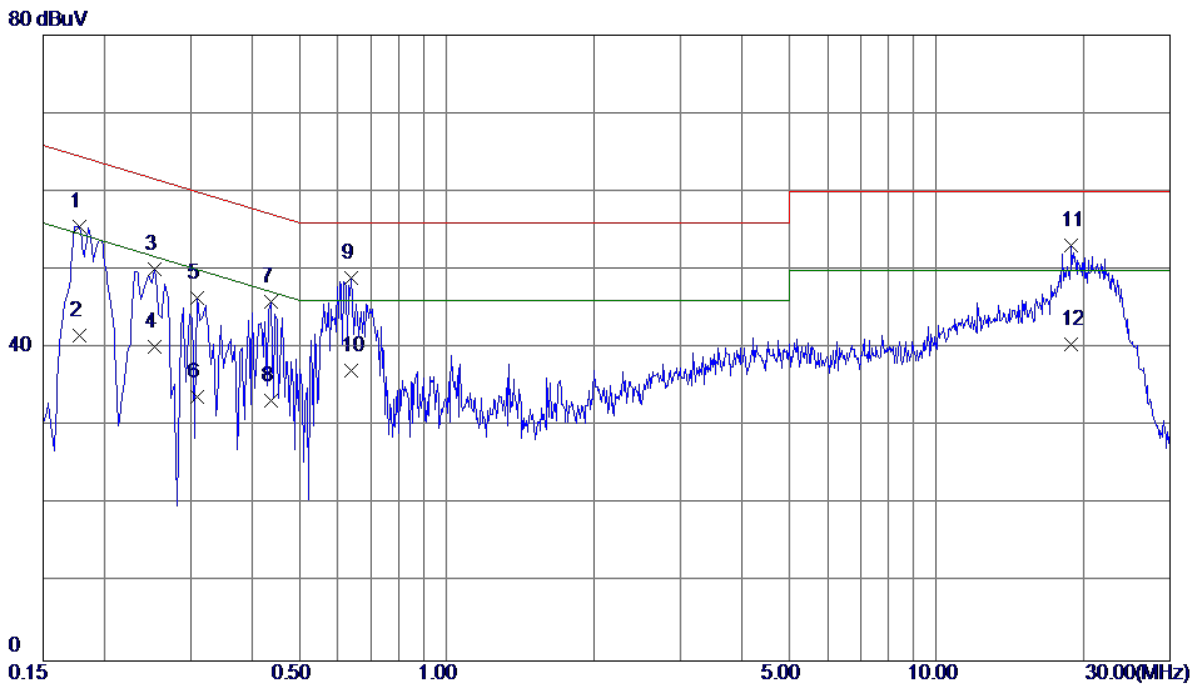


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1780	45.75	9.74	55.49	64.58	-9.09	QP
2	0.1780	31.89	9.74	41.63	54.58	-12.95	AVG
3	0.2540	40.33	9.72	50.05	61.63	-11.58	QP
4	0.2540	30.41	9.72	40.13	51.63	-11.50	AVG
5	0.3100	36.67	9.73	46.40	59.97	-13.57	QP
6	0.3100	24.10	9.73	33.83	49.97	-16.14	AVG
7	0.4380	36.20	9.76	45.96	57.10	-11.14	QP
8	0.4380	23.50	9.76	33.26	47.10	-13.84	AVG
9	0.6380	39.15	9.76	48.91	56.00	-7.09	QP
10	0.6380	27.40	9.76	37.16	46.00	-8.84	AVG
11 *	18.8260	42.79	10.26	53.05	60.00	-6.95	QP
12	18.8260	30.20	10.26	40.46	50.00	-9.54	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

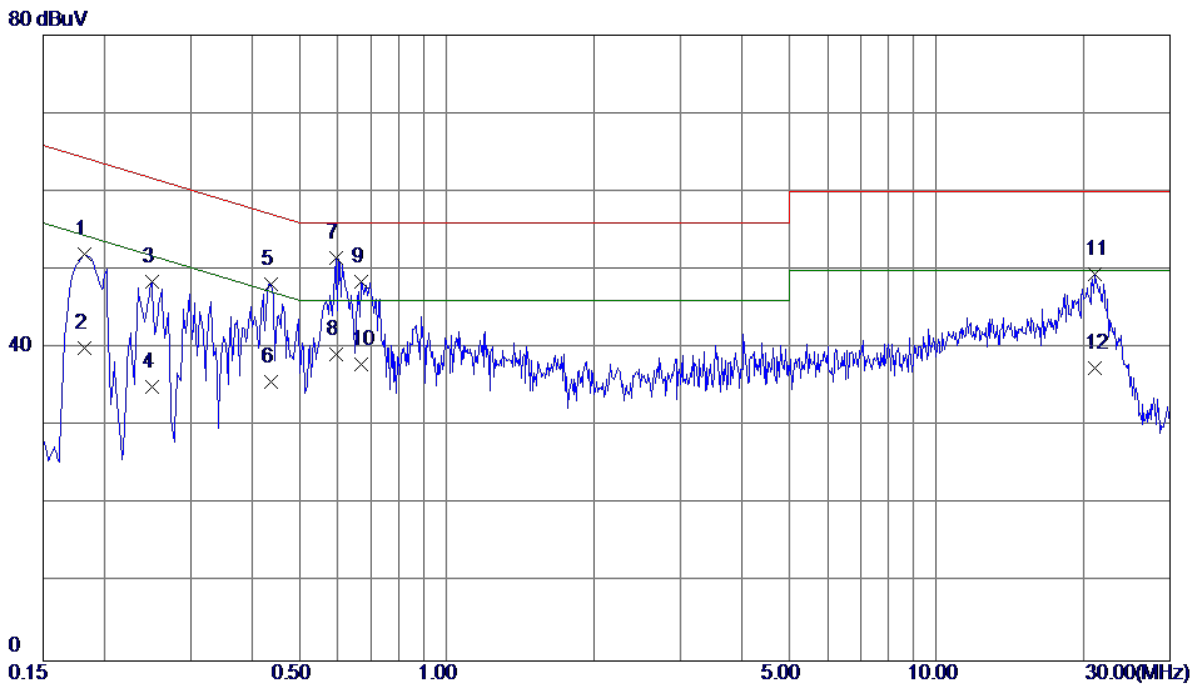


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1819	42.34	9.65	51.99	64.40	-12.41	QP
2	0.1819	30.39	9.65	40.04	54.40	-14.36	AVG
3	0.2500	38.81	9.64	48.45	61.76	-13.31	QP
4	0.2500	25.40	9.64	35.04	51.76	-16.72	AVG
5	0.4380	38.55	9.65	48.20	57.10	-8.90	QP
6	0.4380	26.10	9.65	35.75	47.10	-11.35	AVG
7 *	0.5940	41.85	9.66	51.51	56.00	-4.49	QP
8	0.5940	29.50	9.66	39.16	46.00	-6.84	AVG
9	0.6700	38.76	9.67	48.43	56.00	-7.57	QP
10	0.6700	28.30	9.67	37.97	46.00	-8.03	AVG
11	21.0419	38.99	10.39	49.38	60.00	-10.62	QP
12	21.0419	27.10	10.39	37.49	50.00	-12.51	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

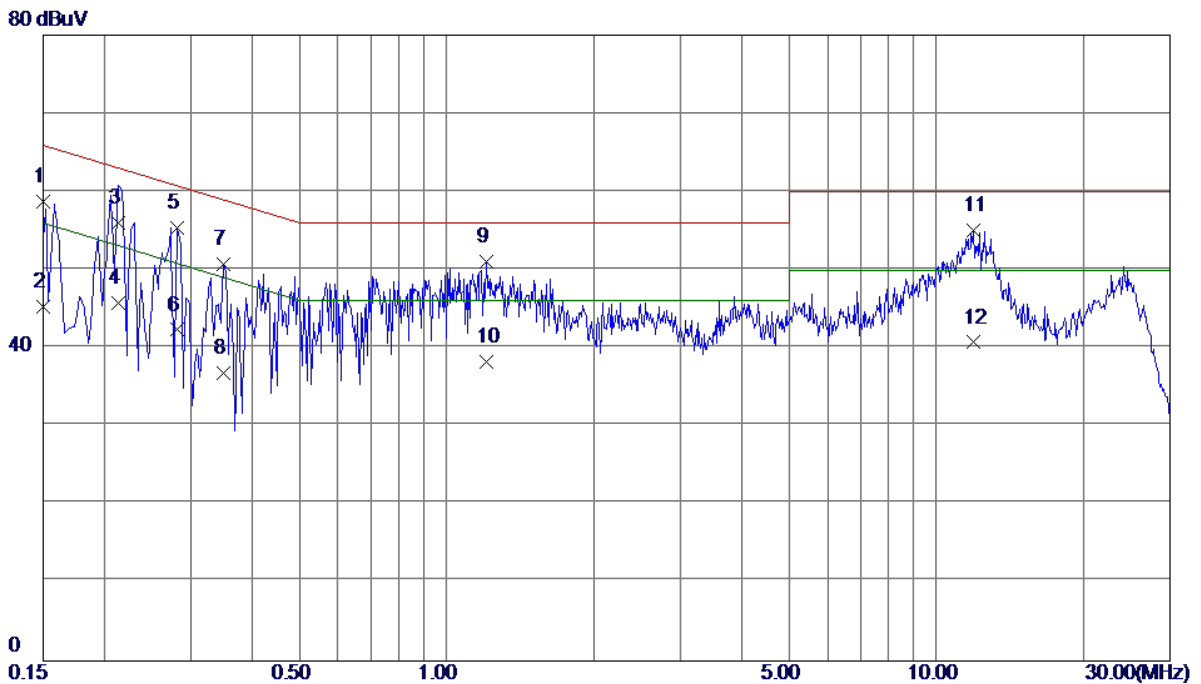


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	49.04	9.75	58.79	66.00	-7.21	QP
2	0.1500	35.60	9.75	45.35	56.00	-10.65	AVG
3	0.2140	46.30	9.72	56.02	63.05	-7.03	QP
4	0.2140	36.10	9.72	45.82	53.05	-7.23	AVG
5	0.2819	45.66	9.72	55.38	60.76	-5.38	QP
6	0.2819	32.60	9.72	42.32	50.76	-8.44	AVG
7	0.3500	41.03	9.75	50.78	58.96	-8.18	QP
8	0.3500	27.10	9.75	36.85	48.96	-12.11	AVG
9 *	1.2059	41.26	9.79	51.05	56.00	-4.95	QP
10	1.2059	28.40	9.79	38.19	46.00	-7.81	AVG
11	11.8820	44.92	10.12	55.04	60.00	-4.96	QP
12	11.8820	30.60	10.12	40.72	50.00	-9.28	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

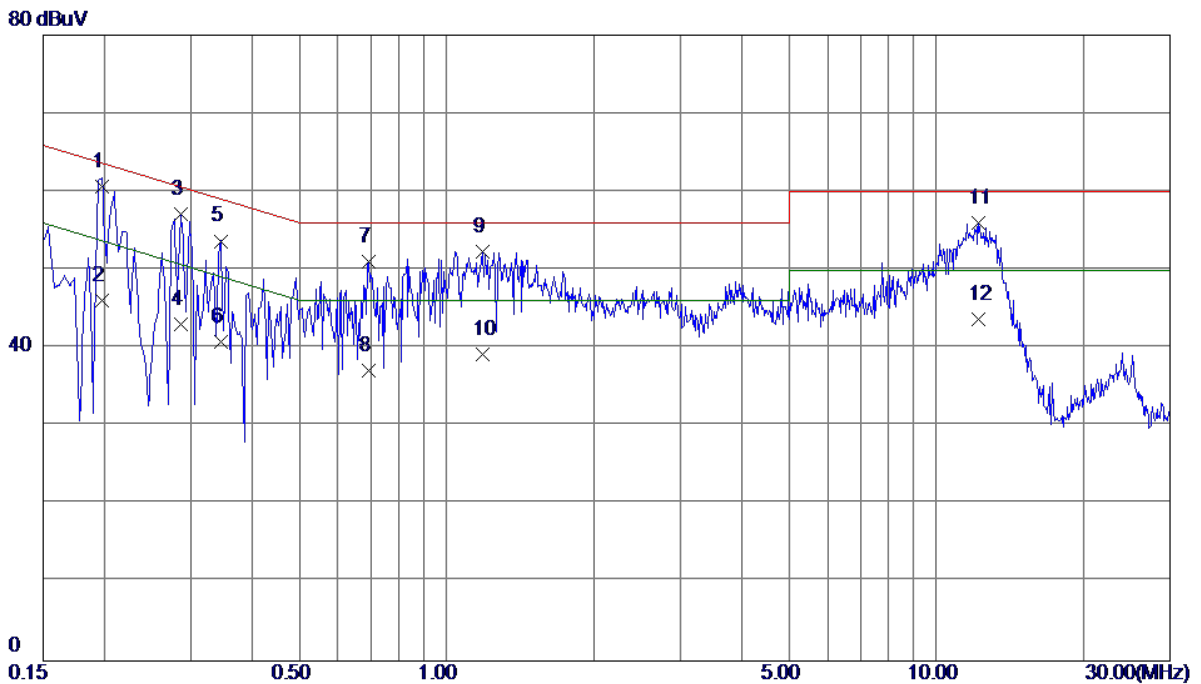


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1980	51.06	9.65	60.71	63.69	-2.98	QP
2	0.1980	36.40	9.65	46.05	53.69	-7.64	AVG
3	0.2860	47.45	9.64	57.09	60.64	-3.55	QP
4	0.2860	33.40	9.64	43.04	50.64	-7.60	AVG
5	0.3460	44.02	9.66	53.68	59.06	-5.38	QP
6	0.3460	31.20	9.66	40.86	49.06	-8.20	AVG
7	0.6940	41.41	9.67	51.08	56.00	-4.92	QP
8	0.6940	27.40	9.67	37.07	46.00	-8.93	AVG
9	1.1820	42.68	9.67	52.35	56.00	-3.65	QP
10	1.1820	29.60	9.67	39.27	46.00	-6.73	AVG
11	12.2180	45.85	10.12	55.97	60.00	-4.03	QP
12	12.2180	33.60	10.12	43.72	50.00	-6.28	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

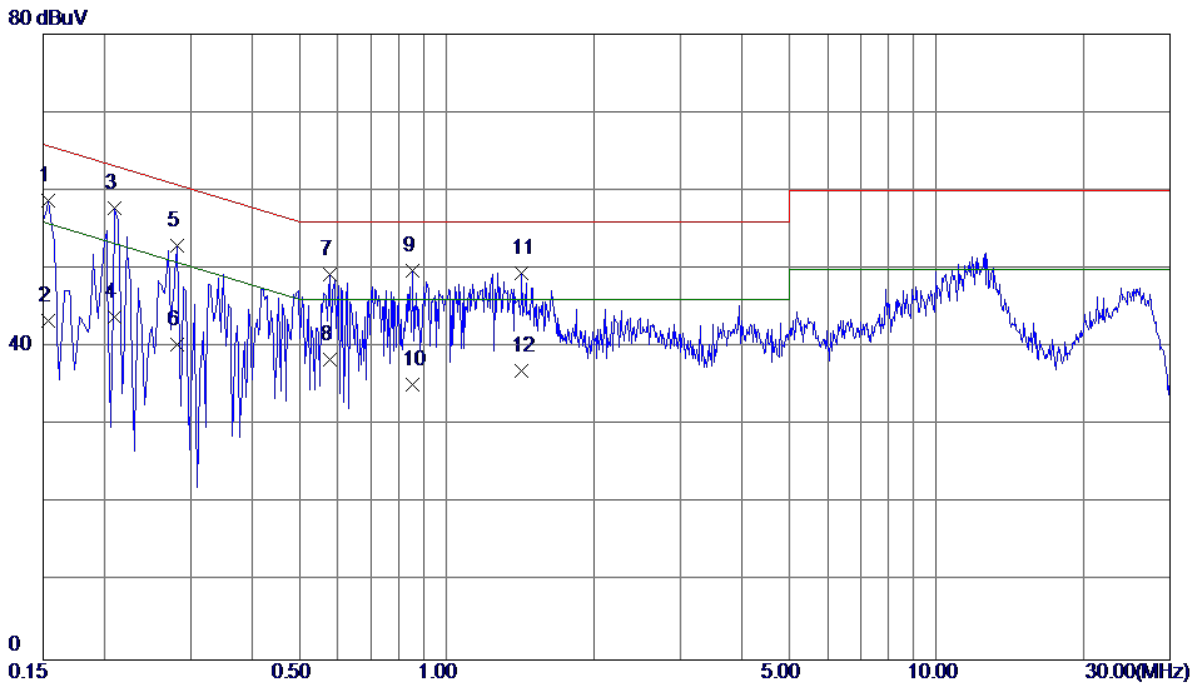


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	48.94	9.75	58.69	65.79	-7.10	QP
2	0.1539	33.60	9.75	43.35	55.79	-12.44	AVG
3 *	0.2100	48.10	9.72	57.82	63.21	-5.39	QP
4	0.2100	34.10	9.72	43.82	53.21	-9.39	AVG
5	0.2819	43.20	9.72	52.92	60.76	-7.84	QP
6	0.2819	30.60	9.72	40.32	50.76	-10.44	AVG
7	0.5780	39.50	9.76	49.26	56.00	-6.74	QP
8	0.5780	28.60	9.76	38.36	46.00	-7.64	AVG
9	0.8540	40.05	9.77	49.82	56.00	-6.18	QP
10	0.8540	25.40	9.77	35.17	46.00	-10.83	AVG
11	1.4220	39.66	9.81	49.47	56.00	-6.53	QP
12	1.4220	27.20	9.81	37.01	46.00	-8.99	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

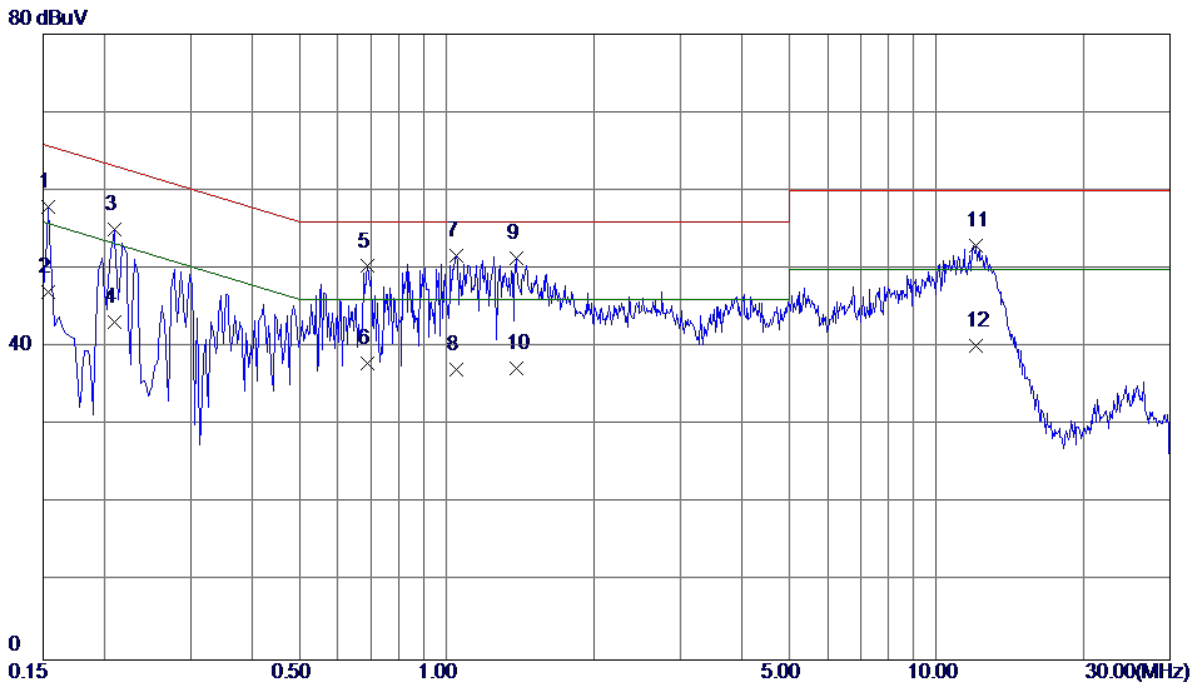


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	48.27	9.64	57.91	65.79	-7.88	QP
2	0.1539	37.40	9.64	47.04	55.79	-8.75	AVG
3	0.2100	45.45	9.65	55.10	63.21	-8.11	QP
4	0.2100	33.60	9.65	43.25	53.21	-9.96	AVG
5	0.6900	40.65	9.67	50.32	56.00	-5.68	QP
6	0.6900	28.30	9.67	37.97	46.00	-8.03	AVG
7 *	1.0460	41.99	9.68	51.67	56.00	-4.33	QP
8	1.0460	27.40	9.68	37.08	46.00	-8.92	AVG
9	1.3860	41.71	9.68	51.39	56.00	-4.61	QP
10	1.3860	27.61	9.68	37.29	46.00	-8.71	AVG
11	12.0219	42.89	10.11	53.00	60.00	-7.00	QP
12	12.0219	30.10	10.11	40.21	50.00	-9.79	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

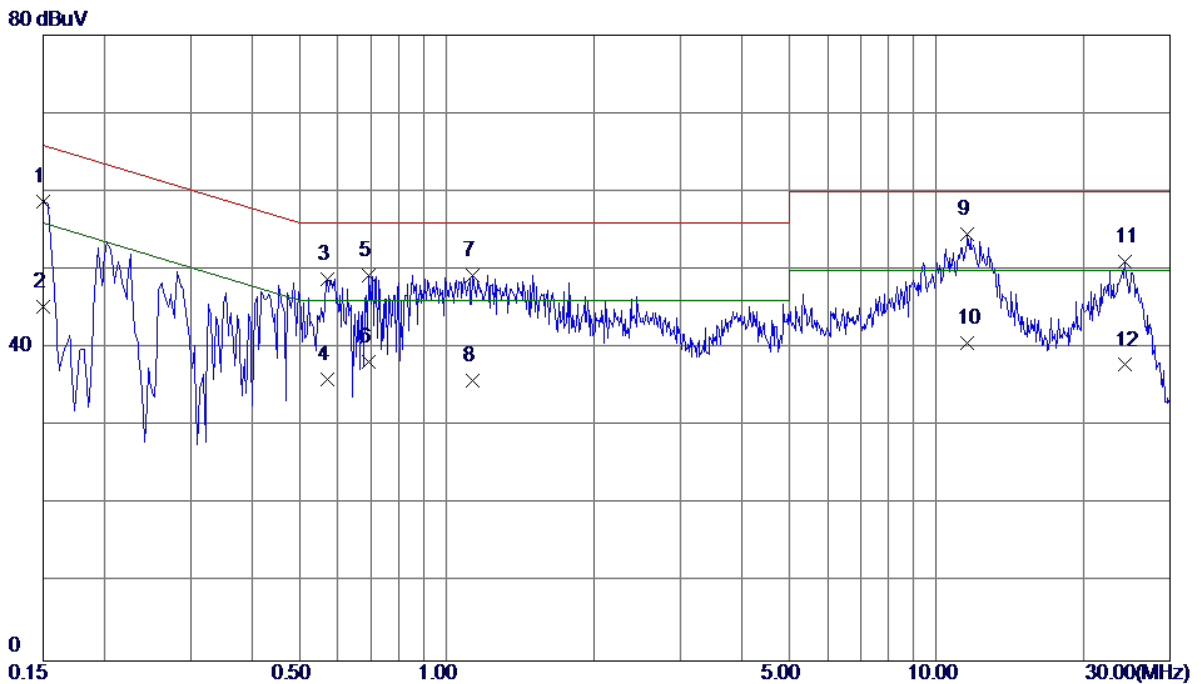


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	48.99	9.75	58.74	66.00	-7.26	QP
2	0.1500	35.60	9.75	45.35	56.00	-10.65	AVG
3	0.5700	39.07	9.76	48.83	56.00	-7.17	QP
4	0.5700	26.30	9.76	36.06	46.00	-9.94	AVG
5	0.6940	39.48	9.77	49.25	56.00	-6.75	QP
6	0.6940	28.40	9.77	38.17	46.00	-7.83	AVG
7	1.1300	39.54	9.79	49.33	56.00	-6.67	QP
8	1.1300	26.09	9.79	35.88	46.00	-10.12	AVG
9 *	11.5780	44.38	10.11	54.49	60.00	-5.51	QP
10	11.5780	30.60	10.11	40.71	50.00	-9.29	AVG
11	24.2900	40.71	10.34	51.05	60.00	-8.95	QP
12	24.2900	27.50	10.34	37.84	50.00	-12.16	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

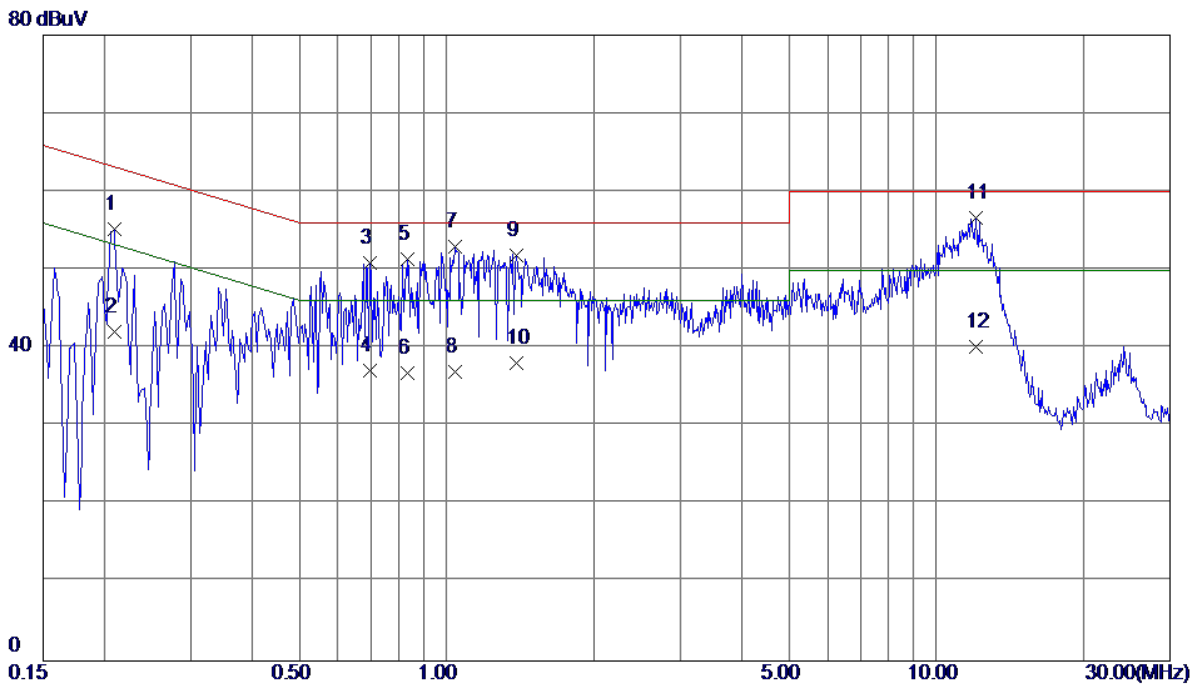


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 2100	45. 53	9. 65	55. 18	63. 21	-8. 03	QP
2	0. 2100	32. 40	9. 65	42. 05	53. 21	-11. 16	AVG
3	0. 6980	41. 17	9. 67	50. 84	56. 00	-5. 16	QP
4	0. 6980	27. 50	9. 67	37. 17	46. 00	-8. 83	AVG
5	0. 8340	41. 64	9. 66	51. 30	56. 00	-4. 70	QP
6	0. 8340	27. 10	9. 66	36. 76	46. 00	-9. 24	AVG
7 *	1. 0420	43. 25	9. 68	52. 93	56. 00	-3. 07	QP
8	1. 0420	27. 30	9. 68	36. 98	46. 00	-9. 02	AVG
9	1. 3900	42. 24	9. 68	51. 92	56. 00	-4. 08	QP
10	1. 3900	28. 41	9. 68	38. 09	46. 00	-7. 91	AVG
11	12. 0420	46. 58	10. 11	56. 69	60. 00	-3. 31	QP
12	12. 0420	30. 10	10. 11	40. 21	50. 00	-9. 79	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

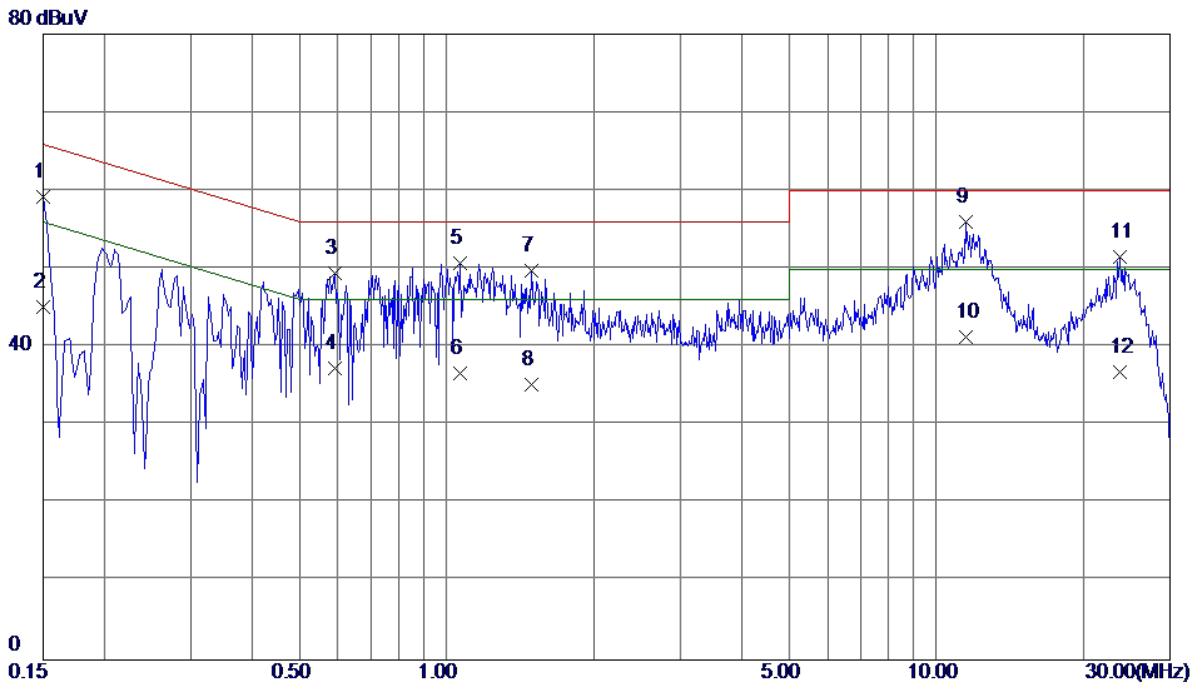


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	49.48	9.75	59.23	66.00	-6.77	QP
2	0.1500	35.40	9.75	45.15	56.00	-10.85	AVG
3	0.5899	39.64	9.76	49.40	56.00	-6.60	QP
4	0.5899	27.50	9.76	37.26	46.00	-8.74	AVG
5	1.0660	40.98	9.78	50.76	56.00	-5.24	QP
6	1.0660	26.80	9.78	36.58	46.00	-9.42	AVG
7	1.4940	39.89	9.81	49.70	56.00	-6.30	QP
8	1.4940	25.40	9.81	35.21	46.00	-10.79	AVG
9 *	11.4980	45.84	10.11	55.95	60.00	-4.05	QP
10	11.4980	31.19	10.11	41.30	50.00	-8.70	AVG
11	23.6580	41.26	10.33	51.59	60.00	-8.41	QP
12	23.6580	26.40	10.33	36.73	50.00	-13.27	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

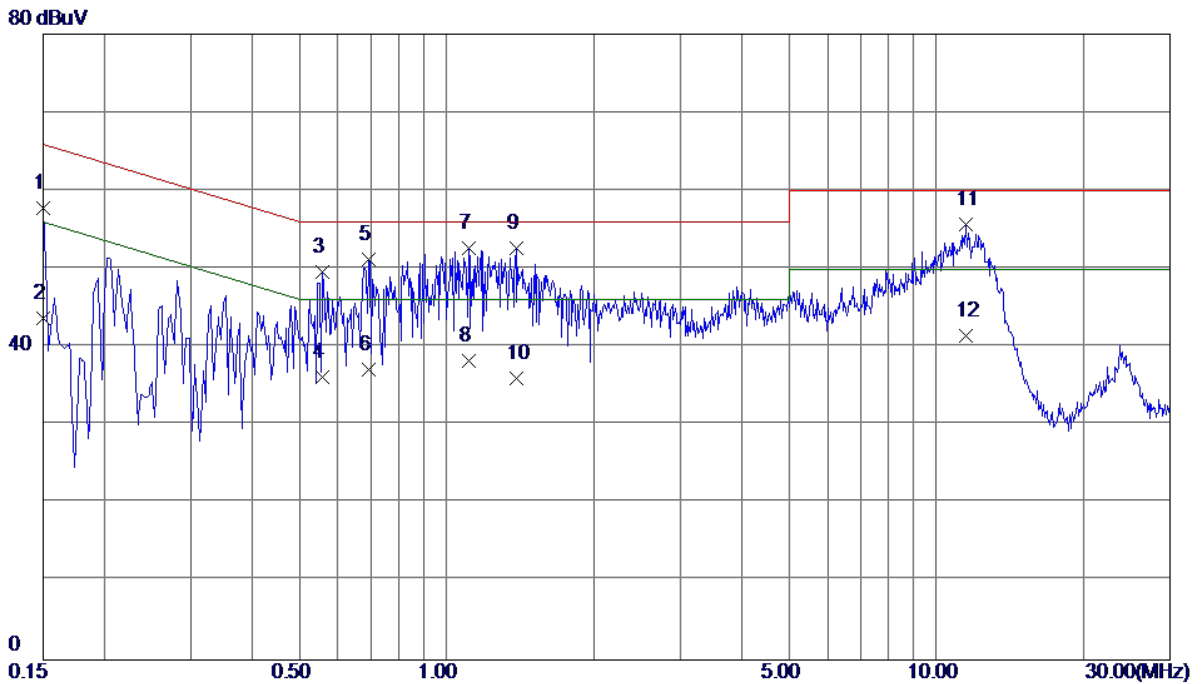


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	48.10	9.64	57.74	66.00	-8.26	QP
2	0.1500	34.10	9.64	43.74	56.00	-12.26	AVG
3	0.5580	40.01	9.66	49.67	56.00	-6.33	QP
4	0.5580	26.50	9.66	36.16	46.00	-9.84	AVG
5	0.6940	41.52	9.67	51.19	56.00	-4.81	QP
6	0.6940	27.40	9.67	37.07	46.00	-8.93	AVG
7 *	1.1100	42.94	9.68	52.62	56.00	-3.38	QP
8	1.1100	28.49	9.68	38.17	46.00	-7.83	AVG
9	1.3860	42.94	9.68	52.62	56.00	-3.38	QP
10	1.3860	26.31	9.68	35.99	46.00	-10.01	AVG
11	11.4900	45.64	10.08	55.72	60.00	-4.28	QP
12	11.4900	31.39	10.08	41.47	50.00	-8.53	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

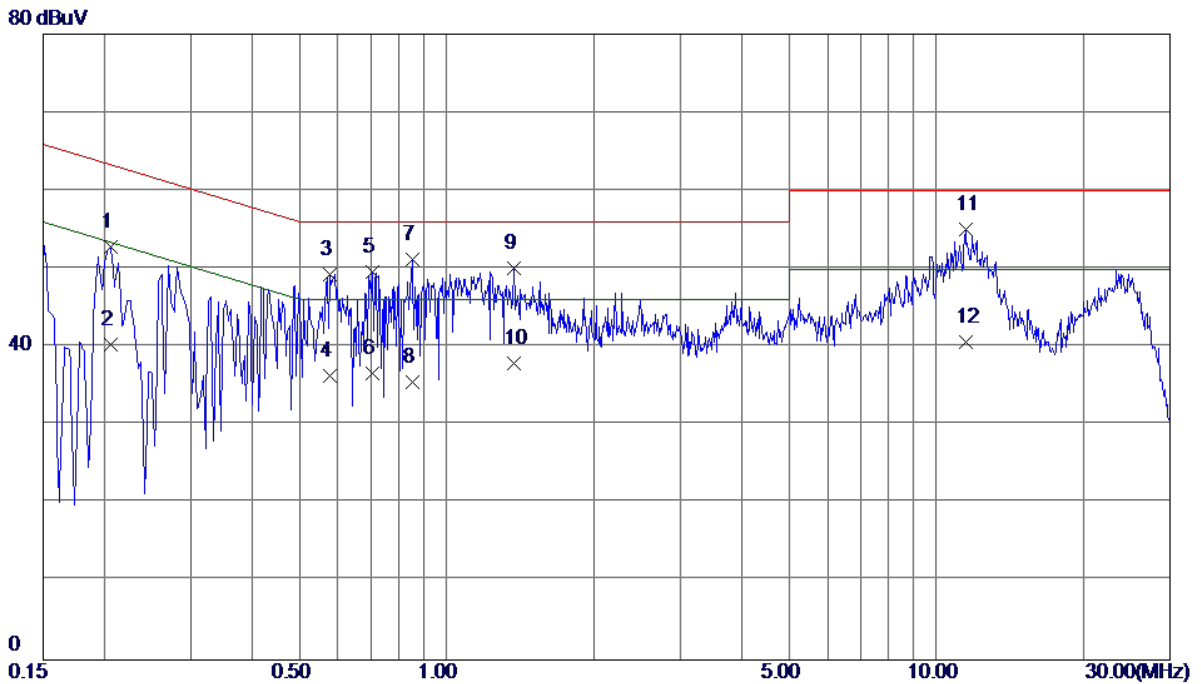

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.2060	43.14	9.72	52.86	63.37	-10.51	QP
2	0.2060	30.60	9.72	40.32	53.37	-13.05	AVG
3	0.5780	39.49	9.76	49.25	56.00	-6.75	QP
4	0.5780	26.50	9.76	36.26	46.00	-9.74	AVG
5	0.7060	39.80	9.77	49.57	56.00	-6.43	QP
6	0.7060	26.80	9.77	36.57	46.00	-9.43	AVG
7 *	0.8500	41.49	9.77	51.26	56.00	-4.74	QP
8	0.8500	25.70	9.77	35.47	46.00	-10.53	AVG
9	1.3700	40.36	9.80	50.16	56.00	-5.84	QP
10	1.3700	28.11	9.80	37.91	46.00	-8.09	AVG
11	11.4940	44.98	10.11	55.09	60.00	-4.91	QP
12	11.4940	30.59	10.11	40.70	50.00	-9.30	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

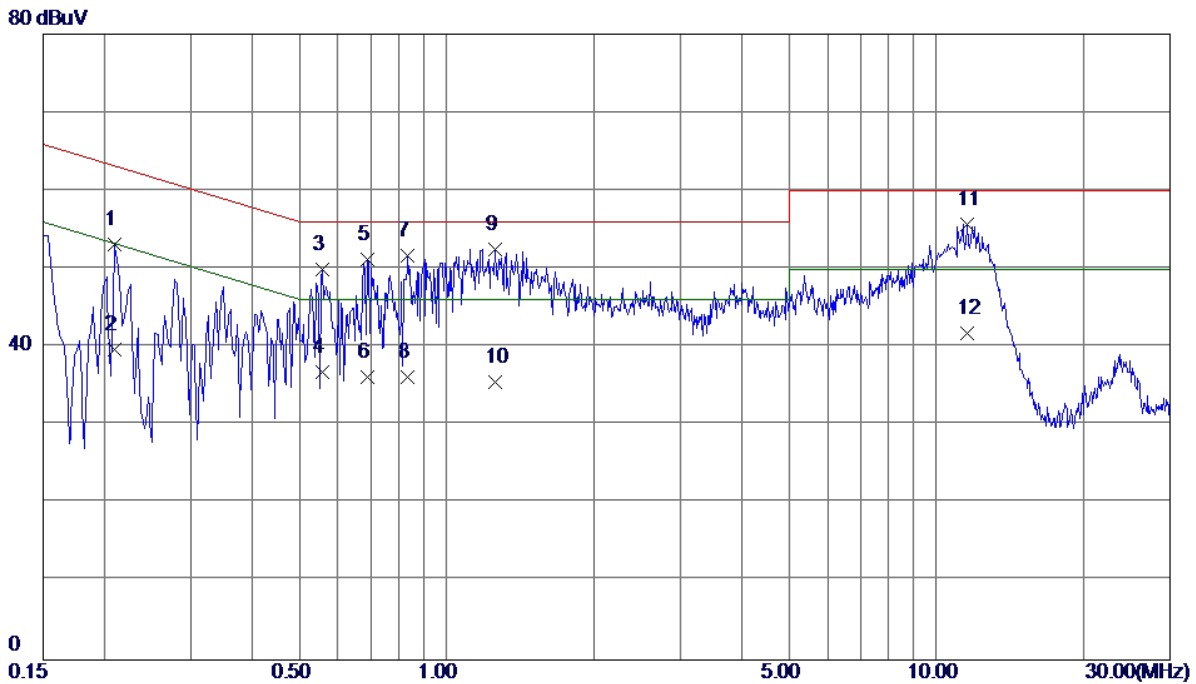

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.2100	43.48	9.65	53.13	63.21	-10.08	QP
2	0.2100	30.10	9.65	39.75	53.21	-13.46	AVG
3	0.5580	40.30	9.66	49.96	56.00	-6.04	QP
4	0.5580	27.10	9.66	36.76	46.00	-9.24	AVG
5	0.6900	41.52	9.67	51.19	56.00	-4.81	QP
6	0.6900	26.50	9.67	36.17	46.00	-9.83	AVG
7	0.8340	42.03	9.66	51.69	56.00	-4.31	QP
8	0.8340	26.50	9.66	36.16	46.00	-9.84	AVG
9 *	1.2540	42.81	9.68	52.49	56.00	-3.51	QP
10	1.2540	25.80	9.68	35.48	46.00	-10.52	AVG
11	11.5780	45.59	10.08	55.67	60.00	-4.33	QP
12	11.5780	31.61	10.08	41.69	50.00	-8.31	AVG

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017
3	Receiver	Agilent	N9038A	MY52130039	Sep. 04, 2017
4	Cable	emci	LMR-400(30M Hz-1GHz)(8m+ 5m)	N/A	Jun. 27, 2017
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-0 1	N/A	N/A
8	Amplifier	Agilent	8449B	3008A02274	Feb. 22, 2018
9	Antenna	EM	EM-6876-1	230	Jul. 08, 2017
10	Cable	emci	EMC104-SM-S M-12000(12m)	N/A	Jul. 06, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

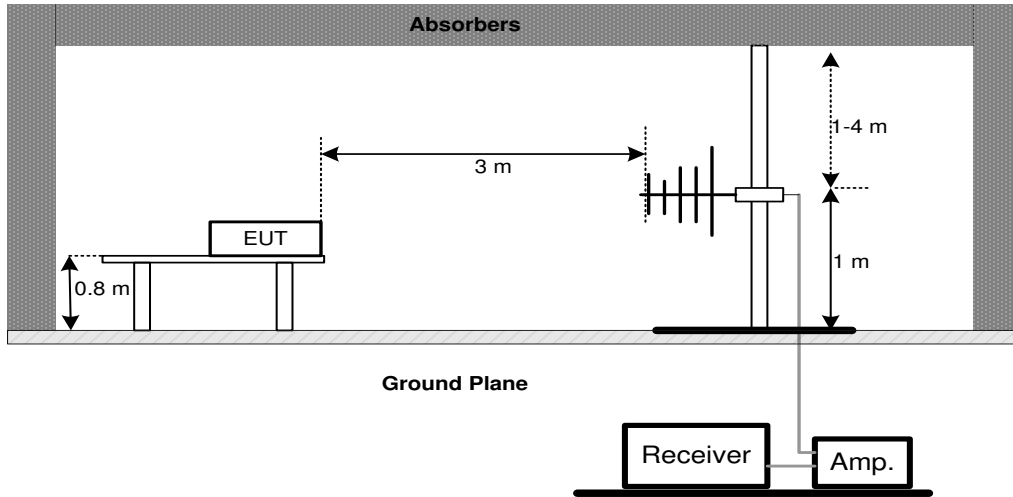

(B) Radiated Emission Test Set-Up Frequency 1 GHz

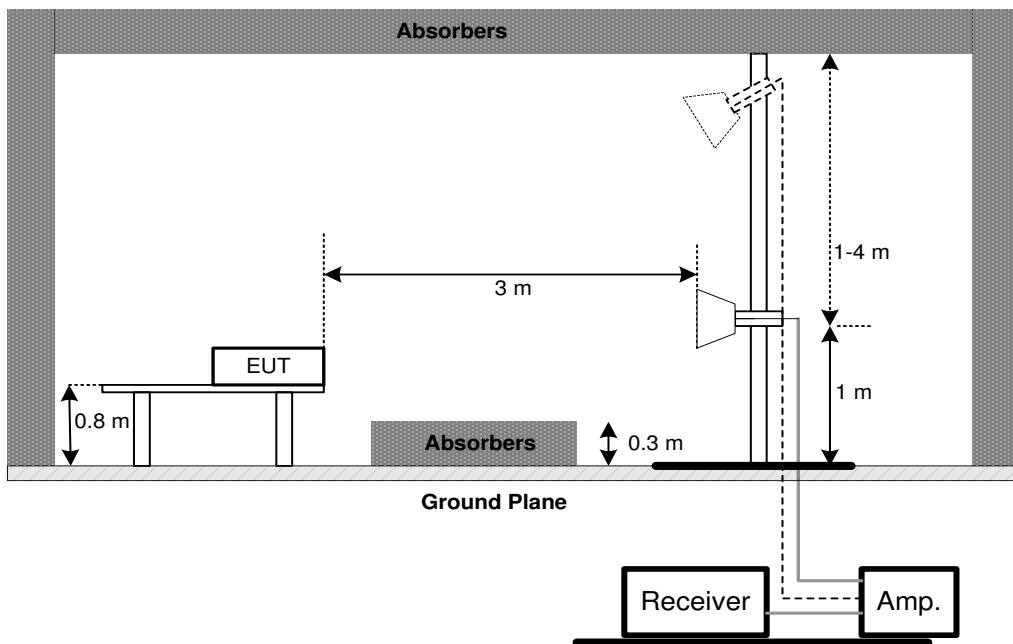


4.2.6 TEST RESULTS-BELOW 1GHZ

Remark :

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

80 dBuV/m

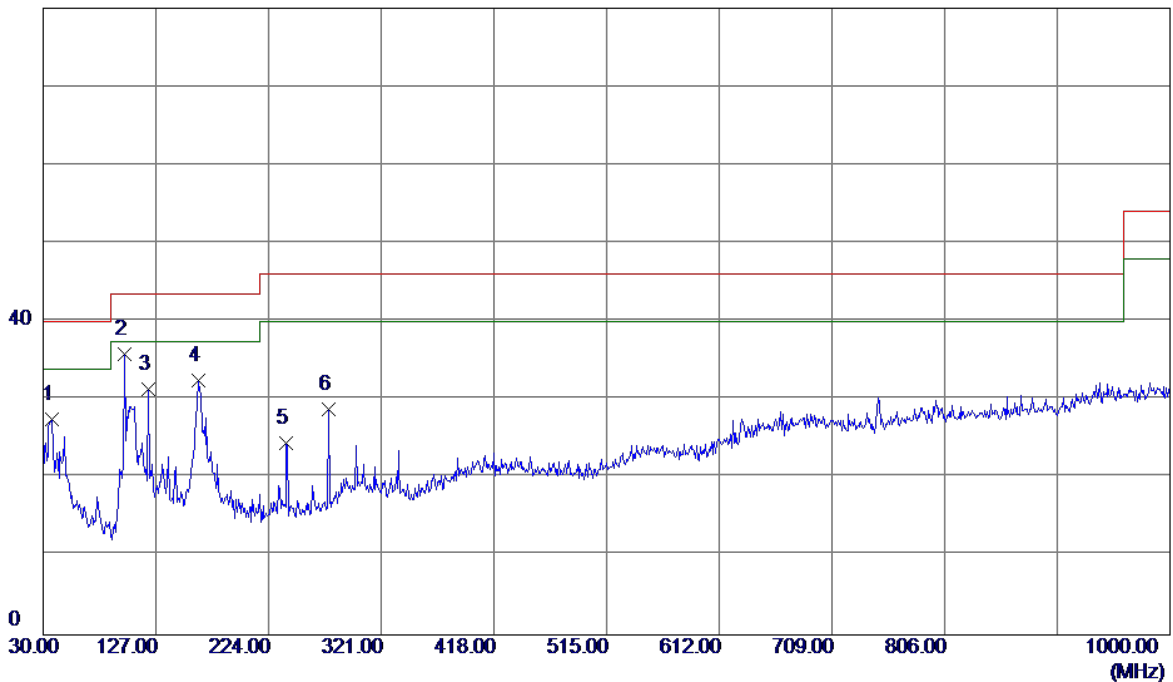


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	37.7599	40.41	-12.88	27.53	40.00	-12.47	QP
2 *	99.8399	50.39	-14.59	35.80	43.50	-7.70	QP
3	120.2100	43.95	-12.57	31.38	43.50	-12.12	QP
4	163.8600	44.32	-11.84	32.48	43.50	-11.02	QP
5	239.5200	37.79	-13.36	24.43	46.00	-21.57	QP
6	275.4100	40.74	-11.88	28.86	46.00	-17.14	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

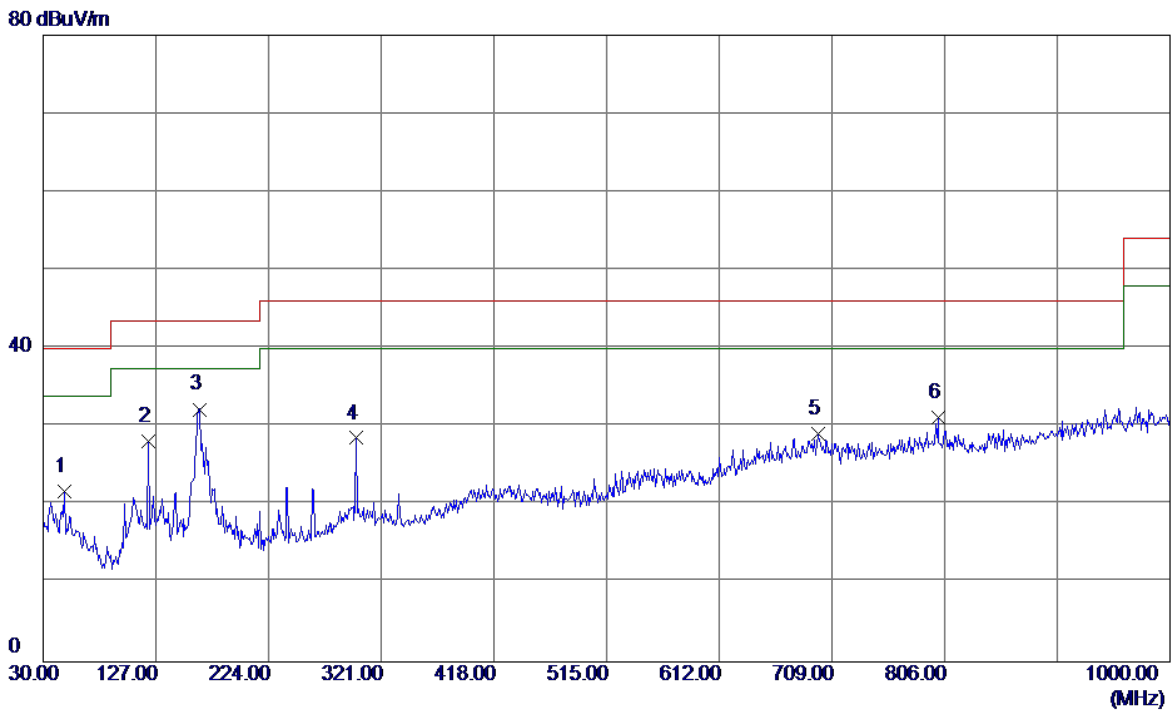

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	48.4300	34.19	-12.36	21.83	40.00	-18.17	QP
2	120.2100	40.80	-12.57	28.23	43.50	-15.27	QP
3 *	164.8300	43.90	-11.66	32.24	43.50	-11.26	QP
4	299.6600	38.50	-9.94	28.56	46.00	-17.44	QP
5	697.3600	29.85	-0.71	29.14	46.00	-16.86	QP
6	800.1800	30.54	0.61	31.15	46.00	-14.85	QP


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Foxconn+Battery:Coslight+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

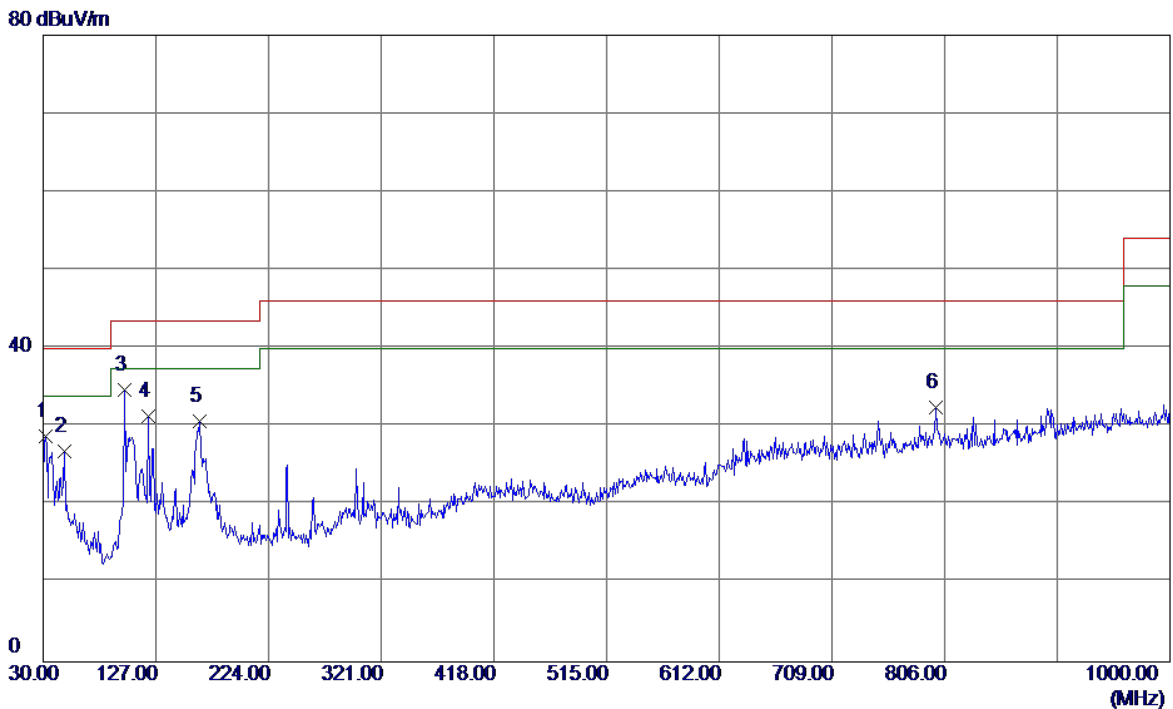

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.9400	41.99	-13.17	28.82	40.00	-11.18	QP
2	48.4300	39.20	-12.36	26.84	40.00	-13.16	QP
3 *	99.8399	49.32	-14.59	34.73	43.50	-8.77	QP
4	120.2100	43.86	-12.57	31.29	43.50	-12.21	QP
5	164.8300	42.33	-11.66	30.67	43.50	-12.83	QP
6	798.2400	31.95	0.56	32.51	46.00	-13.49	QP


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Foxconn+Battery:Coslight+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

80 dBuV/m

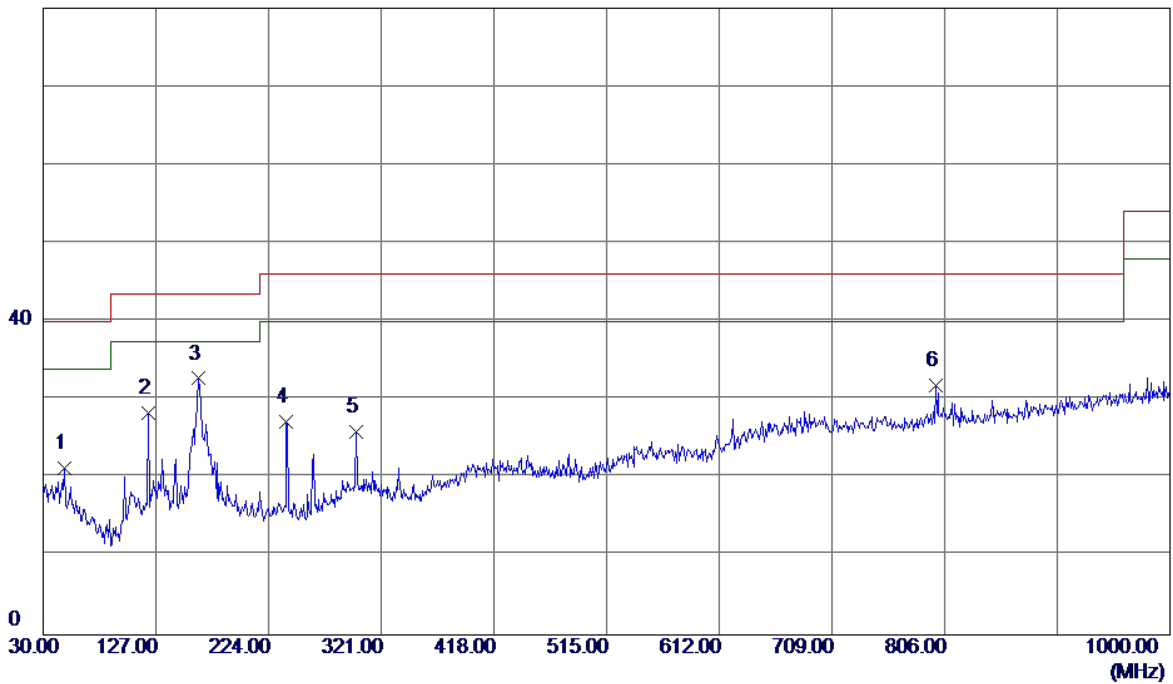

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	48.4300	33.67	-12.36	21.31	40.00	-18.69	QP
2	120.2100	40.90	-12.57	28.33	43.50	-15.17	QP
3 *	163.8600	44.56	-11.84	32.72	43.50	-10.78	QP
4	239.5200	40.58	-13.36	27.22	46.00	-18.78	QP
5	299.6600	35.84	-9.94	25.90	46.00	-20.10	QP
6	798.2400	31.35	0.56	31.91	46.00	-14.09	QP


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:HONGLIN+Battery:SCUD+Earphone:GoerTek		
Test Engineer	Kevin Li		

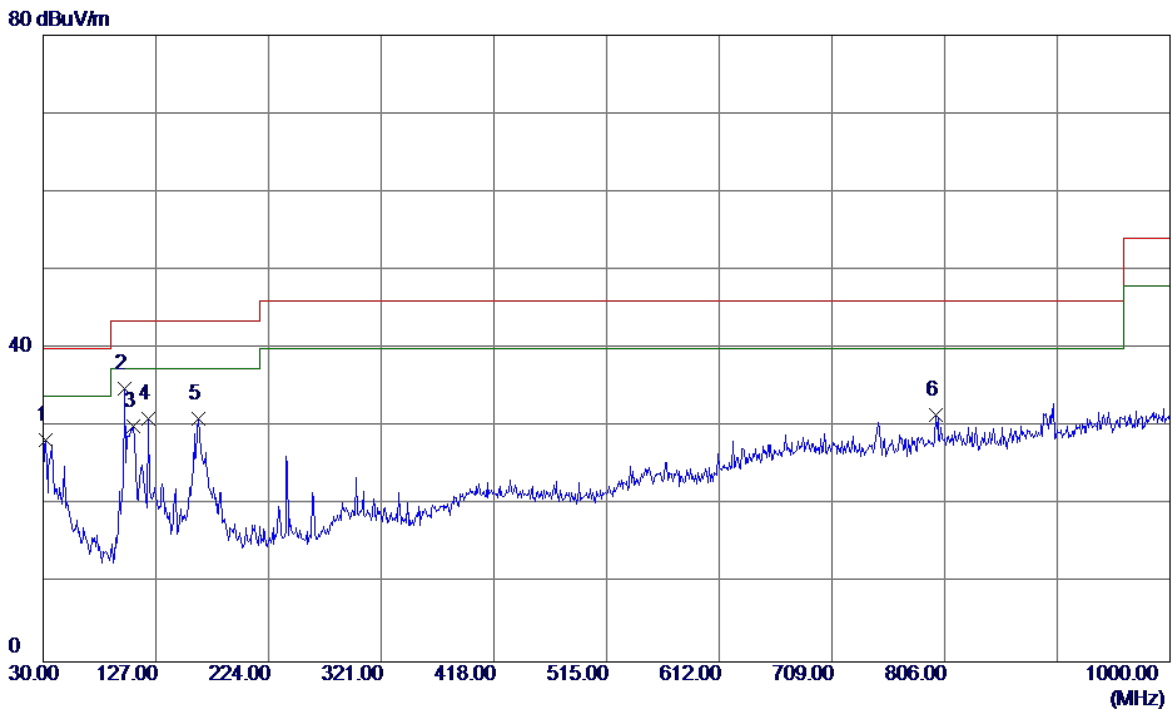

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.9400	41.51	-13.17	28.34	40.00	-11.66	QP
2 *	99.8399	49.46	-14.59	34.87	43.50	-8.63	QP
3	107.6000	44.08	-14.03	30.05	43.50	-13.45	QP
4	120.2100	43.62	-12.57	31.05	43.50	-12.45	QP
5	163.8600	42.90	-11.84	31.06	43.50	-12.44	QP
6	798.2400	31.02	0.56	31.58	46.00	-14.42	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:HONGLIN+Battery:SCUD+Earphone:GoerTek		
Test Engineer	Kevin Li		


80 dBuV/m

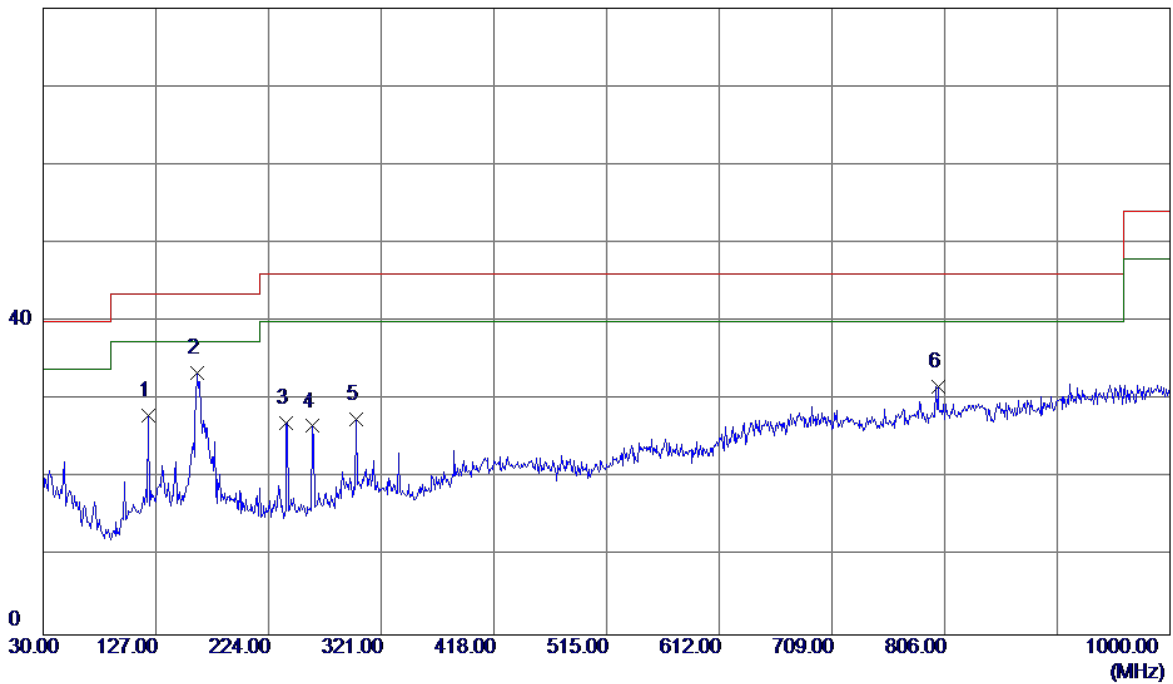

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	120.2100	40.53	-12.57	27.96	43.50	-15.54	QP
2 *	162.8900	45.51	-12.02	33.49	43.50	-10.01	QP
3	239.5200	40.38	-13.36	27.02	46.00	-18.98	QP
4	261.8299	39.39	-12.75	26.64	46.00	-19.36	QP
5	299.6600	37.49	-9.94	27.55	46.00	-18.45	QP
6	800.1800	31.11	0.61	31.72	46.00	-14.28	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		


80 dBuV/m

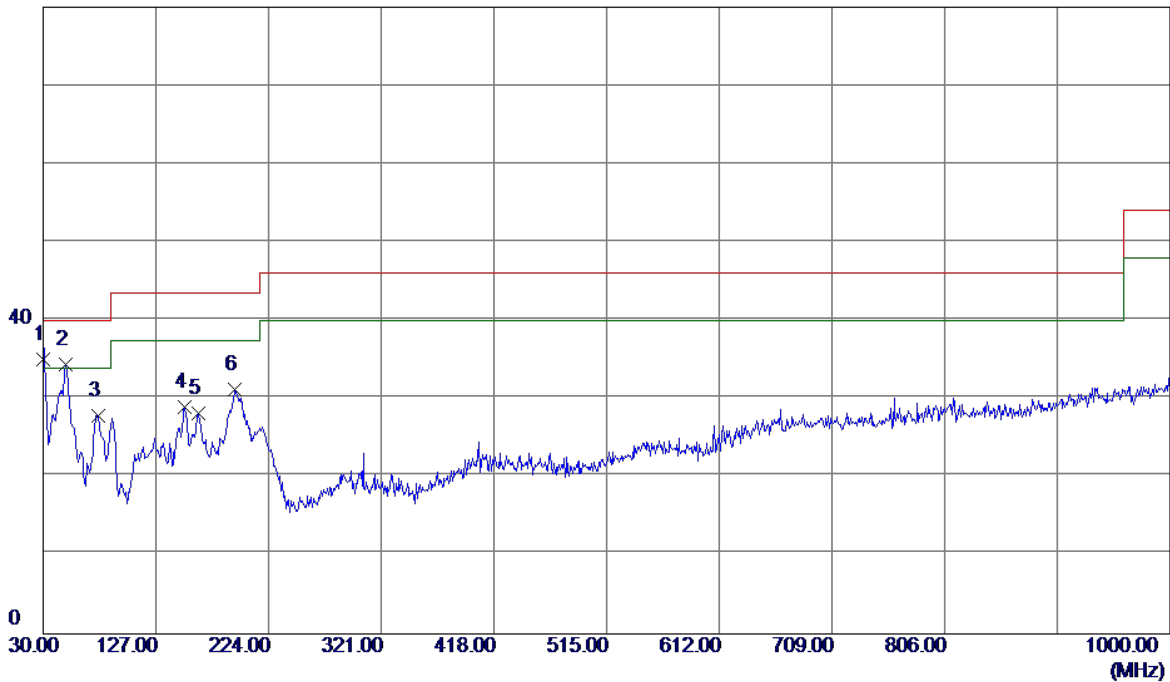

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	47.86	-12.80	35.06	40.00	-4.94	QP
2	49.4000	46.53	-12.16	34.37	40.00	-5.63	QP
3	77.5300	44.32	-16.48	27.84	40.00	-12.16	QP
4	152.2200	40.95	-12.06	28.89	43.50	-14.61	QP
5	163.8600	40.05	-11.84	28.21	43.50	-15.29	QP
6	194.9000	44.63	-13.41	31.22	43.50	-12.28	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		


80 dBuV/m

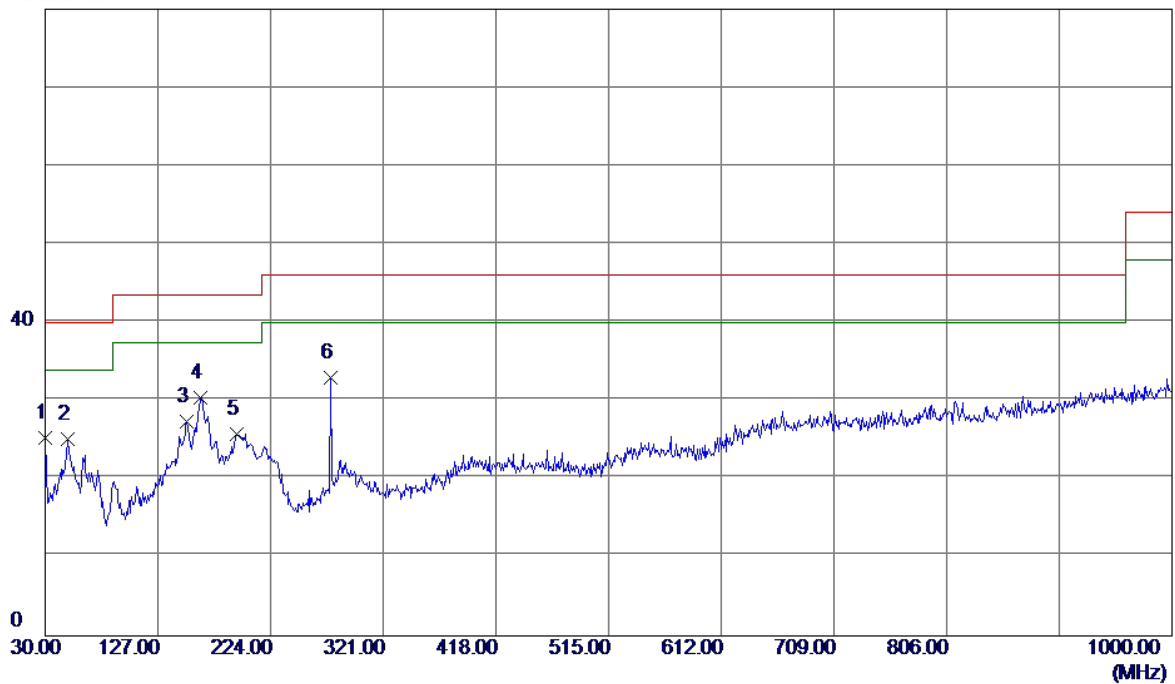

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	38.05	-12.80	25.25	40.00	-14.75	QP
2	49.4000	37.30	-12.16	25.14	40.00	-14.86	QP
3	152.2200	39.49	-12.06	27.43	43.50	-16.07	QP
4 *	163.8600	42.28	-11.84	30.44	43.50	-13.06	QP
5	194.9000	39.15	-13.41	25.74	43.50	-17.76	QP
6	275.4100	44.80	-11.88	32.92	46.00	-13.08	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		


80 dBuV/m

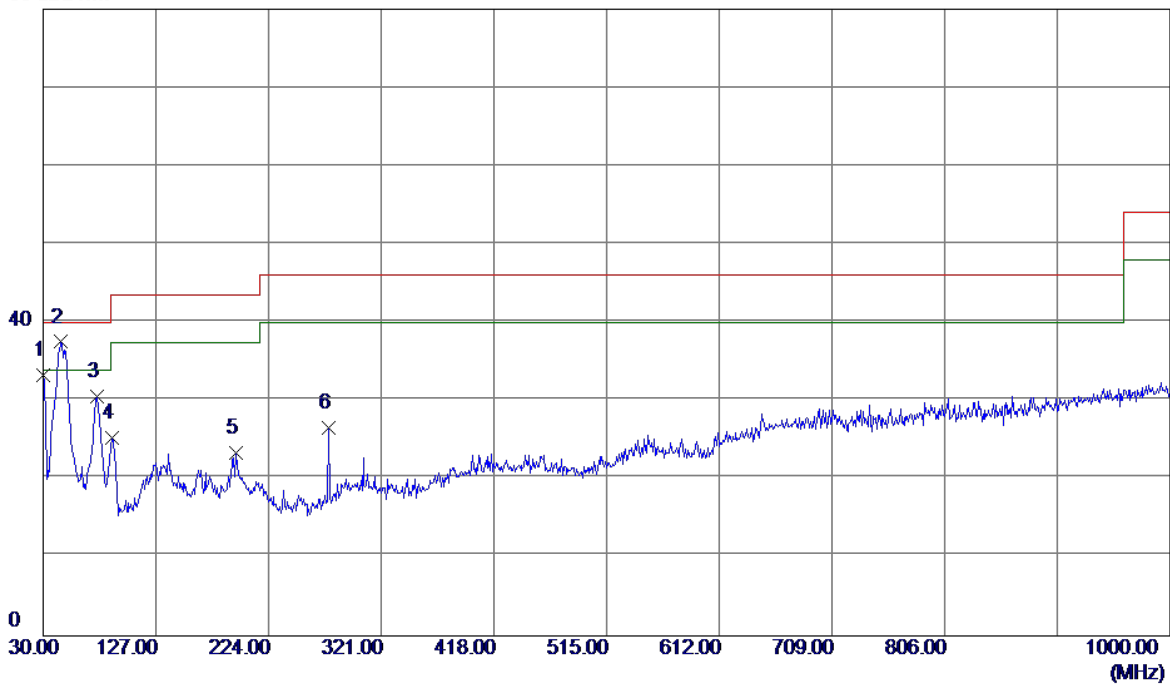

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	46.10	-12.80	33.30	40.00	-6.70	QP
2 *	45.5200	49.50	-11.98	37.52	40.00	-2.48	QP
3	76.5600	46.89	-16.37	30.52	40.00	-9.48	QP
4	89.1700	41.69	-16.37	25.32	43.50	-18.18	QP
5	195.8700	36.81	-13.46	23.35	43.50	-20.15	QP
6	275.4100	38.40	-11.88	26.52	46.00	-19.48	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		


80 dBuV/m

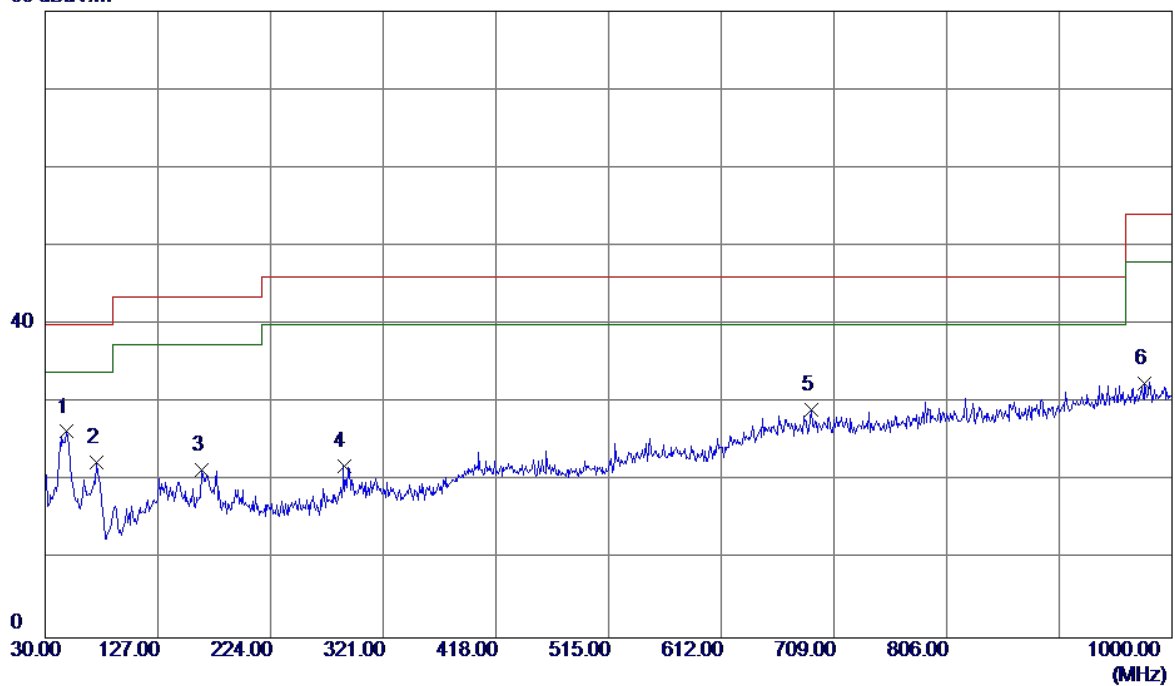

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	48.4300	38.68	-12.36	26.32	40.00	-13.68	QP
2	74.6200	38.59	-16.12	22.47	40.00	-17.53	QP
3	164.8300	33.03	-11.66	21.37	43.50	-22.13	QP
4	287.0500	32.44	-10.49	21.95	46.00	-24.05	QP
5	689.6000	29.95	-0.87	29.08	46.00	-16.92	QP
6	976.7200	28.86	3.59	32.45	54.00	-21.55	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		


80 dBuV/m

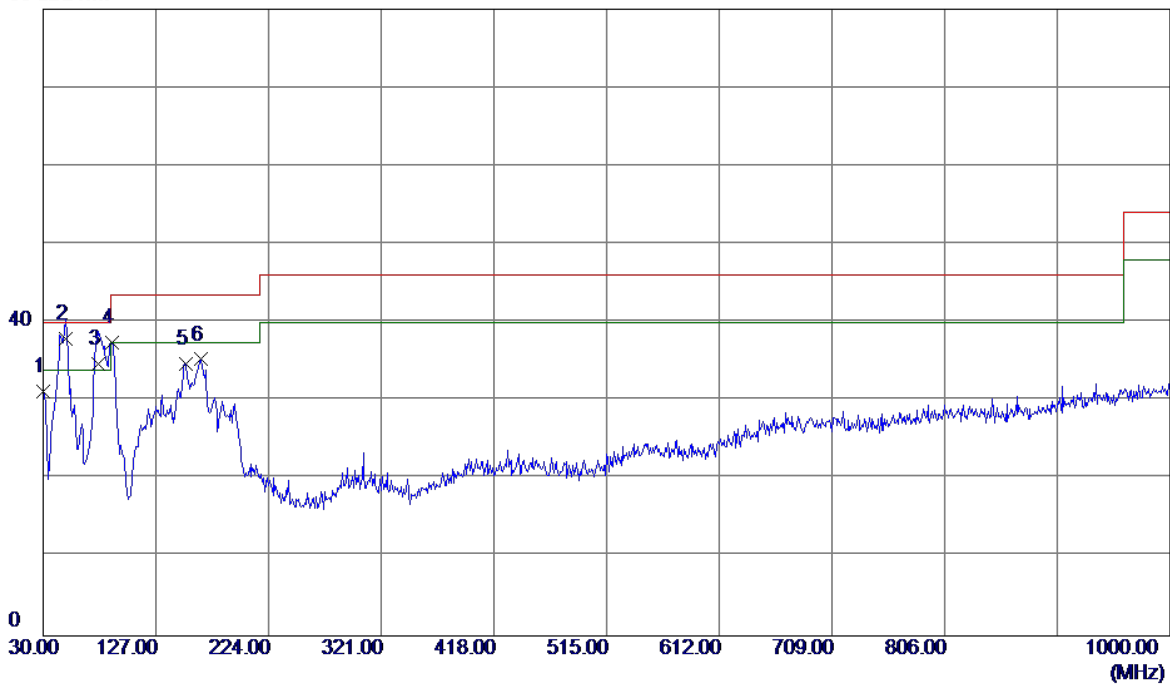

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	43.96	-12.80	31.16	40.00	-8.84	QP
2 *	49.4000	50.04	-12.16	37.88	40.00	-2.12	QP
3	77.5300	51.19	-16.48	34.71	40.00	-5.29	QP
4	89.1700	53.78	-16.37	37.41	43.50	-6.09	QP
5	153.1900	46.84	-12.12	34.72	43.50	-8.78	QP
6	165.8000	46.76	-11.48	35.28	43.50	-8.22	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		


80 dBuV/m

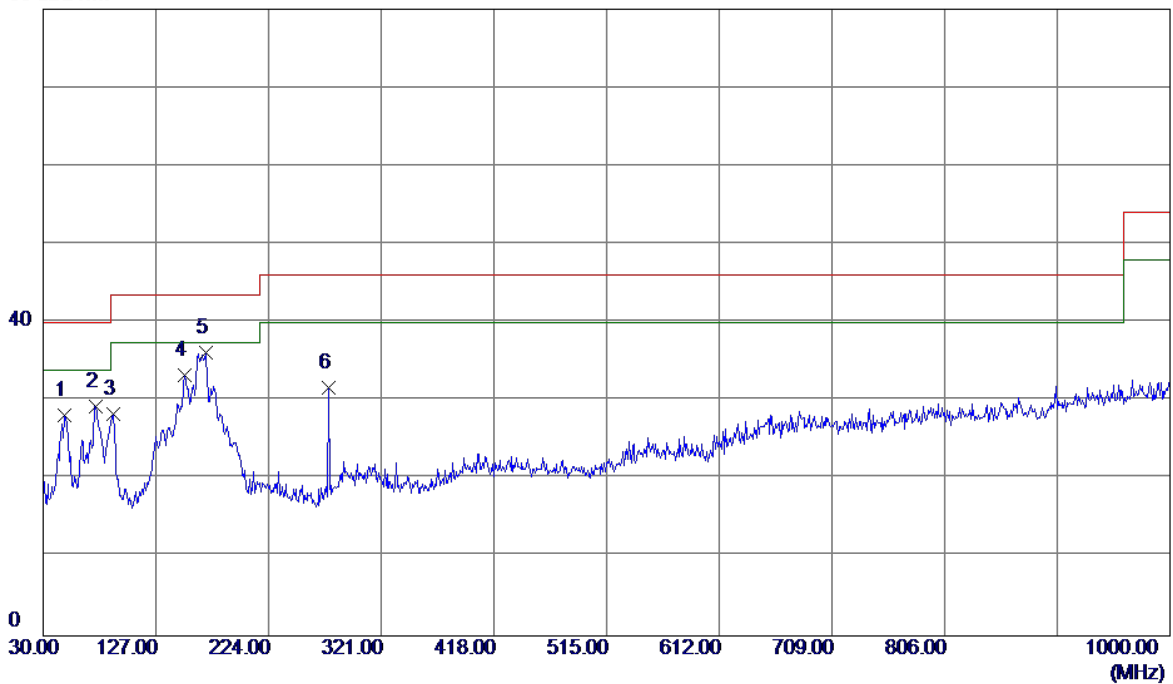

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	48.4300	40.46	-12.36	28.10	40.00	-11.90	QP
2	75.5899	45.59	-16.26	29.33	40.00	-10.67	QP
3	90.1400	44.76	-16.40	28.36	43.50	-15.14	QP
4	152.2200	45.40	-12.06	33.34	43.50	-10.16	QP
5 *	169.6799	46.97	-10.76	36.21	43.50	-7.29	QP
6	275.4100	43.59	-11.88	31.71	46.00	-14.29	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		


80 dBuV/m

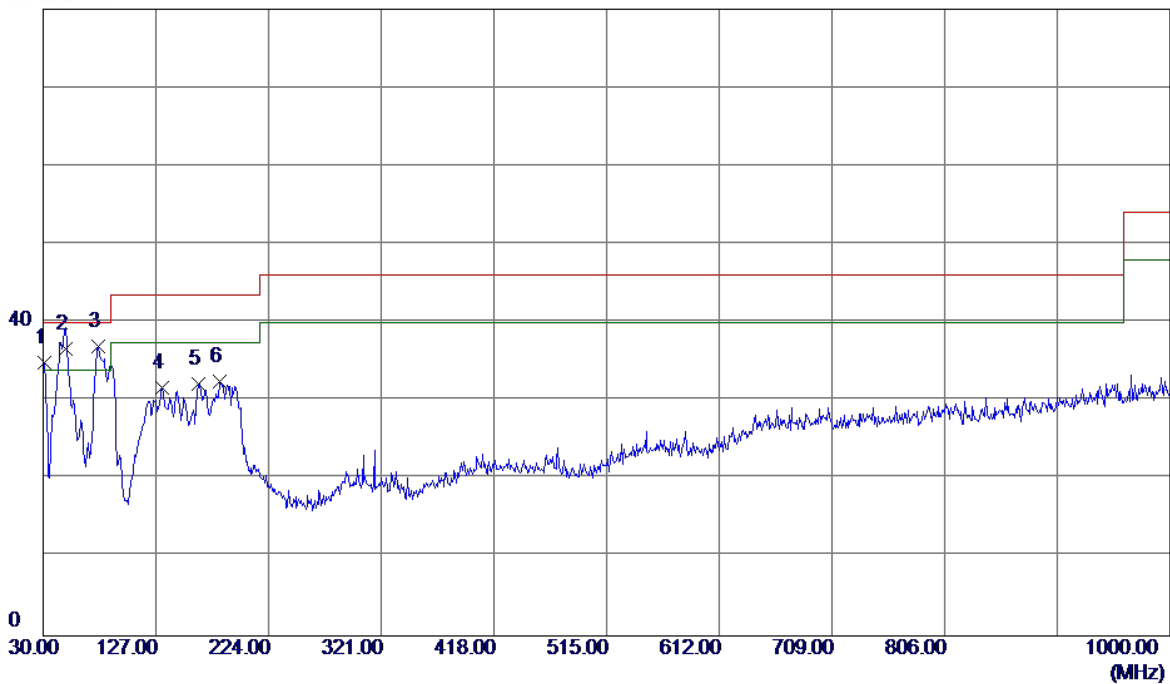

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.9700	47.82	-12.99	34.83	40.00	-5.17	QP
2	49.4000	48.86	-12.16	36.70	40.00	-3.30	QP
3 *	77.5300	53.37	-16.48	36.89	40.00	-3.11	QP
4	132.8200	43.04	-11.35	31.69	43.50	-11.81	QP
5	163.8600	44.05	-11.84	32.21	43.50	-11.29	QP
6	182.2899	44.92	-12.39	32.53	43.50	-10.97	QP


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

80 dBuV/m

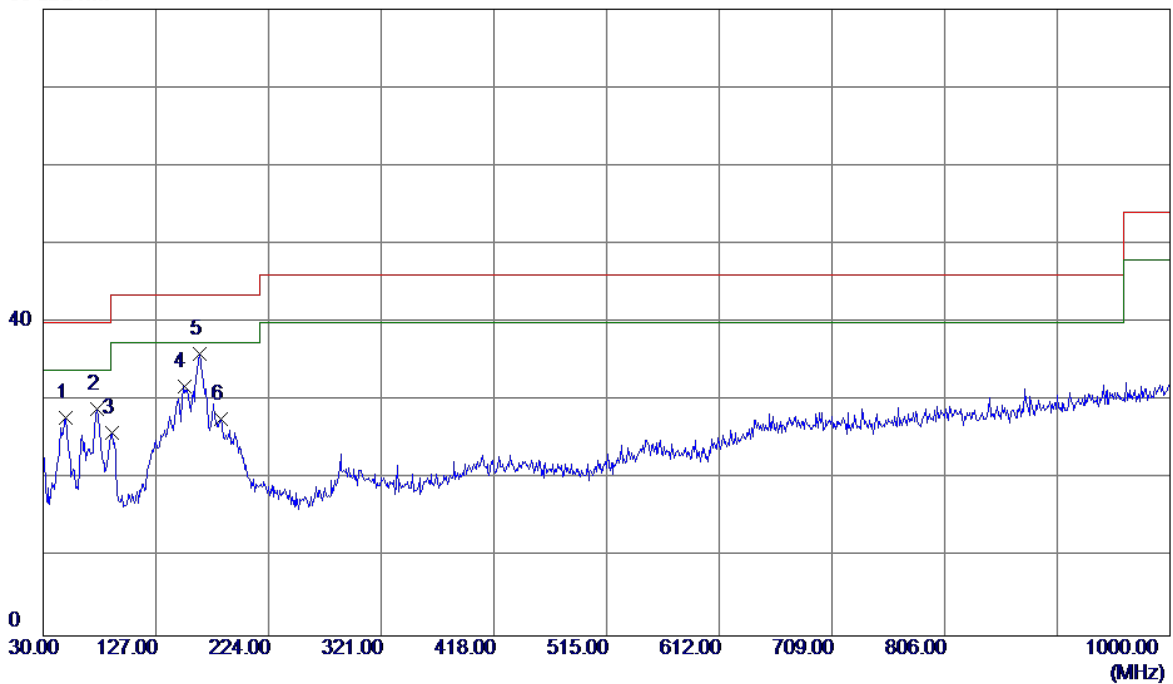


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	49.4000	39.98	-12.16	27.82	40.00	-12.18	QP
2	76.5600	45.27	-16.37	28.90	40.00	-11.10	QP
3	89.1700	42.24	-16.37	25.87	43.50	-17.63	QP
4	151.2500	43.91	-12.00	31.91	43.50	-11.59	QP
5 *	164.8300	47.73	-11.66	36.07	43.50	-7.43	QP
6	183.2600	40.11	-12.49	27.62	43.50	-15.88	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

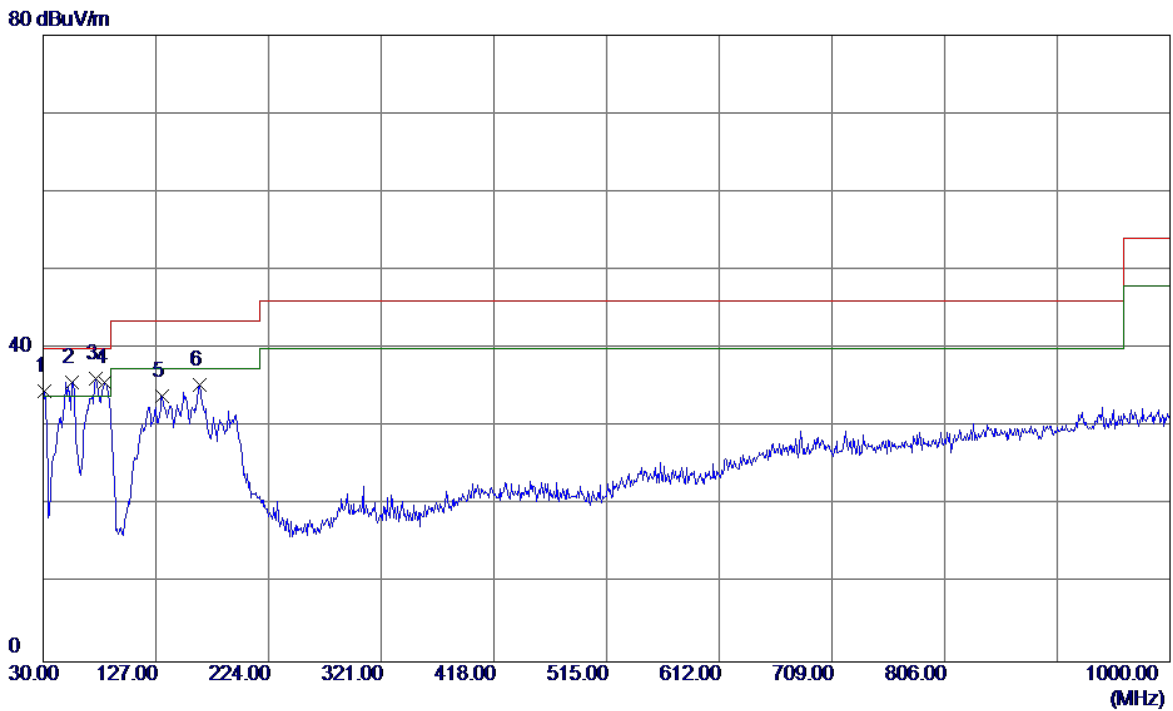

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.9700	47.50	-12.99	34.51	40.00	-5.49	QP
2	55.2200	48.16	-12.44	35.72	40.00	-4.28	QP
3 *	75.5899	52.35	-16.26	36.09	40.00	-3.91	QP
4	83.3500	52.12	-16.41	35.71	40.00	-4.29	QP
5	132.8200	45.27	-11.35	33.92	43.50	-9.58	QP
6	164.8300	47.04	-11.66	35.38	43.50	-8.12	QP


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

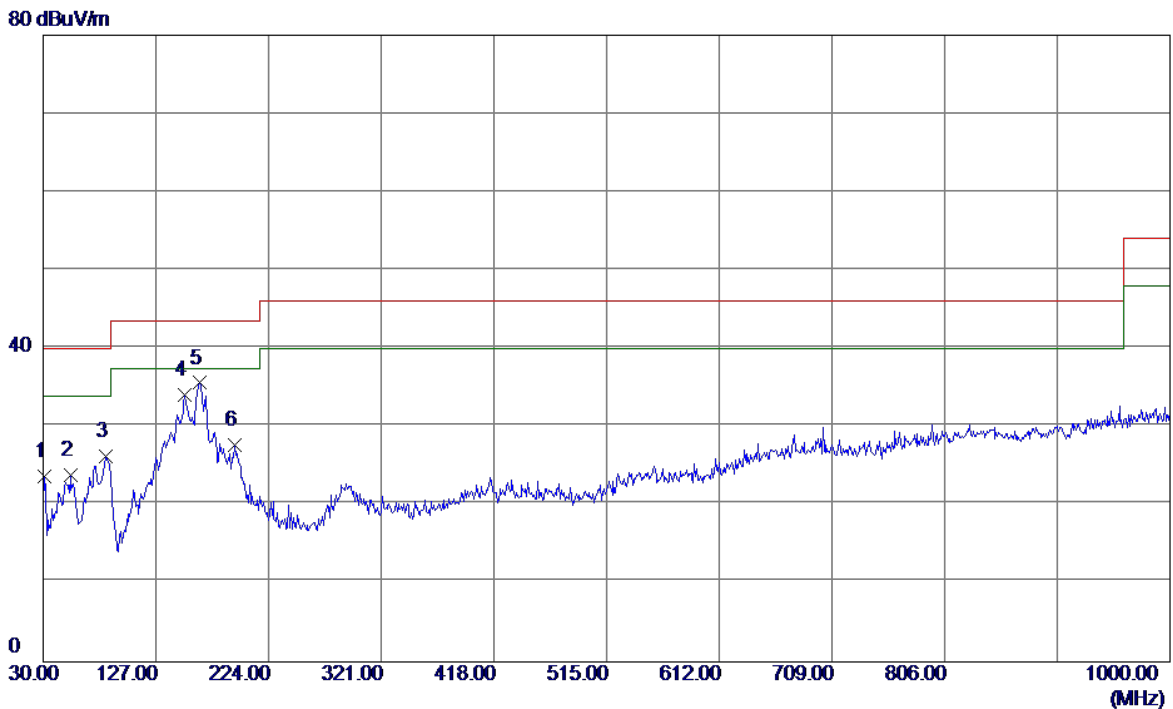

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.9700	36.65	-12.99	23.66	40.00	-16.34	QP
2	53.2800	36.14	-12.32	23.82	40.00	-16.18	QP
3	84.3200	42.52	-16.31	26.21	40.00	-13.79	QP
4	152.2200	46.11	-12.06	34.05	43.50	-9.45	QP
5 *	164.8300	47.26	-11.66	35.60	43.50	-7.90	QP
6	194.9000	41.04	-13.41	27.63	43.50	-15.87	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		


80 dBuV/m

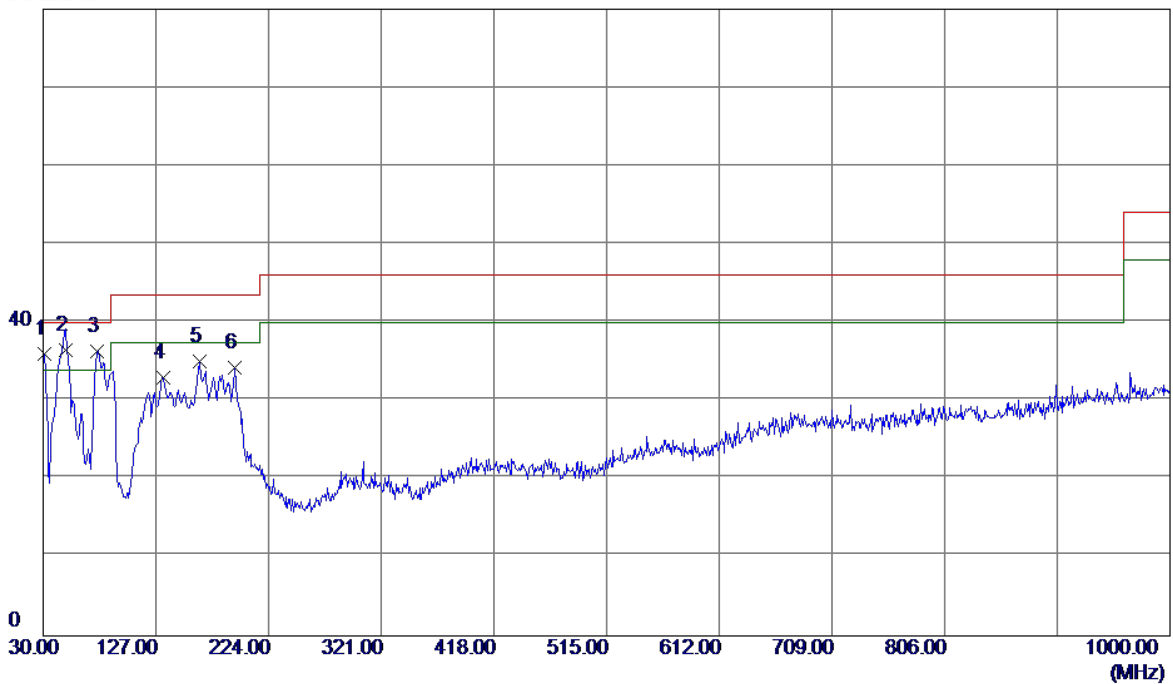

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.9700	48.92	-12.99	35.93	40.00	-4.07	QP
2 *	49.4000	48.57	-12.16	36.41	40.00	-3.59	QP
3	76.5600	52.76	-16.37	36.39	40.00	-3.61	QP
4	133.7899	44.42	-11.42	33.00	43.50	-10.50	QP
5	164.8300	46.71	-11.66	35.05	43.50	-8.45	QP
6	194.9000	47.65	-13.41	34.24	43.50	-9.26	QP


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

80 dBuV/m

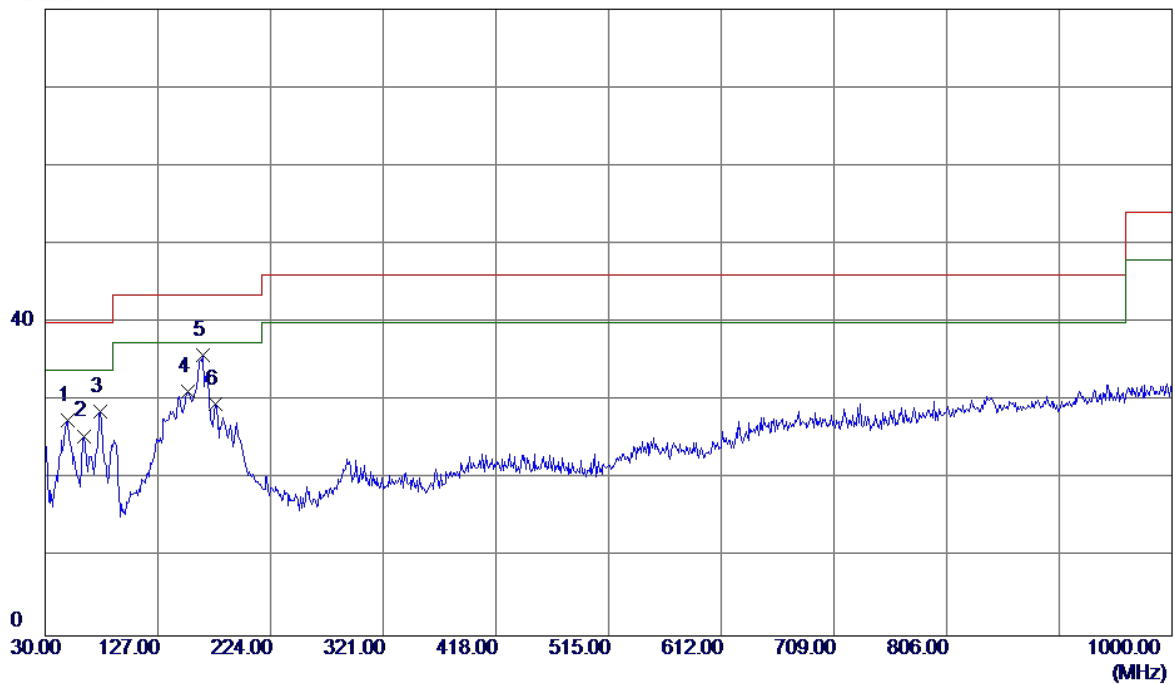


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	49.4000	39.69	-12.16	27.53	40.00	-12.47	QP
2	62.9800	39.47	-13.95	25.52	40.00	-14.48	QP
3	77.5300	45.11	-16.48	28.63	40.00	-11.37	QP
4	153.1900	43.30	-12.12	31.18	43.50	-12.32	QP
5 *	165.8000	47.32	-11.48	35.84	43.50	-7.66	QP
6	176.4700	41.24	-11.64	29.60	43.50	-13.90	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

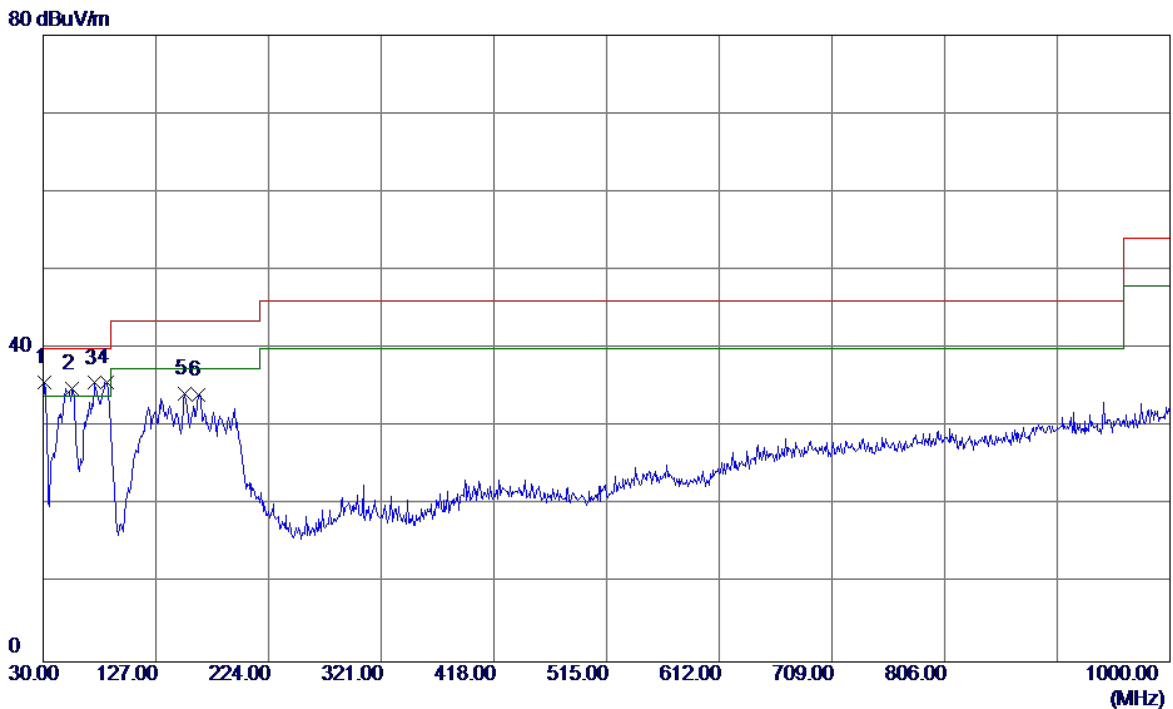


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.9700	48.62	-12.99	35.63	40.00	-4.37	QP
2	55.2200	47.38	-12.44	34.94	40.00	-5.06	QP
3	74.6200	51.72	-16.12	35.60	40.00	-4.40	QP
4 *	85.2900	51.92	-16.24	35.68	40.00	-4.32	QP
5	152.2200	46.33	-12.06	34.27	43.50	-9.23	QP
6	163.8600	45.99	-11.84	34.15	43.50	-9.35	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

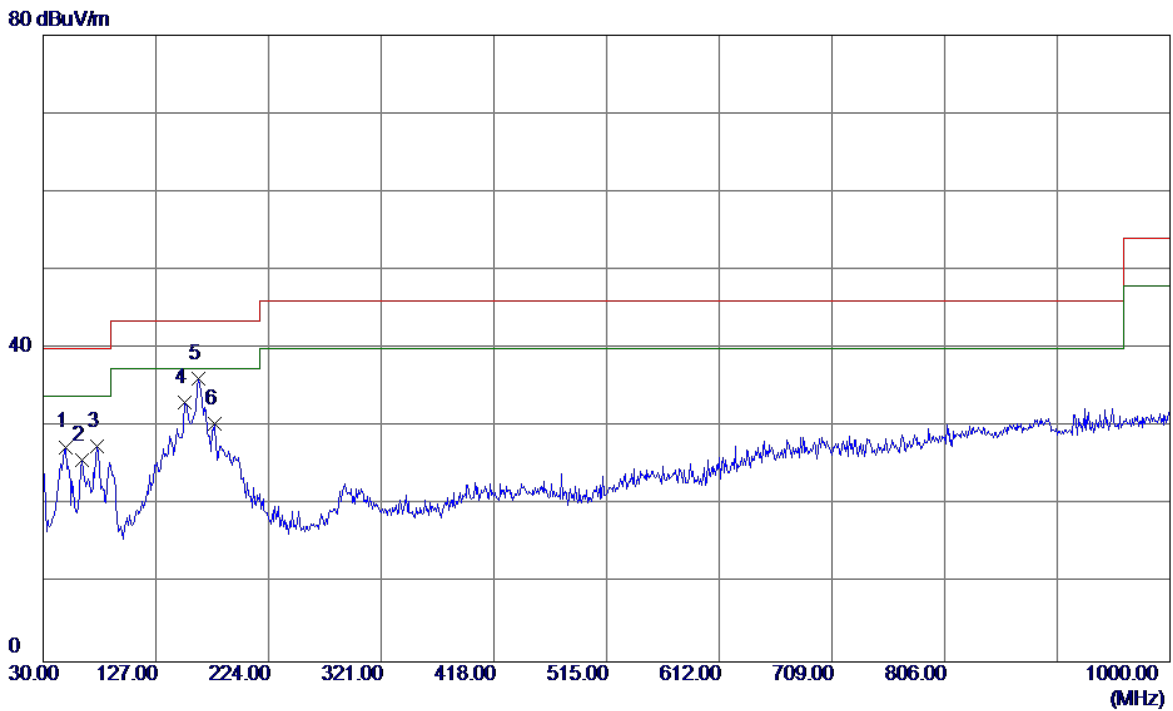


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	49.4000	39.60	-12.16	27.44	40.00	-12.56	QP
2	62.9800	39.67	-13.95	25.72	40.00	-14.28	QP
3	76.5600	43.92	-16.37	27.55	40.00	-12.45	QP
4	152.2200	45.11	-12.06	33.05	43.50	-10.45	QP
5 *	163.8600	48.03	-11.84	36.19	43.50	-7.31	QP
6	177.4400	42.20	-11.78	30.42	43.50	-13.08	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

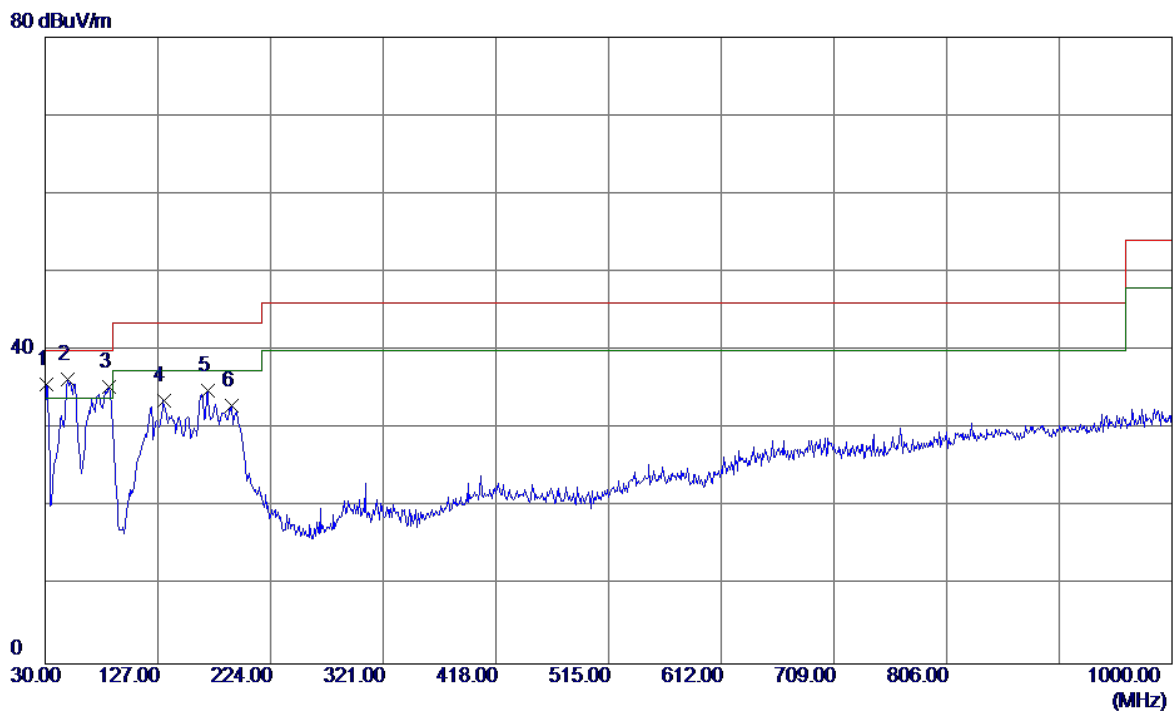

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.9700	48.75	-12.99	35.76	40.00	-4.24	QP
2 *	49.4000	48.48	-12.16	36.32	40.00	-3.68	QP
3	85.2900	51.57	-16.24	35.33	40.00	-4.67	QP
4	131.8500	44.86	-11.28	33.58	43.50	-9.92	QP
5	169.6799	45.61	-10.76	34.85	43.50	-8.65	QP
6	191.0200	46.23	-13.24	32.99	43.50	-10.51	QP

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

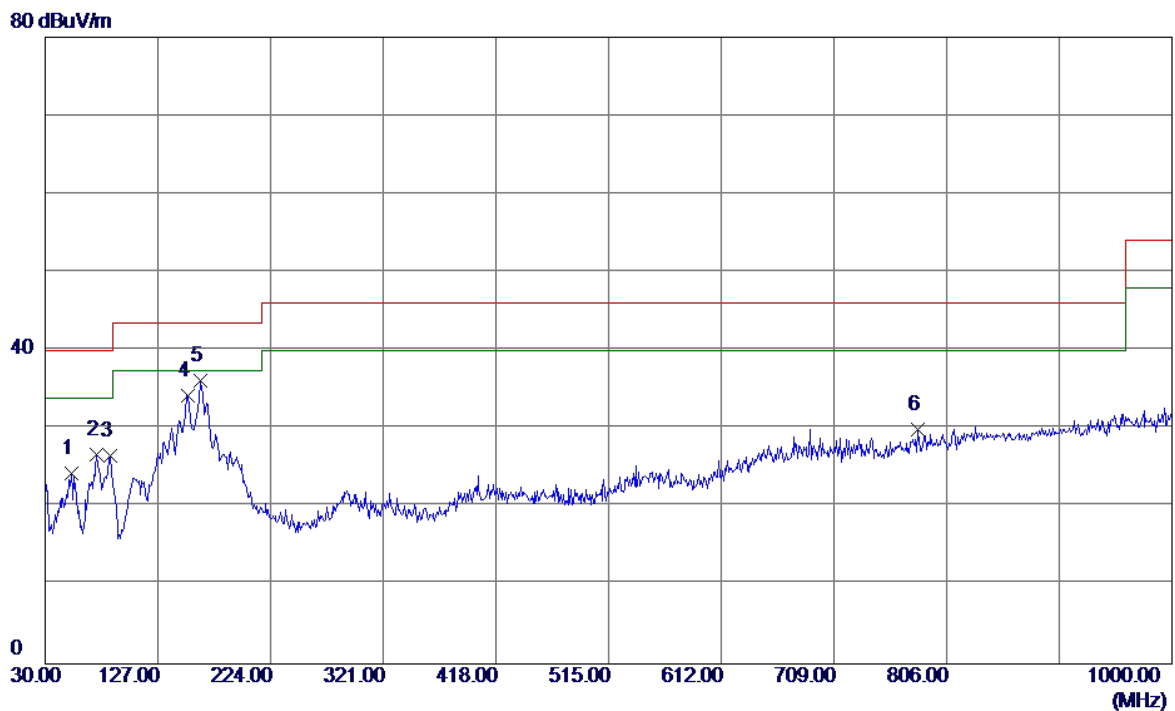


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	52.3100	36.73	-12.47	24.26	40.00	-15.74	QP
2	74.6200	42.86	-16.12	26.74	40.00	-13.26	QP
3	86.2600	42.83	-16.28	26.55	40.00	-13.45	QP
4	153.1900	46.37	-12.12	34.25	43.50	-9.25	QP
5 *	163.8600	48.00	-11.84	36.16	43.50	-7.34	QP
6	780.7800	29.93	0.04	29.97	46.00	-16.03	QP

4.2.7 TEST RESULTS-ABOVE 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of 『Note 』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

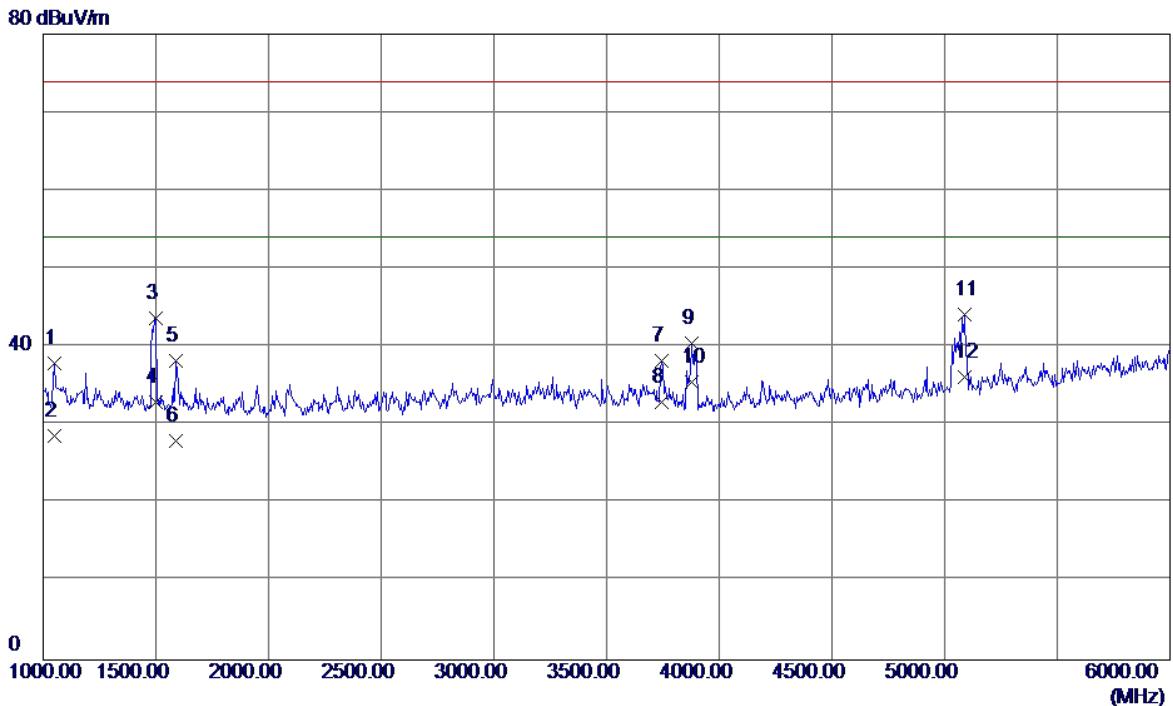


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1050.0000	43.30	-5.41	37.89	74.00	-36.11	Peak
2	1050.0000	34.12	-5.41	28.71	54.00	-25.29	AVG
3	1500.0000	47.25	-3.59	43.66	74.00	-30.34	Peak
4	1500.0000	36.58	-3.59	32.99	54.00	-21.01	AVG
5	1590.0000	41.47	-3.26	38.21	74.00	-35.79	Peak
6	1590.0000	31.24	-3.26	27.98	54.00	-26.02	AVG
7	3745.0000	33.43	4.88	38.31	74.00	-35.69	Peak
8	3745.0000	28.12	4.88	33.00	54.00	-21.00	AVG
9	3880.0000	35.46	5.01	40.47	74.00	-33.53	Peak
10	3880.0000	30.54	5.01	35.55	54.00	-18.45	AVG
11	5090.0000	36.80	7.36	44.16	74.00	-29.84	Peak
12 *	5090.0000	28.81	7.36	36.17	54.00	-17.83	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

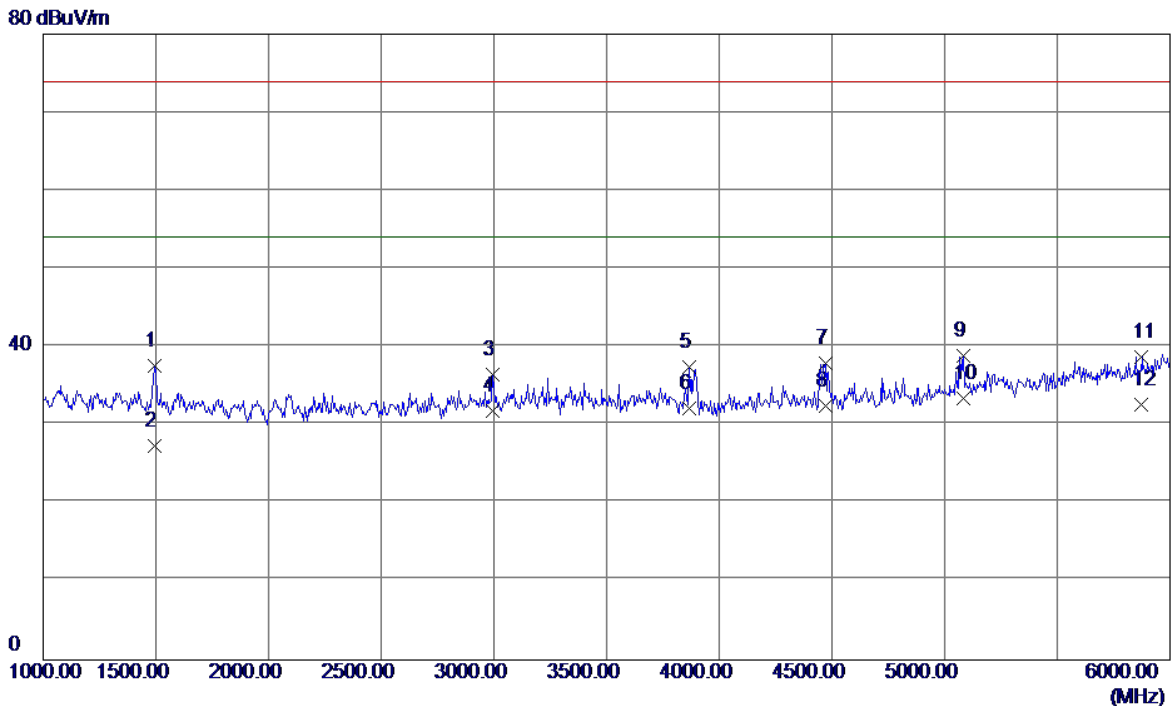

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	41.21	-3.61	37.60	74.00	-36.40	Peak
2	1495.0000	31.04	-3.61	27.43	54.00	-26.57	AVG
3	2995.0000	32.79	3.67	36.46	74.00	-37.54	Peak
4	2995.0000	28.15	3.67	31.82	54.00	-22.18	AVG
5	3865.0000	32.41	4.99	37.40	74.00	-36.60	Peak
6	3865.0000	27.10	4.99	32.09	54.00	-21.91	AVG
7	4470.0000	31.68	6.18	37.86	74.00	-36.14	Peak
8	4470.0000	26.24	6.18	32.42	54.00	-21.58	AVG
9	5085.0000	31.47	7.34	38.81	74.00	-35.19	Peak
10 *	5085.0000	26.15	7.34	33.49	54.00	-20.51	AVG
11	5875.0000	28.43	10.33	38.76	74.00	-35.24	Peak
12	5875.0000	22.32	10.33	32.65	54.00	-21.35	AVG


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Foxconn+Battery:Coslight+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

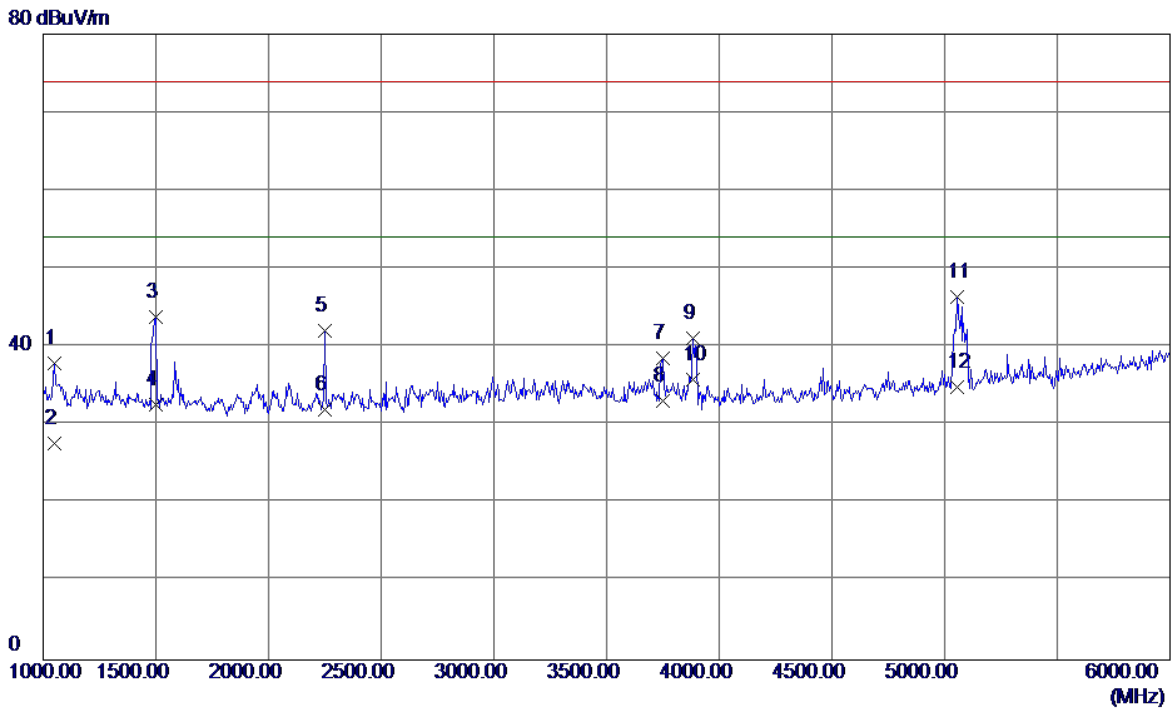

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1050.0000	43.35	-5.41	37.94	74.00	-36.06	Peak
2	1050.0000	33.07	-5.41	27.66	54.00	-26.34	AVG
3	1500.0000	47.42	-3.59	43.83	74.00	-30.17	Peak
4	1500.0000	36.25	-3.59	32.66	54.00	-21.34	AVG
5	2250.0000	42.47	-0.44	42.03	74.00	-31.97	Peak
6	2250.0000	32.41	-0.44	31.97	54.00	-22.03	AVG
7	3750.0000	33.65	4.89	38.54	74.00	-35.46	Peak
8	3750.0000	28.21	4.89	33.10	54.00	-20.90	AVG
9	3885.0000	36.05	5.01	41.06	74.00	-32.94	Peak
10 *	3885.0000	30.89	5.01	35.90	54.00	-18.10	AVG
11	5055.0000	39.22	7.24	46.46	74.00	-27.54	Peak
12	5055.0000	27.61	7.24	34.85	54.00	-19.15	AVG


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Foxconn+Battery:Coslight+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

80 dBuV/m

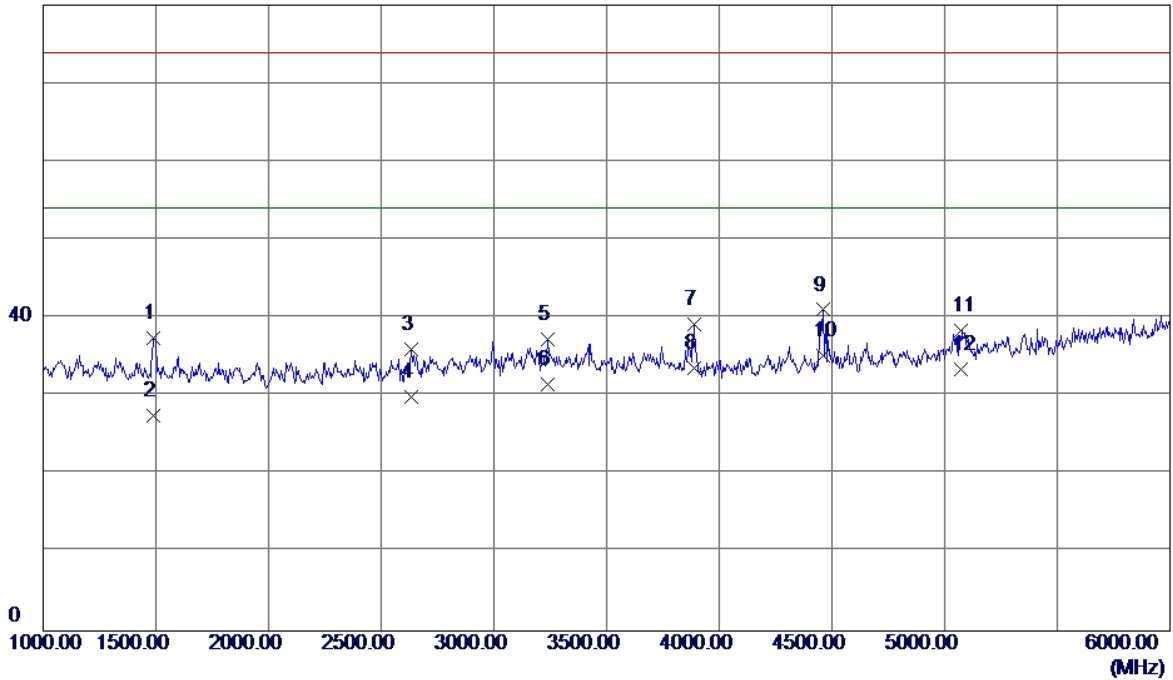


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1490.0000	41.02	-3.63	37.39	74.00	-36.61	Peak
2	1490.0000	31.15	-3.63	27.52	54.00	-26.48	AVG
3	2635.0000	34.37	1.64	36.01	74.00	-37.99	Peak
4	2635.0000	28.24	1.64	29.88	54.00	-24.12	AVG
5	3240.0000	33.06	4.16	37.22	74.00	-36.78	Peak
6	3240.0000	27.36	4.16	31.52	54.00	-22.48	AVG
7	3890.0000	34.11	5.02	39.13	74.00	-34.87	Peak
8	3890.0000	28.61	5.02	33.63	54.00	-20.37	AVG
9	4460.0000	34.88	6.16	41.04	74.00	-32.96	Peak
10 *	4460.0000	29.00	6.16	35.16	54.00	-18.84	AVG
11	5075.0000	31.10	7.31	38.41	74.00	-35.59	Peak
12	5075.0000	26.14	7.31	33.45	54.00	-20.55	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:HONGLIN+Battery:SCUD+Earphone:GoerTek		
Test Engineer	Kevin Li		

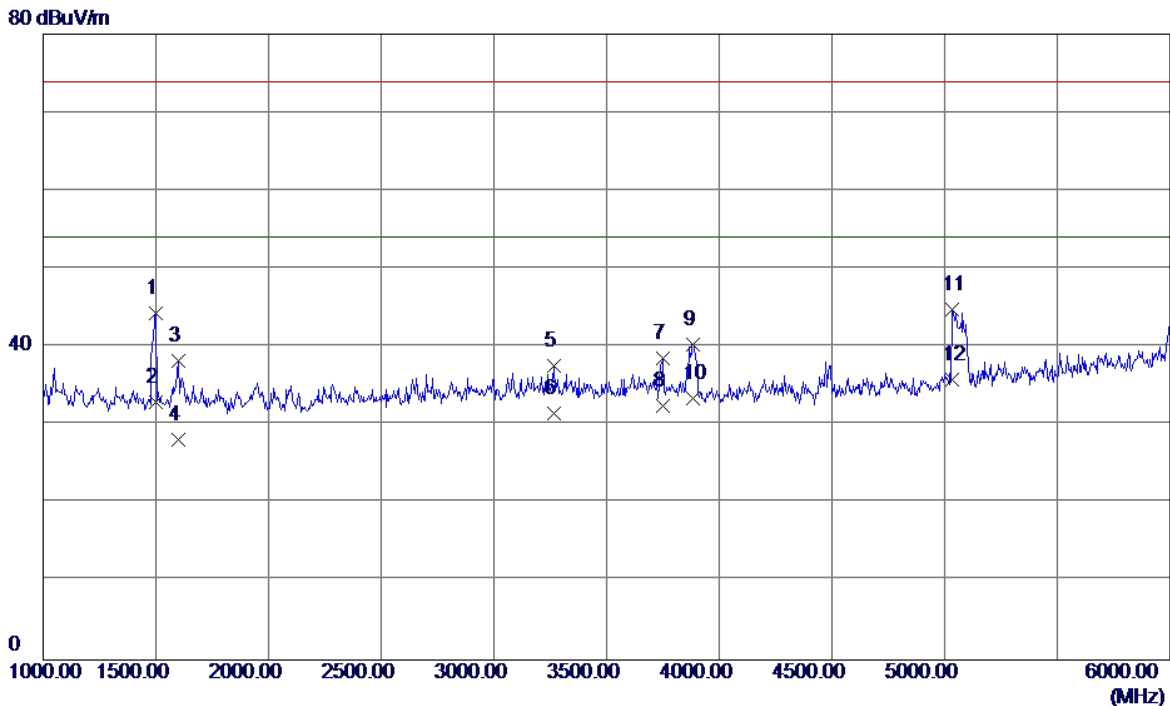


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	47.92	-3.59	44.33	74.00	-29.67	Peak
2	1500.0000	36.60	-3.59	33.01	54.00	-20.99	AVG
3	1600.0000	41.47	-3.22	38.25	74.00	-35.75	Peak
4	1600.0000	31.33	-3.22	28.11	54.00	-25.89	AVG
5	3265.0000	33.43	4.21	37.64	74.00	-36.36	Peak
6	3265.0000	27.24	4.21	31.45	54.00	-22.55	AVG
7	3750.0000	33.74	4.89	38.63	74.00	-35.37	Peak
8	3750.0000	27.56	4.89	32.45	54.00	-21.55	AVG
9	3885.0000	35.29	5.01	40.30	74.00	-33.70	Peak
10	3885.0000	28.46	5.01	33.47	54.00	-20.53	AVG
11	5035.0000	37.71	7.16	44.87	74.00	-29.13	Peak
12 *	5035.0000	28.66	7.16	35.82	54.00	-18.18	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:HONGLIN+Battery:SCUD+Earphone:GoerTek		
Test Engineer	Kevin Li		

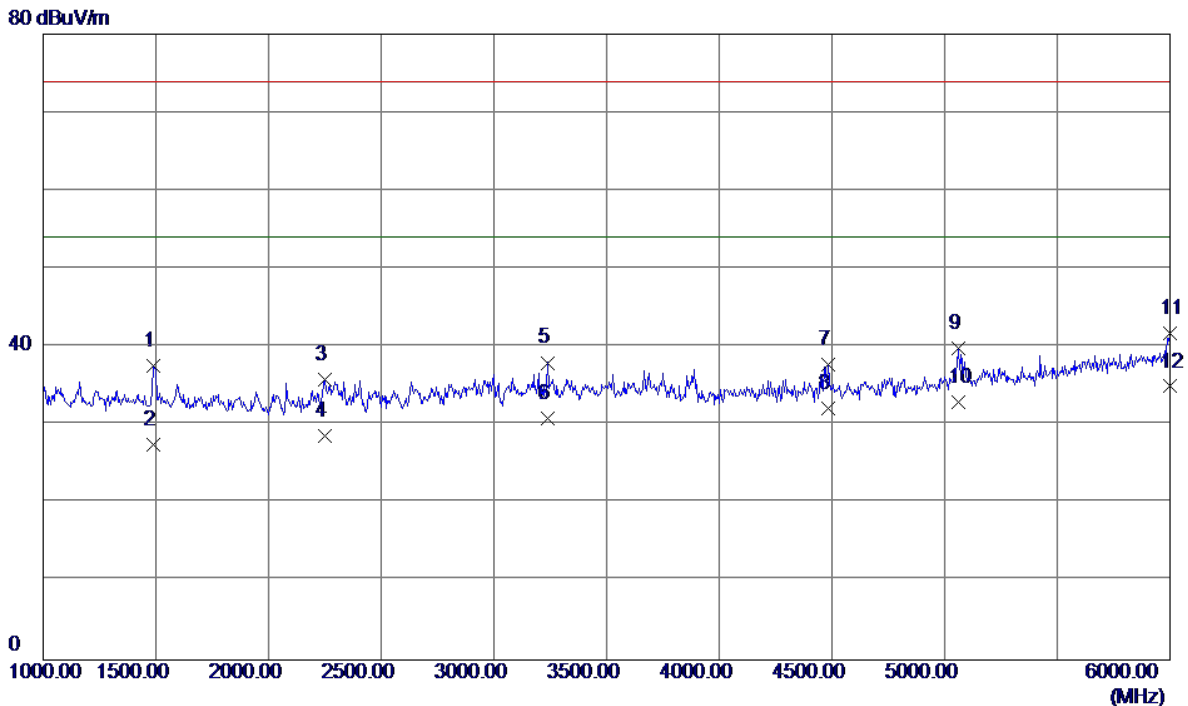


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1490.0000	41.30	-3.63	37.67	74.00	-36.33	Peak
2	1490.0000	31.17	-3.63	27.54	54.00	-26.46	AVG
3	2250.0000	36.29	-0.44	35.85	74.00	-38.15	Peak
4	2250.0000	29.12	-0.44	28.68	54.00	-25.32	AVG
5	3240.0000	33.84	4.16	38.00	74.00	-36.00	Peak
6	3240.0000	26.78	4.16	30.94	54.00	-23.06	AVG
7	4485.0000	31.57	6.21	37.78	74.00	-36.22	Peak
8	4485.0000	26.02	6.21	32.23	54.00	-21.77	AVG
9	5060.0000	32.52	7.25	39.77	74.00	-34.23	Peak
10	5060.0000	25.75	7.25	33.00	54.00	-21.00	AVG
11	6000.0000	30.93	10.84	41.77	74.00	-32.23	Peak
12 *	6000.0000	24.12	10.84	34.96	54.00	-19.04	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

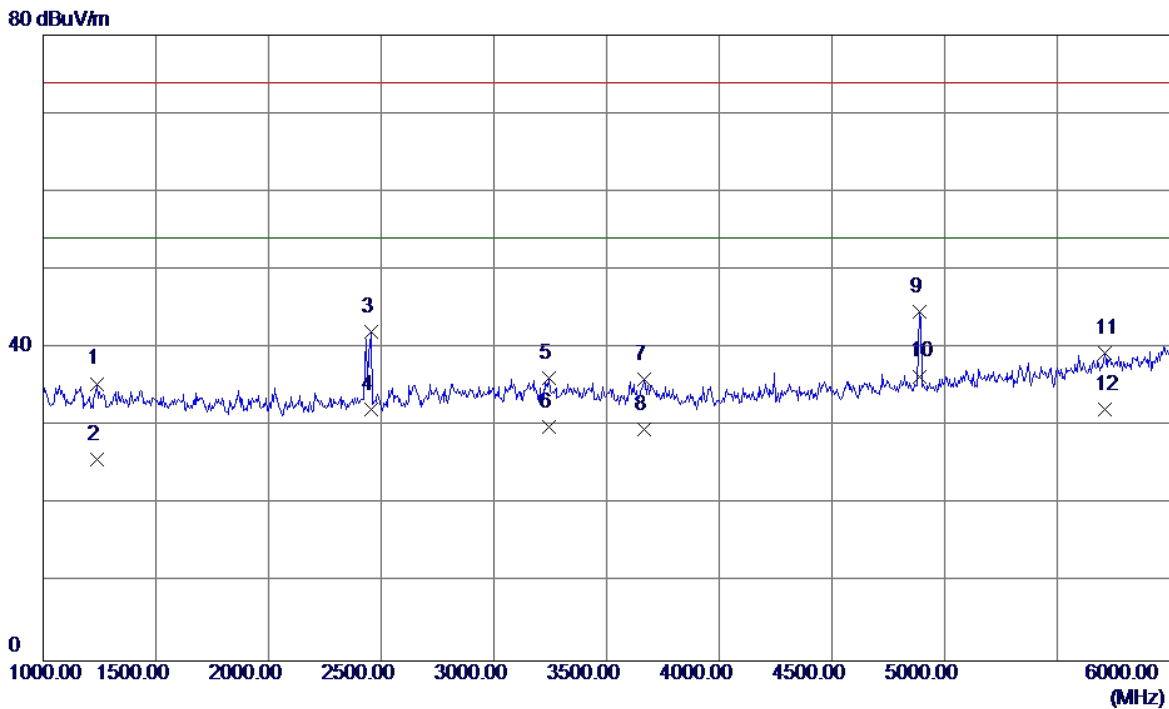


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1240.0000	40.08	-4.64	35.44	74.00	-38.56	Peak
2	1240.0000	30.45	-4.64	25.81	54.00	-28.19	AVG
3	2455.0000	41.40	0.64	42.04	74.00	-31.96	Peak
4	2455.0000	31.54	0.64	32.18	54.00	-21.82	AVG
5	3245.0000	32.03	4.17	36.20	74.00	-37.80	Peak
6	3245.0000	25.75	4.17	29.92	54.00	-24.08	AVG
7	3665.0000	31.25	4.81	36.06	74.00	-37.94	Peak
8	3665.0000	24.78	4.81	29.59	54.00	-24.41	AVG
9	4890.0000	37.70	6.87	44.57	74.00	-29.43	Peak
10 *	4890.0000	29.53	6.87	36.40	54.00	-17.60	AVG
11	5710.0000	29.64	9.67	39.31	74.00	-34.69	Peak
12	5710.0000	22.53	9.67	32.20	54.00	-21.80	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

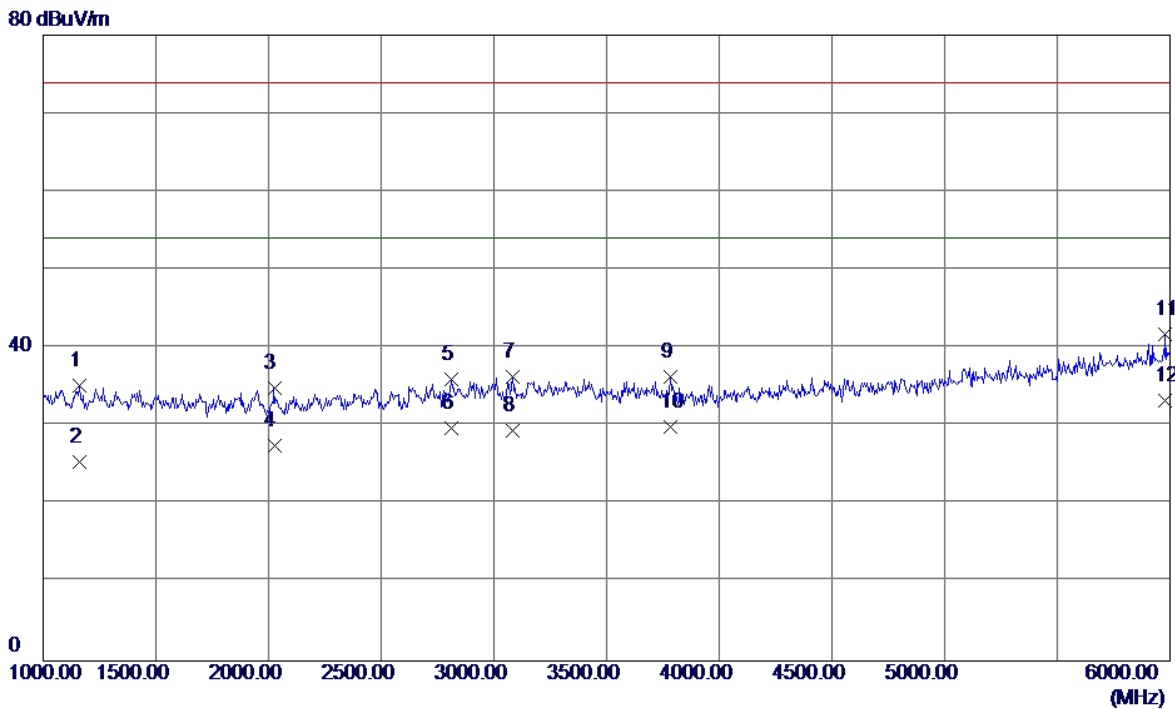


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1160.0000	40.23	-4.96	35.27	74.00	-38.73	Peak
2	1160.0000	30.41	-4.96	25.45	54.00	-28.55	AVG
3	2025.0000	36.46	-1.63	34.83	74.00	-39.17	Peak
4	2025.0000	29.12	-1.63	27.49	54.00	-26.51	AVG
5	2810.0000	33.38	2.63	36.01	74.00	-37.99	Peak
6	2810.0000	27.12	2.63	29.75	54.00	-24.25	AVG
7	3085.0000	32.53	3.86	36.39	74.00	-37.61	Peak
8	3085.0000	25.54	3.86	29.40	54.00	-24.60	AVG
9	3785.0000	31.37	4.92	36.29	74.00	-37.71	Peak
10	3785.0000	24.96	4.92	29.88	54.00	-24.12	AVG
11	5980.0000	30.97	10.76	41.73	74.00	-32.27	Peak
12 *	5980.0000	22.48	10.76	33.24	54.00	-20.76	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

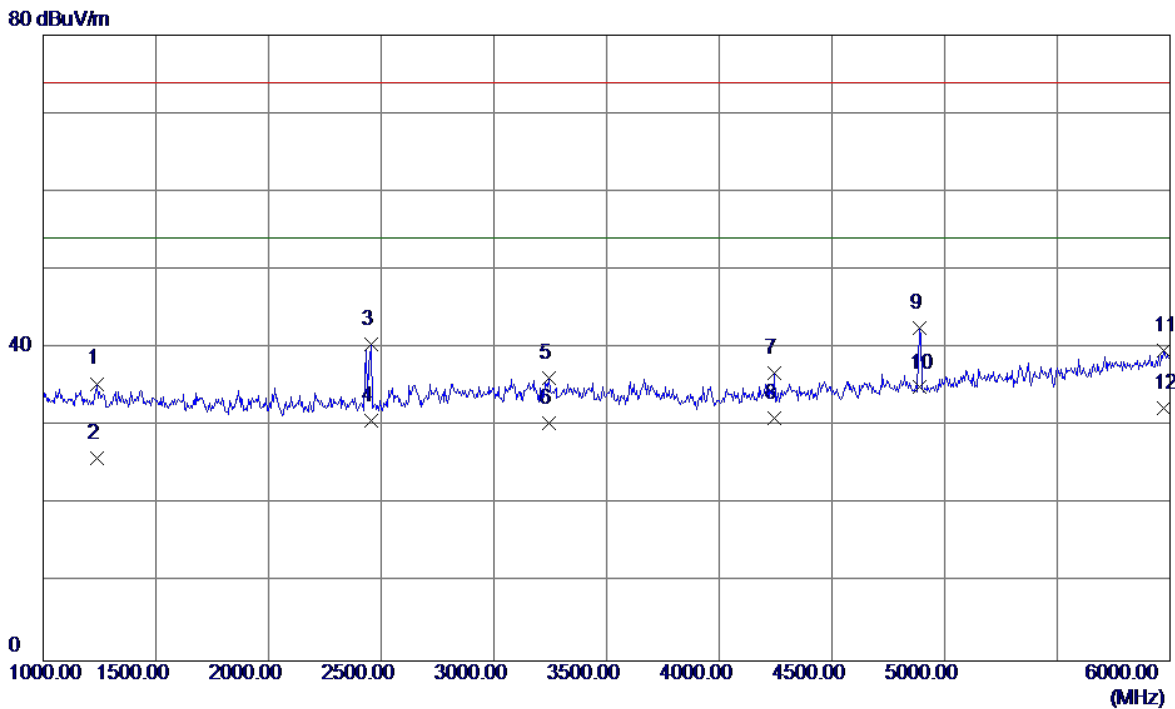


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1240.0000	40.08	-4.64	35.44	74.00	-38.56	Peak
2	1240.0000	30.54	-4.64	25.90	54.00	-28.10	AVG
3	2455.0000	39.90	0.64	40.54	74.00	-33.46	Peak
4	2455.0000	30.12	0.64	30.76	54.00	-23.24	AVG
5	3245.0000	32.03	4.17	36.20	74.00	-37.80	Peak
6	3245.0000	26.20	4.17	30.37	54.00	-23.63	AVG
7	4245.0000	31.13	5.67	36.80	74.00	-37.20	Peak
8	4245.0000	25.31	5.67	30.98	54.00	-23.02	AVG
9	4890.0000	35.70	6.87	42.57	74.00	-31.43	Peak
10 *	4890.0000	28.09	6.87	34.96	54.00	-19.04	AVG
11	5970.0000	29.02	10.72	39.74	74.00	-34.26	Peak
12	5970.0000	21.54	10.72	32.26	54.00	-21.74	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

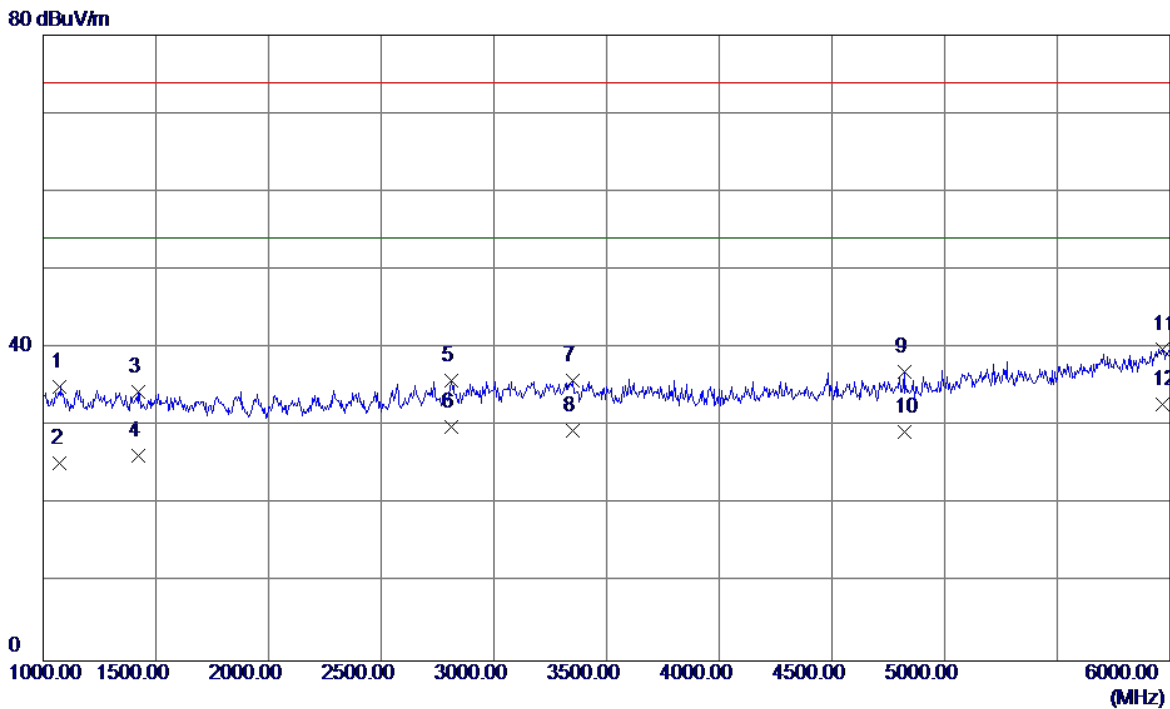


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1075.0000	40.33	-5.31	35.02	74.00	-38.98	Peak
2	1075.0000	30.53	-5.31	25.22	54.00	-28.78	AVG
3	1420.0000	38.36	-3.91	34.45	74.00	-39.55	Peak
4	1420.0000	30.16	-3.91	26.25	54.00	-27.75	AVG
5	2810.0000	33.26	2.63	35.89	74.00	-38.11	Peak
6	2810.0000	27.32	2.63	29.95	54.00	-24.05	AVG
7	3350.0000	31.42	4.37	35.79	74.00	-38.21	Peak
8	3350.0000	25.12	4.37	29.49	54.00	-24.51	AVG
9	4820.0000	30.27	6.75	37.02	74.00	-36.98	Peak
10	4820.0000	22.54	6.75	29.29	54.00	-24.71	AVG
11	5965.0000	29.19	10.70	39.89	74.00	-34.11	Peak
12 *	5965.0000	22.05	10.70	32.75	54.00	-21.25	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

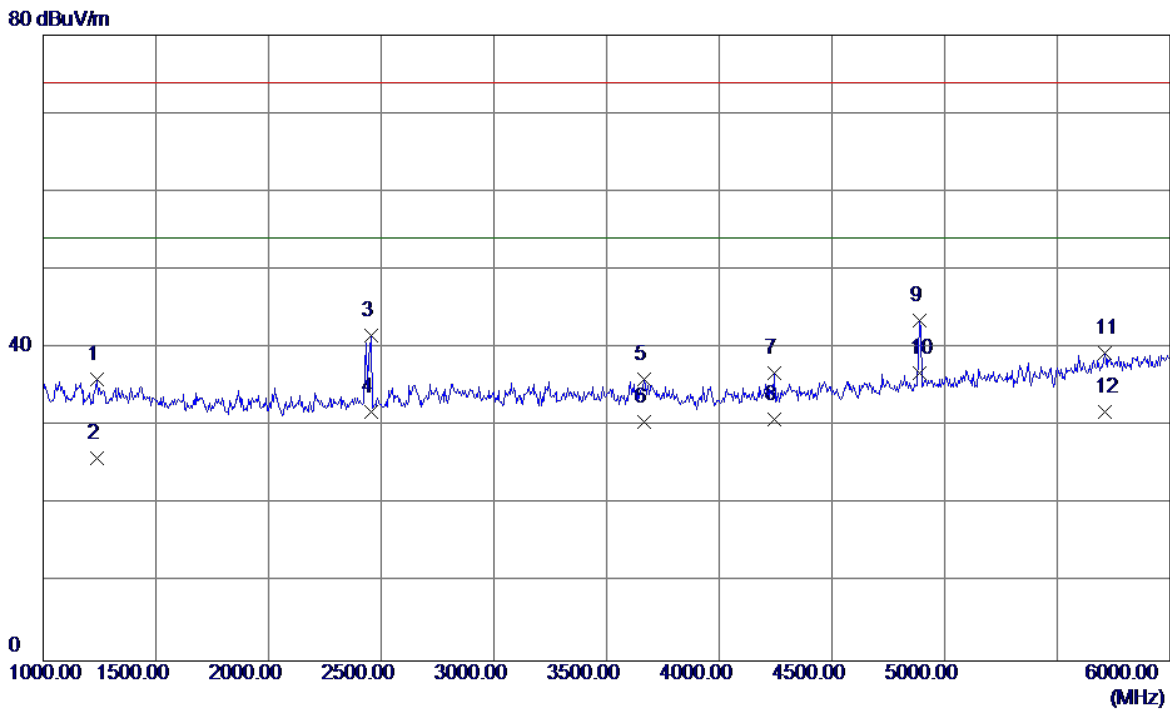


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1240.0000	40.58	-4.64	35.94	74.00	-38.06	Peak
2	1240.0000	30.62	-4.64	25.98	54.00	-28.02	AVG
3	2455.0000	40.90	0.64	41.54	74.00	-32.46	Peak
4	2455.0000	31.26	0.64	31.90	54.00	-22.10	AVG
5	3665.0000	31.25	4.81	36.06	74.00	-37.94	Peak
6	3665.0000	25.75	4.81	30.56	54.00	-23.44	AVG
7	4245.0000	31.13	5.67	36.80	74.00	-37.20	Peak
8	4245.0000	25.26	5.67	30.93	54.00	-23.07	AVG
9	4890.0000	36.70	6.87	43.57	74.00	-30.43	Peak
10 *	4890.0000	29.94	6.87	36.81	54.00	-17.19	AVG
11	5710.0000	29.64	9.67	39.31	74.00	-34.69	Peak
12	5710.0000	22.13	9.67	31.80	54.00	-22.20	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+2.4G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

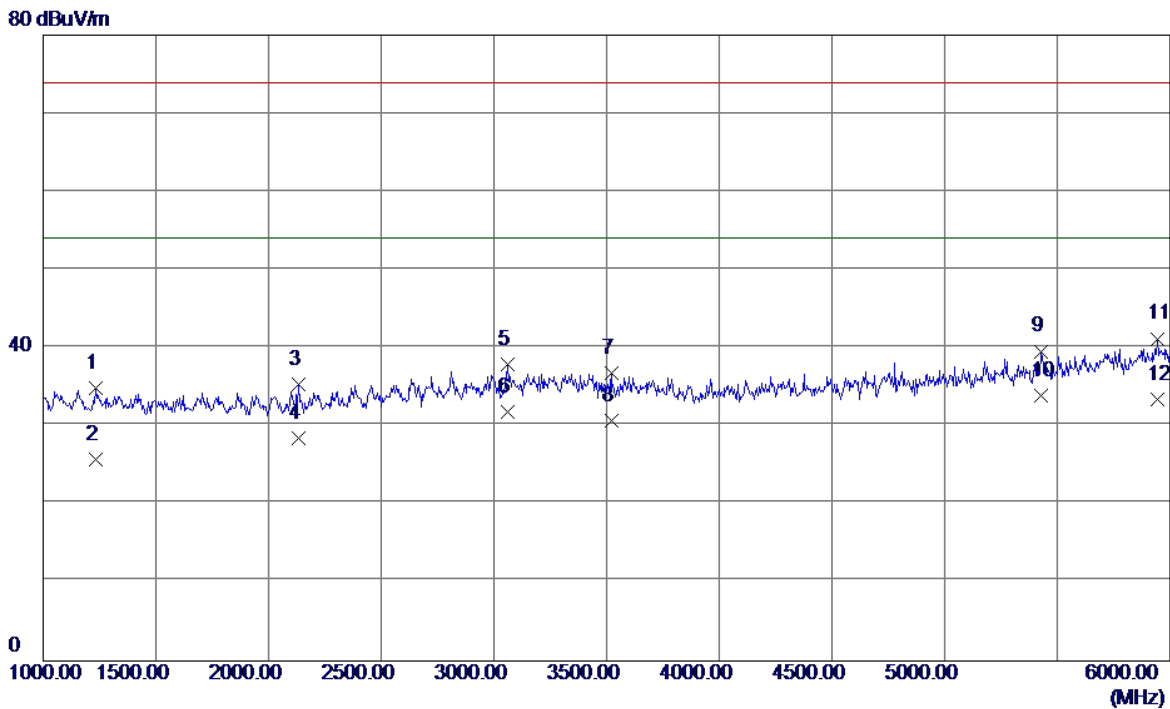


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1235.0000	39.60	-4.66	34.94	74.00	-39.06	Peak
2	1235.0000	30.36	-4.66	25.70	54.00	-28.30	AVG
3	2135.0000	36.37	-1.05	35.32	74.00	-38.68	Peak
4	2135.0000	29.51	-1.05	28.46	54.00	-25.54	AVG
5	3060.0000	34.07	3.81	37.88	74.00	-36.12	Peak
6	3060.0000	27.98	3.81	31.79	54.00	-22.21	AVG
7	3520.0000	32.17	4.67	36.84	74.00	-37.16	Peak
8	3520.0000	26.01	4.67	30.68	54.00	-23.32	AVG
9	5430.0000	31.03	8.57	39.60	74.00	-34.40	Peak
10 *	5430.0000	25.31	8.57	33.88	54.00	-20.12	AVG
11	5945.0000	30.58	10.62	41.20	74.00	-32.80	Peak
12	5945.0000	22.80	10.62	33.42	54.00	-20.58	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

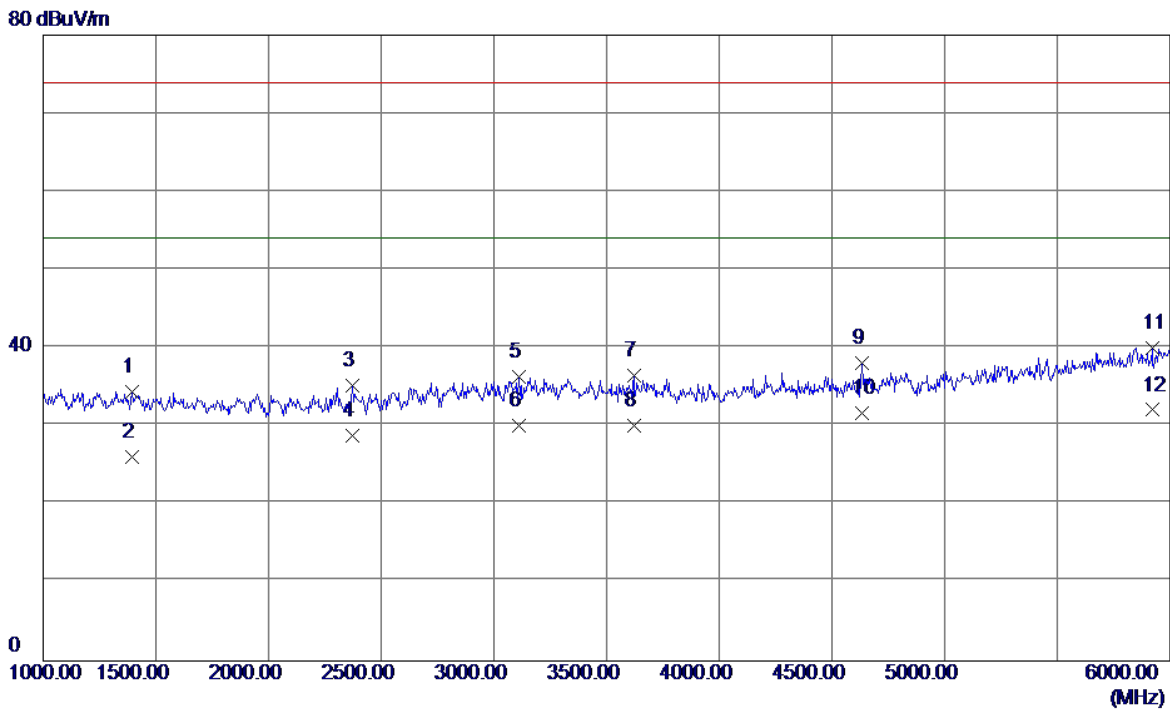


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1395.0000	38.47	-4.01	34.46	74.00	-39.54	Peak
2	1395.0000	30.12	-4.01	26.11	54.00	-27.89	AVG
3	2370.0000	35.02	0.19	35.21	74.00	-38.79	Peak
4	2370.0000	28.54	0.19	28.73	54.00	-25.27	AVG
5	3110.0000	32.39	3.91	36.30	74.00	-37.70	Peak
6	3110.0000	26.14	3.91	30.05	54.00	-23.95	AVG
7	3620.0000	31.64	4.77	36.41	74.00	-37.59	Peak
8	3620.0000	25.35	4.77	30.12	54.00	-23.88	AVG
9	4635.0000	31.57	6.46	38.03	74.00	-35.97	Peak
10	4635.0000	25.28	6.46	31.74	54.00	-22.26	AVG
11	5920.0000	29.52	10.52	40.04	74.00	-33.96	Peak
12 *	5920.0000	21.56	10.52	32.08	54.00	-21.92	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

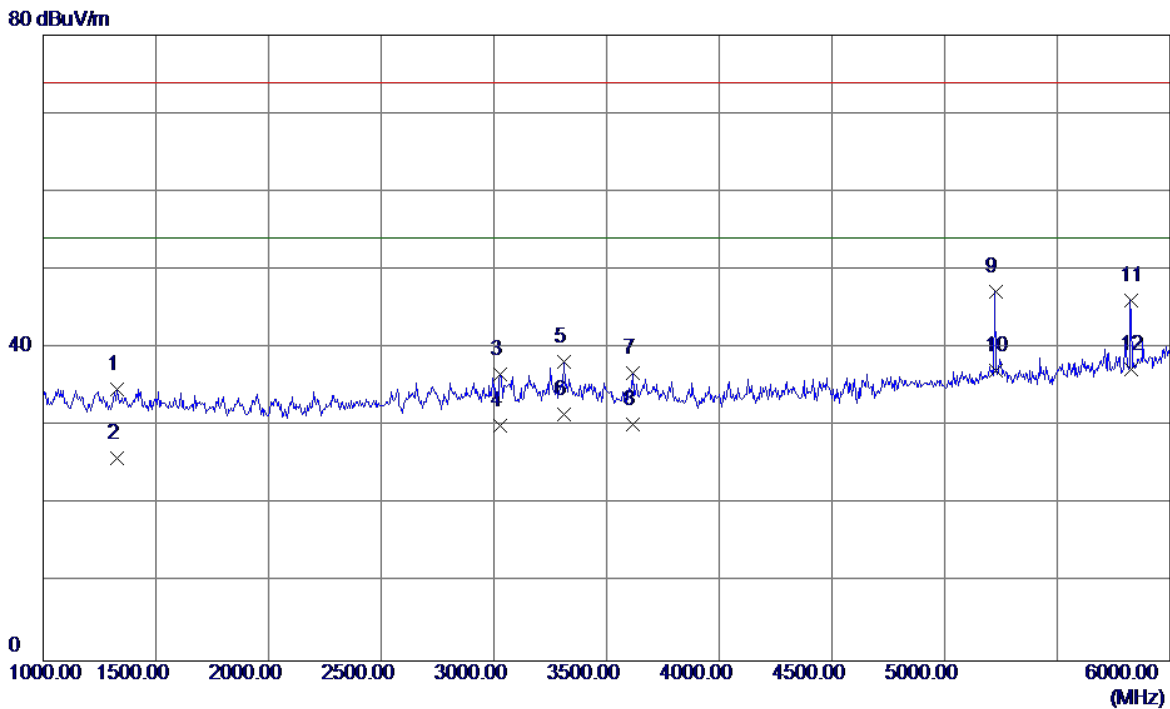


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1330.0000	38.95	-4.27	34.68	74.00	-39.32	Peak
2	1330.0000	30.21	-4.27	25.94	54.00	-28.06	AVG
3	3030.0000	32.82	3.76	36.58	74.00	-37.42	Peak
4	3030.0000	26.32	3.76	30.08	54.00	-23.92	AVG
5	3310.0000	33.98	4.29	38.27	74.00	-35.73	Peak
6	3310.0000	27.26	4.29	31.55	54.00	-22.45	AVG
7	3615.0000	32.11	4.76	36.87	74.00	-37.13	Peak
8	3615.0000	25.55	4.76	30.31	54.00	-23.69	AVG
9	5225.0000	39.37	7.84	47.21	74.00	-26.79	Peak
10	5225.0000	29.23	7.84	37.07	54.00	-16.93	AVG
11	5825.0000	35.95	10.13	46.08	74.00	-27.92	Peak
12 *	5825.0000	27.08	10.13	37.21	54.00	-16.79	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

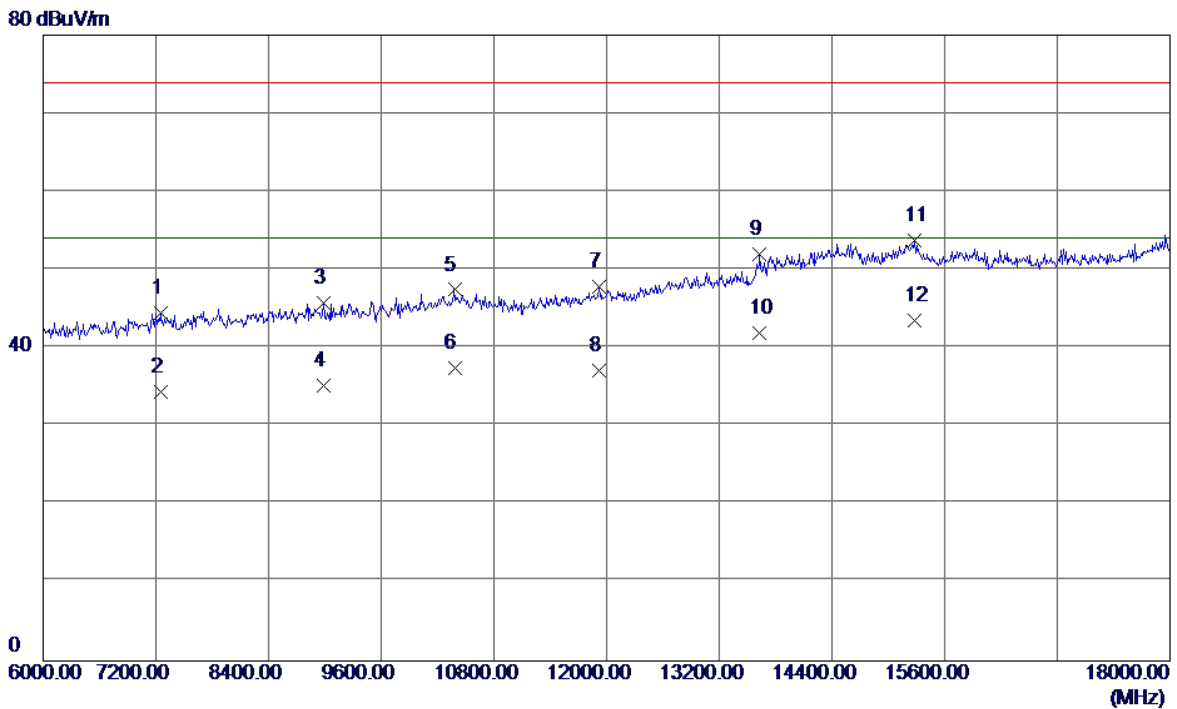

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7248.0000	32.38	12.10	44.48	74.00	-29.52	Peak
2	7248.0000	22.34	12.10	34.44	54.00	-19.56	AVG
3	8988.0000	31.24	14.45	45.69	74.00	-28.31	Peak
4	8988.0000	20.79	14.45	35.24	54.00	-18.76	AVG
5	10380.0000	31.15	16.29	47.44	74.00	-26.56	Peak
6	10380.0000	21.19	16.29	37.48	54.00	-16.52	AVG
7	11916.0000	30.58	17.22	47.80	74.00	-26.20	Peak
8	11916.0000	19.96	17.22	37.18	54.00	-16.82	AVG
9	13632.0000	30.74	21.21	51.95	74.00	-22.05	Peak
10	13632.0000	20.74	21.21	41.95	54.00	-12.05	AVG
11	15276.0000	32.39	21.30	53.69	74.00	-20.31	Peak
12 *	15276.0000	22.27	21.30	43.57	54.00	-10.43	AVG


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

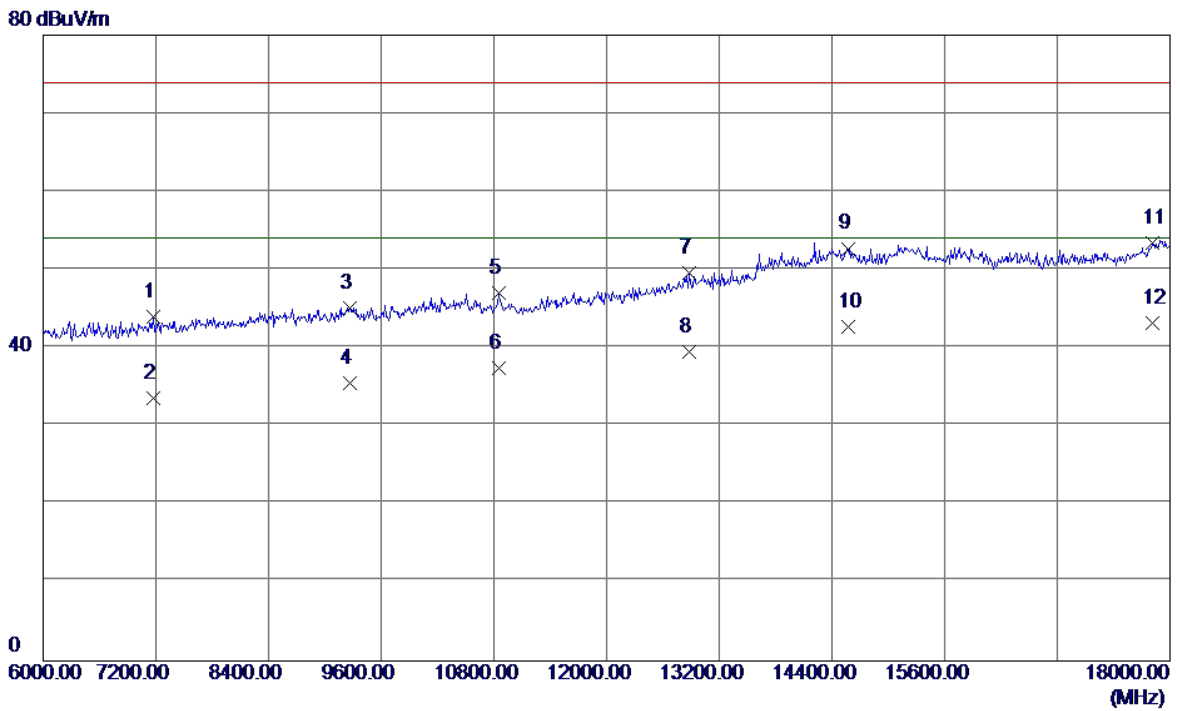

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7176.0000	31.94	11.99	43.93	74.00	-30.07	Peak
2	7176.0000	21.66	11.99	33.65	54.00	-20.35	AVG
3	9264.0000	30.75	14.38	45.13	74.00	-28.87	Peak
4	9264.0000	21.10	14.38	35.48	54.00	-18.52	AVG
5	10848.0000	30.67	16.38	47.05	74.00	-26.95	Peak
6	10848.0000	21.10	16.38	37.48	54.00	-16.52	AVG
7	12876.0000	30.16	19.51	49.67	74.00	-24.33	Peak
8	12876.0000	20.03	19.51	39.54	54.00	-14.46	AVG
9	14568.0000	30.07	22.65	52.72	74.00	-21.28	Peak
10	14568.0000	20.00	22.65	42.65	54.00	-11.35	AVG
11	17808.0000	30.50	22.97	53.47	74.00	-20.53	Peak
12 *	17808.0000	20.24	22.97	43.21	54.00	-10.79	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		


100 dBuV/m

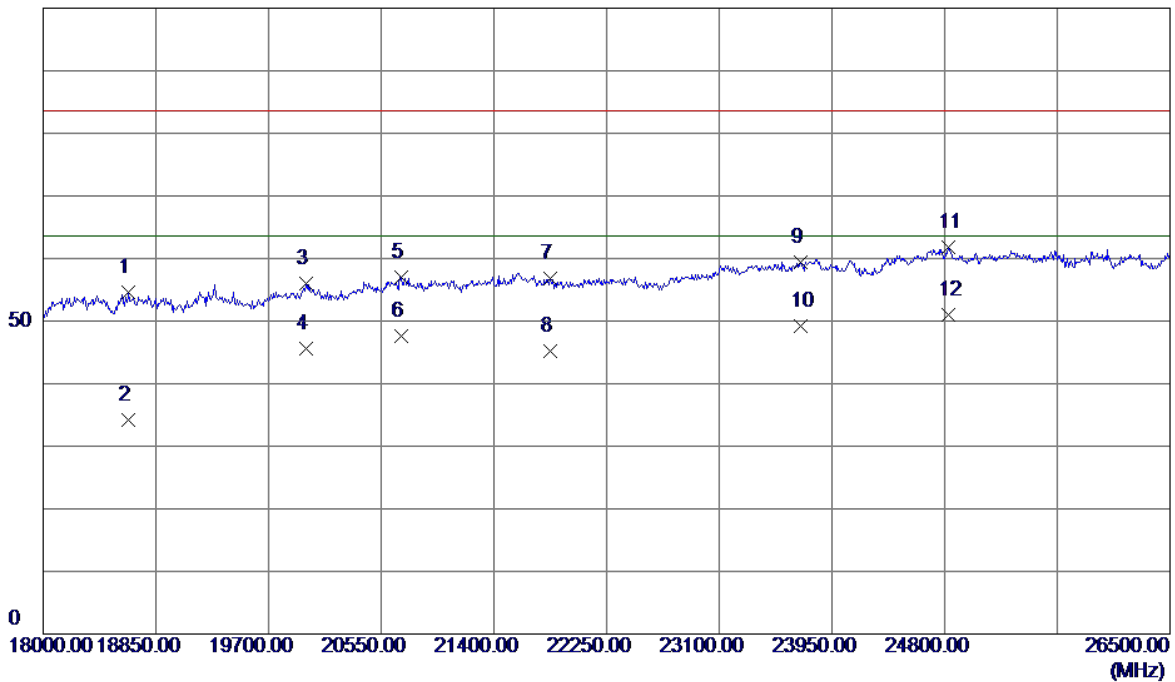

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	18646.0000	49.86	4.83	54.69	83.50	-28.81	Peak
2	18646.0000	29.42	4.83	34.25	63.50	-29.25	AVG
3	19980.5000	51.39	4.54	55.93	83.50	-27.57	Peak
4	19980.5000	41.04	4.54	45.58	63.50	-17.92	AVG
5	20703.0000	52.67	4.34	57.01	83.50	-26.49	Peak
6	20703.0000	43.20	4.34	47.54	63.50	-15.96	AVG
7	21825.0000	52.19	4.57	56.76	83.50	-26.74	Peak
8	21825.0000	40.58	4.57	45.15	63.50	-18.35	AVG
9	23712.0000	54.61	4.73	59.34	83.50	-24.16	Peak
10	23712.0000	44.45	4.73	49.18	63.50	-14.32	AVG
11	24825.5000	56.75	5.09	61.84	83.50	-21.66	Peak
12 *	24825.5000	45.95	5.09	51.04	63.50	-12.46	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		


100 dBuV/m

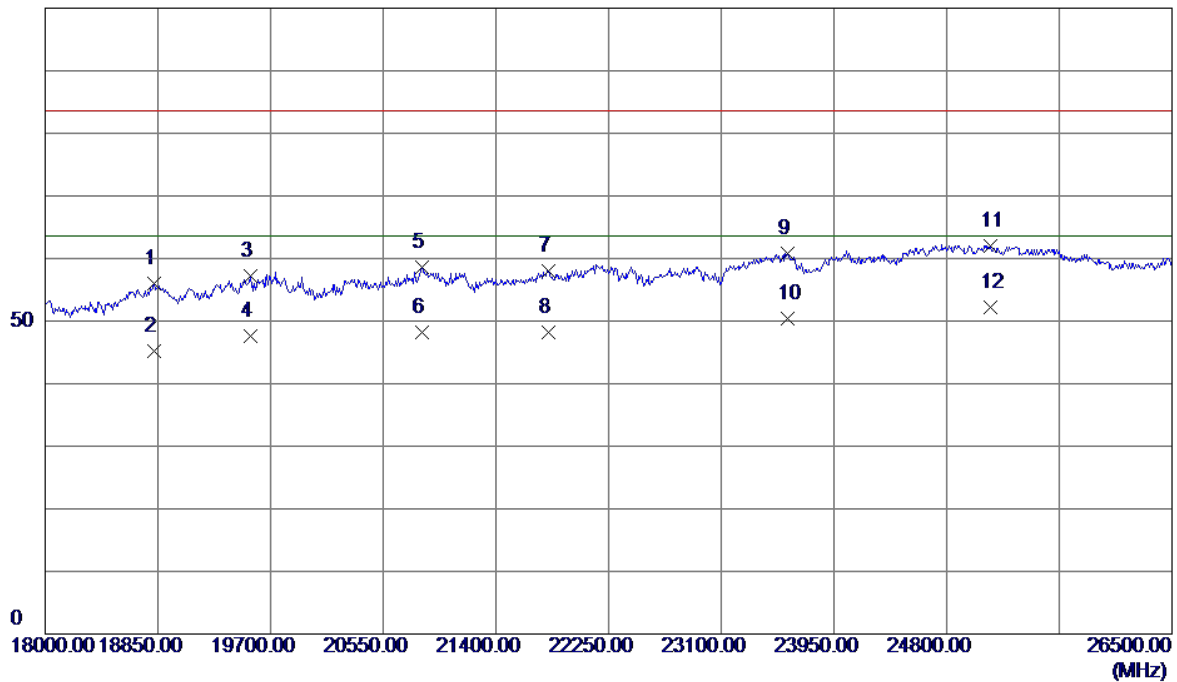

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	18824.5000	51.05	4.89	55.94	83.50	-27.56	Peak
2	18824.5000	40.26	4.89	45.15	63.50	-18.35	AVG
3	19547.0000	51.81	5.43	57.24	83.50	-26.26	Peak
4	19547.0000	42.15	5.43	47.58	63.50	-15.92	AVG
5	20839.0000	54.14	4.48	58.62	83.50	-24.88	Peak
6	20839.0000	43.74	4.48	48.22	63.50	-15.28	AVG
7	21799.5000	53.46	4.59	58.05	83.50	-25.45	Peak
8	21799.5000	43.58	4.59	48.17	63.50	-15.33	AVG
9	23601.5000	55.99	4.86	60.85	83.50	-22.65	Peak
10	23601.5000	45.56	4.86	50.42	63.50	-13.08	AVG
11	25131.5000	56.74	5.35	62.09	83.50	-21.41	Peak
12 *	25131.5000	46.79	5.35	52.14	63.50	-11.36	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		


100 dBuV/m

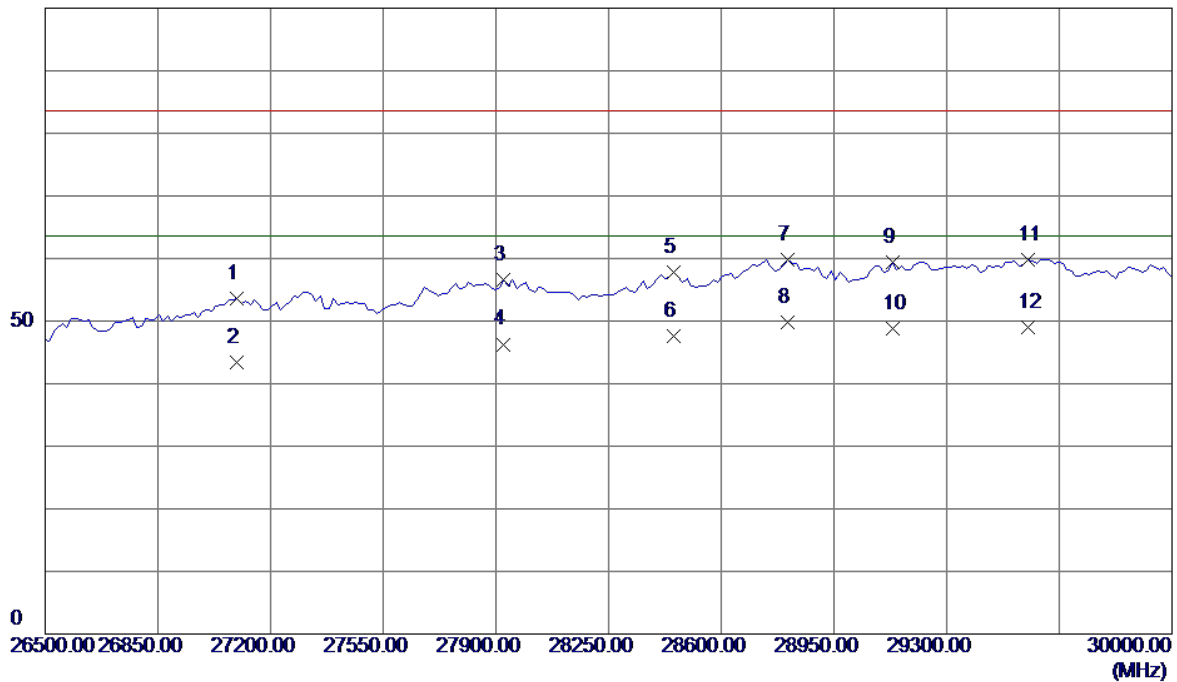

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	27096.8990	48.65	4.96	53.61	83.50	-29.89	Peak
2	27096.8990	38.45	4.96	43.41	63.50	-20.09	AVG
3	27924.4190	52.43	4.15	56.58	83.50	-26.92	Peak
4	27924.4190	42.15	4.15	46.30	63.50	-17.20	AVG
5	28453.4880	52.32	5.40	57.72	83.50	-25.78	Peak
6	28453.4880	42.16	5.40	47.56	63.50	-15.94	AVG
7	28806.2020	53.64	6.21	59.85	83.50	-23.65	Peak
8 *	28806.2020	43.51	6.21	49.72	63.50	-13.78	AVG
9	29131.7830	52.76	6.73	59.49	83.50	-24.01	Peak
10	29131.7830	42.15	6.73	48.88	63.50	-14.62	AVG
11	29552.3260	52.81	7.01	59.82	83.50	-23.68	Peak
12	29552.3260	42.04	7.01	49.05	63.50	-14.45	AVG


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+5G WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

100 dBuV/m

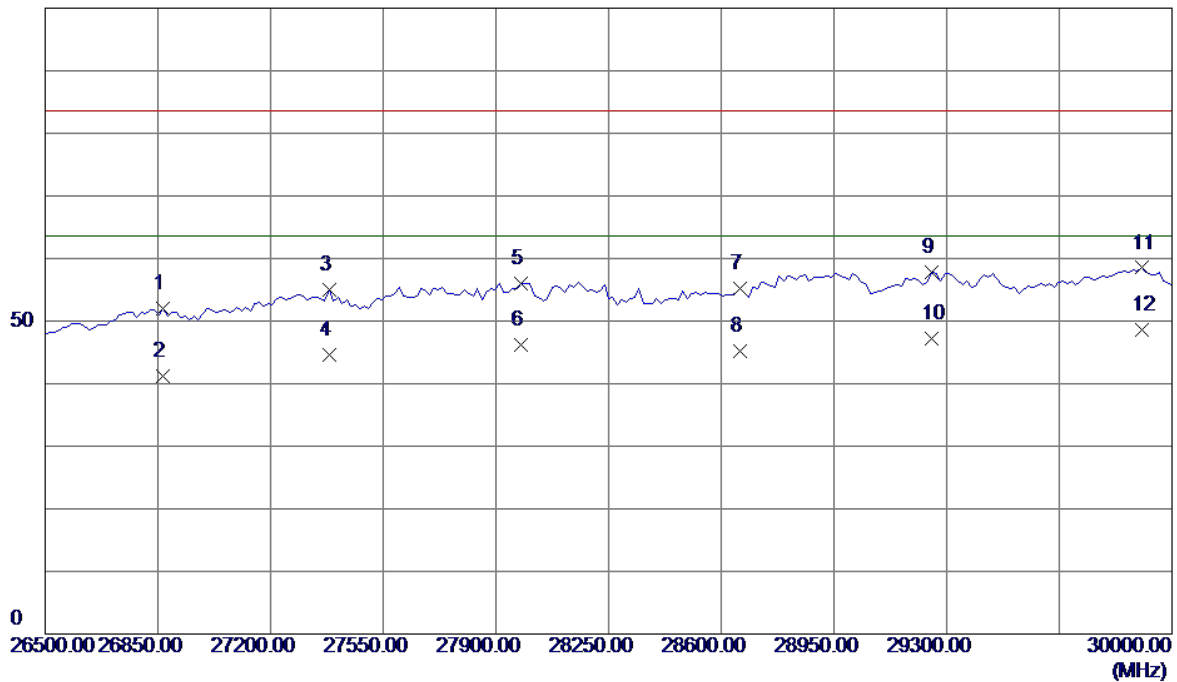


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	26866.2790	46.96	5.02	51.98	83.50	-31.52	Peak
2	26866.2790	36.18	5.02	41.20	63.50	-22.30	AVG
3	27381.7830	50.84	4.15	54.99	83.50	-28.51	Peak
4	27381.7830	40.47	4.15	44.62	63.50	-18.88	AVG
5	27978.6820	51.82	4.19	56.01	83.50	-27.49	Peak
6	27978.6820	42.09	4.19	46.28	63.50	-17.22	AVG
7	28656.9770	49.35	5.88	55.23	83.50	-28.27	Peak
8	28656.9770	39.23	5.88	45.11	63.50	-18.39	AVG
9	29253.8760	50.91	6.81	57.72	83.50	-25.78	Peak
10	29253.8760	40.47	6.81	47.28	63.50	-16.22	AVG
11	29905.0390	51.20	7.30	58.50	83.50	-25.00	Peak
12 *	29905.0390	41.32	7.30	48.62	63.50	-14.88	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

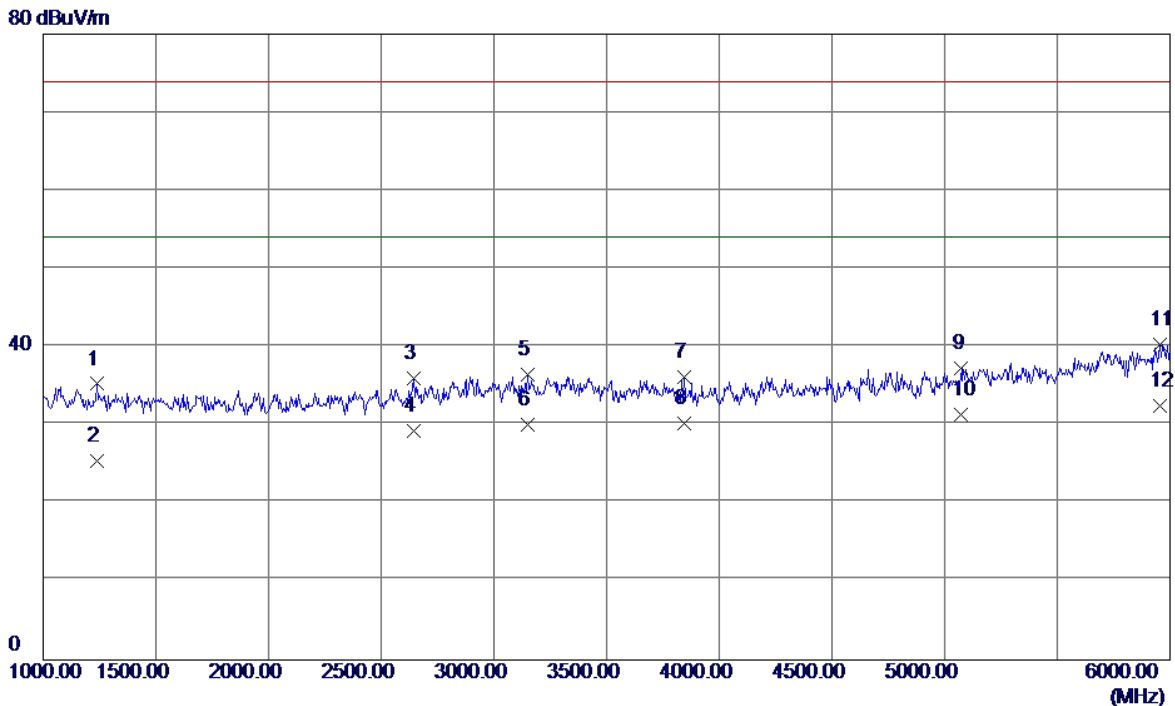


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1240.0000	39.92	-4.64	35.28	74.00	-38.72	Peak
2	1240.0000	30.12	-4.64	25.48	54.00	-28.52	AVG
3	2645.0000	34.24	1.69	35.93	74.00	-38.07	Peak
4	2645.0000	27.55	1.69	29.24	54.00	-24.76	AVG
5	3150.0000	32.51	3.99	36.50	74.00	-37.50	Peak
6	3150.0000	26.12	3.99	30.11	54.00	-23.89	AVG
7	3845.0000	31.21	4.98	36.19	74.00	-37.81	Peak
8	3845.0000	25.20	4.98	30.18	54.00	-23.82	AVG
9	5075.0000	29.90	7.31	37.21	74.00	-36.79	Peak
10	5075.0000	24.11	7.31	31.42	54.00	-22.58	AVG
11	5955.0000	29.73	10.66	40.39	74.00	-33.61	Peak
12 *	5955.0000	21.75	10.66	32.41	54.00	-21.59	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

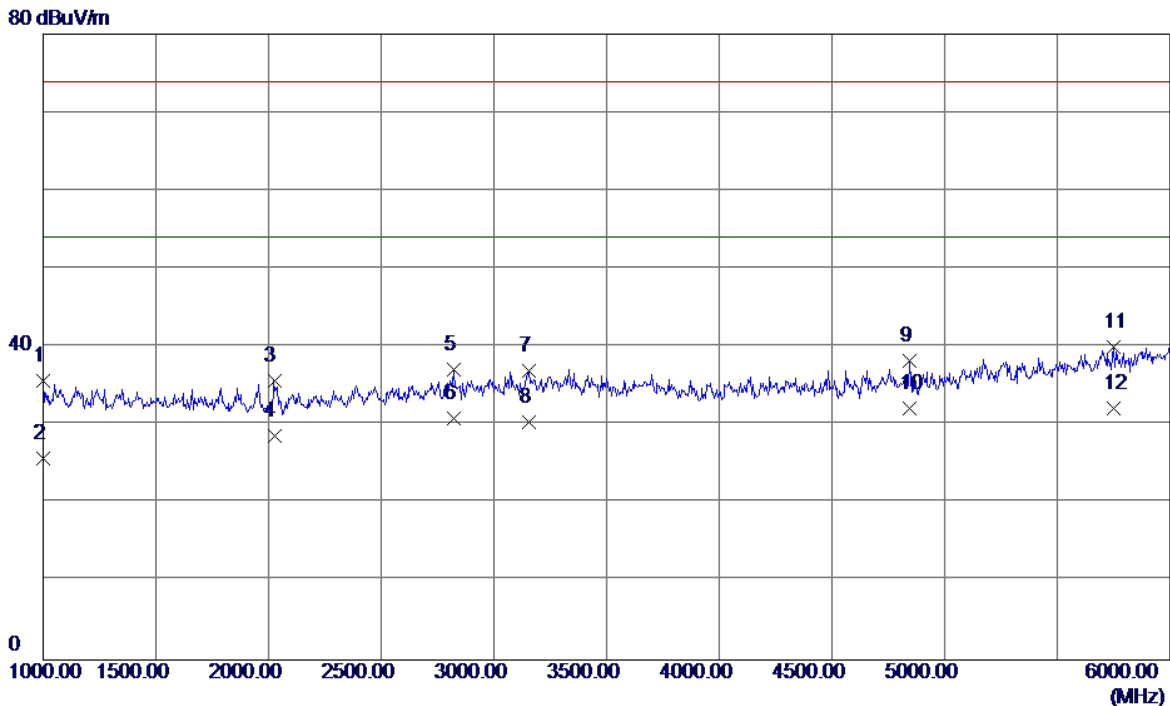


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1000.0000	41.24	-5.61	35.63	74.00	-38.37	Peak
2	1000.0000	31.36	-5.61	25.75	54.00	-28.25	AVG
3	2025.0000	37.24	-1.63	35.61	74.00	-38.39	Peak
4	2025.0000	30.21	-1.63	28.58	54.00	-25.42	AVG
5	2820.0000	34.49	2.68	37.17	74.00	-36.83	Peak
6	2820.0000	28.27	2.68	30.95	54.00	-23.05	AVG
7	3155.0000	32.97	4.00	36.97	74.00	-37.03	Peak
8	3155.0000	26.41	4.00	30.41	54.00	-23.59	AVG
9	4845.0000	31.51	6.79	38.30	74.00	-35.70	Peak
10 *	4845.0000	25.35	6.79	32.14	54.00	-21.86	AVG
11	5750.0000	30.23	9.83	40.06	74.00	-33.94	Peak
12	5750.0000	22.31	9.83	32.14	54.00	-21.86	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

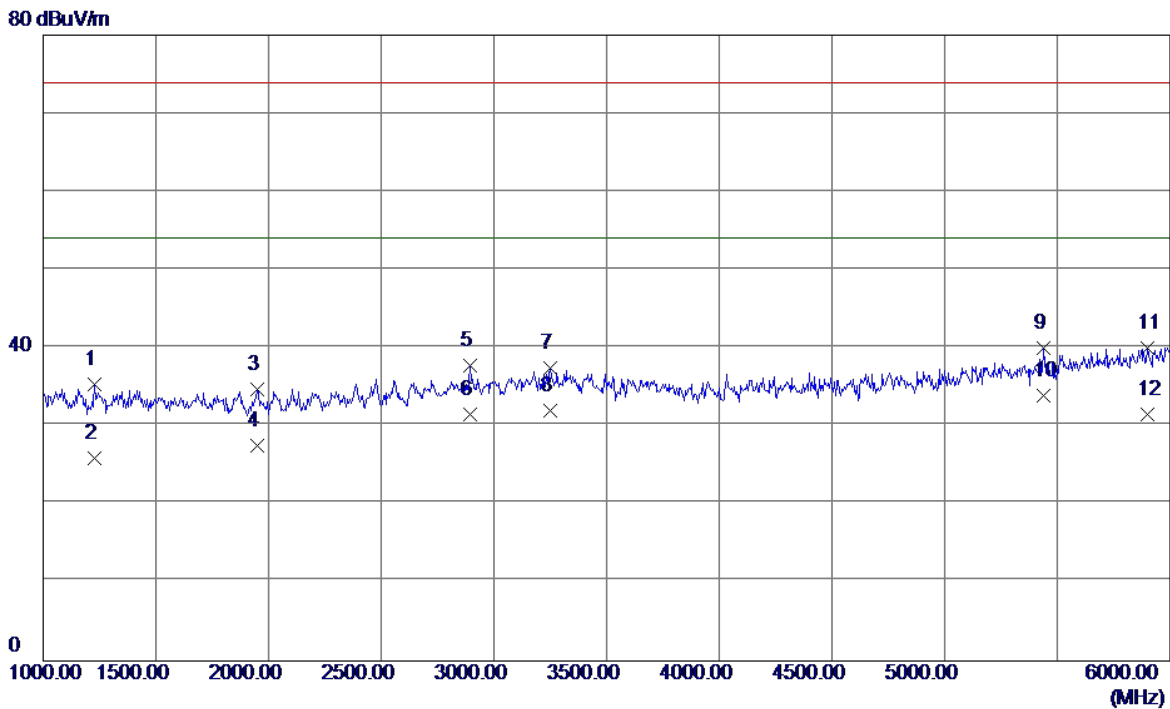


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1230.0000	40.11	-4.68	35.43	74.00	-38.57	Peak
2	1230.0000	30.54	-4.68	25.86	54.00	-28.14	AVG
3	1950.0000	36.69	-1.94	34.75	74.00	-39.25	Peak
4	1950.0000	29.52	-1.94	27.58	54.00	-26.42	AVG
5	2895.0000	34.65	3.11	37.76	74.00	-36.24	Peak
6	2895.0000	28.36	3.11	31.47	54.00	-22.53	AVG
7	3250.0000	33.23	4.18	37.41	74.00	-36.59	Peak
8	3250.0000	27.82	4.18	32.00	54.00	-22.00	AVG
9	5440.0000	31.45	8.60	40.05	74.00	-33.95	Peak
10 *	5440.0000	25.34	8.60	33.94	54.00	-20.06	AVG
11	5900.0000	29.63	10.43	40.06	74.00	-33.94	Peak
12	5900.0000	21.07	10.43	31.50	54.00	-22.50	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

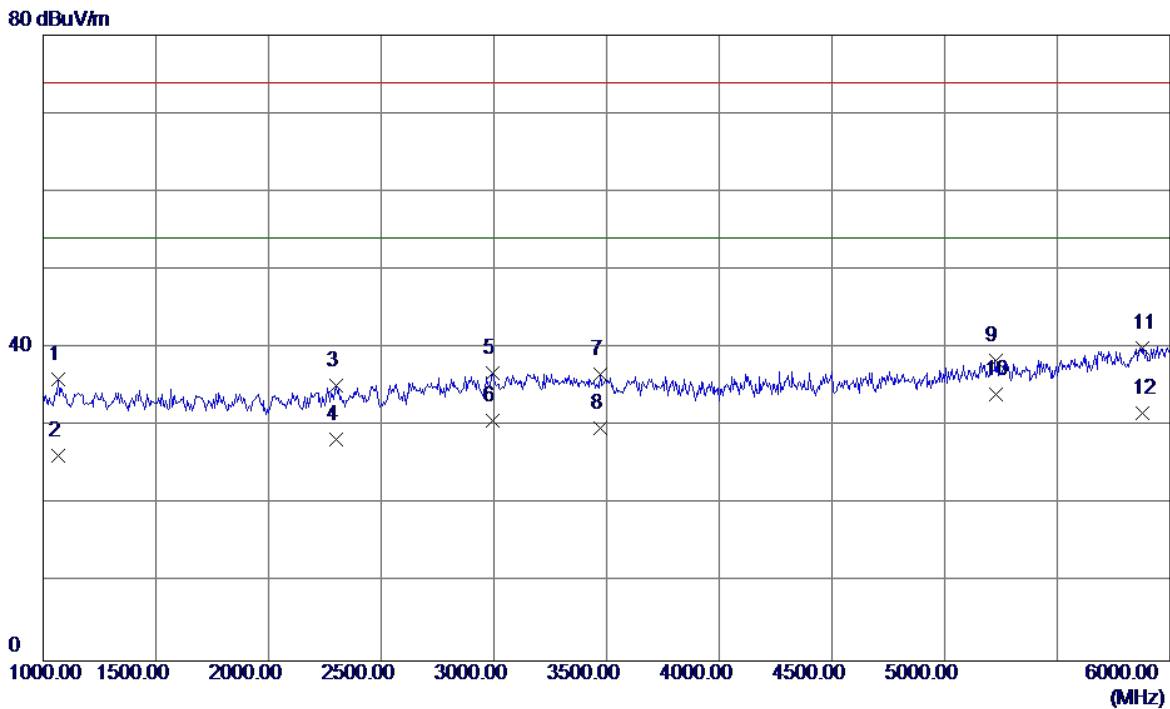

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1065.0000	41.34	-5.35	35.99	74.00	-38.01	Peak
2	1065.0000	31.64	-5.35	26.29	54.00	-27.71	AVG
3	2300.0000	35.38	-0.18	35.20	74.00	-38.80	Peak
4	2300.0000	28.54	-0.18	28.36	54.00	-25.64	AVG
5	2995.0000	33.10	3.67	36.77	74.00	-37.23	Peak
6	2995.0000	27.02	3.67	30.69	54.00	-23.31	AVG
7	3470.0000	32.10	4.60	36.70	74.00	-37.30	Peak
8	3470.0000	25.22	4.60	29.82	54.00	-24.18	AVG
9	5225.0000	30.54	7.84	38.38	74.00	-35.62	Peak
10 *	5225.0000	26.20	7.84	34.04	54.00	-19.96	AVG
11	5880.0000	29.70	10.35	40.05	74.00	-33.95	Peak
12	5880.0000	21.35	10.35	31.70	54.00	-22.30	AVG


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

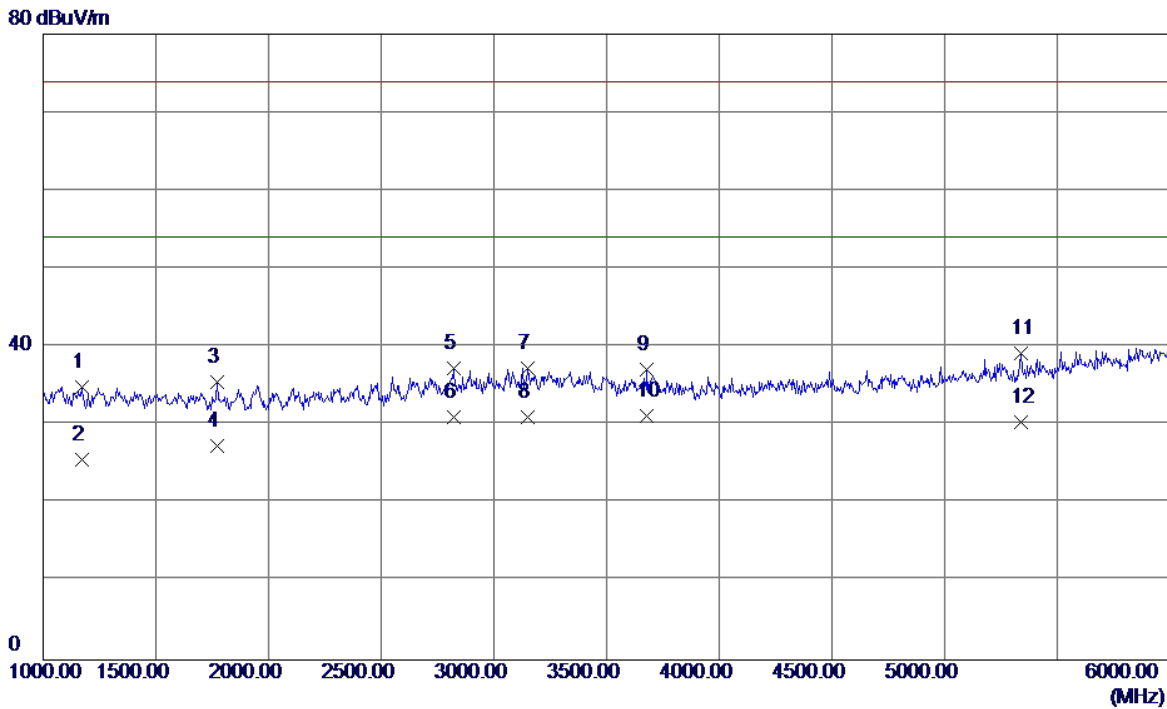

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1170.0000	39.77	-4.92	34.85	74.00	-39.15	Peak
2	1170.0000	30.58	-4.92	25.66	54.00	-28.34	AVG
3	1770.0000	38.19	-2.60	35.59	74.00	-38.41	Peak
4	1770.0000	29.91	-2.60	27.31	54.00	-26.69	AVG
5	2820.0000	34.57	2.68	37.25	74.00	-36.75	Peak
6	2820.0000	28.33	2.68	31.01	54.00	-22.99	AVG
7	3150.0000	33.23	3.99	37.22	74.00	-36.78	Peak
8	3150.0000	27.05	3.99	31.04	54.00	-22.96	AVG
9	3680.0000	32.35	4.82	37.17	74.00	-36.83	Peak
10 *	3680.0000	26.34	4.82	31.16	54.00	-22.84	AVG
11	5340.0000	31.01	8.25	39.26	74.00	-34.74	Peak
12	5340.0000	22.14	8.25	30.39	54.00	-23.61	AVG


EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

80 dBuV/m

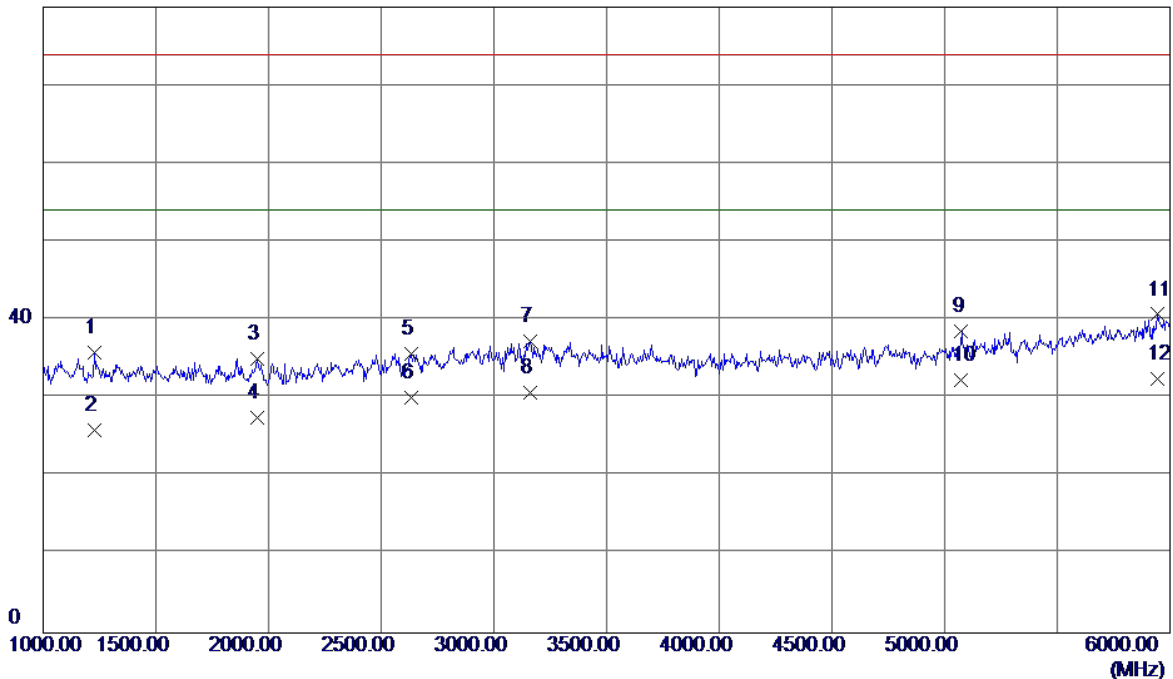


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1230.0000	40.46	-4.68	35.78	74.00	-38.22	Peak
2	1230.0000	30.54	-4.68	25.86	54.00	-28.14	AVG
3	1950.0000	37.05	-1.94	35.11	74.00	-38.89	Peak
4	1950.0000	29.47	-1.94	27.53	54.00	-26.47	AVG
5	2635.0000	34.06	1.64	35.70	74.00	-38.30	Peak
6	2635.0000	28.44	1.64	30.08	54.00	-23.92	AVG
7	3160.0000	33.27	4.01	37.28	74.00	-36.72	Peak
8	3160.0000	26.78	4.01	30.79	54.00	-23.21	AVG
9	5075.0000	31.21	7.31	38.52	74.00	-35.48	Peak
10	5075.0000	25.05	7.31	32.36	54.00	-21.64	AVG
11	5945.0000	30.10	10.62	40.72	74.00	-33.28	Peak
12 *	5945.0000	21.86	10.62	32.48	54.00	-21.52	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

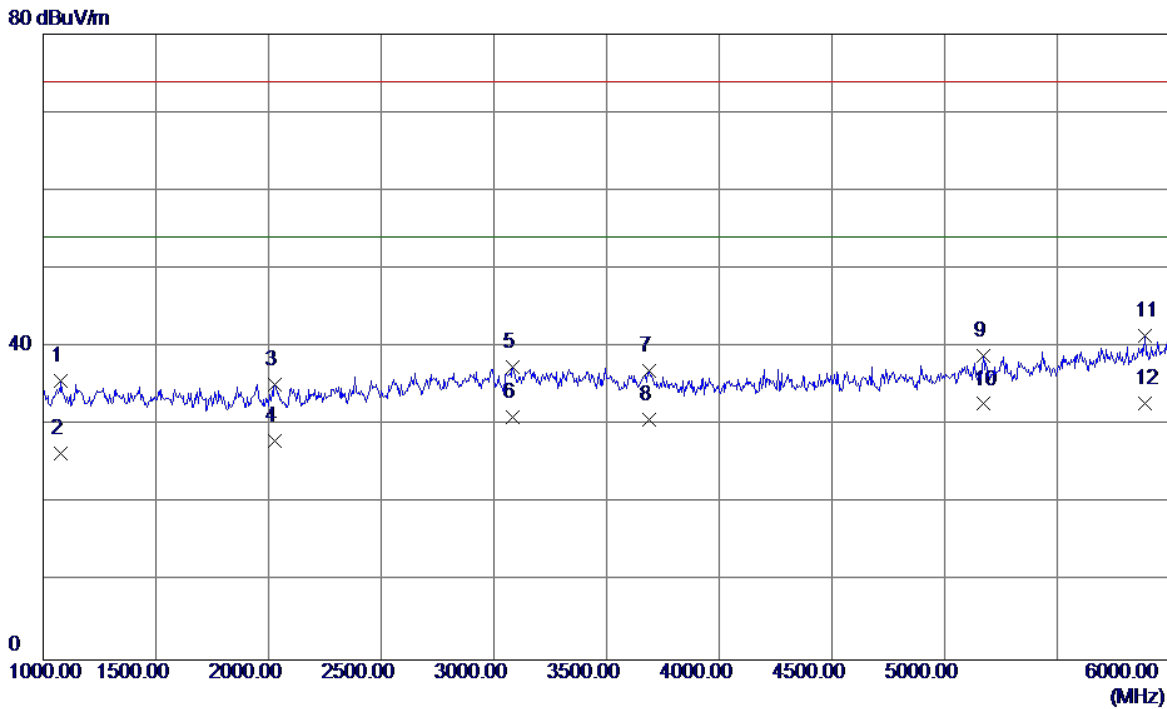

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1080.0000	41.04	-5.29	35.75	74.00	-38.25	Peak
2	1080.0000	31.71	-5.29	26.42	54.00	-27.58	AVG
3	2030.0000	36.87	-1.60	35.27	74.00	-38.73	Peak
4	2030.0000	29.56	-1.60	27.96	54.00	-26.04	AVG
5	3085.0000	33.57	3.86	37.43	74.00	-36.57	Peak
6	3085.0000	27.16	3.86	31.02	54.00	-22.98	AVG
7	3690.0000	32.13	4.83	36.96	74.00	-37.04	Peak
8	3690.0000	25.94	4.83	30.77	54.00	-23.23	AVG
9	5170.0000	31.29	7.64	38.93	74.00	-35.07	Peak
10	5170.0000	25.08	7.64	32.72	54.00	-21.28	AVG
11	5890.0000	31.00	10.39	41.39	74.00	-32.61	Peak
12 *	5890.0000	22.42	10.39	32.81	54.00	-21.19	AVG

EUT	Huawei MediaPad T3 10 (MediaPad T3 10 for short)	Model Name	AGS-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

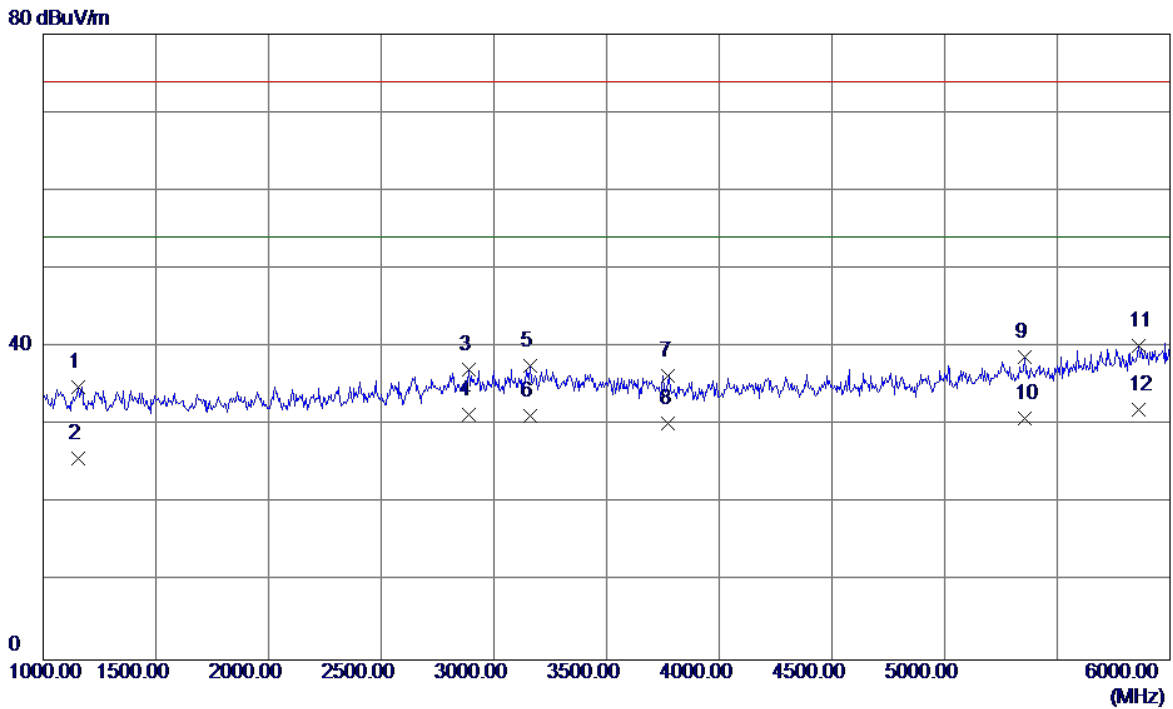

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1155.0000	39.81	-4.98	34.83	74.00	-39.17	Peak
2	1155.0000	30.71	-4.98	25.73	54.00	-28.27	AVG
3	2890.0000	34.11	3.08	37.19	74.00	-36.81	Peak
4	2890.0000	28.24	3.08	31.32	54.00	-22.68	AVG
5	3160.0000	33.60	4.01	37.61	74.00	-36.39	Peak
6	3160.0000	27.23	4.01	31.24	54.00	-22.76	AVG
7	3775.0000	31.46	4.91	36.37	74.00	-37.63	Peak
8	3775.0000	25.35	4.91	30.26	54.00	-23.74	AVG
9	5355.0000	30.41	8.30	38.71	74.00	-35.29	Peak
10	5355.0000	22.53	8.30	30.83	54.00	-23.17	AVG
11	5860.0000	29.90	10.27	40.17	74.00	-33.83	Peak
12 *	5860.0000	21.70	10.27	31.97	54.00	-22.03	AVG