

FCC Radio Test Report

FCC ID: QISAP505130DN

This report concerns (check one): ☐ Original Grant ☒ Class II Change

Project No. : 1403C078A
Equipment : Wireless LAN Access Point
Model Name : AP5030DN
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Mar. 13, 2014
Date of Test : Mar. 13, 2014 ~ May. 14, 2014
Issued Date : Jul. 02, 2014
Tested by : BTL Inc.

Testing Engineer

: David Mao
(David Mao)

Technical Manager

: Leo Hung
(Leo Hung)

Authorized Signatory

: Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	14
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	15
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	19
3.5 DESCRIPTION OF SUPPORT UNITS	20
4 . EMC EMISSION TEST	21
4.1 CONDUCTED EMISSION MEASUREMENT	21
4.1.1 POWER LINE CONDUCTED EMISSION	21
4.1.2 TEST PROCEDURE	21
4.1.3 DEVIATION FROM TEST STANDARD	21
4.1.4 TEST SETUP	22
4.1.5 EUT OPERATING CONDITIONS	22
4.1.6 EUT TEST CONDITIONS	22
4.1.7 TEST RESULTS	22
4.2 RADIATED EMISSION MEASUREMENT	23
4.2.1 RADIATED EMISSION LIMITS	23
4.2.2 TEST PROCEDURE	24
4.2.3 DEVIATION FROM TEST STANDARD	24
4.2.4 TEST SETUP	24
4.2.5 EUT OPERATING CONDITIONS	25
4.2.6 EUT TEST CONDITIONS	25
4.2.7 TEST RESULTS (9K TO 30MHz)	26
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	26
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	26
5 . 26dB SPECTRUM BANDWIDTH	27
5.1 APPLIED PROCEDURES / LIMIT	27
5.1.1 TEST PROCEDURE	27
5.1.2 DEVIATION FROM STANDARD	27
5.1.3 TEST SETUP	27
5.1.4 EUT OPERATION CONDITIONS	27
5.1.5 EUT TEST CONDITIONS	27
5.1.6 TEST RESULTS	27
6 . MAXIMUM CONDUCTED OUTPUT POWER	28
6.1 APPLIED PROCEDURES / LIMIT	28

Table of Contents	Page
6.1.1 TEST PROCEDURE	28
6.1.2 DEVIATION FROM STANDARD	29
6.1.3 TEST SETUP	29
6.1.4 EUT OPERATION CONDITIONS	29
6.1.5 EUT TEST CONDITIONS	29
6.1.6 TEST RESULTS	29
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	30
7.1 APPLIED PROCEDURES / LIMIT	30
7.1.1 TEST PROCEDURE	30
7.1.2 DEVIATION FROM STANDARD	30
7.1.3 TEST SETUP	30
7.1.4 EUT OPERATION CONDITIONS	30
7.1.5 EUT TEST CONDITIONS	30
7.1.6 TEST RESULTS	30
8 . POWER SPECTRAL DENSITY TEST	31
8.1 APPLIED PROCEDURES / LIMIT	31
8.1.1 TEST PROCEDURE	31
8.1.2 DEVIATION FROM STANDARD	31
8.1.3 TEST SETUP	31
8.1.4 EUT OPERATION CONDITIONS	31
8.1.5 EUT TEST CONDITIONS	31
8.1.6 TEST RESULTS	31
9 . PEAK EXCURSION MEASUREMENT	32
9.1 APPLIED PROCEDURES / LIMIT	32
9.1.1 TEST PROCEDURE	32
9.1.2 DEVIATION FROM STANDARD	32
9.1.3 TEST SETUP	33
9.1.4 EUT OPERATION CONDITIONS	33
9.1.5 EUT TEST CONDITIONS	33
9.1.6 TEST RESULTS	33
10 . FREQUENCY STABILITY MEASUREMENT	34
10.1 APPLIED PROCEDURES / LIMIT	34
10.1.1 TEST PROCEDURE	34
10.1.2 DEVIATION FROM STANDARD	34
10.1.3 TEST SETUP	35
10.1.4 EUT OPERATION CONDITIONS	35
10.1.5 EUT TEST CONDITIONS	35
10.1.6 TEST RESULTS	35
11 . MEASUREMENT INSTRUMENTS LIST	36
12 . EUT TEST PHOTOS	38

Table of Contents	Page
ATTACHMENT A - CONDUCTED EMISSION	42
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	45
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	47
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	66
ATTACHMENT E – 26DB BANDWIDTH	243
ATTACHMENT F - MAXIMUM OUTPUT POWER	277
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	320
Band 2/TX 802.11ac(80 MHz) Mode	332
ATTACHMENT H - POWER SPECTRAL DENSITY	429
ATTACHMENT I – PEAK EXCURSION	640
ATTACHMENT J – FREQUENCY STABILITY	670

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FICP-1-1403C080A	Original Issue.	May. 15, 2014
BTL-FCCP-1-1403C078A	Compared with previous report (NEI-FICP-1-1403C080A), differences as follow: antenna type is changed, which has a higher gain. The conducted power specifications are not changed. So, the Conducted Emissions and the Radiated Emissions are performed additionally, other test results are remained and directly quoted into this report. See relevant test results for detailed.	Jul. 02, 2014

1. CERTIFICATION

Equipment : Wireless LAN Access Point
Brand Name : HUAWEI
Model Name : AP5030DN
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen 518129, P.R.China
Factory : Huawei Technologies Co.,Ltd.
Address : Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R.China
Date of Test : Mar. 13, 2014 ~ May. 14, 2014
Test Item : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.4 : 2009;
FCC KDB 789033 D01 General UNII Test Procedures v01r03 .

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc..

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1403C078A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the 5150MHz~5250MHz;5250MHz~5350MHz; 5470~5725MHz Mode part of the product.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
FCC			
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Peak Excursion	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this test report

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless LAN Access Point	
Brand Name	HUAWEI	
Model Name	AP5030DN	
Mode Different	N/A	
Product Description	Operation Frequency	Band 1:5150MHz~5250MHz Band 2:5250MHz~5350MHz Band 3:5470MHz~5725MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	11a:6/ 9/12/18/24/36/48/54Mbps 11n:up to 450Mbps 11ac up to 1300Mbps
	Output Power (Max.)- Band 1 for 1TX	802.11a: 13.87 dBm 802.11n(20 MHz): 13.89 dBm 802.11n(40 MHz): 13.72 dBm 802.11ac(20 MHz): 13.76 dBm 802.11ac(40 MHz): 13.71 dBm 802.11ac(80 MHz): 2.61 dBm
	Output Power (Max.)- Band 2 for 1TX	802.11a: 14.75 dBm 802.11n(20 MHz): 14.87 dBm 802.11n(40 MHz): 13.64 dBm 802.11ac(20 MHz): 14.76 dBm 802.11ac(40 MHz): 13.72 dBm 802.11ac(80 MHz): 2.69 dBm
	Output Power (Max.)- Band 3 for 1TX	802.11a: 15.92 dBm 802.11n(20 MHz): 13.94 dBm 802.11n(40 MHz): 13.92 dBm 802.11ac(20 MHz): 13.84 dBm 802.11ac(40 MHz): 13.63 dBm 802.11ac(80 MHz):7.64 dBm
	Output Power (Max.)- Band 1 for 2TX	802.11a: 14.20 dBm 802.11n(20 MHz): 14.05 dBm 802.11n(40 MHz): 13.88 dBm 802.11ac(20 MHz): 14.09 dBm 802.11ac(40 MHz): 14.14 dBm 802.11ac(80 MHz): 3.19 dBm
	Output Power (Max.)- Band 2 for 2TX	802.11a: 15.09 dBm 802.11n(20 MHz): 15.10 dBm 802.11n(40 MHz): 14.00 dBm 802.11ac(20 MHz): 15.01 dBm 802.11ac(40 MHz): 14.08 dBm 802.11ac(80 MHz): 3.20 dBm
	Output Power (Max.)- Band 3 for 2TX	802.11a: 16.08 dBm 802.11n(20 MHz): 14.05 dBm 802.11n(40 MHz): 14.13 dBm 802.11ac(20 MHz): 14.09 dBm 802.11ac(40 MHz): 14.10 dBm 802.11ac(80 MHz): 8.15 dBm

Product Description	Output Power (Max.)- Band 1 for 3TX	802.11a: 14.68 dBm 802.11n(20 MHz): 14.75 dBm 802.11n(40 MHz): 14.19 dBm 802.11ac(20 MHz): 14.46 dBm 802.11ac(40 MHz): 14.34 dBm 802.11ac(80 MHz): 4.23 dBm
	Output Power (Max.)- Band 2 for 3TX	802.11a: 15.70 dBm 802.11n(20 MHz): 15.79 dBm 802.11n(40 MHz): 14.28 dBm 802.11ac(20 MHz): 15.35 dBm 802.11ac(40 MHz): 14.31 dBm 802.11ac(80 MHz): 4.06 dBm
	Output Power (Max.)- Band 3 for 3TX	802.11a: 16.78 dBm 802.11n(20 MHz): 14.57 dBm 802.11n(40 MHz): 14.48 dBm 802.11ac(20 MHz): 14.36 dBm 802.11ac(40 MHz): 14.52 dBm 802.11ac(80 MHz): 8.29 dBm
	More details of EUT technical specification, please refer to the User's Manual.	
Power Source	Dc voltage supplied from adapter or PoE. #1 Brand/ Model: HUAWEI / HW-120200U1W	
Power Rating	I/P:AC 100-240V 50/60Hz 0.8A DC 12.0V 2.0A	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Channel List:

802.11a / 802.11n(20 MHz) / 802.11ac(20 MHz)							
Band 1		Band 2		Band 3			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	116	5580
40	5200	56	5280	104	5520	132	5660
44	5220	60	5300	108	5540	136	5680
48	5240	64	5320	112	5560	140	5700

802.11n(40 MHz) / 802.11ac(40 MHz)							
Band 1		Band 2		Band 3			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	134	5670
46	5230	62	5310	110	5550		

802.11ac(80 MHz)							
Band 1		Band 2		Band 3			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)		
44	5210	56	5290	106	5530		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
A	Nippon	C15N13Z100BB	Integral Antenna	N/A	5.25	TX/RX
B	Nippon	C15N13Z100BB	Integral Antenna	N/A	5.47	TX/RX
C	Nippon	C15N13Z100BB	Integral Antenna	N/A	5.23	TX/RX

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides three completed three transmitters and three receivers (3T3R). all transmit signals are completely uncorrelated, then, **Direction gain = G_{ANT}** , that is Directional gain=5.47.

2. ANT A for 1TX was found to be the worst case and recorded.

4.

Operating Mode TX Mode	1TX	2TX	3TX
802.11a	V (ANT A)	V (ANT A + ANT B)	V (ANT A + ANT B + ANT C)
802.11n(20MHz)	V (ANT A)	V (ANT A + ANT B)	V (ANT A + ANT B + ANT C)
802.11n(40MHz)	V (ANT A)	V (ANT A + ANT B)	V (ANT A + ANT B + ANT C)
802.11ac(20MHz)	V (ANT A)	V (ANT A + ANT B)	V (ANT A + ANT B + ANT C)
802.11ac(40MHz)	V (ANT A)	V (ANT A + ANT B)	V (ANT A + ANT B + ANT C)
802.11ac(80MHz)	V (ANT A)	V (ANT A + ANT B)	V (ANT A + ANT B + ANT C)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX 802.11a Mode / CH36, CH40, CH48(Band 1) TX 802.11a Mode / CH52, CH56, CH64(Band 2) TX 802.11a Mode / CH100, CH116, CH140(Band 3)
Mode 2	TX 802.11n(20 MHz) Mode / CH36, CH40, CH48(Band 1) TX 802.11n(20 MHz) Mode / CH52, CH56, CH64(Band 2) TX 802.11n(20 MHz) Mode / CH100, CH116, CH140(Band 3)
Mode 3	TX 802.11n(40 MHz) Mode / CH38, CH46 (Band 1) TX 802.11n(40 MHz) Mode / CH54, CH62 (Band 2) TX 802.11n(40 MHz) Mode/CH102, CH110, CH134(Band 3)
Mode 4	TX AC 20M Mode / CH36, CH40, CH48 (Band 1) TX AC 20M Mode / CH52, CH56, CH64 (Band 2) TX AC 20M Mode / CH100, CH116, CH140 (Band 3)
Mode 5	TX AC 40M Mode / CH38, CH46 (Band 1) TX AC 40M Mode / CH54, CH62 (Band 2) TX AC 40M Mode / CH102, CH110, CH134 (Band 3)
Mode 6	TX AC 80M Mode / CH42 (Band 1) TX AC 80M Mode / CH58 (Band 2) TX AC 80M Mode / CH106 (Band 3)
Mode 7	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 4	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX 802.11a Mode / CH36, CH40, CH48(Band 1) TX 802.11a Mode / CH52, CH56, CH64(Band 2) TX 802.11a Mode / CH100, CH116, CH140(Band 3)
Mode 2	TX 802.11n(20 MHz) Mode / CH36, CH40, CH48(Band 1) TX 802.11n(20 MHz) Mode / CH52, CH56, CH64(Band 2) TX 802.11n(20 MHz) Mode / CH100, CH116, CH140(Band 3)
Mode 3	TX 802.11n(40 MHz) Mode / CH38, CH46 (Band 1) TX 802.11n(40 MHz) Mode / CH54, CH62 (Band 2) TX 802.11n(40 MHz) Mode/CH102, CH110, CH134(Band 3)
Mode 4	TX AC 20M Mode / CH36, CH40, CH48 (Band 1) TX AC 20M Mode / CH52, CH56, CH64 (Band 2) TX AC 20M Mode / CH100, CH116, CH140 (Band 3)
Mode 5	TX AC 40M Mode / CH38, CH46 (Band 1) TX AC 40M Mode / CH54, CH62 (Band 2) TX AC 40M Mode / CH102, CH110, CH134 (Band 3)
Mode 6	TX AC 80M Mode / CH42 (Band 1) TX AC 80M Mode / CH58 (Band 2) TX AC 80M Mode / CH106 (Band 3)

Note: For Radiated Below 1G test, the 802.11a mode is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

1TX			
Test software version	Cart		
Frequency (MHz)	5180	5200	5240
802.11a	11	15	15
Frequency (MHz)	5260	5280	5320
802.11a	15	16	10
Frequency (MHz)	5500	5580	5700
802.11a	13	17	9

1TX			
Test software version	Cart		
Frequency (MHz)	5180	5200	5240
802.11n(20 MHz)	11	15	15
Frequency (MHz)	5260	5280	5320
802.11n(20 MHz)	15	16	10
Frequency (MHz)	5500	5580	5700
802.11n(20 MHz)	12	15	9

1TX			
Test software version	Cart		
Frequency (MHz)	5190	5230	
802.11n(40 MHz)	11	15	
Frequency (MHz)	5270	5310	
802.11n(40 MHz)	15	11	
Frequency (MHz)	5510	5550	5670
802.11n(40 MHz)	15	15	14

1TX			
Test software version	Cart		
Frequency (MHz)	5180	5200	5240
802.11ac(20 MHz)	11	15	15
Frequency (MHz)	5260	5280	5320
802.11ac(20 MHz)	15	16	10
Frequency (MHz)	5500	5580	5700
802.11ac(20 MHz)	11	15	9

1TX			
Test software version	Cart		
Frequency (MHz)	5190	5230	
802.11ac(40 MHz)	11	15	
Frequency (MHz)	5270	5310	
802.11ac(40 MHz)	15	10	
Frequency (MHz)	5510	5550	5670
802.11ac(40 MHz)	15	15	14

1TX			
Test software version	Cart		
Frequency (MHz)	5210	5290	5530
802.11ac(80 MHz)	4	4	9

2TX			
Test software version	Cart		
Frequency (MHz)	5180	5200	5240
802.11a	8	12	12
Frequency (MHz)	5260	5280	5320
802.11a	12	13	7
Frequency (MHz)	5500	5580	5700
802.11a	10	14	6

2TX			
Test software version	Cart		
Frequency (MHz)	5180	5200	5240
802.11n(20 MHz)	8	12	12
Frequency (MHz)	5260	5280	5320
802.11n(20 MHz)	12	13	7
Frequency (MHz)	5500	5580	5700
802.11n(20 MHz)	9	12	6

2TX			
Test software version	Cart		
Frequency (MHz)	5190	5230	
802.11n(40 MHz)	8	12	
Frequency (MHz)	5270	5310	
802.11n(40 MHz)	12	8	
Frequency (MHz)	5510	5550	5670
802.11n(40 MHz)	12	12	11

2TX			
Test software version	Cart		
Frequency (MHz)	5180	5200	5240
802.11ac(20 MHz)	8	12	12
Frequency (MHz)	5260	5280	5320
802.11ac(20 MHz)	12	13	7
Frequency (MHz)	5500	5580	5700
802.11ac(20 MHz)	8	12	6

2TX			
Test software version	Cart		
Frequency (MHz)	5190	5230	
802.11ac(40 MHz)	8	12	
Frequency (MHz)	5270	5310	
802.11ac(40 MHz)	12	7	
Frequency (MHz)	5510	5550	5670
802.11ac(40 MHz)	12	12	11

2TX			
Test software version	Cart		
Frequency (MHz)	5210	5290	5530
802.11ac(80 MHz)	1	1	6

3TX			
Test software version	Cart		
Frequency (MHz)	5180	5200	5240
802.11a	6	10	10
Frequency (MHz)	5260	5280	5320
802.11a	10	11	5
Frequency (MHz)	5500	5580	5700
802.11a	7	12	4

3TX			
Test software version	Cart		
Frequency (MHz)	5180	5200	5240
802.11n(20 MHz)	6	10	10
Frequency (MHz)	5260	5280	5320
802.11n(20 MHz)	10	11	5
Frequency (MHz)	5500	5580	5700
802.11n(20 MHz)	7	10	4

3TX			
Test software version	Cart		
Frequency (MHz)	5190	5230	
802.11n(40 MHz)	6	10	
Frequency (MHz)	5270	5310	
802.11n(40 MHz)	10	6	
Frequency (MHz)	5510	5550	5670
802.11n(40 MHz)	10	10	9


3TX			
Test software version	Cart		
Frequency (MHz)	5180	5200	5240
802.11ac(20 MHz)	6	10	10
Frequency (MHz)	5260	5280	5320
802.11ac(20 MHz)	10	11	5
Frequency (MHz)	5500	5580	5700
802.11ac(20 MHz)	6	10	4

3TX			
Test software version	Cart		
Frequency (MHz)	5190	5230	
802.11ac(40 MHz)	6	10	
Frequency (MHz)	5270	5310	
802.11ac(40 MHz)	10	5	
Frequency (MHz)	5510	5550	5670
802.11ac(40 MHz)	10	10	9

3TX			
Test software version	Cart		
Frequency (MHz)	5210	5290	5530
802.11ac(80 MHz)	0	0	4

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated TX Mode:

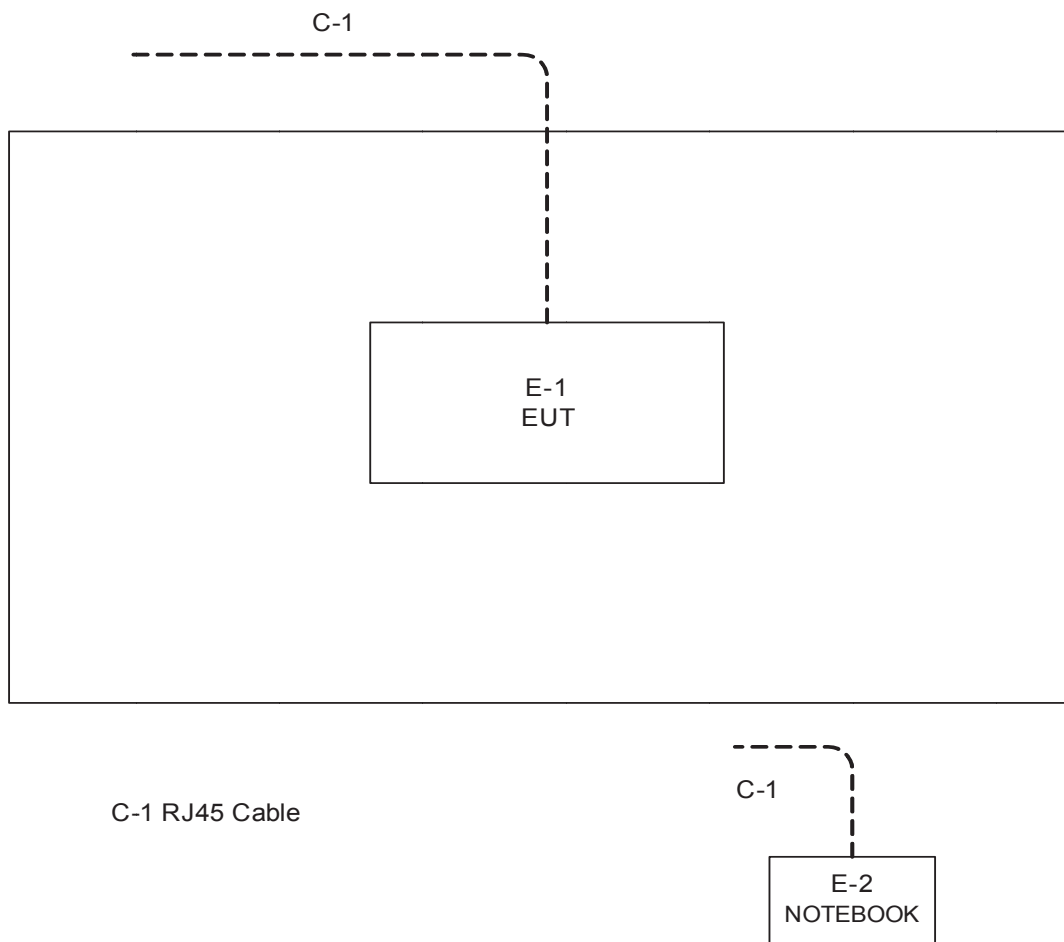

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-2	NOTEBOOK	HP	HP NB 331	DOC	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	10m	

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

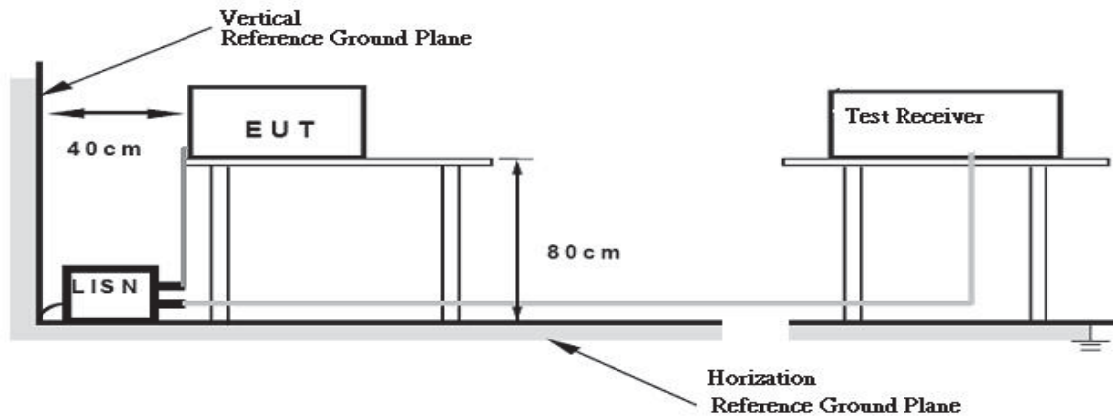

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) and RSS-210 section 2.2&A8.5, then the 15.209(a) and RSS-Gen limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27	68.3
	-17	78.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{100000 \sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

4.2.2 TEST PROCEDURE

- a. The measuring distance of at 1.5m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

Radiated Emission Test Set-Up Frequency 30 - 1000MHz

Radiated Emission Test Set-Up Frequency Above 1 GHz

Radiated emissions below 30MHz

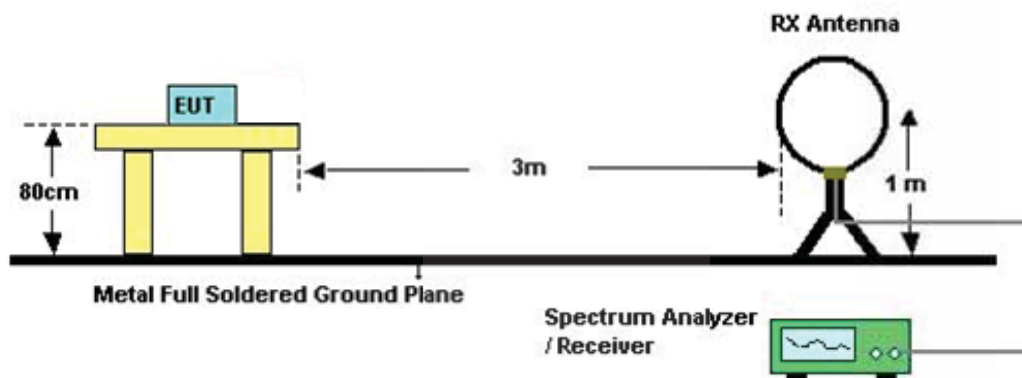

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)

Please refer to the Attachment C.

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.9 TEST RESULTS (ABOVE 1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (7) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
26 dB Bandwidth	-----	5150MHz~5250 5250MHz~5350 5470MHz~5725	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26dB below carrier

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60HZ

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Frequency Range (MHz)	Limit	Result
Conducted Output Power	5150 - 5250	not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B (FCC Part15, Subpart E)	PASS
	5150 - 5250	not exceed the lesser of 200 mW (23dBm) or 10+ 10log B, (RSS-210: 2010)	PASS
	5250 - 5350	not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10log B	PASS
	5470 - 5725	not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10log B	PASS

Note: where “B” is the 26 dB emissions bandwidth in MHz.

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz.
VBW	$\geq$ 3 MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto

- b. Test was performed in accordance with method of KDB 789033 D01.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	-27 dBm/1MHz	5150 – 5250 5250 – 5350 5470 – 5725	PASS

7.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
RB	1000 kHz
VB	1000 kHz
Trace	Max Hold
Sweep Time	Auto

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60HZ

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	4 dBm	5150 - 5250	PASS
	11 dBm	5250 - 5350	PASS
	11 dBm	5470 - 5725	PASS

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	= 1 MHz.
VB	≥ 3 MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60HZ

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. PEAK EXCURSION MEASUREMENT

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Peak Excursion Measurement	13 dB	5150 - 5250	PASS
		5250 - 5350	PASS
		5470 - 5725	PASS

9.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 3000 kHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Max Hold
Sweep Time	60s

c. Peak Trace: Set RBW = 1 MHz, VBW $\geq$ 3 MHz with peak detector and maxhold settings.

d. Average Trace: set RBW = 1 MHz, VBW = 3 MHz with RMS detector and trace average across 100 traces in power averaging mode.

9.1.2 DEVIATION FROM STANDARD

No deviation.

9.1.3 TEST SETUP



9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

9.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60HZ

9.1.6 TEST RESULTS

Please refer to the Attachment I.

10. FREQUENCY STABILITY MEASUREMENT

10.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E 15.407(g)			
Test Item	Limit	Frequency Range (MHz)	Result
Frequency Stability	specified in the user's manual	5150 – 5250	PASS
		5250 – 5350	PASS
		5470 – 5725	PASS

10.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

d. user manual temperature is 0°C~50°C.

10.1.2 DEVIATION FROM STANDARD

No deviation.

10.1.3 TEST SETUP



10.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

10.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60HZ

10.1.6 TEST RESULTS

Please refer to the Attachment J.

11. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 29, 2015
2	LISN	R&S	ENV216	101447	Mar. 29, 2015
3	Test Cable	N/A	C_17	N/A	Mar. 14, 2015
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 29, 2015
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 29, 2015

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 29, 2015
2	Amplifier	HP	8447D	2944A09673	Mar. 29, 2015
3	Receiver	AGILENT	N9038A	MY52130039	Aug. 24, 2014
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 02, 2014
5	Antenna	ETS	3115	00075789	Mar. 29, 2015
6	Amplifier	Agilent	8449B	3008A02274	Mar. 29, 2015
7	Receiver	AGILENT	N9038A	MY52130039	Aug. 24, 2014
8	Test Cable	HUBER+SUHNER	C-48	N/A	Apr. 30, 2015
9	Controller	CT	SC100	N/A	N/A
10	Horn Antenna	EMCO	3115	9605-4803	Mar. 29, 2015
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Feb. 22, 2015
12	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Mar. 29, 2015

26dB Spectrum Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Maximum Conducted Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Antenna Conducted Spurious Emission Measurement

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Power Spectral Density Measurement

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Peak Excurison Measurement

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Frequency Stability Measurement

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014
2	Precision Oven Tester	HOLINK	H-T-1F-D	BA03101701	May. 25, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

12. EUT TEST PHOTOS

Conducted Measurement Photos



**Radiated Measurement Photos
9KHz~30MHz**



**Radiated Measurement Photos
30~1000MHz**




**Radiated Measurement Photos
Above 1000MHz**



ATTACHMENT A - CONDUCTED EMISSION

Test Mode : TX Mode


Line

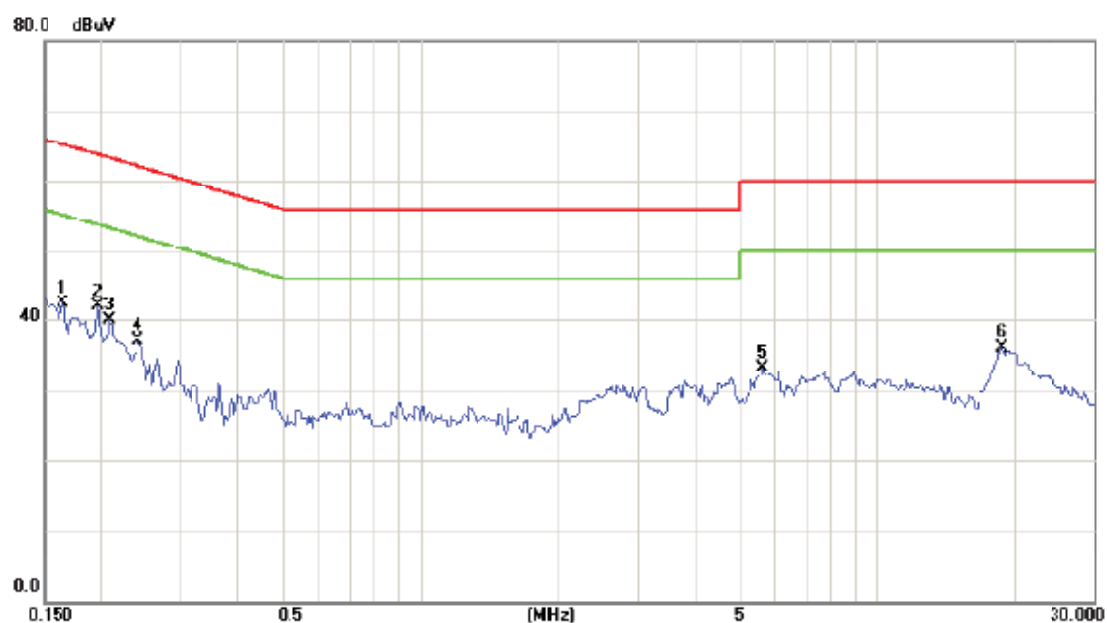

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1655	32.71	9.63	42.34	65.18	22.84	peak	
2	*	0.1970	32.29	9.65	41.94	63.74	-21.80	peak	
3		0.2086	30.21	9.65	39.86	63.26	-23.40	peak	
4		0.2398	27.49	9.65	37.14	62.10	-24.96	peak	
5		5.6680	23.40	9.94	33.34	60.00	-26.66	peak	
6		18.8516	25.81	10.26	36.07	60.00	-23.93	peak	

Test Mode : TX Mode

Neutral

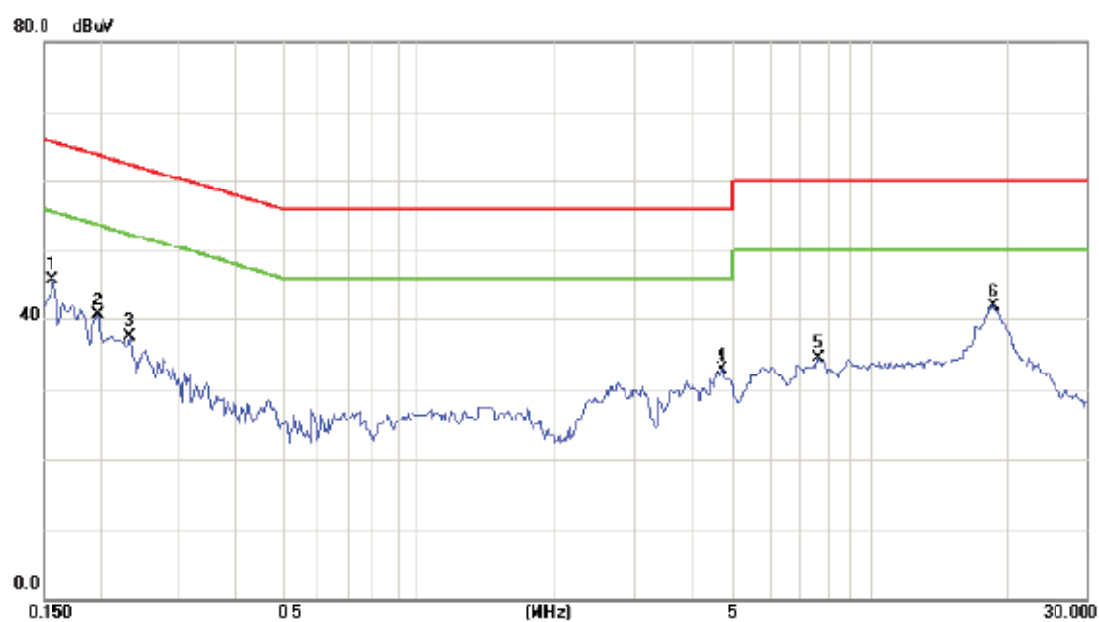

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dR	dBuV	dBuV	dR		
1		0.1578	35.94	9.70	45.64	65.58	-19.94	peak	
2		0.1970	30.77	9.71	40.48	63.74	-23.26	peak	
3		0.2320	27.71	9.71	37.42	62.38	-24.96	peak	
4		4.7148	22.77	9.95	32.72	56.00	-23.28	peak	
5		7.6680	24.40	10.05	34.45	60.00	-25.55	peak	
6	*	18.6758	31.22	10.43	41.65	60.00	-18.35	peak	

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0089	0°	26.32	24.30	50.62	128.62	-78.00	AV
0.0089	0°	30.19	24.30	54.49	148.62	-94.13	PK
0.0256	0°	22.85	23.94	46.79	119.43	-72.64	AV
0.0256	0°	25.37	23.94	49.31	139.43	-90.12	PK
0.0382	0°	20.92	23.15	44.07	115.96	-71.89	AV
0.0382	0°	23.65	23.15	46.80	135.96	-89.16	PK
0.0652	0°	19.82	22.10	41.92	111.32	-69.40	AV
0.0652	0°	24.27	22.10	46.37	131.32	-84.95	PK
0.2639	0°	20.38	20.37	40.75	99.18	-58.43	AV
0.2639	0°	23.72	20.37	44.09	119.18	-75.09	PK
1.4864	0°	27.68	19.55	47.23	64.16	-16.93	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0099	90°	18.56	24.30	42.86	127.67	-84.81	AVG
0.0099	90°	21.34	24.30	45.64	147.67	-102.03	PK
0.0224	90°	14.37	24.15	38.52	120.59	-82.07	AVG
0.0224	90°	16.68	24.15	40.83	140.59	-99.76	PK
0.0463	90°	19.72	22.64	42.36	114.30	-71.94	AVG
0.0463	90°	22.39	22.64	45.03	134.30	-89.27	PK
0.0774	90°	20.61	21.85	42.46	109.83	-67.37	AVG
0.0774	90°	23.53	21.85	45.38	129.83	-84.45	PK
0.3756	90°	20.29	20.10	40.39	96.11	-55.72	AVG
0.3756	90°	23.75	20.10	43.85	116.11	-72.26	PK
1.6719	90°	24.92	19.53	44.45	63.14	-18.69	QP


Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode : Band 1/TX 802.11a Mode 5180MHz


Vertical

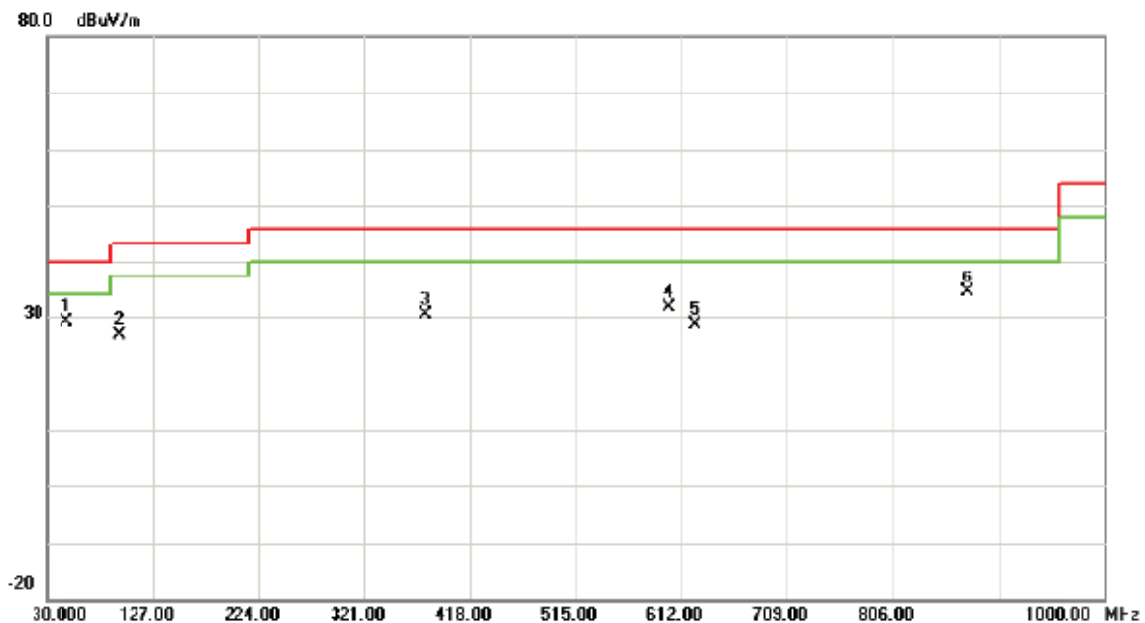

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	47.4600	43.47	-14.40	29.07	40.00	-10.93	peak	
2		94.9900	44.23	-17.27	26.96	43.50	-16.54	peak	
3		375.3200	41.03	-10.66	30.37	46.00	-15.63	peak	
4		600.3600	39.75	-8.08	31.67	46.00	-14.33	peak	
5		624.6100	35.49	-6.86	28.63	46.00	-17.37	peak	
6		874.8700	36.80	-2.48	34.32	46.00	-11.68	peak	

Test Mode : Band 1/TX 802.11a Mode 5180MHz


Horizontal

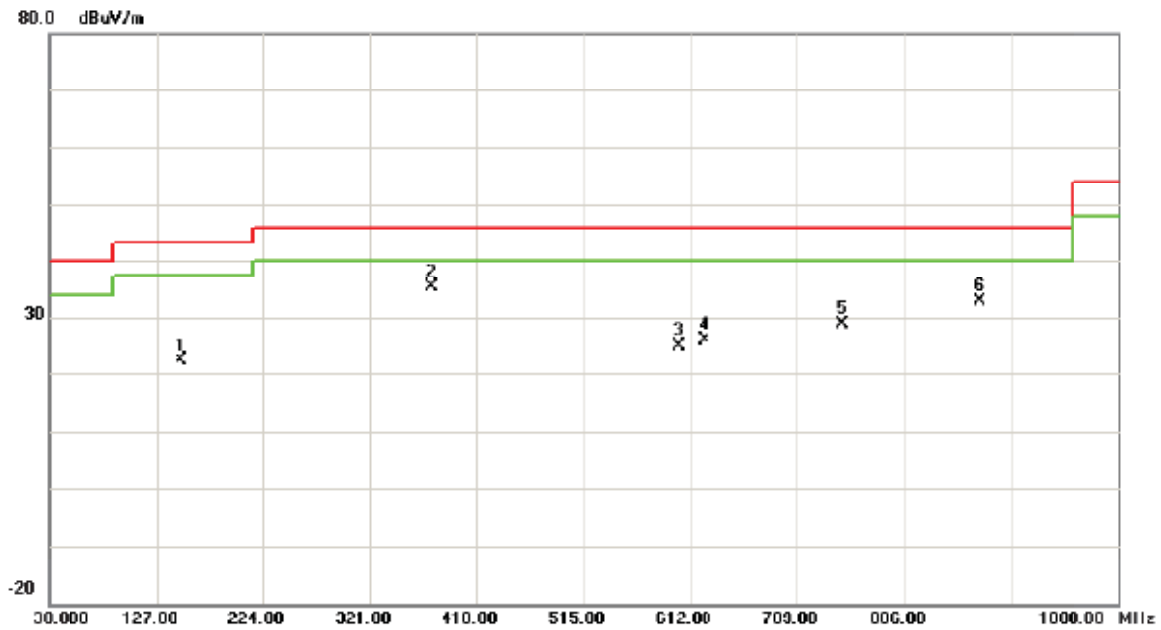

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	36.16	-13.74	22.42	43.50	-21.08	peak	
2	*	375.3200	46.06	-10.66	35.40	46.00	-10.60	peak	
3		600.3600	33.20	-8.08	25.12	46.00	-20.88	peak	
4		624.6100	33.00	-6.86	26.14	46.00	-19.86	peak	
5		749.7400	33.90	-4.91	28.99	46.00	-17.01	peak	
6		874.8700	35.47	-2.48	32.99	46.00	-13.01	peak	

Test Mode : Band 1/TX 802.11a Mode 5200MHz


Vertical

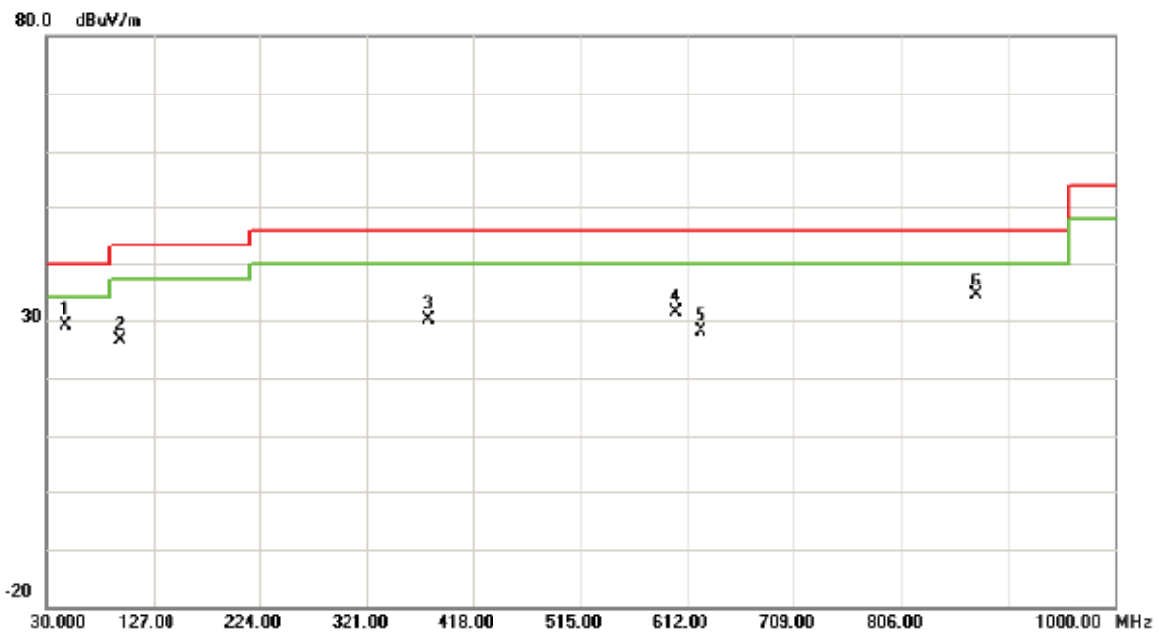

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	47.4600	43.42	-14.40	29.02	40.00	-10.98	peak	
2		95.9600	43.82	-17.07	26.75	43.50	-16.75	peak	
3		375.3200	40.86	-10.66	30.20	46.00	-15.80	peak	
4		600.3600	39.49	-8.08	31.41	46.00	-14.59	peak	
5		624.6100	35.04	-6.86	28.18	46.00	-17.82	peak	
6		874.8700	36.77	-2.48	34.29	46.00	-11.71	peak	


Test Mode : Band 1/TX 802.11a Mode 5200MHz

Horizontal

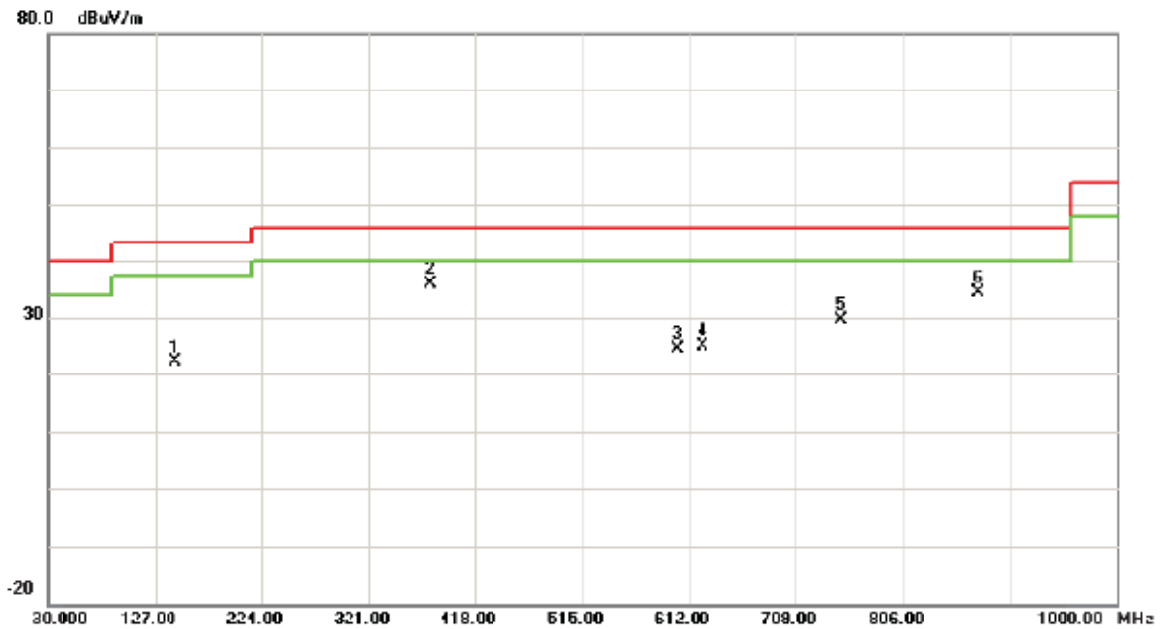

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		145.4300	35.80	-13.75	22.05	43.50	-21.45	peak	
2	*	375.3200	46.47	-10.66	35.81	46.00	-10.19	peak	
3		600.3600	32.74	-8.08	24.66	46.00	-21.34	peak	
4		624.6100	32.10	-6.86	25.24	46.00	-20.76	peak	
5		749.7400	34.53	-4.91	29.62	46.00	-16.38	peak	
6		874.8700	36.88	-2.48	34.40	46.00	-11.60	peak	


Test Mode : Band 1/TX 802.11a Mode 5240MHz

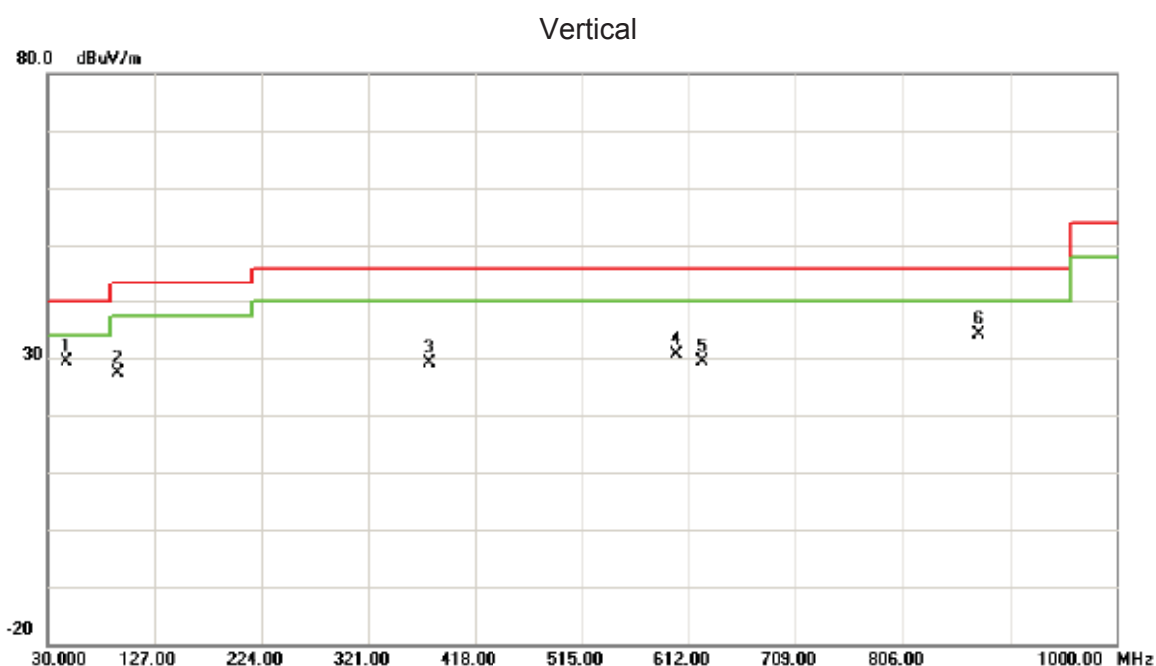

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	47.4600	43.90	-14.40	29.50	40.00	-10.50	peak	
2		94.0200	44.84	-17.43	27.41	43.50	-16.09	peak	
3		375.3200	39.79	-10.66	29.13	46.00	-16.87	peak	
4		600.3600	38.78	-8.08	30.70	46.00	-15.30	peak	
5		624.6100	36.34	-6.86	29.48	46.00	-16.52	peak	
6		874.8700	36.70	-2.48	34.22	46.00	-11.78	peak	

Test Mode : Band 1/TX 802.11a Mode 5240MHz


Horizontal

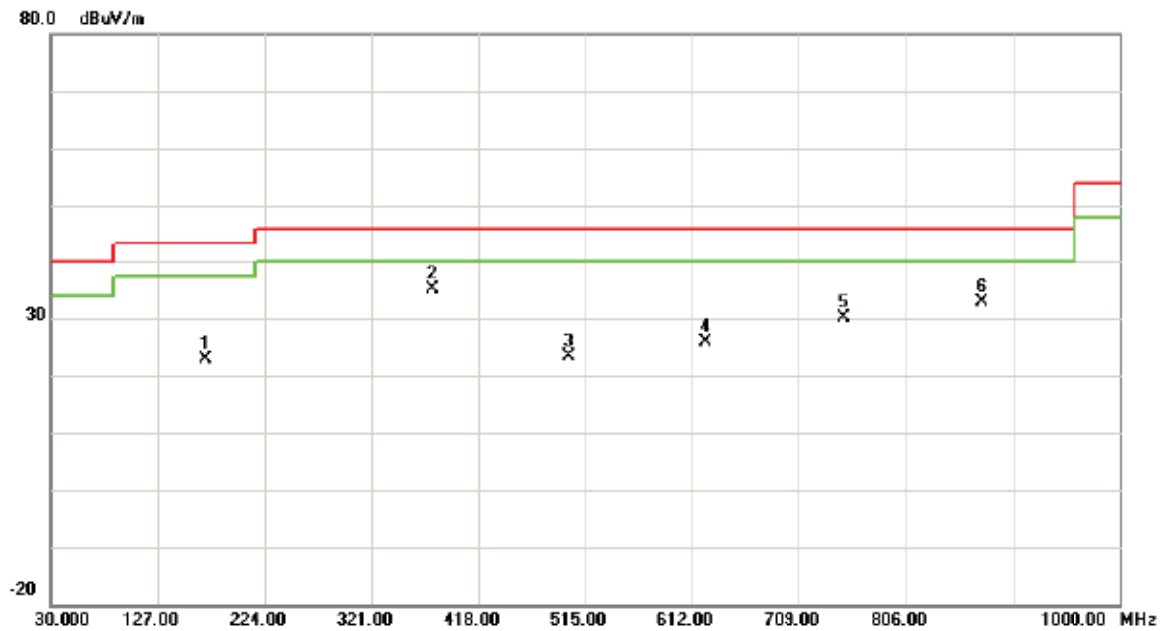

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		169.6800	35.75	-12.76	22.99	43.50	-20.51	peak	
2	*	375.3200	45.88	-10.66	35.22	46.00	-10.78	peak	
3		500.4500	33.71	-10.31	23.40	46.00	-22.60	peak	
4		624.6100	32.66	-6.86	25.80	46.00	-20.20	peak	
5		749.7400	35.01	-4.91	30.10	46.00	-15.90	peak	
6		874.8700	35.46	-2.48	32.98	46.00	-13.02	peak	

Test Mode : Band 2/TX 802.11a Mode 5260MHz


Vertical

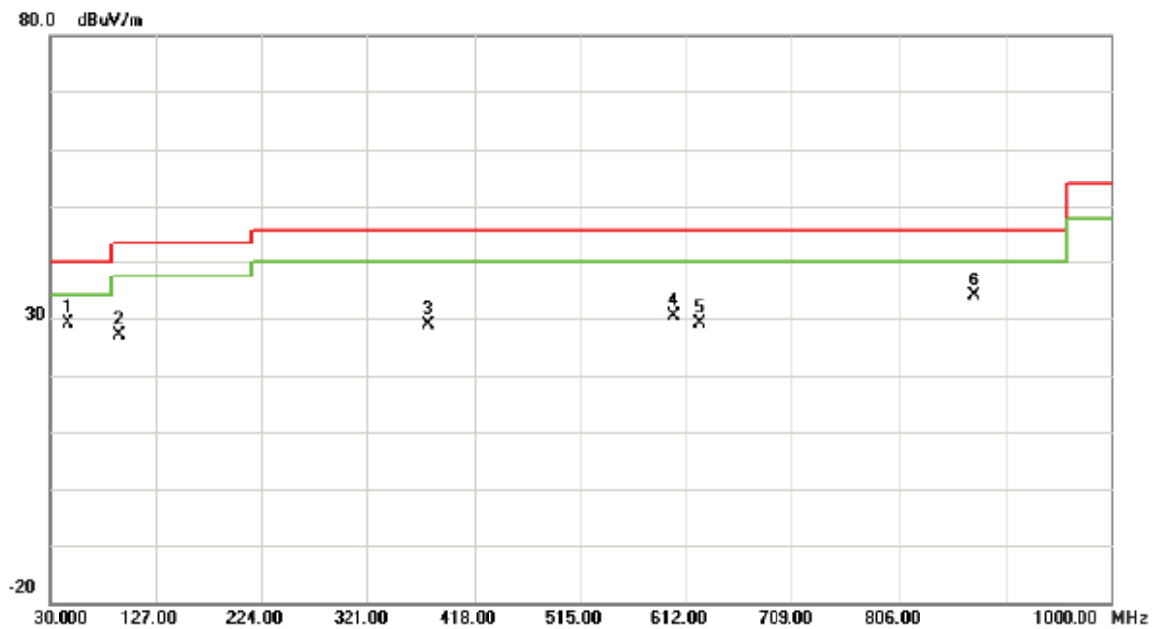

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	47.4600	43.55	-14.40	29.15	40.00	-10.85	peak	
2		94.0200	44.49	-17.43	27.06	43.50	-16.44	peak	
3		375.3200	39.44	-10.66	28.78	46.00	-17.22	peak	
4		600.3600	38.42	-8.08	30.34	46.00	-15.66	peak	
5		624.6100	35.99	-6.86	29.13	46.00	-16.87	peak	
6		874.8700	36.35	-2.48	33.87	46.00	-12.13	peak	

Test Mode : Band 2/TX 802.11a Mode 5260MHz


Horizontal

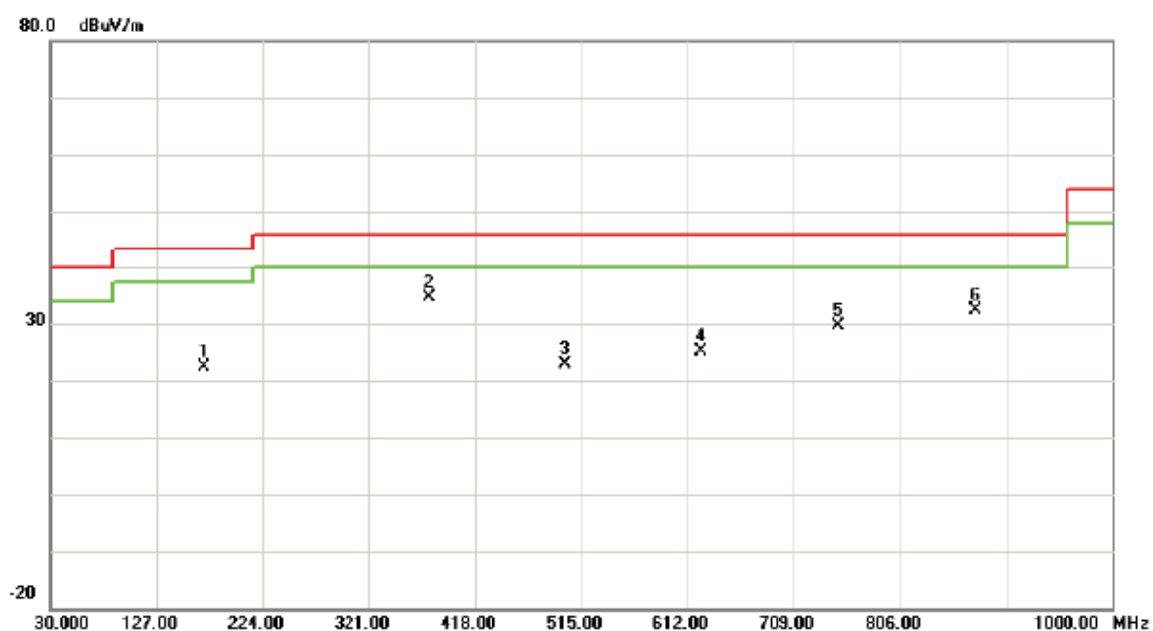

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		169.6800	35.19	-12.76	22.43	43.50	-21.07	peak	
2	*	375.3200	45.32	-10.66	34.66	46.00	-11.34	peak	
3		500.4500	33.15	-10.31	22.84	46.00	-23.16	peak	
4		624.6100	32.10	-6.86	25.24	46.00	-20.76	peak	
5		749.7400	34.45	-4.91	29.54	46.00	-16.46	peak	
6		874.8700	34.90	-2.48	32.42	46.00	-13.58	peak	

Test Mode : Band 2/TX 802.11a Mode 5280MHz


Vertical

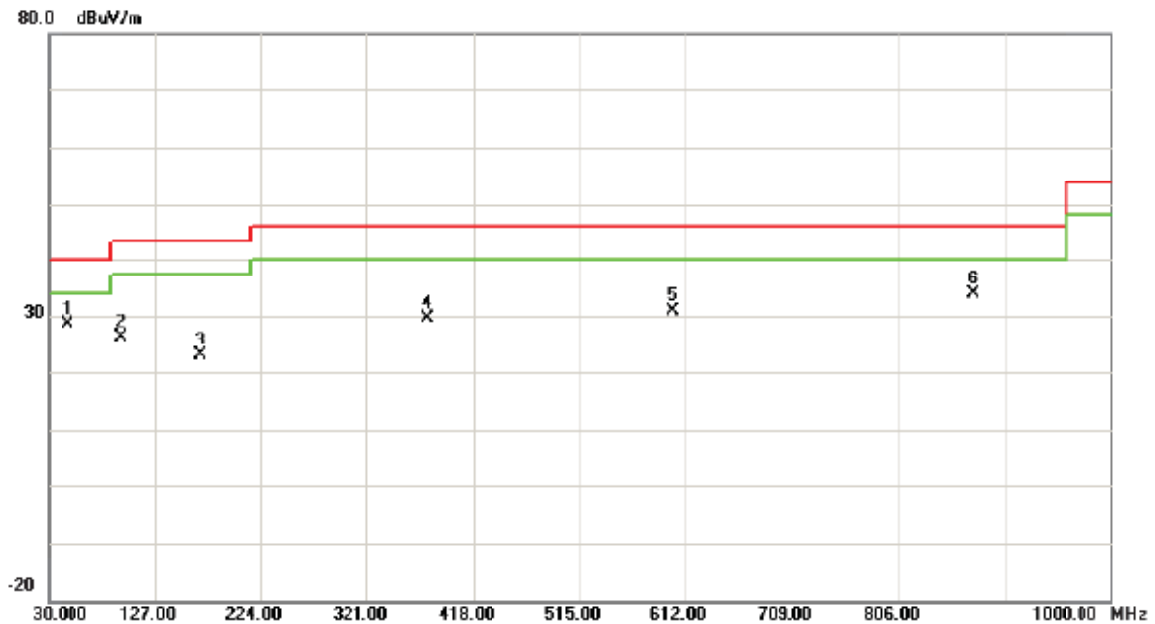

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	47.4600	42.96	-14.40	28.56	40.00	-11.44	peak	
2		95.9600	43.36	-17.07	26.29	43.50	-17.21	peak	
3		167.7400	36.11	-12.93	23.18	43.50	-20.32	peak	
4		375.3200	40.40	-10.66	29.74	46.00	-16.26	peak	
5		600.3600	39.03	-8.08	30.95	46.00	-15.05	peak	
6		874.8700	36.31	-2.48	33.83	46.00	-12.17	peak	

Test Mode : Band 2/TX 802.11a Mode 5280MHz


Horizontal

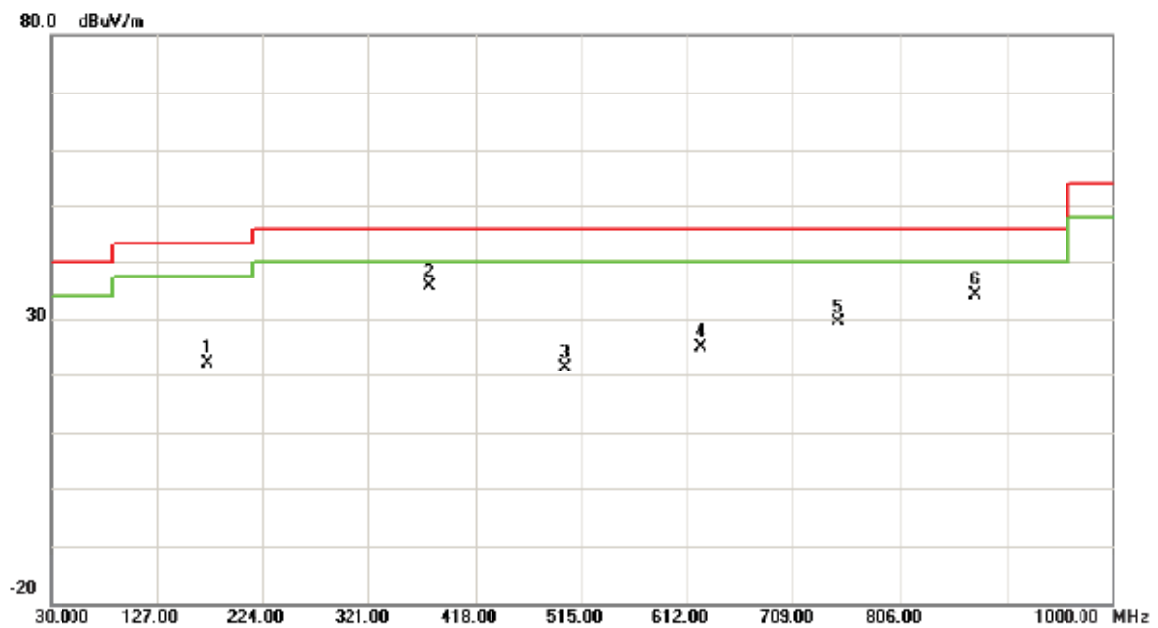

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		172.5900	34.93	-12.75	22.18	43.50	-21.32	peak	
2	*	375.3200	46.18	-10.66	35.52	46.00	-10.48	peak	
3		500.4500	31.67	-10.31	21.36	46.00	-24.64	peak	
4		624.6100	31.81	-6.86	24.95	46.00	-21.05	peak	
5		749.7400	34.24	-4.91	29.33	46.00	-16.67	peak	
6		874.8700	36.59	-2.48	34.11	46.00	-11.89	peak	

Test Mode : Band 2/TX 802.11a Mode 5320MHz


Vertical

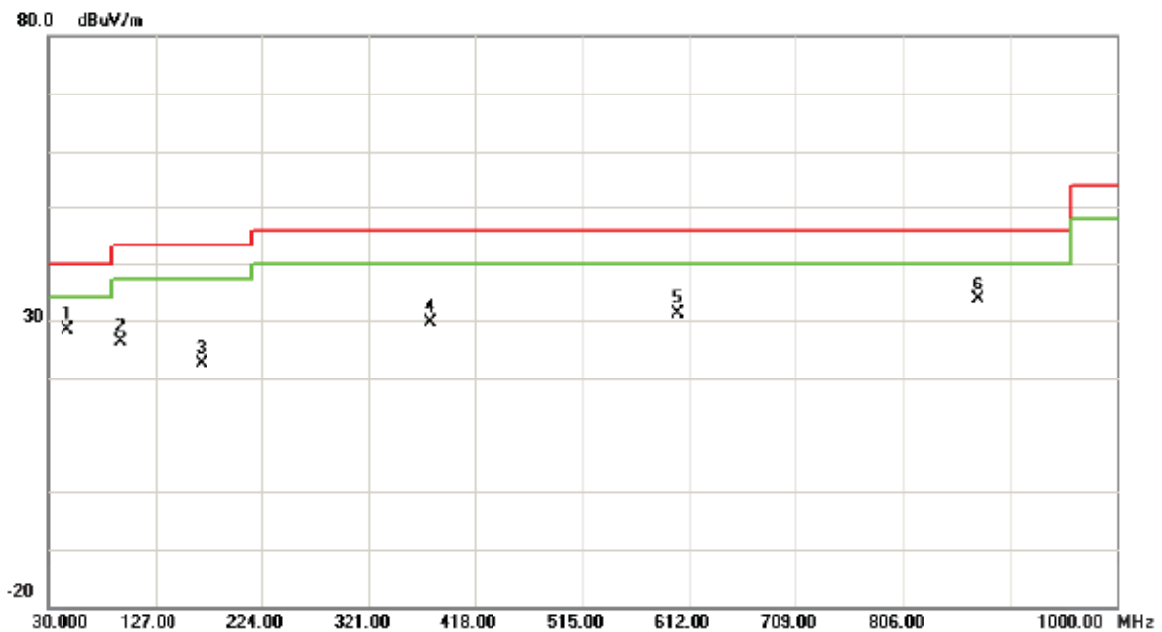

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	I limit dBuV/m	Over dB	Detector	Comment
1	*	47.4600	42.81	-14.40	28.41	40.00	-11.59	peak	
2		94.9900	43.57	-17.27	26.30	43.50	-17.20	peak	
3		170.6500	35.45	-12.73	22.72	43.50	-20.78	peak	
4		375.3200	40.37	-10.66	29.71	46.00	-16.29	peak	
5		600.3600	39.09	-8.08	31.01	46.00	-14.99	peak	
6		874.8700	36.14	-2.48	33.66	46.00	-12.34	peak	

Test Mode : Band 2/TX 802.11a Mode 5320MHz


Horizontal

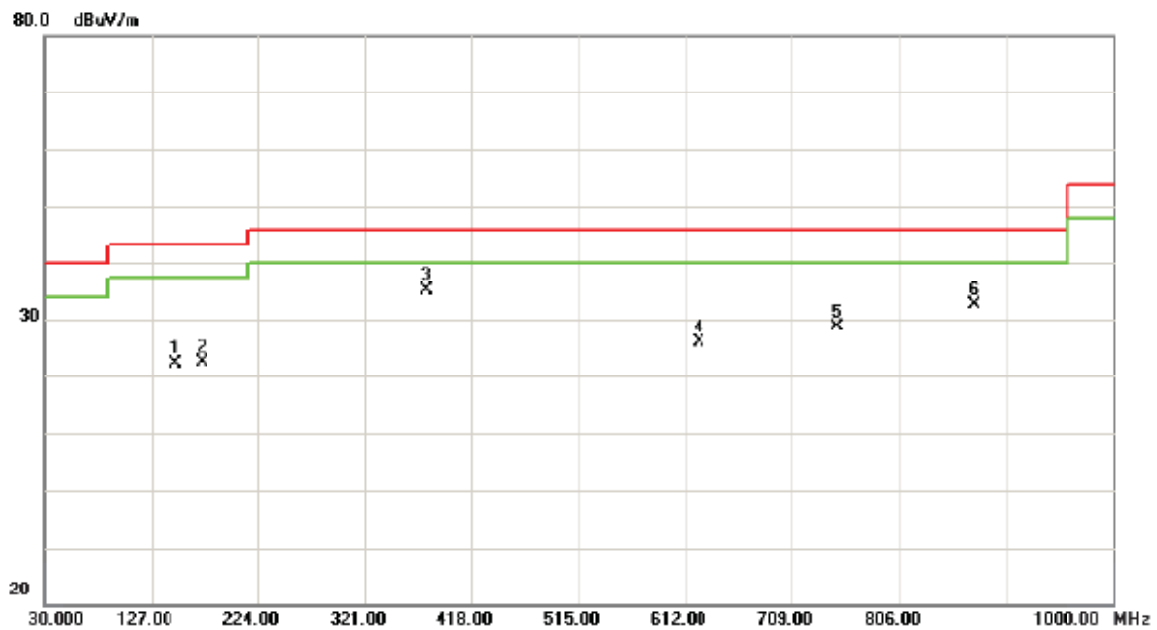

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	35.83	-13.74	22.09	43.50	-21.41	peak	
2		174.5300	35.11	-12.78	22.33	43.50	-21.17	peak	
3	*	375.3200	45.73	-10.66	35.07	46.00	-10.93	peak	
4		624.6100	32.67	-6.86	25.81	46.00	-20.19	peak	
5		749.7400	33.57	-4.91	28.66	46.00	-17.34	peak	
6		874.8700	35.14	-2.48	32.66	46.00	-13.34	peak	

Test Mode : Band 3/TX 802.11a Mode 5500MHz


Vertical

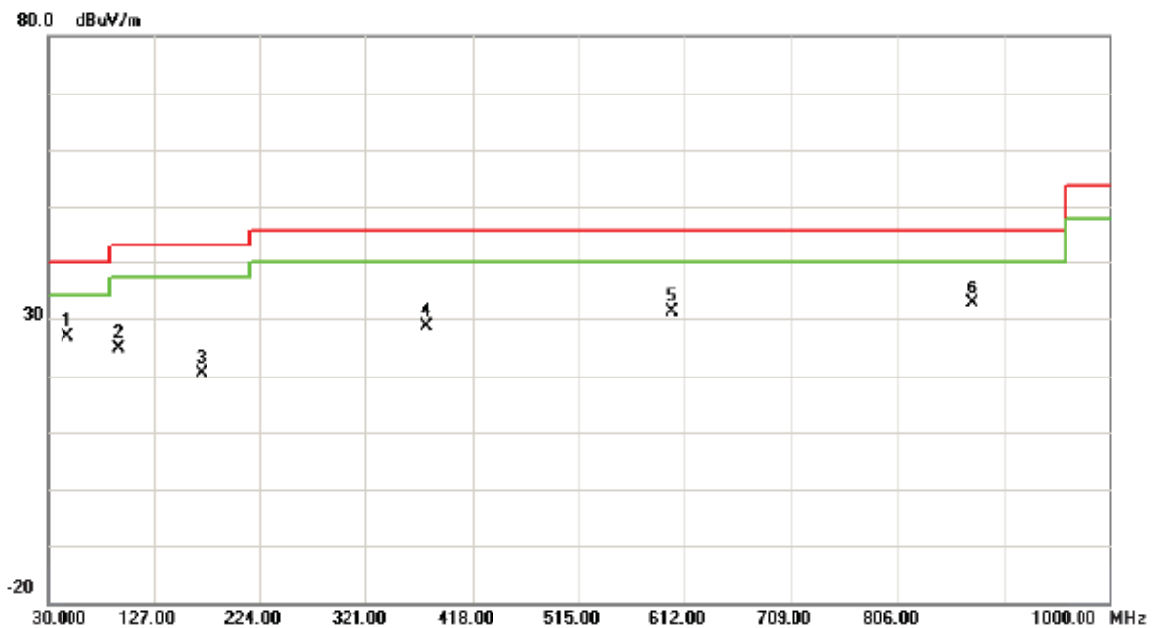

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	47.4600	41.31	-14.40	26.91	40.00	-13.09	peak	
2		94.9900	42.07	-17.27	24.80	43.50	-18.70	peak	
3		170.6500	33.45	-12.73	20.72	43.50	-22.78	peak	
4		375.3200	39.37	-10.66	28.71	46.00	-17.29	peak	
5		600.3600	39.09	-8.08	31.01	46.00	-14.99	peak	
6		874.8700	35.14	-7.48	32.66	46.00	-13.34	peak	

Test Mode : Band 3/TX 802.11a Mode 5500MHz


Horizontal

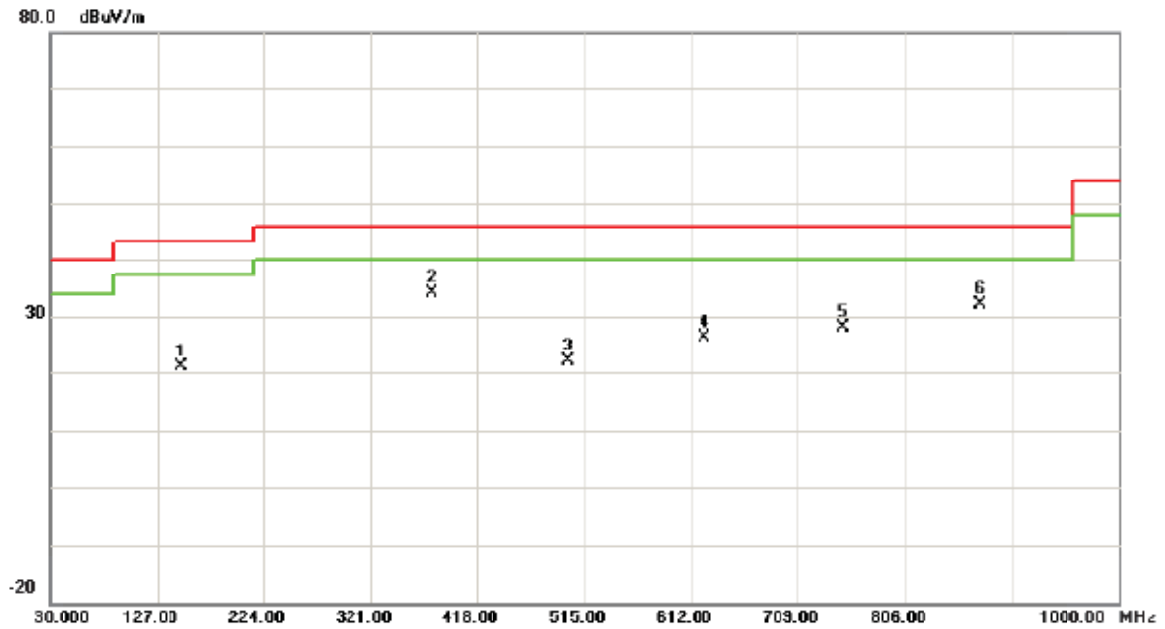

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		149.3100	34.83	-13.74	21.09	43.50	-22.41	peak	
2	*	375.3200	44.73	-10.66	34.07	46.00	-11.93	peak	
3		500.4500	32.50	-10.31	22.19	46.00	-23.81	peak	
4		624.6100	33.17	-6.86	26.31	46.00	-19.69	peak	
5		749.7400	33.07	-4.91	28.16	46.00	-17.84	peak	
6		874.8700	34.64	-2.48	32.16	46.00	-13.84	peak	

Test Mode : Band 3/TX 802.11a Mode 5580MHz


Vertical

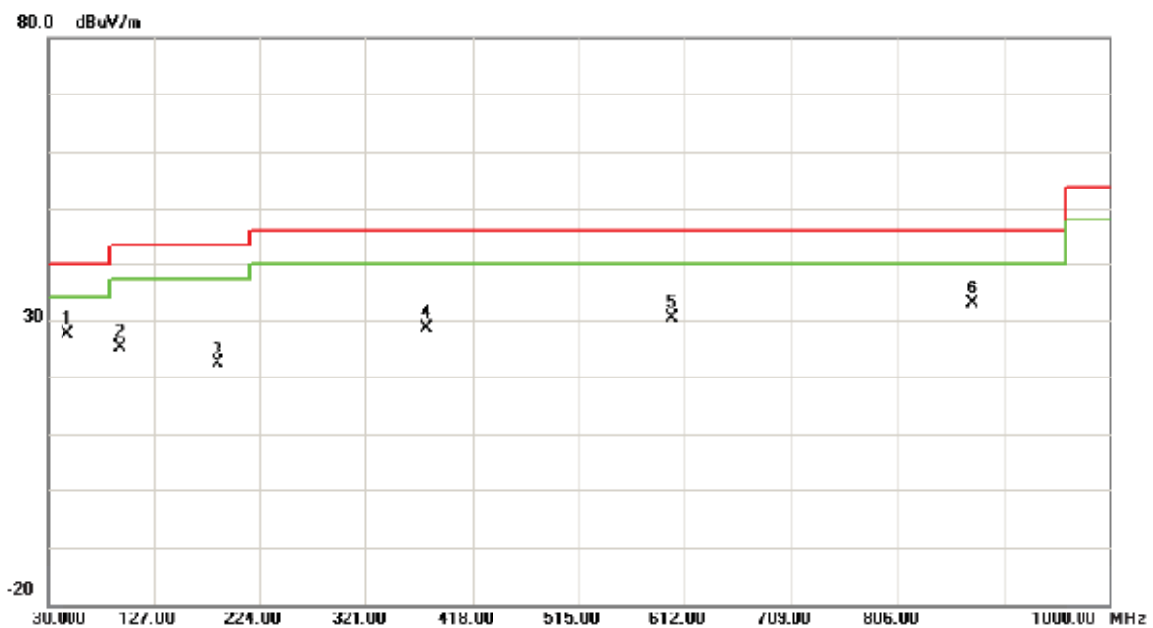

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	47.4600	41.96	-14.40	27.56	40.00	-12.44	peak	
2		95.9600	42.36	-17.07	25.29	43.50	-18.21	peak	
3		185.2000	36.03	-13.60	22.43	43.50	-21.07	peak	
4		375.3200	39.40	-10.66	28.74	46.00	-17.26	peak	
5		600.3600	38.53	-8.08	30.45	46.00	-15.55	peak	
6		874.8700	35.31	-2.48	32.83	46.00	-13.17	peak	

Test Mode : Band 3/TX 802.11a Mode 5580MHz


Horizontal

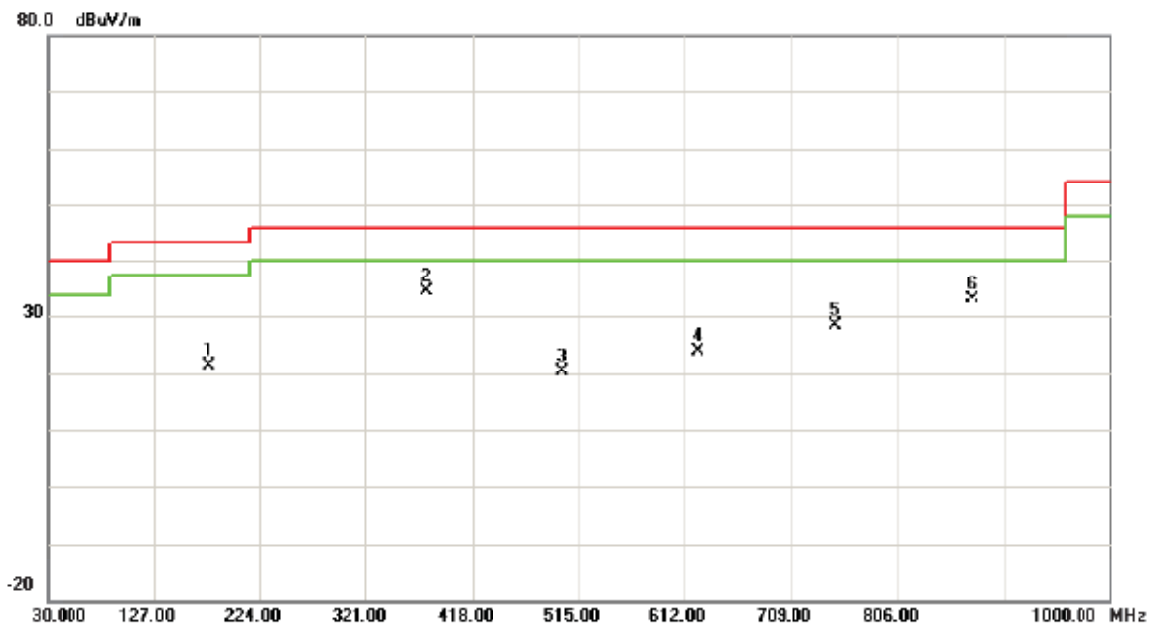

No	Mk	Freq	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		176.4700	34.15	-12.80	21.35	43.50	-22.15	peak	
2	*	375.3200	45.18	-10.66	34.52	46.00	-11.48	peak	
3		500.4500	30.67	-10.31	20.36	46.00	-25.64	peak	
4		624.6100	30.81	-6.86	23.95	46.00	-22.05	peak	
5		749.7400	33.24	-4.91	28.33	46.00	-17.67	peak	
6		874.8700	35.59	-2.48	33.11	46.00	-12.89	peak	

Test Mode : Band 3/TX 802.11a Mode 5700MHz


Vertical

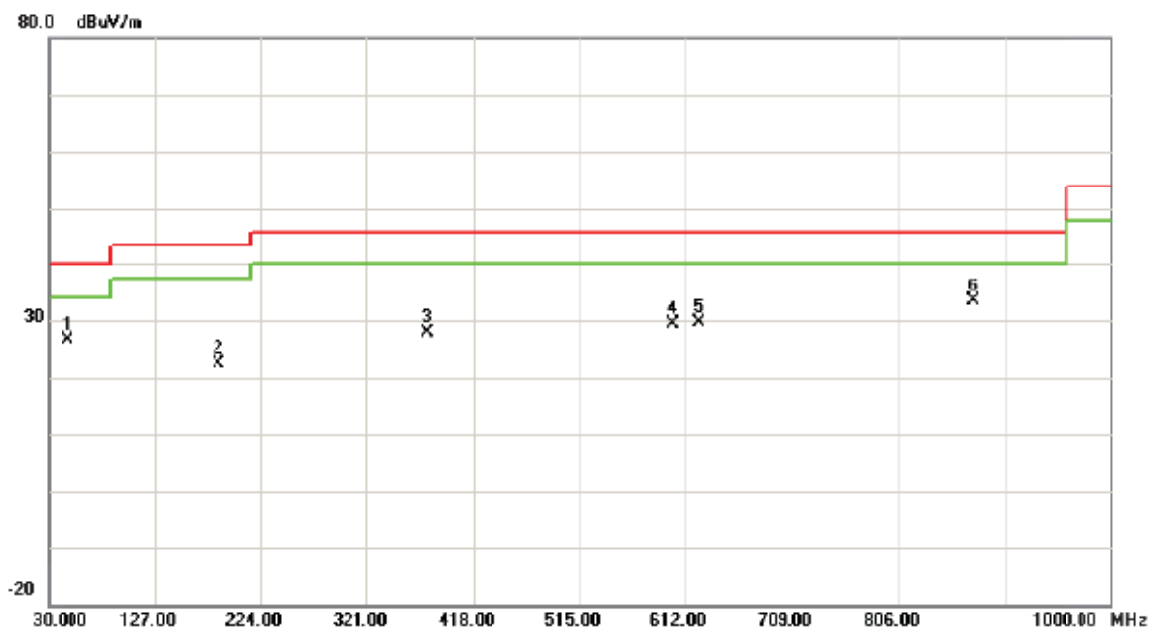

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		47.4600	41.05	-14.40	26.65	40.00	-13.35	peak	
2		185.2000	36.11	-13.60	22.51	43.50	-20.99	peak	
3		375.3200	38.44	-10.66	27.78	46.00	-18.22	peak	
4		600.3600	37.42	-8.08	29.34	46.00	-16.66	peak	
5		624.6100	36.49	-6.86	29.63	46.00	-16.37	peak	
6	*	874.8700	35.85	-2.48	33.37	46.00	-12.63	peak	

Test Mode : Band 3/TX 802.11a Mode 5700MHz

Horizontal

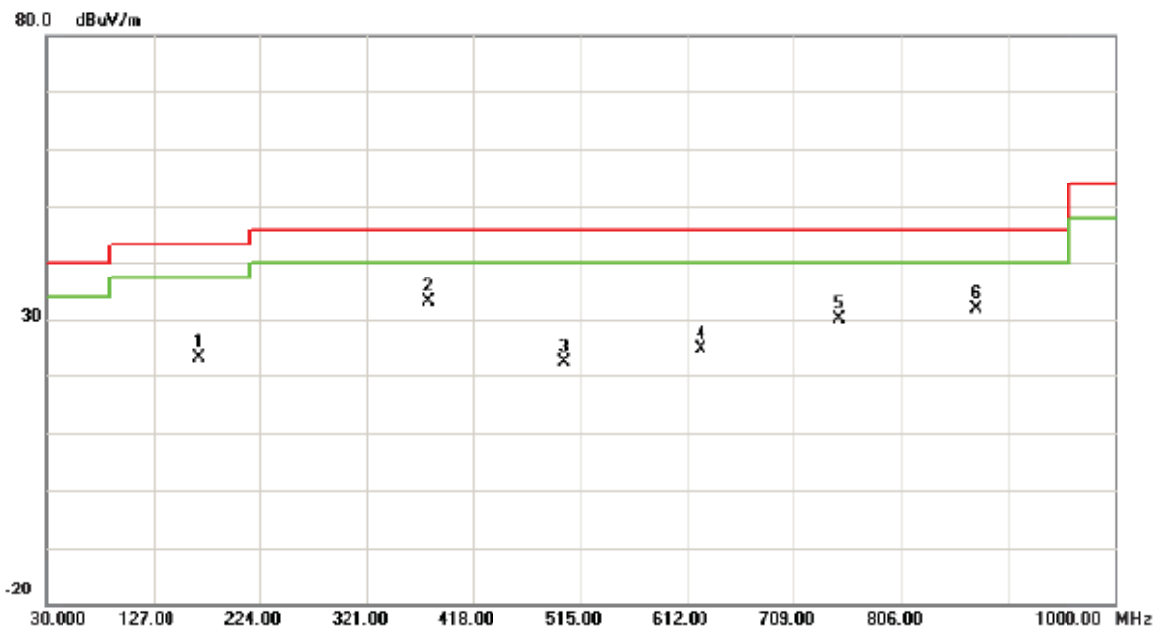


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment cBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	168.7100	36.08	-12.85	23.23	43.50	-20.27	peak	
2 *	375.3200	43.82	-10.66	33.16	46.00	-12.84	peak	
3	500.4500	32.65	-10.31	22.34	46.00	-23.66	peak	
4	624.6100	31.60	-6.86	24.74	46.00	-21.26	peak	
5	749.7400	34.95	-4.91	30.04	46.00	-15.96	peak	
6	874.8700	34.40	-2.48	31.92	46.00	-14.08	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11a Mode 5180MHz


Vertical

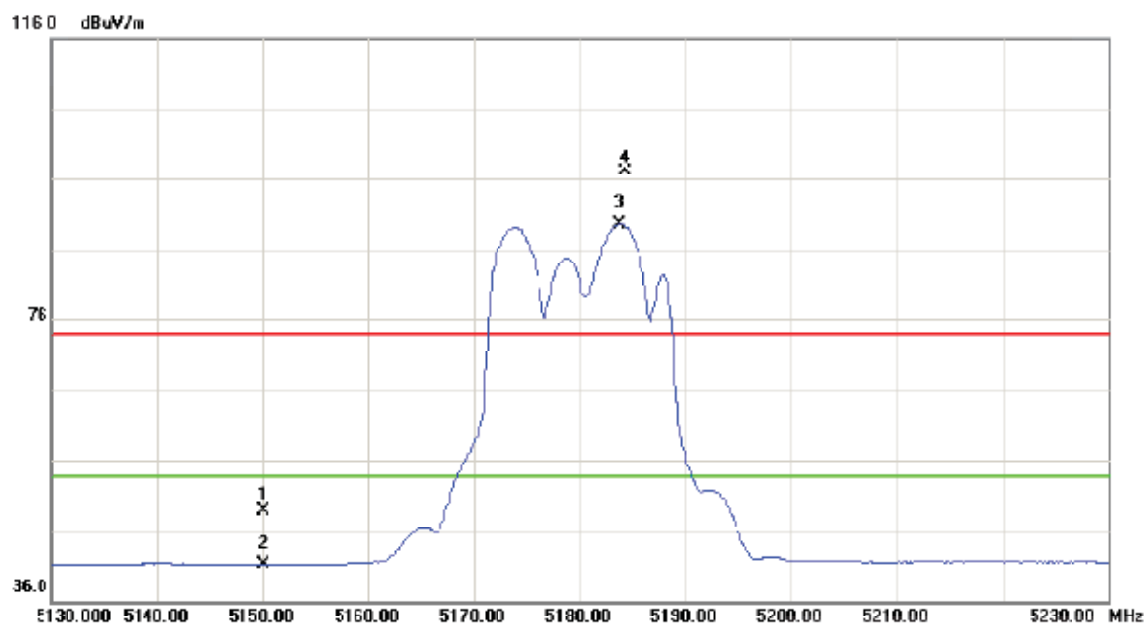

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	6.21	42.72	48.93	74.00	-25.07	peak	
2		5150.000	-1.39	42.72	41.33	54.00	-12.67	AVG	
3	*	5183.700	46.93	42.80	89.73	54.00	35.73	AVG	
4	X	5184.200	54.23	42.80	97.03	74.00	23.03	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11a Mode 5180MHz


Vertical

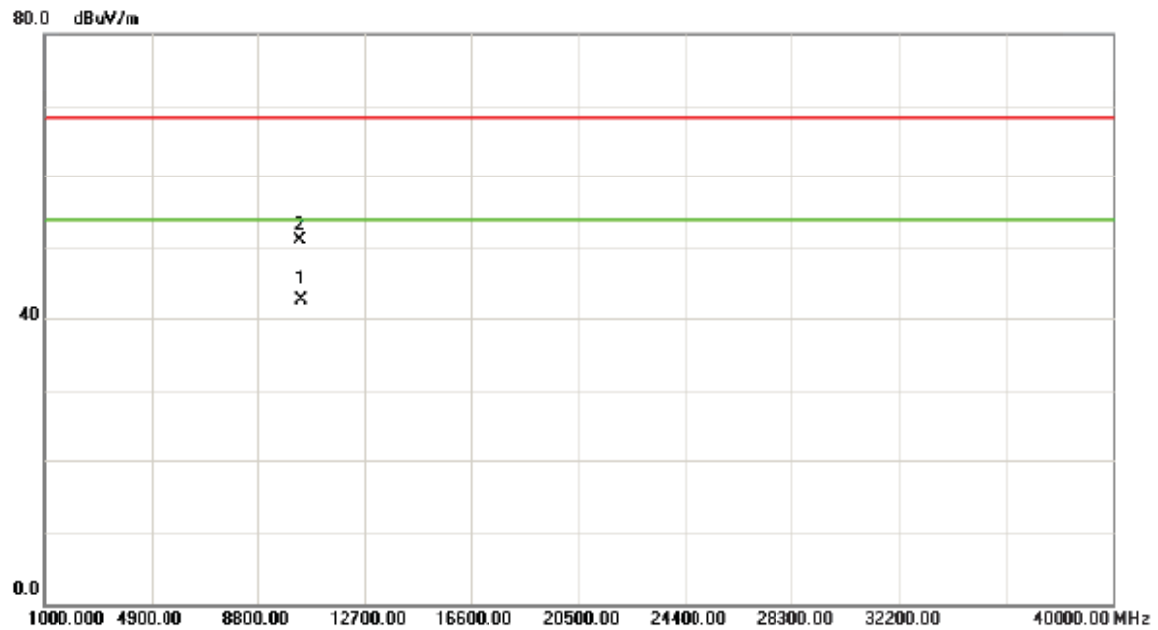

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10357.00	26.54	16.02	42.56	54.00	-11.44	AVG	
2		10358.00	35.15	16.02	51.17	68.30	-17.13	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11a Mode 5180MHz


Horizontal

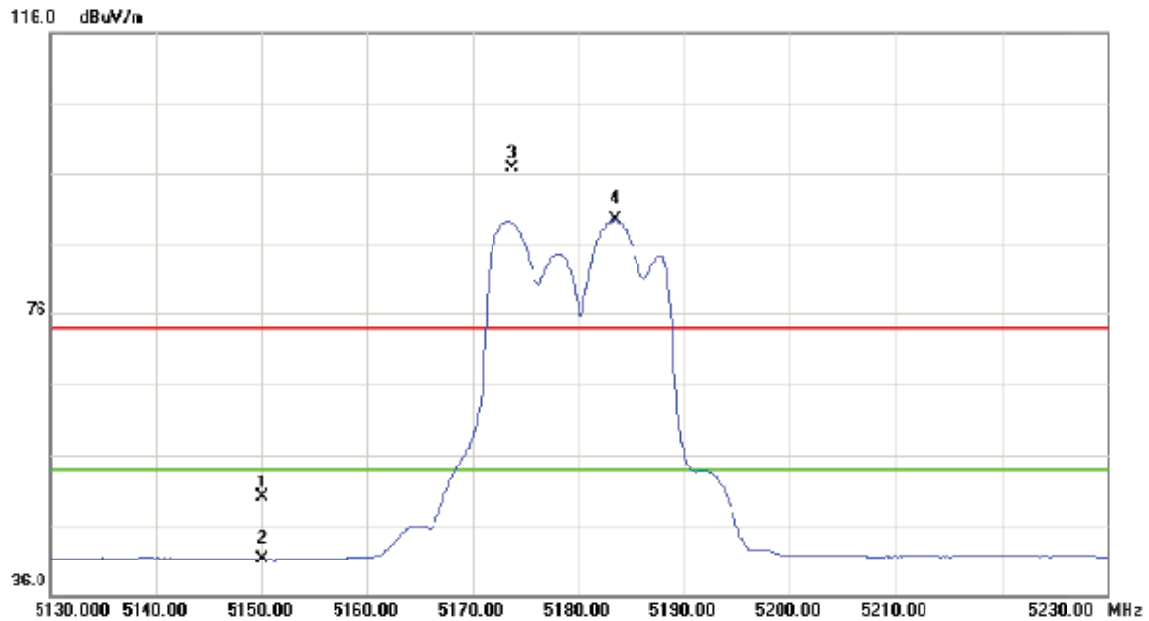

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	7.14	42.72	49.86	74.00	-24.14	peak	
2		5150.000	-1.45	42.72	41.27	54.00	-12.73	AVG	
3	X	5173.700	54.10	42.78	96.88	74.00	22.88	peak	
4	*	5183.400	46.66	42.80	89.46	54.00	35.46	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11a Mode 5180MHz


Horizontal

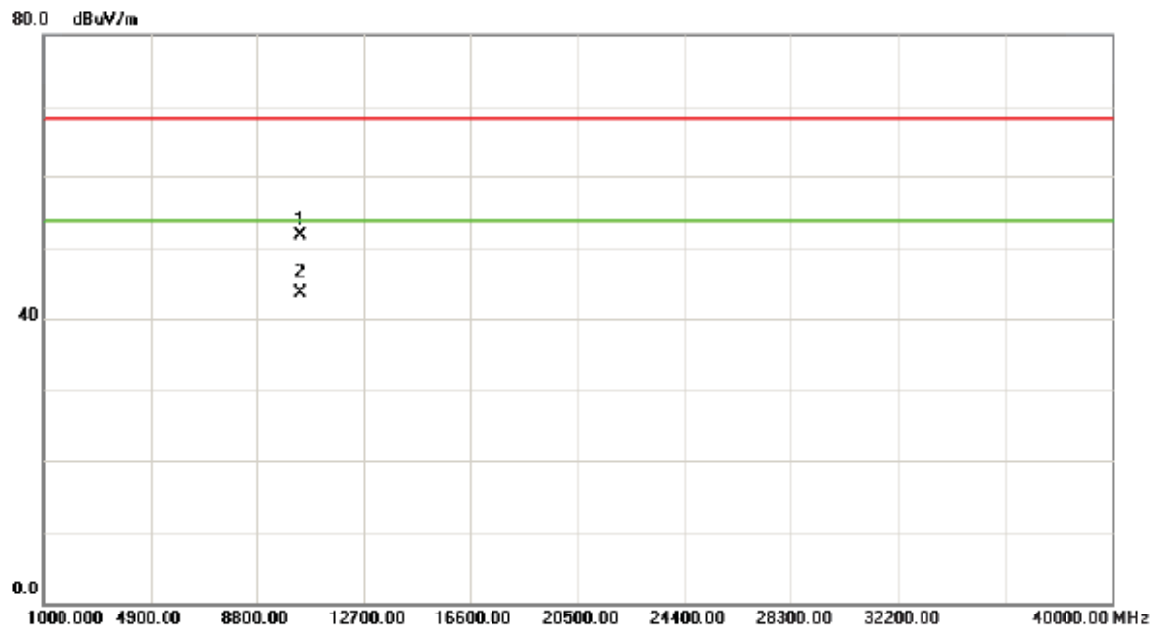

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10363.00	35.90	16.02	51.92	68.30	-16.38	peak	
2	*	10363.00	27.54	16.02	43.56	54.00	-10.44	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11a Mode 5200MHz


Vertical

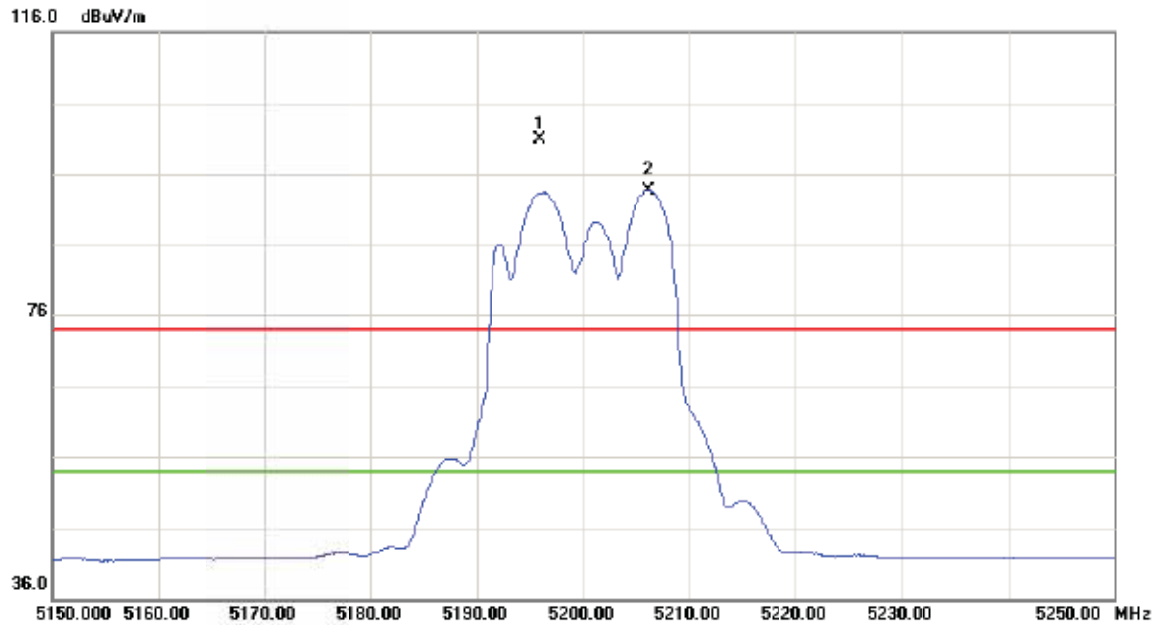

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5195.900	58.17	42.83	101.00	74.00	27.00	peak	
2	*	5206.200	50.93	42.86	93.79	54.00	39.79	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11a Mode 5200MHz


Vertical

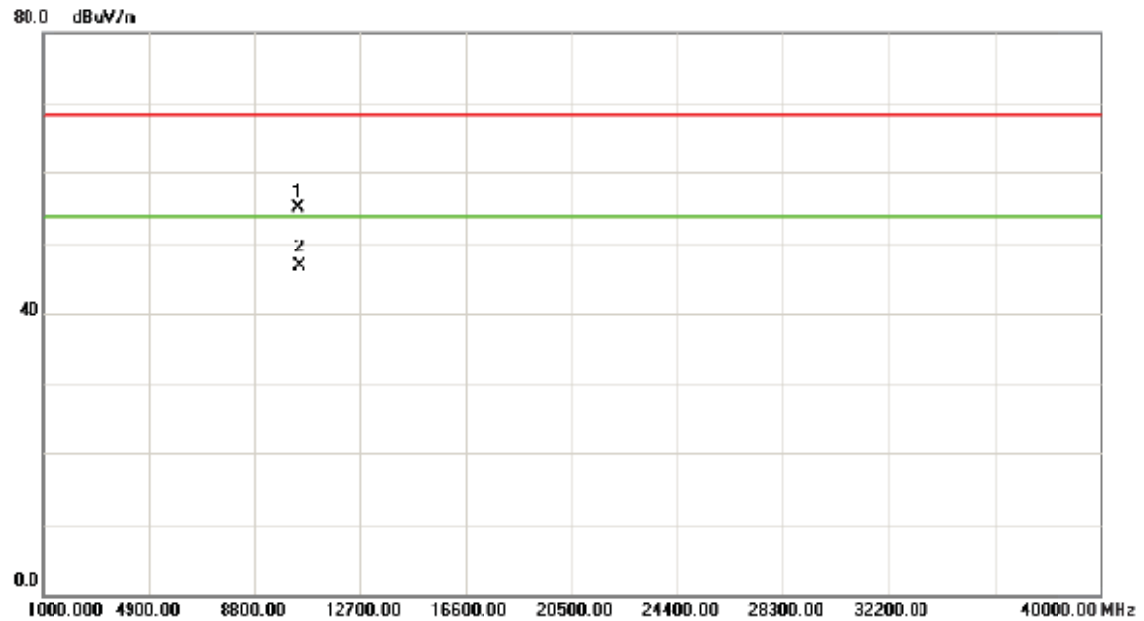

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10402.00	39.13	15.96	55.09	68.30	-13.21	peak	
2	*	10402.00	30.52	15.96	46.48	54.00	-7.52	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11a Mode 5200MHz


Horizontal

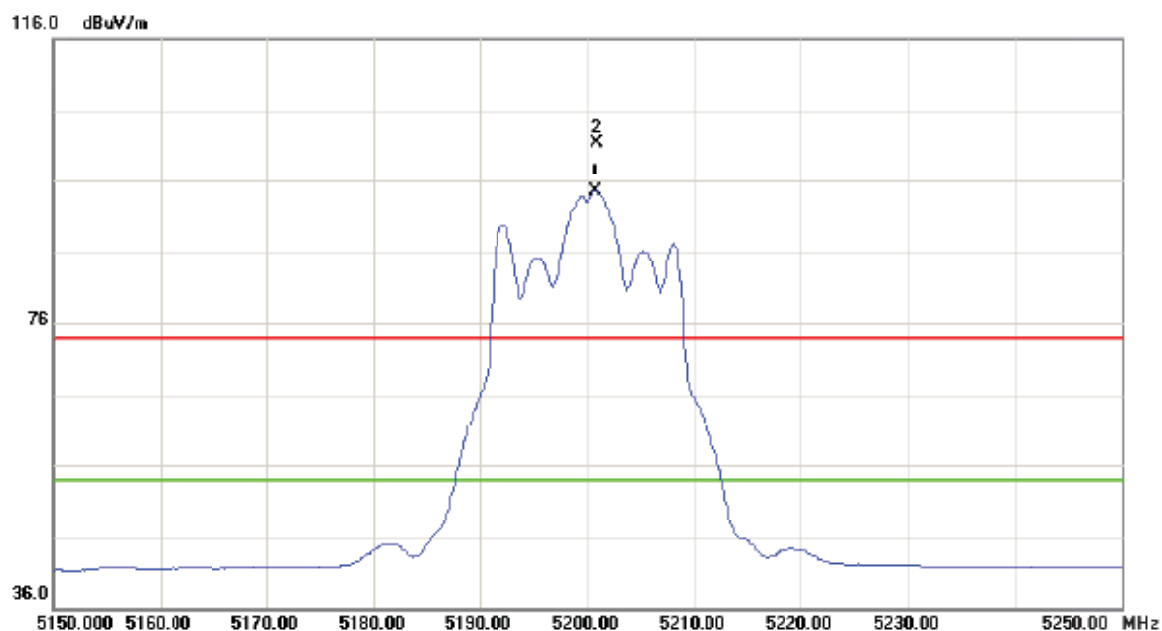

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5200.700	51.60	42.84	94.44	54.00	40.44	AVG	
2	X	5200.900	58.73	42.84	101.57	74.00	27.57	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11a Mode 5200MHz


Horizontal

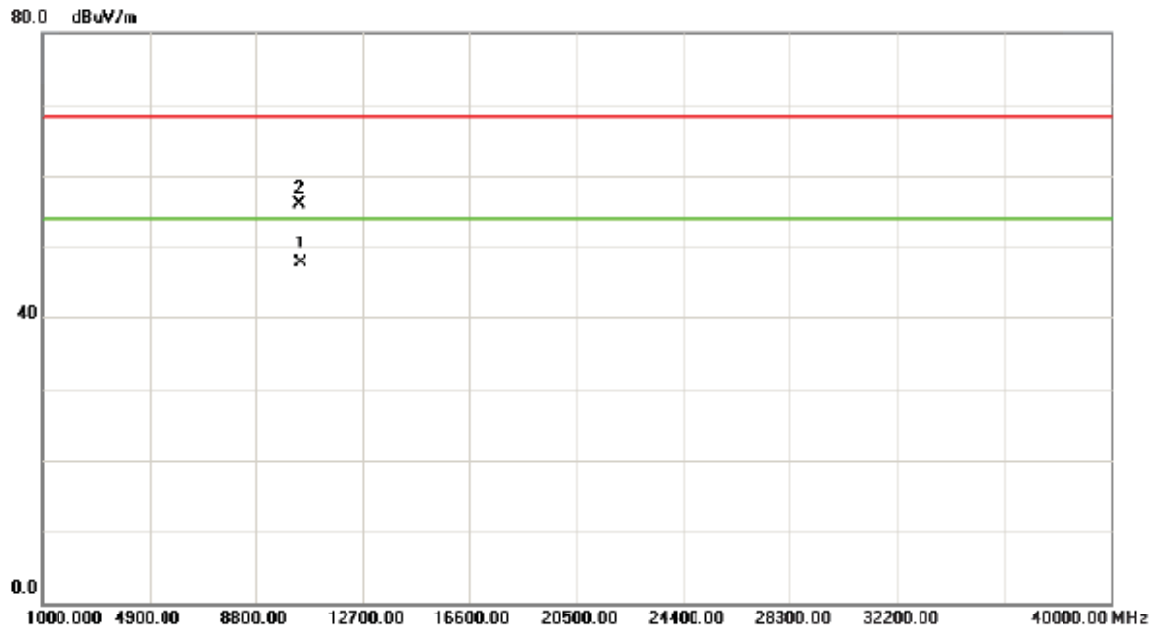

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10402.00	31.54	15.96	47.50	54.00	-6.50	AVG	
2		10405.00	39.86	15.97	55.83	68.30	-12.47	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11a Mode 5240MHz


Vertical

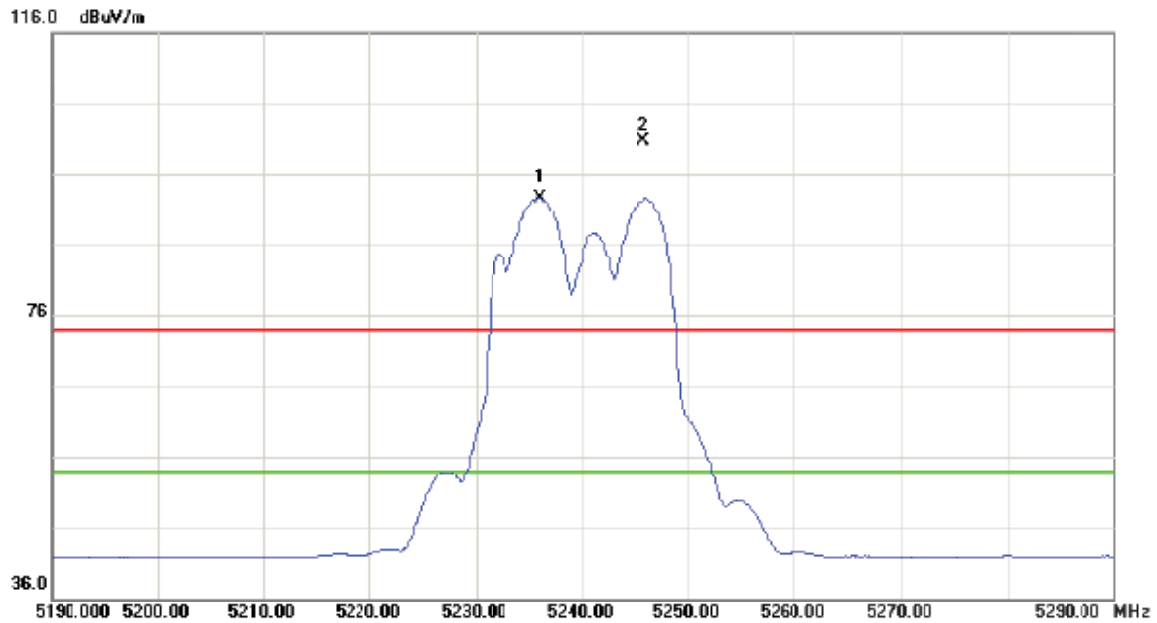

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dE	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5236.000	49.72	42.93	92.65	54.00	38.65	AVG	
2	X	5245.700	57.76	42.95	100.71	74.00	26.71	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11a Mode 5240MHz


Vertical

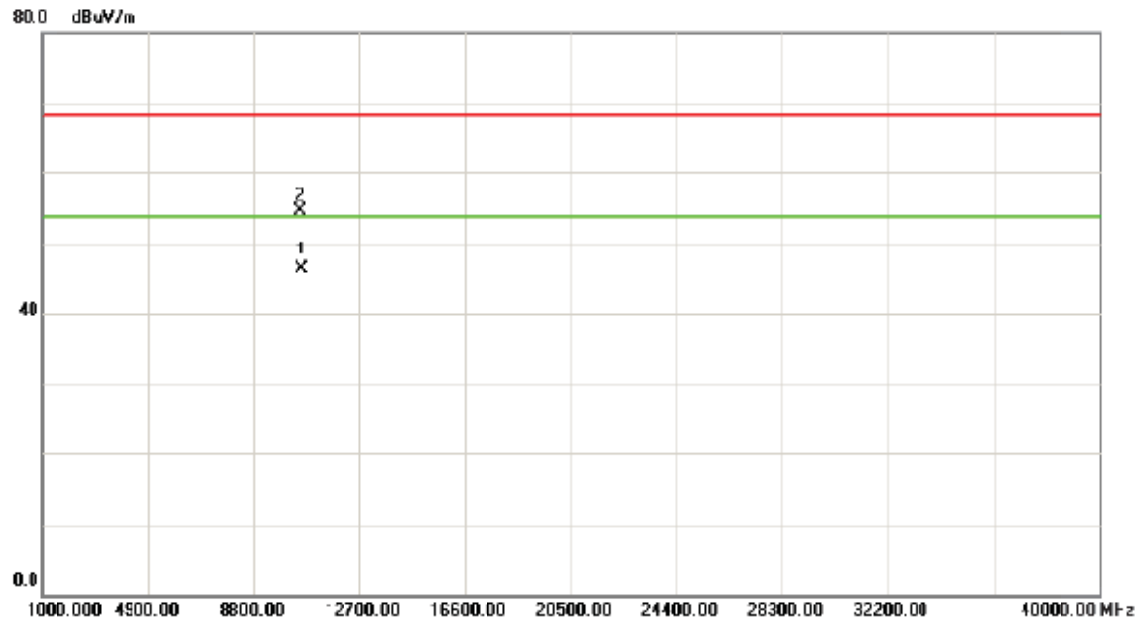

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	cBuV/m	dBuV/m	dB	Detector	Comment
1	*	10482.00	30.17	15.84	46.01	54.00	-7.99	AVG	
2		10485.00	38.84	15.84	54.68	68.30	-13.62	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11a Mode 5240MHz


Horizontal

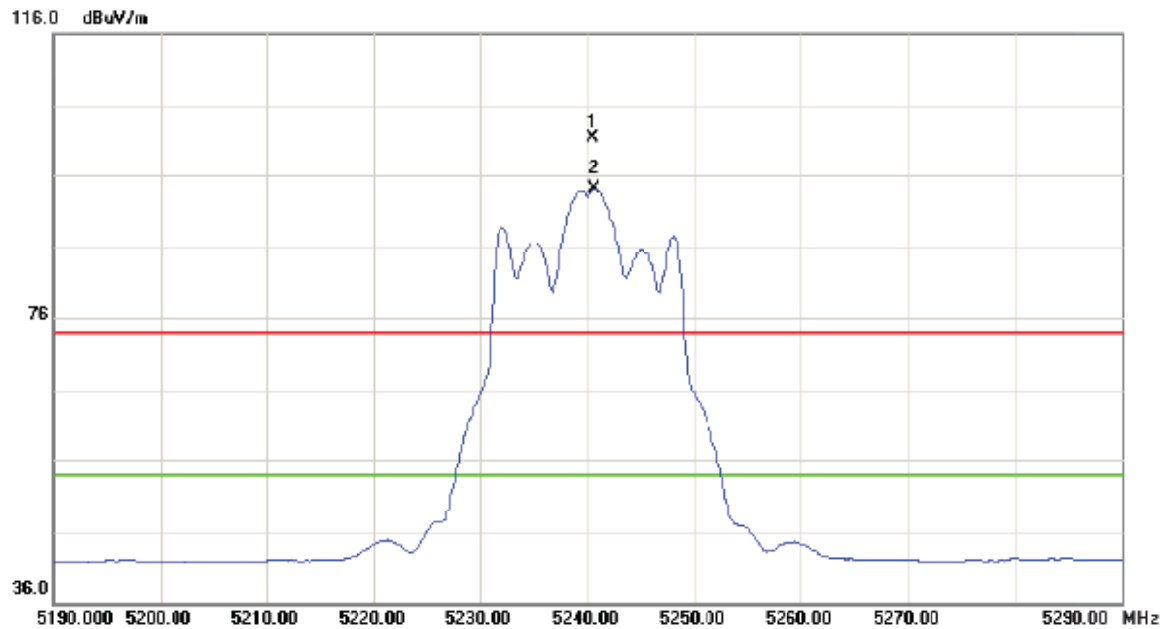

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment cBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5240.500	58.57	42.94	101.51	74.00	27.51	peak	
2	*	5240.600	51.24	42.94	94.18	54.00	40.18	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11a Mode 5240MHz


Horizontal

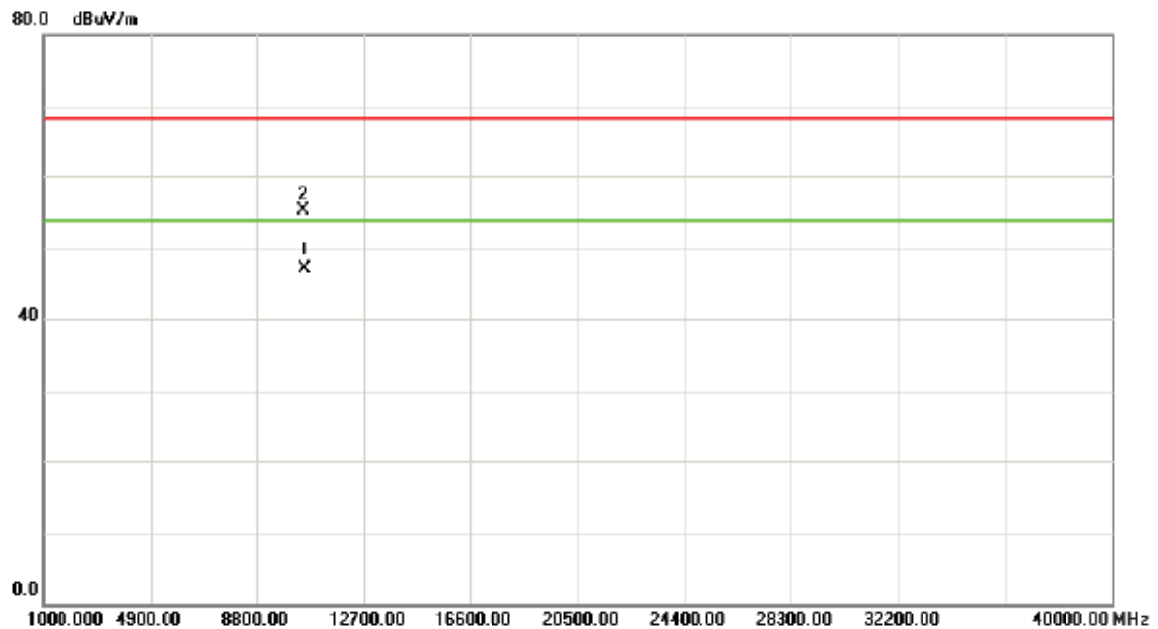

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10482.00	31.12	15.84	46.96	54.00	-7.04	AVG	
2		10483.00	39.48	15.84	55.32	68.30	-12.98	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(20 MHz) Mode 5180MHz


Vertical

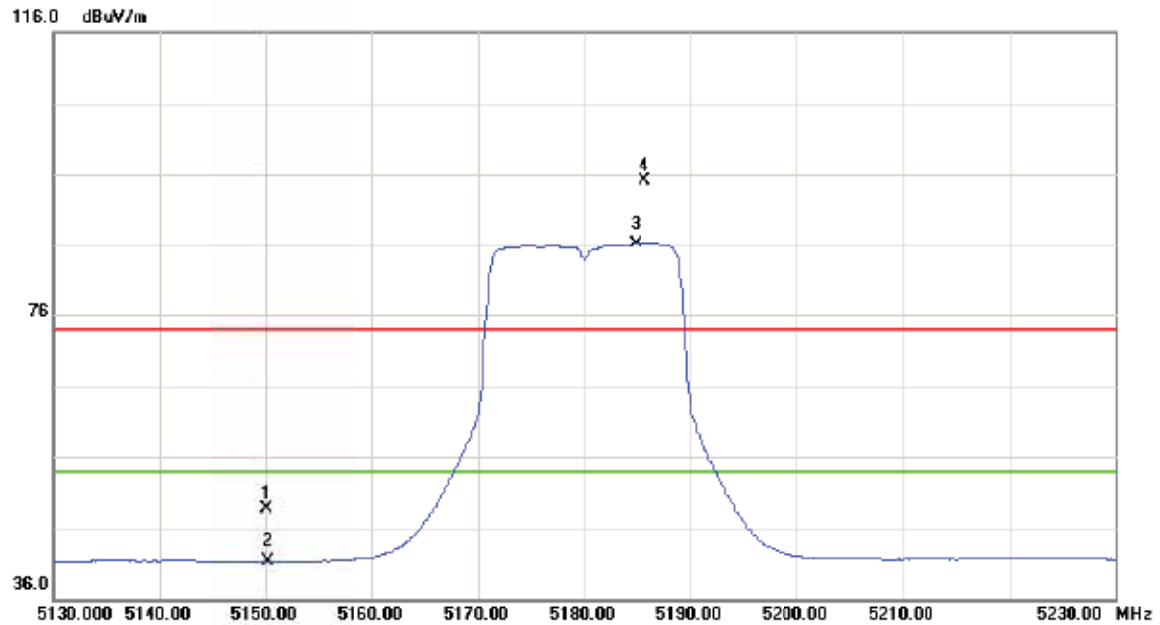

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	6.05	42.72	48.77	74.00	-25.23	peak	
2		5150.000	-1.43	42.72	41.29	54.00	-12.71	AVG	
3	*	5184.800	43.25	42.81	86.06	54.00	32.06	AVG	
4	X	5185.700	52.36	42.81	95.17	74.00	21.17	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(20 MHz) Mode 5180MHz


Vertical

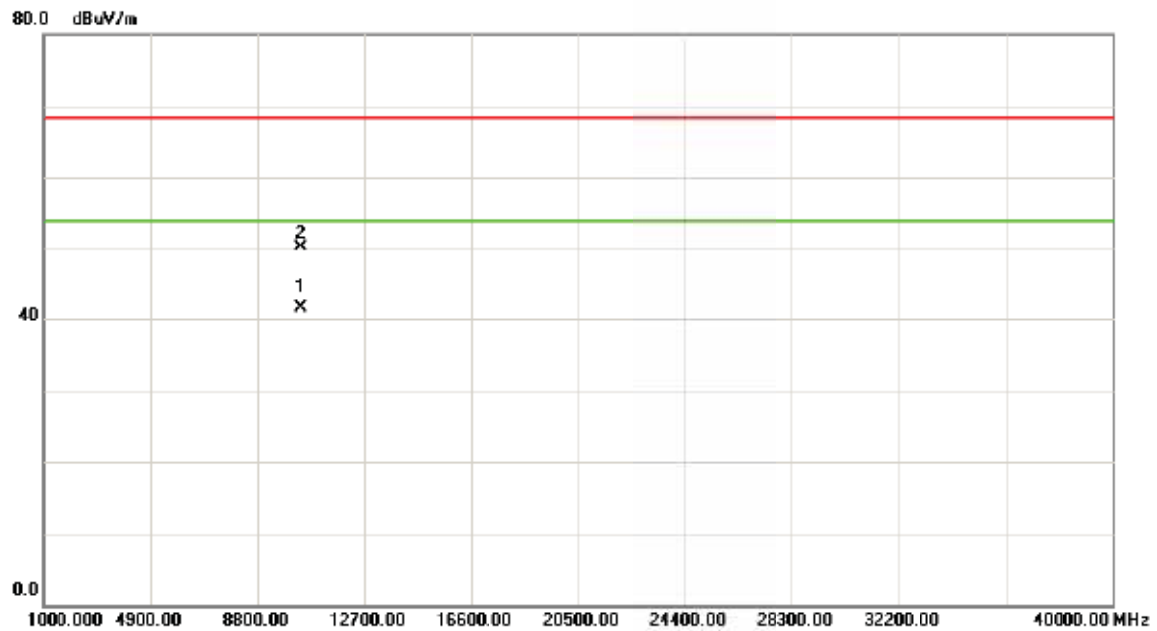

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10362.00	25.41	16.02	41.43	54.00	-12.57	AVG	
2		10363.00	34.02	16.02	50.04	68.30	-18.26	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(20 MHz) Mode 5180MHz


Horizontal

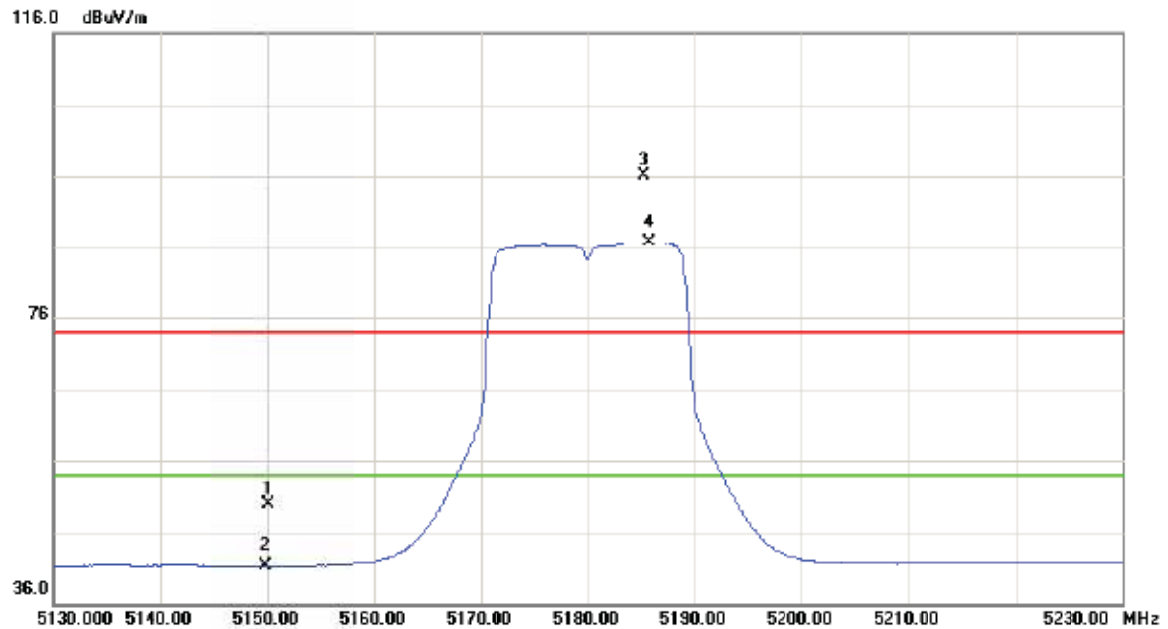

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	7.13	42.72	49.85	74.00	-24.15	peak	
2		5150.000	-1.38	42.72	41.34	54.00	-12.66	AVG	
3	X	5185.200	53.20	42.81	96.01	74.00	22.01	peak	
4	*	5185.800	43.94	42.81	86.75	54.00	32.75	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(20 MHz) Mode 5180MHz


Horizontal

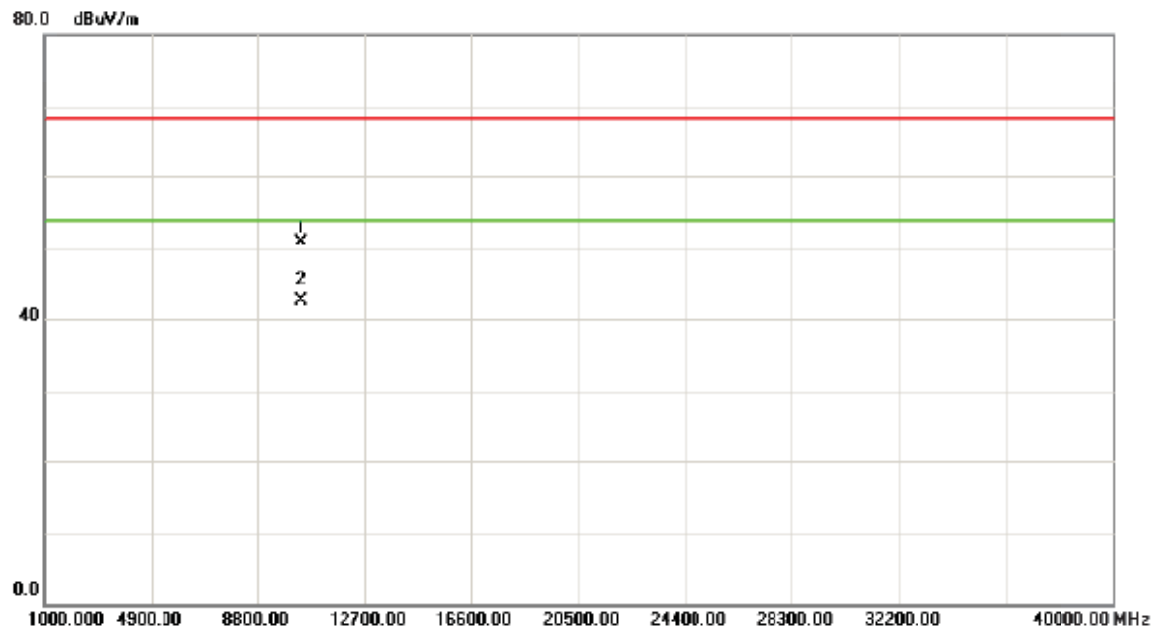

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10364.00	34.82	16.02	50.84	68.30	-17.46	peak	
2	*	10365.00	26.44	16.02	42.46	54.00	-11.54	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(20 MHz) Mode 5200MHz


Vertical

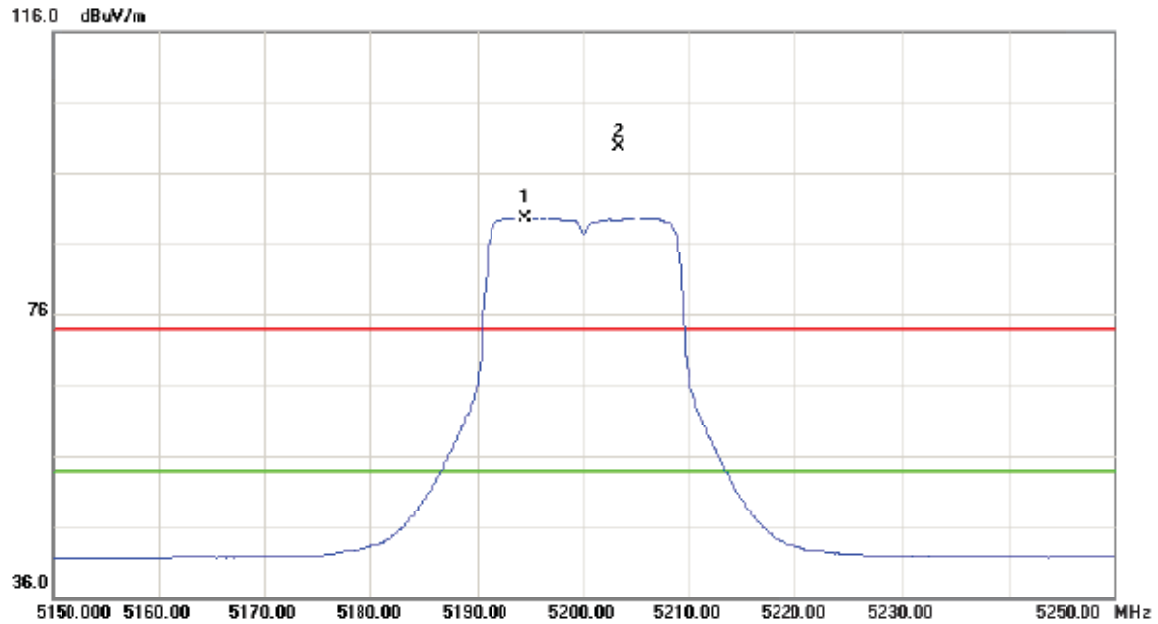

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5194.600	46.92	42.83	89.75	54.00	35.75	AVG	
2	X	5203.300	56.94	42.85	99.79	74.00	25.79	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(20 MHz) Mode 5200MHz


Vertical

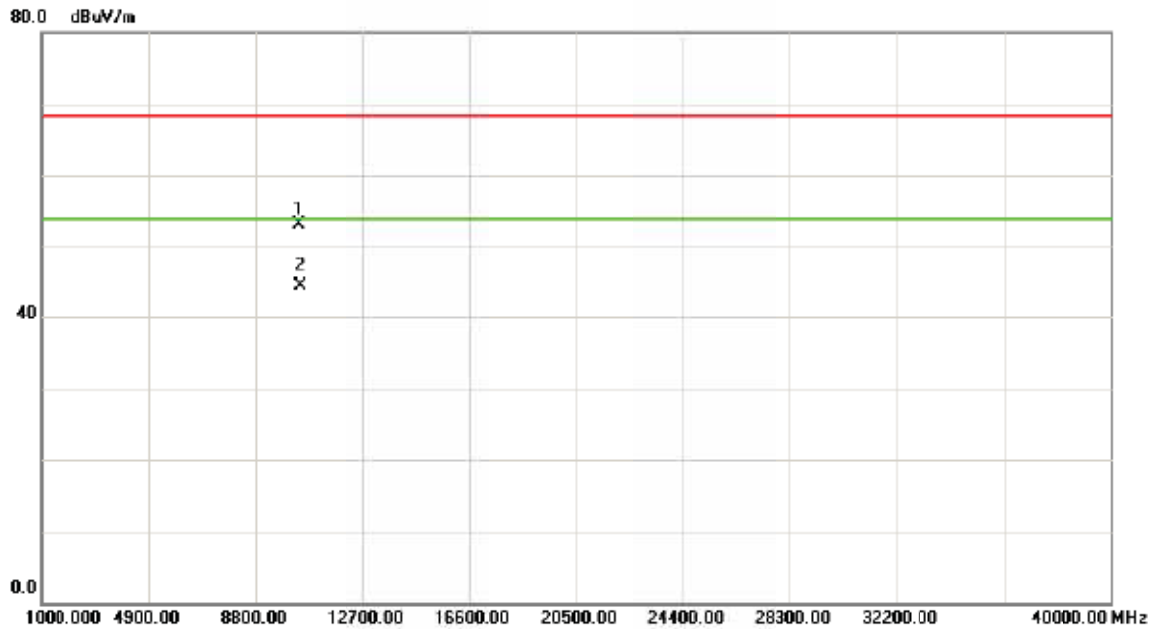

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10403.00	37.05	15.96	53.01	68.30	-15.29	peak	
2	*	10405.00	28.43	15.97	44.40	54.00	-9.60	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(20 MHz) Mode 5200MHz


Horizontal

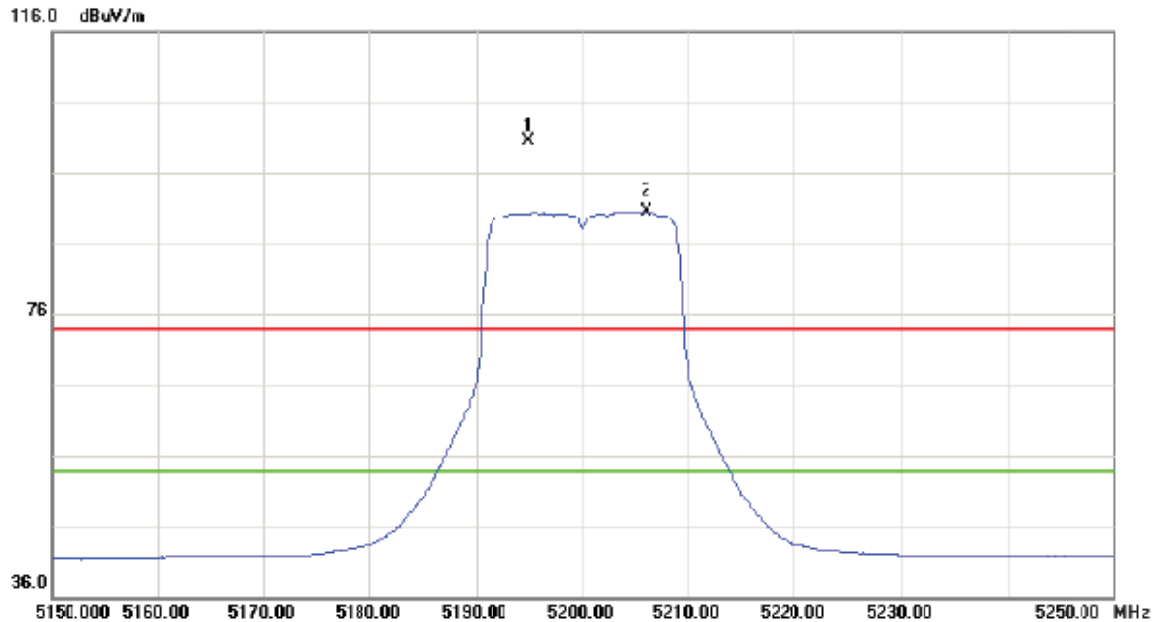

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dE	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5195.000	57.60	42.83	100.43	74.00	26.43	peak	
2	*	5206.000	47.75	42.86	90.61	54.00	36.61	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(20 MHz) Mode 5200MHz


Horizontal

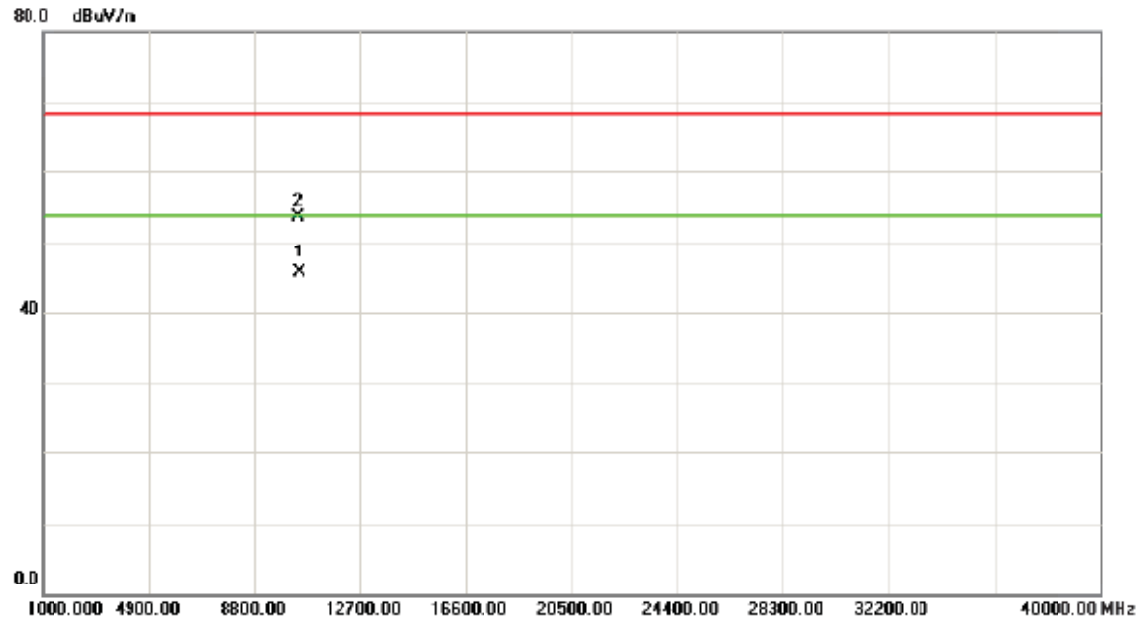

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10405.00	29.45	15.97	45.42	54.00	-8.58	AVG	
2		10407.00	37.75	15.95	53.70	68.30	-14.60	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(20 MHz) Mode 5240MHz


Vertical

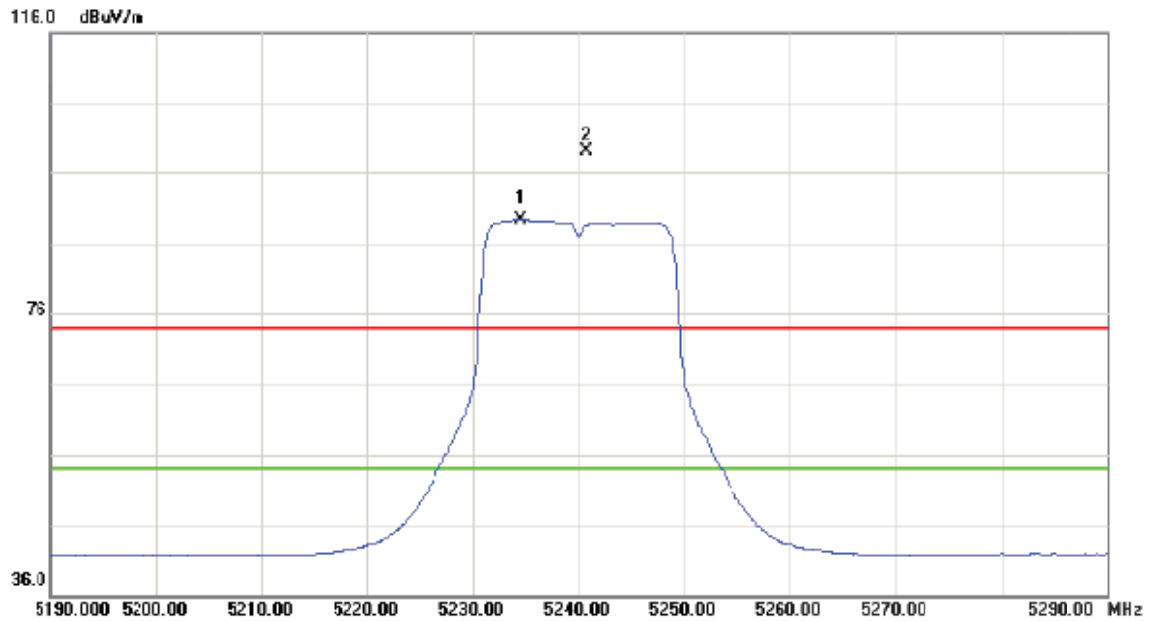

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5234.500	46.59	42.93	89.52	54.00	35.52	AVG	
2	X	5240.700	56.33	42.95	99.28	74.00	25.28	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(20 MHz) Mode 5240MHz


Vertical

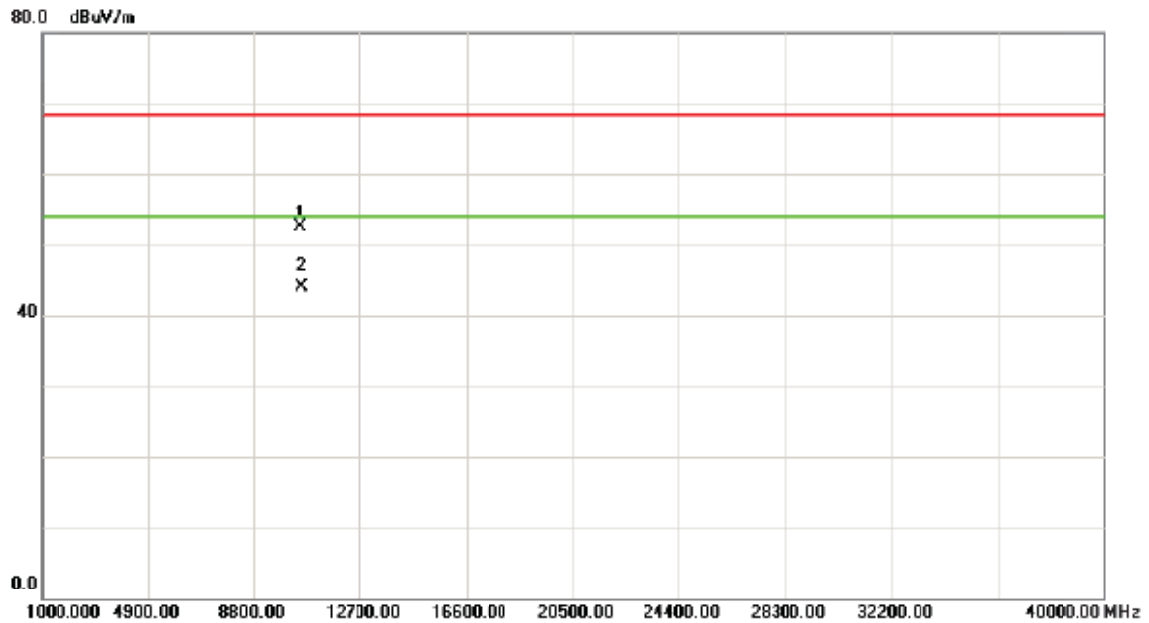

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10482.00	36.71	15.84	52.55	68.30	-15.75	peak	
2	*	10485.00	28.03	15.84	43.87	54.00	-10.13	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(20 MHz) Mode 5240MHz


Horizontal

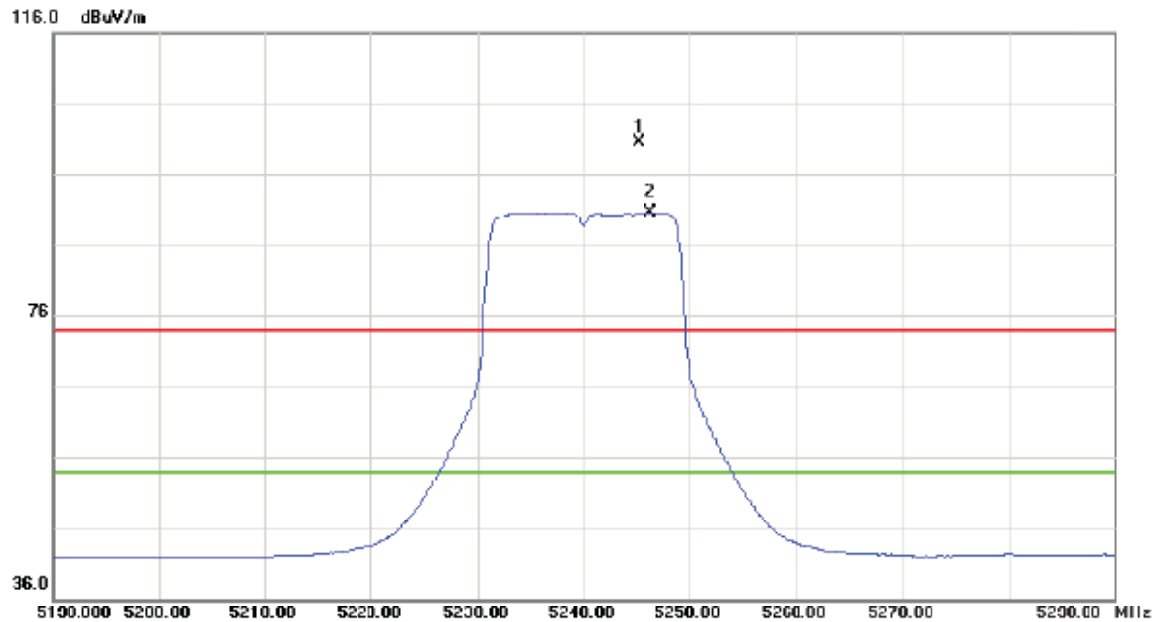

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5245.100	57.49	42.95	100.44	74.00	26.44	peak	
2	*	5246.200	47.81	42.95	90.76	54.00	36.76	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(20 MHz) Mode 5240MHz


Horizontal

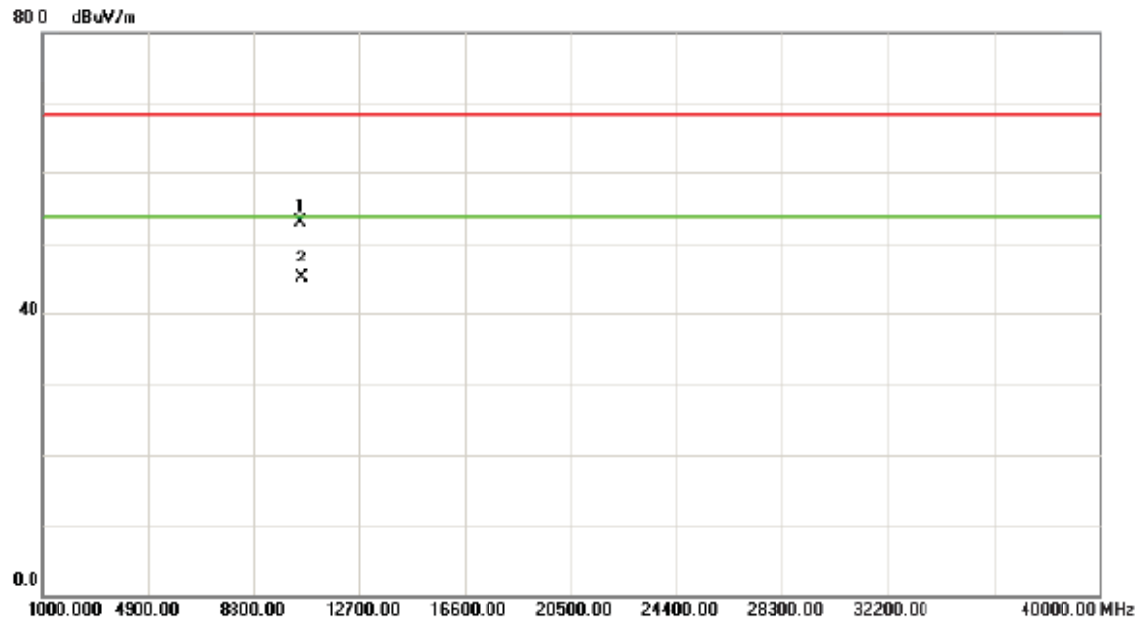

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10483.00	37.33	15.84	53.17	68.30	15.13	peak	
2	*	10483.00	29.04	15.84	44.88	54.00	-9.12	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(40 MHz) Mode 5190MHz


Vertical

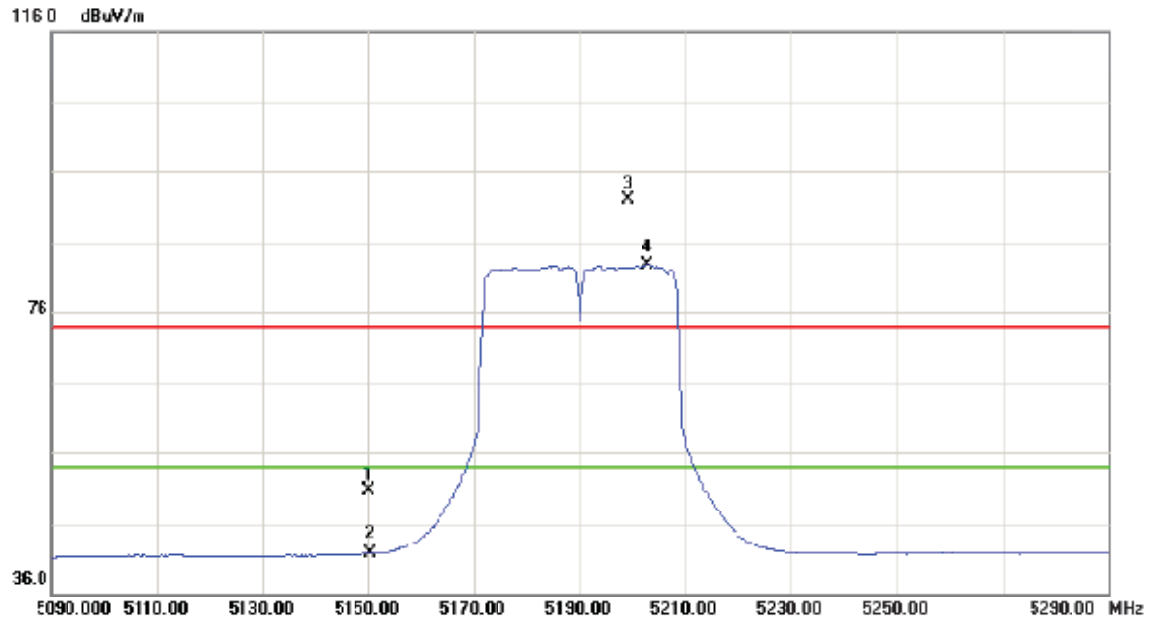

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	7.93	42.72	50.65	74.00	-23.35	peak	
2		5150.000	-1.07	42.72	41.65	54.00	-12.35	AVG	
3	X	5190.000	49.31	42.04	92.15	74.00	10.15	peak	
4	*	5202.800	39.60	42.84	82.44	54.00	28.44	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(40 MHz) Mode 5190MHz


Vertical

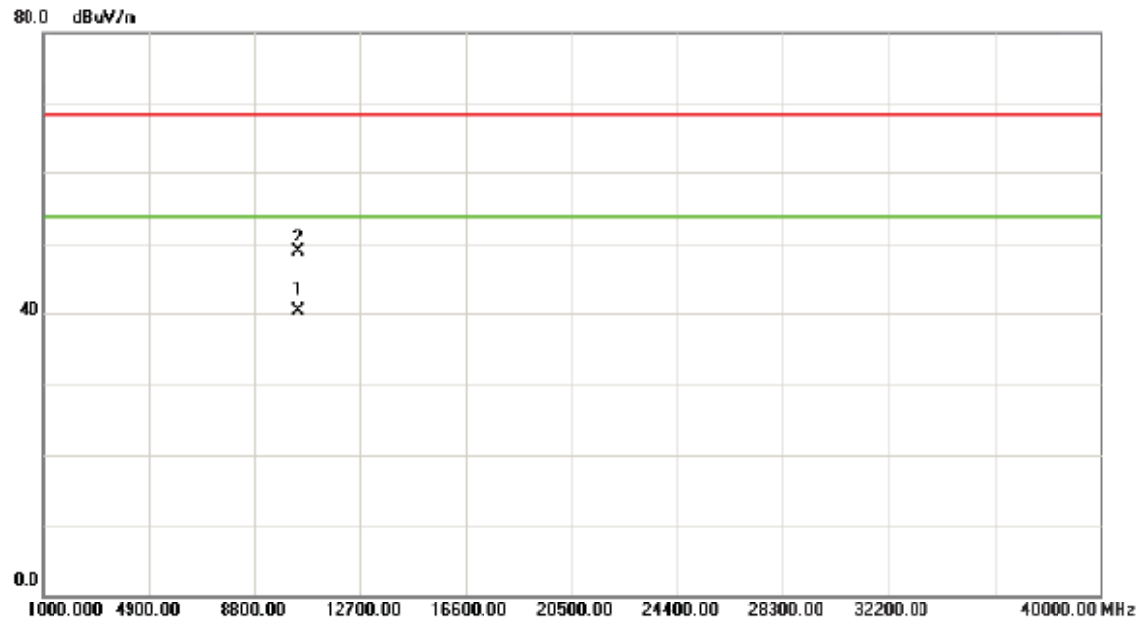

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10382.00	24.31	15.99	40.30	54.00	-13.70	AVG	
2		10385.00	32.96	15.98	48.94	68.30	-19.36	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(40 MHz) Mode 5190MHz


Horizontal

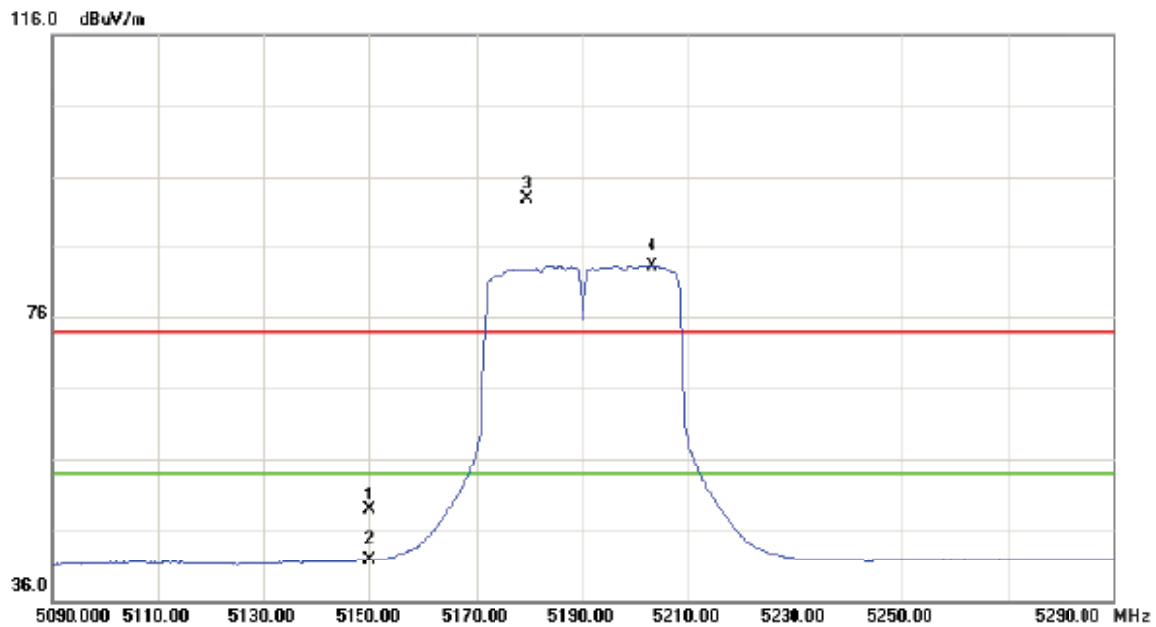

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	6.03	42.72	48.75	74.00	-25.25	peak	
2		5150.000	-1.07	42.72	41.65	54.00	-12.35	AVG	
3	X	5179.600	50.02	42.79	92.81	74.00	18.81	peak	
4	*	5203.200	40.35	42.85	83.20	54.00	29.20	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(40 MHz) Mode 5190MHz


Horizontal

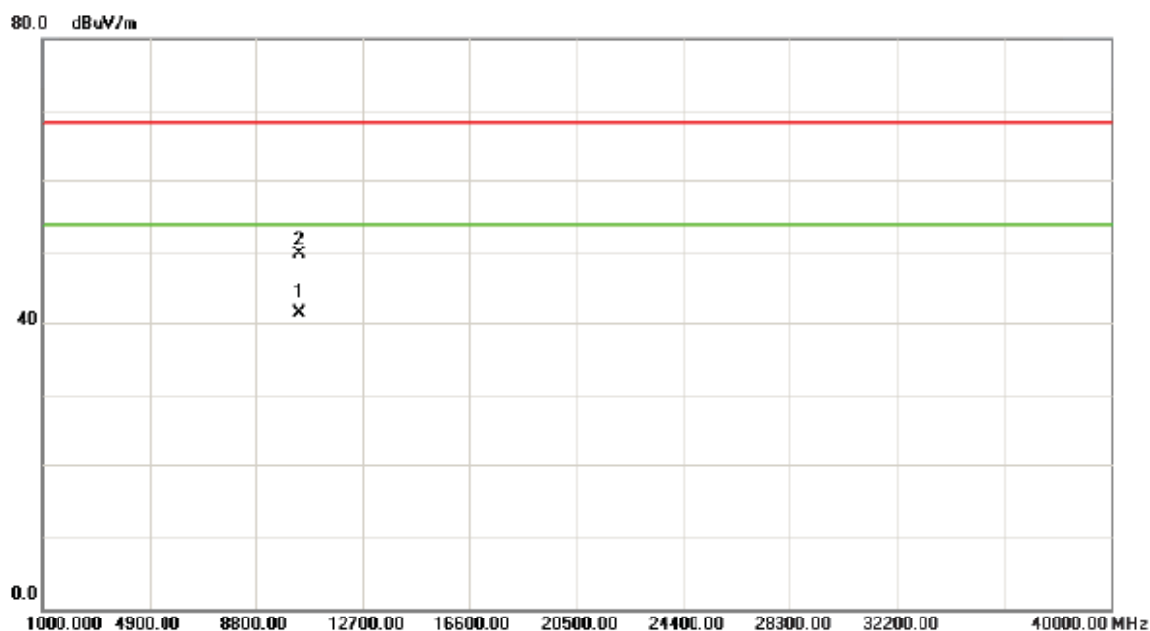

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10382.00	25.36	15.99	41.35	54.00	-12.65	AVG	
2		10385.00	33.74	15.98	49.72	68.30	-18.58	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(40 MHz) Mode 5230MHz


Vertical

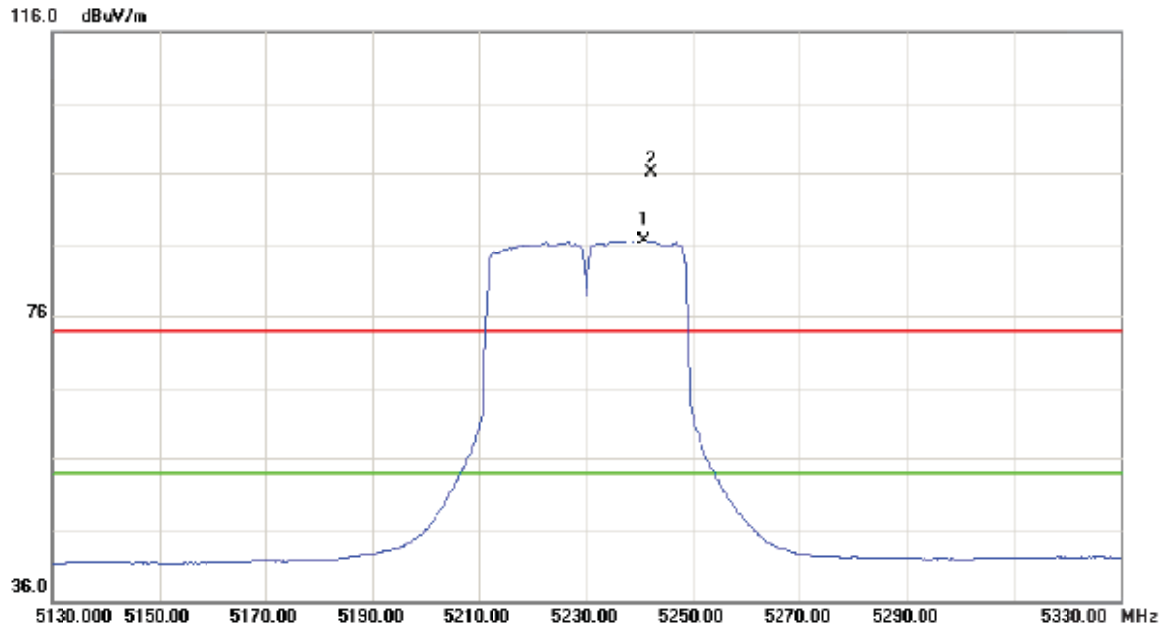

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5240.800	43.67	42.95	86.62	54.00	32.62	AVG	
2	X	5242.000	53.14	42.95	96.09	74.00	22.09	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(40 MHz) Mode 5230MHz


Vertical

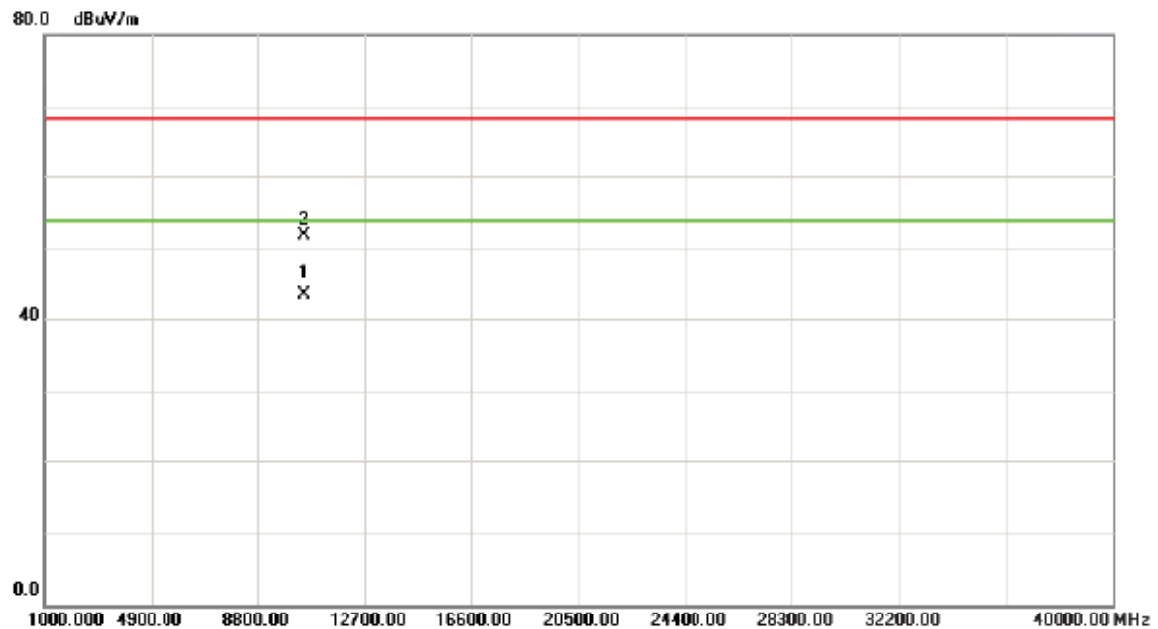

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10463.00	27.40	15.88	43.28	54.00	-10.72	AVG	
2		10465.00	36.05	15.87	51.92	68.30	-16.38	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(40 MHz) Mode 5230MHz


Horizontal

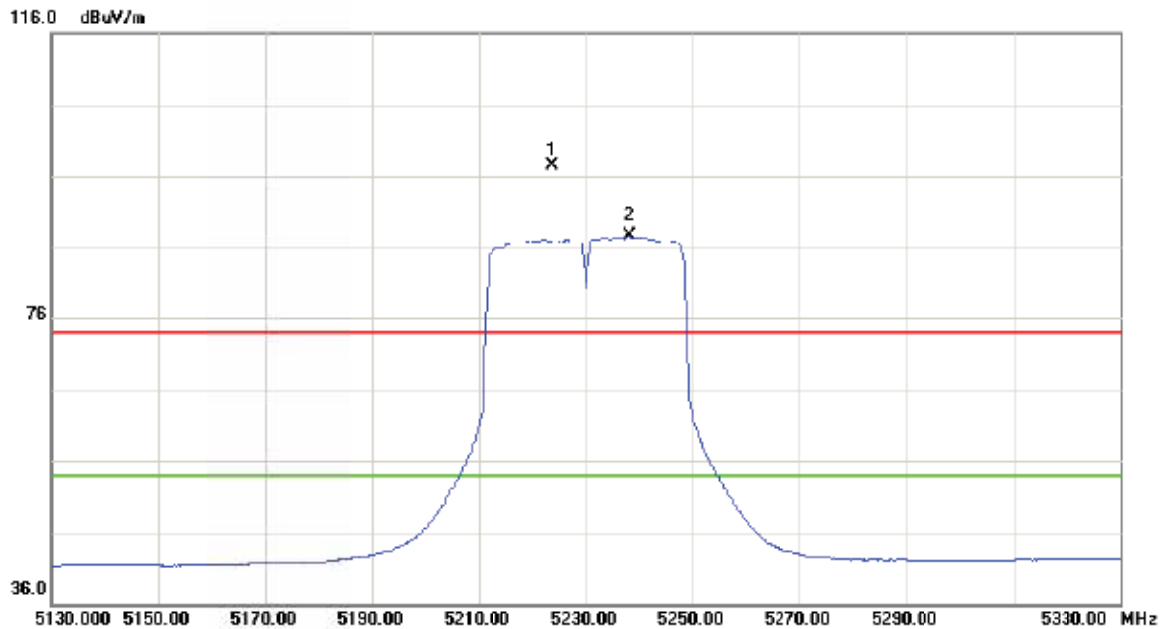

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5223.800	54.55	42.90	97.45	74.00	23.45	peak	
2	*	5238.000	44.70	42.93	87.63	54.00	33.63	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX 802.11n(40 MHz) Mode 5230MHz


Horizontal

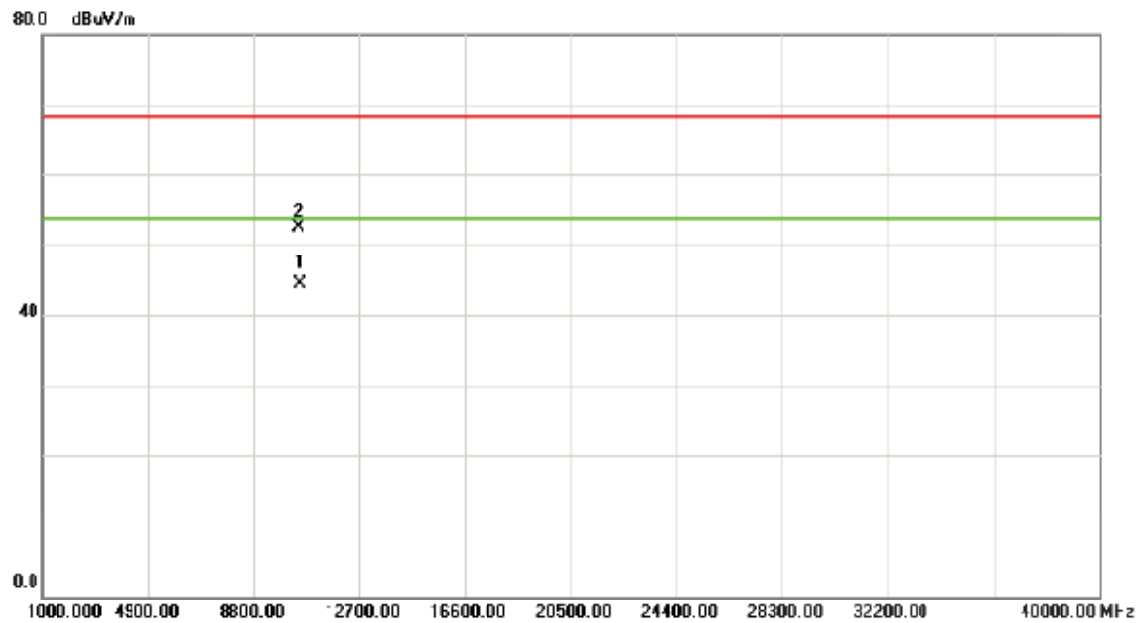

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10462.00	28.43	15.88	44.31	54.00	-9.69	AVG	
2		10463.00	36.73	15.88	52.61	68.30	-15.69	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(20 MHz) Mode 5180MHz


Vertical

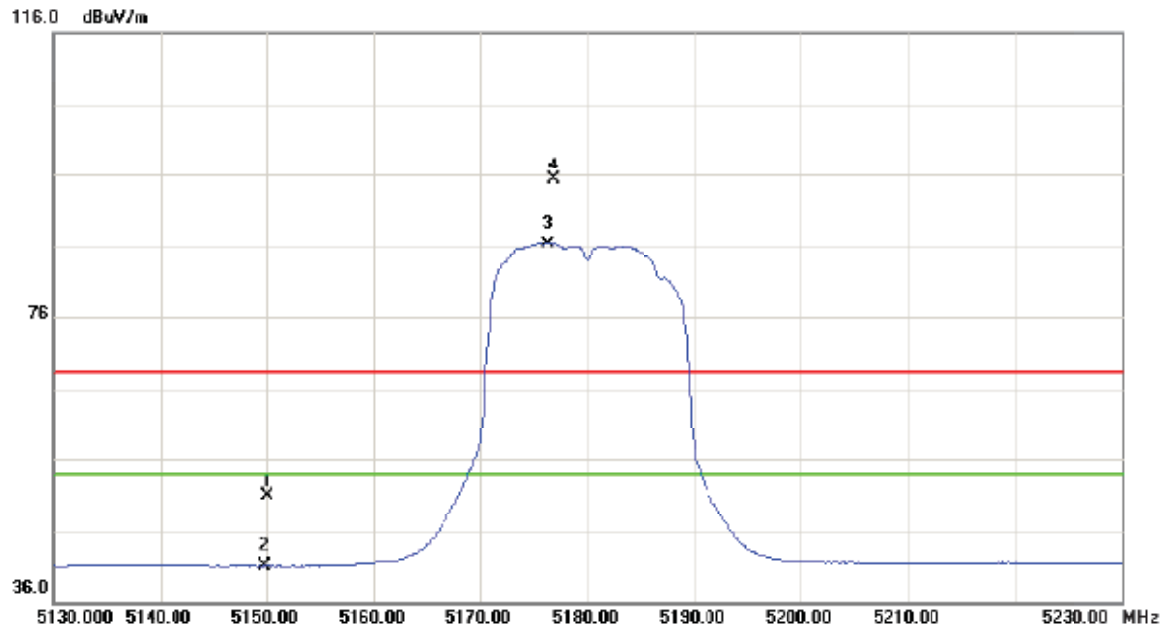

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	cBuV/m	dBuV/m	dB		
1		5150.000	8.09	42.72	50.81	68.30	-17.49	peak	
2		5150.000	-1.52	42.72	41.20	54.00	-12.80	AVG	
3	*	5176.300	43.51	42.78	86.29	54.00	32.29	AVG	
4	X	5176.900	52.48	42.78	95.26	68.30	26.96	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(20 MHz) Mode 5180MHz


Vertical

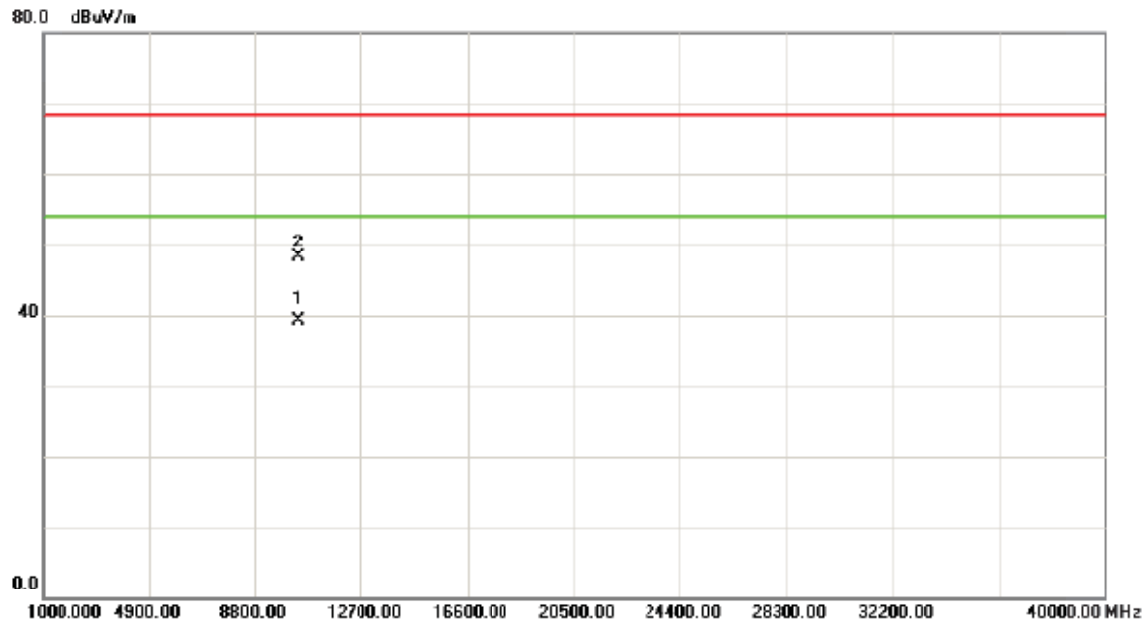

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	cDuV	dD	dDuV/m	dDuV/m	dD	Detector	Comment
1	*	10362.00	23.36	16.02	39.38	54.00	-14.62	AVG	
2		10364.00	32.08	16.02	48.10	68.30	-20.20	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(20 MHz) Mode 5180MHz


Horizontal

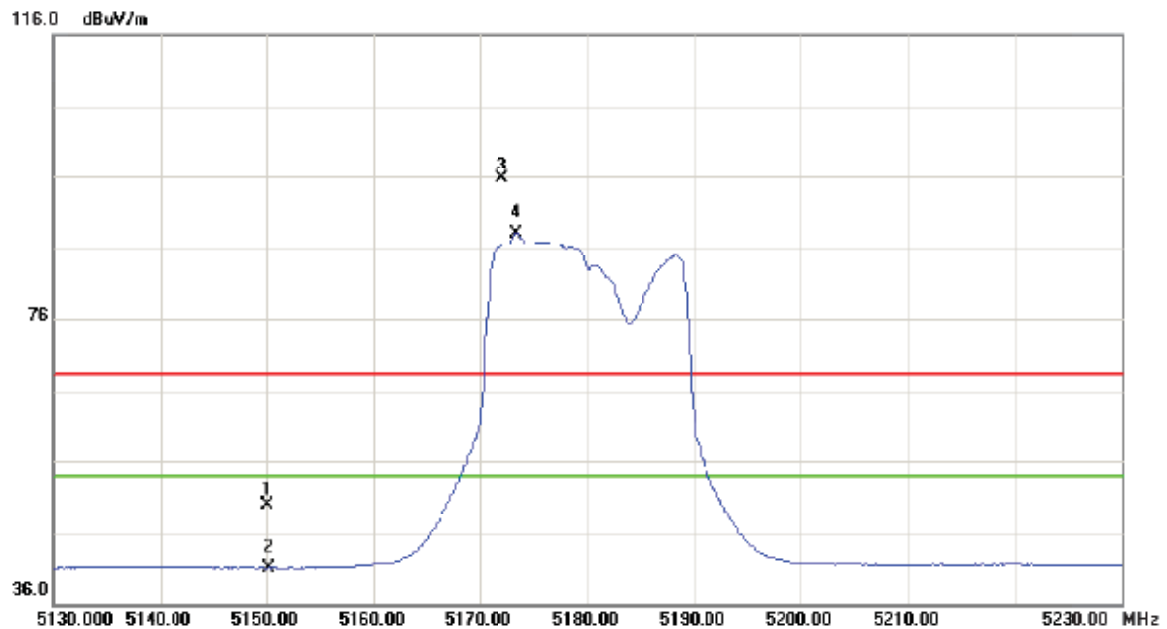

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	7.24	42.72	49.96	68.30	-18.34	peak	
2		5150.000	-1.53	42.72	41.19	54.00	-12.81	AVG	
3	X	5172.100	52.88	42.78	95.66	68.30	27.36	peak	
4	*	5173.400	45.34	42.78	88.12	54.00	34.12	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(20 MHz) Mode 5180MHz


Horizontal

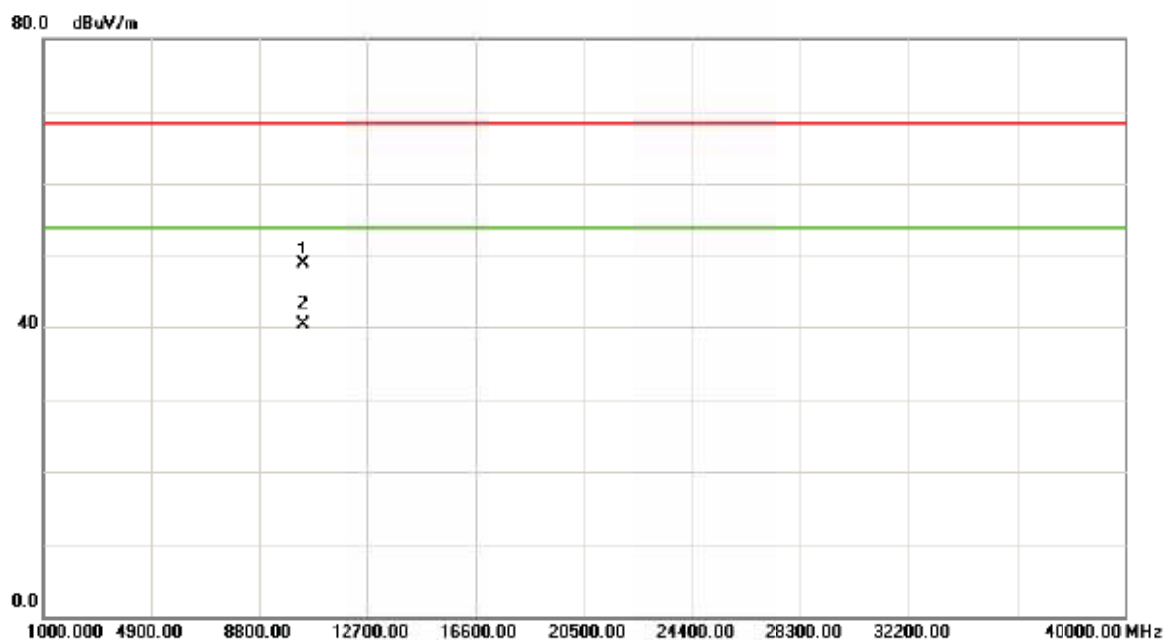

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10364.00	32.74	16.02	48.76	68.30	-19.54	peak	
2	*	10368.00	24.33	16.01	40.34	54.00	-13.66	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(20 MHz) Mode 5200MHz


Vertical

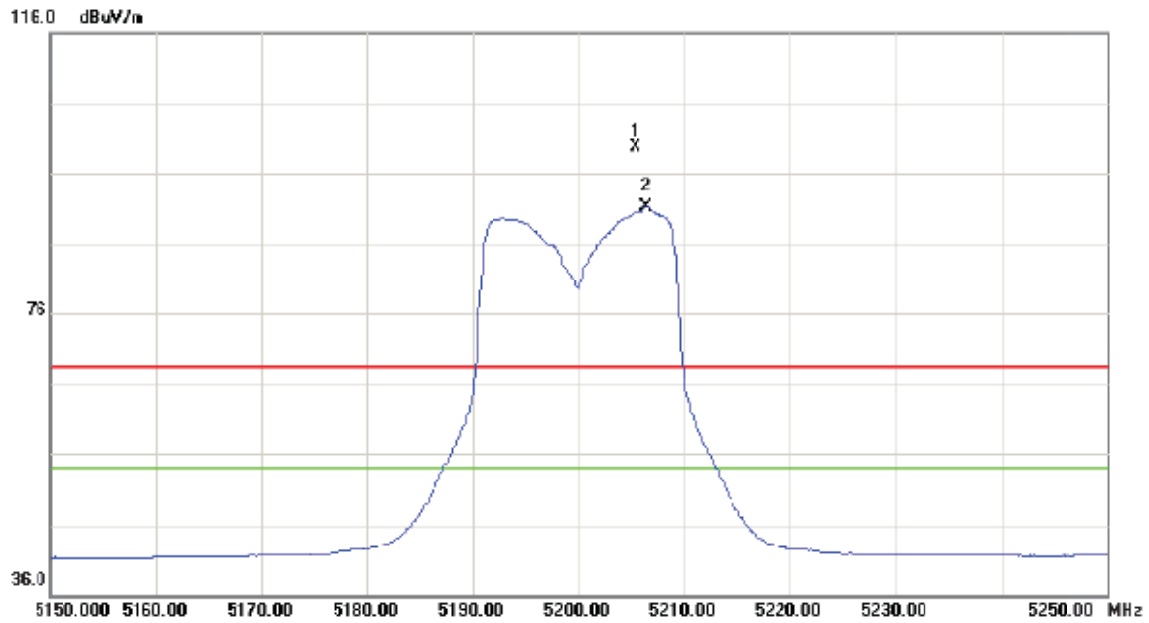

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment				
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5205.400	57.03	42.86	99.89	68.30	31.59	peak	
2	*	5206.500	48.54	42.86	91.40	54.00	37.40	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(20 MHz) Mode 5200MHz


Vertical

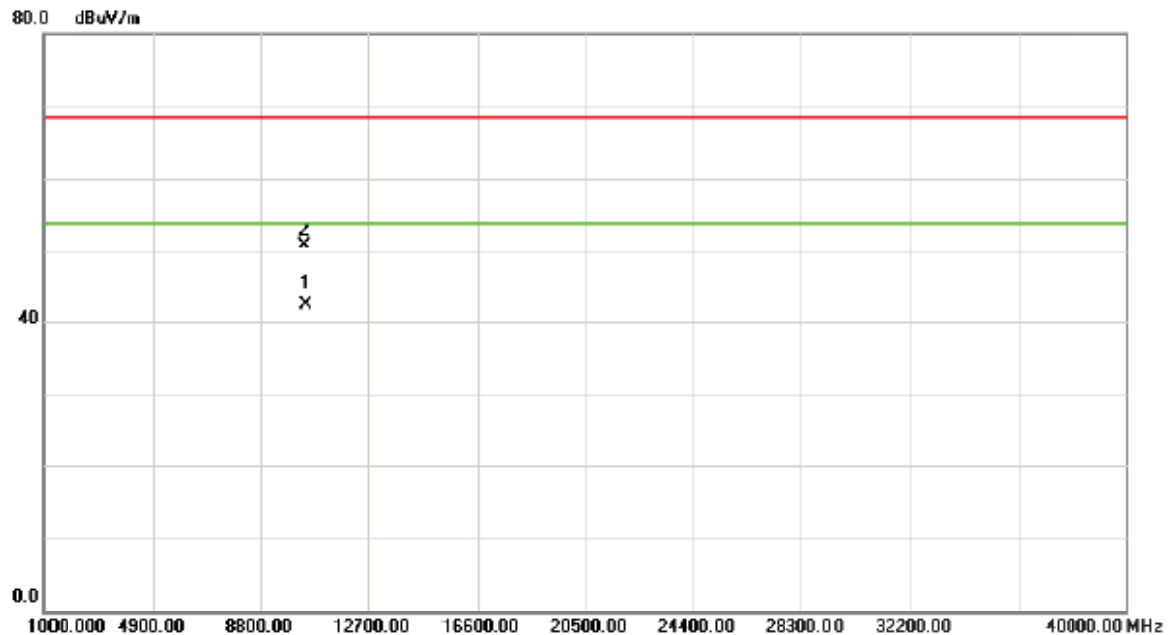

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10403.00	26.35	15.96	42.31	54.00	-11.69	AVG	
2		10406.00	34.97	15.97	50.94	68.30	-17.36	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(20 MHz) Mode 5200MHz


Horizontal

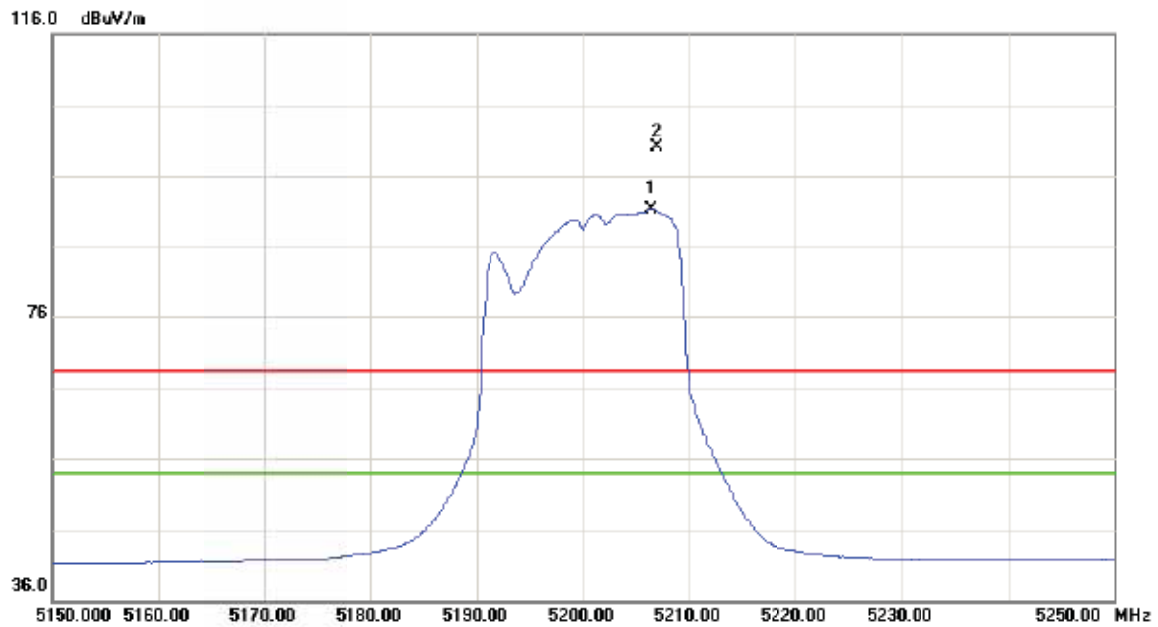

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5206.400	48.51	42.86	91.37	54.00	37.37	AVG	
2	X	5207.000	57.27	42.86	100.13	68.30	31.83	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(20 MHz) Mode 5200MHz


Horizontal

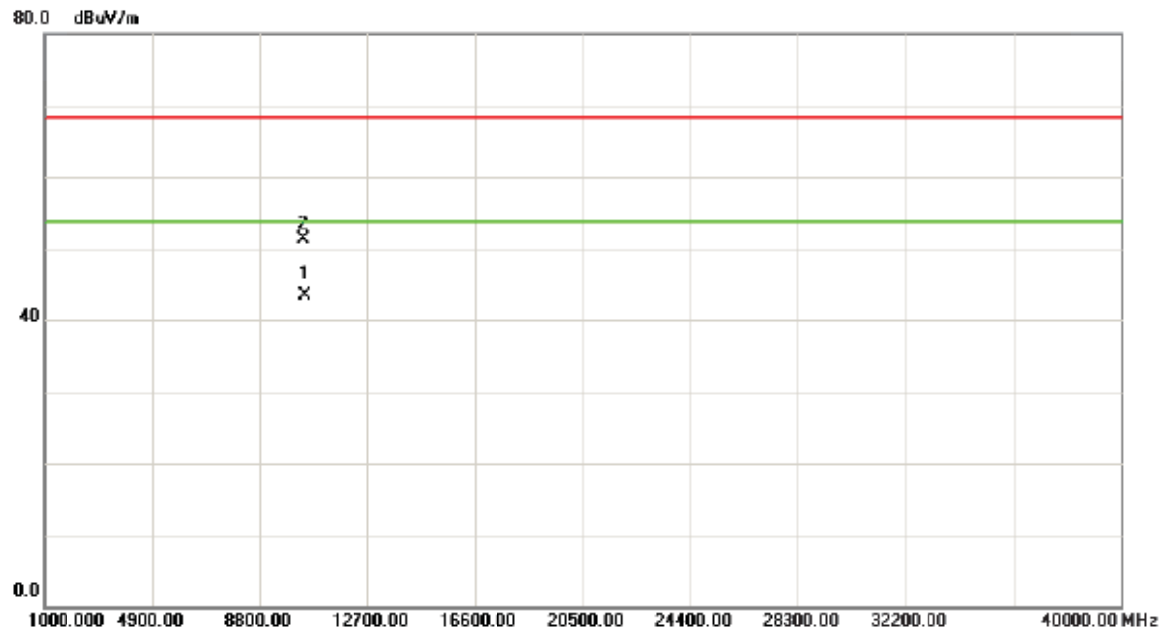

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10403.00	27.33	15.96	43.29	54.00	-10.71	AVG	
2		10405.00	35.62	15.97	51.59	68.30	-16.71	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(20 MHz) Mode 5240MHz


Vertical

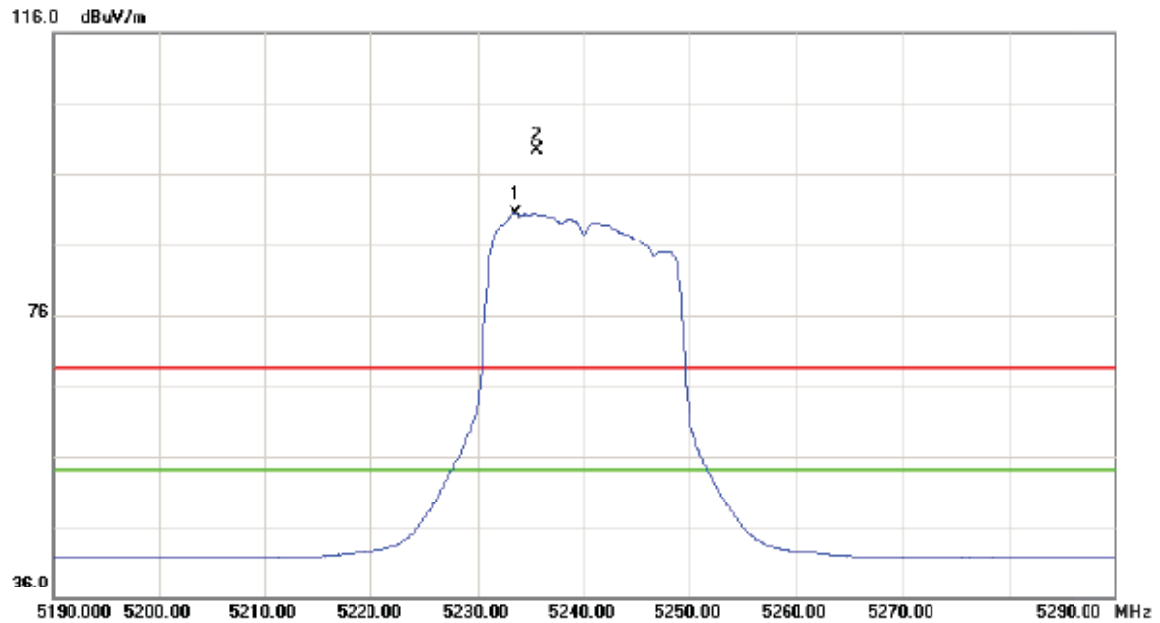

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5233.600	47.35	42.92	90.27	54.00	36.27	AVG	
2	X	5235.700	56.51	42.93	99.44	68.30	31.14	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(20 MHz) Mode 5240MHz


Vertical

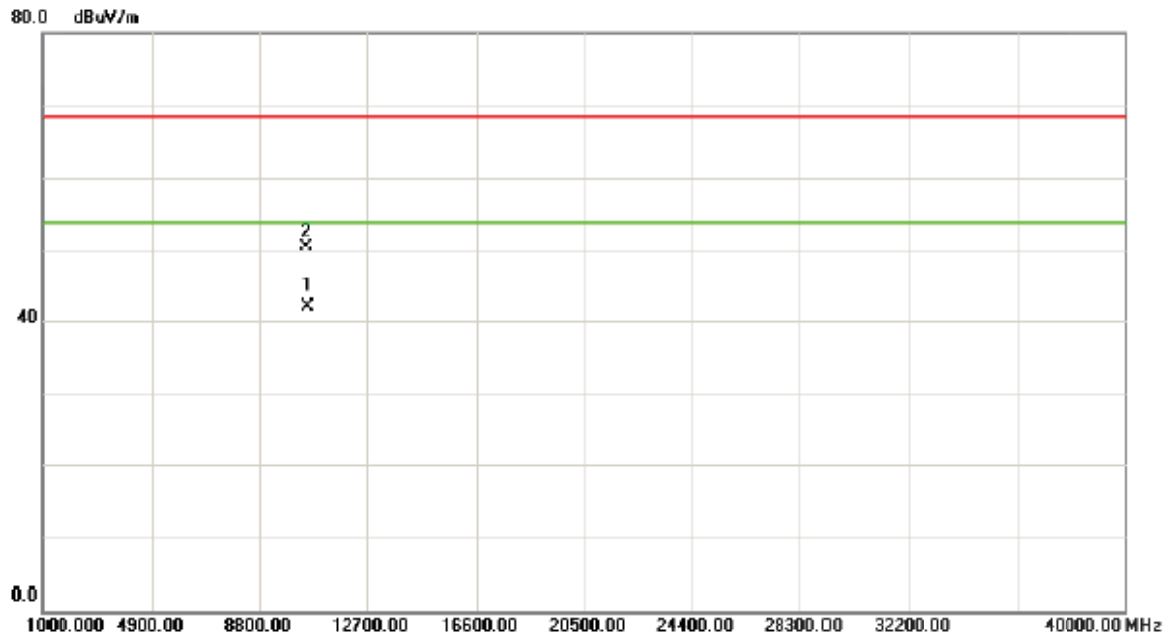

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10482.00	25.98	15.84	41.82	54.00	-12.18	AVG	
2		10485.00	34.63	15.84	50.47	68.30	-17.83	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(20 MHz) Mode 5240MHz


Horizontal

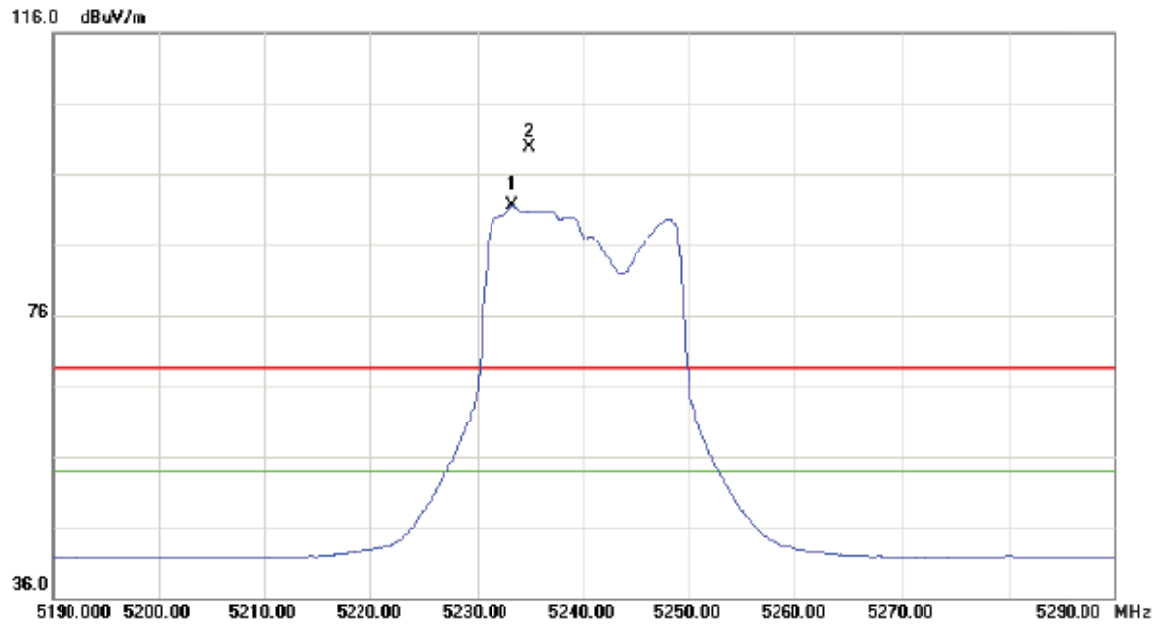

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5233.400	48.85	42.92	91.77	54.00	37.77	AVG	
2	X	5235.000	57.01	42.93	99.94	68.30	31.64	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(20 MHz) Mode 5240MHz


Horizontal

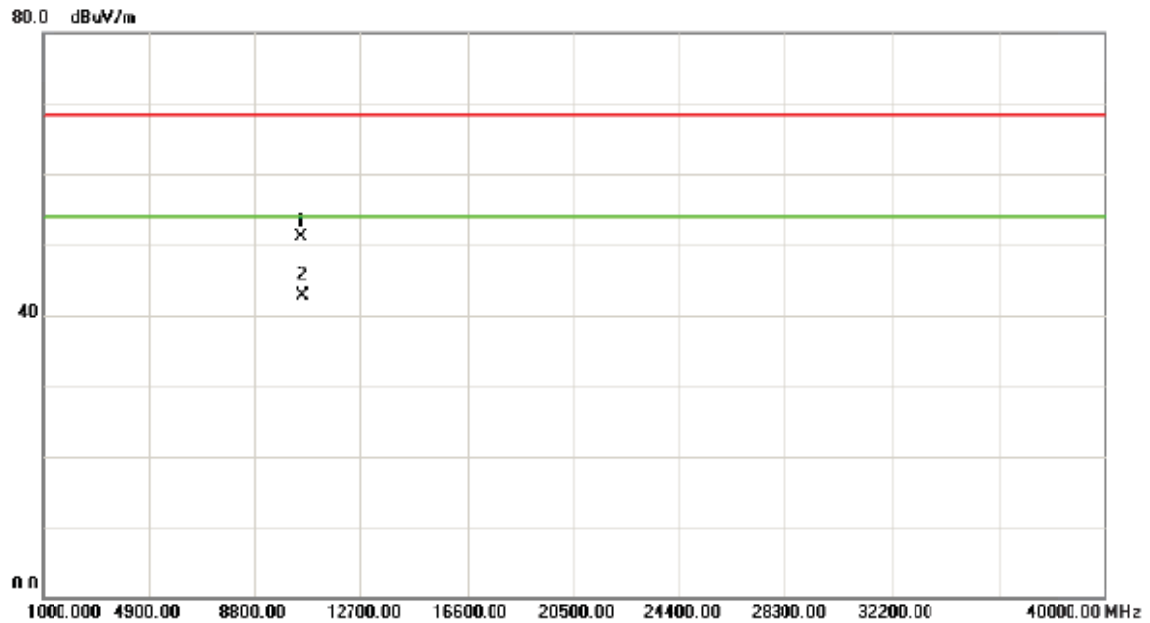

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10483.00	35.24	15.84	51.08	68.30	-17.22	peak	
2	*	10485.00	26.94	15.84	42.78	54.00	-11.22	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(40 MHz) Mode 5190MHz


Vertical

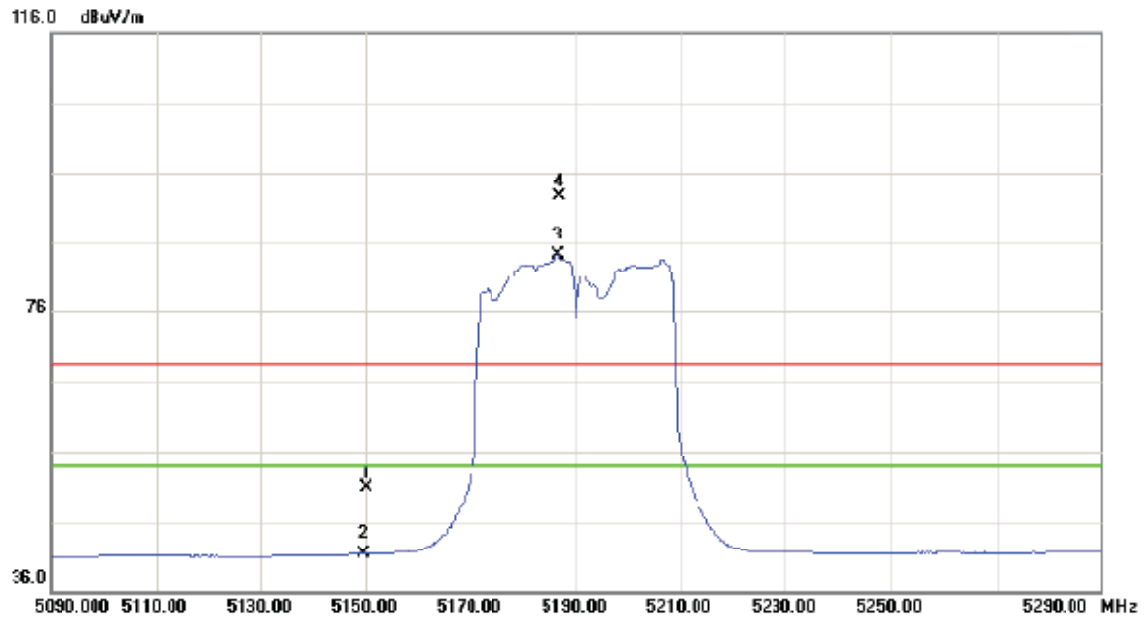

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	8.19	42.72	50.91	68.30	-17.39	peak	
2		5150.000	-1.25	42.72	41.47	54.00	-12.53	AVG	
3	*	5186.600	41.31	42.81	84.12	54.00	30.12	AVG	
4	X	5187.000	49.89	42.81	92.70	68.30	24.40	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(40 MHz) Mode 5190MHz


Vertical

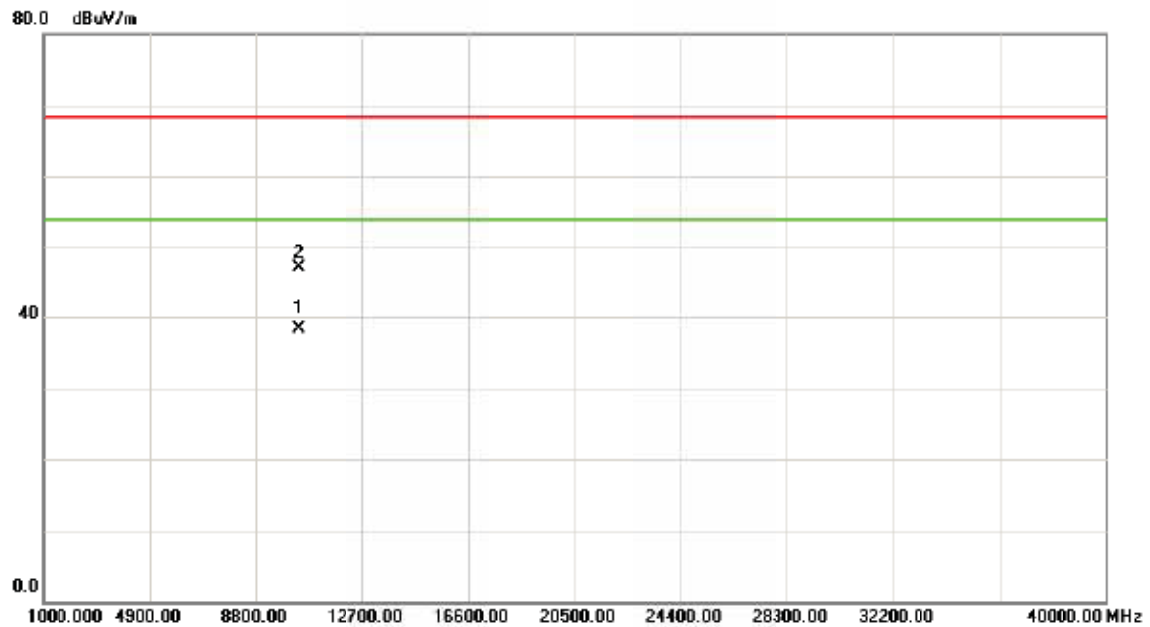

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10384.00	22.27	15.98	38.25	54.00	-15.75	AVG	
2		10386.00	30.84	15.98	46.82	68.30	-21.48	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(40 MHz) Mode 5190MHz


Horizontal

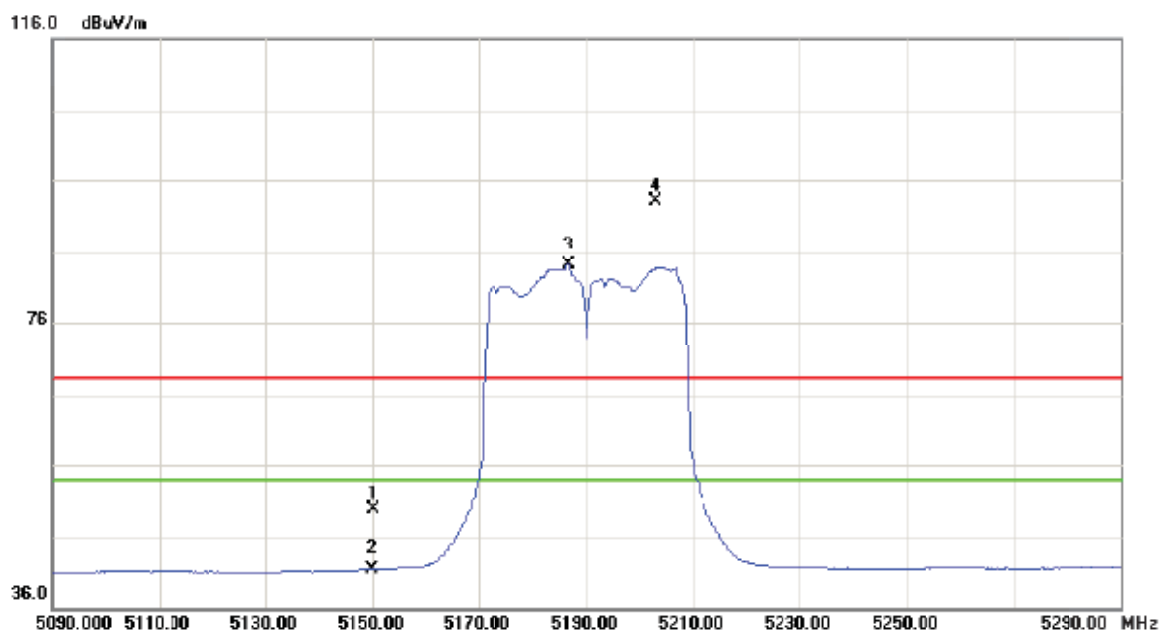

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	7.10	42.72	49.82	68.30	-18.48	peak	
2		5150.000	-1.28	42.72	41.44	54.00	-12.56	AVG	
3	*	5186.600	41.22	42.81	84.03	54.00	30.03	AVG	
4	X	5202.800	50.27	42.84	93.11	68.30	24.81	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(40 MHz) Mode 5190MHz


Horizontal

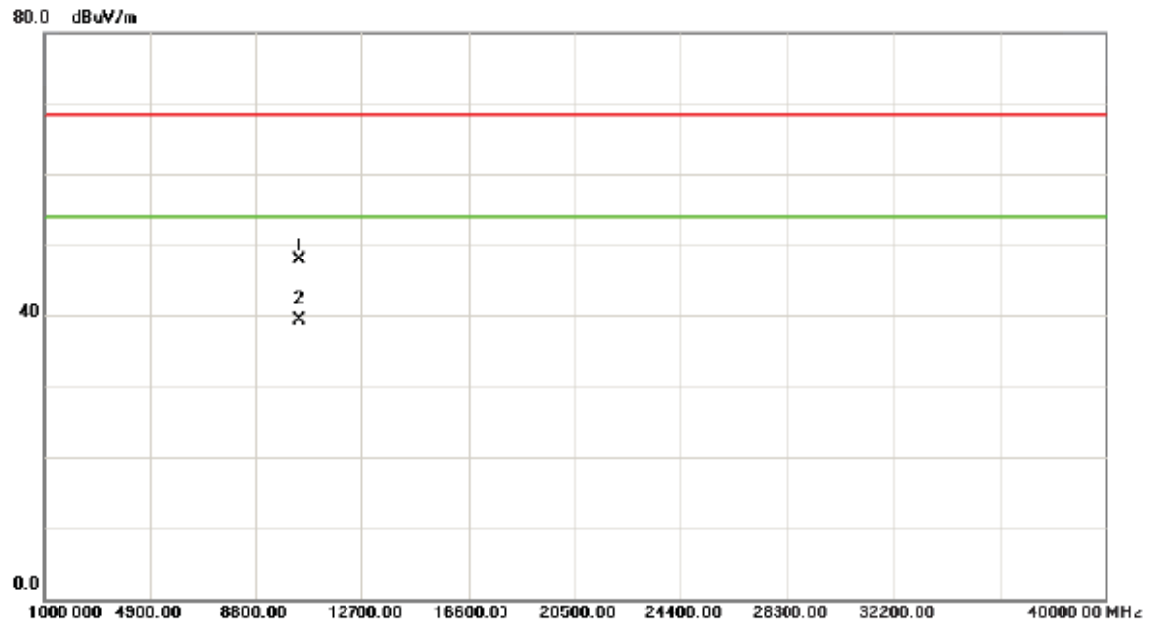

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10385.00	31.65	15.98	47.63	68.30	-20.67	peak	
2	*	10385.00	23.28	15.98	39.26	54.00	-14.74	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(40 MHz) Mode 5230MHz


Vertical

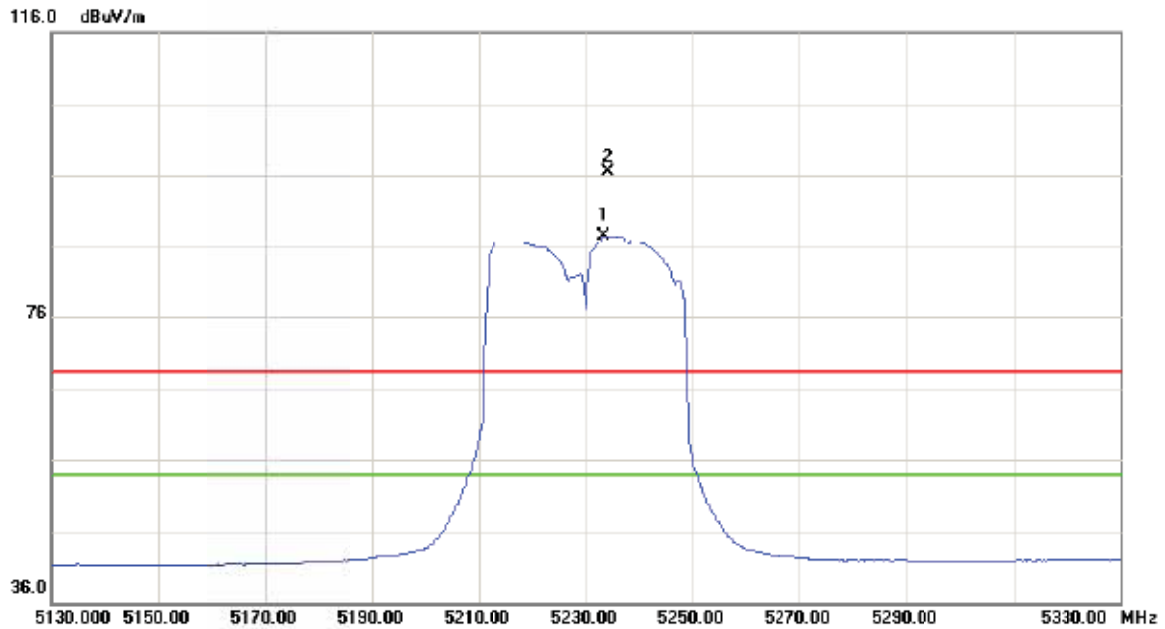

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5233.400	44.67	42.92	87.59	54.00	33.59	AVG	
2	X	5234.200	53.64	42.92	96.56	68.30	28.26	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(40 MHz) Mode 5230MHz


Vertical

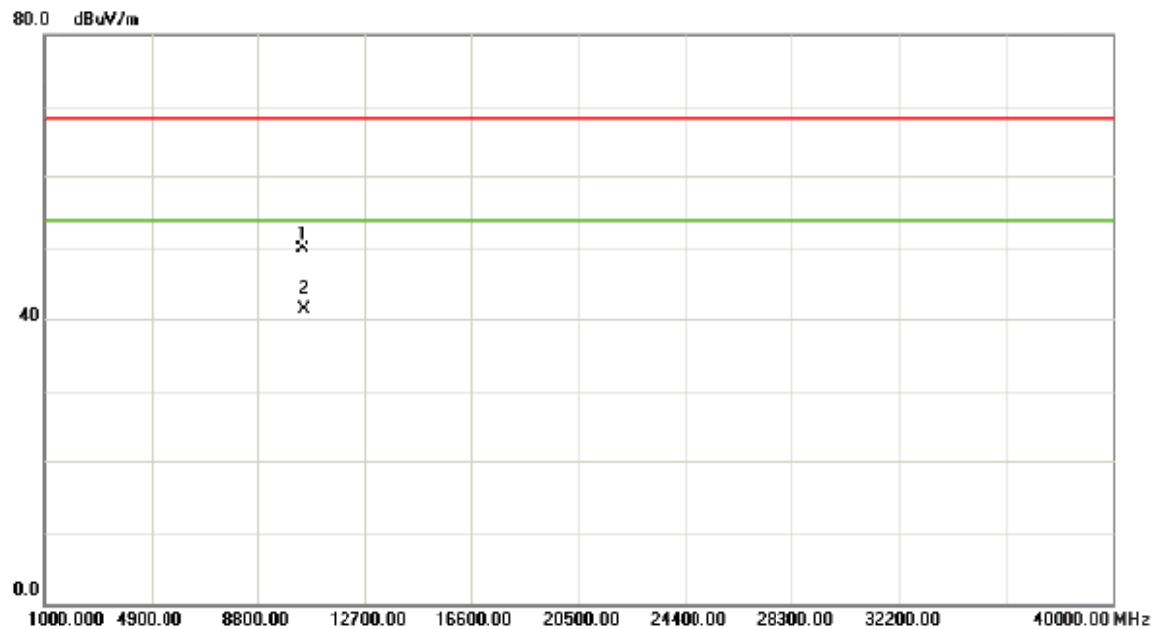

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10463.00	33.98	15.88	49.86	68.30	-18.44	peak	
2	*	10465.00	25.36	15.87	41.23	54.00	-12.77	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(40 MHz) Mode 5230MHz


Horizontal

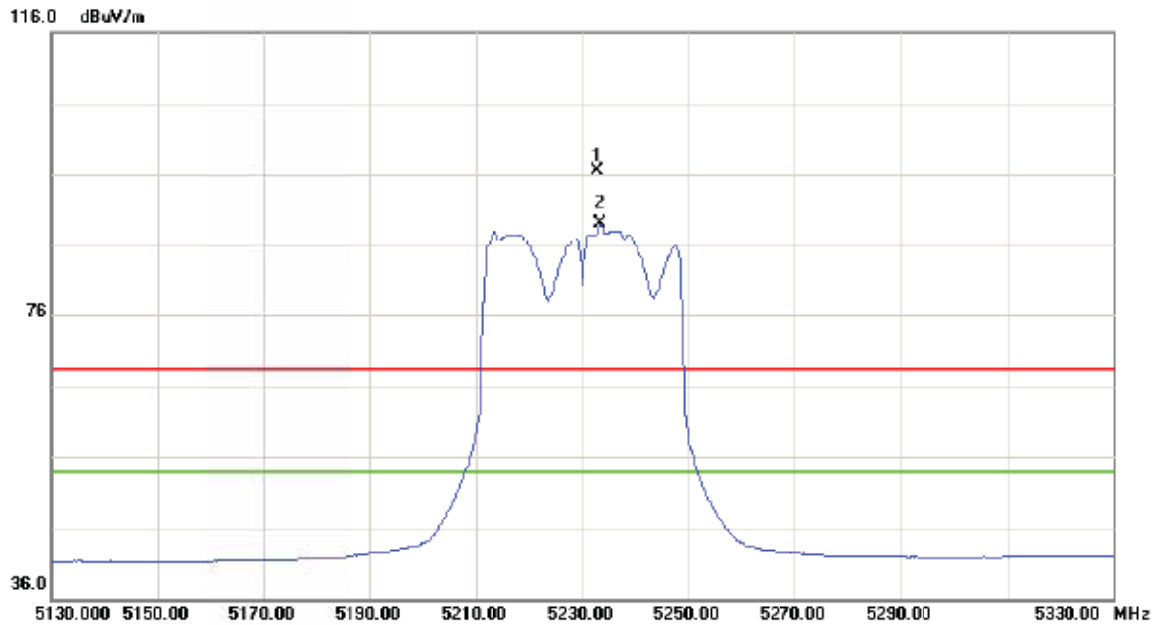

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5232.800	53.65	42.92	96.57	68.30	28.27	peak	
2	*	5233.400	46.10	42.92	89.02	54.00	35.02	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(40 MHz) Mode 5230MHz


Horizontal

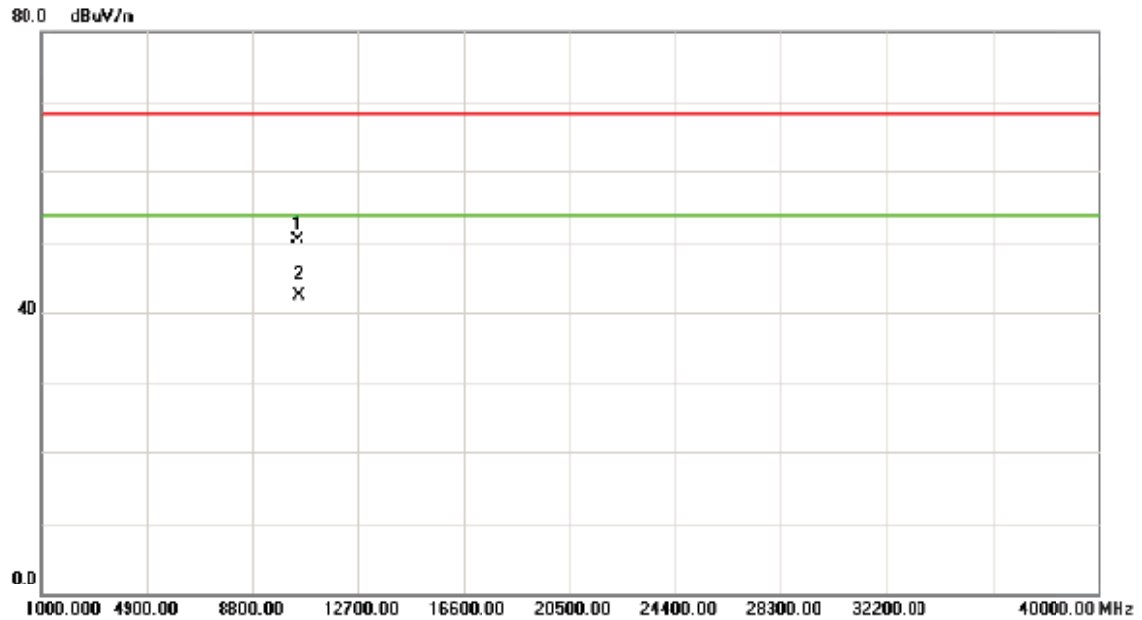

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10462.00	34.68	15.88	50.56	68.30	-17.74	peak	
2	*	10465.00	26.35	15.87	42.22	54.00	-11.78	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(80 MHz) Mode 5210MHz


Vertical

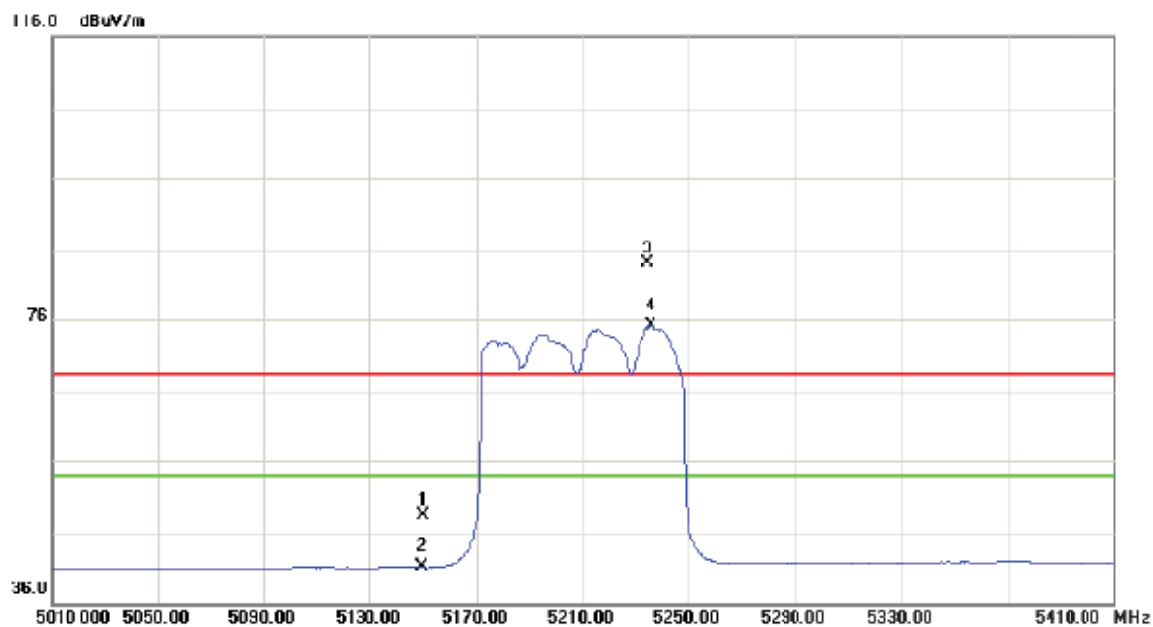

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	5.76	42.72	48.48	68.30	-19.82	peak	
2		5150.000	-1.49	42.72	41.23	54.00	-12.77	AVG	
3	X	5234.400	41.13	42.93	84.06	68.30	15.76	peak	
4	*	5235.600	32.22	42.93	75.15	54.00	21.15	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(80 MHz) Mode 5210MHz


Vertical

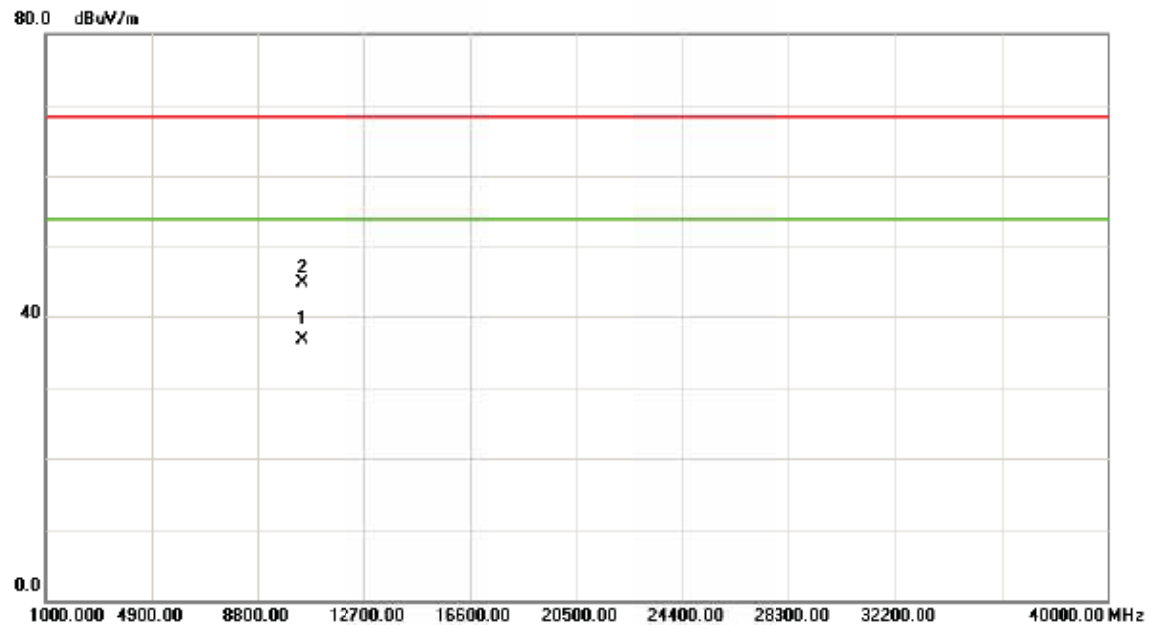

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10426.00	20.75	15.93	36.68	54.00	-17.32	AVG	
2		10427.00	28.84	15.93	44.77	68.30	-23.53	peak	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(80 MHz) Mode 5210MHz


Horizontal

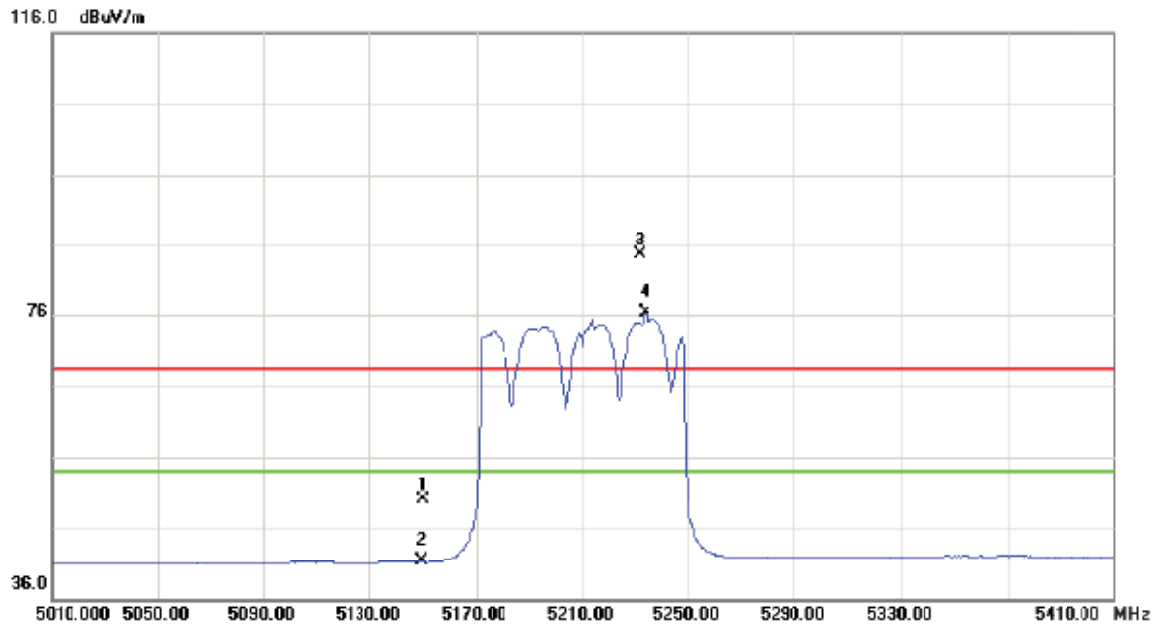

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	7.11	42.72	49.83	68.30	-18.47	peak	
2		5150.000	-1.46	42.72	41.26	54.00	-12.74	AVG	
3	X	5231.600	41.49	42.92	84.41	68.30	16.11	peak	
4	*	5233.600	33.38	42.92	76.30	54.00	22.30	AVG	

Orthogonal Axis :	X
Test Mode :	Band 1/ TX ac(80 MHz) Mode 5210MHz


Horizontal

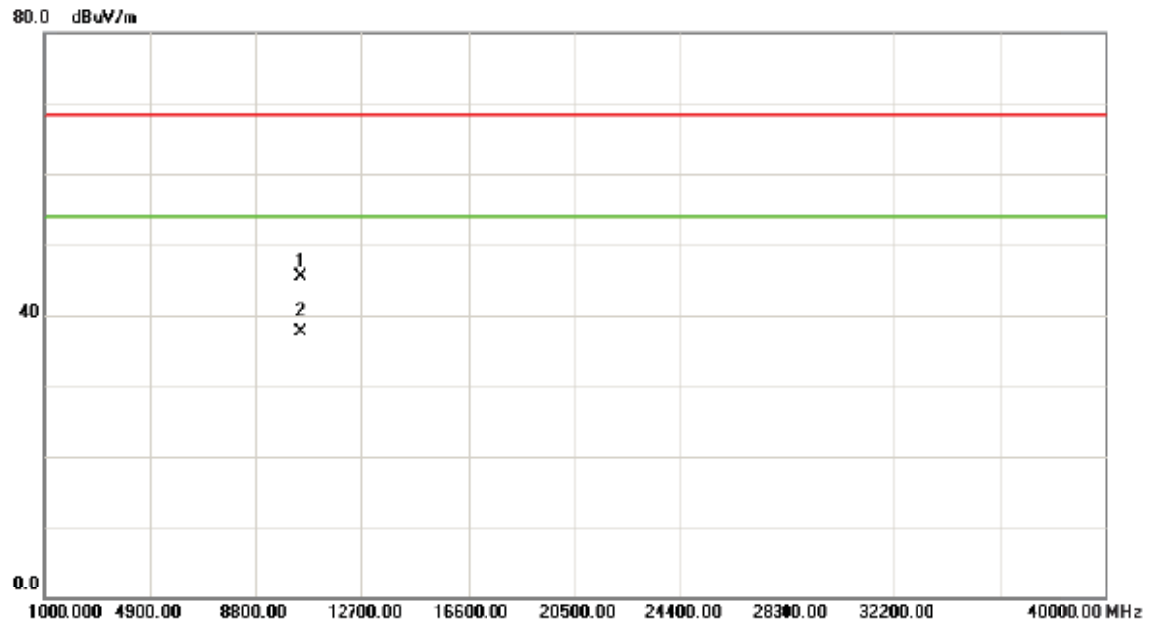

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10425.00	29.33	15.93	45.26	68.30	-23.04	peak	
2	*	10426.00	21.83	15.93	37.76	54.00	-16.24	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11a Mode 5260MHz


Vertical

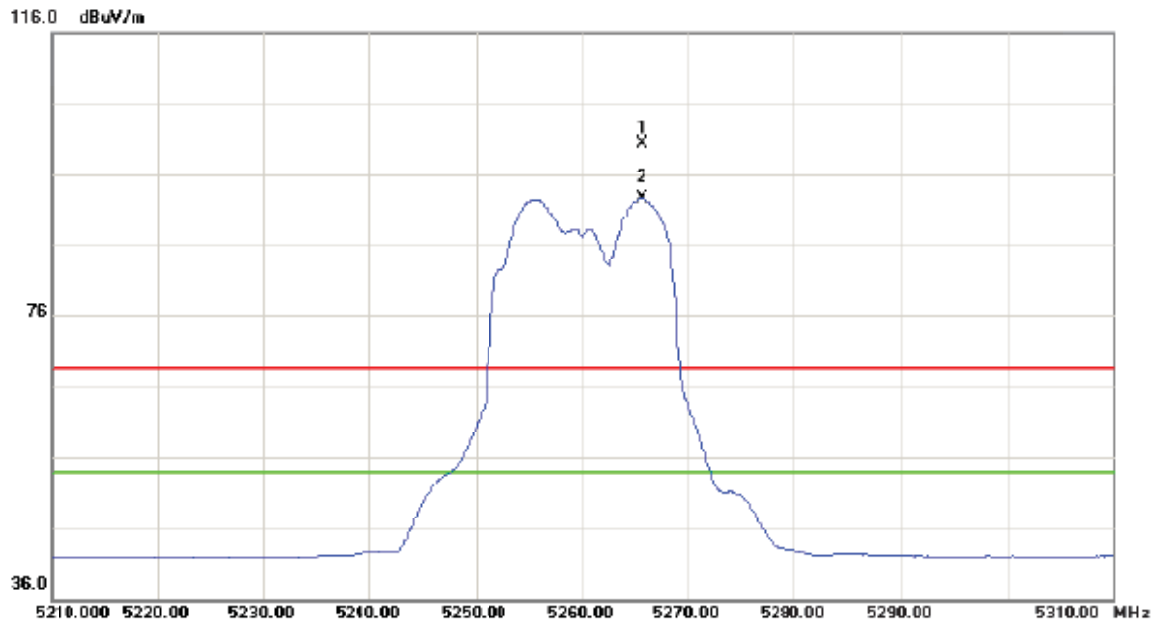

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5265.600	57.23	43.00	100.23	68.30	31.93	peak	
2	*	5265.700	49.78	43.01	92.79	54.00	38.79	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11a Mode 5260MHz


Vertical

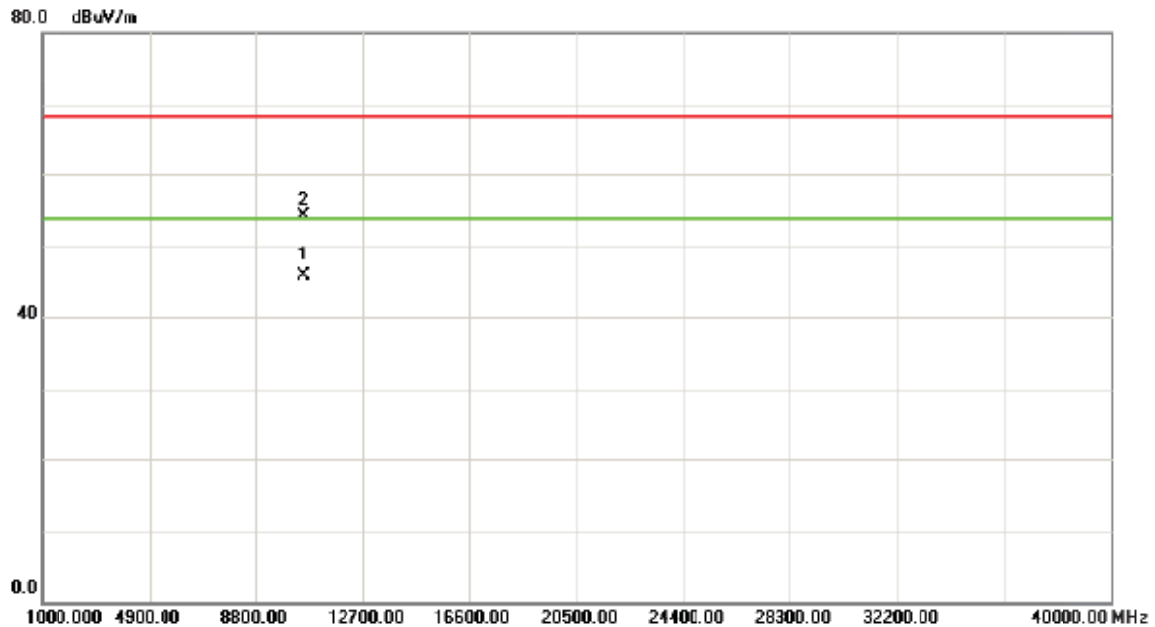

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10524.00	29.75	15.90	45.65	54.00	-8.35	AVG	
2		10527.00	38.39	15.89	54.28	68.30	-14.02	peak	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11a Mode 5260MHz


Horizontal

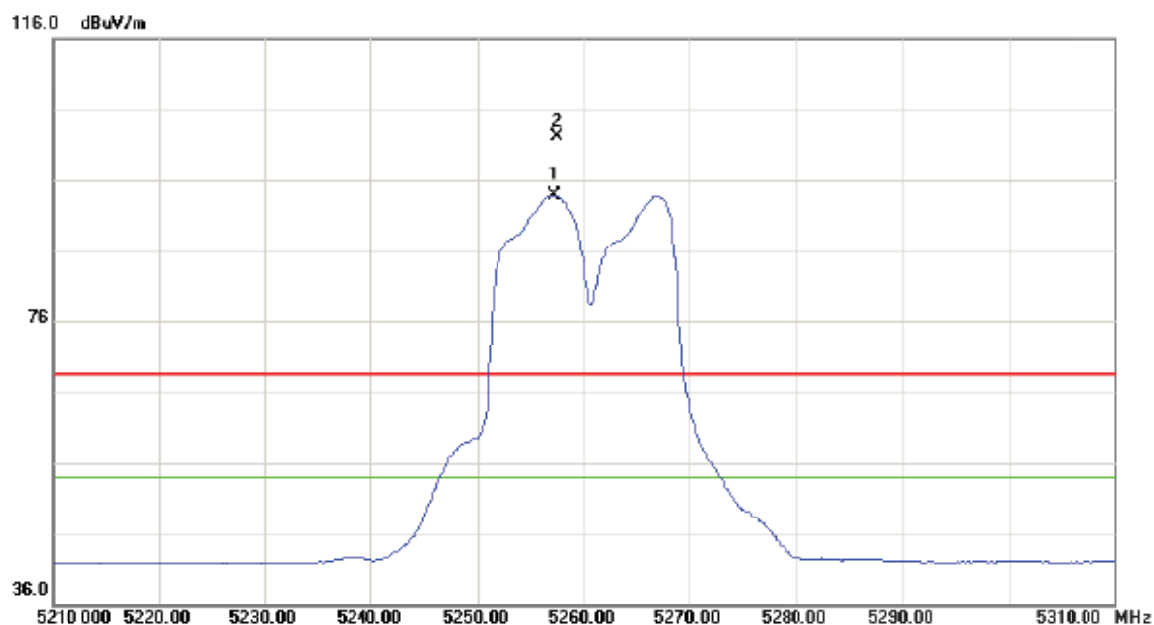

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5257.200	50.88	42.98	93.86	54.00	39.86	AVG	
2	X	5257.500	59.18	42.98	102.16	68.30	33.86	peak	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11a Mode 5260MHz


Horizontal

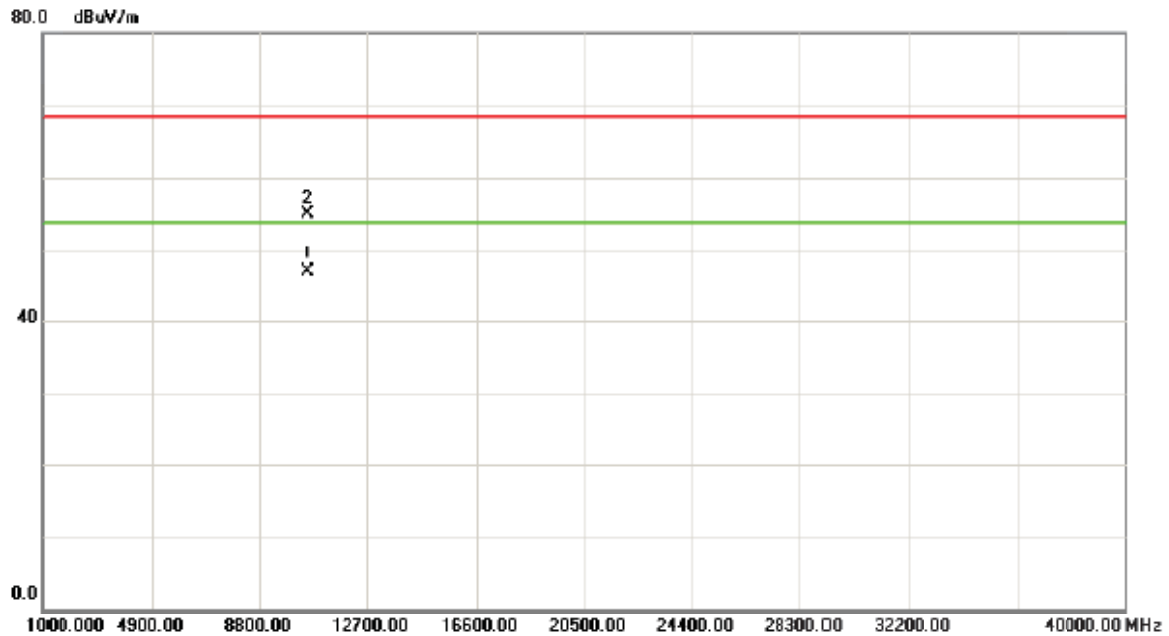

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10523.00	30.74	15.90	46.64	54.00	-7.36	AVG	
2		10526.00	39.15	15.89	55.04	68.30	-13.26	peak	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11a Mode 5280MHz


Vertical

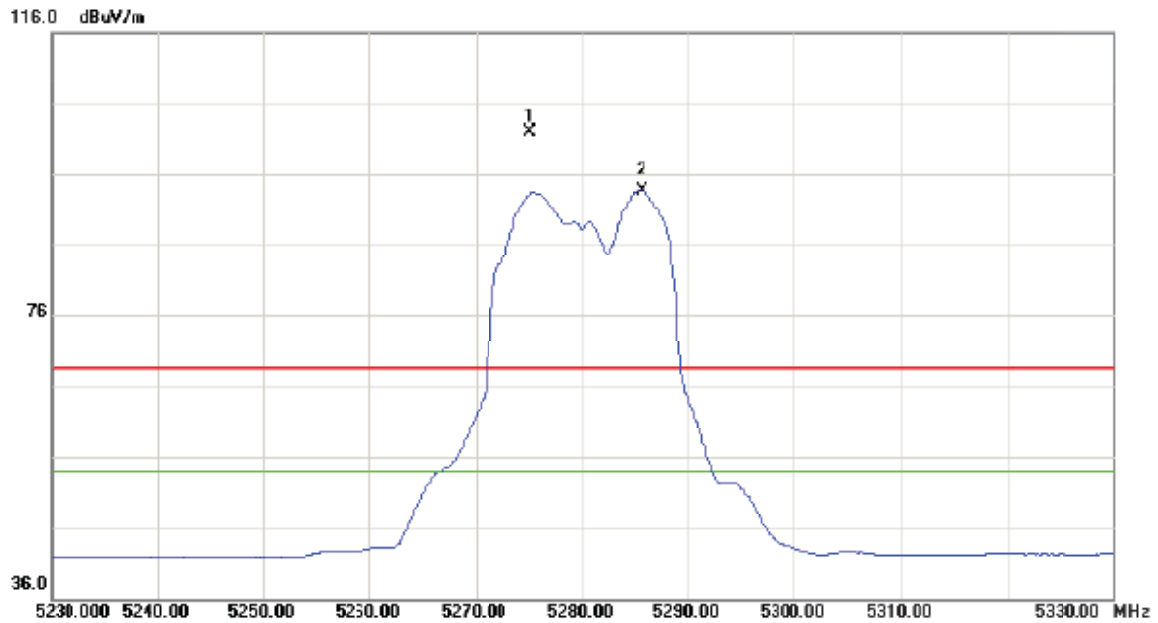

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5275.100	58.80	43.03	101.83	68.30	33.53	peak	
2	*	5285.600	50.60	43.06	93.66	54.00	39.66	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11a Mode 5280MHz


Vertical

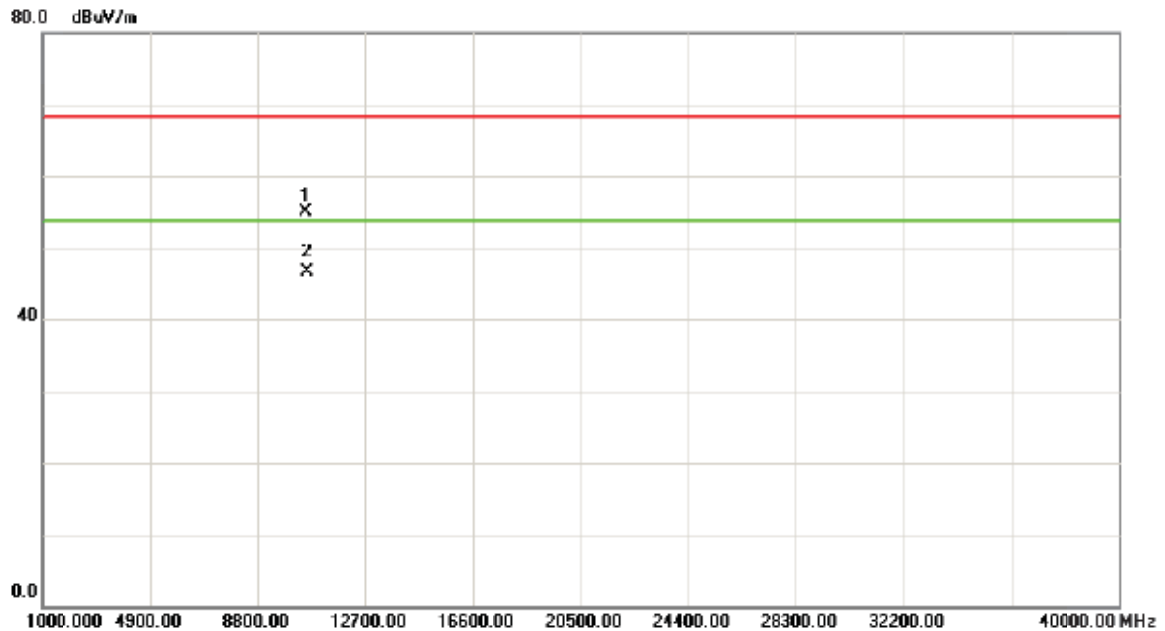

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10562.00	39.15	16.00	55.15	68.30	-13.15	peak	
2	*	10563.00	30.52	16.00	46.52	54.00	-7.48	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11a Mode 5280MHz


Horizontal

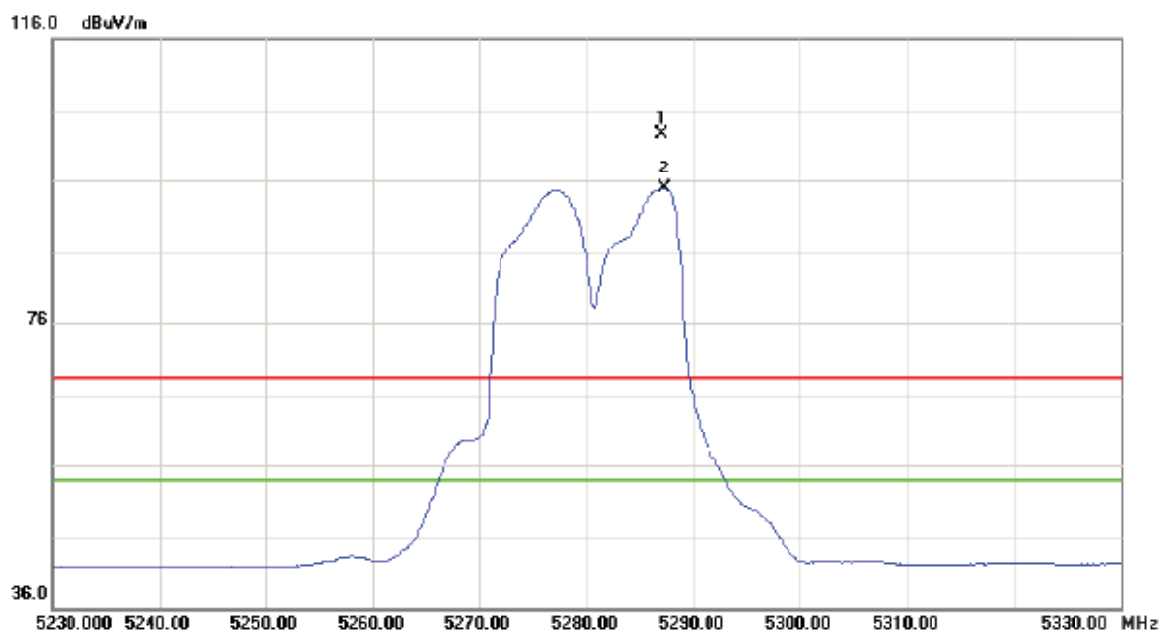

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5287.000	59.67	43.06	102.73	68.30	34.43	peak	
2	*	5287.200	51.86	43.06	94.92	54.00	40.92	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11a Mode 5280MHz


Horizontal

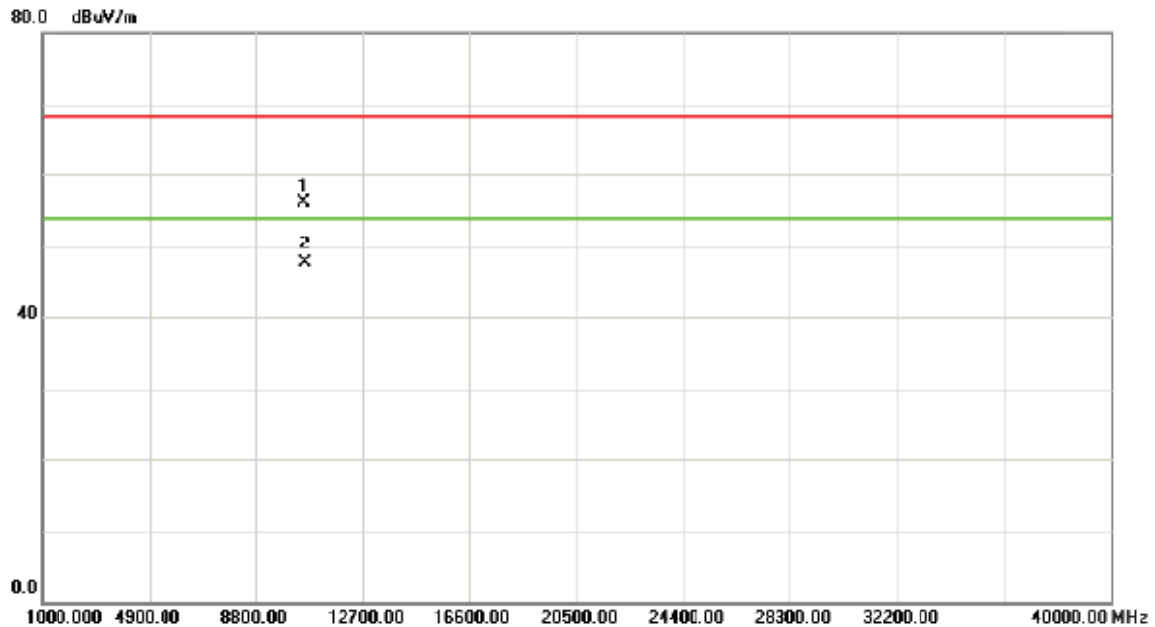

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10564.00	40.16	16.00	56.16	68.30	-12.14	peak	
2	*	10564.00	31.52	16.00	47.52	54.00	-6.48	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11a Mode 5320MHz


Vertical

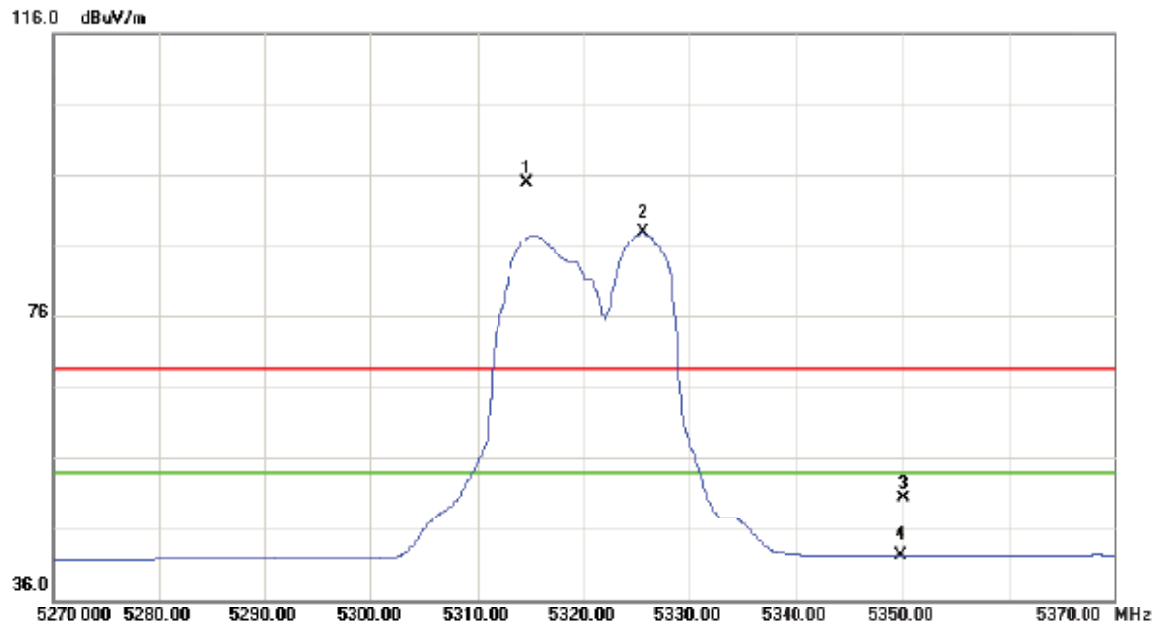

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5314.700	51.85	43.12	94.97	68.30	26.67	peak	
2	*	5325.500	44.67	43.15	87.82	54.00	33.82	AVG	
3		5350.000	7.16	43.21	50.37	68.30	-17.93	peak	
4		5350.000	-1.15	43.21	42.06	54.00	-11.94	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11a Mode 5320MHz


Vertical

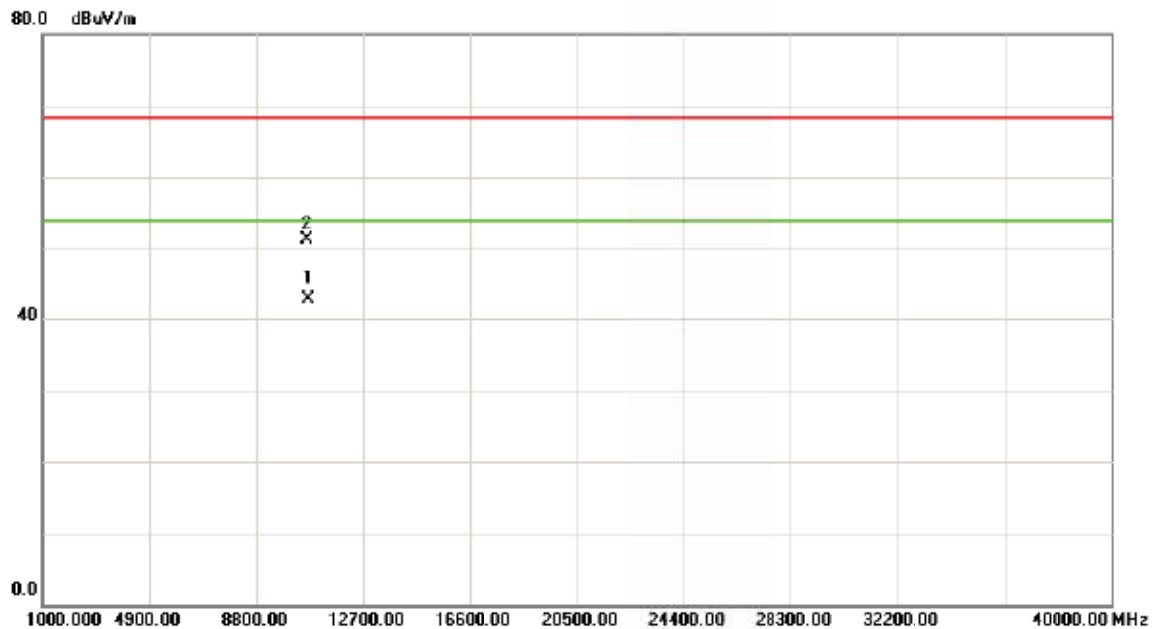

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10642.00	26.42	16.23	42.65	54.00	-11.35	AVG	
2		10645.00	35.01	16.24	51.25	68.30	-17.05	peak	


Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11a Mode 5320MHz

Horizontal

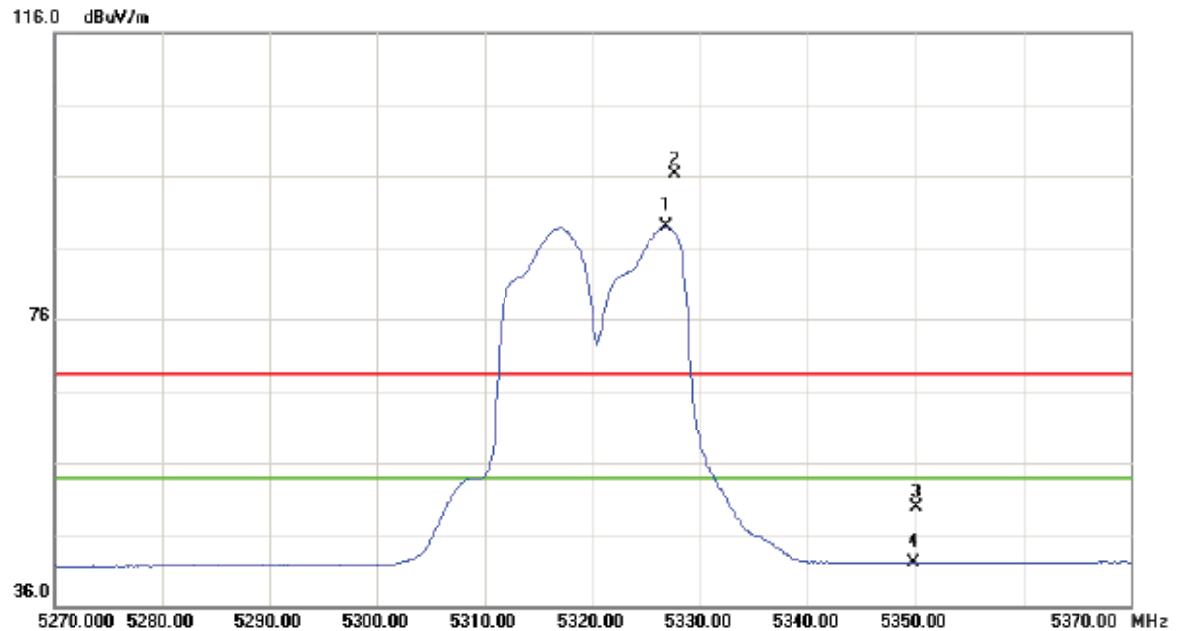

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5326.900	45.94	43.15	89.09	54.00	35.09	AVG	
2	X	5327.600	53.15	43.15	96.30	68.30	28.00	peak	
3		5350.000	6.74	43.21	49.95	68.30	-18.35	peak	
4		5350.000	-1.11	43.21	42.10	54.00	-11.90	AVG	


Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11a Mode 5320MHz

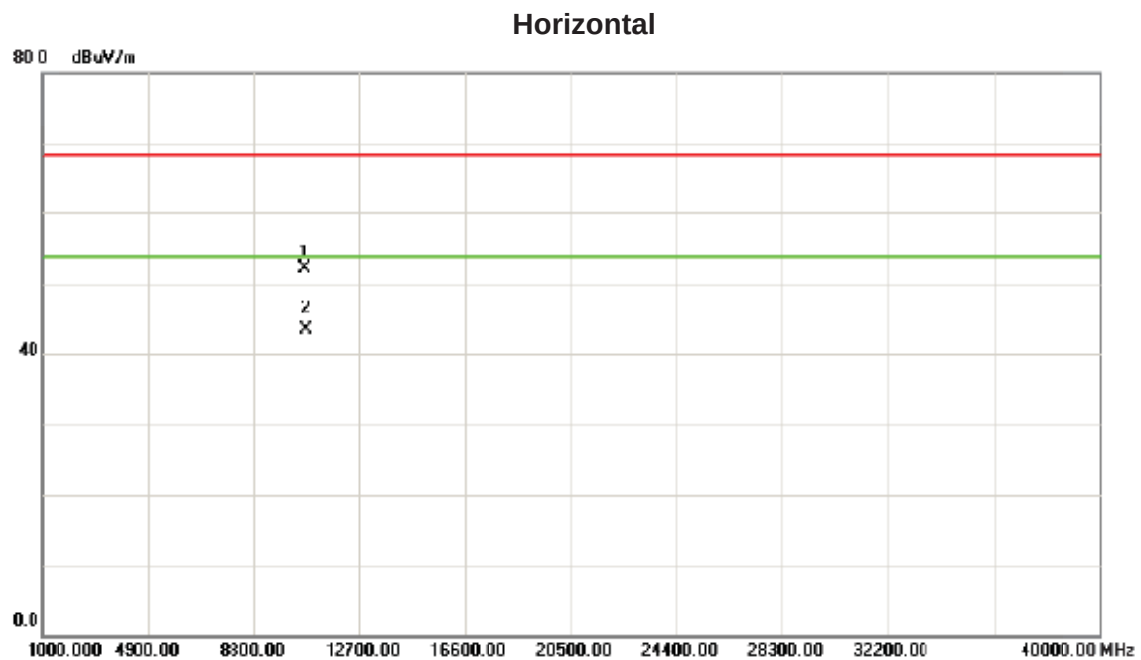

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10642.00	36.03	16.23	52.26	60.30	-16.04	peak	
2	*	10643.00	27.16	16.23	43.39	54.00	-10.61	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(20 MHz) Mode 5260MHz


Vertical

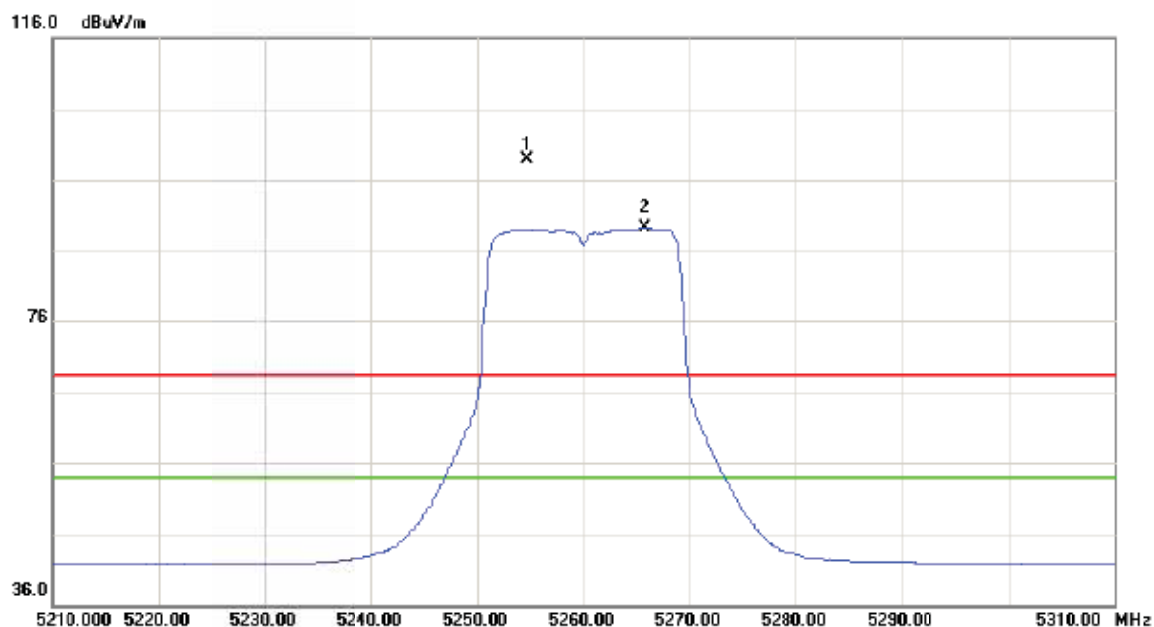

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5254.700	55.93	42.98	98.91	68.30	30.61	peak	
2	*	5265.800	46.31	43.01	89.32	54.00	35.32	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(20 MHz) Mode 5260MHz


Vertical

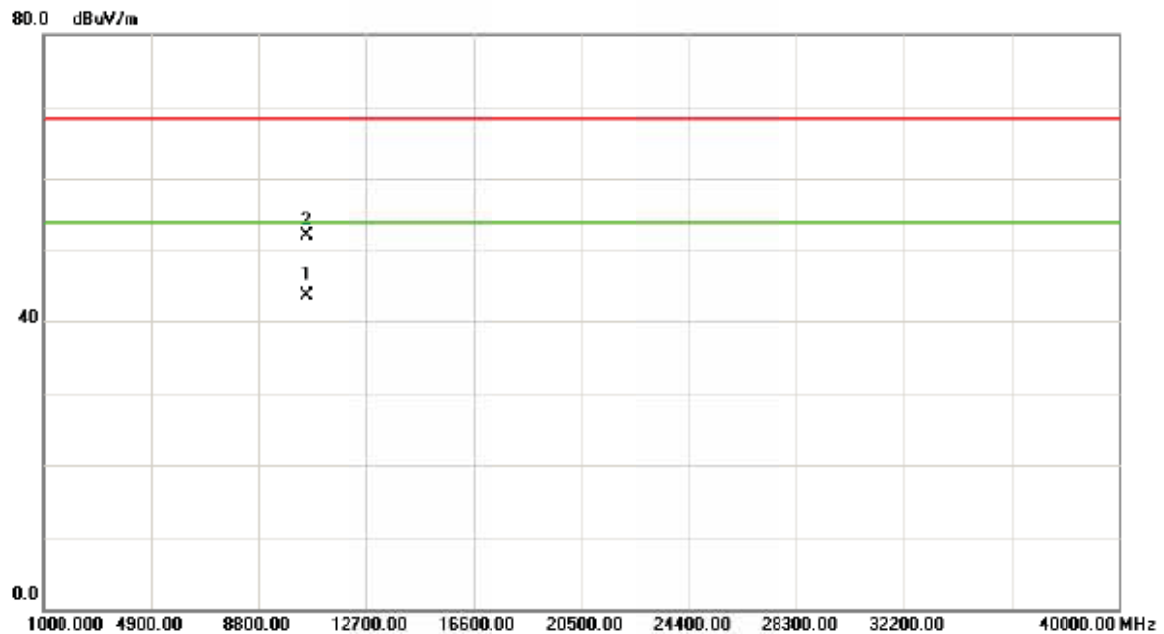

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10521.00	27.63	15.88	43.51	54.00	-10.49	AVG	
2		10523.00	36.29	15.90	52.19	68.30	-16.11	peak	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(20 MHz) Mode 5260MHz


Horizontal

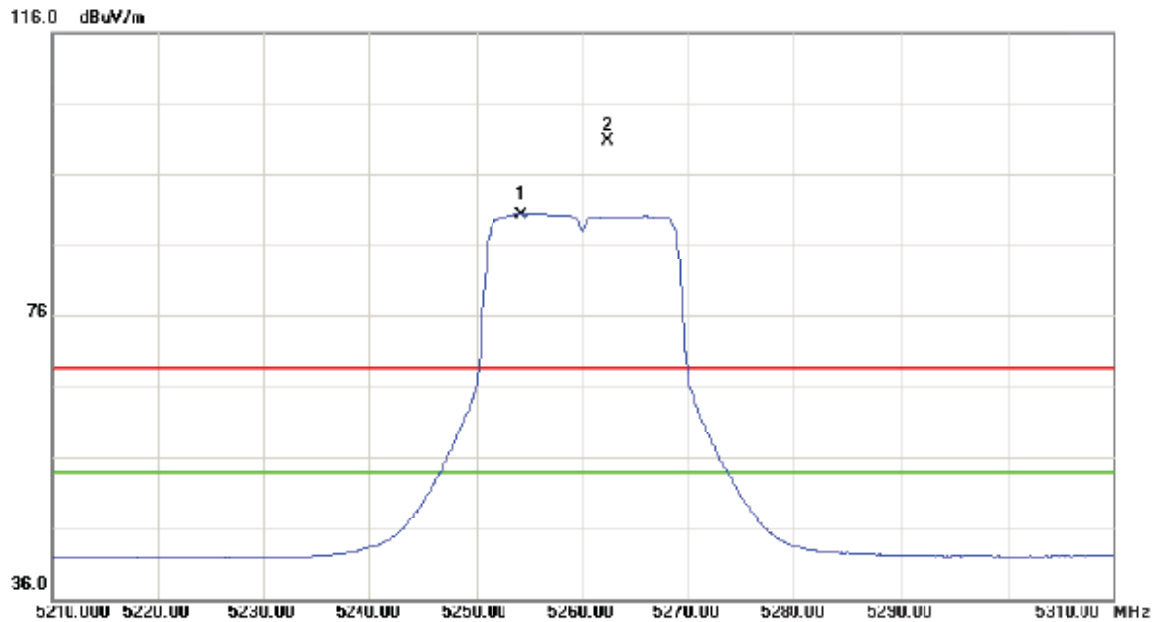

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dE	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5254.300	47.28	42.98	90.26	54.00	36.26	AVG	
2	X	5262.300	57.69	43.00	100.69	68.30	32.39	peak	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(20 MHz) Mode 5260MHz


Horizontal

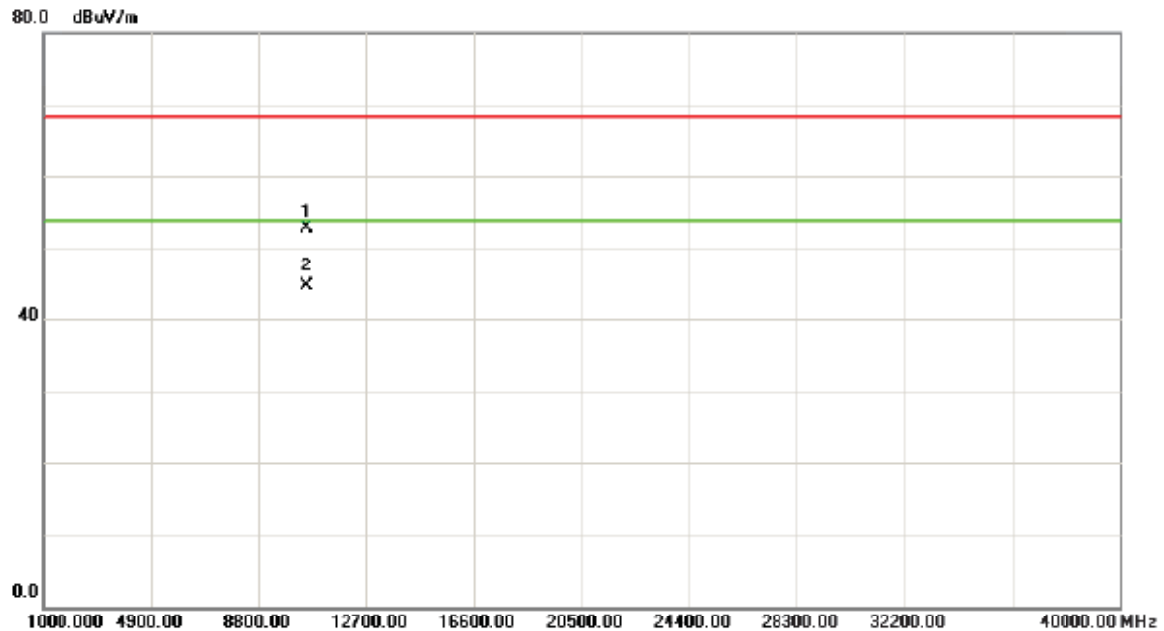

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10523.00	37.09	15.90	52.99	68.30	-15.31	peak	
2	*	10524.00	28.61	15.90	44.51	54.00	-9.49	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(20 MHz) Mode 5280MHz


Vertical

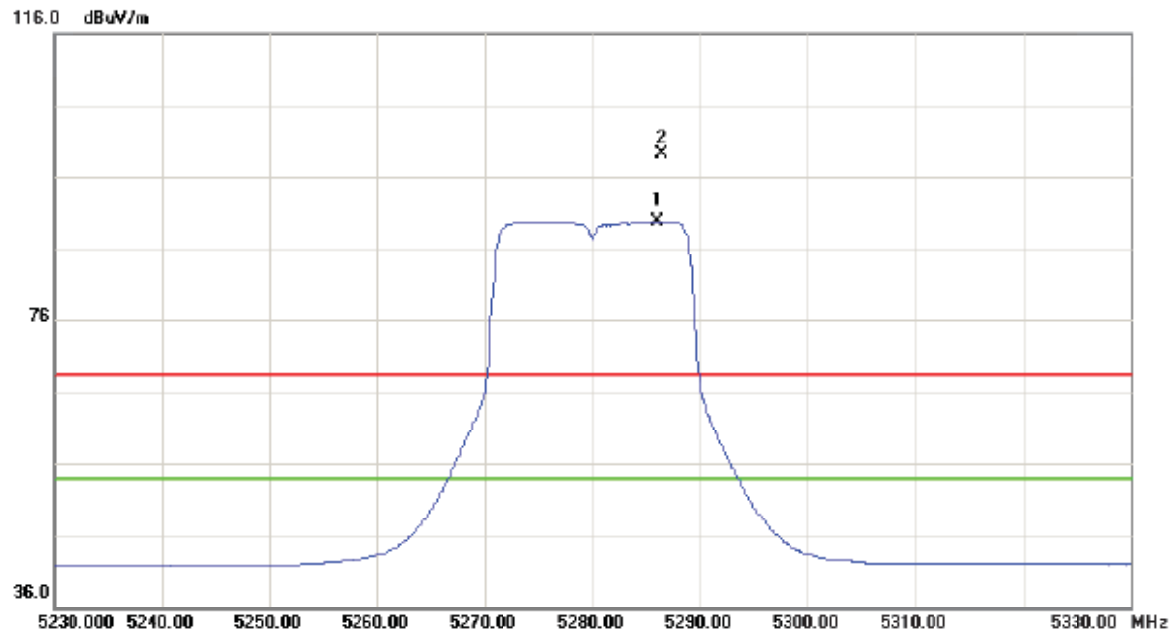

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5286.000	46.89	43.06	89.95	54.00	35.95	AVG	
2	X	5286.500	56.21	43.06	99.27	68.30	30.97	peak	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(20 MHz) Mode 5280MHz


Vertical

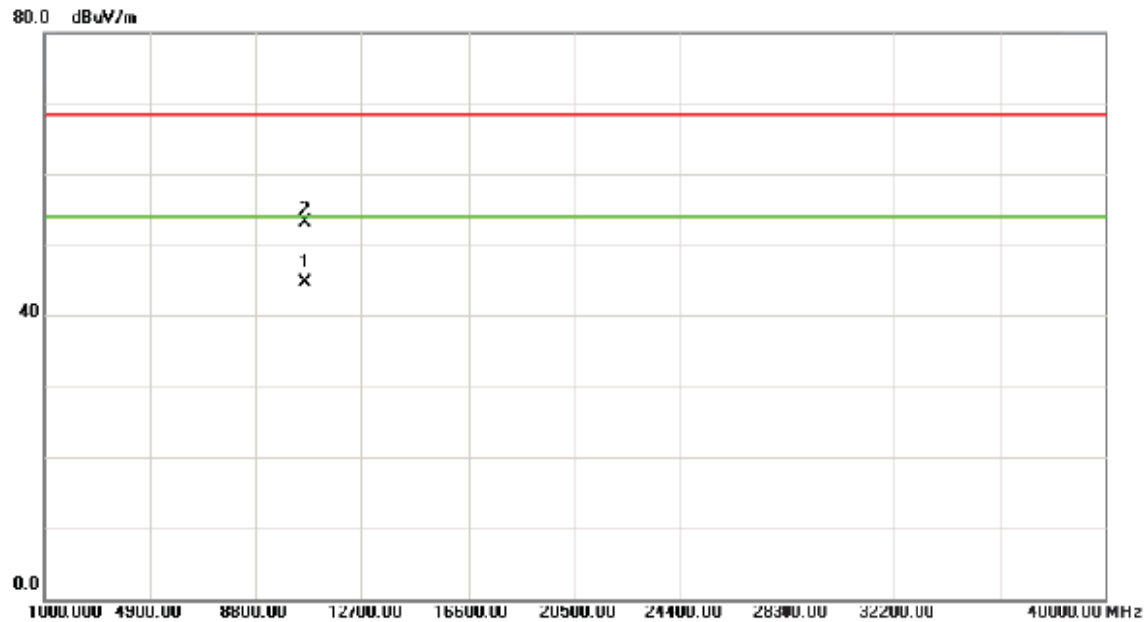

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10567.00	28.43	16.01	44.44	54.00	-9.56	AVG	
2		10568.00	37.02	16.01	53.03	68.30	-15.27	peak	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(20 MHz) Mode 5280MHz


Horizontal

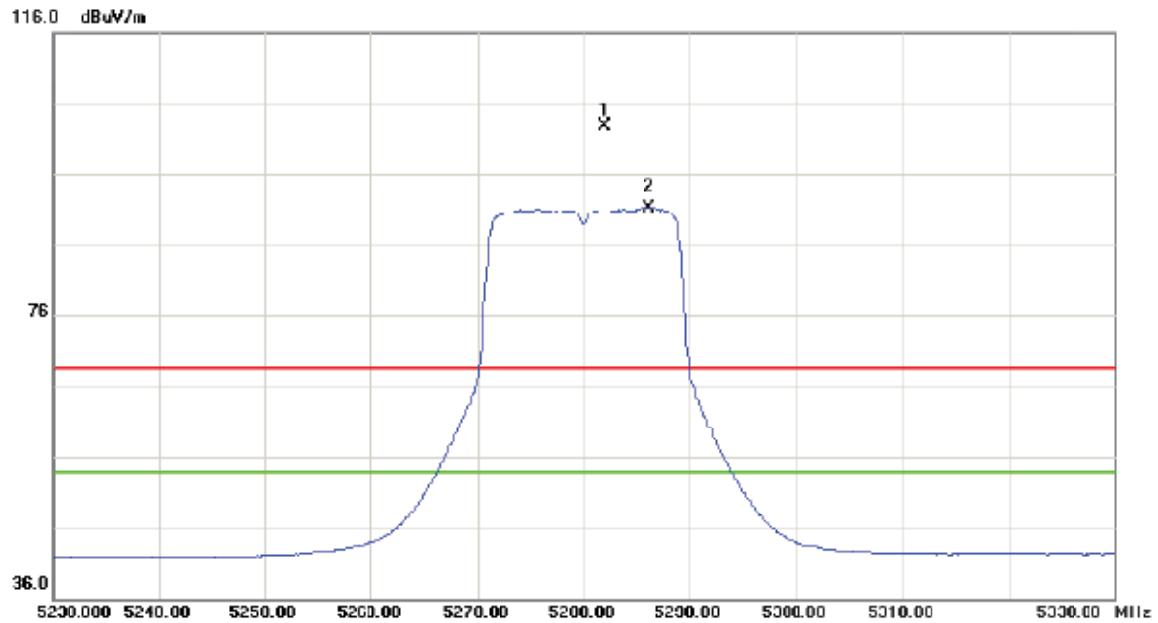

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5281.900	59.58	43.04	102.62	68.30	34.32	peak	
2	*	5286.100	48.28	43.06	91.34	54.00	37.34	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(20 MHz) Mode 5280MHz


Horizontal

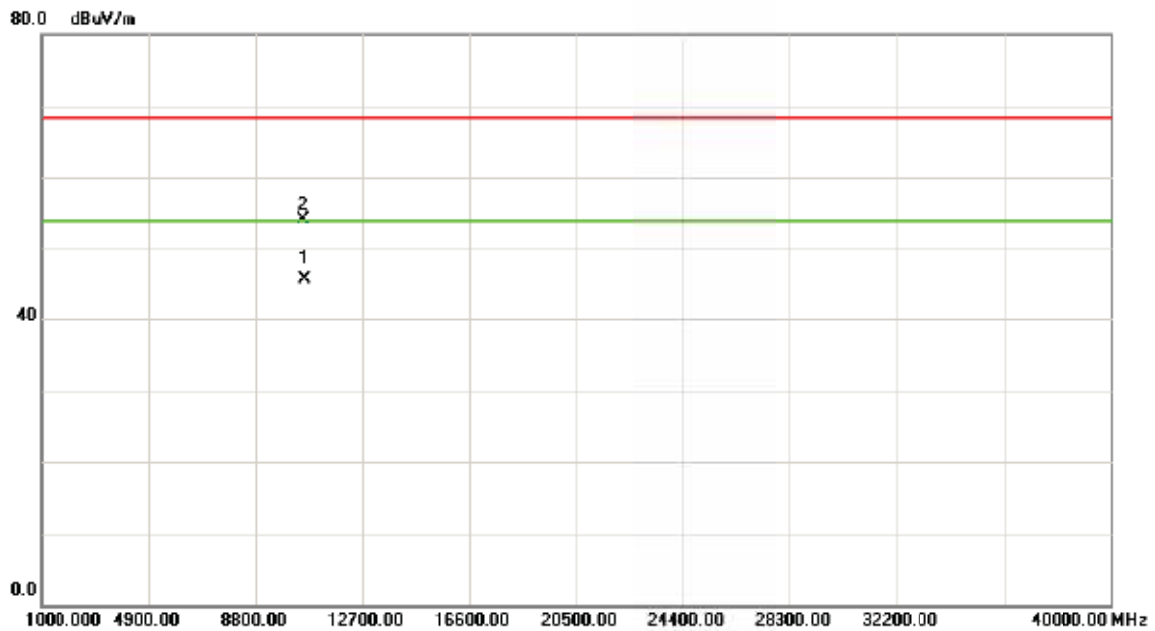

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10562.00	29.46	16.00	45.46	54.00	-8.54	AVG	
2		10563.00	38.08	16.00	54.08	68.30	-14.22	peak	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(20 MHz) Mode 5320MHz


Vertical

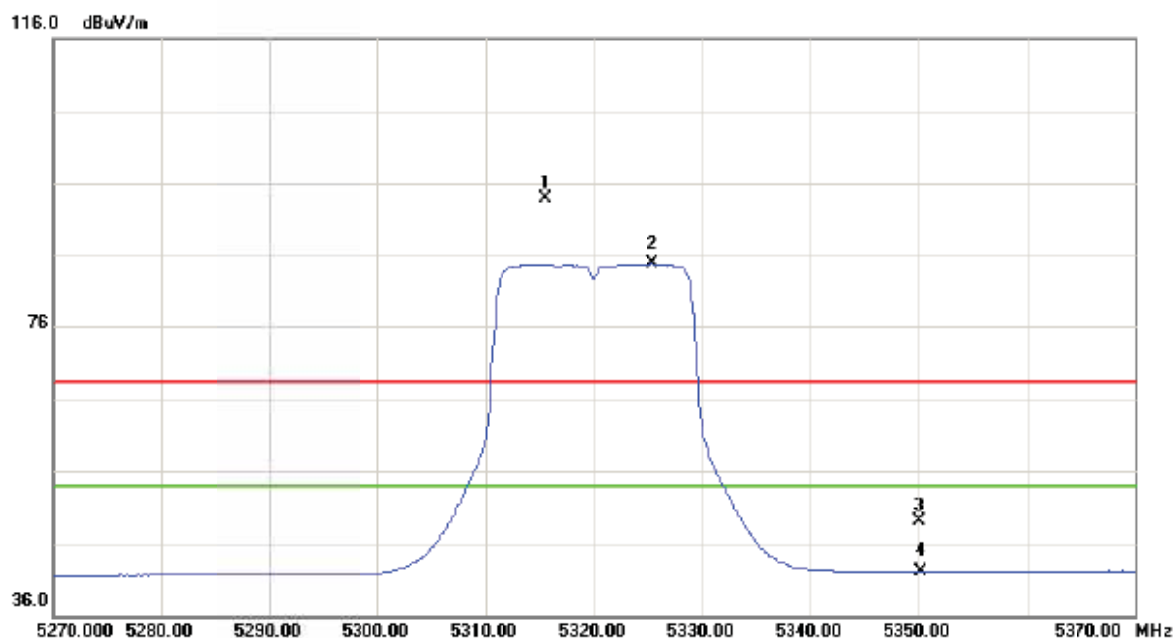

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5315.500	50.78	43.12	93.90	68.30	25.60	peak	
2	*	5325.400	41.46	43.15	84.61	54.00	30.61	AVG	
3		5350.000	5.85	43.21	49.06	68.30	-19.24	peak	
4		5350.000	-1.12	43.21	42.09	54.00	-11.91	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(20 MHz) Mode 5320MHz


Vertical

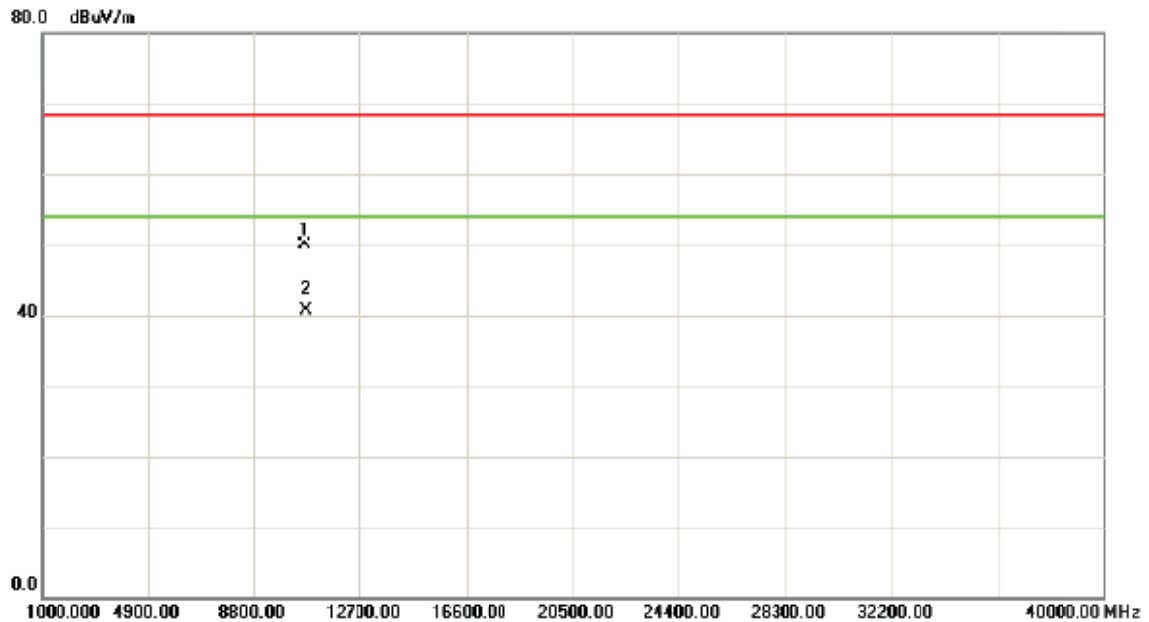

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10639.00	33.78	16.21	49.99	68.30	-18.31	peak	
2	*	10645.00	24.48	16.24	40.72	54.00	-13.28	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(20 MHz) Mode 5320MHz


Horizontal

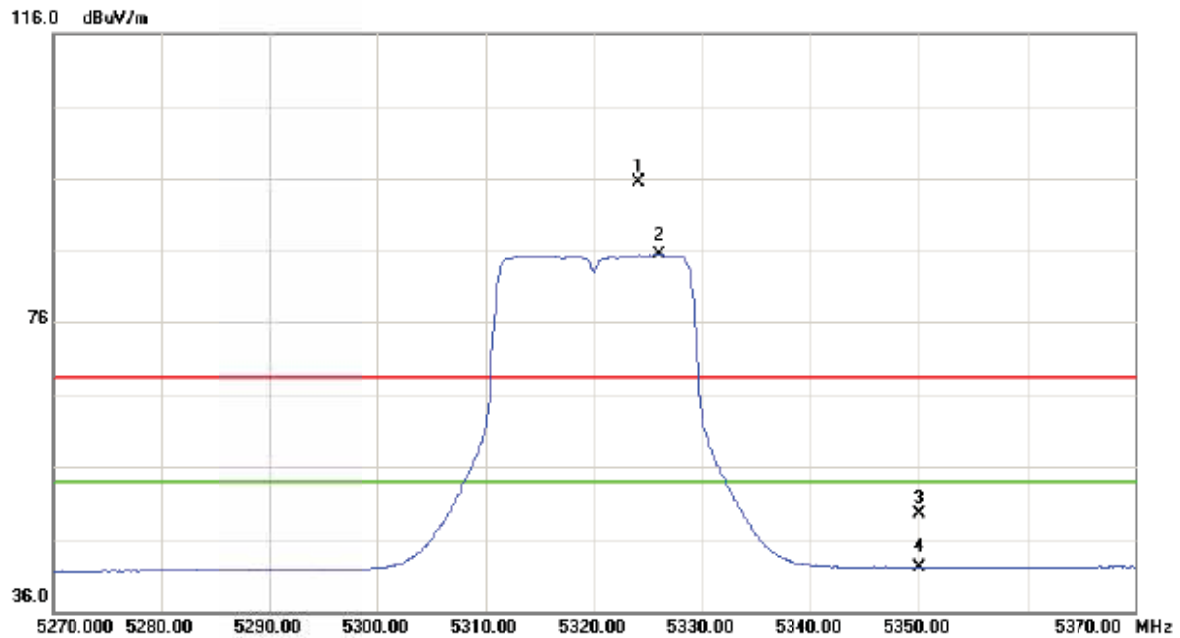

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5324.100	52.35	43.15	95.50	68.30	27.20	peak	
2	*	5326.100	42.21	43.15	85.36	54.00	31.36	AVG	
3		5350.000	6.28	43.21	49.49	68.30	-18.81	peak	
4		5350.000	-1.10	43.21	42.11	54.00	-11.89	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(20 MHz) Mode 5320MHz


Horizontal

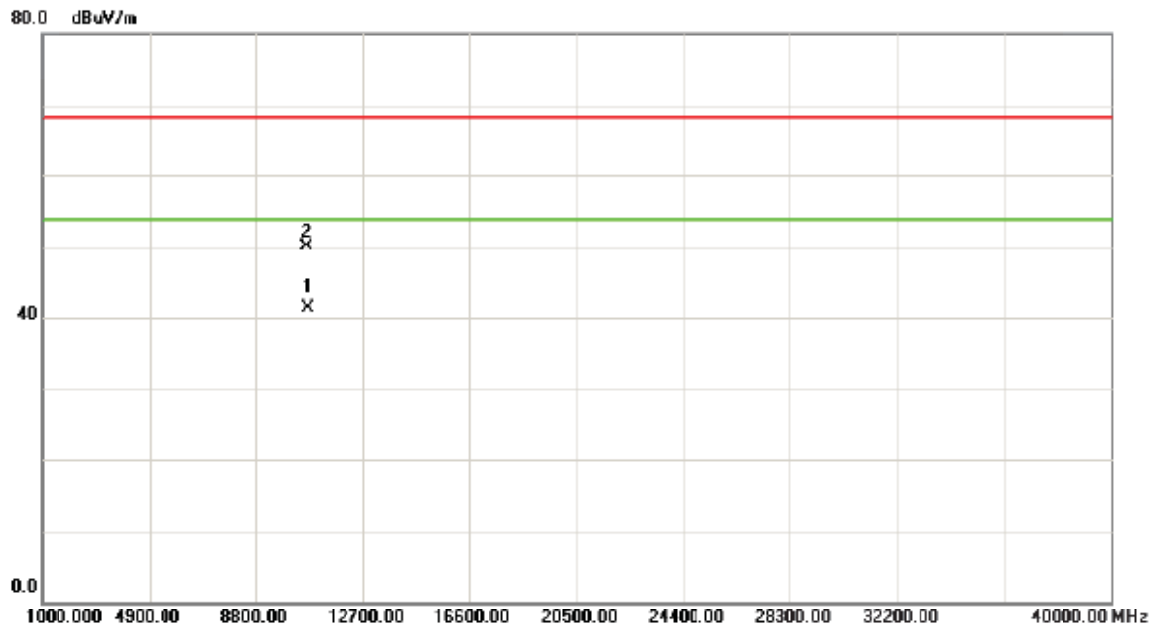

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	cBuV/m	dBuV/m	dB	Detector	Comment
1	*	10642.00	25.08	16.23	41.31	54.00	-12.69	AVG	
2		10643.00	33.91	16.23	50.14	68.30	-18.16	peak	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(40 MHz) Mode 5270MHz


Vertical

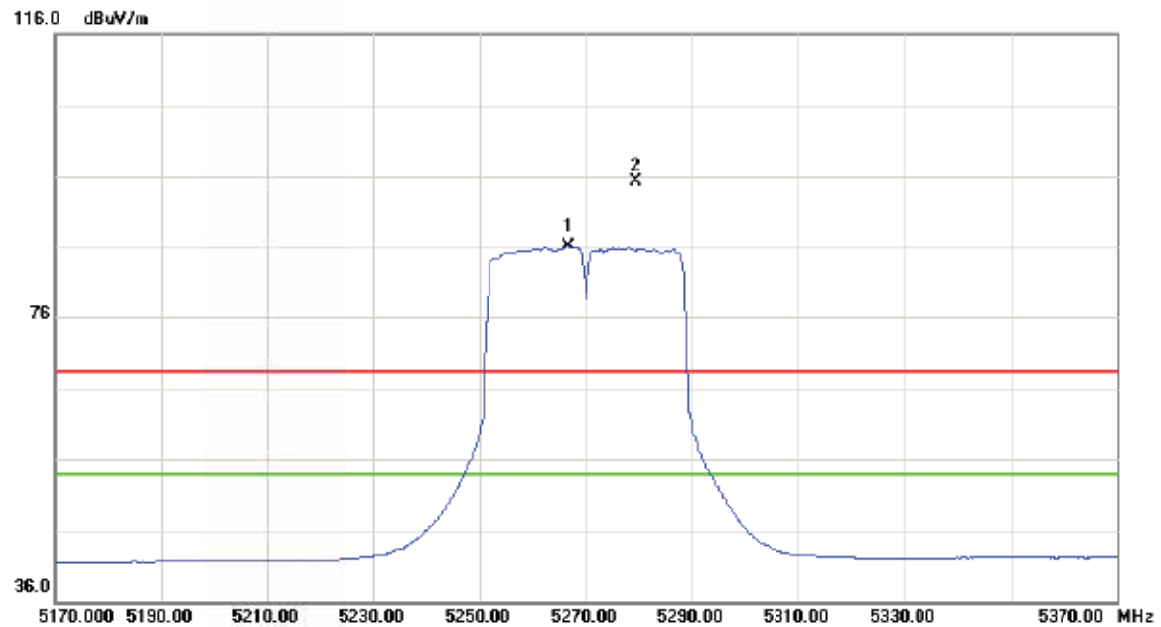

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5266.600	43.05	43.01	86.06	54.00	32.06	AVG	
2	X	5279.400	52.31	43.04	95.35	68.30	27.05	peak	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(40 MHz) Mode 5270MHz


Vertical

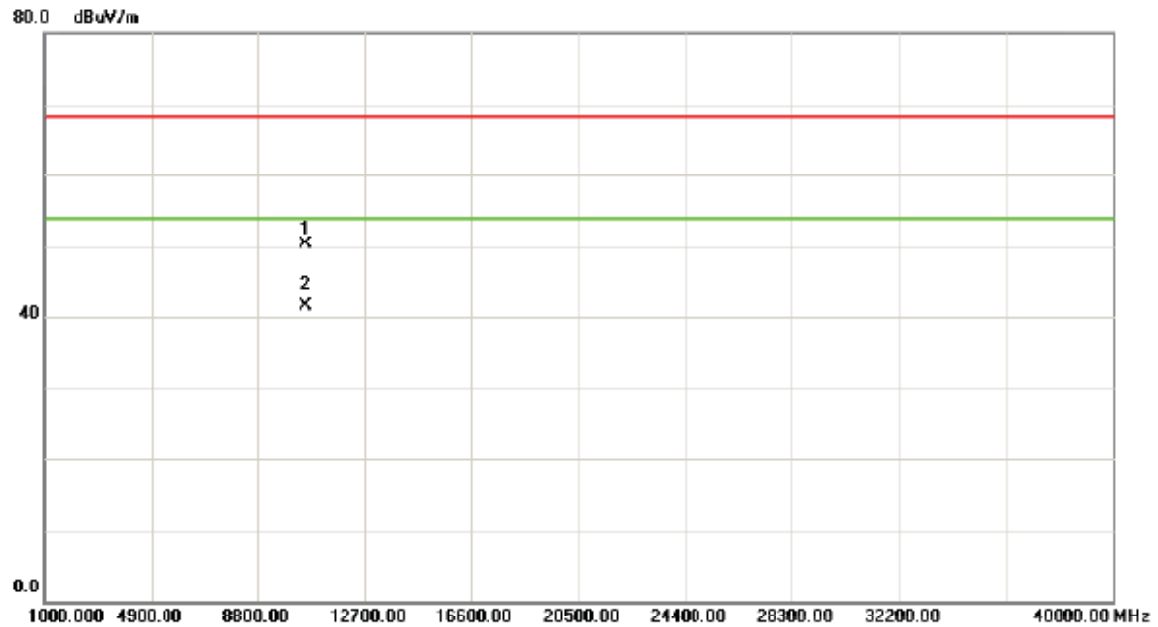

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10542.00	34.38	15.94	50.32	68.30	-17.98	peak	
2	*	10542.00	25.64	15.94	41.58	54.00	-12.42	AVC	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(40 MHz) Mode 5270MHz


Horizontal

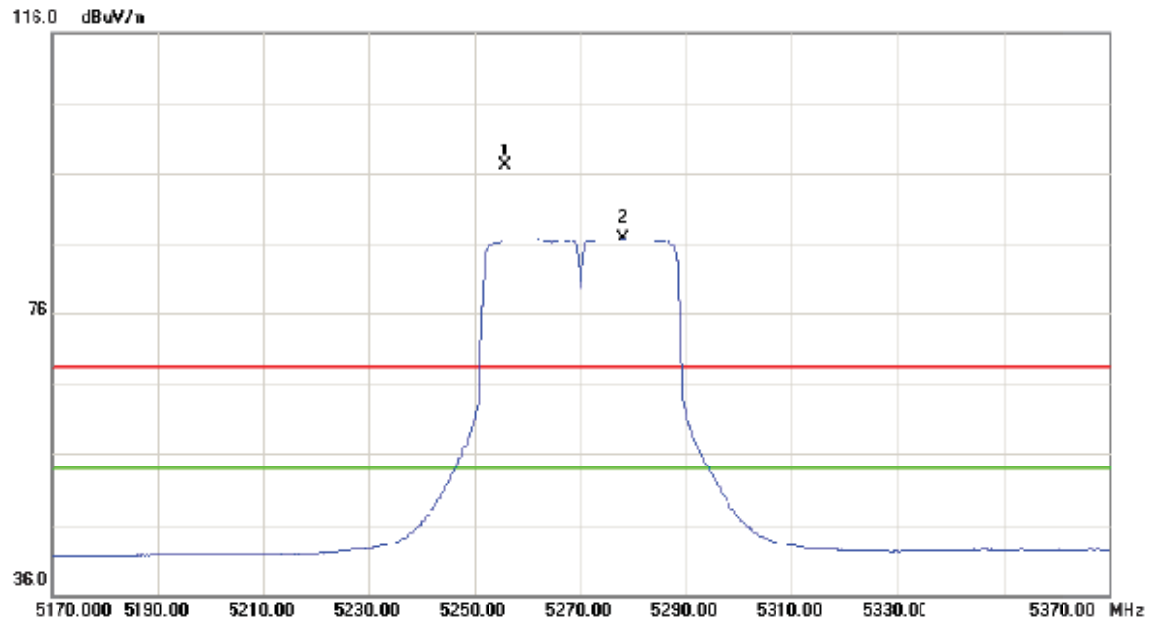

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	5255.600	54.22	42.98	97.20	68.30	28.90	peak	
2	*	5277.800	43.97	43.03	87.00	54.00	33.00	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(40 MHz) Mode 5270MHz


Horizontal

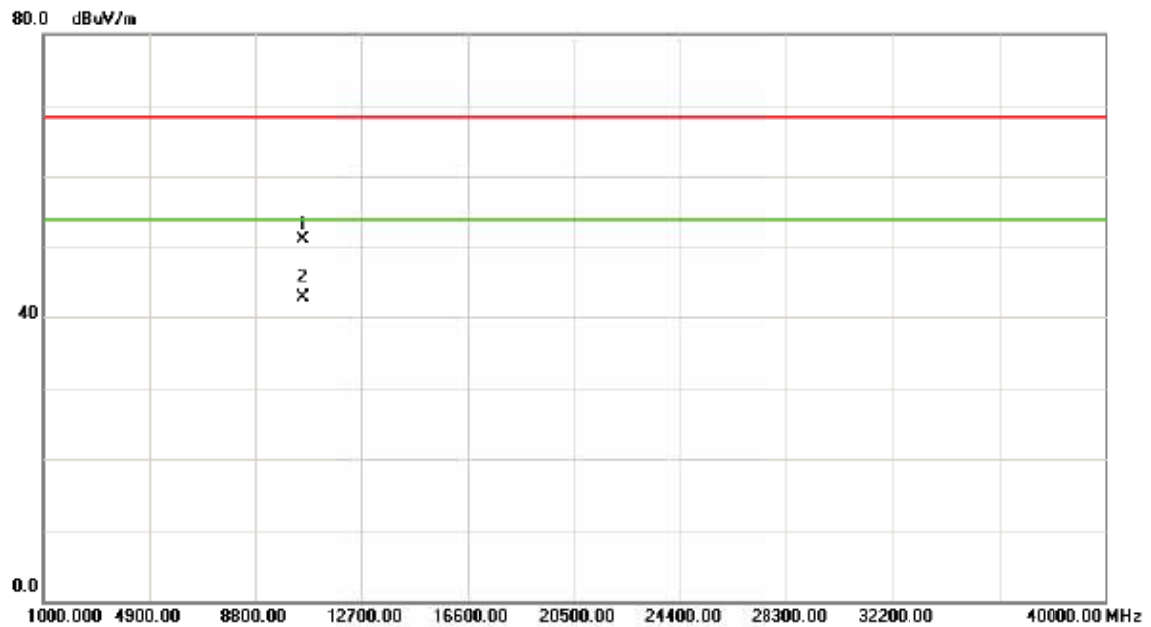

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		10543.00	35.16	15.94	51.10	68.30	-17.20	peak
2	*	10546.00	26.69	15.95	42.64	54.00	-11.36	AVG

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(40 MHz) Mode 5310MHz


Vertical

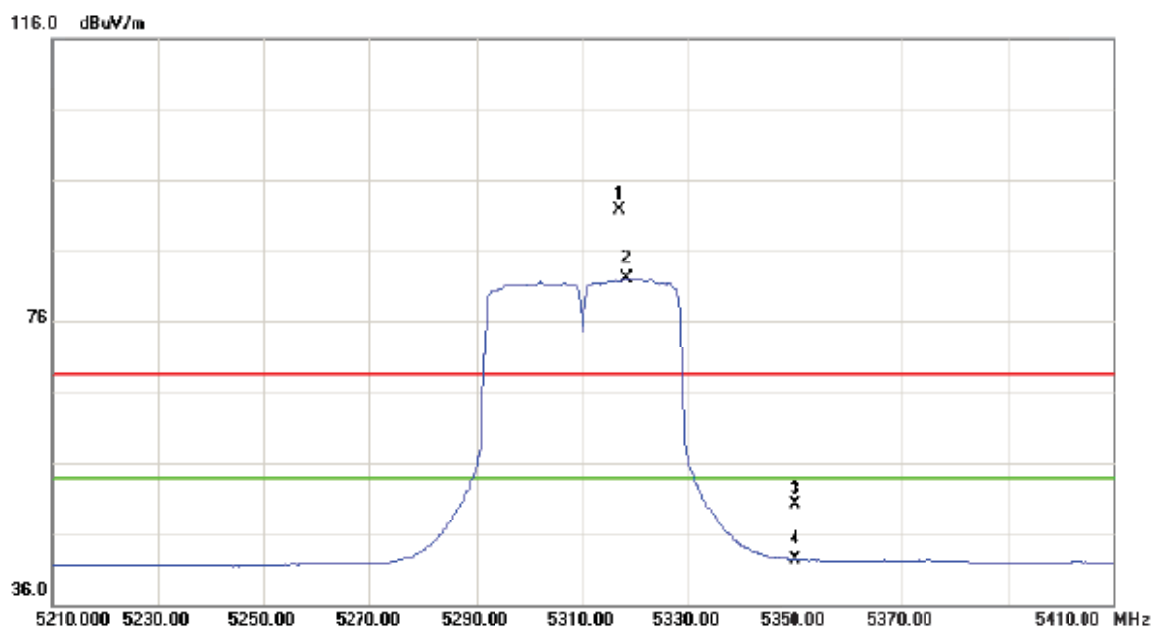

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	X	5316.800	48.81	43.13	91.94	68.30	23.64	peak	
2	*	5318.000	38.71	43.13	81.84	54.00	27.84	AVG	
3		5350.000	7.06	43.21	50.27	68.30	-18.03	peak	
4		5350.000	-0.91	43.21	42.30	54.00	-11.70	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(40 MHz) Mode 5310MHz


Vertical

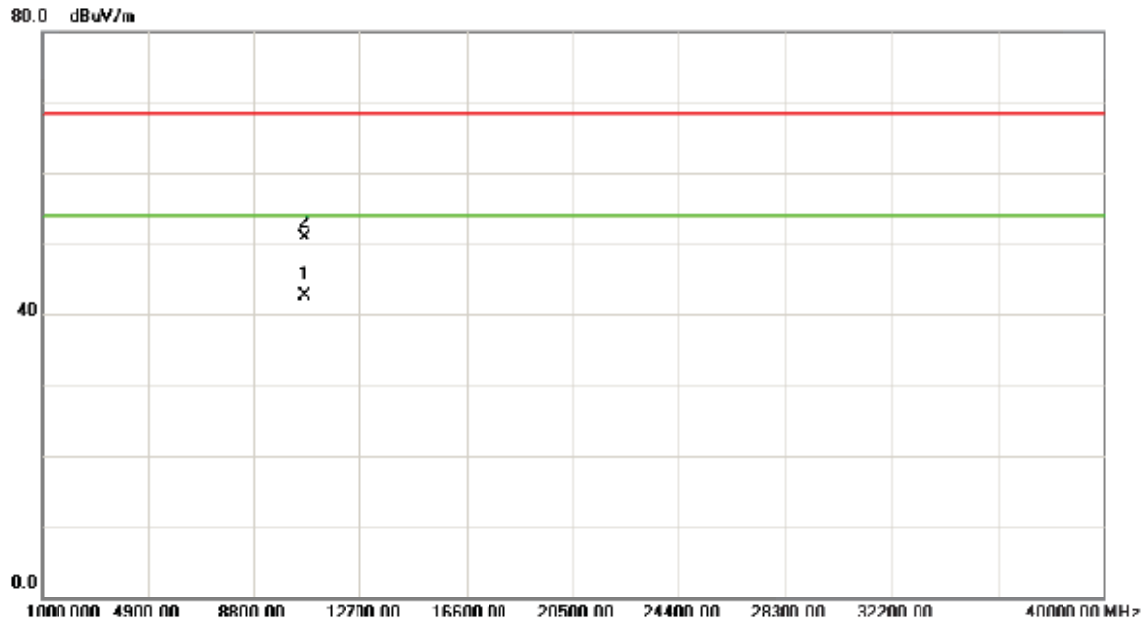

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10623.00	25.37	16.18	42.55	54.00	-11.45	AVG	
2		10624.00	34.72	16.18	50.90	68.30	-17.40	peak	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(40 MHz) Mode 5310MHz


Horizontal

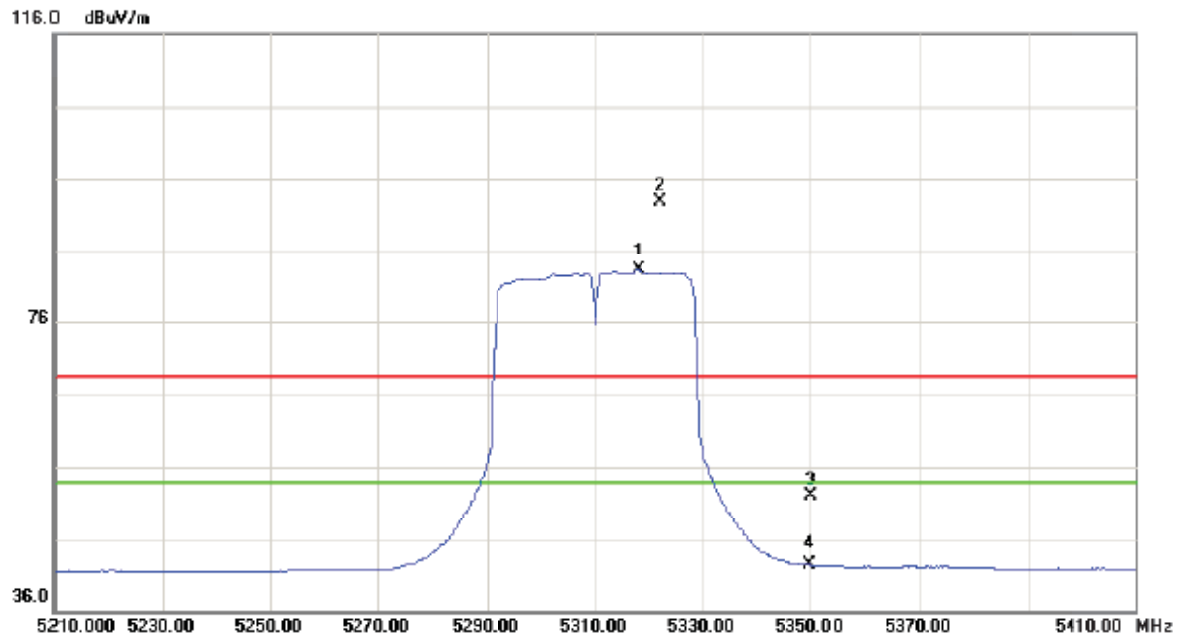

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5318.000	39.94	43.13	83.07	54.00	29.07	AVG	
2	X	5322.000	49.79	43.15	92.94	68.30	24.64	peak	
3		5350.000	8.87	43.21	52.08	68.30	-16.22	peak	
4		5350.000	-0.80	43.21	42.41	54.00	-11.59	AVG	

Orthogonal Axis :	X
Test Mode :	Band 2/ TX 802.11n(40 MHz) Mode 5310MHz

Horizontal

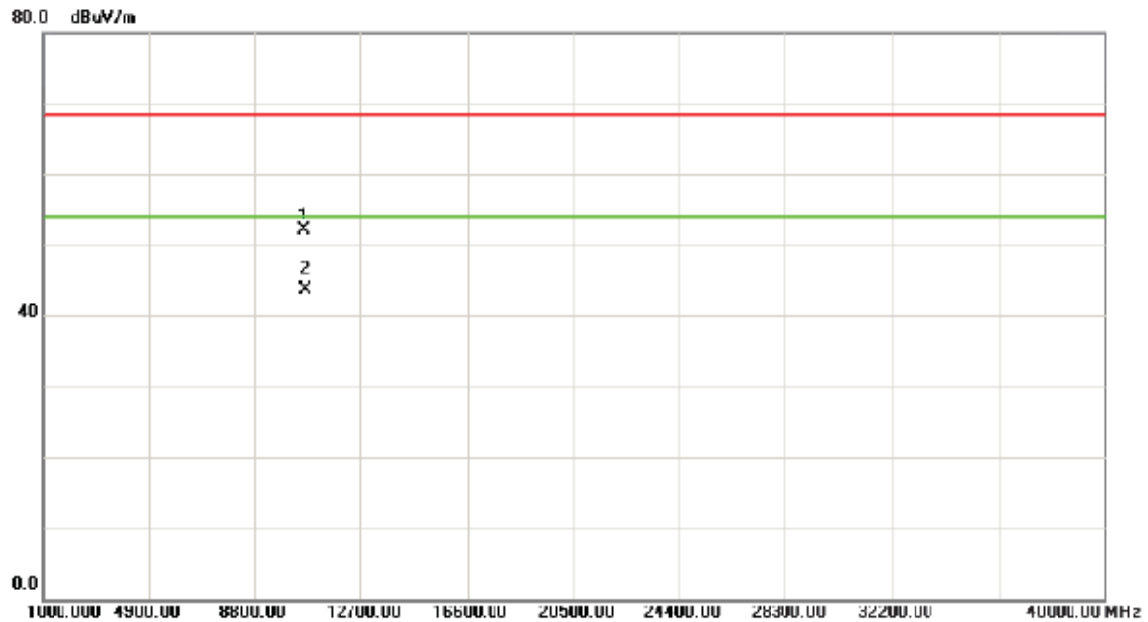

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dE	dBuV/m	dBuV/m	dB	Detector	Comment
1		10618.00	36.03	16.16	52.19	68.30	-16.11	peak	
2	*	10624.00	27.33	16.18	43.51	54.00	-10.49	AVG	