



# FCC RF Test Report

**Product Name: LTE CPE**

**Model Number: B311-521**

**Report No.: SYBH(Z-RF)20191011017001-2001**

**FCC ID: QISB311-521**

| Autherized | APPROVED<br>(Lab Manager) | PREPARED<br>(Test Engineer) |
|------------|---------------------------|-----------------------------|
| BY         | He Hao                    | Zhou Bing bo                |
| DATE       | 2019-11-26                | 2019-11-26                  |

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

**(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)**

No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C

Telephone: +86 769 23830808

Fax: +86 769 23837628

**※ ※ Notice ※ ※**

1. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01
2. The laboratory has been recognized by the US Federal Communications Commission (FCC) to perform compliance testing subject to the Commission's Certification rules. The Designation Number is CN1173, and the Test Firm Registration Number is 294140.
3. The laboratory has been recognized by the Innovation, Science and Economic Development Canada (ISED) to test to Canadian radio equipment requirements. The CAB identifier is CN0003, and the ISED# is 21741.
4. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named "Global Compliance and Testing Center of Huawei Technologies Co., Ltd", the both names have coexisted since 2009.
5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. The test report is only valid for the test samples.
8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
9. If any question about this report, please contact the laboratory ([PublicGCTC@huawei.com](mailto:PublicGCTC@huawei.com)).

**MODIFICATION RECORD**

| No. | Report No                         | Modification Description |
|-----|-----------------------------------|--------------------------|
| 1   | SYBH(Z-RF)2019101<br>1017001-2001 | First release.           |

**DECLARATION**

| Type                               | Description   |
|------------------------------------|---|
| Multiple<br>Models<br>Applications | <input checked="" type="checkbox"/> The present report applies to single model.   |
|                                    | <input type="checkbox"/> The present report applies to several models. The practical measurements are performed with the model. |
|                                    | The present report only presents the worst test case of all modes, see relevant test results for detailed.                      |

## 1 Table of contents

|     |   |    |
|-----|---|----|
| 1   | Table of contents .....                                     | 4  |
| 2   | General Information .....                                   | 5  |
| 2.1 | Test standard/s .....                                       | 5  |
| 2.2 | Test Environment.....                                       | 5  |
| 2.3 | Test Laboratories.....                                      | 5  |
| 2.4 | Applicant and Manufacturer .....                            | 5  |
| 2.5 | Application details.....                                    | 5  |
| 3   | Test Summary.....   | 6  |
| 3.1 | Cellular Band (824-849 MHz paired with 869-894 MHz).....    | 6  |
| 3.2 | PCS Band (1850-1910 MHz paired with 1930-1990 MHz).....     | 7  |
| 3.3 | AWS Band (1710-1755 MHz paired with 2110-2155 MHz).....     | 8  |
| 3.4 | BRS&EBS Band (2500-2570 MHz paired with 2620-2690 MHz)..... | 9  |
| 3.5 | Band 66 (1710-1780 MHz paired with 2110-2175 MHz).....      | 11 |
| 4   | Description of the Equipment under Test (EUT).....          | 12 |
| 4.1 | General Description .....                                   | 12 |
| 4.2 | EUT Identity .....  | 12 |
| 4.3 | Technical Specification.....                                | 13 |
| 5   | General Test Conditions / Configurations.....               | 16 |
| 5.1 | Test Modes .....  | 16 |
| 5.2 | Test Frequency .....  | 17 |
| 5.3 | DESCRIPTION OF TESTS .....                                  | 23 |
| 5.4 | Test Setups.....  | 27 |
| 5.5 | Test Conditions .....                                       | 29 |
| 6   | Main Test Instruments.....                                  | 31 |
| 6.1 | Current Test Project/Report .....                           | 31 |
| 7   | Measurement Uncertainty .....                               | 32 |
| 8   | Appendixes .....  | 33 |

## 2 General Information

### 2.1 Test standard/s

|                 |  |
|-----------------|--|
| Applied Rules : | 47 CFR FCC Part 02<br>47 CFR FCC Part 22<br>47 CFR FCC Part 24<br>47 CFR FCC Part 27 |
| Test Method :   | FCC KDB 971168 D01 Power Meas License Digital Systems v03r01<br>ANSI C63.26          |

### 2.2 Test Environment

|                            |                |          |                                  |
|----------------------------|----------------|----------|----------------------------------|
| Temperature :              | TN             | 15 to 30 | °C during room temperature tests |
| Ambient Relative Humidity: | 25 to 75 %     |          |                                  |
| Atmospheric Pressure:      | Not applicable |          |                                  |
| Power supply :             | VL             | 10.8     | V                                |
|                            | VN             | 12       | V DC by Battery                  |
|                            | VH             | 13.2     | V                                |

NOTE: 1) VN= nominal voltage, VL= low extreme test voltage, VH= High extreme test voltage;

TN= normal temperature, TL= low extreme test temperature, TH= High extreme test temperature.

### 2.3 Test Laboratories

|                              |  |
|------------------------------|--|
| Test Location 1 :            | RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD.                                  |
| Address of Test Location 1 : | No.2, New City Avenue, Songshan Lake Sci. & Tech. Industry Park, Dongguan, 523808, P.R.C |

### 2.4 Applicant and Manufacturer

|                |   |
|----------------|---|
| Company Name : | HUAWEI TECHNOLOGIES CO., LTD  |
| Address :      | Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C |

### 2.5 Application details

|                         |            |
|-------------------------|------------|
| Date of Receipt Sample: | 2019-10-31 |
| Start of test:          | 2019-11-01 |
| End of test:            | 2019-11-26 |

### 3 Test Summary

#### 3.1 Cellular Band (824-849 MHz paired with 869-894 MHz)

| Test Item  | FCC Rule No.     | Requirements  | Test Result | Verdict ( Note1 ) | Testing location |
|--|------------------|---|-------------|-------------------|------------------|
| Effective (Isotropic) Radiated Power Output Data   | §2.1046, §22.913 | FCC: ERP ≤ 7 W.   | Appendix A  | Pass              | Test Location 1  |
| Peak-Average Ratio   | ---              | Limit≤13 dB   | Appendix B  | Pass              | Test Location 1  |
| Modulation Characteristics   | §2.1047          | Digital modulation  | Appendix C  | Pass              | Test Location 1  |
| Bandwidth  | §2.1049          | OBW: No limit.<br>EBW: No limit.  | Appendix D  | Pass              | Test Location 1  |
| Band Edges Compliance  | §2.1051, §22.917 | FCC: ≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.<br><br>Note 1): EBW is -26 dBc EBW.  | Appendix E  | Pass              | Test Location 1  |
| Spurious Emission at Antenna Terminals   | §2.1051, §22.917 | FCC: ≤ -13 dBm/RefBW, from max( lowest internal frequency, 9 kHz ) to min( 10 * highest fundamental frequency, 40 GHz), after 1 MHz bands immediately outside and adjacent to the frequency block.<br>(RefBW: ≥100 kHz for frequency below 1 GHz, and =1 MHz above 1 GHz) | Appendix F  | Pass              | Test Location 1  |
| Field Strength of Spurious Radiation   | §2.1053, §22.917 | FCC: ≤ -13 dBm/RefBW, from max( lowest internal frequency, 9 kHz ) to min( 10 * highest fundamental frequency, 40 GHz), after 1 MHz bands immediately outside and adjacent to the frequency block.<br>(RefBW: ≥100 kHz for frequency below 1 GHz, and =1 MHz above 1 GHz) | Appendix G  | Pass              | Test Location 1  |
| Frequency Stability  | §2.1055, §22.355 | ≤ ±2.5ppm   | Appendix H  | Pass              | Test Location 1  |
| NOTE: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested". |                  |   |             |                   |                  |

**3.2 PCS Band (1850-1910 MHz paired with 1930-1990 MHz)**


| Test Item  | FCC Rule No.     | Requirements   | Test Result | Verdict ( Note1 ) | Testing location |
|--|------------------|--|-------------|-------------------|------------------|
| Effective (Isotropic) Radiated Power Output Data   | §2.1046, §24.232 | EIRP ≤ 2 W   | Appendix A  | Pass              | Test Location 1  |
| Peak-Average Ratio   | §2.1046, §24.232 | Limit≤13 dB  | Appendix B  | Pass              | Test Location 1  |
| Modulation Characteristics   | §2.1047          | Digital modulation   | Appendix C  | Pass              | Test Location 1  |
| Bandwidth  | §2.1049          | OBW: No limit.<br>EBW: No limit.   | Appendix D  | Pass              | Test Location 1  |
| Band Edges Compliance  | §2.1051, §24.238 | FCC:≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.<br><br>Note 1): EBW is -26 dBc EBW.  | Appendix E  | Pass              | Test Location 1  |
| Spurious Emission at Antenna Terminals   | §2.1051, §24.238 | FCC: ≤ -13 dBm/1 MHz, from max( lowest internal frequency, 9 kHz ) to min( 10 * highest fundamental frequency, 40 GHz) but outside authorized operating frequency blocks.. | Appendix F  | Pass              | Test Location 1  |
| Field Strength of Spurious Radiation   | §2.1053, §24.238 | FCC: ≤ -13 dBm/1 MHz, from max( lowest internal frequency, 9 kHz ) to min( 10 * highest fundamental frequency, 40 GHz) but outside authorized operating frequency blocks.  | Appendix G  | Pass              | Test Location 1  |
| Frequency Stability  | §2.1055, §24.235 | FCC:Within authorized bands of operation/frequency block.  | Appendix H  | Pass              | Test Location 1  |
| NOTE: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested". |                  |  |             |                   |                  |

### 3.3 AWS Band (1710-1755 MHz paired with 2110-2155 MHz)

| Test Item  | FCC Rule No.       | Requirements  | Test Result | Verdict ( Note1 ) | Testing location |
|--|--------------------|---|-------------|-------------------|------------------|
| Effective (Isotropic) Radiated Power Output Data   | §2.1046, §27.50(d) | EIRP ≤ 1 W  | Appendix A  | Pass              | Test Location 1  |
| Peak-Average Ratio   | §2.1046, §27.50(d) | Limit ≤ 13 dB   | Appendix B  | Pass              | Test Location 1  |
| Modulation Characteristics   | §2.1047            | Digital modulation  | Appendix C  | Pass              | Test Location 1  |
| Bandwidth  | §2.1049            | OBW: No limit.<br>EBW: No limit.  | Appendix D  | Pass              | Test Location 1  |
| Band Edges Compliance  | §2.1051, §27.53(h) | FCC: ≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.<br><br>Note 1): EBW is -26 dBc EBW.  | Appendix E  | Pass              | Test Location 1  |
| Spurious Emission at Antenna Terminals   | §2.1051, §27.53(h) | FCC: ≤ -13 dBm/1 MHz, from max( lowest internal frequency, 9 kHz ) to min( 10 * highest fundamental frequency, 40 GHz) but outside authorized operating frequency ranges. | Appendix F  | Pass              | Test Location 1  |
| Field Strength of Spurious Radiation   | §2.1053, §27.53(h) | FCC: ≤ -13 dBm/1 MHz, from max( lowest internal frequency, 9 kHz ) to min( 10 * highest fundamental frequency, 40 GHz) but outside authorized operating frequency ranges. | Appendix G  | Pass              | Test Location 1  |
| Frequency Stability  | §2.1055, §27.54    | Within authorized bands of operation/frequency block.   | Appendix H  | Pass              | Test Location 1  |
| NOTE: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested". |                    |   |             |                   |                  |



**3.4 BRS&EBS Band (2500-2570 MHz paired with 2620-2690 MHz)**
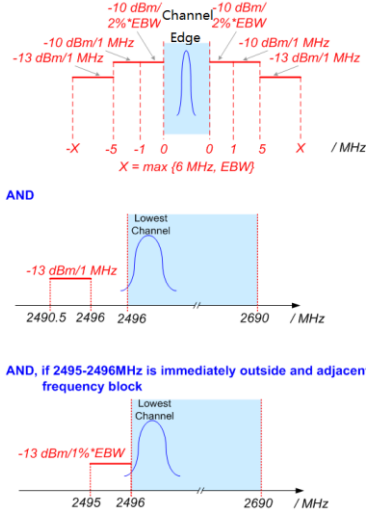
| Test Item  | FCC Rule No.        | Requirements   | Test Result | Verdict ( Note1 ) | Testing location |
|--|---------------------|--|-------------|-------------------|------------------|
| Effective (Isotropic) Radiated Power Output Data | §2.1046, §27.50(h)  | EIRP ≤ 2W  | Appendix A  | Pass              | Test Location 1  |
| Peak-Average Ratio                               | §27.50(a)           | Limit ≤ 13 dB  | Appendix B  | Pass              | Test Location 1  |
| Modulation Characteristics                       | §2.1047             | Digital modulation   | Appendix C  | Pass              | Test Location 1  |
| Bandwidth  | §2.1049             | OBW: No limit.<br>EBW: No limit.   | Appendix D  | Pass              | Test Location 1  |
| Band Edges Compliance                            | §2.1051, §27.53(m4) | FCC:<br> <p>The diagram shows three plots for FCC band edge compliance. The top plot shows a channel with a 2% EBW and slopes of -10 dBm/1 MHz and 10 dBm/1 MHz. The middle plot shows the lowest channel with a -13 dBm/1 MHz slope. The bottom plot shows the lowest channel with a -13 dBm/1% EBW slope. The x-axis for all plots is frequency in MHz, ranging from 2490.5 to 2690.</p> <p>AND</p> <p>AND, if 2495-2496MHz is immediately outside and adjacent to the frequency block</p> <p>Note 1): EBW is -26 dBc EBW.</p> | Appendix E  | Pass              | Test Location 1  |
| Spurious Emission at Antenna Terminals           | §2.1051, §27.53(m)  | FCC:   | Appendix F  | Pass              | Test Location 1  |

| Test Item  | FCC Rule No.       | Requirements  | Test Result | Verdict ( Note1 ) | Testing location |
|--|--------------------|---|-------------|-------------------|------------------|
|  |                    | <p>Channel Edge</p> <p>-25 dBm/1 MHz</p> <p>-25 dBm/1 MHz</p> <p>Fa -X 0 0 X Fb</p> <p>X = max {6 MHz, EBW}</p> <p>AND</p> <p>-25 dBm/1 MHz</p> <p>Fa 2490.5 2496 2690 /MHz</p> <p>Fa = max( lowest internal frequency, 9 kHz )<br/>Fb = min( 10 * highest fundamental frequency, 40 GHz )</p> <p>Note 1): EBW is -26 dBc EBW.<br/>Note 2): MeasFrom: max( lowest internal frequency, 9 kHz ).<br/>Note 3): MeasTo: min( 10 * highest fundamental frequency, 40 GHz).</p>             |             |                   |                  |
| Field Strength of Spurious Radiation   | §2.1053, §27.53(m) | <p>FCC:</p> <p>Channel Edge</p> <p>-25 dBm/1 MHz</p> <p>-25 dBm/1 MHz</p> <p>Fa -X 0 0 X Fb</p> <p>X = max {6 MHz, EBW}</p> <p>AND</p> <p>-25 dBm/1 MHz</p> <p>Fa 2490.5 2496 2690 /MHz</p> <p>Fa = max( lowest internal frequency, 9 kHz )<br/>Fb = min( 10 * highest fundamental frequency, 40 GHz )</p> <p>Note 1): EBW is -26 dBc EBW.<br/>Note 2): MeasFrom: max( lowest internal frequency, 9 kHz ).<br/>Note 3): MeasTo: min( 10 * highest fundamental frequency, 40 GHz).</p> | Appendix G  | Pass              | Test Location 1  |
| Frequency Stability  | §2.1055, §27.54    | Within authorized bands of operation/frequency block.   | Appendix H  | Pass              | Test Location 1  |
| NOTE: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested". |                    |   |             |                   |                  |

### 3.5 Band 66 (1710-1780 MHz paired with 2110-2175 MHz)

| Test Item  | FCC Rule No.       | Requirements  | Test Result | Verdict ( Note1 ) | Testing location |
|--|--------------------|---|-------------|-------------------|------------------|
| Effective (Isotropic) Radiated Power Output Data   | §2.1046, §27.50(d) | $EIRP \leq 1\text{ W}$  | Appendix A  | Pass              | Test Location 1  |
| Peak-Average Ratio   | §2.1046, §27.50(d) | Limits $\leq 13\text{ dB}$  | Appendix B  | Pass              | Test Location 1  |
| Modulation Characteristics   | §2.1047            | Digital modulation  | Appendix C  | Pass              | Test Location 1  |
| Bandwidth  | §2.1049            | OBW: No limit.<br>EBW: No limit.  | Appendix D  | Pass              | Test Location 1  |
| Band Edges Compliance  | §2.1051, §27.53(h) | FCC: $\leq -13\text{ dBm}/1\% \cdot \text{EBW}$ , in 1 MHz bands immediately outside and adjacent to the frequency block.<br><br>Note 1): EBW is $-26\text{ dBc}$ EBW.                              | Appendix E  | Pass              | Test Location 1  |
| Spurious Emission at Antenna Terminals   | §2.1051, §27.53(h) | FCC: $\leq -13\text{ dBm}/1\text{ MHz}$ , from max( lowest internal frequency, 9 kHz ) to min( $10 \cdot$ highest fundamental frequency, 40 GHz) but outside authorized operating frequency ranges. | Appendix F  | Pass              | Test Location 1  |
| Field Strength of Spurious Radiation   | §2.1053, §27.53(h) | FCC: $\leq -13\text{ dBm}/1\text{ MHz}$ , from max( lowest internal frequency, 9 kHz ) to min( $10 \cdot$ highest fundamental frequency, 40 GHz) but outside authorized operating frequency ranges. | Appendix G  | Pass              | Test Location 1  |
| Frequency Stability  | §2.1055, §27.54    | Within authorized bands of operation/frequency block.   | Appendix H  | Pass              | Test Location 1  |
| NOTE: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested". |                    |   |             |                   |                  |

## 4 Description of the Equipment under Test (EUT)

### 4.1 General Description

The HUAWEI LTE CPE B311-521 is a Long Term Evolution (LTE) wireless gateway for multiple users in household or small office environments. It enables users to access the Internet, supports 3GPP Release 9 with UE downlink/uplink category 4. Working band: LTE: B2/B4/B5/B7/B66, UMTS: B2/B4/B5, Wi-Fi: 2.4 GHz 802.11b/g/n 2x2 MIMO up to 300Mbps. Maximum Users: 32

Note1: Only UMTS Band II/IV/V, LTE Band 2/4/5/7/66 test data included in this report.




### 4.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

#### 4.2.1 Board

| Board       |                      |                  |
|-------------|----------------------|------------------|
| Description | Software Version     | Hardware Version |
| Main Board  | 10.0.2.1(H190SP8C00) | WL4B311SW        |

#### 4.2.2 Sub-Assembly

| Sub-Assembly      |              |                               |   |
|-------------------|--------------|-------------------------------|---|
| Sub-Assembly Name | Model        | Manufacturer                  | Description   |
| Adapter           | HW-120100E01 | Huawei Technologies Co., Ltd. | Input voltage: 100-240V ~50/60Hz 0.5A<br>Output voltage: 12V  1A |
| Adapter           | HW-120100B01 | Huawei Technologies Co., Ltd. | Input voltage: 100-240V ~50/60Hz 0.5A<br>Output voltage: 12V  1A |
| Adapter           | HW-120100U01 | Huawei Technologies Co., Ltd. | Input voltage: 100-240V ~50/60Hz 0.5A<br>Output voltage: 12V  1A |

### 4.3 Technical Specification

NOTE: For the detailed technical descriptions, see the applicant/manufacturer's specifications or user manual.

#### 4.3.1 General

| Characteristics           | Description   |   |
|---------------------------|---|---|
| Radio System Type         | <input checked="" type="checkbox"/> UMTS<br><input checked="" type="checkbox"/> LTE |   |
| Supported Frequency Range | WCDMA850  | Transmission (TX): 824 to 849 MHz   |
|                           |   | Receiving (RX): 869 to 894 MHz  |
|                           | WCDMA1900   | Transmission (TX): 1850 to 1910 MHz   |
|                           |   | Receiving (RX): 1930 to 1990 MHz  |
|                           | WCDMA1700   | Transmission (TX): 1710 to 1755 MHz   |
|                           |   | Receiving (RX): 2110 to 2155 MHz  |
|                           | LTE BAND2   | Transmission (TX): 1850 to 1910 MHz   |
|                           |   | Receiving (RX): 1930 to 1990 MHz  |
|                           | LTE BAND4   | Transmission (TX): 1710 to 1755 MHz   |
|                           |   | Receiving (RX): 2110 to 2155 MHz  |
|                           | LTE BAND5   | Transmission (TX): 824 to 849 MHz   |
|                           |   | Receiving (RX): 869 to 894 MHz  |
|                           | LTE BAND7   | Transmission (TX): 2500 to 2570 MHz   |
|                           |   | Receiving (RX): 2620 to 2690 MHz  |
| LTE Band 66               | Transmission (TX): 1710 to 1780 MHz   |   |
|                           | Receiving (RX): 2110 to 2180 MHz  |   |
| Antenna                   | Description   | Isotropic Antenna   |
|                           | Type  | <input checked="" type="checkbox"/> Integral (permanent fixed antenna, which may be built-in, designed as an indispensable part of EUT)<br><input type="checkbox"/> Dedicated (removable antenna supplied with EUT, designed as an indispensable part of EUT) |
|                           | TX and RX Antenna Ports(one band)   | TX & RX port: 1<br>TX-only port: 0<br>RX-only port: 1   |
|                           | Smart Antenna(for uplink)   | <input type="checkbox"/> MIMO<br><input checked="" type="checkbox"/> Non MIMO   |
|                           | Gain  | WCDMA 850: 1.8 dBi (per antenna port, max)<br>WCDMA 1700: 0.3 dBi (per antenna port, max)<br>WCDMA 1900: 1.1 dBi (per antenna port, max)  |

| Characteristics   | Description  |  |
|---|--|--|
|   |  | LTE Band 2: 1.1 dBi (per antenna port, max)<br>LTE Band 4: 0.3 dBi (per antenna port, max)<br>LTE Band 5: 1.8dBi (per antenna port, max)<br>LTE Band 7: 1.6 dBi (per antenna port, max)<br>LTE Band 66: 0.3 dBi (per antenna port, max)  |
|   | Remark   | When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.   |
| Target TX Output Power  | UMTS850 23.0dBm<br>UMTS1900: 22.5dBm<br>UMTS1700 22.5dBm<br>LTE Band 2: 22.5dBm<br>LTE Band 4: 22.5dBm<br>LTE Band 5: 22.5dBm<br>LTE Band 7: 22.5dBm<br>LTE Band 66: 22.5dBm |  |
| Supported Channel Bandwidth   | UMTS system:   | <input checked="" type="checkbox"/> 5 MHz  |
|   | LTE band 2   | <input checked="" type="checkbox"/> 1.4MHz, <input checked="" type="checkbox"/> 3MHz, <input checked="" type="checkbox"/> 5MHz, <input checked="" type="checkbox"/> 10MHz, <input checked="" type="checkbox"/> 15MHz, <input checked="" type="checkbox"/> 20MHz                                    |
|   | LTE band 4   | <input checked="" type="checkbox"/> 1.4MHz, <input checked="" type="checkbox"/> 3MHz, <input checked="" type="checkbox"/> 5MHz, <input checked="" type="checkbox"/> 10MHz, <input checked="" type="checkbox"/> 15MHz, <input checked="" type="checkbox"/> 20MHz                                    |
|   | LTE band 5   | <input checked="" type="checkbox"/> 1.4MHz, <input checked="" type="checkbox"/> 3MHz, <input checked="" type="checkbox"/> 5MHz, <input checked="" type="checkbox"/> 10MHz  |
|   | LTE band 7   | <input checked="" type="checkbox"/> 5MHz, <input checked="" type="checkbox"/> 10MHz, <input checked="" type="checkbox"/> 15MHz, <input checked="" type="checkbox"/> 20MHz  |
|   | LTE band 66  | <input checked="" type="checkbox"/> 1.4MHz, <input checked="" type="checkbox"/> 3MHz, <input checked="" type="checkbox"/> 5MHz, <input checked="" type="checkbox"/> 10MHz, <input checked="" type="checkbox"/> 15MHz, <input checked="" type="checkbox"/> 20MHz                                    |
| Type of Modulation for uplink   | WCDMA  | <input checked="" type="checkbox"/> QPSK<br><input type="checkbox"/> 16QAM(only for HSPA+)<br><input type="checkbox"/> 64QAM   |
|   | LTE  | <input checked="" type="checkbox"/> QPSK<br><input checked="" type="checkbox"/> 16QAM<br><input type="checkbox"/> 64QAM  |
| Designation of Emissions<br>(Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.) | UMTS850:   | 4M17F9W  |
|   | UMTS1900:  | 4M16F9W  |
|   | UMTS1700:  | 4M16F9W  |
|   | LTE BAND2:   | 1M09G7D (1.4 MHz QPSK modulation),<br>1M10W7D (1.4 MHz 16QAM modulation)<br>2M71G7D (3 MHz QPSK modulation),<br>2M71W7D (3 MHz 16QAM modulation)<br>4M51G7D (5 MHz QPSK modulation),<br>4M51W7D (5 MHz 16QAM modulation)<br>9M02G7D (10 MHz QPSK modulation),<br>9M04W7D (10 MHz 16QAM modulation) |

| Characteristics | Description |  |
|-----------------|-------------|--|
|                 |             | 13M6G7D (15 MHz QPSK modulation),<br>13M5W7D (15 MHz 16QAM modulation)<br>18M1G7D (20 MHz QPSK modulation),<br>18M1W7D (20 MHz 16QAM modulation)   |
|                 | LTE BAND4:  | 1M10G7D (1.4 MHz QPSK modulation),<br>1M10W7D (1.4 MHz 16QAM modulation)<br>2M70G7D (3 MHz QPSK modulation),<br>2M71W7D (3 MHz 16QAM modulation)<br>4M51G7D (5 MHz QPSK modulation),<br>4M51W7D (5 MHz 16QAM modulation)<br>9M03G7D (10 MHz QPSK modulation),<br>9M02W7D (10 MHz 16QAM modulation)<br>13M5G7D (15 MHz QPSK modulation),<br>13M5W7D (15 MHz 16QAM modulation)<br>18M1G7D (20 MHz QPSK modulation),<br>18M1W7D (20 MHz 16QAM modulation) |
|                 | LTE BAND5:  | 1M10G7D (1.4 MHz QPSK modulation),<br>1M10W7D (1.4 MHz 16QAM modulation)<br>2M71G7D (3 MHz QPSK modulation),<br>2M71W7D (3 MHz 16QAM modulation)<br>4M51G7D (5 MHz QPSK modulation),<br>4M51W7D (5 MHz 16QAM modulation)<br>9M03G7D (10 MHz QPSK modulation),<br>9M05W7D (10 MHz 16QAM modulation)   |
|                 | LTE BAND7:  | 4M51G7D (5 MHz QPSK modulation),<br>4M51W7D (5 MHz 16QAM modulation)<br>9M01G7D (10 MHz QPSK modulation),<br>9M01W7D (10 MHz 16QAM modulation)<br>13M5G7D (15 MHz QPSK modulation),<br>13M5W7D (15 MHz 16QAM modulation)<br>18M0G7D (20 MHz QPSK modulation),<br>18M0W7D (20 MHz 16QAM modulation)   |
|                 | LTE BAND66: | 1M10G7D (1.4 MHz QPSK modulation),<br>1M10W7D (1.4 MHz 16QAM modulation)<br>2M70G7D (3 MHz QPSK modulation),<br>2M71W7D (3 MHz 16QAM modulation)<br>4M52G7D (5 MHz QPSK modulation),<br>4M52W7D (5 MHz 16QAM modulation)<br>9M04G7D (10 MHz QPSK modulation),<br>9M04W7D (10 MHz 16QAM modulation)<br>13M5G7D (15 MHz QPSK modulation),<br>13M5W7D (15 MHz 16QAM modulation)   |

| Characteristics | Description  |
|-----------------|--|
|                 | 18M0G7D (20 MHz QPSK modulation),<br>18M0W7D (20 MHz 16QAM modulation) |

## 5 General Test Conditions / Configurations

### 5.1 Test Modes

NOTE1: The test mode(s) are selected according to relevant radio technology specifications.

NOTE2: The modulation for WCDMA, HSUPA, HSDPA, DC-HSDPA is the same, which is QPSK, and the WCDMA is the worst, so we test the WCDMA only

| Test Mode | Test Modes Description        |
|-----------|-------------------------------|
| UMTS/TM1  | WCDMA system, QPSK modulation |
| LTE/TM1   | LTE system, QPSK modulation   |
| LTE/TM2   | LTE system, 16QAM modulation  |



## 5.2 Test Frequency

| Test Mode | TX / RX | RF Channel   |              |              |
|-----------|---------|--------------|--------------|--------------|
|           |         | Low (L)      | Middle (M)   | High (H)     |
| WCDMA850  | TX      | Channel 4132 | Channel 4182 | Channel 4233 |
|           |         | 826.4MHz     | 836.4MHz     | 846.6MHz     |
|           | RX      | Channel 4357 | Channel 4407 | Channel 4458 |
|           |         | 871.4MHz     | 881.4MHz     | 891.6MHz     |
| Test Mode | TX / RX | RF Channel   |              |              |
|           |         | Low (L)      | Middle (M)   | High (H)     |
| WCDMA1900 | TX      | Channel 9262 | Channel9400  | Channel9538  |
|           |         | 1852.4MHz    | 1880.0MHz    | 1907.6MHz    |
|           | RX      | Channel 9662 | Channel 9800 | Channel 9938 |
|           |         | 1932.4 MHz   | 1960.0 MHz   | 1987.6 MHz   |
| Test Mode | TX / RX | RF Channel   |              |              |
|           |         | Low (L)      | Middle (M)   | High (H)     |
| WCDMA1700 | TX      | Channel1312  | Channel1413  | Channel1513  |
|           |         | 1712.4MHz    | 1732.6MHz    | 1752.6MHz    |
|           | RX      | Channel 1537 | Channel 1638 | Channel 1738 |
|           |         | 2112.4 MHz   | 2132.6 MHz   | 2152.6 MHz   |

| Test Mode  | TX / RX  | RF Channel    |               |               |
|------------|----------|---------------|---------------|---------------|
|            |          | Low (B)       | Middle (M)    | High (T)      |
| LTE Band 2 | TX(1.4M) | Channel 18607 | Channel 18900 | Channel 19193 |
|            |          | 1850.7 MHz    | 1880 MHz      | 1909.3 MHz    |

| Test Mode | TX / RX     | RF Channel    |               |               |
|-----------|-------------|---------------|---------------|---------------|
|           |             | Low (B)       | Middle (M)    | High (T)      |
|           | TX(3M)      | Channel 18615 | Channel 18900 | Channel 19185 |
|           |             | 1851.5 MHz    | 1880 MHz      | 1908.5 MHz    |
|           | TX(5M)      | Channel 18625 | Channel 18900 | Channel 19175 |
|           |             | 1852.5 MHz    | 1880 MHz      | 1907.5 MHz    |
|           | TX(10M)     | Channel 18650 | Channel 18900 | Channel 19150 |
|           |             | 1855 MHz      | 1880 MHz      | 1905 MHz      |
|           | TX(15M)     | Channel 18675 | Channel 18900 | Channel 19125 |
|           |             | 1857.5 MHz    | 1880 MHz      | 1902.5 MHz    |
|           | TX(20M)     | Channel 18700 | Channel 18900 | Channel 19100 |
|           |             | 1860 MHz      | 1880 MHz      | 1900 MHz      |
|           | RX(1.4M)    | Channel 607   | Channel 900   | Channel 1193  |
|           |             | 1930.7 MHz    | 1960 MHz      | 1989.3 MHz    |
|           | RX(3M)      | Channel 615   | Channel 900   | Channel 1185  |
|           |             | 1931.5 MHz    | 1960 MHz      | 1988.5 MHz    |
|           | RX(5M)      | Channel 625   | Channel 900   | Channel 1175  |
|           |             | 1932.5 MHz    | 1960 MHz      | 1987.5 MHz    |
|           | RX(10M)     | Channel 650   | Channel 900   | Channel 1150  |
|           |             | 1935 MHz      | 1960 MHz      | 1985 MHz      |
|           | RX(15M)     | Channel 675   | Channel 900   | Channel 1125  |
|           |             | 1937.5 MHz    | 1960 MHz      | 1982.5 MHz    |
| RX(20M)   | Channel 700 | Channel 900   | Channel 1100  |               |
|           | 1940 MHz    | 1960 MHz      | 1980 MHz      |               |

| Test Mode  | TX / RX  | RF Channel    |               |               |
|------------|----------|---------------|---------------|---------------|
|            |          | Low (B)       | Middle (M)    | High (T)      |
| LTE Band 4 | TX(1.4M) | Channel 19957 | Channel 20175 | Channel 20393 |
|            |          | 1710.7 MHz    | 1732.5 MHz    | 1754.3 MHz    |
|            | TX(3M)   | Channel 19965 | Channel 20175 | Channel 20385 |
|            |          | 1711.5 MHz    | 1732.5 MHz    | 1753.5 MHz    |
|            | TX(5M)   | Channel 19975 | Channel 20175 | Channel 20375 |
|            |          | 1712.5 MHz    | 1732.5 MHz    | 1752.5 MHz    |
|            | TX(10M)  | Channel 20000 | Channel 20175 | Channel 20350 |
|            |          | 1715 MHz      | 1732.5 MHz    | 1750 MHz      |
|            | TX(15M)  | Channel 20025 | Channel 20175 | Channel 20325 |
|            |          | 1717.5 MHz    | 1732.5 MHz    | 1747.5 MHz    |
|            | TX(20M)  | Channel 20050 | Channel 20175 | Channel 20300 |
|            |          | 1720 MHz      | 1732.5 MHz    | 1745 MHz      |
|            | RX(1.4M) | Channel 1975  | Channel 2175  | Channel 2375  |
|            |          | 2112.5 MHz    | 2132.5MHz     | 2152.5 MHz    |
|            | RX(3M)   | Channel 2000  | Channel 2175  | Channel 2350  |
|            |          | 2115 MHz      | 2132.5MHz     | 2150 MHz      |
|            | RX(5M)   | Channel 1975  | Channel 2175  | Channel 2375  |
|            |          | 2112.5 MHz    | 2132.5MHz     | 2152.5 MHz    |
|            | RX(10M)  | Channel 2000  | Channel 2175  | Channel 2350  |
|            |          | 2115 MHz      | 2132.5MHz     | 2150 MHz      |
|            | RX(15M)  | Channel 2025  | Channel 2175  | Channel 2325  |
|            |          | 2117.5 MHz    | 2132.5MHz     | 2147.5 MHz    |
|            | RX(20M)  | Channel 2050  | Channel 2175  | Channel 2300  |
|            |          | 2120 MHz      | 2132.5MHz     | 2145 MHz      |

| Test Mode  | TX / RX  | RF Channel    |               |               |
|------------|----------|---------------|---------------|---------------|
|            |          | Low (B)       | Middle (M)    | High (T)      |
| LTE Band 5 | TX(1.4M) | Channel 20407 | Channel 20525 | Channel 20643 |
|            |          | 824.7 MHz     | 836.5 MHz     | 848.3 MHz     |
|            | TX(3M)   | Channel 20415 | Channel 20525 | Channel 20635 |
|            |          | 825.5 MHz     | 836.5 MHz     | 847.5 MHz     |
|            | TX(5M)   | Channel 20425 | Channel 20525 | Channel 20625 |
|            |          | 826.5 MHz     | 836.5 MHz     | 846.5 MHz     |
|            | TX(10M)  | Channel 20450 | Channel 20525 | Channel 20600 |
|            |          | 829 MHz       | 836.5 MHz     | 844 MHz       |
|            | RX(1.4M) | Channel 2407  | Channel 2525  | Channel 2643  |
|            |          | 869.7 MHz     | 881.5 MHz     | 893.3 MHz     |
|            | RX (3M)  | Channel 2415  | Channel 2525  | Channel 2635  |
|            |          | 870.5 MHz     | 881.5 MHz     | 892.5 MHz     |
|            | RX(5M)   | Channel 2425  | Channel 2525  | Channel 2625  |
|            |          | 871.5 MHz     | 881.5 MHz     | 891.5 MHz     |
|            | RX (10M) | Channel 2450  | Channel 2525  | Channel 2600  |
|            |          | 874 MHz       | 881.5 MHz     | 889 MHz       |

| Test Mode  | TX / RX  | RF Channel    |               |               |
|------------|----------|---------------|---------------|---------------|
|            |          | Low (B)       | Middle (M)    | High (T)      |
| LTE Band 7 | TX (5M)  | Channel 20775 | Channel 21100 | Channel 21425 |
|            |          | 2502.5 MHz    | 2535 MHz      | 2567.5 MHz    |
|            | TX (10M) | Channel 20800 | Channel 21100 | Channel 21400 |

| Test Mode | TX / RX  | RF Channel    |               |               |          |
|-----------|----------|---------------|---------------|---------------|----------|
|           |          | Low (B)       | Middle (M)    | High (T)      |          |
|           | TX (15M) | 2505 MHz      | 2535 MHz      | 2565 MHz      |          |
|           |          | Channel 20825 | Channel 21100 | Channel 21375 |          |
|           | TX (20M) | 2507.5 MHz    | 2535 MHz      | 2562.5 MHz    |          |
|           |          | Channel 20850 | Channel 21100 | Channel 21350 |          |
|           | RX (5M)  | 2510 MHz      | 2535 MHz      | 2560 MHz      |          |
|           |          | Channel 2775  | Channel 3100  | Channel 3425  |          |
|           | RX (10M) | 2622.5 MHz    | 2655 MHz      | 2687.5 MHz    |          |
|           |          | Channel 2800  | Channel 3100  | Channel 3400  |          |
|           | RX (15M) | 2625 MHz      | 2655 MHz      | 2685 MHz      |          |
|           |          | Channel 2825  | Channel 3100  | Channel 3375  |          |
|           | RX (20M) | 2627.5 MHz    | 2655 MHz      | 2682.5 MHz    |          |
|           |          | Channel 2850  | Channel 3100  | Channel 3350  |          |
|           |          |               | 2630 MHz      | 2655 MHz      | 2680 MHz |

| Test Mode   | TX / RX  | RF Channel     |                |                |
|-------------|----------|----------------|----------------|----------------|
|             |          | Low (B)        | Middle (M)     | High (T)       |
| LTE Band 66 | TX(1.4M) | Channel 131979 | Channel 132322 | Channel 132665 |
|             |          | 1710.7 MHz     | 1745 MHz       | 1779.3 MHz     |
|             | TX(3M)   | Channel 131987 | Channel 132322 | Channel 132657 |
|             |          | 1711.5 MHz     | 1745 MHz       | 1778.5 MHz     |
|             | TX(5M)   | Channel 131997 | Channel 132322 | Channel 132647 |
|             |          | 1712.5 MHz     | 1745 MHz       | 1777.5 MHz     |
|             | TX(10M)  | Channel 132022 | Channel 132322 | Channel 132622 |
|             |          | 1715 MHz       | 1745 MHz       | 1775MHz        |

| Test Mode | TX / RX  | RF Channel     |                |                |
|-----------|----------|----------------|----------------|----------------|
|           |          | Low (B)        | Middle (M)     | High (T)       |
|           | TX(15M)  | Channel 132047 | Channel 132322 | Channel 132597 |
|           |          | 1717.5 MHz     | 1745 MHz       | 1772.5 MHz     |
|           | TX(20M)  | Channel 132072 | Channel 132322 | Channel 132572 |
|           |          | 1720 MHz       | 1745 MHz       | 1770 MHz       |
|           | RX(1.4M) | Channel 66443  | Channel 66786  | Channel 67129  |
|           |          | 2110.7 MHz     | 2145 MHz       | 2179.3 MHz     |
|           | RX(3M)   | Channel 66451  | Channel 66786  | Channel 67121  |
|           |          | 2111.5 MHz     | 2145 MHz       | 2178.3 MHz     |
|           | RX(5M)   | Channel 66461  | Channel 66786  | Channel 67111  |
|           |          | 2112.5 MHz     | 2145 MHz       | 2177.5 MHz     |
|           | RX(10M)  | Channel 66486  | Channel 66786  | Channel 67086  |
|           |          | 2115 MHz       | 2145 MHz       | 2175 MHz       |
|           | RX(15M)  | Channel 66511  | Channel 66786  | Channel 67061  |
|           |          | 2117.5 MHz     | 2145 MHz       | 2172.5 MHz     |
|           | RX(20M)  | Channel 66536  | Channel 66786  | Channel 67036  |
|           |          | 2120 MHz       | 2145 MHz       | 2170 MHz       |

## 5.3 DESCRIPTION OF TESTS

### 5.3.1 Radiated Power and Radiated Spurious Emissions

Radiated spurious emissions are investigated indoors in a full-anechoic chamber to determine the frequencies producing the worst case emissions. Final measurements for radiated power and radiated spurious emissions are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-E-2016. The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 150cm above the ground plane and 3 meters from the receive antenna. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Emissions are also investigated with the receive antenna horizontally and vertically polarized.

A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.

A half-wave dipole is then substituted in place of the EUT. For emissions above 3GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT.

The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power [Watts]})$ .

### Test Procedures Used

KDB 971168 D01 v03-Section 5

ANSI/TIA-603-E-2016-Section 2.2.17 / ANSI/TIA-603-E-2016-Section 2.2.12

Note: Reference test setup 3

### 5.3.2 Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

#### Test Procedures Used

KDB 971168 D01 v03-Section 5.7.2

#### Test Settings

- 1、 The signal analyzer's CCDF measurement profile enabled
- 2、 Frequency= carrier center frequency
- 3、 Measurement BW > EBW of signal
- 4、 for continuous transmissions, set to 1ms
- 5、 Record the maximum PAPR level associated with a probability of 0.1%.

Note: Reference test setup 1



### 5.3.3 Occupied Bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### Test Procedures Used

KDB 971168 D01 v03-Section 4.3

#### Test Settings

- 1、 SET RBW=1-5% of OBW
- 2、 SET VBW  $\geq$  3\*RBW
- 3、 Detector: Peak
- 4、 Trace mode= max hold.
- 5、 Sweep= auto couple
- 6、 Steps 1-5 were repeated after it is stable

Note: Reference test setup 1.

### 5.3.4 Band Edge Compliance

The test complies with the requirements in clause 2 of the present report according to test procedures in KDB 971168 D01 v03-Section 6 with corresponding test settings.

Note: Reference test setup 1.

### 5.3.5 Spurious and Harmonic Emissions at Antenna Terminal

The test complies with the requirements in clause 2 of the present report according to test procedures in KDB 971168 D01 v03-Section 6 with corresponding test settings.

Note: Reference test setup 1.

### 5.3.6 Frequency Stability / Temperature Variation

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.

#### **Time Period and Procedure:**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### **Test Procedures Used**

ANSI/TIA-603-E-2016


Note: Reference test setup 2.

## 5.4 Test Setups


### 5.4.1 General Test Setup Configurations

| Configuration       | Description  |
|---------------------|--|
| Test Antenna Port   | Until declared, all Transmitter tests are performed at TRX port of the EUT   |
| Multiple RF Source  | Other RF sources or functions of the EUT are disabled during testing for RF source.  |
| Sensors and Antenna | Sensors and Antenna optimization function should be disabled during testing by software method to get the stable maximum power and avoid the influence of uncertain conditions |

### 5.4.2 Test Setup 1

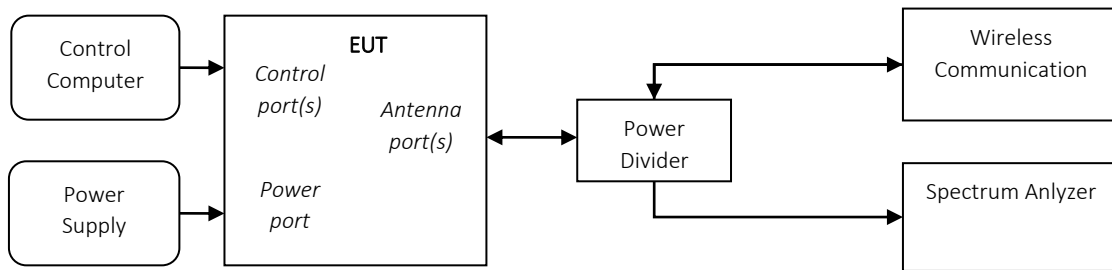


### 5.4.3 Test Setup 2

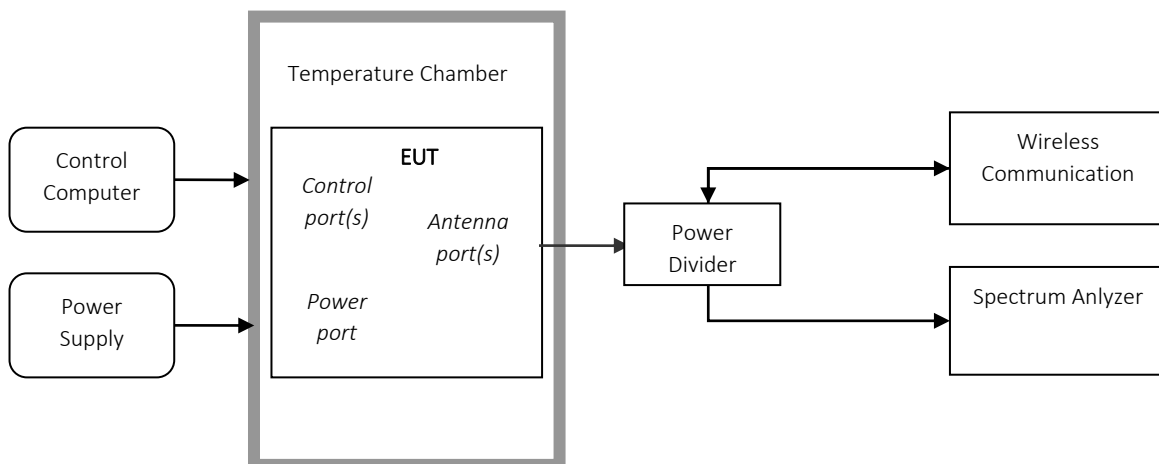


### 5.4.4 Test Setup 3

NOTE: Effective radiated power (ERP) and Equivalent Isotropic Radiated Power(EIRP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

#### 5.4.4.1 Step 1: Pre-test

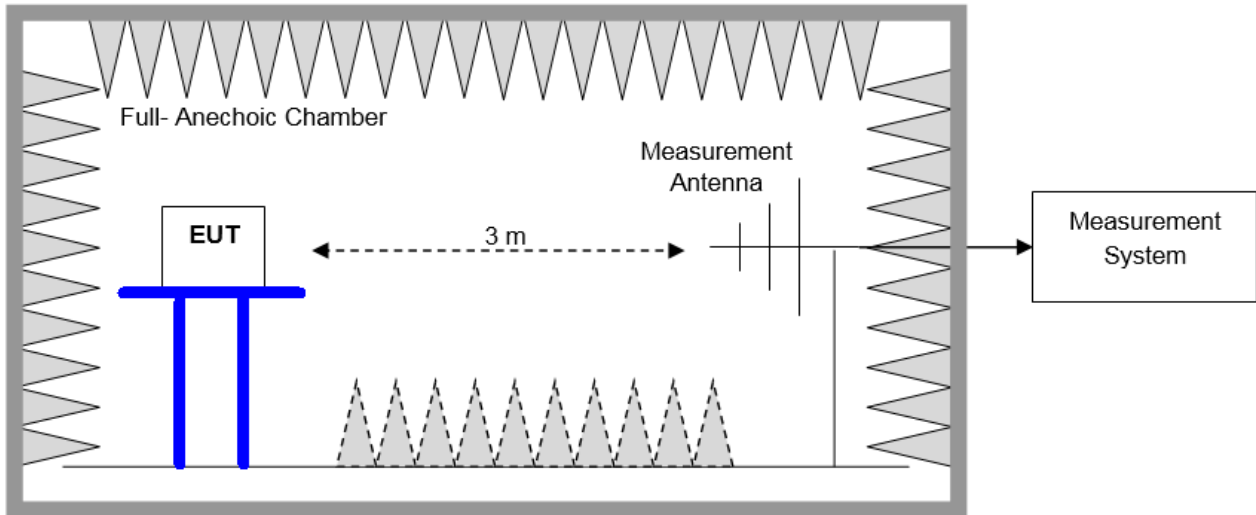

#### 5.4.4.2 Step 2: Substitution method to verify the maximum ERP/EIRP

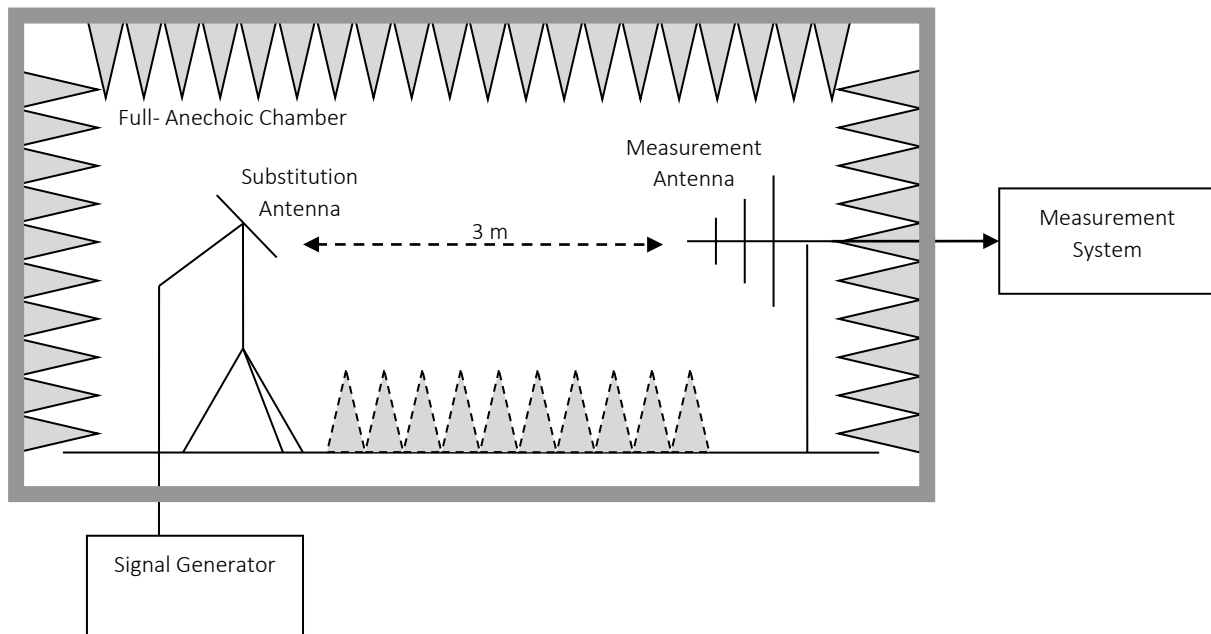

### 5.5 Test Conditions

| Test Case                              |   | Test Conditions  |  |
|--|---|------------------|--|
| Transmit Output Power Data             | Average Power, Total                          | Test Env.        | Ambient Climate & Rated Voltage                                  |
|  |   | Test Setup       | Test Setup 1   |
|  |   | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel ) |
|  |   | Test Mode        | UMTS/TM1,LTE/TM1,LTE/TM2   |
|  | Average Power, Spectral Density (if required) | Test Env.        | Ambient Climate & Rated Voltage                                  |
|  |   | Test Setup       | Test Setup 1   |
|  |   | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel ) |
|  |   | Test Mode        | UMTS/TM1,LTE/TM1,LTE/TM2   |
| Peak-to-Average Ratio (if required)    |   | Test Env.        | Ambient Climate & Rated Voltage                                  |
|  |   | Test Setup       | Test Setup 1   |
|  |   | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel ) |
|  |   | Test Mode        | UMTS/TM1,LTE/TM1,LTE/TM2   |
| Modulation Characteristics             |   | Test Env.        | Ambient Climate & Rated Voltage                                  |
|  |   | Test Setup       | Test Setup 1   |
|  |   | RF Channels (TX) | M<br>(L= low channel, M= middle channel, H= high channel )       |
|  |   | Test Mode        | UMTS/TM1,LTE/TM1,LTE/TM2   |
| Bandwidth                              | Occupied Bandwidth                            | Test Env.        | Ambient Climate & Rated Voltage                                  |
|  |   | Test Setup       | Test Setup 1   |
|  |   | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel ) |
|  |   | Test Mode        | UMTS/TM1,LTE/TM1,LTE/TM2   |
|  | Emission Bandwidth (if required)              | Test Env.        | Ambient Climate & Rated Voltage                                  |
|  |   | Test Setup       | Test Setup 1   |
|  |   | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel ) |
|  |   | Test Mode        | UMTS/TM1,LTE/TM1,LTE/TM2   |
| Band Edges Compliance                  |   | Test Env.        | Ambient Climate & Rated Voltage                                  |
|  |   | Test Setup       | Test Setup 1   |
|  |   | RF Channels (TX) | L, H<br>(L= low channel, M= middle channel, H= high channel )    |
|  |   | Test Mode        | UMTS/TM1,LTE/TM1,LTE/TM2   |
| Spurious Emission at Antenna Terminals |   | Test Env.        | Ambient Climate & Rated Voltage                                  |
|  |   | Test Setup       | Test Setup 1   |
|  |   | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel ) |

| Test Case                            | Test Conditions  |  |
|--------------------------------------|------------------|--|
|                                      | Test Mode        | UMTS/TM1,LTE/TM1,LTE/TM2   |
| Field Strength of Spurious Radiation | Test Env.        | Ambient Climate & Rated Voltage  |
|                                      | Test Setup       | Test Setup 3   |
|                                      | Test Mode        | UMTS/TM1/TM2/TM3,LTE/TM1,LTE/TM2<br>NOTE: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected. |
|                                      | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel )   |
| Frequency Stability                  | Test Env.        | (1) -30 °C to +50 °C with step 10 °C at Rated Voltage;<br>(2) VL, VN and VH of Rated Voltage at Ambient Climate.   |
|                                      | Test Setup       | Test Setup 2   |
|                                      | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel )   |
|                                      | Test Mode        | UMTS/TM1,LTE/TM1,LTE/TM2   |

## 6 Main Test Instruments

### 6.1 Current Test Project/Report

| Main Test Equipments(GSM/WCDMA/LTE test system) |              |        |               |            |            |
|---|--------------|--------|---------------|------------|------------|
| Equipment Name                                  | Manufacturer | Model  | Serial Number | Cal Date   | Cal-Due    |
| Universal Radio Communication Tester            | R&S          | CMW500 | 164698        | 2019/07/05 | 2020/07/05 |
| Spectrum Analyzer                               | Agilent      | N9030A | MY51380032    | 2019/03/01 | 2020/03/01 |
| Signal generator                                | Agilent      | E8257D | MY51500314    | 2019/07/05 | 2020/07/05 |

| Main Test Equipments(RSE test system)           |               |            |               |            |            |
|---|---------------|------------|---------------|------------|------------|
| Equipment Name                                  | Manufacturer  | Model      | Serial Number | Cal Date   | Cal-Due    |
| Universal Radio Communication Tester            | R&S           | CMU200     | 117057        | 2019/03/01 | 2020/03/01 |
| Universal Radio Communication Tester            | R&S           | MT8821C    | 6261760791    | 2019/03/01 | 2020/03/01 |
| Spectrum analyzer                               | R&S           | FSW8       | 104470        | 2019/01/15 | 2020/01/14 |
| Spectrum analyzer                               | R&S           | FSW43      | 104070        | 2019/01/15 | 2020/01/14 |
| Trilog Broadband Antenna (30M~3GHz)             | SCHWARZ BECK  | VULB 9163  | 01157         | 2019/03/11 | 2021/03/10 |
| Double-Ridged Waveguide Horn Antenna (1G~18GHz) | SCHWARZ BECK  | BBHA 9120D | 01931         | 2019/03/22 | 2021/03/21 |
| Pyramidal Horn Antenna(18GHz-40GHz)             | SCHWARZ BECK  | BBHA 9170  | 00863         | 2019/03/30 | 2021/03/29 |
| Software Information                            |               |            |               |            |            |
| Test Item                                       | Software Name |            | Manufacturer  | Version    |            |
| RSE   | TS+           |            | Tonscend      | Ver2.1     |            |

| Main Test Equipments(RE test system)            |              |           |               |            |            |
|---|--------------|-----------|---------------|------------|------------|
| Equipment Name                                  | Manufacturer | Model     | Serial Number | Cal Date   | Cal-Due    |
| Test receiver                                   | R&S          | ESU26     | 100387        | 2019/01/15 | 2020/01/14 |
| LOOP Antennas(9kHz-30MHz)                       | R&S          | HFH2-Z2   | 100263        | 2019/03/15 | 2021/03/15 |
| Trilog Broadband Antenna (30M~3GHz)             | SCHWARZ BECK | VULB 9163 | 9163-356      | 2018/4/9   | 2020/04/08 |
| Double-Ridged Waveguide Horn Antenna (1G~18GHz) | R&S          | HF906     | 100684        | 2018/5/27  | 2020/05/26 |
| Pyramidal Horn Antenna(18GHz-26.5GHz)           | ETS-Lindgren | 3160-09   | 5140299       | 2018/07/20 | 2020/07/19 |

| Pyramidal Horn<br>Antenna(26.5GHz-40GHz) | ETS-Lindgre<br>n | 3160-10      | 00205695 | 2018/04/20 | 2020/04/19 |
|--|------------------|--------------|----------|------------|------------|
| Software Information                     |                  |              |          |            |            |
| Test Item                                | Software Name    | Manufacturer |          | Version    |            |
| RE                                       | EMC32            | R&S          |          | V9.25.0    |            |

## 7 Measurement Uncertainty

For a 95% confidence level ( $k = 2$ ), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

| Test Item                            |                         | Extended Uncertainty   |
|--------------------------------------|-------------------------|--|
| Transmit Output Power Conducted      | Power [dBm]             | U = 0.64 dB  |
| RF Power Density, Conducted          | Power [dBm]             | U = 0.64 dB  |
| Bandwidth                            | Magnitude [kHz]         | 200kHz: U=9.06kHz<br>1.4MHz: U=9.48kHz<br>3MHz: U= 10.86kHz<br>5MHz: U=13.84kHz<br>10MHz: U=22.32kHz<br>15MHz: U=31.9kHz<br>20MHz: U=41.78kHz  |
| Band Edge Compliance                 | Disturbance Power [dBm] | U = 0.9 dB   |
| Spurious Emissions, Conducted        | Disturbance Power [dBm] | 20MHz~3.6GHz: U=0.88dB<br>3.6GHz~8.4GHz: U= 1.08dB<br>8.4GHz~13.6GHz: U= 1.24dB<br>13.6GHz~22GHz: U= 1.34dB<br>22GHz~26.5GHz: U= 1.36dB  |
| Field Strength of Spurious Radiation | ERP/EIRP [dBm]          | For 3 m Chamber:<br>U = 3.868 dB (9 kHz to 150 kHz)<br>U = 3.782 dB (150 kHz to 30 MHz)<br>U = 5.94 dB (30 MHz to 3GHz)<br>U = 5.54 dB (3GHz to 18GHz)<br>U = 4.94 dB (18GHz to 26.5GHz) |
| Frequency Stability                  | Frequency Accuracy [Hz] | 800MHz: U=24.08Hz<br>900MHz: U=24.54Hz<br>1900MHz: U=34.7Hz<br>2100MHz: U=36.96Hz<br>2300MHz: U=39.24Hz<br>2500MHz: U=41.58Hz<br>2600MHz: U=42.74Hz                                      |



**8 Appendixes**

| Appendix No.                    | Description              |
|---------------------------------|--------------------------|
| SYBH(Z-RF)20191011017001-2001-A | Appendix_for_WCDMA       |
| SYBH(Z-RF)20191011017001-2001-B | Appendix_for_LTE_Band_2  |
| SYBH(Z-RF)20191011017001-2001-C | Appendix_for_LTE_Band_4  |
| SYBH(Z-RF)20191011017001-2001-D | Appendix_for_LTE_Band_5  |
| SYBH(Z-RF)20191011017001-2001-E | Appendix_for_LTE_Band_7  |
| SYBH(Z-RF)20191011017001-2001-F | Appendix_for_LTE_Band_66 |

| Appendix   | Description                                      |
|------------|--|
| Appendix A | Effective (Isotropic) Radiated Power Output Data |
| Appendix B | Peak-Average Ratio                               |
| Appendix C | Modulation Characteristics                       |
| Appendix D | Bandwidth  |
| Appendix E | Band Edges Compliance                            |
| Appendix F | Spurious Emission at Antenna Terminals           |
| Appendix G | Field Strength of Spurious Radiation             |
| Appendix H | Frequency Stability                              |

---

END