

# FCC Radio Test Report

## FCC ID: QISB315S-22

This report concerns (check one): Original Grant Class II Change

**Project No.** : 1602C003  
**Equipment** : LTE CPE  
**Model Name** : B315s-22  
**Applicant** : Huawei Technologies Co.,Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen, 518129, P.R.C

**Date of Receipt** : Feb. 02, 2016  
**Date of Test** : Feb. 02, 2016 ~ Feb. 25, 2016  
**Issued Date** : Feb. 26, 2016  
**Tested by** : BTL Inc.

**Technical Engineer** : Shawn Xiao  
(Shawn Xiao)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

**B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

## **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

## **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
<b>REPORT ISSUED HISTORY</b>	<b>5</b>
<b>1 . CERTIFICATION</b>	<b>6</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>2.1 TEST FACILITY</b>	<b>8</b>
<b>2.2 MEASUREMENT UNCERTAINTY</b>	<b>8</b>
<b>3 . GENERAL INFORMATION</b>	<b>9</b>
<b>3.1 GENERAL DESCRIPTION OF EUT</b>	<b>9</b>
<b>3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION</b>	<b>10</b>
<b>3.3 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED</b>	<b>11</b>
<b>3.4 DESCRIPTION OF SUPPORT UNITS</b>	<b>11</b>
<b>4 . TEST RESULT</b>	<b>12</b>
<b>4.1 OUTPUT POWER MEASUREMENT</b>	<b>12</b>
<b>4.1.1 LIMIT</b>	<b>12</b>
<b>4.1.2 TEST PROCEDURE</b>	<b>12</b>
<b>4.1.3 TESTSETUP LAYOUT</b>	<b>13</b>
<b>4.1.4 TEST DEVIATION</b>	<b>13</b>
<b>4.1.5 TEST RESULTS</b>	<b>13</b>
<b>4.2 OCCUPIED BANDWIDTH MEASUREMENT</b>	<b>14</b>
<b>4.2.1 TEST PROCEDURE</b>	<b>14</b>
<b>4.2.2 TEST SETUP LAYOUT</b>	<b>14</b>
<b>4.2.3 TEST DEVIATION</b>	<b>14</b>
<b>4.2.4 TEST RESULTS</b>	<b>14</b>
<b>4.3 CONDUCTED EMISSIONS MEASUREMENT</b>	<b>15</b>
<b>4.3.1 LIMIT</b>	<b>15</b>
<b>4.3.2 TEST PROCEDURES</b>	<b>15</b>
<b>4.3.3 TESTSETUP LAYOUT</b>	<b>15</b>
<b>4.3.4 TESTDEVIATION</b>	<b>15</b>
<b>4.3.5 TEST RESULTS</b>	<b>15</b>
<b>4.4 RADIATED EMISSIONS MEASUREMENT</b>	<b>16</b>
<b>4.4.1 LIMIT</b>	<b>16</b>
<b>4.4.2 TEST PROCEDURES</b>	<b>16</b>
<b>4.4.3 TESTSETUP LAYOUT</b>	<b>16</b>
<b>4.4.4 TESTDEVIATION</b>	<b>16</b>
<b>4.4.5 TEST RESULTS</b>	<b>16</b>
<b>4.5 BAND EDGE MEASUREMENT</b>	<b>17</b>
<b>4.5.1 LIMIT</b>	<b>17</b>

Table of Contents	Page
4.5.2 TEST PROCEDURES	17
4.5.3 TESTSETUP LAYOUT	17
4.5.4 TESTDEVIATION	17
4.5.5 TEST RESULTS	17
<b>4.6 PEAK TO AVERAGE RATIO MEASUREMENT</b>	<b>18</b>
4.6.1 LIMIT	18
4.6.2 TEST PROCEDURES	18
4.6.3 TESTSETUP LAYOUT	18
4.6.4 TESTDEVIATION	18
4.6.5 TEST RESULTS	18
<b>4.7 FREQUENCY STABILITY MEASUREMENT</b>	<b>19</b>
4.7.1 LIMIT	19
4.7.2 TEST PROCEDURES	19
4.7.3 TESTSETUP LAYOUT	19
4.7.4 TESTDEVIATION	19
4.7.5 TEST RESULTS	19
<b>5. LIST OF MEASUREMENT EQUIPMENTS</b>	<b>20</b>
<b>6. EUT TEST PHOTO</b>	<b>22</b>
<b>ATTACHMENT A - OUTPUT POWER</b>	<b>26</b>
<b>ATTACHMENT B - OCCUPIED BANDWIDTH</b>	<b>28</b>
<b>ATTACHMENT C – CONDUCTED EMISSIONS</b>	<b>31</b>
<b>ATTACHMENT D - RADIATED EMISSION</b>	<b>33</b>
<b>ATTACHMENT E - BAND EDGE</b>	<b>54</b>
<b>ATTACHMENT F – PEAK TO AVERAGE RATIO</b>	<b>56</b>
<b>ATTACHMENT G - FREQUENCY STABILITY</b>	<b>58</b>

**REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-FCCP-3-1602C003	Original Issue.	Feb. 26, 2016

## 1. CERTIFICATION

Equipment : LTE CPE  
Brand Name : HUAWEI  
Model Name : B315s-22  
Applicant : Huawei Technologies Co.,Ltd.  
Manufacturer : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen, 518129, P.R.C  
Factory : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen, 518129, P.R.C  
Date of Test : Feb. 02, 2016 ~ Feb. 25, 2016  
Test Sample : Engineering Sample  
Standard(s) : 47 CFR FCC Part 24 Subpart E  
47 CFR FCC Part 2  
ANSI/TIA-603-D-2010  
KDB 971168 D01 Power Meas License Digital Systems v02r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-3-1602C003) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**Test result included in this report is only for the DCS1900 part.**

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 22 Subpart H& Part 2			
Standard(s) Section	Test Item	Judgment	Tested By
2.1046 24.232(c)	Radiated power	PASS	Robort Luo
2.1046 24.232(c)	Conducted Output Power	PASS	Allen Li
2.1049 24.238(a)	Occupied Bandwidth	PASS	Allen Li
2.1051 24.238(a)	Conducted Spurious Emissions	PASS	Allen Li
2.1053 24.238(a)	Radiated Spurious Emissions	PASS	Robort Luo
24.238(a)	Band Edge Measurements	PASS	Allen Li
24.232(d)	Peak To Average Ratio	PASS	Allen Li
2.1055 24.235	Frequency Stability	PASS	Allen Li

NOTE:

(1)" N/A" denotes test is not applicable in this test report

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{cisp}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

A. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U_{cisp}$ (dB)
DG-CB03 (3m)	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	LTE CPE	
Brand Name	HUAWEI	
Model Name	B315s-22	
Model Difference	N/A	
Modulation Type	GSM	GMSK
	EDGE	GMSK, 8PSK
Operation Frequency	GSM /EDGE	1850.2 ~ 1909.8 MHz
Max. EIRP Power	GSM	27.14 dBm
	EDGE	24.18 dBm
Antenna Type	Internal Antenna / External Antenna	
Antenna Gain	2.5 dBi / 3 dBi	
Hardware Version	WL1B310I	
Software Version	V100R001	
IMEI No.	86616902	
Power Source	DC voltage supplied from AC Adapter. Brand / Model: HUAWEI / HW-120100U6W	
Power Rating	I/P: 100-240V~50/60Hz 0.5A O/P: 12.0V— 1.0A	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

### 3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports


The worst case was found when positioned on X-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

GSM MODE			
Test Item	Available Channel	Tested Channel	Mode
EIRP	512 to 810	512, 661, 810	GSM, EDGE
Conducted Output Power	512 to 810	512, 661, 810	GSM, EDGE
Occupied Bandwidth	512 to 810	512, 661, 810	GSM, EDGE
Conducted Emission	512 to 810	661	GSM, EDGE
Radiated Emission	512 to 810	661	GSM, EDGE
Band Edge	512 to 810	512, 810	GSM, EDGE
Peak to Average Ratio	512 to 810	512, 661, 810	GSM, EDGE
Frequency Stability	512 to 810	661	GSM, EDGE

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in **QPSK** modulation.

**EUT TEST CONDITIONS:**

Test Item	Environmental Conditions	Test Voltage
EIRP	24°C, 63%RH	AC120V/60Hz
Conducted Output Power	25°C, 65%RH	AC120V/60Hz
Occupied Bandwidth	25°C, 65%RH	AC120V/60Hz
Conducted Emission	25°C, 65%RH	AC120V/60Hz
Radiated Emission	24°C, 63%RH	AC120V/60Hz
Band Edge	25°C, 65%RH	AC120V/60Hz
Peak to Average Ratio	25°C, 65%RH	AC120V/60Hz
Frequency Stability	25°C, 65%RH	AC120V/60Hz

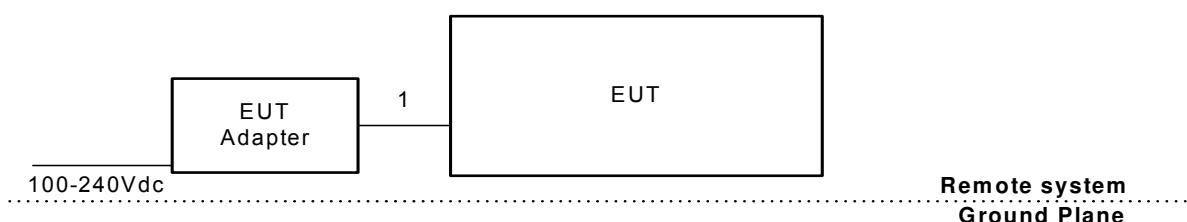**3.3 BLOCKDIGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED****3.4 DESCRIPTION OF SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	Power Cable

## 4. TEST RESULT

### 4.1 OUTPUT POWER MEASUREMENT

#### 4.1.1 LIMIT

Mobile / Portable station are limited to 7 watts e.r.p.

#### 4.1.2 TEST PROCEDURE

##### EIRP/ERP:

1. All measurements were done at low, middle and high operational frequency range. RBW and VBW setting:  
Set the RBW  $\geq$  OBW.  
Set VBW  $\geq 3 \times$  RBW.  
Set span  $\geq 2 \times$  RBW  
Sweep time=auto couple  
Detector=peak  
Ensure that the number of measurement points  $\geq$  span/RBW  
Trace mode=max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the peak amplitude level
2. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
3. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
5. E.R.P power can be calculated from E.I.R.P power by subtracting the gain of Integral, E.R.P power=E.I.P.R power-2.15dBi.


##### Conducted Power:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


#### 4.1.3 TESTSETUP LAYOUT

##### ERP Power Measurement


###### Below 1G

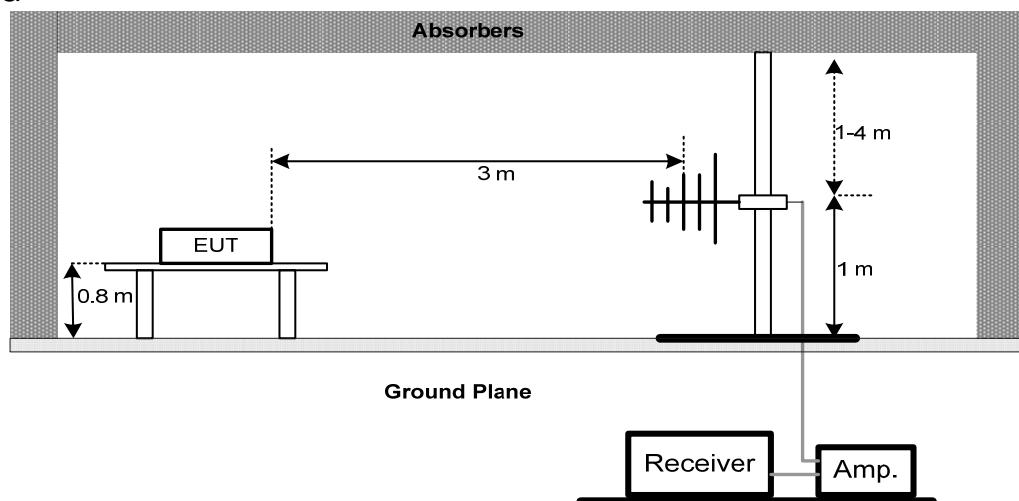

###### Above 1G

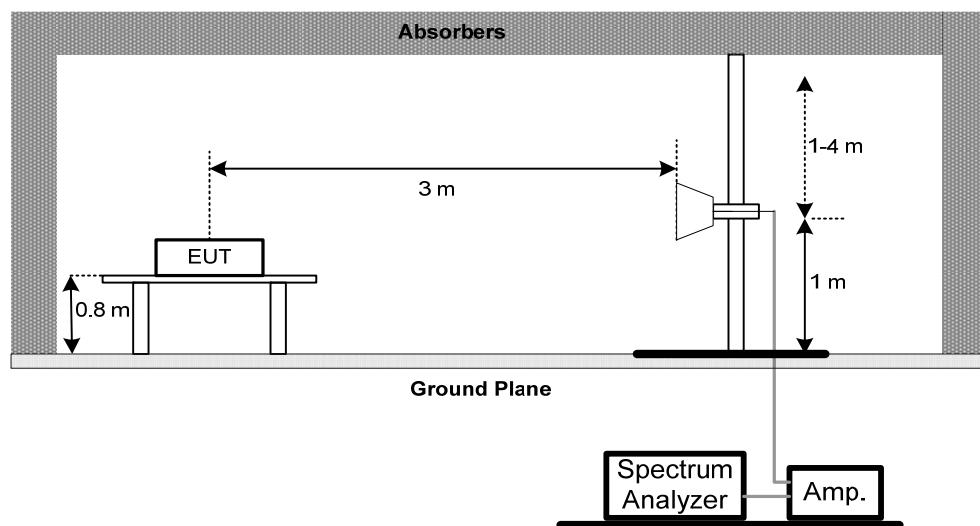

##### Conducted Power Measurement



#### 4.1.4 TEST DEVIATION

No deviation

#### 4.1.5 TEST RESULTS


Please refer to the Attachment A.

## 4.2 OCCUPIED BANDWIDTH MEASUREMENT

### 4.2.1 TEST PROCEDURE

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.

### 4.2.2 TEST SETUP LAYOUT

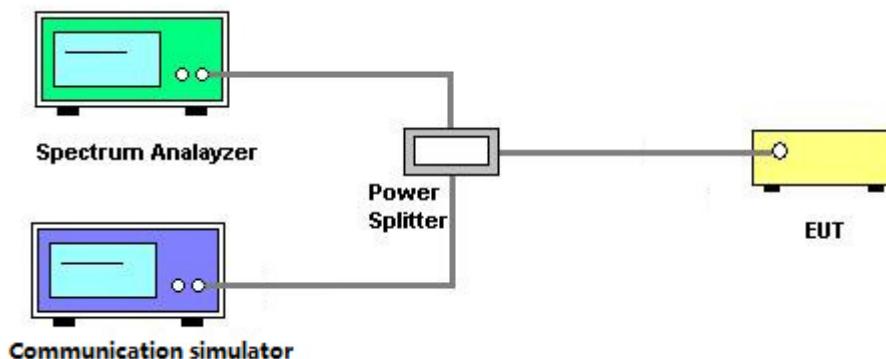

### 4.2.3 TEST DEVIATION

No deviation

### 4.2.4 TEST RESULTS

Please refer to the Attachment B.

## 4.3 CONDUCTED EMISSIONS MEASUREMENT


### 4.3.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

### 4.3.2 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set  $RBW \geq 1\% EBW$  in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43+10\log(P)$ dB below the transmitter power P(Watts)  
 $=P(W)-[43+10\log(P)](dB)$   
 $=[30+10\log(P)](dBm)-[43+10\log(P)](dB)$   
 $=-13dBm$

### 4.3.3 TESTSETUP LAYOUT

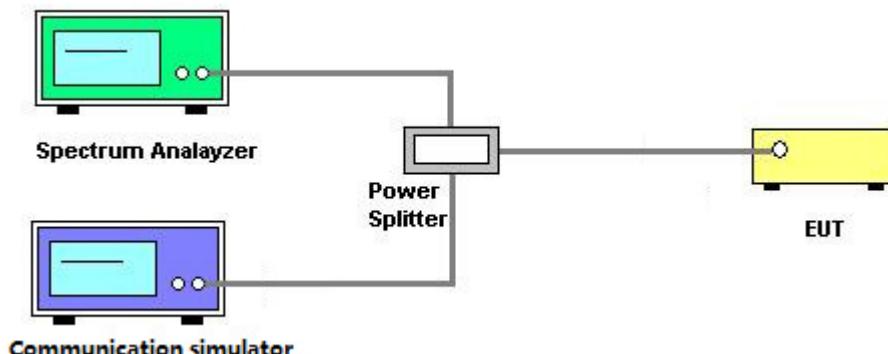

### 4.3.4 TESTDEVIATION

No deviation

### 4.3.5 TEST RESULTS

Please refer to the Attachment C.

## 4.4 RADIATED EMISSIONS MEASUREMENT

### 4.4.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

### 4.4.2 TEST PROCEDURES

1. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
2. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
3. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
4. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15dBi.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

### 4.4.3 TESTSETUP LAYOUT

This test setup layout is the same as that shown in **section 4.1.3**.

### 4.4.4 TESTDEVIATION

No deviation

### 4.4.5 TEST RESULTS

Please refer to the Attachment D.

## 4.5 BAND EDGE MEASUREMENT


### 4.5.1 LIMIT

A Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

### 4.5.2 TEST PROCEDURES

1. All measurements were done at low and high operational frequency range.
2. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS/EDGE).
3. The center frequency of spectrum is the band edge frequency and span is 5MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
4. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 13kHz and VB of the spectrum is 51kHz (LTE Bandwidth 1.4MHz).
5. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz (LTE Bandwidth 3MHz).
6. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (LTE Bandwidth 5MHz/10MHz).
7. Record the max trace plot into the test report.

### 4.5.3 TESTSETUP LAYOUT

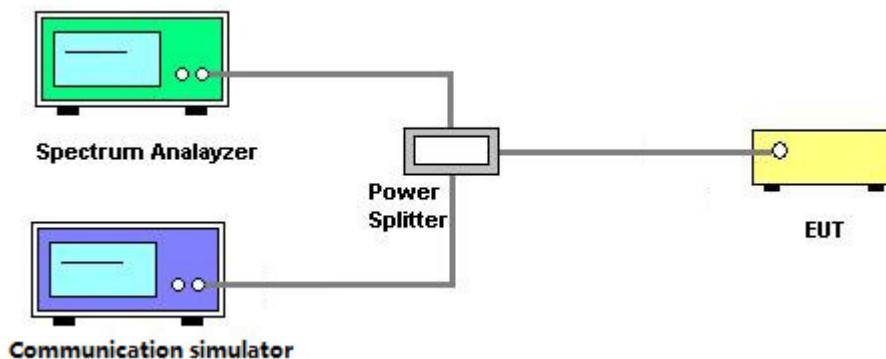

### 4.5.4 TESTDEVIATION

No deviation

### 4.5.5 TEST RESULTS

Please refer to the Attachment E.

## 4.6 PEAK TO AVERAGE RATIO MEASUREMENT


### 4.6.1 LIMIT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 4.6.2 TEST PROCEDURES

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

### 4.6.3 TESTSETUP LAYOUT

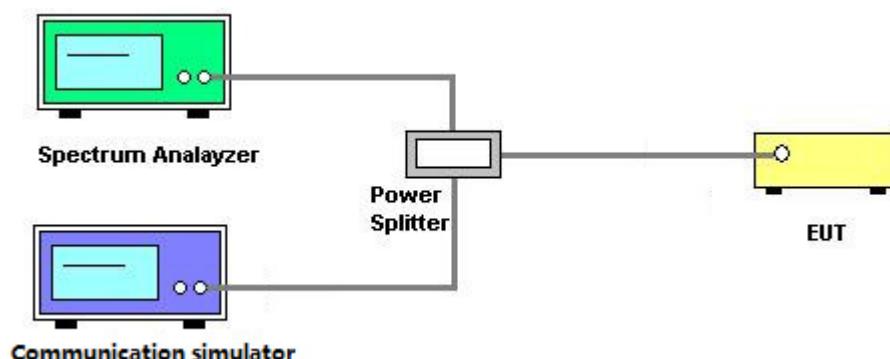

### 4.6.4 TESTDEVIATION

No deviation

### 4.6.5 TEST RESULTS

Please refer to the Attachment F.

## 4.7 FREQUENCY STABILITY MEASUREMENT


### 4.7.1 LIMIT

1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

### 4.7.2 TEST PROCEDURES

1. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
2. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
3. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the  $\pm 0.5^{\circ}\text{C}$  during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. The frequency error was recorded frequency error from the communication simulator.

### 4.7.3 TESTSETUP LAYOUT

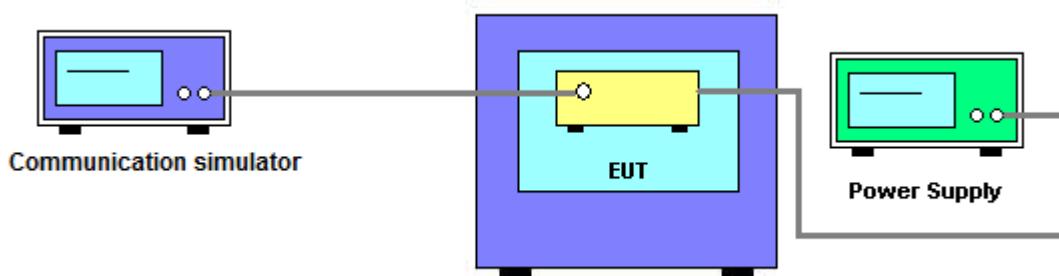

### 4.7.4 TESTDEVIATION

No deviation

### 4.7.5 TEST RESULTS

Please refer to the Attachment G.

## 5. LIST OF MEASUREMENT EQUIPMENTS

Radiated Emission & ERP or EIRP Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 28, 2016
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Controller	CT	SC100	N/A	N/A
6	Antenna	ETS	3115	75789	Mar. 28, 2016
7	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
8	Test Cable	emci	EMC104-SM-SM-10000(1GHz-26.5GHz)	C-68	Jun. 28, 2016
9	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 28, 2016
10	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 28, 2016
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
12	Wireless Communication Test Set	(8960 Series) Agilent	E5515C	MY48364183	Mar. 28, 2016
13	Band Reject Filter	Wairwright Instruments GmbH	WRCG 1850/1910-1830 /1930-60/10SS	17	Mar. 04, 2016
14	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 07, 2016

Conducted Emission & Band Edge & Occupied Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA SpectrumAnalyzer	Agilent	N9010A	MY50520044	Mar. 28, 2016
2	Wireless Communication Test Set	(8960 Series)Agilent	E5515C	MY48364183	Mar. 28, 2016
3	wideband radio communication tester	R&S	CMW500	152372	Mar.30, 2016
4	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Mar. 17, 2016
5	Test Cable	N/A	RG316	Cable4-001	Jul. 15, 2016
6	Test Cable	N/A	RG316	Cable4-002	Jul. 15, 2016
7	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wireless Communication Test Set	(8960 Series)Agilent	E5515C	MY48364183	Mar. 28, 2016
2	wideband radio communication tester	R&S	CMW500	152372	Mar. 30, 2016
3	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Mar. 17, 2016
4	Test Cable	N/A	RG316	Cable4-001	Jul. 15, 2016
5	Const Temp. & Humidity Chamber	GIANT FORCE	ITH-225-20-S	IAB0309-001	Dec.04, 2016
6	DC power supply	GW Insteck	GPC-3030D N	EK880675	Oct. 13, 2016

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

## ATTACHMENT A - OUTPUT POWER

**Conducted Power:**


DCS1900 (Capsensor Off)	Tune-up	Max Frame Average Power (dBm)		
		512CH	661CH	810CH
		1850.2MHz	1880MHz	1909.8MHz
GSM (CS)	30.00	-9.19	-9.19	-9.19
GPRS/EDGE (GMSK)	30.00	20.27	19.72	19.78
	28.50	21.31	20.81	20.88
	26.70	20.98	20.47	20.53
	25.50	20.15	19.71	19.75
EDGE (8PSK)	26.00	16.52	16.12	16.04
	24.50	17.35	16.93	16.99
	22.70	16.85	16.22	16.23
	21.50	15.71	15.16	15.33

**E.I.R.P Power**

DCS1900					
Plane	Channel	Frequency (MHz)	GSM EIRP(dBm)	EDGE EIRP(dBm)	Polarization (H/V)
X	512	1850.2	20.17	16.38	H
	661	1880	19.56	14.03	H
	810	1909.8	18.27	13.32	H
	512	1850.2	23.21	23.48	V
	661	1880	26.87	22.88	V
	810	1909.8	27.14	24.18	V

## ATTACHMENT B - OCCUPIED BANDWIDTH

DCS1900					
GSM			EDGE		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
512	1850.2	0.25	512	1850.2	0.25
661	1880	0.24	661	1880	0.24
810	1909.8	0.25	810	1909.8	0.25
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
512	1850.2	0.31	512	1850.2	0.32
661	1880	0.32	661	1880	0.32
810	1909.8	0.31	810	1909.8	0.31

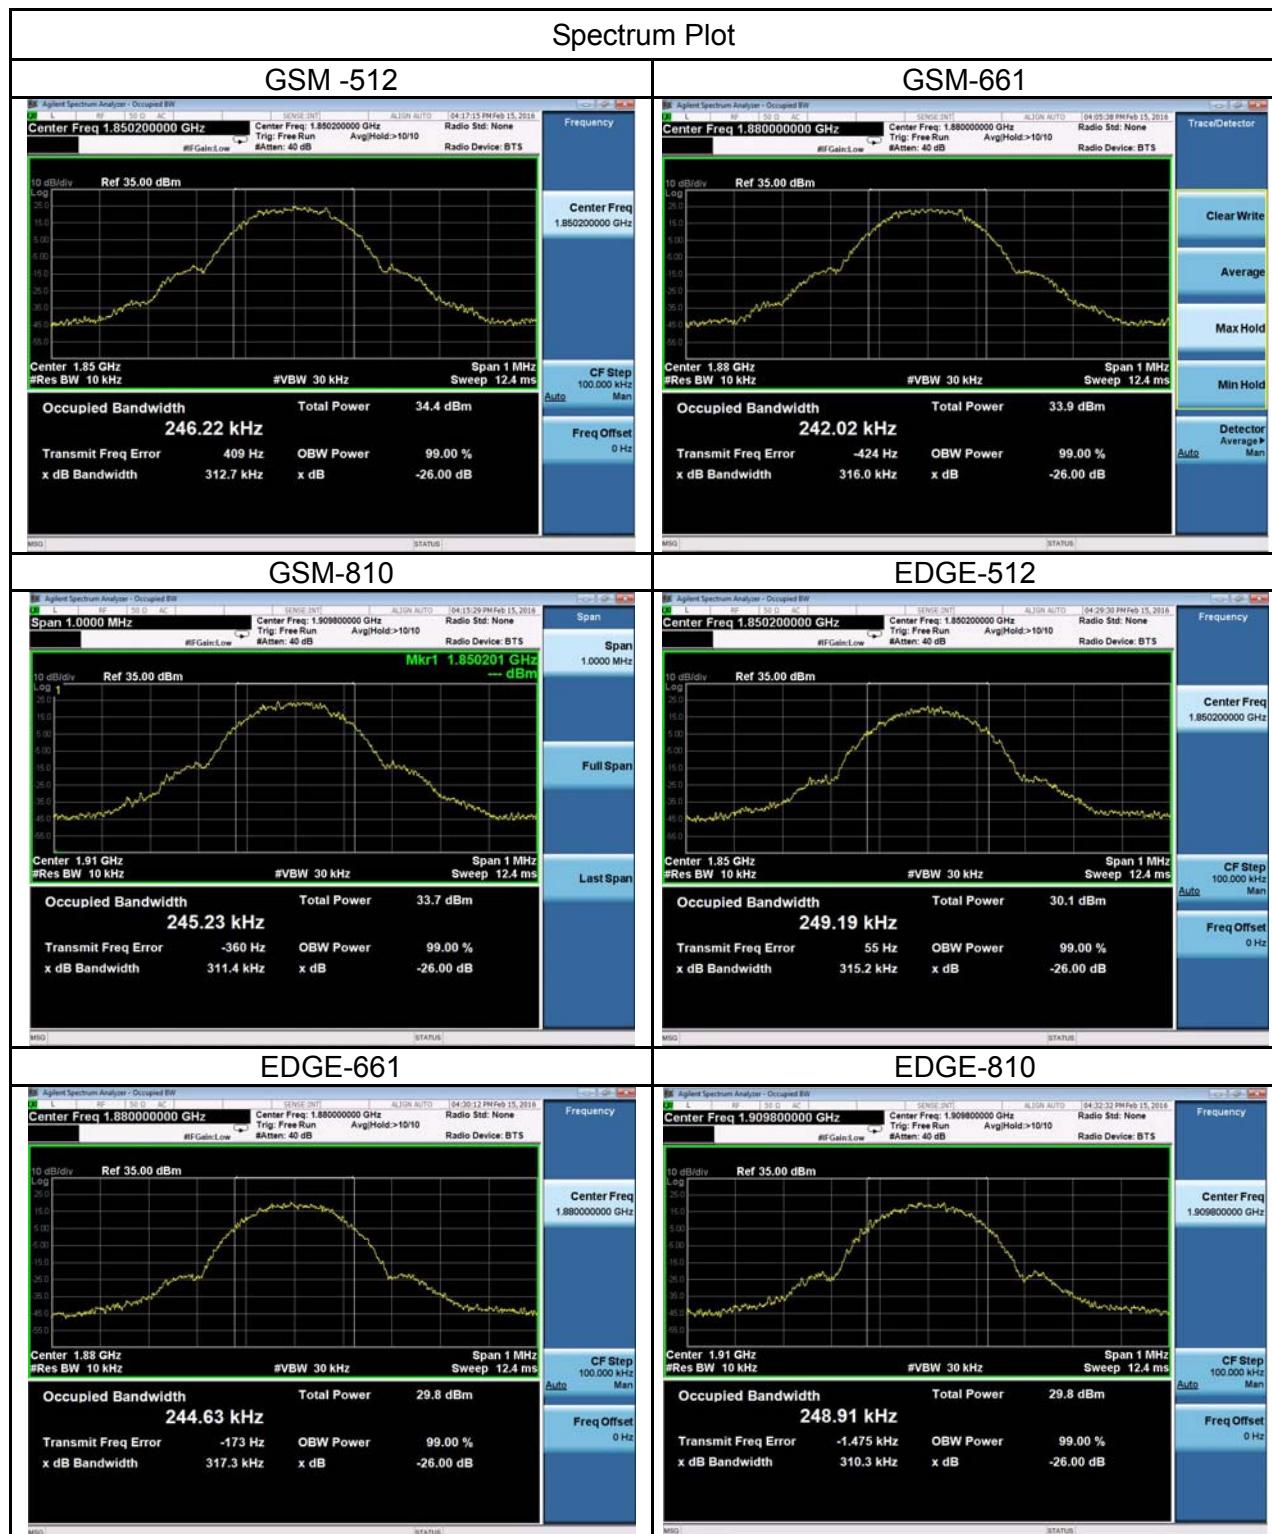


## ATTACHMENT C – CONDUCTED EMISSIONS




## ATTACHMENT D - RADIATED EMISSION

Test Mode: TX MODE - 0°

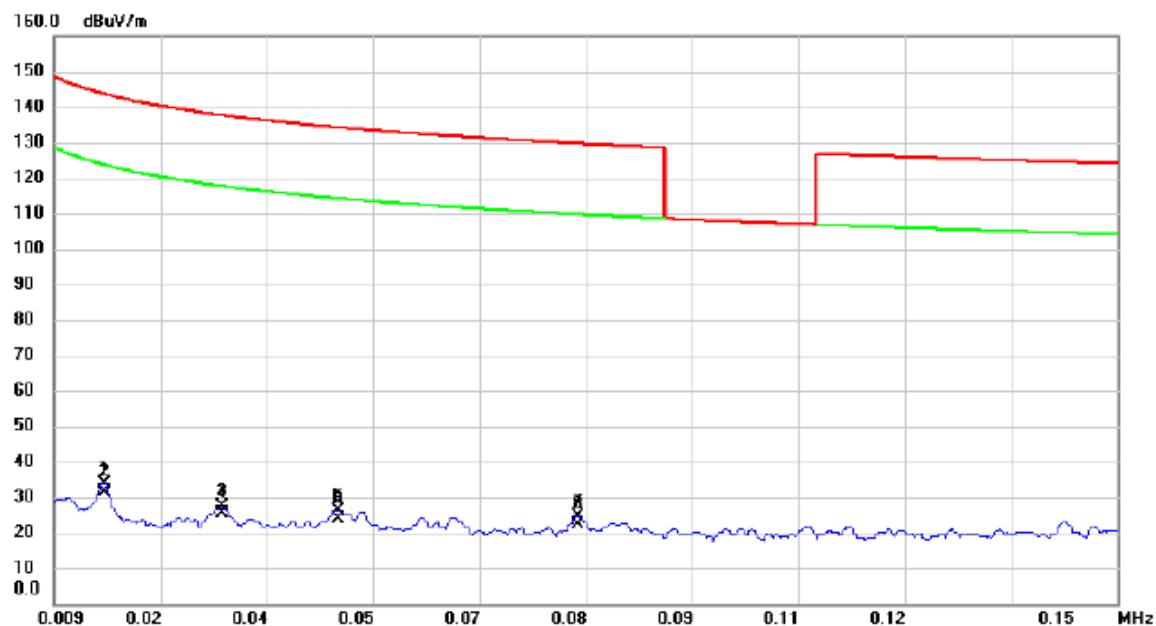


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		0.0156	12.31	21.40	33.71	143.74	-110.03	peak
2		0.0156	10.05	21.40	31.45	123.74	-92.29	AVG
3		0.0313	5.97	21.43	27.40	137.69	-110.29	peak
4		0.0313	3.92	21.43	25.35	117.69	-92.34	AVG
5		0.0466	4.69	21.59	26.28	134.24	-107.96	peak
6		0.0466	2.34	21.59	23.93	114.24	-90.31	AVG
7		0.0784	3.70	20.95	24.65	129.72	-105.07	peak
8	*	0.0784	1.42	20.95	22.37	109.72	-87.35	AVG

Test Mode: TX MODE - 90°

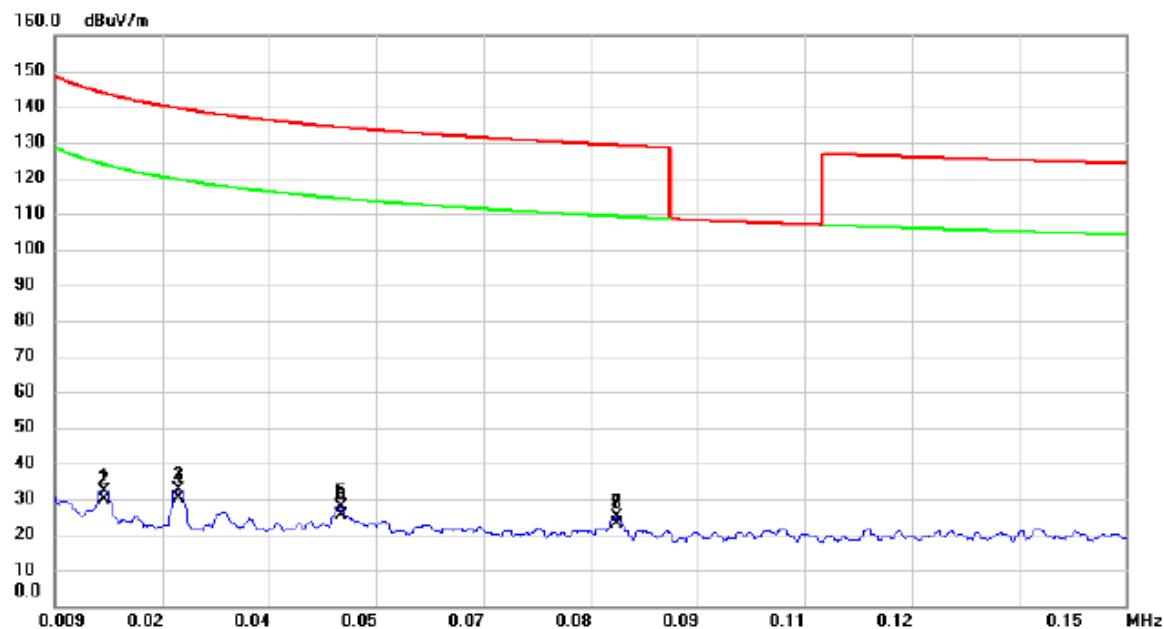


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		0.0155	10.93	21.40	32.33	143.80	-111.47	peak
2		0.0155	8.43	21.40	29.83	123.80	-93.97	AVG
3		0.0253	11.17	21.37	32.54	139.54	-107.00	peak
4		0.0253	8.76	21.37	30.13	119.54	-89.41	AVG
5		0.0466	6.09	21.59	27.68	134.24	-106.56	peak
6		0.0466	3.69	21.59	25.28	114.24	-88.96	AVG
7		0.0830	4.00	20.84	24.84	129.22	-104.38	peak
8	*	0.0830	2.03	20.84	22.87	109.22	-86.35	AVG

Test Mode: TX MODE - 0°

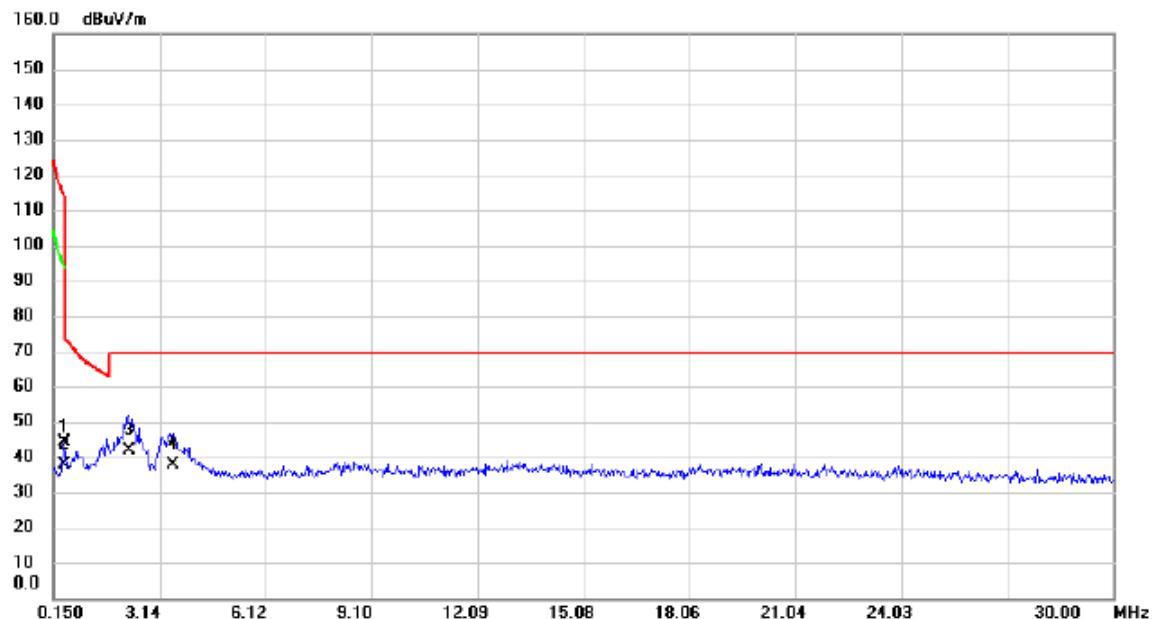


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		0.4485	23.08	20.98	44.06	114.57	-70.51	peak
2		0.4485	16.91	20.98	37.89	94.57	-56.68	AVG
3	*	2.2694	20.02	21.74	41.76	69.54	-27.78	QP
4		3.5231	16.13	21.67	37.80	69.54	-31.74	QP

Test Mode: TX MODE - 90°

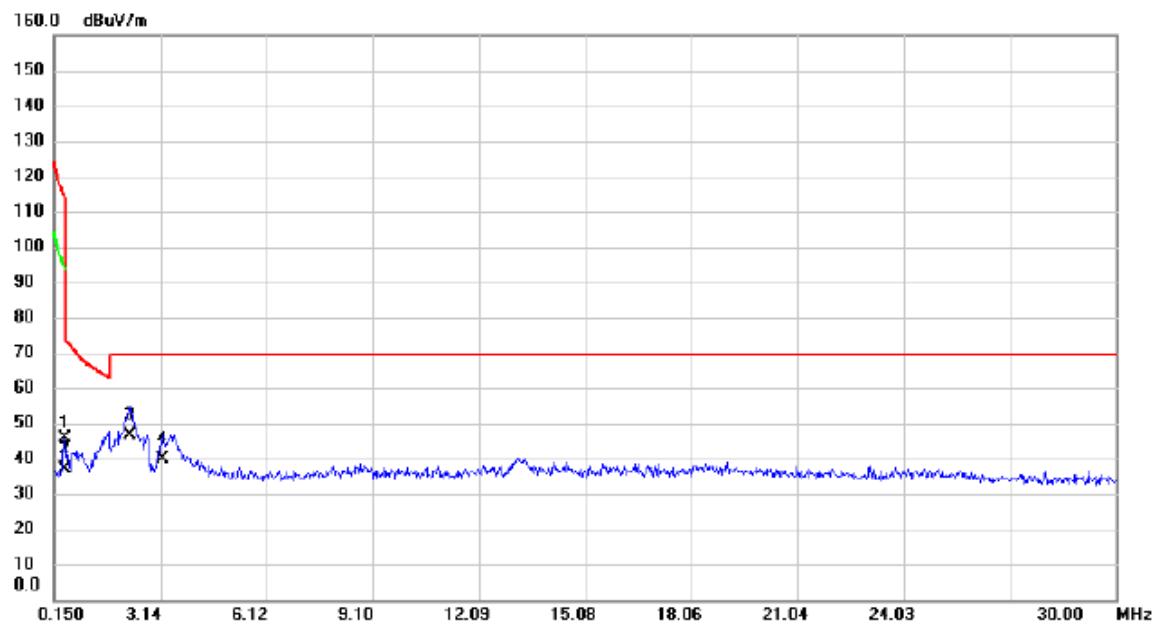

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		0.4485	24.90	20.98	45.88	114.57	-68.69	peak
2		0.4485	16.10	20.98	37.08	94.57	-57.49	AVG
3	*	2.2694	24.90	21.74	46.64	69.54	-22.90	QP
4		3.1947	17.99	21.95	39.94	69.54	-29.60	QP


Test Mode: DCS1900\_TX CH661\_GSM

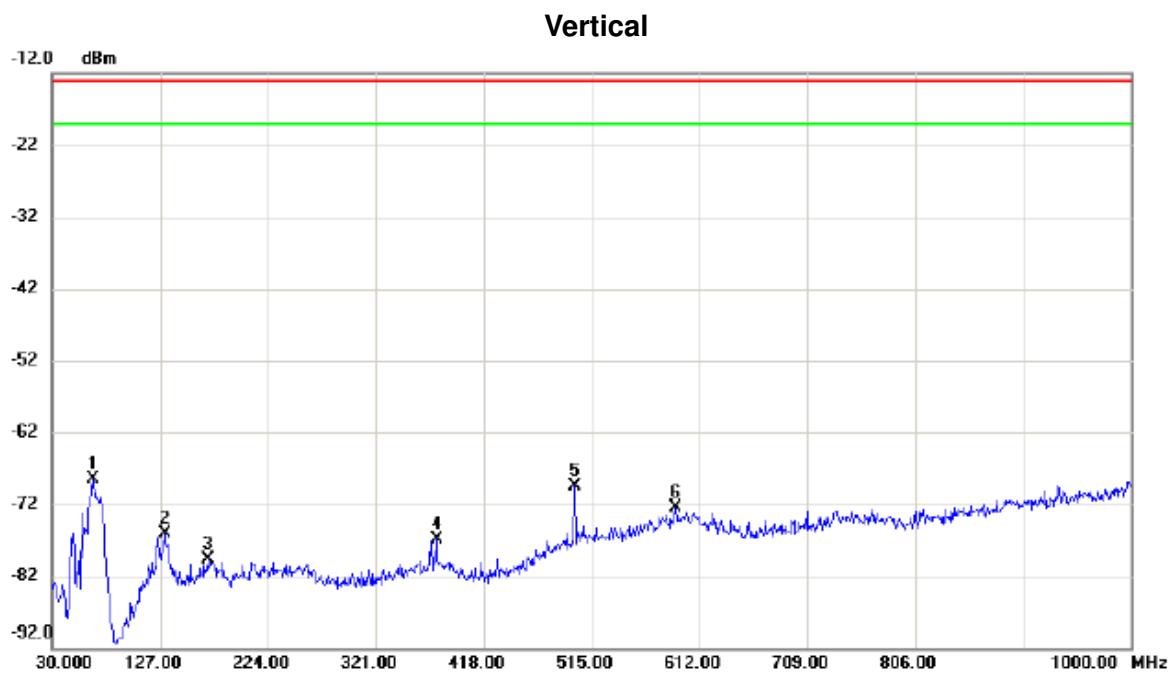

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	66.8600	-64.99	-3.53	-68.52	-13.00	-55.52		peak
2		130.8800	-73.70	-2.34	-76.04	-13.00	-63.04		peak
3		169.6800	-77.94	-1.78	-79.72	-13.00	-66.72		peak
4		375.3200	-76.81	-0.09	-76.90	-13.00	-63.90		peak
5		500.4500	-72.06	2.59	-69.47	-13.00	-56.47		peak
6		590.6600	-77.65	5.16	-72.49	-13.00	-59.49		peak


Test Mode: DCS1900\_TX CH661\_GSM

## Horizontal

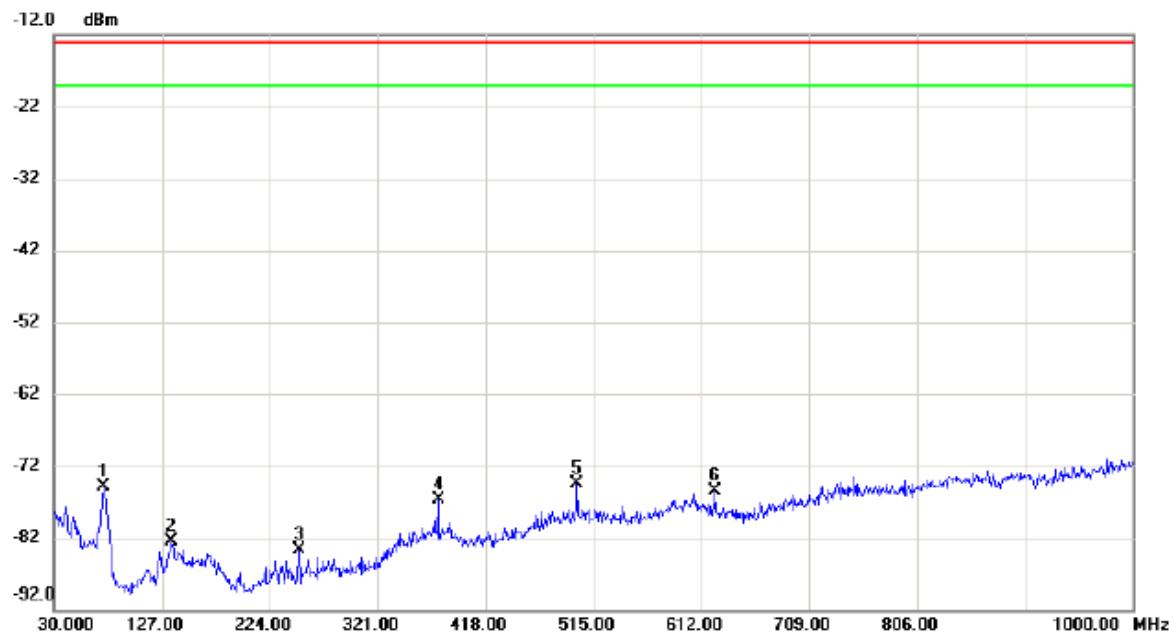


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBm	dB	dBm	dBm	dB		
1		74.6200	-68.95	-6.03	-74.98	-13.00	-61.98	peak	
2		135.7300	-77.08	-5.39	-82.47	-13.00	-69.47	peak	
3		250.1900	-77.42	-6.20	-83.62	-13.00	-70.62	peak	
4		375.3200	-76.14	-0.59	-76.73	-13.00	-63.73	peak	
5	*	500.4500	-75.54	0.95	-74.59	-13.00	-61.59	peak	
6		624.6100	-77.08	1.57	-75.51	-13.00	-62.51	peak	

Test Mode: DCS1900\_TX CH661\_EDGE

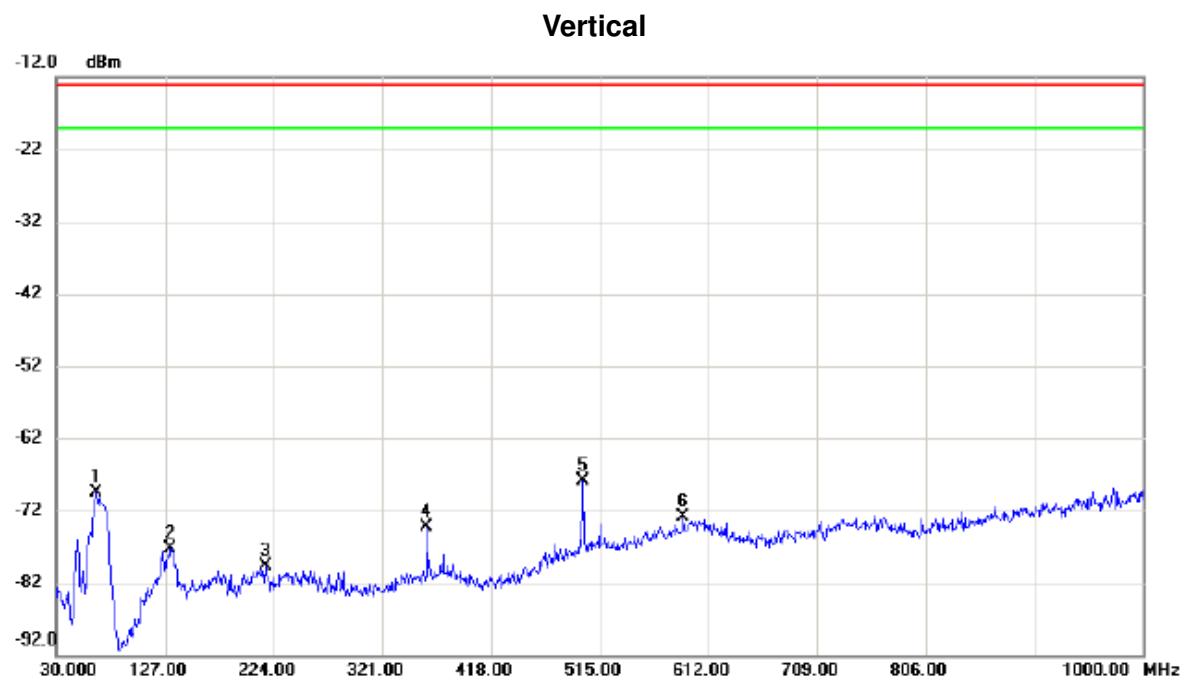

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBm	dB	dBm	dBm	dB		
1		65.8900	-66.28	-3.14	-69.42	-13.00	-56.42	peak	
2		131.8500	-74.86	-2.40	-77.26	-13.00	-64.26	peak	
3		216.2400	-76.37	-3.25	-79.62	-13.00	-66.62	peak	
4		360.7700	-74.01	-0.29	-74.30	-13.00	-61.30	peak	
5	*	500.4500	-70.40	2.59	-67.81	-13.00	-54.81	peak	
6		589.6900	-78.07	5.11	-72.96	-13.00	-59.96	peak	


Test Mode: DCS1900\_TX CH661\_EDGE

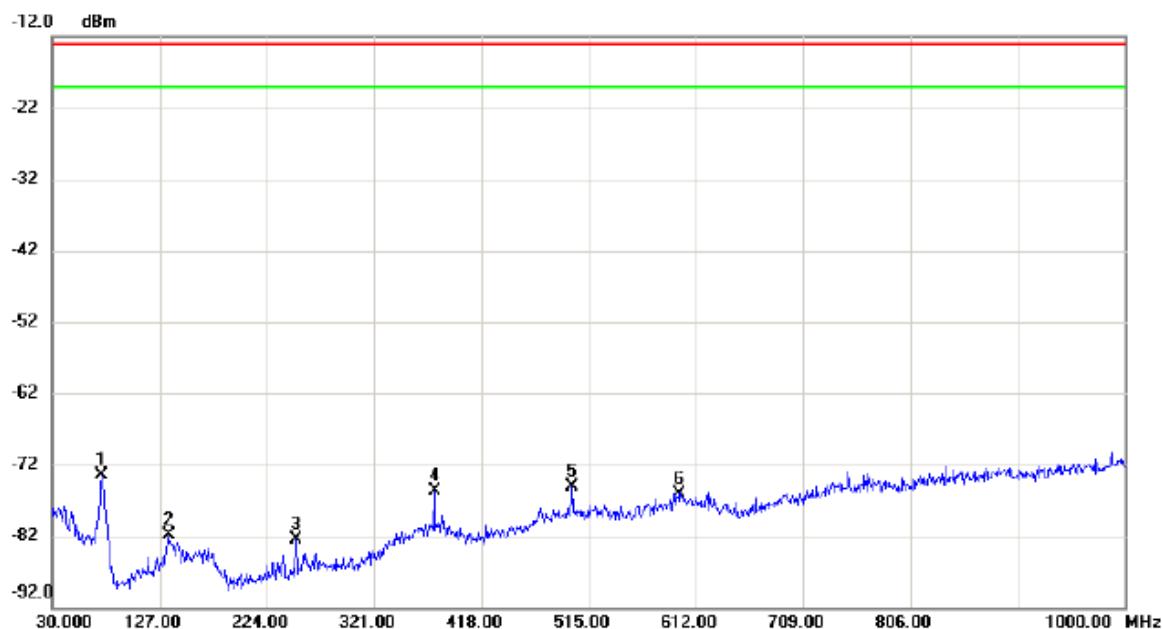**Horizontal**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	74.6200	-67.56	-6.03	-73.59	-13.00	-60.59	peak	
2		134.7600	-76.47	-5.48	-81.95	-13.00	-68.95	peak	
3		250.1900	-76.26	-6.20	-82.46	-13.00	-69.46	peak	
4		375.3200	-75.18	-0.59	-75.77	-13.00	-62.77	peak	
5		500.4500	-75.96	0.95	-75.01	-13.00	-62.01	peak	
6		597.4500	-78.45	2.42	-76.03	-13.00	-63.03	peak	

Test Mode: DCS1900\_TX CH661\_GSM


**Vertical**

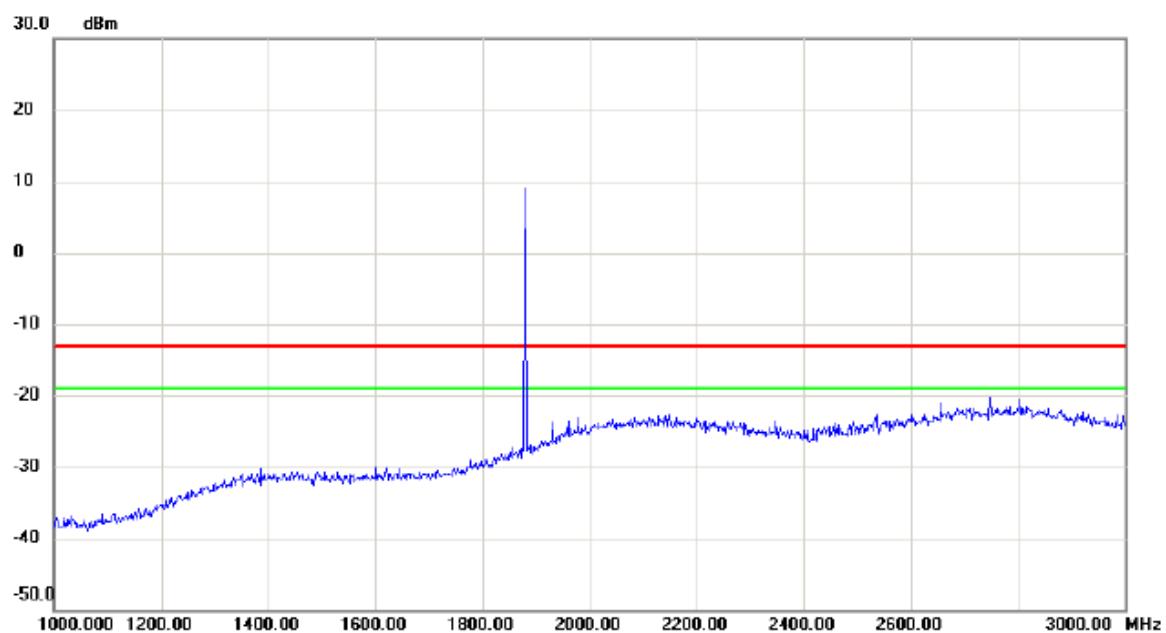

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		

Test Mode: DCS1900\_TX CH661\_GSM


**Horizontal**

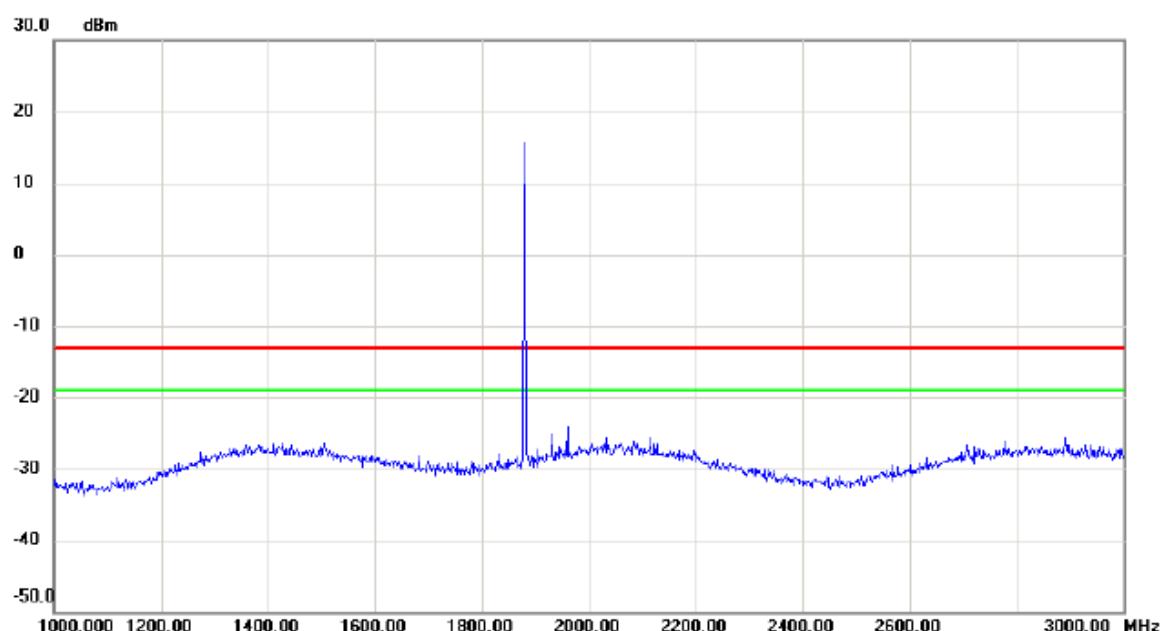

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBm	dB	dBm	dB	Detector	Comment

Test Mode: DCS1900\_TX CH661\_GSM


**Vertical**

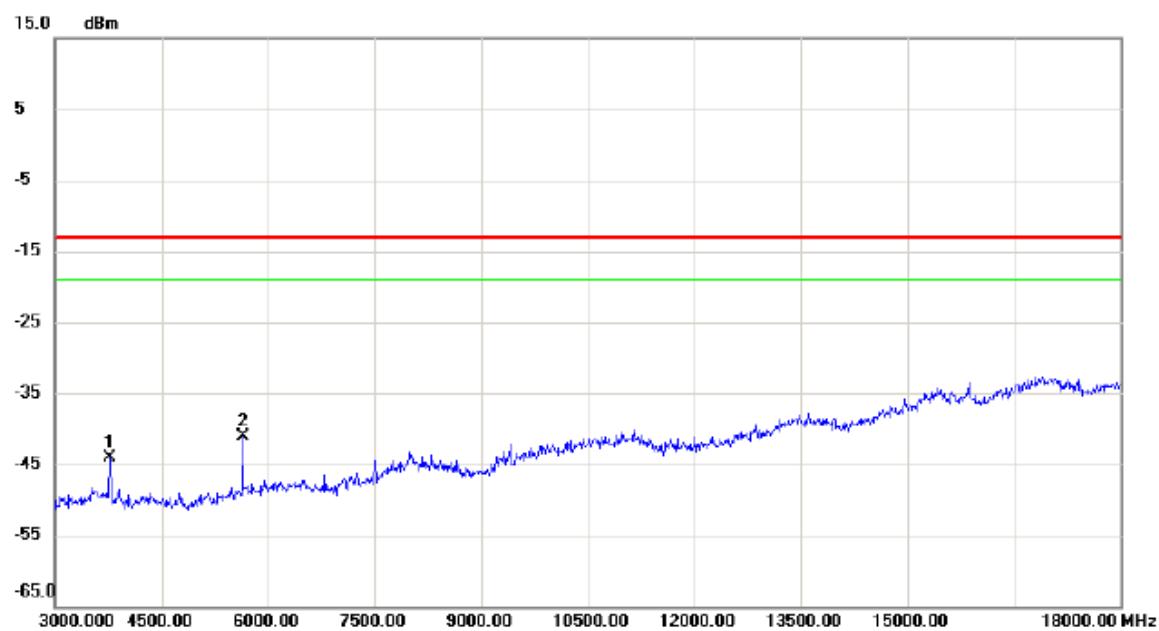

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBm	dB	dBm	dBm	dB		
1		3765.000	-58.53	14.51	-44.02	-13.00	-31.02	peak	
2	*	5640.000	-57.36	16.31	-41.05	-13.00	-28.05	peak	

Test Mode: DCS1900\_TX CH661\_GSM


**Horizontal**

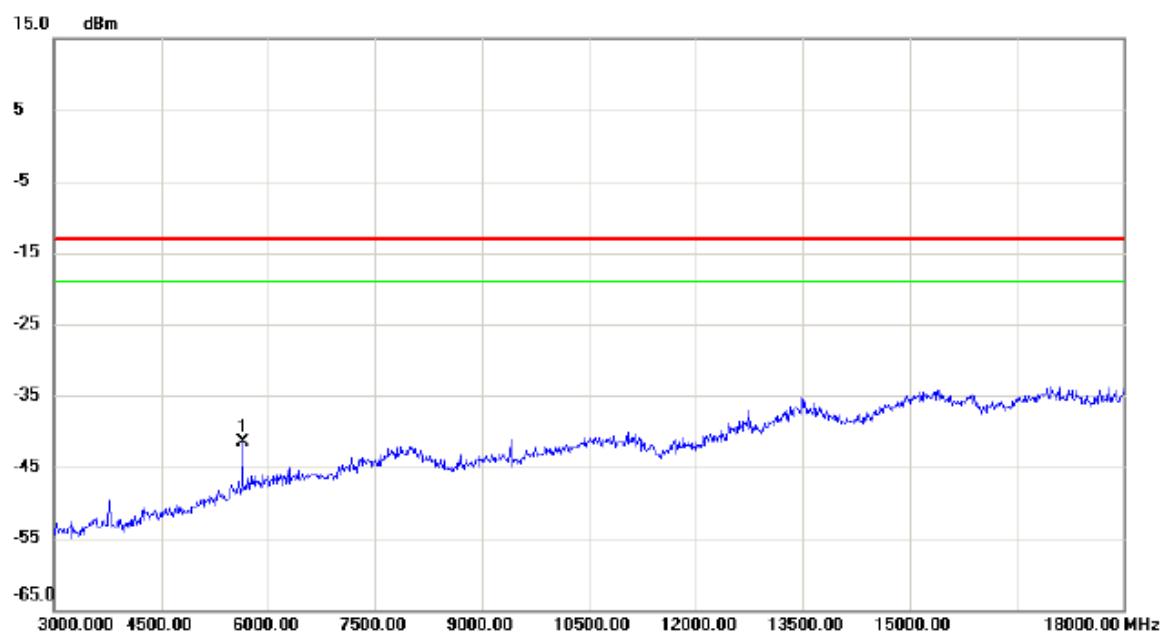

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBm	dB	dBm	dB	Detector	Comment
1	*	5640.000	-58.54	17.04	-41.50	-13.00	-28.50	peak

Test Mode: DCS1900\_TX CH661\_GSM


**Vertical**

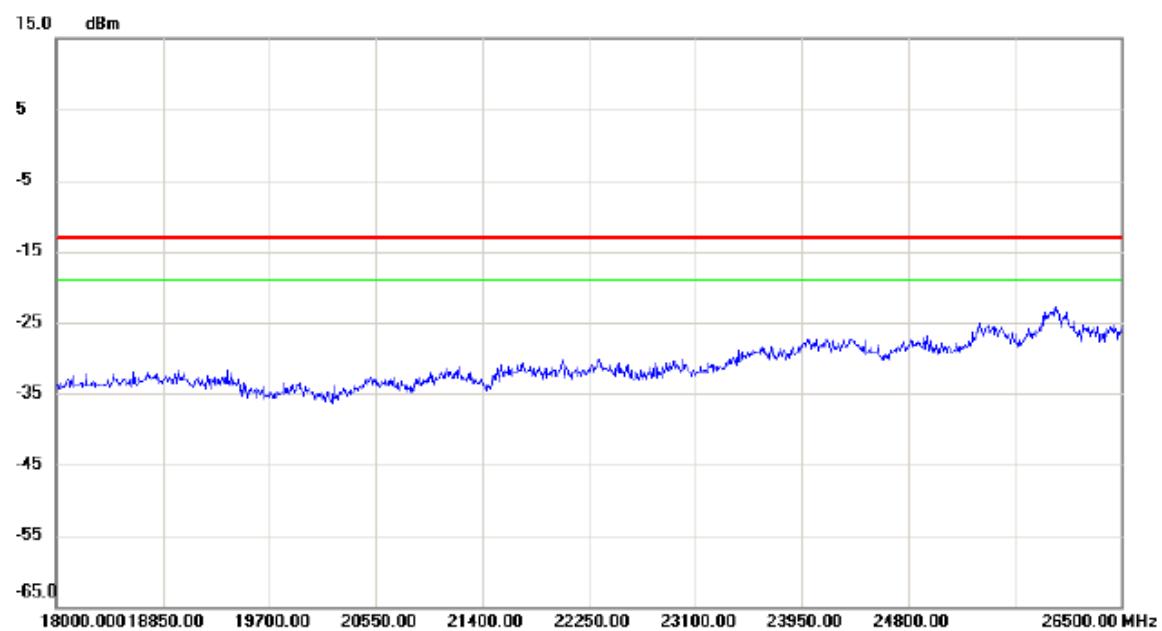

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		

Test Mode: DCS1900\_TX CH661\_GSM


**Horizontal**

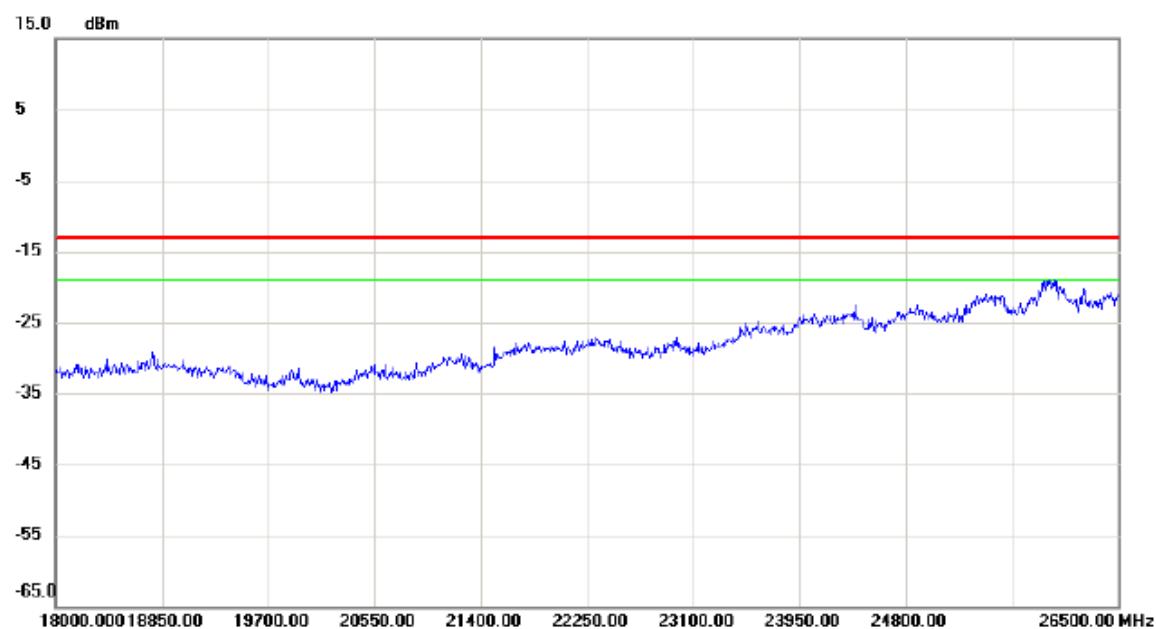

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode: DCS1900\_TX CH661\_EDGE


**Vertical**

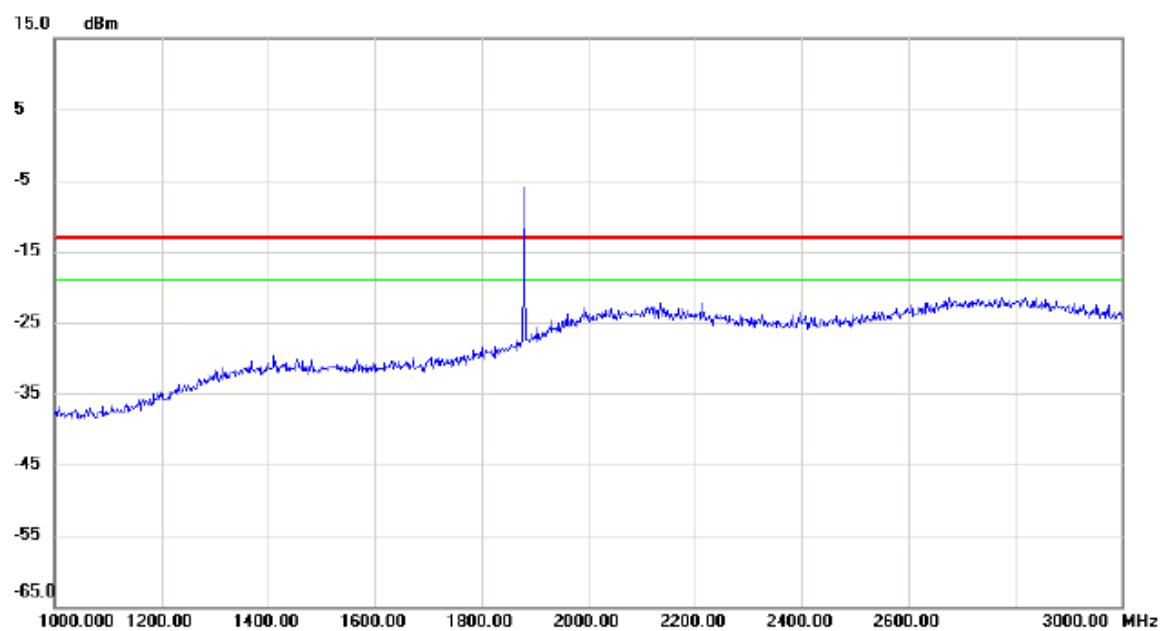

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		

Test Mode: DCS1900\_TX CH661\_EDGE


**Horizontal**

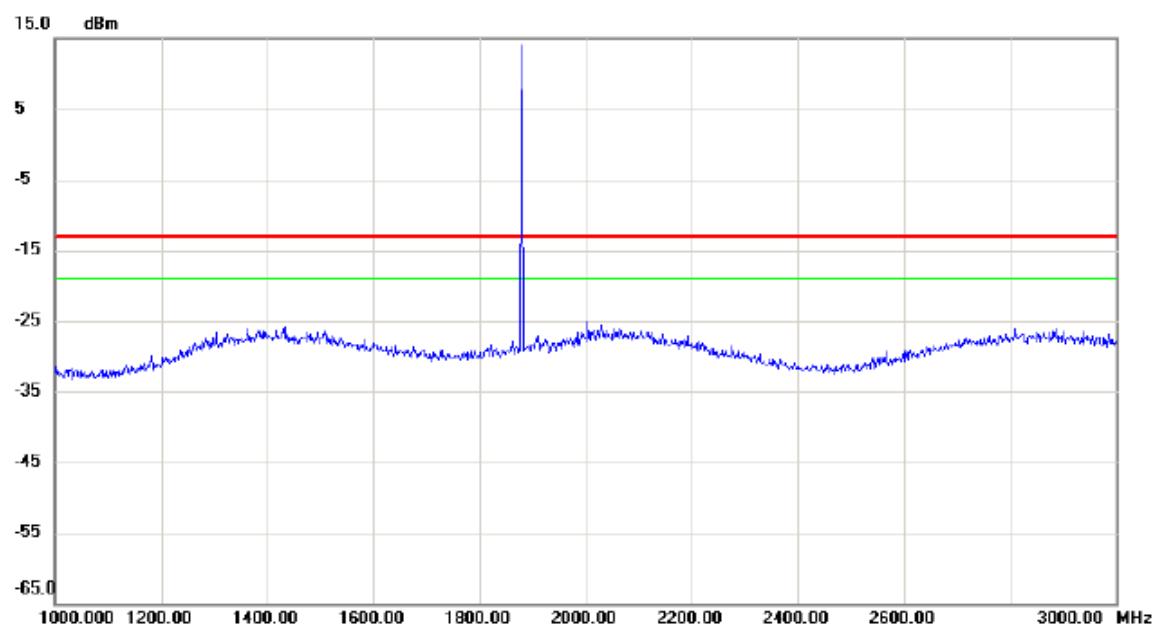

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment

Test Mode: DCS1900\_TX CH661\_EDGE


**Vertical**

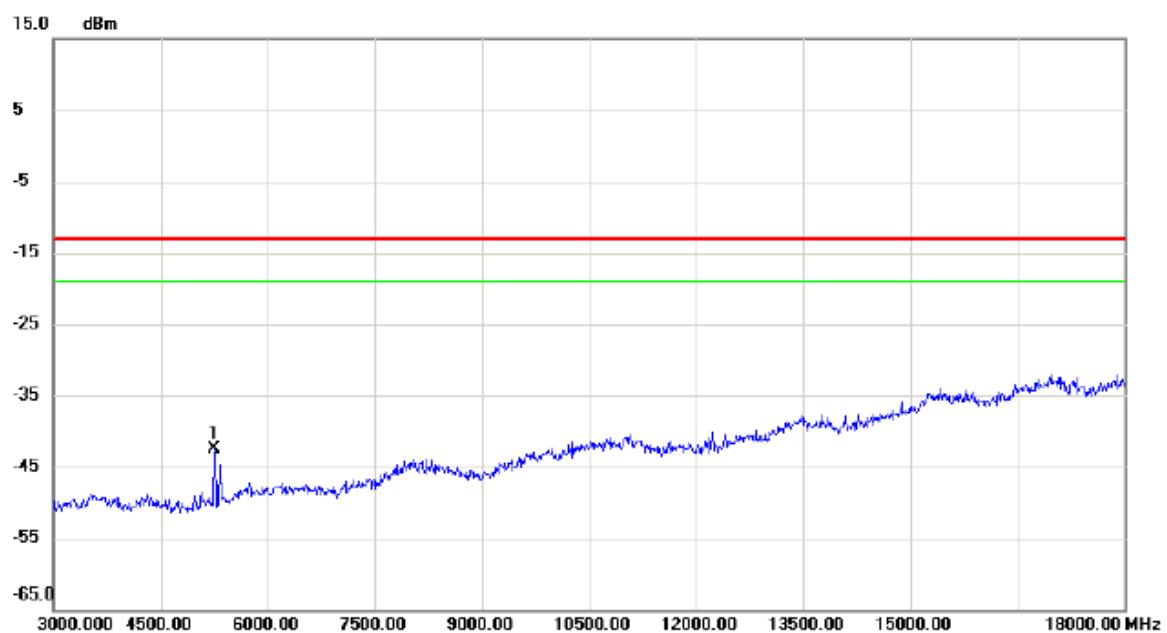

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	5250.000	-57.91	15.32	-42.59	-13.00	-29.59	peak	

Test Mode: DCS1900\_TX CH661\_EDGE


### Horizontal

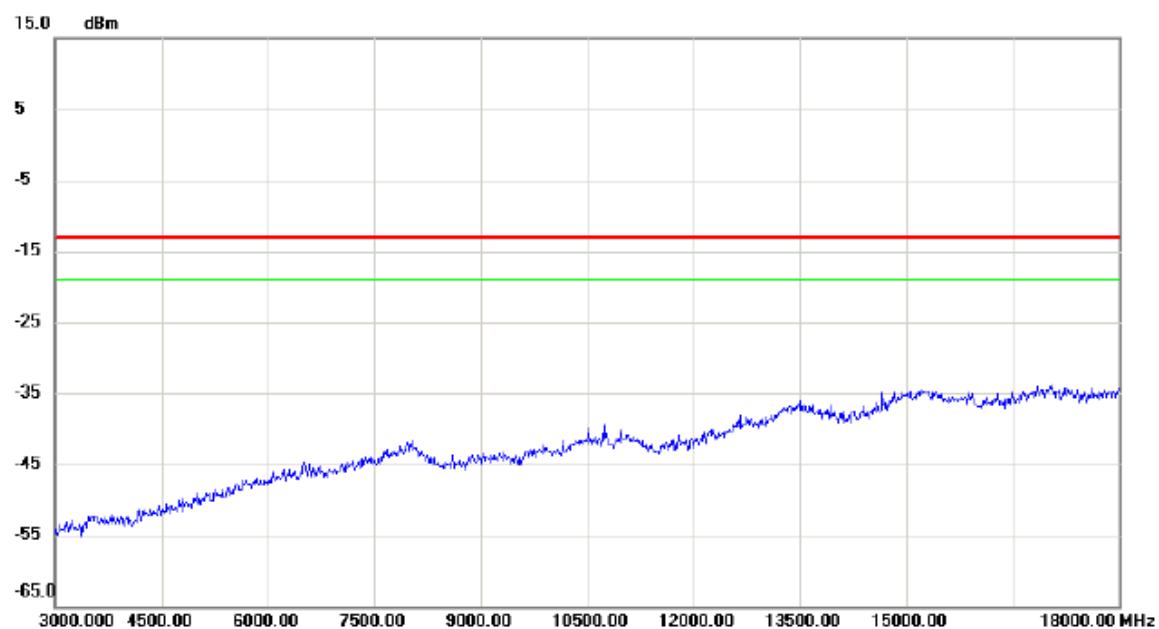

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		

Test Mode: DCS1900\_TX CH661\_EDGE


Vertical

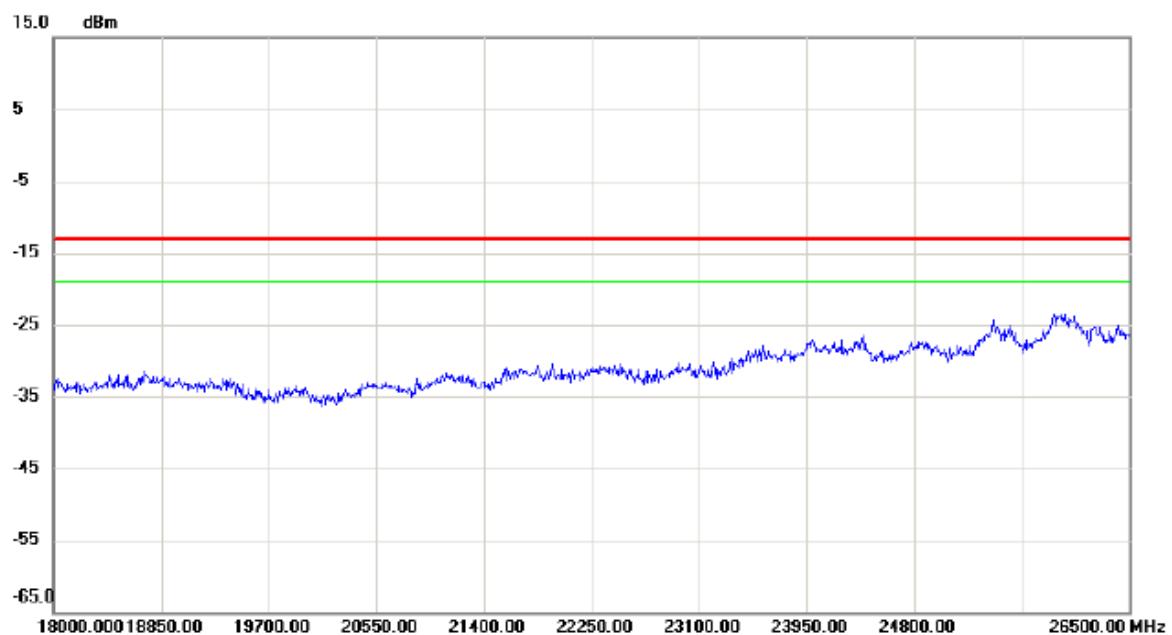

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBm	dB	dBm	dBm	Detector	Comment


Test Mode: DCS1900\_TX CH661\_EDGE

### Horizontal

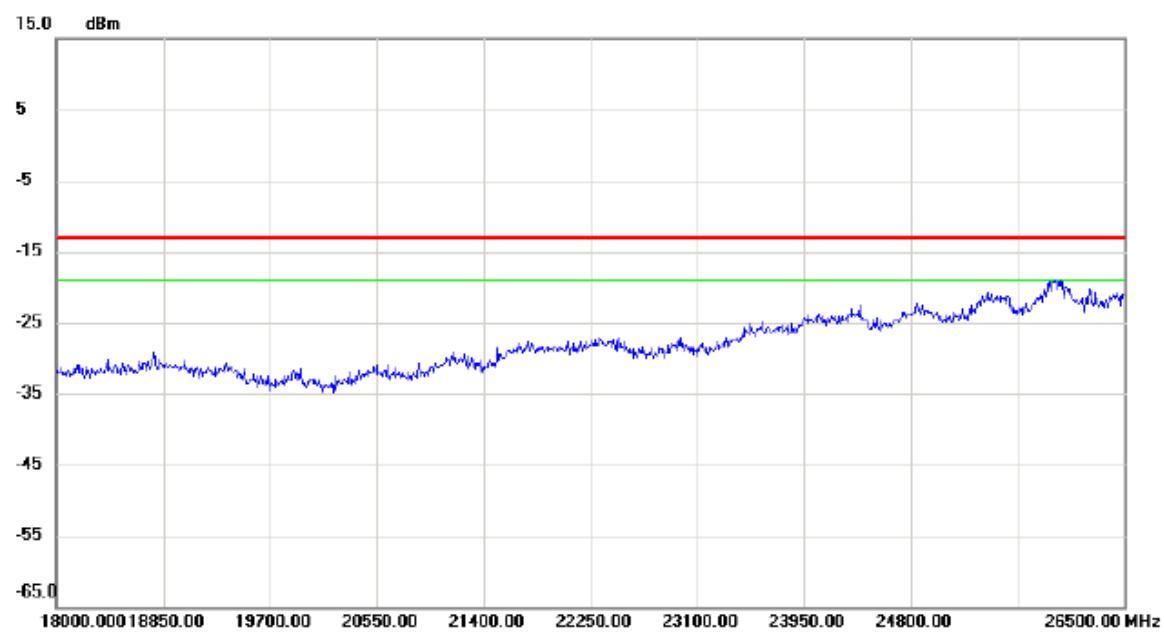


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		

## ATTACHMENT E - BAND EDGE

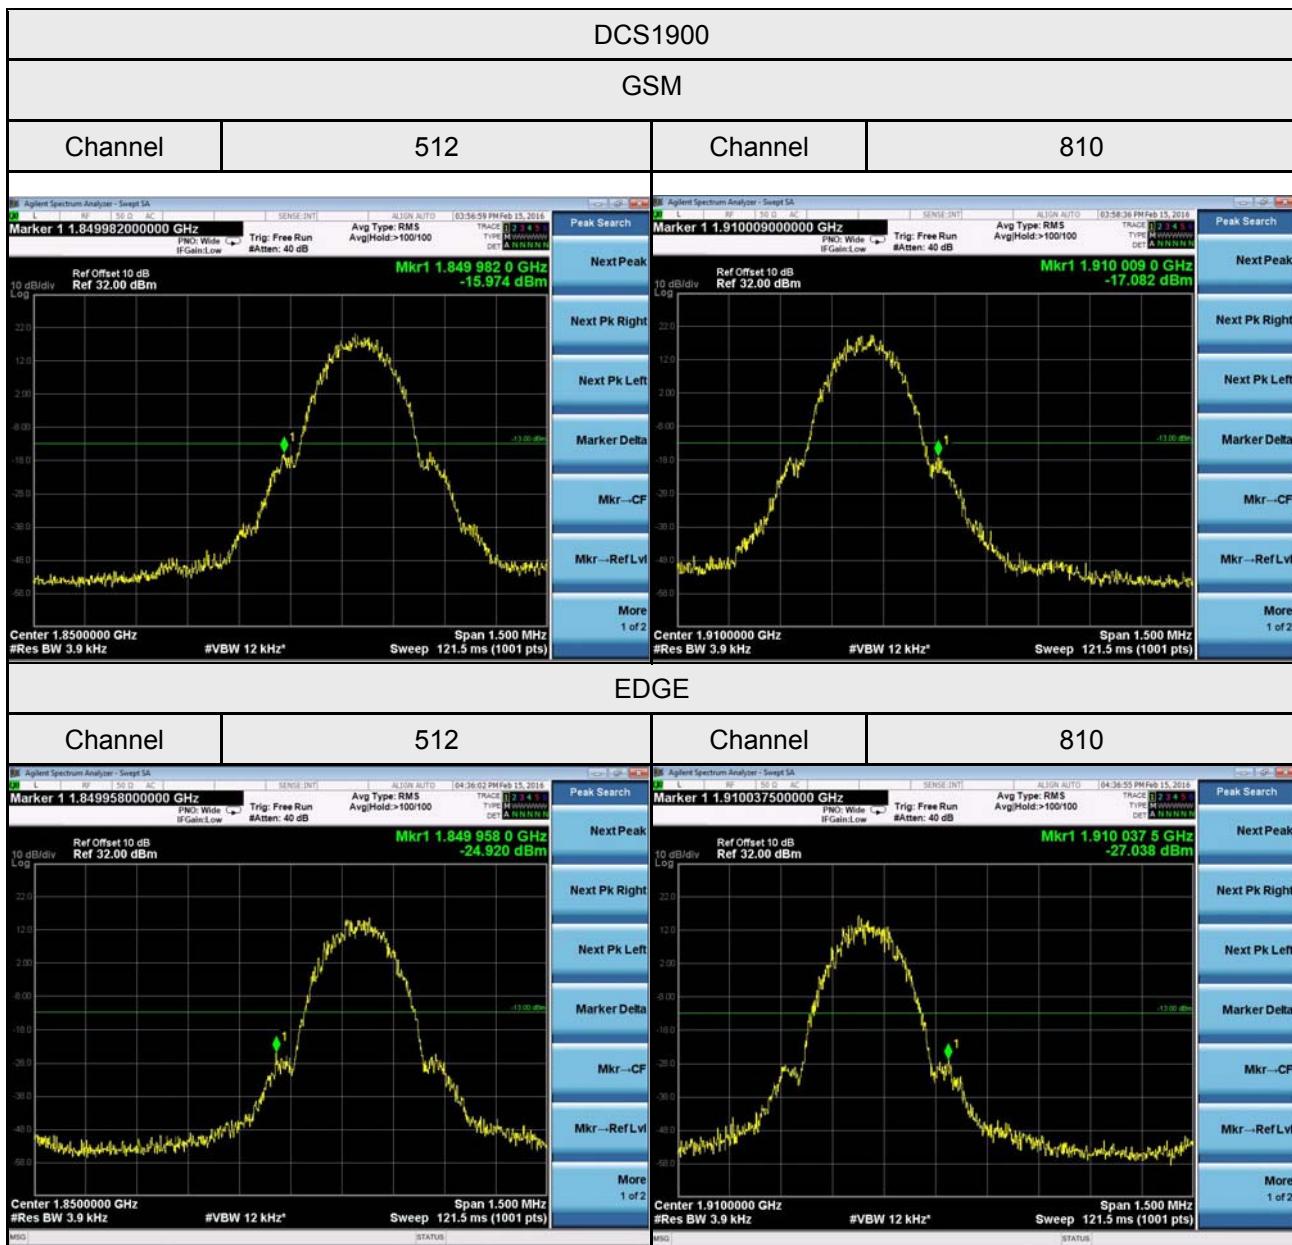

## ATTACHMENT F – PEAK TO AVERAGE RATIO

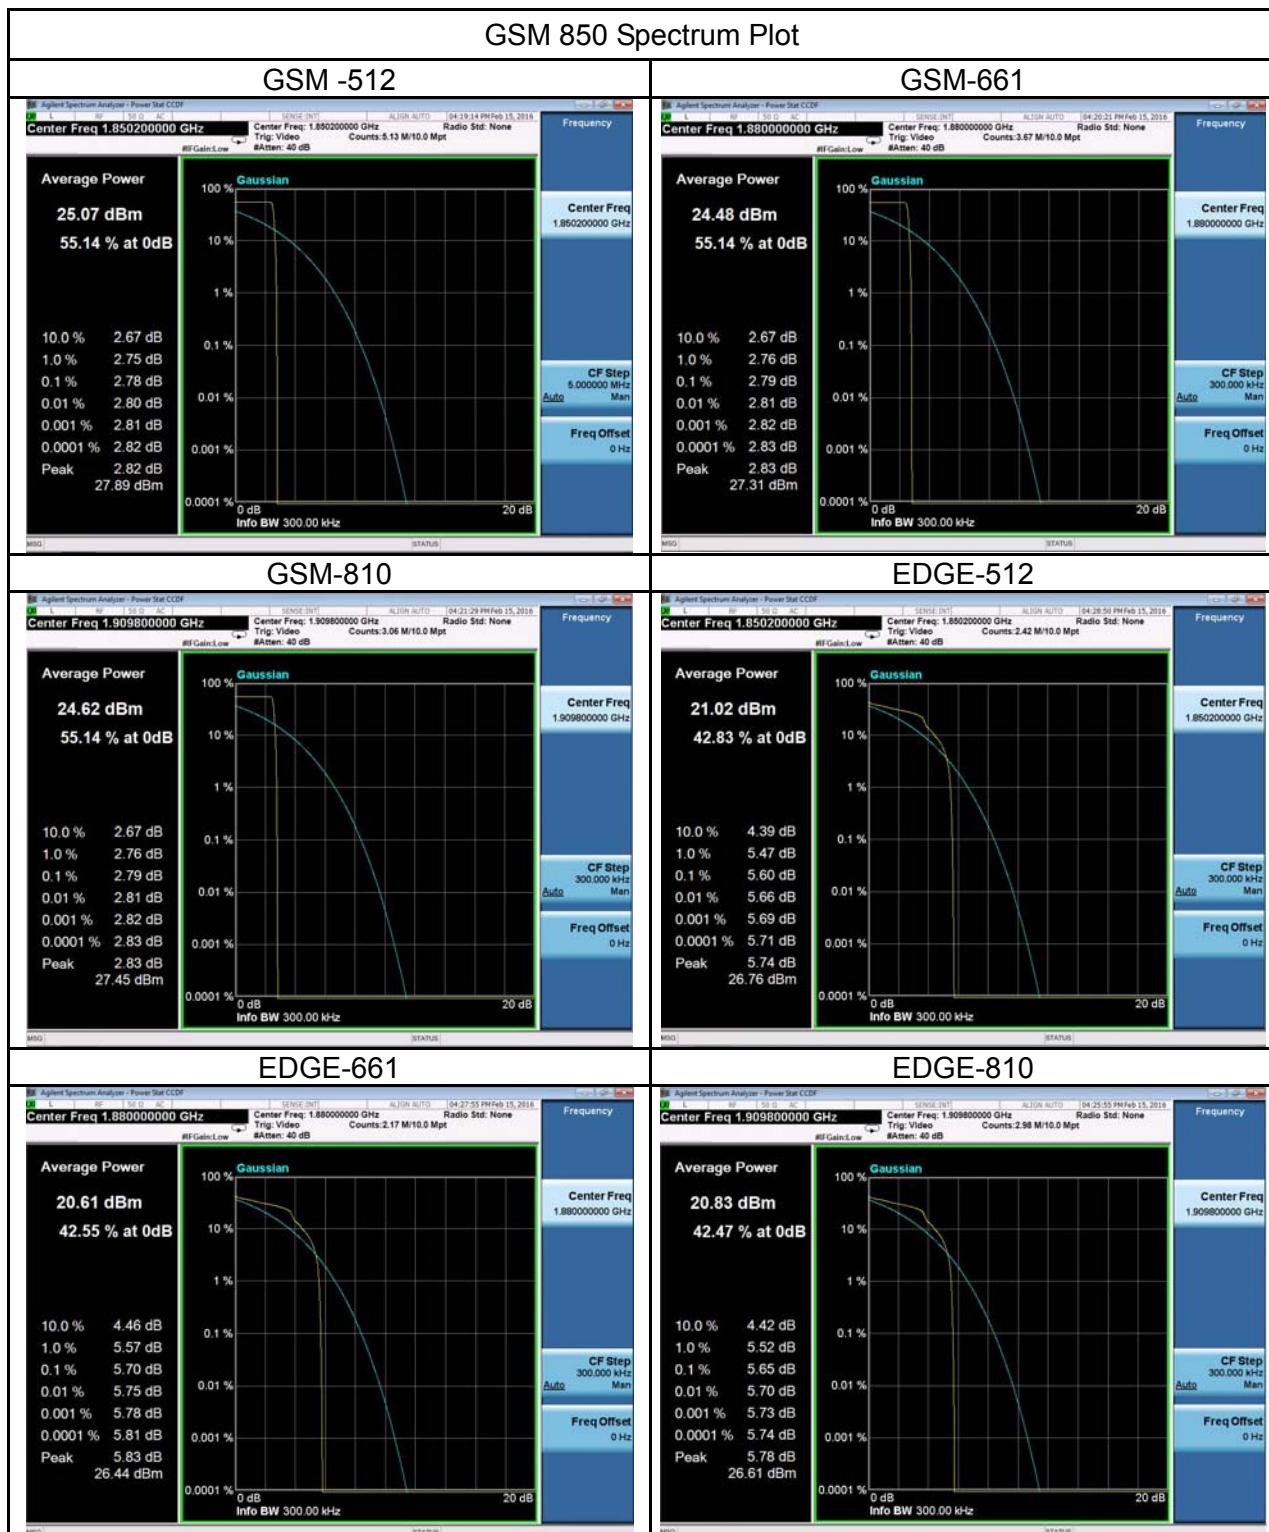

## ATTACHMENT G - FREQUENCY STABILITY

Test Mode:	DCS1900_CH661
------------	---------------

### Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
0	6.25	0.003378013	2.5
10	4.11	0.002221381	2.5
20	7.17	0.003875257	2.5
30	3.98	0.002151119	2.5
40	5.13	0.002772673	2.5
Max. Deviation (ppm)	7.17	0.003875257	2.5

### Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
120	3.24	0.001751162	2.5
108	5.24	0.002832126	2.5
132	3.64	0.001967355	2.5
Max. Deviation (ppm)	5.24	0.002832126	2.5