

FCC Test Report


FCC ID: QISB315S-519

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1606C182
Equipment : LTE CPE
Model Name : B315s-519
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen 518129 P.R.C

Date of Receipt : Jun. 14, 2016
Date of Test : Jun. 14, 2016 ~ Jun. 20, 2016
Issued Date : Jun. 21, 2016
Tested by : BTL Inc.

Testing Engineer : 
(Bill Zhang)

Technical Manager : 
(James Chiu)

Authorized Signatory : 
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS	10
4 . EMC EMISSION TEST	11
4.1 CONDUCTED EMISSION MEASUREMENT	11
4.1.1 POWER LINE CONDUCTED EMISSION	11
4.1.2 TEST PROCEDURE	11
4.1.3 DEVIATION FROM TEST STANDARD	11
4.1.4 TEST SETUP	12
4.1.5 EUT OPERATING CONDITIONS	12
4.1.6 TEST RESULTS	12
4.2 RADIATED EMISSION MEASUREMENT	13
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	13
4.2.2 TEST PROCEDURE	14
4.2.3 DEVIATION FROM TEST STANDARD	14
4.2.4 TEST SETUP	15
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS (30 TO 1000 MHZ)	16
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	16
5 . MEASUREMENT INSTRUMENTS LIST	17
6 . EUT TEST PHOTO	18
ATTACHMENT A - CONDUCTED EMISSION	21
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	26
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	31

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1606C182	Original Issue.	Jun. 21, 2016

1. CERTIFICATION

Equipment : LTE CPE
Brand Name : HUAWEI
Model Name : B315s-519
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen 518129 P.R.C
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen 518129 P.R.C
Date of Test : Jun. 14, 2016 ~ Jun. 20, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1606C182) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE (2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	LTE CPE
Brand Name	HUAWEI
Model Name	B315s-519
Model Difference	NA
Power Source	DC voltage supplied from AC Adapter. Brand / Model: HUAWEI / HW-120100U01 #1 S/N: G75002G4800038 #2 S/N: U75002G4C00684
Power Rating	I/P: 100-240~ 50/60Hz, 0.5A O/P: 12V --- 1A
Frequency	Wi-Fi: 802.11b/g/n

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	FULL SYSTEM

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	FULL SYSTEM

For Radiated Test	
Final Test Mode	Description
Mode 1	FULL SYSTEM

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

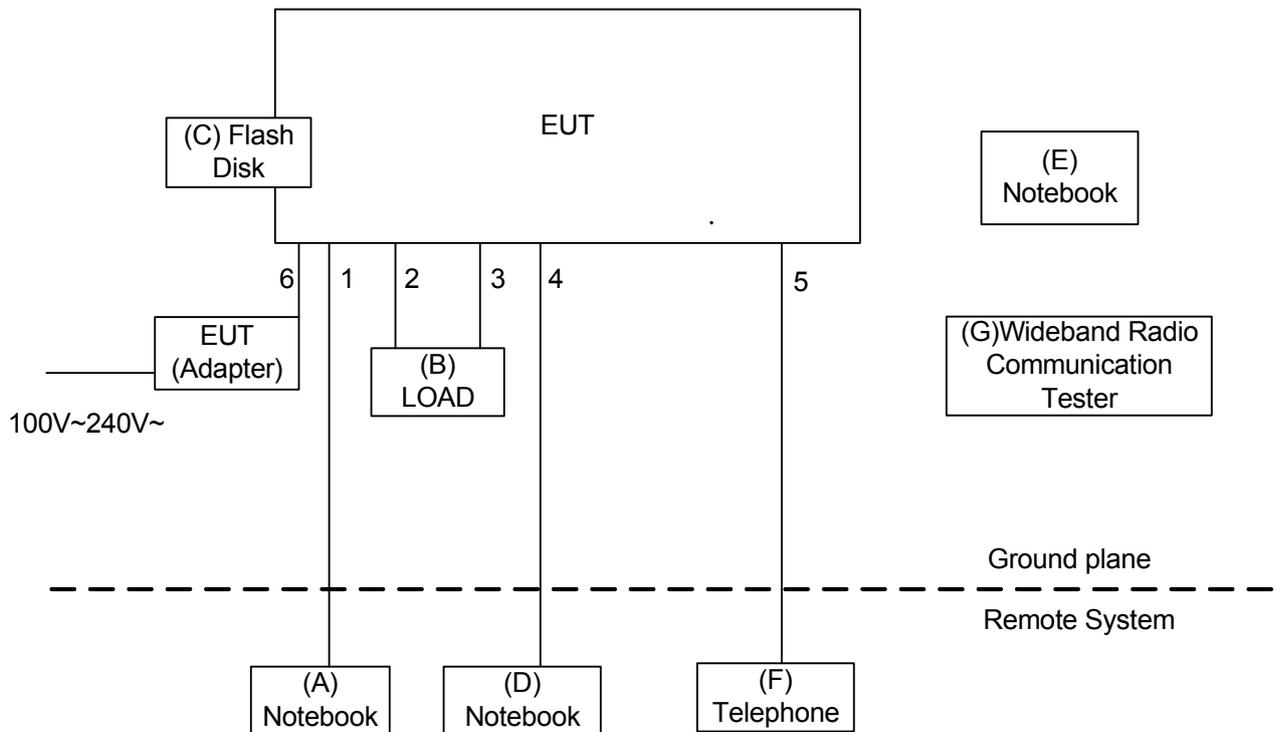

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Notebook	DELL	latitude E5510	DOC	N/A
B	LOAD	N/A	N/A	N/A	N/A
C	USB flash disk	Kingston	N/A	DOC	N/A
D	Notebook	Lenovo	E445	DOC	MP-05Y56S
E	Notebook	Lenovo	E445	DOC	MP-05Y3X6
F	Telephone	TCL	HCD868TSD	VER	N/A
G	Wideband Radio Communication Tester	RS	CMW500	N/A	122125

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	15m	RJ45 Cable
2	NO	NO	1.8m	RJ45 Cable
3	NO	NO	1.8m	RJ45 Cable
4	NO	NO	15m	RJ45 Cable
5	NO	NO	15m	RJ11 Cable
6	NO	NO	1.5m	DC Cable

Note:

- (1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

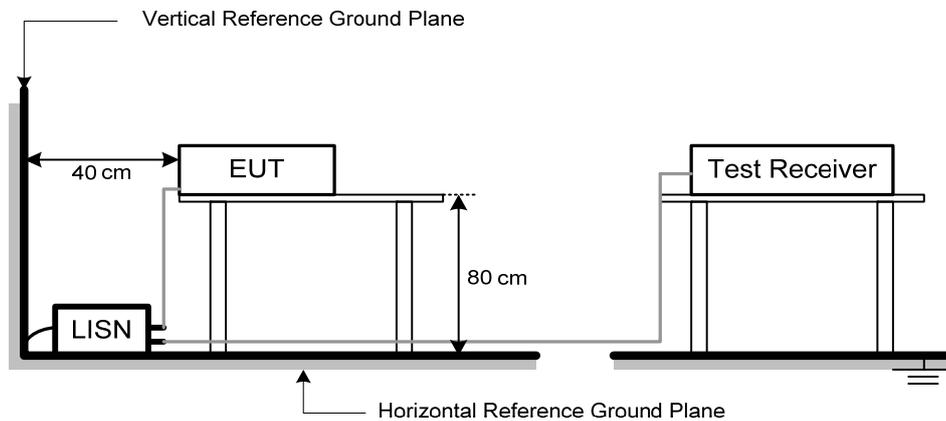

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.
Temperature: 24°C Relative Humidity: 60%

4.1.6 TEST RESULTS

Please refer to the Attachment A.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)		Class B (at 10m)	
	dBuV/m		dBuV/m	
30 - 230	40		30	
230 - 1000	47		37	

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

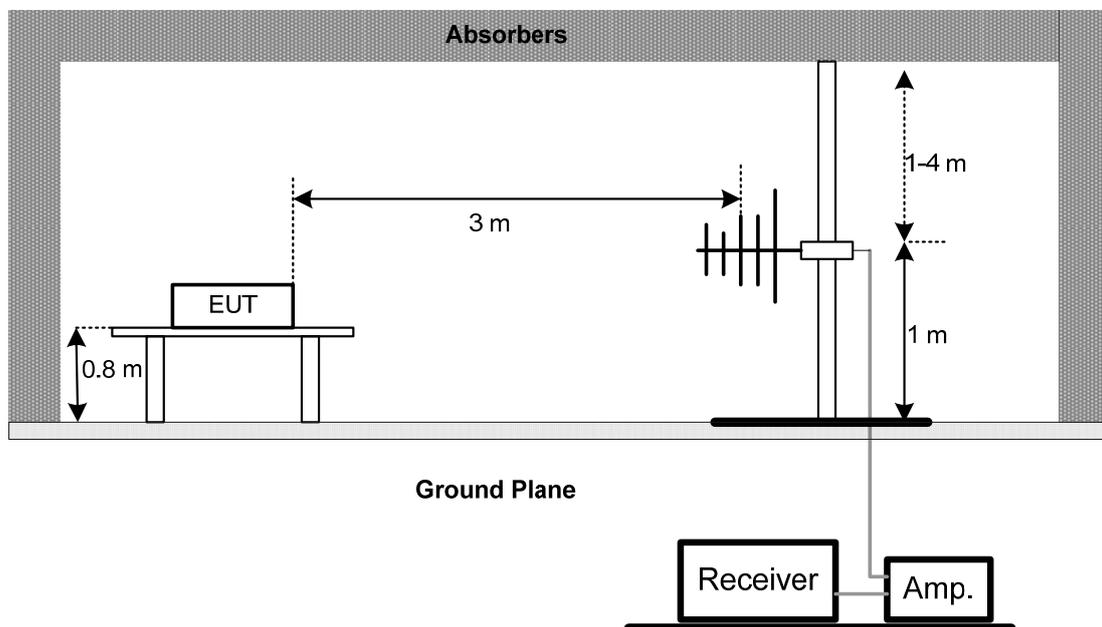

(B) Radiated Emission Test Set-Up Frequency 1 GHz-18GHz

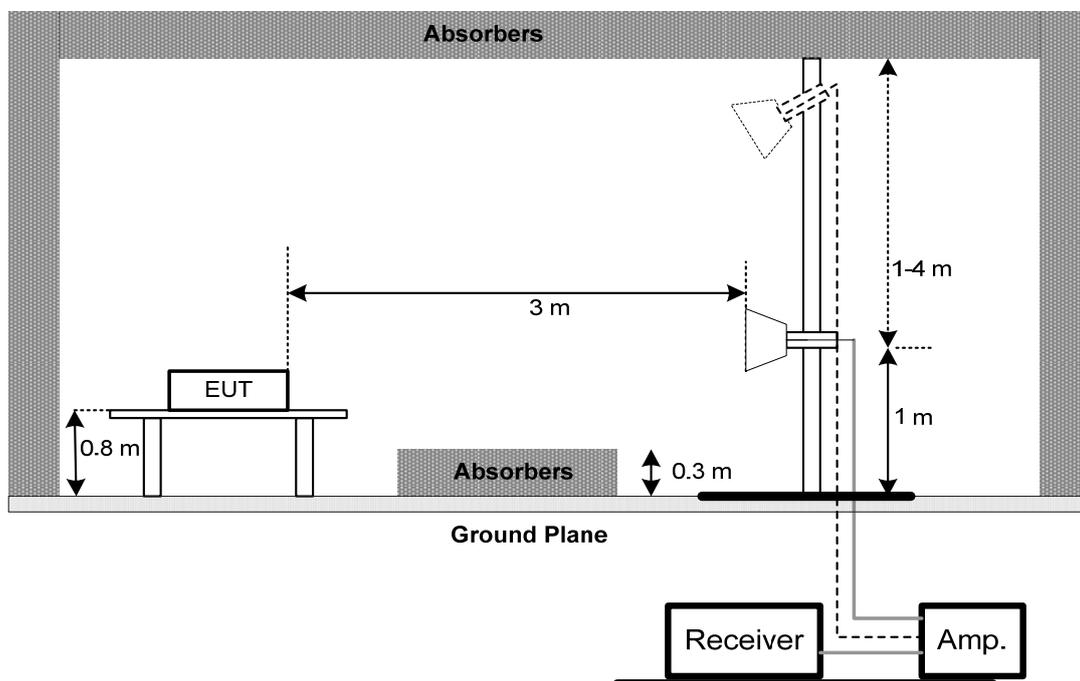

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30 TO 1000 MHz)

Please refer to the Attachment B.

Temperature: 24°C Relative Humidity: 52%

4.2.7 TEST RESULTS (Above 1000 MHz)

Please refer to the Attachment C.

Temperature: 24°C Relative Humidity: 52%

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30 MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Antenna	ETS	3115	00075789	Mar. 27, 2017
6	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
7	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
8	Test Cable	emci	EMC104-SM-SM-10000(1GHz – 26.5GHz)	C-68	Jun. 28, 2016
9	Controller	CT	SC100	N/A	N/A
10	Position Control	MF	MF-7802	MF780208416	N/A
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC120V/60Hz
Test Mode:	FULL SYSTEM – S/N: U75002G4C00684


Line

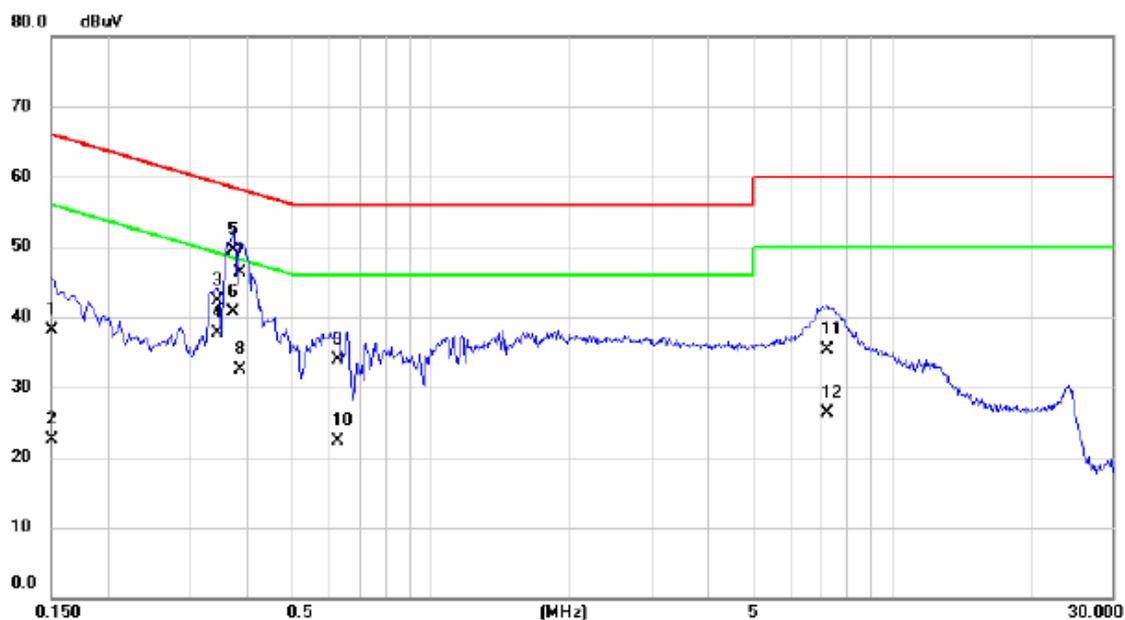

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	28.50	9.64	38.14	66.00	-27.86	QP	
2		0.1500	12.80	9.64	22.44	56.00	-33.56	AVG	
3		0.3435	32.30	9.93	42.23	59.12	-16.89	QP	
4		0.3435	27.80	9.93	37.73	49.12	-11.39	AVG	
5		0.3727	39.70	9.90	49.60	58.44	-8.84	QP	
6	*	0.3727	30.80	9.90	40.70	48.44	-7.74	AVG	
7		0.3840	36.40	9.89	46.29	58.19	-11.90	QP	
8		0.3840	22.60	9.89	32.49	48.19	-15.70	AVG	
9		0.6292	23.80	10.04	33.84	56.00	-22.16	QP	
10		0.6292	12.20	10.04	22.24	46.00	-23.76	AVG	
11		7.2488	25.10	10.21	35.31	60.00	-24.69	QP	
12		7.2488	16.00	10.21	26.21	50.00	-23.79	AVG	

Test Voltage:	AC120V/60Hz
Test Mode:	FULL SYSTEM – S/N: U75002G4C00684


Neutral

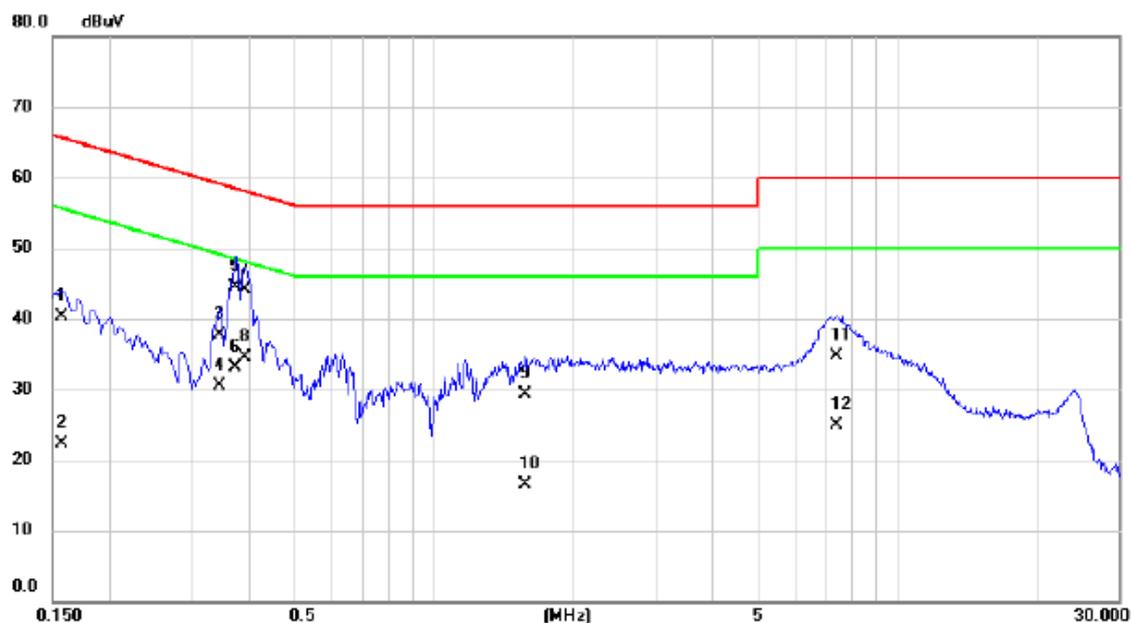

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1568	30.70	9.54	40.24	65.63	-25.39	QP	
2		0.1568	12.80	9.54	22.34	55.63	-33.29	AVG	
3		0.3435	28.00	9.74	37.74	59.12	-21.38	QP	
4		0.3435	20.80	9.74	30.54	49.12	-18.58	AVG	
5		0.3727	34.80	9.75	44.55	58.44	-13.89	QP	
6		0.3727	23.40	9.75	33.15	48.44	-15.29	AVG	
7		0.3907	34.40	9.76	44.16	58.05	-13.89	QP	
8	*	0.3907	24.70	9.76	34.46	48.05	-13.59	AVG	
9		1.5743	19.20	10.05	29.25	56.00	-26.75	QP	
10		1.5743	6.50	10.05	16.55	46.00	-29.45	AVG	
11		7.3658	24.40	10.29	34.69	60.00	-25.31	QP	
12		7.3658	14.70	10.29	24.99	50.00	-25.01	AVG	

Test Voltage:	AC120V/60Hz
Test Mode:	FULL SYSTEM - S/N: G75002C4800038


Line

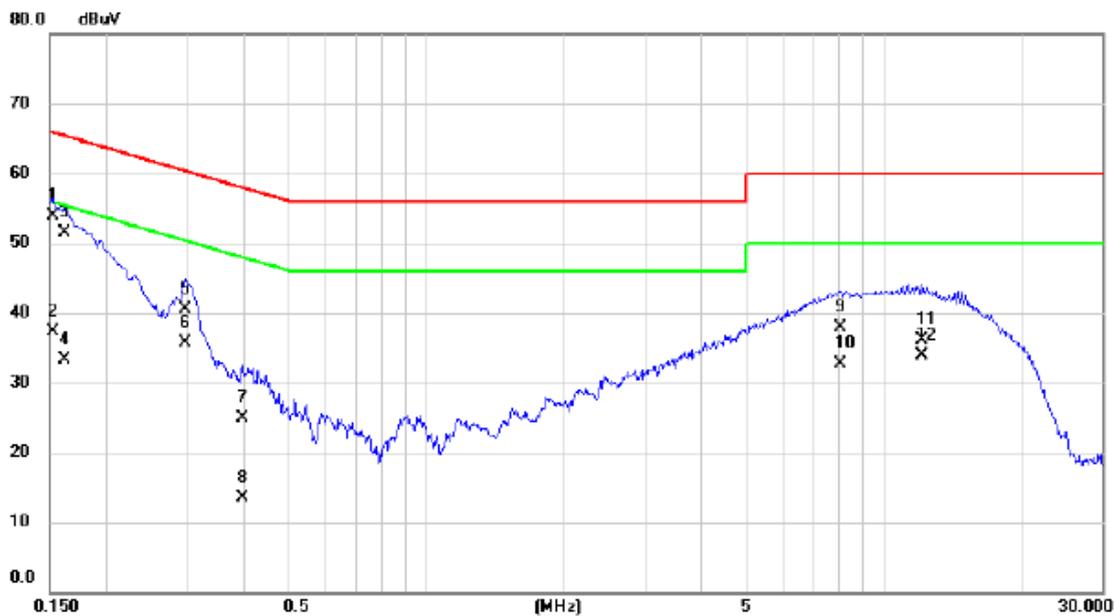

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1522	44.30	9.64	53.94	65.88	-11.94	QP	
2		0.1522	27.70	9.64	37.34	55.88	-18.54	AVG	
3		0.1613	41.80	9.65	51.45	65.40	-13.95	QP	
4		0.1613	23.70	9.65	33.35	55.40	-22.05	AVG	
5		0.2962	30.70	9.81	40.51	60.35	-19.84	QP	
6		0.2962	25.90	9.81	35.71	50.35	-14.64	AVG	
7		0.3952	15.00	9.87	24.87	57.95	-33.08	QP	
8		0.3952	3.70	9.87	13.57	47.95	-34.38	AVG	
9		8.0408	27.60	10.29	37.89	60.00	-22.11	QP	
10		8.0408	22.50	10.29	32.79	50.00	-17.21	AVG	
11		12.1290	25.60	10.55	36.15	60.00	-23.85	QP	
12		12.1290	23.30	10.55	33.85	50.00	-16.15	AVG	

Test Voltage:	AC120V/60Hz
Test Mode:	FULL SYSTEM - S/N: G75002C4800038

Neutral

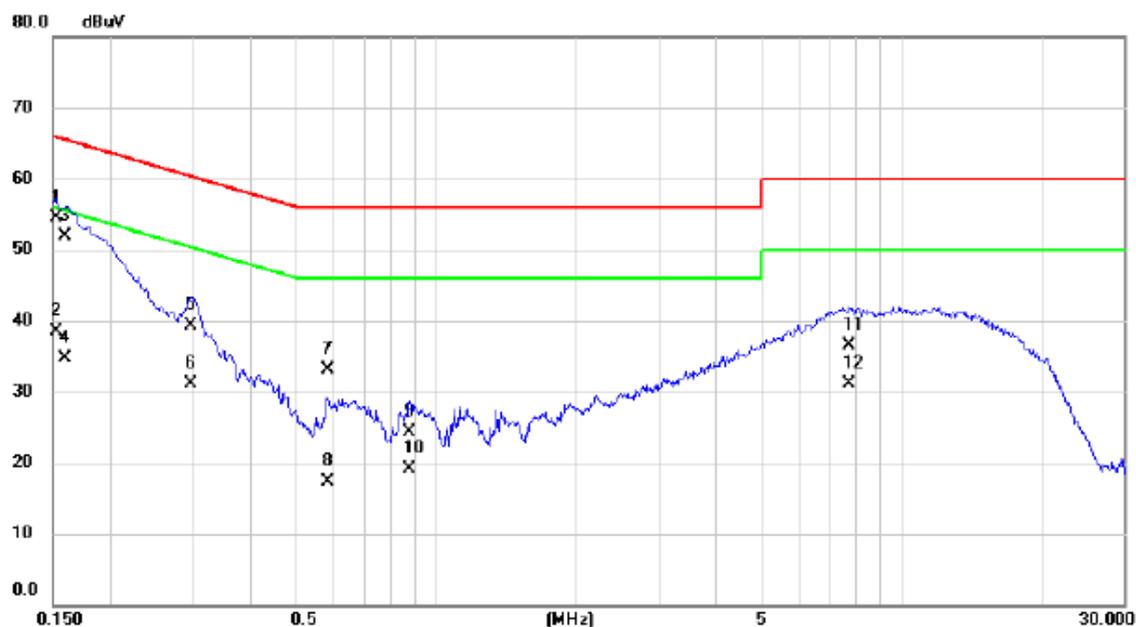


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1522	44.90	9.54	54.44	65.88	-11.44	QP	
2		0.1522	28.90	9.54	38.44	55.88	-17.44	AVG	
3		0.1590	42.30	9.55	51.85	65.52	-13.67	QP	
4		0.1590	25.10	9.55	34.65	55.52	-20.87	AVG	
5		0.2962	29.60	9.71	39.31	60.35	-21.04	QP	
6		0.2962	21.40	9.71	31.11	50.35	-19.24	AVG	
7		0.5842	23.20	9.83	33.03	56.00	-22.97	QP	
8		0.5842	7.40	9.83	17.23	46.00	-28.77	AVG	
9		0.8722	14.40	9.89	24.29	56.00	-31.71	QP	
10		0.8722	9.20	9.89	19.09	46.00	-26.91	AVG	
11		7.7258	26.20	10.29	36.49	60.00	-23.51	QP	
12		7.7258	20.90	10.29	31.19	50.00	-18.81	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC120V/60Hz
Test Mode:	FULL SYSTEM – S/N: U75002G4C00684


Vertical

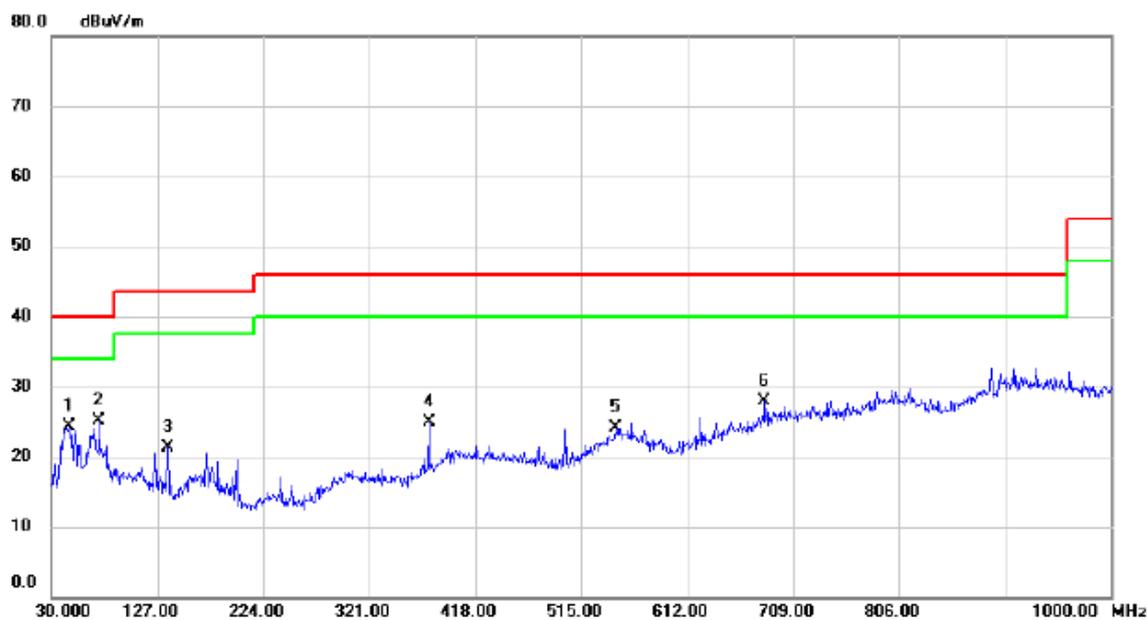

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		45.5200	36.87	-12.56	24.31	40.00	-15.69	QP	
2	*	73.6500	41.65	-16.50	25.15	40.00	-14.85	QP	
3		136.7000	34.68	-13.30	21.38	43.50	-22.12	QP	
4		375.3200	34.77	-9.92	24.85	46.00	-21.15	QP	
5		547.0100	29.72	-5.58	24.14	46.00	-21.86	QP	
6		682.8100	31.61	-3.71	27.90	46.00	-18.10	QP	

Test Voltage:	AC120V/60Hz
Test Mode:	FULL SYSTEM – S/N: U75002G4C00684


Horizontal

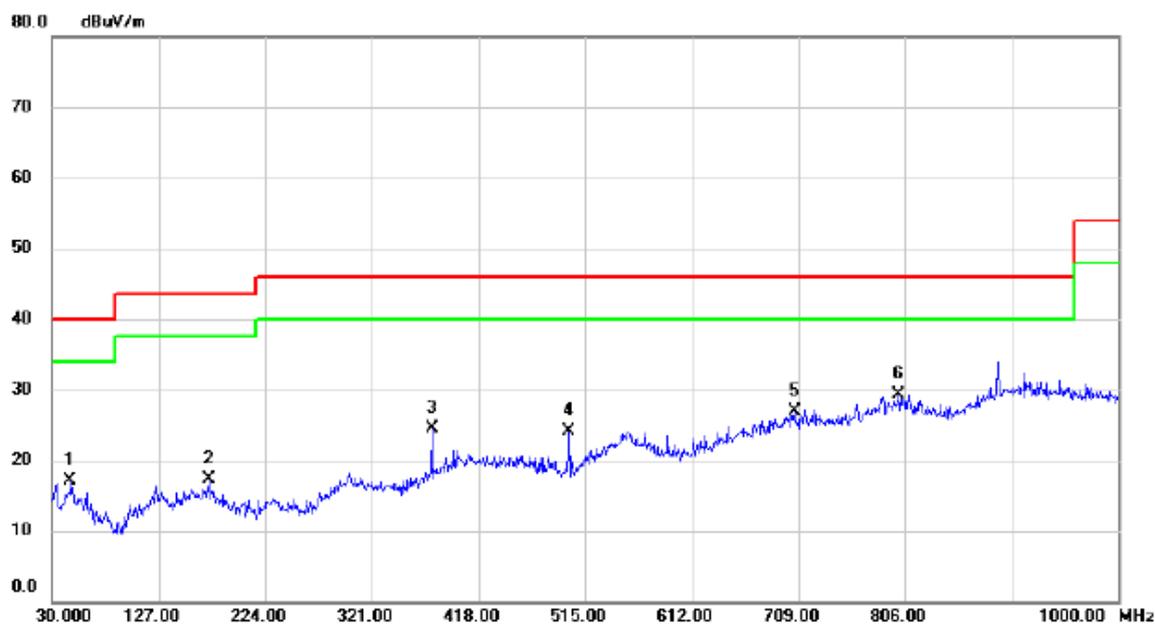

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		46.4900	29.63	-12.56	17.07	40.00	-22.93	QP	
2		172.5900	29.76	-12.46	17.30	43.50	-26.20	QP	
3		375.3200	34.43	-9.92	24.51	46.00	-21.49	QP	
4		500.4500	34.35	-10.34	24.01	46.00	-21.99	QP	
5		705.1200	29.93	-3.00	26.93	46.00	-19.07	QP	
6	*	800.1800	30.09	-0.75	29.34	46.00	-16.66	QP	

Test Voltage:	AC120V/60Hz
Test Mode:	FULL SYSTEM - S/N: G75002C4800038

Vertical

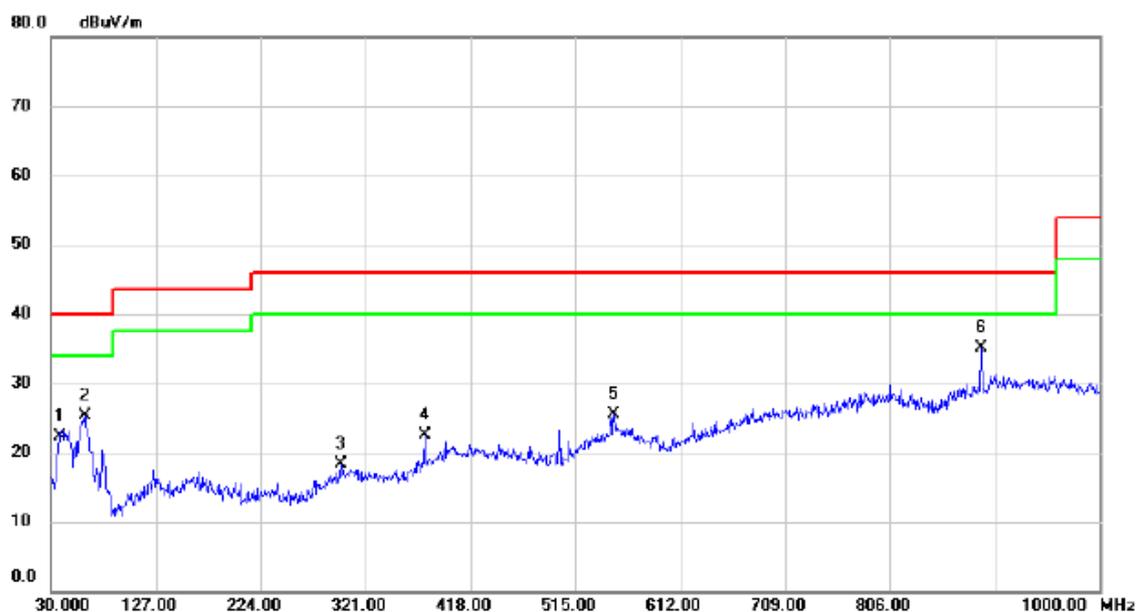

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		37.7600	36.31	-14.04	22.27	40.00	-17.73	QP	
2		61.0400	39.22	-13.97	25.25	40.00	-14.75	QP	
3		297.7200	29.01	-10.70	18.31	46.00	-27.69	QP	
4		375.3200	32.44	-9.92	22.52	46.00	-23.48	QP	
5		550.8900	30.84	-5.33	25.51	46.00	-20.49	QP	
6	*	890.3900	34.29	0.82	35.11	46.00	-10.89	QP	

Test Voltage:	AC120V/60Hz
Test Mode:	FULL SYSTEM - S/N: G75002C4800038

Horizontal




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	29.49	-13.72	15.77	40.00	-24.23	QP	
2		160.9500	28.82	-12.21	16.61	43.50	-26.89	QP	
3		375.3200	31.66	-9.92	21.74	46.00	-24.26	QP	
4		548.9500	30.27	-5.37	24.90	46.00	-21.10	QP	
5		678.9300	30.40	-3.86	26.54	46.00	-19.46	QP	
6	*	826.3700	30.50	-1.56	28.94	46.00	-17.06	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	FULL SYSTEM – S/N: U75002G4C00684


Polarization: Vertical

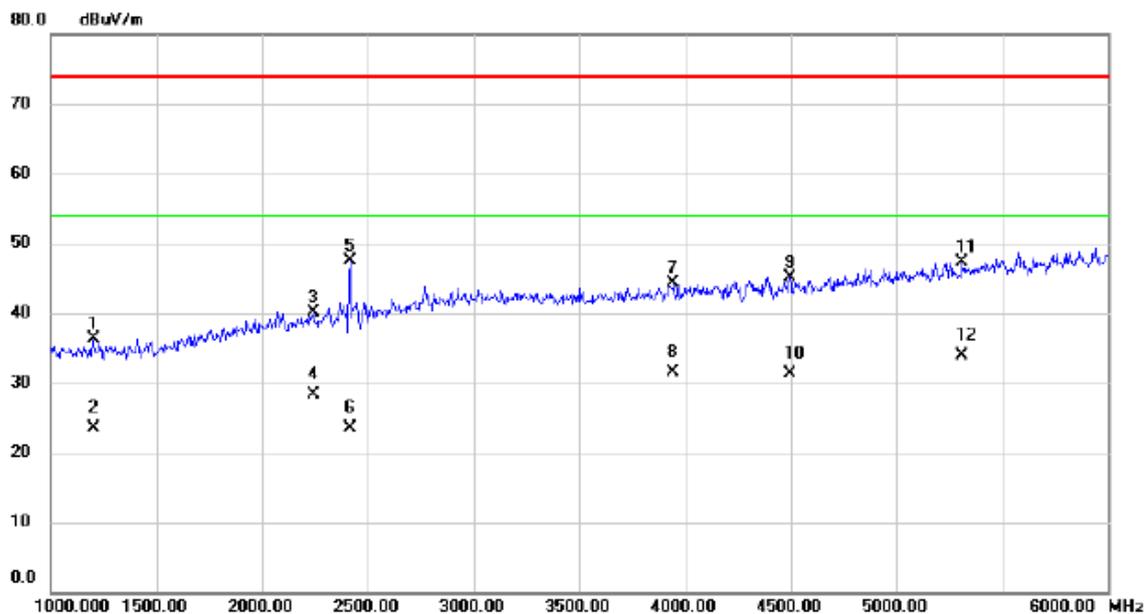

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1200.000	43.93	-7.67	36.26	74.00	-37.74	peak	
2		1200.000	31.17	-7.67	23.50	54.00	-30.50	AVG	
3		2240.000	42.34	-2.17	40.17	74.00	-33.83	peak	
4		2240.000	30.57	-2.17	28.40	54.00	-25.60	AVG	
5		2415.000	49.06	-1.53	47.53	74.00	-26.47	peak	
6		2415.000	25.03	-1.53	23.50	54.00	-30.50	AVG	
7		3945.000	41.67	2.62	44.29	74.00	-29.71	peak	
8		3945.000	28.98	2.62	31.60	54.00	-22.40	AVG	
9		4495.000	41.78	3.42	45.20	74.00	-28.80	peak	
10		4495.000	27.98	3.42	31.40	54.00	-22.60	AVG	
11		5310.000	41.00	6.39	47.39	74.00	-26.61	peak	
12	*	5310.000	27.51	6.39	33.90	54.00	-20.10	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	FULL SYSTEM – S/N: U75002G4C00684


Polarization: Horizontal

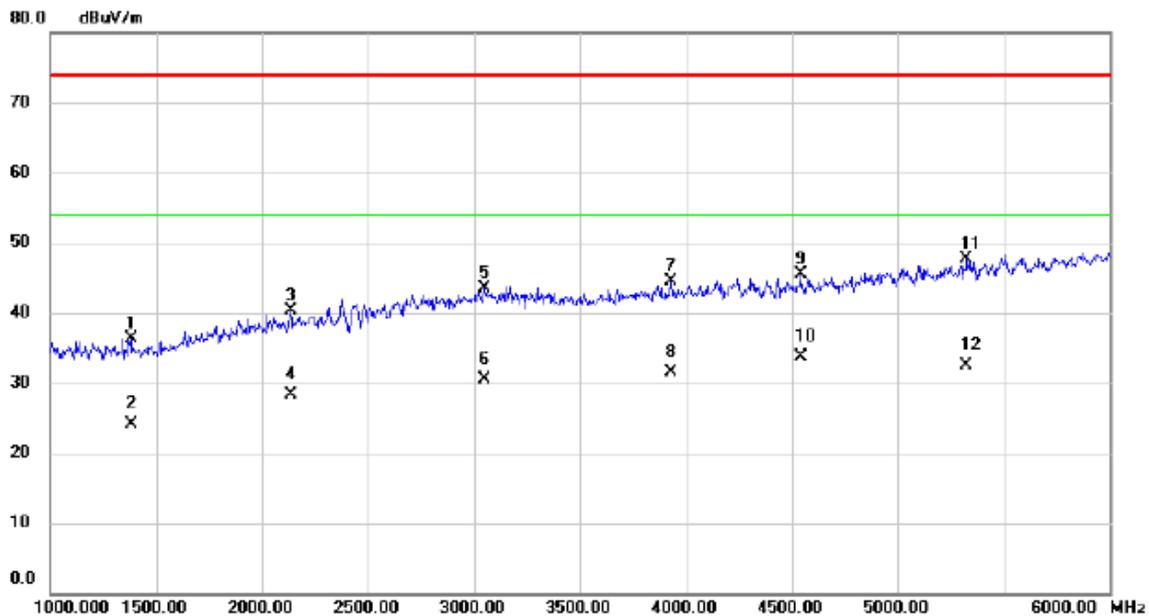

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1380.000	43.45	-7.19	36.26	74.00	-37.74	peak	
2	1380.000	31.29	-7.19	24.10	54.00	-29.90	AVG	
3	2135.000	42.79	-2.55	40.24	74.00	-33.76	peak	
4	2135.000	30.95	-2.55	28.40	54.00	-25.60	AVG	
5	3050.000	42.21	1.21	43.42	74.00	-30.58	peak	
6	3050.000	29.39	1.21	30.60	54.00	-23.40	AVG	
7	3930.000	41.98	2.57	44.55	74.00	-29.45	peak	
8	3930.000	28.93	2.57	31.50	54.00	-22.50	AVG	
9	4540.000	41.84	3.59	45.43	74.00	-28.57	peak	
10 *	4540.000	30.11	3.59	33.70	54.00	-20.30	AVG	
11	5325.000	41.22	6.44	47.66	74.00	-26.34	peak	
12	5325.000	26.06	6.44	32.50	54.00	-21.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	FULL SYSTEM – S/N: U75002G4C00684


Polarization: Vertical

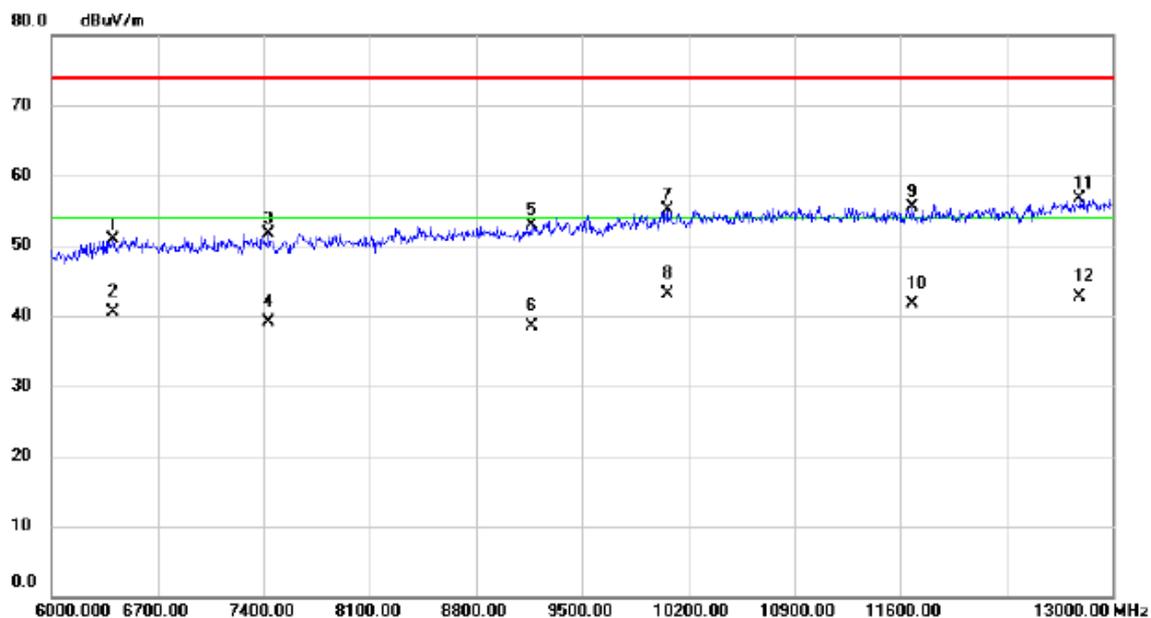

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6406.000	40.83	10.08	50.91	74.00	-23.09	peak	
2		6406.000	30.52	10.08	40.60	54.00	-13.40	AVG	
3		7435.000	40.76	10.97	51.73	74.00	-22.27	peak	
4		7435.000	28.13	10.97	39.10	54.00	-14.90	AVG	
5		9171.000	40.65	12.32	52.97	74.00	-21.03	peak	
6		9171.000	26.18	12.32	38.50	54.00	-15.50	AVG	
7		10060.000	41.57	13.59	55.16	74.00	-18.84	peak	
8	*	10060.000	29.61	13.59	43.20	54.00	-10.80	AVG	
9		11677.000	41.11	14.45	55.56	74.00	-18.44	peak	
10		11677.000	27.35	14.45	41.80	54.00	-12.20	AVG	
11		12783.000	40.87	15.93	56.80	74.00	-17.20	peak	
12		12783.000	26.77	15.93	42.70	54.00	-11.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	FULL SYSTEM – S/N: U75002G4C00684


Polarization: Horizontal

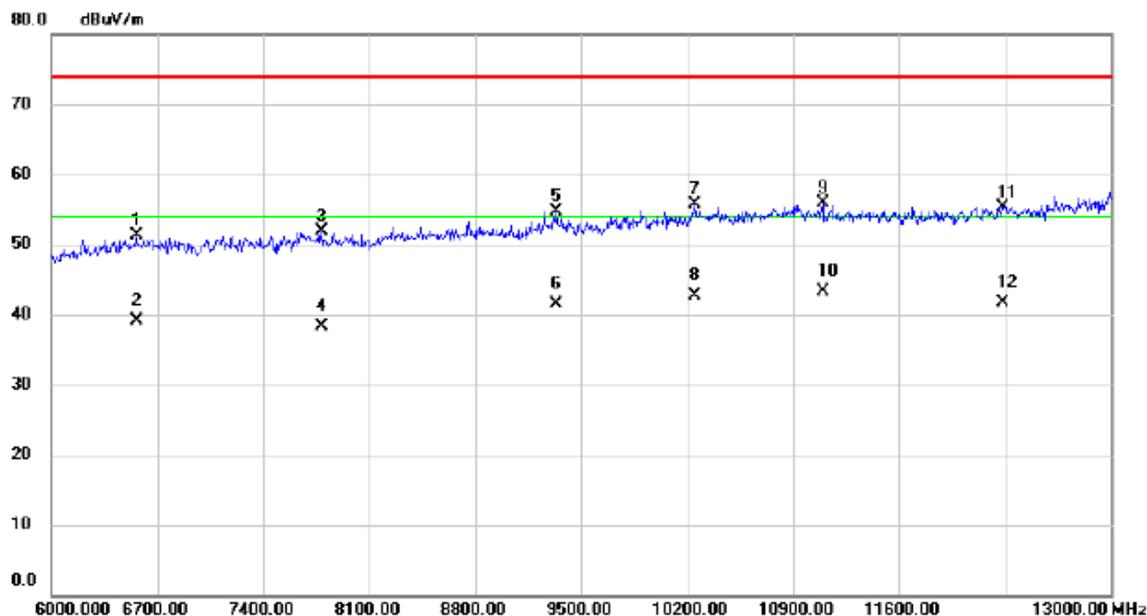

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6560.000	40.94	10.43	51.37	74.00	-22.63	peak	
2		6560.000	28.77	10.43	39.20	54.00	-14.80	AVG	
3		7785.000	40.96	11.01	51.97	74.00	-22.03	peak	
4		7785.000	27.39	11.01	38.40	54.00	-15.60	AVG	
5		9339.000	42.21	12.50	54.71	74.00	-19.29	peak	
6		9339.000	29.10	12.50	41.60	54.00	-12.40	AVG	
7		10249.000	41.83	13.85	55.68	74.00	-18.32	peak	
8		10249.000	28.95	13.85	42.80	54.00	-11.20	AVG	
9		11096.000	41.03	14.78	55.81	74.00	-18.19	peak	
10	*	11096.000	28.62	14.78	43.40	54.00	-10.60	AVG	
11		12286.000	40.50	14.83	55.33	74.00	-18.67	peak	
12		12286.000	26.97	14.83	41.80	54.00	-12.20	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	FULL SYSTEM - S/N: G75002C4800038


Polarization: Vertical

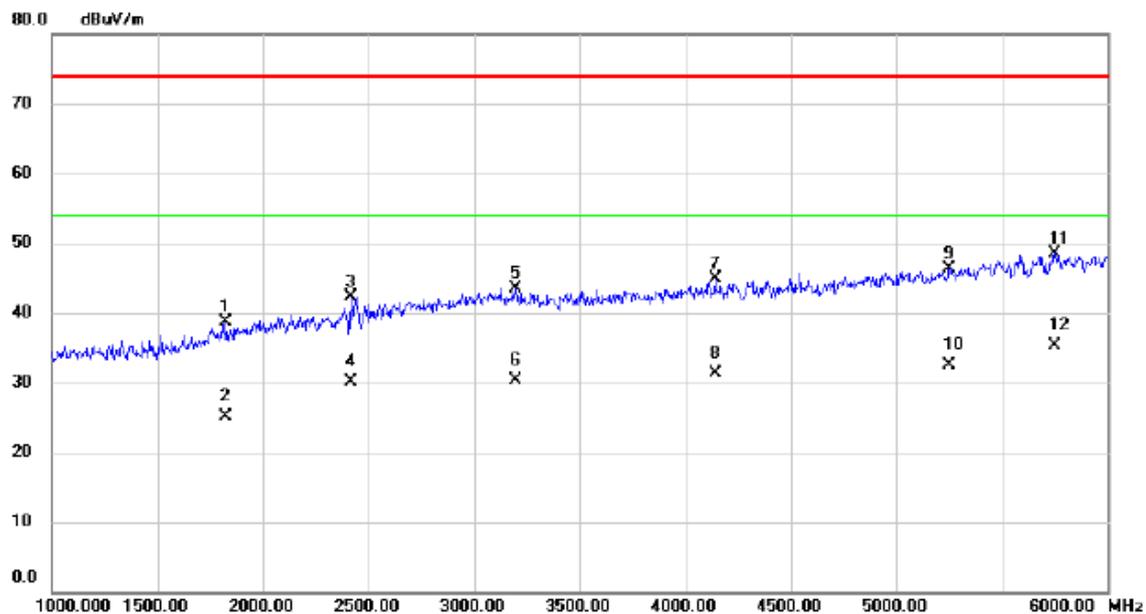

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1825.000	43.05	-4.39	38.66	74.00	-35.34	peak	
2		1825.000	29.52	-4.39	25.13	54.00	-28.87	AVG	
3		2415.000	43.92	-1.53	42.39	74.00	-31.61	peak	
4		2415.000	31.55	-1.53	30.02	54.00	-23.98	AVG	
5		3195.000	42.38	1.18	43.56	74.00	-30.44	peak	
6		3195.000	29.06	1.18	30.24	54.00	-23.76	AVG	
7		4140.000	41.98	2.98	44.96	74.00	-29.04	peak	
8		4140.000	28.24	2.98	31.22	54.00	-22.78	AVG	
9		5250.000	40.17	6.19	46.36	74.00	-27.64	peak	
10		5250.000	26.38	6.19	32.57	54.00	-21.43	AVG	
11		5750.000	40.82	7.76	48.58	74.00	-25.42	peak	
12	*	5750.000	27.50	7.76	35.26	54.00	-18.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	FULL SYSTEM - S/N: G75002C4800038


Polarization: Horizontal

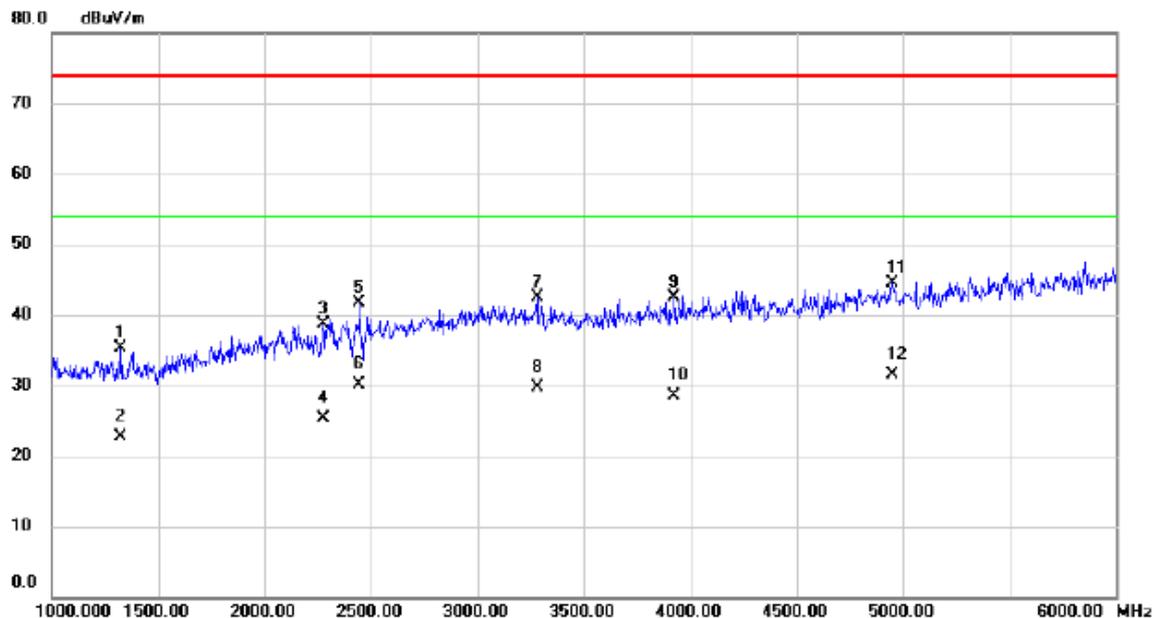

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1325.000	42.67	-7.34	35.33	74.00	-38.67	peak	
2	1325.000	30.04	-7.34	22.70	54.00	-31.30	AVG	
3	2275.000	40.66	-2.04	38.62	74.00	-35.38	peak	
4	2275.000	27.44	-2.04	25.40	54.00	-28.60	AVG	
5	2445.000	43.16	-1.42	41.74	74.00	-32.26	peak	
6	2445.000	31.52	-1.42	30.10	54.00	-23.90	AVG	
7	3280.000	41.32	1.17	42.49	74.00	-31.51	peak	
8	3280.000	28.53	1.17	29.70	54.00	-24.30	AVG	
9	3925.000	39.92	2.56	42.48	74.00	-31.52	peak	
10	3925.000	25.94	2.56	28.50	54.00	-25.50	AVG	
11	4950.000	39.39	5.19	44.58	74.00	-29.42	peak	
12 *	4950.000	26.41	5.19	31.60	54.00	-22.40	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	FULL SYSTEM - S/N: G75002C4800038


Polarization: Vertical

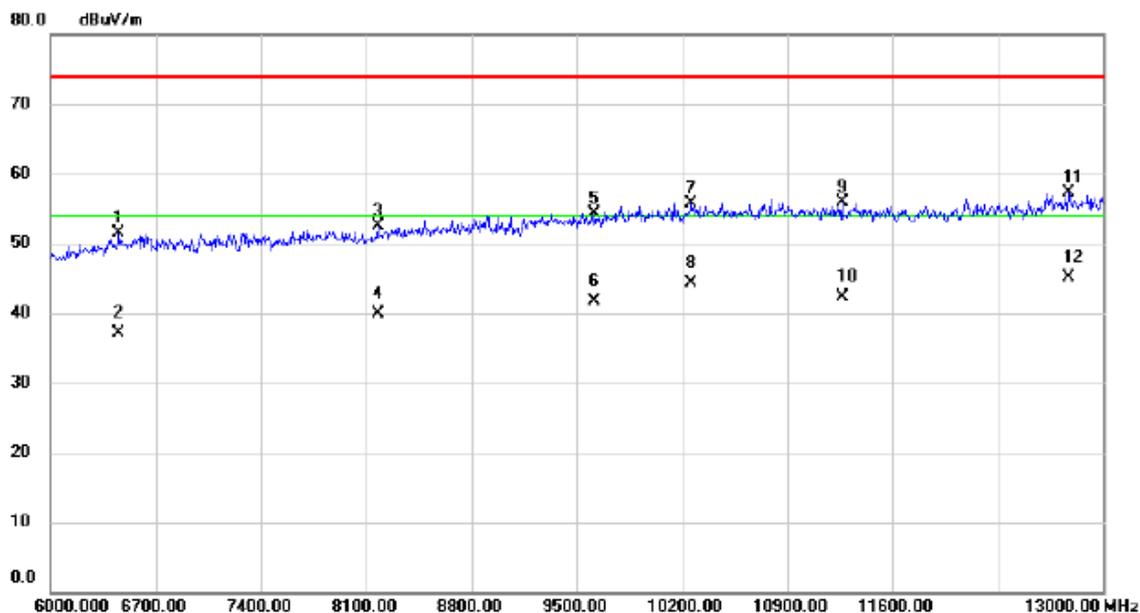

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6455.000	41.30	10.28	51.58	74.00	-22.42	peak	
2		6455.000	26.92	10.28	37.20	54.00	-16.80	AVG	
3		8177.000	41.19	11.31	52.50	74.00	-21.50	peak	
4		8177.000	28.59	11.31	39.90	54.00	-14.10	AVG	
5		9619.000	41.46	12.87	54.33	74.00	-19.67	peak	
6		9619.000	28.93	12.87	41.80	54.00	-12.20	AVG	
7		10263.000	41.79	13.87	55.66	74.00	-18.34	peak	
8		10263.000	30.43	13.87	44.30	54.00	-9.70	AVG	
9		11264.000	41.27	14.66	55.93	74.00	-18.07	peak	
10		11264.000	27.74	14.66	42.40	54.00	-11.60	AVG	
11		12769.000	41.33	15.89	57.22	74.00	-16.78	peak	
12	*	12769.000	29.21	15.89	45.10	54.00	-8.90	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	FULL SYSTEM - S/N: G75002C4800038

Polarization: Horizontal

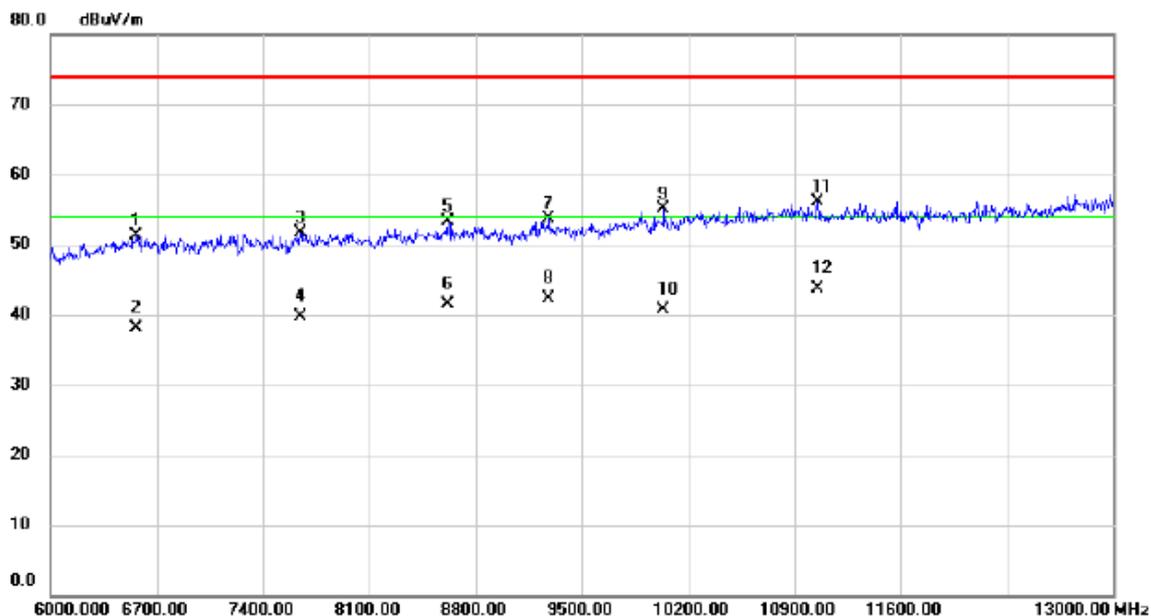

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	6567.000	40.84	10.44	51.28	74.00	-22.72	peak	
2	6567.000	27.76	10.44	38.20	54.00	-15.80	AVG	
3	7645.000	40.69	11.04	51.73	74.00	-22.27	peak	
4	7645.000	28.76	11.04	39.80	54.00	-14.20	AVG	
5	8618.000	41.26	12.01	53.27	74.00	-20.73	peak	
6	8618.000	29.59	12.01	41.60	54.00	-12.40	AVG	
7	9283.000	41.26	12.44	53.70	74.00	-20.30	peak	
8	9283.000	29.96	12.44	42.40	54.00	-11.60	AVG	
9	10039.000	41.50	13.56	55.06	74.00	-18.94	peak	
10	10039.000	27.24	13.56	40.80	54.00	-13.20	AVG	
11	11054.000	41.30	14.82	56.12	74.00	-17.88	peak	
12 *	11054.000	28.88	14.82	43.70	54.00	-10.30	AVG	