



TEST REPORT

No. I17N00107-LTE

for

Huawei Technologies Co.,Ltd.

LTE CPE

Model Name: B612s-51d

FCC ID: QISB612S-51D

with

Hardware Version: WL1B612SW

Software Version: 11.187.01.01.00

Issued Date: 2017-03-24

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No. 342690

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17N00107-LTE	Rev.0	1st edition	2017-03-24



CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA.....	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS.....	9
6.1. SUMMARY OF TEST RESULTS	9
6.2. STATEMENTS	11
7. TEST EQUIPMENTS UTILIZED.....	12
ANNEX A: MEASUREMENT RESULTS	13
A.1 OUTPUT POWER	13
A.2 EMISSION LIMIT	46
A.3 FREQUENCY STABILITY	68
A.4 OCCUPIED BANDWIDTH	72
A.5 EMISSION BANDWIDTH.....	97
A.6 BAND EDGE COMPLIANCE	122
A.7 CONDUCTED SPURIOUS EMISSION	138
A.8 PEAK-TO-AVERAGE POWER RATIO	164



1. Test Laboratory

1.1. Testing Location

Company Name: CTTL ShenZhen, Telecommunication Technology Labs, Academy of
Telecommunication Research, MIIT
Address: TCL International E city No. 1001 Zhongshanyuan Road, Nanshan
District, Shenzhen, Guangdong, China
Postal Code: 518048
Telephone: +86(755)33322000
Fax: +86(755)33322000

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%
Air pressure 980 - 1040 hPa

The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

1.3. Project data

Testing Start Date: 2017-02-16
Testing End Date: 2017-03-22

1.4. Signature

Lai Minghua

(Prepared this test report)

Yang Zi'an

(Reviewed this test report)

Zhang Bojun

Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Huawei Technologies Co.,Ltd.
Address /Post: Administration Building, Huawei Base, Bantian, Longgang District,
Shenzhen 518129, P.R.China
Contact Person: caihaiyong
Contact Email: caihaiyong1@huawei.com
Telephone: 075523656206
Fax: /

2.2. Manufacturer Information

Company Name: Huawei Technologies Co.,Ltd.
Address /Post: Administration Building, Huawei Base, Bantian, Longgang District,
Shenzhen 518129, P.R.China
Contact Person: caihaiyong
Contact Email: caihaiyong1@huawei.com
Telephone: 075523656206
Fax: /



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	LTE CPE
Model Name	B612s-51d
FCC ID	QISB612S-51D
Antenna	Integrated
Output power	29.44dBm maximum EIRP measured for LTE Band 2
Extreme vol. Limits	10.8VDC to 13.2VDC (nominal: 12.0VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Sample Arrival Date
S01	/	WL1B612SW	11.187.01.01.00	2017-02-16
S02	/	WL1B612SW	11.187.01.01.00	2017-02-16

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Charger

AE1

Model	HW-120100U01
Manufacturer	SWITCHING POWER ADAPTER

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model TD-LTE mobile phone with integrated antenna. It consists of normal options: charger. Manual and specifications of the EUT were provided to fulfil the test.



4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-15 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-15 Edition
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	10-1-15 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-15 Edition
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v02r02

5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber 2 (8.6 meters X 6.1 meters X 3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Semi-anechoic chamber 2 / Fully-anechoic chamber 3 (10 meters X 6.7 meters X 6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

6.1. Summary of test results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

LTE Band 2

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	24.232(c)	A.1	P
2	Emission Limit	24.238(a), 2.1051	A.2	P
3	Frequency Stability	24.235, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	24.238(a)	A.5	P
6	Band Edge Compliance	24.238(a)	A.6	P
7	Conducted Spurious Emission	24.238, 2.1057	A.7	P
8	Peak to Average Power Ratio	24.232 (d)	A.8	P

LTE Band 4

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(d)(4)	A.1	P
2	Emission Limit	27.53(h), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(h)	A.5	P
6	Band Edge Compliance	27.53(h)	A.6	P
7	Conducted Spurious Emission	27.53(h), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

LTE Band 5

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046(a), 22.913(a)	A.1	P
2	Emission Limit	22.917, 2.1051	A.2	P
3	Frequency Stability	22.235, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	22.917(b)	A.5	P
6	Band Edge Compliance	22.917(b)	A.6	P
7	Conducted Spurious Emission	22.917, 2.1057	A.7	P

LTE Band 7

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(h)(2)	A.1	P
2	Emission Limit	27.53(m), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(m)	A.5	P
6	Band Edge Compliance	27.53(m)	A.6	P
7	Conducted Spurious Emission	27.53(m), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

LTE Band 41

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(h)(2)	A.1	P
2	Emission Limit	27.53(m), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(m)	A.5	P
6	Band Edge Compliance	27.53(m)	A.6	P
7	Conducted Spurious Emission	27.53(m), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P



6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by CTTL according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1.

This report only deals with the LTE functions among the features described in section 3.



7. Test Equipments Utilized

NO.	Description	TYPE	Manufacture	series number	CAL DUE DATE
1	Test Receiver	ESR7	R&S	101675	2017-07-21
2	BiLog Antenna	VULB9163	Schwarzbeck	9163330	2017-04-22
3	Horn Antenna	3117	ETS-Lindgren	00066585	2019-03-05
4	Signal Generator	SMR40	R&S	100541	2017-06-27
5	Fully Anechoic Chamber	FACT5-2.0	ETS-Lindgren	4166	2018-05-13
6	Spectrum Analyzer	FSP40	R&S	100378	2017-12-15
7	Universal Radio Communication Tester	CMU200	R&S	114544	2017-09-09
8	Universal Radio Communication Tester	CMW500	R&S	158344	2017-07-21
9	Universal Radio Communication Tester	CMU200	R&S	123210	2017-12-25
10	Spectrum Analyzer	FSU	R&S	200679	2017-12-25
11	Temperature Chamber	SH-241	ESPECs	92007516	2017-11-29
12	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2017-11-22

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

Reference

FCC: 22.913(a), 24.232(c), 27.50(h)(2).

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

This result contains peak output power and ERP/EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 2

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1909.3	21.66	21.40
		1880.0	22.51	22.26
		1850.7	23.08	22.76
	1 RB low	1909.3	22.03	21.75
		1880.0	22.66	22.38
		1850.7	23.14	22.87
	50% RB mid	1909.3	21.94	21.49
		1880.0	22.66	22.21
		1850.7	23.18	22.72
	100% RB	1909.3	21.60	20.66
		1880.0	22.20	21.35
		1850.7	22.70	21.82
3MHz	1 RB high	1908.5	21.55	21.34
		1880.0	22.31	22.11
		1851.5	22.95	22.68
	1 RB low	1908.5	22.33	22.08
		1880.0	22.61	22.34
		1851.5	23.08	22.77
	50% RB mid	1908.5	21.68	20.85
		1880.0	22.20	21.34
		1851.5	22.73	21.82



	100% RB	1908.5	21.69	20.83
		1880.0	22.19	21.28
		1851.5	22.70	21.73
5MHz	1 RB high	1907.5	22.09	21.82
		1880.0	22.95	22.65
		1852.5	23.44	23.13
	1 RB low	1907.5	22.68	22.38
		1880.0	22.60	22.32
		1852.5	23.10	22.83
	50% RB mid	1907.5	22.08	21.21
		1880.0	22.29	21.44
		1852.5	22.86	21.90
	100% RB	1907.5	21.91	21.01
		1880.0	22.24	21.31
		1852.5	22.69	21.69
10MHz	1 RB high	1905.0	22.16	21.92
		1880.0	22.87	22.60
		1855.0	23.34	23.04
	1 RB low	1905.0	22.86	22.60
		1880.0	22.70	22.41
		1855.0	23.06	22.79
	50% RB mid	1905.0	22.35	21.39
		1880.0	22.28	21.39
		1855.0	22.76	21.76
	100% RB	1905.0	22.26	21.34
		1880.0	22.19	21.26
		1855.0	22.66	21.58
15MHz	1 RB high	1902.5	22.97	22.75
		1880.0	22.78	22.52
		1857.5	23.14	22.85
	1 RB low	1902.5	22.54	22.28
		1880.0	22.57	22.26
		1857.5	22.94	22.65
	50% RB mid	1902.5	22.93	22.47
		1880.0	22.76	22.25
		1857.5	23.12	22.63
	100% RB	1902.5	22.51	21.51
		1880.0	22.30	21.38
		1857.5	22.64	21.67
20MHz	1 RB high	1900.0	22.05	21.85



		1880.0	22.59	22.32
		1860.0	22.87	22.61
	1 RB low	1900.0	22.30	22.09
		1880.0	22.58	22.34
		1860.0	22.97	22.63
	50% RB mid	1900.0	22.57	21.54
		1880.0	22.18	21.31
		1860.0	22.57	21.49
	100% RB	1900.0	22.15	21.17
		1880.0	22.07	21.11
		1860.0	22.50	21.42

LTE band 4

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	1754.3	23.36	23.03
		1732.5	22.38	22.13
		1710.7	22.49	22.31
	1 RB low	1754.3	23.40	23.08
		1732.5	22.40	22.12
		1710.7	22.50	22.35
	50% RB mid	1754.3	23.42	22.95
		1732.5	22.46	22.01
		1710.7	22.53	22.21
	100% RB	1754.3	22.98	21.98
		1732.5	22.09	21.18
		1710.7	22.12	21.22
3MHz	1 RB high	1753.5	23.20	22.91
		1732.5	22.26	21.98
		1711.5	22.36	22.32
	1 RB low	1753.5	23.11	22.88
		1732.5	22.31	22.03
		1711.5	22.40	22.33
	50% RB mid	1753.5	22.95	21.97
		1732.5	22.14	21.20
		1711.5	22.21	21.34
	100% RB	1753.5	22.87	21.88
		1732.5	22.11	21.17
		1711.5	22.17	21.23
5MHz	1 RB high	1752.5	23.48	23.27
		1732.5	22.66	22.38
		1712.5	22.63	22.36
	1 RB low	1752.5	23.38	23.09
		1732.5	22.49	22.20
		1712.5	22.59	22.37
	50% RB mid	1752.5	22.95	21.97
		1732.5	22.24	21.32
		1712.5	22.32	21.39
	100% RB	1752.5	22.78	21.80
		1732.5	22.14	21.20
		1712.5	22.25	21.30
10MHz	1 RB high	1750.0	23.26	23.03
		1732.5	22.59	22.32



	1 RB low	1715.0	22.15	22.07
		1750.0	23.01	22.64
		1732.5	22.36	22.12
	50% RB mid	1715.0	22.58	22.31
		1750.0	22.70	21.66
		1732.5	22.19	21.26
	100% RB	1715.0	22.25	21.25
		1750.0	22.62	21.59
		1732.5	22.07	21.14
15MHz	1 RB high	1715.0	22.15	21.15
		1750.0	22.62	21.59
		1732.5	22.07	21.14
	1 RB low	1747.5	23.33	22.84
		1732.5	22.67	22.11
		1717.5	22.76	22.08
	50% RB mid	1747.5	22.81	22.22
		1732.5	22.45	21.94
		1717.5	22.56	22.12
	100% RB	1747.5	22.41	21.54
		1732.5	22.32	21.34
		1717.5	22.18	21.23
20MHz	1 RB high	1747.5	22.45	21.53
		1732.5	22.11	21.45
		1717.5	22.25	21.18
	1 RB low	1745.0	23.39	23.25
		1732.5	22.53	22.42
		1720.0	22.72	22.41
	50% RB mid	1745.0	22.80	22.54
		1732.5	22.38	22.10
		1720.0	22.53	22.41
	100% RB	1745.0	22.45	21.51
		1732.5	22.19	21.27
		1720.0	22.22	21.27
1 RB high	1745.0	22.46	21.52	
	1732.5	22.06	21.19	
	1720.0	22.14	21.22	

LTE band 5

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	848.3	22.61	22.42
		836.5	22.54	22.36
		824.7	22.89	22.71
	1 RB low	848.3	22.91	22.73
		836.5	22.66	22.40
		824.7	22.79	22.64
	50% RB mid	848.3	22.89	22.48
		836.5	22.68	22.30
		824.7	22.95	22.54
	100% RB	848.3	22.47	21.54
		836.5	22.26	21.25
		824.7	22.49	21.51
3MHz	1 RB high	847.5	22.47	22.33
		836.5	22.45	22.28
		825.5	22.86	22.68
	1 RB low	847.5	23.11	22.85
		836.5	22.65	22.42
		825.5	22.69	22.59
	50% RB mid	847.5	22.64	21.58
		836.5	22.30	21.22
		825.5	22.69	21.64
	100% RB	847.5	22.58	21.50
		836.5	22.27	21.15
		825.5	22.59	21.50
5MHz	1 RB high	846.5	22.91	22.60
		836.5	22.73	22.49
		826.5	23.44	23.26
	1 RB low	846.5	23.03	22.79
		836.5	22.62	22.40
		826.5	22.63	22.42
	50% RB mid	846.5	22.86	21.82
		836.5	22.35	21.30
		826.5	22.69	21.70
	100% RB	846.5	22.68	21.61
		836.5	22.28	21.21
		826.5	22.63	21.62
10MHz	1 RB high	844.0	22.80	22.50
		836.5	22.85	22.62



		829.0	22.71	22.41
	1 RB low	844.0	22.37	22.19
		836.5	22.75	22.46
		829.0	22.50	22.24
	50% RB mid	844.0	22.62	21.51
		836.5	22.30	21.21
		829.0	22.72	21.71
	100% RB	844.0	22.43	21.30
		836.5	22.31	21.19
		829.0	22.49	21.45

LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	2567.5	22.54	22.27
		2535.0	22.24	22.00
		2502.5	22.19	21.94
	1 RB low	2567.5	22.85	22.56
		2535.0	22.41	22.20
		2502.5	22.53	22.28
	50% RB mid	2567.5	22.74	21.85
		2535.0	22.27	21.41
		2502.5	22.33	21.37
	100% RB	2567.5	22.59	21.68
		2535.0	22.24	21.38
		2502.5	22.24	21.27
10MHz	1 RB high	2565.0	22.56	22.29
		2535.0	22.37	22.14
		2505.0	22.38	22.17
	1 RB low	2565.0	22.74	22.45
		2535.0	22.38	22.16
		2505.0	22.38	22.20
	50% RB mid	2565.0	22.65	21.74
		2535.0	22.22	21.34
		2505.0	22.28	21.30
	100% RB	2565.0	22.61	21.70
		2535.0	22.26	21.38
		2505.0	22.31	21.34
15MHz	1 RB high	2562.5	22.91	22.65
		2535.0	22.48	22.27
		2507.5	22.53	22.33
	1 RB low	2562.5	22.47	22.20
		2535.0	22.21	22.00
		2507.5	22.13	21.93
	50% RB mid	2562.5	22.77	22.31
		2535.0	22.39	22.00
		2507.5	22.34	21.86
	100% RB	2562.5	22.47	21.48
		2535.0	22.07	21.17
		2507.5	22.17	21.13
20MHz	1 RB high	2560.0	22.17	22.74



		2535.0	22.83	22.62
		2510.0	22.99	22.75
	1 RB low	2560.0	22.13	22.83
		2535.0	22.90	22.62
		2510.0	22.76	22.49
	50% RB mid	2560.0	22.21	22.28
		2535.0	22.70	21.84
		2510.0	22.77	21.75
	100% RB	2560.0	22.09	22.25
		2535.0	22.68	21.84
		2510.0	22.73	21.86

LTE band 41

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	2652.5	22.59	22.32
		2600.0	22.36	21.94
		2547.5	22.21	21.98
	1 RB low	2652.5	22.88	22.45
		2600.0	22.59	21.86
		2547.5	22.64	21.78
	50% RB mid	2652.5	22.81	21.88
		2600.0	22.35	21.45
		2547.5	22.48	21.53
	100% RB	2652.5	22.71	21.78
		2600.0	22.33	21.36
		2547.5	22.27	21.31
10MHz	1 RB high	2650.0	22.25	21.67
		2600.0	22.48	22.01
		2550.0	22.44	22.04
	1 RB low	2650.0	22.88	21.96
		2600.0	22.35	21.46
		2550.0	22.36	21.56
	50% RB mid	2650.0	22.78	21.81
		2600.0	22.24	21.28
		2550.0	22.34	21.30
	100% RB	2650.0	22.64	21.68
		2600.0	22.23	21.32
		2550.0	22.45	21.49
15MHz	1 RB high	2647.5	22.83	22.43
		2600.0	22.45	22.27
		2552.5	22.67	22.12
	1 RB low	2647.5	22.55	22.08
		2600.0	22.21	21.35
		2552.5	22.34	21.87
	50% RB mid	2647.5	22.83	22.12
		2600.0	22.46	21.54
		2552.5	22.45	21.65
	100% RB	2647.5	22.49	21.51
		2600.0	22.21	21.17
		2552.5	22.25	21.18
20MHz	1 RB high	2645.0	22.19	21.49
		2600.0	22.83	22.36



	1 RB low	2555.0	22.98	22.18	
		2645.0	22.19	21.36	
		2600.0	22.96	22.21	
	50% RB mid	2555.0	22.87	22.03	
		2645.0	22.32	21.45	
		2600.0	22.76	21.72	
	100% RB	2555.0	22.77	21.81	
		2645.0	22.19	21.31	
		2600.0	22.68	21.65	
			2555.0	22.41	21.53

A.1.3 Radiated

A.1.3.1 Description

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".

Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP".


Rule Part 27.50(c) specifies "Portable stations (hand-held de-vices) are limited to 3 watts ERP".

Rule Part 27.50(a)(3) specifies "For mobile and portable stations transmitting in the 2305–2315 MHz band or the 2350–2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth."


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

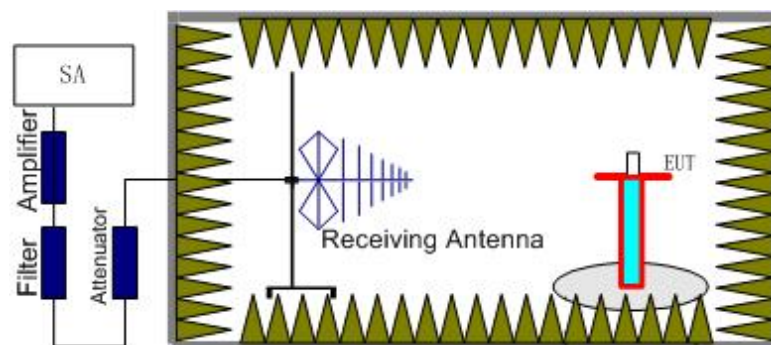

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

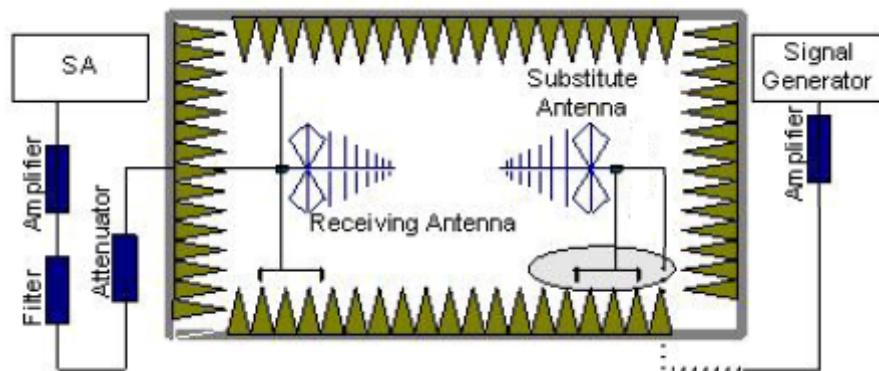

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna. The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15$.

A.1.3.3 Measurement result

LTE Band 2- EIRP 24. 232(b)

Limits: $\leq 33\text{dBm}$ (2W)

LTE Band 2_1.4MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-3.11	-29.40	0.15	26.44	33.00	H
1880.00	-0.79	-29.30	0.25	28.76	33.00	H
1909.30	-1.47	-29.30	0.35	28.18	33.00	H

LTE Band 2_3MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-3.74	-29.40	0.15	25.81	33.00	H
1880.00	-2.32	-29.30	0.25	27.23	33.00	H
1908.50	-2.40	-29.30	0.35	27.25	33.00	H

LTE Band 2_5MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-3.85	-29.40	0.15	25.70	33.00	H
1880.00	-2.20	-29.30	0.25	27.35	33.00	H
1907.50	-2.42	-29.30	0.35	27.23	33.00	H

LTE Band 2_10MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-4.48	-29.40	0.15	25.07	33.00	H
1880.00	-3.16	-29.30	0.25	26.39	33.00	H
1905.00	-3.06	-29.30	0.35	26.59	33.00	H

LTE Band 2_15MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-5.83	-29.40	0.15	23.72	33.00	H
1880.00	-4.48	-29.30	0.25	25.07	33.00	H
1902.50	-5.97	-29.30	0.35	23.68	33.00	H

LTE Band 2_20 MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-6.62	-29.40	0.15	22.93	33.00	H
1880.00	-5.11	-29.30	0.25	24.44	33.00	H
1900.00	-5.22	-29.30	0.35	24.43	33.00	H

LTE Band 2_1.4MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-1.72	-29.40	0.15	27.83	33.00	H
1880.00	-1.42	-29.30	0.25	28.14	33.00	H
1909.30	-5.22	-29.30	0.35	24.43	33.00	H

LTE Band 2_3MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-1.56	-29.40	0.15	27.99	33.00	H
1880.00	-1.07	-29.30	0.25	28.48	33.00	H
1908.50	-1.82	-29.30	0.35	27.83	33.00	H

LTE Band 2_5MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-4.51	-29.40	0.15	25.04	33.00	H
1880.00	-2.30	-29.30	0.25	27.25	33.00	H
1907.50	-4.42	-29.30	0.35	25.23	33.00	H

LTE Band 2_10MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-4.16	-29.40	0.15	25.39	33.00	H
1880.00	-2.81	-29.30	0.25	26.74	33.00	H
1905.00	-3.17	-29.30	0.35	26.48	33.00	H

LTE Band 2_15MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-5.94	-29.40	0.15	23.61	33.00	H
1880.00	-4.58	-29.30	0.25	24.97	33.00	H
1902.50	-4.80	-29.30	0.35	24.86	33.00	H

LTE Band 2_20 MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-5.94	-29.40	0.15	23.61	33.00	H
1880.00	-4.58	-29.30	0.25	24.97	33.00	H
1900.00	-4.80	-29.30	0.35	24.86	33.00	H

Peak EIRP (dBm)=P_{Mea}(-0.21dBm)- (P_{cl}+P_{Ag}) (-29.30dB)+G_a(0.35dB) =29.44dBm



LTE Band 4- EIRP 27.50(d)

Limits: ≤30dBm (1W)

LTE Band 4_1.4MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-2.35	-29.60	0.39	27.64	33.00	H
1732.50	-0.52	-29.60	0.27	29.35	33.00	H
1754.30	0.10	-29.50	0.17	29.77	33.00	H

LTE Band 4_3MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-1.66	-29.60	0.39	28.33	33.00	H
1732.50	-0.32	-29.60	0.27	29.55	33.00	H
1753.50	-0.11	-29.50	0.17	29.56	33.00	H

LTE Band 4_5MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-1.95	-29.60	0.39	28.04	33.00	H
1732.50	-0.65	-29.60	0.27	29.22	33.00	H
1752.50	-0.08	-29.50	0.17	29.59	33.00	H

LTE Band 4_10MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-2.78	-29.60	0.39	27.21	33.00	H
1732.50	-1.15	-29.60	0.27	28.72	33.00	H
1750.50	-0.61	-29.50	0.17	29.06	33.00	H

LTE Band 4_15MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-4.37	-29.60	0.39	25.62	33.00	H
1732.50	-2.39	-29.60	0.27	27.48	33.00	H
1747.50	-1.65	-29.50	0.17	28.02	33.00	H

LTE Band 4_20MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-5.77	-29.60	0.39	24.22	33.00	H
1732.50	-3.36	-29.60	0.27	26.51	33.00	H
1745.00	-2.57	-29.50	0.17	27.10	33.00	H

LTE Band 4_1.4MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-1.99	-29.60	0.39	28.00	33.00	H
1732.50	-0.58	-29.60	0.27	29.29	33.00	H
1754.30	0.01	-29.50	0.17	29.68	33.00	H

LTE Band 4_3MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-1.89	-29.60	0.39	28.11	33.00	H
1732.50	-0.25	-29.60	0.27	29.62	33.00	H
1753.50	-0.01	-29.50	0.17	29.67	33.00	H

LTE Band 4_5MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-2.02	-29.60	0.39	27.98	33.00	H
1732.50	-0.23	-29.60	0.27	29.64	33.00	H
1752.50	0.41	-29.50	0.17	30.08	33.00	H

LTE Band 4_10MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-2.75	-29.60	0.39	27.24	33.00	H
1732.50	-1.05	-29.60	0.27	28.82	33.00	H
1750.50	-0.96	-29.50	0.17	28.71	33.00	H

LTE Band 4_15MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-3.76	-29.60	0.39	26.23	33.00	H
1732.50	-2.06	-29.60	0.27	27.81	33.00	H
1747.50	-2.10	-29.50	0.17	27.57	33.00	H

LTE Band 4_20MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-4.53	-29.60	0.39	25.46	33.00	H
1732.50	-2.30	-29.60	0.27	27.57	33.00	H
1745.00	-2.17	-29.50	0.17	27.50	33.00	H

Peak EIRP (dBm)=P_{Mea}(-2.62dBm)- (P_{cl}+P_{Ag}) (-29.50dB)+G_a(0.17dB) =27.05dBm

LTE Band 5- ERP 22.913(a)

Limits: ≤38.45dBm (7W)

LTE Band 5_1.4MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-7.75	-33.60	0.28	2.15	23.98	38.45	H
836.50	-9.08	-33.50	0.25	2.15	22.52	38.45	H
848.30	-8.62	-33.50	0.21	2.15	22.94	38.45	H

LTE Band 5_3MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-7.35	-33.60	0.28	2.15	24.38	38.45	H
836.50	-9.00	-33.50	0.25	2.15	22.60	38.45	H
847.50	-8.13	-33.50	0.21	2.15	23.43	38.45	H

LTE Band 5_5MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-7.19	-33.60	0.28	2.15	24.54	38.45	H
836.50	-8.92	-33.50	0.25	2.15	22.68	38.45	H
846.50	-8.13	-33.50	0.21	2.15	23.43	38.45	H

LTE Band 5_10MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-8.80	-33.60	0.28	2.15	22.93	38.45	H
836.50	-9.58	-33.50	0.25	2.15	22.02	38.45	H
844.00	-9.22	-33.50	0.21	2.15	22.34	38.45	H

LTE Band 5_1.4MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-7.55	-33.60	0.28	2.15	24.19	38.45	H
836.50	-8.66	-33.50	0.25	2.15	22.94	38.45	H
848.30	-7.83	-33.50	0.21	2.15	23.73	38.45	H

LTE Band 5_3MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-7.11	-33.60	0.28	2.15	24.62	38.45	H
836.50	-8.81	-33.50	0.25	2.15	22.79	38.45	H
847.50	-7.39	-33.50	0.21	2.15	24.17	38.45	H

LTE Band 5_5MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-7.41	-33.60	0.28	2.15	24.32	38.45	H
836.50	-9.13	-33.50	0.25	2.15	22.47	38.45	H
846.50	-7.74	-33.50	0.21	2.15	23.82	38.45	H

LTE Band 5_10MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-8.11	-33.60	0.28	2.15	23.62	38.45	H
836.50	-9.10	-33.50	0.25	2.15	22.50	38.45	H
844.00	-8.33	-33.50	0.21	2.15	23.23	38.45	H

Peak ERP (dBm)=P_{Mea}(-3.21dBm)- (P_{cl}+P_{Ag}) (-33.60dB)+G_a(0.28dB) -2.15dB =28.52dBm



LTE Band 7- EIRP 27.50(h)(2)

Limits: ≤33 dBm (2W)

LTE Band 7_5MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-2.04	-28.70	0.59	27.25	33.00	H
2535.00	-1.40	-28.60	0.45	27.65	33.00	H
2567.50	0.39	-28.60	0.38	29.37	33.00	H

LTE Band 7_10MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-2.10	-28.70	0.59	27.19	33.00	H
2535.00	-2.38	-28.60	0.45	26.67	33.00	H
2565.00	-0.49	-28.60	0.38	28.49	33.00	H

LTE Band 7_15MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-2.40	-28.70	0.59	26.89	33.00	H
2535.00	-3.88	-28.60	0.45	25.17	33.00	H
2562.50	-1.97	-28.60	0.38	27.01	33.00	H

LTE Band 7_20MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-2.58	-28.70	0.59	26.71	33.00	H
2535.00	-3.62	-28.60	0.45	25.43	33.00	H
2560.00	-2.22	-28.60	0.38	26.76	33.00	H

LTE Band 7_5MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-1.83	-28.70	0.59	27.46	33.00	H
2535.00	-1.42	-28.60	0.45	27.63	33.00	H
2567.50	0.20	-28.60	0.38	29.18	33.00	H

LTE Band 7_10MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-1.46	-28.70	0.59	27.84	33.00	H
2535.00	-2.33	-28.60	0.45	26.73	33.00	H
2565.00	-0.50	-28.60	0.38	28.48	33.00	H

LTE Band 7_15MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-2.26	-28.70	0.59	27.03	33.00	H
2535.00	-3.34	-28.60	0.45	25.71	33.00	H
2562.50	-1.67	-28.60	0.38	27.31	33.00	H

LTE Band 7_20MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-2.42	-28.70	0.59	26.87	33.00	H
2535.00	-3.23	-28.60	0.45	25.82	33.00	H
2560.00	-1.67	-28.60	0.38	27.31	33.00	H

Peak EIRP (dBm)=P_{Mea}(-1.40dBm)- (P_{cl}+P_{Ag}) (-28.60dB)+G_a(0.38dB) -2.15dB =27.58dBm



LTE Band 41- EIRP Part 27.50(h)(2)

Limits: ≤33dBm (2W)

LTE Band 41_5MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2547.50	-0.47	-28.60	0.38	28.51	33.00	H
2600.00	0.75	-28.60	0.30	29.65	33.00	H
2652.50	0.51	-28.60	-0.01	29.10	33.00	H

LTE Band 41_10MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2550.00	-0.78	-28.60	0.38	28.20	33.00	H
2600.00	0.62	-28.60	0.30	29.52	33.00	H
2650.00	0.38	-28.60	-0.01	28.97	33.00	H

LTE Band 41_15MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2552.50	-2.48	-28.60	0.38	26.50	33.00	H
2600.00	-0.89	-28.60	0.30	28.01	33.00	H
2647.50	-0.88	-28.60	-0.01	27.71	33.00	H

LTE Band 41_20MHz_QPSK-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2555.00	-2.39	-28.60	0.38	26.59	33.00	H
2600.00	-1.05	-28.60	0.30	27.85	33.00	H
2645.00	-0.96	-28.60	-0.01	27.63	33.00	H



LTE Band 41_5MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2547.50	-0.91	-28.60	0.38	28.07	33.00	H
2600.00	0.70	-28.60	0.30	29.60	33.00	H
2652.50	0.95	-28.60	-0.01	29.54	33.00	H

LTE Band 41_10MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2550.00	-0.99	-28.60	0.38	27.99	33.00	H
2600.00	0.39	-28.60	0.30	29.30	33.00	H
2650.00	0.52	-28.60	-0.01	29.11	33.00	H

LTE Band 41_15MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2552.50	-1.86	-28.60	0.38	27.12	33.00	H
2600.00	-0.71	-28.60	0.30	28.20	33.00	H
2647.50	-0.49	-28.60	-0.01	28.10	33.00	H

LTE Band 41_20 MHz_16QAM-Internal Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2555.00	-2.58	-28.60	0.38	26.40	33.00	H
2600.00	-0.45	-28.60	0.30	28.45	33.00	H
2645.00	-1.21	-28.60	-0.01	27.38	33.00	H

Peak EIRP (dBm)=P_{Mea}(-0.87dBm)- (P_{cl}+P_{Ag}) (-28.60dB)+G_a(0.30dB) =28.03dBm

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: Expanded measurement uncertainty is $U = 0.96$ dB, $k = 2$.



LTE Band 2- EIRP 24. 232(b)

Limits: ≤33dBm (2W)

LTE Band 2_1.4MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-2.41	-29.40	0.15	27.14	33.00	V
1880.00	-0.64	-29.30	0.25	28.92	33.00	V
1909.30	-0.80	-29.30	0.35	28.85	33.00	V

LTE Band 2_3MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-2.29	-29.40	0.15	27.26	33.00	V
1880.00	-0.75	-29.30	0.25	28.80	33.00	V
1908.50	-0.41	-29.30	0.35	29.24	33.00	V

LTE Band 2_5MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-2.12	-29.40	0.15	27.43	33.00	V
1880.00	-0.49	-29.30	0.25	29.06	33.00	V
1907.50	-3.02	-29.30	0.35	26.63	33.00	V

LTE Band 2_10MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-2.54	-29.40	0.15	27.01	33.00	V
1880.00	-1.42	-29.30	0.25	28.13	33.00	V
1905.00	-0.85	-29.30	0.35	28.80	33.00	V

LTE Band 2_15MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-3.39	-29.40	0.15	26.16	33.00	V
1880.00	-2.35	-29.30	0.25	27.20	33.00	V
1902.50	-2.08	-29.30	0.35	27.57	33.00	V

LTE Band 2_20 MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-2.36	-29.40	0.15	27.19	33.00	V
1880.00	-0.45	-29.30	0.25	29.10	33.00	V
1900.00	-0.53	-29.30	0.35	29.12	33.00	V

LTE Band 2_1.4MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1850.70	-2.70	-29.40	0.15	26.85	33.00	V
1880.00	-0.77	-29.30	0.25	28.78	33.00	V
1909.30	-1.41	-29.30	0.35	28.24	33.00	V

LTE Band 2_3MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1851.50	-2.33	-29.40	0.15	27.22	33.00	V
1880.00	-0.52	-29.30	0.25	29.03	33.00	V
1908.50	-0.72	-29.30	0.35	28.93	33.00	V

LTE Band 2_5MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1852.50	-2.18	-29.40	0.15	27.37	33.00	V
1880.00	-1.03	-29.30	0.25	28.52	33.00	V
1907.50	-0.46	-29.30	0.35	29.20	33.00	V

LTE Band 2_10MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1855.00	-2.33	-29.40	0.15	27.22	33.00	V
1880.00	-1.46	-29.30	0.25	28.09	33.00	V
1905.00	-0.50	-29.30	0.35	29.15	33.00	V

LTE Band 2_15MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1857.50	-3.15	-29.40	0.15	26.40	33.00	V
1880.00	-2.56	-29.30	0.25	26.99	33.00	V
1902.50	-1.56	-29.30	0.35	28.09	33.00	V

LTE Band 2_20 MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1860.00	-2.39	-29.40	0.15	27.16	33.00	V
1880.00	-2.10	-29.30	0.25	27.46	33.00	V
1900.00	-0.21	-29.30	0.35	29.44	33.00	V

Peak EIRP (dBm)=P_{Mea}(-0.21dBm)- (P_{cl}+P_{Ag}) (-29.30dB)+G_a(0.35dB) =29.44dBm



LTE Band 4- EIRP 27.50(d)

Limits: ≤30dBm (1W)

LTE Band 4_1.4MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-3.89	-29.60	0.39	26.10	33.00	V
1732.50	-4.10	-29.60	0.27	25.77	33.00	V
1754.30	-2.90	-29.50	0.17	26.77	33.00	V

LTE Band 4_3MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-3.38	-29.60	0.39	26.61	33.00	V
1732.50	-4.25	-29.60	0.27	25.62	33.00	V
1753.50	-2.78	-29.50	0.17	26.89	33.00	V

LTE Band 4_5MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-3.62	-29.60	0.39	26.37	33.00	V
1732.50	-4.21	-29.60	0.27	25.66	33.00	V
1752.50	-3.35	-29.50	0.17	26.32	33.00	V

LTE Band 4_10MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-4.96	-29.60	0.39	25.04	33.00	V
1732.50	-5.22	-29.60	0.27	24.65	33.00	V
1750.50	-3.51	-29.50	0.17	26.16	33.00	V

LTE Band 4_15MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-5.22	-29.60	0.39	24.77	33.00	V
1732.50	-5.21	-29.60	0.27	24.66	33.00	V
1747.50	-4.62	-29.50	0.17	25.05	33.00	V

LTE Band 4_20MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-3.42	-29.60	0.39	26.57	33.00	V
1732.50	-4.85	-29.60	0.27	25.02	33.00	V
1745.00	-3.16	-29.50	0.17	26.52	33.00	V

LTE Band 4_1.4MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1710.70	-3.38	-29.60	0.39	26.61	33.00	V
1732.50	-4.85	-29.60	0.27	25.02	33.00	V
1754.30	-2.62	-29.50	0.17	27.05	33.00	V

LTE Band 4_3MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1711.50	-3.50	-29.60	0.39	26.49	33.00	V
1732.50	-4.38	-29.60	0.27	25.49	33.00	V
1753.50	-2.73	-29.50	0.17	26.94	33.00	V

LTE Band 4_5MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1712.50	-3.66	-29.60	0.39	26.33	33.00	V
1732.50	-4.38	-29.60	0.27	25.49	33.00	V
1752.50	-2.73	-29.50	0.17	26.94	33.00	V

LTE Band 4_10MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1715.00	-4.53	-29.60	0.39	25.46	33.00	V
1732.50	-4.75	-29.60	0.27	25.12	33.00	V
1750.50	-3.24	-29.50	0.17	26.43	33.00	V

LTE Band 4_15MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1717.50	-6.09	-29.60	0.39	23.90	33.00	V
1732.50	-6.03	-29.60	0.27	23.84	33.00	V
1747.50	-4.78	-29.50	0.17	24.89	33.00	V

LTE Band 4_20MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
1720.00	-3.28	-29.60	0.39	26.71	33.00	V
1732.50	-4.92	-29.60	0.27	24.95	33.00	V
1745.00	-2.78	-29.50	0.17	26.89	33.00	V

Peak EIRP (dBm)=P_{Mea}(-2.62dBm)- (P_{cl}+P_{Ag}) (-29.50dB)+G_a(0.17dB) =27.05dBm



LTE Band 5- ERP 22.913(a)

Limits: ≤38.45dBm (7W)

LTE Band 5_1.4MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-4.48	-33.60	0.28	2.15	27.25	38.45	V
836.50	-5.81	-33.50	0.25	2.15	25.79	38.45	V
848.30	-5.20	-33.50	0.21	2.15	26.36	38.45	V

LTE Band 5_3MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-4.17	-33.60	0.28	2.15	27.56	38.45	V
836.50	-5.48	-33.50	0.25	2.15	26.12	38.45	V
847.50	-5.11	-33.50	0.21	2.15	26.45	38.45	V

LTE Band 5_5MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-3.83	-33.60	0.28	2.15	27.90	38.45	V
836.50	-5.48	-33.50	0.25	2.15	26.12	38.45	V
846.50	-4.90	-33.50	0.21	2.15	26.66	38.45	V

LTE Band 5_10MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-4.79	-33.60	0.28	2.15	26.94	38.45	V
836.50	-5.26	-33.50	0.25	2.15	26.34	38.45	V
844.00	-5.39	-33.50	0.21	2.15	26.17	38.45	V



LTE Band 5_1.4MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
824.70	-3.76	-33.60	0.28	2.15	27.97	38.45	V
836.50	-4.97	-33.50	0.25	2.15	26.63	38.45	V
848.30	-4.19	-33.50	0.21	2.15	27.37	38.45	V

LTE Band 5_3MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
825.50	-3.21	-33.60	0.28	2.15	28.52	38.45	V
836.50	-4.47	-33.50	0.25	2.15	27.14	38.45	V
847.50	-4.30	-33.50	0.21	2.15	27.26	38.45	V

LTE Band 5_5MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
826.50	-3.71	-33.60	0.28	2.15	28.02	38.45	V
836.50	-4.60	-33.50	0.25	2.15	27.00	38.45	V
846.50	-4.11	-33.50	0.21	2.15	27.46	38.45	V

LTE Band 5_10MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Polarization
829.00	-4.14	-33.60	0.28	2.15	27.59	38.45	V
836.50	-4.71	-33.50	0.25	2.15	26.90	38.45	V
844.00	-5.11	-33.50	0.21	2.15	26.45	38.45	V

Peak ERP (dBm)=P_{Mea}(-3.21dBm)- (P_{cl}+P_{Ag}) (-33.60dB)+G_a(0.28dB) -2.15dB =28.52dBm



LTE Band 7- EIRP 27.50(h)(2)

Limits: ≤33 dBm (2W)

LTE Band 7_5MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-2.62	-28.70	0.59	26.67	33.00	V
2535.00	-4.36	-28.60	0.45	24.69	33.00	V
2567.50	-1.47	-28.60	0.38	27.51	33.00	V

LTE Band 7_10MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-2.52	-28.70	0.59	26.77	33.00	V
2535.00	-4.99	-28.60	0.45	24.06	33.00	V
2565.00	-2.21	-28.60	0.38	26.77	33.00	V

LTE Band 7_15MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-3.37	-28.70	0.59	25.92	33.00	V
2535.00	-6.57	-28.60	0.45	22.48	33.00	V
2562.50	-2.76	-28.60	0.38	26.22	33.00	V

LTE Band 7_20MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-2.36	-28.70	0.59	26.93	33.00	V
2535.00	-2.23	-28.60	0.45	26.82	33.00	V
2560.00	-1.97	-28.60	0.38	27.01	33.00	V

LTE Band 7_5MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2502.50	-2.19	-28.70	0.59	27.10	33.00	V
2535.00	-4.24	-28.60	0.45	24.81	33.00	V
2567.50	-1.40	-28.60	0.38	27.58	33.00	V

LTE Band 7_10MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2505.00	-3.15	-28.70	0.59	26.14	33.00	V
2535.00	-4.77	-28.60	0.45	24.28	33.00	V
2565.00	-1.90	-28.60	0.38	27.09	33.00	V

LTE Band 7_15MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2507.50	-2.92	-28.70	0.59	26.37	33.00	V
2535.00	-5.64	-28.60	0.45	23.41	33.00	V
2562.50	-2.92	-28.60	0.38	26.07	33.00	V

LTE Band 7_20MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2510.00	-2.35	-28.70	0.59	26.94	33.00	V
2535.00	-3.17	-28.60	0.45	25.88	33.00	V
2560.00	-1.79	-28.60	0.38	27.19	33.00	V

Peak EIRP (dBm)=P_{Mea}(-1.40dBm)- (P_{cl}+P_{Ag}) (-28.60dB)+G_a(0.38dB) -2.15dB =27.58dBm



LTE Band 41- EIRP Part 27.50(h)(2)

Limits: ≤33dBm (2W)

LTE Band 41_5MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2547.50	-2.35	-28.60	0.38	26.64	33.00	V
2600.00	-0.87	-28.60	0.30	28.03	33.00	V
2652.50	-1.89	-28.60	-0.01	26.70	33.00	V

LTE Band 41_10MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2550.00	-2.71	-28.60	0.38	26.27	33.00	V
2600.00	-1.71	-28.60	0.30	27.19	33.00	V
2650.00	-2.27	-28.60	-0.01	26.32	33.00	V

LTE Band 41_15MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2552.00	-3.77	-28.60	0.38	25.22	33.00	V
2600.00	-3.63	-28.60	0.30	25.27	33.00	V
2647.50	-3.61	-28.60	-0.01	24.99	33.00	V

LTE Band 41_20MHz_QPSK-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2555.00	-2.48	-28.60	0.38	26.50	33.00	V
2600.00	-1.67	-28.60	0.30	27.23	33.00	V
2645.00	-0.68	-28.60	-0.01	27.91	33.00	V



LTE Band 41_5MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2547.50	-2.67	-28.60	0.38	26.31	33.00	V
2600.00	-1.04	-28.60	0.30	27.86	33.00	V
2652.50	-1.84	-28.60	-0.01	26.75	33.00	V

LTE Band 41_10MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2550.00	-2.57	-28.60	0.38	26.41	33.00	V
2600.00	-1.92	-28.60	0.30	26.98	33.00	V
2650.00	-2.41	-28.60	-0.01	26.18	33.00	V

LTE Band 41_15MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2552.00	-3.63	-28.60	0.38	25.36	33.00	V
2600.00	-3.46	-28.60	0.30	25.44	33.00	V
2647.50	-3.79	-28.60	-0.01	24.80	33.00	V

LTE Band 41_20 MHz_16QAM-External Antenna

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)+ P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Polarization
2555.00	-2.61	-28.60	0.38	26.37	33.00	V
2600.00	-1.51	-28.60	0.30	27.39	33.00	V
2645.00	-1.64	-28.60	-0.01	26.95	33.00	V

Peak EIRP (dBm)=P_{Mea}(-0.87dBm)- (P_{cl}+P_{Ag}) (-28.60dB)+G_a(0.30dB) =28.03dBm

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: Expanded measurement uncertainty is $U = 0.96$ dB, $k = 2$.

A.2 EMISSION LIMIT

Reference

FCC: CFR 2.1051, 22.917, 24.238(a), 27.53(m).


A.2.1 Measurement Method

The measurements procedures in TIA-603-D-2010 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 22.917, 24.238(a), Part 27.53(m). The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 2, 4, 5, 7,41

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

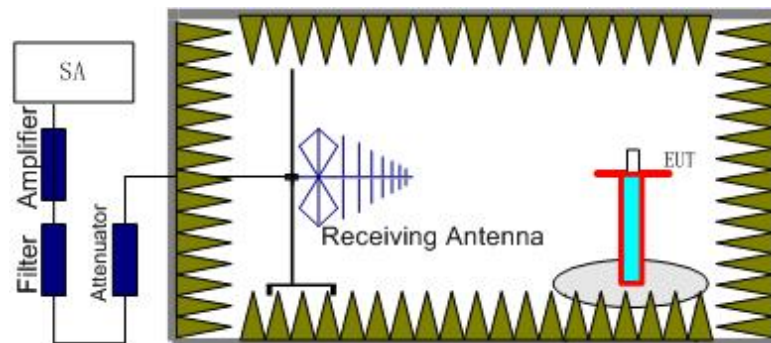

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

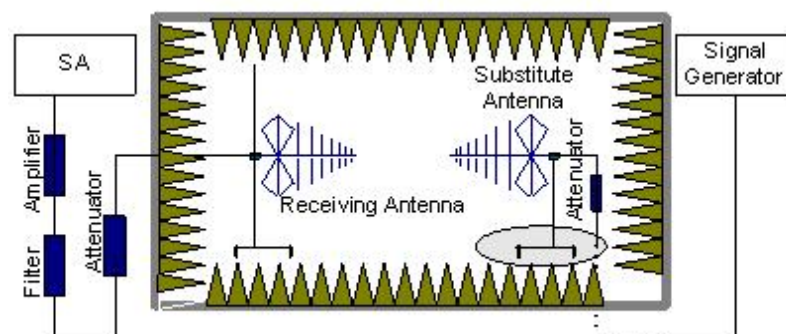

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is

connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

Part 22.917, Part 24.238(a), Part 27.53(g), Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Part 27.53(a) states for mobile and portable stations operating in the 2305–2315 MHz and 2350–2360 MHz bands: By a factor of not less than: $43 + 10 \log(P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log(P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log(P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log(P)$ dB on all frequencies between 2328 and 2337 MHz; By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log(P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log(P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log(P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log(P)$ dB below 2288 MHz; By a factor of not less than $43 + 10 \log(P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log(P)$ dB above 2365 MHz

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 2, 4, 5, 7, 41. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 2, 4, 5, 7, 41 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

LTE Band 2, 1.4MHz, QPSK-Internal Antenna, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16818.09	-34.06	2.90	-0.26	-37.22	-13.00	H
17219.06	-33.15	2.90	-1.01	-37.06	-13.00	H
17444.16	-32.29	3.20	-1.08	-36.57	-13.00	H
17597.06	-32.53	3.20	-0.81	-36.54	-13.00	H
17763.09	-33.22	3.20	-0.75	-37.17	-13.00	H
17928.47	-33.07	3.20	-0.64	-36.91	-13.00	H

LTE Band 2, 1.4MHz, QPSK-Internal Antenna, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17198.72	-33.17	2.90	-0.79	-36.86	-13.00	H
17361.47	-33.71	2.90	-0.98	-37.59	-13.00	H
17406.09	-32.29	3.20	-1.08	-36.57	-13.00	H
17602.31	-32.74	3.20	-1.01	-36.95	-13.00	H
17799.84	-32.96	3.20	-0.75	-36.91	-13.00	H
17927.16	-32.13	3.20	-0.64	-35.97	-13.00	H

LTE Band 2, 1.4MHz, QPSK-Internal Antenna, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17143.59	-33.73	2.90	-0.79	-37.42	-13.00	H
17274.19	-33.71	2.90	-1.01	-37.62	-13.00	H
17463.84	-33.06	3.20	-1.08	-37.34	-13.00	H
17606.91	-33.14	3.20	-1.01	-37.35	-13.00	H
17793.28	-33.46	3.20	-0.75	-37.41	-13.00	H
17925.19	-32.54	3.20	-0.64	-36.38	-13.00	H

LTE Band 2, 1.4MHz, 16QAM-Internal Antenna, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17198.06	-33.67	2.90	-0.79	-37.36	-13.00	H
17362.78	-33.75	2.90	-0.98	-37.63	-13.00	H
17452.69	-32.79	3.20	-1.08	-37.07	-13.00	H
17600.34	-32.70	3.20	-1.01	-36.91	-13.00	H
17747.34	-32.97	3.20	-0.75	-36.92	-13.00	H
17922.56	-32.17	3.20	-0.64	-36.01	-13.00	H

LTE Band 2, 1.4MHz, 16QAM-Internal Antenna, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16734.09	-34.27	2.90	-0.26	-37.43	-13.00	H
16814.16	-34.78	2.90	-0.26	-37.94	-13.00	H
17450.72	-32.54	3.20	-1.08	-36.82	-13.00	H
17618.72	-33.22	3.20	-1.01	-37.43	-13.00	H
17805.75	-32.82	3.20	-0.84	-36.86	-13.00	H
17938.31	-32.29	3.20	-0.64	-36.13	-13.00	H

LTE Band 2, 1.4MHz, 16QAM-Internal Antenna, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16787.25	-34.05	2.90	-0.26	-37.21	-13.00	H
17136.38	-33.73	2.90	-0.79	-37.42	-13.00	H
17441.53	-32.60	3.20	-1.08	-36.88	-13.00	H
17599.69	-31.41	3.20	-0.81	-35.42	-13.00	H
17778.84	-32.30	3.20	-0.75	-36.25	-13.00	H
17933.06	-32.60	3.20	-0.64	-36.44	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

LTE Band 4, 1.4MHz QPSK-Internal Antenna, Channel 19957

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16877.16	-34.63	2.90	-0.26	-37.79	-13.00	H
17211.19	-33.87	2.90	-1.01	-37.78	-13.00	H
17397.56	-32.84	2.90	-0.98	-36.72	-13.00	H
17604.94	-33.31	3.20	-1.01	-37.52	-13.00	H
17770.31	-33.53	3.20	-0.75	-37.48	-13.00	H
17922.56	-32.59	3.20	-0.64	-36.43	-13.00	H

LTE Band 4, 1.4MHz, QPSK-Internal Antenna, Channel 20175

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16948.69	-34.79	2.90	-0.50	-38.19	-13.00	H
17211.19	-33.37	2.90	-1.01	-37.28	-13.00	H
17457.94	-33.54	3.20	-1.08	-37.82	-13.00	H
17608.88	-33.15	3.20	-1.01	-37.36	-13.00	H
17767.69	-32.82	3.20	-0.75	-36.77	-13.00	H
17918.63	-32.17	3.20	-0.64	-36.01	-13.00	H

LTE Band 4, 1.4MHz, QPSK-Internal Antenna, Channel 20393

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17207.25	-33.78	2.90	-1.01	-37.69	-13.00	H
17305.03	-33.73	2.90	-0.98	-37.61	-13.00	H
17454.00	-32.41	3.20	-1.08	-36.69	-13.00	H
17620.03	-32.80	3.20	-1.01	-37.01	-13.00	H
17777.53	-32.15	3.20	-0.75	-36.10	-13.00	H
17847.75	-32.80	3.20	-0.84	-36.84	-13.00	H

LTE Band 4, 1.4MHz, 16QAM-Internal Antenna, Channel 19957

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16810.88	-34.31	2.90	-0.26	-37.47	-13.00	H
17303.06	-33.89	2.90	-0.98	-37.77	-13.00	H
17392.31	-33.23	2.90	-0.98	-37.11	-13.00	H
17545.88	-33.41	3.20	-0.81	-37.42	-13.00	H
17835.28	-32.94	3.20	-0.84	-36.98	-13.00	H
17917.31	-32.51	3.20	-0.64	-36.35	-13.00	H

LTE Band 4, 1.4MHz, 16QAM-Internal Antenna, Channel 20175

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16724.25	-34.22	2.90	-0.26	-37.38	-13.00	H
16874.53	-34.50	2.90	-0.26	-37.66	-13.00	H
17371.97	-33.11	2.90	-0.98	-36.99	-13.00	H
17622.66	-32.87	3.20	-1.01	-37.08	-13.00	H
17756.53	-33.11	3.20	-0.75	-37.06	-13.00	H
17927.81	-32.40	3.20	-0.64	-36.24	-13.00	H

LTE Band 4, 1.4MHz, 16QAM-Internal Antenna, Channel 20393

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
5212.88	-32.56	1.20	-2.07	-35.83	-13.00	V
17187.56	-33.54	2.90	-0.79	-37.23	-13.00	H
17423.16	-33.11	3.20	-1.08	-37.39	-13.00	H
17612.81	-32.15	3.20	-1.01	-36.36	-13.00	H
17774.25	-33.50	3.20	-0.75	-37.45	-13.00	H
17922.56	-31.74	3.20	-0.64	-35.58	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

LTE Band 5, 1.4MHz, QPSK-Internal Antenna, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
8264.00	-42.37	1.80	-1.90	-48.22	-13.00	V
9159.00	-41.97	2.10	-1.36	-47.58	-13.00	V
9221.00	-42.34	2.10	-1.16	-47.75	-13.00	H
9404.50	-42.55	2.10	-0.86	-47.66	-13.00	V
9694.50	-43.00	2.10	-0.66	-47.91	-13.00	H
9910.50	-43.38	2.20	-0.40	-48.13	-13.00	V

LTE Band 5, 1.4MHz, QPSK-Internal Antenna, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
8643.50	-42.01	2.00	-1.64	-47.80	-13.00	V
8769.50	-42.45	2.00	-1.63	-48.23	-13.00	H
9169.50	-41.93	2.10	-1.36	-47.54	-13.00	H
9193.00	-42.42	2.10	-1.36	-48.03	-13.00	V
9325.50	-42.69	2.10	-1.12	-48.06	-13.00	V
9919.50	-42.89	2.20	-0.40	-47.64	-13.00	H

LTE Band 5, 1.4MHz, QPSK-Internal Antenna, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
8168.00	-42.33	1.80	-2.15	-48.43	-13.00	V
8616.50	-42.55	2.00	-1.64	-48.34	-13.00	V
9160.50	-42.44	2.10	-1.36	-48.05	-13.00	V
9249.50	-42.78	2.10	-1.16	-48.19	-13.00	H
9305.50	-41.98	2.10	-1.12	-47.35	-13.00	V
9501.00	-43.10	2.10	-0.92	-48.27	-13.00	H

LTE Band 5, 1.4MHz, 16QAM-Internal Antenna, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
8544.00	-42.37	2.00	-1.77	-48.29	-13.00	V
8755.50	-42.19	2.00	-1.63	-47.97	-13.00	V
8789.50	-42.37	2.00	-1.63	-48.15	-13.00	H
9256.00	-42.29	2.10	-1.16	-47.70	-13.00	H
9408.00	-42.94	2.10	-0.86	-48.05	-13.00	V
9921.00	-43.62	2.20	-0.40	-48.37	-13.00	H

LTE Band 5, 1.4MHz, 16QAM-Internal Antenna, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
3169.88	-30.94	1.10	-12.34	-46.53	-13.00	H
8244.00	-42.66	1.80	-1.90	-48.51	-13.00	V
8640.50	-42.51	2.00	-1.64	-48.30	-13.00	V
9162.00	-42.41	2.10	-1.36	-48.02	-13.00	V
9204.50	-41.63	2.10	-1.16	-47.04	-13.00	V
9350.50	-43.00	2.10	-1.12	-48.37	-13.00	V

LTE Band 5, 1.4MHz, 16QAM-Internal Antenna, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
8544.50	-41.84	2.00	-1.77	-47.76	-13.00	H
8601.00	-41.98	2.00	-1.64	-47.77	-13.00	V
8680.00	-42.15	2.00	-1.64	-47.94	-13.00	H
9170.00	-42.46	2.10	-1.36	-48.07	-13.00	V
9204.00	-42.05	2.10	-1.16	-47.46	-13.00	V
9416.50	-42.88	2.10	-0.86	-47.99	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

LTE Band 7, 5 MHz, QPSK-Internal Antenna, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16810.22	-33.14	2.90	-0.26	-36.30	-13.00	H
17368.03	-33.36	2.90	-0.98	-37.24	-13.00	H
17452.03	-32.02	3.20	-1.08	-36.30	-13.00	H
17625.28	-31.84	3.20	-1.01	-36.05	-13.00	H
17765.72	-32.89	3.20	-0.75	-36.84	-13.00	H
17922.56	-32.23	3.20	-0.64	-36.07	-13.00	H

LTE Band 7, 5 MHz, QPSK-Internal Antenna, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16732.13	-33.98	2.90	-0.26	-37.14	-13.00	H
17201.34	-31.80	2.90	-1.01	-35.71	-13.00	H
17414.63	-32.60	3.20	-1.08	-36.88	-13.00	H
17600.34	-31.64	3.20	-1.01	-35.85	-13.00	H
17833.31	-32.45	3.20	-0.84	-36.49	-13.00	H
17921.25	-32.08	3.20	-0.64	-35.92	-13.00	H

LTE Band 7, 5 MHz, QPSK-Internal Antenna, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16790.53	-33.26	2.90	-0.26	-36.42	-13.00	H
17202.00	-32.59	2.90	-1.01	-36.50	-13.00	H
17440.88	-31.51	3.20	-1.08	-35.79	-13.00	H
17604.94	-31.76	3.20	-1.01	-35.97	-13.00	H
17749.31	-32.41	3.20	-0.75	-36.36	-13.00	H
17915.34	-31.73	3.20	-0.64	-35.57	-13.00	H

LTE Band 7, 5 MHz, 16QAM-Internal Antenna, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17199.38	-32.85	2.90	-0.79	-36.54	-13.00	H
17284.03	-33.13	2.90	-1.01	-37.04	-13.00	H
17409.38	-32.15	3.20	-1.08	-36.43	-13.00	H
17595.09	-32.48	3.20	-0.81	-36.49	-13.00	H
17761.78	-31.12	3.20	-0.75	-35.07	-13.00	H
17845.13	-31.60	3.20	-0.84	-35.64	-13.00	H

LTE Band 7, 5 MHz, 16QAM-Internal Antenna, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17196.75	-32.94	2.90	-0.79	-36.63	-13.00	H
17299.78	-32.84	2.90	-1.01	-36.75	-13.00	H
17385.09	-32.06	2.90	-0.98	-35.94	-13.00	H
17600.34	-32.00	3.20	-1.01	-36.21	-13.00	H
17755.22	-31.47	3.20	-0.75	-35.42	-13.00	H
17853.66	-30.92	3.20	-0.84	-34.96	-13.00	H

LTE Band 7, 5 MHz, 16QAM-Internal Antenna, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16180.22	-34.40	2.90	0.59	-36.71	-13.00	H
17203.31	-32.24	2.90	-1.01	-36.15	-13.00	H
17438.25	-30.78	3.20	-1.08	-35.06	-13.00	H
17602.31	-32.09	3.20	-1.01	-36.30	-13.00	H
17782.78	-32.24	3.20	-0.75	-36.19	-13.00	H
17909.44	-30.65	3.20	-0.64	-34.49	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

LTE Band 41, 5MHz, QPSK-Internal Antenna, Channel 40165

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16716.38	-34.54	2.90	-0.26	-37.70	-13.00	H
16810.22	-34.66	2.90	-0.26	-37.82	-13.00	H
17395.59	-33.38	2.90	-0.98	-37.26	-13.00	H
17586.56	-32.92	3.20	-0.81	-36.93	-13.00	H
17780.16	-33.80	3.20	-0.75	-37.75	-13.00	H
17928.47	-31.88	3.20	-0.64	-35.72	-13.00	H

LTE Band 41, 5MHz, QPSK-Internal Antenna, Channel 40690

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16954.59	-34.13	2.90	-0.50	-37.53	-13.00	H
17206.59	-33.24	2.90	-1.01	-37.15	-13.00	H
17440.88	-33.01	3.20	-1.08	-37.29	-13.00	H
17607.56	-33.05	3.20	-1.01	-37.26	-13.00	H
17800.50	-32.80	3.20	-0.84	-36.84	-13.00	V
17927.81	-32.79	3.20	-0.64	-36.63	-13.00	H

LTE Band 41, 5MHz, QPSK-Internal Antenna, Channel 41215

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16841.06	-34.45	2.90	-0.26	-37.61	-13.00	V
17203.97	-33.69	2.90	-1.01	-37.60	-13.00	H
17459.25	-33.15	3.20	-1.08	-37.43	-13.00	H
17625.28	-33.75	3.20	-1.01	-37.96	-13.00	H
17773.59	-31.79	3.20	-0.75	-35.74	-13.00	H
17929.13	-32.66	3.20	-0.64	-36.50	-13.00	H

LTE Band 41, 5MHz, 16QAM-Internal Antenna, Channel 40165

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16705.88	-34.76	2.90	-0.26	-37.92	-13.00	H
17274.19	-33.07	2.90	-1.01	-36.98	-13.00	H
17437.59	-33.08	3.20	-1.08	-37.36	-13.00	H
17602.31	-33.50	3.20	-1.01	-37.71	-13.00	H
17770.97	-33.01	3.20	-0.75	-36.96	-13.00	H
17856.28	-32.46	3.20	-0.84	-36.50	-13.00	H

LTE Band 41, 5MHz, 16QAM-Internal Antenna, Channel 40690

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16820.72	-34.91	2.90	-0.26	-38.07	-13.00	H
17237.44	-33.96	2.90	-1.01	-37.87	-13.00	H
17512.41	-32.80	3.20	-0.81	-36.81	-13.00	V
17620.03	-33.03	3.20	-1.01	-37.24	-13.00	H
17770.97	-32.68	3.20	-0.75	-36.63	-13.00	H
17925.19	-32.63	3.20	-0.64	-36.47	-13.00	H

LTE Band 41, 5MHz, 16QAM-Internal Antenna, Channel 41215

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17213.81	-33.75	2.90	-1.01	-37.66	-13.00	H
17366.72	-33.42	2.90	-0.98	-37.30	-13.00	H
17400.19	-32.87	3.20	-1.08	-37.15	-13.00	H
17607.56	-32.07	3.20	-1.01	-36.28	-13.00	H
17793.28	-33.47	3.20	-0.75	-37.42	-13.00	H
17935.69	-32.46	3.20	-0.64	-36.30	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

LTE Band 2, 1.4MHz, QPSK-External Antenna, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17198.72	-33.41	2.90	-0.79	-37.10	-13.00	H
17299.78	-33.55	2.90	-1.01	-37.46	-13.00	H
17440.88	-32.89	3.20	-1.08	-37.17	-13.00	H
17622.00	-33.30	3.20	-1.01	-37.51	-13.00	H
17780.16	-32.84	3.20	-0.75	-36.79	-13.00	H
17927.81	-32.17	3.20	-0.64	-36.01	-13.00	H

LTE Band 2, 1.4MHz, QPSK-External Antenna, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16831.88	-34.26	2.90	-0.26	-37.42	-13.00	H
17295.84	-33.45	2.90	-1.01	-37.36	-13.00	H
17449.41	-32.85	3.20	-1.08	-37.13	-13.00	H
17625.28	-33.20	3.20	-1.01	-37.41	-13.00	H
17777.53	-32.85	3.20	-0.75	-36.80	-13.00	H
17992.78	-31.47	3.20	-0.64	-35.31	-13.00	H

LTE Band 2, 1.4MHz, QPSK-External Antenna, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17123.25	-33.75	2.90	-0.79	-37.44	-13.00	H
17350.97	-33.25	2.90	-0.98	-37.13	-13.00	H
17402.81	-31.96	3.20	-1.08	-36.24	-13.00	H
17623.31	-33.17	3.20	-1.01	-37.38	-13.00	H
17773.59	-32.79	3.20	-0.75	-36.74	-13.00	H
17927.81	-31.36	3.20	-0.64	-35.20	-13.00	H

LTE Band 2, 1.4MHz, 16QAM-External Antenna, Channel 18607

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17144.25	-34.52	2.90	-0.79	-38.21	-13.00	H
17230.22	-34.61	2.90	-1.01	-38.52	-13.00	H
17415.28	-33.69	3.20	-1.08	-37.97	-13.00	H
17586.56	-33.89	3.20	-0.81	-37.90	-13.00	H
17796.56	-33.74	3.20	-0.75	-37.69	-13.00	V
17925.19	-31.93	3.20	-0.64	-35.77	-13.00	H

LTE Band 2, 1.4MHz, 16QAM-External Antenna, Channel 18900

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16846.97	-34.74	2.90	-0.26	-37.90	-13.00	V
17203.97	-34.38	2.90	-1.01	-38.29	-13.00	H
17395.59	-32.89	2.90	-0.98	-36.77	-13.00	H
17607.56	-33.45	3.20	-1.01	-37.66	-13.00	H
17776.22	-33.01	3.20	-0.75	-36.96	-13.00	H
17919.94	-32.78	3.20	-0.64	-36.62	-13.00	H

LTE Band 2, 1.4MHz, 16QAM-External Antenna, Channel 19193

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16747.88	-35.48	2.90	-0.26	-38.64	-13.00	V
17194.13	-34.24	2.90	-0.79	-37.93	-13.00	H
17283.38	-34.60	2.90	-1.01	-38.51	-13.00	H
17423.16	-33.09	3.20	-1.08	-37.37	-13.00	H
17800.50	-32.94	3.20	-0.84	-36.98	-13.00	V
17912.06	-32.52	3.20	-0.64	-36.36	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

LTE Band 4, 1.4MHz QPSK-External Antenna, Channel 19957

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17198.72	-33.93	2.90	-0.79	-37.62	-13.00	H
17274.19	-33.50	2.90	-1.01	-37.41	-13.00	H
17435.63	-33.36	3.20	-1.08	-37.64	-13.00	H
17603.63	-33.06	3.20	-1.01	-37.27	-13.00	H
17777.53	-32.77	3.20	-0.75	-36.72	-13.00	H
17925.19	-32.52	3.20	-0.64	-36.36	-13.00	H

LTE Band 4, 1.4MHz, QPSK-External Antenna, Channel 20175

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16960.50	-33.70	2.90	-0.50	-37.10	-13.00	H
17197.41	-33.23	2.90	-0.79	-36.92	-13.00	H
17307.66	-32.84	2.90	-0.98	-36.72	-13.00	H
17394.28	-32.56	2.90	-0.98	-36.44	-13.00	H
17599.69	-31.90	3.20	-0.81	-35.91	-13.00	H
17887.13	-32.16	3.20	-0.84	-36.20	-13.00	V

LTE Band 4, 1.4MHz, QPSK-External Antenna, Channel 20393

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16950.66	-34.67	2.90	-0.50	-38.07	-13.00	H
17192.81	-33.56	2.90	-0.79	-37.25	-13.00	H
17221.69	-33.99	2.90	-1.01	-37.90	-13.00	H
17457.28	-32.67	3.20	-1.08	-36.95	-13.00	H
17809.03	-33.56	3.20	-0.84	-37.60	-13.00	V
17927.81	-33.39	3.20	-0.64	-37.23	-13.00	H

LTE Band 4, 1.4MHz, 16QAM-External Antenna, Channel 19957

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16940.16	-34.68	2.90	-0.50	-38.08	-13.00	H
17213.81	-34.22	2.90	-1.01	-38.13	-13.00	H
17385.09	-33.83	2.90	-0.98	-37.71	-13.00	H
17618.72	-33.93	3.20	-1.01	-38.14	-13.00	H
17761.13	-33.41	3.20	-0.75	-37.36	-13.00	H
17922.56	-32.62	3.20	-0.64	-36.46	-13.00	H

LTE Band 4, 1.4MHz, 16QAM-External Antenna, Channel 20175

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17199.38	-33.87	2.90	-0.79	-37.56	-13.00	H
17369.34	-34.64	2.90	-0.98	-38.52	-13.00	H
17438.25	-33.99	3.20	-1.08	-38.27	-13.00	H
17559.00	-34.32	3.20	-0.81	-38.33	-13.00	H
17765.72	-33.56	3.20	-0.75	-37.51	-13.00	H
17929.78	-33.05	3.20	-0.64	-36.89	-13.00	H

LTE Band 4, 1.4MHz, 16QAM-External Antenna, Channel 20393

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16796.44	-34.93	2.90	-0.26	-38.09	-13.00	V
17361.47	-34.48	2.90	-0.98	-38.36	-13.00	V
17454.00	-33.79	3.20	-1.08	-38.07	-13.00	H
17625.28	-33.84	3.20	-1.01	-38.05	-13.00	H
17795.25	-33.56	3.20	-0.75	-37.51	-13.00	V
17930.44	-32.13	3.20	-0.64	-35.97	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

LTE Band 5, 1.4MHz, QPSK-External Antenna, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
7071.00	-41.39	1.80	-2.85	-48.19	-13.00	V
8251.00	-41.69	1.80	-1.90	-47.54	-13.00	V
8515.00	-42.00	2.00	-1.77	-47.92	-13.00	V
8568.00	-42.21	2.00	-1.77	-48.13	-13.00	H
9184.50	-41.89	2.10	-1.36	-47.50	-13.00	V
9247.50	-42.79	2.10	-1.16	-48.20	-13.00	H

LTE Band 5, 1.4MHz, QPSK-External Antenna, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
7651.50	-41.57	1.80	-2.58	-48.10	-13.00	H
7971.00	-41.82	1.80	-2.34	-48.11	-13.00	V
8157.00	-41.34	1.80	-2.15	-47.44	-13.00	H
8671.50	-42.16	2.00	-1.64	-47.95	-13.00	V
9159.00	-41.50	2.10	-1.36	-47.11	-13.00	V
9206.00	-42.51	2.10	-1.16	-47.92	-13.00	H

LTE Band 5, 1.4MHz, QPSK-External Antenna, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
8538.00	-42.04	2.00	-1.77	-47.96	-13.00	H
8632.50	-42.06	2.00	-1.64	-47.85	-13.00	H
8984.50	-41.95	2.10	-1.58	-47.78	-13.00	H
9163.50	-41.71	2.10	-1.36	-47.32	-13.00	H
9210.50	-42.20	2.10	-1.16	-47.61	-13.00	H
9353.50	-42.71	2.10	-1.12	-48.08	-13.00	V

LTE Band 5, 1.4MHz, 16QAM-External Antenna, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
7059.00	-41.59	1.80	-2.85	-48.39	-13.00	V
7592.00	-41.00	1.80	-2.57	-47.52	-13.00	V
8411.50	-42.64	1.80	-1.79	-48.38	-13.00	H
8581.00	-42.52	2.00	-1.77	-48.44	-13.00	H
8978.50	-42.60	2.10	-1.58	-48.43	-13.00	V
9164.50	-42.85	2.10	-1.36	-48.46	-13.00	V

LTE Band 5, 1.4MHz, 16QAM-External Antenna, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
8110.50	-42.34	1.80	-2.15	-48.44	-13.00	V
8217.00	-42.29	1.80	-1.90	-48.14	-13.00	H
8548.00	-42.43	2.00	-1.77	-48.35	-13.00	V
8595.00	-42.32	2.00	-1.77	-48.24	-13.00	H
9067.00	-42.55	2.10	-1.42	-48.22	-13.00	V
9215.50	-43.10	2.10	-1.16	-48.51	-13.00	H

LTE Band 5, 1.4MHz, 16QAM-External Antenna, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Polarization
7599.00	-41.43	1.80	-2.57	-47.95	-13.00	H
8108.50	-41.14	1.80	-2.15	-47.24	-13.00	H
8310.00	-41.50	1.80	-2.04	-47.49	-13.00	H
8643.50	-41.66	2.00	-1.64	-47.45	-13.00	V
8678.50	-42.34	2.00	-1.64	-48.13	-13.00	H
9349.50	-42.55	2.10	-1.12	-47.92	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

LTE Band 7, 5 MHz, QPSK-External Antenna, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17205.94	-33.68	2.90	-1.01	-37.59	-13.00	H
17277.47	-33.20	2.90	-1.01	-37.11	-13.00	H
17392.31	-33.61	2.90	-0.98	-37.49	-13.00	H
17599.69	-34.13	3.20	-0.81	-38.14	-13.00	H
17797.22	-32.46	3.20	-0.75	-36.41	-13.00	H
17926.50	-32.58	3.20	-0.64	-36.42	-13.00	H

LTE Band 7, 5 MHz, QPSK-External Antenna, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17208.56	-33.07	2.90	-1.01	-36.98	-13.00	H
17267.63	-33.22	2.90	-1.01	-37.13	-13.00	V
17427.75	-31.77	3.20	-1.08	-36.05	-13.00	H
17608.22	-32.91	3.20	-1.01	-37.12	-13.00	H
17795.91	-32.47	3.20	-0.75	-36.42	-13.00	V
17921.25	-31.33	3.20	-0.64	-35.17	-13.00	H

LTE Band 7, 5 MHz, QPSK-External Antenna, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17195.44	-34.43	2.90	-0.79	-38.12	-13.00	H
17299.78	-34.21	2.90	-1.01	-38.12	-13.00	H
17396.25	-33.95	2.90	-0.98	-37.83	-13.00	H
17622.66	-33.58	3.20	-1.01	-37.79	-13.00	H
17759.81	-32.95	3.20	-0.75	-36.90	-13.00	H
17940.94	-32.34	3.20	-0.64	-36.18	-13.00	H

LTE Band 7, 5 MHz, 16QAM-External Antenna, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17203.31	-34.28	2.90	-1.01	-38.19	-13.00	H
17281.41	-34.48	2.90	-1.01	-38.39	-13.00	H
17413.97	-34.10	3.20	-1.08	-38.38	-13.00	H
17604.94	-34.02	3.20	-1.01	-38.23	-13.00	H
17776.22	-33.60	3.20	-0.75	-37.55	-13.00	H
17929.13	-32.77	3.20	-0.64	-36.61	-13.00	H

LTE Band 7, 5 MHz, 16QAM-External Antenna, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16807.59	-35.03	2.90	-0.26	-38.19	-13.00	H
17310.94	-34.15	2.90	-0.98	-38.03	-13.00	H
17445.47	-32.80	3.20	-1.08	-37.08	-13.00	H
17551.13	-34.51	3.20	-0.81	-38.52	-13.00	H
17799.19	-33.67	3.20	-0.75	-37.62	-13.00	H
17925.19	-32.58	3.20	-0.64	-36.42	-13.00	H

LTE Band 7, 5 MHz, 16QAM-External Antenna, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17197.41	-33.85	2.90	-0.79	-37.54	-13.00	H
17354.25	-33.69	2.90	-0.98	-37.57	-13.00	H
17438.25	-33.21	3.20	-1.08	-37.49	-13.00	H
17629.22	-33.54	3.20	-1.01	-37.75	-13.00	H
17769.00	-33.66	3.20	-0.75	-37.61	-13.00	H
17917.31	-33.28	3.20	-0.64	-37.12	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

LTE Band 41, 5MHz, QPSK-External Antenna, Channel 40165

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16801.69	-33.98	2.90	-0.26	-37.14	-13.00	V
17209.22	-32.20	2.90	-1.01	-36.11	-13.00	H
17357.53	-32.77	2.90	-0.98	-36.65	-13.00	H
17429.06	-32.03	3.20	-1.08	-36.31	-13.00	H
17791.31	-32.31	3.20	-0.75	-36.26	-13.00	V
17924.53	-32.05	3.20	-0.64	-35.89	-13.00	H

LTE Band 41, 5MHz, QPSK-External Antenna, Channel 40690

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16738.03	-34.04	2.90	-0.26	-37.20	-13.00	H
16824.00	-33.52	2.90	-0.26	-36.68	-13.00	H
17201.34	-32.93	2.90	-1.01	-36.84	-13.00	H
17408.72	-31.27	3.20	-1.08	-35.55	-13.00	H
17791.97	-32.44	3.20	-0.75	-36.39	-13.00	V
17927.16	-31.98	3.20	-0.64	-35.82	-13.00	H

LTE Band 41, 5MHz, QPSK-External Antenna, Channel 41215

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16840.41	-34.13	2.90	-0.26	-37.29	-13.00	V
17209.88	-33.12	2.90	-1.01	-37.03	-13.00	H
17452.03	-33.38	3.20	-1.08	-37.66	-13.00	H
17613.47	-33.15	3.20	-1.01	-37.36	-13.00	H
17807.72	-33.44	3.20	-0.84	-37.48	-13.00	V
17849.06	-32.64	3.20	-0.84	-36.68	-13.00	H

LTE Band 41, 5MHz, 16QAM-External Antenna, Channel 40165

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
17199.38	-33.14	2.90	-0.79	-36.83	-13.00	H
17290.59	-33.92	2.90	-1.01	-37.83	-13.00	H
17434.31	-33.16	3.20	-1.08	-37.44	-13.00	H
17624.63	-33.31	3.20	-1.01	-37.52	-13.00	H
17782.78	-33.37	3.20	-0.75	-37.32	-13.00	H
17920.59	-32.53	3.20	-0.64	-36.37	-13.00	H

LTE Band 41, 5MHz, 16QAM-External Antenna, Channel 40690

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16827.28	-34.55	2.90	-0.26	-37.71	-13.00	H
17154.75	-33.84	2.90	-0.79	-37.53	-13.00	H
17284.69	-33.46	2.90	-1.01	-37.37	-13.00	H
17442.19	-33.49	3.20	-1.08	-37.77	-13.00	H
17793.94	-33.33	3.20	-0.75	-37.28	-13.00	H
17924.53	-32.85	3.20	-0.64	-36.69	-13.00	H

LTE Band 41, 5MHz, 16QAM-External Antenna, Channel 41215

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Polarization
16836.47	-34.98	2.90	-0.26	-38.14	-13.00	H
17200.03	-33.46	2.90	-1.01	-37.37	-13.00	H
17266.31	-33.64	2.90	-1.01	-37.55	-13.00	H
17400.84	-32.90	3.20	-1.08	-37.18	-13.00	V
17793.94	-33.25	3.20	-0.75	-37.20	-13.00	H
17925.84	-32.39	3.20	-0.64	-36.23	-13.00	H

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.



A.3 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 22.235, 24.235, 27.54.

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 10.8VDC and 13.2VDC, with a nominal voltage of 12.0VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -5.4% to 10.8%. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.3 Measurement results

LTE Band 2, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
10.8	32	-8	0.017	0.004
12.0	11	15	0.006	0.008
13.2	25	-3	0.013	0.002

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30°	26	25	0.014	0.013
-20°	35	16	0.019	0.009
-10°	14	11	0.007	0.006
0°	27	34	0.014	0.018
10°	16	22	0.009	0.012
20°	11	-9	0.006	0.005
30°	9	5	0.005	0.003
40°	25	18	0.013	0.010
50°	18	22	0.010	0.012

LTE Band 4, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
10.8	-19	16	0.011	0.009
12.0	-6	25	0.003	0.014
13.2	-23	4	0.013	0.002

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30°	-17	9	0.010	0.005
-20°	-26	15	0.015	0.009
-10°	-35	27	0.020	0.016
0°	-15	11	0.009	0.006
10°	-16	14	0.009	0.008
20°	-8	5	0.005	0.003
30°	-5	7	0.003	0.004
40°	-26	24	0.015	0.014
50°	-33	19	0.019	0.011



LTE Band 5, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
10.8	9	8	0.011	0.010
12.0	25	5	0.030	0.006
13.2	18	11	0.022	0.013

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30°	18	22	0.022	0.026
-20°	15	15	0.018	0.018
-10°	34	11	0.041	0.013
0°	27	9	0.032	0.011
10°	19	10	0.023	0.012
20°	15	7	0.018	0.008
30°	22	13	0.026	0.016
40°	28	26	0.033	0.031
50°	36	18	0.043	0.022

LTE Band 7, 10MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
10.8	33	-9	0.013	0.004
12.0	29	-18	0.011	0.007
13.2	45	35	0.018	0.014

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30°	61	36	0.024	0.014
-20°	52	29	0.021	0.011
-10°	33	41	0.013	0.016
0°	18	16	0.007	0.006
10°	42	18	0.017	0.007
20°	25	22	0.010	0.009
30°	38	27	0.015	0.011
40°	54	38	0.021	0.015
50°	66	49	0.026	0.019



LTE Band 41, 20MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
10.8	-18	-9	0.007	0.003
12.0	-24	-48	0.009	0.018
13.2	-33	3	0.013	0.001

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
-30°	-11	-16	0.004	0.006
-20°	-29	-41	0.011	0.016
-10°	-8	-33	0.003	0.013
0°	-15	-26	0.006	0.010
10°	-26	-37	0.010	0.014
20°	-13	-9	0.005	0.003
30°	-8	3	0.003	0.001
40°	-16	-25	0.006	0.010
50°	-21	-29	0.008	0.011



A.4 OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049(h)(i)

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from KDB 971168 4.2:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

LTE band 2, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	1089.74	1097.76

LTE band 2, 1.4MHz Bandwidth, QPSK (99% BW)

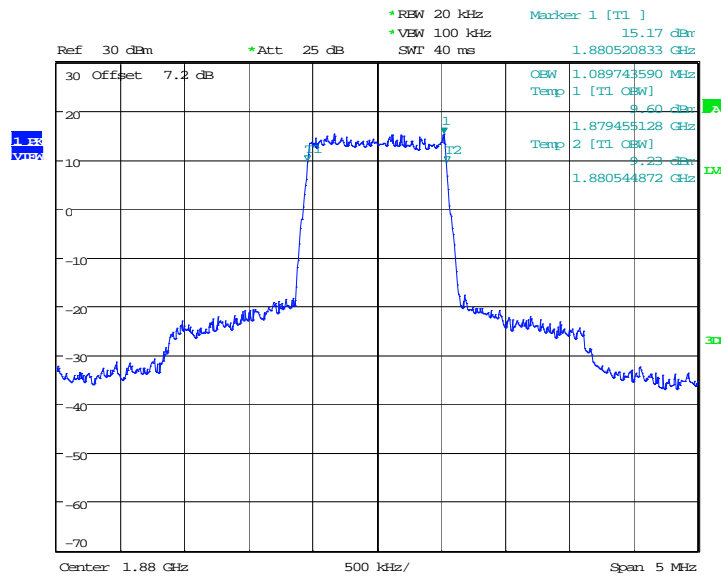

Date: 6.MAR.2017 18:19:22

LTE band 2, 1.4MHz Bandwidth, 16QAM (99% BW)

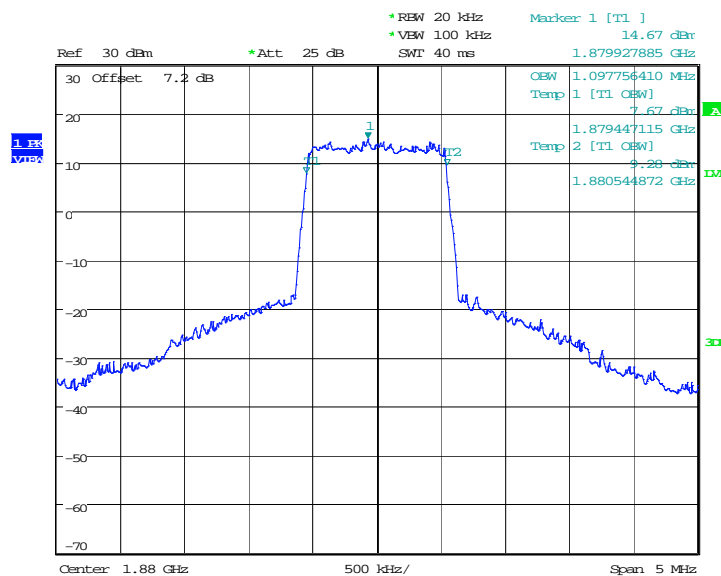


Date: 6.MAR.2017 18:20:25

LTE band 2, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	2692.31	2692.31

LTE band 2, 3MHz Bandwidth, QPSK (99% BW)

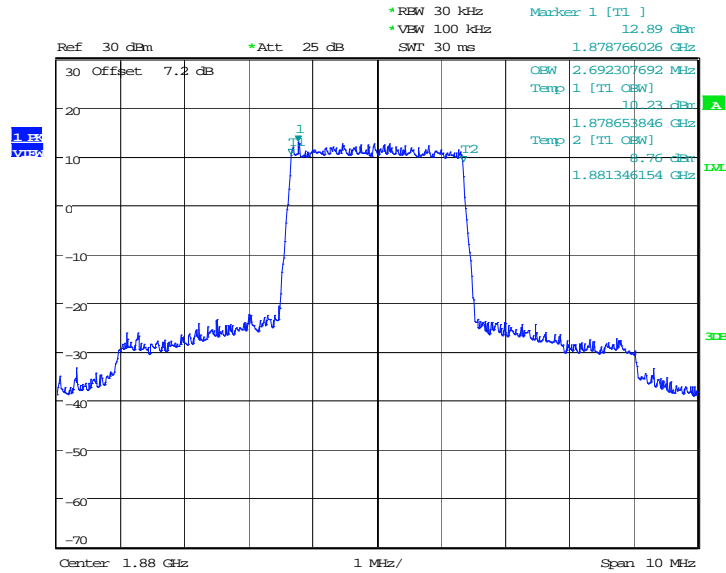

Date: 6.MAR.2017 18:36:42

LTE band 2, 3MHz Bandwidth, 16QAM (99% BW)

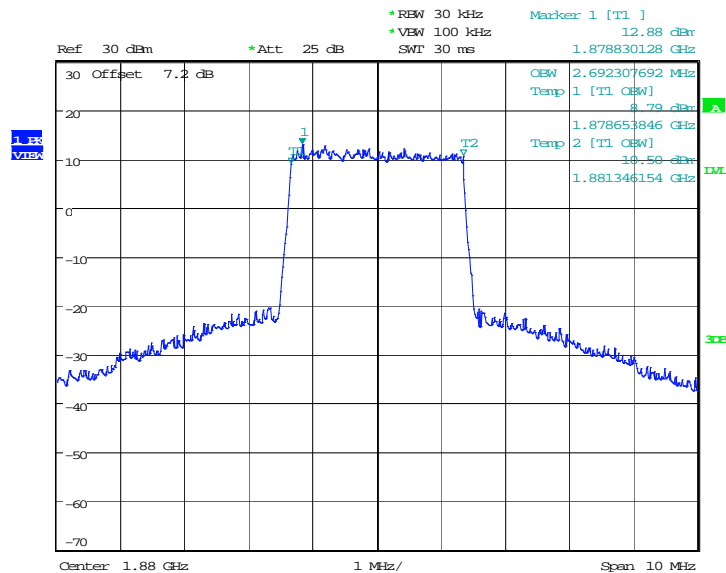


Date: 6.MAR.2017 18:35:35

LTE band 2, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	4495.19	4495.19

LTE band 2, 5MHz Bandwidth, QPSK (99% BW)

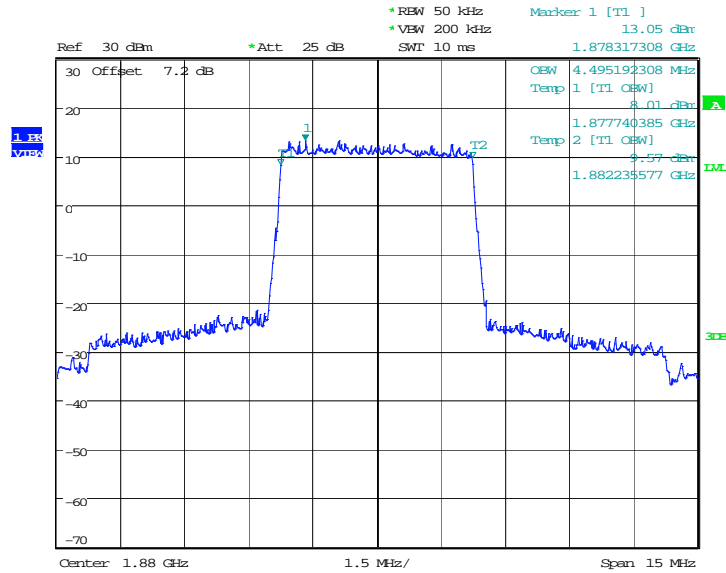

Date: 6.MAR.2017 18:37:32

LTE band 2, 5MHz Bandwidth,16QAM (99% BW)

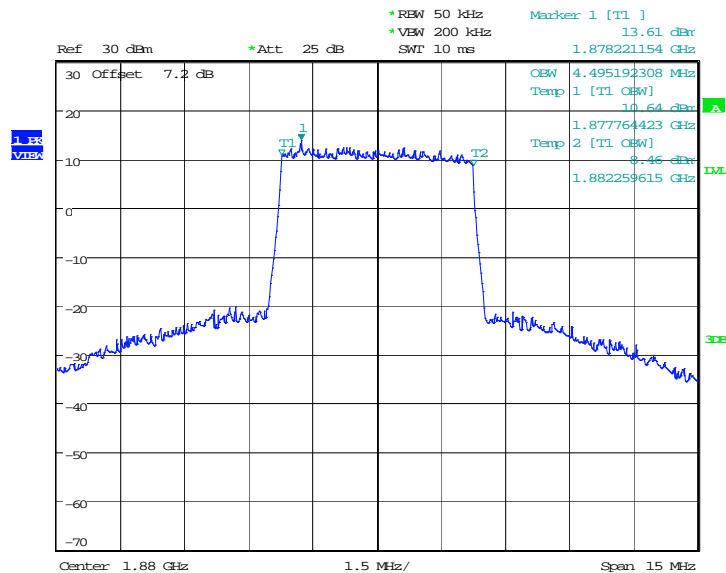


Date: 6.MAR.2017 18:38:33

LTE band 2, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	8942.31	8990.38

LTE band 2, 10MHz Bandwidth, QPSK (99% BW)

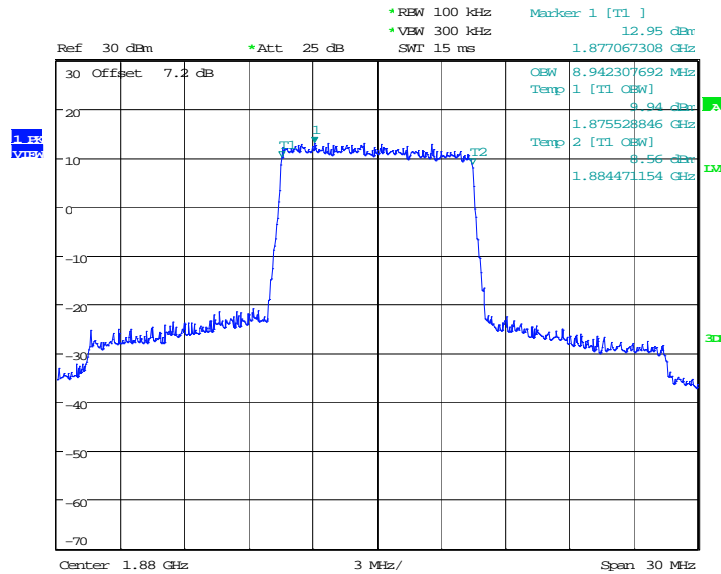

Date: 6.MAR.2017 19:01:07

LTE band 2, 10MHz Bandwidth, 16QAM (99% BW)

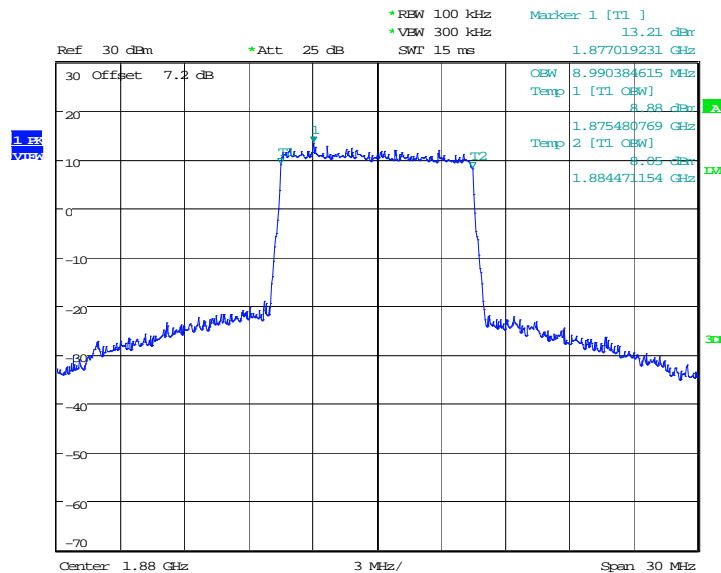


Date: 6.MAR.2017 19:01:54

LTE band 2, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	13485.58	13485.58

LTE band 2, 15MHz Bandwidth, QPSK (99% BW)

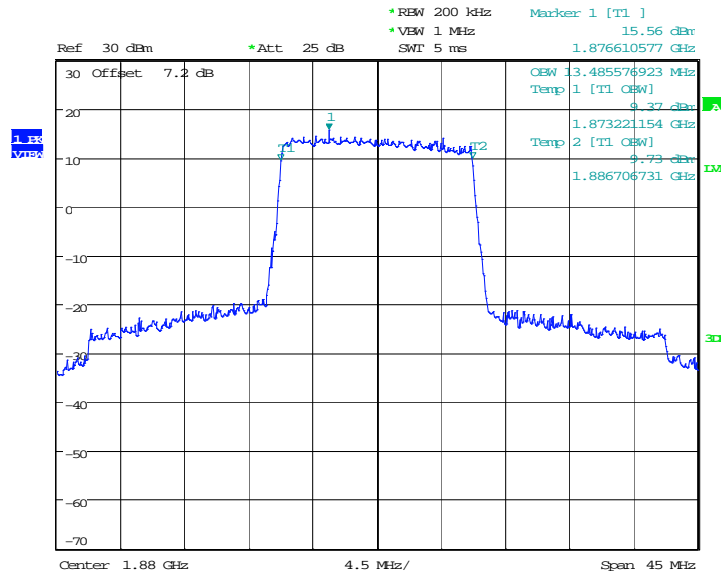

Date: 6.MAR.2017 19:06:56

LTE band 2, 15MHz Bandwidth, 16QAM (99% BW)

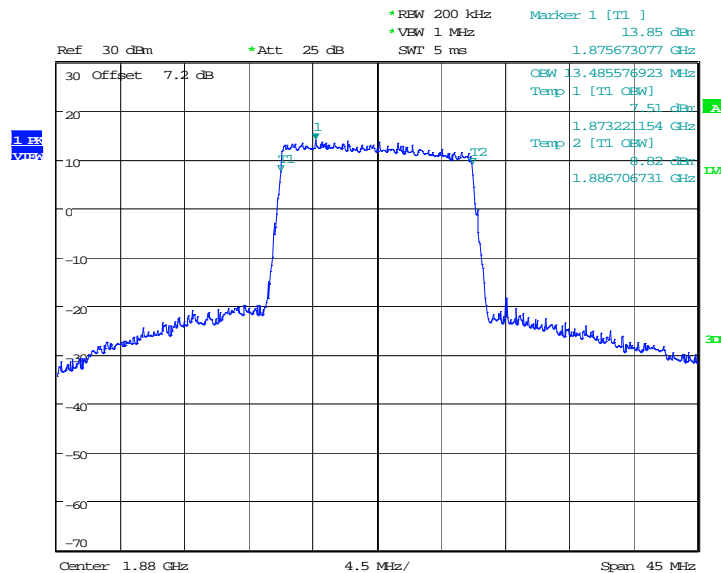


Date: 6.MAR.2017 19:06:14

LTE band 2, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	17980.77	17980.77

LTE band 2, 20MHz Bandwidth, QPSK (99% BW)

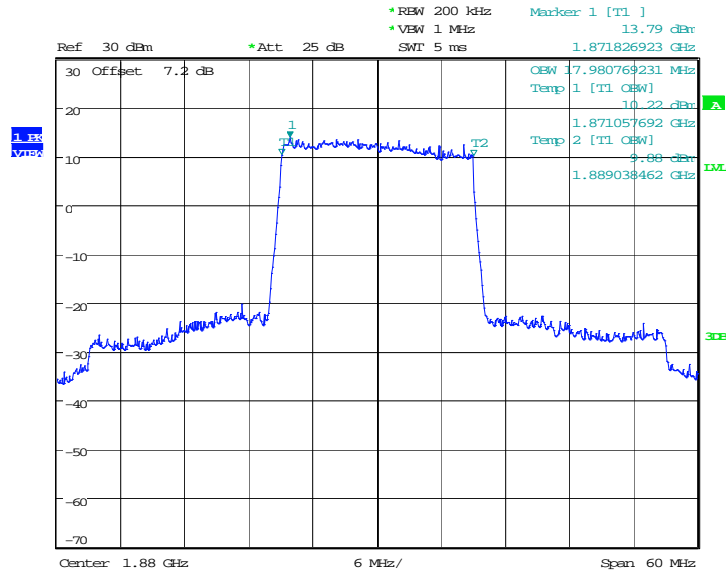

Date: 6.MAR.2017 19:18:18

LTE band 2, 20MHz Bandwidth, 16QAM (99% BW)

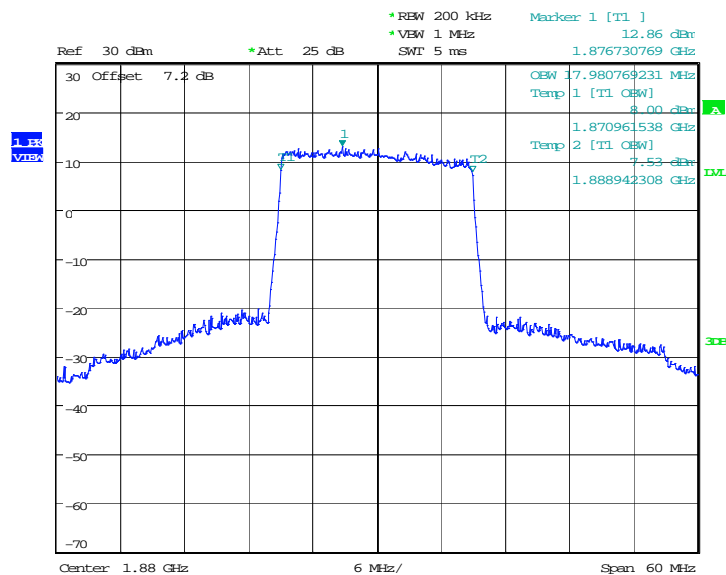


Date: 6.MAR.2017 19:19:02

LTE band 4, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	1089.74	1089.74

LTE band 4, 1.4MHz Bandwidth, QPSK (99% BW)

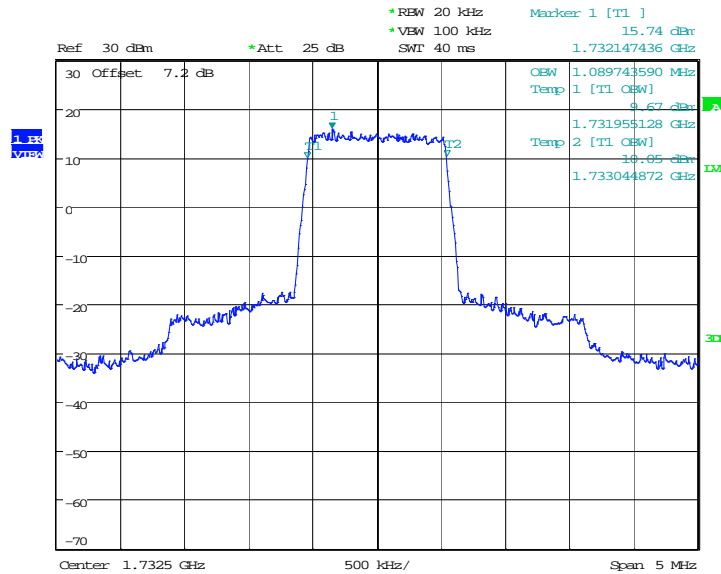

Date: 6.MAR.2017 18:24:33

LTE band 4, 1.4MHz Bandwidth, 16QAM (99% BW)

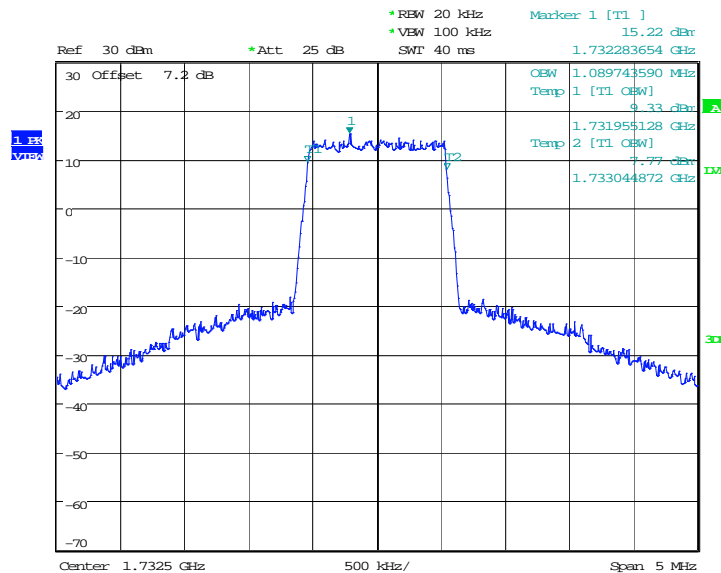


Date: 6.MAR.2017 18:23:45

LTE band 4, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	2692.31	2692.31

LTE band 4, 3MHz Bandwidth, QPSK (99% BW)

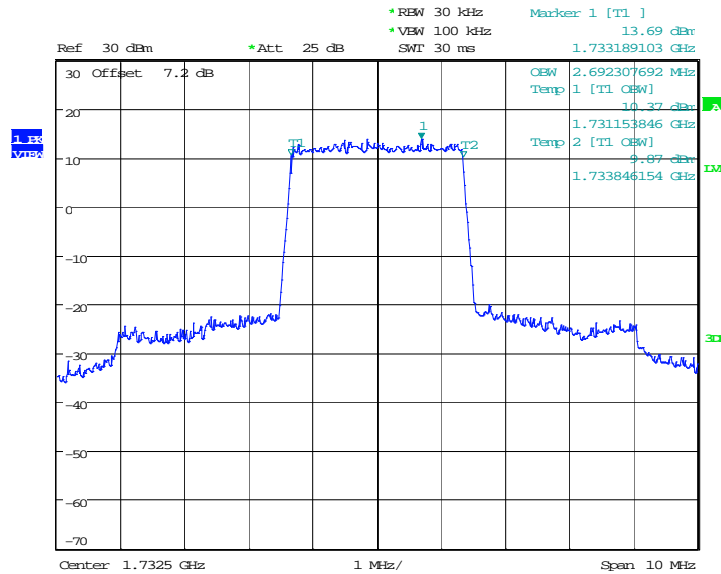

Date: 6.MAR.2017 18:31:43

LTE band 4, 3MHz Bandwidth, 16QAM (99% BW)

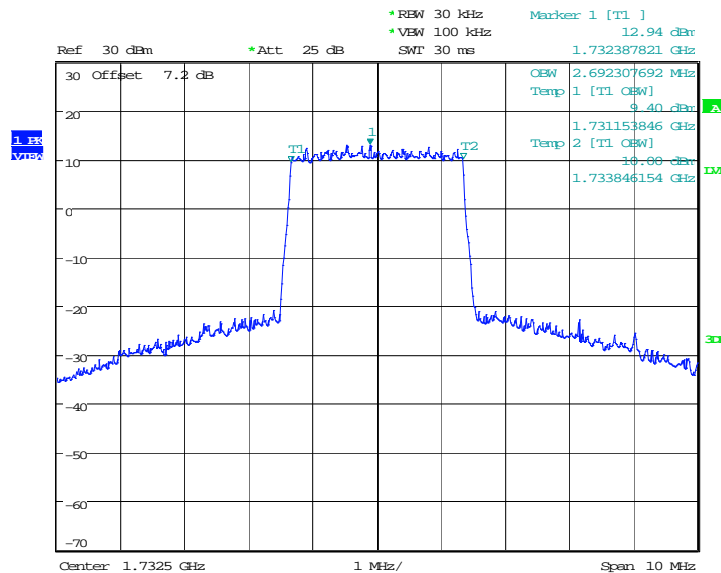


Date: 6.MAR.2017 18:32:24

LTE band 4, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	4471.15	4495.19

LTE band 4, 5MHz Bandwidth, QPSK (99% BW)

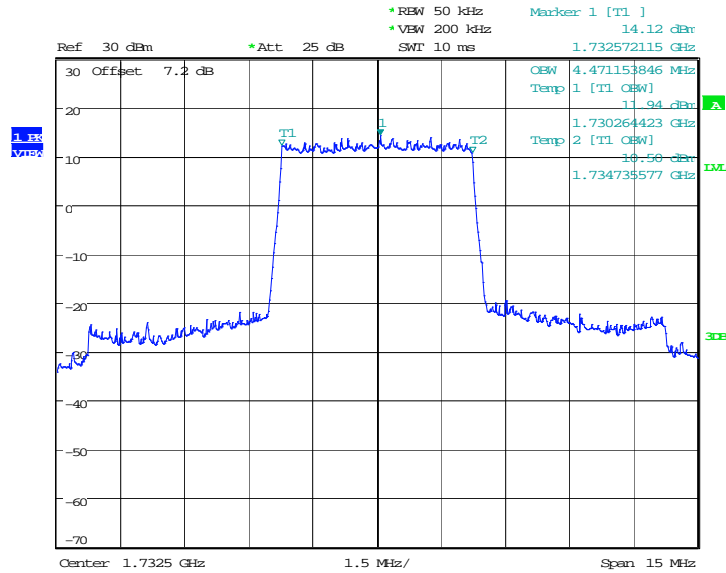

Date: 6.MAR.2017 18:43:23

LTE band 4, 5MHz Bandwidth,16QAM (99% BW)

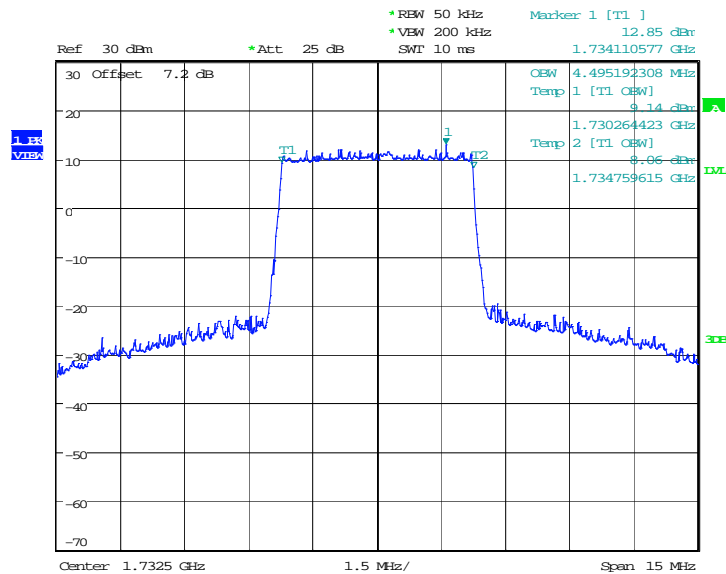


Date: 6.MAR.2017 18:42:40

LTE band 4, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	8990.38	8990.38

LTE band 4, 10MHz Bandwidth, QPSK (99% BW)

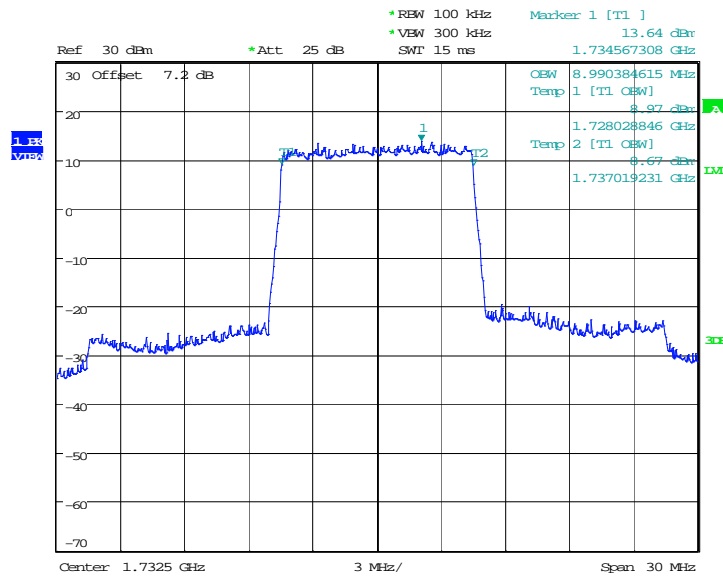

Date: 6.MAR.2017 19:00:31

LTE band 4, 10MHz Bandwidth, 16QAM (99% BW)

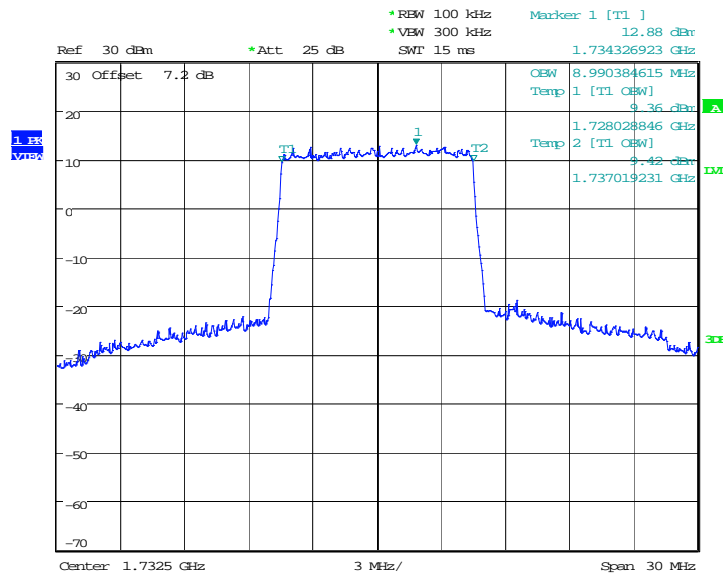


Date: 6.MAR.2017 19:00:01

LTE band 4, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	13485.58	13485.58

LTE band 4, 15MHz Bandwidth, QPSK (99% BW)

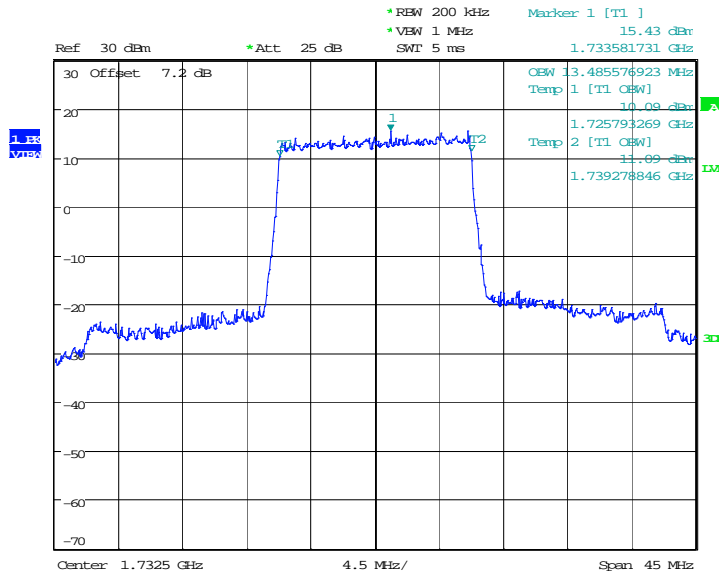

Date: 6.MAR.2017 19:07:35

LTE band 4, 15MHz Bandwidth, 16QAM (99% BW)

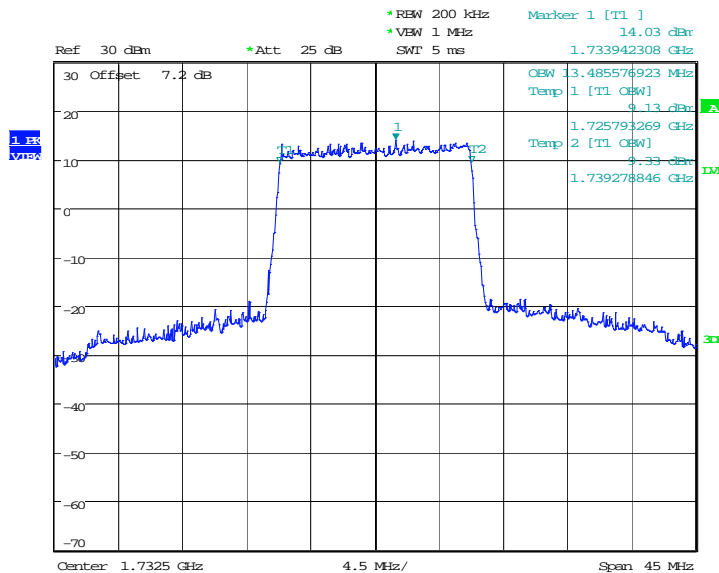


Date: 6.MAR.2017 19:07:56

LTE band 4, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1732.5	QPSK	16QAM
	17980.77	17980.77

LTE band 4, 20MHz Bandwidth, QPSK (99% BW)

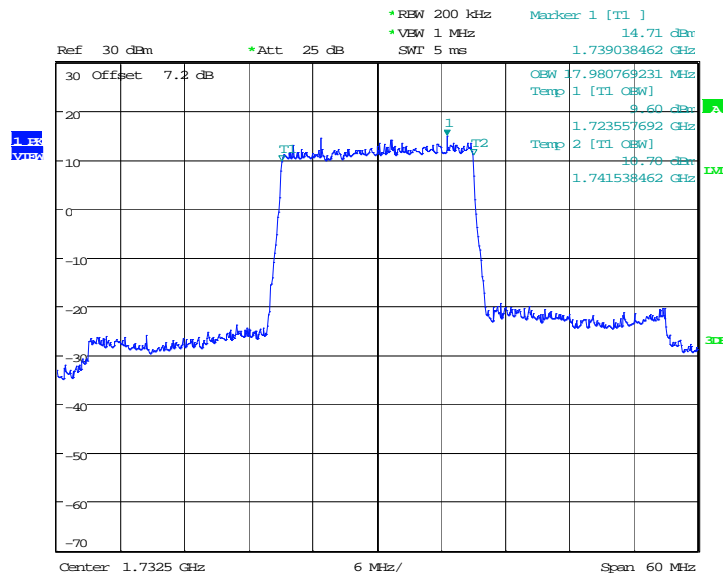

Date: 6.MAR.2017 19:17:31

LTE band 4, 20MHz Bandwidth, 16QAM (99% BW)

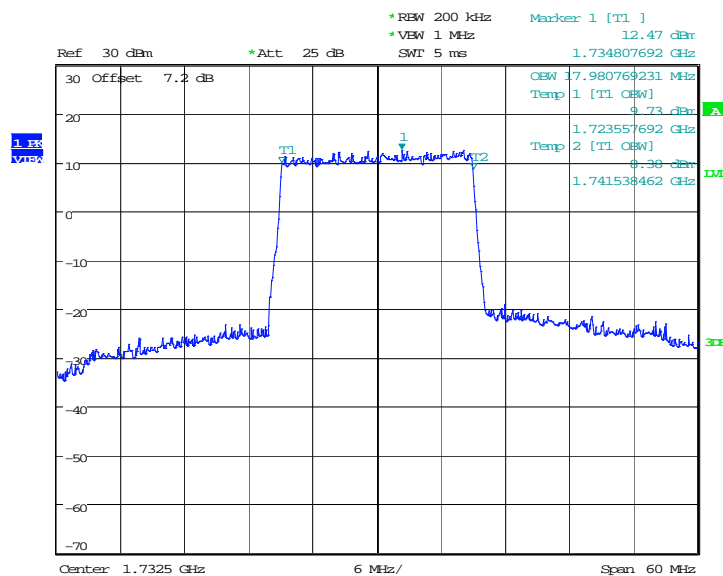


Date: 6.MAR.2017 19:17:10

LTE band 5, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
	836.5	QPSK
	1089.74	1097.76

LTE band 5, 1.4MHz Bandwidth, QPSK (99% BW)

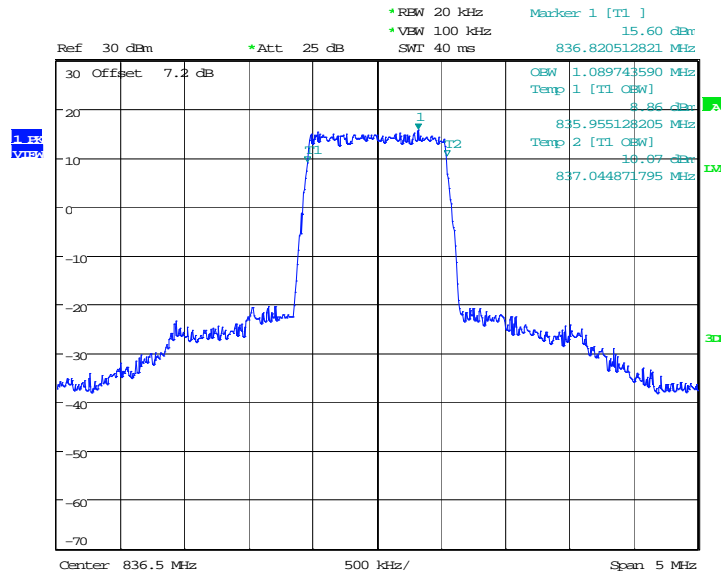

Date: 6.MAR.2017 18:25:28

LTE band 5, 1.4MHz Bandwidth, 16QAM (99% BW)

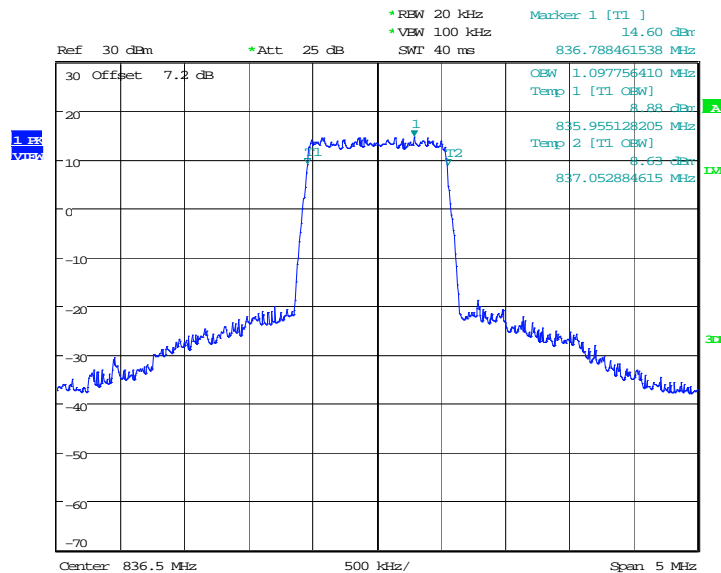


Date: 6.MAR.2017 18:26:11

LTE band 5, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	2692.31	2692.31

LTE band 5, 3MHz Bandwidth, QPSK (99% BW)

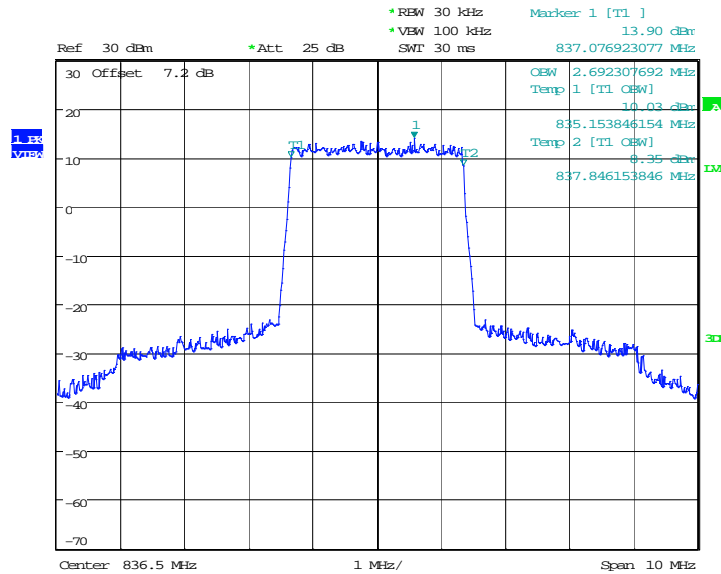

Date: 6.MAR.2017 18:30:55

LTE band 5, 3MHz Bandwidth, 16QAM (99% BW)

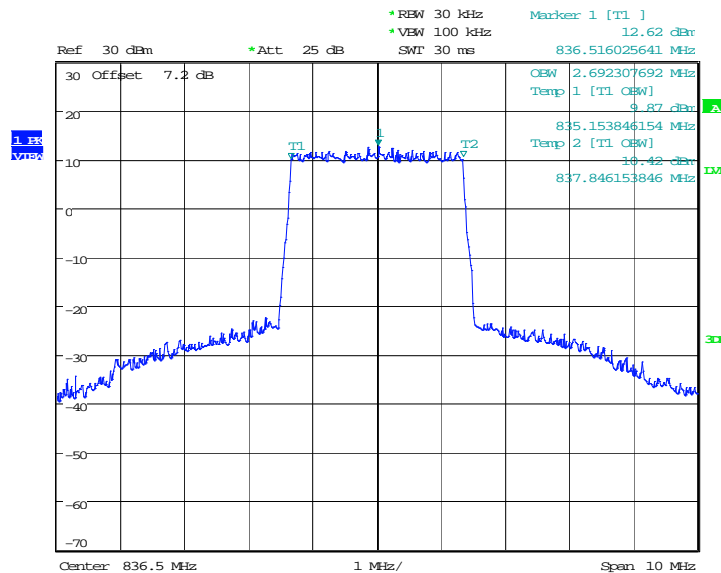


Date: 6.MAR.2017 18:30:30

LTE band 5, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	4471.15	4495.19

LTE band 5, 5MHz Bandwidth, QPSK (99% BW)

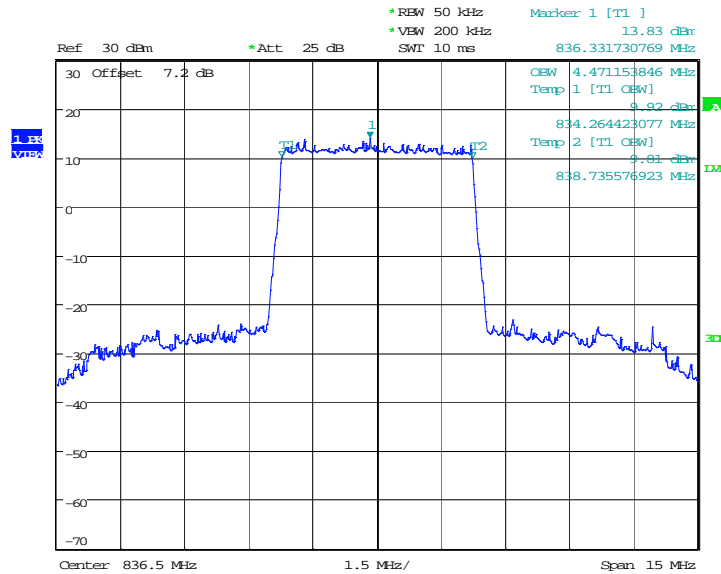

Date: 6.MAR.2017 18:47:21

LTE band 5, 5MHz Bandwidth,16QAM (99% BW)

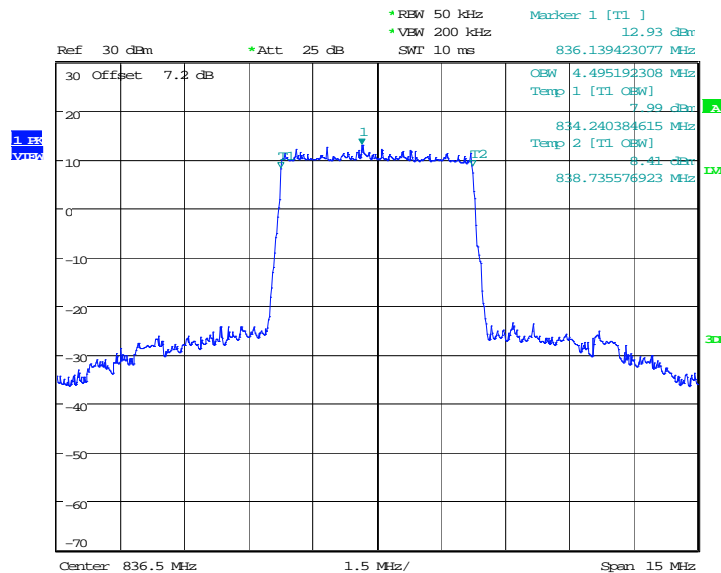


Date: 6.MAR.2017 18:46:34

LTE band 5, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	8942.31	8942.31

LTE band 5, 10MHz Bandwidth, QPSK (99% BW)

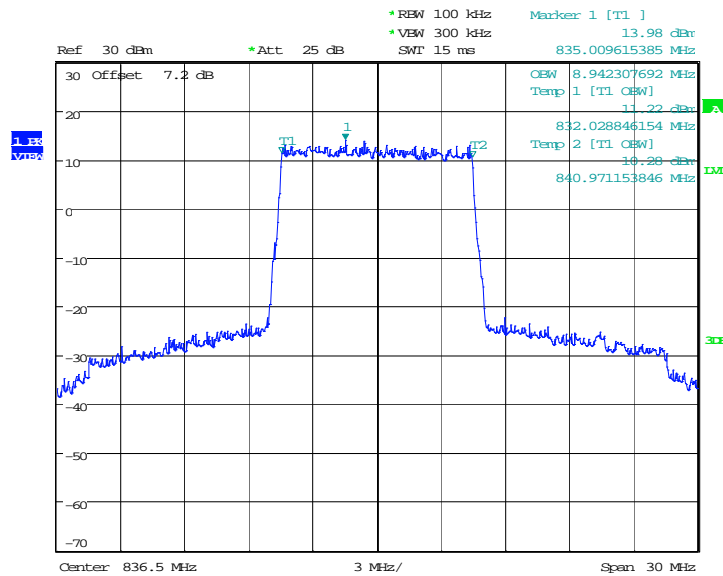

Date: 6.MAR.2017 18:54:05

LTE band 5, 10MHz Bandwidth, 16QAM (99% BW)

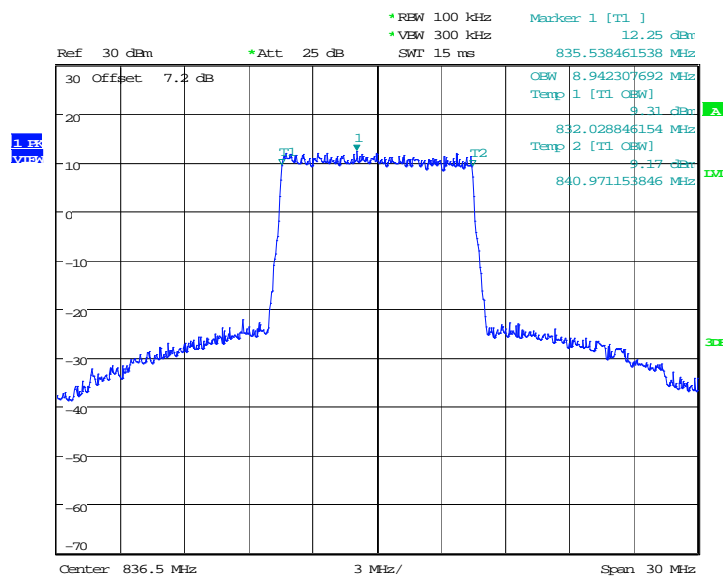


Date: 6.MAR.2017 18:54:35

LTE band 7, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	4519.23	4495.19

LTE band 7, 5MHz Bandwidth, QPSK (99% BW)

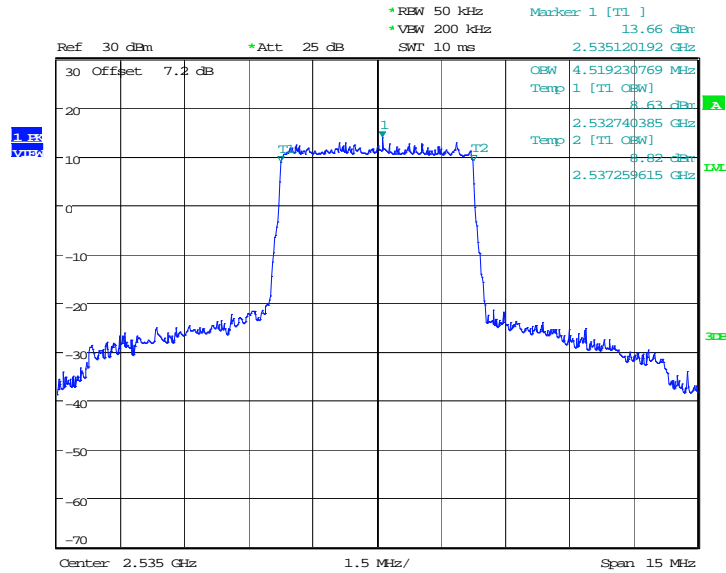

Date: 6.MAR.2017 18:48:10

LTE band 7, 5MHz Bandwidth,16QAM (99% BW)

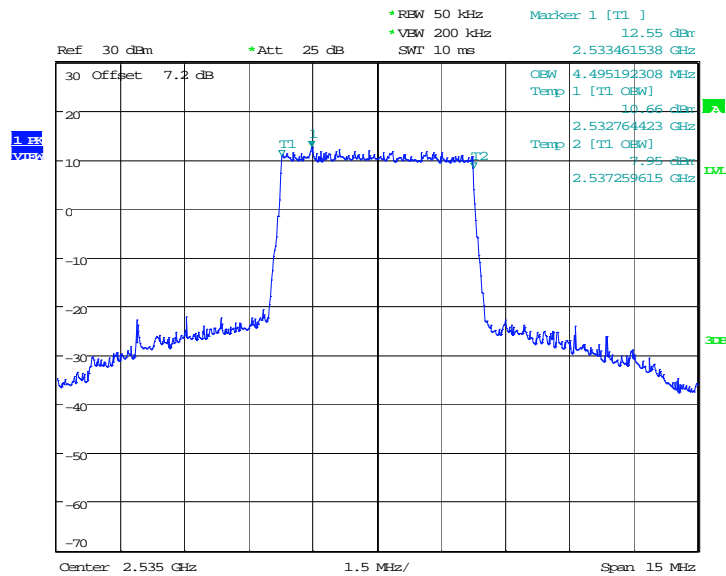

Date: 6.MAR.2017 18:48:54