



FCC&IC RF Test Report

Product Name: LTE Wireless Gateway

Model Number: B890-66

Report No: SYBH(Z-RF)016112013-2006

FCC ID: QISB890

IC: 6369A-B890

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518



Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Receipt Test Item: Aug.24, 2012
Start Date of Test: Aug.27, 2012
End Date of Test: Sept.10, 2012

Test Result: Pass

Approved By Senior Engineer Dec.20, 2013 Dai Linjun *Dai Linjun*
 Date Name Signature

Reviewed By Dec.20, 2013 Cousy Xu *Cousy XU*
 Date Name Signature

Zhu Mingjing

Operator Dec.20, 2013 Zhu Mingjing Signature
 Date Name



Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD	5
1.2	TEST LOCATION	5
1.3	TEST ENVIRONMENT CONDITION	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCTION INFORMATION	7
4	<u>Test Description</u>	8
4.1	SUPPORTED FREQUENCY RANGE.....	8
4.2	TRANSMITTER / RECEIVER CHARACTERISTICS	8
4.3	ANTENNA GAIN.....	8
4.4	POWER SUPPLY	8
5	<u>General Test Conditions / Configurations</u>	9
5.1	RF CHANNELS UNDER TEST.....	9
5.2	TEST MODES	10
5.3	TEST ENVIRONMENTS.....	10
5.4	TEST SETUPS.....	11
5.5	TEST CONDITIONS	14
6	<u>Main Test Instruments</u>	16
7	<u>Test Results</u>	17
8	<u>Measurement Uncertainty</u>	17



1 General Information

1.1 Applied Standard	
Applied Rules:	47 CFR FCC Part 2:2011, Subpart J 47 CFR FCC Part 22:2011, Subpart H ANSI/TIA 603C:2004 RSS-Gen Issue 3 RSS-132 Issue 3
1.2 Test Location	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
1.3 Test Environment Condition	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa



2 Summary

Table 1 Summary of results

Test Case	FCC Part No.	Requirements	Result
Cellular Band			
Transmitter Output Power	2.1046 & 22.913	ERP not exceed 7 W	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 22.917	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 22.917	Below -33 dBm/1 kHz, 9 kHz to 150 kHz Below -23 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 22.917	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 22.355	Maintained within the tolerances of ± 2.5 ppm	Pass

Table 2 Summary of results

Test Case	IC Standard No.	Requirements	Result
Cellular Band			
Transmitter Output Power	RSS-Gen, §4.8; RSS-132, §4.4	EIRP not exceed 11.5 W PAR \leq 13 dB	Pass
Modulation Characteristics	RSS-132, §4.2	Digital modulation	Pass
Occupied Bandwidth	RSS-Gen, §4.6	(Not specified)	Pass
Band Edges Compliance	RSS-Gen, §4.9; RSS-132, §4.5	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	RSS-Gen, §4.9; RSS-132, §4.5	(EBW \leq 4 MHz) Below -33 dBm/1 kHz, 9 kHz to 150 kHz Below -23 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 5 th harmonics (EBW > 4 MHz) Below -43 dBm/1 kHz, 9 kHz to 150 kHz Below -33 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/1 MHz, 30 MHz to 5 th harmonics	Pass
Field Strength of Spurious Radiation	RSS-Gen, §4.9; RSS-132, §4.5	Below -13 dBm/100 kHz (EBW \leq 4 MHz) Below -13 dBm/1 MHz (EBW > 4 MHz)	Pass
Frequency Stability	RSS-Gen, §4.7; RSS-132, §4.3	Maintained within the tolerances of ± 2.5 ppm	Pass
Receiver Spurious Emissions (Conducted)	RSS-Gen, §4.10; RSS-Gen, §6; RSS-132, §4.6	Below 2 nW/4 kHz (-57 dBm/4 kHz), for 30 MHz - 1000 MHz Below 5 nW/MHz (-53 dBm/MHz), for above 1 GHz	Pass



3 Product Description

3.1 Production Information

3.1.1 General Description

HUAWEI LTE Wireless Gateway–B890-66 is subscriber equipment in the WCDMA/LTE system, also supports wireless Internet accessing function, routing function, network address translation (NAT) function. The HSPA+/WCDMA frequency band is Band 2/4/5. The LTE frequency band includes Band 2/4/5/7/12/13/17. And the TX/RX band is 2400MHz~2483MHz for WLAN. B890-66 implements such functions as RF signal receiving/sending, WCDMA and LTE protocol processing, voice and data service etc. Externally it provides USB port interface, SIM card interface, four auto-sensing Ethernet interfaces and external antenna interface.

3.1.2 Board Information

Table 3 Board Information

LTE Wireless Gateway		
B890-66		
Board and Module		
Hardware Version	Software Version	Description
WL1B890I	V100R001	Board

3.1.3 Adapter Technical Data

AC/DCAdapter Model	HW-120200U6W
Input Voltage	~100-240V 50/60Hz
Output Voltage	12V  2A
Rated Power	24W



4 Test Description

4.1 Supported Frequency Range

Characteristics	Description
Downlink	869 to 894 MHz;
Uplink	824 to 849 MHz

4.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	UMTS LTE
TX Output Power (per Antenna Port)	UMTS system: 24dBm; LTE system: 23dBm
Channel Spacing(s) / Bandwidth(s)	UMTS system: 5 MHz LTE system: 1.4MHz,3Mhz,5 MHz,10 MHz
Designation of Emissions	UMTS system: 4M17F6W LTE system: 1M09G7D (1.4MHz ,QPSK modulation), 1M08W7D (1.4 MHz ,16QAM modulation), 2M69G7D (3MHz ,QPSK modulation), 2M69W7D (3 MHz ,16QAM modulation), 4M48G7D (5MHz ,QPSK modulation), 4M48W7D (5 MHz ,16QAM modulation), 8M96G7D (10 MHz QPSK modulation), 8M94W7D (10 MHz 16QAM modulation),

4.3 Antenna Gain

Antenna Gain(dBi)	-1
Antenna Gain(dBd)	-3.15

4.4 Power Supply

Specification	Description
Power Supply Type	Directly Connected to DC /AC Power Supply
Input to EUT (DC power)	DC Voltage Nominal: $\overline{\overline{=}}$ 12 V DC Voltage Range: $\overline{\overline{=}}$ 10.8 V to 13.2 V
Input to EUT (AC power)	AC Voltage Nominal: ~ 120 V (50/60 Hz) AC Voltage Range: ~100-240V



5 General Test Conditions / Configurations

5.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
TM1/TM2/TM3	TX	Channel 4132	Channel 4182	Channel 4233
		826.4 MHz	836.4 MHz	846.6 MHz
	RX	Channel 4357	Channel 4407	Channel 4458
		871.4 MHz	881.4 MHz	891.6 MHz
TM4/TM5	TX(1.4M)	Channel 20407	Channel 20525	Channel 20643
		824.7 MHz	836.5 MHz	848.3 MHz
	RX(1.4M)	Channel 2407	Channel 2525	Channel 2643
		869.7 MHz	881.5 MHz	893.3 MHz
	TX(3M)	Channel 20415	Channel 20525	Channel 20635
		825.5 MHz	836.5 MHz	847.5 MHz
	RX(3M)	Channel 2415	Channel 2525	Channel 2635
		870.5 MHz	881.5 MHz	892.5 MHz
	TX(5M)	Channel 20425	Channel 20525	Channel 20625
		826.5 MHz	836.5 MHz	846.5 MHz
	RX(5M)	Channel 2425	Channel 2525	Channel 2625
		871.5 MHz	881.5 MHz	891.5 MHz
	TX(10M)	Channel 20450	Channel 20525	Channel 20600
		829 MHz	836.5 MHz	844 MHz
	RX(10M)	Channel 2450	Channel 2525	Channel 2600
		874 MHz	881.5 MHz	889 MHz



5.2 Test Modes

Test Mode	Test Modes Description
TM1	WCDMA ,QPSK modulation
TM2	HSDPA , QPSK modulation
TM3	HSUPA , QPSK modulation
TM4	LTE , QPSK modulation
TM5	LTE ,16QAM modulation

5.3 Test Environments

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	10.8V
	VN	12.0V
	VH	13.2V


NOTE: VL= lower extreme test voltages
 VN= nominal voltage
 VH= upper extreme test voltage
 TN= normal temperature

5.4 Test Setups


5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

5.4.2 Test Setup 1

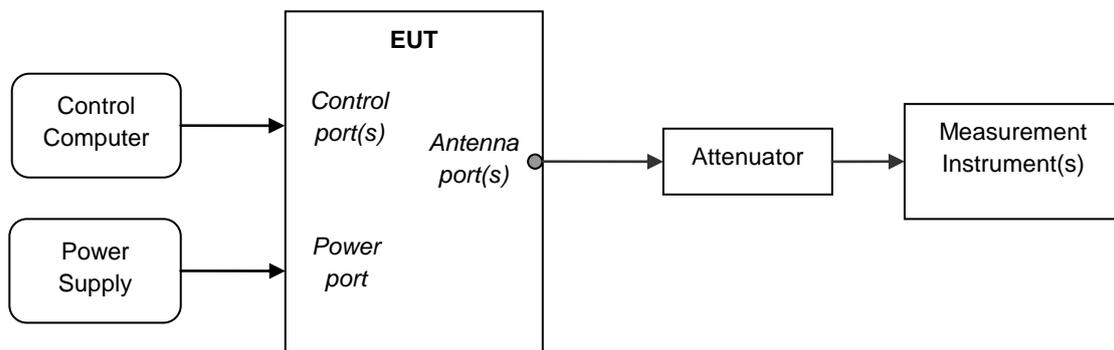

5.4.3 Test Setup 2

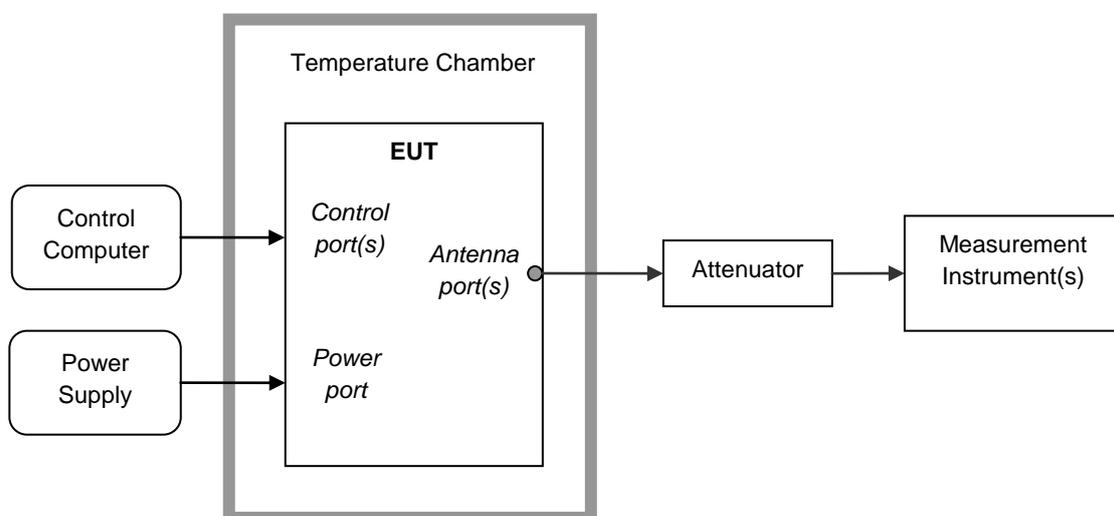


5.4.4 Test Setup 3

NOTE1: Effective radiated power (ERP) or Effective Isotropic radiated power (EIRP) refers to the EUT radiation power output, assuming all emissions are radiated from half-wave dipole antennas or horn antennas.

NOTE2: The EUT was set on insulator 80cm above the Ground Plane. The setup and test methods were according to ANSI-TIA-603C 2004. The measurements were carried through with a Rohde and Schwarz Test Receiver and control software.


Step 1: Pre-test

1. Connect the test system according to the following figure. EUT is running for 30 minutes before test, and measurement instruments are warming-up for 30 minutes.
2. Set up communication link between Universal radio communication tester and EUT, set EUT working frequency, and control EUT to transmit at maximum power.
3. Set the center frequency of the signal analyzer or receiver to the EUT's operating frequency, the RBW is equal to the emission bandwidth of the signal. Set RMS detector for the test, and the span is equal to 2 times of emission bandwidth, the other settings should remain automatic. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°. The receiver antenna has two polarizations V and H. A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.
4. Changing EUT working frequency and measuring the RF power at channel T, M, B respectively. Complete the test data.

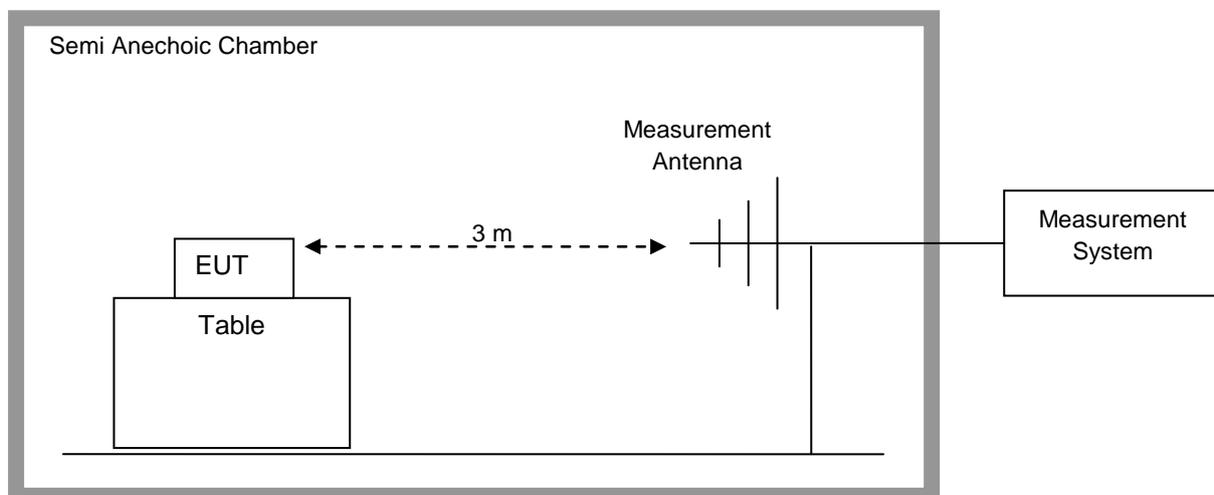

Step 2: Substitution method to verify the maximum ERP

1. Measurement setup is according to the following figure. EUT was substituted by antenna, and the polarization is identical with the test antenna; the signal generator was connected to the substitution antenna.
2. The radiated output power, measured by signal analyzer set, is the same as recorded in above. Then this power level is matched by a signal from a calibrated signal generator which is substituted for EUT. The power supplied by the generator is then equal to the ERP or EIRP after corrected by the antenna gain and cable loss.

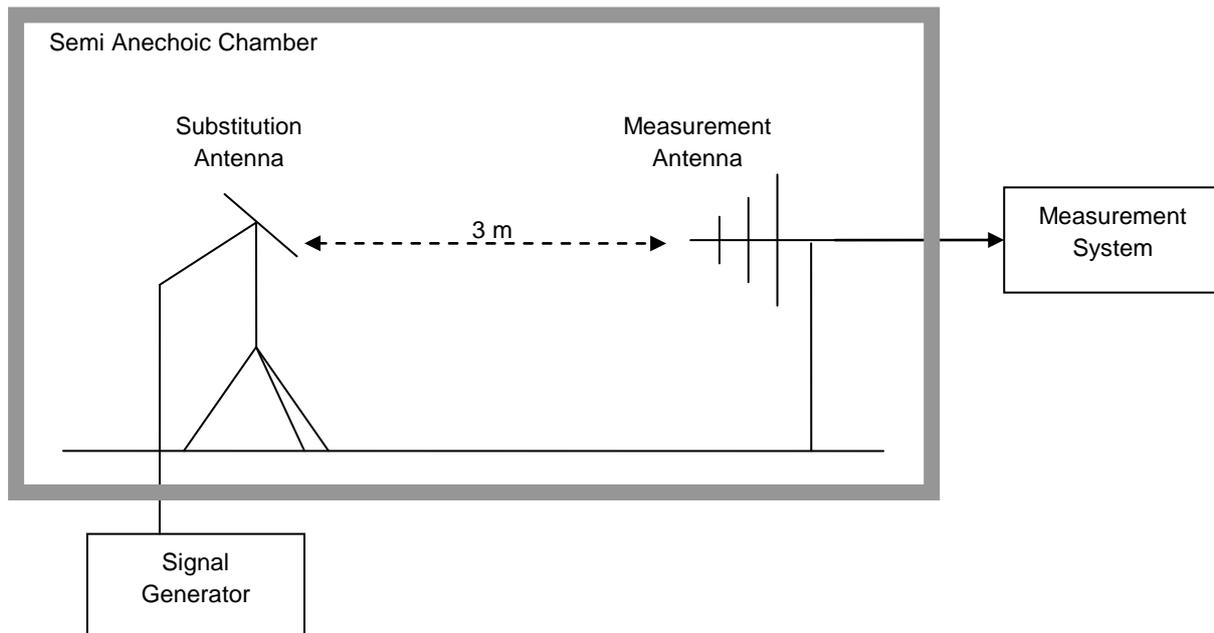

5.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2/TM3/TM4/TM5
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM4/TM5
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM4/TM5
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, T
	Test Mode	TM1/TM4/TM5
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM4/TM5
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3/TM4/TM5
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Temperature.
	Test Setup	Test Setup 2



Test Case	Test Conditions	
	RF Channels (TX)	M
	Test Mode	TM1/TM4/TM5
Receiver Spurious Emissions	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	QP,PK, AV
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3/TM4/TM5



6 Main Test Instruments

Table 4 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sept., 27,2012
Universal Radio Communication Tester	R&S	CMU200	117341	Jan., 12,2013
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug., 30,2013
Spectrum Analyzer	Agilent	E4440A	MY49420179	Jul., 17,2013
Signal Analyzer	Agilent	N9020A	MY52090652	Jul., 17,2013
Signal Analyzer	R&S	FSQ31	200021	Sept., 27,2012
Temperature Chamber	WEISS	WKL64	24600294	Feb.,13,2013
Signal generator	Agilent	E8257D	MY49281095	Jul.,09,2013
Spectrum analyzer	R&S	FSU3	200474	Mar., 05, 2013
Spectrum analyzer	R&S	FSU43	100144	Mar., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	Apr., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100391	Apr., 05, 2013
Trilog Broadband Antenna (30M~3GHz)	SCHWARZB ECK	VULB 9163	9163-521	Jul., 07, 2013
Pyramidal Horn Antenna(26GHz-40GHz)	ETS-Lindgren	3160-10	00123940	Feb., 27, 2013
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-Lindgren	3160-09	00125912	Feb., 27, 2013
Universal Radio Communication Tester	R & S	CMW500	20347676	Sept., 06, 2013
Universal Radio Communication Tester	Anritsu	MT8820C	6200971028	May, 04, 2013

Note: All the equipments are calibrated once a year. When it's almost due, we will arrange calibration again before the calibration deadline.



7 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Field Strength of Spurious Radiation	Appendix F
7	Frequency Stability	Appendix G
8	Receiver Spurious Emissions	Appendix H
9	Photos of Test Setup	Appendix I

NOTE: The Appendix I is only photos Field Strength of Spurious Radiation and Receiver Spurious Emissions test setup, no test data.

8 Measurement Uncertainty

For a 95% confidence level (k=2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----