



FCC Test Report of B890-66
FCC ID: QISB890
IC: 6369A-B890



Appendix H


Receiver Spurious Emissions

According to RSS-132



This test was carried out in all the test modes, Here only the worst test result was shown.

30MHz-1GHz

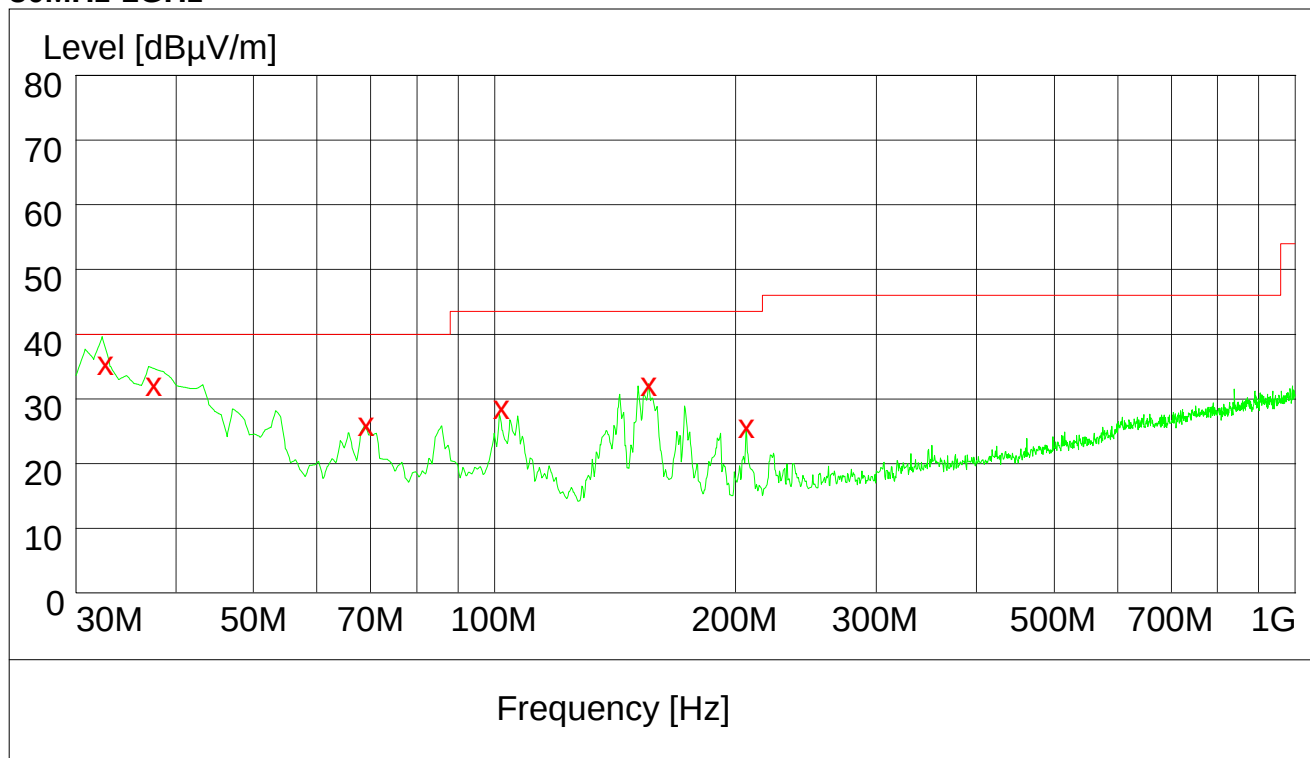


MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
32.640000	35.80	14.7	40.0	4.2	100.0	359.00	VERTICAL
37.500000	32.50	15.2	40.0	7.5	114.0	341.00	VERTICAL
69.120000	26.60	11.1	40.0	13.4	136.0	85.00	VERTICAL
101.880000	28.00	13.4	43.5	15.5	109.0	263.00	VERTICAL
155.640000	31.90	10.0	43.5	11.6	100.0	84.00	VERTICAL
206.220000	26.30	12.4	43.5	17.2	163.0	326.00	HORIZONTAL



1GHz-18GHz

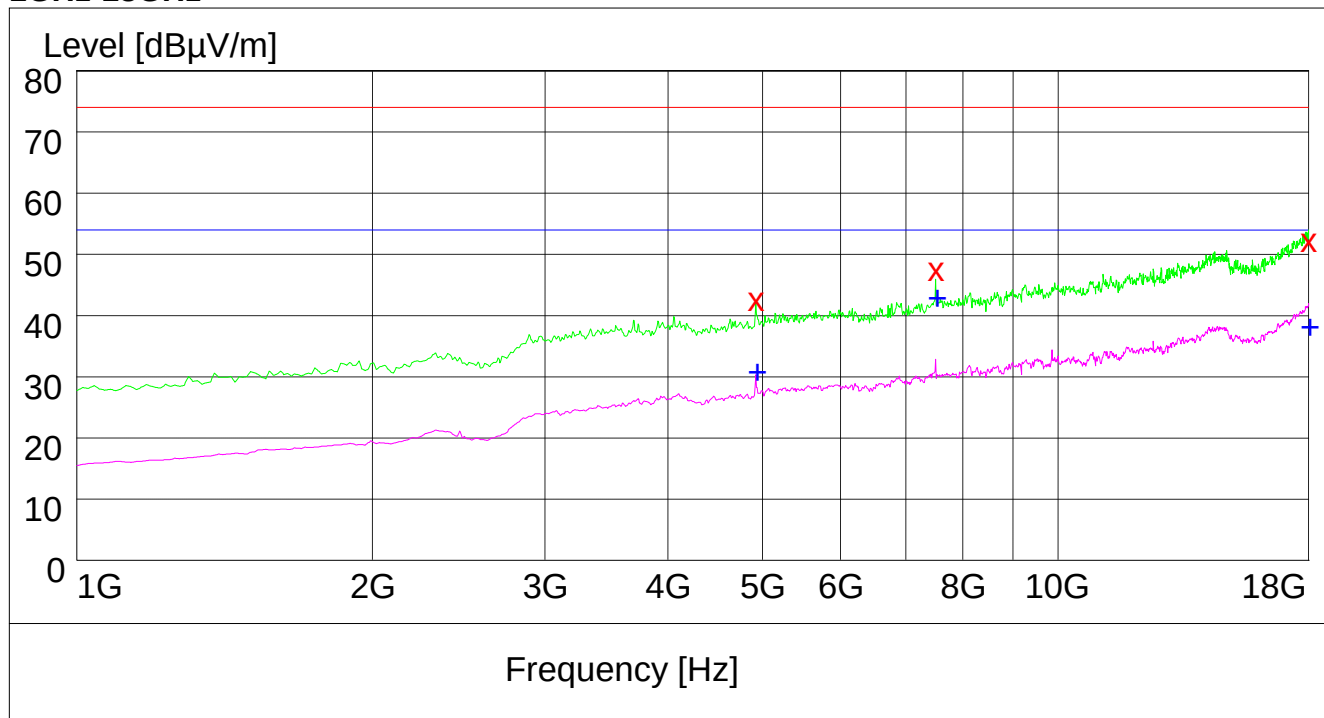

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
4923.800000	42.80	-2.5	74.0	31.2	100.0	46.00	VERTICAL
7500.300000	48.00	3.7	74.0	26.0	100.0	318.00	HORIZONTAL
17992.400000	52.00	19.4	74.0	22.0	100.0	280.00	HORIZONTAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
4923.800000	31.20	-2.5	54.0	22.8	100.0	24.00	VERTICAL
7500.300000	43.60	3.7	54.0	10.4	100.0	316.00	HORIZONTAL
17993.500000	38.20	19.4	54.0	15.8	100.0	216.00	VERTICAL

-----END-----