



# FCC RF Test Report

**APPLICANT** : Huawei Technologies Co., Ltd.  
**EQUIPMENT** : smart phone  
**BRAND NAME** : honor  
**MODEL NAME** : BKL-L04  
**FCC ID** : QISBKL-L04  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on Jan. 30, 2018 and testing was completed on Feb. 26, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.**

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID: QISBKL-L04

Page Number : 1 of 28

Report Issued Date : Mar. 02, 2018

Report Version : Rev. 01

Report Template No.: BU5-FR15EWLB4 AC MA Version 1.4



# TABLE OF CONTENTS

**REVISION HISTORY.....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION .....5**

    1.1 Applicant .....5

    1.2 Manufacturer.....5

    1.3 Product Feature of Equipment Under Test.....5

    1.4 Modification of EUT .....5

    1.5 Testing Location .....6

    1.6 Applicable Standards.....6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....7**

    2.1 Carrier Frequency and Channel .....7

    2.2 Test Mode.....8

    2.3 Connection Diagram of Test System.....9

    2.4 Support Unit used in test configuration and system .....9

    2.5 EUT Operation Test Setup .....10

    2.6 Measurement Results Explanation Example.....10

**3 TEST RESULT .....11**

    3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement .....11

    3.2 Maximum Conducted Output Power Measurement .....14

    3.3 Power Spectral Density Measurement .....15

    3.4 Unwanted Emissions Measurement.....17

    3.5 AC Conducted Emission Measurement.....23

    3.6 Automatically Discontinue Transmission .....25

    3.7 Antenna Requirements .....26

**4 LIST OF MEASURING EQUIPMENT .....27**

**5 UNCERTAINTY OF EVALUATION.....28**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS**

**APPENDIX E. DUTY CYCLE PLOTS**

**APPENDIX F. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 10.29 dB at 42.420 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.12 dB at 0.198 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Huawei Technologies Co., Ltd.**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

## 1.2 Manufacturer

**Huawei Technologies Co., Ltd**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

## 1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, NFC, and GNSS.

Product Specification subjective to this standard	
<b>Antenna Type</b>	WWAN: <Up Ant.>: PIFA Antenna <Down Ant.>: PIFA Antenna WLAN: Left-hand Type Antenna Bluetooth: Left-hand Type Antenna GPS/Glonass/Galileo/BDS: Left-hand Type Antenna NFC: Loop Antenna

## 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH10-HY	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ANSI C63.10-2013

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#" were 802.11ac VHT80.



## 2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0

<b>AC Conducted Emission</b>	Mode 1 : WLAN (5GHz) Link + Earphone 1 + USB Cable (Charging from Adapter)
--------------------------------------	--

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

### 2.3 Connection Diagram of Test System

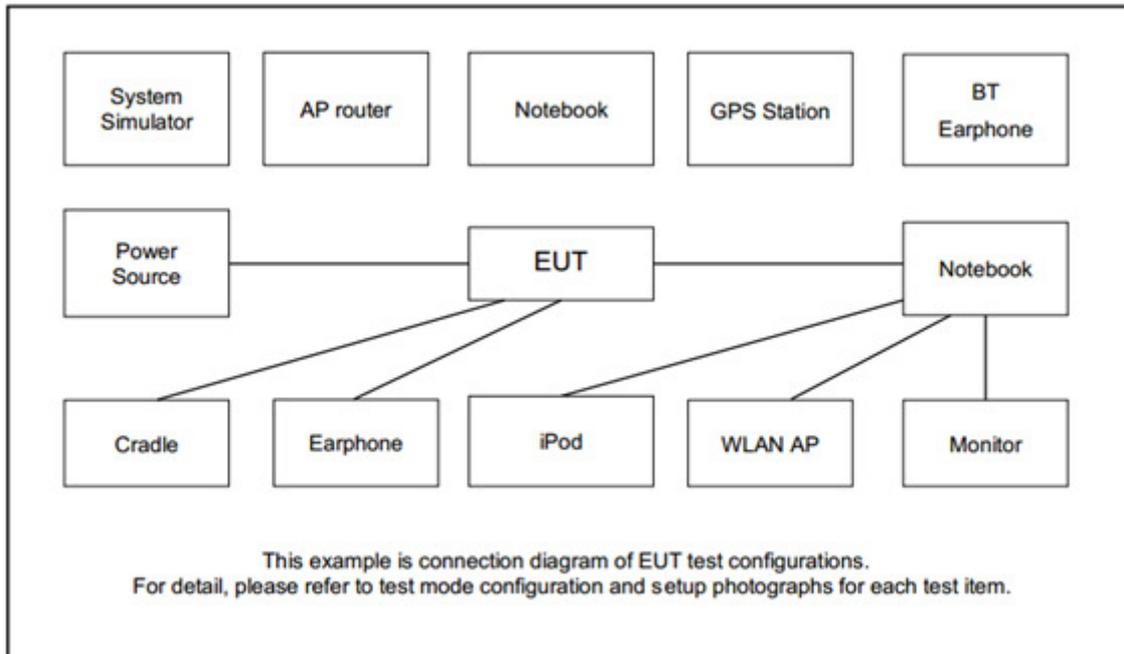

### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A



## 2.5 EUT Operation Test Setup

The RF test items, utility “ADB” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


##### 3.1.4 Test Setup

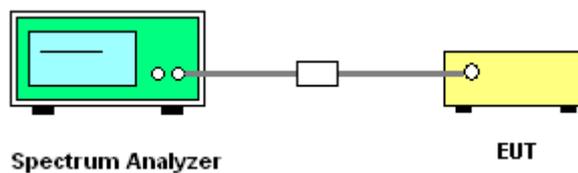

##### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

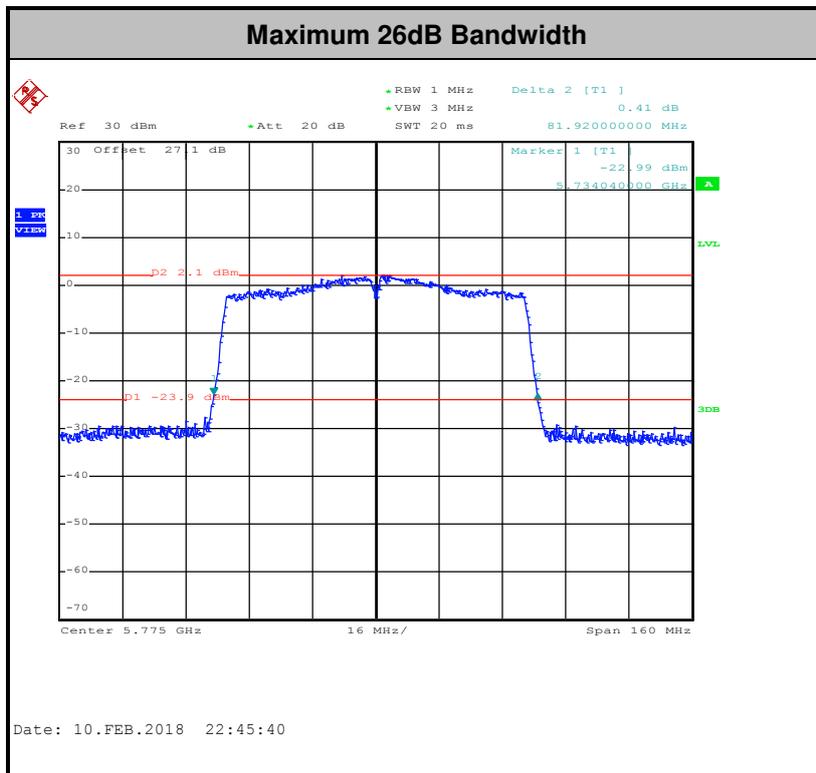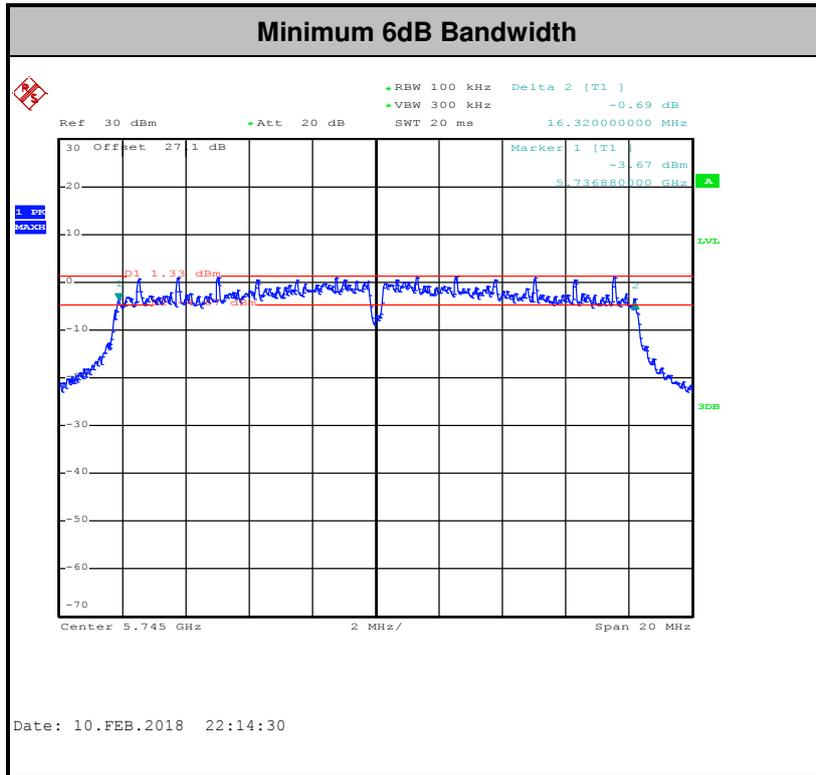

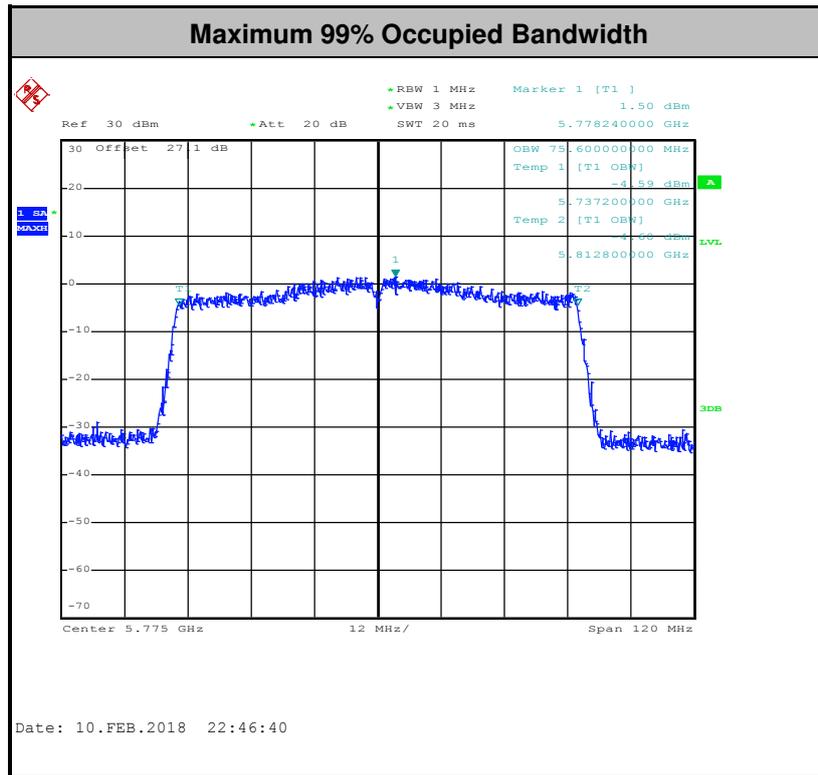

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

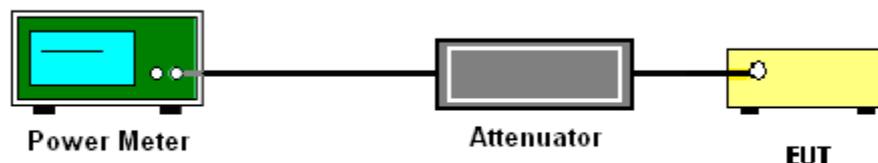

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

##### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 300 kHz.
  - Set VBW  $\geq$  1 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
  - Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.





### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:  
 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.<sup>3</sup>
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.<sup>4</sup>

**Note 3:** An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

**Note 4:** Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

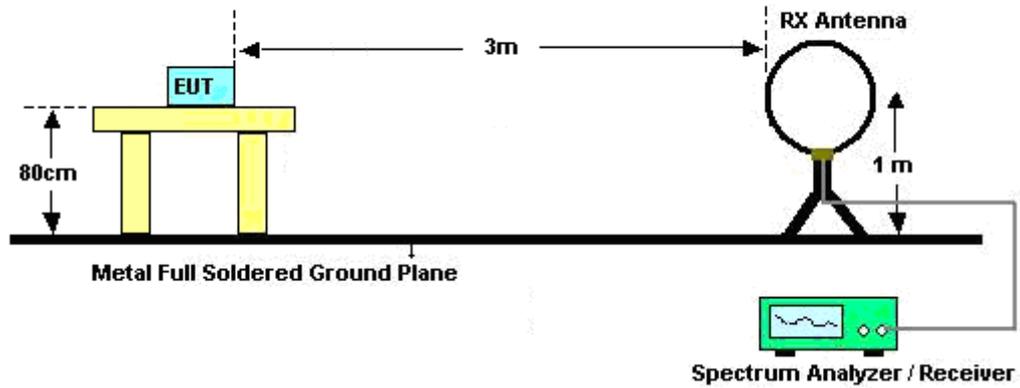

For radiated emissions from 30MHz to 1GHz

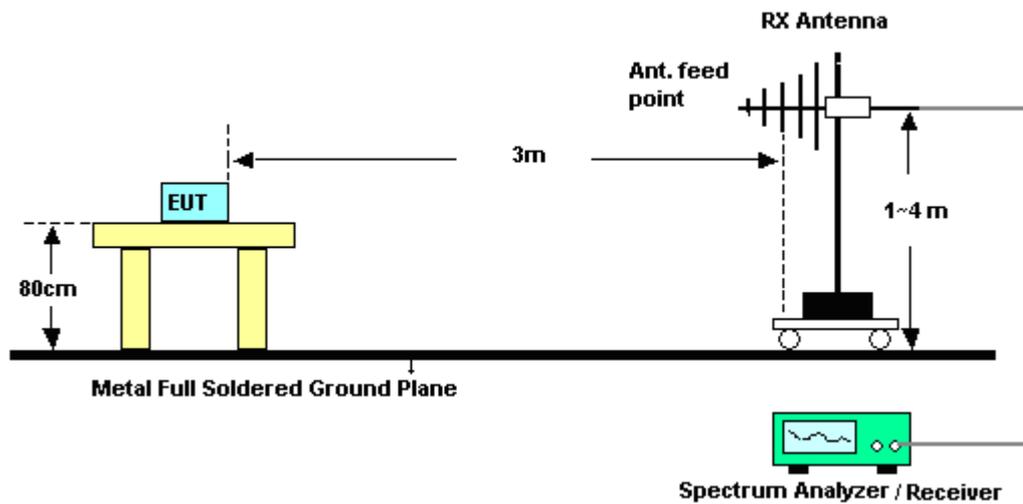

For radiated emissions above 1GHz

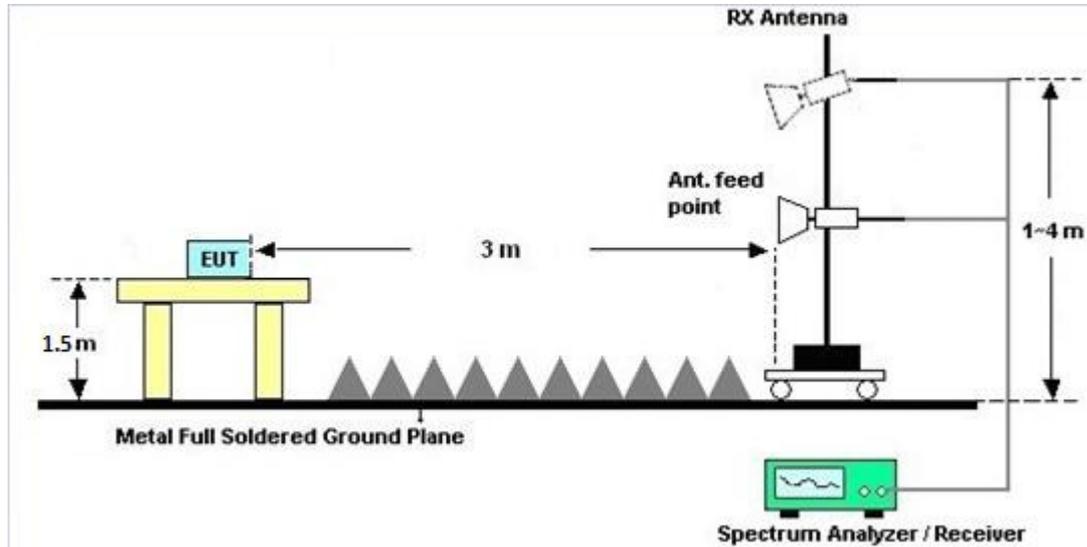

### 3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

### 3.4.7 Duty Cycle

Please refer to Appendix E.

### 3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

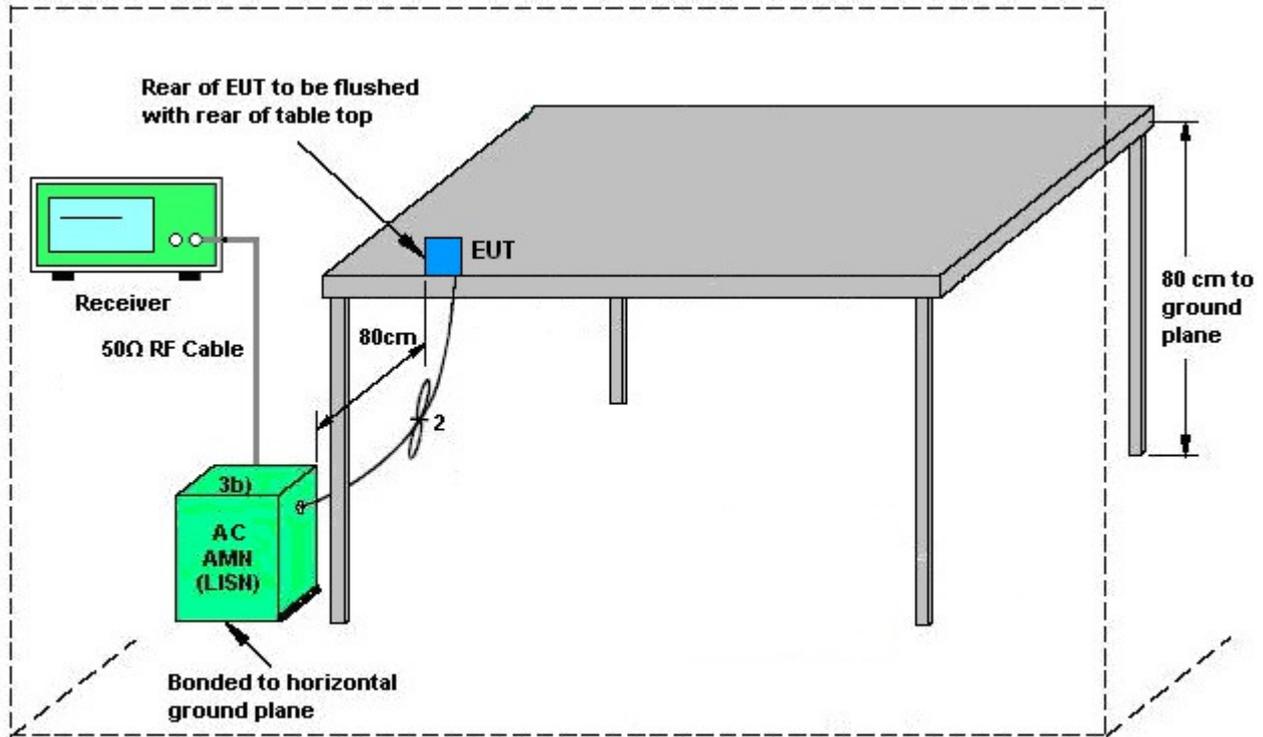

AMN = Artificial mains network (LISH)  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Automatically Discontinue Transmission**

### **3.6.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.6.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.6.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 26, 2017	Feb. 07, 2018 ~ Feb. 26, 2018	Sep. 25, 2018	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz z	Sep. 26, 2017	Feb. 07, 2018 ~ Feb. 26, 2018	Sep. 25, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz ~ 30GHz	Nov. 13, 2017	Feb. 07, 2018 ~ Feb. 26, 2018	Nov. 12, 2018	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Feb. 08, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Sep. 20, 2017	Feb. 08, 2018	Sep. 19, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Feb. 08, 2018	Nov. 29, 2018	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	May 15, 2017	Feb. 08, 2018 ~ Feb. 14, 2018	May 14, 2019	Radiation (03CH10-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Oct. 19, 2017	Feb. 08, 2018 ~ Feb. 14, 2018	Oct. 18, 2018	Radiation (03CH10-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Feb. 08, 2018 ~ Feb. 14, 2018	Jul. 17, 2018	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35413&02	30MHz~1GHz	Dec. 18, 2017	Feb. 08, 2018 ~ Feb. 14, 2018	Dec. 17, 2018	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-132 5	1GHz ~ 18GHz	Sep. 27, 2017	Feb. 08, 2018 ~ Feb. 14, 2018	Sep. 26, 2018	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY532700 78	1GHz~26.5GHz	Oct. 25, 2017	Feb. 08, 2018 ~ Feb. 14, 2018	Oct. 24, 2018	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 85	10Hz ~ 44GHz	Oct. 31, 2017	Feb. 08, 2018 ~ Feb. 14, 2018	Oct. 30, 2018	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 08, 2018 ~ Feb. 14, 2018	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Feb. 08, 2018 ~ Feb. 14, 2018	N/A	Radiation (03CH10-HY)
Preamplifier	Jet-Power	JAP00101800 -30-10P	160118550 004	1GHz~18GHz	Apr. 13, 2017	Feb. 08, 2018 ~ Feb. 14, 2018	Apr. 12, 2018	Radiation (03CH10-HY)
Software	Audix	E3 6.2009-8-24	RK-00104 2	N/A	N/A	Feb. 08, 2018 ~ Feb. 14, 2018	N/A	Radiation (03CH10-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 27, 2017	Feb. 08, 2018 ~ Feb. 14, 2018	Nov. 26, 2018	Radiation (03CH10-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY572901 11	3Hz~26.5GHz	Nov. 02, 2017	Feb. 08, 2018 ~ Feb. 14, 2018	Nov. 01, 2018	Radiation (03CH10-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.7
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.6
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.9
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2
---	-----

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Shiang Wang /Luffy Lin /Reece Lin	Temperature:	21~25	°C
Test Date:	2018/2/7 ~ 2018/02/26	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	18.20	22.91	16.32	0.5	Pass
11a	6Mbps	1	157	5785	17.95	22.90	16.32	0.5	Pass
11a	6Mbps	1	165	5825	17.95	23.20	16.32	0.5	Pass
HT20	MCS 0	1	149	5745	18.85	22.70	17.52	0.5	Pass
HT20	MCS 0	1	157	5785	18.80	23.30	17.56	0.5	Pass
HT20	MCS 0	1	165	5825	18.85	25.20	17.52	0.5	Pass
HT40	MCS 0	1	151	5755	36.40	41.22	36.24	0.5	Pass
HT40	MCS 0	1	159	5795	36.60	41.22	36.24	0.5	Pass
VHT80	MCS 0	1	155	5775	75.60	81.92	75.20	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.47	14.18	30.00	2.57		Pass
11a	6Mbps	1	157	5785	0.47	14.08	30.00	2.57		Pass
11a	6Mbps	1	165	5825	0.47	14.32	30.00	2.57		Pass
HT20	MCS 0	1	149	5745	0.50	13.75	30.00	2.57		Pass
HT20	MCS 0	1	157	5785	0.50	13.74	30.00	2.57		Pass
HT20	MCS 0	1	165	5825	0.50	13.72	30.00	2.57		Pass
HT40	MCS 0	1	151	5755	0.50	11.34	30.00	2.57		Pass
HT40	MCS 0	1	159	5795	0.50	11.32	30.00	2.57		Pass
VHT20	MCS 0	1	149	5745	0.50	13.74	30.00	2.57		Pass
VHT20	MCS 0	1	157	5785	0.50	13.72	30.00	2.57		Pass
VHT20	MCS 0	1	165	5825	0.50	13.71	30.00	2.57		Pass
VHT40	MCS 0	1	151	5755	0.44	11.31	30.00	2.57		Pass
VHT40	MCS 0	1	159	5795	0.44	11.24	30.00	2.57		Pass
VHT80	MCS 0	1	155	5775	0.67	9.31	30.00	2.57		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.47	2.22	-0.03	30.00	2.57	Pass
11a	6Mbps	1	157	5785	0.47	2.22	0.15	30.00	2.57	Pass
11a	6Mbps	1	165	5825	0.47	2.22	-0.28	30.00	2.57	Pass
HT20	MCS 0	1	149	5745	0.50	2.22	-0.69	30.00	2.57	Pass
HT20	MCS 0	1	157	5785	0.50	2.22	-0.78	30.00	2.57	Pass
HT20	MCS 0	1	165	5825	0.50	2.22	-0.93	30.00	2.57	Pass
HT40	MCS 0	1	151	5755	0.50	2.22	-6.41	30.00	2.57	Pass
HT40	MCS 0	1	159	5795	0.50	2.22	-6.51	30.00	2.57	Pass
VHT80	MCS 0	1	155	5775	0.67	2.22	-5.18	30.00	2.57	Pass




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Blue Lan	Temperature :	24~25°C
		Relative Humidity :	43~45%

# EUT Information

Report NO : 813035  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

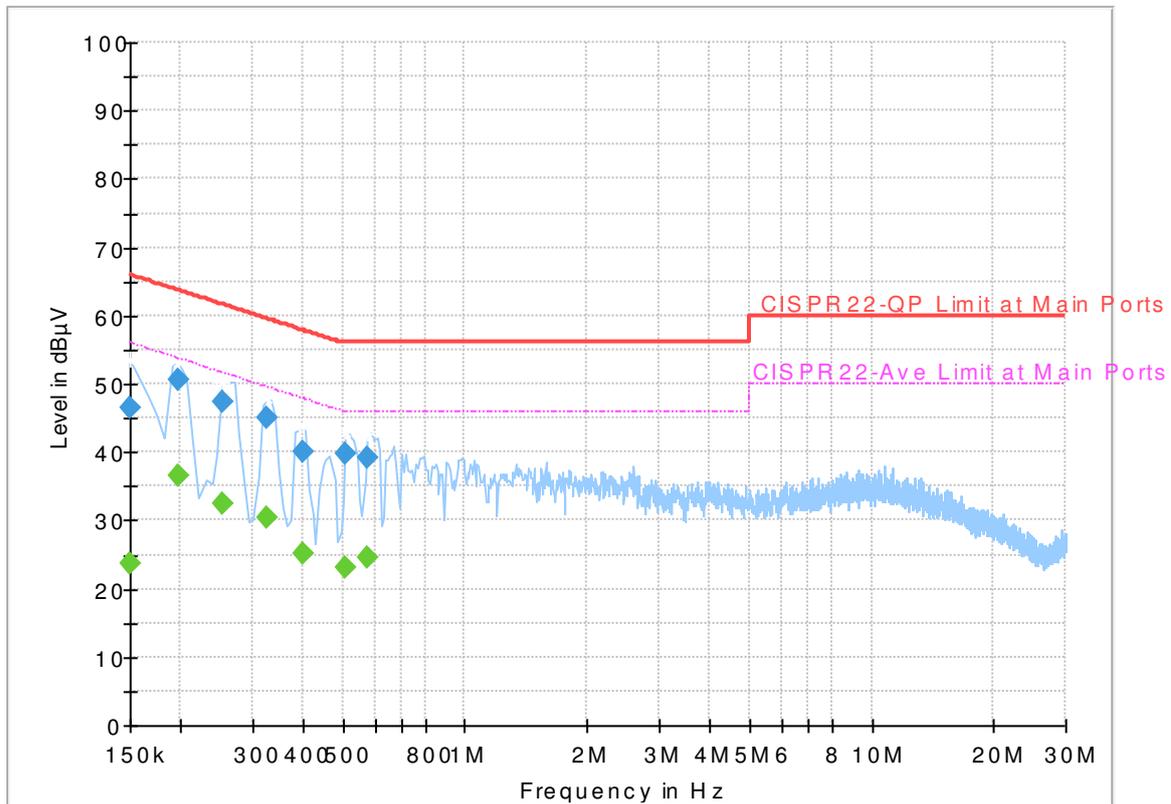

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	46.41	66.00	19.59	L1	OFF	19.5
0.198000	50.57	63.69	13.12	L1	OFF	19.5
0.254000	47.44	61.63	14.19	L1	OFF	19.5
0.326000	45.12	59.55	14.43	L1	OFF	19.5
0.398000	40.12	57.90	17.78	L1	OFF	19.5
0.510000	39.74	56.00	16.26	L1	OFF	19.5
0.574000	39.07	56.00	16.93	L1	OFF	19.5


## Final Result

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	23.59	56.00	32.41	L1	OFF	19.5
0.198000	36.48	53.69	17.21	L1	OFF	19.5
0.254000	32.60	51.63	19.03	L1	OFF	19.5
0.326000	30.44	49.55	19.11	L1	OFF	19.5
0.398000	25.18	47.90	22.72	L1	OFF	19.5
0.510000	23.02	46.00	22.98	L1	OFF	19.5
0.574000	24.43	46.00	21.57	L1	OFF	19.5

# EUT Information

Report NO : 813035  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

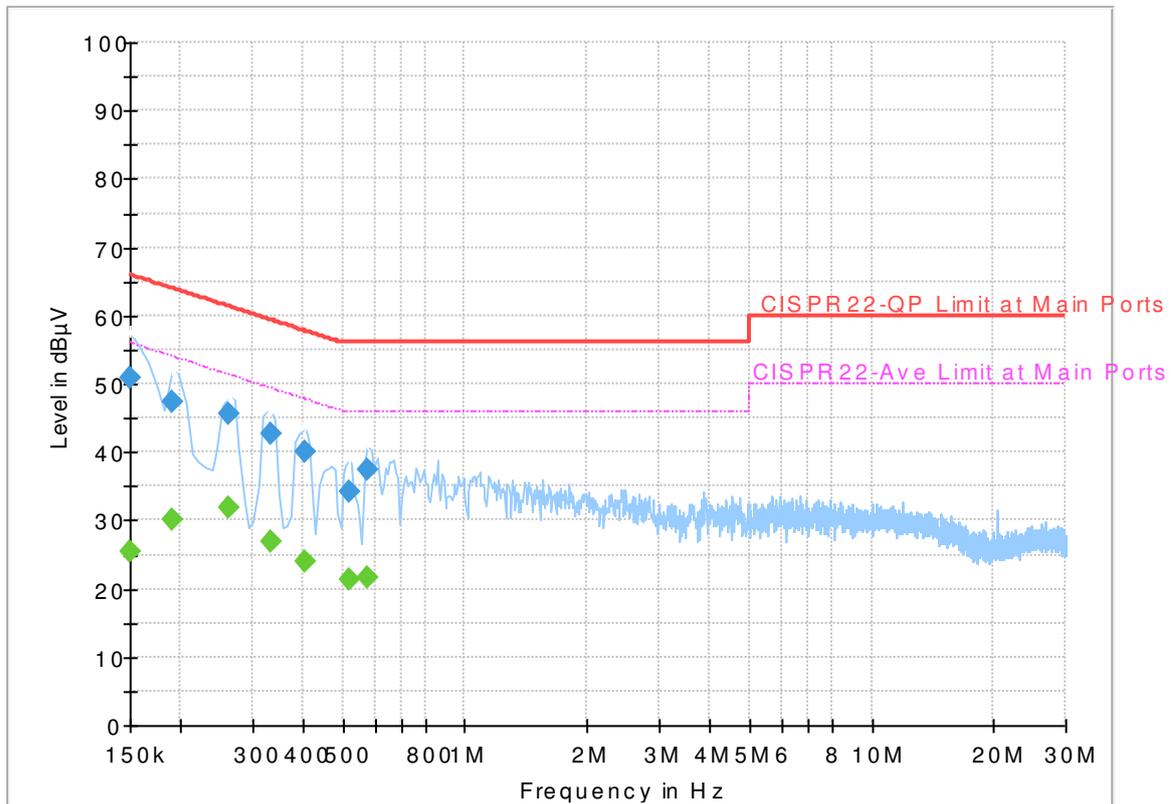

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	50.86	66.00	15.14	N	OFF	19.5
0.190000	47.51	64.04	16.53	N	OFF	19.5
0.262000	45.59	61.37	15.78	N	OFF	19.5
0.334000	42.63	59.35	16.72	N	OFF	19.5
0.406000	40.06	57.73	17.67	N	OFF	19.5
0.518000	34.24	56.00	21.76	N	OFF	19.5
0.574000	37.45	56.00	18.55	N	OFF	19.5

## Final Result

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	25.38	56.00	30.62	N	OFF	19.5
0.190000	30.03	54.04	24.01	N	OFF	19.5
0.262000	31.82	51.37	19.55	N	OFF	19.5
0.334000	26.88	49.35	22.47	N	OFF	19.5
0.406000	24.06	47.73	23.67	N	OFF	19.5
0.518000	21.27	46.00	24.73	N	OFF	19.5
0.574000	21.59	46.00	24.41	N	OFF	19.5



## Appendix C. Radiated Spurious Emission

Test Engineer :	Yun Huang, Daniel Lee, and JC Liang	Temperature :	18~22°C
		Relative Humidity :	48~52%

### Band 4 - 5725~5850MHz

#### WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11a CH 149 5745MHz		5610	48.16	-20.04	68.2	39.86	32.2	8.64	32.54	100	111	P	H
		5695.2	50.1	-51.56	101.66	41.49	32.29	8.89	32.57	100	111	P	H
		5719.2	56.57	-54.01	110.58	47.82	32.32	9.01	32.58	100	111	P	H
		5722.8	62.49	-54.69	117.18	53.74	32.32	9.01	32.58	100	111	P	H
	*	5745	105.84	-	-	97.02	32.34	9.07	32.59	100	111	P	H
	*	5745	98.53	-	-	89.71	32.34	9.07	32.59	100	111	A	H
		5641.6	49.07	-19.13	68.2	40.68	32.24	8.7	32.55	340	72	P	V
		5698.6	52.96	-51.21	104.17	44.35	32.29	8.89	32.57	340	72	P	V
		5718.4	63.58	-46.77	110.35	54.83	32.32	9.01	32.58	340	72	P	V
		5720.6	65.67	-46.5	112.17	56.92	32.32	9.01	32.58	340	72	P	V
	*	5745	109.11	-	-	100.29	32.34	9.07	32.59	340	72	P	V
	*	5745	101.86	-	-	93.04	32.34	9.07	32.59	340	72	A	V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
		5647.4	47.84	-20.36	68.2	39.38	32.24	8.77	32.55	100	110	P	H	
		5670.8	48.63	-35	83.63	40.09	32.27	8.83	32.56	100	110	P	H	
		5717	49.27	-60.69	109.96	40.59	32.31	8.95	32.58	100	110	P	H	
		5724.6	50.3	-70.99	121.29	41.55	32.32	9.01	32.58	100	110	P	H	
	*	5785	107.23	39.03	68.2	98.26	32.38	9.2	32.61	100	110	P	H	
	*	5785	100.09	46.09	54	91.12	32.38	9.2	32.61	100	110	A	H	
		5852.2	53.09	-64.09	117.18	44.12	32.44	9.16	32.63	100	110	P	H	
		5865.6	51.5	-56.33	107.83	42.55	32.46	9.13	32.64	100	110	P	H	
		5891.2	49.6	-43.58	93.18	40.64	32.5	9.1	32.64	100	110	P	H	
		5927.6	49.92	-18.28	68.2	41	32.53	9.04	32.65	100	110	P	H	
802.11a CH 157 5785MHz		5647.4	47.96	-20.24	68.2	39.5	32.24	8.77	32.55	391	66	P	V	
		5693.2	49.03	-51.16	100.19	40.42	32.29	8.89	32.57	391	66	P	V	
		5717.8	50.92	-59.26	110.18	42.17	32.32	9.01	32.58	391	66	P	V	
		5721.8	48.86	-66.04	114.9	40.11	32.32	9.01	32.58	391	66	P	V	
		* 5785	109.46	41.26	68.2	100.49	32.38	9.2	32.61	391	66	P	V	
		* 5785	102.25	48.25	54	93.28	32.38	9.2	32.61	391	66	A	V	
			5852.4	49.57	-67.16	116.73	40.6	32.44	9.16	32.63	391	66	P	V
			5861.4	48.87	-60.14	109.01	39.92	32.46	9.13	32.64	391	66	P	V
			5887	49.15	-47.14	96.29	40.21	32.48	9.1	32.64	391	66	P	V
			5938.2	49.66	-18.54	68.2	40.78	32.53	9.01	32.66	391	66	P	V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 165 5825MHz	*	5825	107.77	-	-	98.73	32.43	9.23	32.62	100	111	P	H
	*	5825	100.46	-	-	91.42	32.43	9.23	32.62	100	111	A	H
		5850.2	59.15	-62.59	121.74	50.18	32.44	9.16	32.63	100	111	P	H
		5856.4	58.82	-51.59	110.41	49.83	32.46	9.16	32.63	100	111	P	H
		5875	53.84	-51.36	105.2	44.87	32.48	9.13	32.64	100	111	P	H
		5926.4	49.29	-18.91	68.2	40.37	32.53	9.04	32.65	100	111	P	H
	*	5825	109.54	-	-	100.5	32.43	9.23	32.62	349	68	P	V
	*	5825	102.1	-	-	93.06	32.43	9.23	32.62	349	68	A	V
		5850.8	60.94	-59.44	120.38	51.97	32.44	9.16	32.63	349	68	P	V
		5855.2	57.35	-53.39	110.74	48.36	32.46	9.16	32.63	349	68	P	V
		5875.8	53.55	-51.06	104.61	44.58	32.48	9.13	32.64	349	68	P	V
		5945.4	49.82	-18.38	68.2	40.92	32.55	9.01	32.66	349	68	P	V
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 149 5745MHz		11490	44.19	-29.81	74	57.85	39.81	12.74	66.21	100	0	P	H
		17235	45.62	-22.58	68.2	53.86	41.02	16.76	66.02	100	0	P	H
		11490	44.41	-29.59	74	58.07	39.81	12.74	66.21	100	0	P	V
		17235	46.68	-21.52	68.2	54.92	41.02	16.76	66.02	100	0	P	V
802.11a CH 157 5785MHz		11570	44.19	-29.81	74	57.89	39.69	12.8	66.19	100	0	P	H
		17355	46.67	-21.53	68.2	54.11	41.58	16.86	65.88	100	0	P	H
		11570	44.8	-29.2	74	58.5	39.69	12.8	66.19	100	0	P	V
		17355	46.6	-21.6	68.2	54.04	41.58	16.86	65.88	100	0	P	V
802.11a CH 165 5825MHz		11650	44.56	-29.44	74	58.28	39.58	12.87	66.17	100	0	P	H
		17475	46.76	-21.44	68.2	53.4	42.14	16.96	65.74	100	0	P	H
		11650	44.46	-29.54	74	58.18	39.58	12.87	66.17	100	0	P	V
		17475	46.58	-21.62	68.2	53.22	42.14	16.96	65.74	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 149 5745MHz		5621.6	47.7	-20.5	68.2	39.38	32.22	8.64	32.54	104	112	P	H
		5694.4	49.39	-51.68	101.07	40.78	32.29	8.89	32.57	104	112	P	H
		5717.8	56.03	-54.15	110.18	47.28	32.32	9.01	32.58	104	112	P	H
		5724.8	58.32	-63.42	121.74	49.57	32.32	9.01	32.58	104	112	P	H
	*	5745	105.04	-	-	96.22	32.34	9.07	32.59	104	112	P	H
	*	5745	97.84	-	-	89.02	32.34	9.07	32.59	104	112	A	H
		5631.4	48.98	-19.22	68.2	40.61	32.22	8.7	32.55	341	64	P	V
		5699.2	52.67	-51.94	104.61	44.06	32.29	8.89	32.57	341	64	P	V
		5719	59.45	-51.07	110.52	50.7	32.32	9.01	32.58	341	64	P	V
		5724.6	61.9	-59.39	121.29	53.15	32.32	9.01	32.58	341	64	P	V
	*	5745	109.22	-	-	100.4	32.34	9.07	32.59	341	64	P	V
	*	5745	101.73	-	-	92.91	32.34	9.07	32.59	341	64	A	V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5647.2	47.1	-21.1	68.2	38.64	32.24	8.77	32.55	102	109	P	H
		5673.2	48.42	-36.99	85.41	39.88	32.27	8.83	32.56	102	109	P	H
		5708.4	50.01	-57.54	107.55	41.33	32.31	8.95	32.58	102	109	P	H
		5724.8	49.17	-72.57	121.74	40.42	32.32	9.01	32.58	102	109	P	H
	*	5785	106.31	-	-	97.34	32.38	9.2	32.61	102	109	P	H
	*	5785	98.82	-	-	89.85	32.38	9.2	32.61	102	109	A	H
		5852.8	50.56	-65.26	115.82	41.59	32.44	9.16	32.63	102	109	P	H
		5856.2	51.33	-59.13	110.46	42.34	32.46	9.16	32.63	102	109	P	H
		5876.6	49.43	-54.58	104.01	40.46	32.48	9.13	32.64	102	109	P	H
		5938.4	50.22	-17.98	68.2	41.34	32.53	9.01	32.66	102	109	P	H
		5608.4	49.61	-18.59	68.2	41.37	32.2	8.58	32.54	338	66	P	V
		5698.6	48.98	-55.19	104.17	40.37	32.29	8.89	32.57	338	66	P	V
		5716.4	50.34	-59.45	109.79	41.66	32.31	8.95	32.58	338	66	P	V
		5724.2	51.37	-69.01	120.38	42.62	32.32	9.01	32.58	338	66	P	V
	*	5785	108.42	-	-	99.45	32.38	9.2	32.61	338	66	P	V
	*	5785	101.3	-	-	92.33	32.38	9.2	32.61	338	66	A	V
		5854.2	50.45	-62.17	112.62	41.46	32.46	9.16	32.63	338	66	P	V
		5866.6	51.66	-55.89	107.55	42.71	32.46	9.13	32.64	338	66	P	V
	5895.8	51.29	-38.48	89.77	42.33	32.5	9.1	32.64	338	66	P	V	
	5949.4	49.34	-18.86	68.2	40.44	32.55	9.01	32.66	338	66	P	V	



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 165 5825MHz	*	5825	107.21	-	-	98.17	32.43	9.23	32.62	100	113	P	H
	*	5825	99.61	-	-	90.57	32.43	9.23	32.62	100	113	A	H
		5850.2	56.1	-65.64	121.74	47.13	32.44	9.16	32.63	100	113	P	H
		5864.8	56.5	-51.55	108.05	47.55	32.46	9.13	32.64	100	113	P	H
		5894.2	52.99	-37.96	90.95	44.03	32.5	9.1	32.64	100	113	P	H
		5942	50.06	-18.14	68.2	41.16	32.55	9.01	32.66	100	113	P	H
	*	5825	109.38	-	-	100.34	32.43	9.23	32.62	368	69	P	V
	*	5825	100.82	-	-	91.78	32.43	9.23	32.62	368	69	A	V
		5850	58.05	-64.15	122.2	49.08	32.44	9.16	32.63	368	69	P	V
		5856.4	57.38	-53.03	110.41	48.39	32.46	9.16	32.63	368	69	P	V
		5875.2	51.79	-53.26	105.05	42.82	32.48	9.13	32.64	368	69	P	V
		5928	49.12	-19.08	68.2	40.2	32.53	9.04	32.65	368	69	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 149 5745MHz		11490	44.44	-29.56	74	58.1	39.81	12.74	66.21	100	0	P	H
		17235	46.46	-21.74	68.2	54.7	41.02	16.76	66.02	100	0	P	H
		11490	44.48	-29.52	74	58.14	39.81	12.74	66.21	100	0	P	V
		17235	45.61	-22.59	68.2	53.85	41.02	16.76	66.02	100	0	P	V
802.11n HT20 CH 157 5785MHz		11570	44.4	-29.6	74	58.1	39.69	12.8	66.19	100	0	P	H
		17355	45.63	-22.57	68.2	53.07	41.58	16.86	65.88	100	0	P	H
		11570	43.66	-30.34	74	57.36	39.69	12.8	66.19	100	0	P	V
		17355	45.39	-22.81	68.2	52.83	41.58	16.86	65.88	100	0	P	V
802.11n HT20 CH 165 5825MHz		11650	44.85	-29.15	74	58.57	39.58	12.87	66.17	100	0	P	H
		17475	46.77	-21.43	68.2	53.41	42.14	16.96	65.74	100	0	P	H
		11650	44.94	-29.06	74	58.66	39.58	12.87	66.17	100	0	P	V
		17475	46.43	-21.77	68.2	53.07	42.14	16.96	65.74	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 151 5755MHz		5638.2	47.62	-20.58	68.2	39.23	32.24	8.7	32.55	100	112	P	H
		5695	48.72	-52.79	101.51	40.11	32.29	8.89	32.57	100	112	P	H
		5717.6	57.5	-52.63	110.13	48.75	32.32	9.01	32.58	100	112	P	H
		5723.2	58.61	-59.49	118.1	49.86	32.32	9.01	32.58	100	112	P	H
	*	5755	101.78	-	-	92.87	32.36	9.14	32.59	100	112	P	H
	*	5755	93.01	-	-	84.1	32.36	9.14	32.59	100	112	A	H
		5851.8	50.4	-67.7	118.1	41.43	32.44	9.16	32.63	100	112	P	H
		5861	50.29	-58.83	109.12	41.31	32.46	9.16	32.64	100	112	P	H
		5915.8	49.63	-25.35	74.98	40.73	32.51	9.04	32.65	100	112	P	H
		5931.8	49.1	-19.1	68.2	40.18	32.53	9.04	32.65	100	112	P	H
		5633	48.48	-19.72	68.2	40.09	32.24	8.7	32.55	340	65	P	V
		5697	52.46	-50.53	102.99	43.85	32.29	8.89	32.57	340	65	P	V
		5716.8	60.85	-49.06	109.91	52.17	32.31	8.95	32.58	340	65	P	V
		5723.8	60.39	-59.07	119.46	51.64	32.32	9.01	32.58	340	65	P	V
	*	5755	104.35	-	-	95.44	32.36	9.14	32.59	340	65	P	V
	*	5755	96.43	-	-	87.52	32.36	9.14	32.59	340	65	A	V
		5852.2	49.22	-67.96	117.18	40.25	32.44	9.16	32.63	340	65	P	V
		5872.4	50.66	-55.27	105.93	41.69	32.48	9.13	32.64	340	65	P	V
	5904.6	50.11	-33.15	83.26	41.17	32.51	9.07	32.64	340	65	P	V	
	5948.6	49.06	-19.14	68.2	40.16	32.55	9.01	32.66	340	65	P	V	



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5631	47.8	-20.4	68.2	39.43	32.22	8.7	32.55	100	112	P	H
		5658.6	48.26	-26.33	74.59	39.79	32.26	8.77	32.56	100	112	P	H
		5702.6	48.63	-57.3	105.93	39.94	32.31	8.95	32.57	100	112	P	H
		5724.8	48.96	-72.78	121.74	40.21	32.32	9.01	32.58	100	112	P	H
	*	5795	102.12	-	-	93.08	32.39	9.26	32.61	100	112	P	H
	*	5795	93.79	-	-	84.75	32.39	9.26	32.61	100	112	A	H
		5851.6	51.34	-67.21	118.55	42.37	32.44	9.16	32.63	100	112	P	H
		5862.2	52.8	-55.98	108.78	43.85	32.46	9.13	32.64	100	112	P	H
		5883	51.7	-47.56	99.26	42.76	32.48	9.1	32.64	100	112	P	H
		5934.2	49.24	-18.96	68.2	40.35	32.53	9.01	32.65	100	112	P	H
		5629.6	48.5	-19.7	68.2	40.13	32.22	8.7	32.55	337	62	P	V
		5691	49.25	-49.31	98.56	40.64	32.29	8.89	32.57	337	62	P	V
		5711.6	49.76	-58.69	108.45	41.08	32.31	8.95	32.58	337	62	P	V
		5722.6	50.04	-66.69	116.73	41.29	32.32	9.01	32.58	337	62	P	V
	*	5795	103.85	-	-	94.81	32.39	9.26	32.61	337	62	P	V
	*	5795	96.12	-	-	87.08	32.39	9.26	32.61	337	62	A	V
		5855	50.52	-60.28	110.8	41.53	32.46	9.16	32.63	337	62	P	V
		5859.8	51.96	-57.49	109.45	42.98	32.46	9.16	32.64	337	62	P	V
	5897	50.71	-38.17	88.88	41.75	32.5	9.1	32.64	337	62	P	V	
	5931.2	48.98	-19.22	68.2	40.06	32.53	9.04	32.65	337	62	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 151		11510	44.28	-29.72	74	57.93	39.8	12.75	66.2	100	0	P	H
		17265	45.11	-23.09	68.2	53.12	41.18	16.79	65.98	100	0	P	H
5755MHz		11510	45.19	-28.81	74	58.84	39.8	12.75	66.2	100	0	P	V
		17265	45.05	-23.15	68.2	53.06	41.18	16.79	65.98	100	0	P	V
802.11n HT40 CH 159		11590	44.13	-29.87	74	57.84	39.66	12.81	66.18	100	0	P	H
		17385	45.41	-22.79	68.2	52.62	41.74	16.89	65.84	100	0	P	H
5795MHz		11590	43.6	-30.4	74	57.31	39.66	12.81	66.18	100	0	P	V
		17385	46.74	-21.46	68.2	53.95	41.74	16.89	65.84	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT80 CH 155 5775MHz		5634.4	48.93	-19.27	68.2	40.54	32.24	8.7	32.55	100	111	P	H
		5698.6	53.9	-50.27	104.17	45.29	32.29	8.89	32.57	100	111	P	H
		5715.6	56.04	-53.53	109.57	47.36	32.31	8.95	32.58	100	111	P	H
		5724.8	57.37	-64.37	121.74	48.62	32.32	9.01	32.58	100	111	P	H
	*	5775	98.82	-	-	89.84	32.38	9.2	32.6	100	111	P	H
	*	5775	90.74	-	-	81.76	32.38	9.2	32.6	100	111	A	H
		5850.8	55.66	-64.72	120.38	46.69	32.44	9.16	32.63	100	111	P	H
		5870.2	54.87	-51.67	106.54	45.92	32.46	9.13	32.64	100	111	P	H
		5885.8	51.78	-45.4	97.18	42.84	32.48	9.1	32.64	100	111	P	H
		5937.8	52	-16.2	68.2	43.12	32.53	9.01	32.66	100	111	P	H
		5634.8	50.27	-17.93	68.2	41.88	32.24	8.7	32.55	338	64	P	V
		5683.6	57.09	-36.01	93.1	48.48	32.29	8.89	32.57	338	64	P	V
		5718.6	60.75	-49.66	110.41	52	32.32	9.01	32.58	338	64	P	V
		5723.4	60.49	-58.06	118.55	51.74	32.32	9.01	32.58	338	64	P	V
	*	5775	102.87	-	-	93.89	32.38	9.2	32.6	338	64	P	V
	*	5775	93.6	-	-	84.62	32.38	9.2	32.6	338	64	A	V
		5850	53.03	-69.17	122.2	44.06	32.44	9.16	32.63	338	64	P	V
		5863.4	52.84	-55.61	108.45	43.89	32.46	9.13	32.64	338	64	P	V
		5909.6	52.39	-27.17	79.56	43.46	32.51	9.07	32.65	338	64	P	V
		5926.4	51.49	-16.71	68.2	42.57	32.53	9.04	32.65	338	64	P	V

<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.
---------------	---



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11550	44.3	-29.7	74	57.99	39.72	12.78	66.19	100	0	P	H
VHT80		17325	46.21	-21.99	68.2	53.88	41.42	16.83	65.92	100	0	P	H
CH 155		11550	45.68	-28.32	74	59.37	39.72	12.78	66.19	100	0	P	V
5775MHz		17325	46.19	-22.01	68.2	53.86	41.42	16.83	65.92	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
5GHz 802.11a LF		102.36	29.88	-13.62	43.5	44.98	16.32	1.29	32.71	-	-	P	H
		195.78	31.71	-11.79	43.5	47.56	14.91	1.88	32.64	100	0	P	H
		212.52	28.11	-15.39	43.5	43.64	15.16	1.94	32.63	-	-	P	H
		563.9	26.74	-19.26	46	30.39	26.02	3.09	32.76	-	-	P	H
		748.7	30.12	-15.88	46	31.08	28.26	3.5	32.72	-	-	P	H
		937	32.05	-13.95	46	29.62	30.06	4.04	31.67	-	-	P	H
		42.42	29.71	-10.29	40	43.68	17.9	0.9	32.77	100	0	P	V
		66.72	29.6	-10.4	40	49.18	12.12	1.04	32.74	-	-	P	V
		194.97	27.91	-15.59	43.5	43.78	14.89	1.88	32.64	-	-	P	V
		519.8	24.88	-21.12	46	30.62	24.01	2.93	32.68	-	-	P	V
		725.6	28.73	-17.27	46	30.56	27.46	3.46	32.75	-	-	P	V
	846	30.73	-15.27	46	30.49	28.88	3.75	32.39	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Yun Huang, Daniel Lee, and JC Liang	Temperature :	18~22°C
		Relative Humidity :	48~52%

**Note symbol**



-L	Low channel location
-R	High channel location






**Band 4 - 5725~5850MHz**  
**WIFI 802.11a (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Fundamental
<b>Peak</b>	<p>           Site : 03CH10-HY            Condition : PEAK_8E(84)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 33         </p>	<p>           Site : 03CH10-HY            Condition : PEAK(LINE) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 33         </p>


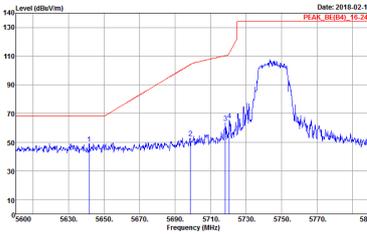
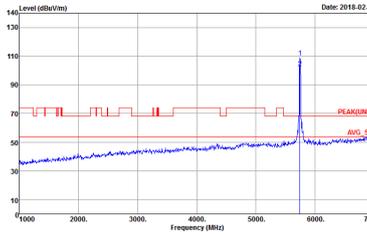


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH10-11Y          Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL          Detector : Peak          Project : 813035          Mode : 33</p>	 <p>Site : 03CH10-11Y          Condition : PEAK(LINII) 3m HORN 9120D-HF VERTICAL          Detector : Peak          Project : 813035          Mode : 33</p>

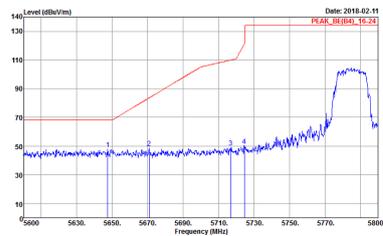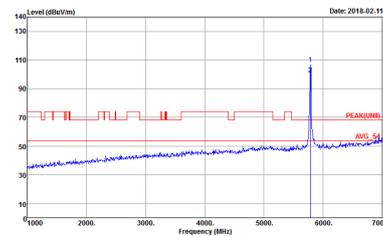
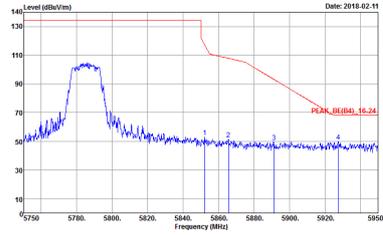


WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 813035            Mode : 34</p>	 <p>Site : 03CH10-HY            Condition : PEAK(LINII) 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 813035            Mode : 34</p>
<p><b>Peak</b></p>	 <p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 813035            Mode : 34</p>	<p>Left blank</p>

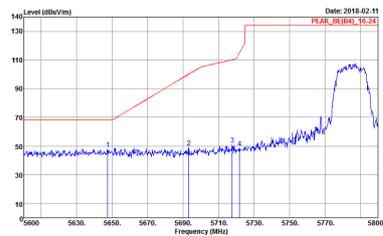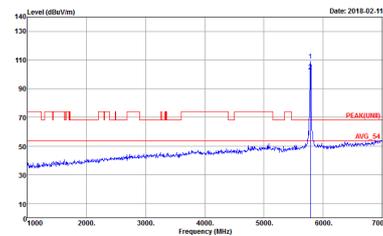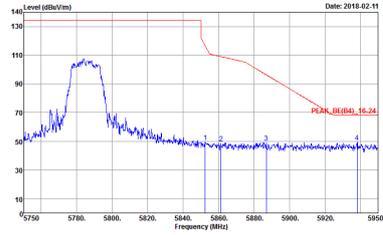

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 34</p>	 <p>Site : 03CH10-HY            Condition : PEAK(LINII) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 34</p>
<p><b>Peak</b></p>	 <p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 34</p>	<p>Left blank</p>

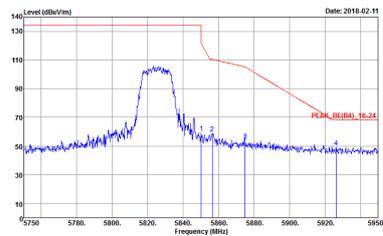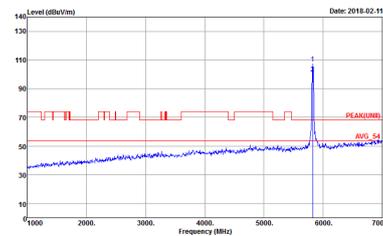

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
<b>Peak</b>	 <p>Site : 03CH10-11Y            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 35</p>	 <p>Site : 03CH10-11Y            Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 35</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH10-11Y            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 35</p>	<p>Site : 03CH10-11Y            Condition : PEAK(LINII) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 35</p>



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Fundamental
<b>Peak</b>	<p>Site : 03CH10-HY            Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 36</p>	<p>Site : 03CH10-HY            Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 36</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH10-11Y            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 36</p>	<p>Site : 03CH10-11Y            Condition : PEAK(LINII) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 36</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 813035            Mode : 37</p>	<p>Site : 03CH10-HY            Condition : PEAK(LINII) 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 813035            Mode : 37</p>
	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 813035            Mode : 37</p>	Left blank





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 37</p>	<p>Site : 03CH10-HY            Condition : PEAK(LINII) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 37</p>
	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 37</p>	Left blank






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH10-11Y          Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL          Detector : Peak          Project : 813035          Mode : 3B</p>	<p>Site : 03CH10-11Y          Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL          Detector : Peak          Project : 813035          Mode : 3B</p>

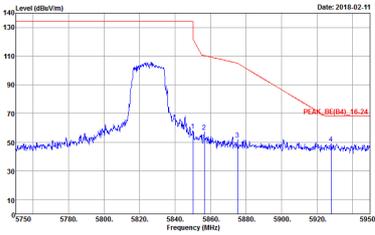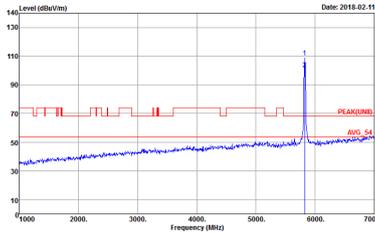

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH10-11Y          Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL          Detector : Peak          Project : 813035          Mode : 3B</p>	 <p>Site : 03CH10-11Y          Condition : PEAK(LINII) 3m HORN 9120D-HF VERTICAL          Detector : Peak          Project : 813035          Mode : 3B</p>



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT40 (Band Edge @ 3m)**

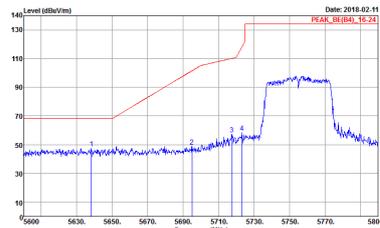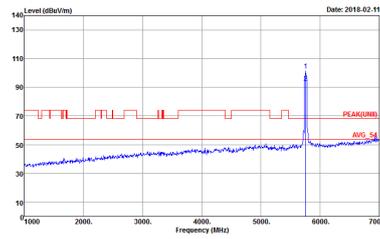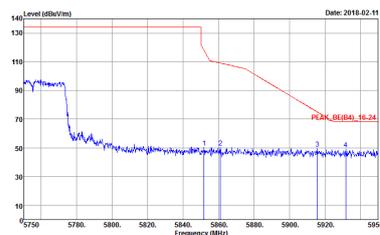WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH10-IHY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-IHF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 39</p>	 <p>Site : 03CH10-IHY            Condition : PEAK(UNIT) 3m HORN 9120D-IHF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 39</p>
<p><b>Peak</b></p>	 <p>Site : 03CH10-IHY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-IHF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 39</p>	<p align="center"><b>Left blank</b></p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 39</p>	<p>Site : 03CH10-HY            Condition : PEAK(LINII) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 39</p>
	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 39</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 813035            Mode : 40</p>	<p>Site : 03CH10-HY            Condition : PEAK(LINB) 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 813035            Mode : 40</p>
Peak	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 813035            Mode : 40</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 40</p>	<p>Site : 03CH10-HY            Condition : PEAK(LINII) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 40</p>
	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 40</p>	Left blank



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 41</p>	<p>Site : 03CH10-HY            Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 41</p>
	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 41</p>	Left blank





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 813035            Mode : 41</p>	<p>Site : 03CH10-HY            Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 813035            Mode : 41</p>
	<p>Site : 03CH10-HY            Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 813035            Mode : 41</p>	Left blank





**Band 4 - 5725~5850MHz**  
**WIFI 802.11a (Harmonic @ 3m)**

<b>WIFI</b>	<b>Band 4 5725~5850MHz Harmonic @ 3m</b>	
<b>ANT</b>	<b>802.11a CH149 5745MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	<p>Site : 03CH10-HY          Condition : PEAK(LINE) 3m HORN 9120D-4HF HORIZONTAL          Detector : Peak          Project : 813035          Mode : 33</p>	<p>Site : 03CH10-HY          Condition : PEAK(LINE) 3m HORN 9120D-4HF VERTICAL          Detector : Peak          Project : 813035          Mode : 33</p>

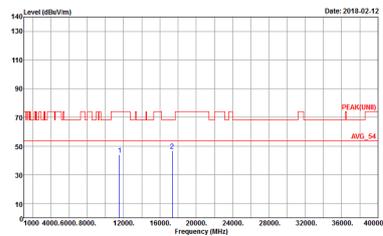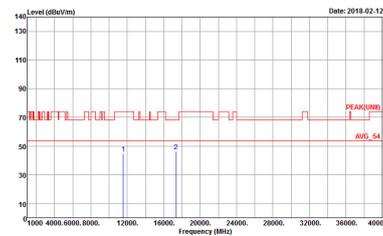

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH10-111 Condition : PEA(LUNII) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 813035 Mode : -34</p>	 <p>Site : 03CH10-111 Condition : PEA(LUNII) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 813035 Mode : -34</p>

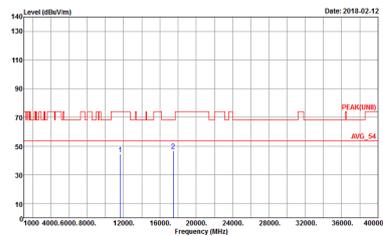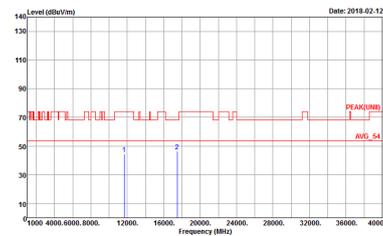

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH10-111 Condition : PEA(LINEI) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 813035 Mode : 35</p>	 <p>Site : 03CH10-111 Condition : PEA(LINEI) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 813035 Mode : 35</p>





**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Vertical
<b>Peak</b> <b>Avg.</b>	<p>Site : 03CH10-HY            Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 36</p>	<p>Site : 03CH10-HY            Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 36</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH10-111 Condition : PEAK(LINE) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 813035 Mode : 37</p>	<p>Site : 03CH10-111 Condition : PEAK(LINE) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 813035 Mode : 37</p>

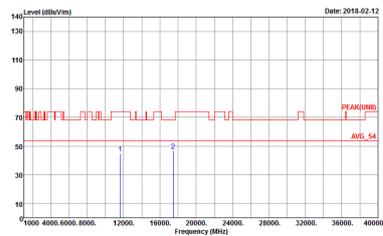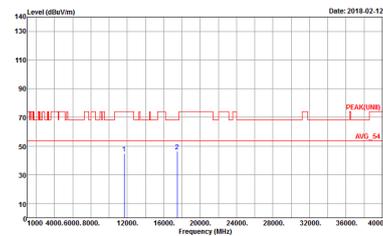



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH10-111 Condition : PEAK(LINE) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 813035 Mode : 38</p>	 <p>Site : 03CH10-111 Condition : PEAK(LINE) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 813035 Mode : 38</p>



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 2 columns: WIFI, ANT. Sub-headers: Horizontal, Vertical. Contains two spectral plots and technical details for Peak and Avg. measurements.

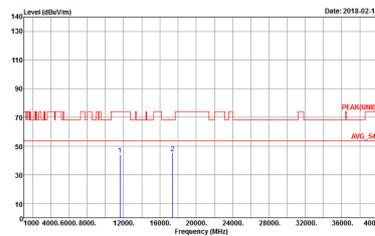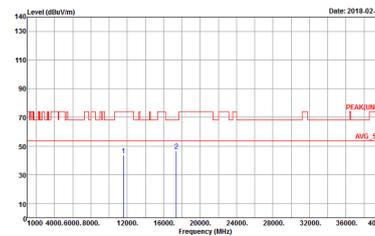

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Vertical
<p>Peak Avg.</p>	 <p>Site : 03CH10-111 Condition : PEAK(LINE) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 813035 Mode : -40</p>	 <p>Site : 03CH10-111 Condition : PEAK(LINE) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 813035 Mode : -40</p>



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH10-HY            Condition : PEAK(UNIT) 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 813035            Mode : 41</p>	<p>Site : 03CH10-HY            Condition : PEAK(UNIT) 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 813035            Mode : 41</p>



Emission below 1GHz  
5GHz WIFI 802.11ac VHT80 (LF)

WIFI	5GHz 5725~5850MHz	
ANT	802.11ac VHT80 LF	
1	Horizontal	Vertical
QP / Peak	<p>Site : 03CH10-HY Condition : QP 3m BE-LOG 6111D-LF HORIZONTAL Detector : Peak Project : 813035 Mode : 42</p>	<p>Site : 03CH10-HY Condition : QP 3m BE-LOG 6111D-LF VERTICAL Detector : Peak Project : 813035 Mode : 42</p>




### Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
802.11a	89.74	1400	0.71	1kHz	0.47
5GHz 802.11n HT20	89.12	1310	0.76	1kHz	0.50
5GHz 802.11n HT40	89.12	1310	0.76	1kHz	0.50
5GHz 802.11n VHT20	89.19	1320	0.76	1kHz	0.50
5GHz 802.11n VHT40	90.29	948	1.05	3kHz	0.44
5GHz 802.11n VHT80	85.71	648	1.54	3kHz	0.67




802.11a

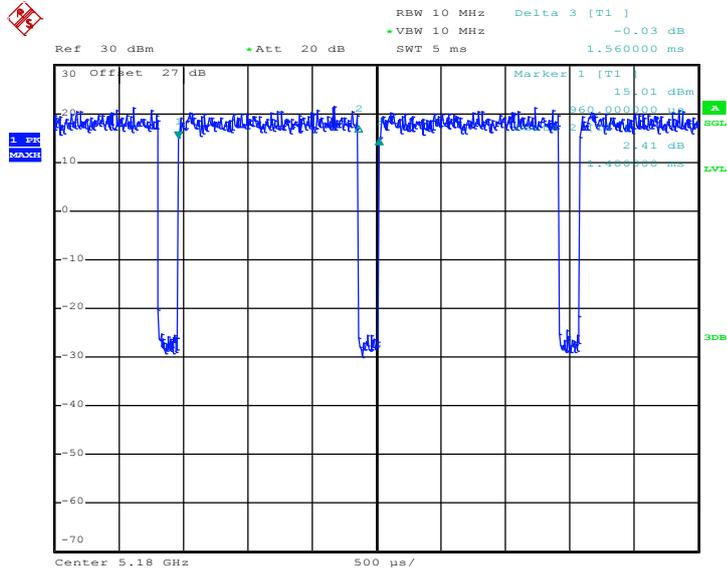

Date: 7.FEB.2018 16:21:10


802.11n HT20

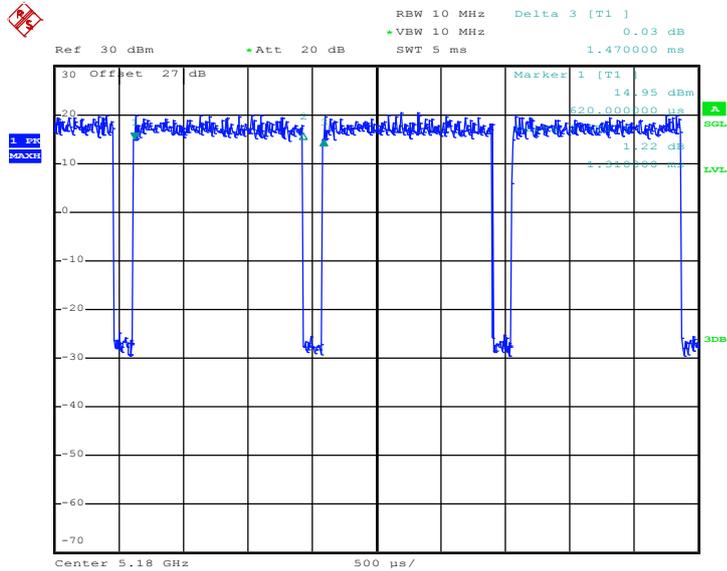

Date: 7.FEB.2018 16:53:40




802.11n HT40

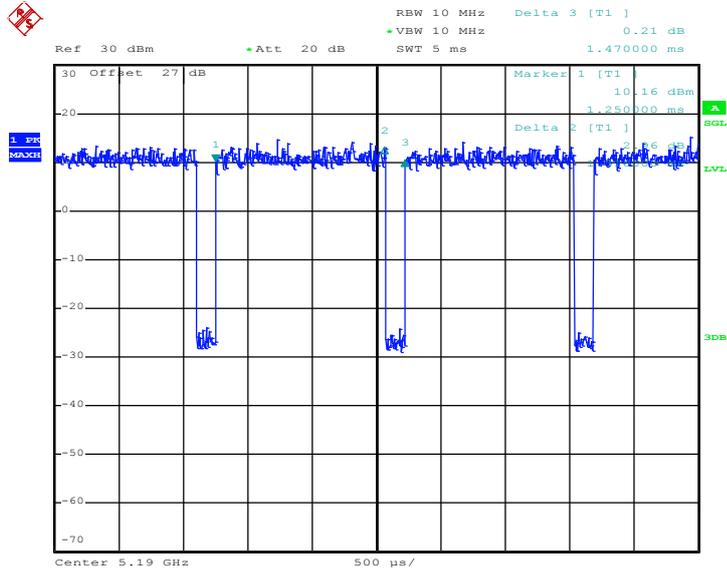

Date: 7.FEB.2018 17:12:07


802.11ac VHT20

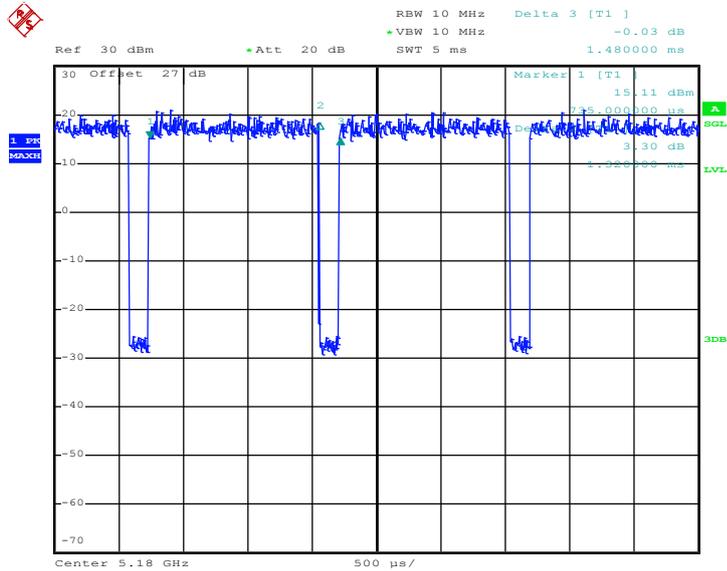

Date: 7.FEB.2018 17:14:39




802.11ac VHT40

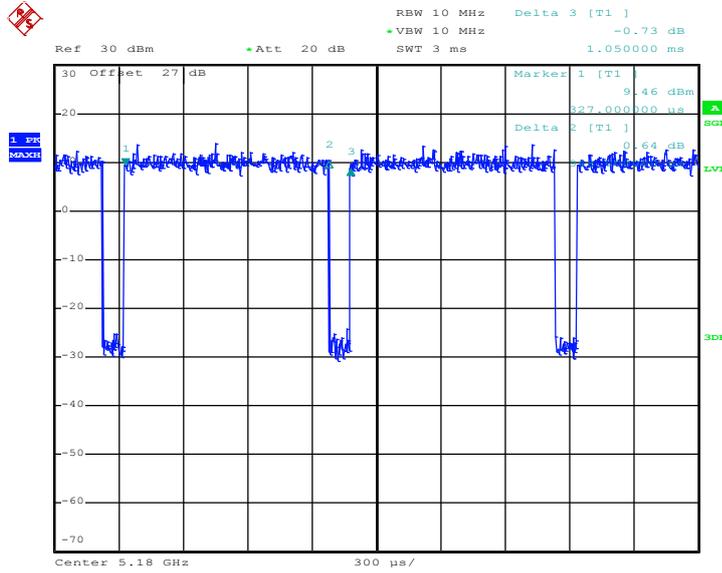

Date: 7.FEB.2018 17:24:08

802.11ac VHT80

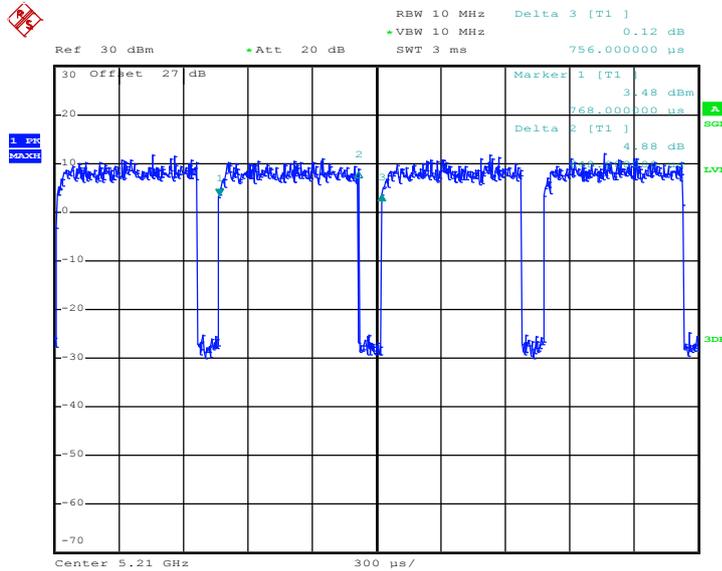

Date: 7.FEB.2018 17:57:59

## Appendix F. Setup Photographs

### <Conducted Emission>

Remote View






Rear View



<Radiated Emission>

X Plane

LF

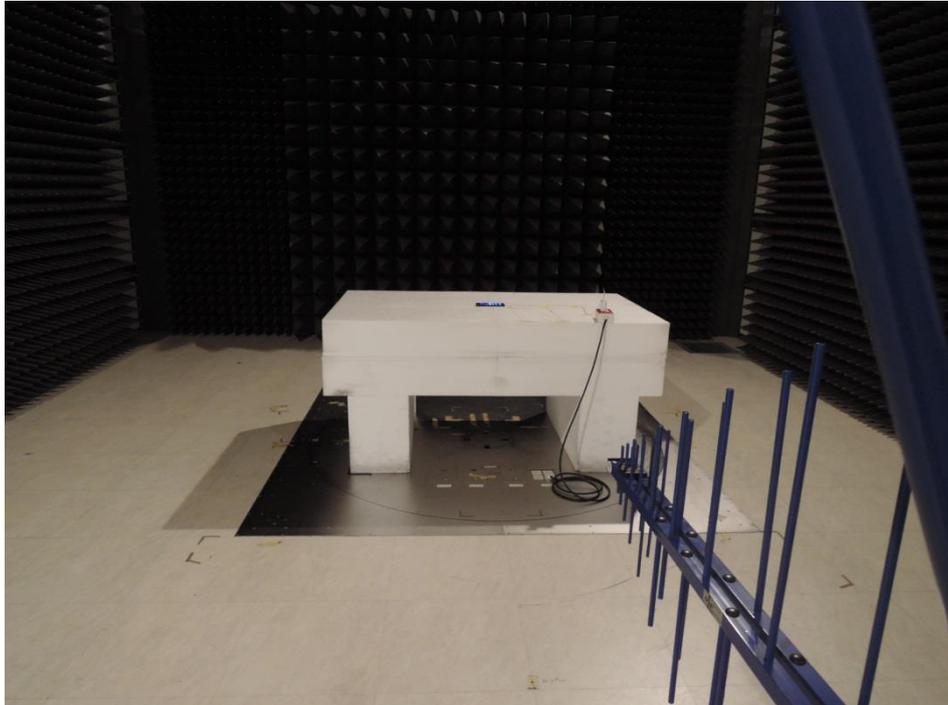

HF

