




2.24 11N20m_H@Ant 2


Pref:




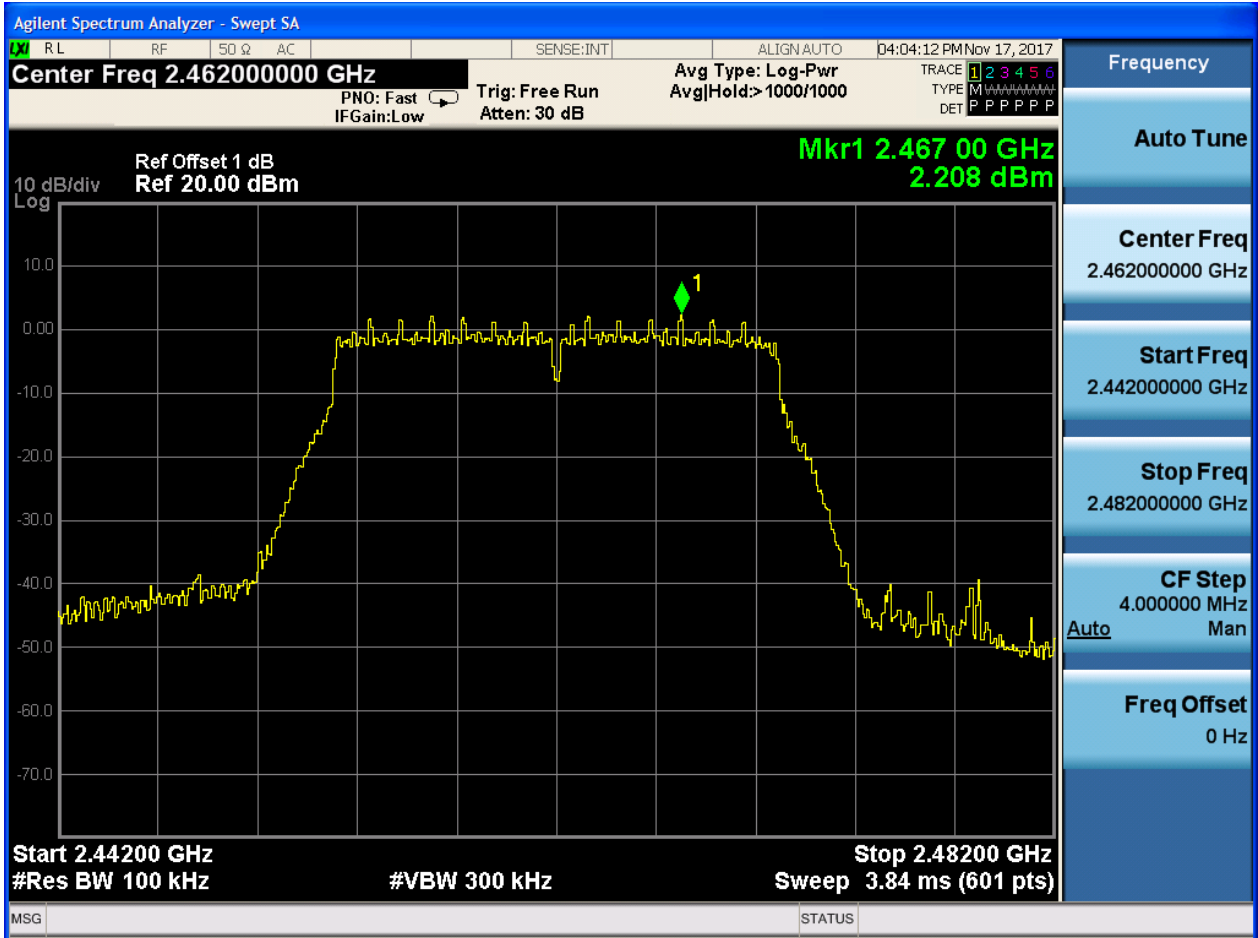



Puw:




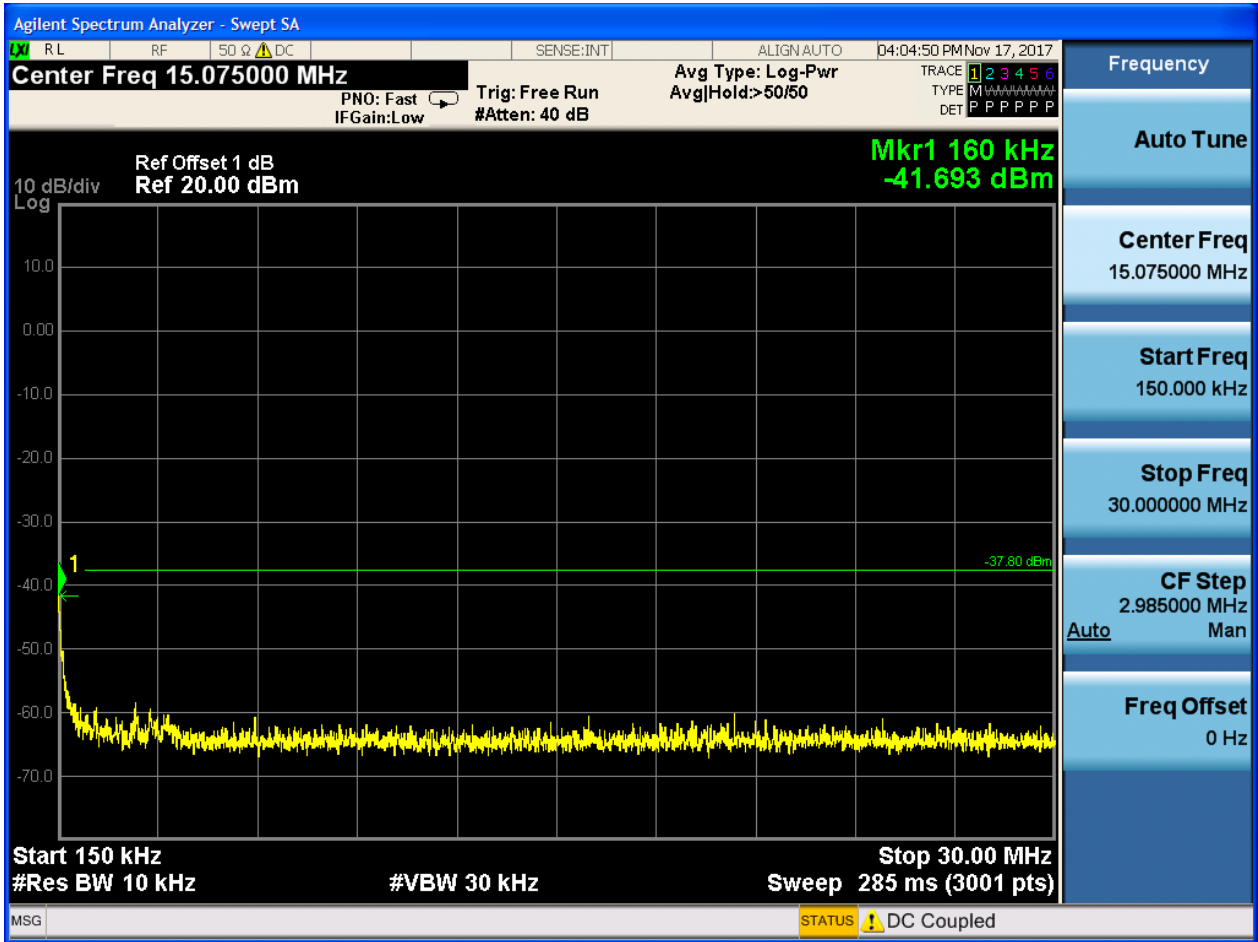

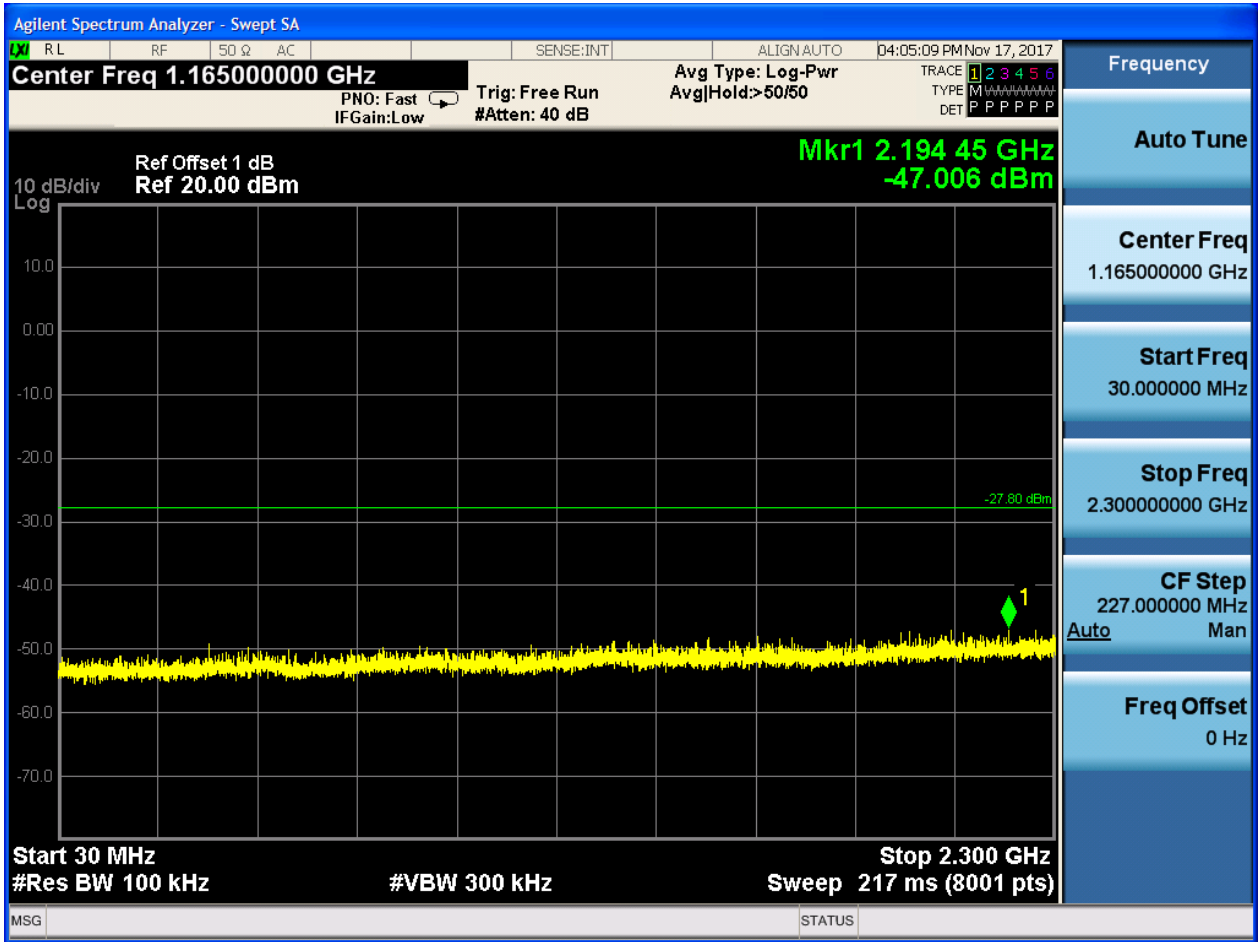

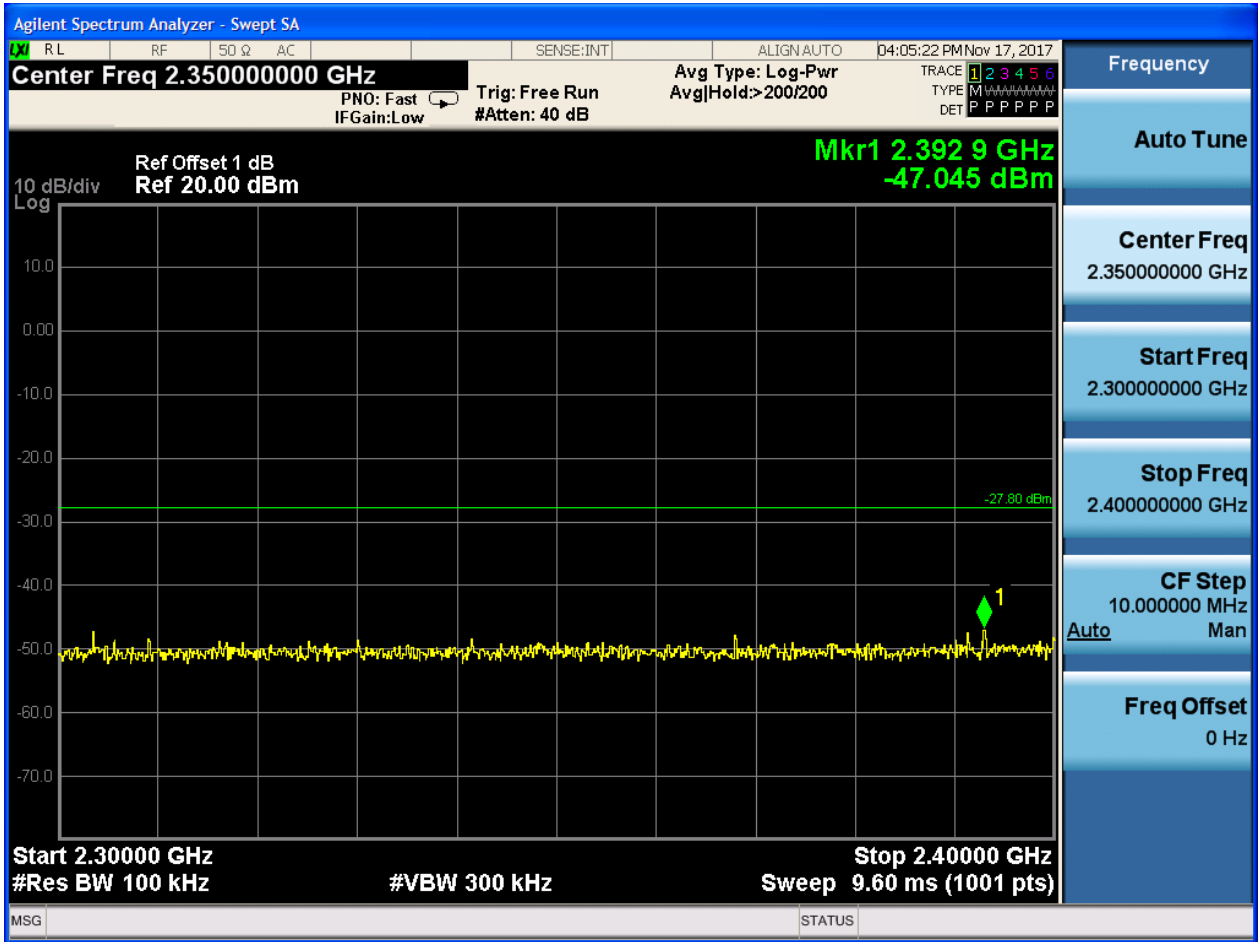

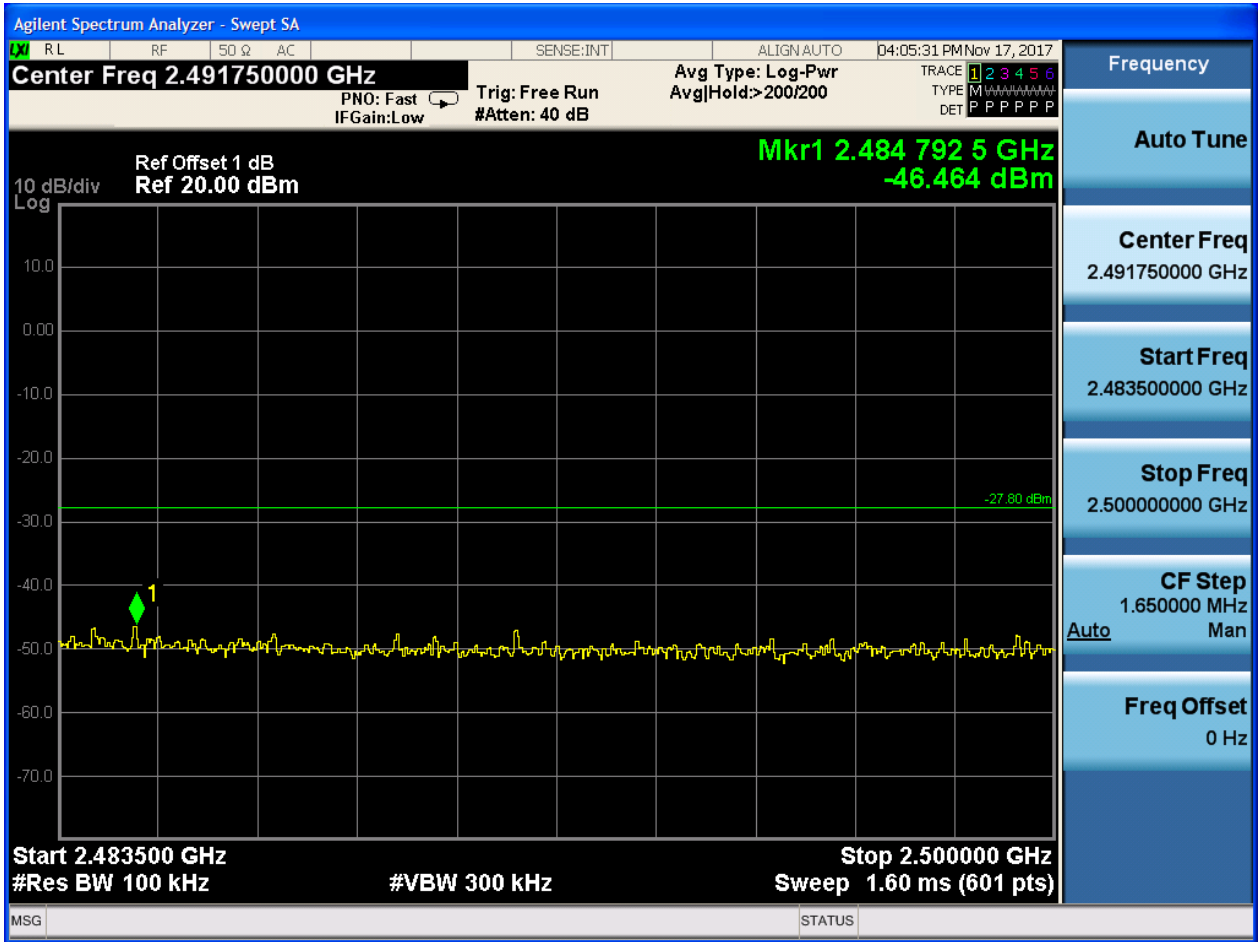


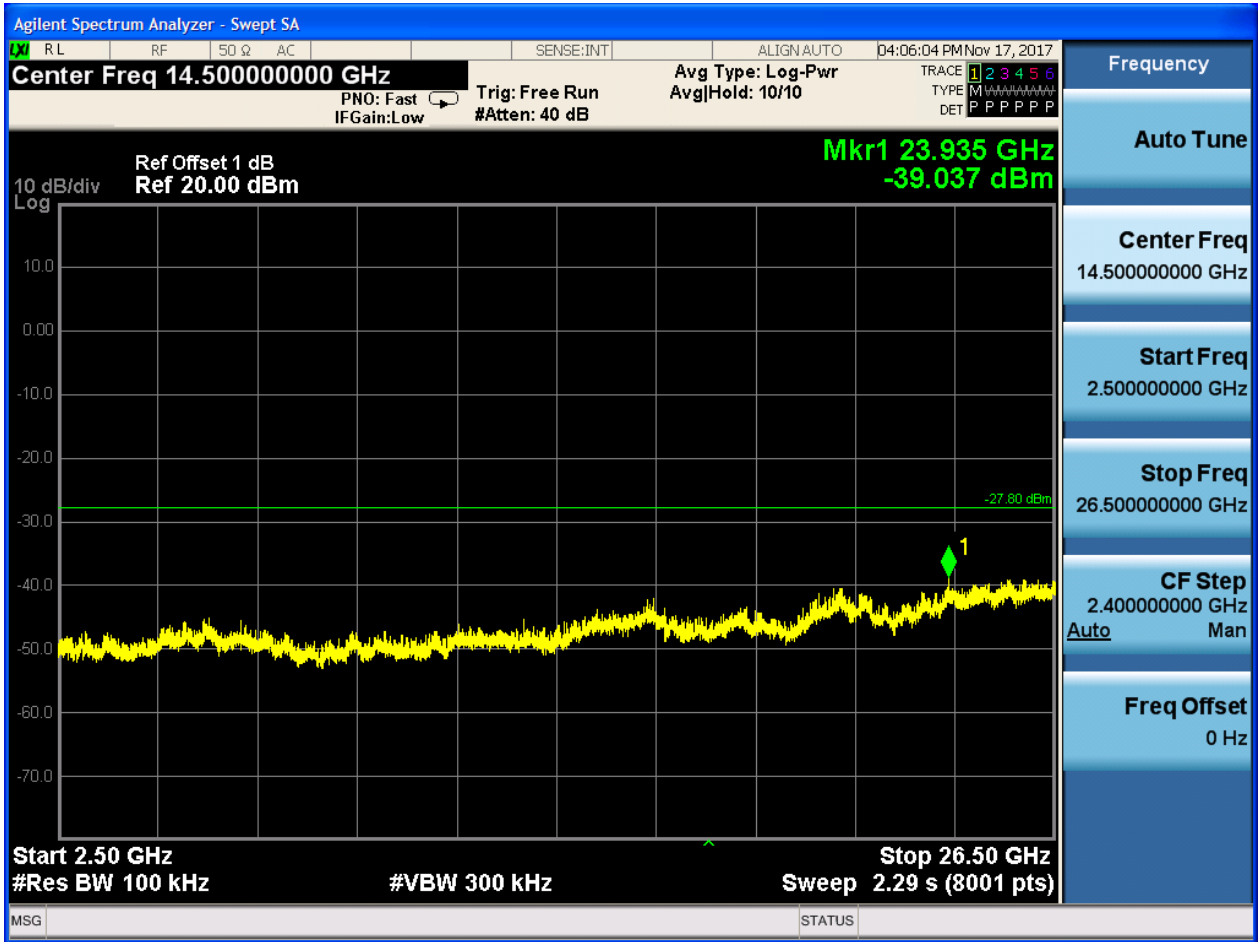



2.25 11G CDD__L@Ant 1


Pref:

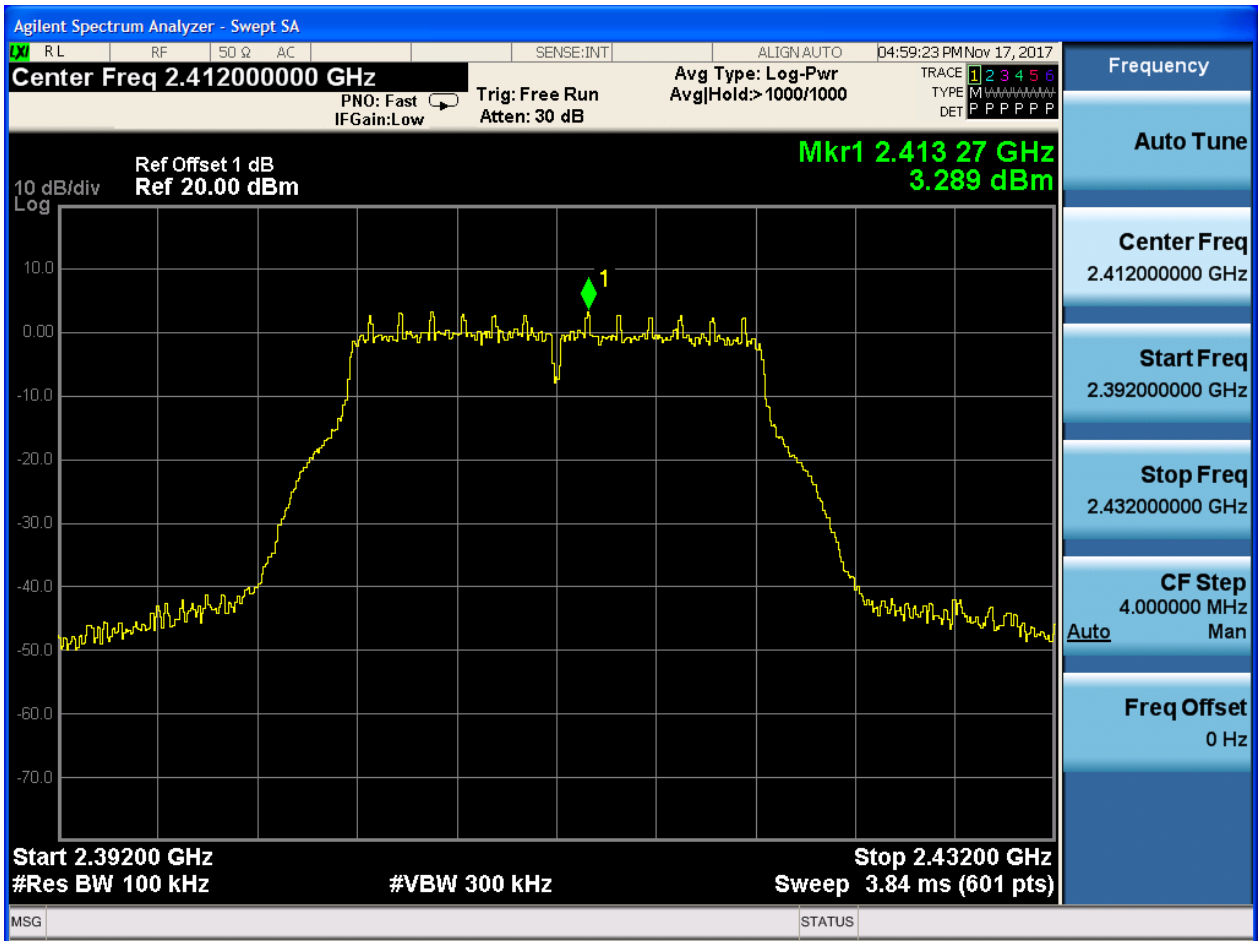






Puw:




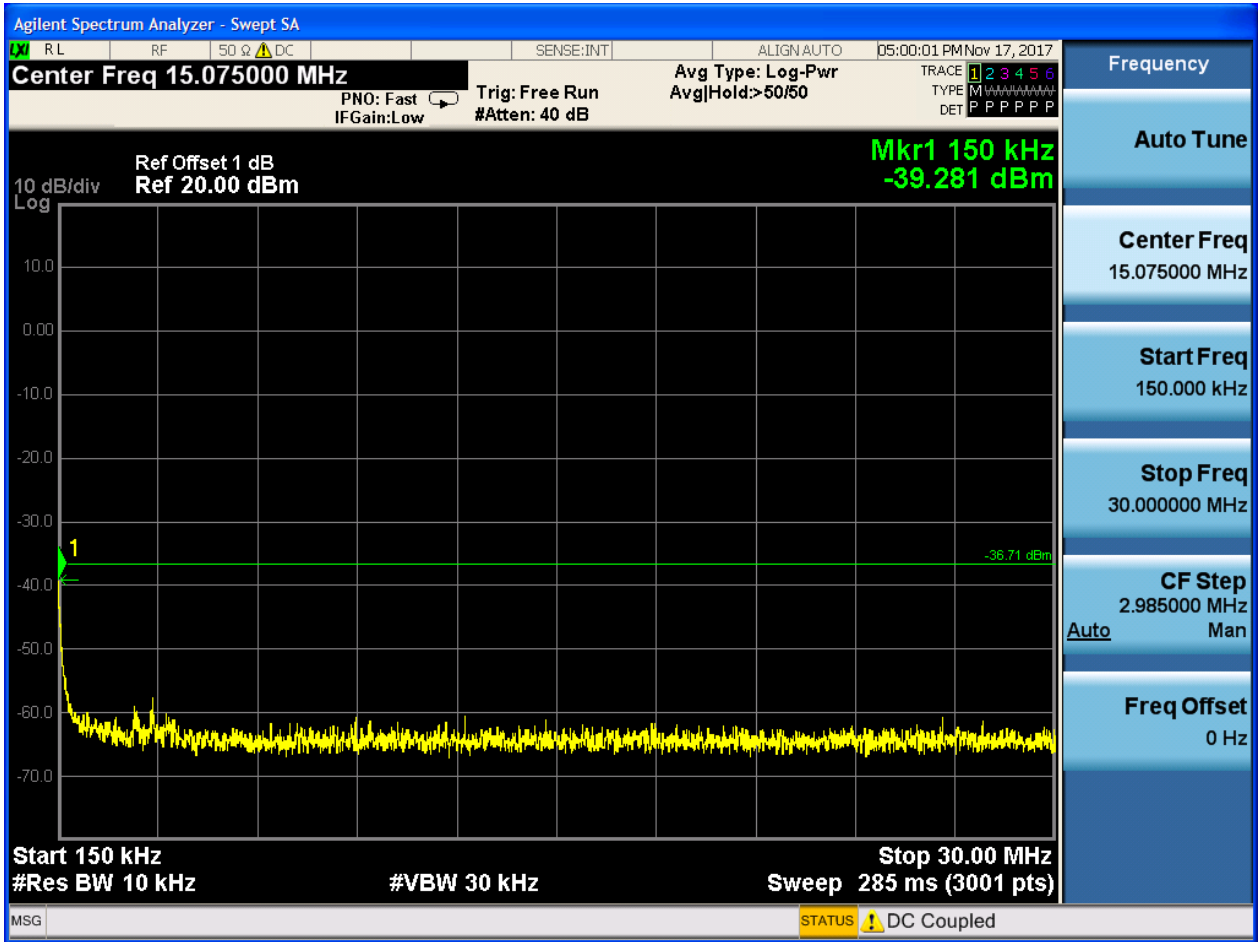

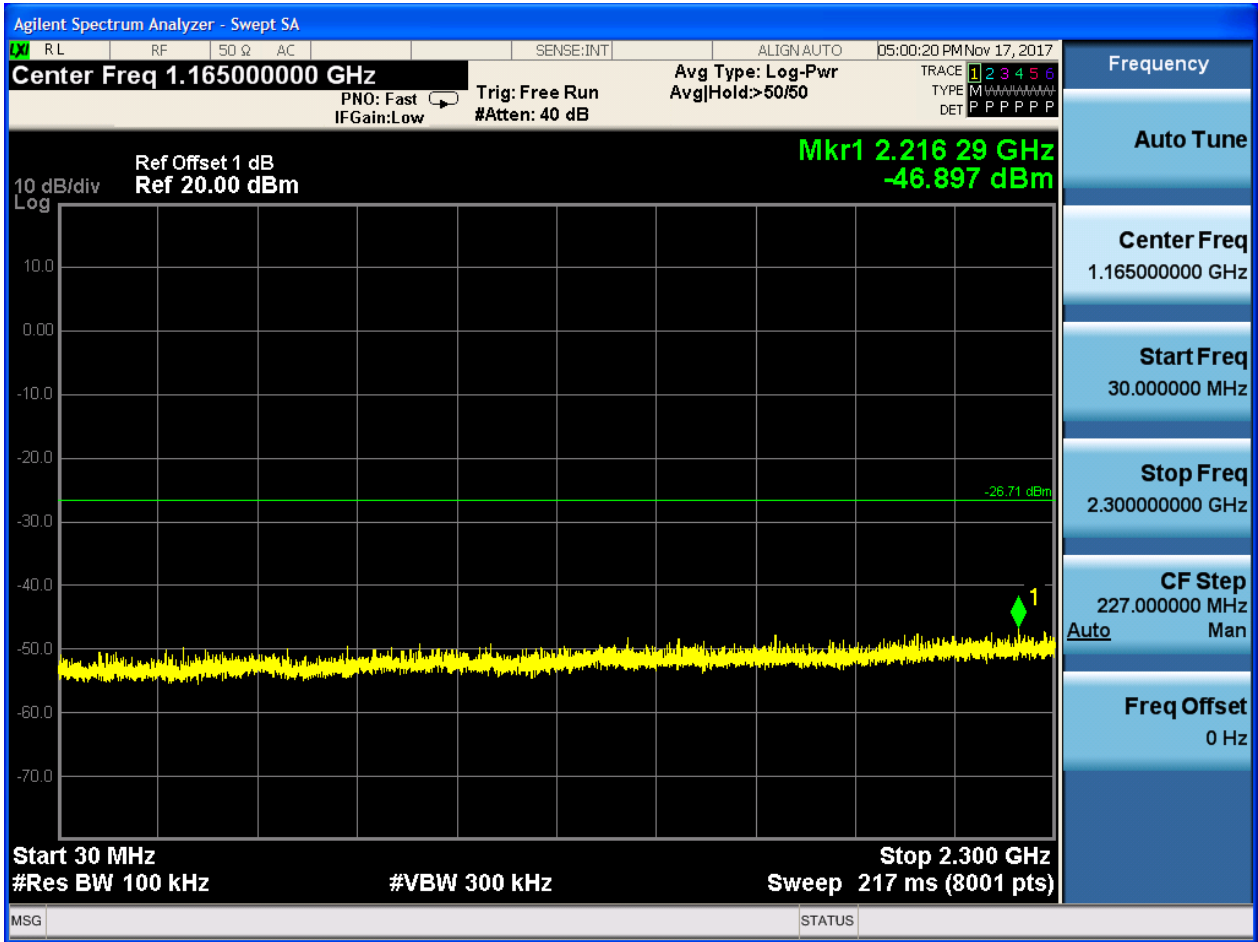

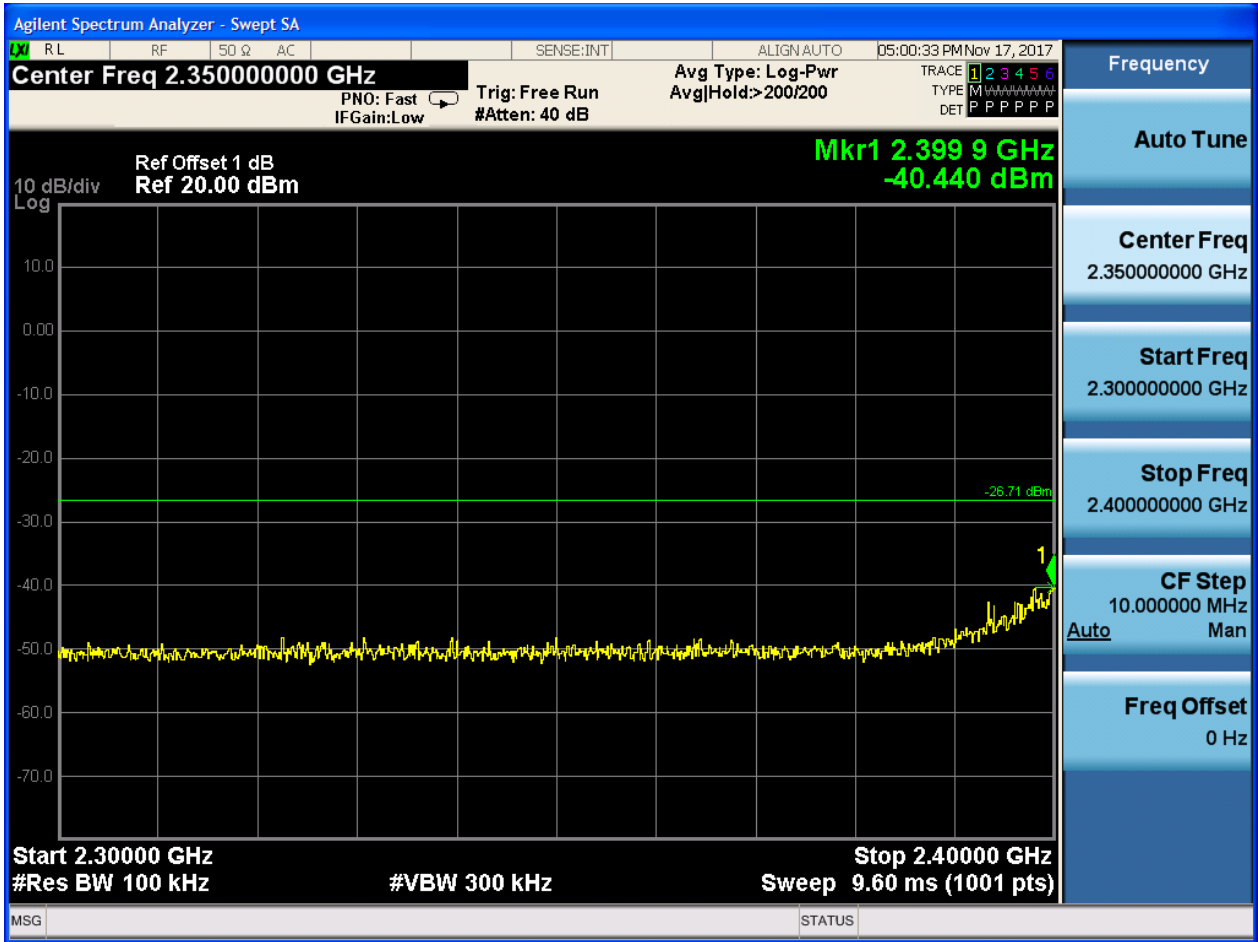

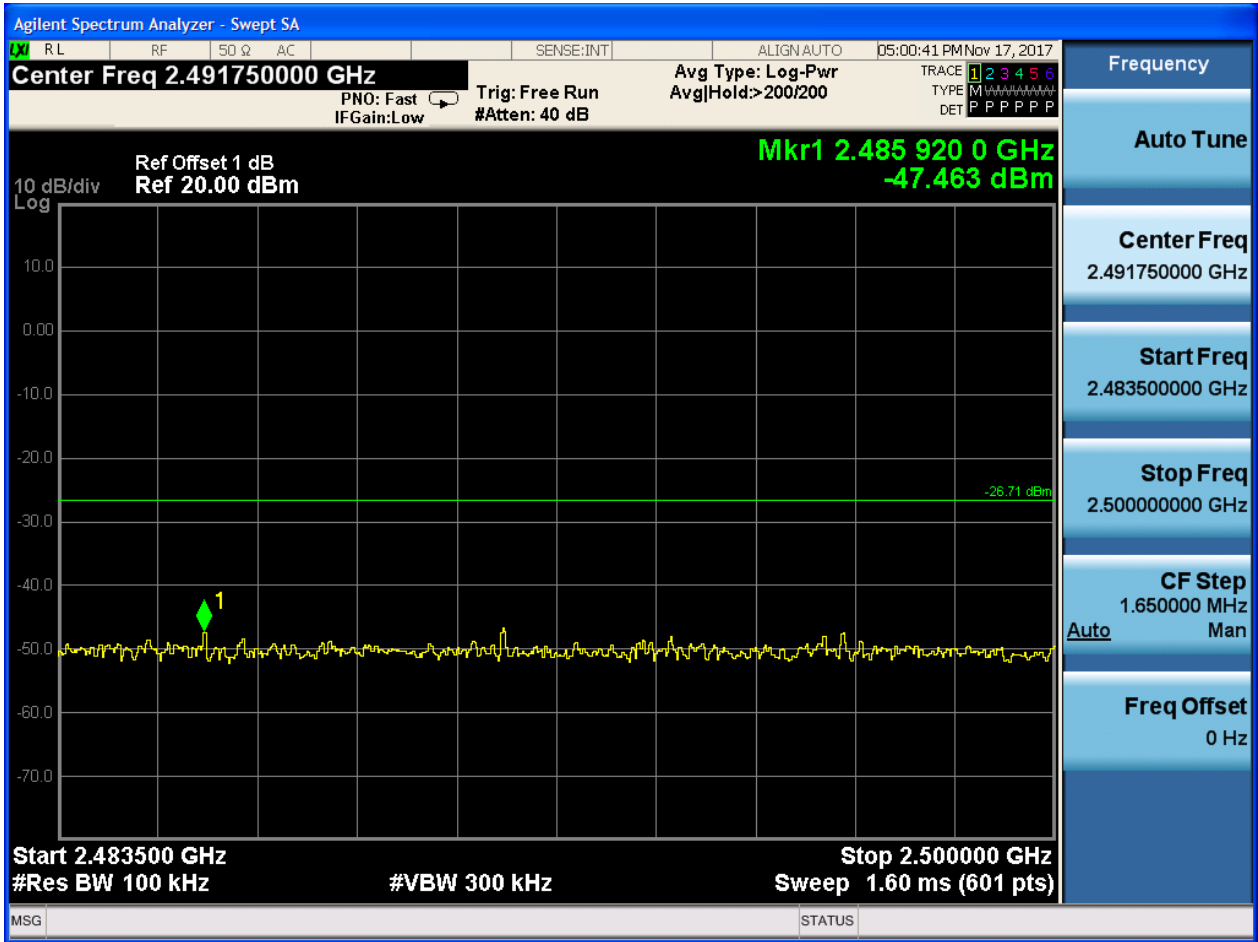


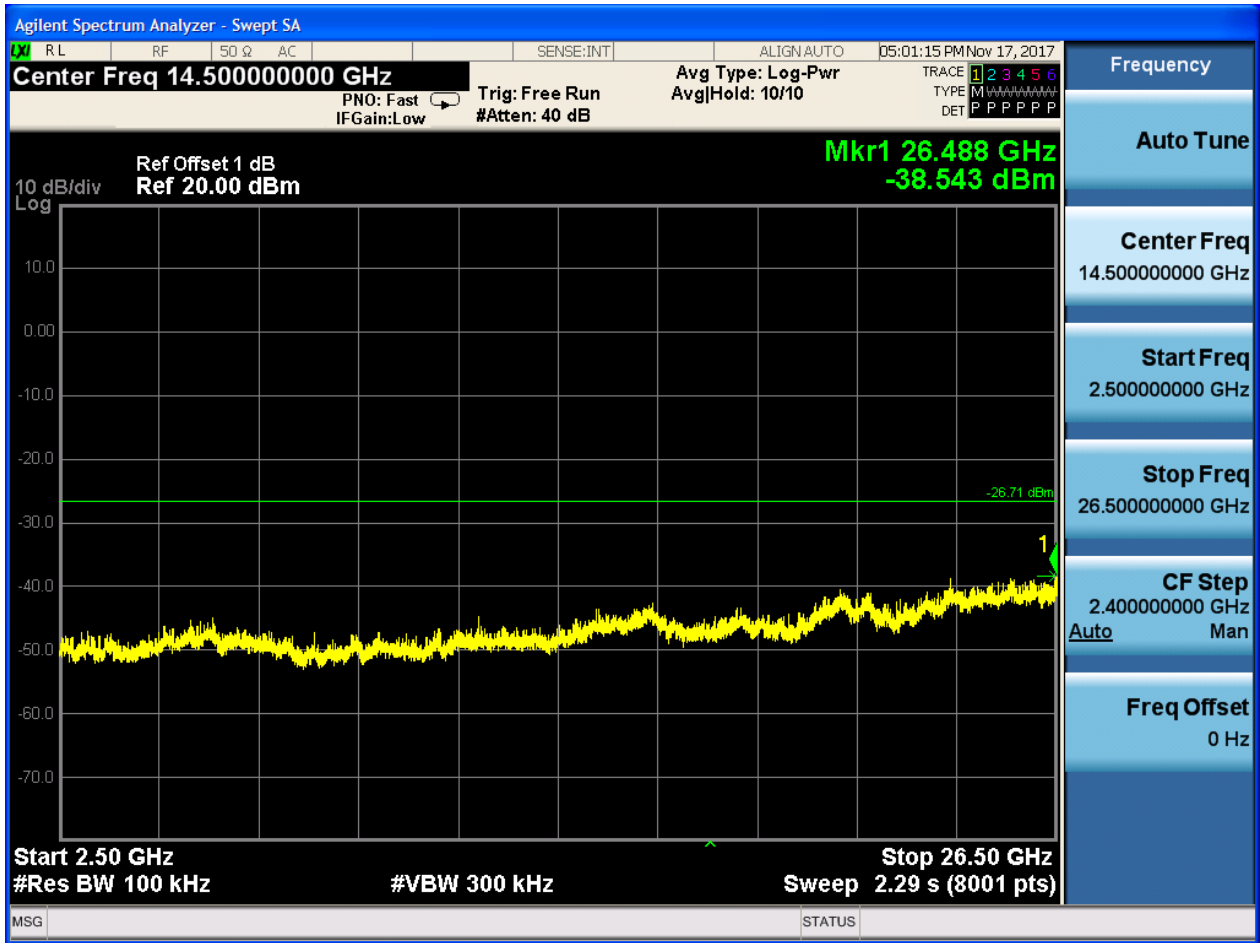




2.26 11G CDD__L@Ant 2


Pref:

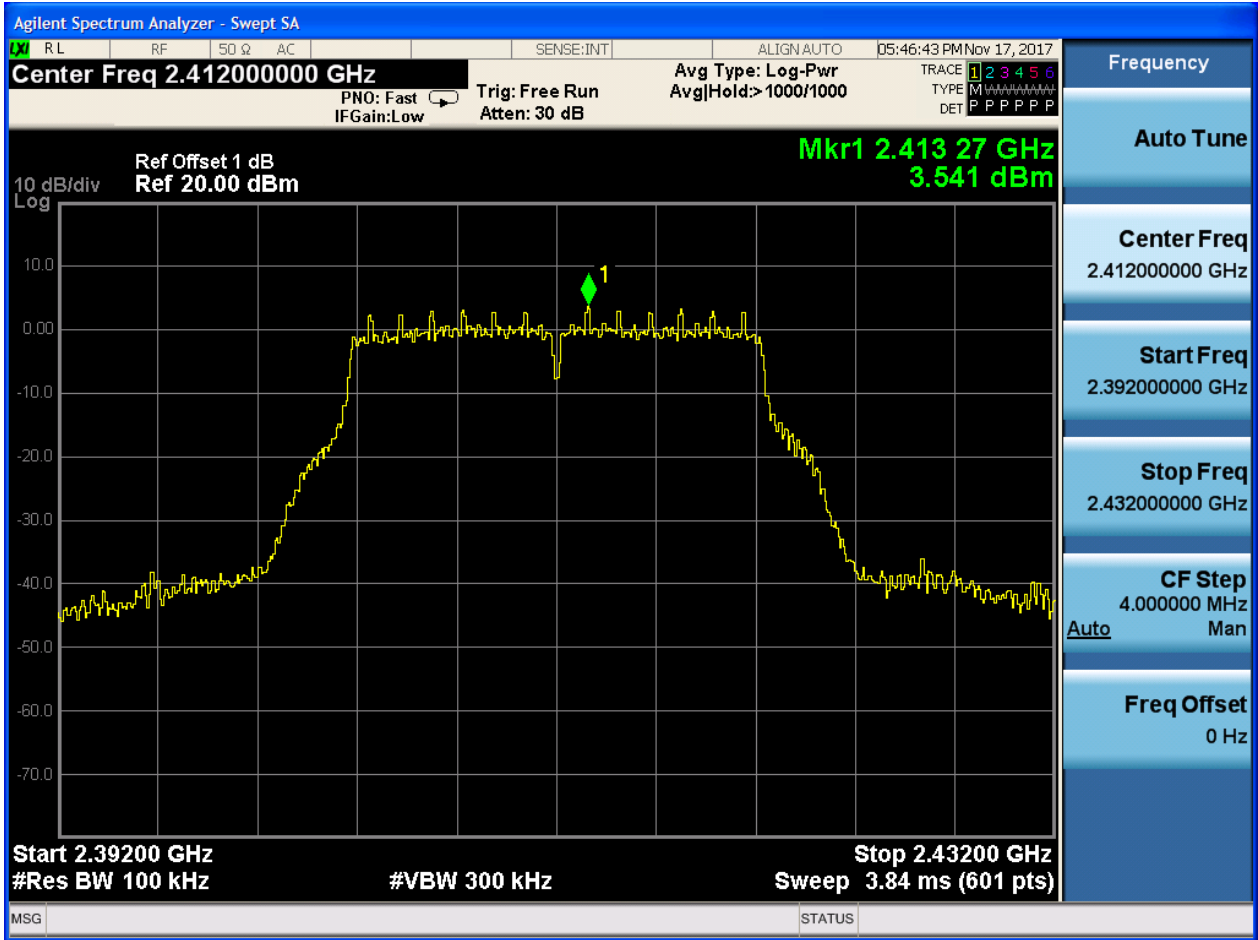






Puw:

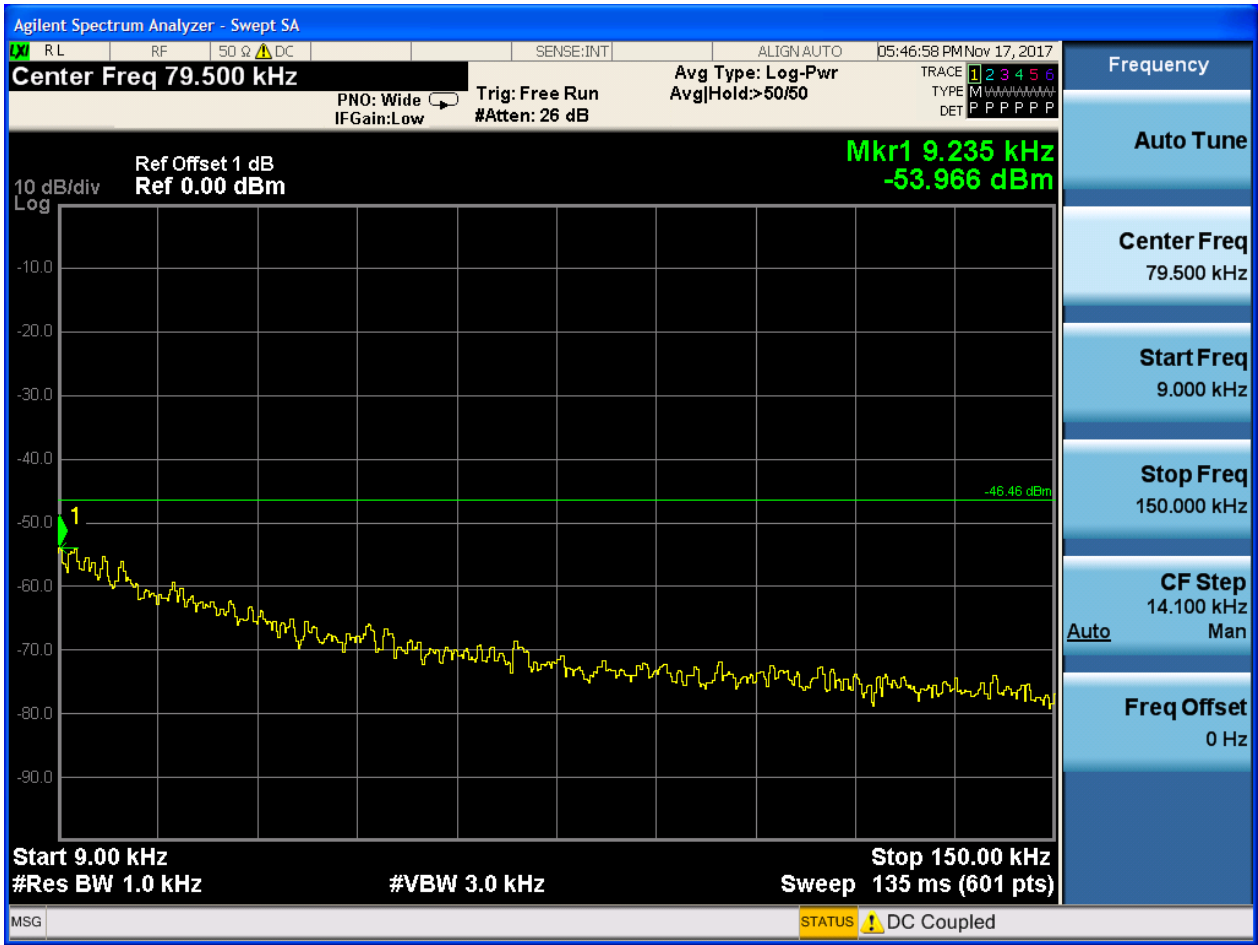


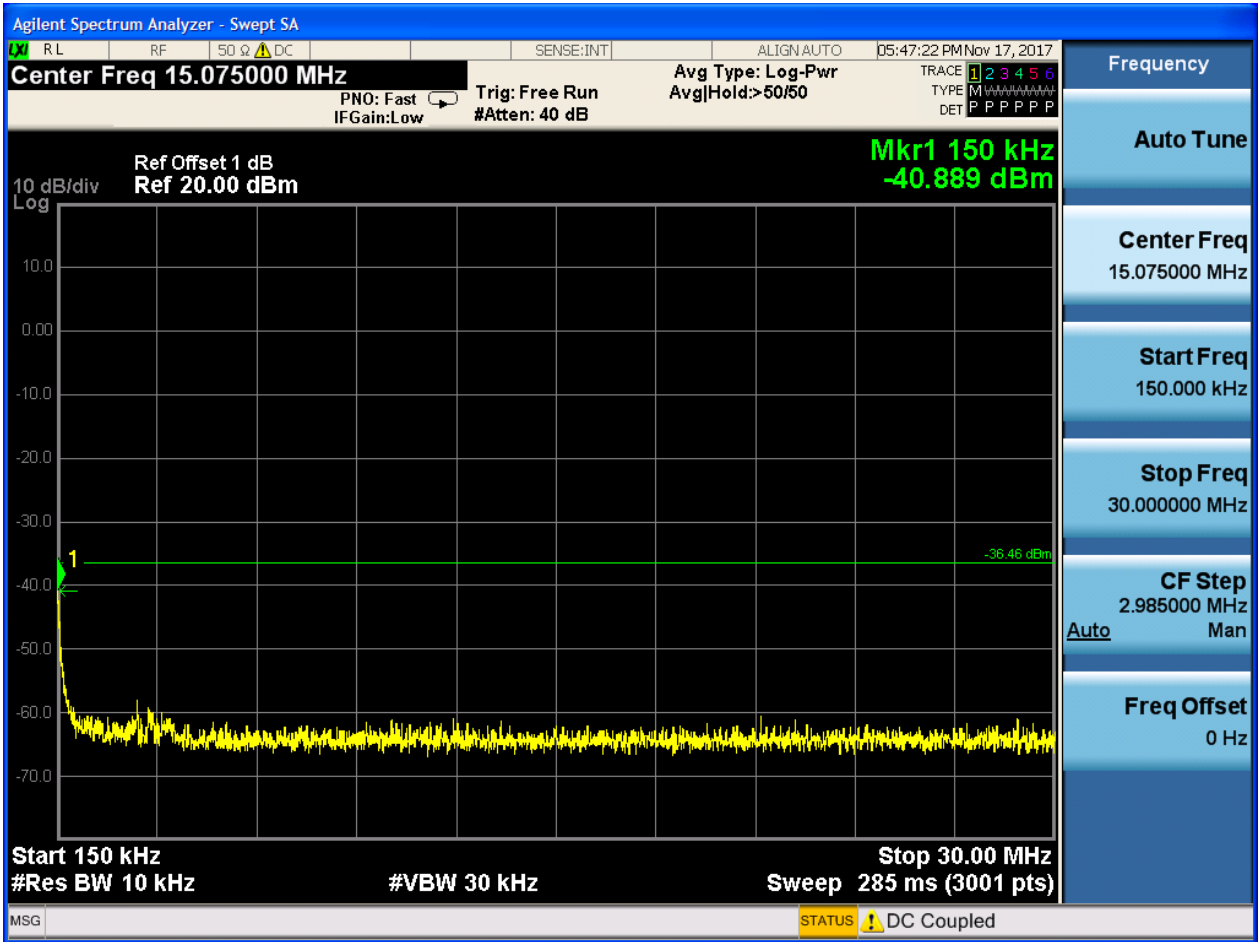

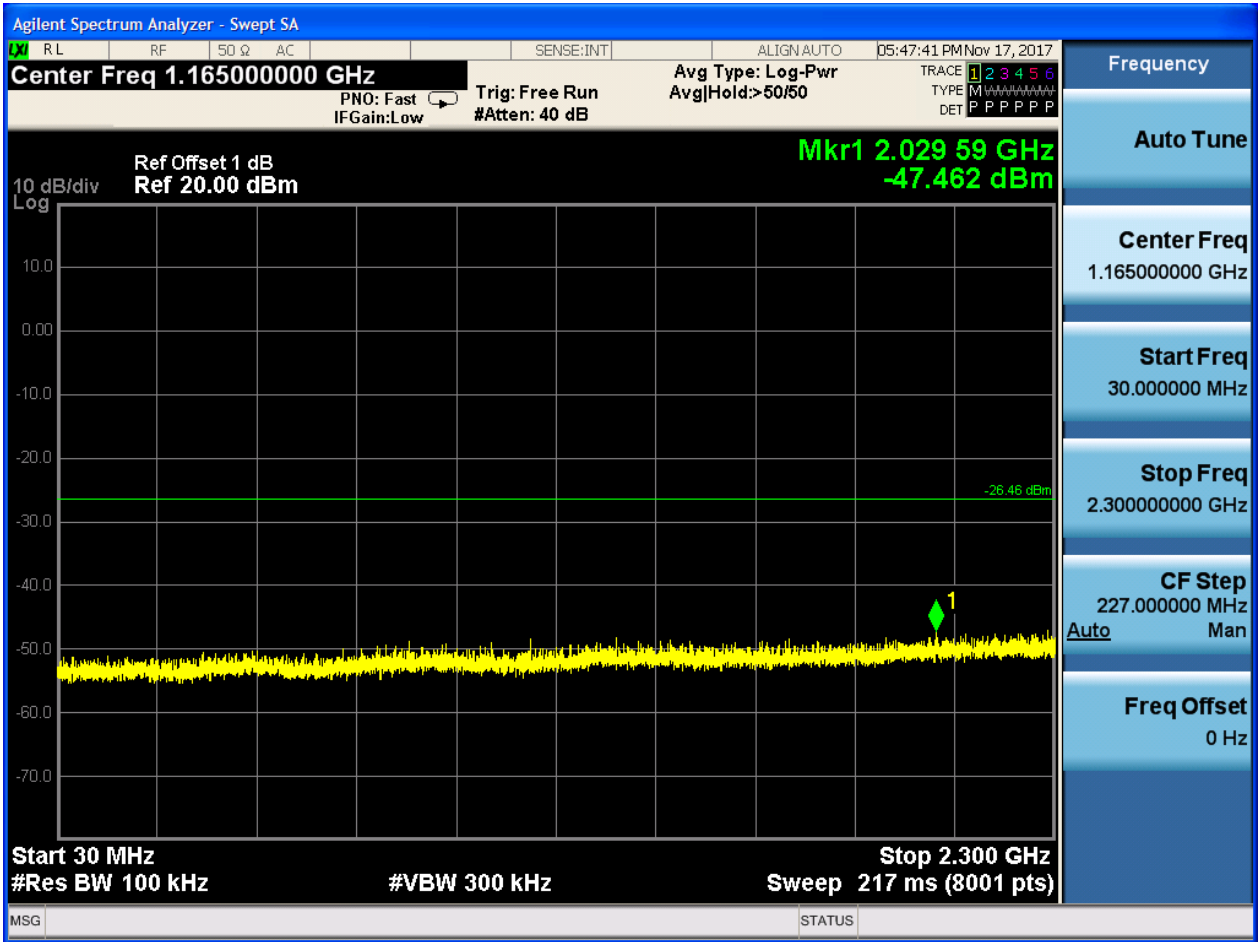

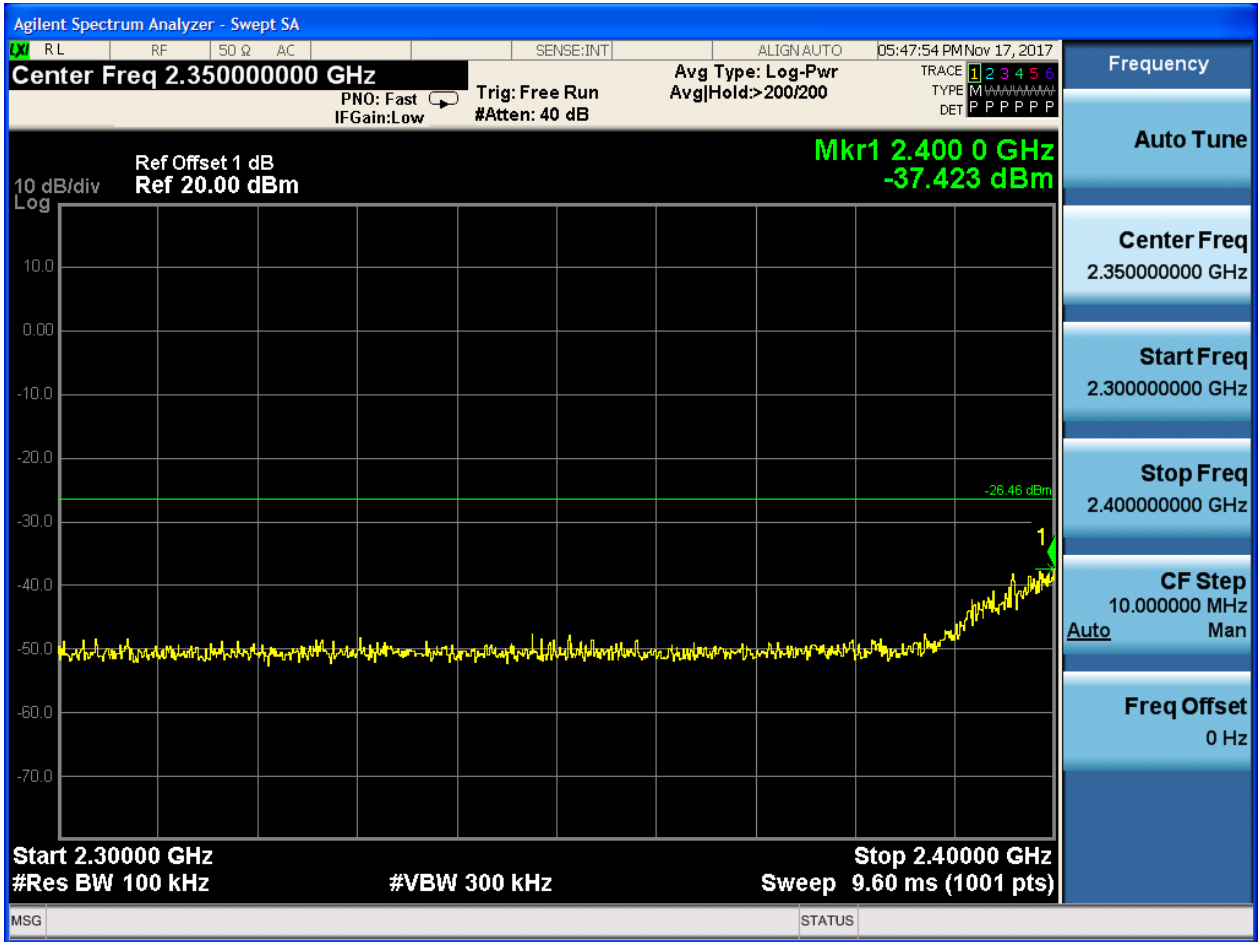

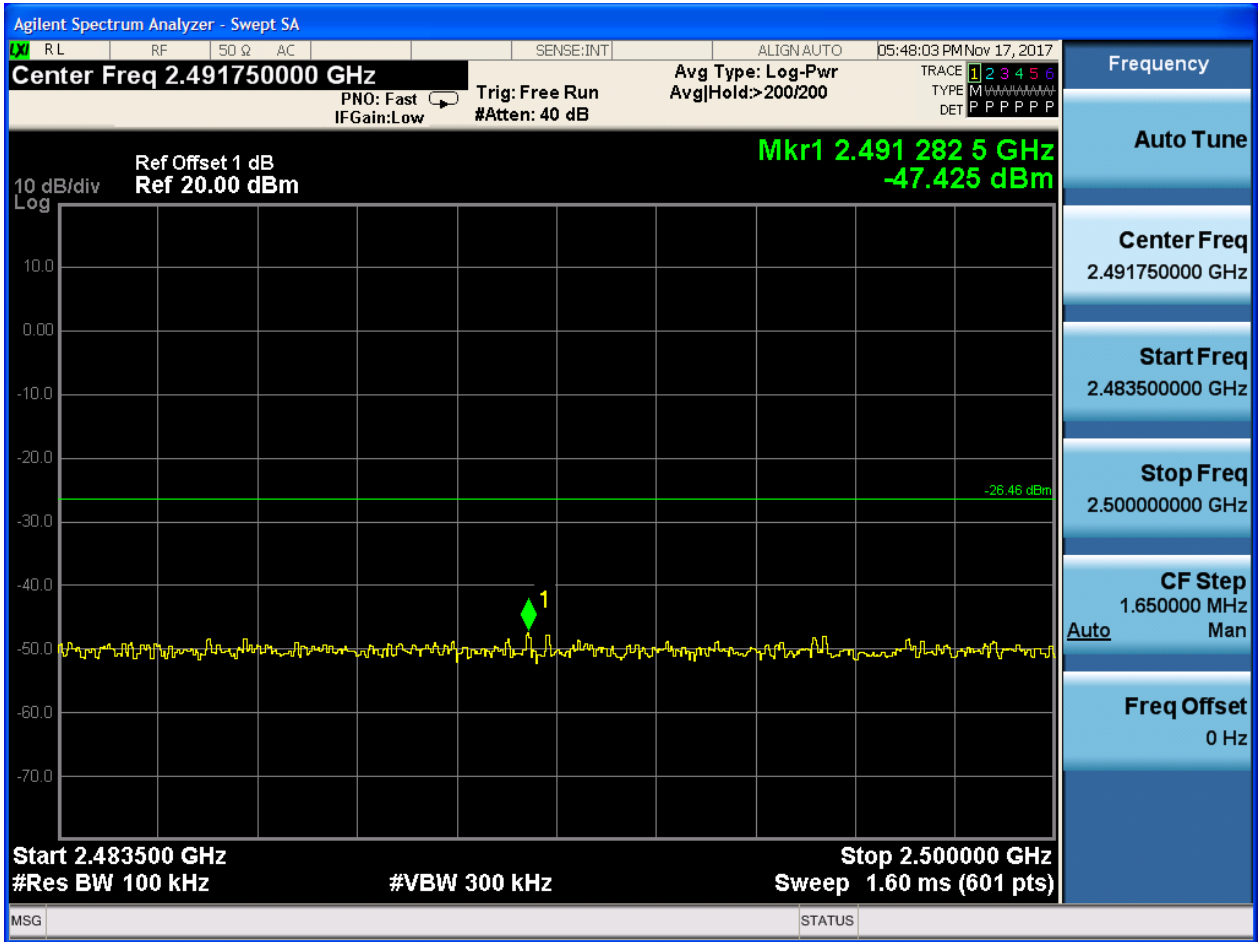


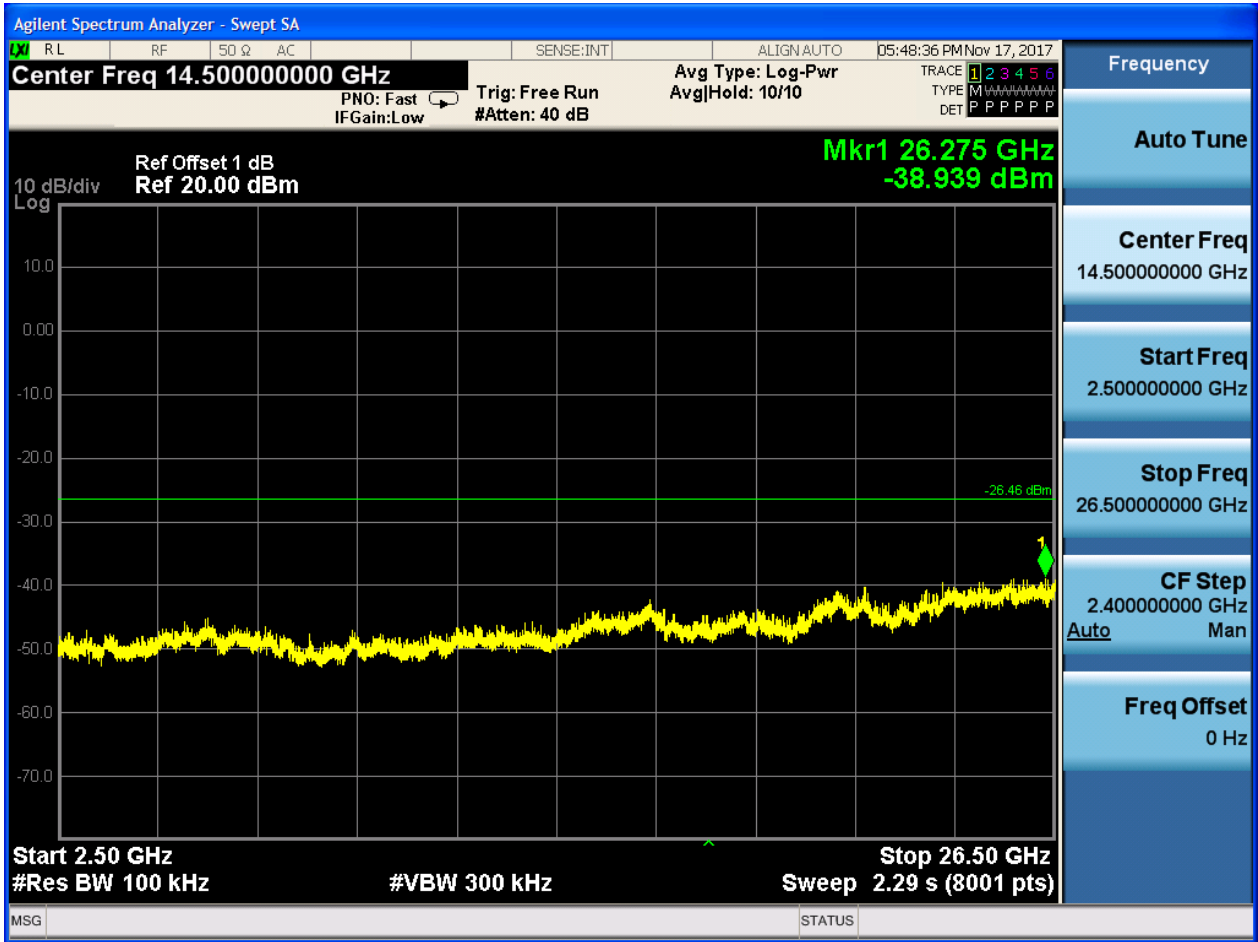




2.27 11G CDD_M@Ant 1


Pref:

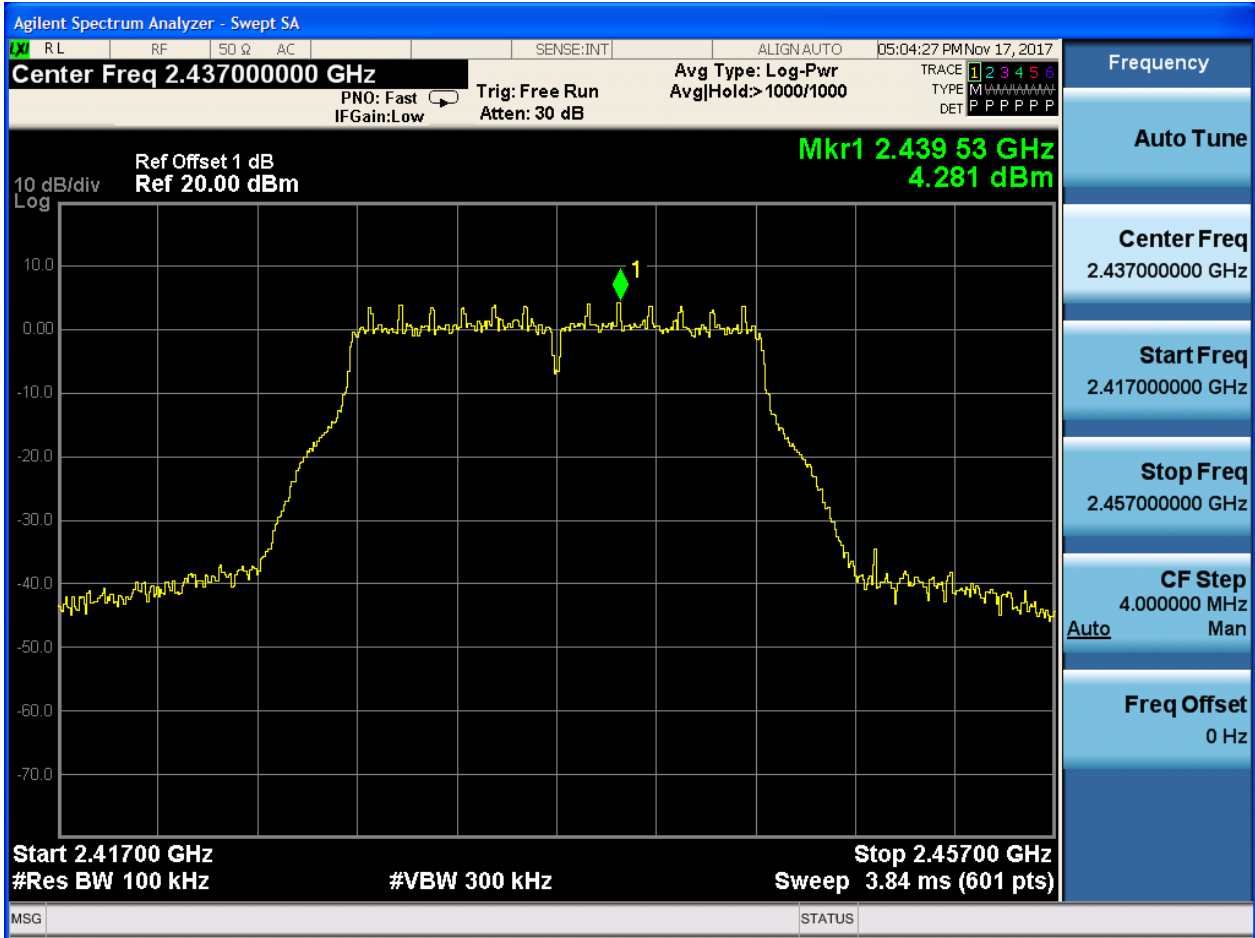






Puw:

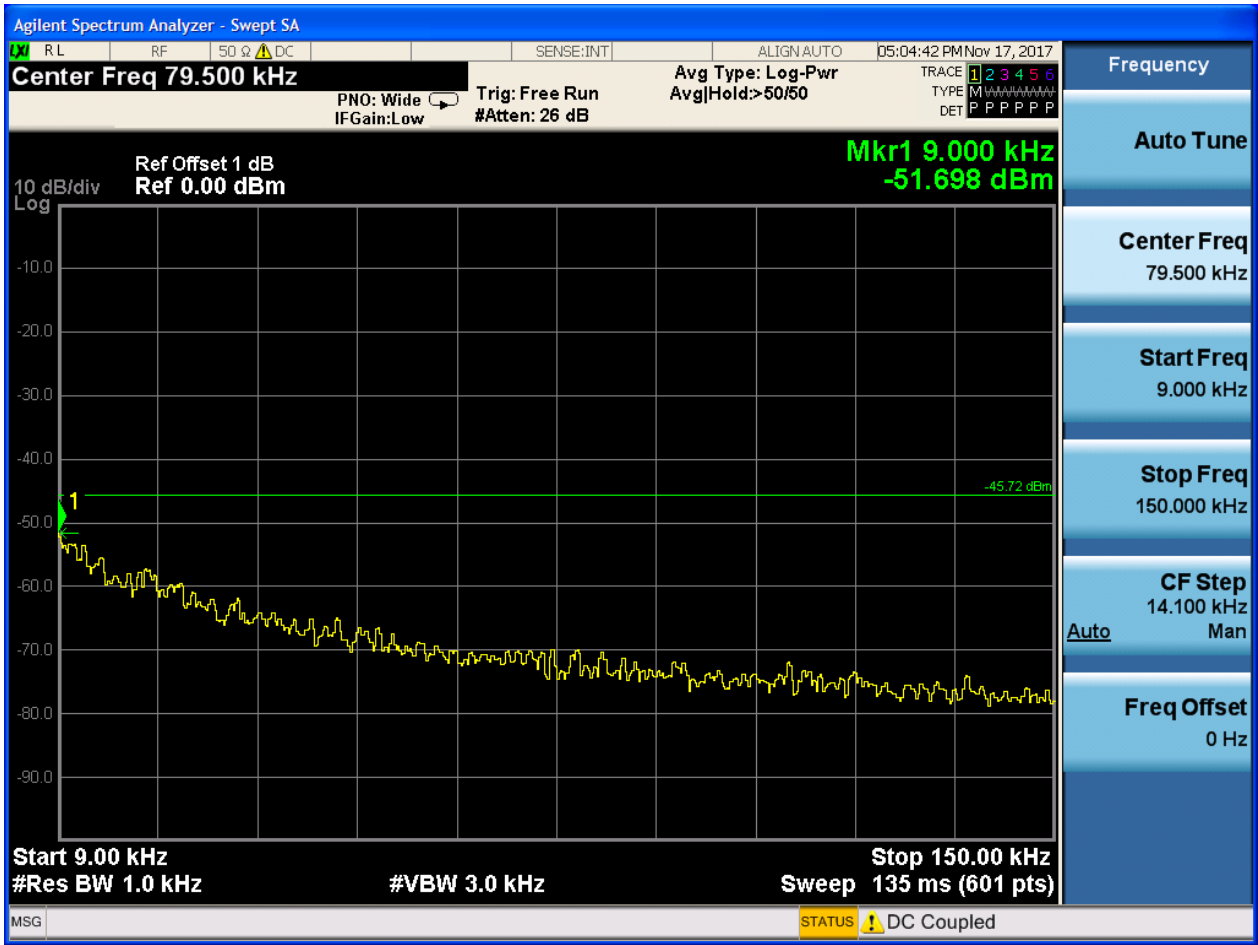


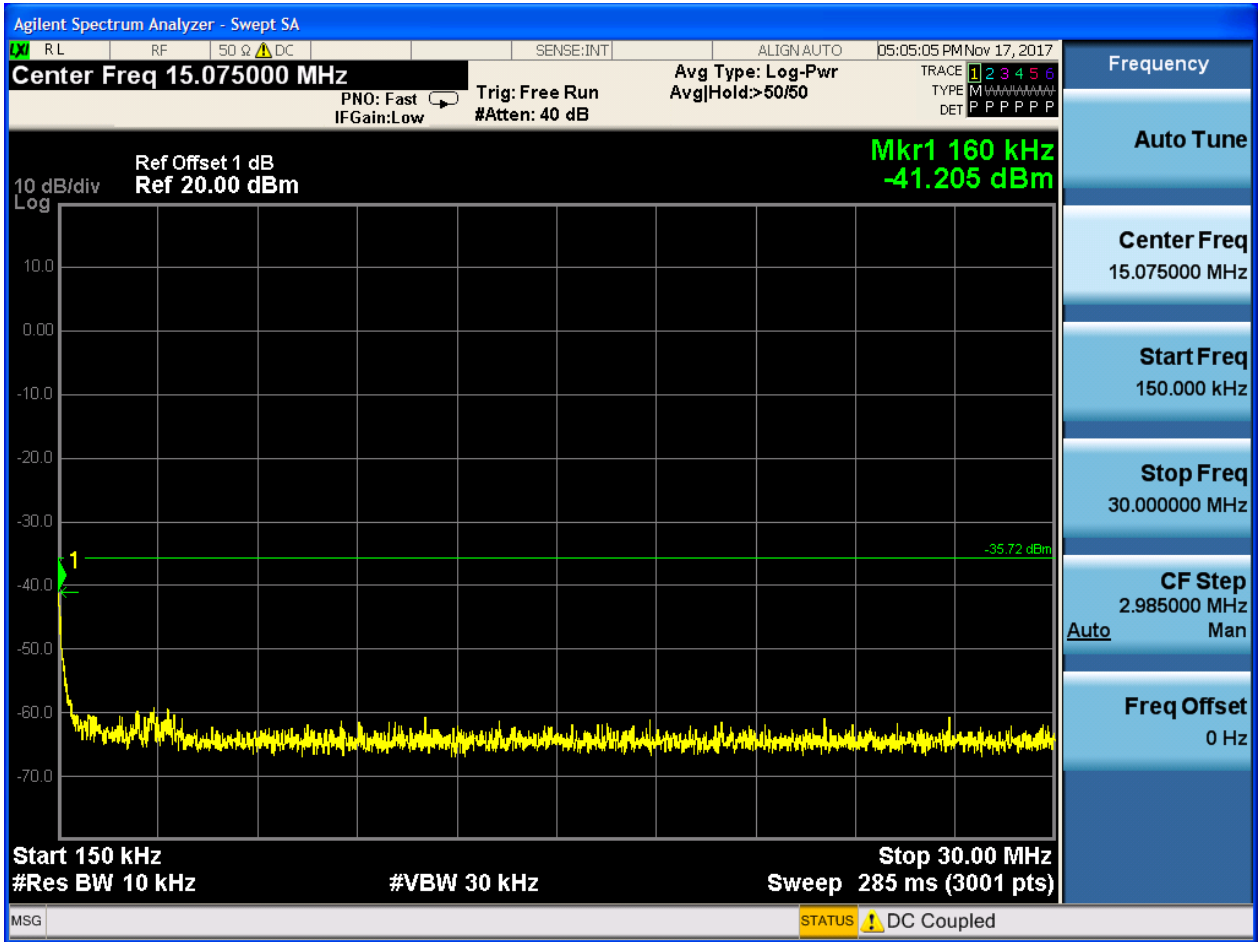

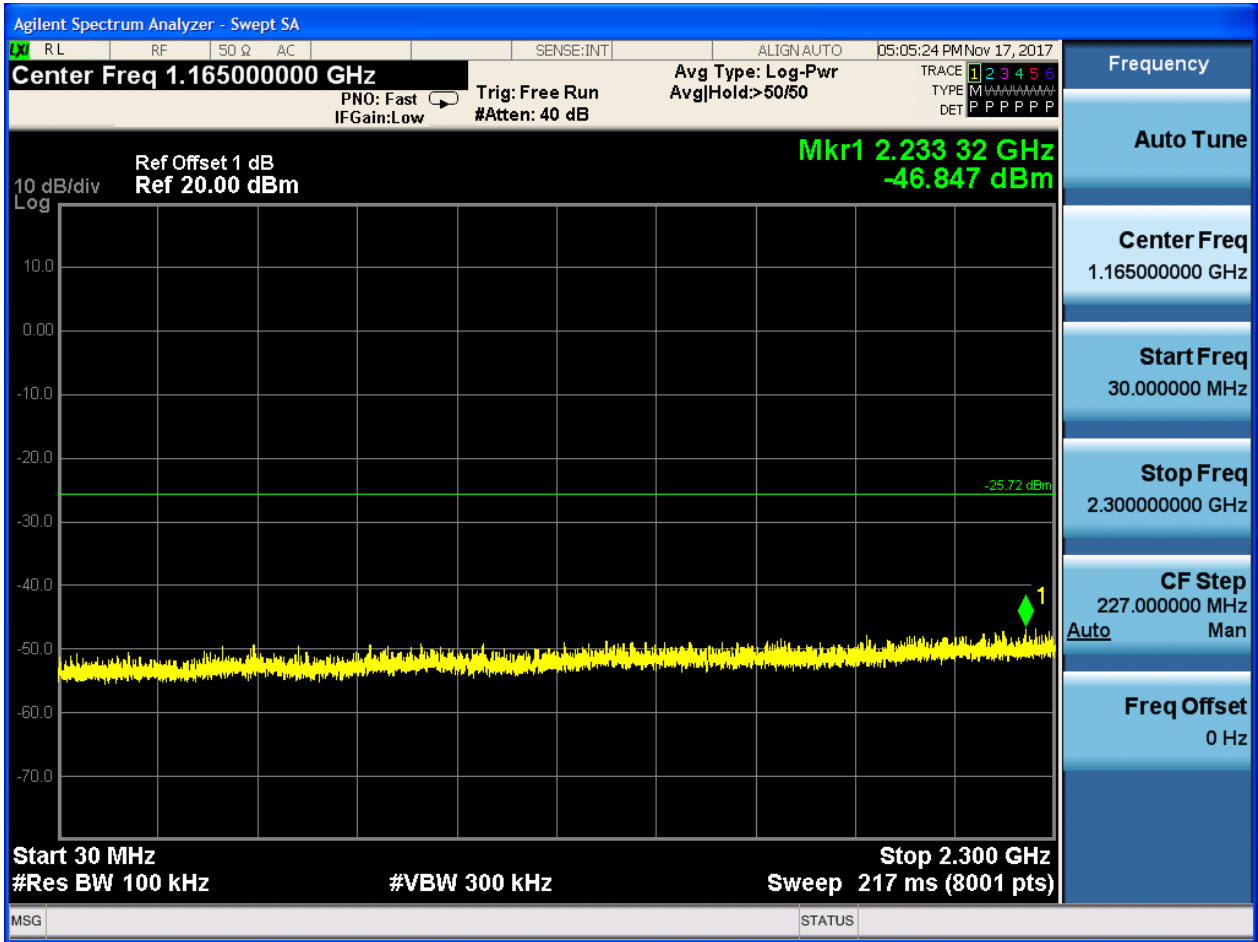

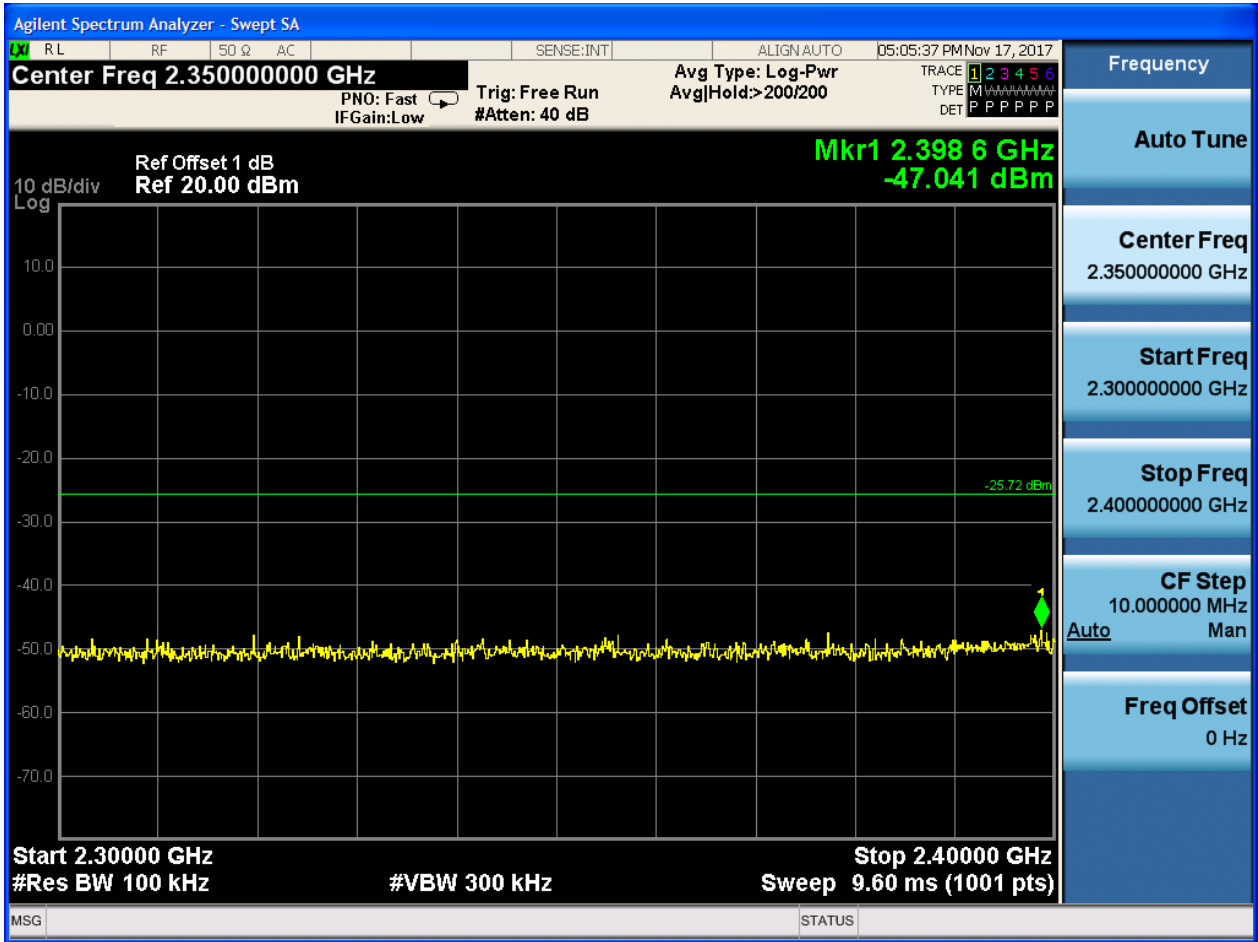

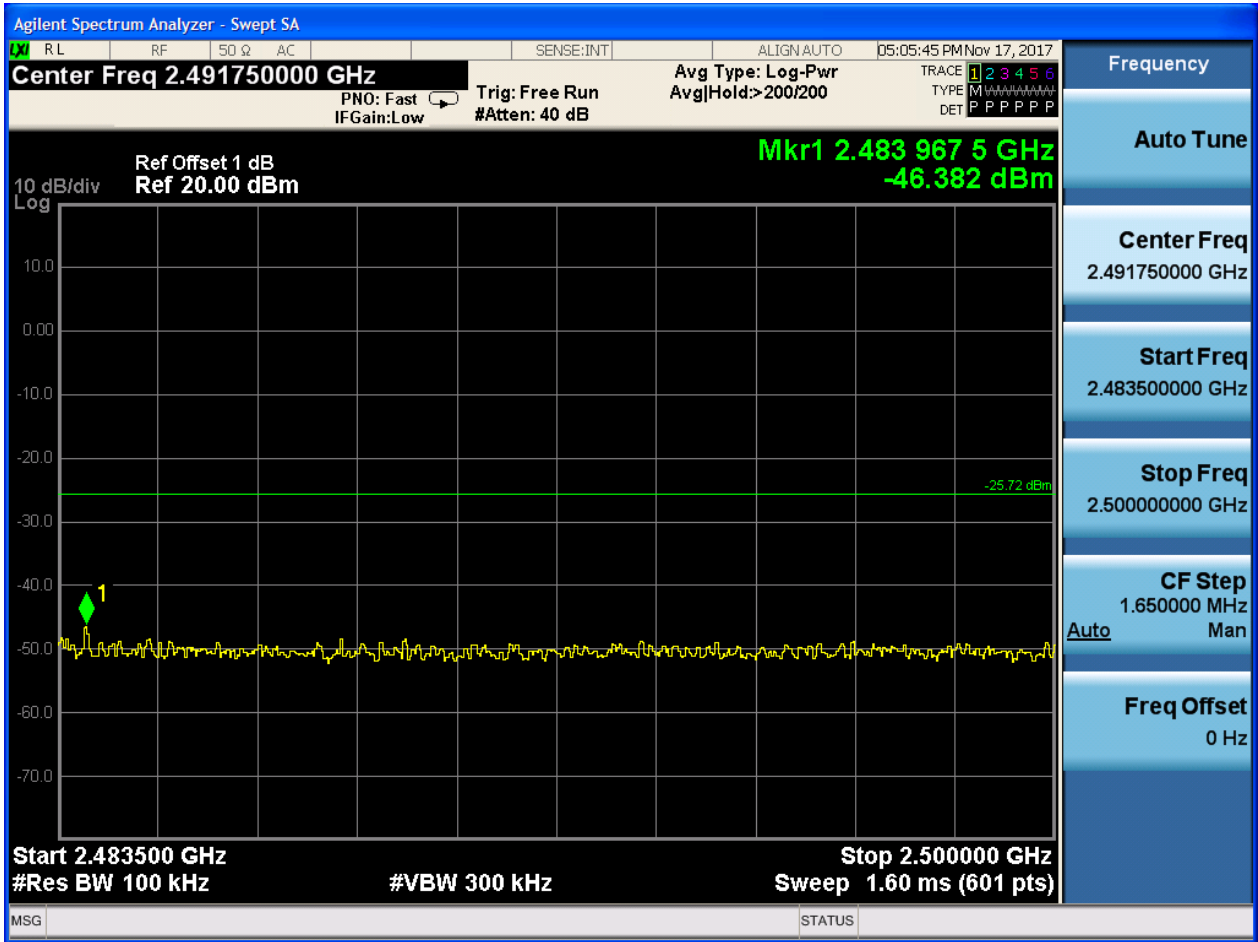


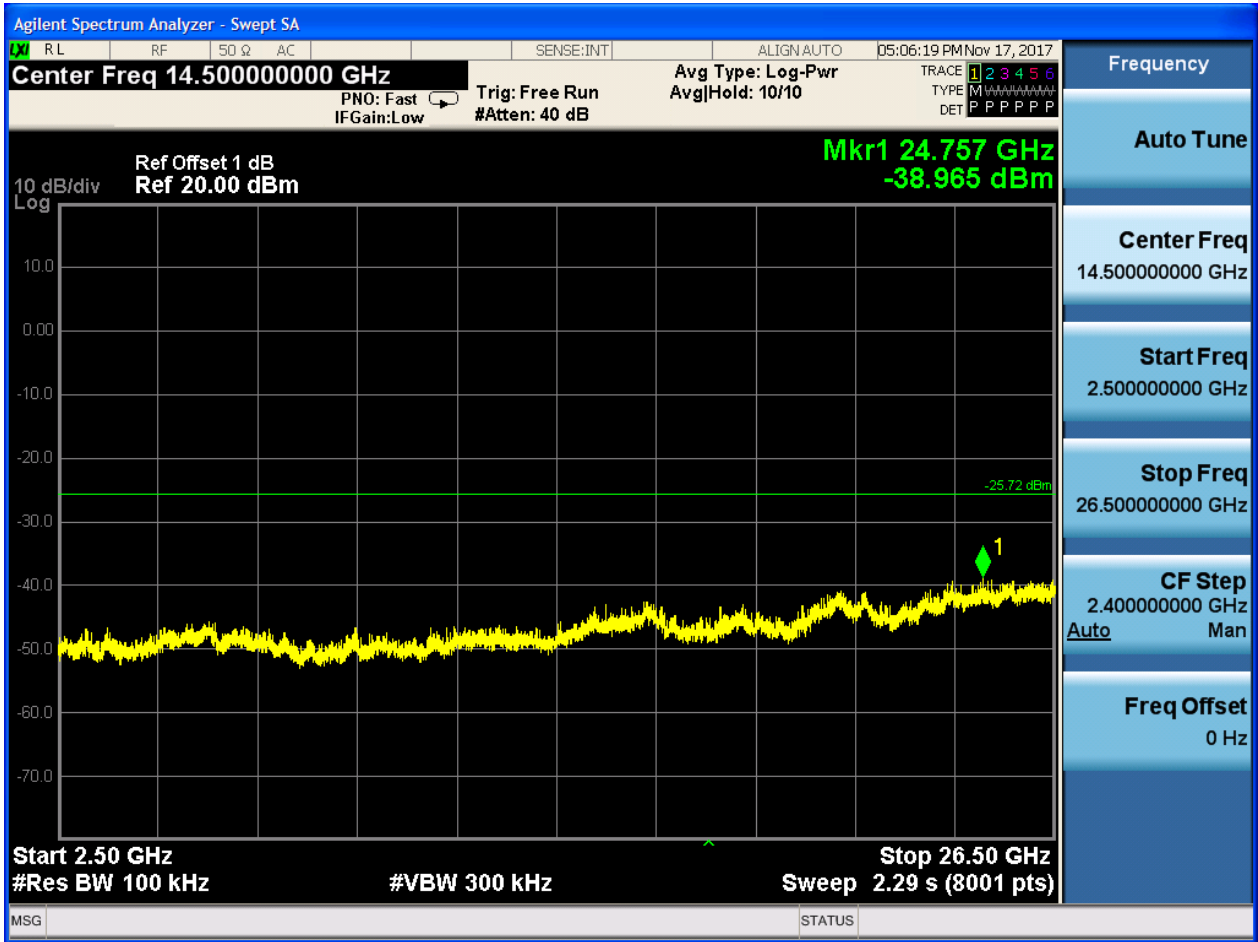




2.28 11G CDD_M@Ant 2


Pref:

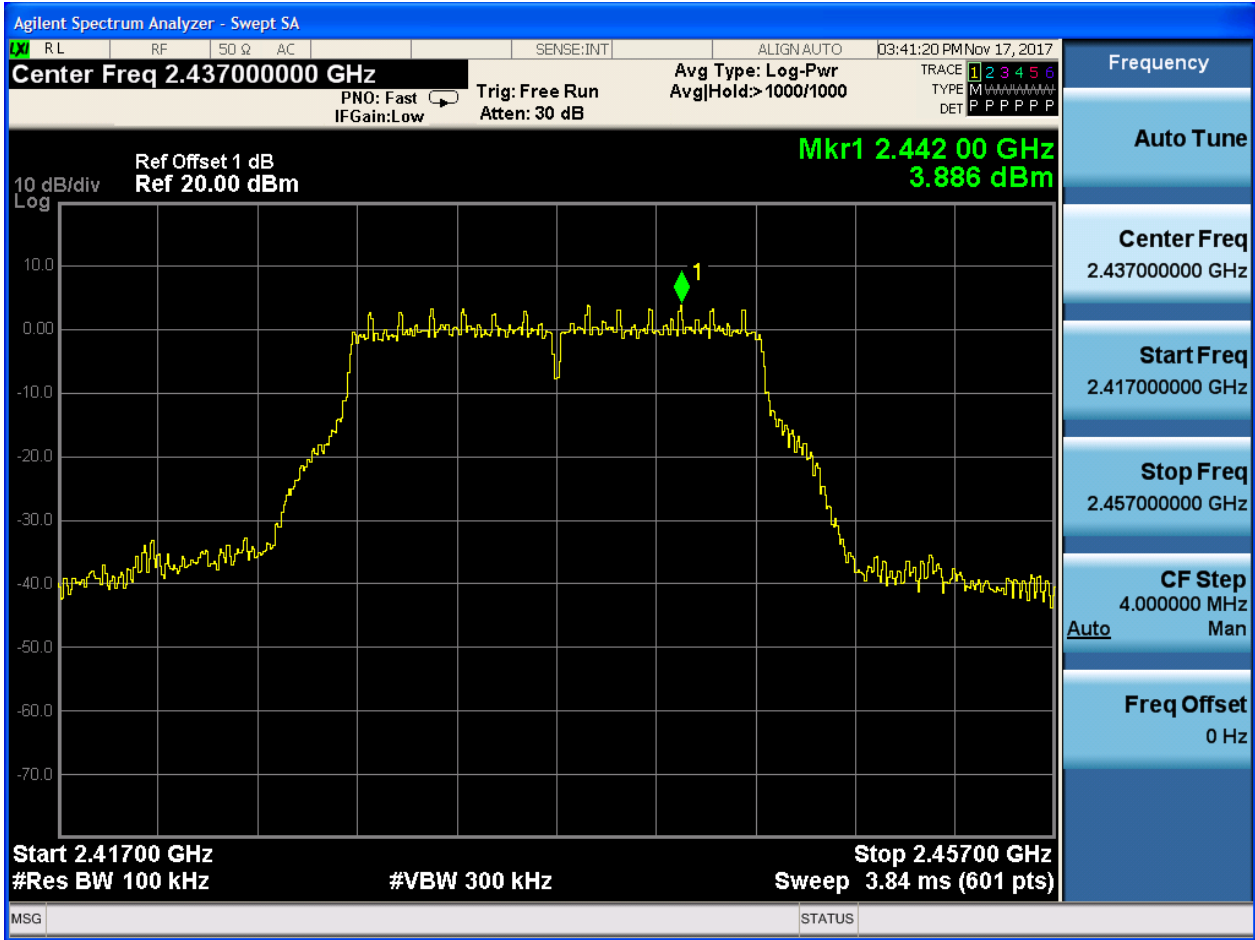






Puw:

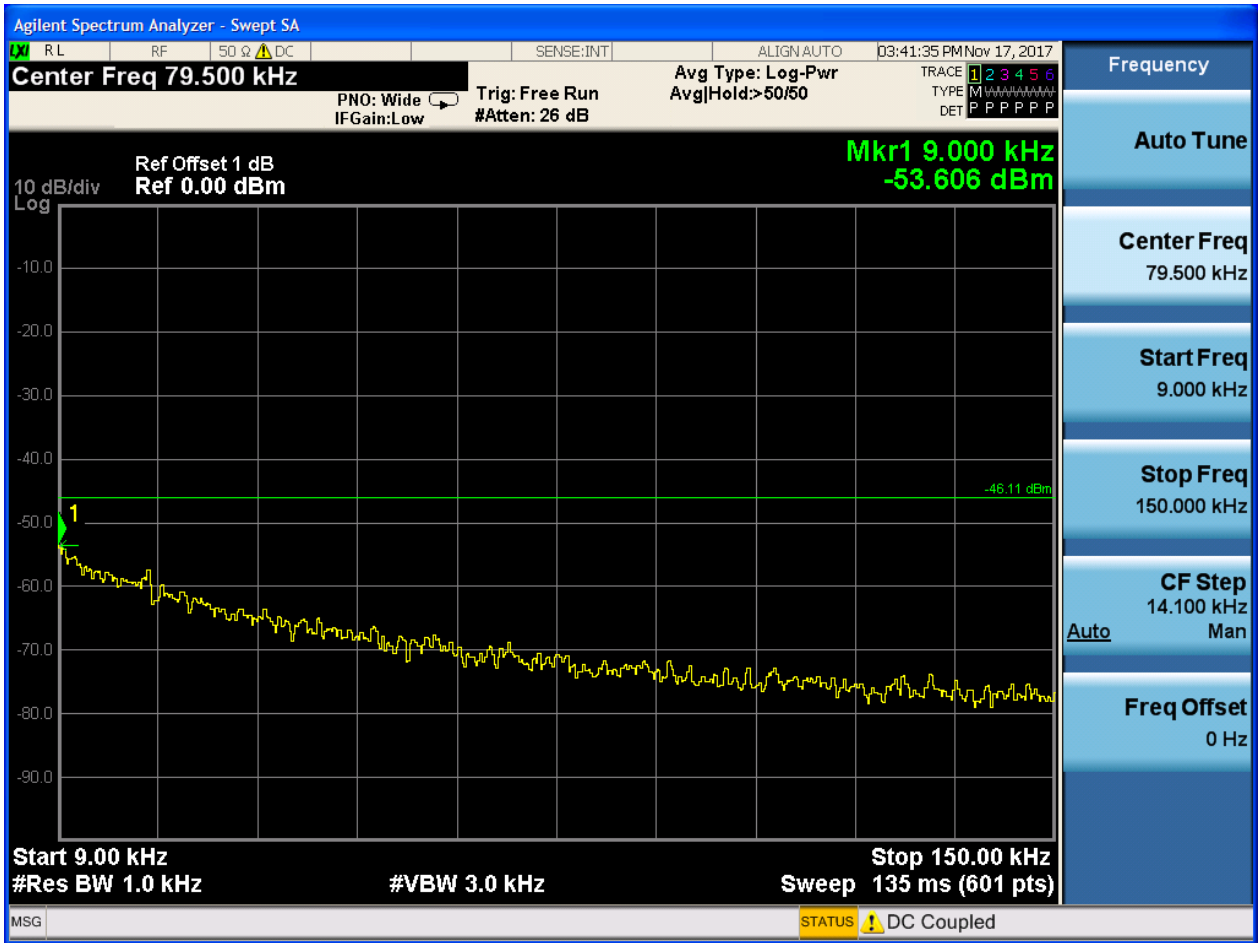

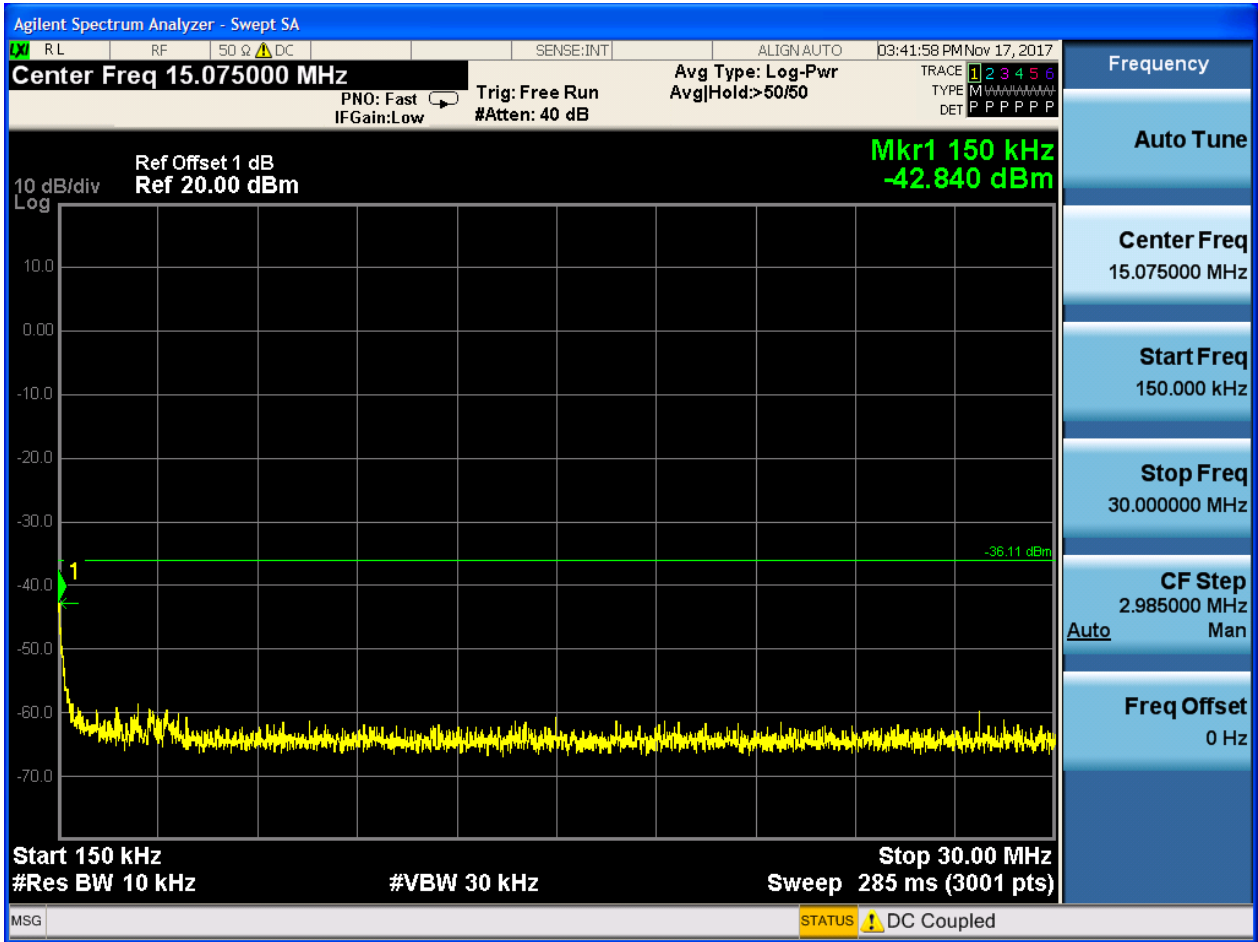

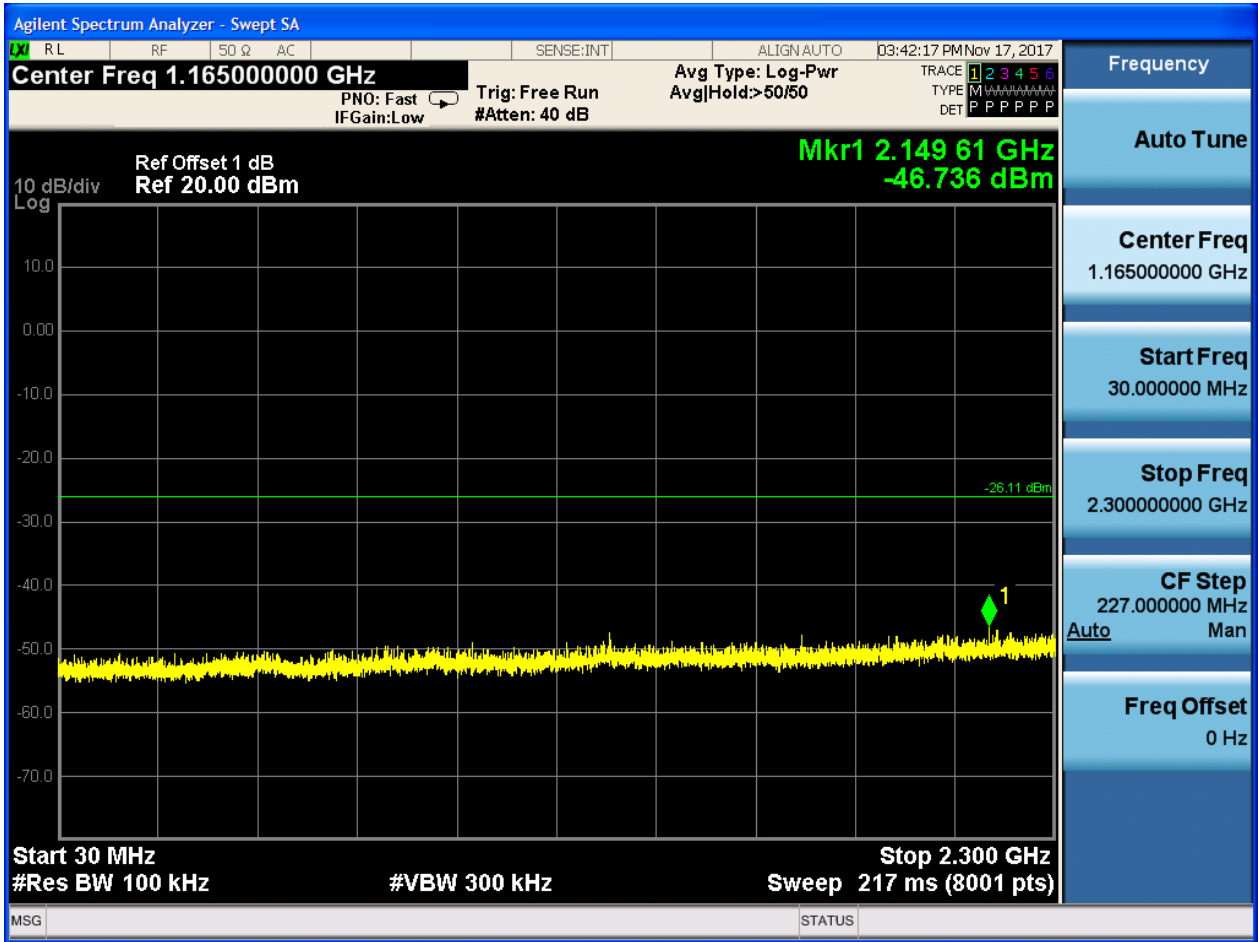

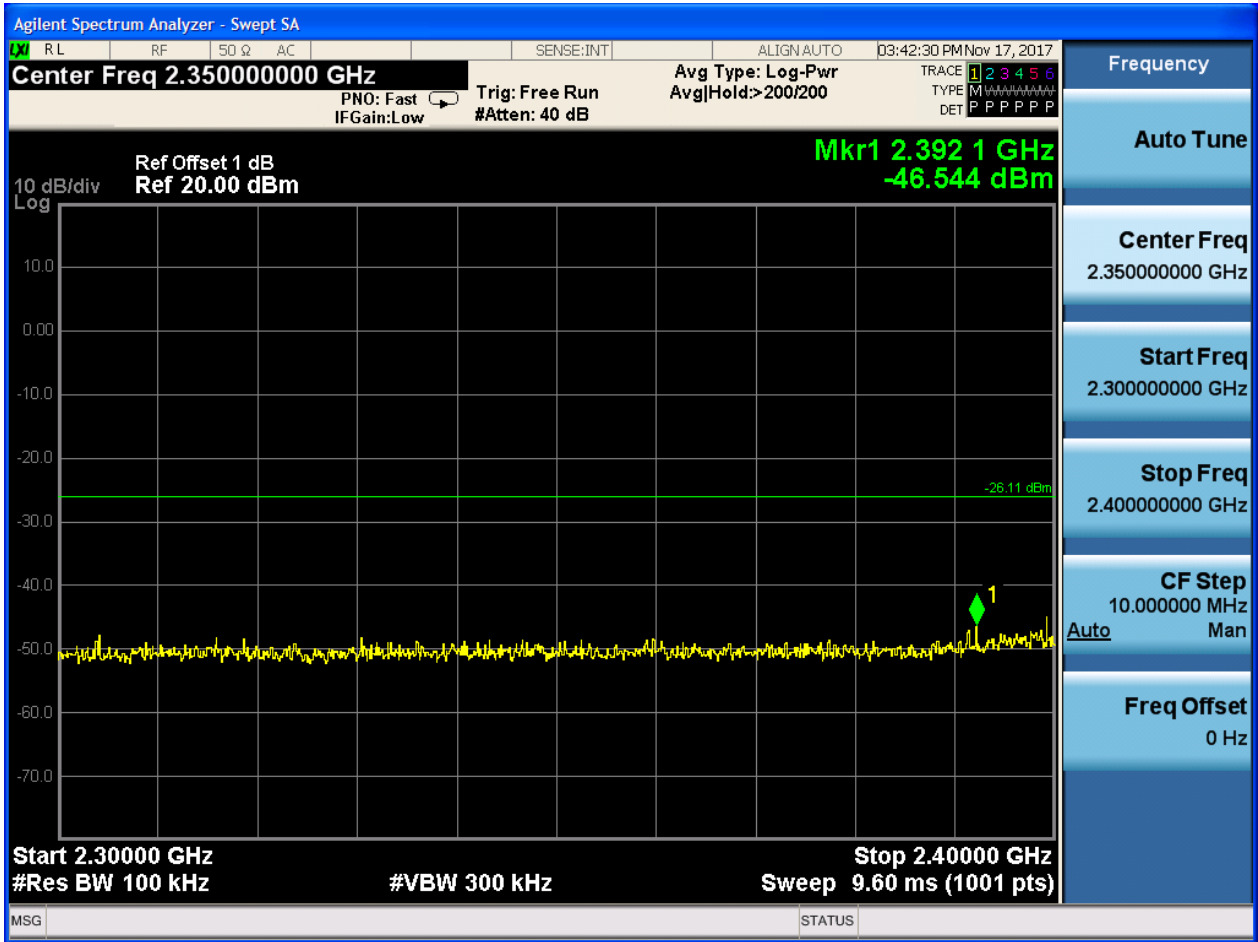

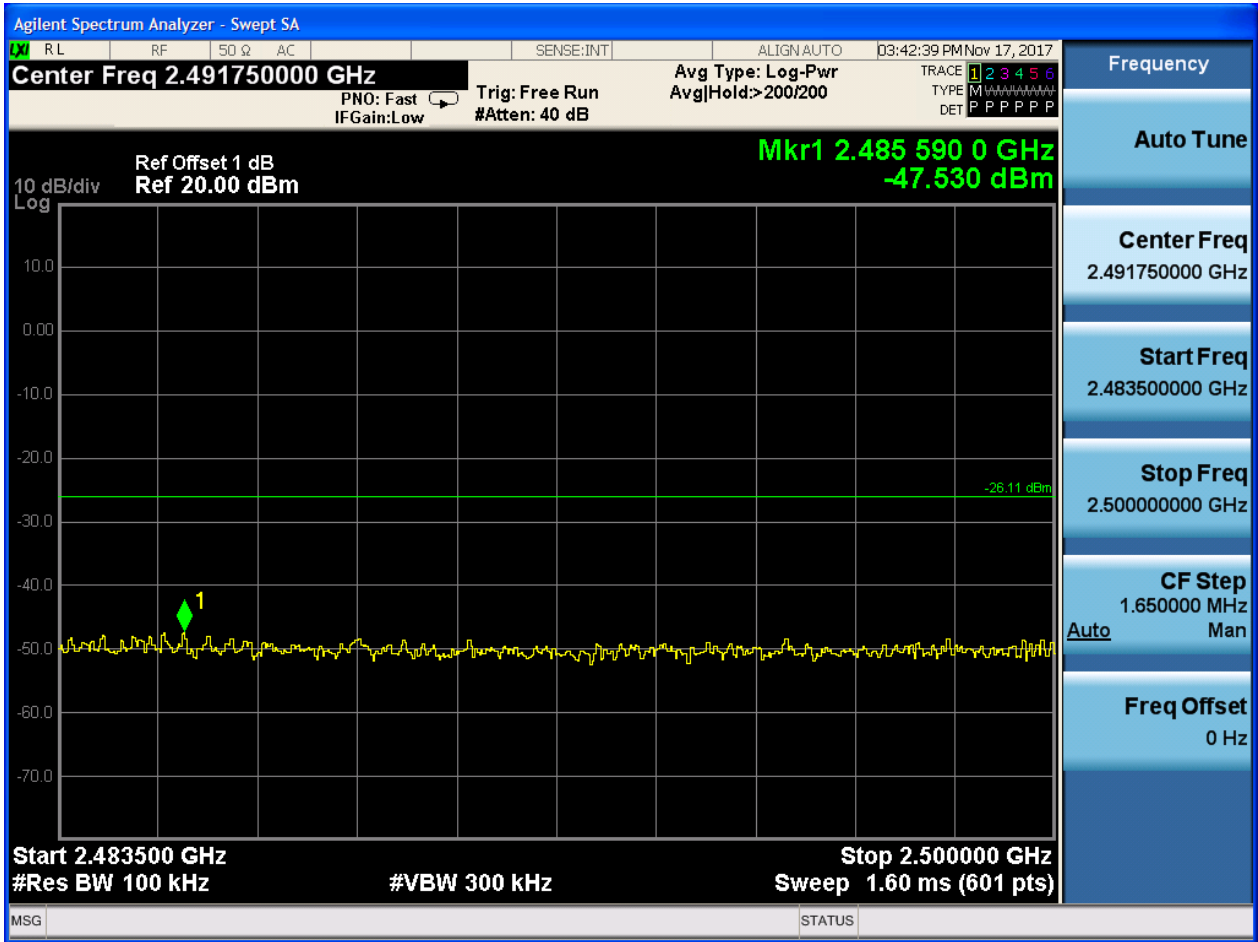







2.29 11G CDD__H@Ant 1


Pref:

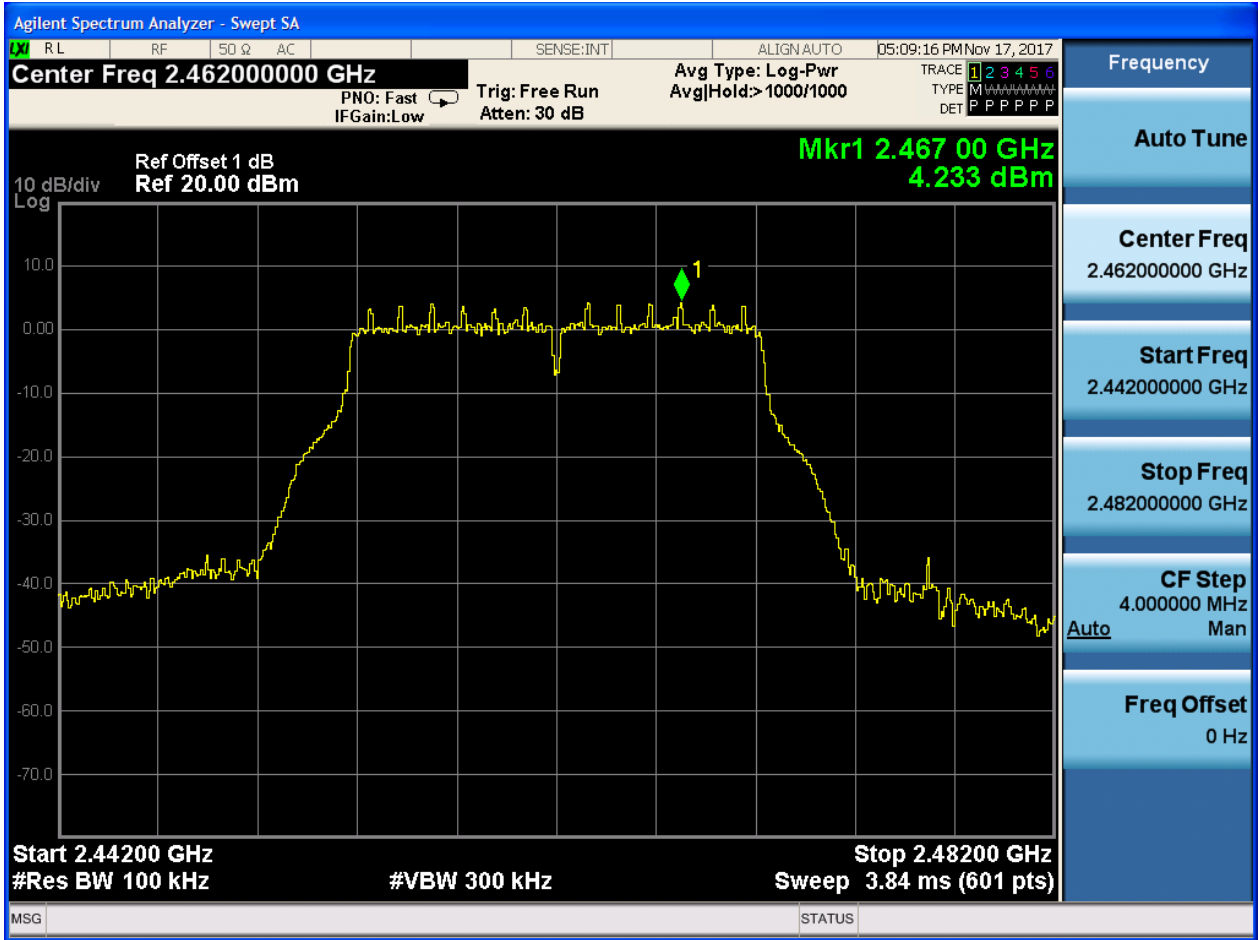






Puw:

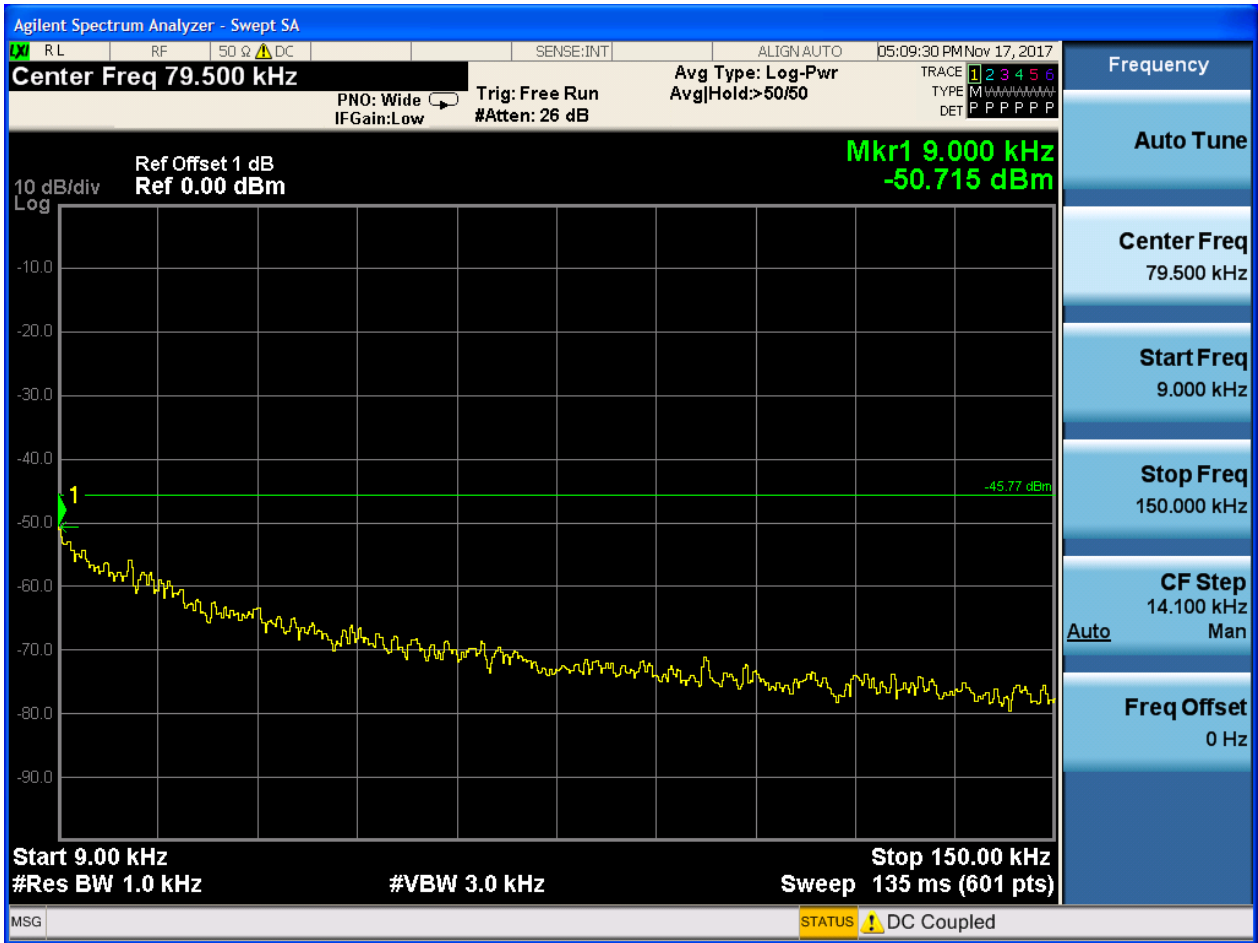


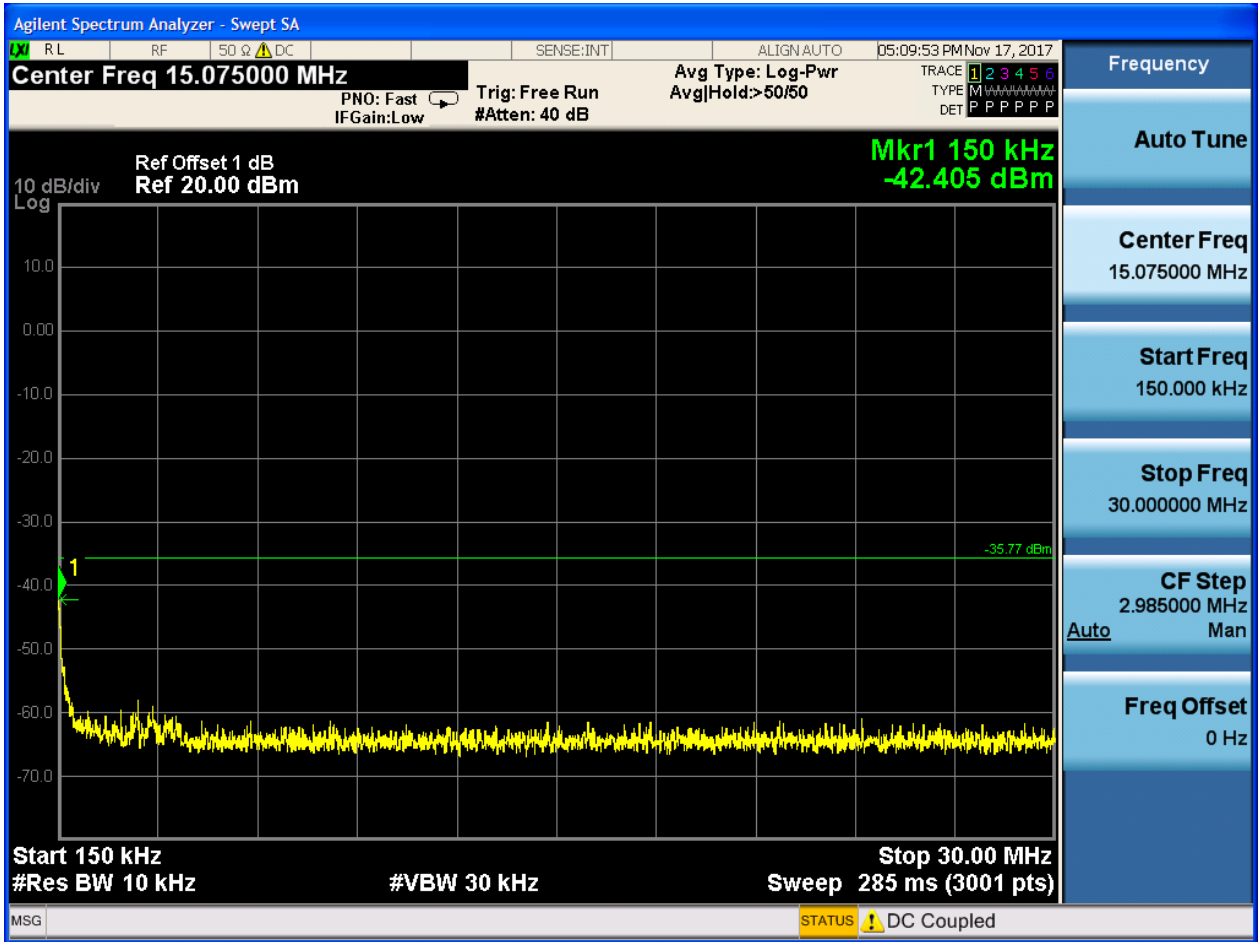

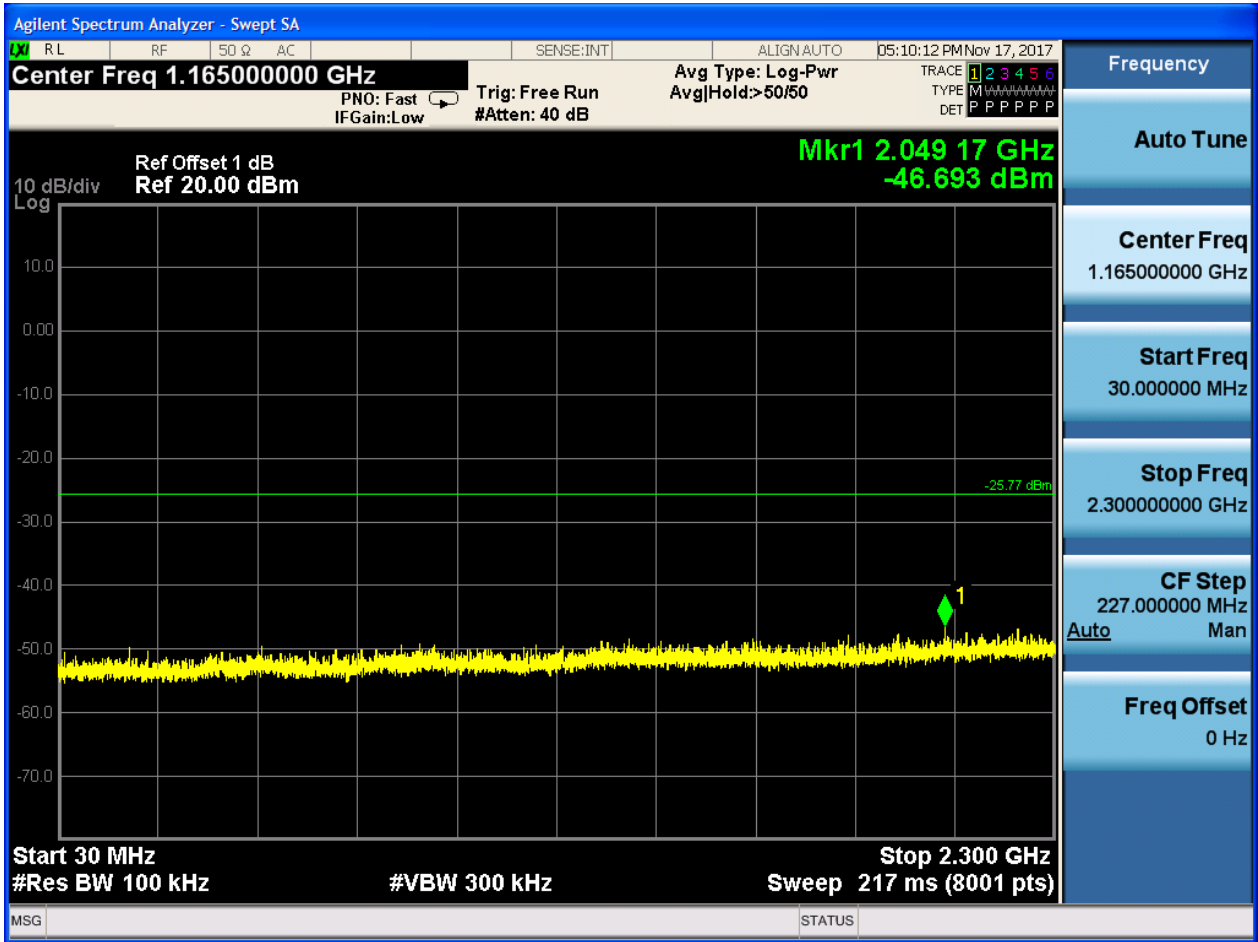

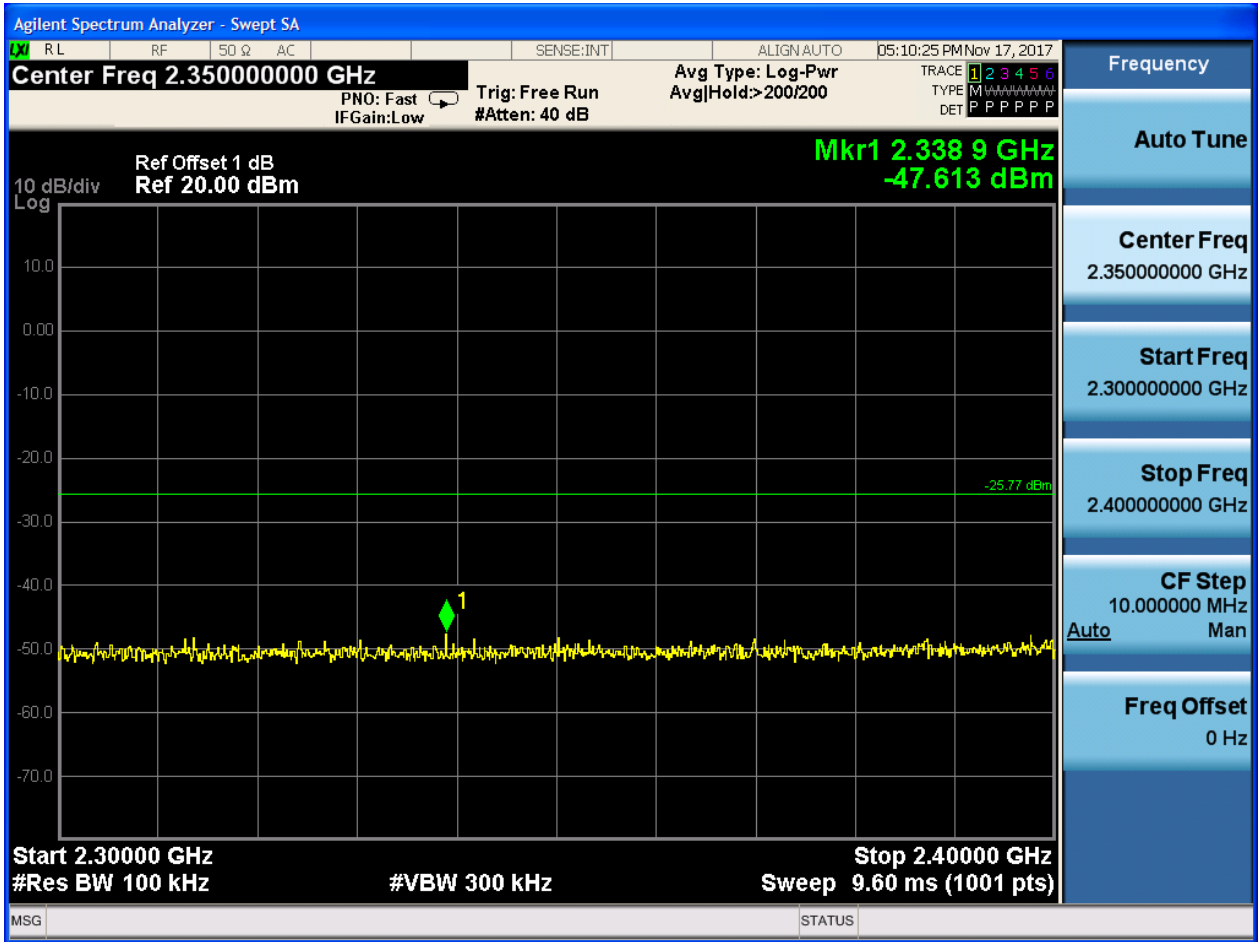

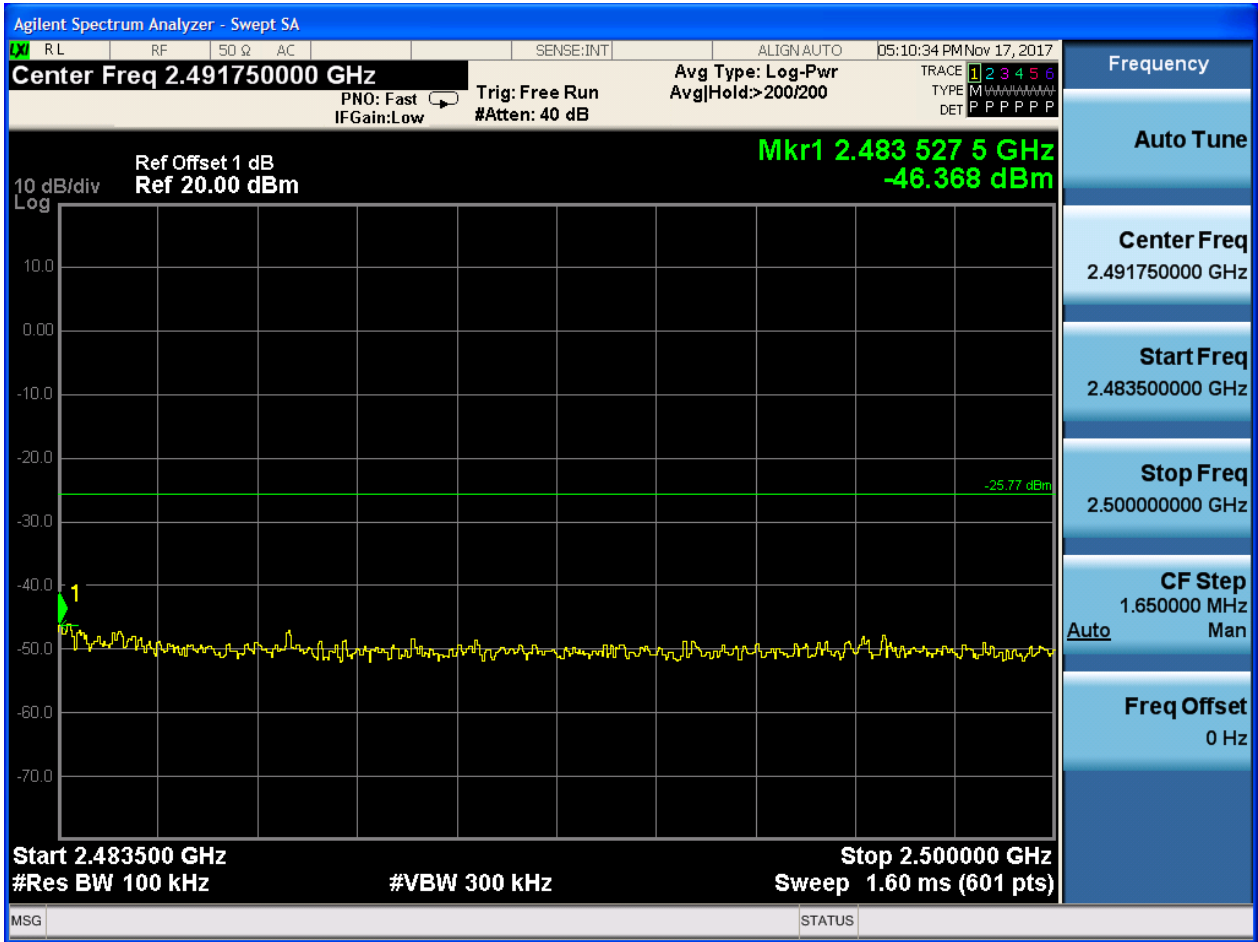


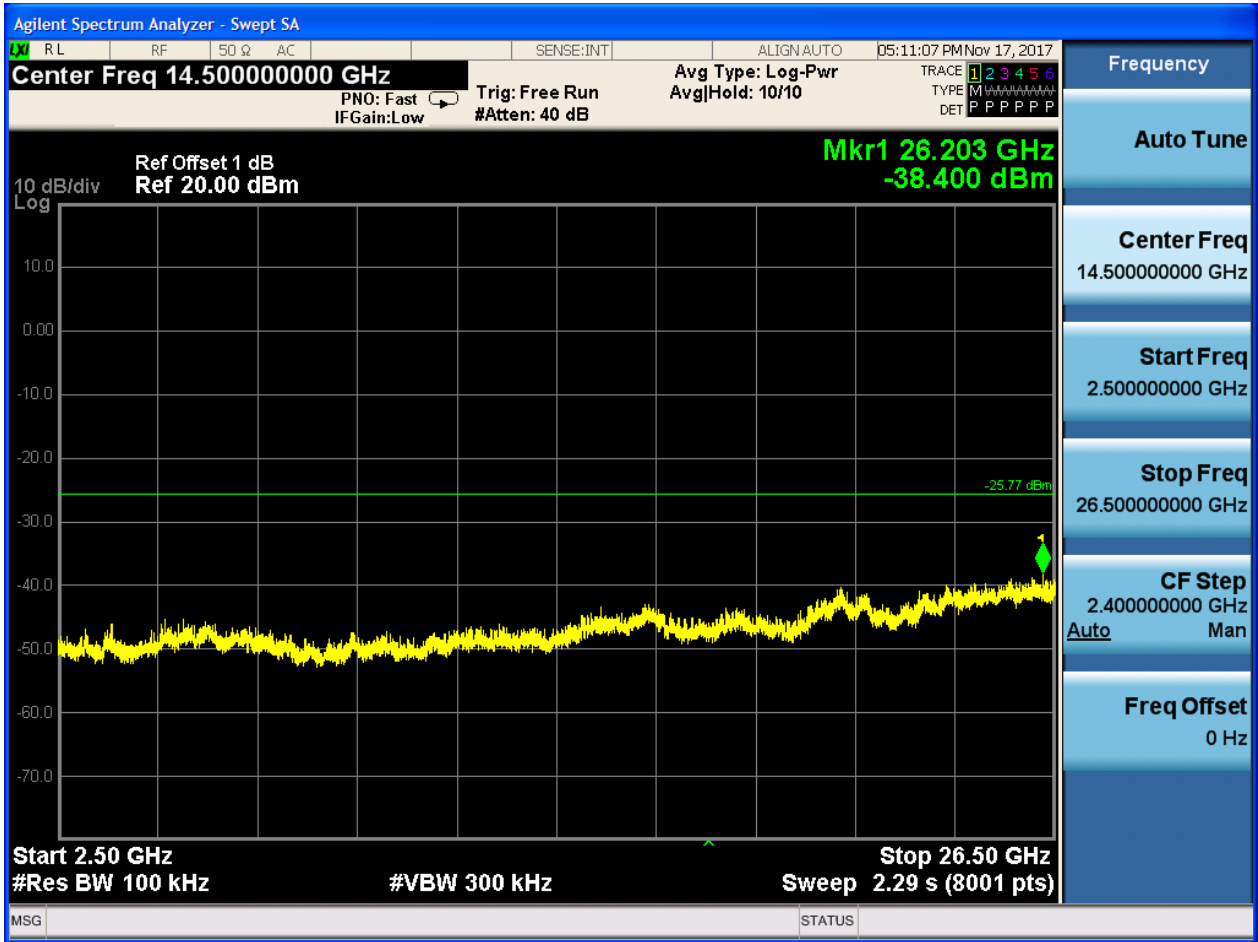




2.30 11G CDD__H@Ant 2


Pref:

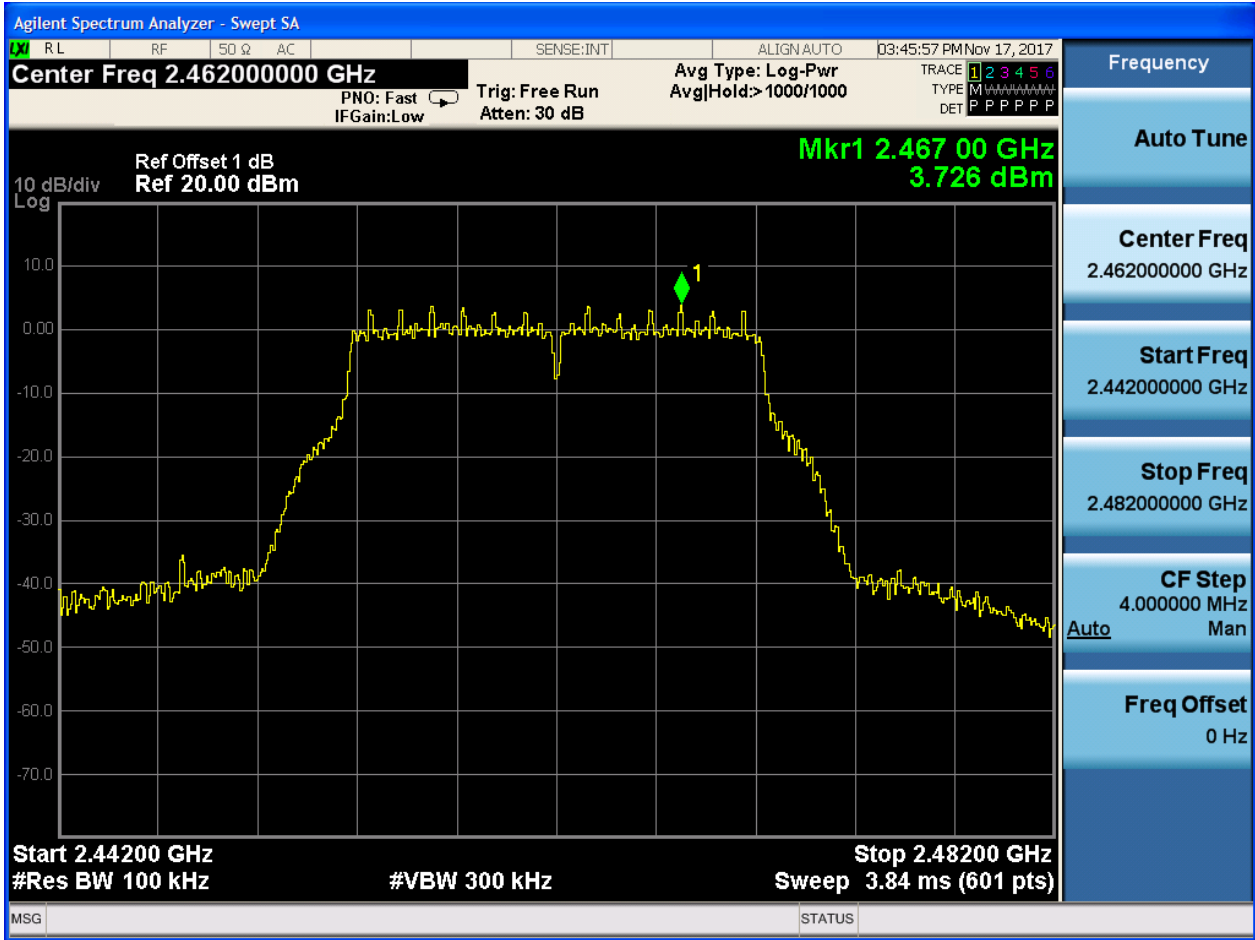






Puw:

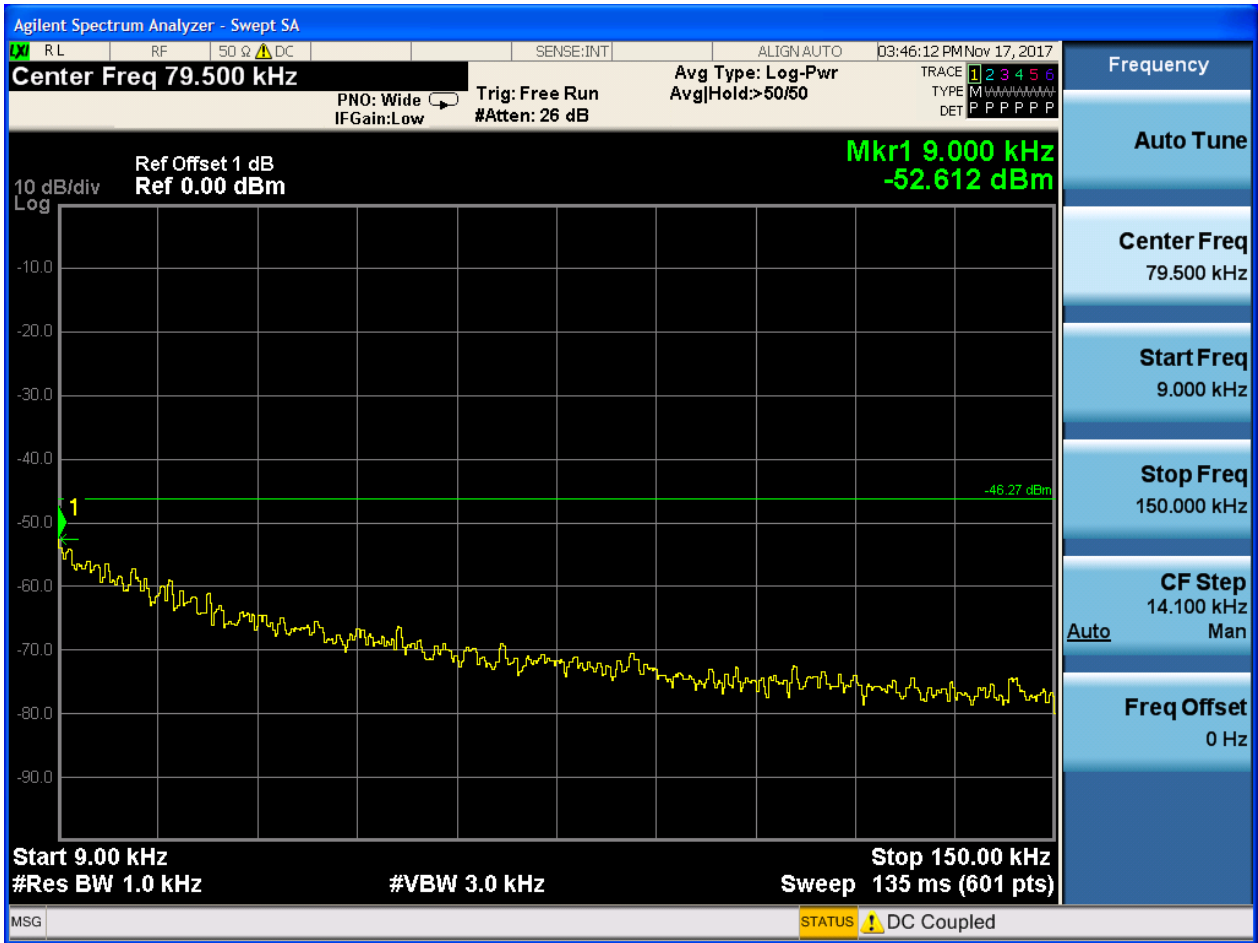


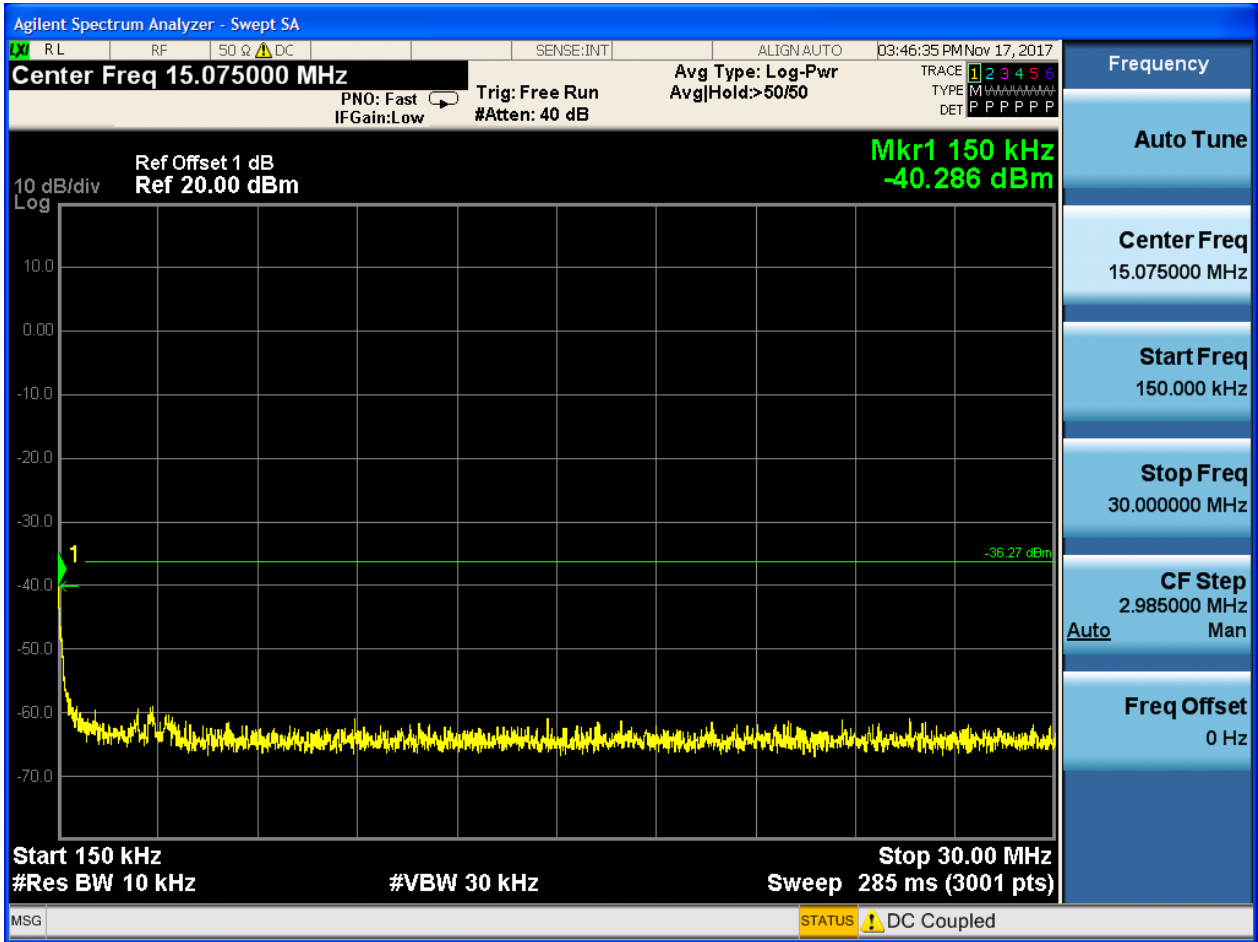

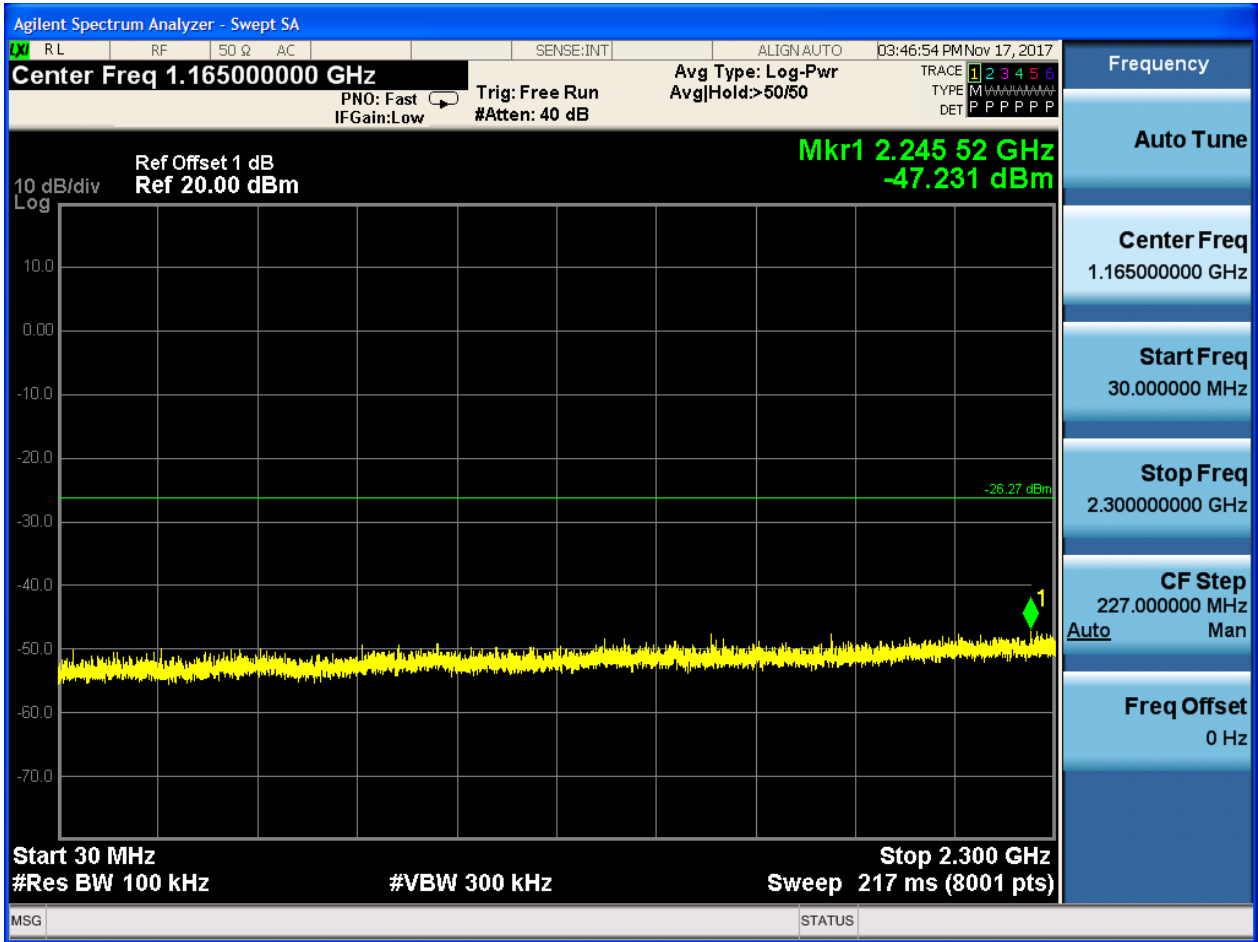

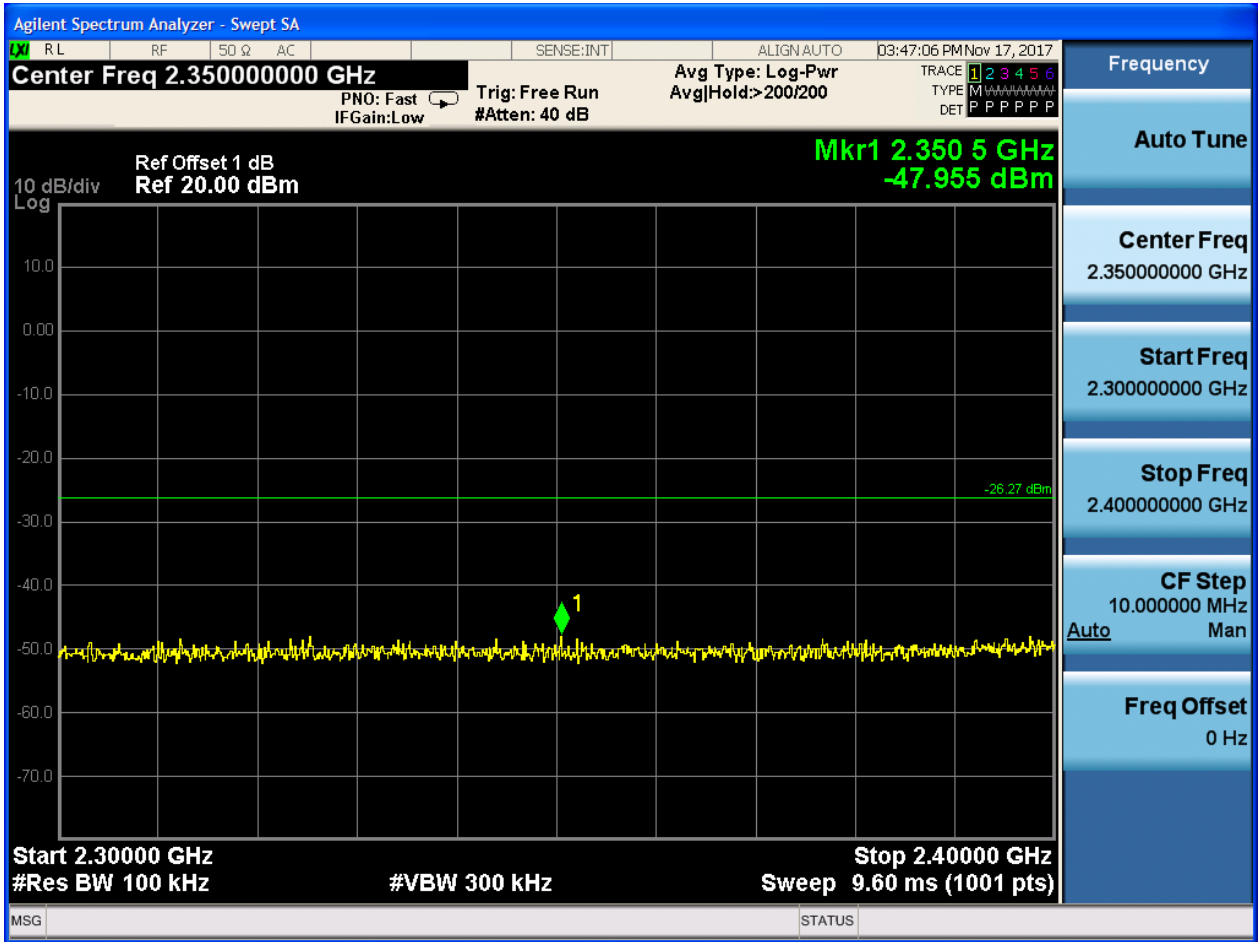

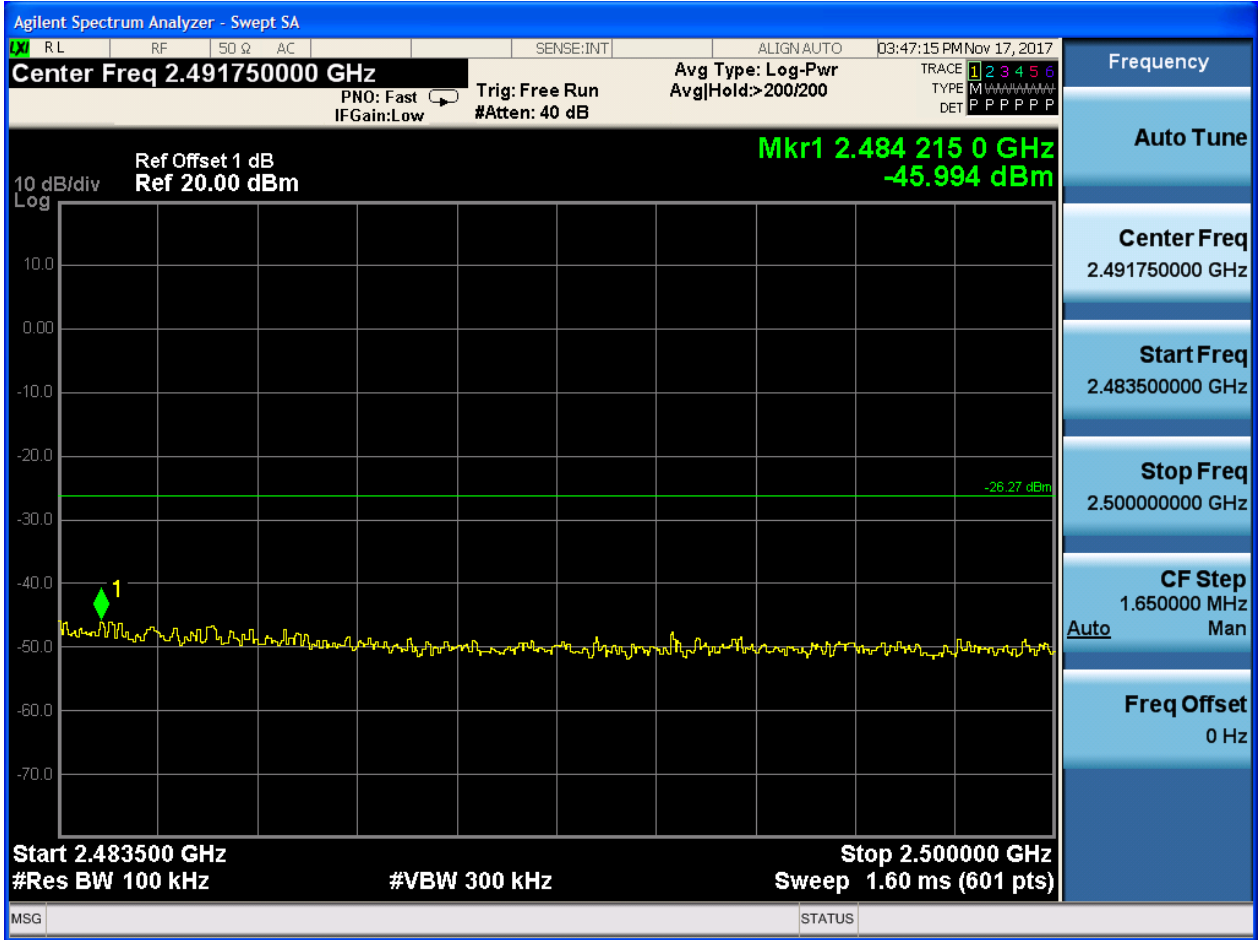

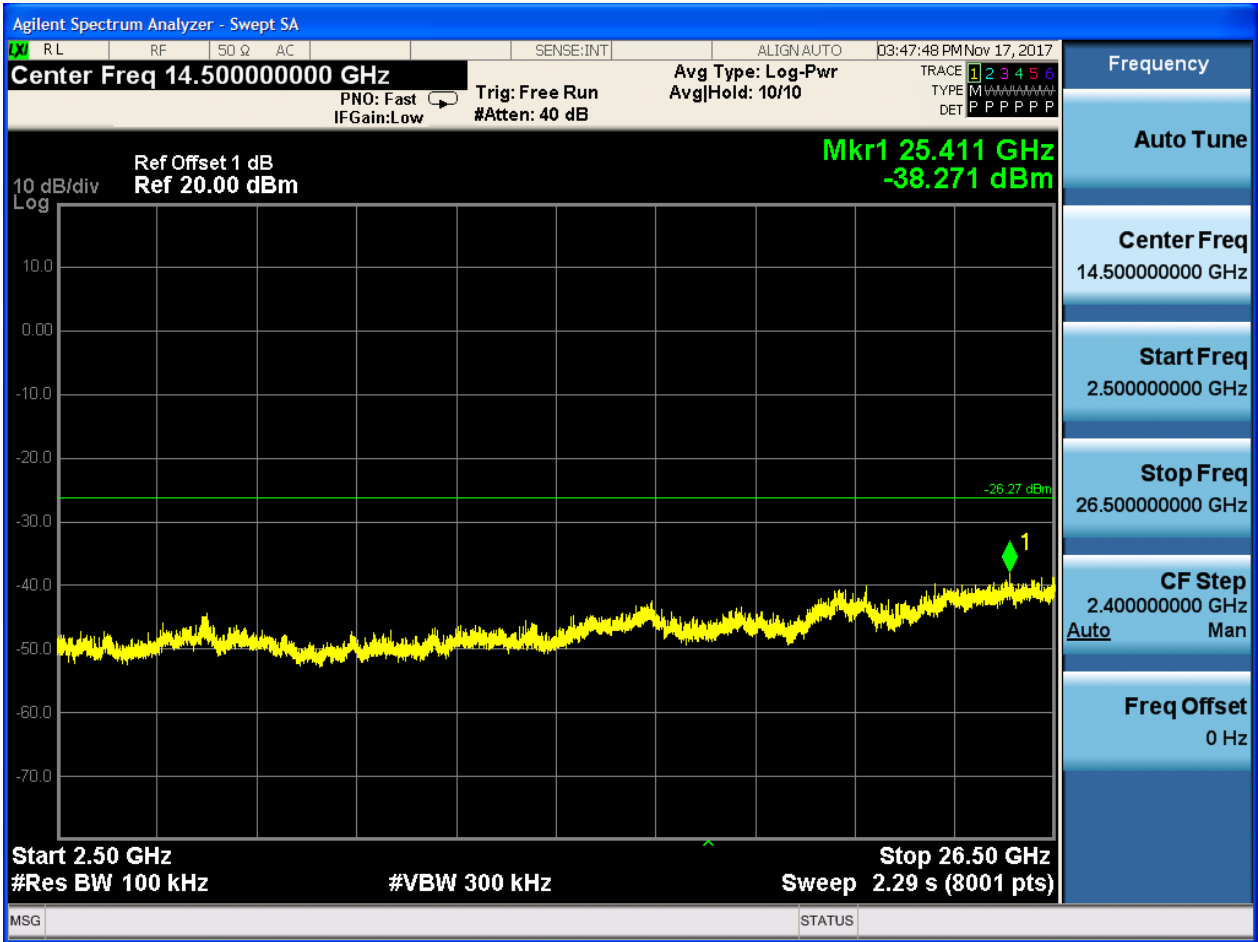



Appendix H: Radiated Spurious Emission & Spurious in Restricted Band

Note: We tested all modes, but the data presented below is the worst case.

Below 1GHz, RBW = 100 kHz, VBW = 300 kHz.

Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered

1.1 Part 1: Testing Range of “9 kHz to 30MHz”

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

1.2 Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).





| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|---------------|--------------|
| 40.330857 | 31.91 | 40.00 | 8.09 | 120.0 | V | 310.0 | 17.2 |
| 44.532857 | 31.39 | 40.00 | 8.61 | 100.0 | V | 237.0 | 16.6 |
| 60.509714 | 28.62 | 40.00 | 11.38 | 100.0 | V | 224.0 | 12.0 |
| 143.362286 | 27.56 | 43.50 | 15.94 | 101.0 | V | 298.0 | 13.1 |
| 190.744571 | 25.96 | 43.50 | 17.54 | 101.0 | V | 328.0 | 12.0 |
| 401.165428 | 28.07 | 46.00 | 17.93 | 117.0 | H | 332.0 | 19.2 |

Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3Part 3: Testing Range of “1 GHz to 3 GHz”

Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.


Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Test Mode:

1.3.1Test Mode: 11B

1.3.1.1 Channel 1 @Ant 1

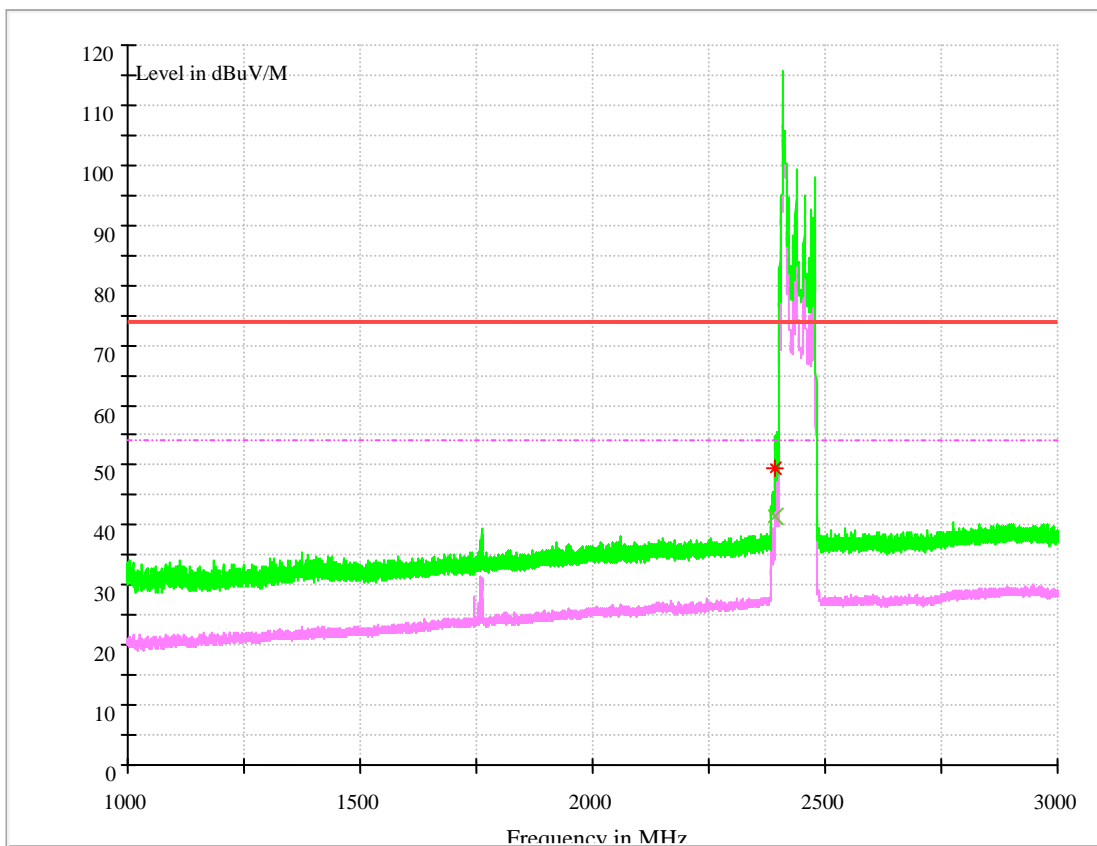

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------|--------------|
| 2390 | 41.61 | 54.00 | 12.39 | 150.0 | H | 8.0 | -8.5 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------------|--------------|
| 2390 | 49.34 | 74.00 | 24.66 | 150.0 | H | 11.0 | -8.5 |


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.1.2 Channel 1 @Ant 2

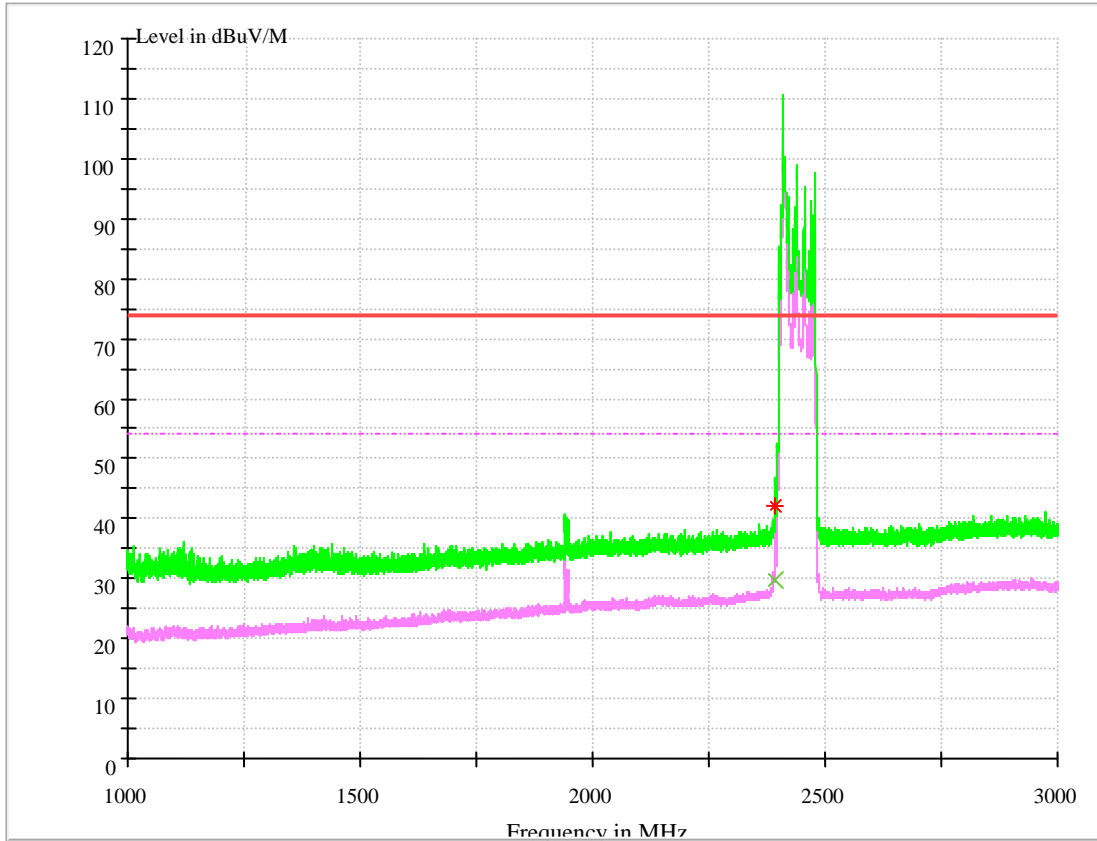

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|-----------------|-----------------|-------------|-------------|-----|-----------|--------------|
| 2390 | 29.82 | 54.00 | 24.18 | 150.0 | H | 192.0 | -8.6 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|-----------------|-----------------|-------------|-------------|-----|-----------------|--------------|
| 2390 | 42.26 | 74.00 | 31.74 | 100.0 | H | 200.0 | -8.6 |


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.1.3 Channel 11@Ant 1

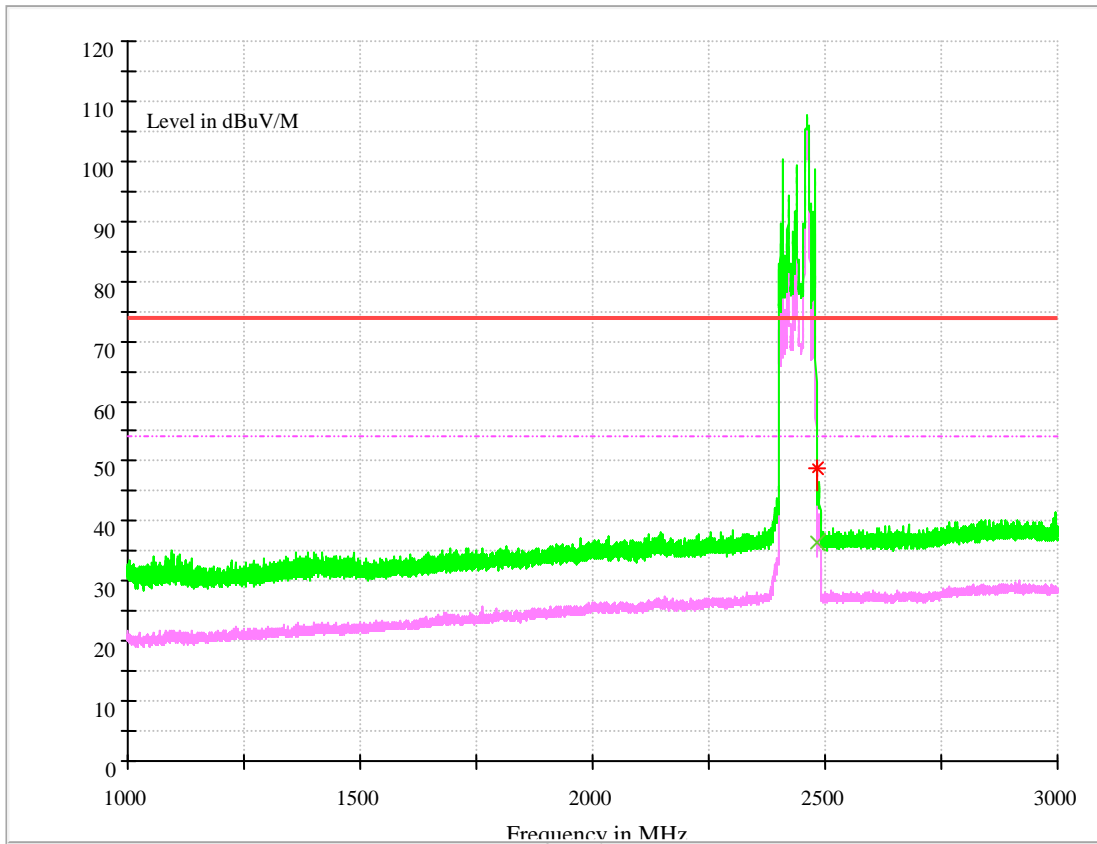

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------|--------------|
| 2483.5 | 36.39 | 54.00 | 17.61 | 100.0 | H | 45.0 | -6.8 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------------|--------------|
| 2483.5 | 48.84 | 74.00 | 25.16 | 100.0 | H | 45.0 | -6.8 |


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.1.4 Channel 11@Ant 2

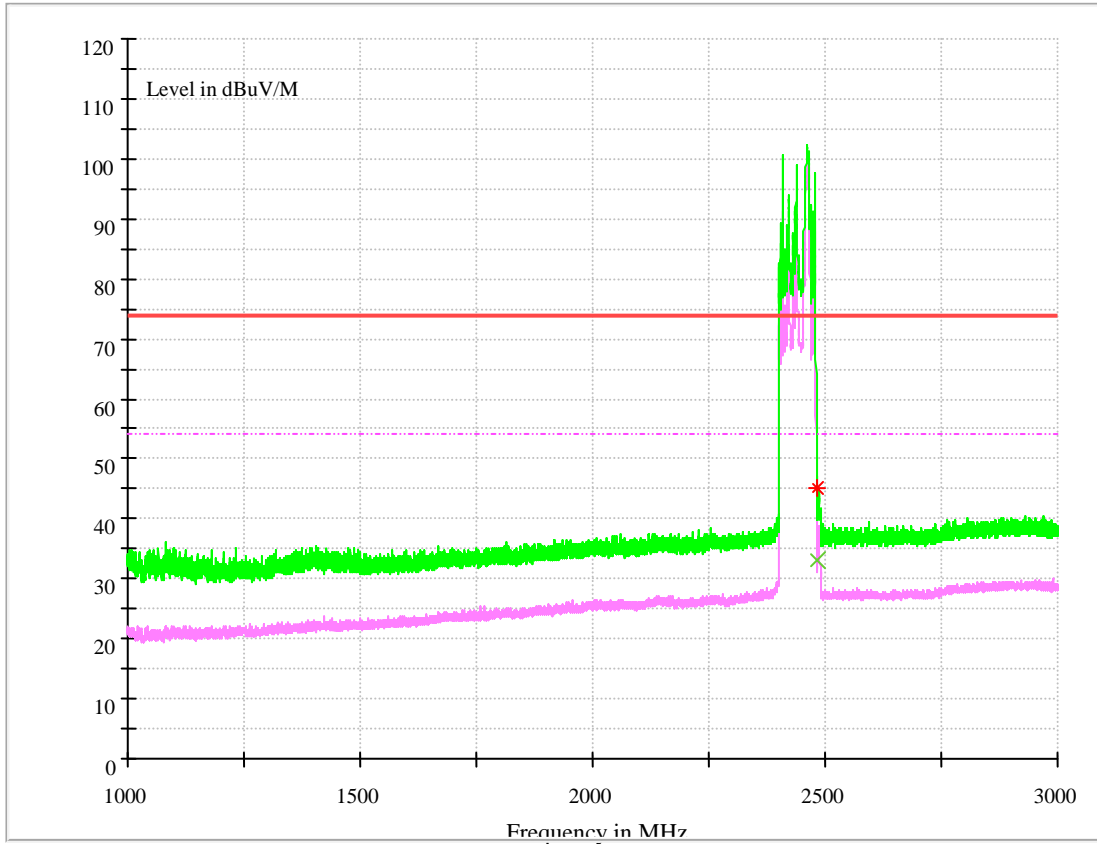

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|-----------------|-----------------|-------------|-------------|-----|-----------|--------------|
| 2483.5 | 33.20 | 54.00 | 20.80 | 150.0 | H | 16.0 | -6.5 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|-----------------|-----------------|-------------|-------------|-----|-----------------|--------------|
| 2483.5 | 45.27 | 74.00 | 28.73 | 150.0 | H | 45.0 | -6.5 |

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2 Test Mode: 11G

1.3.2.1 Channel 1 @Ant 1

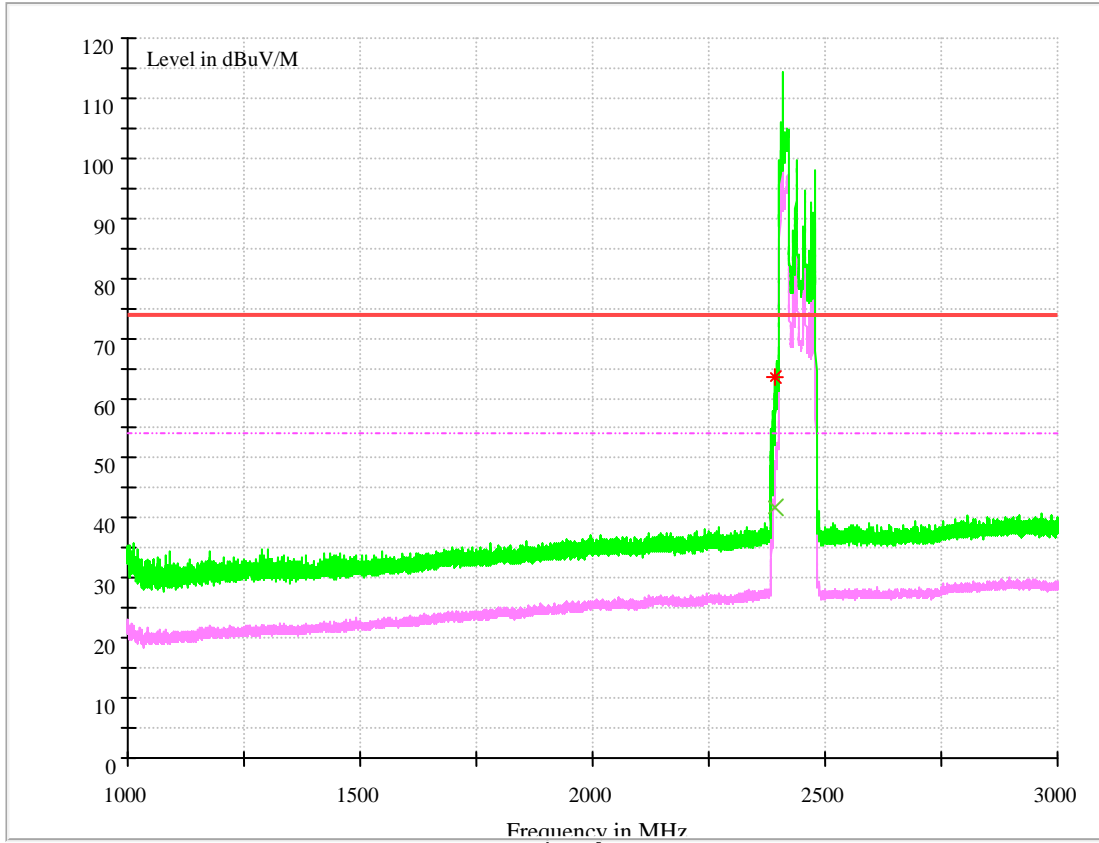

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------|--------------|
| 2390 | 41.85 | 54.00 | 12.15 | 150.0 | H | 108.0 | -8.6 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------------|--------------|
| 2390 | 63.45 | 74.00 | 10.55 | 150.0 | H | 108.0 | -8.6 |


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2.2 Channel 1 @Ant 2

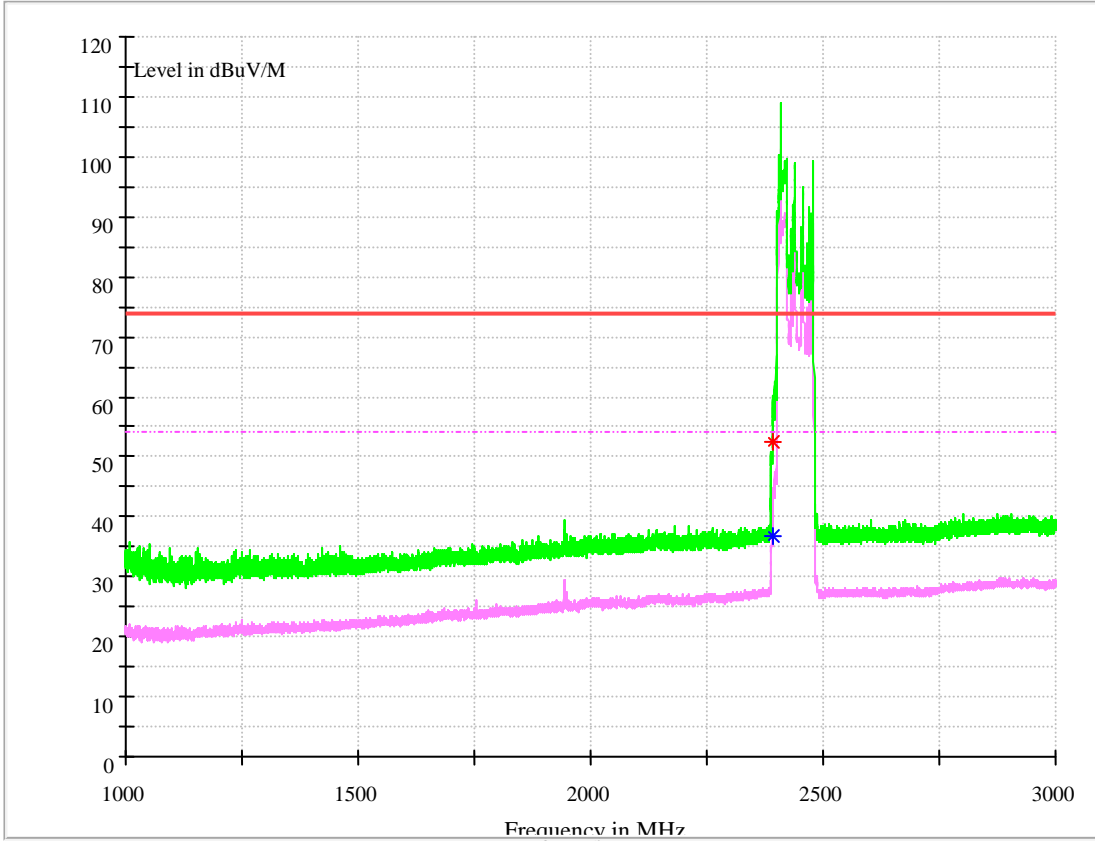

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------|--------------|
| 2390 | 36.15 | 54.00 | 17.85 | 150.0 | V | 107.0 | -8.6 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------------|--------------|
| 2390 | 50.39 | 74.00 | 23.61 | 150.0 | H | 220.0 | -8.6 |


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2.3 Channel 11@Ant 1

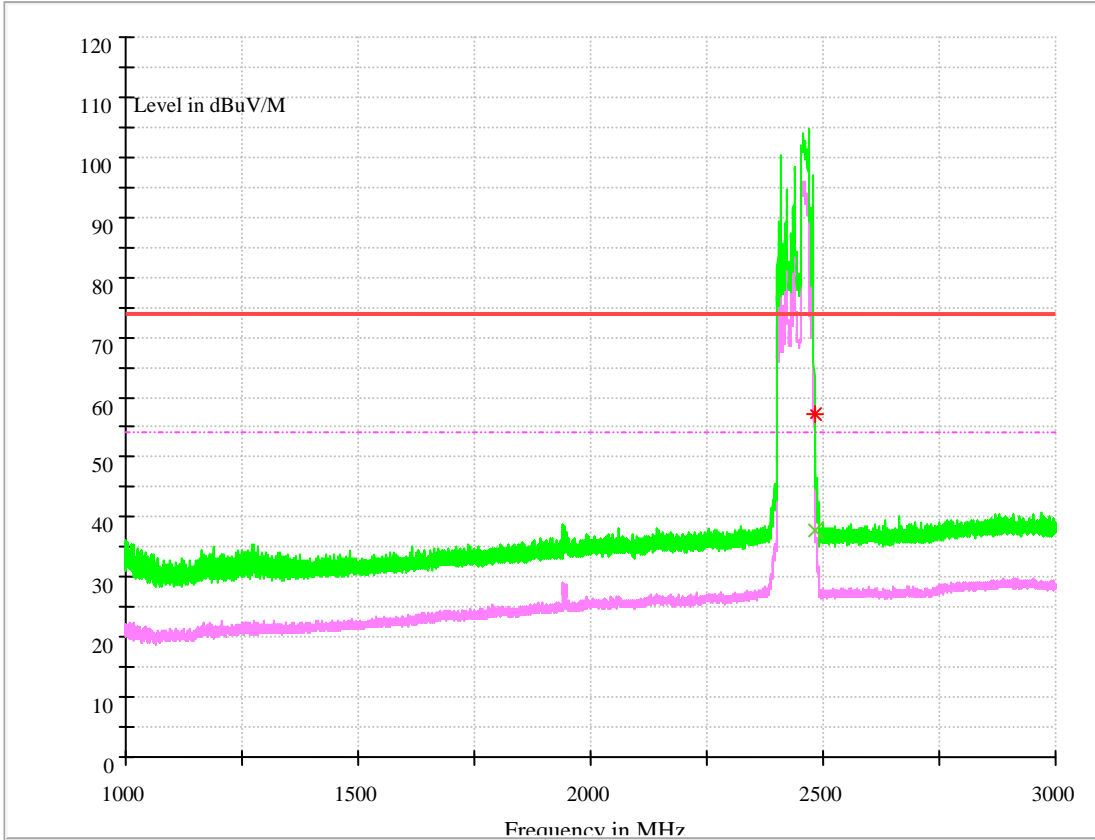

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|-----------------|-----------------|-------------|-------------|-----|-----------|--------------|
| 2483.5 | 37.73 | 54.00 | 16.27 | 150.0 | H | 52.0 | -6.5 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|-----------------|-----------------|-------------|-------------|-----|-----------------|--------------|
| 2483.5 | 57.03 | 74.00 | 16.97 | 150.0 | H | 52.0 | -6.5 |


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.2.4 Channel 11@Ant 2

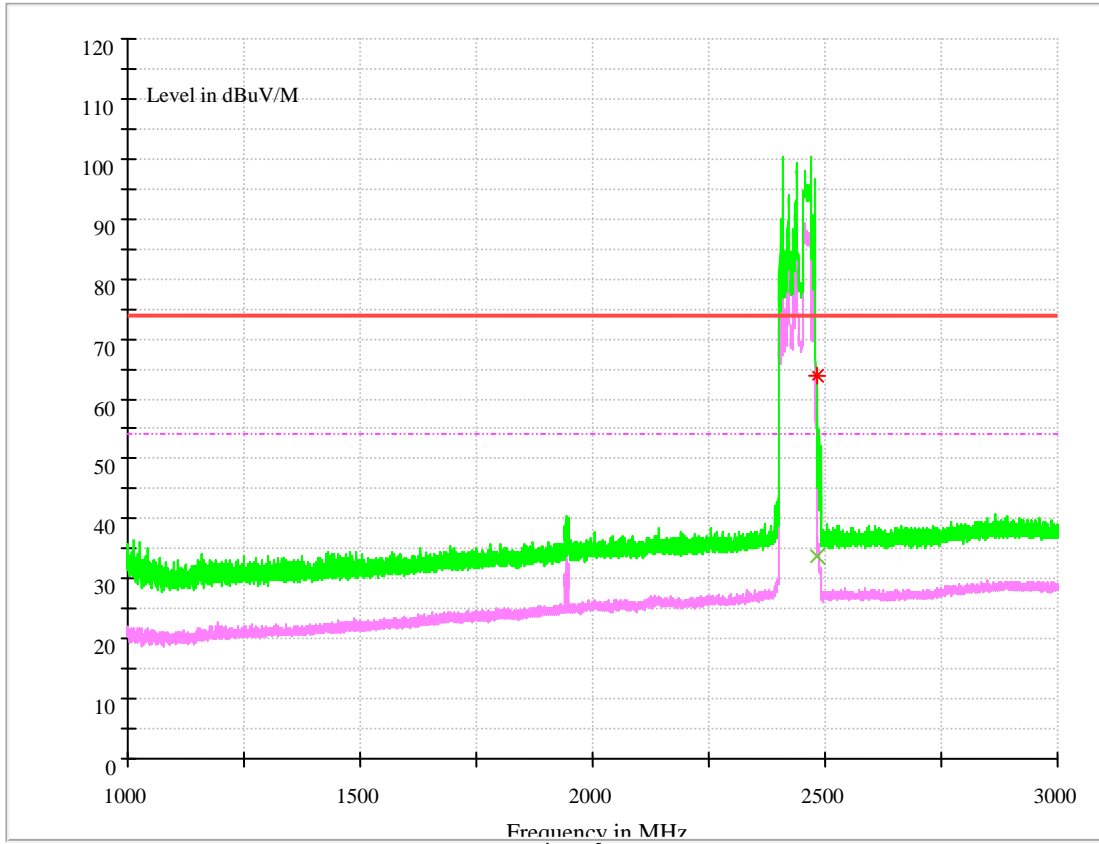

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------|--------------|
| 2483.5 | 33.92 | 54.00 | 20.08 | 150.0 | H | 31.0 | -7.2 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------------|--------------|
| 2483.5 | 63.80 | 74.00 | 10.20 | 150.0 | H | 291.0 | -7.2 |

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.3 Test Mode: 11N20

1.3.3.1 Channel 1 @Ant 1

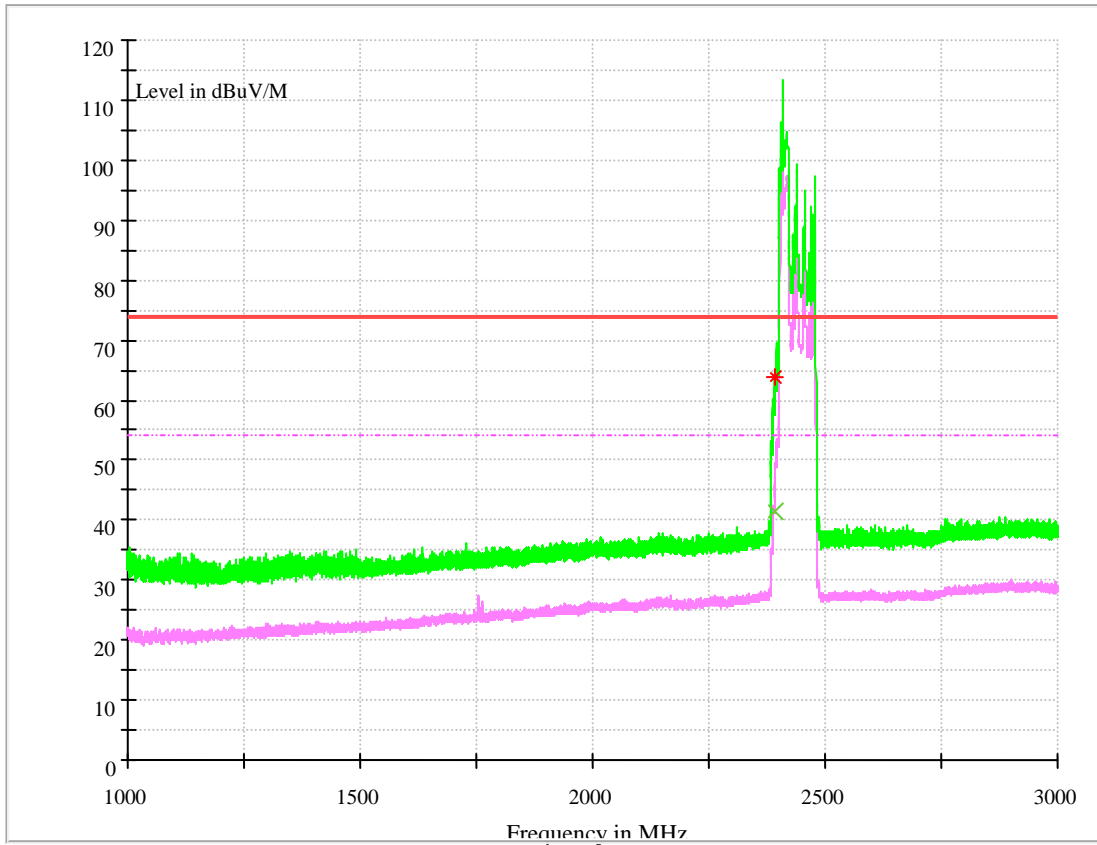

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------|--------------|
| 2390 | 41.56 | 54.00 | 12.44 | 150.0 | H | 8.0 | -8.6 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------------|--------------|
| 2390 | 63.82 | 74.00 | 10.18 | 150.0 | V | 1.0 | -8.6 |


Note2:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.3.2 Channel 1 @Ant 2

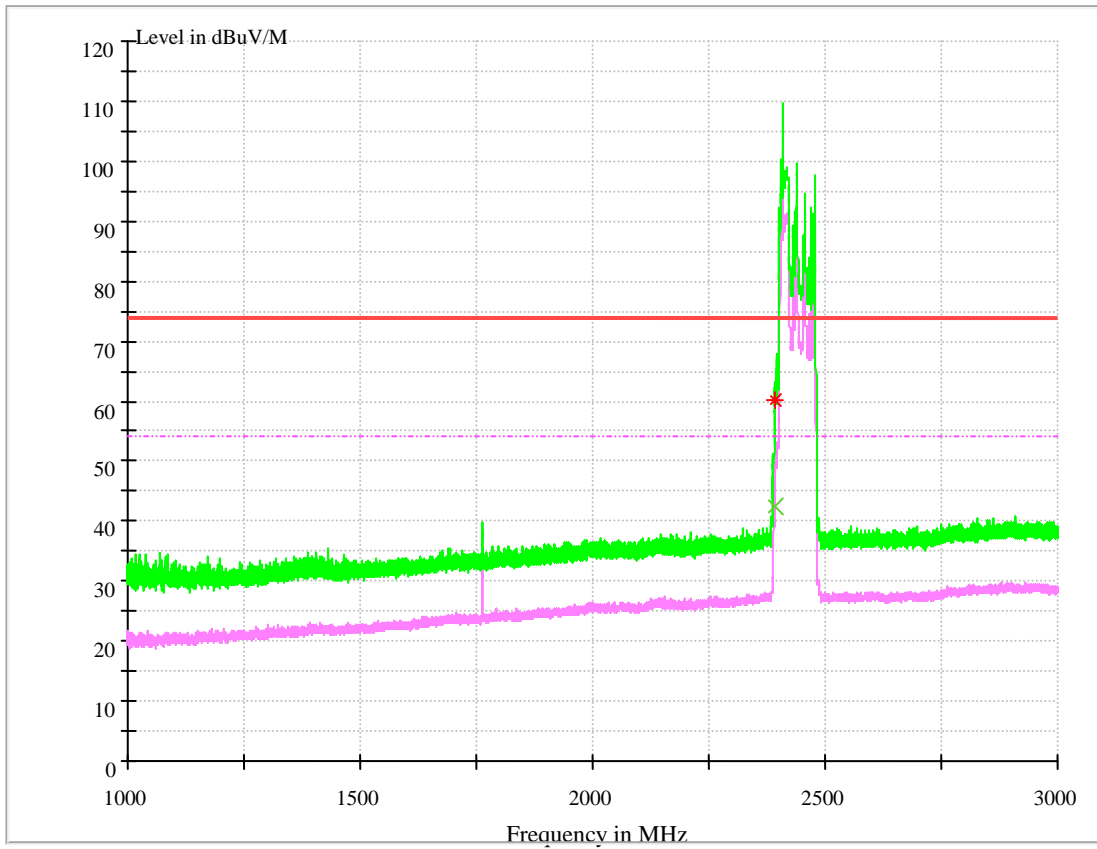

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------|--------------|
| 2390 | 42.29 | 54.00 | 11.71 | 150.0 | H | 10.0 | -8.5 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------------|--------------|
| 2390 | 60.05 | 74.00 | 13.95 | 150.0 | V | 10.0 | -8.5 |


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.3.3 Channel 11@Ant 1

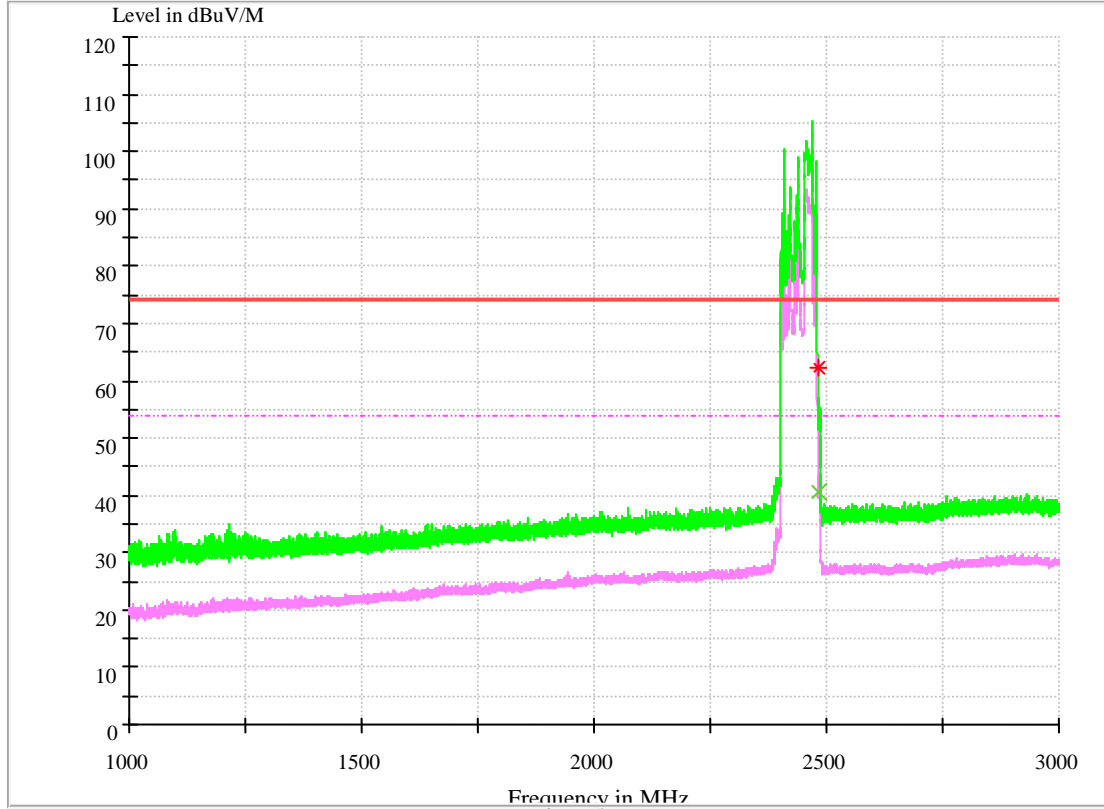

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------|--------------|
| 2483.5 | 40.52 | 54.00 | 13.48 | 150.0 | V | 52.0 | -6.9 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------------|--------------|
| 2483.5 | 63.76 | 74.00 | 10.24 | 150.0 | H | 52.0 | -6.9 |


Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.3.4 Channel 11@Ant 2

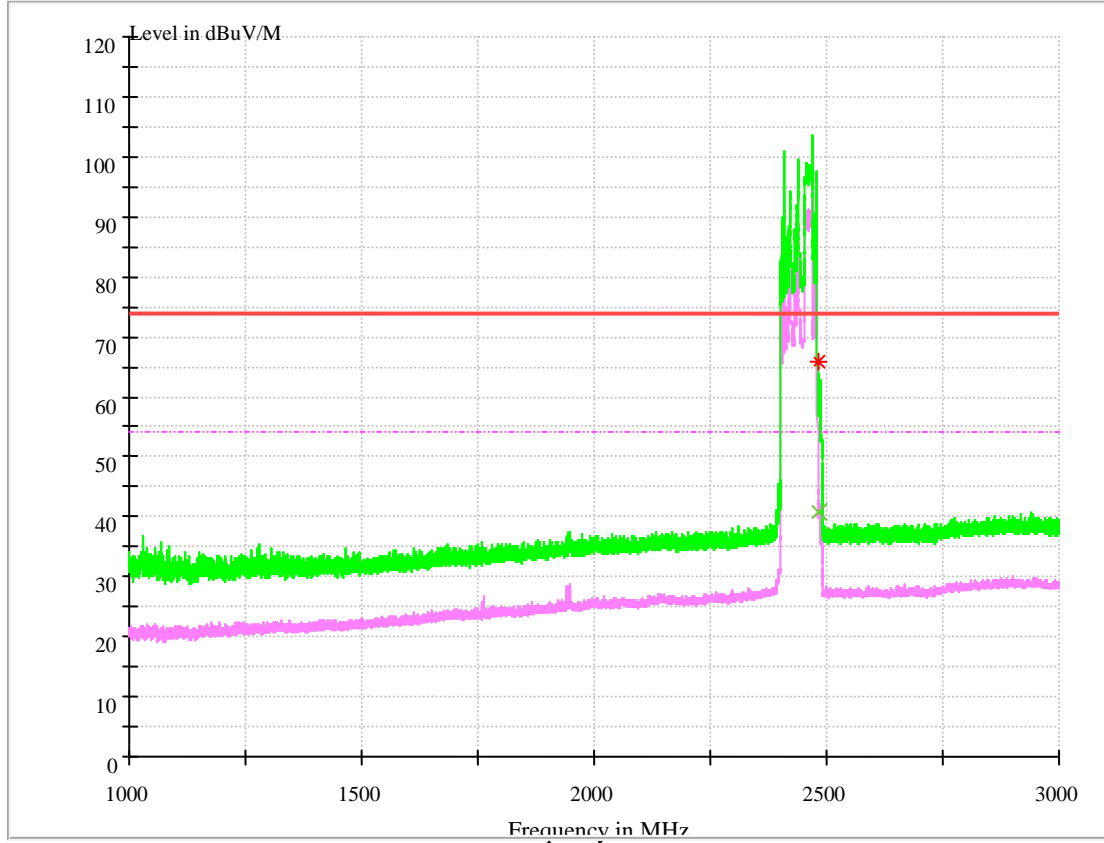

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------|--------------|
| 2483.5 | 40.76 | 54.00 | 13.24 | 150.0 | H | 30.0 | -6.4 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------------|--------------|
| 2483.5 | 65.97 | 74.00 | 8.03 | 150.0 | H | 23.0 | -6.4 |

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.4 Test Mode: 11G_CDD

1.3.4.1 11G_CDD Channel 1

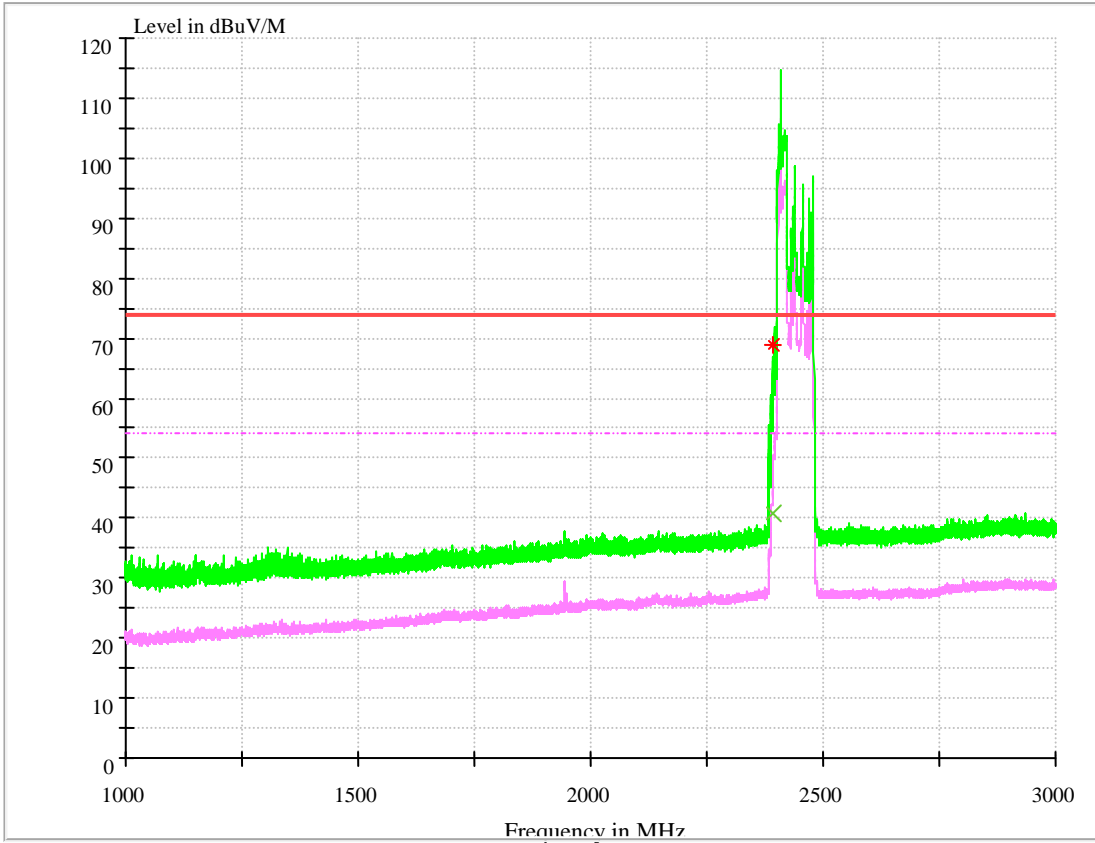

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|-----------------|-----------------|-------------|-------------|-----|-----------|--------------|
| 2390 | 40.72 | 54.00 | 13.28 | 150.0 | H | 274.0 | -8.6 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|-----------------|-----------------|-------------|-------------|-----|-----------------|--------------|
| 2390 | 68.78 | 74.00 | 5.22 | 150.0 | V | 107.0 | -8.6 |


Note2:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.4.1 11G_CDD Channel 11

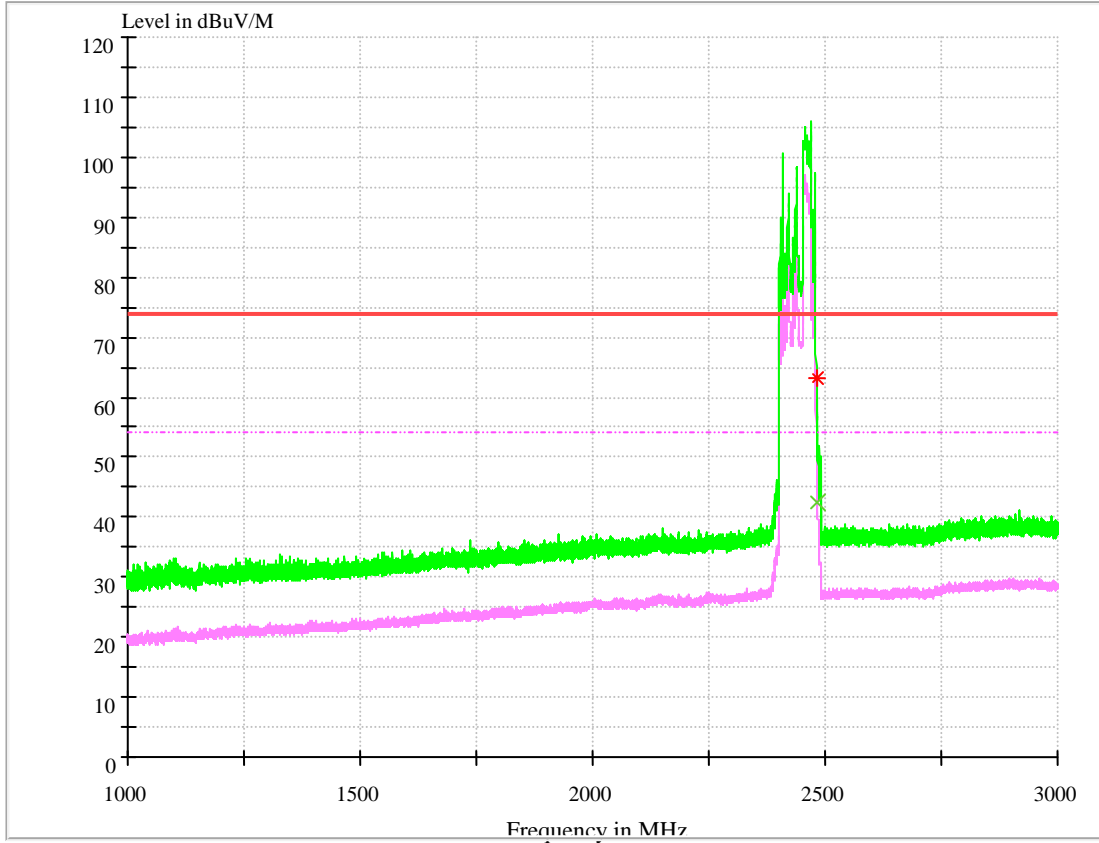

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|-----------------|-----------------|-------------|-------------|-----|-----------|--------------|
| 2483.5 | 42.31 | 54.00 | 11.69 | 150 | V | 44.0 | -6.6 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|-----------------|-----------------|-------------|-------------|-----|-----------------|--------------|
| 2483.5 | 63.08 | 74.00 | 10.92 | 150 | H | 50.0 | -6.6 |

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.5 Test Mode: 11N_MIMO

1.3.5.1 11N_MIMO Channel 1

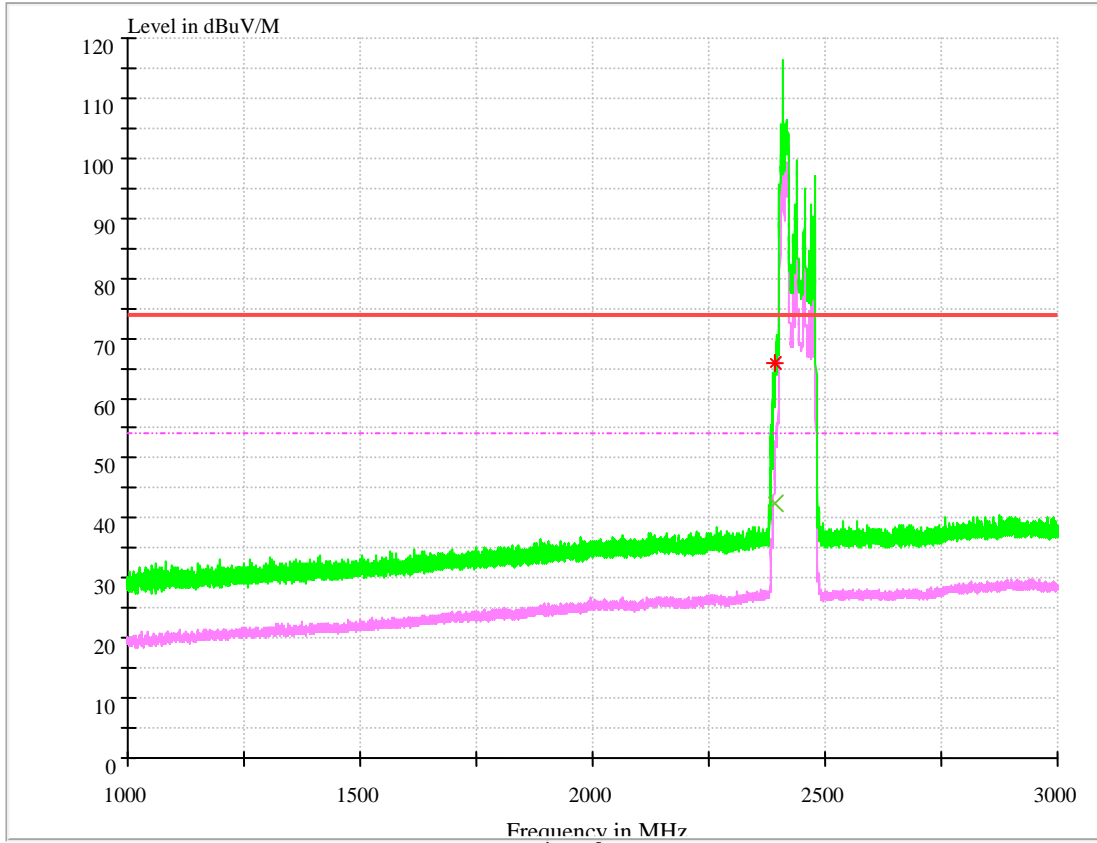

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|-----------------|-----------------|-------------|-------------|-----|-----------|--------------|
| 2390 | 42.36 | 54.00 | 11.64 | 100.0 | H | 19.0 | -8.6 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dBμ V/m) | Limit (dBμ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|-----------------|-----------------|-------------|-------------|-----|-----------------|--------------|
| 2390 | 65.97 | 74.00 | 8.03 | 150.0 | H | 19.0 | -8.6 |


Note2:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.5.2 11N_MIMO Channel 11

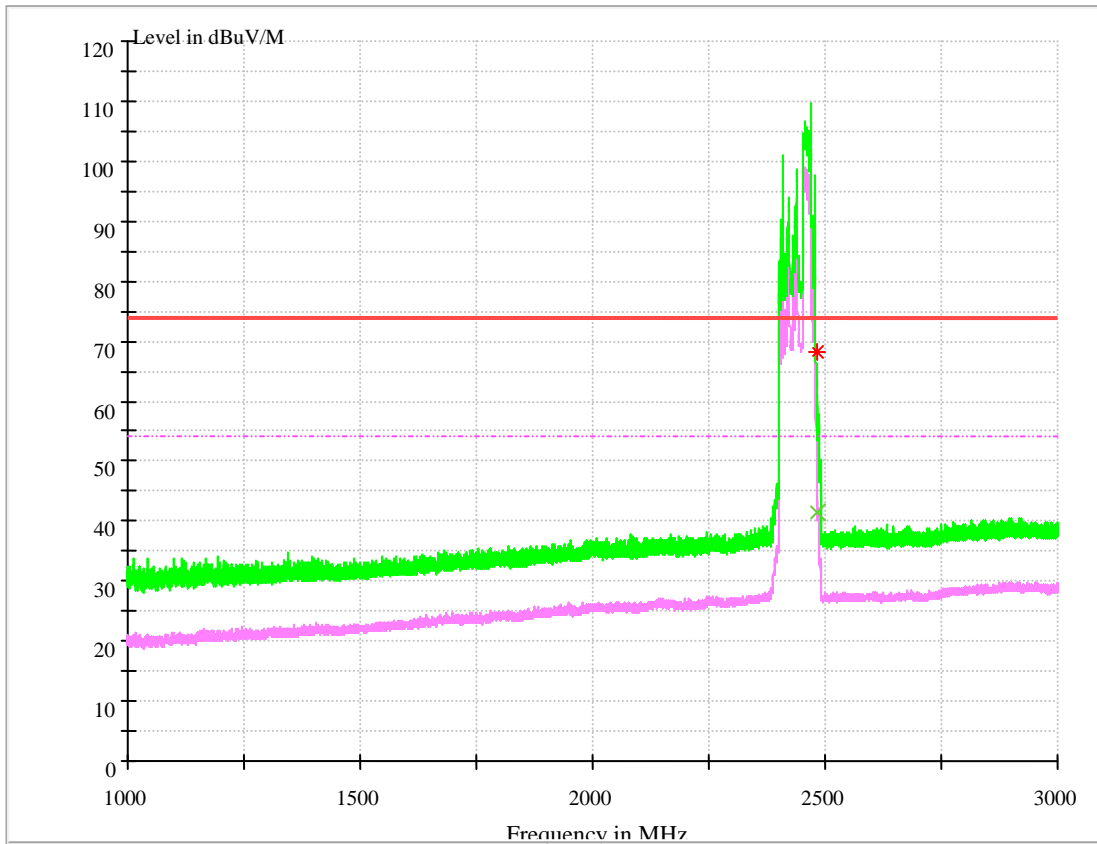

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------|--------------|
| 2483.5 | 41.53 | 54.00 | 12.47 | 100.0 | H | 51.0 | -6.8 |

MEASUREMENT RESULT: PK Detector

| Frequency (MHz) | Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth h (deg) | Transd. (dB) |
|-----------------|----------------------|----------------------|-------------|-------------|-----|-----------------|--------------|
| 2483.5 | 68.14 | 74.00 | 5.86 | 150.0 | H | 52.0 | -6.8 |

Note2:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.4 Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands far away from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

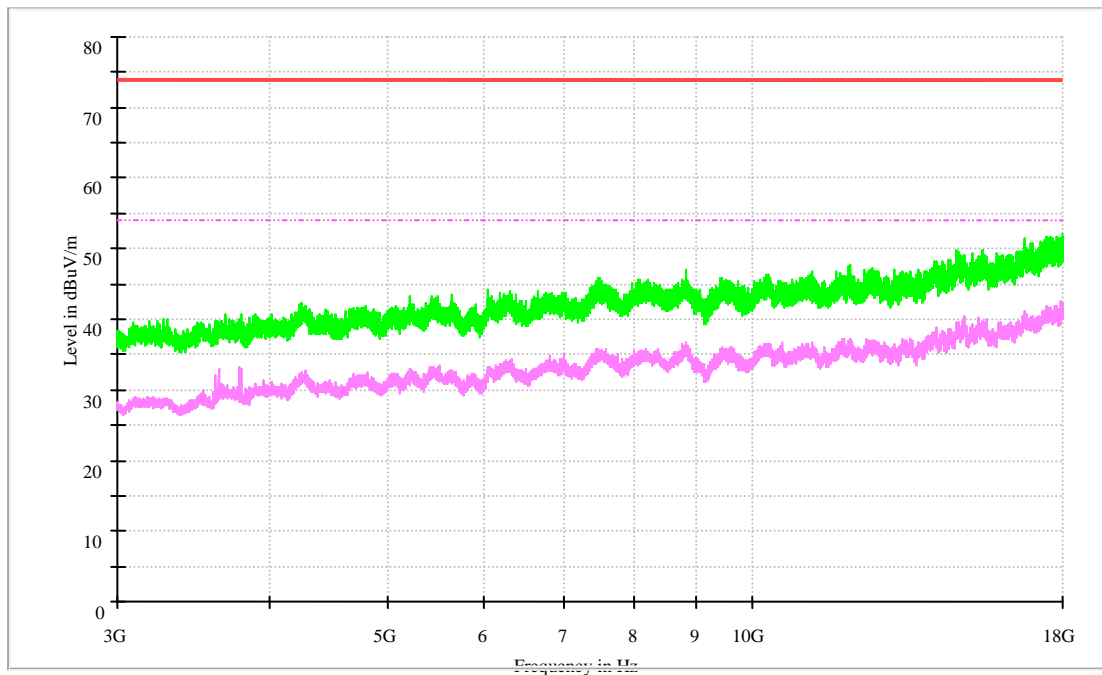


1.5 Part 5: Testing Range of “18 GHz to 26.5 GHz”

NOTE: No peak found in the Test Range of “18 GHz to 26.5GHz”

Appendix I: Conducted Emission at Power Port

Note: RBW = 9 kHz, VBW = 30 kHz

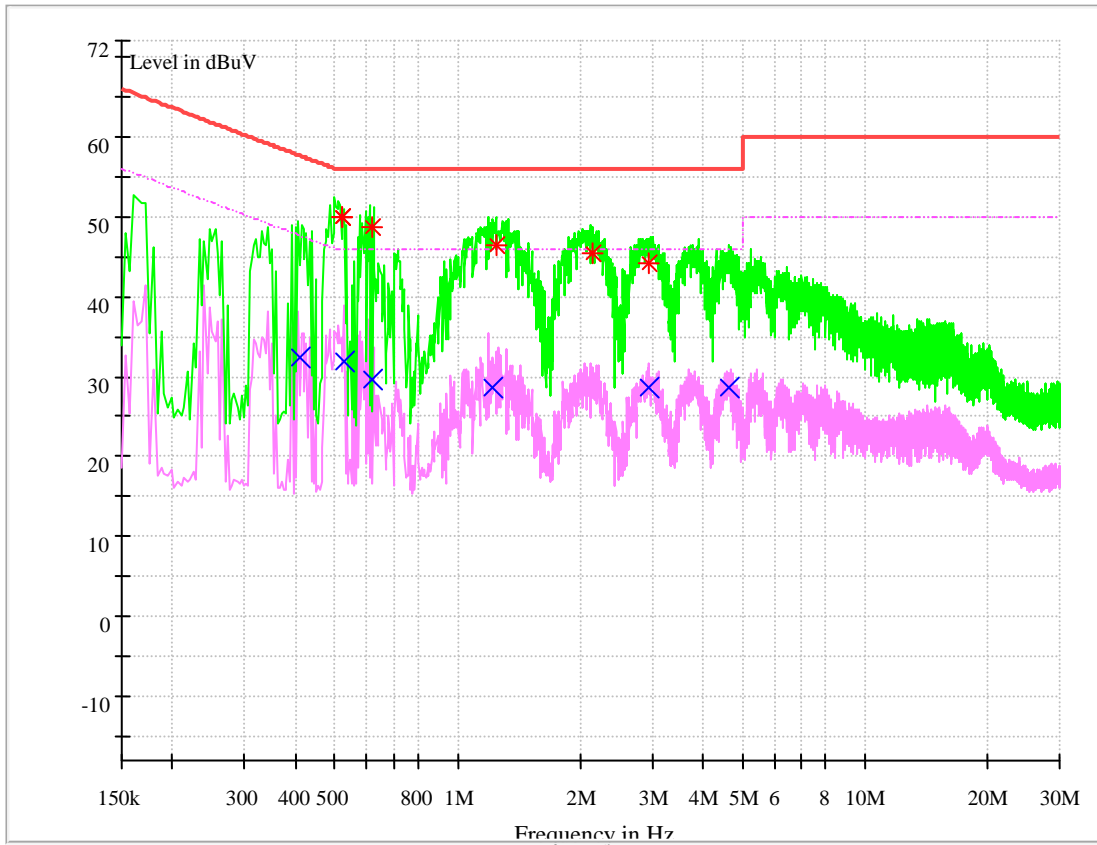

**MEASUREMENT RESULT: PK Detector**

| Frequency (MHz) | Level (dB μ V) | Limit (dB μ V) | Transd. (dB) | Margin (dB) | Line | PE |
|-----------------|--------------------|--------------------|--------------|-------------|------|-----|
| 0.522218 | 49.87 | 56.00 | 9.7 | 6.13 | N | FLO |
| 0.522298 | 49.91 | 56.00 | 9.7 | 6.09 | N | FLO |
| 0.617368 | 48.69 | 56.00 | 9.7 | 7.31 | L1 | FLO |
| 1.239538 | 46.49 | 56.00 | 9.7 | 9.51 | N | FLO |
| 2.142157 | 45.42 | 56.00 | 9.7 | 10.58 | N | FLO |
| 4.654426 | 44.21 | 56.00 | 9.7 | 11.79 | N | FLO |

MEASUREMENT RESULT: AV Detector

| Frequency (MHz) | Level (dB μ V) | Limit (dB μ V) | Transd. (dB) | Margin (dB) | Line | PE |
|-----------------|--------------------|--------------------|--------------|-------------|------|-----|
| 0.412235 | 32.34 | 47.60 | 9.7 | 15.26 | L1 | FLO |
| 0.526924 | 31.77 | 46.00 | 9.7 | 14.23 | N | FLO |
| 0.618484 | 29.66 | 46.00 | 9.7 | 16.34 | L1 | FLO |
| 1.217661 | 28.59 | 46.00 | 9.7 | 17.41 | L1 | FLO |
| 2.943090 | 28.57 | 46.00 | 9.7 | 17.43 | N | FLO |
| 4.654426 | 28.7 | 46.00 | 9.7 | 17.30 | N | FLO |

Note2:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

END