



# Appendix A: 20dB Emission Bandwidth (EBW)




## 1 Result Table

EUT Conf.	EBW [MHz]	Verdict
TM1_DH5_Ch0	0.96	Pass
TM1_DH5_Ch39	1.02	Pass
TM1_DH5_Ch78	1.02	Pass
TM2_2DH5_Ch0	1.35	Pass
TM2_2DH5_Ch39	1.34	Pass
TM2_2DH5_Ch78	1.34	Pass
TM3_3DH5_Ch0	1.35	Pass
TM3_3DH5_Ch39	1.34	Pass
TM3_3DH5_Ch78	1.34	Pass




## 2 Test Plot

### 2.1 TM1\_DH5\_Ch0

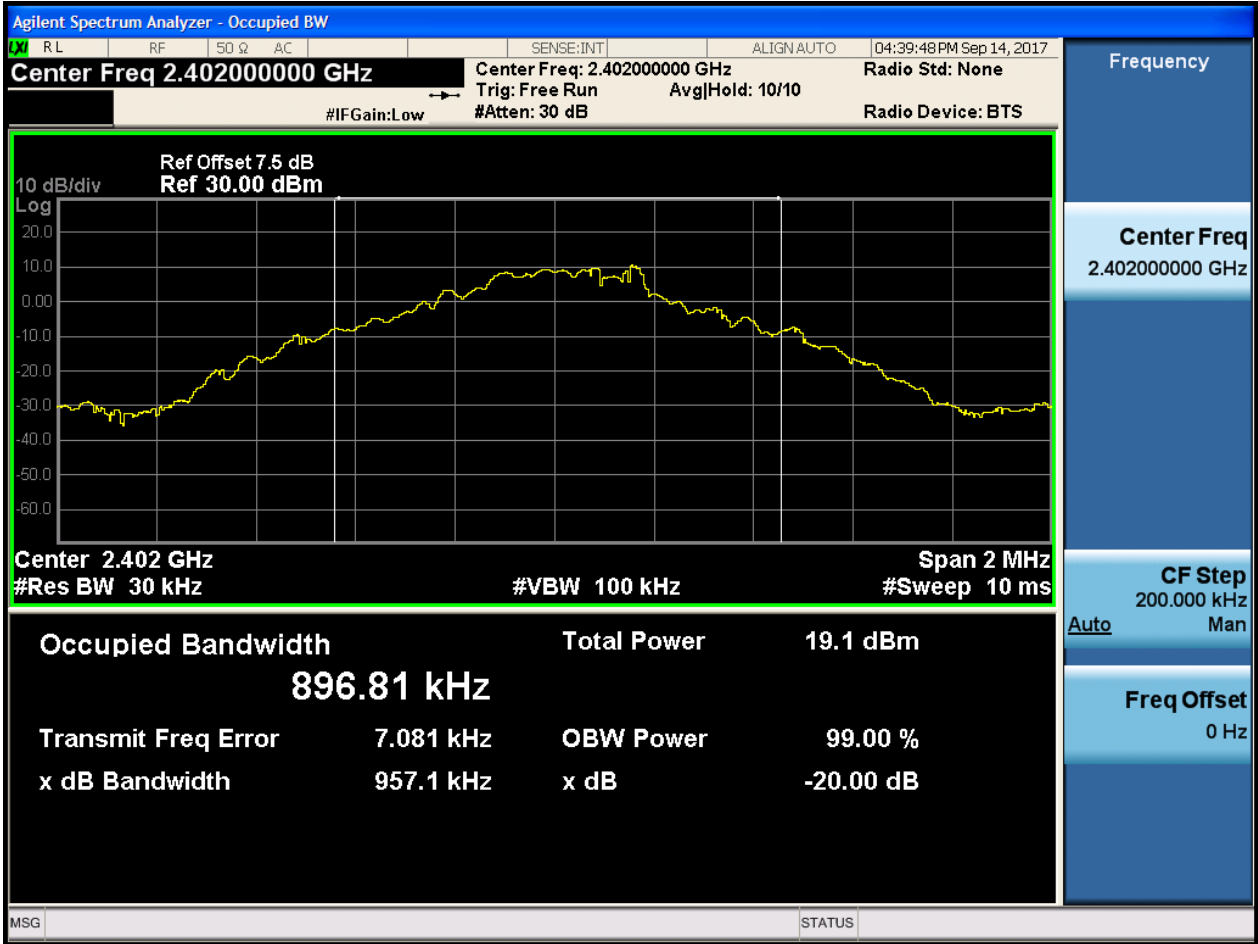




### 2.2 TM1\_DH5\_Ch39

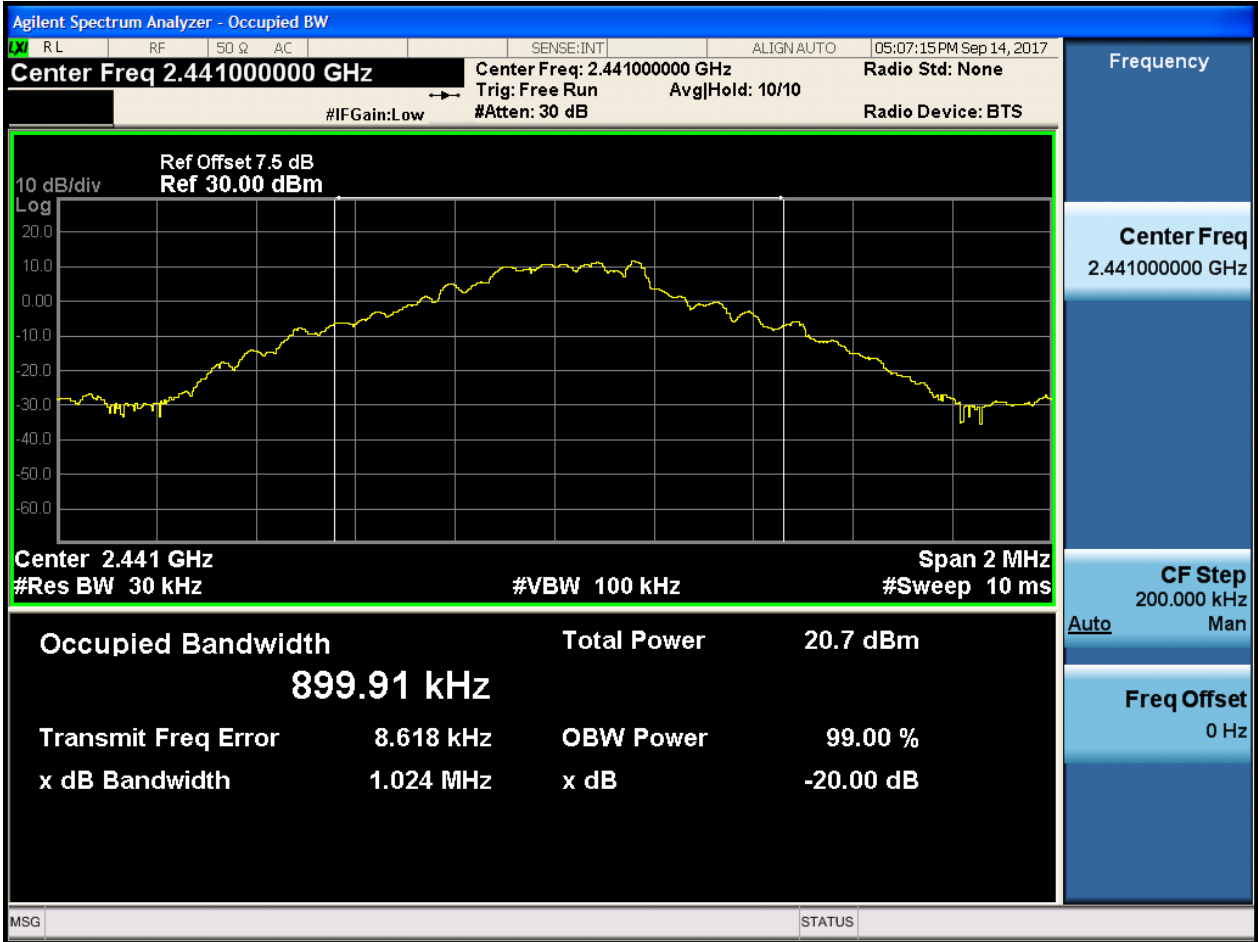




### 2.3 TM1\_DH5\_Ch78

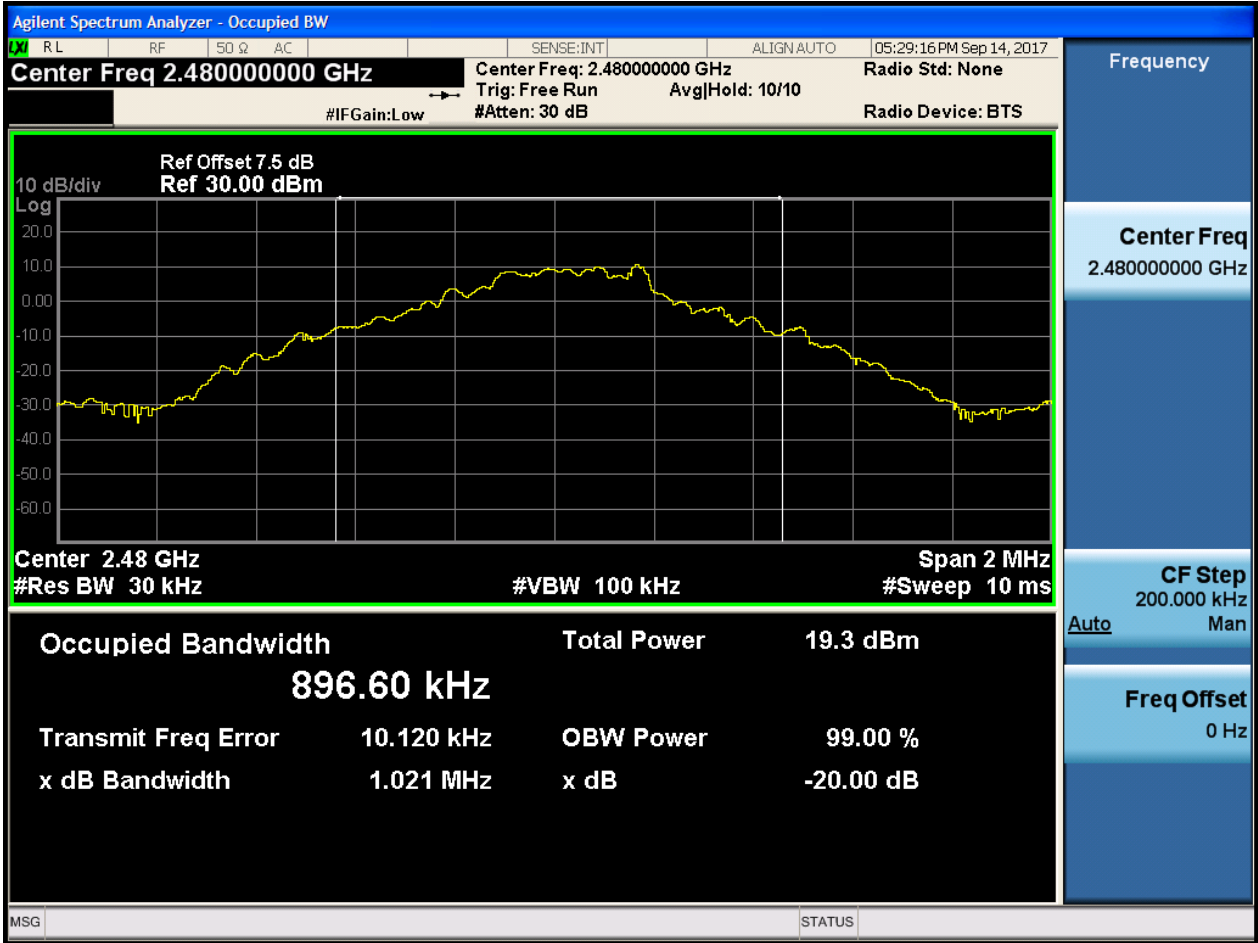


2.4 TM2\_2DH5\_Ch0

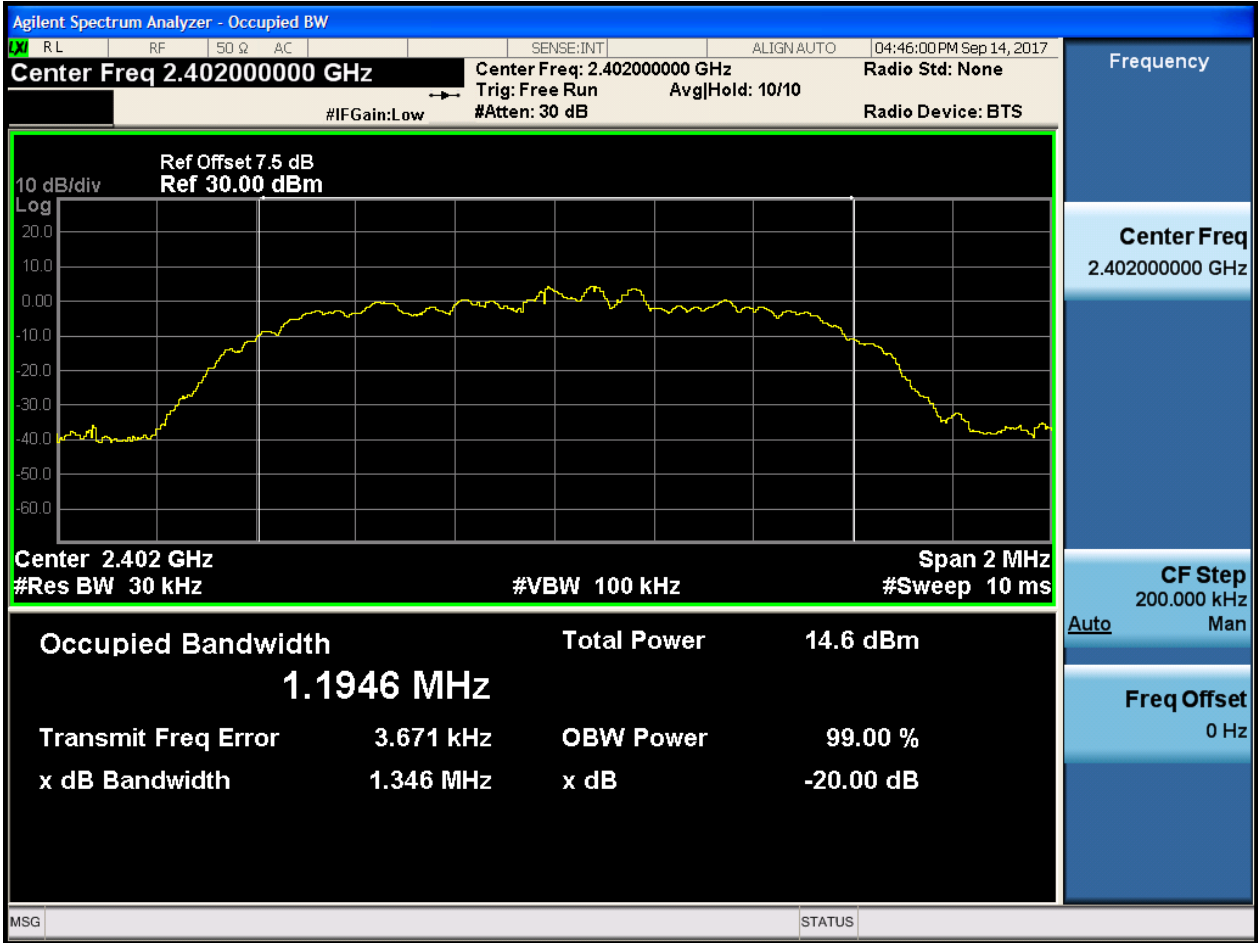




2.5 TM2\_2DH5\_Ch39

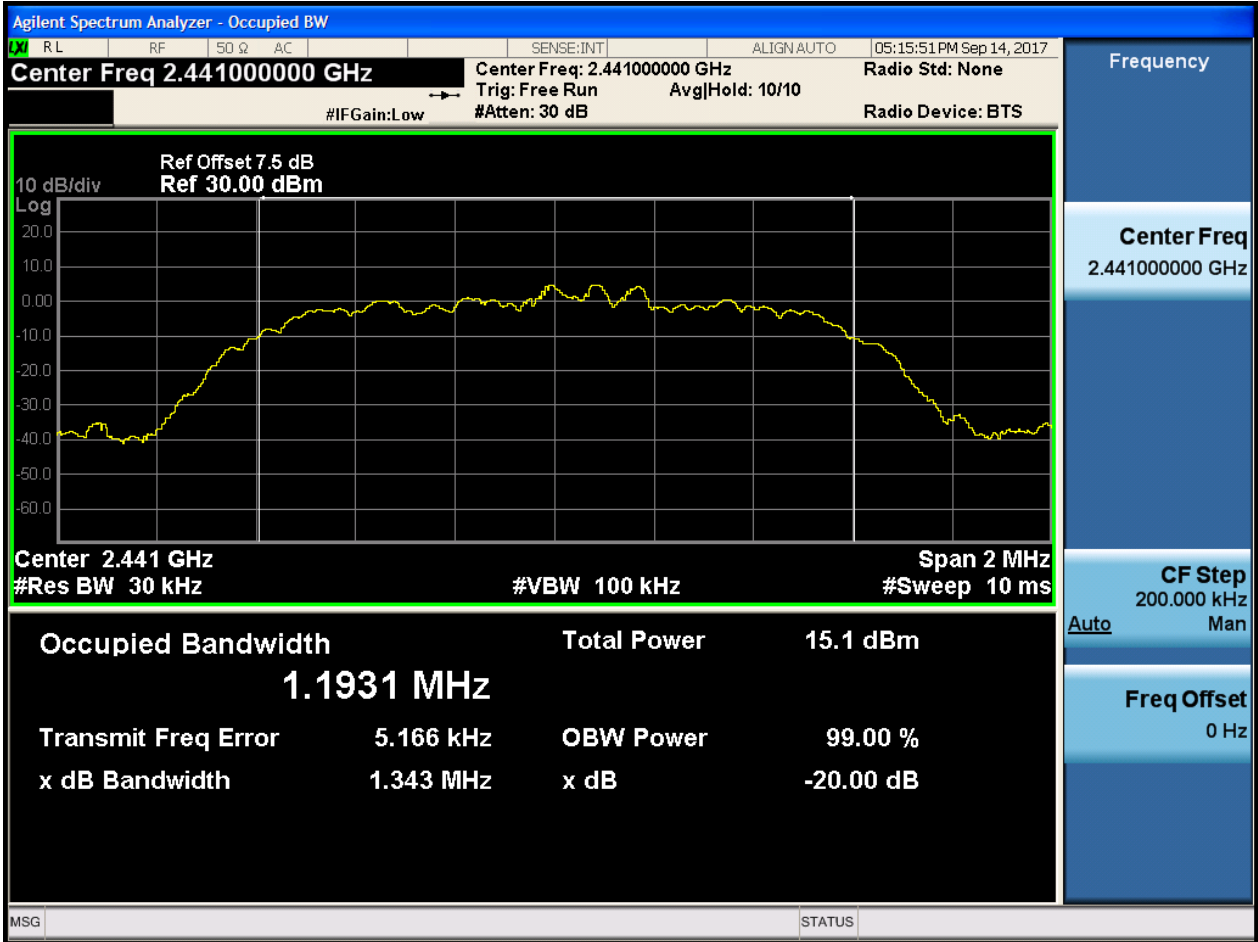




### 2.6 TM2\_2DH5\_Ch78

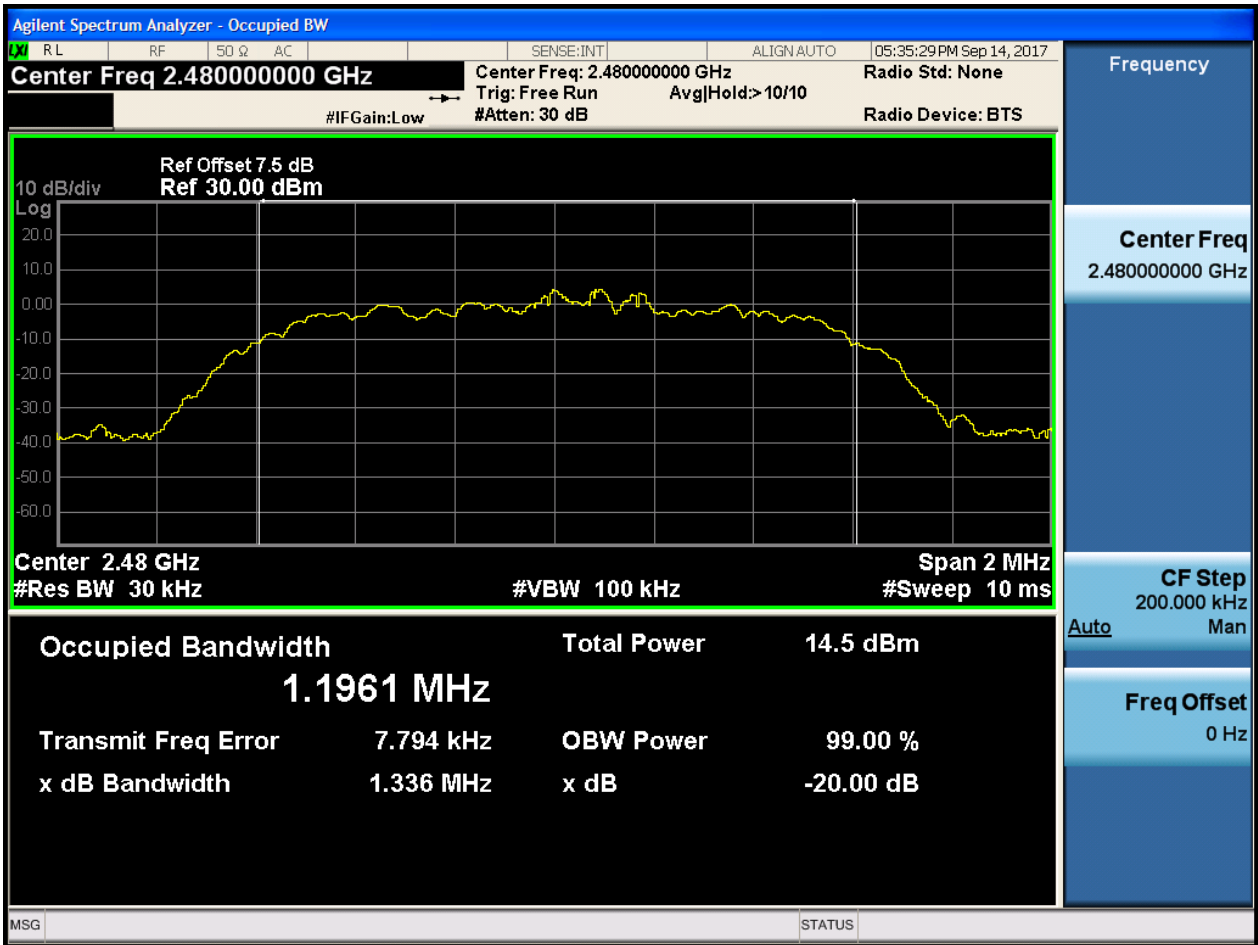






2.7 TM3\_3DH5\_Ch0

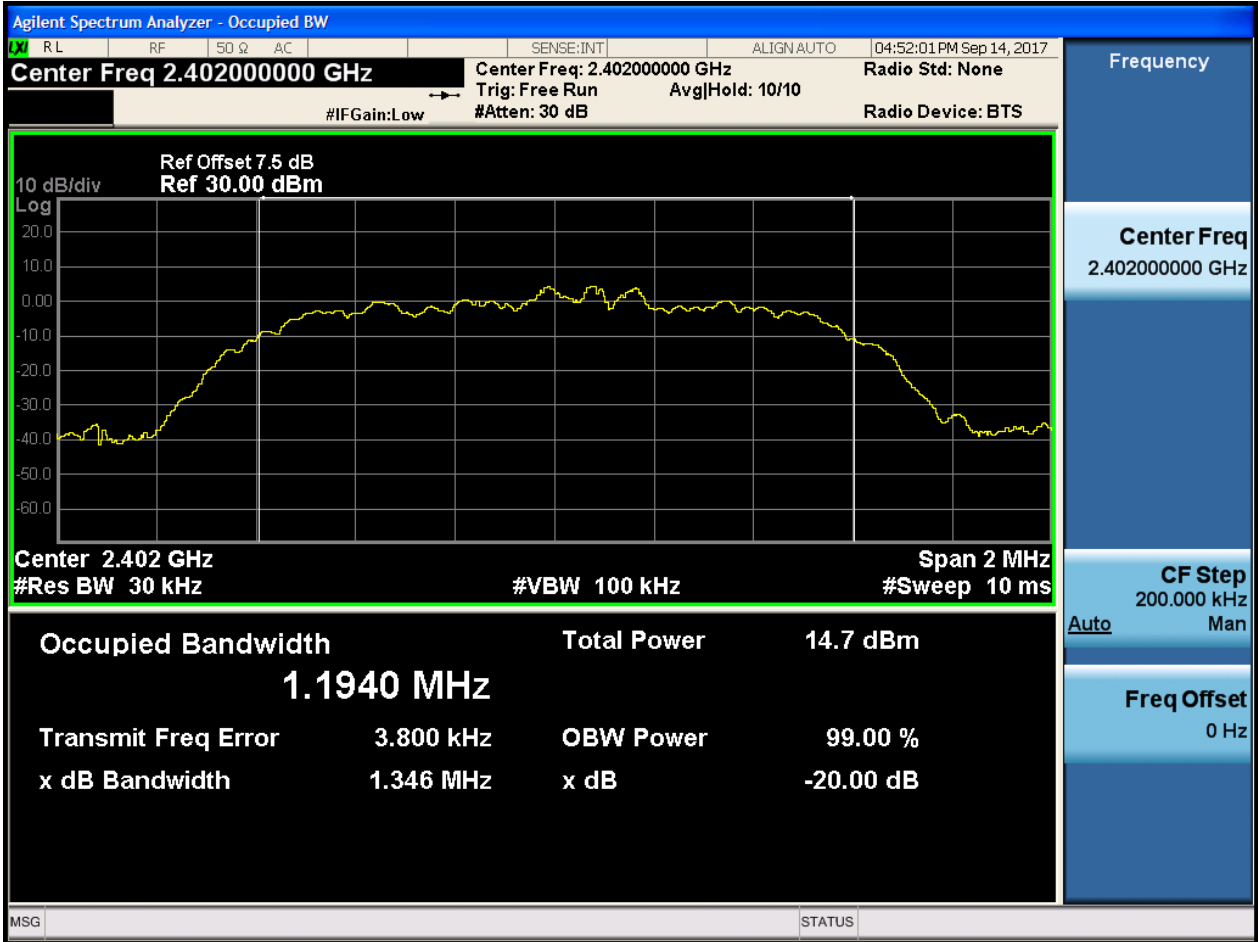




### 2.8 TM3\_3DH5\_Ch39

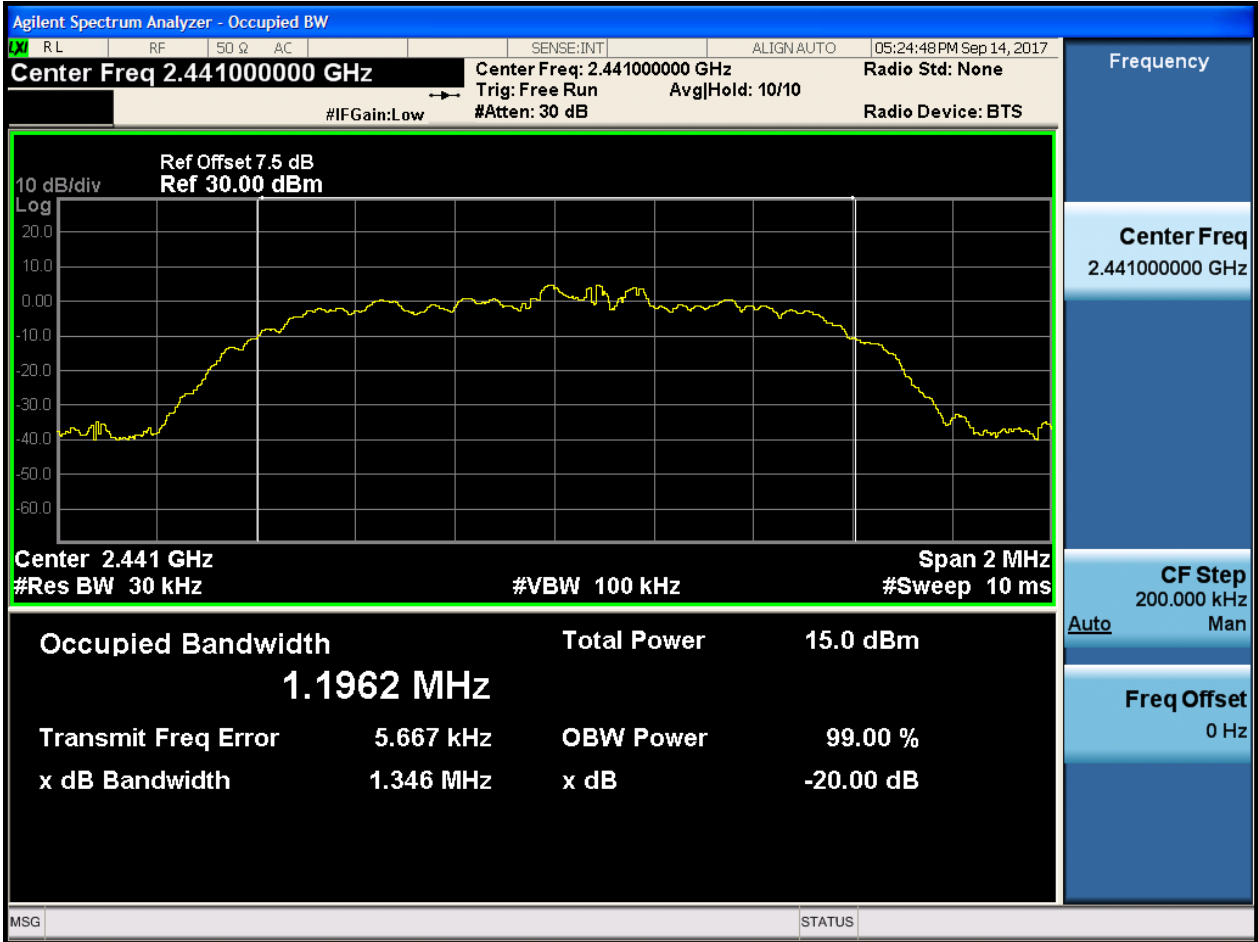



### 2.9 TM3\_3DH5\_Ch78

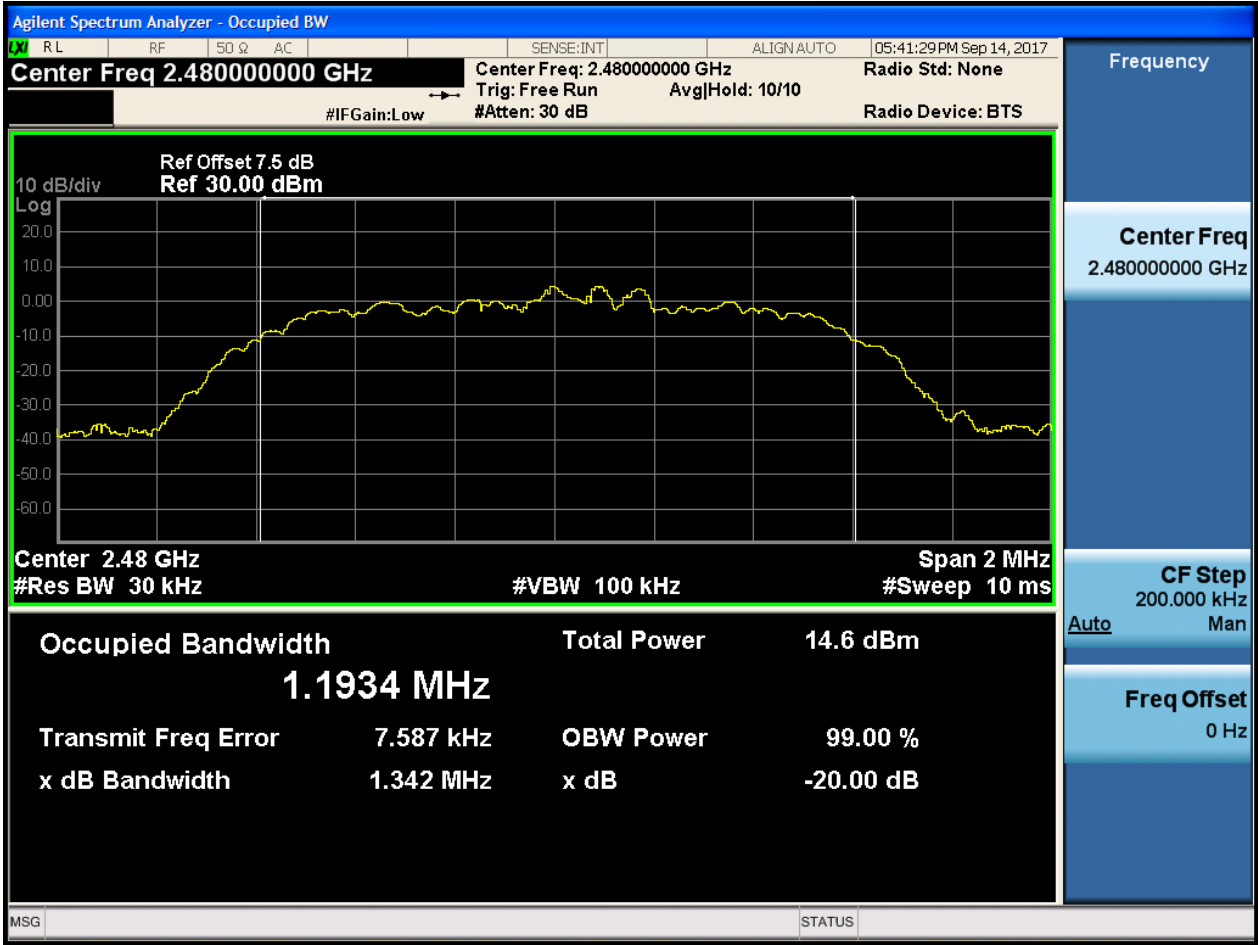



# Appendix B: Carrier Frequency Separation




**1 Result Table**

EUT Conf.	Carrier Frequency Separation [MHz]	Verdict
TM1_DH5_Hop	1	Pass
TM2_2DH5_Hop	0.85	Pass
TM3_3DH5_Hop	1	Pass


## 2 Test Plot

### 2.1 TM1\_DH5\_Hop

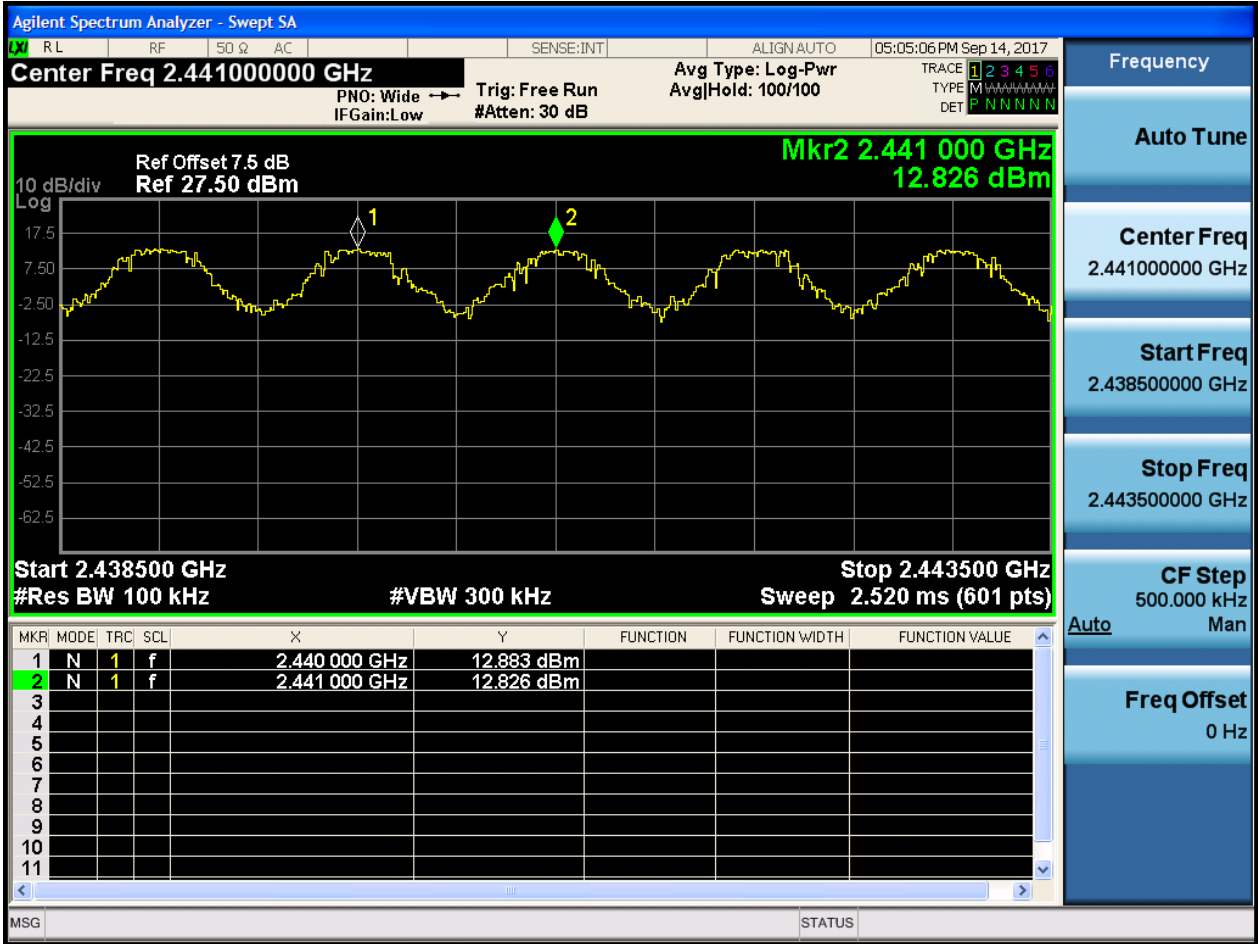




### 2.2 TM2\_2DH5\_Hop

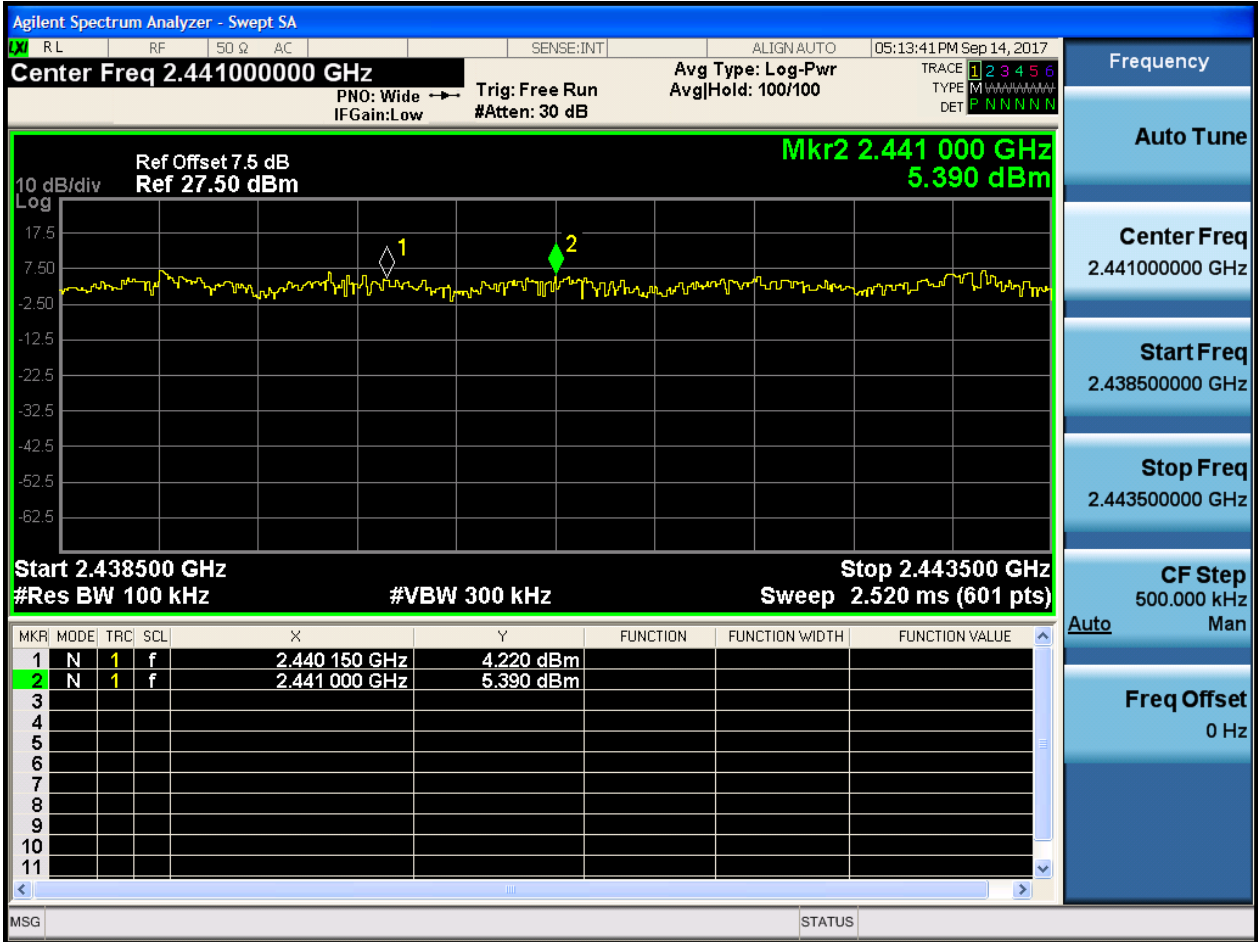



### 2.3 TM3\_3DH5\_Hop

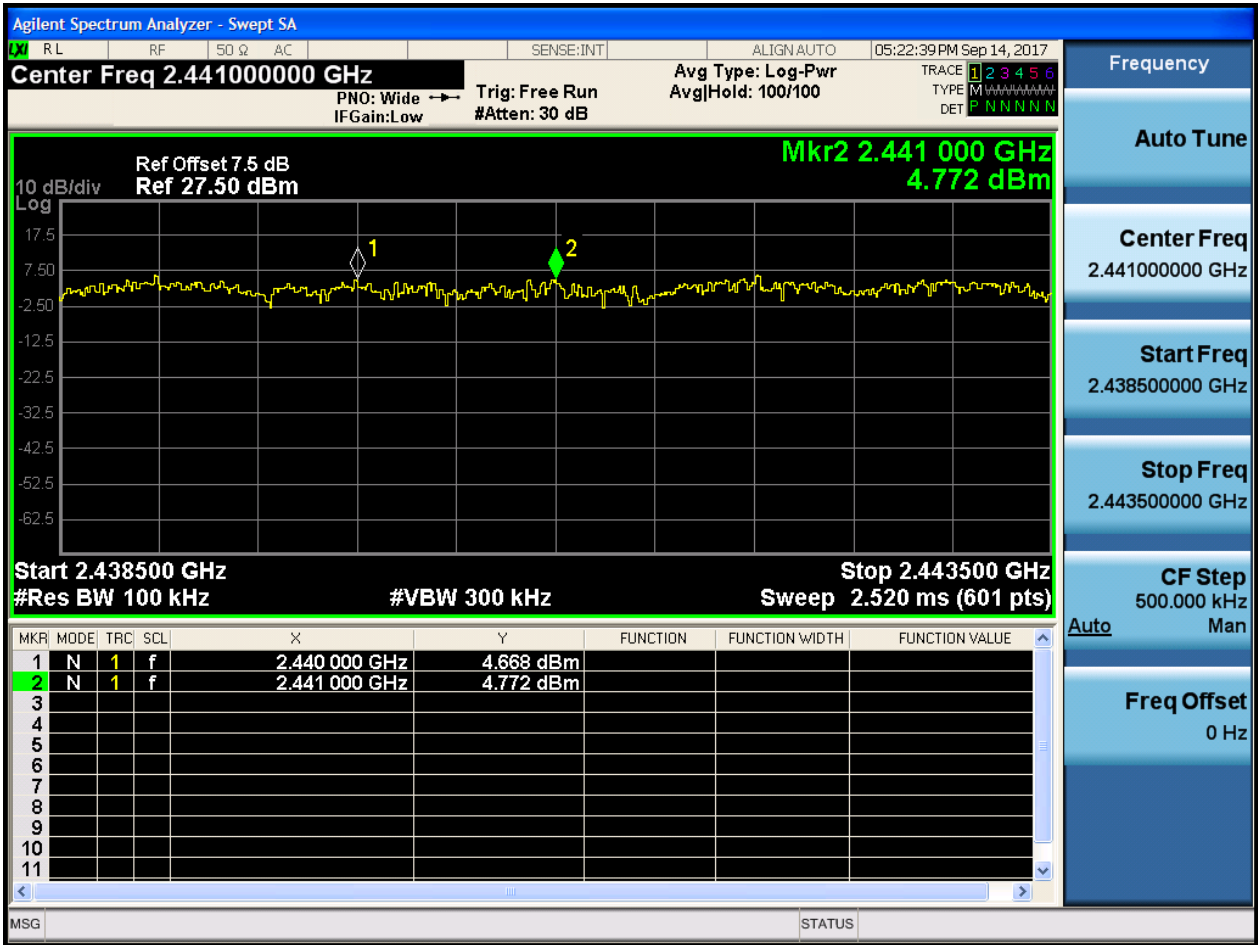





# Appendix C: Number of Hopping Channel




**1 Result Table**

EUT Conf.	Number of Hopping Channel	Verdict
TM1_DH5_Hop	79	Pass
TM2_2DH5_Hop	79	Pass
TM3_3DH5_Hop	79	Pass




## 2 Test Plot

### 2.1 TM1\_DH5\_Hop

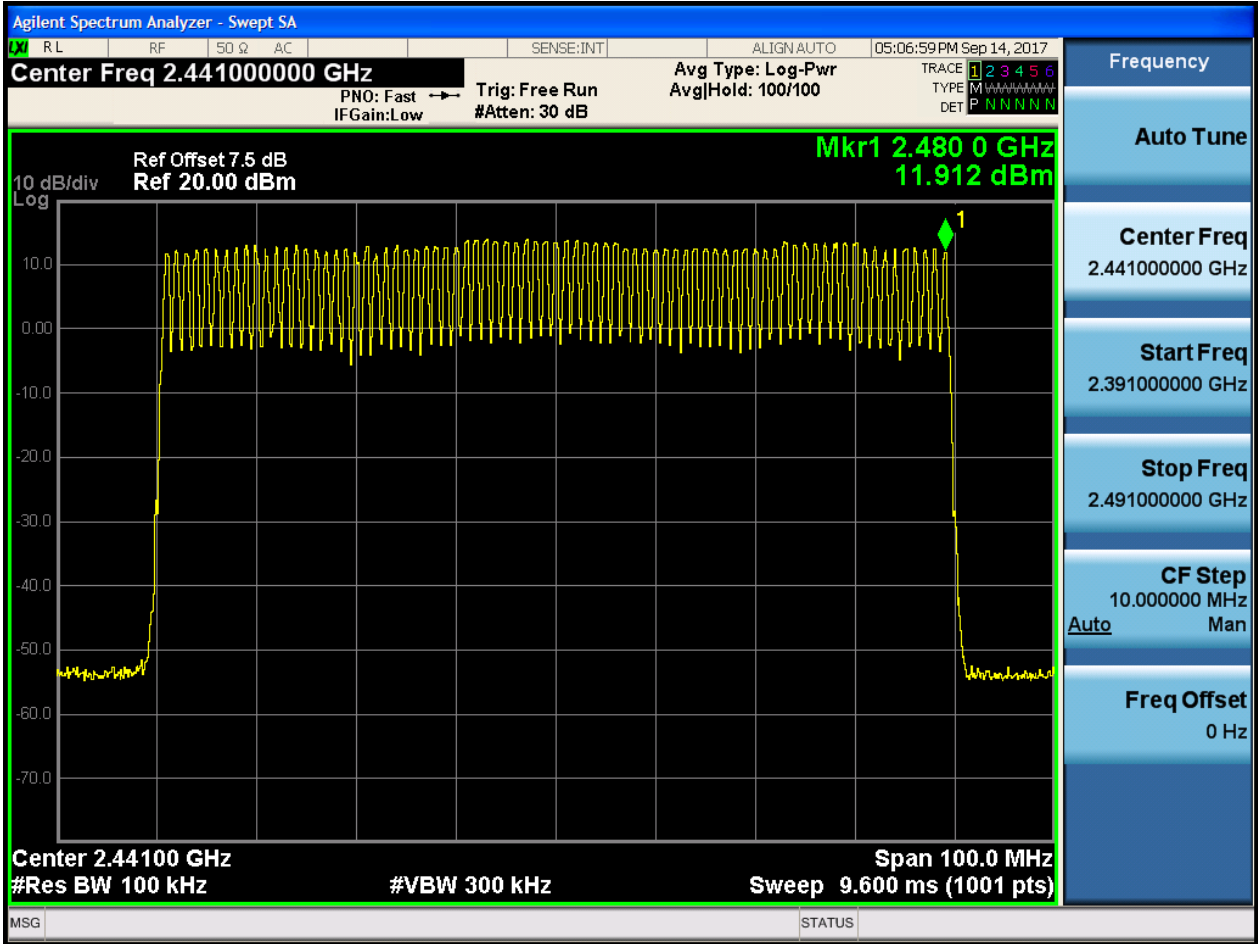




## 2.2 TM2\_2DH5\_Hop

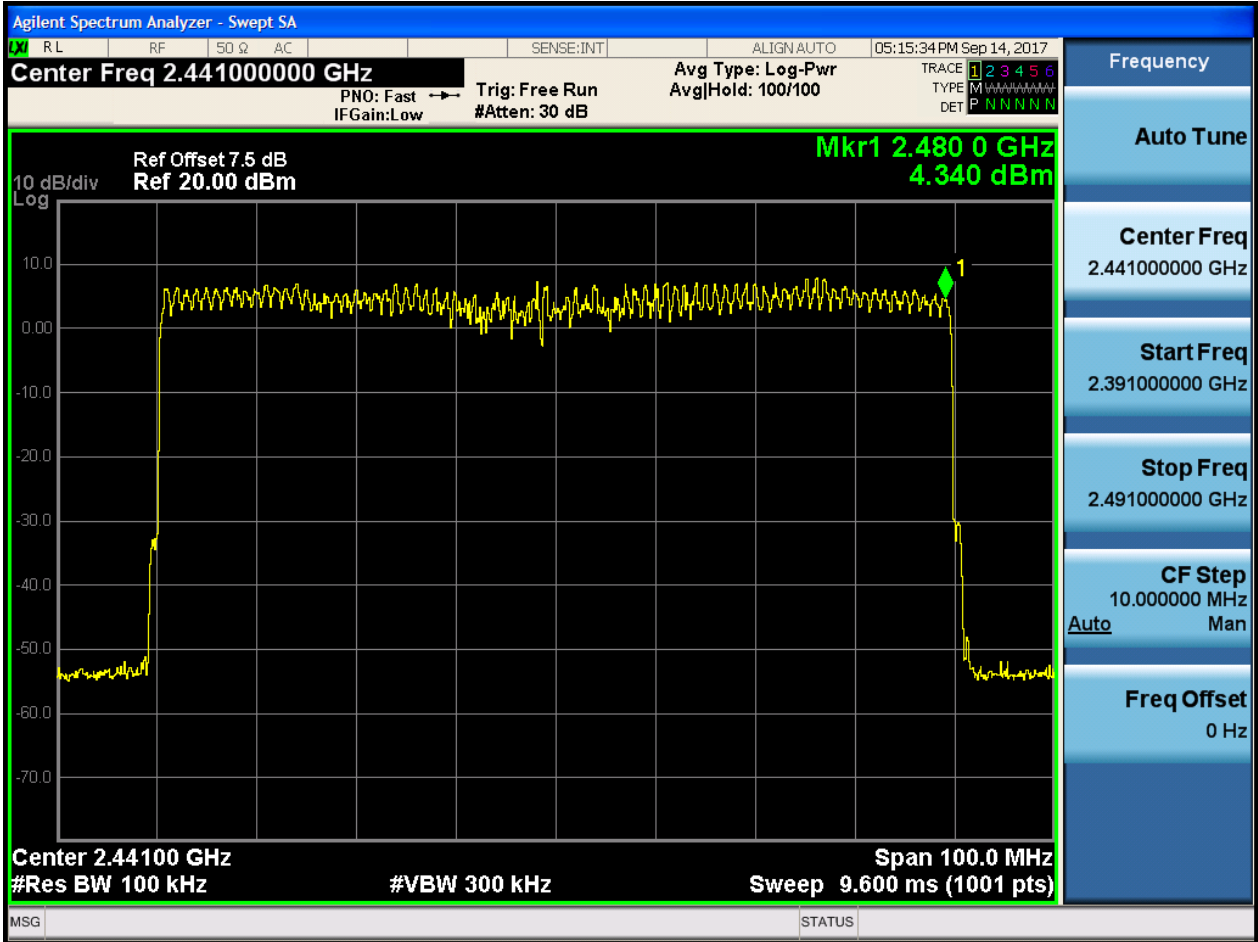



### 2.3 TM3\_3DH5\_Hop

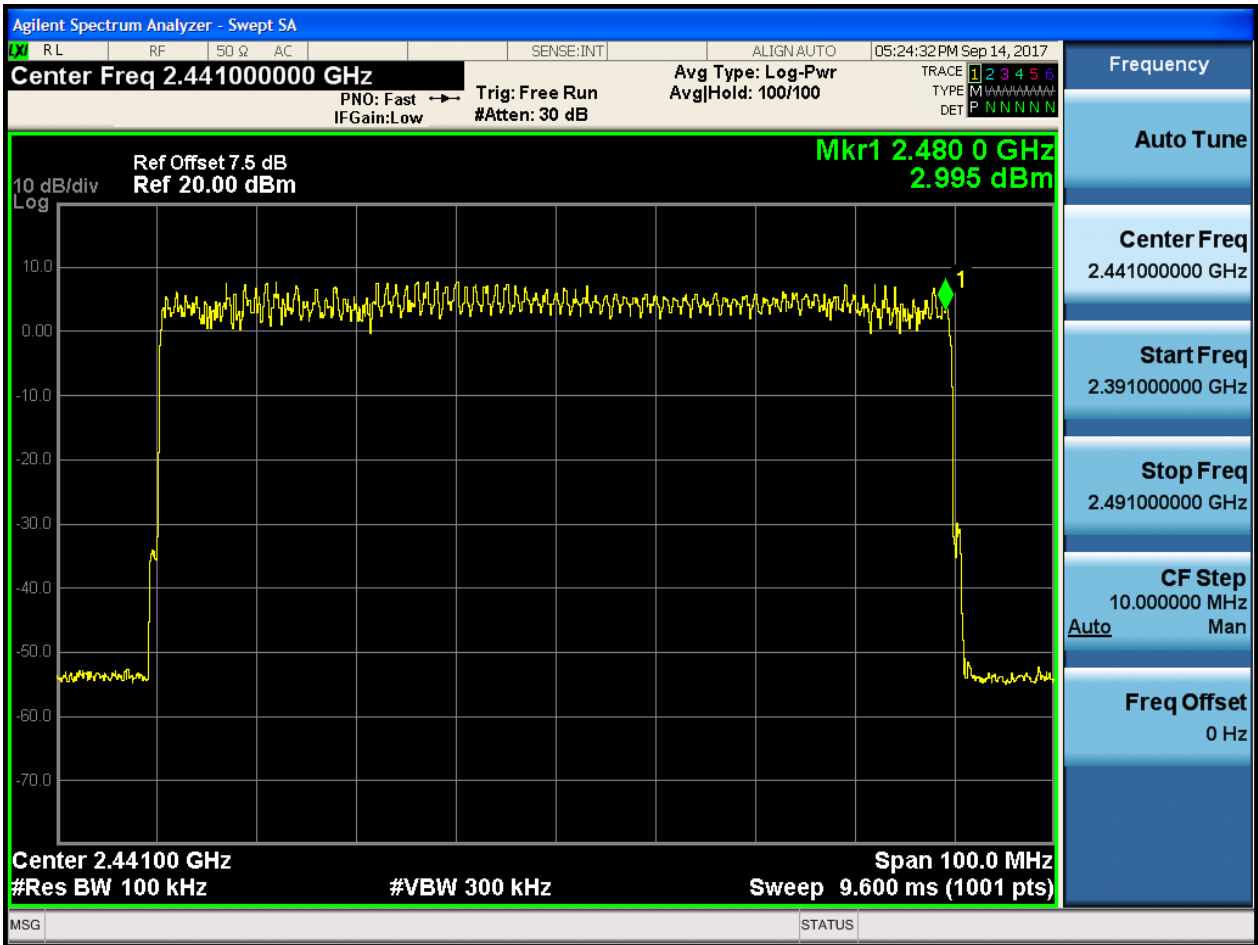

# Appendix D: Time of Occupancy (Dwell Time)

## 1 Result Table

The Dwell Time = Burst Width \* Total Hops. The detailed calculations are showed as follows:

- The duration for dwell time calculation:  $0.4 \text{ [s]} * \text{hopping number} = 0.4 \text{ [s]} * 79 \text{ [ch]} = 31.6 \text{ [s*ch]}$ ;
- The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.
- The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch\*hop/s] for all channels. So the final hopping rate for all channels is  $1600 / 6 = 266.67 \text{ [ch*hop/s]}$ ;
- The hops per second on one channel:  $266.67 \text{ [ch*hop/s]} / 79 \text{ [ch]} = 3.38 \text{ [hop/s]}$ ;
- The total hops for all channels within the dwell time calculation duration:  $3.38 \text{ [hop/s]} * 31.6 \text{ [s*ch]} = 106.67 \text{ [hop*ch]}$ ;
- The dwell time for all channels hopping:  $106.67 \text{ [hop*ch]} * \text{Burst Width [ms/hop/ch]}$ .


EUT Conf.	Burst Width [s/hop/ch]	Total Hops [hop*ch]	Dwell Time [ms]	Verdict
TM1_DH5_Ch39	0.0029	106.67	0.309	Pass
TM2_2DH5_Ch39	0.0029	106.67	0.309	Pass
TM3_3DH5_Ch39	0.0029	106.67	0.309	Pass



## 2 Test Plot


NOTE: The test plots are only for Burst Width measurements.

### 2.1 TM1\_DH5\_Ch39

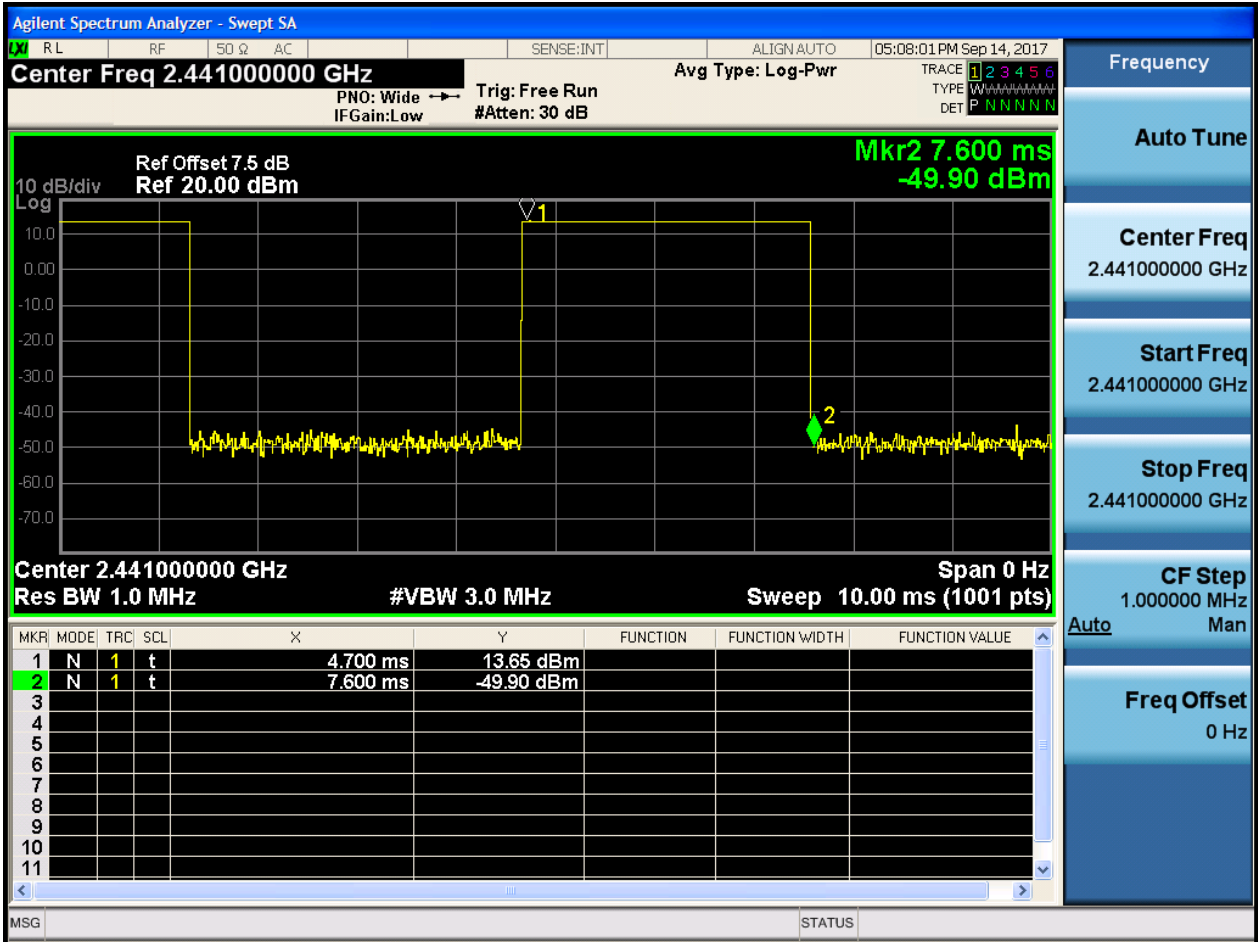




2.2 TM2\_2DH5\_Ch39

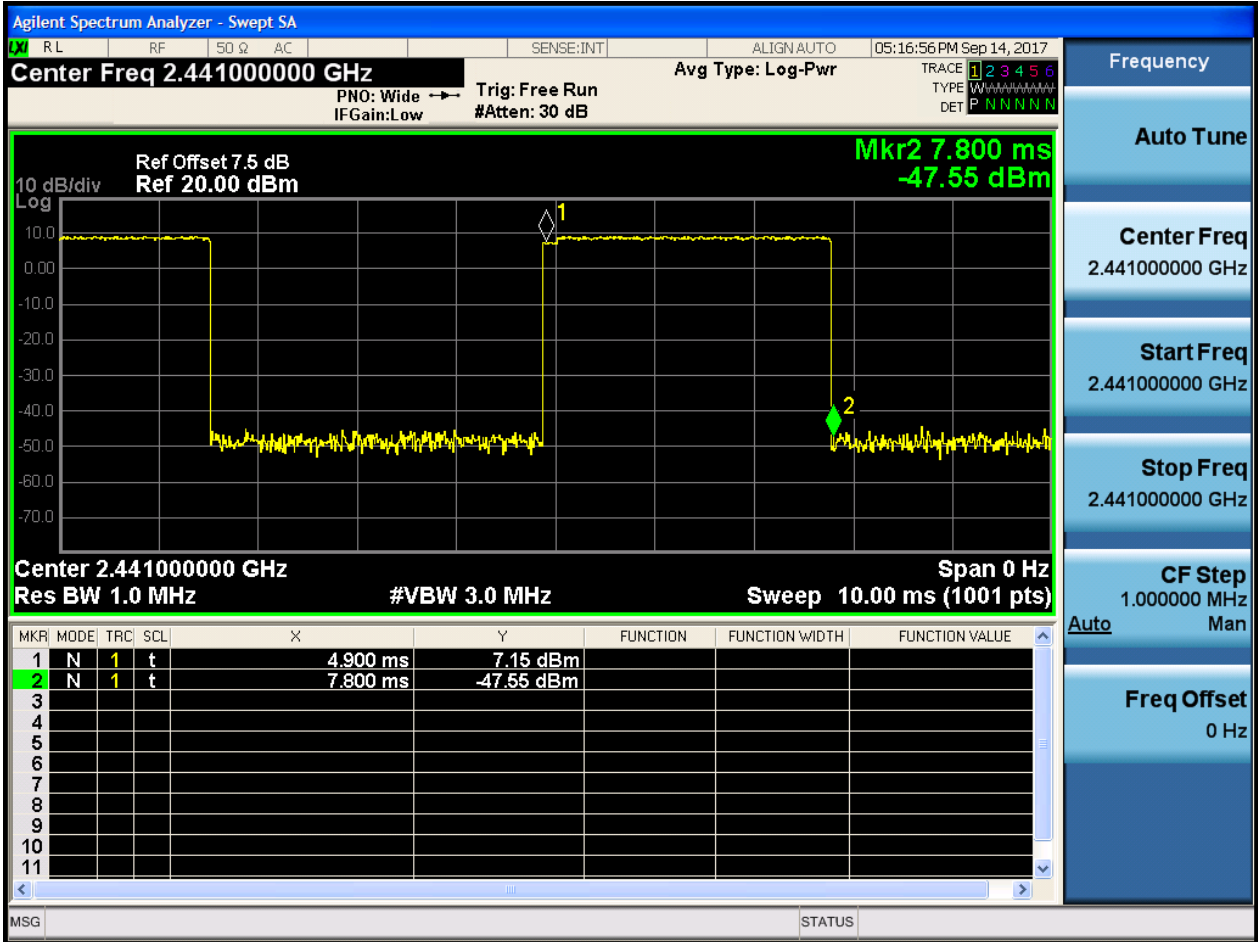

2.3 TM3\_3DH5\_Ch39

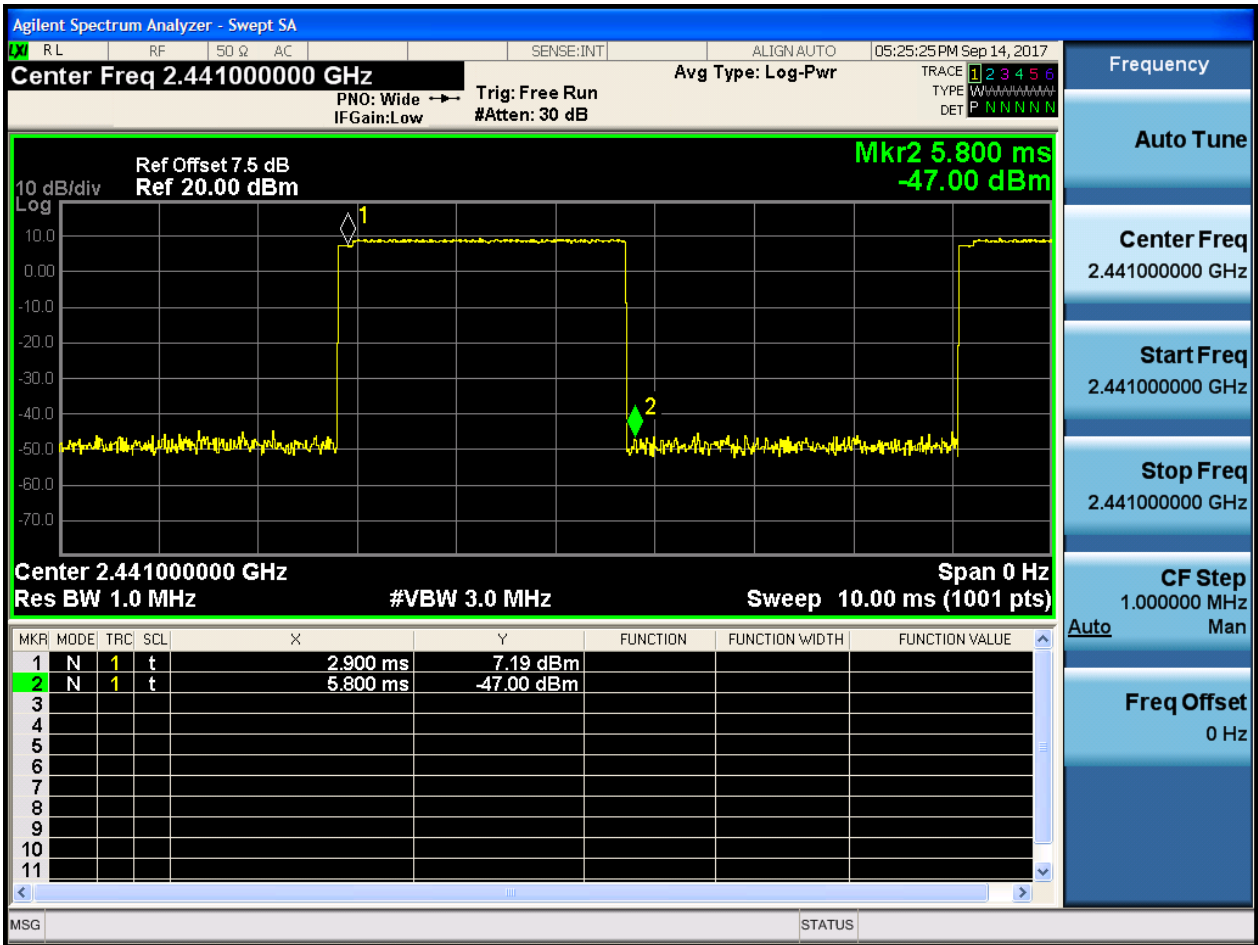



# Appendix E: Maximum Peak Conducted Output Power




## 1 Result Table

EUT Conf.	Max. Peak Power [dBm]	Verdict
TM1_DH5_Ch0	12.14	Pass
TM1_DH5_Ch39	13.733	Pass
TM1_DH5_Ch78	12.362	Pass
TM2_2DH5_Ch0	9.249	Pass
TM2_2DH5_Ch39	9.554	Pass
TM2_2DH5_Ch78	9.044	Pass
TM3_3DH5_Ch0	9.257	Pass
TM3_3DH5_Ch39	9.661	Pass
TM3_3DH5_Ch78	9.073	Pass




## 2 Test Plot

### 2.1 TM1\_DH5\_Ch0

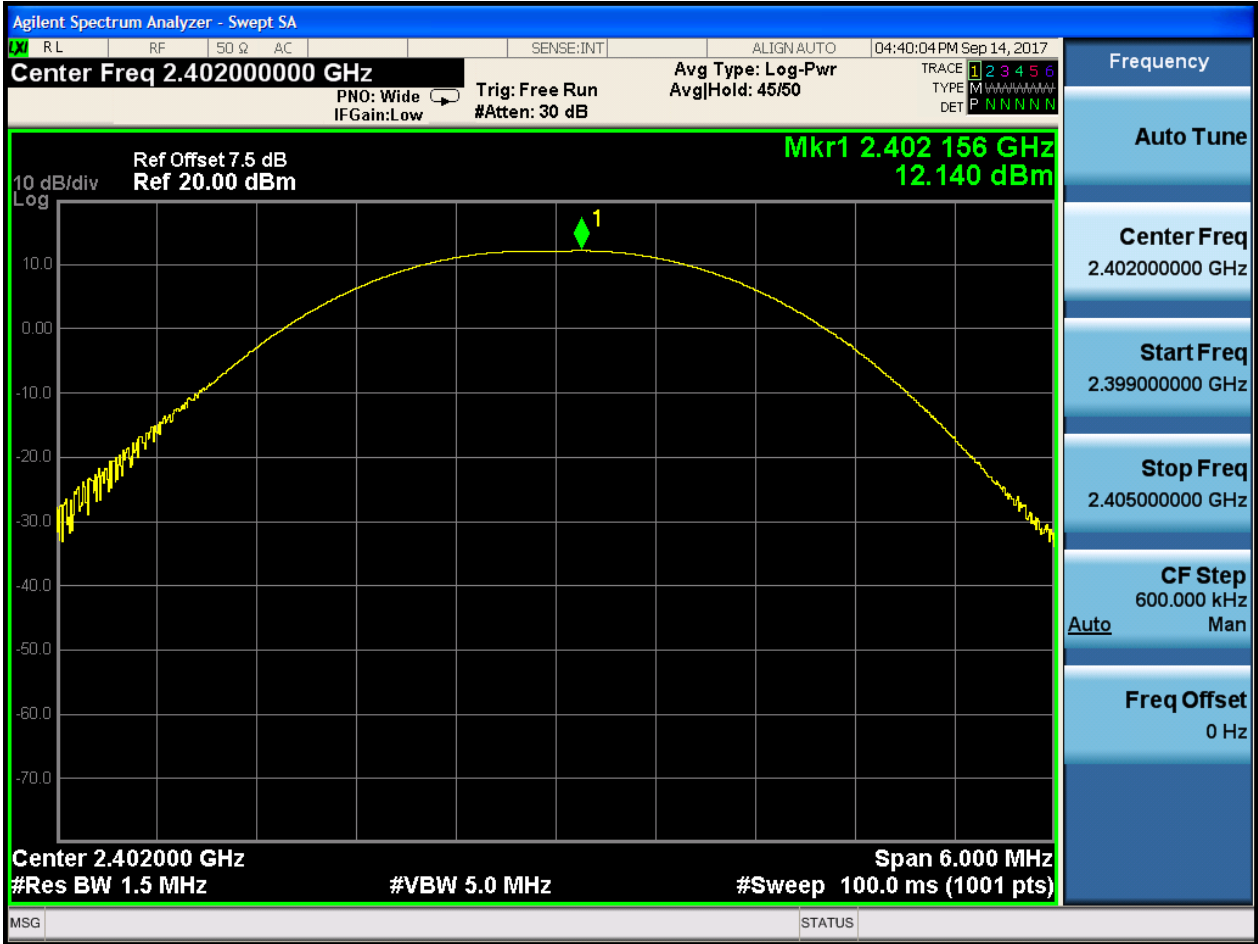




### 2.2 TM1\_DH5\_Ch39

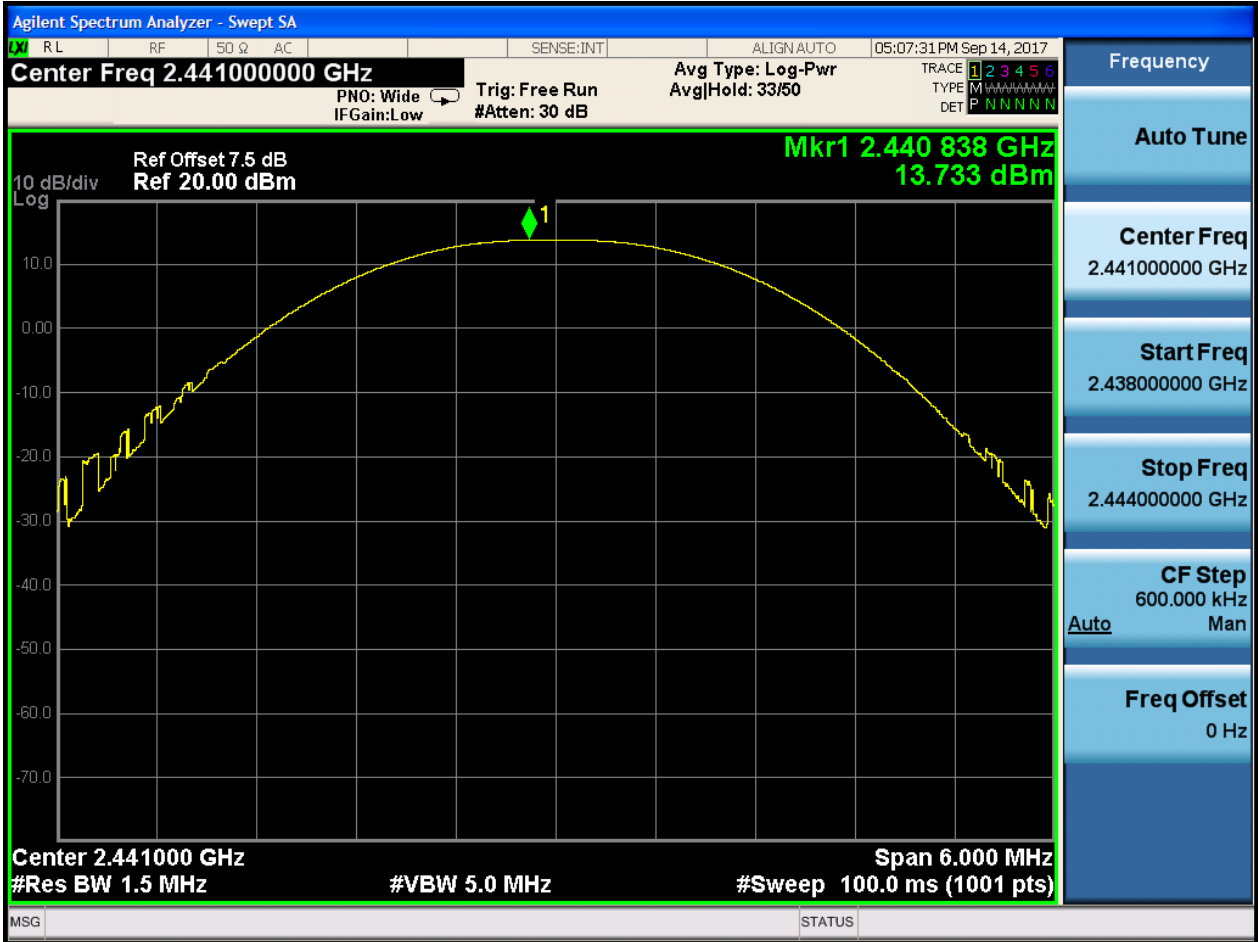




### 2.3 TM1\_DH5\_Ch78

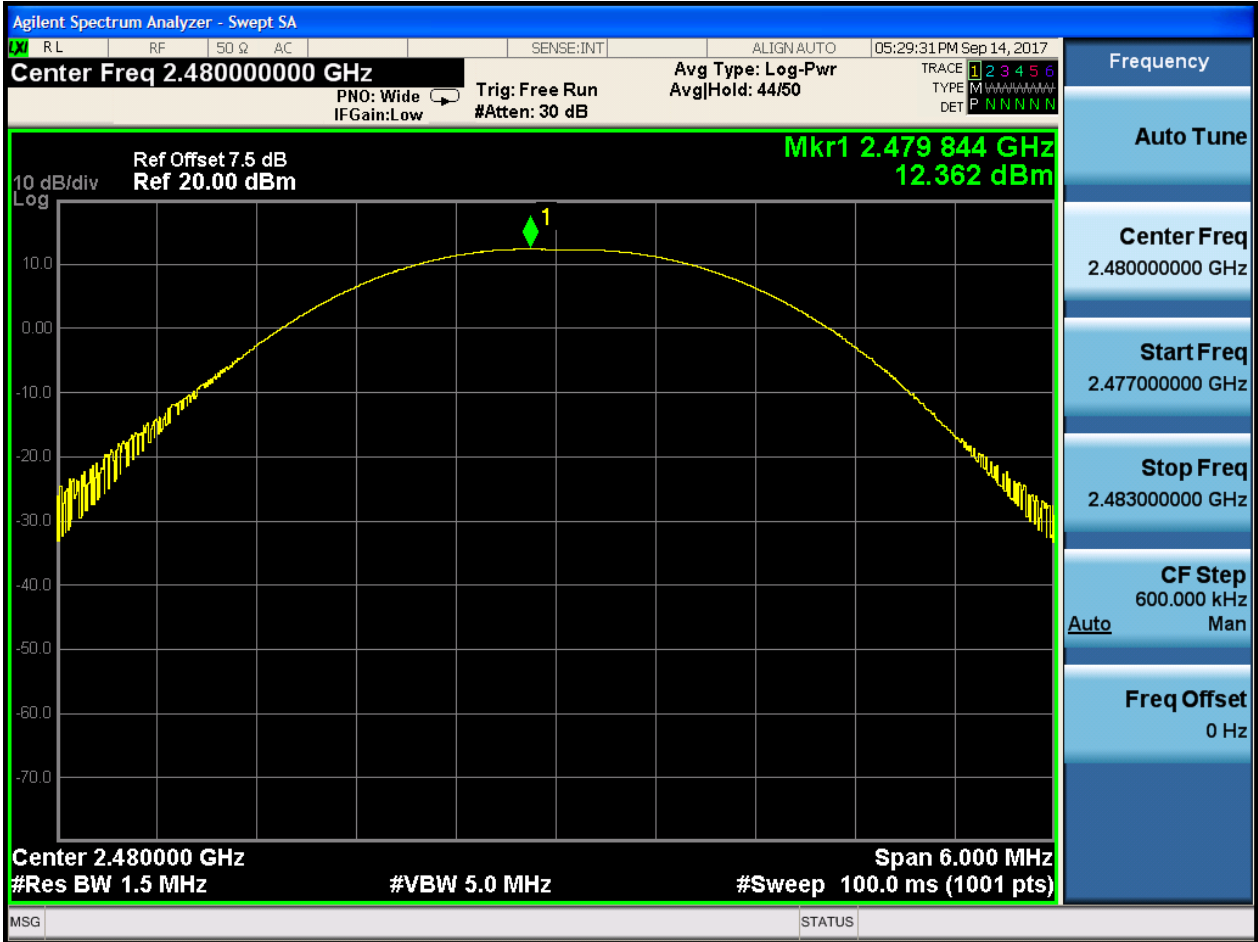




### 2.4 TM2\_2DH5\_Ch0

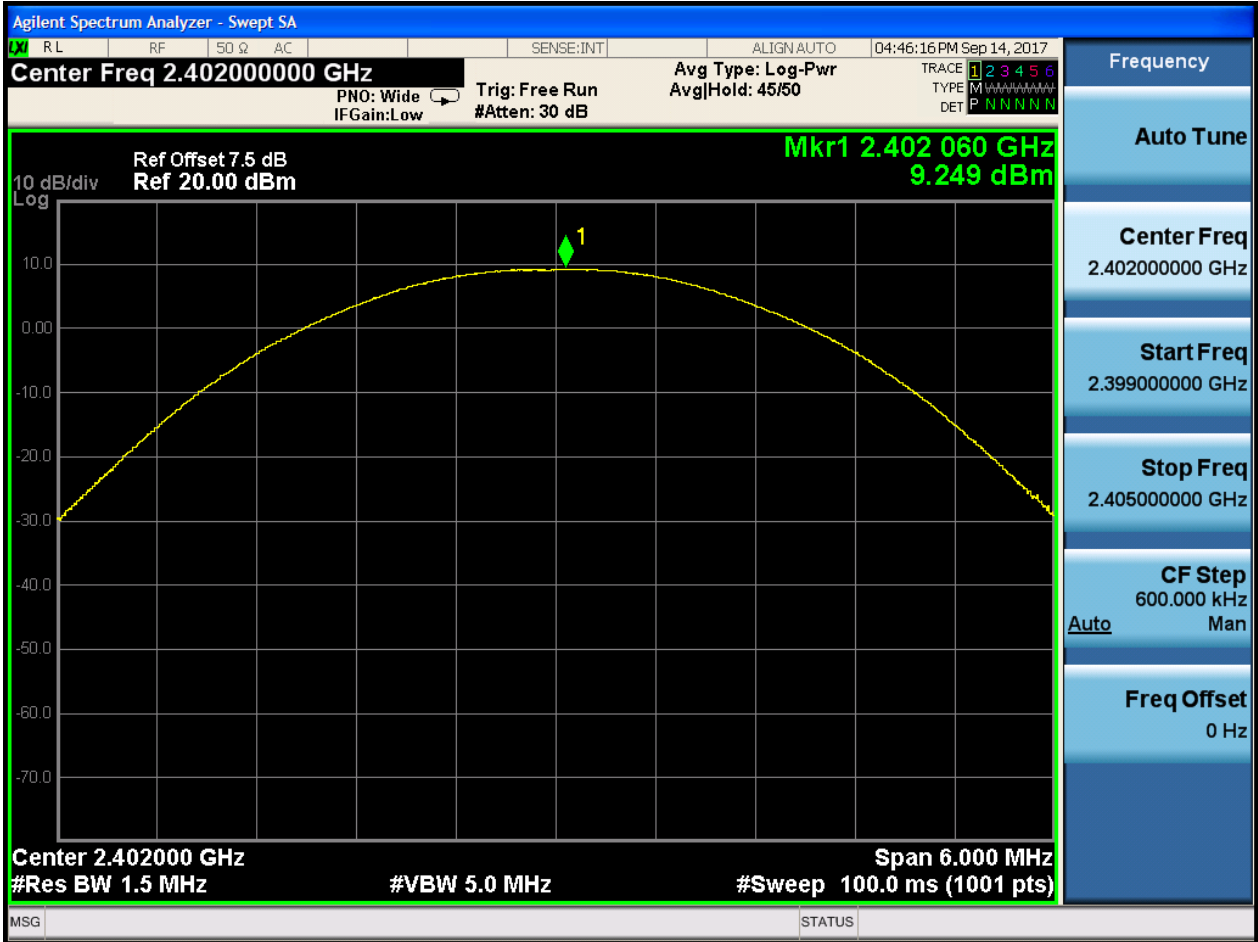






### 2.5 TM2\_2DH5\_Ch39

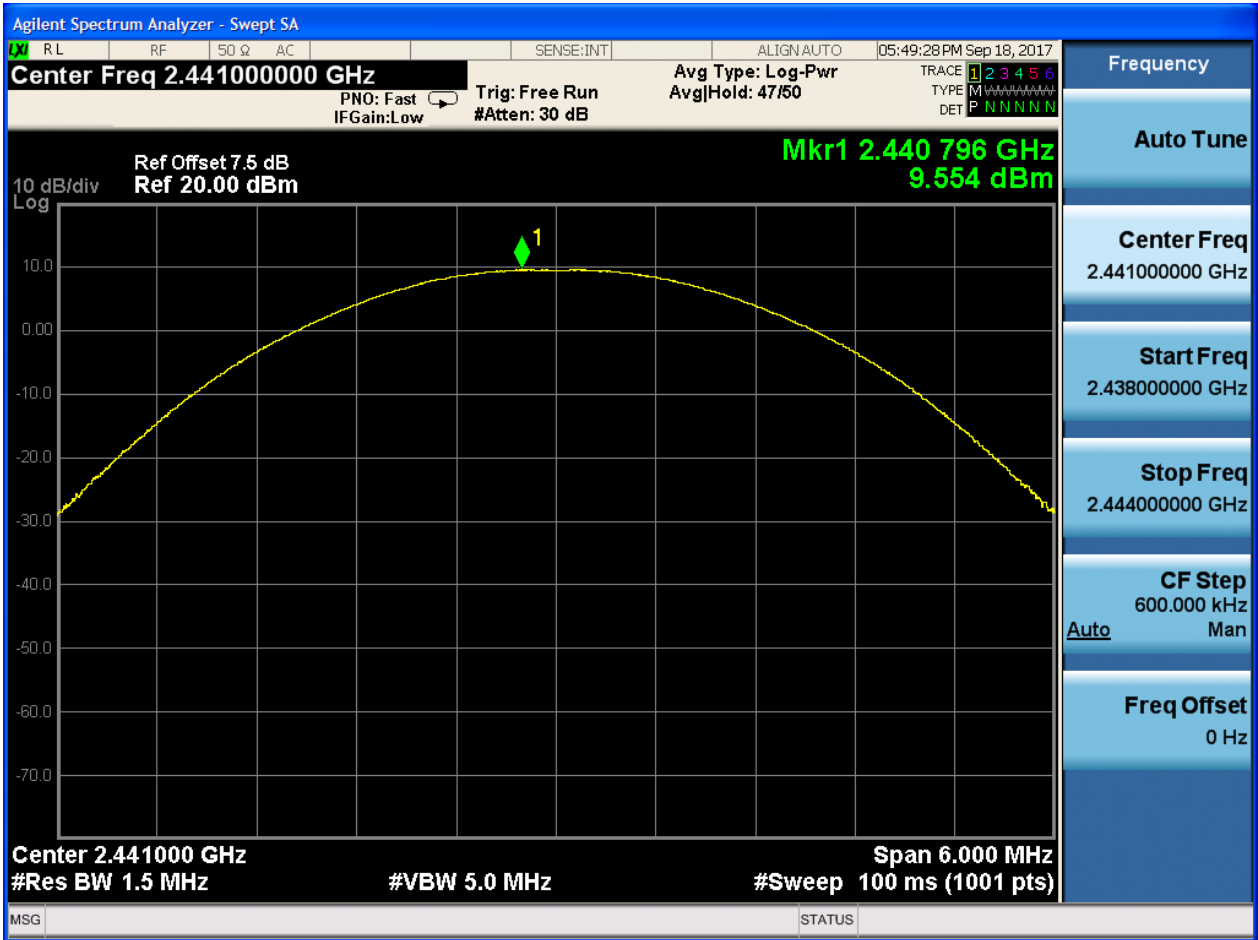


2.6 TM2\_2DH5\_Ch78

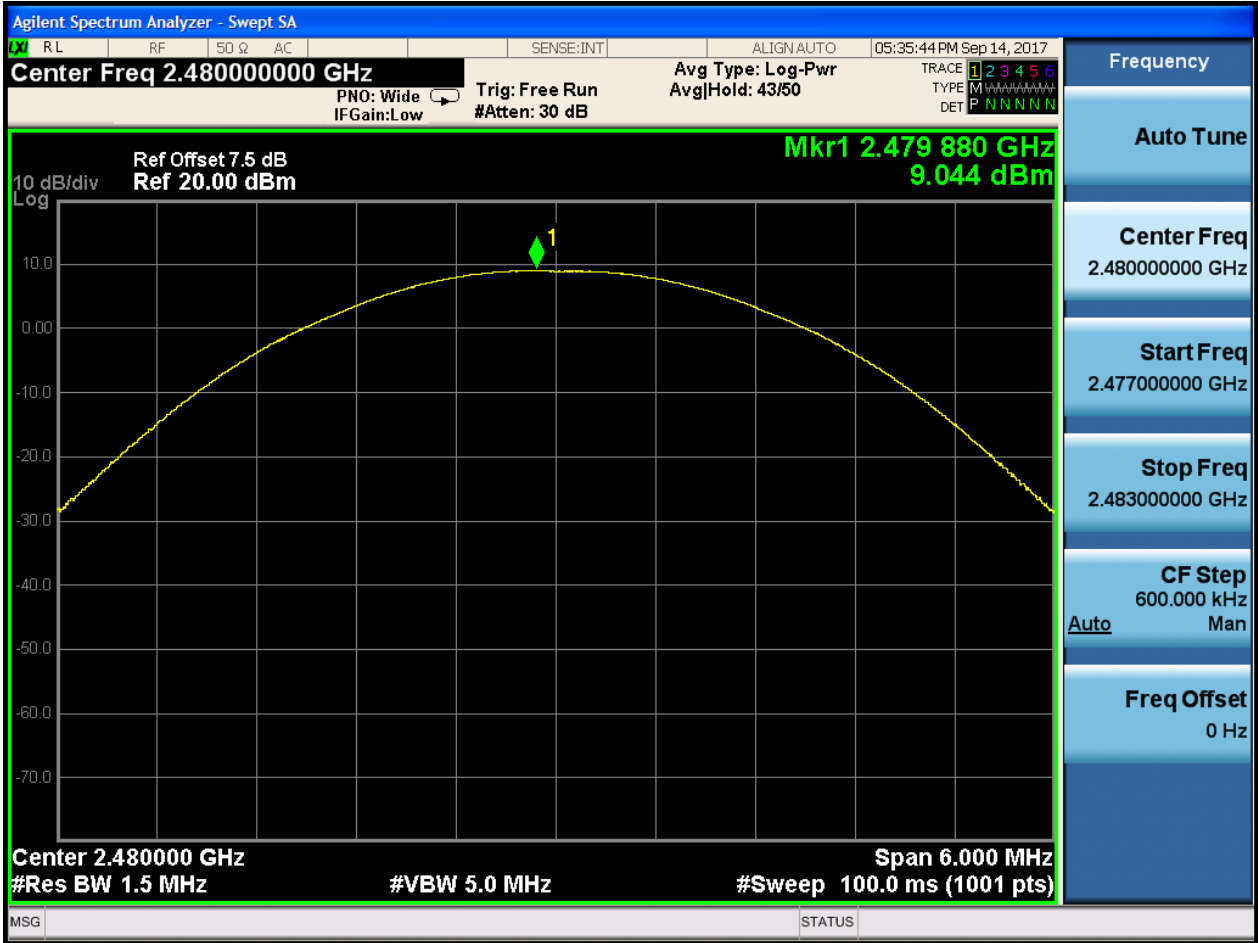




### 2.7 TM3\_3DH5\_Ch0

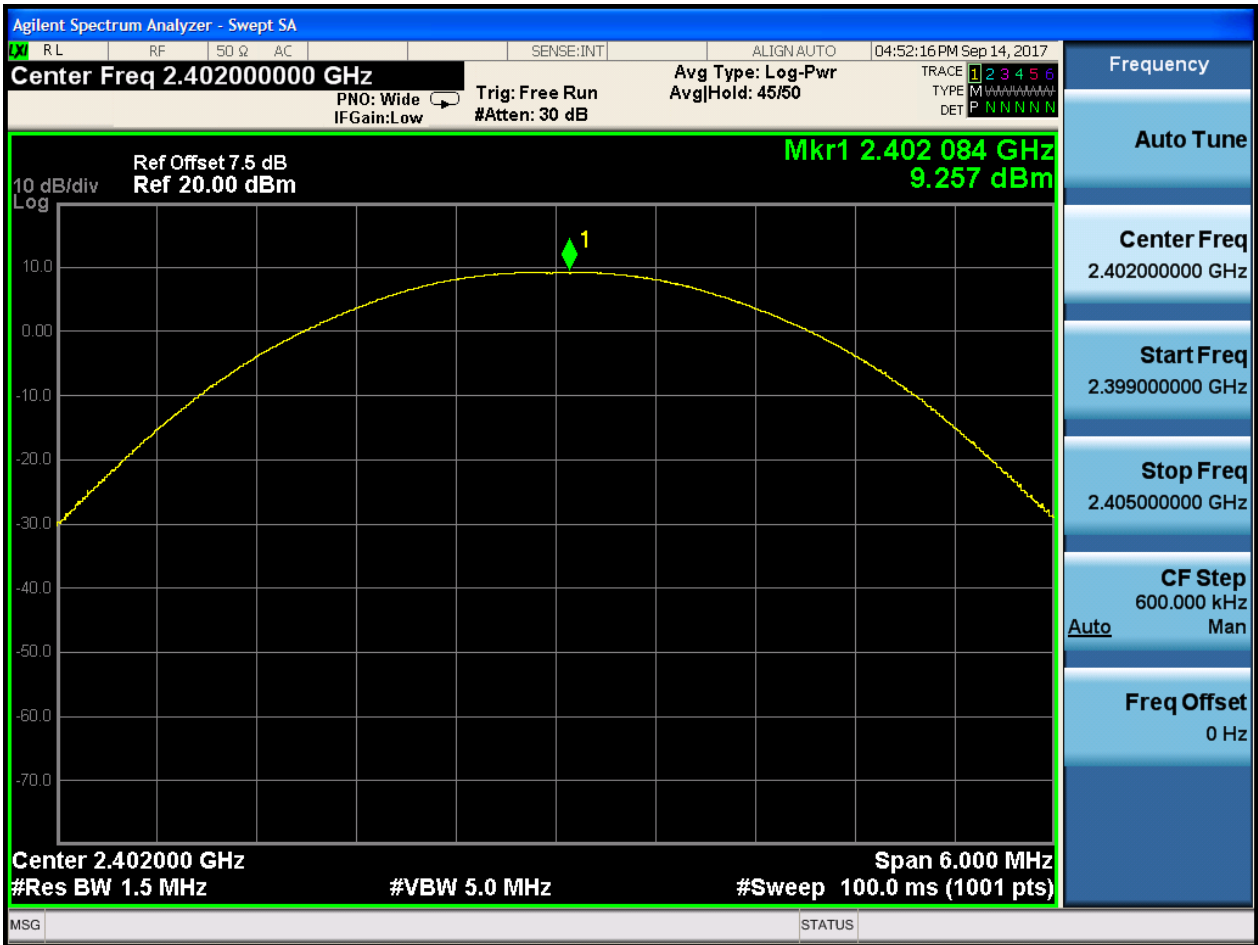




### 2.8 TM3\_3DH5\_Ch39

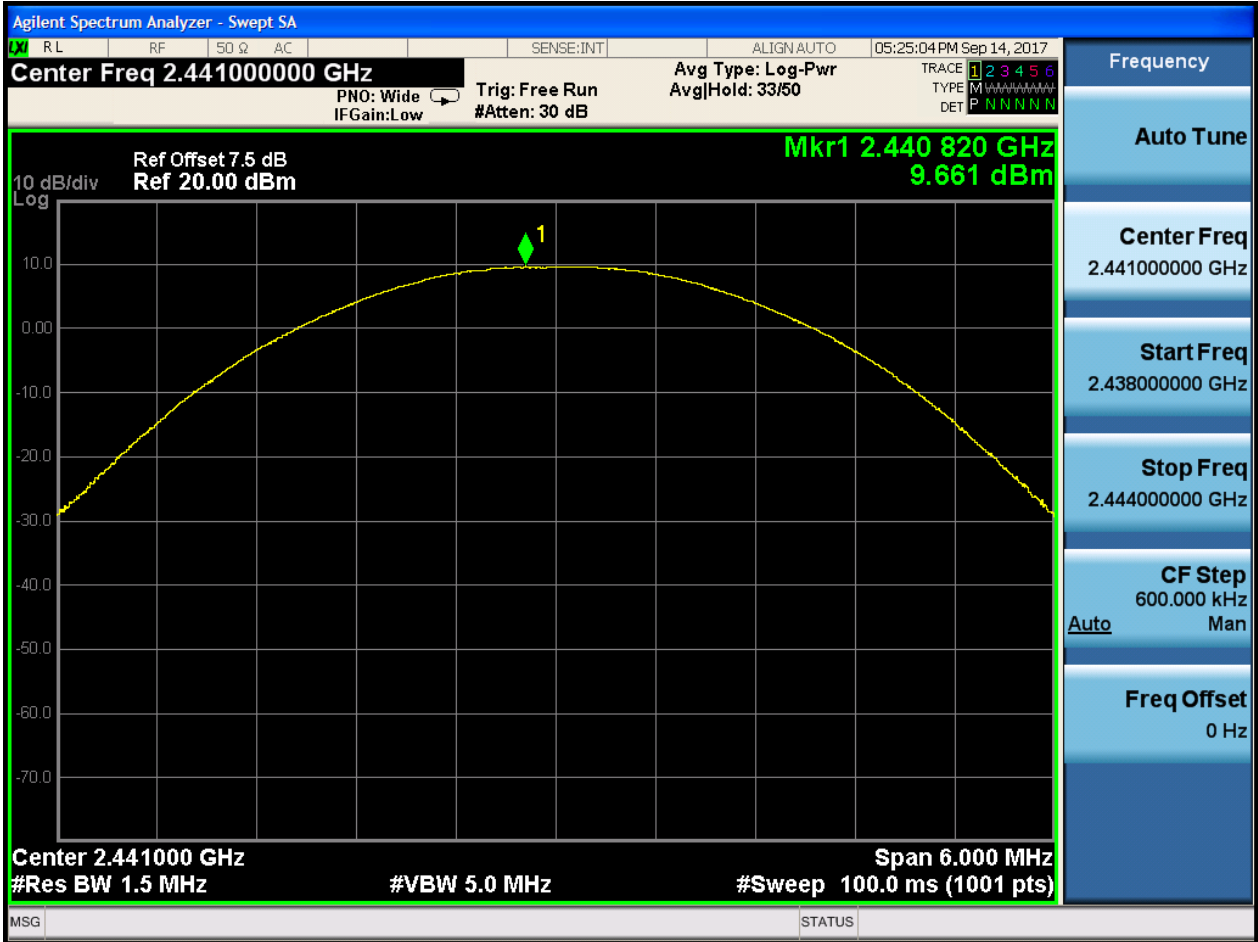



### 2.9 TM3\_3DH5\_Ch78

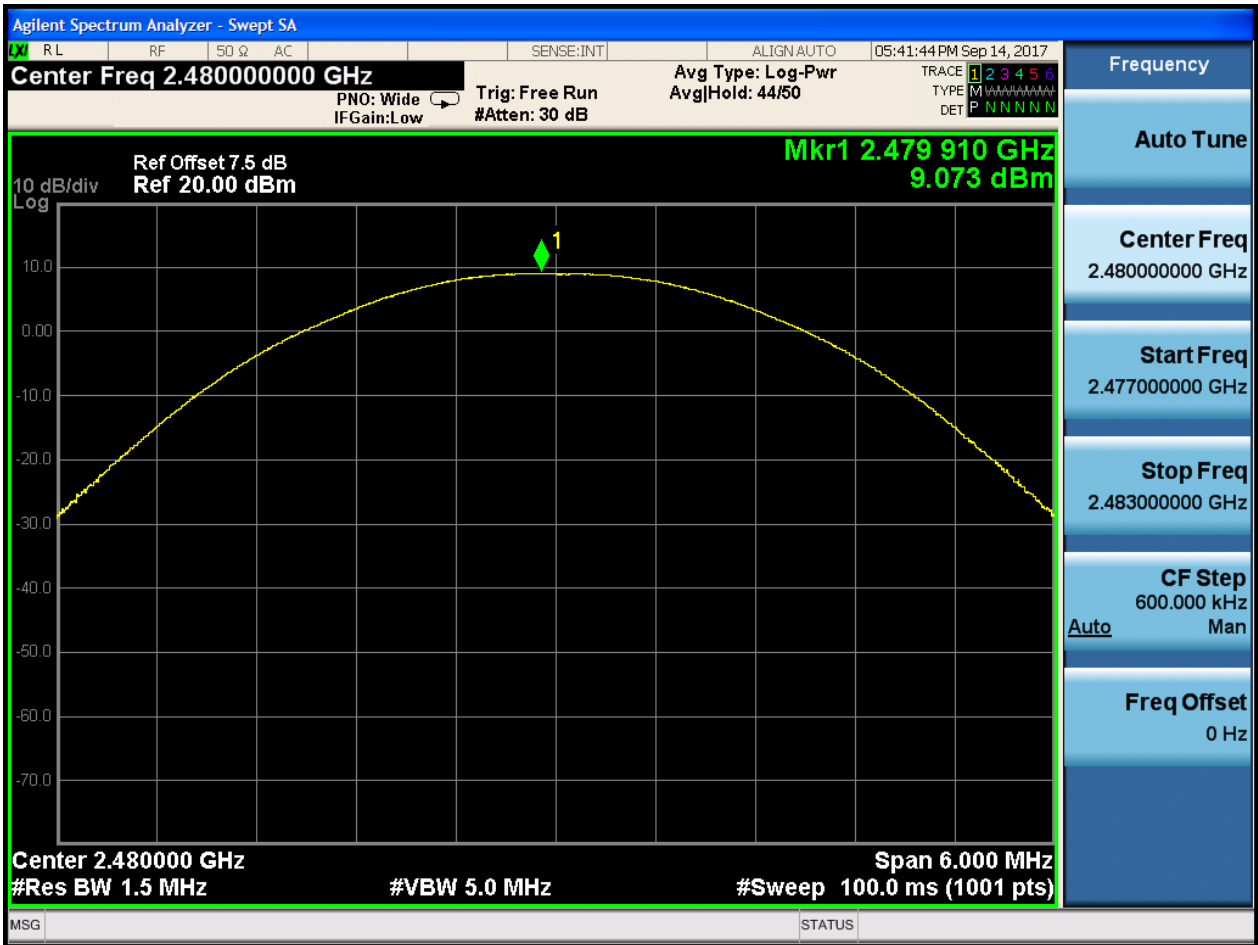



# Appendix F: Band edge spurious emission



## 1 Result Table


EUT Conf.	Channel No.	Carrier Frequency [MHz]	Max. Spurious Level [dBm]	Frequency Hopping	Carrier Power [dBm]	Limit [dBm]	Result
TM1_DH5 _Ch0	0	2402	-50.801	Off	12.107	-7.893	Pass
	-	-	-53.959	On	12.024	-7.976	Pass
TM1_DH5 _Ch78	78	2480	-52.862	Off	12.183	-7.817	Pass
	-	-	-55.324	On	11.894	-8.106	Pass
TM2_2DH 5_Ch0	0	2402	-51.262	Off	6.756	-13.244	Pass
	-	-	-54.846	On	5.982	-14.018	Pass
TM2_2DH 5_Ch78	78	2480	-54.36	Off	6.561	-13.439	Pass
	-	-	-55.951	On	6.792	-13.208	Pass
TM3_3DH 5_Ch0	0	2402	-52.373	Off	6.819	-13.181	Pass
	-	-	-52.629	On	4.872	-15.128	Pass
TM3_3DH 5_Ch78	78	2480	-54.399	Off	6.616	-13.384	Pass
	-	-	-55.246	On	5.363	-14.637	Pass



## 2 Test Plot


### 2.1 TM1\_DH5\_Ch0

No hopping

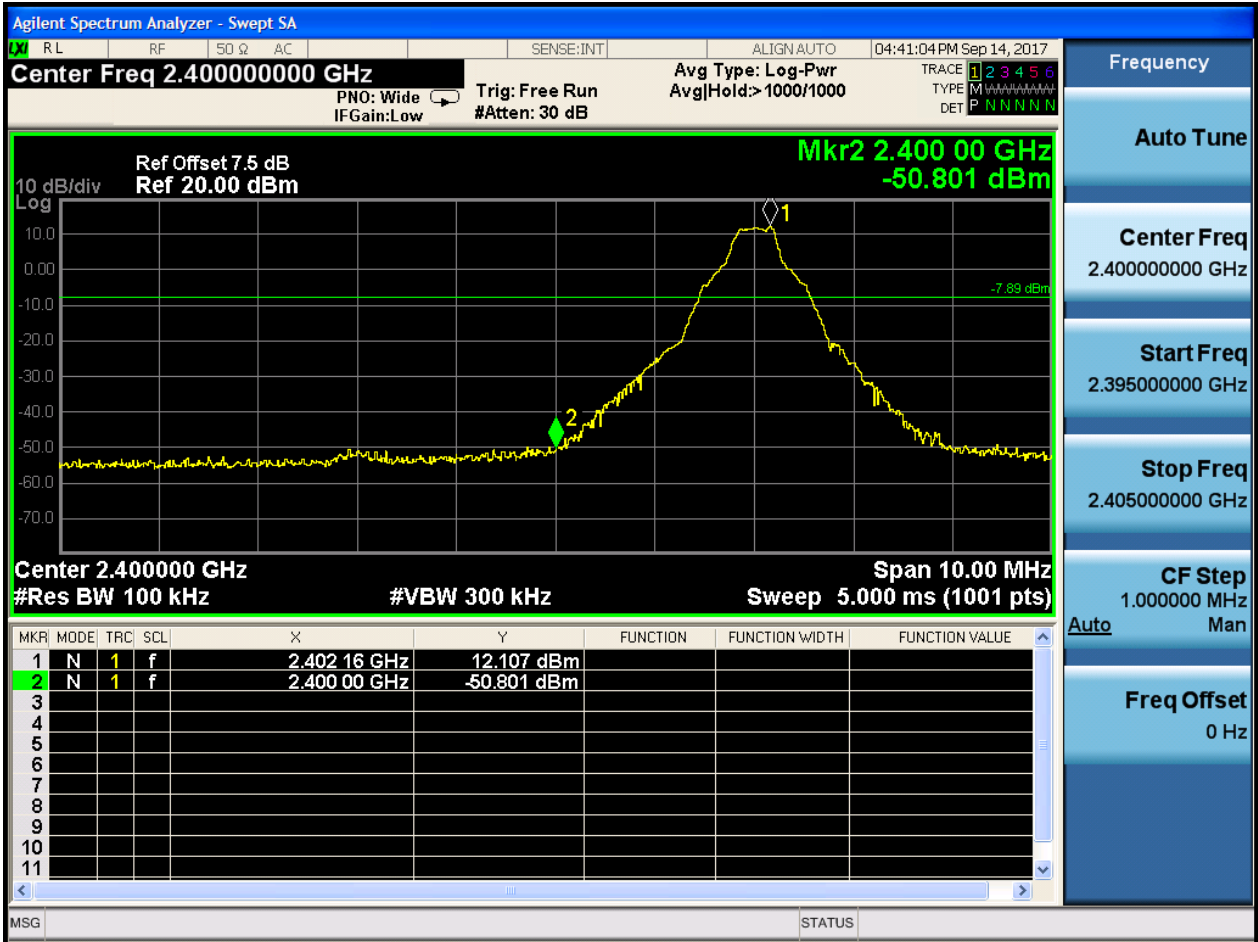



With hopping

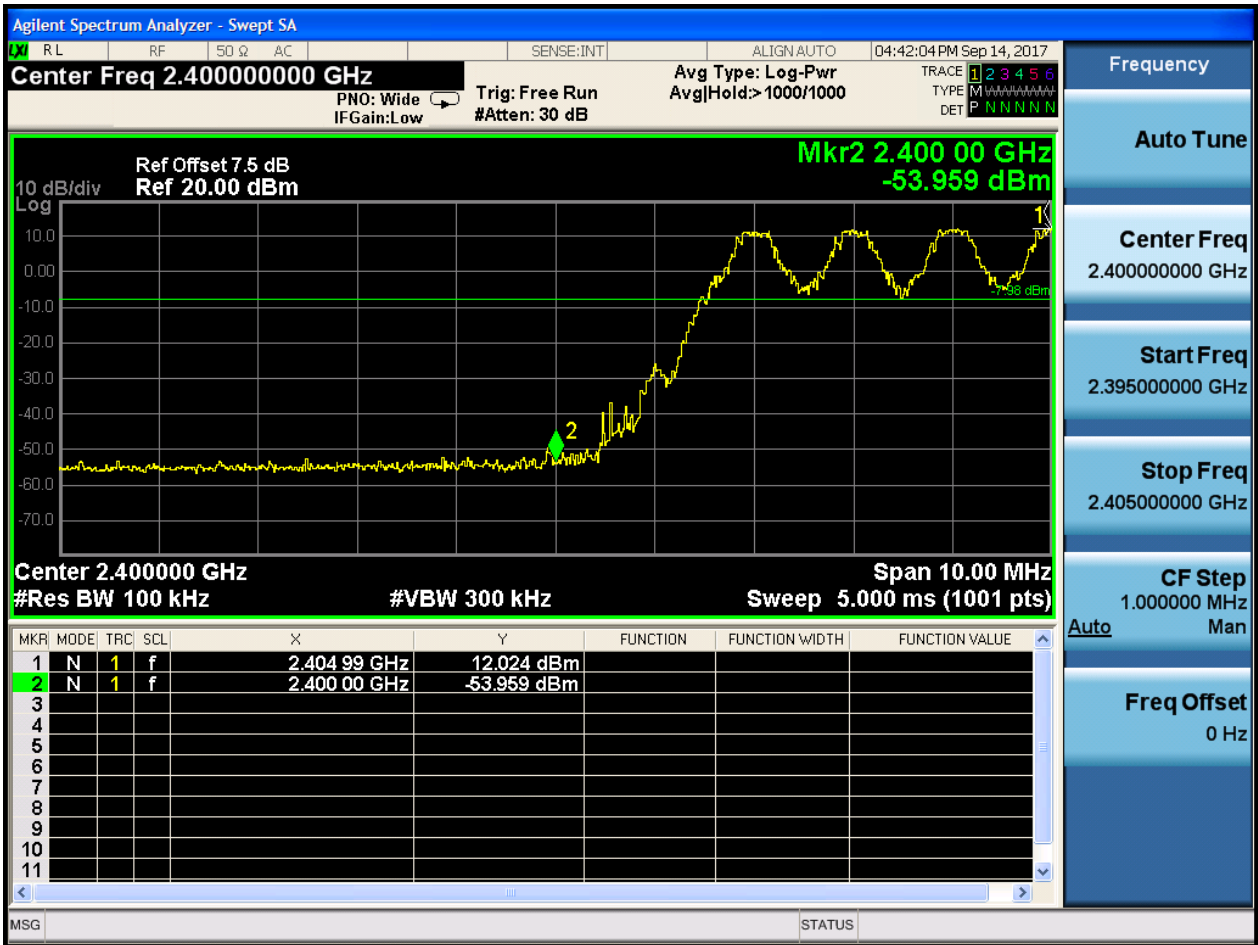


2.2 TM1\_DH5\_Ch78

No hopping




With hopping

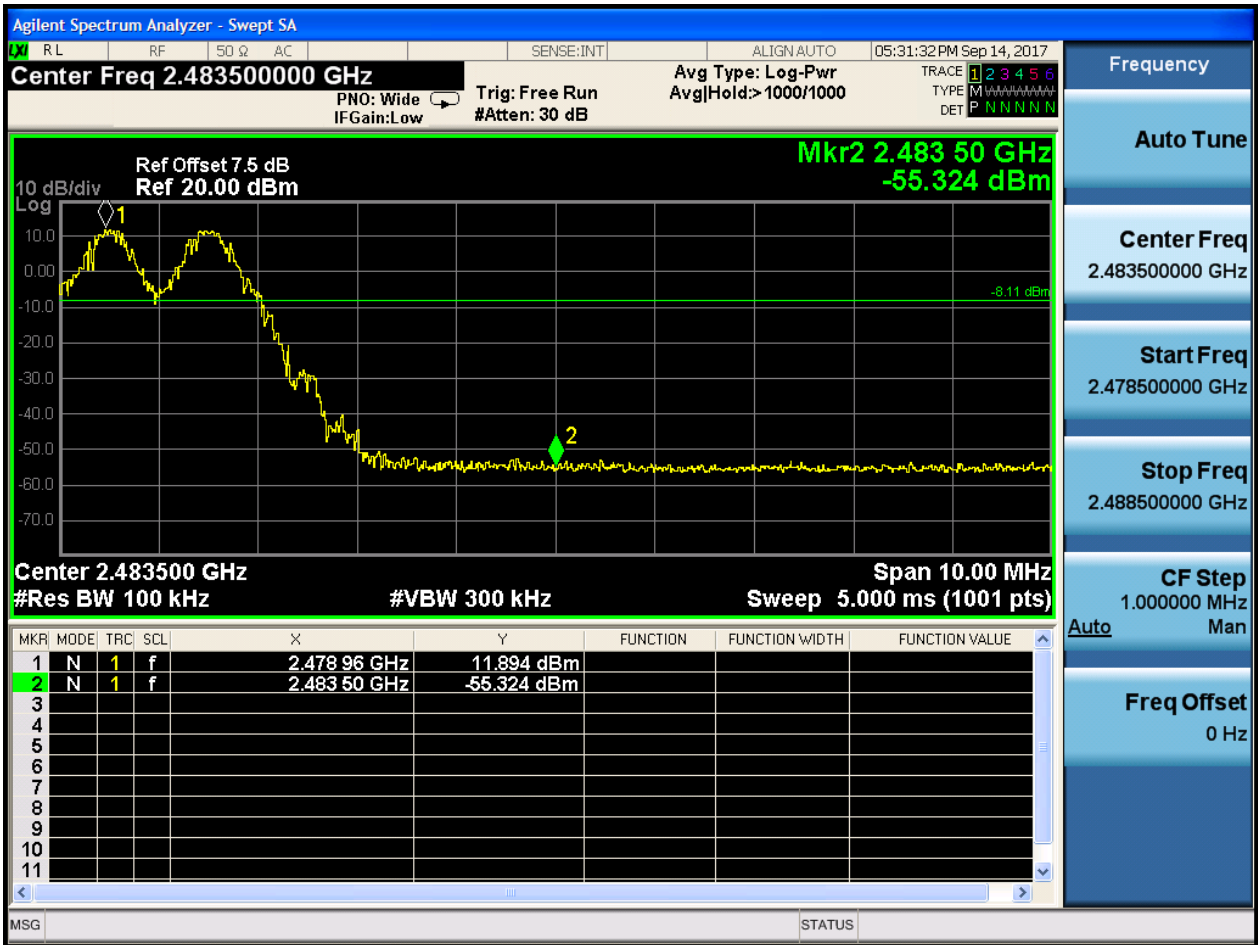


2.3 TM2\_2DH5\_Ch0

No hopping

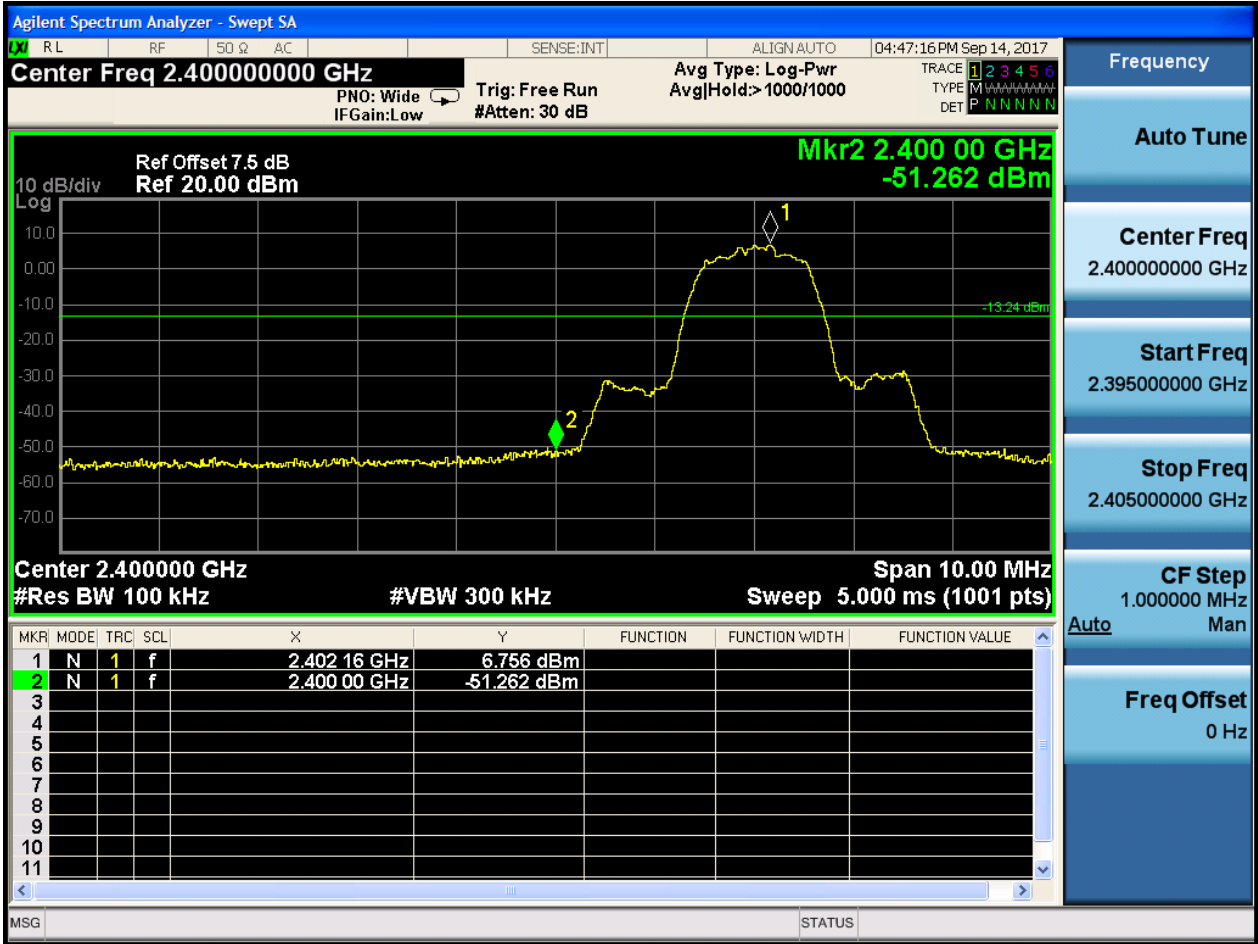




### With hopping

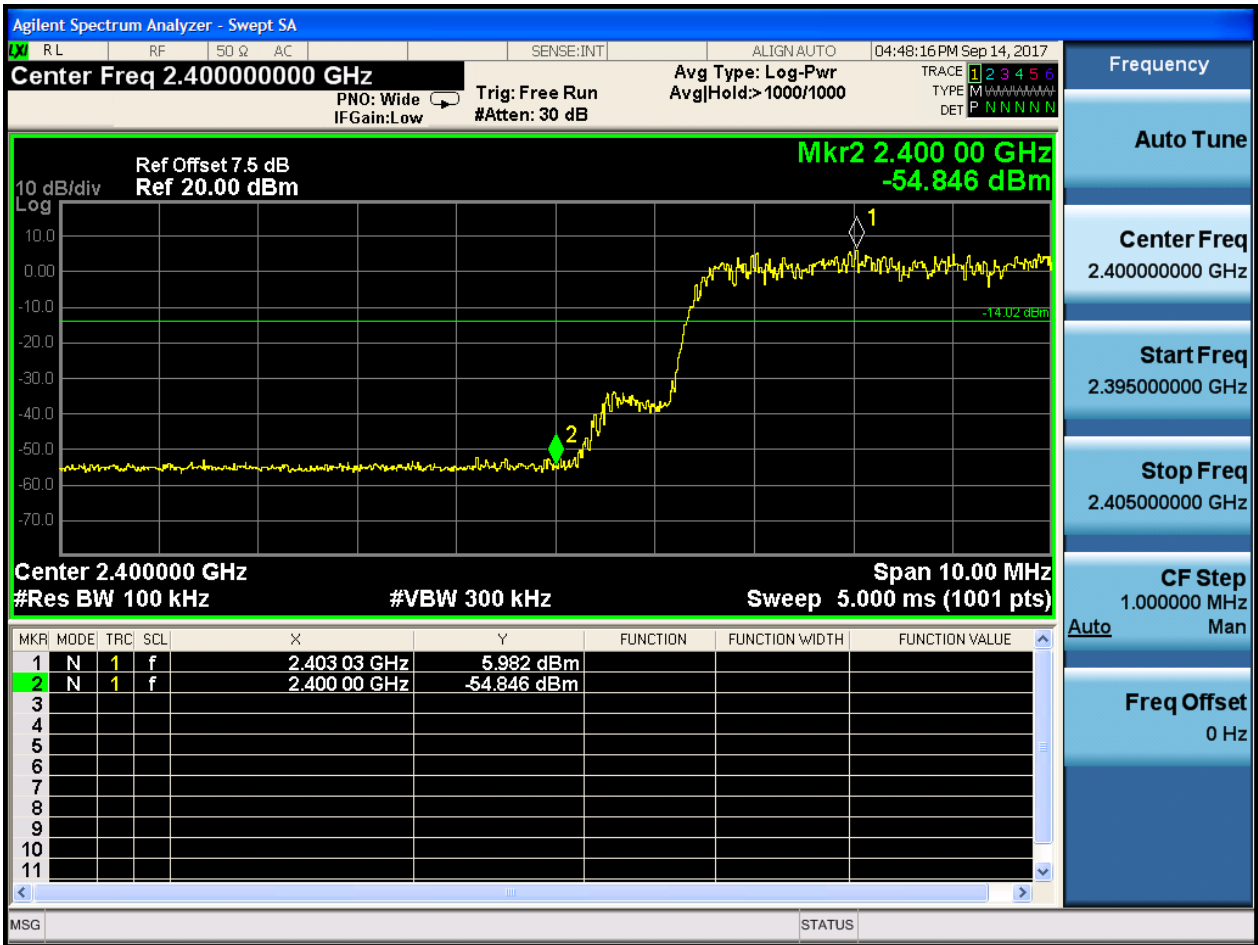


2.4 TM2\_2DH5\_Ch78

No hopping

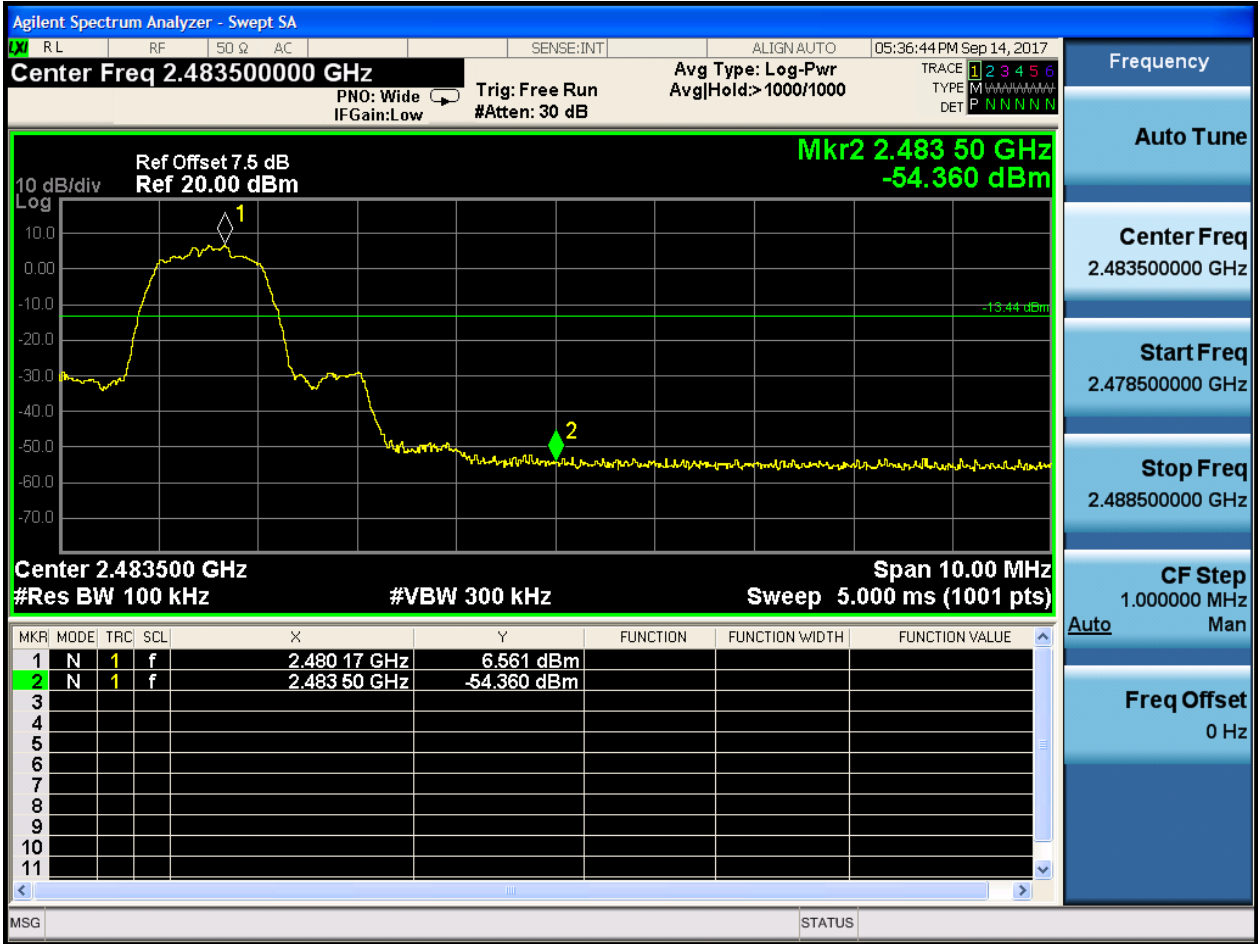


With hopping

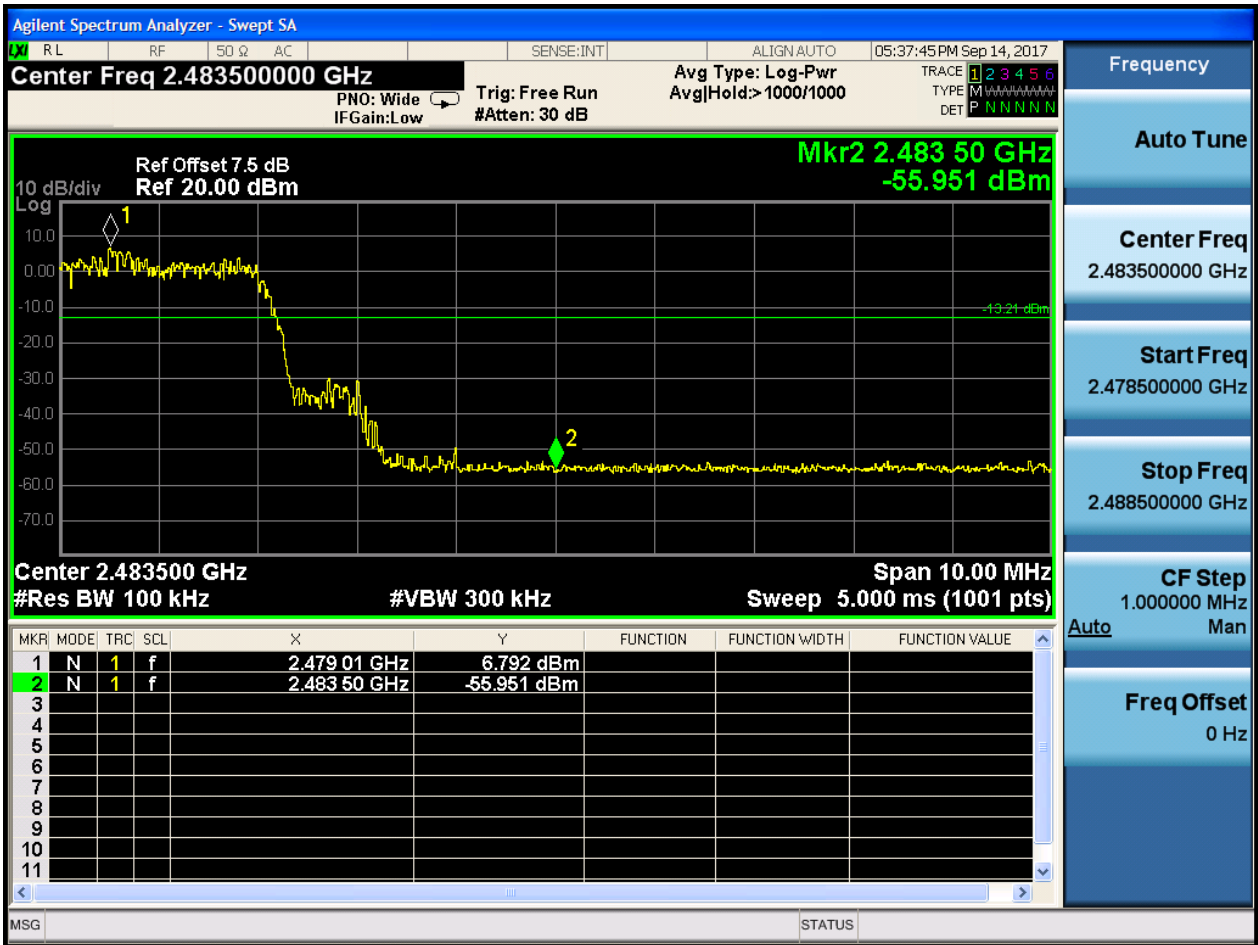


2.5 TM3\_3DH5\_Ch0

No hopping

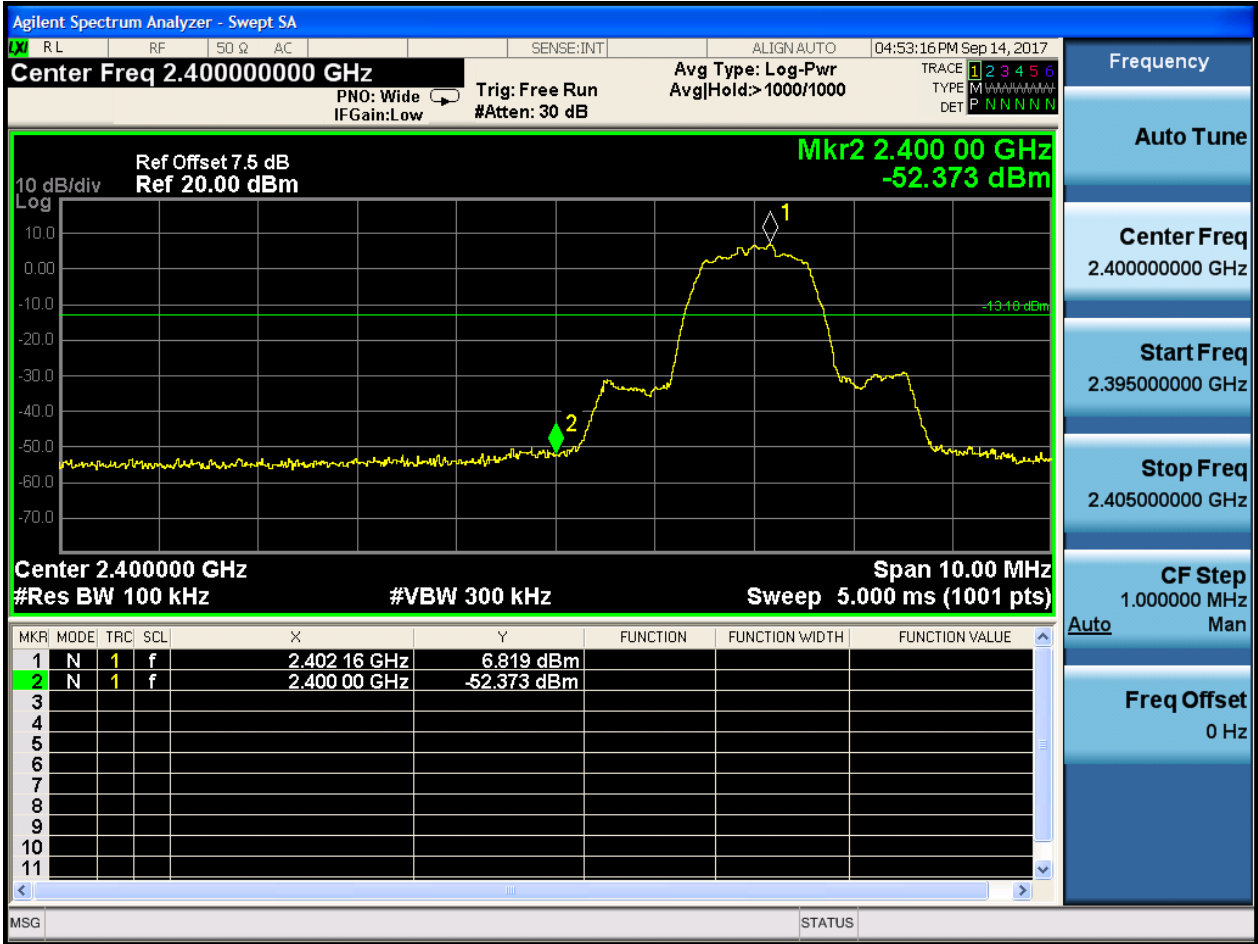




With hopping

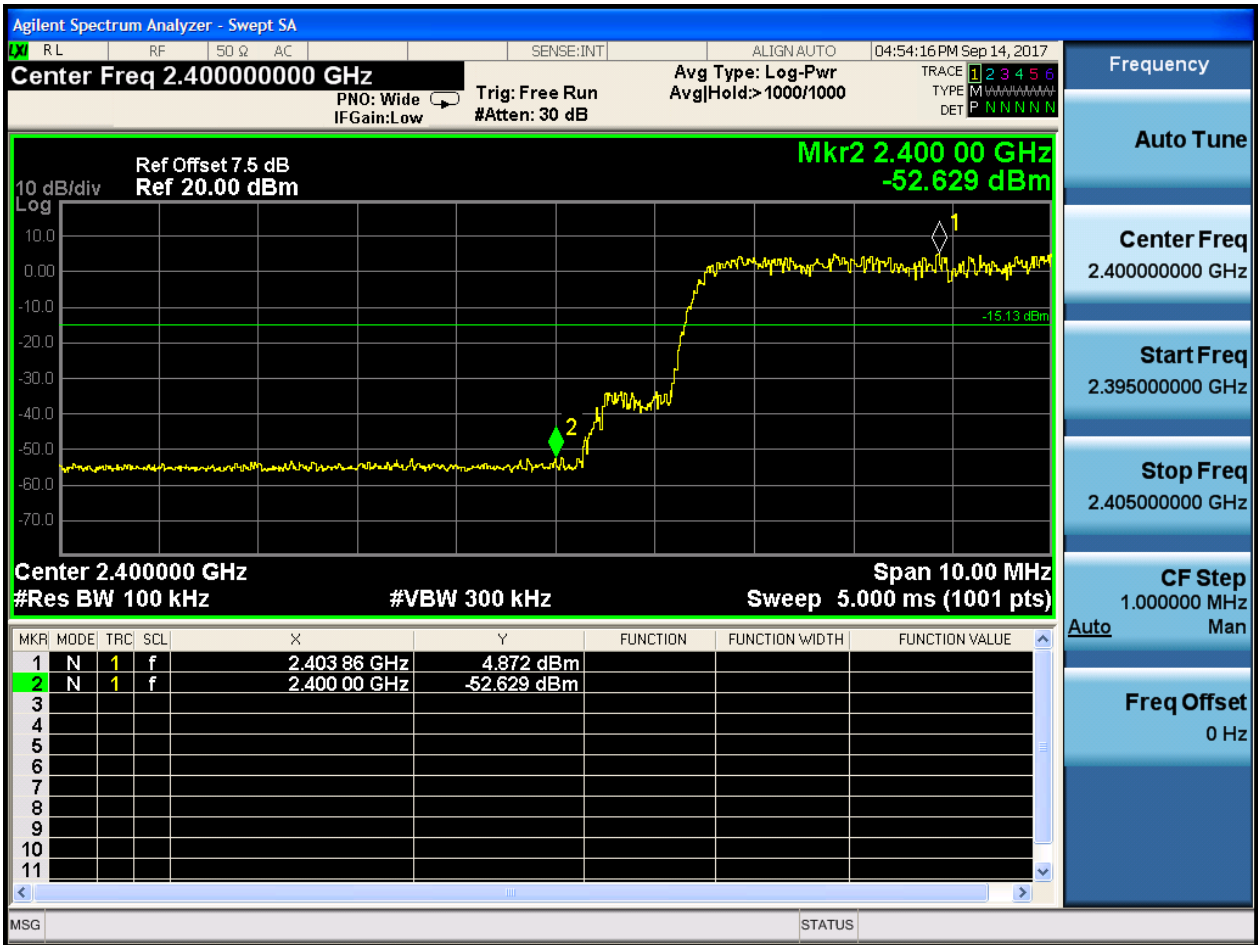



### 2.6 TM3\_3DH5\_Ch78

No hopping

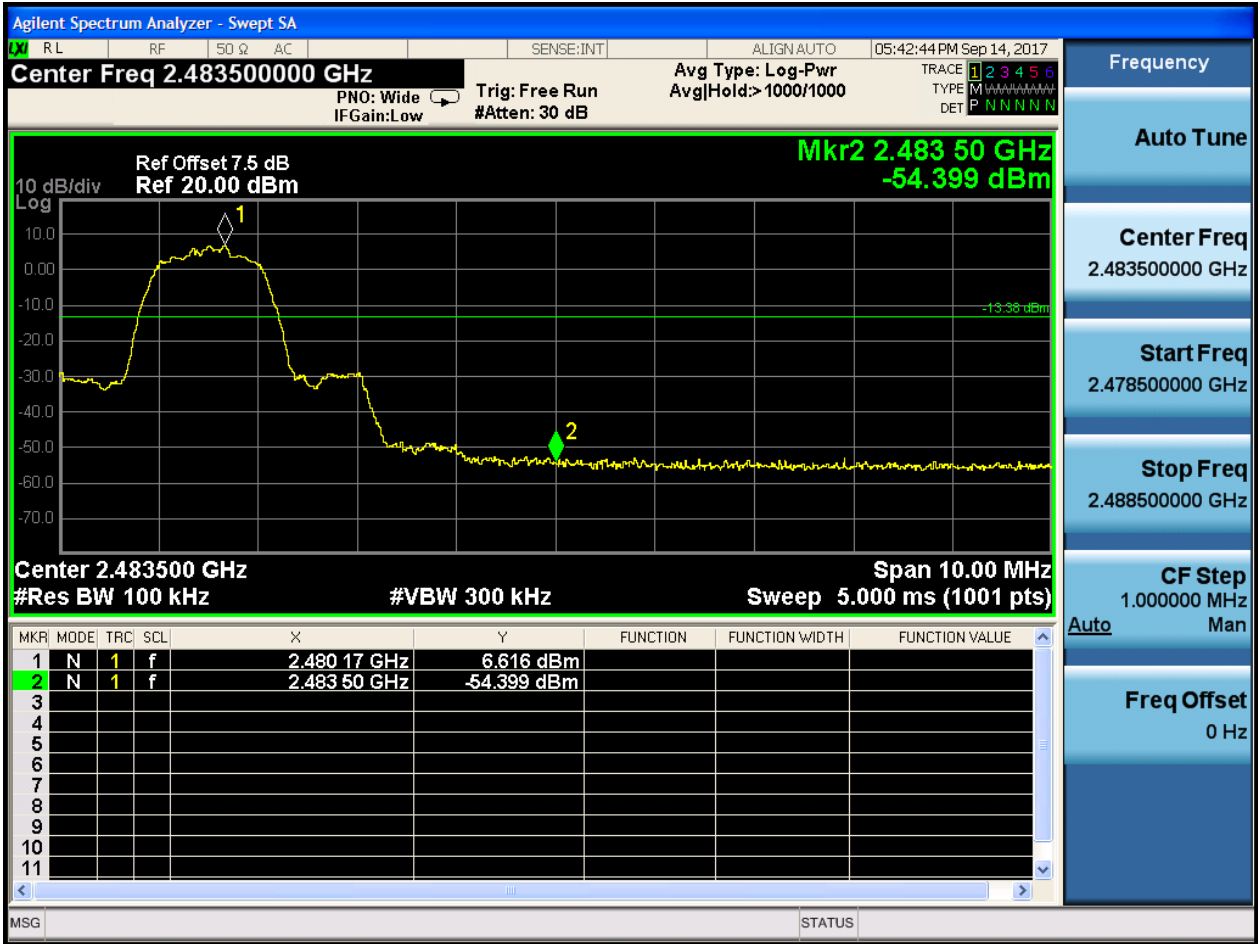



### With hopping





# Appendix G: Conducted RF Spurious Emission

## 1 Result Table

In this Appendix, the “Pref” refers to the peak power level in any 100 kHz bandwidth within the fundamental emission which is used as the reference level, the “Puw” refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$ . As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

In the result table, the “< Limit” denotes that “The Puw [dBm] is less than Pref [dBm] - 20 [dB], see test plots for detailed”.


EUT Conf.	Pref [dBm/100 kHz]	Puw [dBm/100 kHz]	Verdict
TM1_DH5_Ch0	12.153	< Limit	Pass
TM1_DH5_Ch39	13.667	< Limit	Pass
TM1_DH5_Ch78	12.198	< Limit	Pass
TM2_2DH5_Ch0	6.829	< Limit	Pass
TM2_2DH5_Ch39	7.187	< Limit	Pass
TM2_2DH5_Ch78	6.636	< Limit	Pass
TM3_3DH5_Ch0	6.825	< Limit	Pass
TM3_3DH5_Ch39	7.225	< Limit	Pass
TM3_3DH5_Ch78	6.674	< Limit	Pass



## 2 Test Plot


### 2.1 TM1\_DH5\_Ch0


#### 2.1.1 Pref

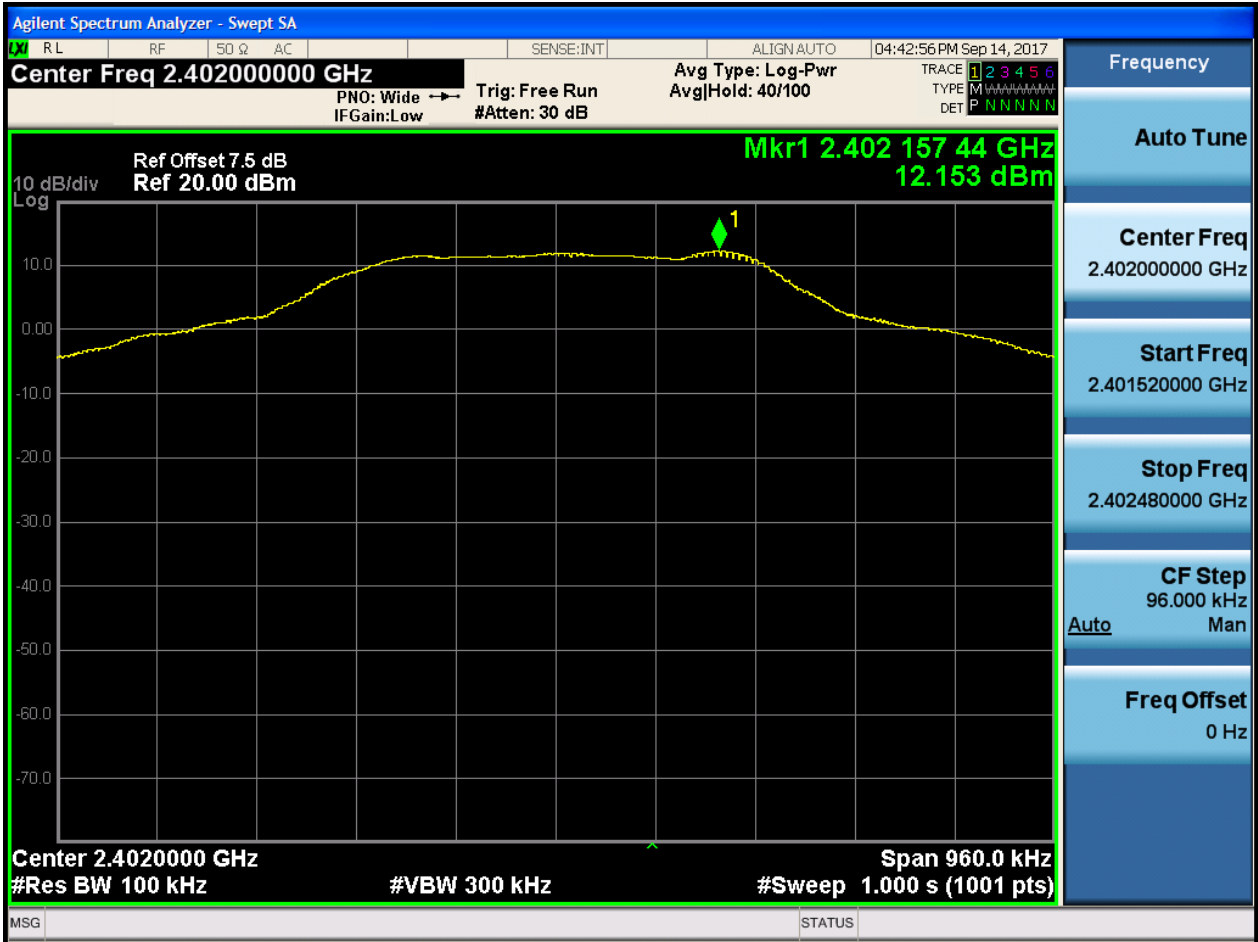





### 2.1.2 Puw

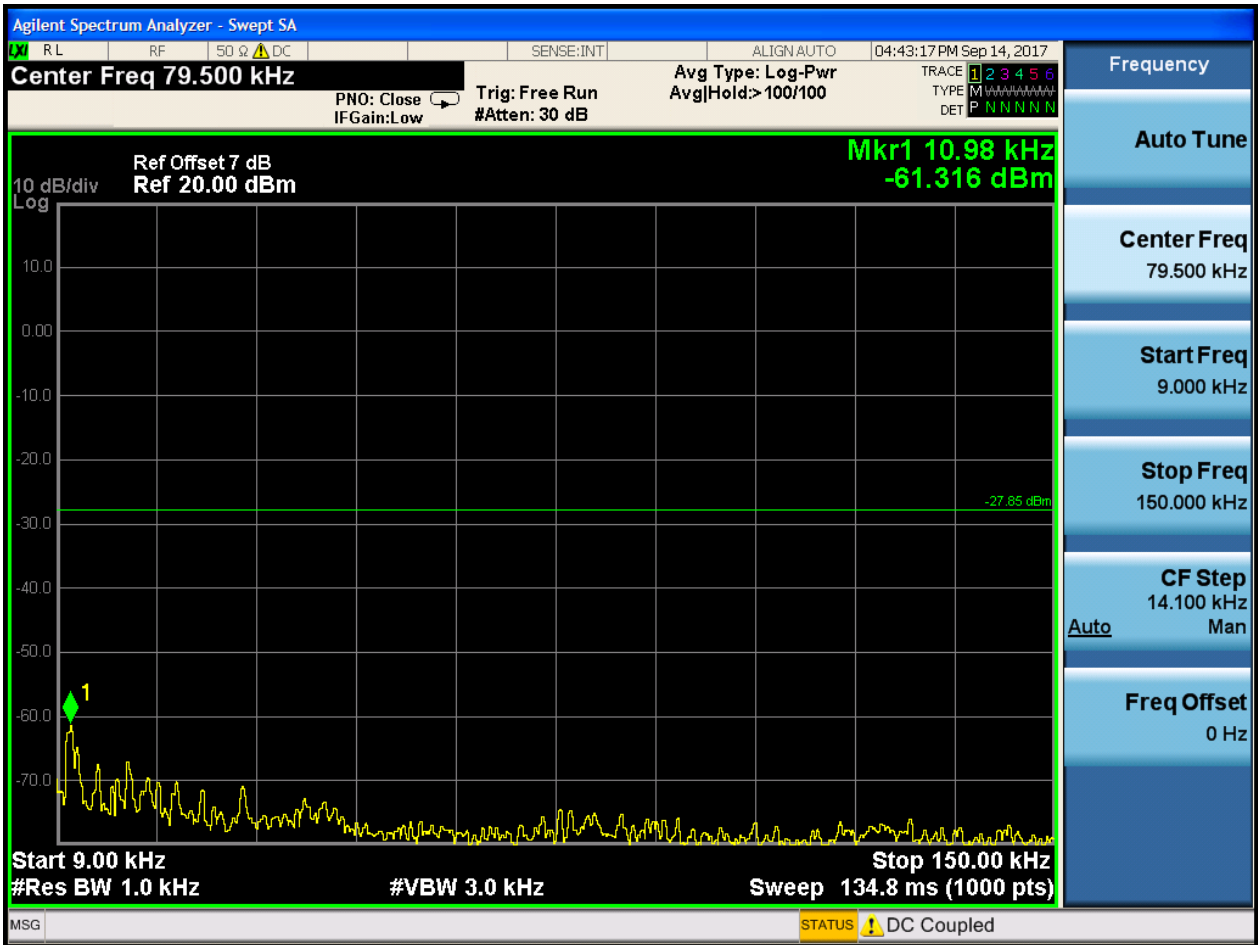


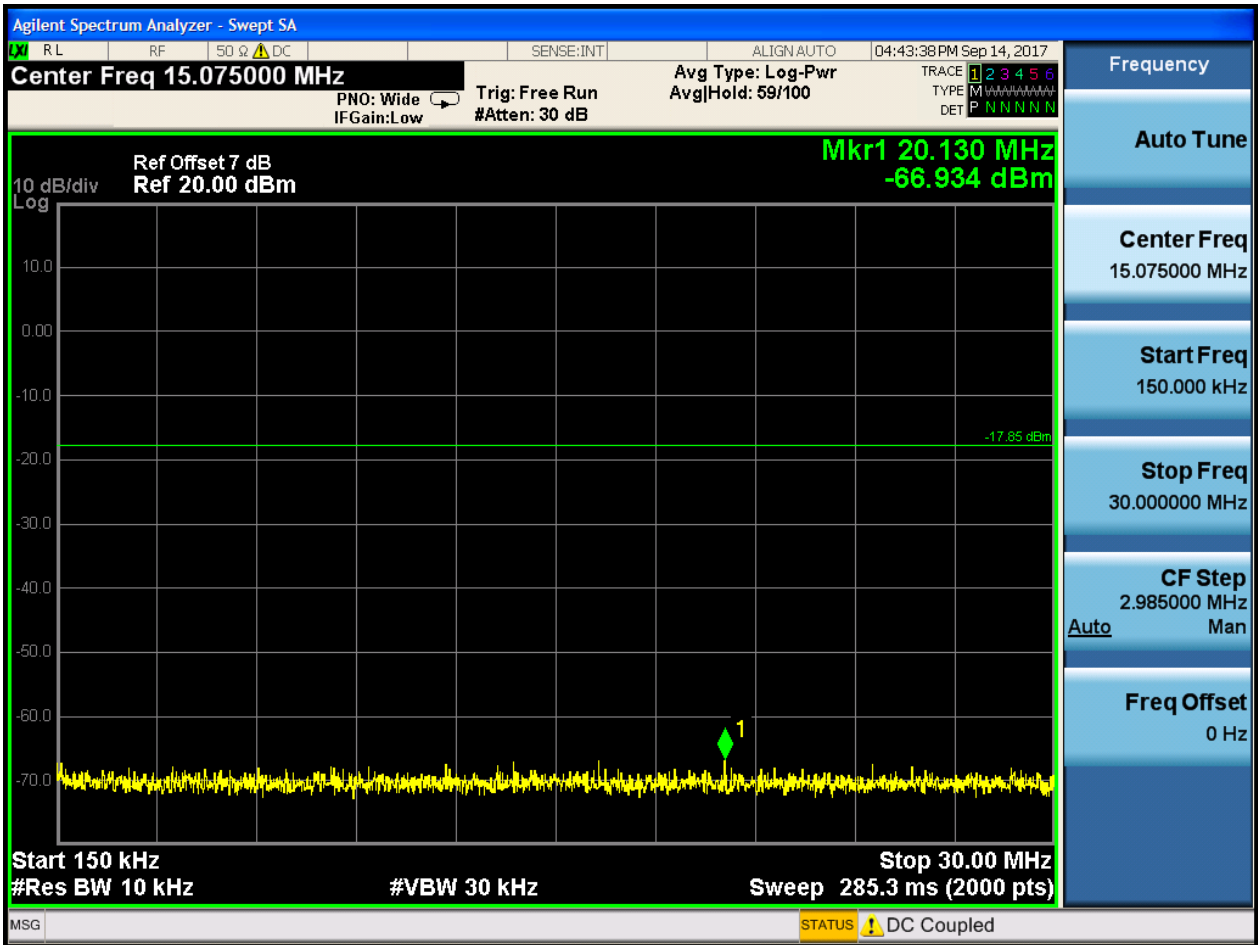



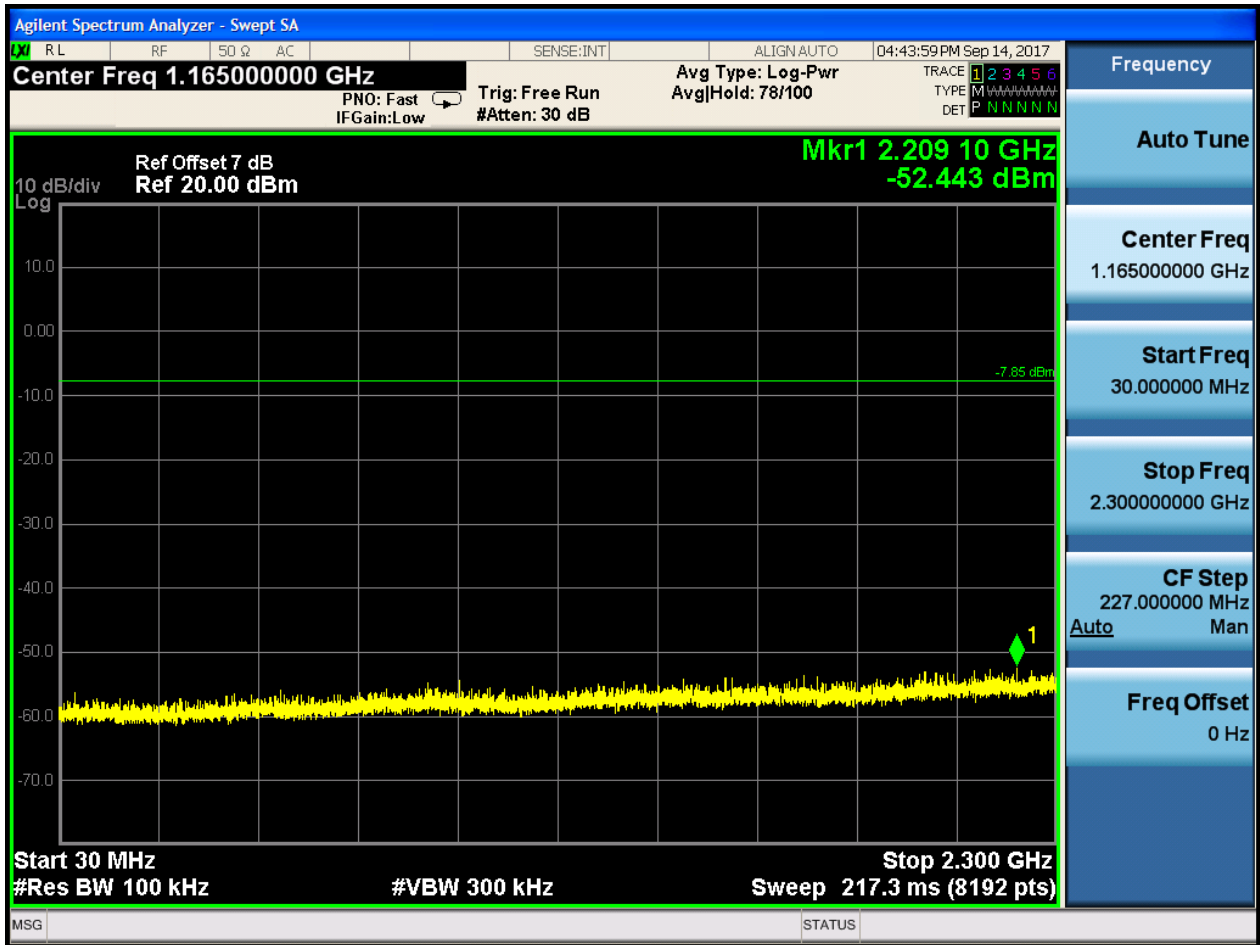

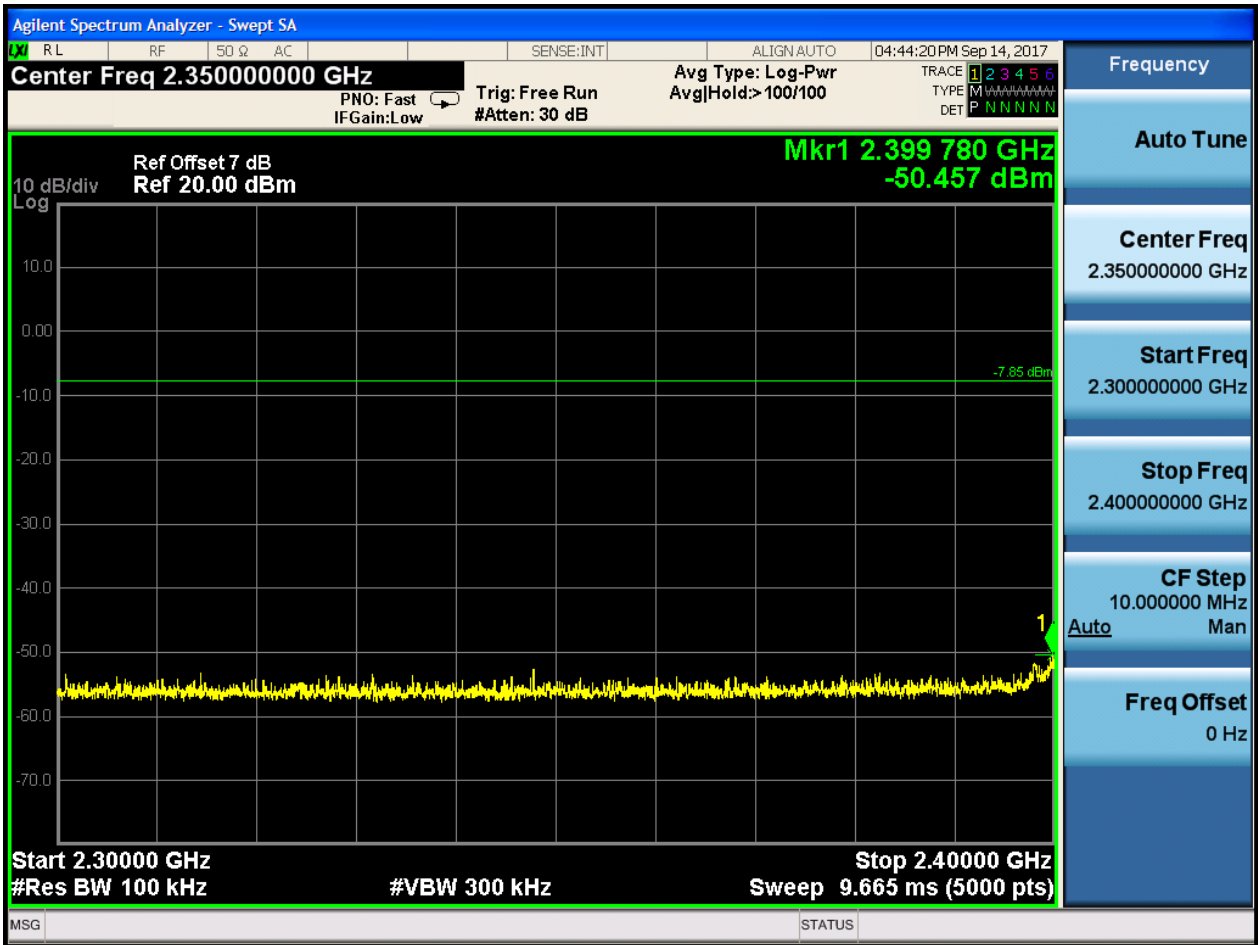

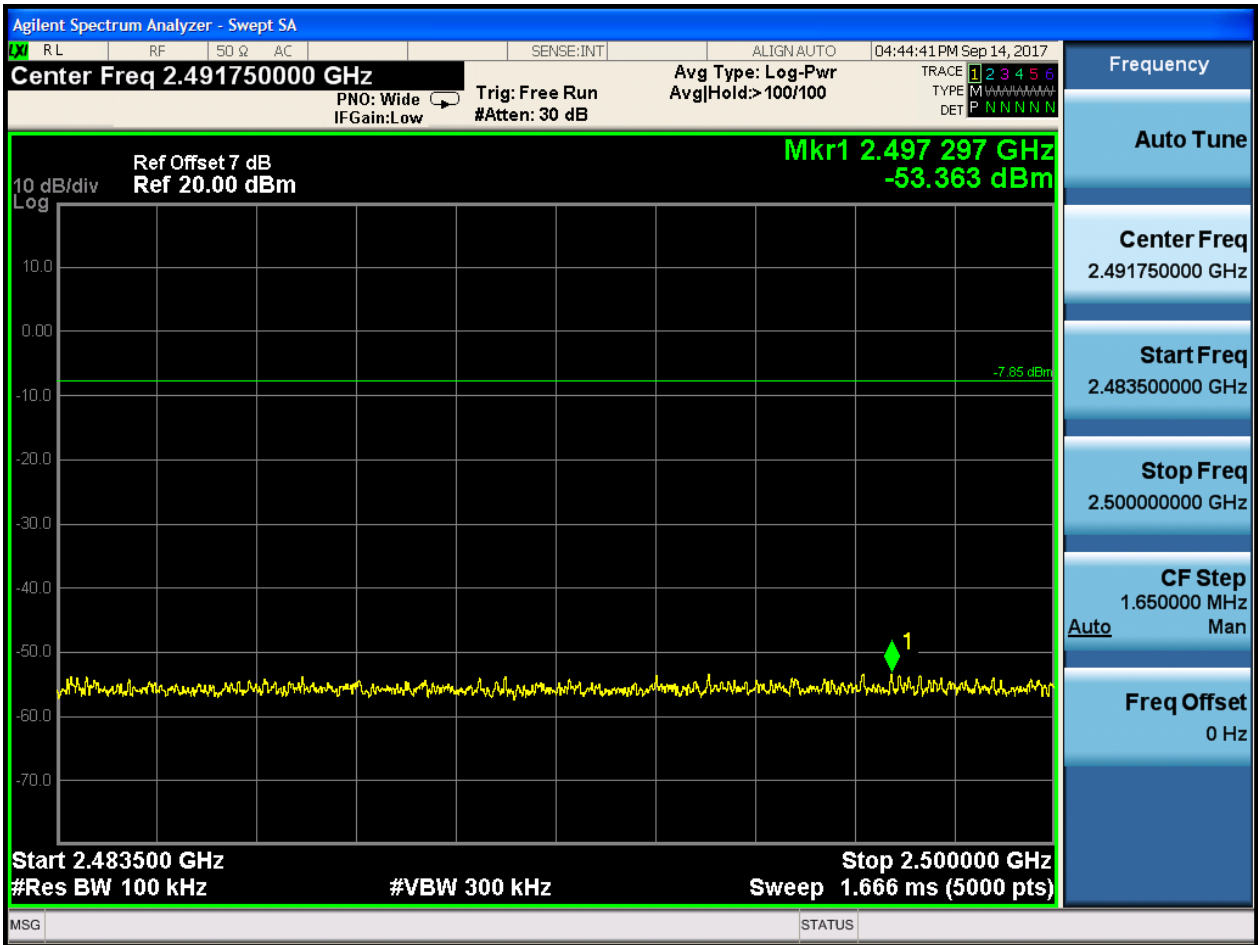







## 2.2 TM1\_DH5\_Ch39


### 2.2.1 Pref




### 2.2.2 Puw

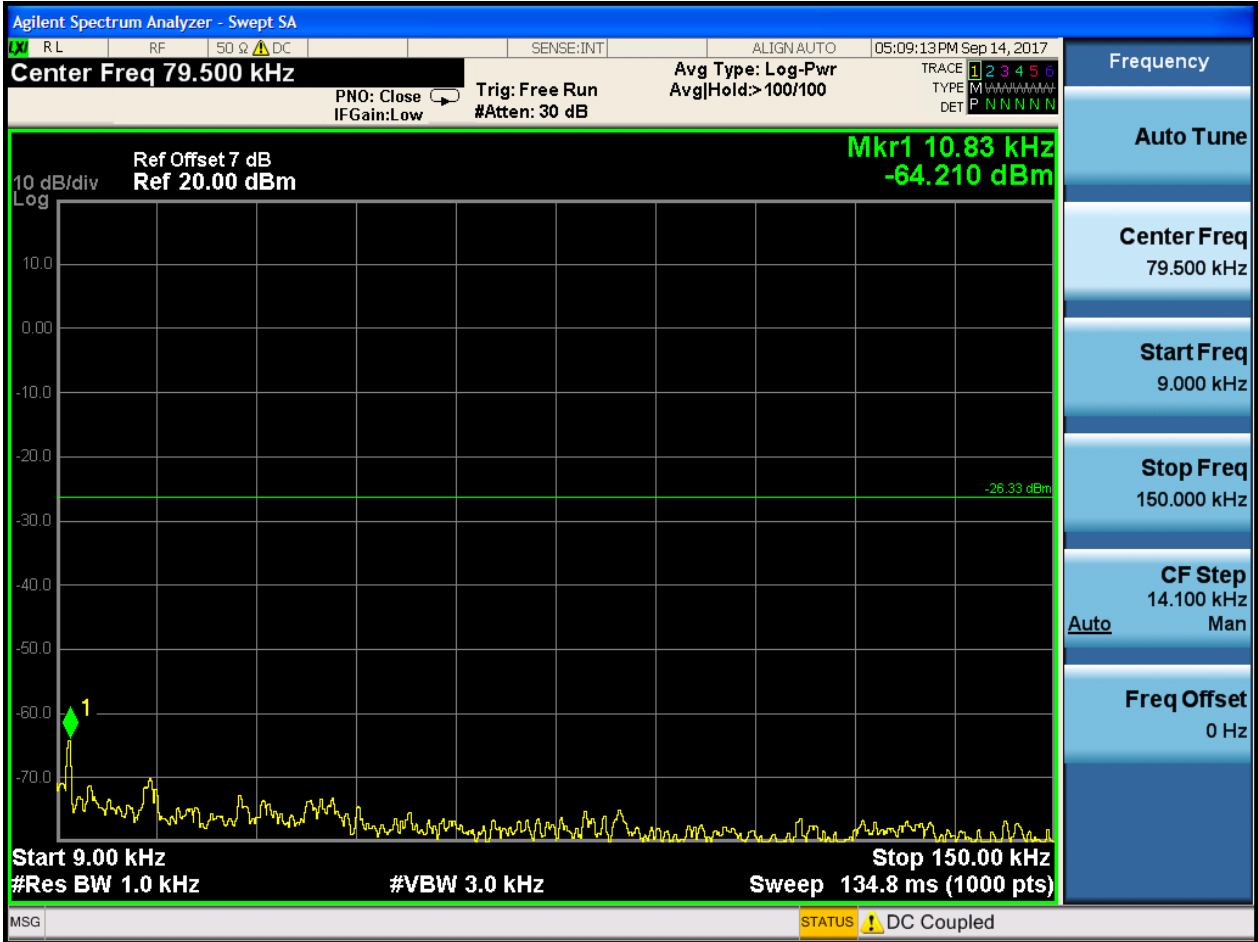


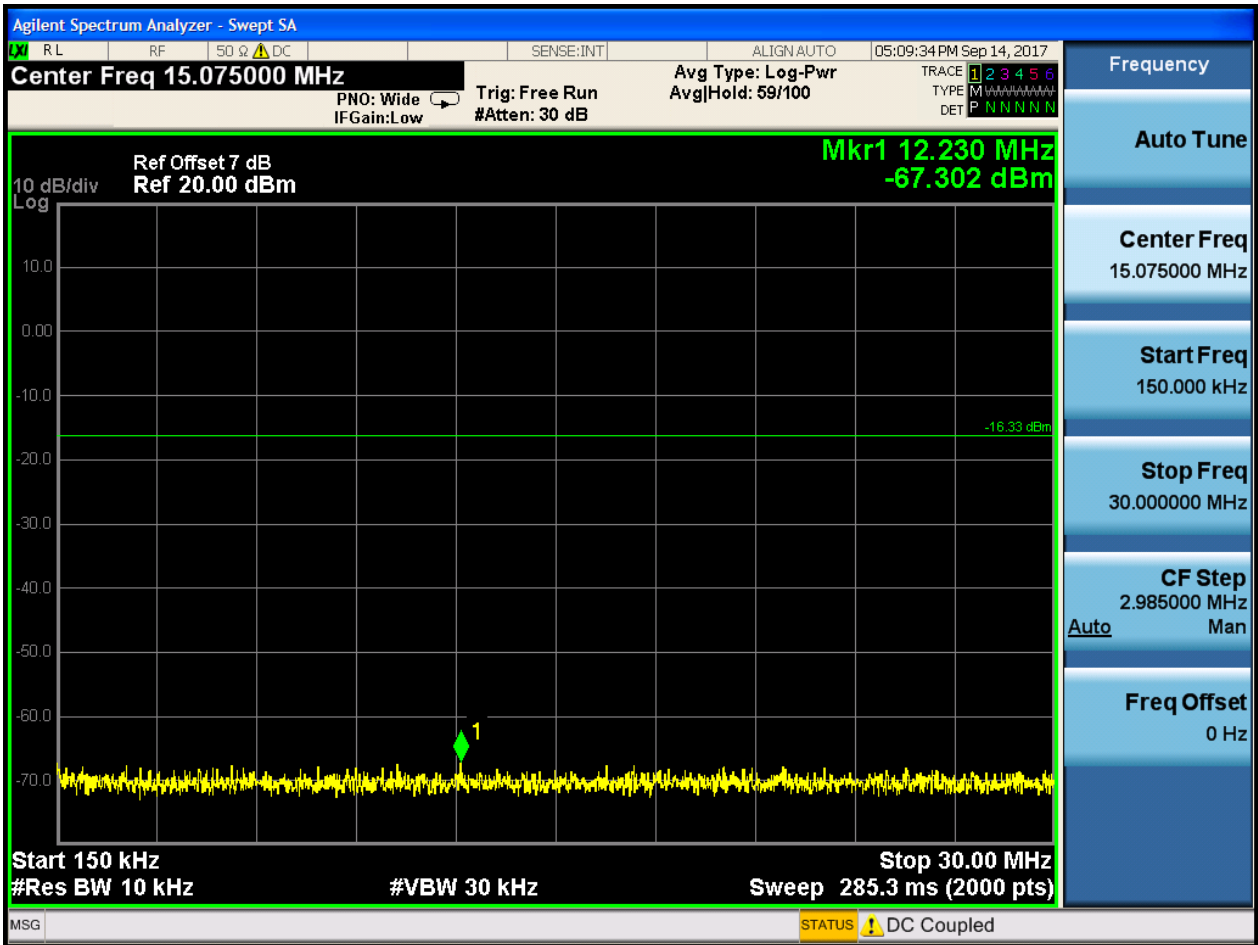

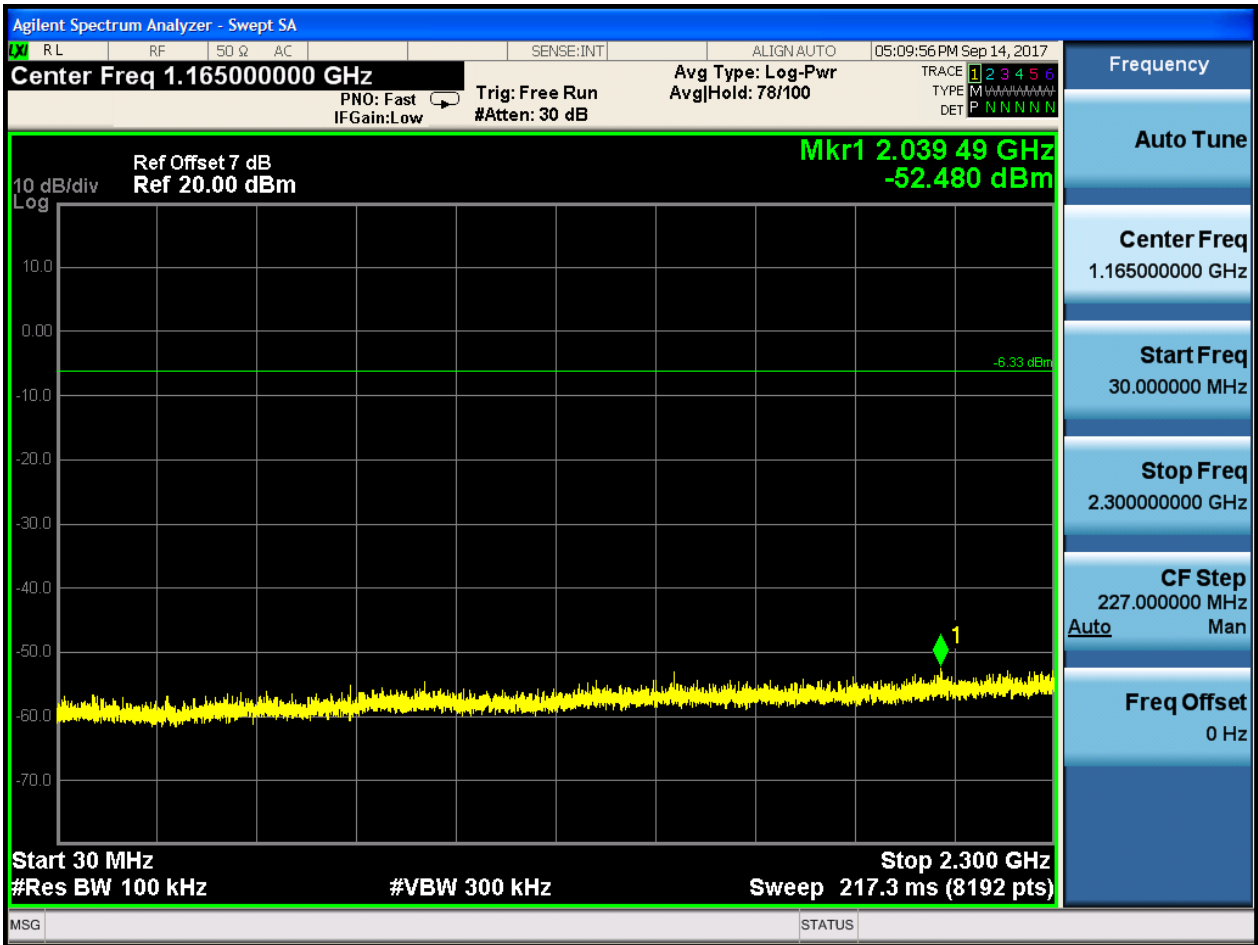



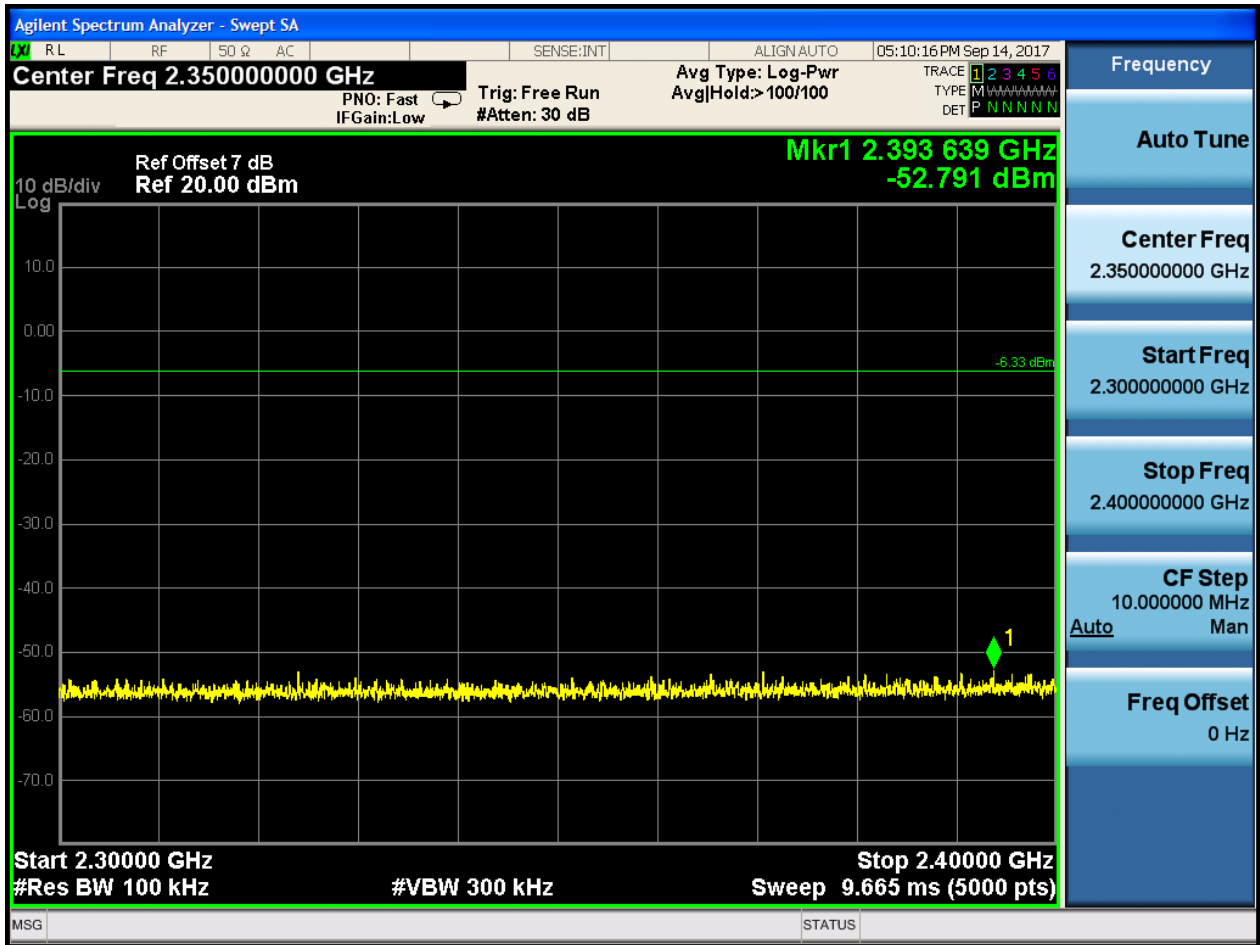

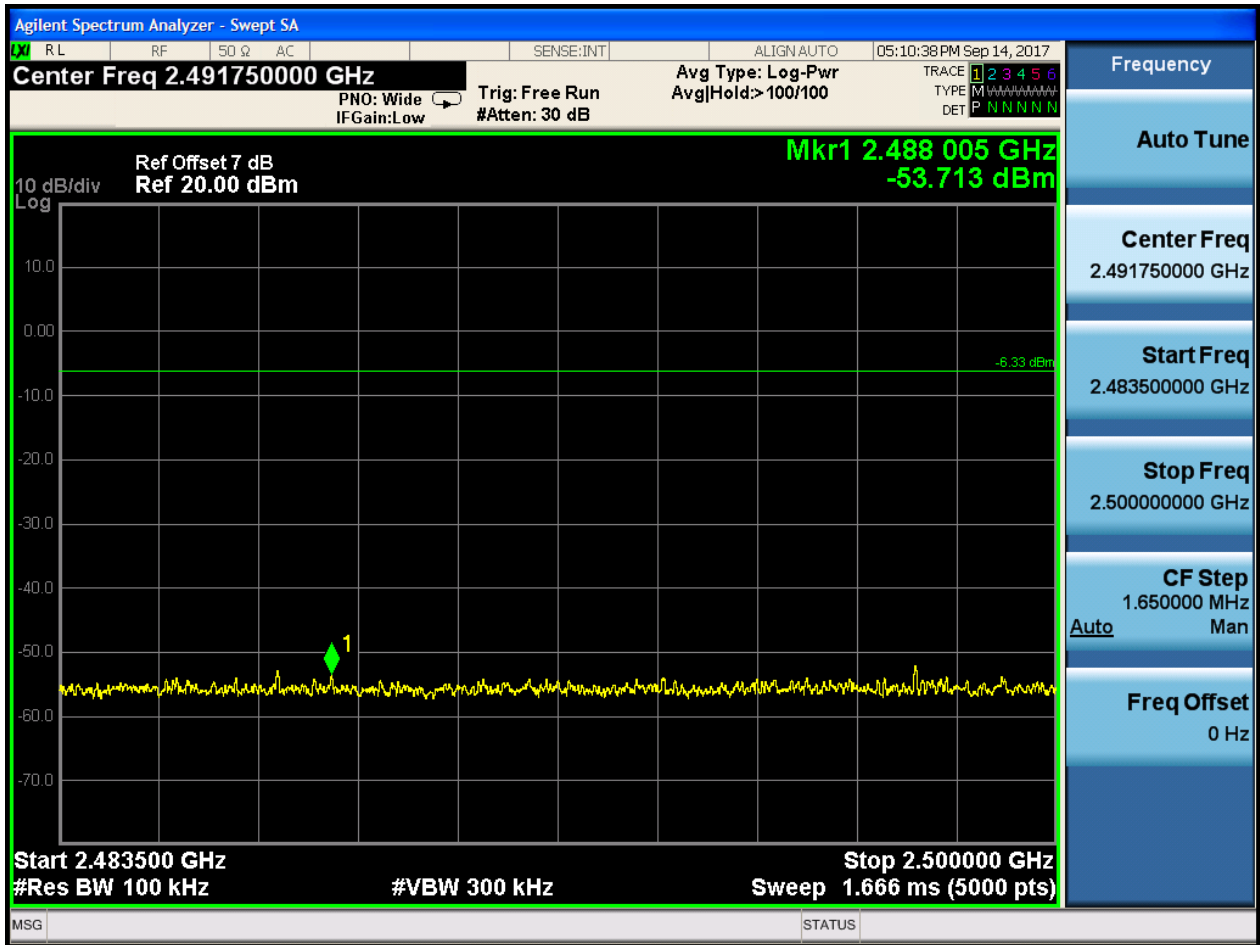






### 2.3 TM1\_DH5\_Ch78


#### 2.3.1 Pref







### 2.3.2 Puw

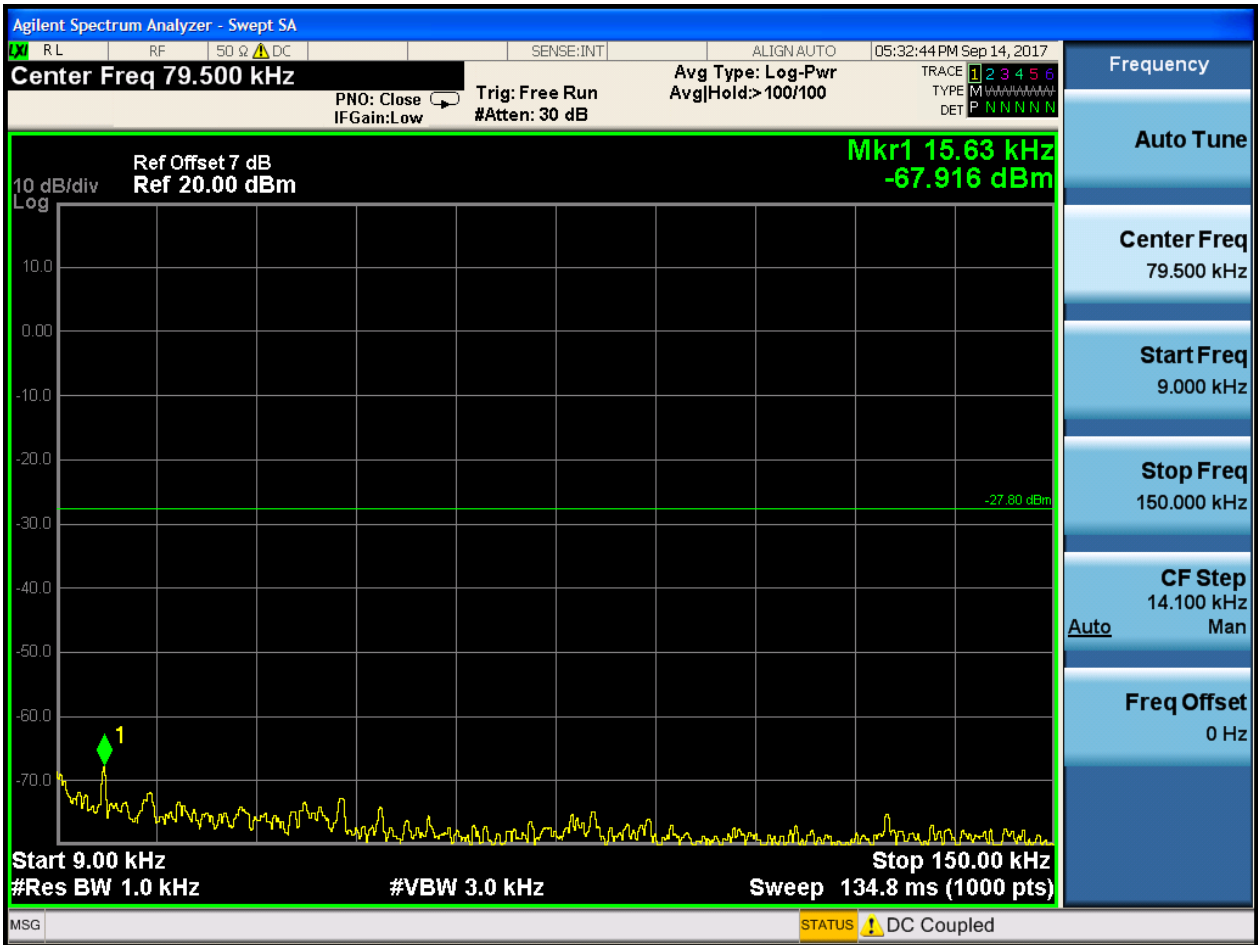


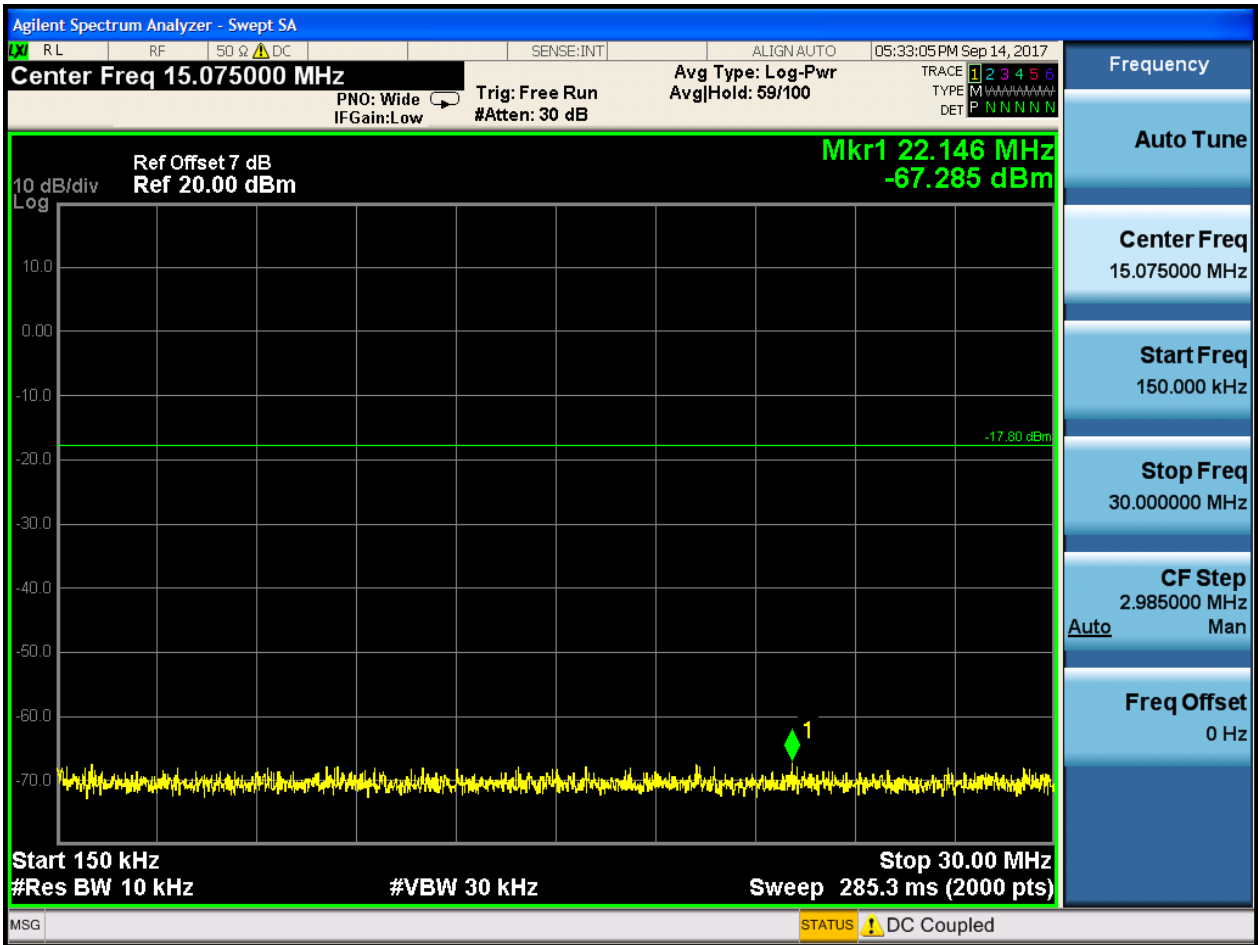

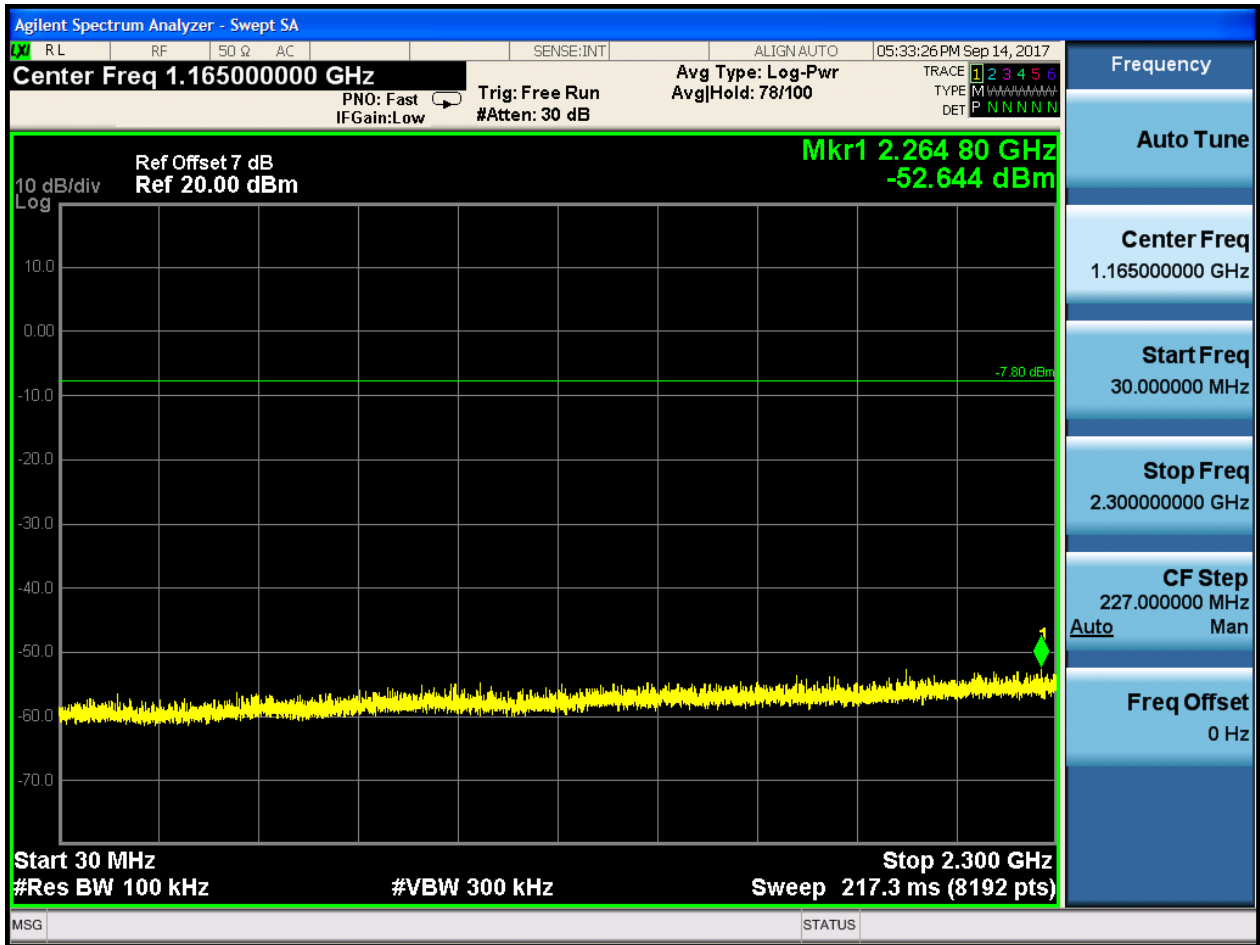

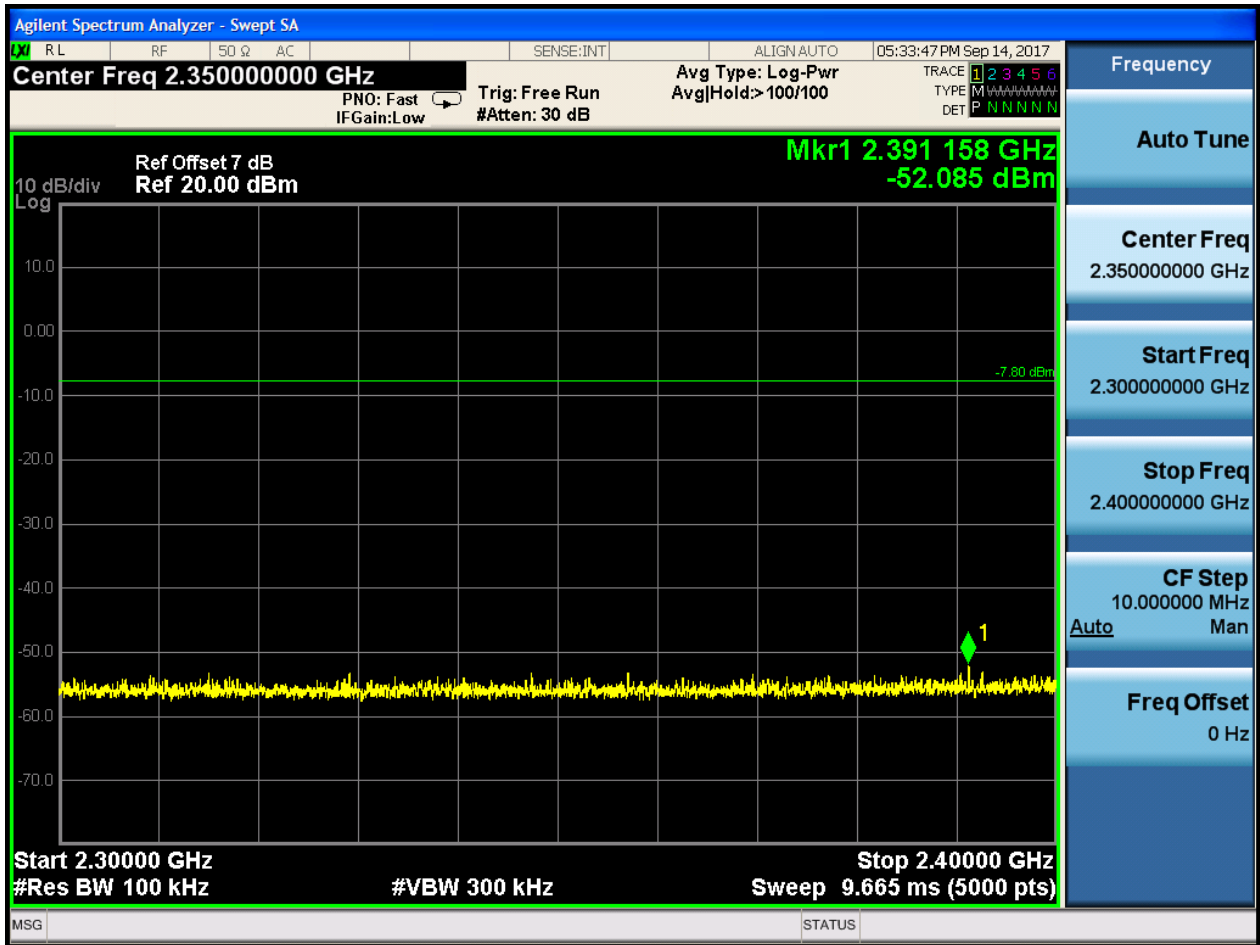



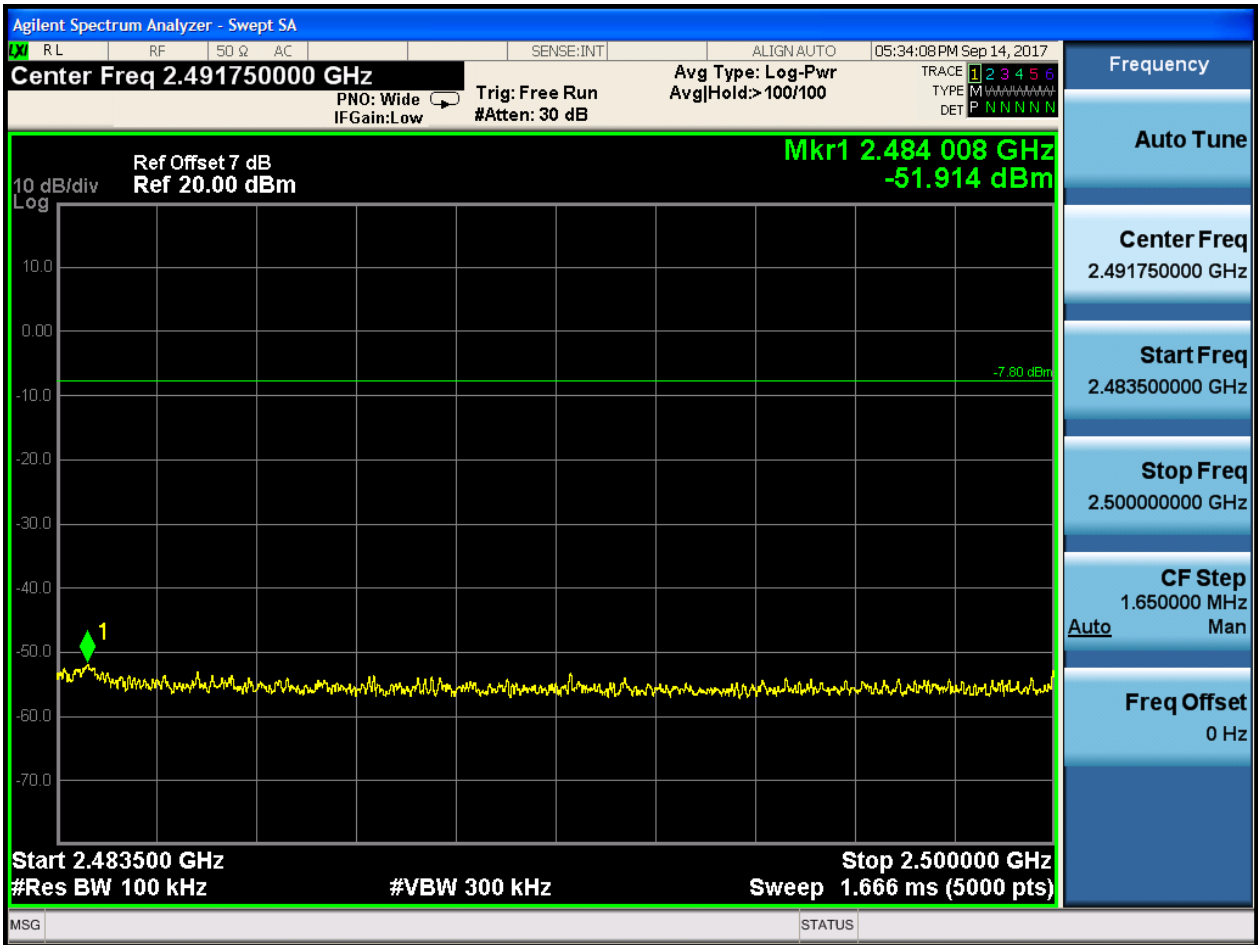







## 2.4 TM2\_2DH5\_Ch0


### 2.4.1 Pref





2.4.2 Puw

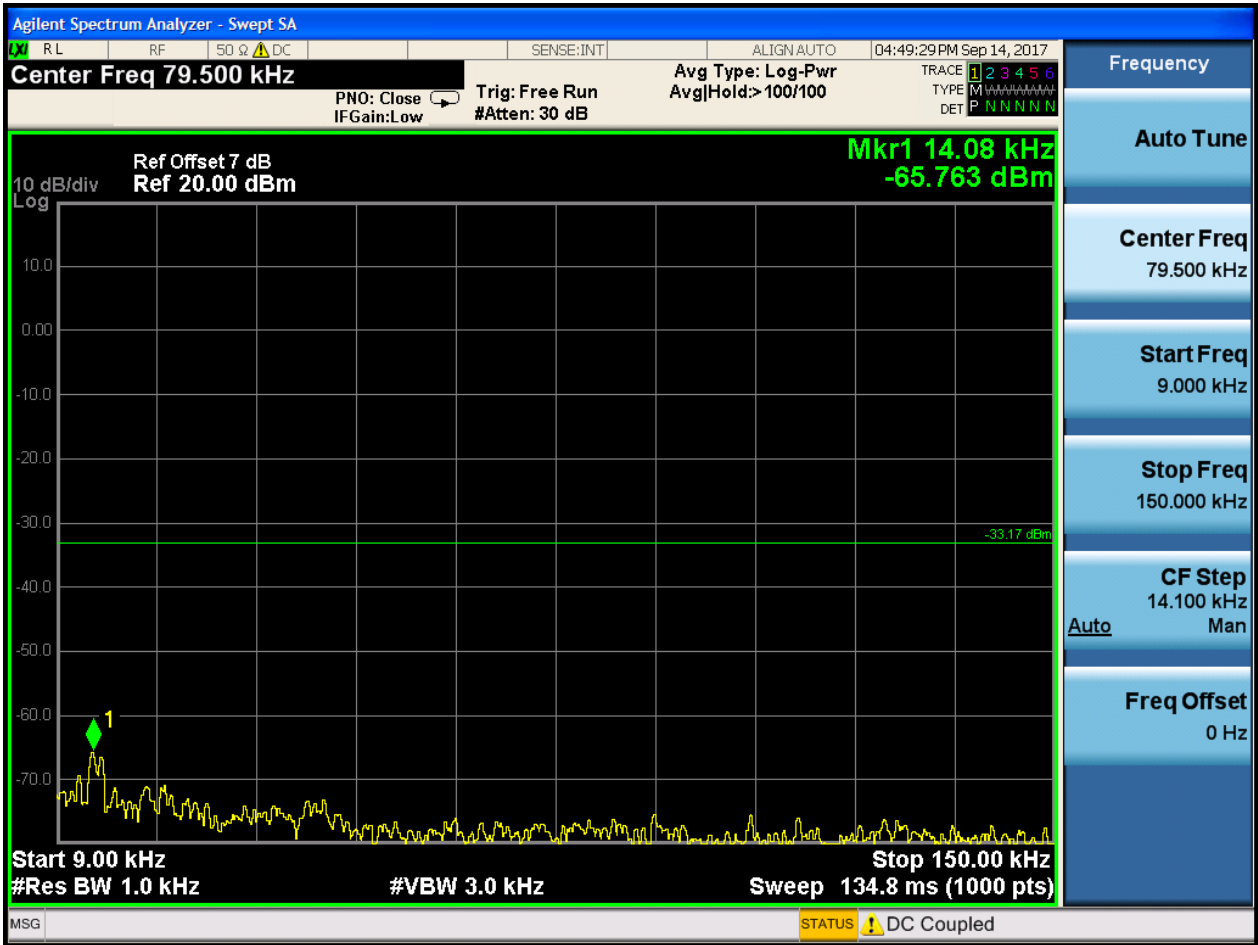

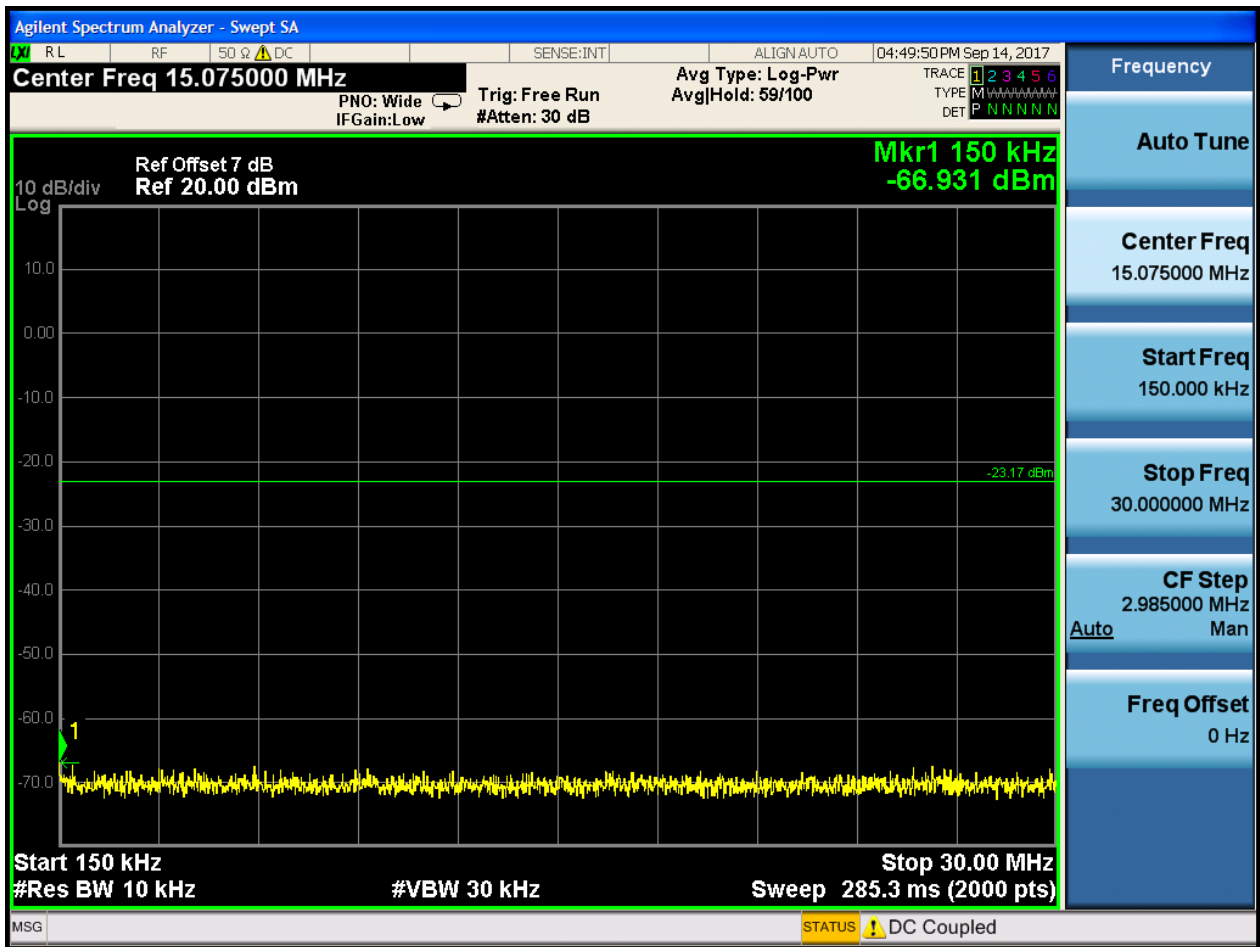

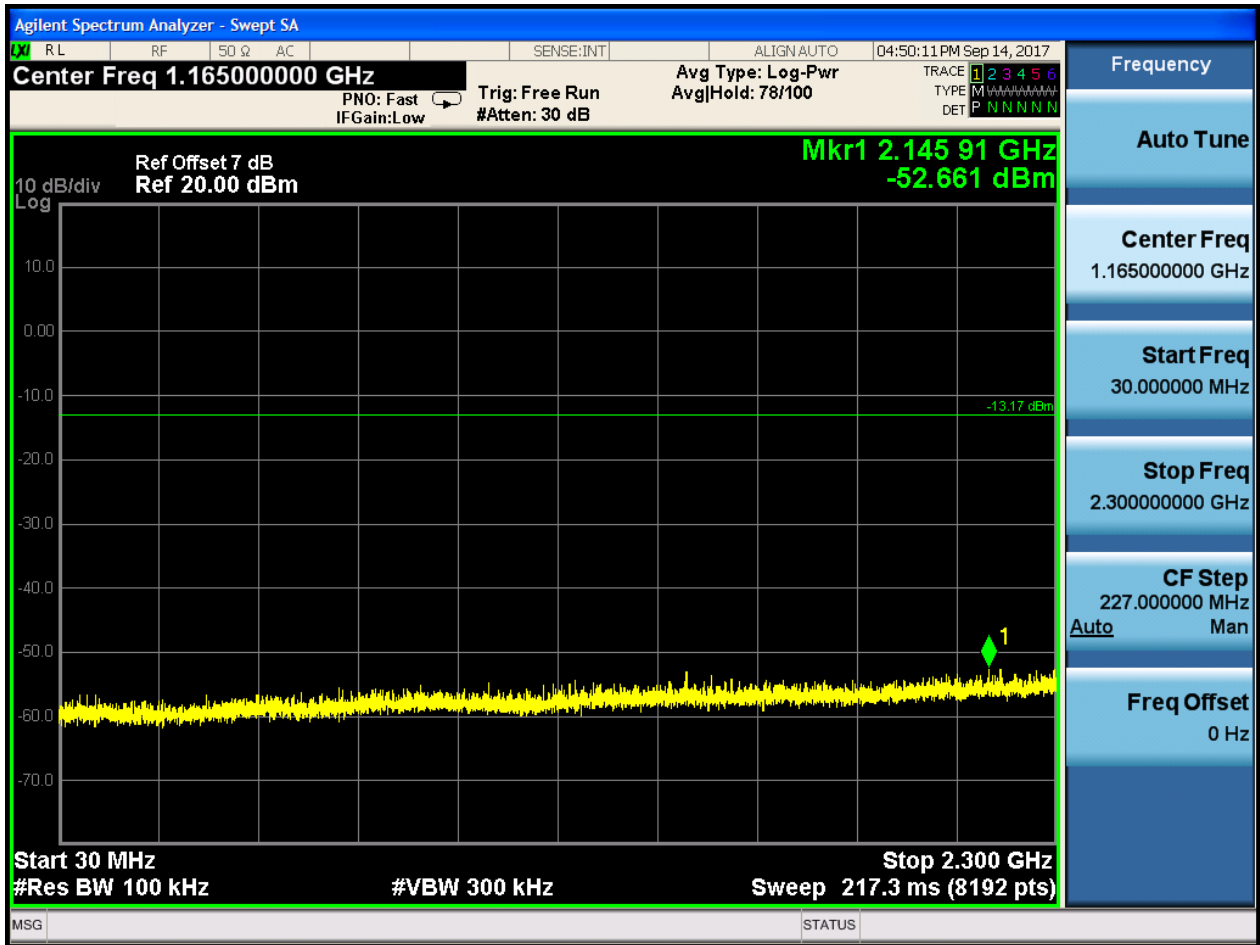

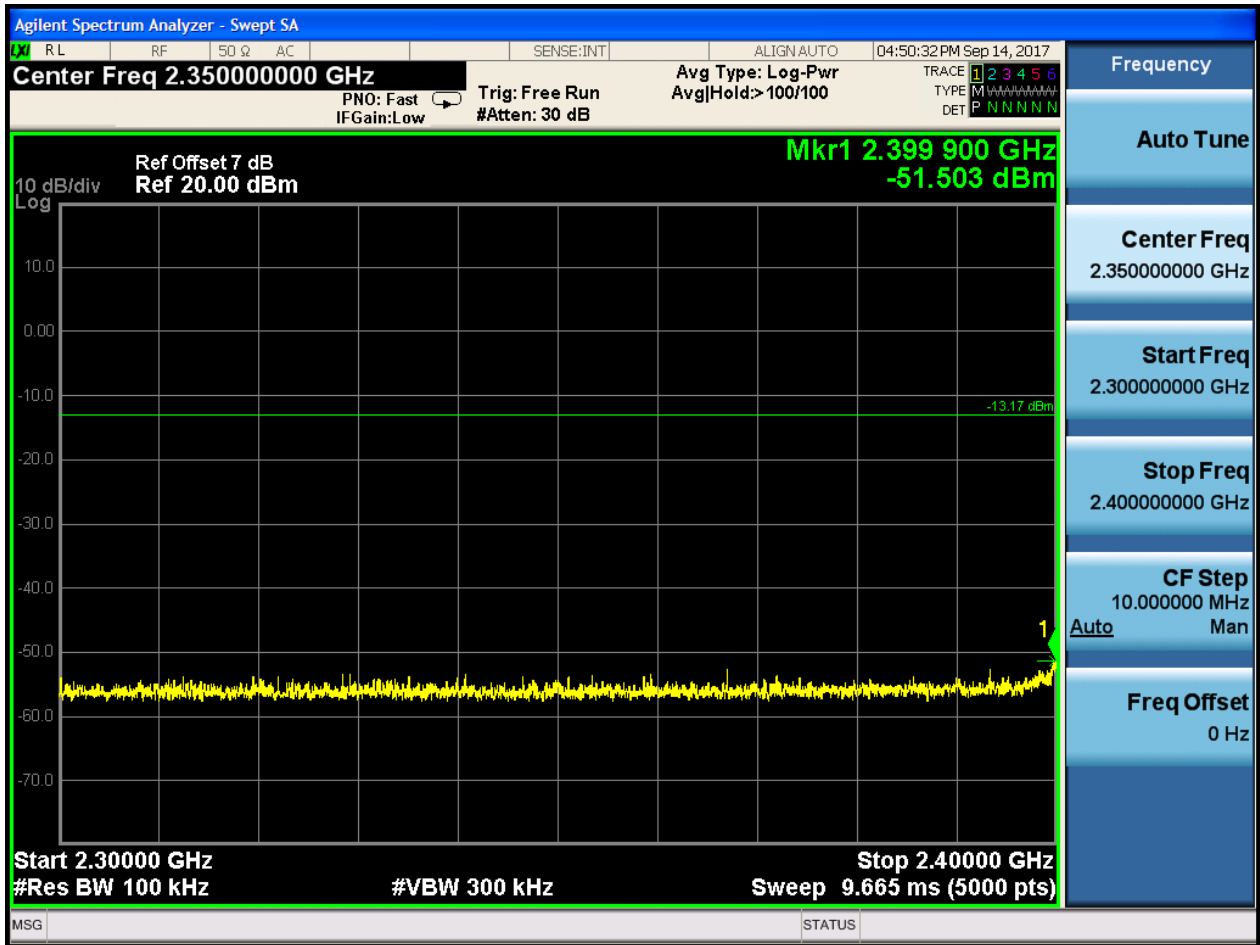

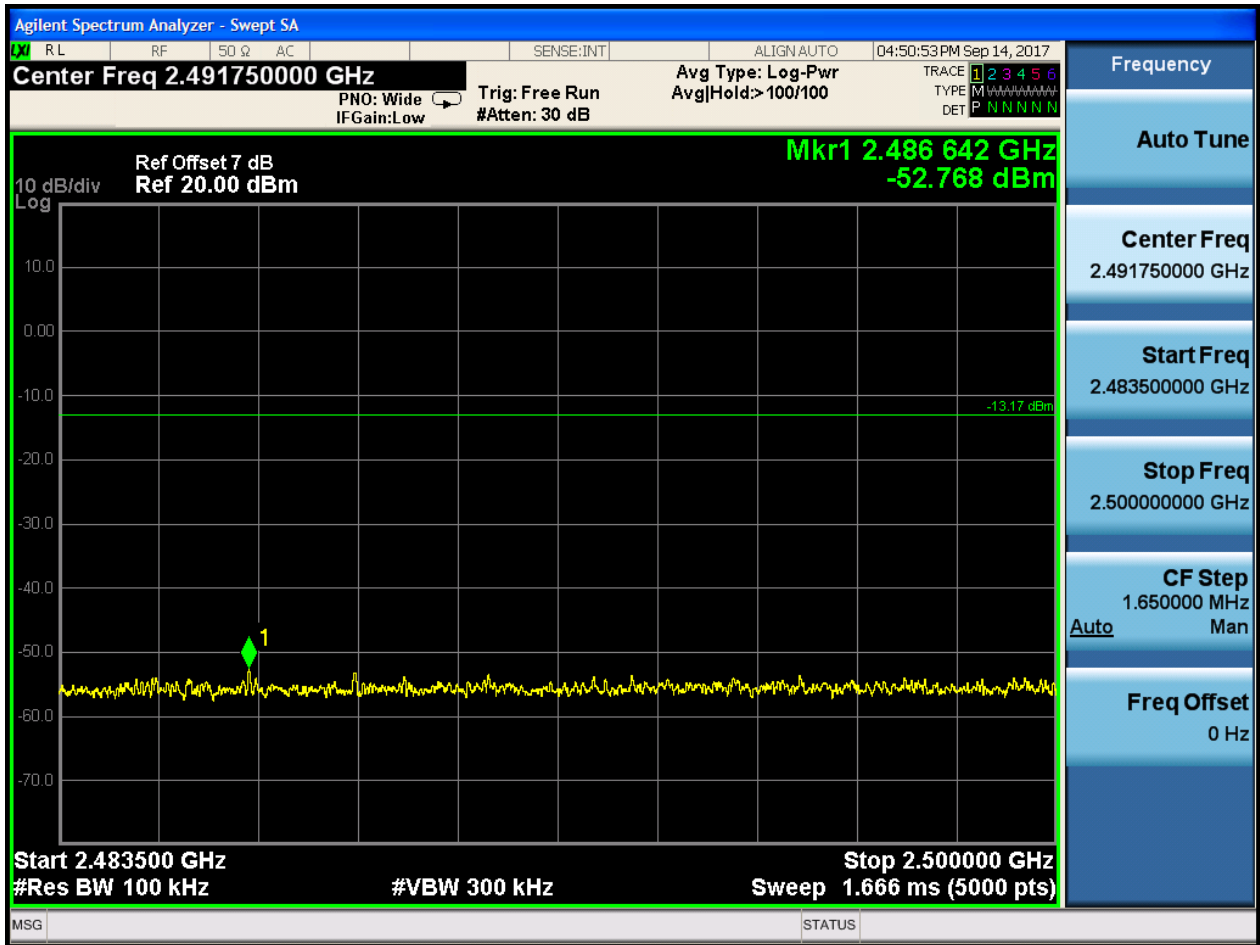







## 2.5 TM2\_2DH5\_Ch39


### 2.5.1 Pref





2.5.2 Puw

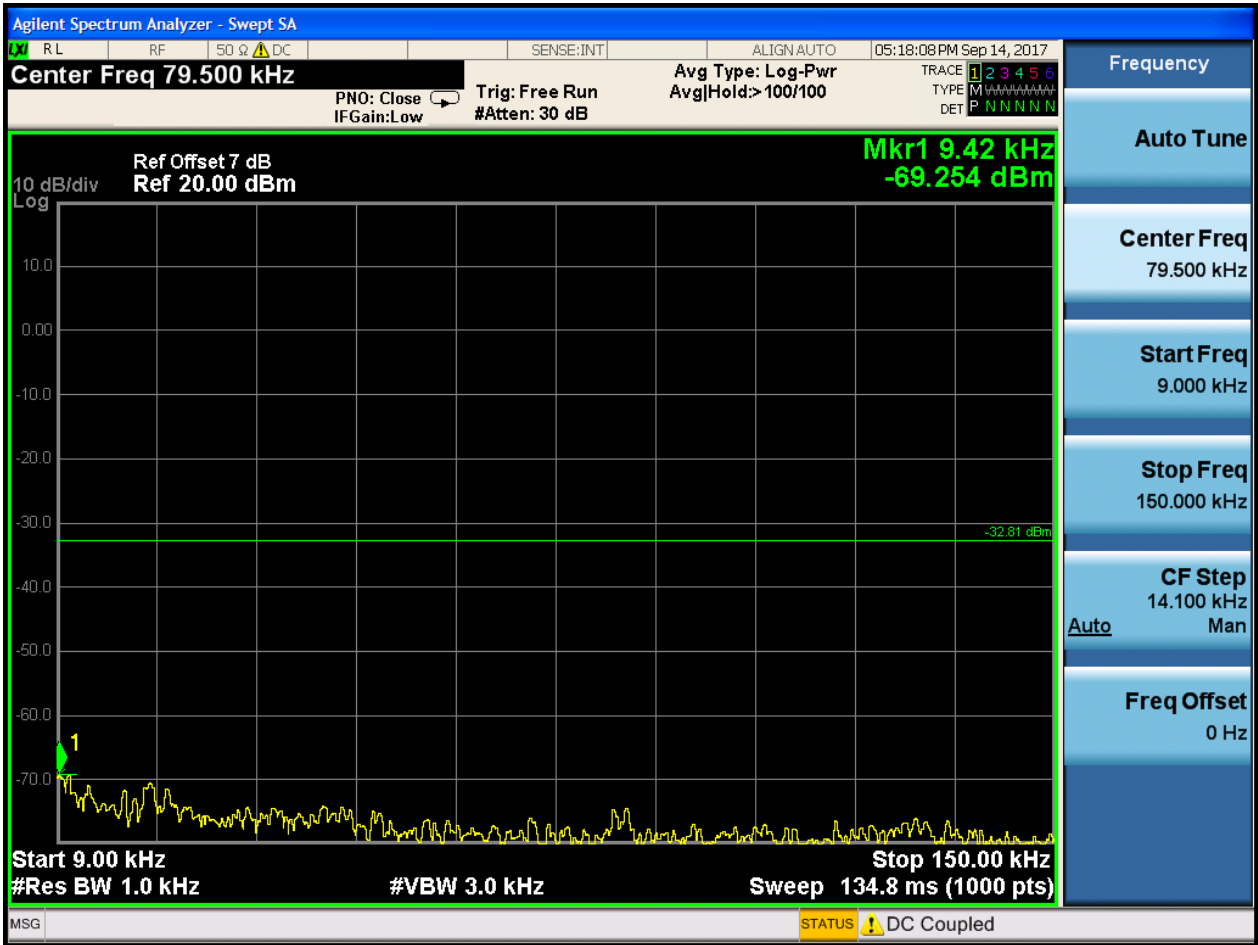

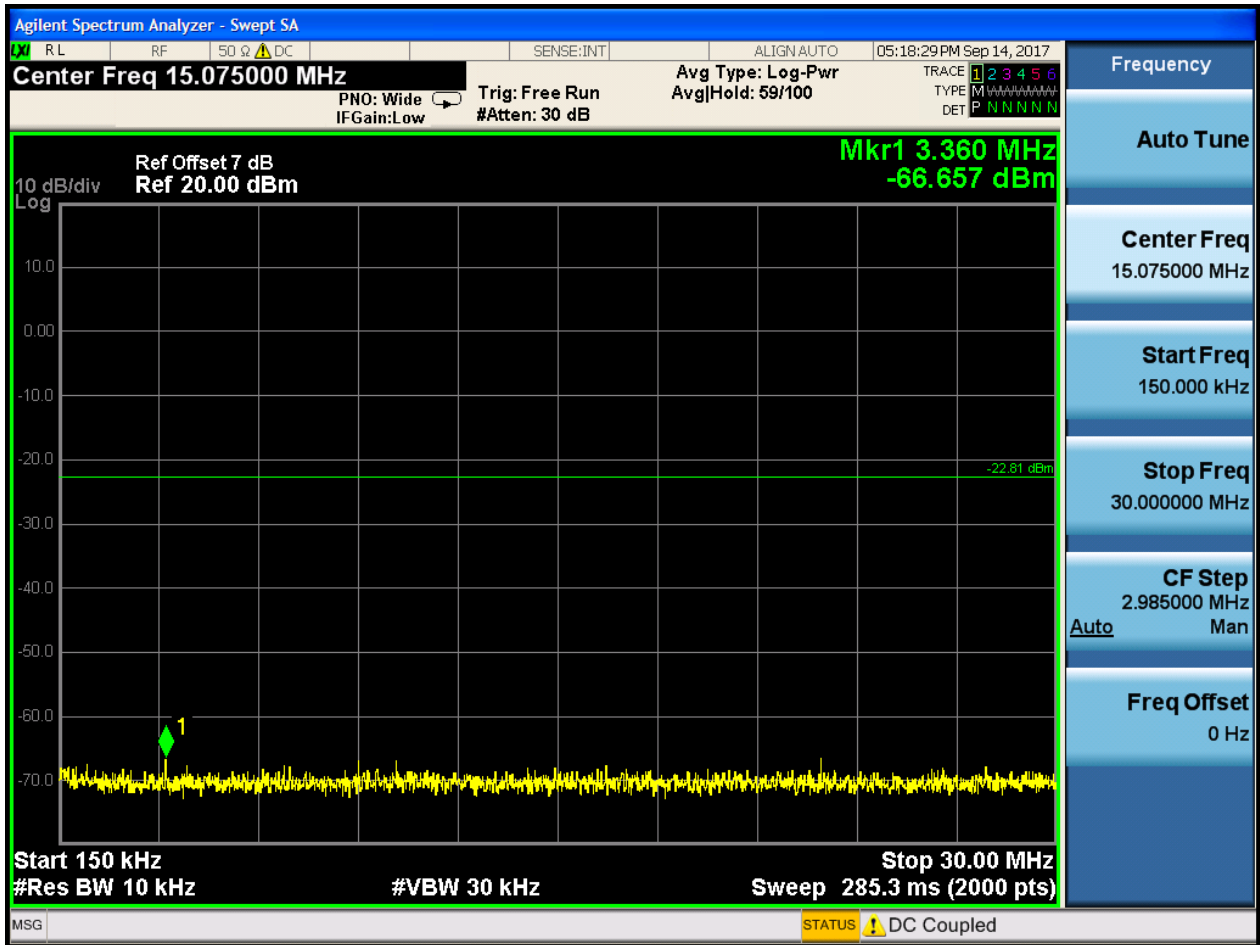

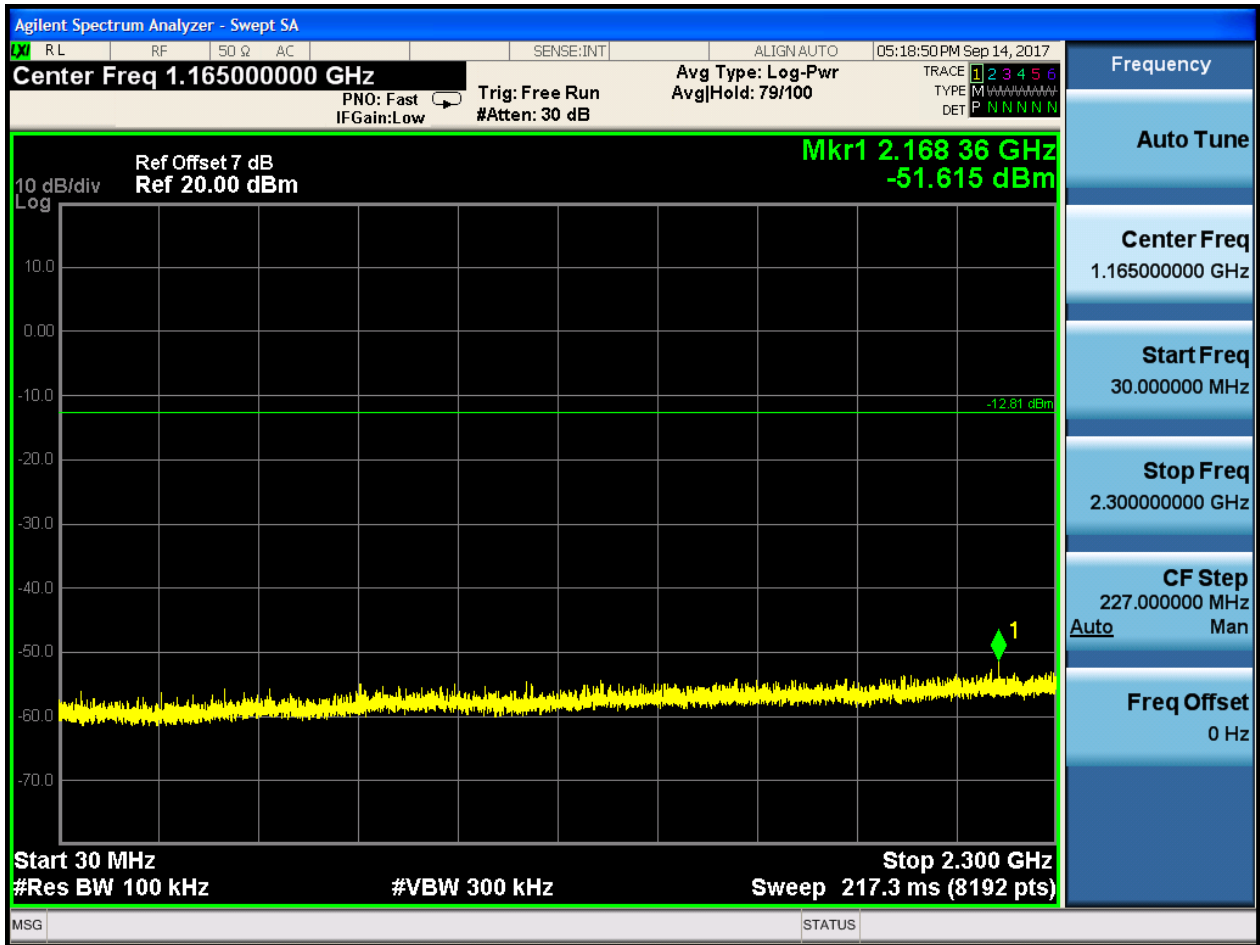

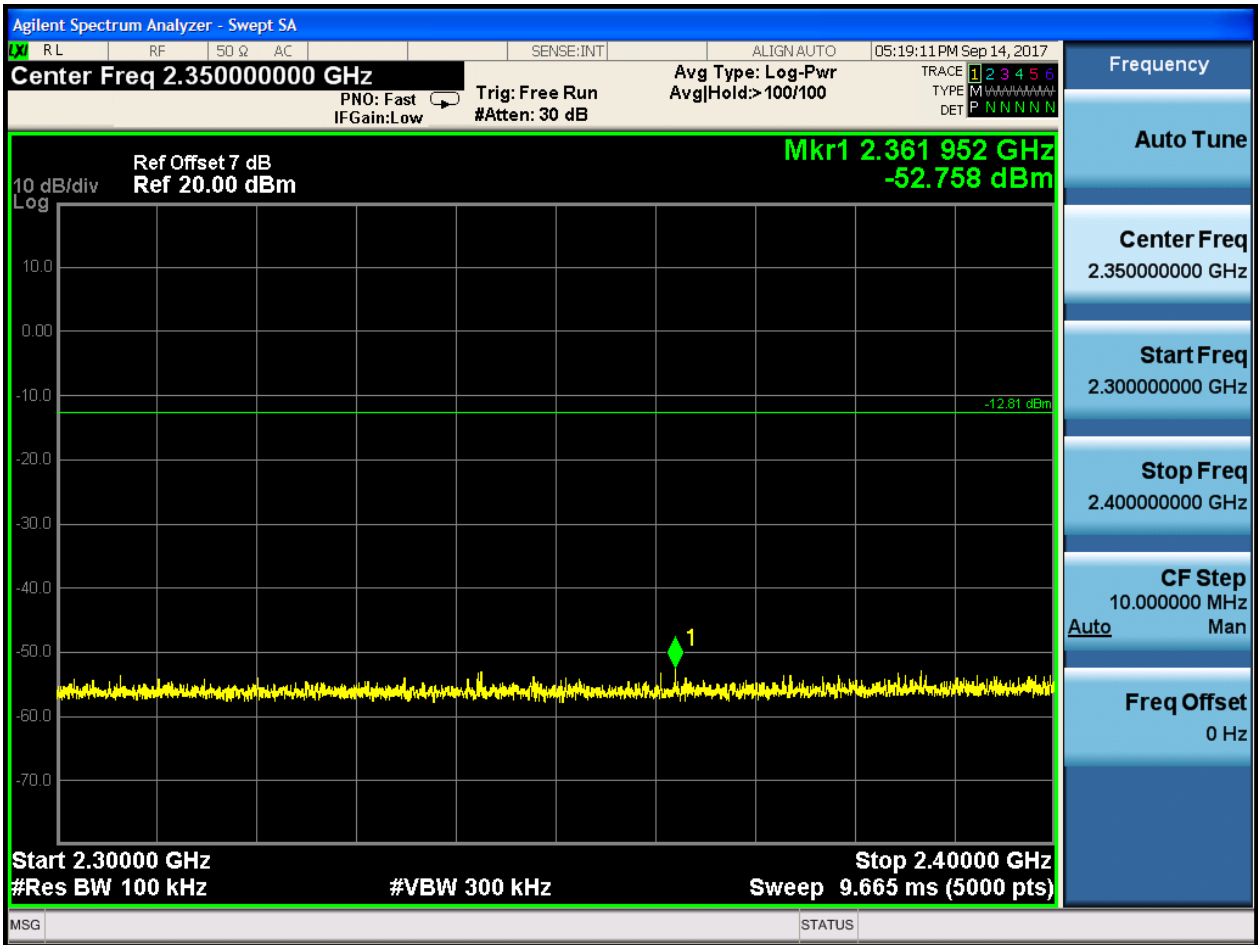

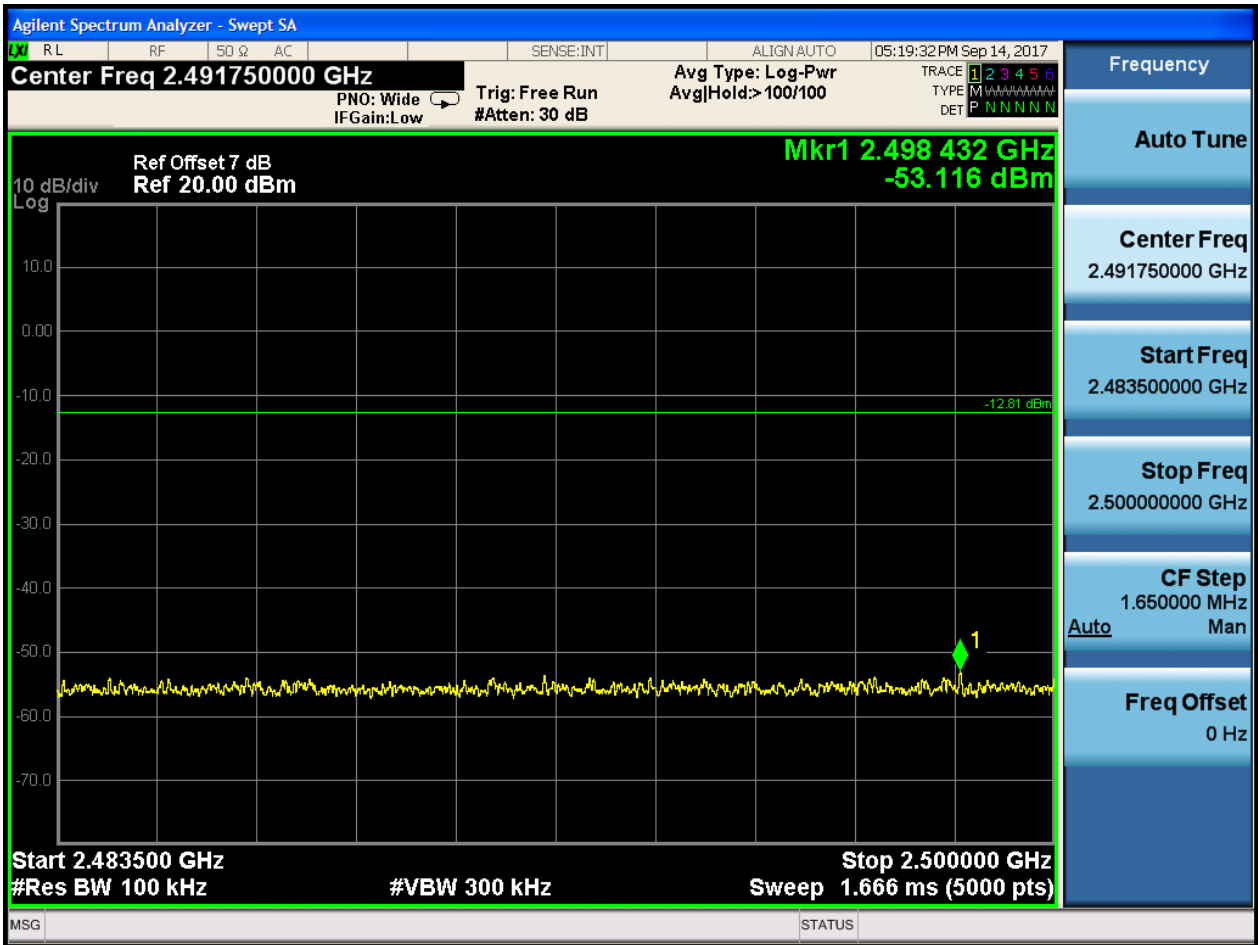








## 2.6 TM2\_2DH5\_Ch78


### 2.6.1 Pref








### 2.6.2 Puw

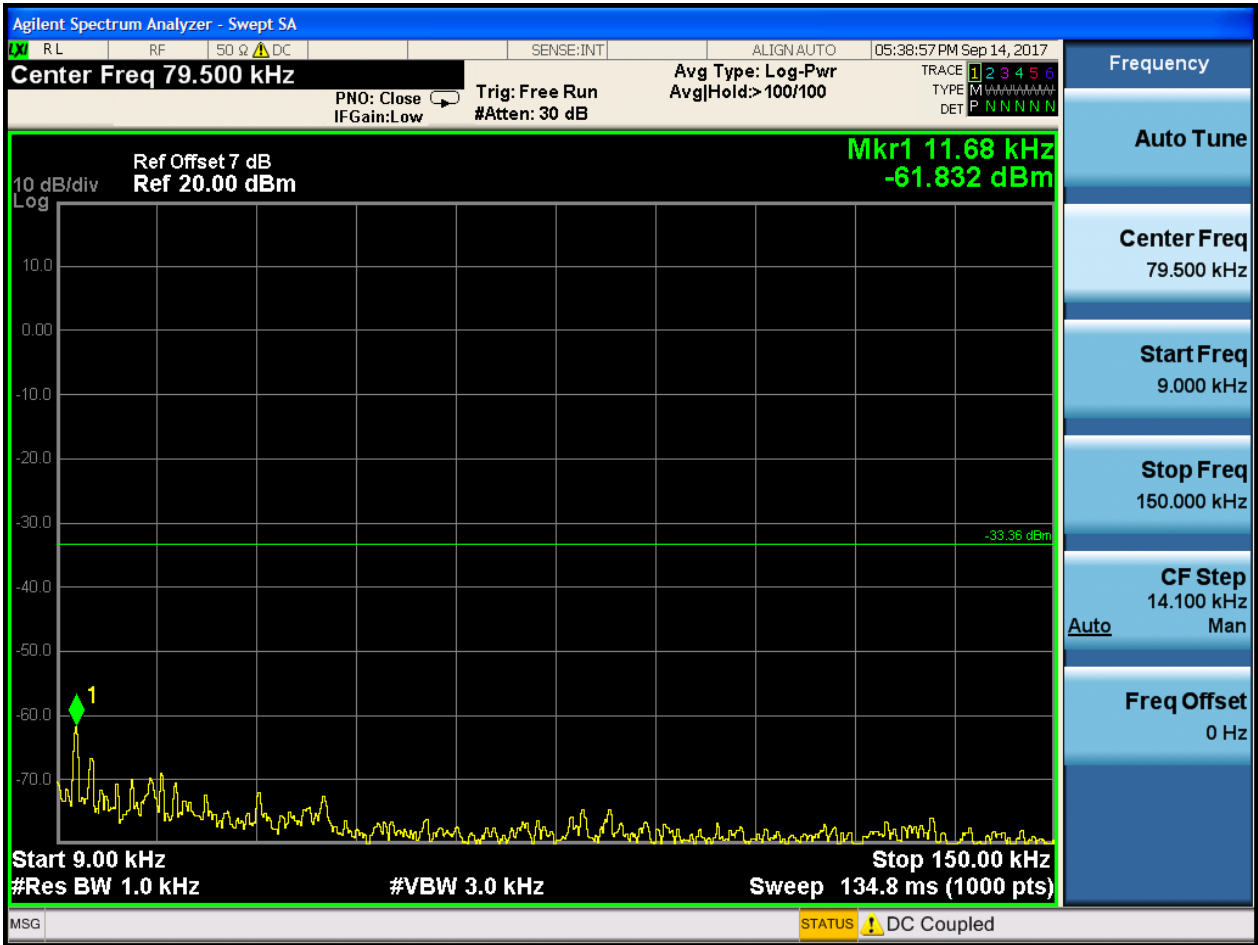

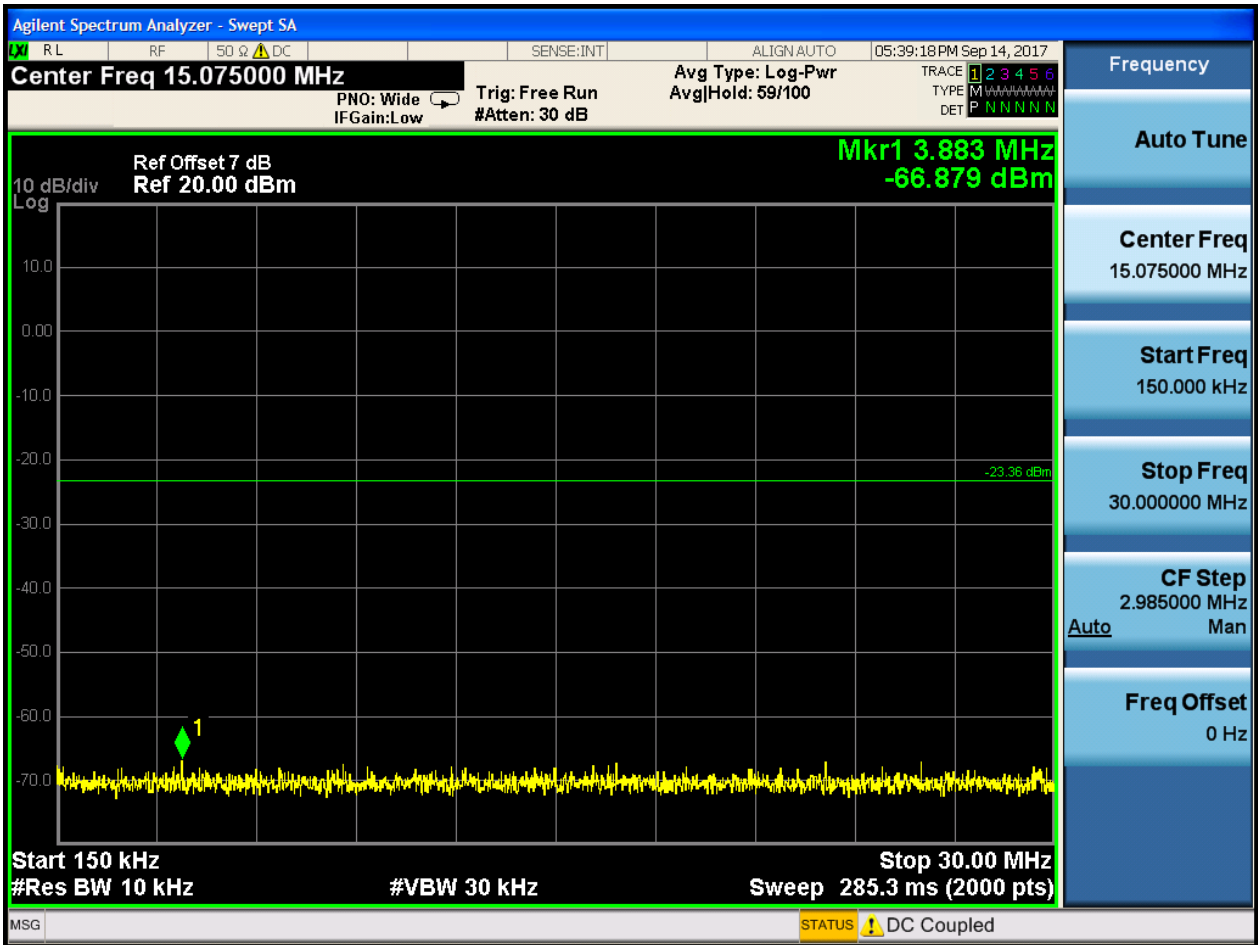

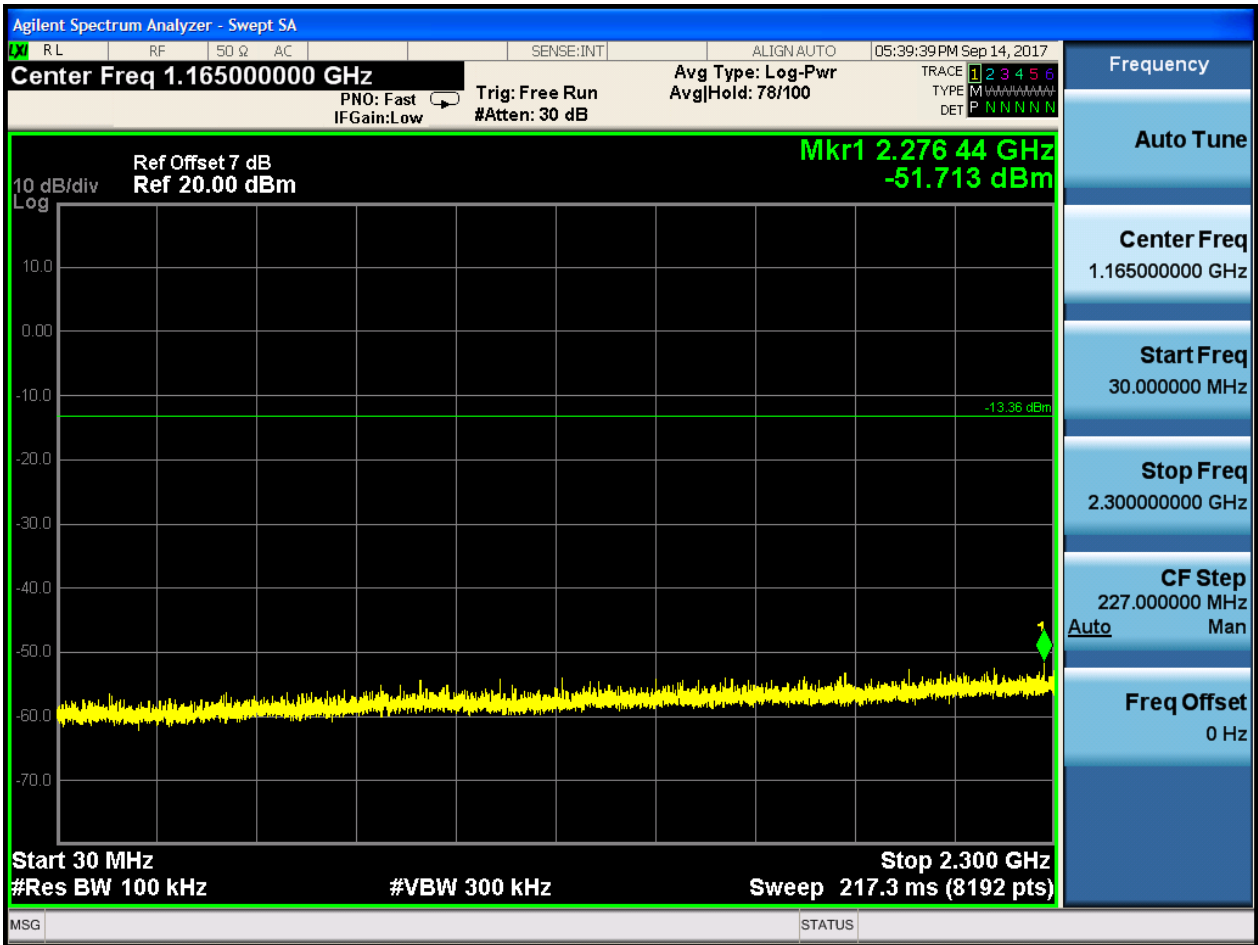

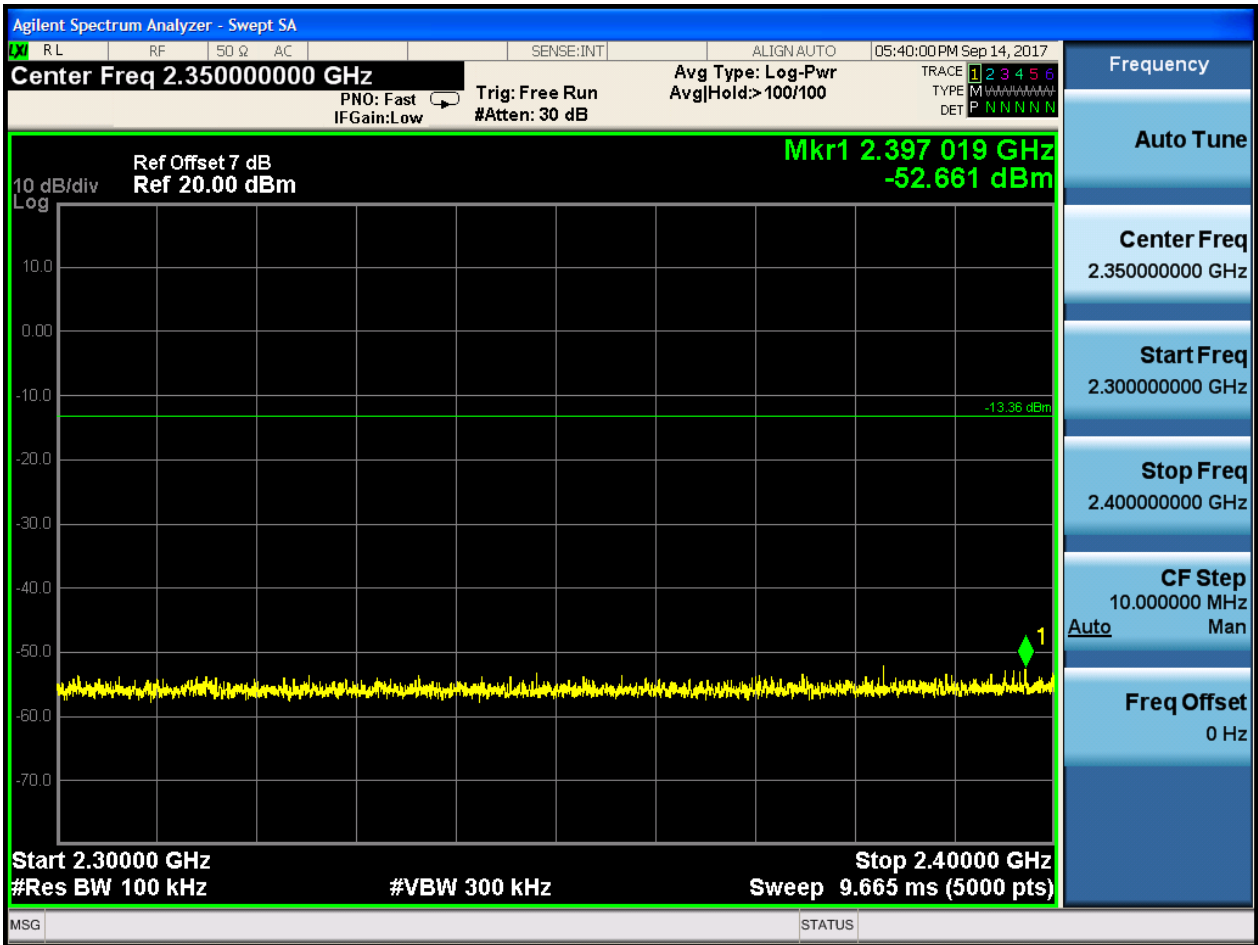

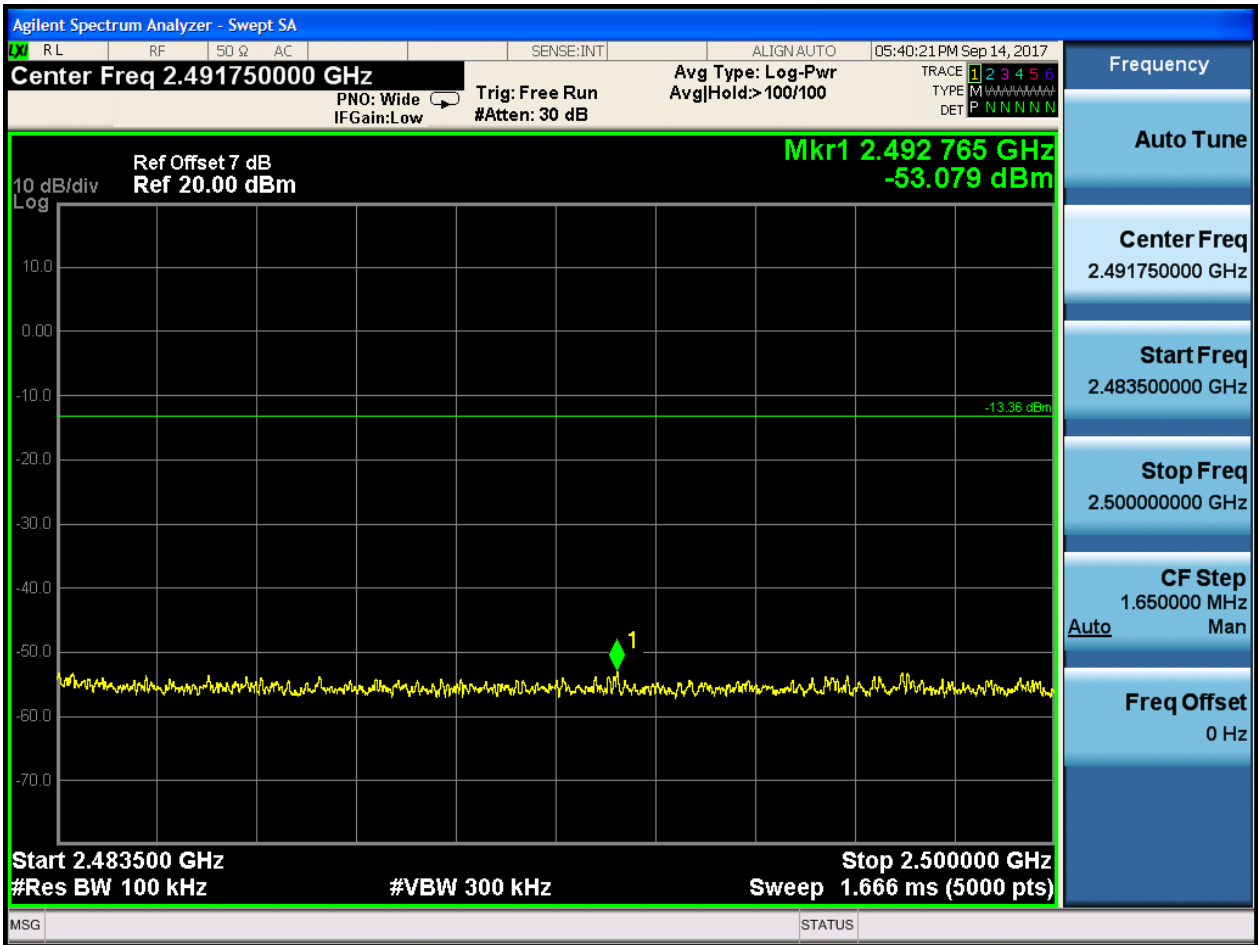






## 2.7 TM3\_3DH5\_Ch0


### 2.7.1 Pref








2.7.2 Puw

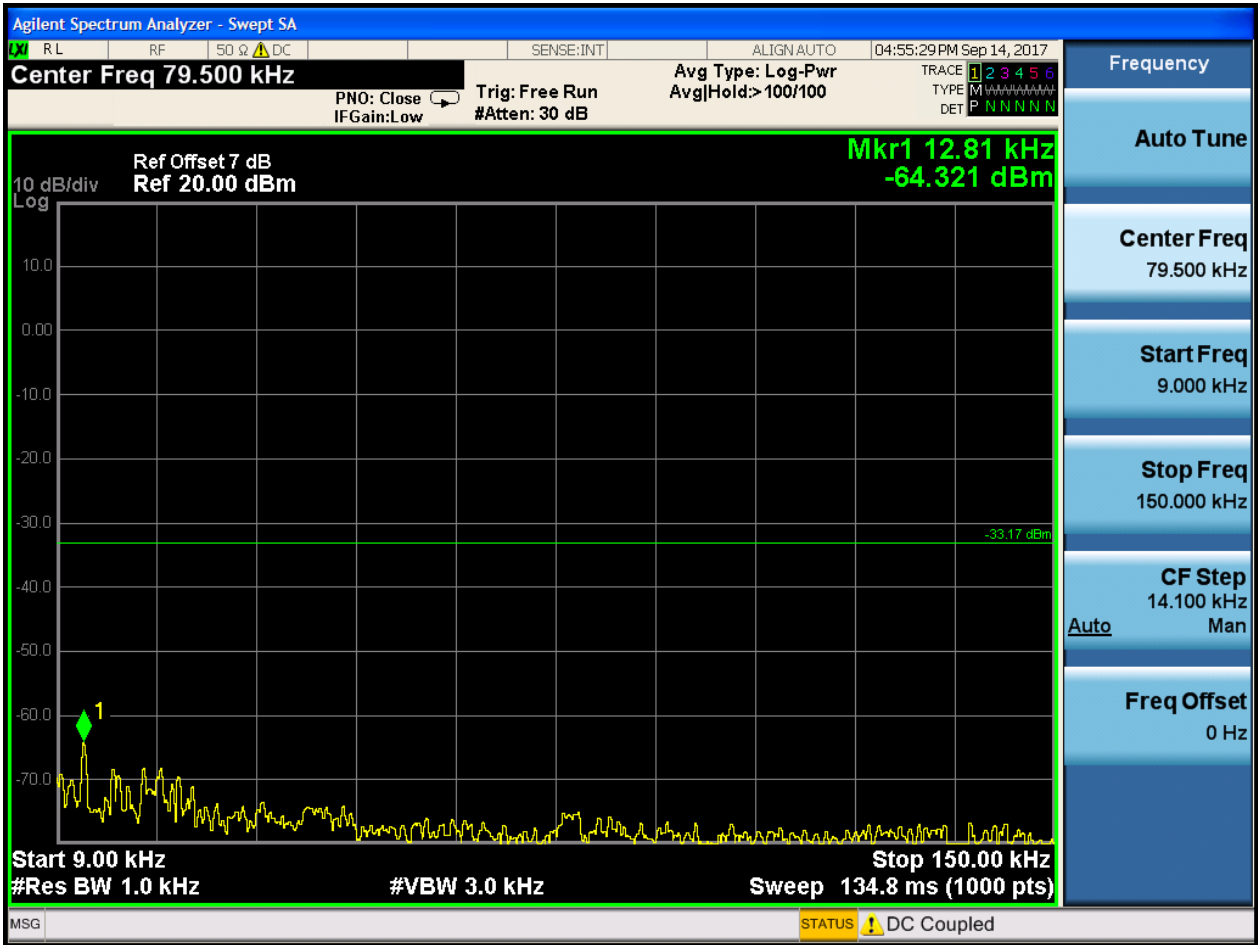


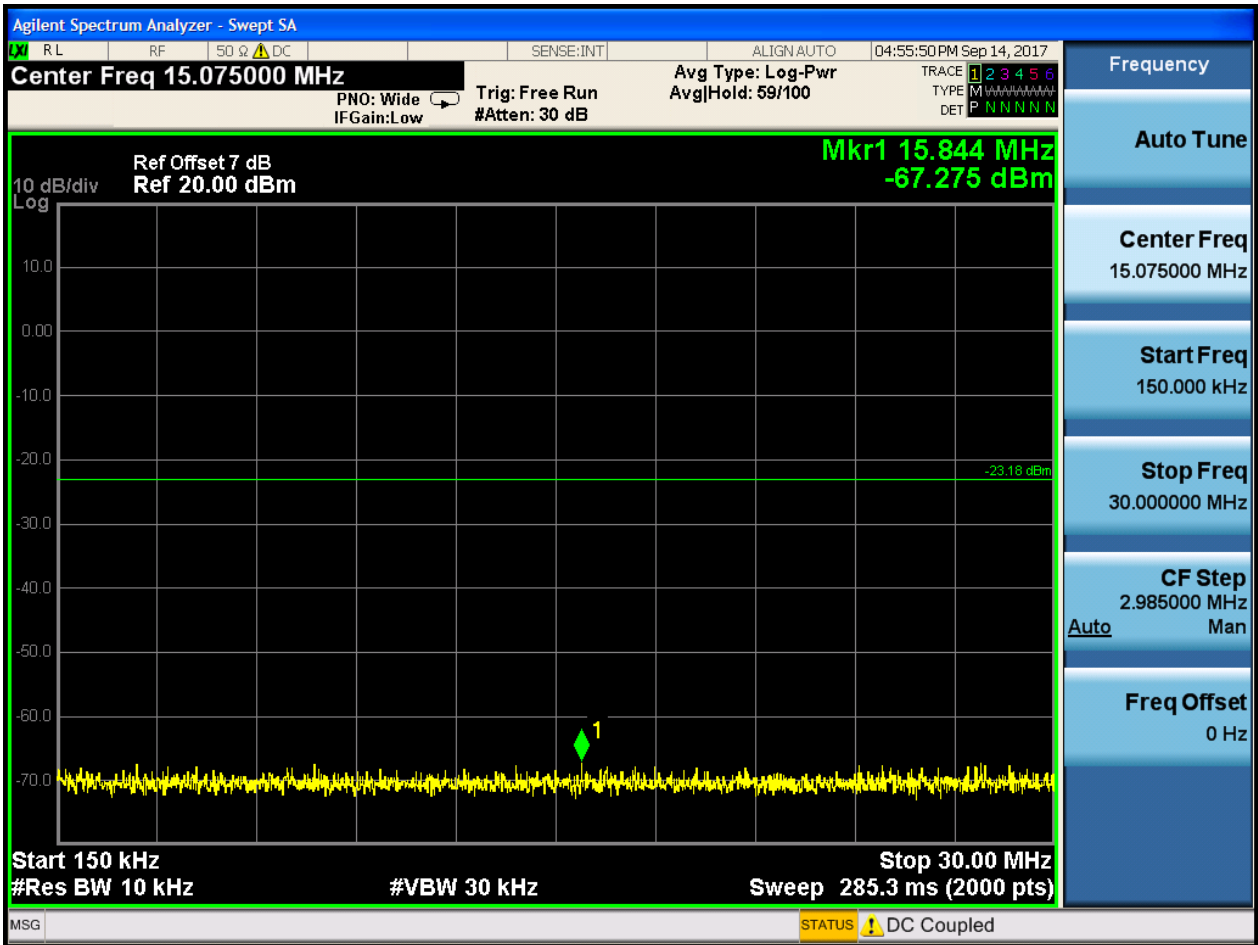

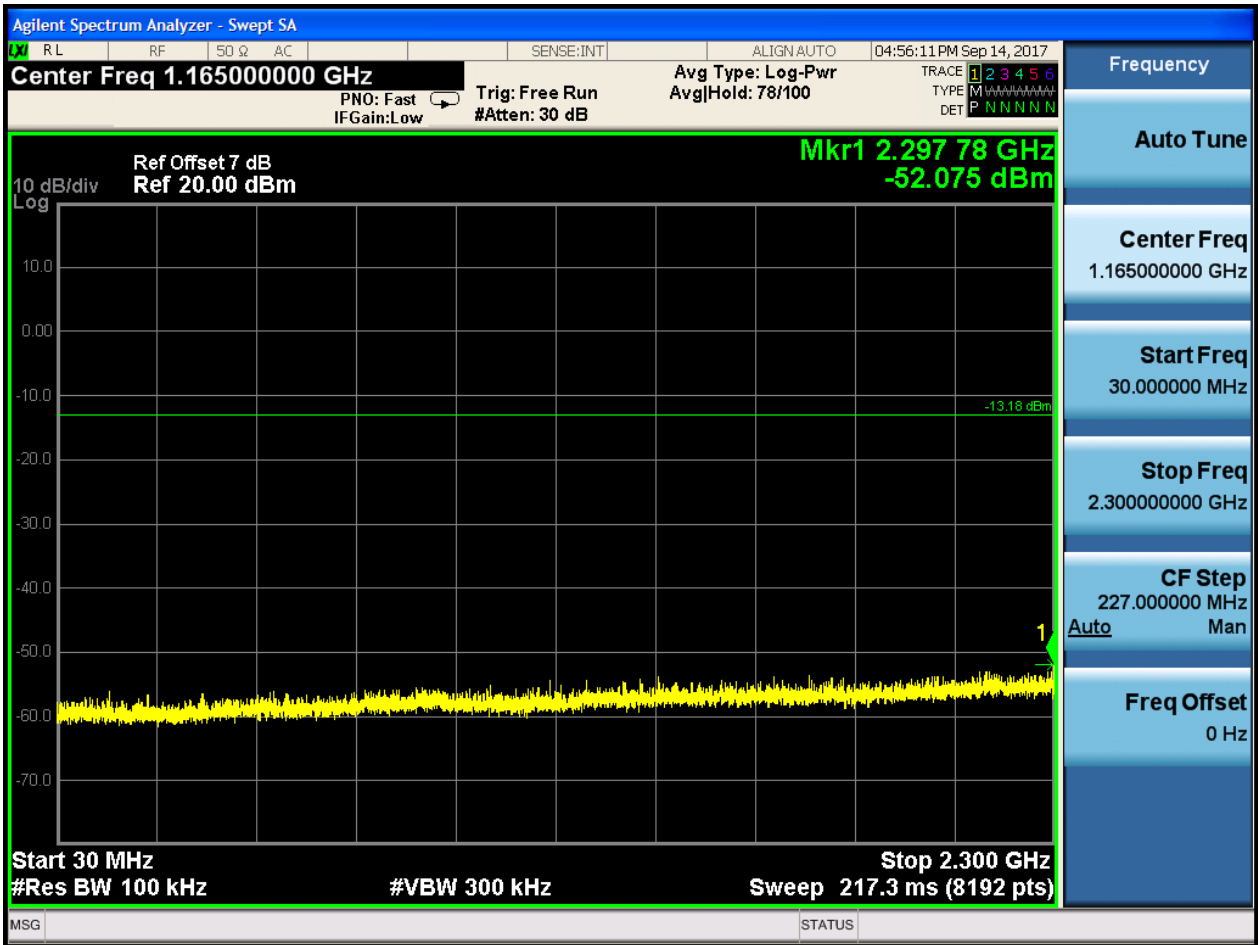

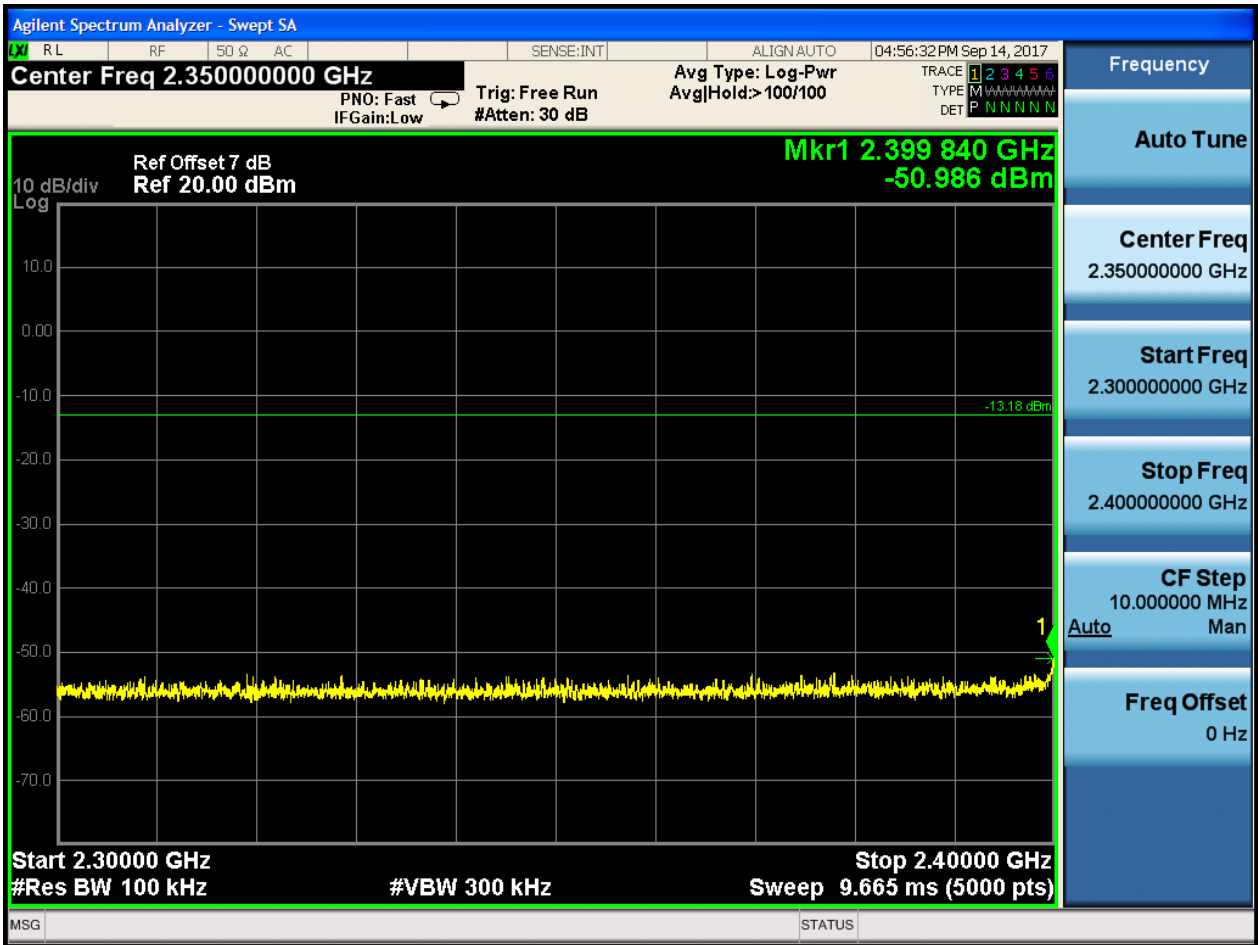

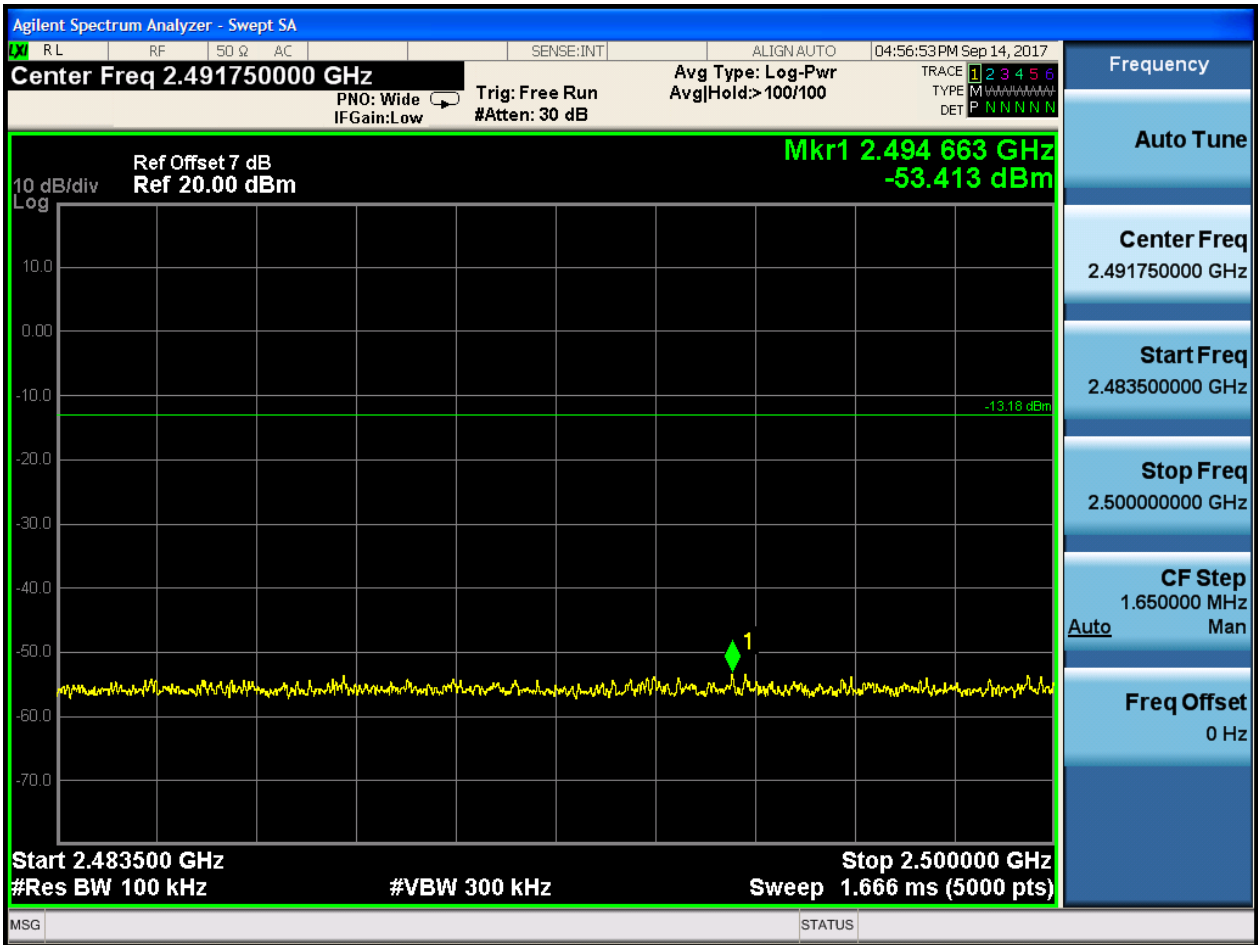

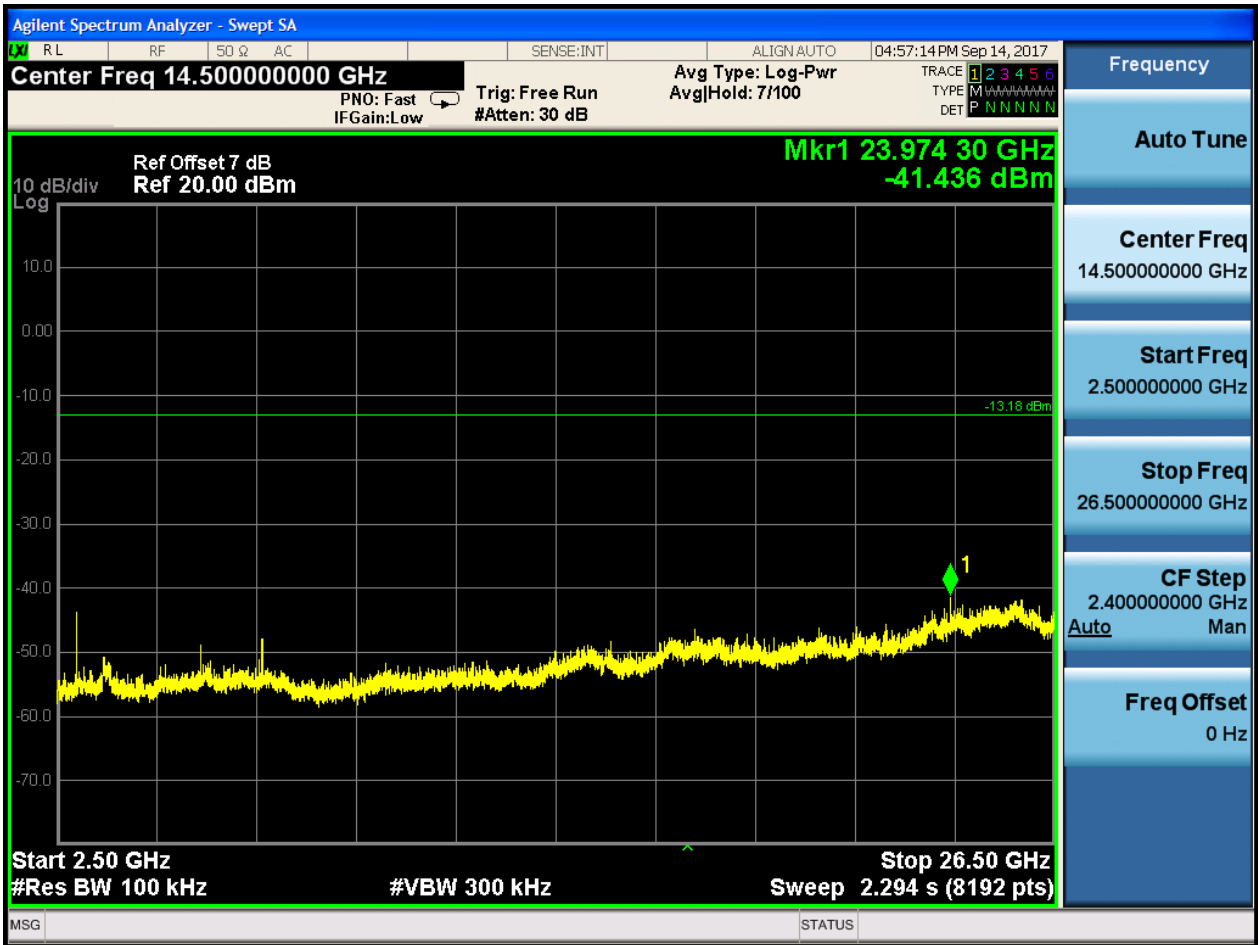


## 2.8 TM3\_3DH5\_Ch39


### 2.8.1 Pref





2.8.2 P<sub>uw</sub>

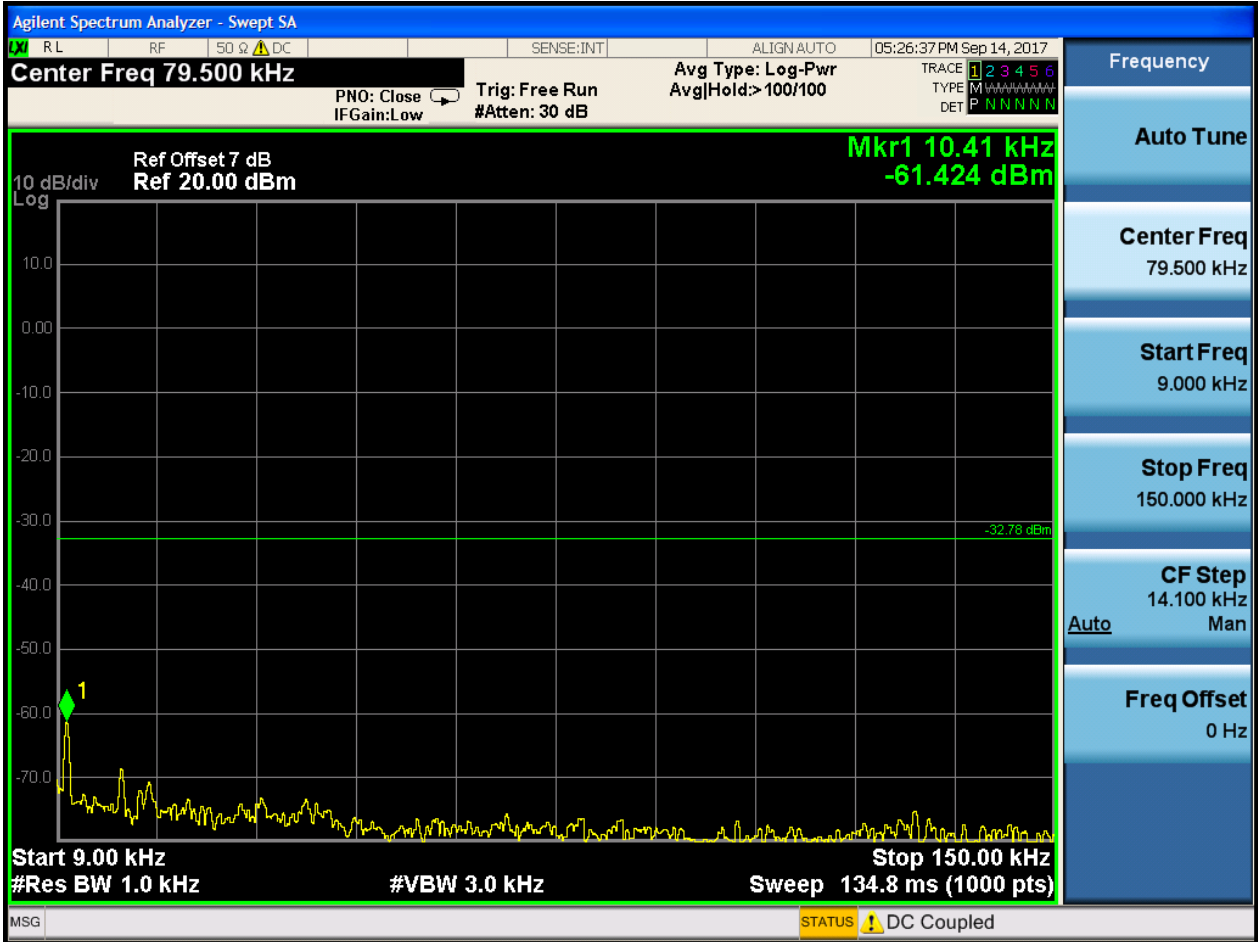




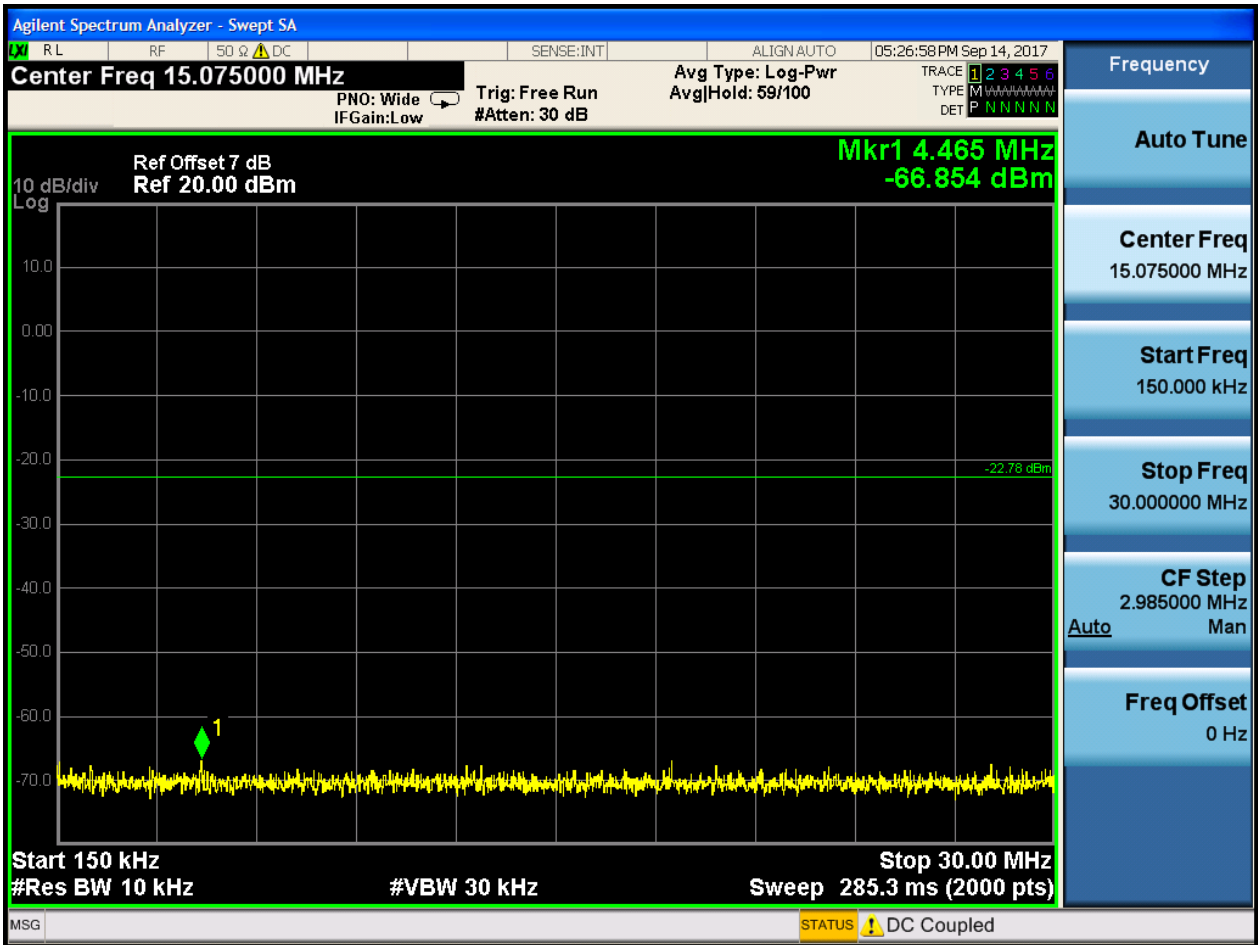

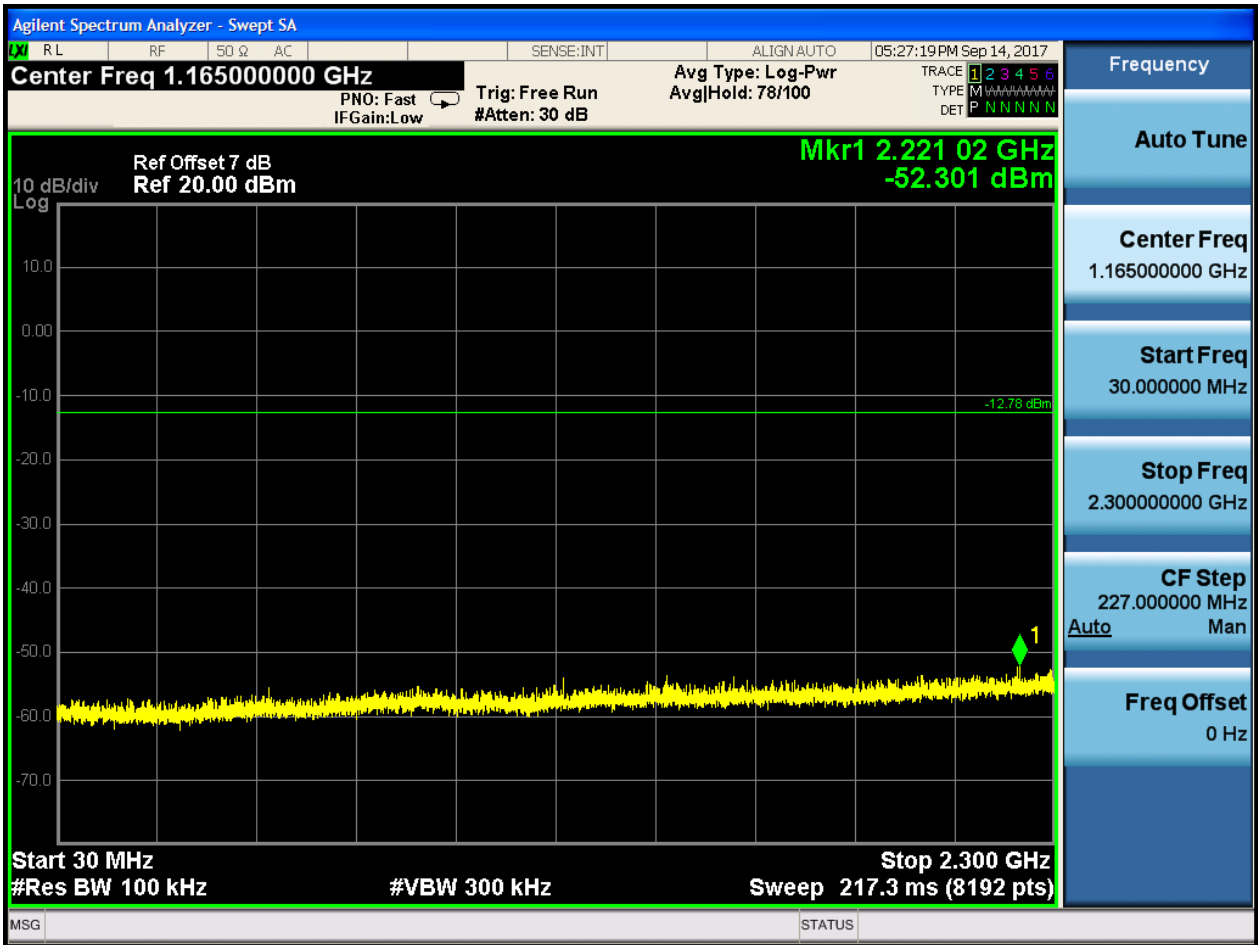

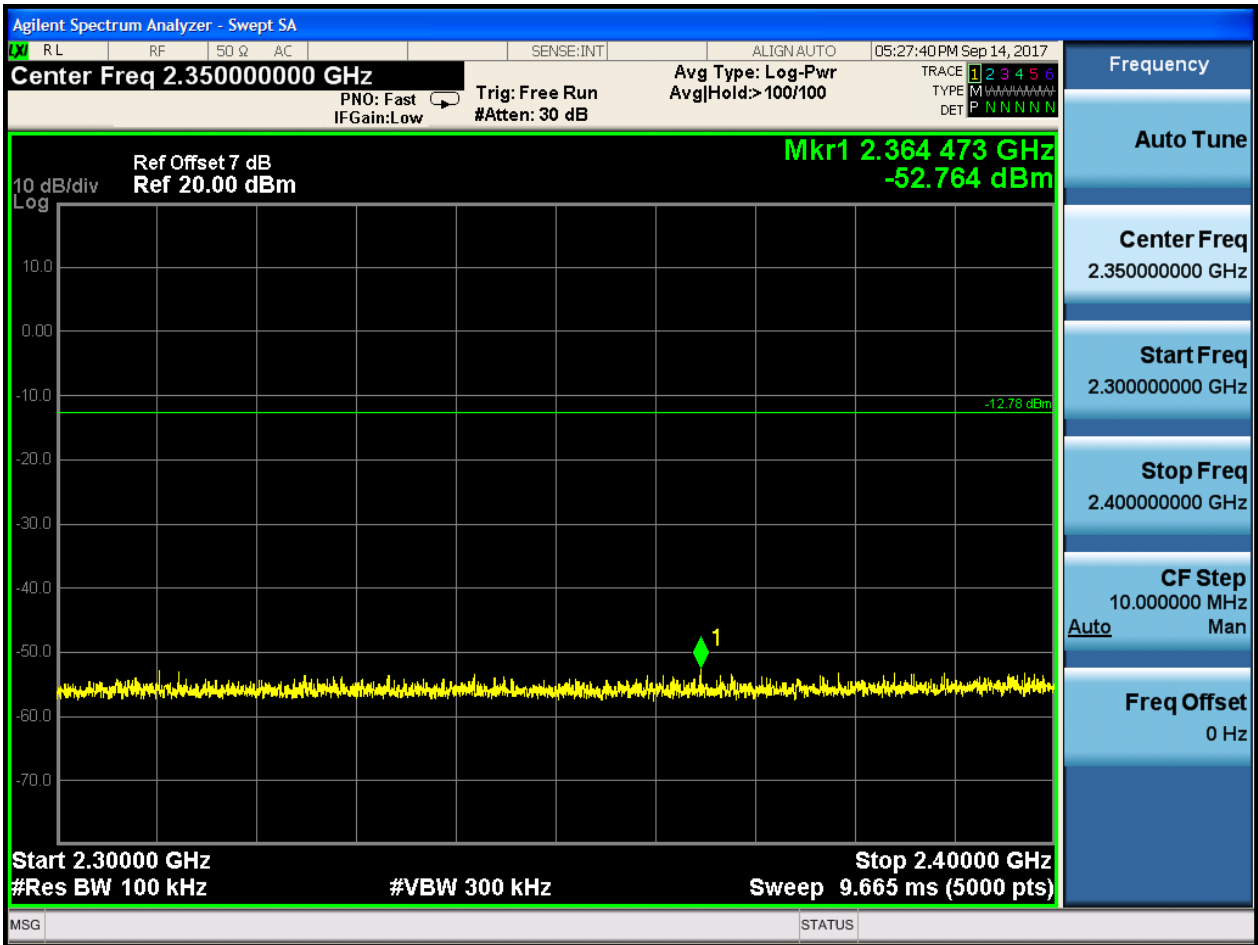

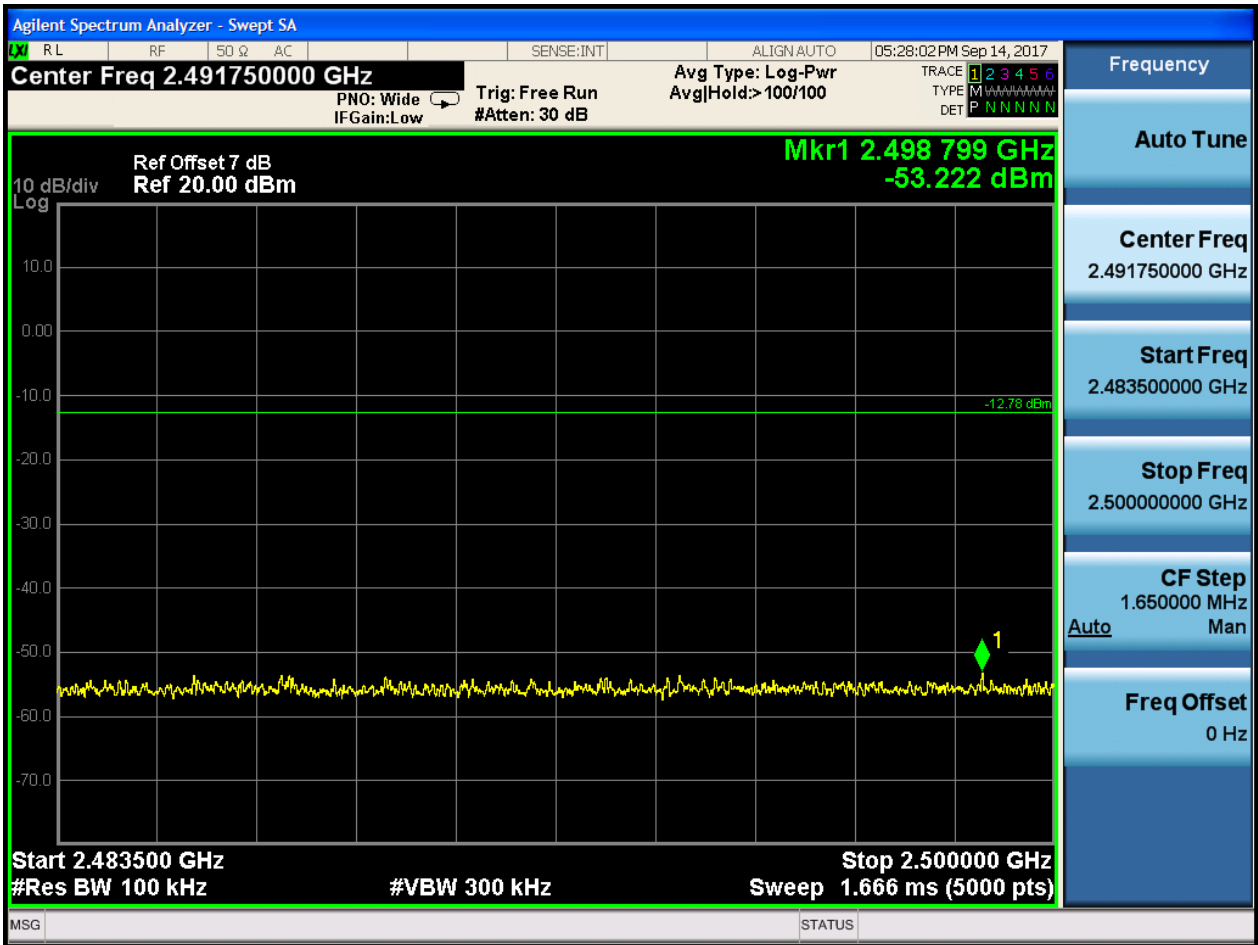







## 2.9 TM3\_3DH5\_Ch78

### 2.9.1 Pref





### 2.9.2 Puw

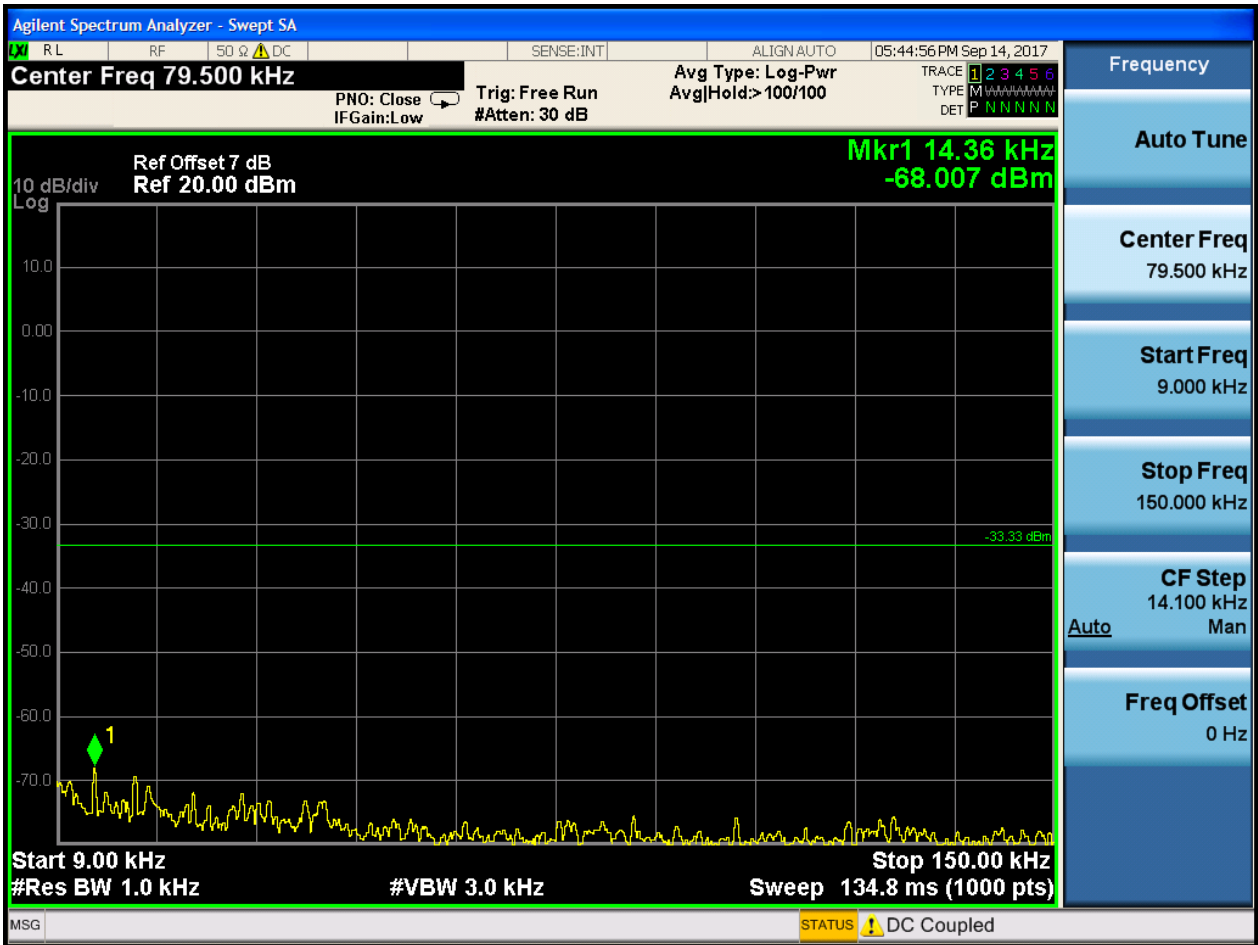


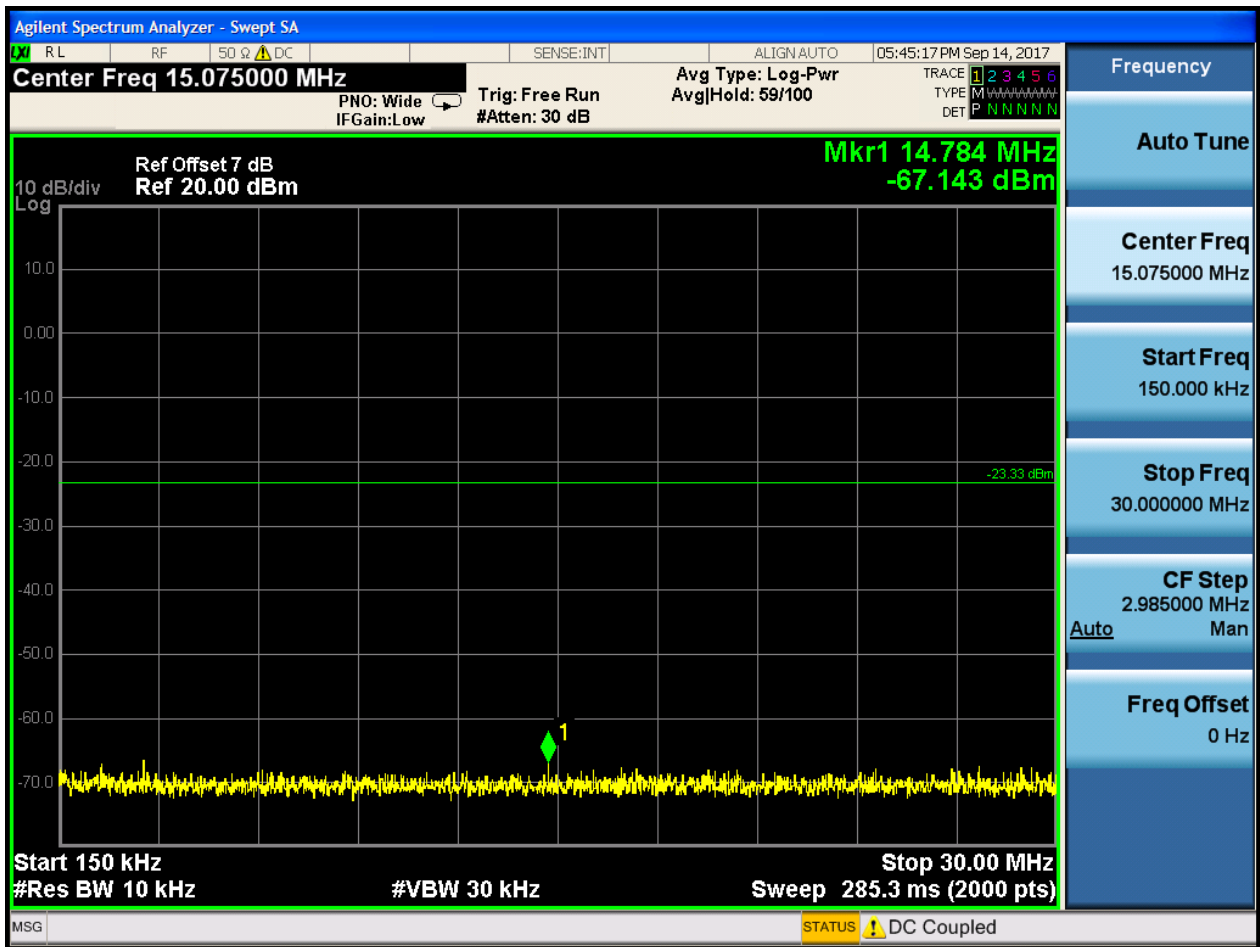



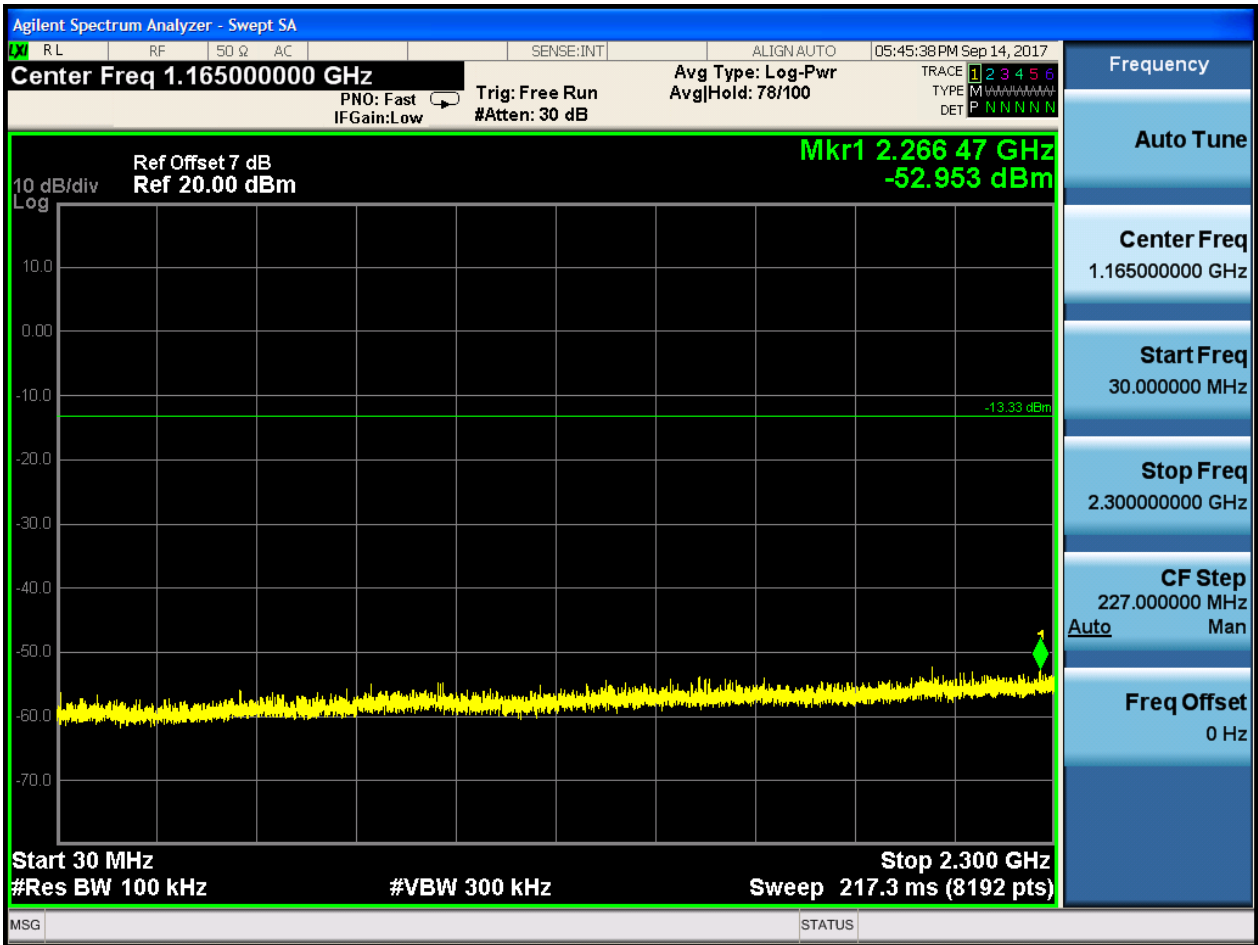

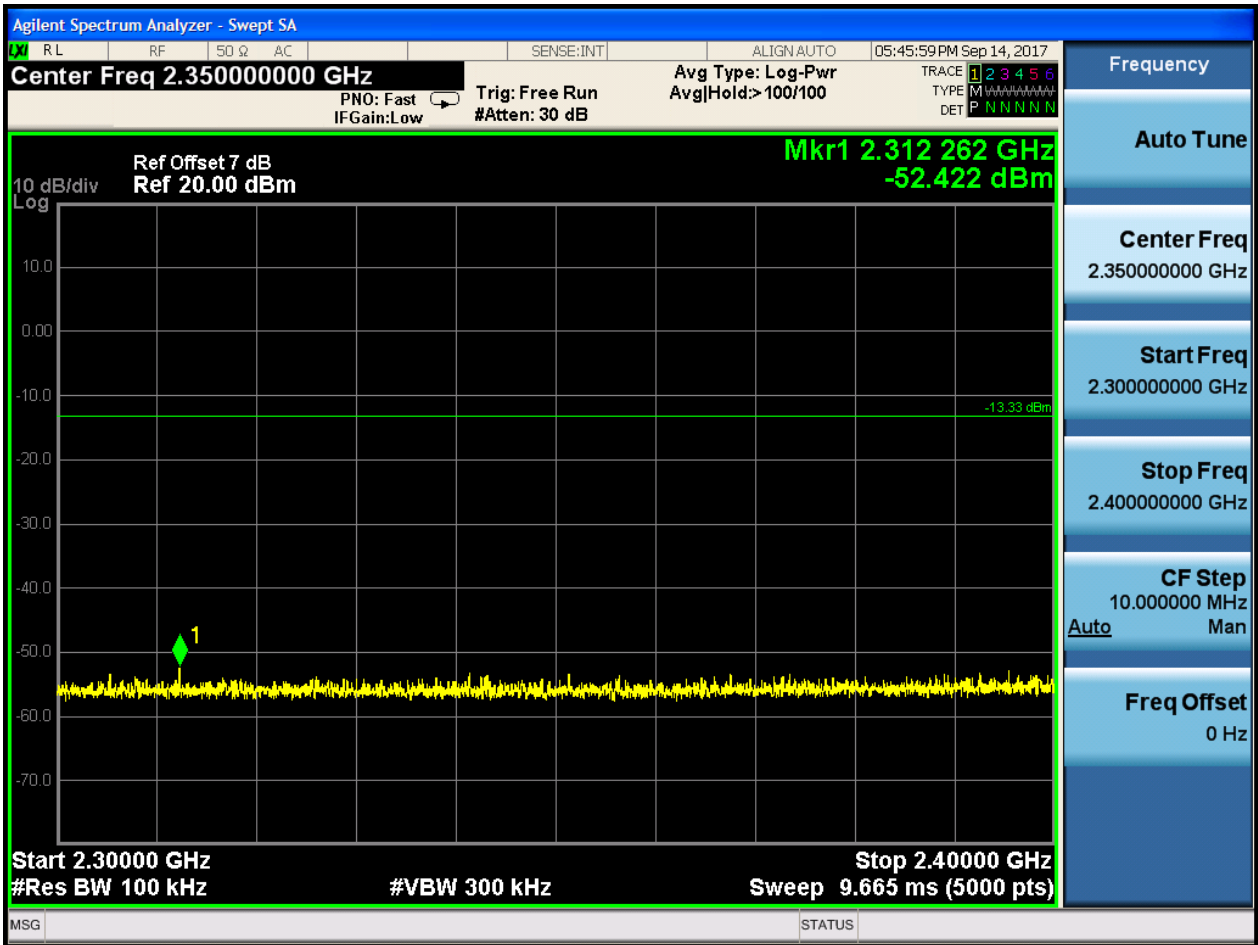

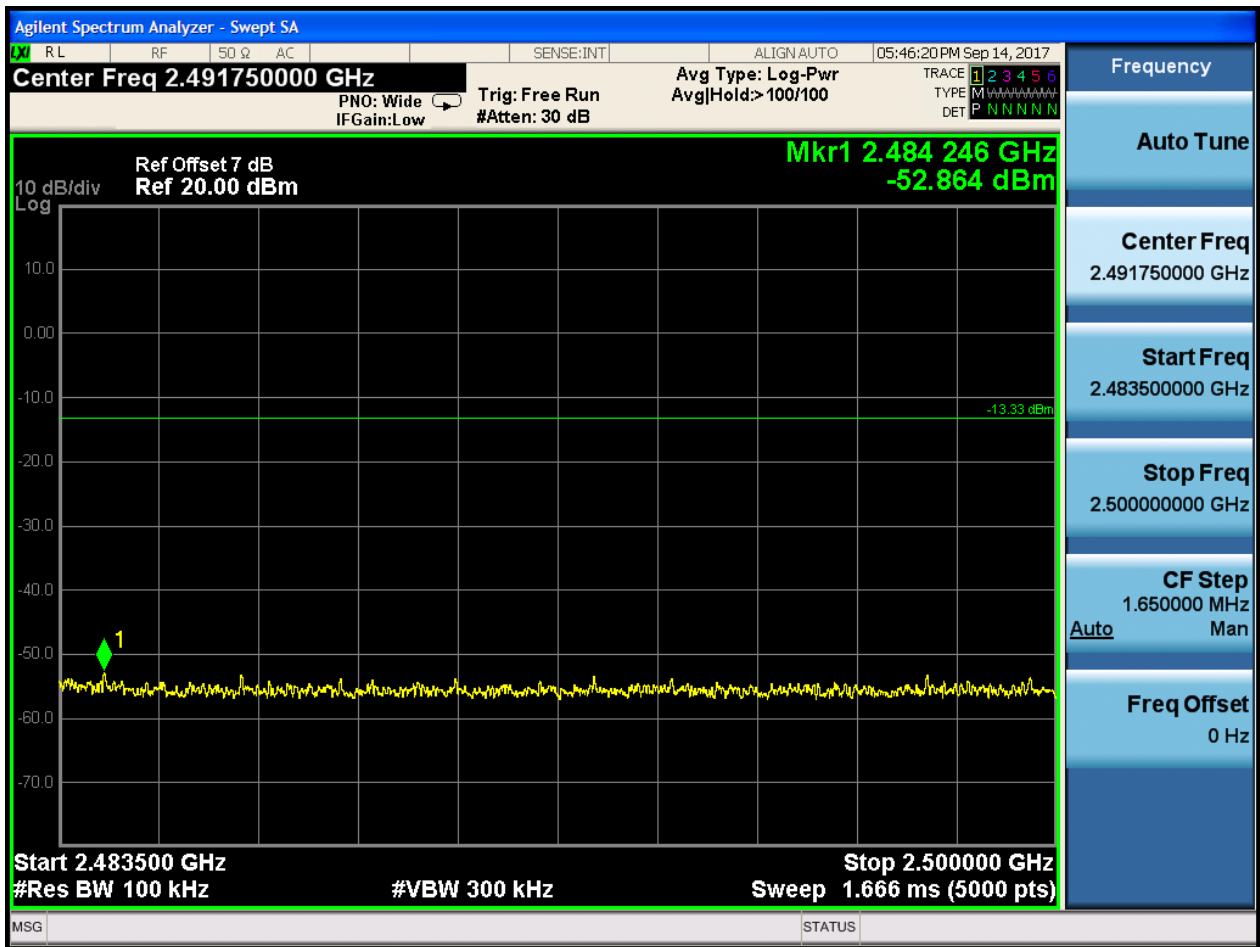





# Appendix H: Radiated Emissions in the Restricted Bands



## 1 Result Table

The whole testing range is from “30 MHz to 26.5 GHz (10th harmonics)” is divided into 4 parts according to the test site settings, which are:

- (Part 1): Test range of “9 KHz to 30 MHz”,
- (Part 2): Test range of “30 MHz to 1 GHz”,
- (Part 3): Test range of “1 GHz to 3 GHz”.
- (Part 4): Test range of “3 GHz to 18 GHz”,
- (Part 5): Test range of “18 GHz to 26.5 GHz”.

In this Appendix, only the test results and plots under the worst case can be reported. In the result table, the “< Limit” denotes that “Not found obvious spikes or see marked spikes on plots and listed emissions records”.

Test Range	EUT Conf.	Emissions	Verdict
30 MHz to 1 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
1 GHz to 3 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
	TM1_DH5_Ch78 (Worst Conf.)	< Limit	Pass
3 GHz to 18 GHz	TM1_DH5_Ch0 (Worse Conf.)	< Limit	Pass
18 GHz to 26.5 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass

Note: We tested all modes, but the data presented below is the worst case.

## 2 Result Plot


### Part 1: Testing Range of “9 kHz to 30MHz”

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

### Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

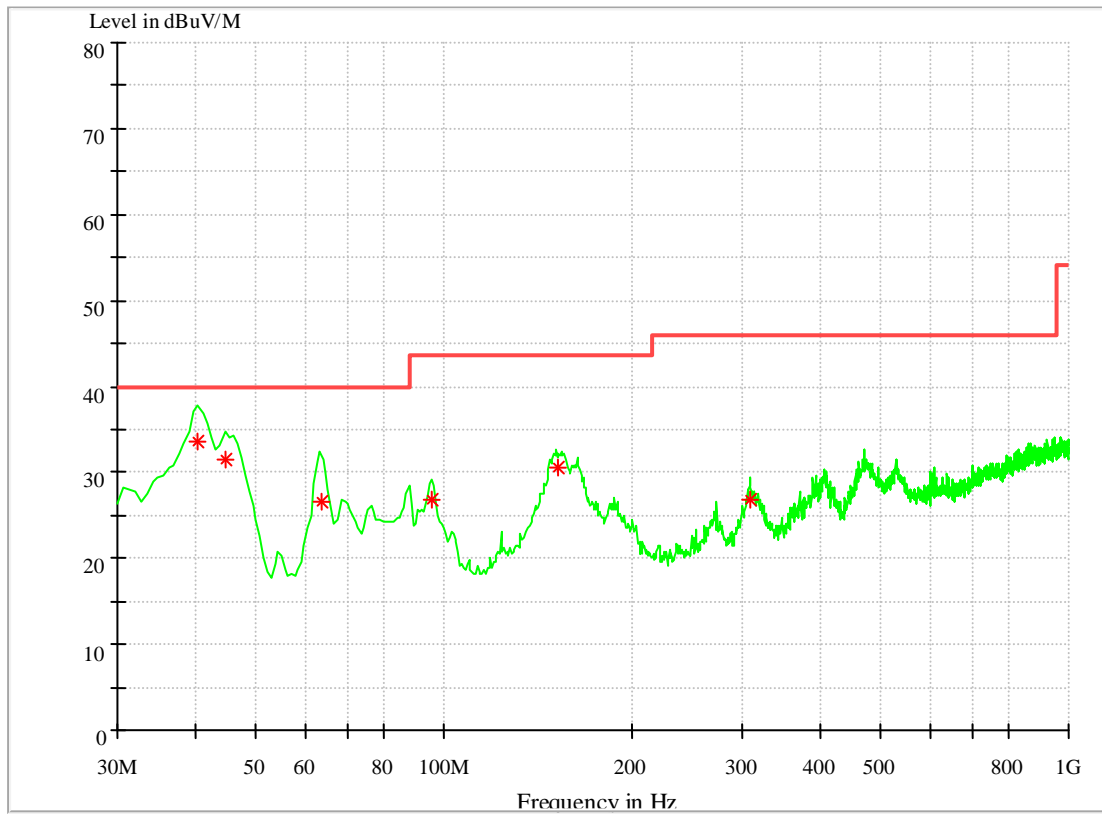



## MEASUREMENT RESULT: QP Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
40.355143	33.64	40.00	6.36	100.0	V	239.0	17.2
44.695714	31.49	40.00	8.51	100.0	V	135.0	16.6
63.636000	26.69	40.00	13.31	109.0	V	337.0	10.4
95.708286	26.94	43.50	16.56	100.0	V	72.0	10.5
152.503714	30.60	43.50	12.90	100.0	V	333.0	12.4
309.401715	26.91	46.00	19.09	109.0	H	116.0	16.8

Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.


2, Margin = Limit - Level



**Part 3: Testing Range of “1GHz to 3GHz”**

- Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

**Channel 0**

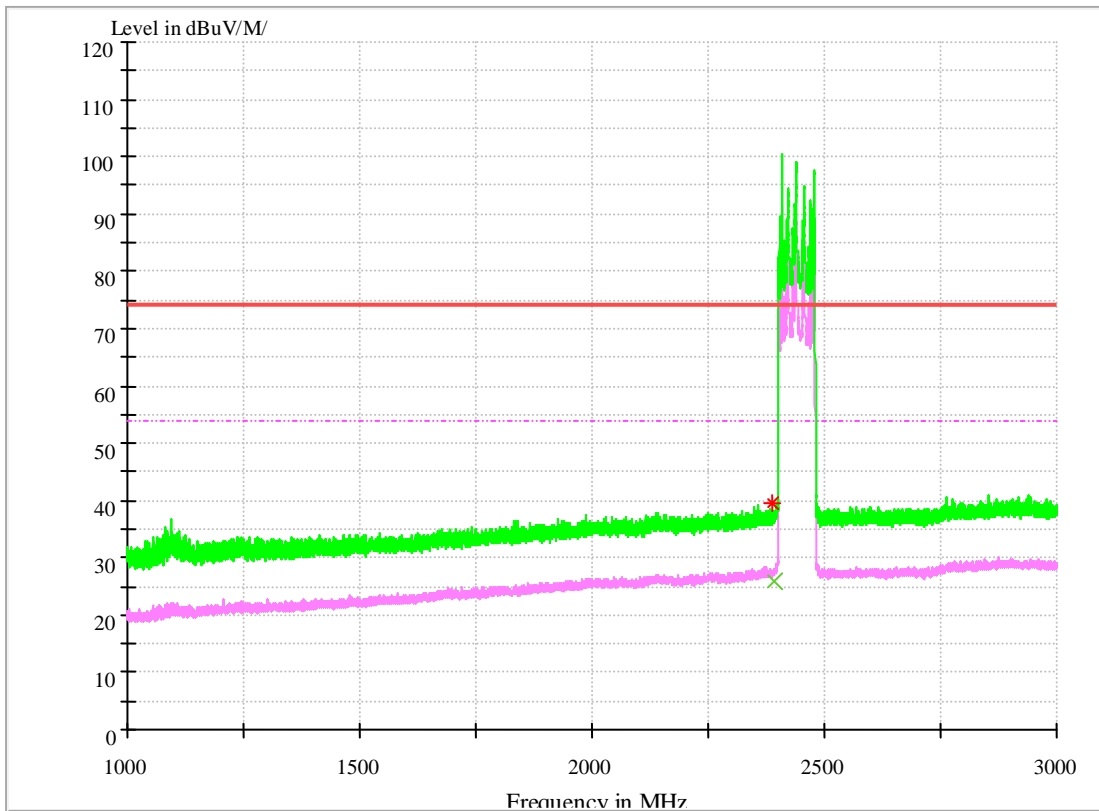

**MEASUREMENT RESULT: AV Detector**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	26.01	54.00	27.99	150.0	H	359.0	-8.6

**MEASUREMENT RESULT: PK Detector**

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	39.65	74.00	34.35	150.0	V	225.0	-8.6


- Note:
- 1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)



The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

**Channel 78**

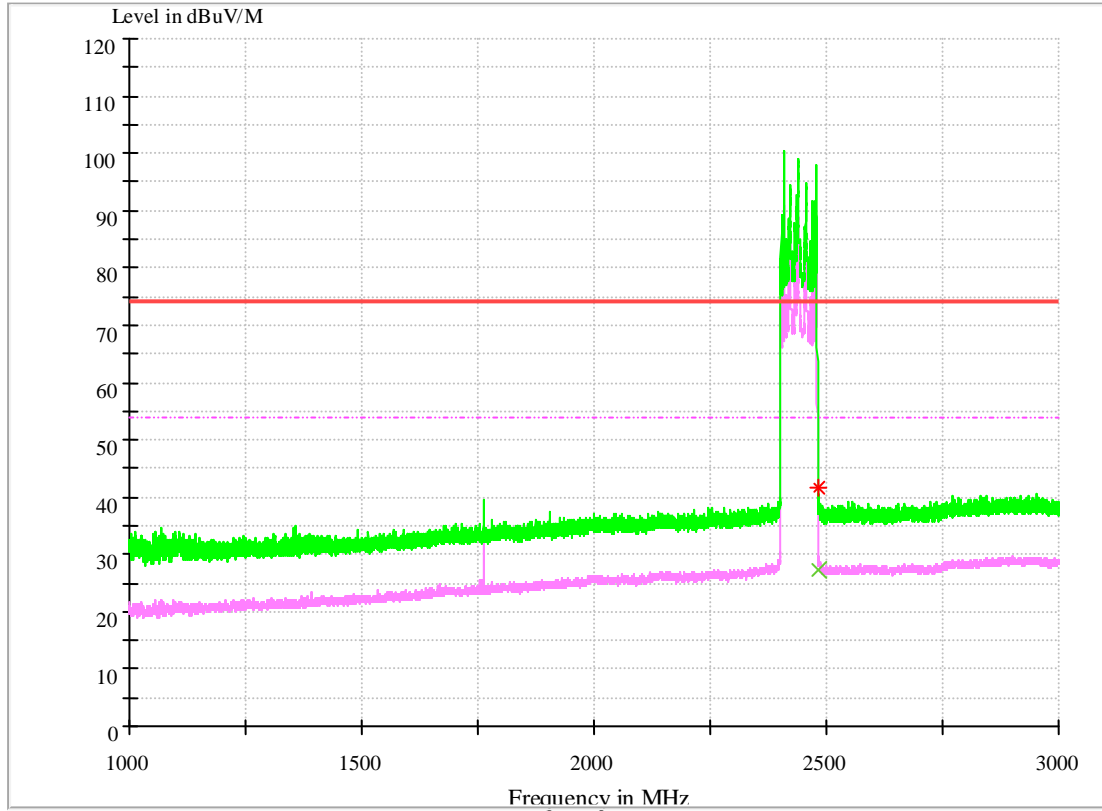

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	27.43	54.00	26.57	110.0	H	60.0	-7.0

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	41.68	74.00	32.32	100.0	V	214.0	-7.0

Note:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

#### Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB $\mu$ V/m) and Average Limit (54 dB $\mu$ V/m).

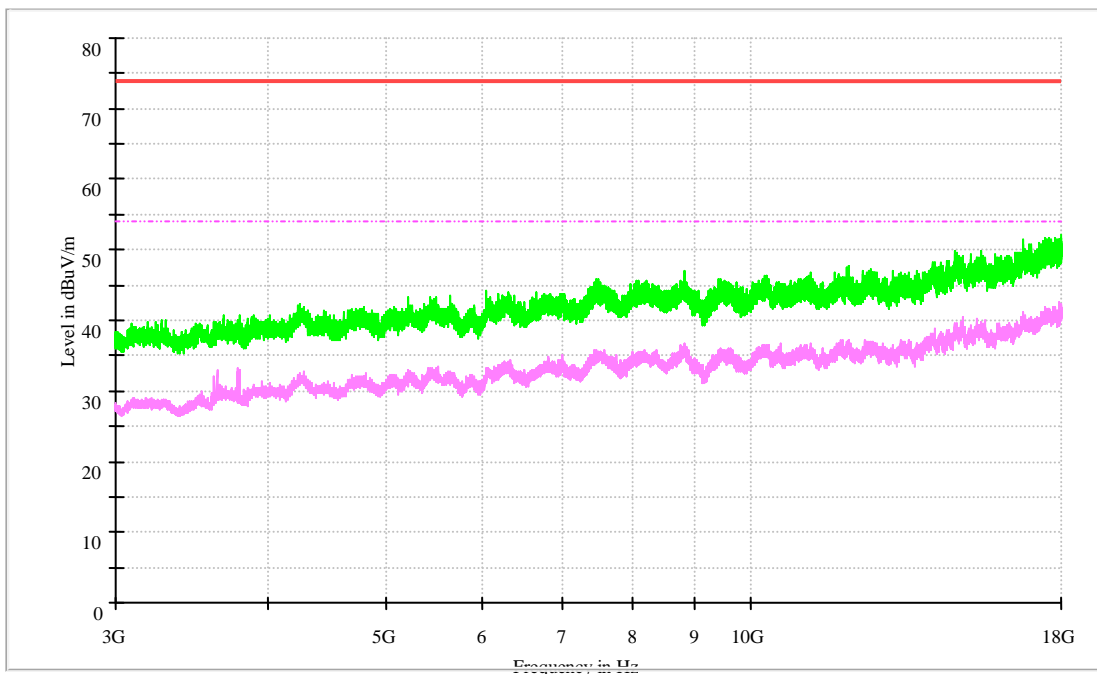

#### Part 5: Testing Range of “18 GHz to 26.5 GHz”

NOTE1: No peak found in the Test Range of “18 GHz to 26.5GHz”



# Appendix I: AC Power Line Conducted Emission




## 1 Result Table

In this Appendix, only the test results and plots under the worst case can be reported.

EUT Conf.	Maximum Emissions	Verdict
TM1_DH5_Ch39	Not found obvious spikes or see marked spikes on plots and listed emissions records.	Pass

## 2 Result Plot

# Channel 39

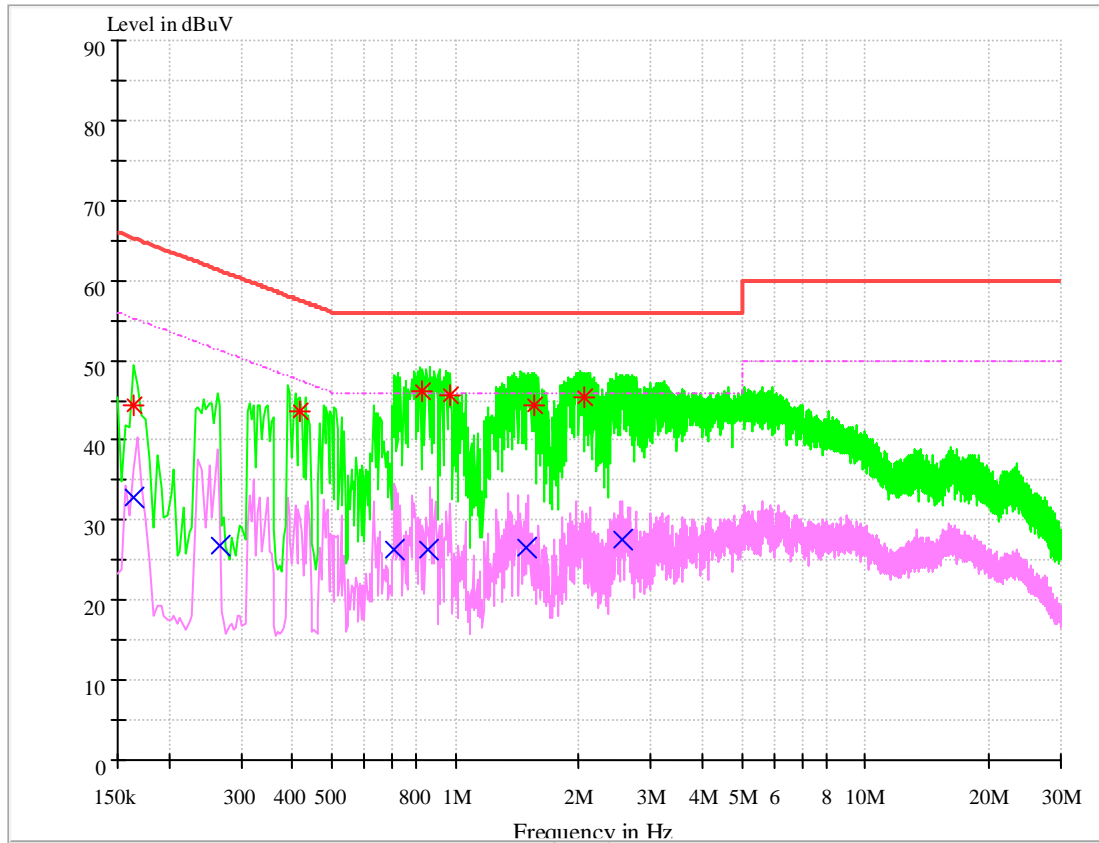

**MEASUREMENT RESULT: AV Detector**

Frequency (MHz)	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Transd. (dB)	Margin (dB)	Line	PE
0.164233	32.80	65.26	9.7	20.97	L1	FLO
0.265360	26.86	57.50	9.7	13.84	L1	FLO
0.711281	26.20	56.00	9.7	9.85	N	FLO
0.857841	26.40	56.00	9.7	10.48	N	FLO
1.485026	26.52	56.00	9.7	11.52	N	FLO
2.553319	27.67	56.00	9.7	10.66	N	FLO

**MEASUREMENT RESULT: PK Detector**

Frequency (MHz)	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Transd. (dB)	Margin (dB)	Line	PE
0.163919	44.29	55.25	9.7	22.45	N	FLO
0.417229	43.67	51.26	9.7	24.40	N	FLO
0.827869	46.15	46.00	9.7	19.80	N	FLO
0.965412	45.52	46.00	9.7	19.60	N	FLO
1.562924	44.48	46.00	9.7	19.48	N	FLO
2.072806	45.34	46.00	9.7	18.33	N	FLO

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

END