



中国认可  
国际互认  
检测  
TESTING  
CNAS L0310



## FCC SAR Compliance Test Report

**Product Name:** Smart Phone

**Model:** BND-L24, BND-L34

**Report No.:** SYBH(Z-SAR)005102017-2

**FCC ID:** QISBND-L24

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	<i>Wei Huanbin</i>	<i>Zhang Chao</i>
DATE	2017-11-19	2017-11-19

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

**(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

※ ※ **Notice** ※ ※

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01 & 2174.02 & 2174.03
3. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.
4. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
5. The test report is invalid if there is any evidence of erasure and/or falsification.
6. The test report is only valid for the test samples.
7. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

# Table of Contents

<b>Table of Contents</b> .....	<b>3</b>
<b>1 General Information</b> .....	<b>6</b>
1.1 Statement of Compliance.....	6
1.2 RF exposure limits.....	7
1.3 EUT Description.....	8
1.3.1 General Description.....	10
1.3.2 Dynamic antenna switching specification.....	12
1.3.3 Dynamic antenna tuning Test Configurations.....	12
1.3.4 Power reduction specification.....	13
1.4 Test specification(s).....	15
1.5 Testing laboratory.....	15
1.6 Applicant and Manufacturer.....	15
1.7 Application details.....	15
1.8 Ambient Condition.....	15
<b>2 SAR Measurement System</b> .....	<b>16</b>
2.1 SAR Measurement Set-up.....	16
2.2 Test environment.....	17
2.3 Data Acquisition Electronics description.....	17
2.4 Probe description.....	18
2.5 Phantom description.....	19
2.6 Device holder description.....	20
2.7 Test Equipment List.....	21
<b>3 SAR Measurement Procedure</b> .....	<b>22</b>
3.1 Scanning procedure.....	22
3.2 Spatial Peak SAR Evaluation.....	23
3.3 Data Storage and Evaluation.....	24
<b>4 System Verification Procedure</b> .....	<b>26</b>
4.1 Tissue Verification.....	26
4.2 System Check.....	30
4.3 System check Procedure.....	31
<b>5 SAR measurement variability and uncertainty</b> .....	<b>32</b>
5.1 SAR measurement variability.....	32
5.2 SAR measurement uncertainty.....	32
<b>6 SAR Test Configuration</b> .....	<b>33</b>
6.1 Test Positions Configuration.....	33
6.1.1 General considerations.....	33
6.1.2 Head Exposure Condition.....	33
6.1.3 Body-worn Exposure Condition.....	34
6.1.4 Hotspot Exposure Condition.....	34
6.1.5 Product specific 10-g Exposure Condition.....	35
6.1.6 Capacitive proximity sensor power reduction test configurations.....	35
6.1.7 Infrared proximity sensor power reduction test Configuration.....	45
6.2 3G SAR Test Reduction Procedure.....	48
6.3 GSM Test Configuration.....	48
6.4 UMTS Test Configuration.....	49
6.5 LTE Test Configuration.....	55
6.6 WiFi Test Configuration.....	57
6.6.1 Initial Test Position Procedure.....	57
6.6.2 Initial Test Configuration Procedure.....	57
6.6.3 Sub Test Configuration Procedure.....	57
6.6.4 WiFi 2.4G SAR Test Procedures.....	58
6.7 BT Test Configuration.....	58
<b>7 SAR Measurement Results</b> .....	<b>59</b>
7.1 Conducted power measurements.....	59
7.1.1 Conducted power measurements of GSM850 (Second Antenna).....	60

7.1.2	Conducted power measurements of GSM1900 (Second Antenna) .....	61
7.1.3	Conducted power measurements of UMTS Band II (Second Antenna) .....	62
7.1.4	Conducted power measurements of UMTS Band IV (Second Antenna) .....	64
7.1.5	Conducted power measurements of UMTS Band V (Second Antenna) .....	66
7.1.6	Conducted power measurements of LTE Band II (Second Antenna) .....	68
7.1.7	Conducted power measurements of LTE Band IV (Second Antenna) .....	77
7.1.8	Conducted power measurements of LTE Band V(Second Antenna) .....	86
7.1.9	Conducted power measurements of LTE Band VII (Second Antenna) .....	92
7.1.10	Conducted power measurements of LTE Band XII (Second Antenna) .....	98
7.1.11	Conducted power measurements of LTE Band XVII (Second Antenna).....	104
7.1.12	Conducted power measurements of GSM850 (Main Antenna) .....	107
7.1.13	Conducted power measurements of GSM1900 (Main Antenna) .....	108
7.1.14	Conducted power measurements of UMTS Band II (Main Antenna) .....	109
7.1.15	Conducted power measurements of UMTS Band IV (Main Antenna).....	111
7.1.16	Conducted power measurements of UMTS Band V (Main Antenna).....	113
7.1.17	Conducted power measurements of LTE Band II (Main Antenna).....	114
7.1.18	Conducted power measurements of LTE Band IV (Main Antenna) .....	126
7.1.19	Conducted power measurements of LTE Band V(Main Antenna) .....	138
7.1.20	Conducted power measurements of LTE Band VII (Main Antenna) .....	142
7.1.21	Conducted power measurements of LTE Band XII (Main Antenna) .....	150
7.1.22	Conducted power measurements of LTE Band XVII (Main Antenna) .....	152
7.1.23	Conducted power measurements of WiFi 2.4G.....	153
7.1.24	Conducted power measurements of BT.....	154
7.2	SAR measurement Results.....	155
7.2.1	SAR measurement Result of GSM850 (Second Antenna) .....	157
7.2.2	SAR measurement Result of GSM1900 (Second Antenna) .....	159
7.2.3	SAR measurement Result of UMTS Band II(Second Antenna) .....	161
7.2.4	SAR measurement Result of UMTS Band IV(Second Antenna).....	163
7.2.5	SAR measurement Result of UMTS Band V(Second Antenna).....	165
7.2.6	SAR measurement Result of LTE Band II(Second Antenna) .....	167
7.2.7	SAR measurement Result of LTE Band IV(Second Antenna) .....	170
7.2.8	SAR measurement Result of LTE Band V(Second Antenna) .....	173
7.2.9	SAR measurement Result of LTE Band VII(Second Antenna) .....	176
7.2.10	SAR measurement Result of LTE Band XII(Second Antenna) .....	179
7.2.11	SAR measurement Result of LTE Band XVII(Second Antenna).....	181
7.2.12	SAR measurement Result of GSM850(Main Antenna).....	182
7.2.13	SAR measurement Result of GSM1900(Main Antenna).....	184
7.2.14	SAR measurement Result of UMTS Band II(Main Antenna) .....	187
7.2.15	SAR measurement Result of UMTS Band IV(Main Antenna) .....	191
7.2.16	SAR measurement Result of UMTS Band V(Main Antenna).....	195
7.2.17	SAR measurement Result of LTE Band II (Main Antenna).....	196
7.2.18	SAR measurement Result of LTE Band IV(Main Antenna) .....	201
7.2.19	SAR measurement Result of LTE Band V(Main Antenna) .....	206
7.2.20	SAR measurement Result of LTE Band VII(Main Antenna) .....	209
7.2.21	SAR measurement Result of LTE Band XII(Main Antenna) .....	212
7.2.22	SAR measurement Result of LTE Band XVII(Main Antenna) .....	213
7.2.23	SAR measurement Result of WiFi 2.4G .....	214
7.3	Multiple Transmitter Evaluation.....	216
7.3.1	Stand-alone SAR test exclusion.....	217
7.3.2	Simultaneous Transmission Possibilities .....	218
7.3.3	SAR Summation Scenario .....	219
7.3.4	Simultaneous Transmission Conclusion .....	219
	Appendix A. System Check Plots .....	220
	Appendix B. SAR Measurement Plots .....	220
	Appendix C. Calibration Certificate .....	220
	Appendix D. Photo documentation .....	220
<b>End</b>	.....	220

※ ※ **Modified History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release.	2017-11-19	Zhang Chao

# 1 General Information

## 1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for BND-L24, BND-L34 is as below Table 1.

Band	Max Reported SAR(W/kg)			
	1-g Head SAR	1-g Body-worn SAR(15mm) *	1-g Hotspot SAR(10mm)	Product Specific 10-g SAR **
GSM850	1.00	0.48	0.59	/
GSM1900	0.44	0.50	0.95	0.26
UMTS Band II	0.81	<b>1.11</b>	1.03	1.43
UMTS Band IV	<b>1.11</b>	0.86	<b>1.27</b>	2.27
UMTS Band V	0.86	0.49	0.65	/
LTE Band II	0.71	1.05	0.80	<b>2.40</b>
LTE Band IV	0.95	0.88	0.79	1.97
LTE Band V	0.97	0.42	0.52	/
LTE Band VII	0.95	0.29	0.19	/
LTE Band XII	1.01	0.38	0.45	/
LTE Band XVII	/	/	/	/
WiFi 2.4G	0.32	0.07	0.18	/
BT	/	/	/	/

**The highest reported SAR for head, body-worn, hotspot, simultaneous transmission and product specific 10-g SAR exposure conditions are 1.11W/kg, 1.11W/kg, 1.27W/kg, 1.43W/kg and 2.40 W/kg respectively per KDB690783 D01.**

Table 1:Summary of test result

Note:

- 1)\* For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.
- 2) According to TCB workshop October,2014 RF Exposure Procedures Update(Overlapping LTE Bands):
  - a) Main and Second Antenna SAR for LTE Band 17 (Frequency range:704-716 MHz) is covered by LTE Band 12 (Frequency range:699-716 MHz) due to similar frequency range,same maximum tune up limit and same channel bandwidth.

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

## 1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
<b>Spatial Peak SAR*</b> (Brain/Body/Arms/Legs)	<b>1.60 W/kg</b>	8.00 W/kg
<b>Spatial Average SAR**</b> (Whole Body)	0.08 W/kg	0.40 W/kg
<b>Spatial Peak SAR***</b> (Hands/Feet/Ankle/Wrist)	<b>4.00 W/kg</b>	20.00 W/kg

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

- \* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- \*\* The Spatial Average value of the SAR averaged over the whole body.
- \*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

### 1.3 EUT Description

Device Information:			
Product Name:	Smart Phone		
Model:	BND-L24, BND-L34		
FCC ID :	QISBND-L24		
SN.:	1#: R9G0117901000016 2#: R9G0117901000047 3#: R9G0117901000102 4#: R9G0117901000304 5#: R9G0117901000020 6#: R9G0117901000191		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	HL4BNDM		
Software Version :	BND-L24C900B088		
Antenna Type :	Internal antenna		
Others Accessories	Headset		
Device Operating Configurations:			
Supporting Mode(s)	GSM 850/1900, UMTS Band II/IV/V, LTE Band II/IV/V/VII/XII/XVII, WiFi 2.4G; BT		
Test Modulation	GSM(GMSK/8PSK), UMTS(QPSK), LTE(QPSK/16QAM), WiFi(DSSS/OFDM), BT(GFSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	PCS1900	1850-1910	1930-1990
	UMTS Band II	1850-1910	1930-1990
	UMTS Band IV	1710-1755	2110-2155
	UMTS Band V	824-849	869-894
	LTE Band II	1850-1910	1930-1990
	LTE Band IV	1710-1755	2110-2155
	LTE Band V	824-849	869-894
	LTE Band VII	2500-2570	2620-2690
	LTE Band XII	699-716	729-746
	LTE Band XVII	704-716	734-746
	BT	2400-2483.5	
WiFi 2.4G	2412-2462		
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
Power Class:	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(UMTS Band II)		



	3, tested with power control "all 1"(UMTS Band IV)
	3, tested with power control "all 1"(UMTS Band V)
	3, tested with power control all Max.(LTE Band II)
	3, tested with power control all Max.(LTE Band IV)
	3, tested with power control all Max.(LTE Band V)
	3, tested with power control all Max.(LTE Band VII)
	3, tested with power control all Max.(LTE Band XII)
	3, tested with power control all Max.(LTE Band XVII)
Test Channels (low-mid-high):	128-190-251(GSM850)
	512-661-810(GSM1900)
	9262-9400-9538(UMTS Band II)
	1312-1413-1513(UMTS Band IV)
	4132-4182-4233(UMTS Band V)
	18607-18900-19193(LTE Band II BW=1.4MHz)
	18615-18900-19185(LTE Band II BW=3MHz)
	18625-18900-19175(LTE Band II BW=5MHz)
	18650-18900-19150(LTE Band II BW=10MHz)
	18675-18900-19125(LTE Band II BW=15MHz)
	18700-18900-19100(LTE Band II BW=20MHz)
	19957-20175-20393(LTE Band IV BW=1.4MHz)
	19965-20175-20385(LTE Band IV BW=3MHz)
	19975-20175-20375(LTE Band IV BW=5MHz)
	20000-20175-20350 (LTE Band IV BW=10MHz)
	20025-20175-20325 (LTE Band IV BW=15MHz)
	20050-20175-20300(LTE Band IV BW=20MHz)
	20407-20525-20643(LTE Band V BW=1.4MHz)
	20415-20525-20635(LTE Band V BW=3MHz)
	20425-20525-20625(LTE Band V BW=5MHz)
	20450-20525-20600(LTE Band V BW=10MHz)
	20775-21100-21425(LTE Band VII BW=5MHz)
	20800-21100-21400(LTE Band VII BW=10MHz)
	20825-21100-21375(LTE Band VII BW=15MHz)
	20850-21100-21350 (LTE Band VII BW=20MHz)
	23017-23095-23173(LTE Band XII BW=1.4MHz)
	23025-23095-23165(LTE Band XII BW=3MHz)
	23035-23095-23155(LTE Band XII BW=5MHz)
	23060-23095-23130(LTE Band XII BW=10MHz)
	23755-23790-23825(LTE Band XVII BW=5MHz)
	23780-23790-23800(LTE Band XVII BW=10MHz)
	802.11b/g/n 20M:1-6-11
	802.11n 40M:3-6-9
BT: 0-19-39-78	

Table 3: Device information and operating configuration

### 1.3.1 General Description

BND-L24, BND-L34 is subscriber equipment in the GSM/UMTS/LTE system. The GSM frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. but only GSM850/1900 test data included in this report.

The UMTS frequency band is band I and band II and band IV and band V ,but only band II and Band IV and Band V test data included in this report.

The LTE frequency band is Band II band IV and band V and band VII and Band XII and Band XVII,all Bands test data included in this report.

The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and Wi-Fi etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Battery information :

Name	Manufacture	Description
Li-Polymer Battery	Desay Battery Co., Ltd.	Battery Model: HB356687ECW Rated capacity: 3240mAh Nominal Voltage: +3.82V
	Sunwoda Electronic Co., LTD	
	SCUD (FUJIAN) Electronics Co., Ltd	

**Difference description:**

The difference between BND-L24 and BND-L34 is show in the below table:

		Model: BND-L24	Model: BND-L34
Brand	Brand name	Honor	HUAWEI
Licensed Frequency	LTE BAND	FDD:B2/B4/B5/B7/B12/B17 same	FDD:B2/B4/B5/B7/B12/B17 same
	UMTS BAND	B1/B2/B4/B5 same	B1/B2/B4/B5 same
	GSM	850/900/1800/1900 same	850/900/1800/1900 same
	Antenna	Same	same
Unlicensed Frequency	Bluetooth	BT4.1 same	BT4.1 same
	2.4G Wi-Fi	Same	same
	Antenna	Same	same
Hardware	Ram / Rom	3GB+32GB	4GB+64GB
	PCB	Same	same
	USB Port	Same	same
Appearance	Dimension	Same(156.5x75.3x7.6mm)	Same(156.5x75.3x7.6mm)
Accessory	Battery	Same 3340mAh(typical)	Same 3340mAh(typical)
	External Charger	Same	same
	USB label	Same	same
	Earphone	Same	same
<b>others</b>	Decorative parts of Camera	Get the details in below	Get the details in below

The difference of decorative parts of Camera:

Bond-L24



Bond-L34



**According to the difference description above, full test is performed on BND-L24. BND-L34 shares the same test data of BND-L24.**

### 1.3.2 Dynamic antenna switching specification

The device has two 2G/3G/4G Tx antennas (Main Antenna and Second Antenna). It can transmit from either Main Antenna or Second Antenna, but they can not transmit simultaneously.

SAR test procedure for dynamic antenna switching is as below:

During the SAR test, the Main Antenna (Ant 1) and Second Antenna (Ant2) are set to the MAX transmit power level respectively and test the SAR respectively in all applicable RF exposure conditions. Some AT commands are supplied to fix the operation state and choose the antenna, and some test scripts are supplied to fix the modem state so that only one TX antenna and one modem is chosen and tested at a time. We can ensure that all independent antennas and modems are completely covered by the appropriate SAR measurements and all simultaneous transmission possibilities are fully considered.

### 1.3.3 Dynamic antenna tuning Test Configurations

The device also supports the dynamic antenna tuning function to optimize transmission efficiency for 1710MHz~2700MHz frequency operations, especially in any hand usage scenario.

**The dynamic antenna tuning function is only applicable for some frequency bands of the 2G/3G/4G main Tx antenna: GSM1900, UMTS Band II/IV, LTE Band II/IV/VII;** which is located in the bottom part of the device. The 2G/3G/4G main antenna has two fixed states for these tuning bands: the state 1 and state 2. Two states shares the same antenna, RF path, test channel and conductive power. The software will choose better RSSI as the working state of the main TX antenna based on the RSSI comparison and switch algorithm.

The antenna tuning and operating parameters are implemented using a fixed table look-up mechanism that is fully contained within the approved transmitter; therefore, antenna tuning is static and remains unchanged for the same device operating configurations. PAG is not required per KDB388624D02.

SAR test procedure for dynamic antenna tuning is as below:

- a) Firstly, some test script are used to fix the tuning state at state1 or state 2, so that only one antenna tuning state is chosen at a time for SAR test.
- b) Secondly, in order to reduce the number of SAR tests required to demonstrate compliance for the two tuning states, one single point zoom scan SAR measurement between state1 and state 2 for each antenna tuning band and applicable RF exposure condition is considered to identify the higher SAR tuning state that need the full set of normally required SAR measurements and allow SAR test reduction for the other lower SAR conditions.
- c) Thirdly, full normally required SAR measurements are performed for the chosen higher SAR tuning state. The SAR worst case will also be checked for the other state in each antenna tuning band and applicable RF exposure condition to ensure the SAR compliance

### 1.3.4 Power reduction specification

#### 1) Power reduction triggered by specific use conditions(2G&3G&4G Second antenna)

This device uses the receiver to indicate whether the user is making a voice call in head scenario or not. The selection between head and body power levels is based on the receiver detection mechanism.

The following tables summarize the key power reduction information triggered by specific use conditions. The detailed full power and reduced conducted power measurement results are provided in Section 7 of this report:

Band	Power Reduction Level Amount (dB)		
	Second Antenna		
	Second antenna only, Receiver on(Head)	Second antenna only, Receiver off	Second antenna+WiFi antenna Simultaneous Transmission (wifi station or hotspot)
GSM850	3.0	0	5.0
GSM1900	2.0	0	5.0
UMTS Band II	3.0	0	6.0
UMTS Band IV	2.0	0	4.0
UMTS Band V	3.5	0	6.0
LTE Band II	4.4	0	6.4
LTE Band IV	2.0	0	5.5
LTE Band V	3.5	0	6.5
LTE Band VII	6.5	0	8.3
LTE Band XII	2.5	0	6.0
LTE Band XVII	2.5	0	6.0

The SAR test plan is as below:

- a) For Head SAR test of 2G/3G/4G Second Antenna, Standalone Head SAR should be evaluated at power level A(Audio Receiver on). In the LTE and UMTS VOIP test mode, as the test lab can not simulate the actual user scenarios to trigger the receiver on. A test script is used to trigger the receiver on during the test. The TX power and SAR value during the test is the same as the actual user scenarios.
- b) For Body /Hotspot Product Specific 10-g SAR test of 2G/3G/4G Second Antenna, Standalone Body SAR should be evaluated at power level B (Audio Receiver off) ;

## 2) Power reduction triggered by proximity sensor and hotspot (2G&3G&4G Main antenna)

This device uses a capacitive proximity sensor that share the same metallic electrode as the transmitting antenna to facilitate triggering in typical user interactivity with the device per KDB616217.

Due to the operating configurations and exposure conditions required by the device, the proximity sensor is used to indicate when the device is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes to ensure SAR compliance for the following scenarios: To reduce the output power of main antennas during body operating configurations.

A fixed level power reduction is also applied for some frequency bands when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.

The following tables summarize the key power reduction information. The detailed full power and reduced tune-up specifications and conducted power measurement results are provided in Section 6.1.6 and Section 7 of this report.

Band	Power Reduction Level Amount (dB)			
	Main Antenna			
	Full power (Other conditions)	Hotspot on	Receiver off, proximity sensor on	Receiver off, hotspot on + proximity sensor on
GSM 1900	0	0	2.0	2.0
UMTS Band II	0	3.0	2.0	5.0
UMTS Band IV	0	3.0	2.0	6.0
LTE Band II	0	4.3	2.0	6.2
LTE Band IV	0	4.0	2.0	5.5
LTE Band V	0	0	2.0	2.0
LTE Band VII	0	5.0	2.0	7.0

## 3) Power reduction triggered by infrared proximity sensor(WiFi antenna)

The device uses an infrared proximity sensor to reduce the output power of WiFi antenna when WiFi and 2G&3G&4G antenna voice mode transmit simultaneously in held-to-ear scenario.

The following tables summarize the key power reduction information. The detailed full power and reduced tune-up specifications and conducted power measurement results are provided in Section 6.1.7 and Section 7 of this report.

Band	Power Reduction Level Amount (dB)		
	WiFi Antenna only	WiFi Antenna and 2G&3G&4G antenna simultaneous transmission	
		infrared proximity sensor off	infrared proximity sensor on (Voice mode)
WiFi 2.4G 802.11b	0	0	5.5
WiFi 2.4G 802.11g	0	0	6.0
WiFi 2.4G 802.11n(20M)	0	0	6.0
WiFi 2.4G 802.11n(40M)	0	0	3.5

#### 1.4 Test specification(s)

ANSI C95.1:1992 /IEEE C95.1:1991	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1-1991)
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB941225 D01	3G SAR Procedures v03r01
KDB941225 D05	SAR for LTE Devices v02r05
KDB941225 D06	Hotspot SAR v02r01
KDB447498 D01	General RF Exposure Guidance v06
KDB648474 D04	Handsets SAR v01r03
KDB248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02	SAR Reporting v01r02
KDB690783 D01	SAR Listings on Grants v01r03
KDB616217 D04	SAR for laptop and tablets v01r02

#### 1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Section G1,Huawei Base Bantian, Longgang District, Shenzhen 518129, P.R. China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01 & 2174.02 & 2174.03

#### 1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

#### 1.7 Application details


Start Date of test	2017-10-04
End Date of test	2017-11-14

#### 1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

## 2 SAR Measurement System

### 2.1 SAR Measurement Set-up

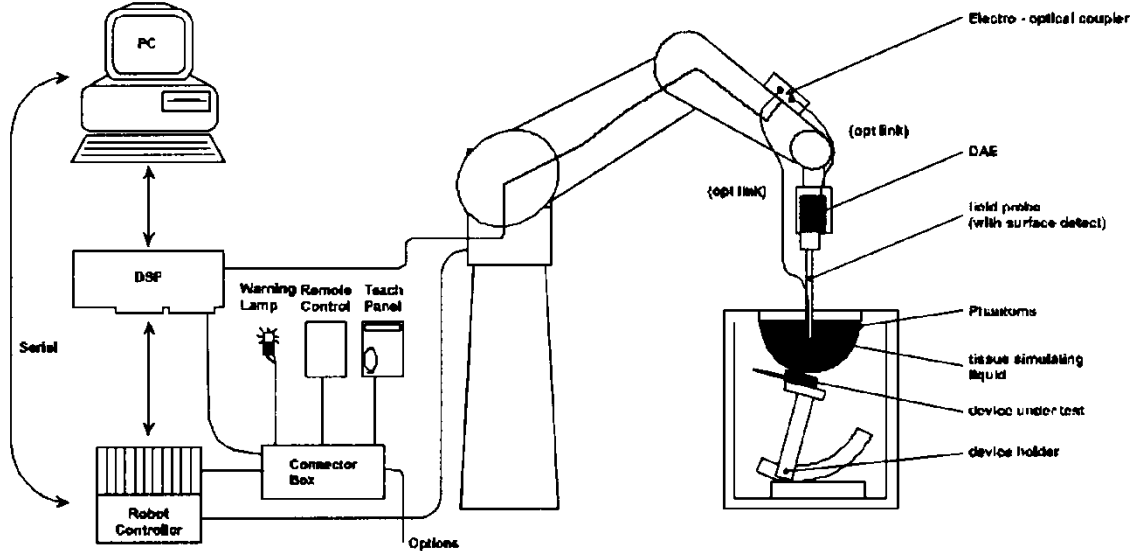

The DASY system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5/6 measurement server.
- The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.



## 2.2 Test environment

The DASY measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m<sup>3</sup>, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m<sup>2</sup> array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.


The system allows the measurement of SAR values larger than 0.005 mW/g.

## 2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


### DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	


## 2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor ( $\pm 2$  dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

### Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

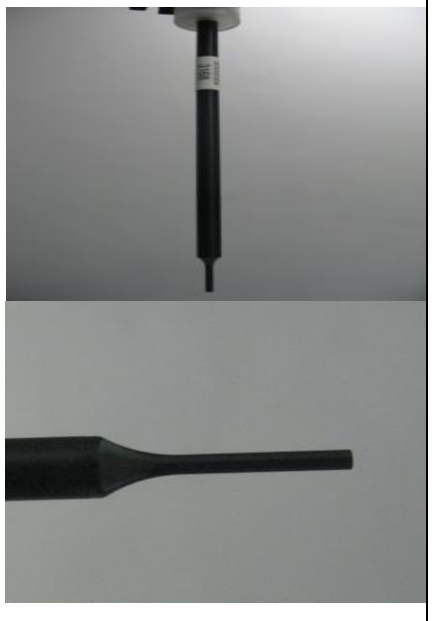
Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)	
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.3$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

### Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)	
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	


## 2.5 Phantom description

### SAM Twin Phantom


Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

The following figure shows the definition of reference point:

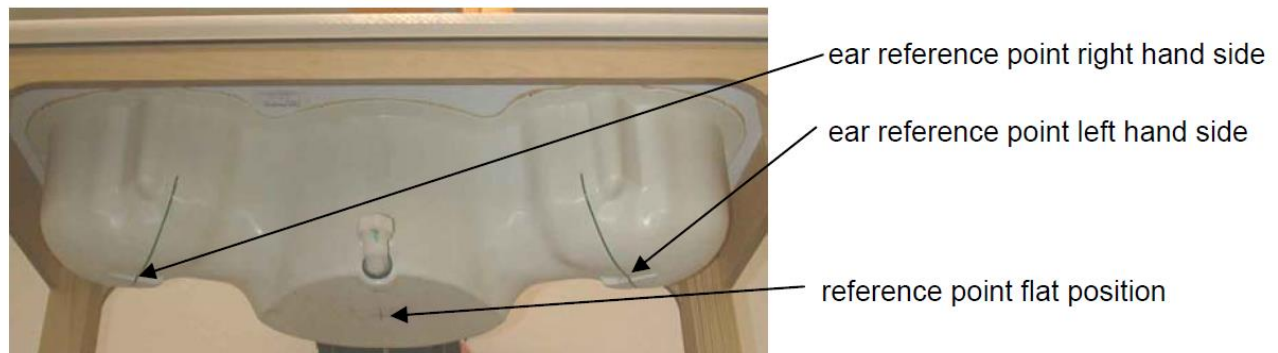

### ELI4 Phantom

Shell Thickness	2mm±0.2mm	
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity  $2 \leq \epsilon_r \leq 5$  at  $\leq 3$  GHz,  $3 \leq \epsilon_r \leq 4$  at  $> 3$  GHz and a loss tangent  $\leq 0.05$ .

## 2.6 Device holder description

The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of  $65^\circ$ . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\sigma = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The device holder permits the device to be positioned with a tolerance of  $\pm 1^\circ$  in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

## 2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration*	Valid period
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3744	2017-07-24	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	ES3DV3	3168	2017-09-28	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3578	2017-05-05	One year
<input checked="" type="checkbox"/>	SPEAG	750MHz Dipole	D750V3	1078	2017-06-20	Three years
<input checked="" type="checkbox"/>	SPEAG	835MHz Dipole	D835V2	4d059	2016-04-20	Three years
<input checked="" type="checkbox"/>	SPEAG	1750MHz Dipole	D1750V2	1123	2017-07-27	Three years
<input checked="" type="checkbox"/>	SPEAG	1900MHz Dipole	D1900V2	5d142	2017-06-21	Three years
<input checked="" type="checkbox"/>	SPEAG	2450MHz Dipole	D2450V2	860	2016-11-23	Three years
<input checked="" type="checkbox"/>	SPEAG	2600MHz Dipole	D2600V2	1021	2017-07-21	Three years
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	852	2017-04-27	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1492	2017-09-25	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1236	2017-07-21	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY5	N/A	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM3	TP-1597	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM4	TP-1620	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM5	TP-1894	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM6	TP-1892	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	111379	2016-12-29	One year
<input checked="" type="checkbox"/>	R & S	WideBand Radio Communication Tester	CMW 500	158850	2017-06-13	One year
<input checked="" type="checkbox"/>	Agilent	Wireless Connectivity Test Set	N4010A	MY49081592	2017-07-31	One year
<input checked="" type="checkbox"/>	Agilent	Signal Analyzer	N9030A	MY49431698	2017-07-31	One year
<input checked="" type="checkbox"/>	Agilent	Network Analyser	E5071C	MY46213349	2016-12-30	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
<input checked="" type="checkbox"/>	Agilent	Signal Generator	E8257D	MY49281095	2017-02-15	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
<input checked="" type="checkbox"/>	SHX	Directional Coupler	DDTO-4-20	07122401	2017-08-07	One year
<input checked="" type="checkbox"/>	AR	Directional Coupler	DC7144AM1	0423264	2017-04-12	NCR
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP	100740	2017-07-17	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP-Z11	106288	2017-07-17	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY45101339	2016-12-30	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY44420359	2016-12-30	One year

Note: 1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3) \*All the equipments are within the valid period when the tests are performed.

## 3 SAR Measurement Procedure

### 3.1 Scanning procedure

The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5/6 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ( $\leq 2\text{GHz}$ ), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution:  $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$ , 2-4GHz -  $\leq 5\text{ mm}$  and 4-6 GHz- $\leq 4\text{mm}$ ;  $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$ , 3-4 GHz-  $\leq 4\text{mm}$  and 4-6GHz- $\leq 2\text{mm}$  where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ( $\Delta x_{area}, \Delta y_{area}$ )	Maximun Zoom Scan spatial resolution ( $\Delta x_{Zoom}, \Delta y_{Zoom}$ )	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{Zoom}(n)$	$\Delta z_{Zoom}(1)^*$	$\Delta z_{Zoom}(n>1)^*$	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5* $\Delta z_{Zoom}(n-1)$	≥22mm

### 3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points( with 8mm horizontal resolution) or 7 x 7 x 7 points( with 5mm horizontal resolution) or 8 x 8 x 7 points( with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

#### Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

#### Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

#### Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

#### Advanced Extrapolation

DASY5/6 uses the advanced extrapolation option which is able to compensates boundary effects on E-field probes.

### 3.3 Data Storage and Evaluation

#### Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm <sub>i</sub> , a <sub>10</sub> , a <sub>11</sub> , a <sub>12</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcpi$$

with	V <sub>i</sub>	= compensated signal of channel i	(i = x, y, z)
	U <sub>i</sub>	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcpi	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:



E-field probes:  $E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$   
H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

- with  $V_i$  = compensated signal of channel i (i = x, y, z)  
 $\text{Norm}_i$  = sensor sensitivity of channel i (i = x, y, z)  
[mV/(V/m)<sup>2</sup>] for E-field Probes  
ConvF = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
f = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}}^2 \cdot \sigma) / (\rho \cdot 1000)$$

- with SAR = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \quad \text{or} \quad P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

- with  $P_{\text{pwe}}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>  
 $E_{\text{tot}}$  = total electric field strength in V/m  
 $H_{\text{tot}}$  = total magnetic field strength in A/m

## 4 System Verification Procedure

### 4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Head Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	39.2	41.45	52.64	55.242	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.8	44.452
Ingredients (% of weight)	Body Tissue					
Frequency Band (MHz)	750	835	1750	1900	2450	2600
Water	50.3	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

#### Simulating Head Liquid (HBBL600-6000MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	50-65%
Mineral oil	10-30%
Emulsifiers	8-25%
Sodium salt	0-1.5%

#### Simulating Body Liquid (MBBL600-6000MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	60-80%
Esters, Emulsifiers, Inhibitors	20-40%
Sodium salt	0-1.5%

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M $\Omega$ + resistivity  
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]  
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Type	Target Frequency	Target Tissue		Measured Tissue		Deviation (Within +/-5% )		Liquid Temp.	Test Date
		Permittivity	Conductivity [S/m]	Permittivity	Conductivity [S/m]	$\Delta\epsilon_r$	$\Delta\sigma$		
750MHz Head	705	42.14	0.89	41.65	0.874	-1.16%	-1.83%	21.8°C	2017/10/23
	710	42.11	0.89	41.63	0.876	-1.14%	-1.63%		
	750	41.90	0.89	41.53	0.890	-0.88%	-0.02%		
835MHz Head	825	41.60	0.90	41.44	0.909	-0.38%	1.02%	21.8°C	2017/10/16
	835	41.50	0.90	41.41	0.913	-0.22%	1.39%		
	850	41.50	0.92	41.36	0.918	-0.34%	-0.18%		
835MHz Head	825	41.60	0.90	41.38	0.926	-0.53%	2.84%	21.8°C	2017/10/20
	835	41.50	0.90	41.34	0.929	-0.41%	3.26%		
	850	41.50	0.92	41.24	0.935	-0.63%	1.62%		
1750MHz Head	1710	40.10	1.35	38.89	1.386	-3.02%	2.67%	21.8°C	2017/10/14
	1730	40.10	1.36	38.84	1.397	-3.14%	2.72%		
	1750	40.10	1.37	38.80	1.407	-3.24%	2.70%		
	1800	40.00	1.40	38.71	1.435	-3.23%	2.50%		
1750MHz Head	1710	40.10	1.35	39.08	1.336	-2.54%	-1.04%	21.6°C	2017/10/20
	1730	40.10	1.36	39.06	1.347	-2.59%	-0.96%		
	1750	40.10	1.37	39.03	1.356	-2.67%	-1.02%		
	1800	40.00	1.40	38.97	1.386	-2.58%	-1.00%		
1900MHz Head	1850	40.00	1.40	39.32	1.347	-1.70%	-3.79%	20.8°C	2017/10/10
	1880	40.00	1.40	39.26	1.365	-1.85%	-2.50%		
	1900	40.00	1.40	39.23	1.375	-1.93%	-1.79%		
	1910	40.00	1.40	39.21	1.381	-1.98%	-1.36%		
1900MHz Head	1850	40.00	1.40	39.06	1.407	-2.35%	0.50%	21.5°C	2017/10/17
	1880	40.00	1.40	39.02	1.425	-2.45%	1.79%		
	1900	40.00	1.40	39.00	1.436	-2.50%	2.57%		
	1910	40.00	1.40	38.99	1.442	-2.52%	3.00%		
1900MHz Head	1850	40.00	1.40	41.39	1.410	3.48%	0.71%	22.1°C	2017/11/2
	1880	40.00	1.40	41.30	1.433	3.25%	2.36%		
	1900	40.00	1.40	41.28	1.441	3.20%	2.93%		
	1910	40.00	1.40	41.24	1.450	3.10%	3.57%		
2450MHz Head	2410	39.30	1.76	40.67	1.827	3.49%	3.81%	21.9°C	2017/11/11
	2435	39.20	1.79	40.66	1.849	3.72%	3.30%		
	2450	39.20	1.80	40.61	1.860	3.60%	3.33%		
	2460	39.20	1.81	40.59	1.868	3.55%	3.20%		
2600MHz Head	2510	39.12	1.86	39.14	1.916	0.05%	3.01%	22°C	2017/10/21
	2535	39.10	1.89	39.14	1.938	0.10%	2.54%		
	2560	39.00	1.92	39.11	1.963	0.28%	2.40%		
	2600	39.00	1.96	39.08	1.996	0.18%	1.84%		

750MHz Body	705	55.70	0.96	53.63	0.929	-3.72%	-3.19%	21.8°C	2017/10/23
	710	55.70	0.96	53.62	0.932	-3.73%	-2.92%		
	750	55.50	0.96	53.50	0.950	-3.60%	-1.00%		
835MHz Body	825	55.20	0.97	53.69	0.966	-2.74%	-0.39%	21.8°C	2017/10/17
	835	55.20	0.97	53.65	0.971	-2.81%	0.09%		
	850	55.20	0.99	53.61	0.978	-2.88%	-1.17%		
835MHz Body	825	55.20	0.97	53.44	0.958	-3.19%	-1.28%	22.0°C	2017/10/25
	835	55.20	0.97	53.41	0.962	-3.24%	-0.77%		
	850	55.20	0.99	53.37	0.969	-3.32%	-2.08%		
1750MHz Body	1710	53.50	1.46	53.36	1.410	-0.26%	-3.42%	21.8°C	2017/10/14
	1730	53.50	1.48	53.30	1.425	-0.37%	-3.72%		
	1750	53.40	1.49	53.25	1.438	-0.28%	-3.49%		
	1800	53.30	1.52	53.19	1.469	-0.21%	-3.36%		
1750MHz Body	1710	53.50	1.46	52.85	1.485	-1.21%	1.71%	22.4°C	2017/10/16
	1730	53.50	1.48	52.85	1.497	-1.21%	1.15%		
	1750	53.40	1.49	52.85	1.509	-1.03%	1.28%		
	1800	53.30	1.52	52.83	1.547	-0.88%	1.78%		
1750MHz Body	1710	53.50	1.46	53.28	1.401	-0.41%	-4.04%	21.8°C	2017/10/26
	1730	53.50	1.48	53.22	1.415	-0.52%	-4.39%		
	1750	53.40	1.49	53.17	1.428	-0.43%	-4.16%		
	1800	53.30	1.52	53.11	1.459	-0.36%	-4.01%		
1750MHz Body	1710	53.50	1.46	51.51	1.415	-3.72%	-3.08%	21.9°C	2017/11/14
	1730	53.50	1.48	51.43	1.426	-3.87%	-3.65%		
	1750	53.40	1.49	51.43	1.440	-3.70%	-3.36%		
	1800	53.30	1.52	51.43	1.476	-3.51%	-2.89%		
1750MHz Body	1710	53.50	1.46	51.31	1.411	-4.09%	-3.36%	21.8°C	2017/11/14
	1730	53.50	1.48	51.23	1.426	-4.24%	-3.65%		
	1750	53.40	1.49	51.23	1.440	-4.06%	-3.36%		
	1800	53.30	1.52	51.23	1.476	-3.88%	-2.89%		
1900MHz Body	1850	53.30	1.52	51.40	1.445	-3.56%	-4.93%	21.2°C	2017/10/13
	1880	53.30	1.52	51.29	1.452	-3.77%	-4.47%		
	1900	53.30	1.52	51.26	1.468	-3.83%	-3.42%		
	1910	53.30	1.52	51.26	1.476	-3.83%	-2.89%		
1900MHz Body	1850	53.30	1.52	52.60	1.465	-1.31%	-3.62%	22.6°C	2017/10/18
	1880	53.30	1.52	52.52	1.487	-1.46%	-2.17%		
	1900	53.30	1.52	52.47	1.499	-1.56%	-1.38%		
	1910	53.30	1.52	52.45	1.506	-1.59%	-0.92%		
1900MHz Body	1850	53.30	1.52	51.48	1.488	-3.41%	-2.11%	21.6°C	2017/10/25
	1880	53.30	1.52	51.43	1.508	-3.51%	-0.79%		
	1900	53.30	1.52	51.39	1.520	-3.58%	0.00%		
	1910	53.30	1.52	51.37	1.526	-3.62%	0.39%		
1900MHz Body	1850	53.30	1.52	51.86	1.478	-2.70%	-2.76%	21.6°C	2017/11/13
	1880	53.30	1.52	51.75	1.512	-2.91%	-0.53%		
	1900	53.30	1.52	51.67	1.534	-3.06%	0.86%		
	1910	53.30	1.52	51.65	1.544	-3.10%	1.58%		
2450MHz Body	2410	52.80	1.91	54.28	1.914	2.80%	0.21%	21.9°C	2017/11/10
	2435	52.70	1.94	54.24	1.935	2.92%	-0.26%		
	2450	52.70	1.95	54.21	1.948	2.87%	-0.10%		
	2460	52.70	1.96	54.19	1.957	2.83%	-0.15%		
2600MHz Body	2510	52.62	2.03	50.71	2.024	-3.63%	-0.30%	21.3°C	2017/10/23
	2535	52.59	2.07	50.74	2.048	-3.52%	-1.06%		
	2560	52.57	2.09	50.68	2.069	-3.60%	-1.00%		
	2600	52.50	2.16	50.59	2.109	-3.64%	-2.36%		
2600MHz Body	2510	52.62	2.03	51.17	2.013	-2.76%	-0.84%	22.1°C	2017/11/14
	2535	52.59	2.07	51.08	2.031	-2.87%	-1.88%		

---

	2560	52.57	2.09	51.09	2.050	-2.82%	-1.91%		
	2600	52.50	2.16	51.01	2.088	-2.84%	-3.33%		

Table 5: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

## 4.2 System Check


The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).

System Check	Target SAR (Normalized to 1W)		Measured SAR (Normalized to 1W)		Deviation (Within +/-10% )		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)	Δ1-g	Δ10-g		
750MHz Head	8.39	5.47	8.52	5.60	1.55%	2.38%	21.8°C	2017/10/23
835MHz Head	9.30	6.05	9.52	6.16	2.37%	1.82%	21.8°C	2017/10/16
835MHz Head	9.30	6.05	9.32	6.04	0.22%	-0.17%	21.8°C	2017/10/20
1750MHz Head	36.60	19.40	36.00	19.12	-1.64%	-1.44%	21.6°C	2017/10/14
1750MHz Head	36.60	19.40	34.88	18.32	-4.70%	-5.57%	21.8°C	2017/10/20
1900MHz Head	40.30	21.00	40.80	21.16	1.24%	0.76%	20.8°C	2017/10/10
1900MHz Head	40.30	21.00	42.00	21.68	4.22%	3.24%	21.5°C	2017/10/17
1900MHz Head	40.30	21.00	39.48	20.44	-2.03%	-2.67%	22.1°C	2017/11/2
2450MHz Head	51.90	24.40	52.00	24.12	0.19%	-1.15%	21.9°C	2017/11/11
2600MHz Head	58.70	26.10	54.80	24.88	-6.64%	-4.67%	22.0°C	2017/10/21
750MHz Body	8.67	5.71	8.48	5.72	-2.19%	0.18%	21.8°C	2017/10/23
835MHz Body	9.41	6.20	9.20	6.16	-2.23%	-0.65%	21.8°C	2017/10/17
835MHz Body	9.41	6.20	9.92	6.68	5.42%	7.74%	22.0°C	2017/10/25
1750MHz Body	36.40	19.40	35.08	18.80	-3.63%	-3.09%	21.8°C	2017/10/14
1750MHz Body	36.40	19.40	37.28	19.72	2.42%	1.65%	22.4°C	2017/10/16
1750MHz Body	36.40	19.40	34.88	18.68	-4.18%	-3.71%	21.8°C	2017/10/26
1750MHz Body	36.40	19.40	37.72	20.20	3.63%	4.12%	21.9°C	2017/11/14
1750MHz Body	36.40	19.40	35.88	19.04	-1.43%	-1.86%	21.8°C	2017/11/14
1900MHz Body	40.40	21.30	38.48	19.68	-4.75%	-7.61%	21.2°C	2017/10/13
1900MHz Body	40.40	21.30	37.80	19.48	-6.44%	-8.54%	22.6°C	2017/10/18
1900MHz Body	40.40	21.30	40.00	20.60	-0.99%	-3.29%	21.6°C	2017/10/25
1900MHz Body	40.40	21.30	38.36	20.36	-5.05%	-4.41%	21.6°C	2017/11/13
2450MHz Body	50.60	23.80	53.20	24.88	5.14%	4.54%	21.9°C	2017/11/10
2600MHz Body	55.90	24.90	52.40	23.28	-6.26%	-6.51%	21.3°C	2017/10/23
2600MHz Body	55.90	24.90	56.00	24.64	0.18%	-1.04%	22.1°C	2017/11/14

Table 6: System Check Results

### 4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW (below 3GHz) or 100mW (3-6GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot). System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

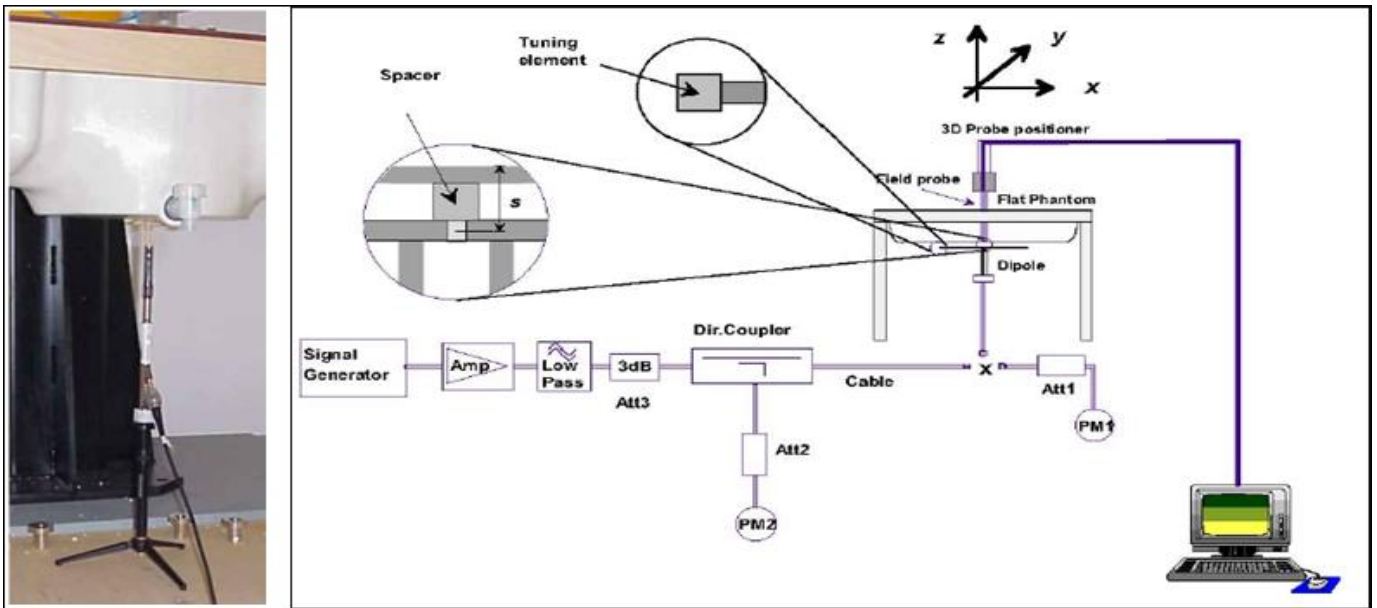

## 5 SAR measurement variability and uncertainty

### 5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

### 5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



## 6 SAR Test Configuration

### 6.1 Test Positions Configuration

#### 6.1.1 General considerations

Per IEEE 1528-2013, two imaginary lines on the handset were established: the vertical centerline and the horizontal line (See Figure 1).

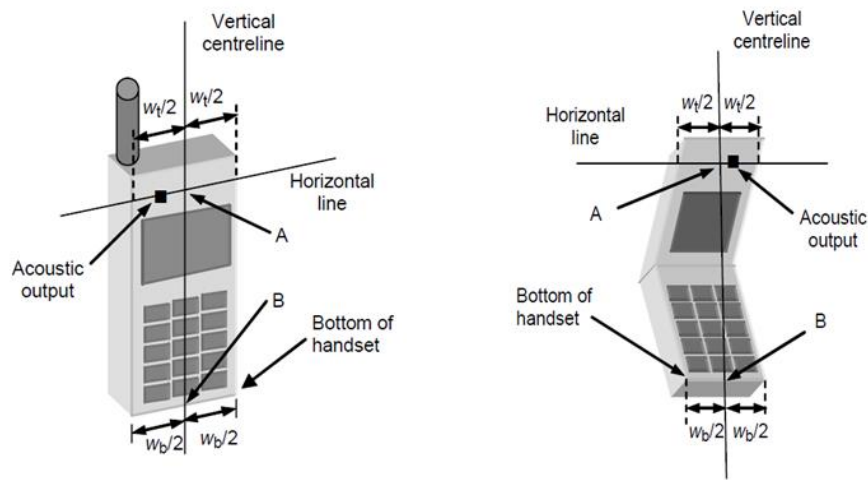


Figure 1 Hand Vertical Center & Horizontal Line Reference Points

#### 6.1.2 Head Exposure Condition

Per IEEE 1528-2013, Head SAR measurements were made in the “cheek” position (See Figure 2) and the “tilt” position (See Figure 3). The device should be tested in both positions on left and right sides of the SAM phantom.

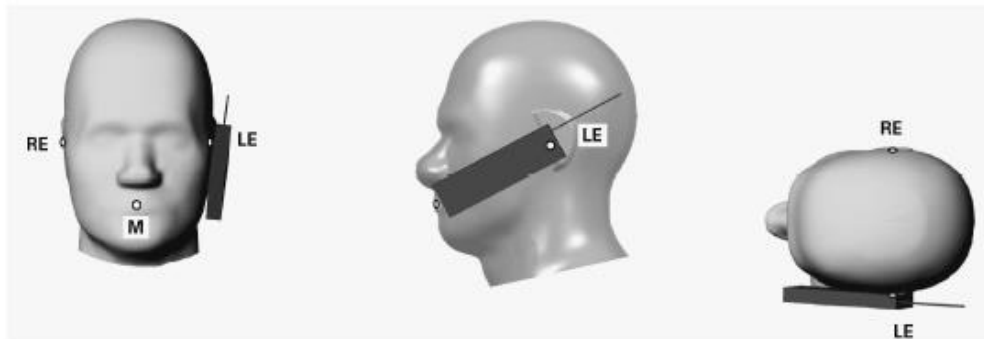


Figure 2 Front, Side and Top View of Cheek Position

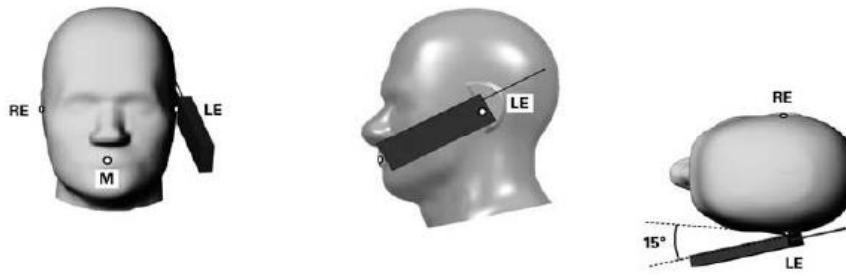


Figure 3 Front, Side and Top View of Tilt 15° Position

Note:

M Mouth reference point

LE Left ear reference point (ERP)

RE Right ear reference point(ERP)

### 6.1.3 Body-worn Exposure Condition

Body-worn operating configurations are tested with the holder attached to the device and positioned against a flat phantom with test separation distance of 15mm in a normal use configuration (See Figure 4). Per FCC KDB648474 D04v01, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

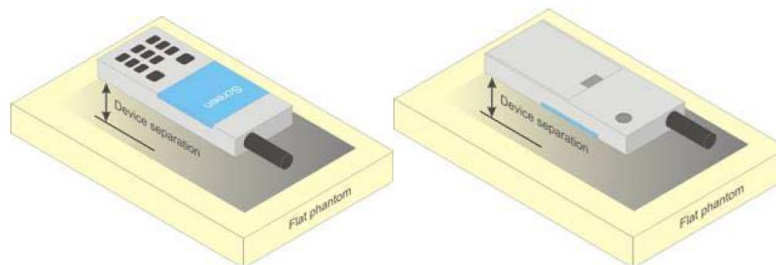


Figure 4 Test position for Body-Worn device

### 6.1.4 Hotspot Exposure Condition

Per FCC KDB 941225D06, The SAR test separation distance for hotspot mode is determined according to device form factor. When the overall length and width of a device is  $> 9 \text{ cm} \times 5 \text{ cm}$ , a test separation distance of 10 mm is required for hotspot mode SAR measurements. A test separation distance of 5 mm or less is required for smaller devices. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode. The SAR results are used to determine simultaneous transmission SAR test exclusion for hotspot mode; otherwise, simultaneous transmission SAR measurement is required.

### 6.1.5 Product specific 10-g Exposure Condition

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as “Phablet”.

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for product specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

### 6.1.6 Capacitive proximity sensor power reduction test configurations

This device uses a proximity sensor that shares the same metallic electrode as the main transmitting antenna to facilitate triggering in typical user interactivity with the device.

Due to the operating configurations and exposure conditions required by the device, the proximity sensor is used to indicate when the device is held close to a user’s body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes of main antenna to ensure SAR compliance.

The following tables summarize the key power reduction information for proximity sensor. The test procedures in KDB 616217 should be applied to determine proximity sensor triggering distances, and sensor coverage for normal and tilt positions. To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

Band	Power Reduction Level Amount (dB)			
	Main Antenna			
	Full power (Other conditions)	Hotspot on	Receiver off + proximity sensor on	Receiver off+ hotspot on+ proximity sensor on
GSM 1900	0	0	2.0	2.0
UMTS Band II	0	3.0	2.0	5.0
UMTS Band IV	0	3.0	2.0	6.0
LTE Band II	0	4.3	2.0	6.2
LTE Band IV	0	4.0	2.0	5.5
LTE Band V	0	0	2.0	2.0
LTE Band VII	0	5.0	2.0	7.0

Band	Sensor Trigger Distance
GSM1900	Front side:12mm Back side: 14mm Bottom side: 13mm
UMTS Band II	Front side:12mm Back side: 14mm Bottom side: 13mm
UMTS Band IV	Front side:12mm Back side: 14mm Bottom side: 13mm
LTE Band II	Front side:12mm Back side: 14mm Bottom side: 13mm
LTE Band IV	Front side:12mm Back side: 14mm Bottom side: 13mm
LTE Band V	Front side:12mm Back side: 14mm Bottom side: 13mm
LTE Band VII	Front side:12mm Back side: 14mm Bottom side: 13mm


Note:

- 1) Since the capacitive proximity sensor triggering distance for the front side is 12mm, a conservative distance of 11mm was required for additional SAR test at maximum power level with sensor off.
- 2) Since the capacitive proximity sensor triggering distance for the back side is 14mm, a conservative distance of 13mm was required for additional SAR test at maximum power level with sensor off.
- 3) Since the capacitive proximity sensor triggering distance for the bottom side is 13mm, a conservative distance of 12mm was required for additional SAR test at maximum power level with sensor off.
- 4) SAR tests with proximity sensor power reduction are only required for the sides of frequency bands in the table above. For the other sides or other frequency bands of the device, SAR is still tested at the maximum power level with sensor off.

### 1) Procedures for determining proximity sensor triggering distances

The device was tested by the test lab to determine the proximity sensor triggering distances for the front side, back side and bottom side of the device. To ensure all production units are compliant, the smallest separation distance determined by the sensor triggering minus 1 mm, must be used as the test separation distance for SAR testing.

the proximity sensor triggering distance measurement method are as below:

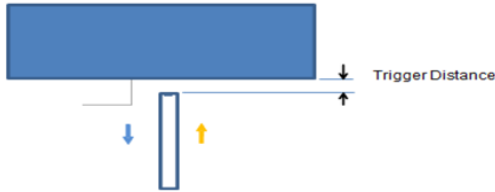

Picture: Proximity sensor triggering distances assessment Bottom Side



Picture: Proximity sensor triggering distances assessment Front Side and Back side


**Table: Summary of Trigger Distances**

Band(MHz)	Trigger distance-Front Side		Trigger distance-Back Side		Trigger distance-Bottom Side	
	Moving toward phantom	Moving away from phantom	Moving toward phantom	Moving away from phantom	Moving toward phantom	Moving away from phantom
GSM1900	12mm	14mm	14mm	16mm	13mm	15mm
UMTS Band II	12mm	14mm	14mm	16mm	13mm	15mm
UMTS Band IV	12mm	14mm	14mm	16mm	13mm	15mm
LTE Band II	12mm	14mm	14mm	16mm	13mm	15mm
LTE Band IV	12mm	14mm	14mm	16mm	13mm	15mm
LTE Band V	12mm	14mm	14mm	16mm	13mm	15mm
LTE Band VII	12mm	14mm	14mm	16mm	13mm	15mm

The detailed conducted power measurement data to determine the triggering distances is as below:


The DUT(Front side) is moved towards the flat phantom(hotspot off):

**Distance VS Output Power Plot(Front)**

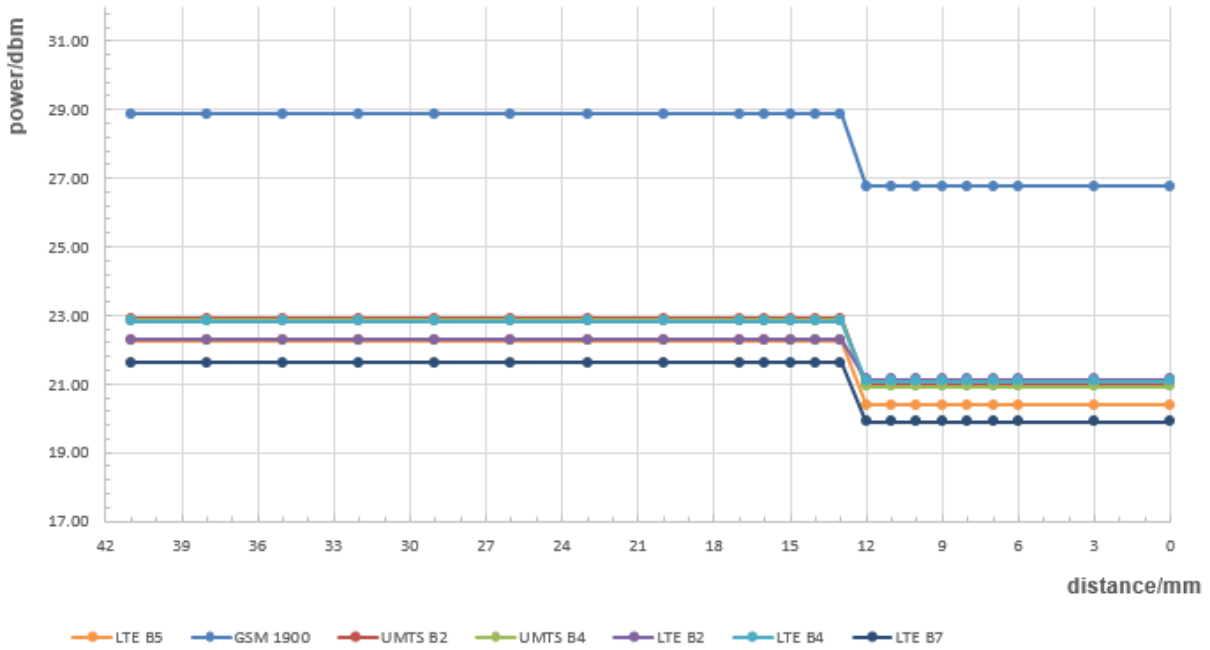


The DUT(back side) is moved towards the flat phantom(hotspot off):


**Distance VS Output Power Plot(Back)**

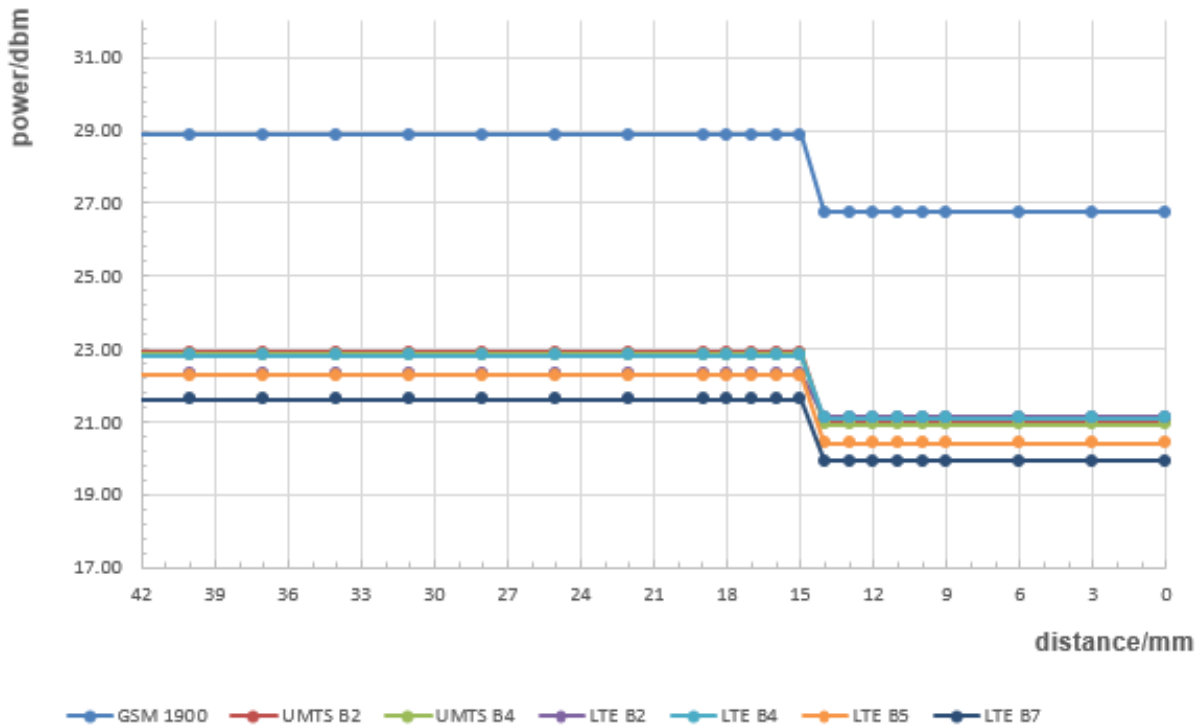

The DUT(bottom side) is moved towards the flat phantom(hotspot off):

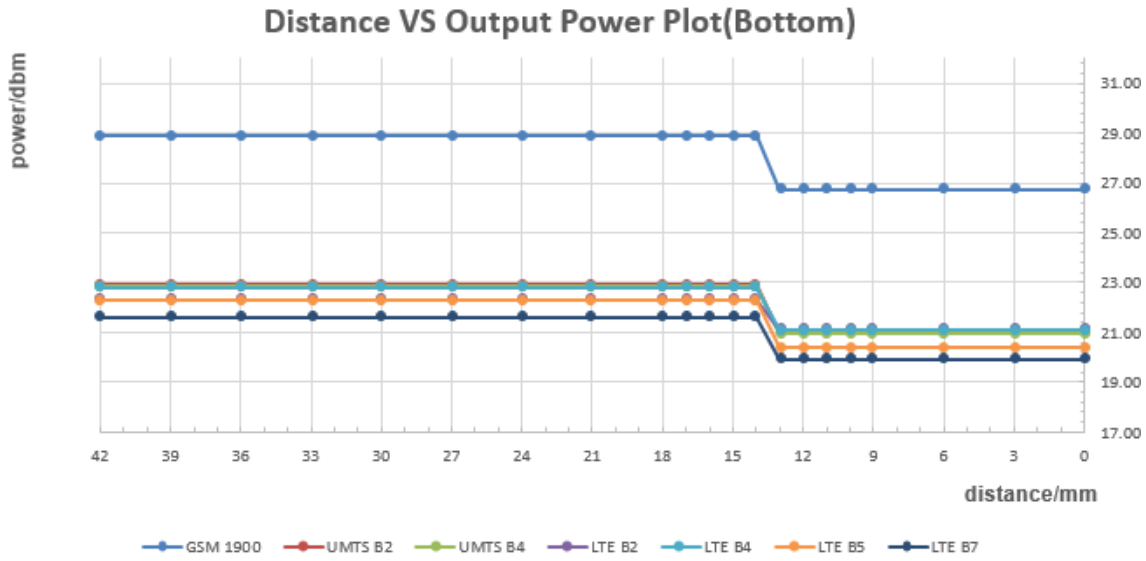


The DUT(Front side) is moved away from the flat phantom(hotspot off):

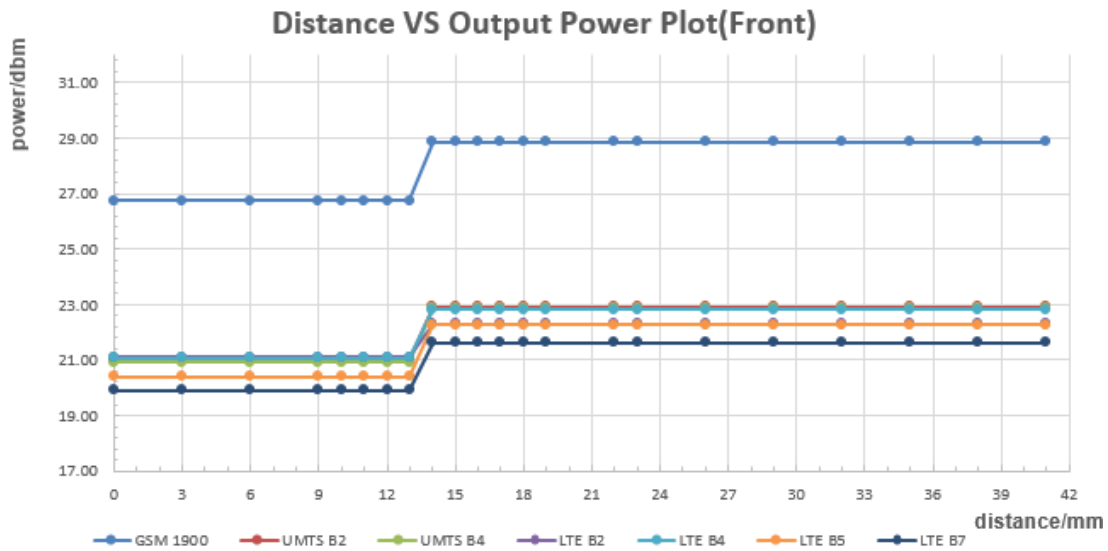


The DUT(back side) is moved away from the flat phantom(hotspot off):

**Distance VS Output Power Plot(Back)**

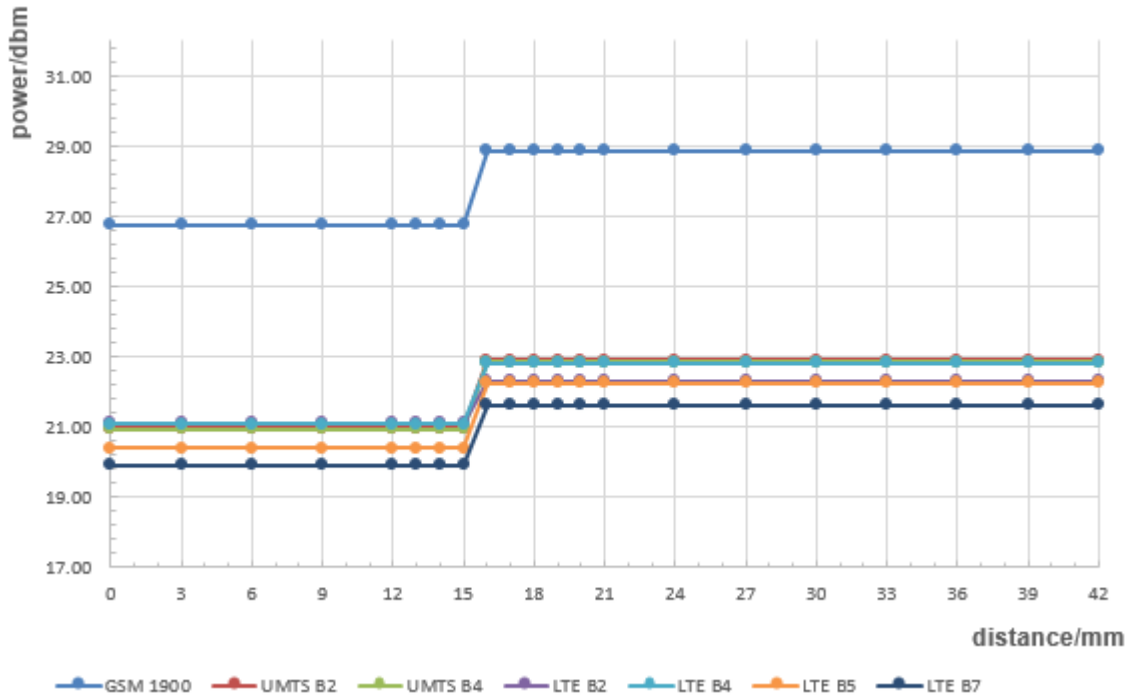

The DUT(bottom side) is moved away from the flat phantom(hotspot off):


**Distance VS Output Power Plot(Bottom)**

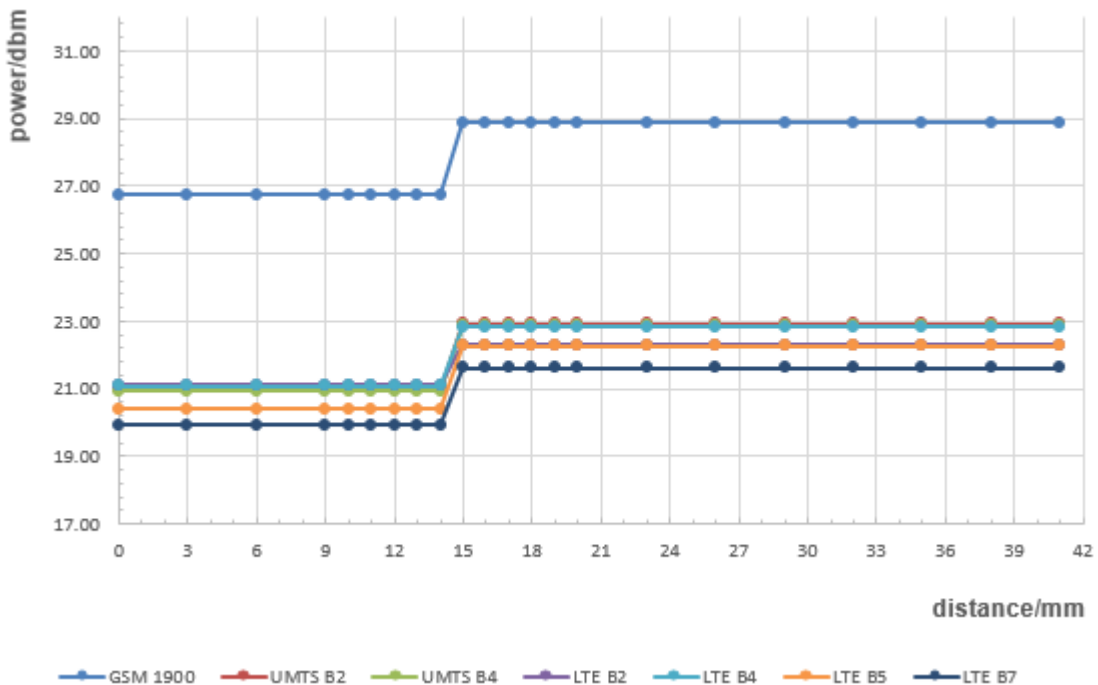




The DUT(Front side) is moved towards the flat phantom(hotspot on):

**Distance VS Output Power Plot(Front)**

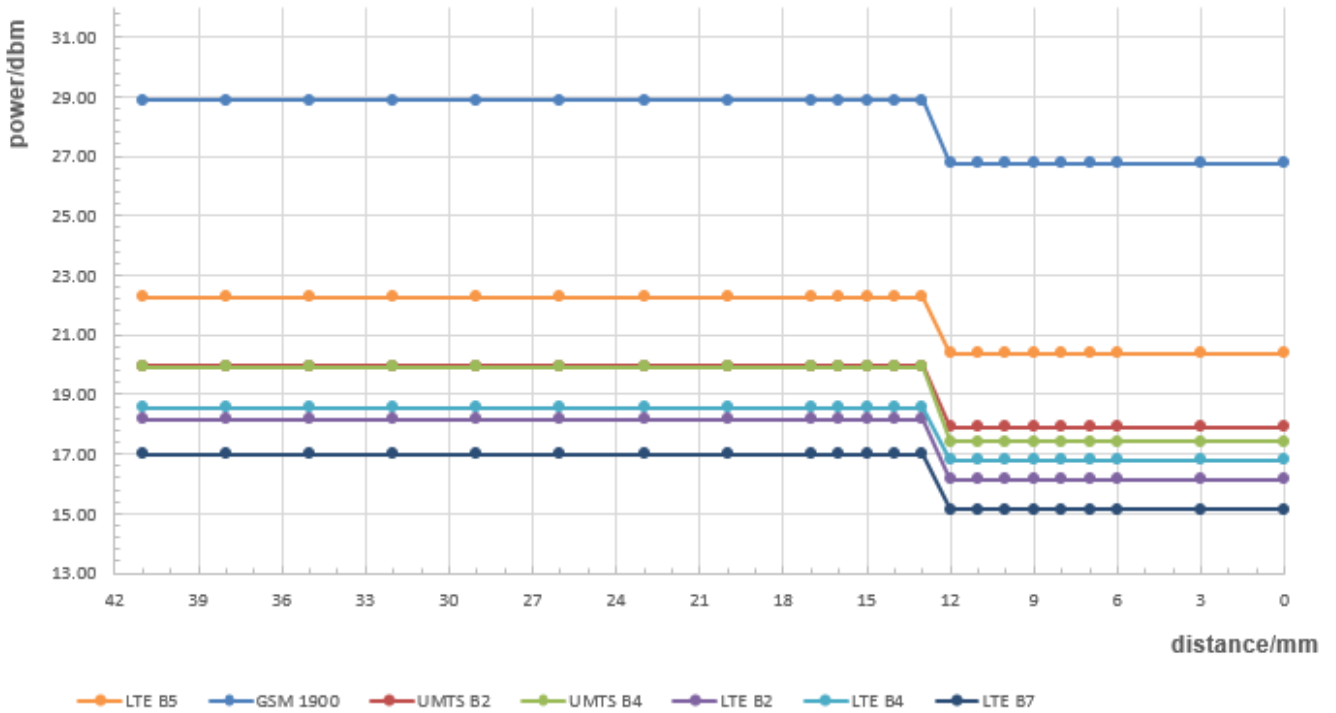


The DUT(back side) is moved towards the flat phantom(hotspot on):


**Distance VS Output Power Plot(Back)**

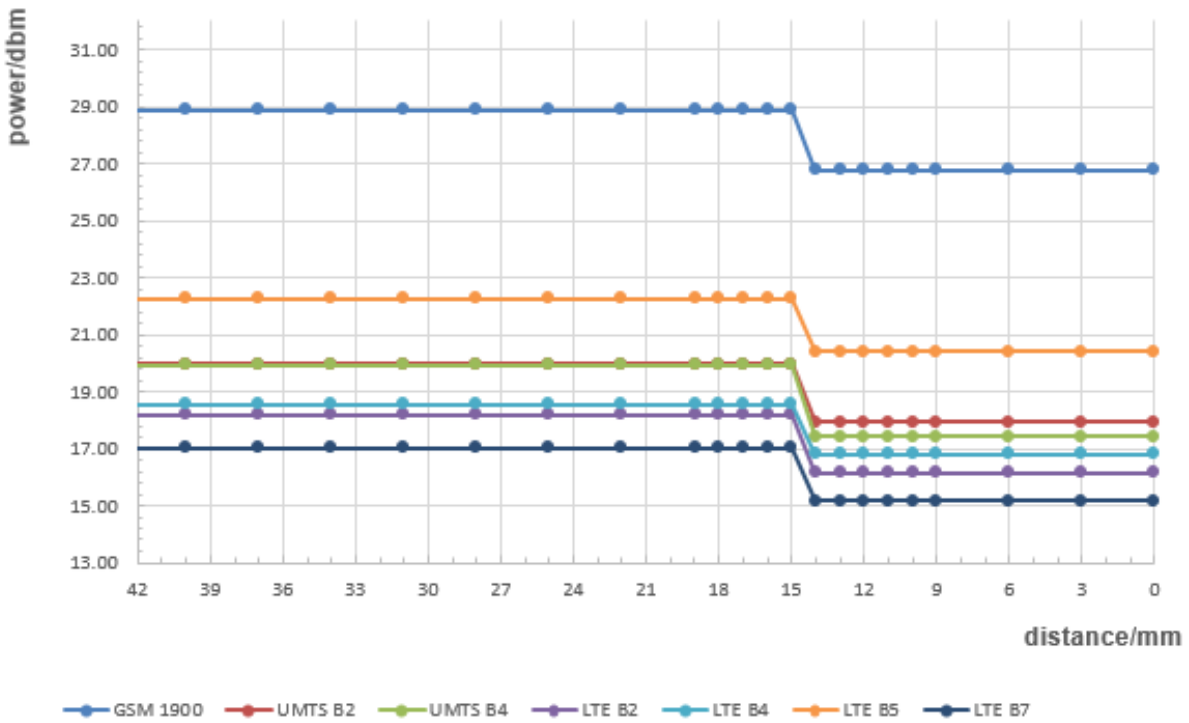


The DUT(bottom side) is moved towards the flat phantom(hotspot on):

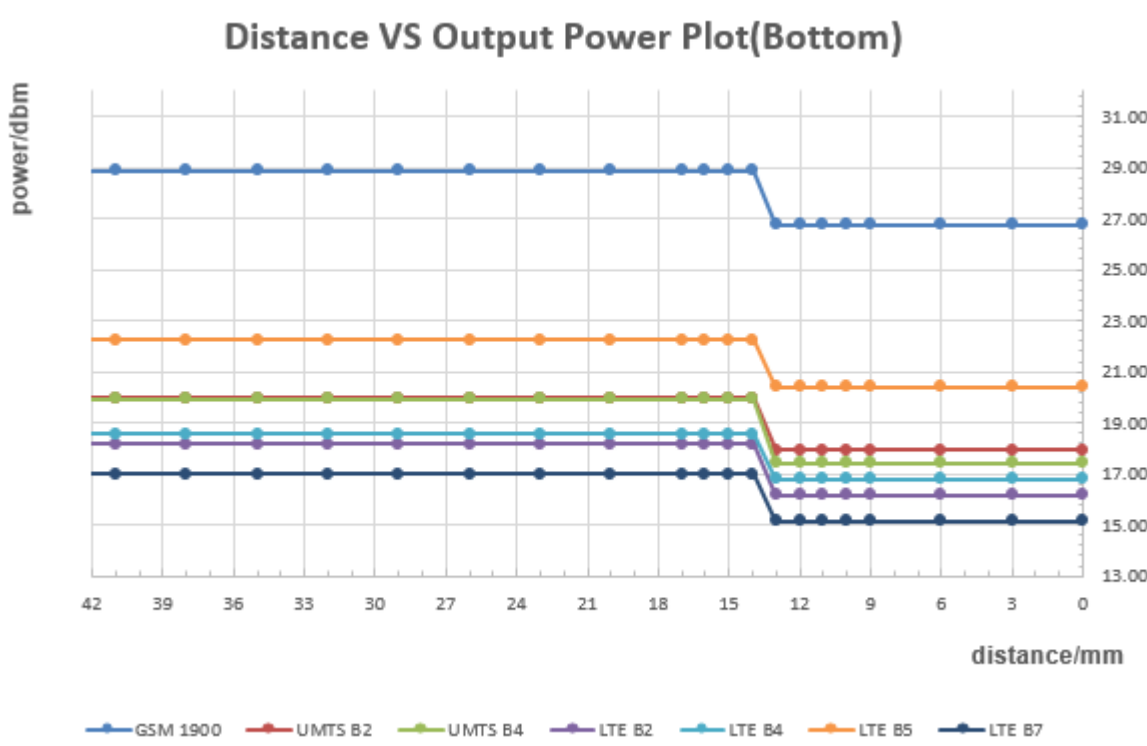


The DUT(Front side) is moved away from the flat phantom(hotspot on):

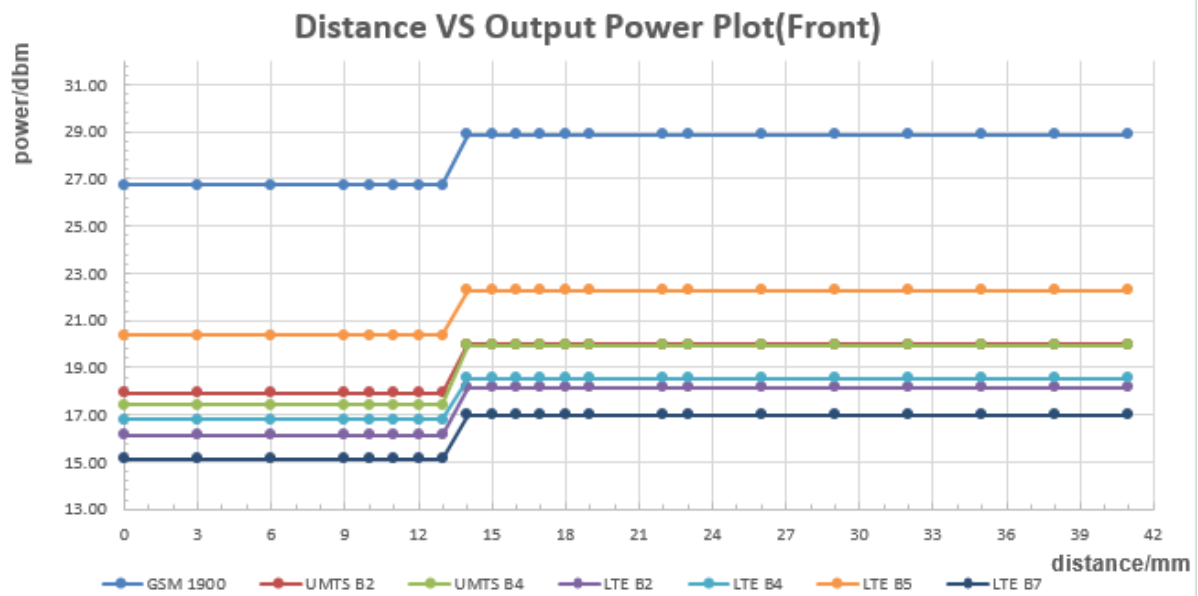

The DUT(back side) is moved away from the flat phantom(hotspot on):

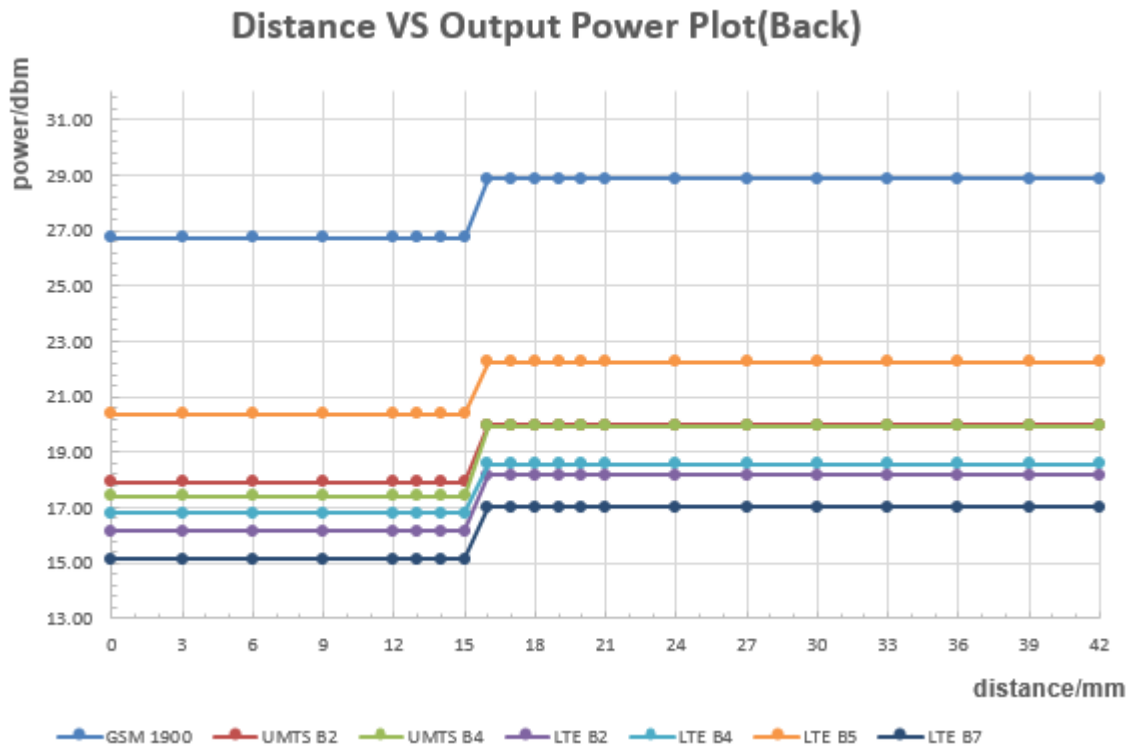

The DUT(bottom side) is moved away from the flat phantom(hotspot on):

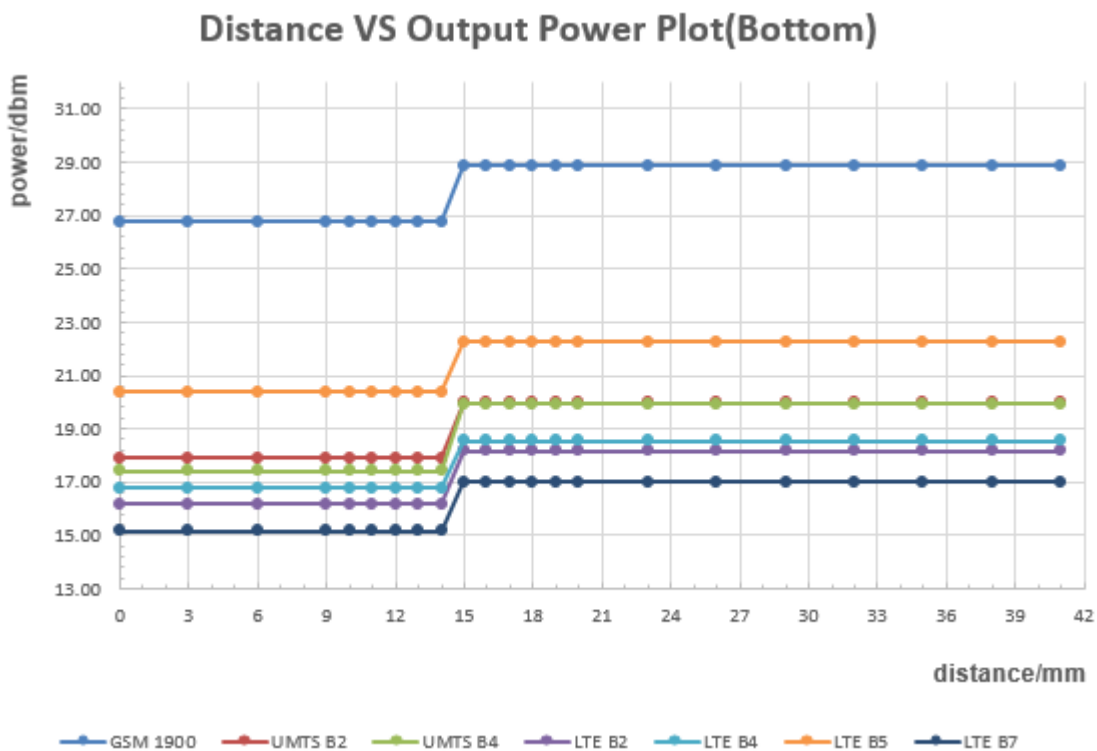

**Conclusion:** It can be ensured that the proximity sensor can be valid triggered.

**2) Procedures for determining antenna and proximity sensor coverage**


There is no spatial offset between the Main antenna and the proximity sensor element, so procedures for determining the proximity sensor coverage does not need to be assessed per KDB616217.

**3) Procedures for determining device tilt angle influences to proximity sensor triggering**

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Bottom side parallel to the base of the flat phantom for each band.

The EUT was rotated about Bottom side for angles up to +/- 45°. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to +/- 45°.

The proximity sensor triggering tilt angle measurement method are as below:

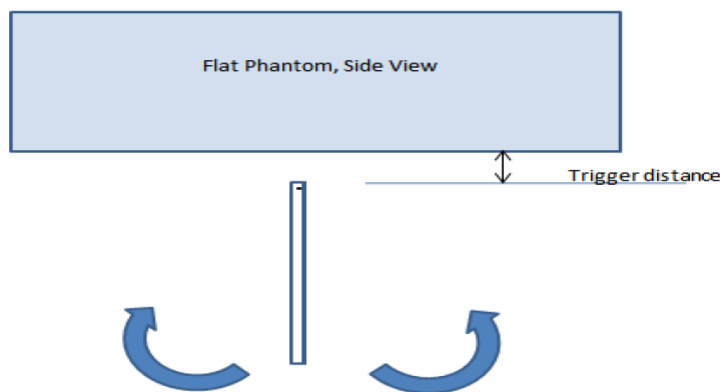

**Table: Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering(Bottom side)**

Band(MHz)	Minimum trigger distance at which power reduction was maintained over ±45°	Power Reduction Status											
		-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°	
GSM1900	13mm	on	on	on	on	on	on	on	on	on	on	on	on
UMTS Band II	13mm	on	on	on	on	on	on	on	on	on	on	on	on
UMTS Band IV	13mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band II	13mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band IV	13mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band V	13mm	on	on	on	on	on	on	on	on	on	on	on	on
LTE Band VII	13mm	on	on	on	on	on	on	on	on	on	on	on	on

**Conclusion:** It can be ensured that the proximity sensor can be valid triggered for the DUT tilt coverage exposure condition (GSM1900,UMTS Band II/IV,LTE Band II//IV/V/VII of Main Antenna)

### 6.1.7 Infrared proximity sensor power reduction test Configuration

The device uses an infrared proximity sensor to reduce the output power of WiFi antenna when WiFi and 2G&3G&4G antenna voice mode transmit simultaneously in held-to-ear scenario or body front side scenario.

A specific external test software and chipset based internal test modes are used in sensor triggering power measurement validation tests. It can be ensured that the unmodified settings in production units, including maximum output power, amplifier gain and other RF performance or tuning parameters, are used for SAR measurement.

In this section, the following procedure is used to determine the triggering distances, coverage and tilt angle influences per FCC KDB 616217 D04 §6.

#### 1) Procedures for determining proximity sensor triggering distances

The procedure per FCC KDB 616217 D04 §6.2 is used to determine the triggering distances. As the proximity sensor locates on the front face of the device and detects objects approaching only from the front side, so triggering distance only need to be checked for the front side when device is under voice mode(WiFi and 2G&3G&4G antenna voice mode transmit simultaneously in held-to-ear scenario or body front side scenario).

FCC KDB 616217 D04v01§6.2, the proximity sensor triggering distance measurement results are as below:



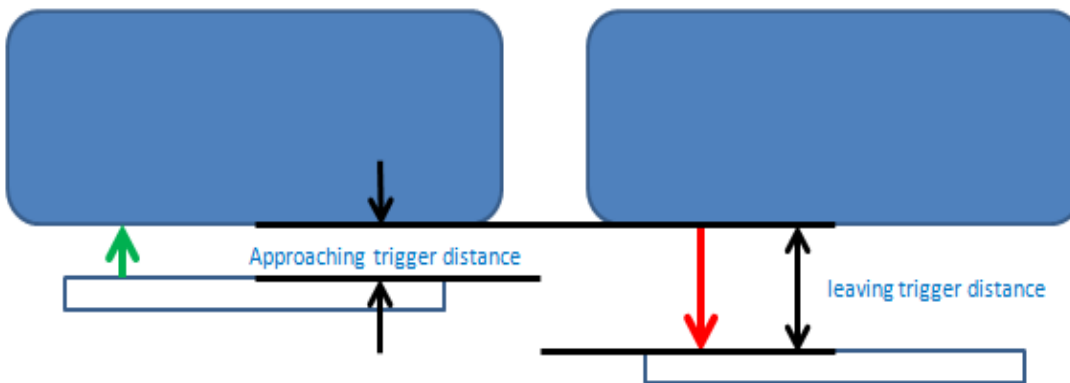


Figure : Proximity sensor triggering distances assessment (Front side only)

The DUT is moved towards from the flat phantom (WiFi + 2G&3G&4G antenna voice mode simultaneous transmission ):

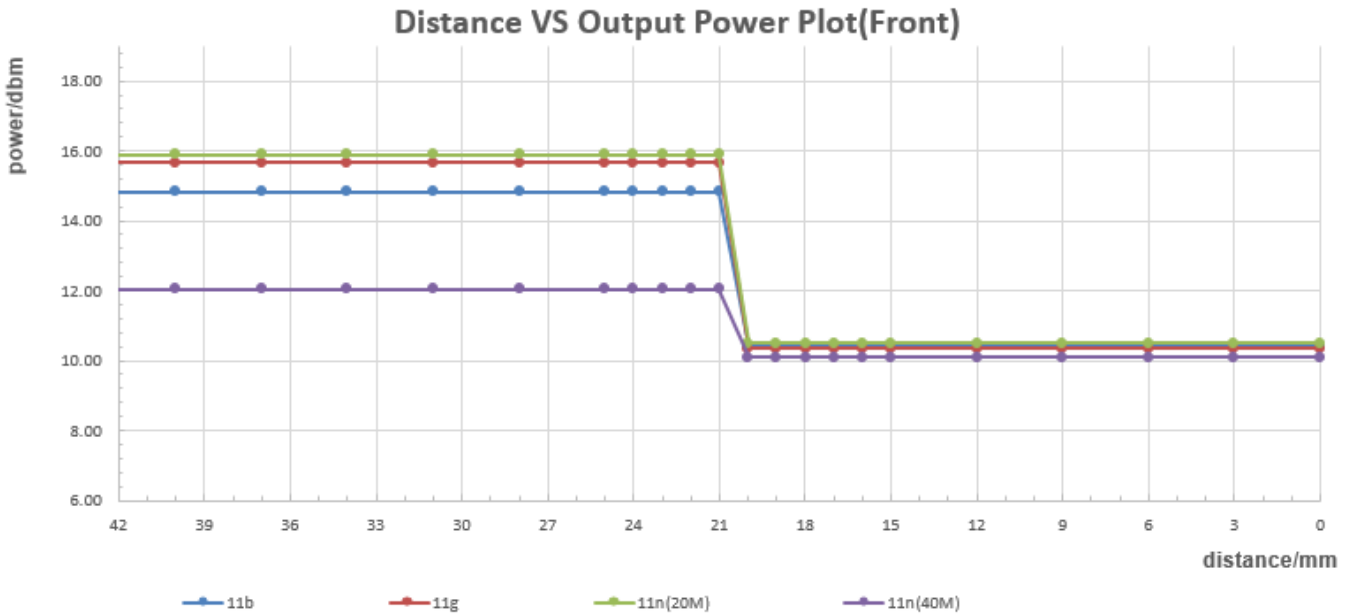

The DUT is moved away from the flat phantom(WiFi + 2G&3G&4G antenna voice mode simultaneous transmission):

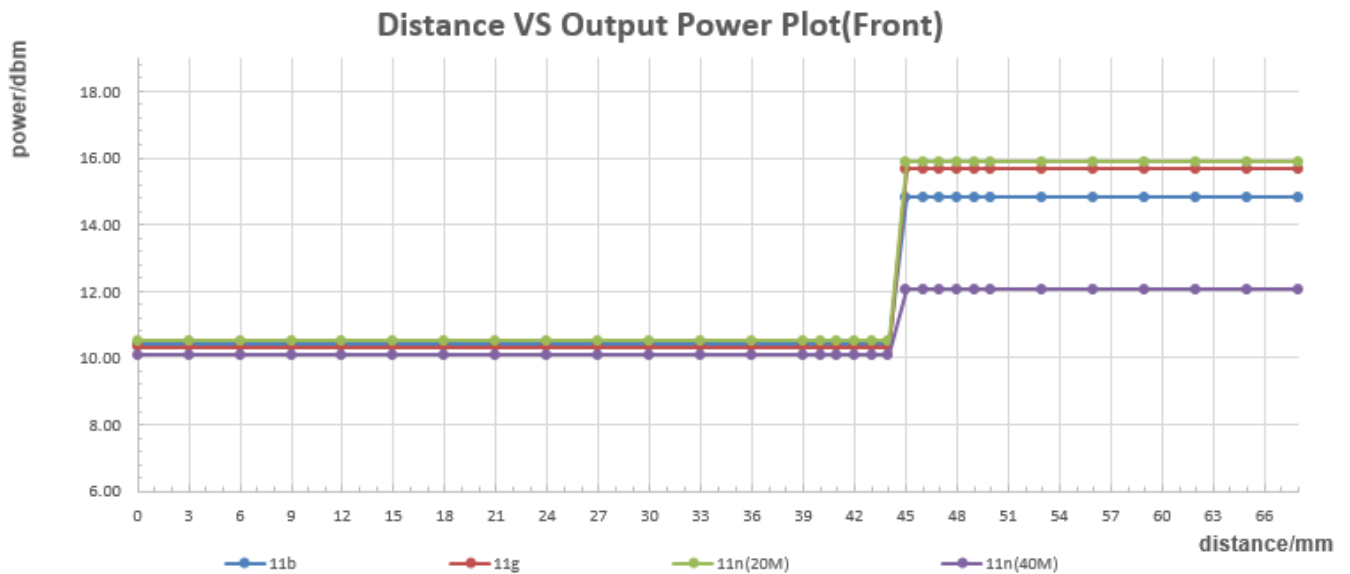

## 2) Procedures for determining antenna and proximity sensor coverage

The IR proximity sensor triggering power reduction is only applicable for the front side, not including the edges. For front side view, there is no spatial offset between the WiFi antenna and the proximity sensor element. The scene does not exist when the antenna is next to the user but the sensor is laterally further away, so procedures for determining the proximity sensor coverage per FCC KDB 616217§6.3 does not need to be assessed.

### 3) Procedures for determining device tilt angle influences to proximity sensor triggering

The following procedure is used to determine the triggering angle. Distance need to be check when device under voice mode so that sensor is working.

For Head exposure condition, device tilt angle influences to proximity sensor triggering is determined as below:

Firstly, the DUT was positioned directly touch the Head SAM phantom (Left&Right hand touch cheek position). Rotate the DUT around the ear reference point of the phantom in 5° increments until the DUT is 15° tilted or more away from the touch cheek position at 0° .

Secondly, the DUT is positioned at 15° or more away from the touch cheek position and moved towards the SAM phantom in 5°increments until the DUT directly touch the SAM phantom at 0°(Left & Right hand touch cheek position).

The DUT is moved towards and away from SAM phantom:

Angle between phantom to DUT in degree	0°	5°	10°	15°	20°	25°	30°
Condition of Sensor power reduction (Wi-Fi + 2G&3G&4G antenna voice)	on	on	on	on	on	on	on

**Conclusion:** Based on the validation results above, angle tilt coverage can ensure that the proximity sensor is valid triggered for all required Head test positions(Left/Right Hand Touched cheek and Left/Right Hand tiled 15 °).

### 4) Summary SAR test Plan for Infrared Proximity sensor power reduction scenarios

a) For Head SAR compliance: The device not supports VoWIFI function. Head SAR for Wi-Fi antenna is evaluated at reduced power levels according to the real usage scenarios.

b) For other scenarios: Standalone SAR compliance for Wi-Fi antenna is still tested at the maximum output power level without any power reduction. The more conservative SAR results are used to ensure Body SAR compliance for both standalone and simultaneous transmission scenarios. So additional SAR test at the sensor triggering distance minus 1mm with the maximum output power level per KDB 616217D04 is not required.

## 6.2 3G SAR Test Reduction Procedure

Per KDB941225 D01v03, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

## 6.3 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.



## 6.4 UMTS Test Configuration

### 1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

### 2) WCDMA

#### a. Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

#### b. Body SAR Measurements-

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode

### 3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The  $\beta_c$  and  $\beta_d$  gain factors for DPCCH and DPDCH were set according to the values in the below table,  $\beta_{hs}$  for HS-DPCCH is set automatically to the correct value when  $\Delta ACK, \Delta NACK, \Delta CQI = 8$ . The variation of the  $\beta_c / \beta_d$  ratio causes a power reduction at sub-tests 2 - 4.

Sub-test <sup>↗</sup>	$\beta_c$ <sup>↗</sup>	$\beta_d$ <sup>↗</sup>	$\beta_d$ (SF) <sup>↗</sup>	$\beta_c/\beta_d$ <sup>↗</sup>	$\beta_{hs}(1)$ <sup>↗</sup>	CM(dB)(2) <sup>↗</sup>	MPR (dB) <sup>↗</sup>
1 <sup>↗</sup>	2/15 <sup>↗</sup>	15/15 <sup>↗</sup>	64 <sup>↗</sup>	2/15 <sup>↗</sup>	4/15 <sup>↗</sup>	0.0 <sup>↗</sup>	0 <sup>↗</sup>
2 <sup>↗</sup>	12/15(3) <sup>↗</sup>	15/15(3) <sup>↗</sup>	64 <sup>↗</sup>	12/15(3) <sup>↗</sup>	24/15 <sup>↗</sup>	1.0 <sup>↗</sup>	0 <sup>↗</sup>
3 <sup>↗</sup>	15/15 <sup>↗</sup>	8/15 <sup>↗</sup>	64 <sup>↗</sup>	15/8 <sup>↗</sup>	30/15 <sup>↗</sup>	1.5 <sup>↗</sup>	0.5 <sup>↗</sup>
4 <sup>↗</sup>	15/15 <sup>↗</sup>	4/15 <sup>↗</sup>	64 <sup>↗</sup>	15/4 <sup>↗</sup>	30/15 <sup>↗</sup>	1.5 <sup>↗</sup>	0.5 <sup>↗</sup>

Note 1:  $\Delta ACK$ ,  $\Delta NACK$  and  $\Delta CQI = 8$      $A_{hs} = \beta_{hs}/\beta_c = 30/15$      $\beta_{hs} = 30/15 * \beta_c$ <sup>↗</sup>  
Note 2 : CM=1 for  $\beta_c/\beta_d= 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH,DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.<sup>↗</sup>  
Note 3 : For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ <sup>↗</sup>

Table 7: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 8:settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 9:HSDPA UE category

#### 4) HSUPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the ‘WCDMA Handset’ and ‘Release 5 HSDPA Data Device’ sections of 3G device.

Sub-test <sup>⌘</sup>	$\beta_{c^{\lrcorner}}$	$\beta_{d^{\lrcorner}}$	$\beta_d$ (SF) <sup>⌘</sup>	$\beta_c/\beta_{d^{\lrcorner}}$	$\beta_{hs}^{(1)}$ <sup>⌘</sup>	$\beta_{ec^{\lrcorner}}$	$\beta_{ed^{\lrcorner}}$	$\beta_{c^{\lrcorner}}$ (SF) <sup>⌘</sup>	$\beta_{ed^{\lrcorner}}$ (code) <sup>⌘</sup>	CM(2) <sup>⌘</sup> (dB) <sup>⌘</sup>	MP R <sup>⌘</sup> (dB) <sup>⌘</sup>	AG <sup>(4)</sup> <sub>x</sub> <sup>⌘</sup>	E-TFC I <sup>⌘</sup>
1 <sup>⌘</sup>	11/15 <sup>(3)⌘</sup>	15/15 <sup>(3)⌘</sup>	64 <sup>⌘</sup>	11/15 <sup>(3)⌘</sup>	22/15 <sup>⌘</sup>	209/225 <sup>⌘</sup>	1039/225 <sup>⌘</sup>	4 <sup>⌘</sup>	1 <sup>⌘</sup>	1.0 <sup>⌘</sup>	0.0 <sup>⌘</sup>	20 <sup>⌘</sup>	75 <sup>⌘</sup>
2 <sup>⌘</sup>	6/15 <sup>⌘</sup>	15/15 <sup>⌘</sup>	64 <sup>⌘</sup>	6/15 <sup>⌘</sup>	12/15 <sup>⌘</sup>	12/15 <sup>⌘</sup>	94/75 <sup>⌘</sup>	4 <sup>⌘</sup>	1 <sup>⌘</sup>	3.0 <sup>⌘</sup>	2.0 <sup>⌘</sup>	12 <sup>⌘</sup>	67 <sup>⌘</sup>
3 <sup>⌘</sup>	15/15 <sup>⌘</sup>	9/15 <sup>⌘</sup>	64 <sup>⌘</sup>	15/9 <sup>⌘</sup>	30/15 <sup>⌘</sup>	30/15 <sup>⌘</sup>	$\beta_{ed1}:47/15^{\lrcorner}$ $\beta_{ed2}:47/15^{\lrcorner}$	4 <sup>⌘</sup>	2 <sup>⌘</sup>	2.0 <sup>⌘</sup>	1.0 <sup>⌘</sup>	15 <sup>⌘</sup>	92 <sup>⌘</sup>
4 <sup>⌘</sup>	2/15 <sup>⌘</sup>	15/15 <sup>⌘</sup>	64 <sup>⌘</sup>	2/15 <sup>⌘</sup>	4/15 <sup>⌘</sup>	2/15 <sup>⌘</sup>	56/75 <sup>⌘</sup>	4 <sup>⌘</sup>	1 <sup>⌘</sup>	3.0 <sup>⌘</sup>	2.0 <sup>⌘</sup>	17 <sup>⌘</sup>	71 <sup>⌘</sup>
5 <sup>⌘</sup>	15/15 <sup>(4)⌘</sup>	15/15 <sup>(4)⌘</sup>	64 <sup>⌘</sup>	15/15 <sup>(4)⌘</sup>	30/15 <sup>⌘</sup>	24/15 <sup>⌘</sup>	134/15 <sup>⌘</sup>	4 <sup>⌘</sup>	1 <sup>⌘</sup>	1.0 <sup>⌘</sup>	0.0 <sup>⌘</sup>	21 <sup>⌘</sup>	81 <sup>⌘</sup>
Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_{c^{\lrcorner}}$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference <sup>⌘</sup> Note 3 : For subtest 1 the $\beta_c/\beta_d$ ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15^{\lrcorner}$ Note 4 : For subtest 5 the $\beta_c/\beta_d$ ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15^{\lrcorner}$ Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g <sup>⌘</sup> Note 6: $\beta_{ed}$ can not be set directly; it is set by Absolute Grant Value. <sup>⌘</sup>													

Table 10:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

Table 11: HSUPA UE category

#### 5) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 12: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

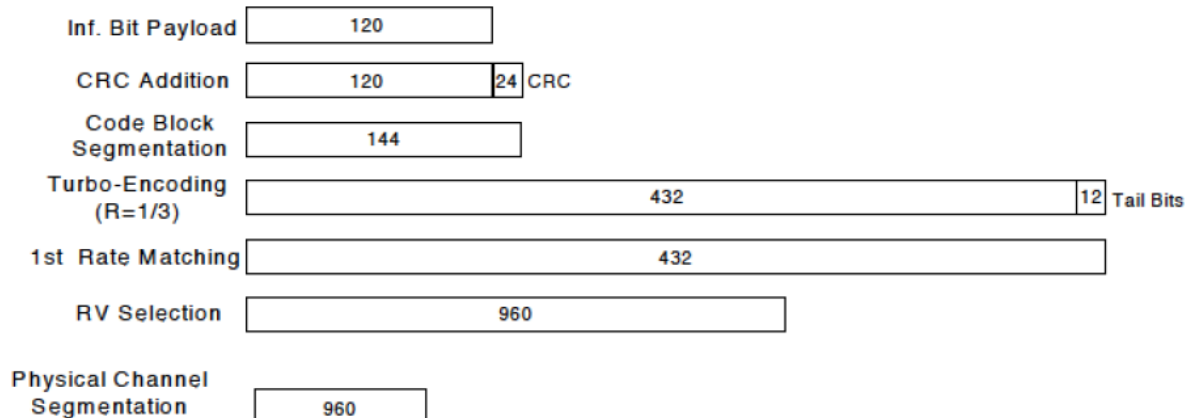


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test <sup>o</sup>	$\beta_c$ <sup>o</sup>	$\beta_d$ <sup>o</sup>	$\beta_d$ (SF) <sup>o</sup>	$\beta_c/\beta_d$ <sup>o</sup>	$\beta_{hs}(1)$ <sup>o</sup>	CM(dB)(2) <sup>o</sup>	MPR(dB) <sup>o</sup>
1 <sup>o</sup>	2/15 <sup>o</sup>	15/15 <sup>o</sup>	64 <sup>o</sup>	2/15 <sup>o</sup>	4/15 <sup>o</sup>	0.0 <sup>o</sup>	0 <sup>o</sup>
2 <sup>o</sup>	12/15(3) <sup>o</sup>	15/15(3) <sup>o</sup>	64 <sup>o</sup>	12/15(3) <sup>o</sup>	24/15 <sup>o</sup>	1.0 <sup>o</sup>	0 <sup>o</sup>
3 <sup>o</sup>	15/15 <sup>o</sup>	8/15 <sup>o</sup>	64 <sup>o</sup>	15/8 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>
4 <sup>o</sup>	15/15 <sup>o</sup>	4/15 <sup>o</sup>	64 <sup>o</sup>	15/4 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>

Note 1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI=8       $A_{hs} = \beta_{hs}/\beta_c = 30/15$        $\beta_{hs} = 30/15 * \beta_c$ <sup>o</sup>

Note 2: CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.<sup>o</sup>

Note 3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ <sup>o</sup>

Up commands are set continuously to set the UE to Max power.

Note:

1. The Dual Carriers transmission only applies to HSDPA physical channels
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
4. The Dual Carriers operate in the same frequency band .
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn't support carrier aggregation for it just can operate in Release 8.

## 6.5 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames (Maximum TTI)

### 1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

### 3) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS\_01" on the base station simulator.

### 4) LTE procedures for SAR testing

#### A) Largest channel bandwidth standalone SAR test requirements

##### i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.



## 6.6 WiFi Test Configuration

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The test procedures in KDB 248227D01 are applied.

### 6.6.1 Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4\text{W/kg}$ , no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8\text{W/kg}$  or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is  $> 0.8\text{ W/kg}$ , SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is  $\leq 1.2\text{ W/kg}$  or all required channels are tested.

### 6.6.2 Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01v02). SAR test reduction of subsequent highest output test channels is based on the *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is  $> 0.8\text{ W/kg}$ , SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the *reported* SAR is  $\leq 1.2\text{ W/kg}$  or all required channels are tested.

### 6.6.3 Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2\text{ W/kg}$ , SAR is not required for that subsequent test configuration.

#### 6.6.4 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

##### A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

1) When the *reported* SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227D01v02) for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

2) When the *reported* SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any *reported* SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

##### B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227D01v02). SAR is not required for the following 2.4 GHz OFDM conditions.

1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.

2) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

#### 6.7 BT Test Configuration

For BT SAR testing, the is set to the DUT continuous transmitting with maximum output power using the Wireless Connectivity Test Set N4010A. Per October 2016 TCB Worksop Notes, the BT SAR was scaled to the 100% transmission duty cycle to determine compliance. Refer to section 7.1 for the time-domain plot and calculation for the duty cylce of the device.

## 7 SAR Measurement Results

### 7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200&CMW500 was used. SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

<b>No. of timeslots</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

<b>mode</b>	<b>coding scheme</b>	<b>modulation</b>
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

### 7.1.1 Conducted power measurements of GSM850 (Second Antenna)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
GSM (CS)		33.50	32.45	32.40	32.34	-9.19	24.31	23.26	23.21	23.15
GPRS /EDGE (GMSK)	1 Tx Slot	33.50	32.45	32.40	32.35	-9.19	24.31	23.26	23.21	23.16
	2 Tx Slots	<b>31.50</b>	<b>30.40</b>	<b>30.36</b>	<b>30.29</b>	<b>-6.13</b>	<b>25.37</b>	<b>24.27</b>	<b>24.23</b>	<b>24.16</b>
	3 Tx Slots	29.50	28.37	28.31	28.25	-4.42	25.08	23.95	23.89	23.83
	4 Tx Slots	27.50	26.29	26.26	26.17	-3.18	24.32	23.11	23.08	22.99
EDGE (8PSK)	1 Tx Slot	27.00	26.08	26.04	25.97	-9.19	17.81	16.89	16.85	16.78
	2 Tx Slots	25.00	23.68	23.75	23.70	-6.13	18.87	17.55	17.62	17.57
	3 Tx Slots	23.00	21.60	21.70	21.60	-4.42	18.58	17.18	17.28	17.18
	4 Tx Slots	21.00	19.57	19.62	19.67	-3.18	17.82	16.39	16.44	16.49

Table 13:Conducted power measurement results of GSM850 (Full power)

GSM850	Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
	Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
GSM (CS)	30.50	29.37	29.34	29.28	-9.19	21.31	20.18	20.15	20.09

Table 14:Conducted power measurement results of GSM850 (Receiver on, voice mode)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
GSM (CS)		28.50	27.36	27.33	27.26	-9.19	19.31	18.17	18.14	18.07
GPRS /EDGE (GMSK)	1 Tx Slot	28.50	27.32	27.31	27.22	-9.19	19.31	18.13	18.12	18.03
	2 Tx Slots	<b>26.50</b>	<b>25.34</b>	<b>25.30</b>	<b>25.23</b>	<b>-6.13</b>	<b>20.37</b>	<b>19.21</b>	<b>19.17</b>	<b>19.10</b>
	3 Tx Slots	24.50	23.28	23.25	23.18	-4.42	20.08	18.86	18.83	18.76
	4 Tx Slots	22.50	21.30	21.23	21.15	-3.18	19.32	18.12	18.05	17.97
EDGE (8PSK)	1 Tx Slot	24.50	24.02	24.01	24.02	-9.19	15.31	14.83	14.82	14.83
	2 Tx Slots	22.50	21.92	21.90	21.83	-6.13	16.37	15.79	15.77	15.70
	3 Tx Slots	20.50	19.91	19.87	19.81	-4.42	16.08	15.49	15.45	15.39
	4 Tx Slots	18.50	17.73	17.73	17.62	-3.18	15.32	14.55	14.55	14.44

Table 15:Conducted power measurement results of GSM850 (Second antenna+WiFi antenna Simultaneous Transmission)

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

### 7.1.2 Conducted power measurements of GSM1900 (Second Antenna)

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		30.00	28.74	28.44	28.37	-9.19	20.81	19.55	19.25	19.18
GPRS /EDGE (GMSK)	1 Tx Slot	30.00	28.68	28.43	28.38	-9.19	20.81	19.49	19.24	19.19
	2 Tx Slots	<b>28.00</b>	<b>26.49</b>	<b>26.30</b>	<b>26.35</b>	<b>-6.13</b>	<b>21.87</b>	<b>20.36</b>	<b>20.17</b>	<b>20.22</b>
	3 Tx Slots	26.00	24.46	24.29	24.28	-4.42	21.58	20.04	19.87	19.86
	4 Tx Slots	24.00	22.80	22.67	22.72	-3.18	20.82	19.62	19.49	19.54
EDGE (8PSK)	1 Tx Slot	25.50	23.93	23.79	23.89	-9.19	16.31	14.74	14.60	14.70
	2 Tx Slots	23.50	21.85	21.79	21.82	-6.13	17.37	15.72	15.66	15.69
	3 Tx Slots	21.00	19.35	19.16	19.74	-4.42	16.58	14.93	14.74	15.32
	4 Tx Slots	19.50	17.79	17.72	17.61	-3.18	16.32	14.61	14.54	14.43

Table 16:Conducted power measurement results of GSM1900 (Full power)

GSM1900	Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
	Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)	28.00	26.46	26.31	26.37	-9.19	18.81	17.27	17.12	17.18

Table 17: Conducted power measurement results of GSM1900 (Receiver on,voice mode)

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		25.00	23.42	23.31	23.32	-9.19	15.81	14.23	14.12	14.13
GPRS /EDGE (GMSK)	1 Tx Slot	25.00	23.46	23.32	23.33	-9.19	15.81	14.27	14.13	14.14
	2 Tx Slots	<b>23.00</b>	<b>21.41</b>	<b>21.31</b>	<b>21.35</b>	<b>-6.13</b>	<b>16.87</b>	<b>15.28</b>	<b>15.18</b>	<b>15.22</b>
	3 Tx Slots	21.00	19.52	19.40	19.54	-4.42	16.58	15.1	14.98	15.12
	4 Tx Slots	19.00	18.01	17.94	18.05	-3.18	15.82	14.83	14.76	14.87
EDGE (8PSK)	1 Tx Slot	25.00	23.76	23.51	23.71	-9.19	15.81	14.57	14.32	14.52
	2 Tx Slots	23.00	21.64	21.30	21.61	-6.13	16.87	15.51	15.17	15.48
	3 Tx Slots	20.50	19.39	19.18	19.71	-4.42	16.08	14.97	14.76	15.29
	4 Tx Slots	19.00	17.71	17.54	17.58	-3.18	15.82	14.53	14.36	14.40

Table 18:Conducted power measurement results of GSM1900 (Second antenna+WiFi antenna Simultaneous Transmission)

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

### 7.1.3 Conducted power measurements of UMTS Band II (Second Antenna)

UMTS1900 (Band II)		Tune-up	Average Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	<b>20.00</b>	<b>18.63</b>	<b>18.77</b>	<b>18.87</b>
	12.2kbps AMR	20.00	18.49	18.72	18.95
HSDPA	Subtest 1	19.00	17.56	17.70	17.83
	Subtest 2	19.00	17.33	17.48	17.64
	Subtest 3	18.50	17.87	16.91	17.03
	Subtest 4	18.50	17.95	16.90	17.02
HSUPA	Subtest 1	19.00	17.24	17.48	17.01
	Subtest 2	16.00	14.36	14.67	14.87
	Subtest 3	17.00	15.73	15.82	15.77
	Subtest 4	16.00	14.83	15.22	15.23
	Subtest 5	19.00	17.54	17.69	17.83
DC-HSDPA	Subtest 1	19.00	17.63	17.76	17.89
	Subtest 2	19.00	17.44	17.55	17.70
	Subtest 3	18.50	17.95	16.99	17.12
	Subtest 4	18.50	18.03	16.99	17.09

Table 19: Conducted power measurement results of UMTS Band II (Receiver on)

UMTS1900 (Band II)		Tune-up	Average Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	<b>23.00</b>	<b>21.63</b>	<b>21.80</b>	<b>21.89</b>
	12.2kbps AMR	23.00	21.55	21.81	21.83
HSDPA	Subtest 1	22.00	20.60	20.78	20.87
	Subtest 2	22.00	20.36	20.55	20.64
	Subtest 3	21.50	19.83	19.98	20.10
	Subtest 4	21.50	19.82	19.98	20.08
HSUPA	Subtest 1	22.00	20.32	20.52	20.07
	Subtest 2	19.00	17.39	17.62	17.71
	Subtest 3	20.00	18.54	18.58	18.57
	Subtest 4	19.00	17.85	18.07	18.31
	Subtest 5	22.00	20.49	20.70	20.83
DC-HSDPA	Subtest 1	22.00	20.68	20.88	20.94
	Subtest 2	22.00	20.44	20.64	20.71
	Subtest 3	21.50	19.90	20.08	20.17
	Subtest 4	21.50	19.90	20.07	20.18

Table 20: Conducted power measurement results of UMTS Band II (Full power)

UMTS1900 (Band II)		Tune-up	Average Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	<b>17.00</b>	<b>15.57</b>	<b>15.75</b>	<b>15.91</b>
	12.2kbps AMR	17.00	15.46	15.74	15.84
HSDPA	Subtest 1	16.00	14.81	14.75	14.89
	Subtest 2	16.00	14.26	14.48	14.61
	Subtest 3	15.50	14.11	14.05	14.23
	Subtest 4	15.50	14.22	14.38	14.25
HSUPA	Subtest 1	15.50	15.47	13.82	13.96
	Subtest 2	13.00	12.34	11.66	12.05
	Subtest 3	14.00	13.19	12.94	13.06
	Subtest 4	13.00	13.00	12.33	12.40
	Subtest 5	16.00	14.55	14.70	14.80
DC-HSDPA	Subtest 1	16.00	14.87	14.85	14.97
	Subtest 2	16.00	14.32	14.54	14.71
	Subtest 3	15.50	14.21	14.15	14.31
	Subtest 4	15.50	14.31	14.44	14.32

Table 21: Conducted power measurement results of UMTS Band II (Second antenna+WiFi antenna Simultaneous Transmission)

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.4 Conducted power measurements of UMTS Band IV (Second Antenna)

UMTS1700 (Band IV)		Tune-up	Average Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	<b>21.00</b>	<b>19.95</b>	<b>19.92</b>	<b>19.96</b>
	12.2kbps AMR	21.00	19.91	19.80	19.81
HSDPA	Subtest 1	20.00	19.02	18.90	18.92
	Subtest 2	20.00	18.70	18.68	18.71
	Subtest 3	19.50	18.11	18.13	18.12
	Subtest 4	19.50	18.10	18.10	18.10
HSUPA	Subtest 1	20.00	18.05	18.41	18.37
	Subtest 2	17.00	15.68	15.63	15.72
	Subtest 3	18.00	17.11	17.11	17.14
	Subtest 4	17.00	16.21	16.18	16.27
	Subtest 5	20.00	18.87	18.86	18.84
DC-HSDPA	Subtest 1	20.00	19.10	19.00	19.03
	Subtest 2	20.00	18.76	18.74	18.78
	Subtest 3	19.50	18.19	18.20	18.21
	Subtest 4	19.50	18.19	18.20	18.17

Table 22: Conducted power measurement results of UMTS Band IV (Receiver on)

UMTS1700 (Band IV)		Tune-up	Average Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	<b>23.00</b>	<b>21.97</b>	<b>21.95</b>	<b>21.87</b>
	12.2kbps AMR	23.00	21.95	21.85	21.80
HSDPA	Subtest 1	22.00	20.99	20.91	20.84
	Subtest 2	22.00	20.79	20.69	20.62
	Subtest 3	21.50	20.20	20.12	20.07
	Subtest 4	21.50	20.19	20.11	20.05
HSUPA	Subtest 1	22.00	20.58	20.28	20.41
	Subtest 2	19.00	17.66	17.67	17.57
	Subtest 3	20.00	19.06	18.23	18.96
	Subtest 4	19.00	17.88	17.96	17.68
	Subtest 5	22.00	20.81	20.84	20.66
DC-HSDPA	Subtest 1	22.00	21.08	21.00	20.90
	Subtest 2	22.00	20.89	20.77	20.67
	Subtest 3	21.50	20.26	20.23	20.16
	Subtest 4	21.50	20.26	20.22	20.15

Table 23: Conducted power measurement results of UMTS Band IV (Full power)



UMTS1700 (Band IV)		Tune-up	Average Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	<b>19.00</b>	<b>17.93</b>	<b>17.90</b>	<b>17.95</b>
	12.2kbps AMR	19.00	17.90	17.84	17.81
HSDPA	Subtest 1	18.00	16.90	16.90	16.91
	Subtest 2	18.00	16.65	16.66	16.66
	Subtest 3	17.50	16.49	16.45	16.43
	Subtest 4	17.50	16.51	16.49	16.46
HSUPA	Subtest 1	18.00	16.62	16.71	16.69
	Subtest 2	15.00	13.52	13.39	13.59
	Subtest 3	16.00	15.08	15.14	15.13
	Subtest 4	15.00	13.96	13.83	14.01
	Subtest 5	18.00	16.83	16.87	16.86
DC-HSDPA	Subtest 1	18.00	17.01	16.98	17.02
	Subtest 2	18.00	16.71	16.76	16.76
	Subtest 3	17.50	16.56	16.50	16.49
	Subtest 4	17.50	16.57	16.57	16.53

Table 24: Conducted power measurement results of UMTS Band IV (Second antenna+WiFi antenna Simultaneous Transmission)

Note:

- 1) The conducted power of UMTS Band IV is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.5 Conducted power measurements of UMTS Band V (Second Antenna)

UMTS850 (Band V)		Tune-up	Average Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	<b>20.50</b>	<b>19.33</b>	<b>19.34</b>	<b>19.38</b>
	12.2kbps AMR	20.50	19.35	19.36	19.39
HSDPA	Subtest 1	19.50	18.35	18.34	18.37
	Subtest 2	19.50	18.11	18.14	18.13
	Subtest 3	19.00	17.45	17.46	17.48
	Subtest 4	19.00	17.73	17.82	17.68
HSUPA	Subtest 1	19.00	17.93	17.45	17.50
	Subtest 2	16.50	15.16	15.24	15.29
	Subtest 3	17.50	16.45	16.58	16.52
	Subtest 4	17.50	15.71	15.76	15.80
	Subtest 5	19.00	18.24	18.26	18.28
DC-HSDPA	Subtest 1	19.50	18.42	18.43	18.44
	Subtest 2	19.50	18.17	18.23	18.22
	Subtest 3	19.00	17.51	17.56	17.55
	Subtest 4	19.00	17.80	17.91	17.77

Table 25: Conducted power measurement results of UMTS Band V (Receiver on)

UMTS850 (Band V)		Tune-up	Average Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	<b>24.00</b>	<b>22.86</b>	<b>22.87</b>	<b>22.85</b>
	12.2kbps AMR	24.00	22.85	22.90	22.81
HSDPA	Subtest 1	23.00	21.85	21.86	21.85
	Subtest 2	23.00	21.64	21.65	21.67
	Subtest 3	22.50	20.96	21.01	21.00
	Subtest 4	22.50	20.96	20.98	20.98
HSUPA	Subtest 1	22.50	21.04	21.18	21.12
	Subtest 2	20.00	18.81	18.71	18.68
	Subtest 3	21.00	19.17	19.19	19.14
	Subtest 4	21.00	19.11	19.17	19.05
	Subtest 5	22.50	21.79	21.76	21.76
DC-HSDPA	Subtest 1	23.00	21.91	21.92	21.94
	Subtest 2	23.00	21.71	21.72	21.76
	Subtest 3	22.50	21.02	21.11	21.07
	Subtest 4	22.50	21.02	21.03	21.04

Table 26: Conducted power measurement results of UMTS Band V (Full power)

UMTS850 (Band V)		Tune-up	Average Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	<b>18.00</b>	<b>16.87</b>	<b>16.85</b>	<b>16.86</b>
	12.2kbps AMR	18.00	16.92	16.81	16.91
HSDPA	Subtest 1	17.00	15.84	15.86	15.87
	Subtest 2	17.00	15.62	15.65	15.65
	Subtest 3	16.50	15.13	15.29	15.19
	Subtest 4	16.50	15.12	15.28	15.19
HSUPA	Subtest 1	16.50	15.06	15.85	15.03
	Subtest 2	14.00	12.54	12.65	12.64
	Subtest 3	15.00	13.37	13.58	13.45
	Subtest 4	15.00	13.07	13.25	13.22
	Subtest 5	16.50	15.76	15.80	15.82
DC-HSDPA	Subtest 1	17.00	15.93	15.93	15.92
	Subtest 2	17.00	15.69	15.75	15.73
	Subtest 3	16.50	15.20	15.34	15.30
	Subtest 4	16.50	15.22	15.33	15.24

Table 27: Conducted power measurement results of UMTS Band V (Second antenna+WiFi antenna Simultaneous Transmission)

Note:

- 1) The conducted power of UMTS Band V is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.6 Conducted power measurements of LTE Band II (Second Antenna)

LTE Band II					Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel	
					18607CH	18900CH	19193CH	
1.4MHz	QPSK	1	0	19.00	18.22	17.71	17.97	
		1	3	19.00	18.28	17.84	18.03	
		1	5	19.00	18.15	17.73	18.04	
		3	0	19.00	18.19	17.76	17.88	
		3	2	19.00	18.20	17.74	17.89	
		3	3	19.00	18.15	17.70	17.92	
	16QAM	6	0	19.00	18.16	17.73	17.87	
		1	0	19.40	18.22	17.60	18.02	
		1	3	19.40	18.27	17.76	17.81	
		1	5	19.40	17.90	17.66	18.12	
		3	0	19.40	18.22	17.87	17.92	
		3	2	19.40	18.12	17.87	17.97	
	3MHz	QPSK	3	3	19.40	18.19	17.80	17.91
			6	0	19.40	18.15	17.76	17.88
1			0	19.00	18.08	17.56	17.67	
1			7	19.00	18.17	17.76	17.94	
1			14	19.00	17.96	17.62	17.83	
8			0	19.00	18.12	17.68	17.68	
8			4	19.00	18.21	17.72	17.78	
16QAM		8	7	19.00	18.14	17.70	17.78	
		15	0	19.00	18.16	17.67	17.73	
		1	0	19.40	17.95	17.48	17.83	
		1	7	19.40	18.24	17.74	18.10	
		1	14	19.40	17.92	17.60	18.08	
		8	0	19.40	18.15	17.67	17.62	
		8	4	19.40	18.17	17.71	17.71	
	8	7	19.40	18.11	17.69	17.71		
	15	0	19.40	18.09	17.68	17.72		

LTE Band II					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	19.00	18.25	17.51	17.45
		1	13	19.00	18.62	17.91	17.97
		1	24	19.00	18.35	17.65	17.94
		12	0	19.00	18.43	17.71	17.69
		12	6	19.00	18.54	17.89	17.94
		12	13	19.00	18.49	17.84	17.93
		25	0	19.00	18.41	17.76	17.86
	16QAM	1	0	19.40	18.48	17.96	17.83
		1	13	19.40	18.80	18.38	18.36
		1	24	19.40	18.54	18.12	18.27
		12	0	19.40	18.41	17.78	17.65
		12	6	19.40	18.54	17.99	17.91
		12	13	19.40	18.46	17.92	17.94
		25	0	19.40	18.41	17.81	17.82
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	19.00	18.83	18.05	18.56
		1	25	19.00	18.89	17.98	17.74
		1	49	19.00	18.50	18.11	17.84
		25	0	19.00	18.52	17.64	17.74
		25	13	19.00	18.77	17.83	17.69
		25	25	19.00	18.73	17.97	17.78
		50	0	19.00	18.61	17.88	17.81
	16QAM	1	0	19.40	18.89	18.30	18.59
		1	25	19.40	18.91	18.23	17.76
		1	49	19.40	18.59	18.50	17.87
		25	0	19.40	18.45	17.65	17.66
		25	13	19.40	18.74	17.84	17.61
		25	25	19.40	18.66	17.97	17.71
		50	0	19.40	18.55	17.84	17.72

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	19.00	18.03	17.13	18.46
		1	38	19.00	18.95	17.93	17.81
		1	74	19.00	17.97	18.06	17.46
		36	0	19.00	18.56	17.59	18.22
		36	18	19.00	18.82	17.96	17.83
		36	39	19.00	18.46	18.11	17.52
		75	0	19.00	18.50	17.74	17.94
	16QAM	1	0	19.40	18.19	17.46	18.73
		1	38	19.40	19.13	18.21	18.07
		1	74	19.40	18.19	18.33	17.82
		36	0	19.40	18.49	17.60	18.22
		36	18	19.40	18.77	17.98	17.84
		36	39	19.40	18.47	18.14	17.53
		75	0	19.40	18.48	17.74	17.94
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	19.00	17.93	17.24	18.61
		1	50	19.00	<b>18.93</b>	18.02	18.21
		1	99	19.00	17.25	18.44	17.36
		50	0	19.00	18.49	17.44	<b>18.58</b>
		50	25	19.00	<b>18.52</b>	17.90	18.13
		50	50	19.00	18.02	<b>18.17</b>	17.56
		100	0	19.00	18.25	17.69	18.12
	16QAM	1	0	19.40	18.29	17.47	19.06
		1	50	19.40	19.33	18.22	18.71
		1	99	19.40	17.63	18.64	17.90
		50	0	19.40	18.42	17.42	18.58
		50	25	19.40	18.46	17.88	18.13
		50	50	19.40	17.99	18.15	17.56
		100	0	19.40	18.22	17.67	18.05

Table 28: Conducted power measurement results of LTE Band II (Receiver on)

LTE Band II					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	23.40	22.48	22.03	22.44
		1	3	23.40	22.53	22.11	22.48
		1	5	23.40	22.40	22.13	22.41
		3	0	23.40	22.46	22.11	22.37
		3	2	23.40	22.48	22.10	22.43
		3	3	23.40	22.44	22.04	22.38
	16QAM	6	0	22.50	21.56	21.03	21.48
		1	0	22.50	21.61	20.90	21.29
		1	3	22.50	21.67	20.99	21.35
		1	5	22.50	21.49	20.95	21.38
		3	0	22.50	21.63	21.11	21.30
		3	2	22.50	21.63	21.10	21.36
		3	3	22.50	21.61	21.06	21.35
		6	0	21.50	20.43	20.13	20.32
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615CH	18900CH	19185CH
3MHz	QPSK	1	0	23.40	22.46	21.92	22.08
		1	7	23.40	22.61	22.14	22.31
		1	14	23.40	22.49	21.99	22.27
		8	0	22.50	21.59	21.11	21.28
		8	4	22.50	21.61	21.11	21.41
		8	7	22.50	21.55	21.14	21.25
		15	0	22.50	21.57	21.02	21.30
	16QAM	1	0	22.50	21.34	20.70	21.11
		1	7	22.50	21.46	20.98	21.42
		1	14	22.50	21.41	20.80	21.33
		8	0	21.50	20.53	20.00	20.12
		8	4	21.50	20.50	20.06	20.22
		8	7	21.50	20.45	20.04	20.23
		15	0	21.50	20.55	20.04	20.15

LTE Band II					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	23.40	22.49	21.84	21.71
		1	13	23.40	22.81	22.23	22.30
		1	24	23.40	22.57	21.97	22.24
		12	0	22.50	21.77	20.97	20.90
		12	6	22.50	21.88	21.16	21.16
		12	13	22.50	21.83	21.12	21.18
		25	0	22.50	21.76	21.04	21.08
	16QAM	1	0	22.50	21.55	21.04	20.93
		1	13	22.50	21.89	21.40	21.56
		1	24	22.50	21.66	21.15	21.49
		12	0	21.50	20.77	19.98	19.96
		12	6	21.50	20.89	20.19	20.17
		12	13	21.50	20.84	20.13	20.19
		25	0	21.50	20.66	20.04	20.09
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	23.40	23.37	22.35	22.70
		1	25	23.40	23.10	22.25	21.92
		1	49	23.40	22.81	22.41	22.22
		25	0	22.50	21.83	20.89	20.85
		25	13	22.50	22.08	21.09	20.87
		25	25	22.50	21.98	21.24	21.00
		50	0	22.50	21.88	21.16	21.01
	16QAM	1	0	22.50	22.35	21.38	21.85
		1	25	22.50	22.32	21.28	21.03
		1	49	22.50	21.95	21.42	21.31
		25	0	21.50	20.72	19.89	19.89
		25	13	21.50	20.96	20.10	19.85
		25	25	21.50	20.86	20.23	19.98
		50	0	21.50	20.78	20.10	19.98



Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	23.40	22.28	21.49	22.60
		1	38	23.40	23.13	22.26	21.99
		1	74	23.40	22.16	22.42	21.97
		36	0	22.50	21.87	20.84	21.37
		36	18	22.50	22.11	21.21	21.01
		36	39	22.50	21.72	21.38	20.81
		75	0	22.50	21.77	21.01	21.19
	16QAM	1	0	22.50	21.49	20.68	21.67
		1	38	22.50	22.39	21.40	20.98
		1	74	22.50	21.38	21.57	20.79
		36	0	21.50	20.80	19.85	20.39
		36	18	21.50	21.04	20.23	20.04
		36	39	21.50	20.72	20.39	19.82
		75	0	21.50	20.76	20.00	20.20
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	23.00	21.79	21.40	22.38
		1	50	23.00	<b>22.39</b>	21.53	22.14
		1	99	23.00	21.30	21.71	21.13
		50	0	22.50	21.90	21.26	21.80
		50	25	22.50	<b>21.92</b>	21.62	21.34
		50	50	22.50	21.45	21.45	21.75
		100	0	22.50	21.58	21.39	21.35
	16QAM	1	0	22.50	21.62	20.76	22.00
		1	50	22.50	22.41	21.46	21.57
		1	99	22.50	20.76	22.02	21.09
		50	0	21.00	20.78	19.63	20.76
		50	25	21.00	20.81	20.15	20.33
		50	50	21.00	20.28	20.42	19.85
		100	0	21.00	20.55	19.97	20.34

Table 29: Conducted power measurement results of LTE Band II (Full power)

LTE Band II					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	17.00	15.75	15.19	15.25
		1	3	17.00	15.94	15.33	15.46
		1	5	17.00	15.84	15.21	15.46
		3	0	17.00	15.84	15.20	15.32
		3	2	17.00	15.94	15.28	15.45
		3	3	17.00	15.90	15.22	15.49
		6	0	17.00	15.89	15.23	15.41
	16QAM	1	0	17.00	15.92	15.48	15.34
		1	3	17.00	16.10	15.59	15.60
		1	5	17.00	16.01	15.49	15.57
		3	0	17.00	15.97	15.31	15.56
		3	2	17.00	16.01	15.39	15.62
		3	3	17.00	15.97	15.37	15.68
		6	0	17.00	15.89	15.18	15.44
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615CH	18900CH	19185CH
3MHz	QPSK	1	0	17.00	15.64	15.04	15.22
		1	7	17.00	16.07	15.40	15.35
		1	14	17.00	15.82	15.15	15.37
		8	0	17.00	15.87	15.08	15.05
		8	4	17.00	15.97	15.24	15.26
		8	7	17.00	15.94	15.23	15.31
		15	0	17.00	15.91	15.18	15.20
	16QAM	1	0	17.00	15.88	15.24	15.73
		1	7	17.00	16.34	15.44	15.26
		1	14	17.00	16.12	15.21	15.23
		8	0	17.00	15.88	15.02	15.48
		8	4	17.00	15.99	15.19	15.22
		8	7	17.00	15.96	15.17	15.27
		15	0	17.00	15.92	15.14	15.12

LTE Band II					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	17.00	15.87	15.11	15.10
		1	13	17.00	16.35	15.56	15.63
		1	24	17.00	16.03	15.27	15.46
		12	0	17.00	16.11	15.32	15.33
		12	6	17.00	16.23	15.52	15.58
		12	13	17.00	16.17	15.47	15.54
		25	0	17.00	16.08	15.38	15.48
	16QAM	1	0	17.00	16.16	15.52	15.38
		1	13	17.00	16.54	16.02	15.94
		1	24	17.00	16.20	15.70	15.80
		12	0	17.00	16.10	15.34	15.32
		12	6	17.00	16.22	15.58	15.56
		12	13	17.00	16.14	15.50	15.54
		25	0	17.00	16.01	15.35	15.48
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	17.00	16.52	15.71	16.17
		1	25	17.00	16.58	15.63	15.38
		1	49	17.00	16.22	15.67	15.39
		25	0	17.00	16.16	15.23	15.29
		25	13	17.00	16.43	15.45	15.32
		25	25	17.00	16.38	15.57	15.37
		50	0	17.00	16.25	15.49	15.42
	16QAM	1	0	17.00	16.79	15.99	16.45
		1	25	17.00	16.75	15.94	15.65
		1	49	17.00	16.53	16.01	15.71
		25	0	17.00	16.12	15.26	15.26
		25	13	17.00	16.39	15.48	15.28
		25	25	17.00	16.28	15.61	15.35
		50	0	17.00	16.14	15.48	15.42

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	16.70	15.56	14.76	16.01
		1	38	16.70	16.62	15.58	15.48
		1	74	16.70	15.39	15.55	15.07
		36	0	16.70	16.15	15.13	15.82
		36	18	16.70	16.48	15.42	15.42
		36	39	16.70	16.11	15.67	15.17
		75	0	16.70	16.15	15.29	15.62
	16QAM	1	0	17.10	15.87	15.30	16.33
		1	38	17.10	16.95	15.85	15.79
		1	74	17.10	15.81	15.83	15.38
		36	0	16.50	16.16	15.16	15.80
		36	18	16.50	16.44	15.45	15.40
		36	39	16.50	16.14	15.71	15.17
		75	0	16.50	16.15	15.34	15.65
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	16.70	15.53	14.73	16.06
		1	50	16.70	<b>16.66</b>	15.54	15.83
		1	99	16.70	14.72	15.84	14.87
		50	0	16.70	16.13	15.04	16.16
		50	25	16.70	<b>16.19</b>	15.48	15.75
		50	50	16.70	15.58	15.77	15.21
		100	0	16.70	15.89	15.30	15.76
	16QAM	1	0	17.10	15.87	15.21	16.47
		1	50	17.10	17.10	16.03	16.17
		1	99	17.10	15.19	16.30	15.24
		50	0	16.50	16.07	14.98	16.16
		50	25	16.50	16.19	15.48	15.76
		50	50	16.50	15.59	15.73	15.24
		100	0	16.50	15.90	15.22	15.73

Table 30: Conducted power measurement results of LTE Band II (Second antenna+WiFi antenna Simultaneous Transmission)

### 7.1.7 Conducted power measurements of LTE Band IV (Second Antenna)

LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	21.50	19.60	19.87	20.47
		1	3	21.50	19.56	19.90	20.46
		1	5	21.50	19.57	19.70	20.38
		3	0	21.50	19.56	19.83	20.41
		3	2	21.50	19.58	19.80	20.39
		3	3	21.50	19.54	19.75	20.35
		6	0	21.50	19.58	19.78	20.37
	16QAM	1	0	21.50	19.53	19.83	20.44
		1	3	21.50	19.58	20.04	20.49
		1	5	21.50	19.59	19.72	20.35
		3	0	21.50	19.64	19.91	20.38
		3	2	21.50	19.65	19.84	20.36
		3	3	21.50	19.62	19.83	20.32
		6	0	21.50	19.63	19.75	20.40
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965CH	20175CH	20385CH
3MHz	QPSK	1	0	21.50	19.55	19.70	20.37
		1	7	21.50	19.69	19.86	20.42
		1	14	21.50	19.62	19.54	20.12
		8	0	21.50	19.56	19.84	20.44
		8	4	21.50	19.64	19.78	20.44
		8	7	21.50	19.65	19.68	20.33
		15	0	21.50	19.63	19.77	20.40
	16QAM	1	0	21.50	19.54	19.75	20.44
		1	7	21.50	19.73	19.68	20.58
		1	14	21.50	19.56	19.59	20.17
		8	0	21.50	19.55	19.76	20.37
		8	4	21.50	19.58	19.75	20.39
		8	7	21.50	19.60	19.64	20.27
		15	0	21.50	19.61	19.72	20.37

LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975CH	20175CH	20375CH
5MHz	QPSK	1	0	21.50	19.68	19.99	20.40
		1	13	21.50	20.10	20.16	20.73
		1	24	21.50	19.83	19.64	20.25
		12	0	21.50	19.86	20.16	20.59
		12	6	21.50	19.99	20.17	20.67
		12	13	21.50	19.95	19.95	20.49
		25	0	21.50	19.88	20.09	20.60
	16QAM	1	0	21.50	19.90	20.28	20.78
		1	13	21.50	20.34	20.44	20.97
		1	24	21.50	20.07	19.88	20.55
		12	0	21.50	19.89	20.17	20.53
		12	6	21.50	20.06	20.16	20.62
		12	13	21.50	20.02	19.93	20.35
		25	0	21.50	19.90	19.97	20.48
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000CH	20175CH	20350CH
10MHz	QPSK	1	0	21.50	20.17	20.51	20.53
		1	25	21.50	20.30	20.22	20.65
		1	49	21.50	20.54	20.35	20.69
		25	0	21.50	19.95	20.19	20.35
		25	13	21.50	20.18	20.09	20.47
		25	25	21.50	20.20	19.94	20.44
		50	0	21.50	20.14	20.02	20.44
	16QAM	1	0	21.50	20.45	20.73	20.60
		1	25	21.50	20.51	20.50	20.71
		1	49	21.50	20.72	20.62	20.72
		25	0	21.50	19.87	20.04	20.33
		25	13	21.50	20.10	20.01	20.46
		25	25	21.50	20.12	19.81	20.40
		50	0	21.50	20.10	19.89	20.34

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025CH	20175CH	20325CH
15MHz	QPSK	1	0	21.50	19.57	20.28	20.11
		1	38	21.50	20.41	20.22	20.56
		1	74	21.50	20.12	19.99	20.39
		36	0	21.50	20.10	20.22	20.33
		36	18	21.50	20.32	20.25	20.53
		36	39	21.50	20.33	20.05	20.57
		75	0	21.50	20.27	20.08	20.40
	16QAM	1	0	21.50	19.91	20.49	20.15
		1	38	21.50	20.79	20.48	20.60
		1	74	21.50	20.45	20.24	20.39
		36	0	21.50	20.08	20.21	20.23
		36	18	21.50	20.25	20.19	20.42
		36	39	21.50	20.31	20.00	20.46
		75	0	21.50	20.23	19.99	20.34
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050CH	20175CH	20300CH
20MHz	QPSK	1	0	21.00	19.90	<b>20.40</b>	20.12
		1	50	21.00	<b>20.57</b>	20.25	<b>20.48</b>
		1	99	21.00	20.12	19.96	20.38
		50	0	21.00	20.15	<b>20.21</b>	20.14
		50	25	21.00	<b>20.33</b>	20.04	20.30
		50	50	21.00	20.28	20.20	<b>20.39</b>
		100	0	21.00	20.24	20.11	<b>20.29</b>
	16QAM	1	0	21.00	20.26	20.67	20.27
		1	50	21.00	20.94	20.49	20.60
		1	99	21.00	20.44	20.32	20.46
		50	0	21.00	20.06	20.13	20.12
		50	25	21.00	20.32	19.98	20.24
		50	50	21.00	20.20	19.86	20.37
		100	0	21.00	20.17	20.07	20.25

Table 31: Conducted power measurement results of LTE Band IV (Receiver on)

LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	23.50	21.95	22.11	22.49
		1	3	23.50	22.00	22.11	22.36
		1	5	23.50	21.94	22.00	22.27
		3	0	23.50	21.95	22.05	22.38
		3	2	23.50	21.92	22.05	22.40
		3	3	23.50	21.89	22.02	22.28
		6	0	22.50	21.04	21.23	21.52
	16QAM	1	0	22.50	21.13	21.41	21.64
		1	3	22.50	21.21	21.43	21.62
		1	5	22.50	21.14	20.90	21.53
		3	0	22.50	21.27	21.23	21.66
		3	2	22.50	21.01	21.23	21.64
		3	3	22.50	20.99	21.21	21.61
		6	0	21.50	20.17	20.25	20.67
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965CH	20175CH	20385CH
3MHz	QPSK	1	0	23.50	21.88	22.08	22.48
		1	7	23.50	22.09	22.12	22.38
		1	14	23.50	21.94	21.79	22.12
		8	0	22.50	21.03	21.26	21.64
		8	4	22.50	21.13	21.24	21.58
		8	7	22.50	21.15	21.13	21.50
		15	0	22.50	21.13	21.18	21.54
	16QAM	1	0	22.50	21.11	21.27	21.63
		1	7	22.50	21.32	21.33	21.64
		1	14	22.50	21.03	21.01	21.33
		8	0	21.50	20.29	20.14	20.81
		8	4	21.50	20.36	20.10	20.81
		8	7	21.50	20.35	19.99	20.64
		15	0	21.50	20.34	20.13	20.78



LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975CH	20175CH	20375CH
5MHz	QPSK	1	0	23.50	22.03	22.31	22.40
		1	13	23.50	22.45	22.41	22.64
		1	24	23.50	22.19	21.86	22.19
		12	0	22.50	21.32	21.58	21.79
		12	6	22.50	21.47	21.52	21.80
		12	13	22.50	21.44	21.29	21.60
		25	0	22.50	21.32	21.45	21.74
	16QAM	1	0	22.50	21.33	21.72	21.84
		1	13	22.50	21.75	21.83	22.11
		1	24	22.50	21.55	21.29	21.61
		12	0	21.50	20.54	20.52	20.94
		12	6	21.50	20.70	20.56	20.94
		12	13	21.50	20.61	20.35	20.74
		25	0	21.50	20.51	20.37	20.92
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000CH	20175CH	20350CH
10MHz	QPSK	1	0	23.50	22.29	22.76	22.65
		1	25	23.50	22.63	22.43	22.69
		1	49	23.50	22.81	22.44	22.59
		25	0	22.50	21.41	21.58	21.60
		25	13	22.50	21.59	21.46	21.67
		25	25	22.50	21.67	21.31	21.62
		50	0	22.50	21.61	21.40	21.58
	16QAM	1	0	22.50	21.67	22.29	21.81
		1	25	22.50	21.94	21.90	21.93
		1	49	22.50	22.21	21.93	21.84
		25	0	21.50	20.53	20.45	20.71
		25	13	21.50	20.50	20.43	20.83
		25	25	21.50	20.58	20.47	20.79
		50	0	21.50	20.48	20.29	20.74

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025CH	20175CH	20325CH
15MHz	QPSK	1	0	23.50	21.98	22.45	21.93
		1	38	23.50	22.81	22.40	22.62
		1	74	23.50	22.49	21.93	22.34
		36	0	22.50	21.56	21.69	21.47
		36	18	22.50	21.79	21.71	21.72
		36	39	22.50	21.85	21.43	21.75
		75	0	22.50	21.78	21.49	21.65
	16QAM	1	0	22.50	21.35	21.86	21.23
		1	38	22.50	22.22	21.76	21.85
		1	74	22.50	21.98	21.35	21.55
		36	0	21.50	20.44	20.62	20.60
		36	18	21.50	20.68	20.62	20.75
		36	39	21.50	20.73	20.60	20.84
		75	0	21.50	20.67	20.37	20.71
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050CH	20175CH	20300CH
20MHz	QPSK	1	0	23.00	21.21	21.71	21.26
		1	50	23.00	<b>22.94</b>	22.44	22.52
		1	99	23.00	22.31	21.90	22.29
		50	0	22.50	21.61	21.69	21.33
		50	25	22.50	<b>21.88</b>	21.47	21.48
		50	50	22.50	21.77	21.41	21.58
		100	0	22.50	21.71	21.60	21.54
	16QAM	1	0	22.50	21.44	22.13	21.59
		1	50	22.50	22.21	22.07	22.00
		1	99	22.50	21.65	21.51	21.79
		50	0	21.50	20.48	20.61	20.49
		50	25	21.50	20.70	20.38	20.59
		50	50	21.50	20.65	20.52	20.75
		100	0	21.50	20.60	20.47	20.60

Table 32: Conducted power measurement results of LTE Band IV (Full power)

LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	18.00	16.19	16.63	17.43
		1	3	18.00	16.29	16.62	17.41
		1	5	18.00	16.28	16.47	17.29
		3	0	18.00	16.21	16.60	17.40
		3	2	18.00	16.26	16.58	17.39
		3	3	18.00	16.24	16.55	17.34
		6	0	18.00	16.22	16.55	17.37
	16QAM	1	0	18.00	16.26	16.84	17.51
		1	3	18.00	16.39	16.84	17.54
		1	5	18.00	16.34	16.69	17.45
		3	0	18.00	16.27	16.60	17.43
		3	2	18.00	16.31	16.57	17.41
		3	3	18.00	16.34	16.52	17.37
		6	0	18.00	16.27	16.51	17.31
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965CH	20175CH	20385CH
3MHz	QPSK	1	0	18.00	16.08	16.55	17.32
		1	7	18.00	16.47	16.67	17.52
		1	14	18.00	16.31	16.19	17.21
		8	0	18.00	16.26	16.56	17.39
		8	4	18.00	16.35	16.53	17.34
		8	7	18.00	16.35	16.43	17.29
		15	0	18.00	16.35	16.50	17.28
	16QAM	1	0	18.00	16.31	16.71	17.34
		1	7	18.00	16.72	16.83	17.55
		1	14	18.00	16.55	16.32	17.26
		8	0	18.00	16.23	16.52	17.29
		8	4	18.00	16.34	16.48	17.24
		8	7	18.00	16.33	16.39	17.20
		15	0	18.00	16.27	16.45	17.16

LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975CH	20175CH	20375CH
5MHz	QPSK	1	0	18.00	16.59	17.00	17.14
		1	13	18.00	17.09	17.19	17.42
		1	24	18.00	16.87	16.57	16.93
		12	0	18.00	16.83	17.18	17.29
		12	6	18.00	17.01	17.13	17.33
		12	13	18.00	16.95	16.90	17.12
		25	0	18.00	16.90	17.04	17.22
	16QAM	1	0	18.00	16.71	17.31	17.29
		1	13	18.00	17.19	17.48	17.56
		1	24	18.00	16.97	16.85	17.13
		12	0	18.00	16.82	17.21	17.35
		12	6	18.00	17.04	17.13	17.39
		12	13	18.00	16.98	16.94	17.19
		25	0	18.00	16.81	17.00	17.25
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000CH	20175CH	20350CH
10MHz	QPSK	1	0	18.00	17.00	17.62	17.28
		1	25	18.00	17.35	17.22	17.39
		1	49	18.00	17.62	17.03	17.42
		25	0	18.00	16.92	17.19	17.12
		25	13	18.00	17.19	17.09	17.27
		25	25	18.00	17.25	16.84	17.16
		50	0	18.00	17.14	16.95	17.14
	16QAM	1	0	18.00	17.26	17.84	17.49
		1	25	18.00	17.58	17.43	17.61
		1	49	18.00	17.87	17.11	17.49
		25	0	18.00	16.86	17.12	17.04
		25	13	18.00	17.09	17.01	17.19
		25	25	18.00	17.15	16.77	17.14
		50	0	18.00	17.05	16.84	17.10

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025CH	20175CH	20325CH
15MHz	QPSK	1	0	18.00	16.63	17.37	16.73
		1	38	18.00	17.59	17.22	17.26
		1	74	18.00	17.31	16.57	17.08
		36	0	18.00	17.07	17.34	17.00
		36	18	18.00	17.40	17.11	17.20
		36	39	18.00	17.48	16.95	17.23
		75	0	18.00	17.33	17.08	17.11
	16QAM	1	0	18.00	16.80	17.51	16.89
		1	38	18.00	17.73	17.37	17.42
		1	74	18.00	17.47	16.82	17.16
		36	0	18.00	17.00	17.34	16.87
		36	18	18.00	17.33	17.04	17.07
		36	39	18.00	17.40	16.90	17.17
		75	0	18.00	17.23	17.06	17.00
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050CH	20175CH	20300CH
20MHz	QPSK	1	0	18.00	16.81	17.34	16.73
		1	50	18.00	<b>17.49</b>	17.26	17.28
		1	99	18.00	16.70	16.61	17.12
		50	0	18.00	17.08	17.27	16.88
		50	25	18.00	<b>17.31</b>	17.04	17.01
		50	50	18.00	17.15	16.92	17.14
		100	0	18.00	17.13	17.17	16.97
	16QAM	1	0	18.00	17.12	17.69	16.96
		1	50	18.00	17.68	17.58	17.45
		1	99	18.00	16.92	17.01	17.33
		50	0	18.00	17.00	17.30	16.81
		50	25	18.00	17.17	16.91	16.94
		50	50	18.00	17.06	16.86	17.06
		100	0	18.00	17.08	17.09	16.93

Table 33: Conducted power measurement results of LTE Band IV (Second antenna+WiFi antenna Simultaneous Transmission)

### 7.1.8 Conducted power measurements of LTE Band V(Second Antenna)

LTE Band V					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	20.50	19.08	19.28	19.40
		1	3	20.50	19.33	19.35	19.55
		1	5	20.50	19.23	19.25	19.44
		3	0	20.50	19.17	19.30	19.37
		3	2	20.50	19.27	19.32	19.51
		3	3	20.50	19.24	19.27	19.48
	16QAM	6	0	20.50	19.21	19.27	19.48
		1	0	20.50	19.22	19.46	19.47
		1	3	20.50	19.36	19.52	19.72
		1	5	20.50	19.37	19.43	19.54
		3	0	20.50	19.21	19.32	19.49
		3	2	20.50	19.30	19.33	19.53
		3	3	20.50	19.26	19.28	19.50
		6	0	20.50	19.23	19.15	19.43
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20415CH	20525CH	20635CH
3MHz	QPSK	1	0	20.50	18.90	19.17	19.33
		1	7	20.50	19.36	19.39	19.58
		1	14	20.50	19.20	19.17	19.19
		8	0	20.50	19.21	19.23	19.39
		8	4	20.50	19.33	19.26	19.40
		8	7	20.50	19.32	19.26	19.34
		15	0	20.50	19.26	19.20	19.38
	16QAM	1	0	20.50	19.03	19.14	19.41
		1	7	20.50	19.48	19.35	19.52
		1	14	20.50	19.28	19.22	19.21
		8	0	20.50	19.21	19.10	19.26
		8	4	20.50	19.33	19.14	19.26
		8	7	20.50	19.32	19.14	19.21
		15	0	20.50	19.20	19.17	19.22

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20425CH	20525CH	20625CH
5MHz	QPSK	1	0	20.50	18.94	18.99	19.38
		1	13	20.50	19.57	19.32	19.48
		1	24	20.50	18.91	19.03	19.00
		12	0	20.50	19.30	19.17	19.50
		12	6	20.50	19.46	19.25	19.49
		12	13	20.50	19.21	19.18	19.22
		25	0	20.50	19.25	19.19	19.33
	16QAM	1	0	20.50	19.18	19.29	19.66
		1	13	20.50	19.76	19.61	19.72
		1	24	20.50	19.13	19.36	19.28
		12	0	20.50	19.26	19.22	19.41
		12	6	20.50	19.41	19.28	19.40
		12	13	20.50	19.16	19.21	19.14
		25	0	20.50	19.15	19.16	19.23
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20450CH	20525CH	20600CH
10MHz	QPSK	1	0	20.50	18.82	18.85	19.15
		1	25	20.50	19.35	19.34	<b>19.62</b>
		1	49	20.50	18.67	19.10	18.77
		25	0	20.50	19.20	19.02	19.37
		25	13	20.50	<b>19.22</b>	<b>19.18</b>	<b>19.47</b>
		25	25	20.50	19.01	19.13	19.16
		50	0	20.50	19.08	19.13	19.30
	16QAM	1	0	20.50	18.94	19.00	19.26
		1	25	20.50	19.47	19.52	19.70
		1	49	20.50	18.84	19.30	18.67
		25	0	20.50	19.07	19.03	19.27
		25	13	20.50	19.10	19.19	19.36
		25	25	20.50	18.89	19.14	19.05
		50	0	20.50	18.94	19.09	19.19

Table 34: Conducted power measurement results of LTE Band V (Receiver on)

LTE Band V					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	24.00	22.56	22.61	22.76
		1	3	24.00	22.71	22.69	22.82
		1	5	24.00	22.55	22.54	22.60
		3	0	24.00	22.62	22.60	22.73
		3	2	24.00	22.64	22.63	22.70
		3	3	24.00	22.58	22.57	22.60
		6	0	23.00	21.66	21.69	21.77
	16QAM	1	0	23.00	21.66	22.00	21.85
		1	3	23.00	21.80	22.05	21.91
		1	5	23.00	21.60	21.92	21.70
		3	0	23.00	21.61	21.70	21.86
		3	2	23.00	21.64	21.76	21.86
		3	3	23.00	21.56	21.70	21.81
		6	0	22.00	20.70	20.71	20.81
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
3MHz	QPSK	1	0	24.00	22.37	22.38	22.68
		1	7	24.00	22.82	22.72	22.82
		1	14	24.00	22.44	22.48	22.40
		8	0	23.00	21.63	21.62	21.72
		8	4	23.00	21.77	21.70	21.77
		8	7	23.00	21.74	21.68	21.66
		15	0	23.00	21.69	21.62	21.72
	16QAM	1	0	23.00	21.48	21.66	21.68
		1	7	23.00	21.93	22.02	21.93
		1	14	23.00	21.58	21.74	21.45
		8	0	22.00	20.63	20.66	20.69
		8	4	22.00	20.78	20.73	20.76
		8	7	22.00	20.75	20.71	20.65
		15	0	22.00	20.61	20.67	20.74
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20415CH	20525CH	20635CH



Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20425CH	20525CH	20625CH
5MHz	QPSK	1	0	24.00	22.40	22.27	22.69
		1	13	24.00	22.80	22.65	22.81
		1	24	24.00	22.25	22.45	22.20
		12	0	23.00	21.70	21.58	21.90
		12	6	23.00	21.84	21.69	21.87
		12	13	23.00	21.56	21.63	21.57
		25	0	23.00	21.63	21.63	21.71
	16QAM	1	0	23.00	21.47	21.56	22.02
		1	13	23.00	21.88	21.97	22.14
		1	24	23.00	21.30	21.67	21.55
		12	0	22.00	20.70	20.66	20.86
		12	6	22.00	20.87	20.77	20.85
		12	13	22.00	20.59	20.70	20.57
		25	0	22.00	20.60	20.68	20.70
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20450CH	20525CH	20600CH
10MHz	QPSK	1	0	24.00	22.12	22.06	22.54
		1	25	24.00	22.78	22.65	<b>22.99</b>
		1	49	24.00	22.01	22.46	22.13
		25	0	23.00	21.57	21.44	21.82
		25	13	23.00	21.62	21.64	<b>21.92</b>
		25	25	23.00	21.41	21.58	21.58
		50	0	23.00	21.46	21.56	21.74
	16QAM	1	0	23.00	21.51	21.24	21.52
		1	25	23.00	22.12	21.89	22.07
		1	49	23.00	21.34	21.60	21.16
		25	0	22.00	20.55	20.43	20.78
		25	13	22.00	20.61	20.64	20.89
		25	25	22.00	20.39	20.58	20.56
		50	0	22.00	20.46	20.55	20.73

Table 35: Conducted power measurement results of LTE Band V (Full power)

LTE Band V					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	17.50	16.09	16.37	16.53
		1	3	17.50	16.35	16.49	16.58
		1	5	17.50	16.26	16.37	16.48
		3	0	17.50	16.16	16.40	16.56
		3	2	17.50	16.29	16.44	16.52
		3	3	17.50	16.26	16.39	16.50
		6	0	17.50	16.20	16.38	16.49
	16QAM	1	0	17.50	16.14	16.64	16.50
		1	3	17.50	16.41	16.78	16.56
		1	5	17.50	16.36	16.68	16.49
		3	0	17.50	16.27	16.46	16.60
		3	2	17.50	16.39	16.50	16.58
		3	3	17.50	16.38	16.45	16.56
		6	0	17.50	16.30	16.31	16.45
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20415CH	20525CH	20635CH
3MHz	QPSK	1	0	17.50	15.86	16.16	16.42
		1	7	17.50	16.42	16.50	16.74
		1	14	17.50	16.19	16.17	16.29
		8	0	17.50	16.21	16.29	16.49
		8	4	17.50	16.37	16.36	16.54
		8	7	17.50	16.35	16.34	16.43
		15	0	17.50	16.26	16.27	16.48
	16QAM	1	0	17.50	16.04	16.38	16.42
		1	7	17.50	16.62	16.72	16.76
		1	14	17.50	16.38	16.35	16.32
		8	0	17.50	16.20	16.24	16.44
		8	4	17.50	16.36	16.29	16.49
		8	7	17.50	16.35	16.29	16.38
		15	0	17.50	16.20	16.32	16.43

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20425CH	20525CH	20625CH
5MHz	QPSK	1	0	17.50	15.90	16.07	16.47
		1	13	17.50	16.60	16.43	16.61
		1	24	17.50	15.90	16.12	16.10
		12	0	17.50	16.27	16.27	16.60
		12	6	17.50	16.46	16.36	16.61
		12	13	17.50	16.23	16.29	16.35
		25	0	17.50	16.24	16.29	16.45
	16QAM	1	0	17.50	16.12	16.36	16.83
		1	13	17.50	16.86	16.72	16.96
		1	24	17.50	16.17	16.39	16.45
		12	0	17.50	16.34	16.33	16.58
		12	6	17.50	16.50	16.41	16.62
		12	13	17.50	16.27	16.34	16.34
		25	0	17.50	16.19	16.26	16.38
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20450CH	20525CH	20600CH
10MHz	QPSK	1	0	17.50	15.75	15.90	16.20
		1	25	17.50	16.40	16.43	<b>16.75</b>
		1	49	17.50	15.77	16.14	15.89
		25	0	17.50	16.22	16.14	16.45
		25	13	17.50	16.29	16.31	<b>16.58</b>
		25	25	17.50	16.14	16.24	16.29
		50	0	17.50	16.11	16.24	16.40
	16QAM	1	0	17.50	16.06	16.11	16.36
		1	25	17.50	16.73	16.59	16.91
		1	49	17.50	16.10	16.37	16.08
		25	0	17.50	16.16	16.11	16.41
		25	13	17.50	16.21	16.28	16.54
		25	25	17.50	16.08	16.21	16.23
		50	0	17.50	16.04	16.18	16.35

Table 36: Conducted power measurement results of LTE Band V (Second antenna+WiFi antenna Simultaneous Transmission)

### 7.1.9 Conducted power measurements of LTE Band VII (Second Antenna)

LTE Band VII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	16.00	15.19	15.52	15.11
		1	13	16.00	15.26	15.35	15.07
		1	24	16.00	15.13	15.35	14.99
		12	0	16.00	15.11	15.23	14.94
		12	6	16.00	15.16	15.37	14.99
		12	13	16.00	14.96	15.12	14.79
	16QAM	25	0	16.00	14.98	15.12	14.88
		1	0	16.00	15.48	15.99	15.63
		1	13	16.00	15.53	15.75	15.52
		1	24	16.00	15.38	15.79	15.42
		12	0	16.00	15.15	15.37	14.87
		12	6	16.00	15.25	15.51	14.92
		12	13	16.00	15.08	15.25	14.72
		25	0	16.00	14.97	15.17	14.79
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	16.00	15.18	15.41	14.67
		1	25	16.00	15.19	15.40	14.98
		1	49	16.00	14.88	15.33	15.04
		25	0	16.00	15.01	15.14	14.62
		25	13	16.00	15.01	15.22	14.81
		25	25	16.00	14.84	15.08	14.84
		50	0	16.00	15.05	15.06	14.75
	16QAM	1	0	16.00	15.51	15.69	14.85
		1	25	16.00	15.54	15.69	15.09
		1	49	16.00	15.19	15.57	15.21
		25	0	16.00	15.00	15.17	14.57
		25	13	16.00	15.01	15.23	14.83
		25	25	16.00	14.84	15.10	14.80
		50	0	16.00	15.04	15.05	14.68

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	16.00	14.97	14.97	14.34
		1	38	16.00	15.05	15.39	14.89
		1	74	16.00	14.31	14.89	14.95
		36	0	16.00	15.03	15.02	14.25
		36	18	16.00	14.91	15.28	14.63
		36	39	16.00	14.37	14.94	14.70
		75	0	16.00	14.77	14.94	14.63
	16QAM	1	0	16.00	15.27	15.28	14.62
		1	38	16.00	15.41	15.69	15.17
		1	74	16.00	14.69	15.26	15.22
		36	0	16.00	15.05	15.05	14.19
		36	18	16.00	14.93	15.31	14.57
		36	39	16.00	14.40	14.97	14.64
		75	0	16.00	14.78	14.93	14.58
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	16.00	<b>15.32</b>	15.18	14.53
		1	50	16.00	14.85	<b>15.48</b>	14.67
		1	99	16.00	14.69	14.98	<b>15.13</b>
		50	0	16.00	<b>15.02</b>	14.97	14.43
		50	25	16.00	14.69	<b>15.23</b>	14.60
		50	50	16.00	14.31	15.06	<b>14.67</b>
		100	0	16.00	14.78	<b>14.98</b>	14.61
	16QAM	1	0	16.00	15.60	15.66	14.95
		1	50	16.00	15.20	15.92	15.05
		1	99	16.00	15.06	15.44	15.67
		50	0	16.00	14.98	14.96	14.45
		50	25	16.00	14.66	15.21	14.63
		50	50	16.00	14.28	15.05	14.69
		100	0	16.00	14.72	14.97	14.60

Table 37: Conducted power measurement results of LTE Band VII (Receiver on)

LTE Band VII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	22.50	21.70	22.06	21.69
		1	13	22.50	21.68	21.99	21.56
		1	24	22.50	21.52	21.89	21.34
		12	0	21.50	20.75	21.00	20.75
		12	6	21.50	20.85	21.04	20.79
		12	13	21.50	20.70	20.87	20.61
		25	0	21.50	20.70	20.90	20.65
	16QAM	1	0	21.50	21.00	21.46	21.13
		1	13	21.50	20.93	21.24	21.03
		1	24	21.50	20.83	21.27	20.91
		12	0	21.50	21.10	21.39	21.07
		12	6	21.50	21.16	21.45	21.12
		12	13	21.50	21.00	21.33	20.90
		25	0	21.50	20.97	21.28	20.97
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	22.50	21.64	21.99	21.30
		1	25	22.50	21.56	22.03	21.51
		1	49	22.50	21.22	21.84	21.36
		25	0	21.50	20.73	20.90	20.46
		25	13	21.50	20.64	20.94	20.58
		25	25	21.50	20.42	20.83	20.64
		50	0	21.50	20.75	20.82	20.56
	16QAM	1	0	21.50	21.03	21.23	20.55
		1	25	21.50	20.91	21.14	20.76
		1	49	21.50	20.69	21.01	20.83
		25	0	21.50	20.97	21.35	20.75
		25	13	21.50	20.90	21.37	20.89
		25	25	21.50	20.68	21.21	20.87
		50	0	21.50	21.04	21.20	20.90

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	22.50	21.44	21.70	20.85
		1	38	22.50	21.37	22.04	21.31
		1	74	22.50	20.80	21.50	21.20
		36	0	21.50	20.71	20.82	20.11
		36	18	21.50	20.49	20.94	20.39
		36	39	21.50	20.01	20.69	20.49
		75	0	21.50	20.47	20.70	20.37
	16QAM	1	0	21.50	20.84	21.08	20.20
		1	38	21.50	20.79	21.30	20.68
		1	74	21.50	20.25	20.83	20.73
		36	0	21.50	20.94	21.21	20.45
		36	18	21.50	20.77	21.34	20.76
		36	39	21.50	20.44	21.05	20.83
		75	0	21.50	20.71	21.09	20.73
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	22.50	21.63	21.67	21.05
		1	50	22.50	21.08	<b>22.04</b>	21.16
		1	99	22.50	21.06	21.47	21.37
		50	0	21.50	20.55	20.75	20.11
		50	25	21.50	20.18	<b>20.87</b>	20.36
		50	50	21.50	19.89	20.67	20.45
		100	0	21.50	20.27	20.67	20.39
	16QAM	1	0	21.50	21.06	20.97	20.59
		1	50	21.50	20.63	21.15	20.74
		1	99	21.50	20.65	20.60	21.07
		50	0	21.50	20.89	21.10	20.46
		50	25	21.50	20.57	21.26	20.73
		50	50	21.50	20.29	21.05	20.76
		100	0	21.50	20.60	21.04	20.70

Table 38: Conducted power measurement results of LTE Band VII (Full power)

LTE Band VII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	14.20	13.31	13.54	13.29
		1	13	14.20	13.40	13.41	13.16
		1	24	14.20	13.27	13.33	13.18
		12	0	14.20	13.17	13.29	13.06
		12	6	14.20	13.24	13.43	13.11
		12	13	14.20	12.99	13.21	12.92
		25	0	14.20	13.06	13.20	13.00
	16QAM	1	0	14.20	13.48	14.07	13.69
		1	13	14.20	13.49	13.88	13.59
		1	24	14.20	13.38	13.83	13.56
		12	0	14.20	13.17	13.36	13.00
		12	6	14.20	13.27	13.51	13.04
		12	13	14.20	13.02	13.29	12.88
		25	0	14.20	12.98	13.15	12.91
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	14.20	13.10	13.40	12.74
		1	25	14.20	13.24	13.48	13.09
		1	49	14.20	12.90	13.36	13.26
		25	0	14.20	12.92	13.18	12.70
		25	13	14.20	13.03	13.28	12.91
		25	25	14.20	12.89	13.15	12.94
		50	0	14.20	12.99	13.12	12.84
	16QAM	1	0	14.20	13.61	13.97	13.02
		1	25	14.20	13.76	14.05	13.30
		1	49	14.20	13.31	13.91	13.47
		25	0	14.20	12.89	13.19	12.64
		25	13	14.20	13.00	13.28	12.85
		25	25	14.20	12.85	13.17	12.87
		50	0	14.20	12.97	13.13	12.76



Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	14.20	12.92	12.96	12.24
		1	38	14.20	13.13	13.47	12.90
		1	74	14.20	12.34	12.97	12.98
		36	0	14.20	12.99	13.04	12.31
		36	18	14.20	12.99	13.32	12.69
		36	39	14.20	12.47	13.04	12.76
		75	0	14.20	12.76	12.99	12.71
	16QAM	1	0	14.20	13.16	13.31	12.56
		1	38	14.20	13.34	13.87	13.21
		1	74	14.20	12.63	13.29	13.34
		36	0	14.20	12.93	13.10	12.27
		36	18	14.20	12.92	13.38	12.65
		36	39	14.20	12.39	13.07	12.72
		75	0	14.20	12.70	12.99	12.64
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	14.20	13.23	13.04	12.53
		1	50	14.20	12.90	<b>13.49</b>	12.67
		1	99	14.20	12.64	12.94	13.18
		50	0	14.20	12.91	12.94	12.40
		50	25	14.20	12.69	<b>13.27</b>	12.65
		50	50	14.20	12.29	13.11	12.71
		100	0	14.20	12.67	12.96	12.65
	16QAM	1	0	14.20	13.64	13.42	12.88
		1	50	14.20	13.30	13.72	12.99
		1	99	14.20	12.96	13.19	13.60
		50	0	14.20	12.87	12.93	12.39
		50	25	14.20	12.63	13.21	12.63
		50	50	14.20	12.24	13.07	12.70
		100	0	14.20	12.63	12.97	12.59

Table 39: Conducted power measurement results of LTE Band VII (Second antenna+WiFi antenna Simultaneous Transmission)

### 7.1.10 Conducted power measurements of LTE Band XII (Second Antenna)

LTE Band XII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23017CH	23095CH	23173CH
1.4MHz	QPSK	1	0	21.50	20.48	20.52	20.26
		1	3	21.50	20.61	20.71	20.42
		1	5	21.50	20.58	20.65	20.38
		3	0	21.50	20.56	20.58	20.29
		3	2	21.50	20.61	20.69	20.32
		3	3	21.50	20.56	20.66	20.35
		6	0	21.50	20.50	20.65	20.29
	16QAM	1	0	21.50	20.62	20.75	20.30
		1	3	21.50	20.73	20.98	20.45
		1	5	21.50	20.67	20.91	20.41
		3	0	21.50	20.59	20.56	20.29
		3	2	21.50	20.64	20.65	20.33
		3	3	21.50	20.58	20.63	20.37
		6	0	21.50	20.54	20.57	20.23
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23025CH	23095CH	23165CH
3MHz	QPSK	1	0	21.50	20.25	20.18	20.25
		1	7	21.50	20.62	20.77	20.52
		1	14	21.50	20.13	20.46	20.11
		8	0	21.50	20.45	20.48	20.27
		8	4	21.50	20.52	20.67	20.30
		8	7	21.50	20.29	20.59	20.21
		15	0	21.50	20.33	20.52	20.26
	16QAM	1	0	21.50	20.46	20.30	20.35
		1	7	21.50	20.83	20.94	20.59
		1	14	21.50	20.33	20.58	20.13
		8	0	21.50	20.41	20.49	20.19
		8	4	21.50	20.48	20.68	20.23
		8	7	21.50	20.26	20.60	20.13
		15	0	21.50	20.26	20.50	20.24

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23035CH	23095CH	23155CH
5MHz	QPSK	1	0	21.50	20.20	20.00	20.41
		1	13	21.50	20.50	20.65	20.40
		1	24	21.50	19.79	20.31	19.91
		12	0	21.50	20.34	20.34	20.48
		12	6	21.50	20.42	20.57	20.38
		12	13	21.50	20.08	20.55	20.13
		25	0	21.50	20.21	20.46	20.31
	16QAM	1	0	21.50	20.53	20.46	20.76
		1	13	21.50	20.83	21.09	20.72
		1	24	21.50	20.11	20.76	20.26
		12	0	21.50	20.36	20.34	20.42
		12	6	21.50	20.39	20.57	20.30
		12	13	21.50	20.10	20.54	20.08
		25	0	21.50	20.17	20.42	20.25
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23060CH	23095CH	23130CH
10MHz	QPSK	1	0	21.50	20.03	19.78	20.04
		1	25	21.50	<b>20.30</b>	<b>20.77</b>	<b>20.87</b>
		1	49	21.50	20.08	19.91	19.59
		25	0	21.50	20.12	20.15	20.49
		25	13	21.50	<b>20.14</b>	<b>20.49</b>	<b>20.55</b>
		25	25	21.50	20.08	20.34	20.07
		50	0	21.50	20.09	20.20	20.30
	16QAM	1	0	21.50	20.21	19.99	20.13
		1	25	21.50	20.58	21.07	20.91
		1	49	21.50	20.39	20.05	19.65
		25	0	21.50	20.06	20.12	20.43
		25	13	21.50	20.08	20.45	20.49
		25	25	21.50	20.04	20.30	20.01
		50	0	21.50	20.05	20.15	20.23

Table 40: Conducted power measurement results of LTE Band XII (Receiver on)

LTE Band XII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23017CH	23095CH	23173CH
1.4MHz	QPSK	1	0	24.00	22.86	22.82	22.54
		1	3	24.00	22.95	22.98	22.65
		1	5	24.00	22.85	22.99	22.61
		3	0	24.00	22.88	22.92	22.52
		3	2	24.00	22.92	23.02	22.55
		3	3	24.00	22.86	23.00	22.57
		6	0	23.00	21.96	22.13	21.69
	16QAM	1	0	22.50	21.89	22.17	21.48
		1	3	22.50	21.98	22.42	21.68
		1	5	22.50	21.88	22.38	21.65
		3	0	22.50	22.05	22.08	21.63
		3	2	22.50	22.04	22.20	21.68
		3	3	22.50	21.99	22.16	21.70
		6	0	22.00	21.08	21.13	20.66
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23025CH	23095CH	23165CH
3MHz	QPSK	1	0	24.00	22.70	22.59	22.61
		1	7	24.00	22.97	23.10	22.71
		1	14	24.00	22.59	22.89	22.40
		8	0	23.00	21.96	21.96	21.67
		8	4	23.00	22.01	22.14	21.69
		8	7	23.00	21.80	22.07	21.61
		15	0	23.00	21.86	22.02	21.67
	16QAM	1	0	22.50	21.86	21.68	21.59
		1	7	22.50	22.22	22.23	21.74
		1	14	22.50	21.76	21.98	21.45
		8	0	22.00	20.98	20.90	20.63
		8	4	22.00	21.05	21.15	20.65
		8	7	22.00	20.75	21.01	20.56
		15	0	22.00	20.74	21.00	20.63

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23035CH	23095CH	23155CH
5MHz	QPSK	1	0	24.00	22.57	22.39	22.74
		1	13	24.00	22.84	23.00	22.67
		1	24	24.00	22.21	22.76	22.26
		12	0	23.00	21.82	21.83	21.91
		12	6	23.00	21.87	22.07	21.81
		12	13	23.00	21.52	22.05	21.56
		25	0	23.00	21.68	21.96	21.74
	16QAM	1	0	22.50	21.76	21.62	22.17
		1	13	22.50	22.03	22.25	22.08
		1	24	22.50	21.34	21.94	21.68
		12	0	22.00	20.91	20.82	20.85
		12	6	22.00	20.92	21.12	20.77
		12	13	22.00	20.57	21.09	20.51
		25	0	22.00	20.66	20.94	20.73
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23060CH	23095CH	23130CH
10MHz	QPSK	1	0	24.00	22.45	22.21	22.45
		1	25	24.00	22.58	23.02	<b>23.09</b>
		1	49	24.00	22.51	22.31	22.03
		25	0	23.00	21.60	21.64	22.00
		25	13	23.00	21.61	21.97	<b>22.04</b>
		25	25	23.00	21.59	21.86	21.56
		50	0	23.00	21.60	21.72	21.76
	16QAM	1	0	22.50	21.68	21.59	21.54
		1	25	22.50	21.85	22.45	22.19
		1	49	22.50	21.80	21.58	20.99
		25	0	22.00	20.51	20.56	20.93
		25	13	22.00	20.53	20.90	20.95
		25	25	22.00	20.51	20.78	20.45
		50	0	22.00	20.53	20.61	20.73

Table 41: Conducted power measurement results of LTE Band XII (Full power)

LTE Band XII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23017CH	23095CH	23173CH
1.4MHz	QPSK	1	0	18.00	17.05	17.24	17.01
		1	3	18.00	17.19	17.35	17.12
		1	5	18.00	17.12	17.27	17.08
		3	0	18.00	17.07	17.29	16.99
		3	2	18.00	17.18	17.33	17.00
		3	3	18.00	17.15	17.29	17.03
		6	0	18.00	17.09	17.26	16.99
	16QAM	1	0	18.00	17.13	17.53	16.99
		1	3	18.00	17.27	17.64	17.13
		1	5	18.00	17.17	17.58	17.08
		3	0	18.00	17.14	17.32	17.08
		3	2	18.00	17.23	17.35	17.10
		3	3	18.00	17.16	17.31	17.13
		6	0	18.00	17.10	17.23	17.09
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23025CH	23095CH	23165CH
3MHz	QPSK	1	0	18.00	16.86	16.92	16.93
		1	7	18.00	17.22	17.43	17.19
		1	14	18.00	16.84	17.20	16.79
		8	0	18.00	17.05	17.17	16.99
		8	4	18.00	17.11	17.28	17.01
		8	7	18.00	16.95	17.26	16.92
		15	0	18.00	16.98	17.21	16.98
	16QAM	1	0	18.00	17.05	16.92	16.88
		1	7	18.00	17.39	17.44	17.14
		1	14	18.00	17.05	17.23	16.77
		8	0	18.00	17.02	17.12	16.94
		8	4	18.00	17.07	17.24	16.96
		8	7	18.00	16.92	17.20	16.87
		15	0	18.00	16.94	17.23	16.95

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23035CH	23095CH	23155CH
5MHz	QPSK	1	0	18.00	16.75	16.76	17.10
		1	13	18.00	17.17	17.32	17.12
		1	24	18.00	16.48	17.03	16.59
		12	0	18.00	16.94	17.05	17.17
		12	6	18.00	17.09	17.27	17.07
		12	13	18.00	16.77	17.24	16.84
		25	0	18.00	16.87	17.15	16.99
	16QAM	1	0	18.00	17.01	17.04	17.38
		1	13	18.00	17.35	17.63	17.40
		1	24	18.00	16.66	17.33	16.88
		12	0	18.00	16.92	17.07	17.08
		12	6	18.00	17.04	17.27	17.03
		12	13	18.00	16.73	17.24	16.84
		25	0	18.00	16.83	17.10	16.96
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23060CH	23095CH	23130CH
10MHz	QPSK	1	0	18.00	16.59	16.49	16.73
		1	25	18.00	16.98	17.40	<b>17.51</b>
		1	49	18.00	16.74	16.61	16.26
		25	0	18.00	16.79	16.84	17.17
		25	13	18.00	16.83	17.17	<b>17.23</b>
		25	25	18.00	16.79	17.03	16.77
		50	0	18.00	16.78	16.90	17.00
	16QAM	1	0	18.00	16.90	16.65	16.69
		1	25	18.00	17.23	17.66	17.54
		1	49	18.00	17.00	16.87	16.29
		25	0	18.00	16.72	16.81	17.10
		25	13	18.00	16.75	17.12	17.15
		25	25	18.00	16.71	17.00	16.69
		50	0	18.00	16.72	16.83	16.94

Table 42: Conducted power measurement results of LTE Band XII (Second antenna+WiFi antenna Simultaneous Transmission)

### 7.1.11 Conducted power measurements of LTE Band XVII (Second Antenna)

LTE Band XVII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23755CH	23790CH	23825CH
5MHz	QPSK	1	0	21.50	19.91	20.54	20.45
		1	13	21.50	20.70	20.91	20.45
		1	24	21.50	20.53	20.19	20.00
		12	0	21.50	20.31	20.79	20.52
		12	6	21.50	20.56	20.87	20.48
		12	13	21.50	20.62	20.54	20.28
		25	0	21.50	20.44	20.69	20.43
	16QAM	1	0	21.50	20.14	20.91	20.89
		1	13	21.50	20.89	21.27	20.84
		1	24	21.50	20.66	20.52	20.44
		12	0	21.50	20.32	20.85	20.51
		12	6	21.50	20.57	20.95	20.48
		12	13	21.50	20.56	20.60	20.21
		25	0	21.50	20.38	20.74	20.36
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23780CH	23790CH	23800CH
10MHz	QPSK	1	0	21.50	19.79	19.92	20.19
		1	25	21.50	20.98	21.04	20.93
		1	49	21.50	19.77	19.68	19.73
		25	0	21.50	20.42	20.53	20.62
		25	13	21.50	20.73	20.76	20.70
		25	25	21.50	20.43	20.29	20.20
		50	0	21.50	20.44	20.44	20.39
	16QAM	1	0	21.50	19.94	20.15	20.24
		1	25	21.50	21.21	21.20	20.97
		1	49	21.50	20.02	19.91	19.84
		25	0	21.50	20.33	20.45	20.51
		25	13	21.50	20.67	20.72	20.60
		25	25	21.50	20.31	20.24	20.12
		50	0	21.50	20.34	20.27	20.34

Table 43: Conducted power measurement results of LTE Band XVII (Receiver on)



LTE Band XVII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23755CH	23790CH	23825CH
5MHz	QPSK	1	0	24.00	22.31	22.96	22.83
		1	13	24.00	23.03	23.24	22.80
		1	24	24.00	22.89	22.65	22.39
		12	0	23.00	21.83	22.28	22.00
		12	6	23.00	22.08	22.43	21.94
		12	13	23.00	22.11	22.04	21.69
		25	0	23.00	22.03	22.25	21.85
	16QAM	1	0	23.00	21.57	22.30	22.07
		1	13	23.00	22.30	22.62	22.00
		1	24	23.00	22.11	21.92	21.66
		12	0	22.00	20.74	21.29	20.97
		12	6	22.00	21.10	21.34	20.91
		12	13	22.00	21.07	21.14	20.68
		25	0	22.00	20.88	21.23	20.84
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23780CH	23790CH	23800CH
10MHz	QPSK	1	0	24.00	22.27	22.33	22.64
		1	25	24.00	23.32	23.28	23.23
		1	49	24.00	22.36	22.15	22.11
		25	0	23.00	21.90	22.02	22.13
		25	13	23.00	22.30	22.20	22.11
		25	25	23.00	21.89	21.73	21.68
		50	0	23.00	21.95	21.93	21.93
	16QAM	1	0	23.00	21.52	21.61	21.75
		1	25	23.00	22.57	22.71	22.48
		1	49	23.00	21.53	21.38	21.24
		25	0	22.00	20.87	21.00	21.09
		25	13	22.00	21.25	21.26	21.15
		25	25	22.00	20.82	20.75	20.63
		50	0	22.00	20.92	20.86	20.84

Table 44: Conducted power measurement results of LTE Band XVII (Full power)

LTE Band XVII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23755CH	23790CH	23825CH
5MHz	QPSK	1	0	18.00	16.34	16.85	16.91
		1	13	18.00	17.13	17.27	16.98
		1	24	18.00	16.93	16.63	16.35
		12	0	18.00	16.68	17.15	16.92
		12	6	18.00	16.98	17.33	16.84
		12	13	18.00	16.90	16.99	16.59
		25	0	18.00	16.83	17.19	16.84
	16QAM	1	0	18.00	16.46	17.08	17.33
		1	13	18.00	17.20	17.54	17.32
		1	24	18.00	16.90	16.88	16.83
		12	0	18.00	16.68	17.17	16.89
		12	6	18.00	16.93	17.34	16.87
		12	13	18.00	17.00	17.01	16.57
		25	0	18.00	16.86	17.12	16.74
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23780CH	23790CH	23800CH
10MHz	QPSK	1	0	18.00	16.14	16.28	16.56
		1	25	18.00	17.35	17.29	17.30
		1	49	18.00	16.27	16.08	16.02
		25	0	18.00	16.72	16.95	16.93
		25	13	18.00	17.10	17.13	17.08
		25	25	18.00	16.77	16.65	16.63
		50	0	18.00	16.78	16.81	16.85
	16QAM	1	0	18.00	16.38	16.42	16.56
		1	25	18.00	17.56	17.56	17.42
		1	49	18.00	16.54	16.29	16.15
		25	0	18.00	16.67	16.86	16.89
		25	13	18.00	16.96	17.10	17.01
		25	25	18.00	16.67	16.71	16.52
		50	0	18.00	16.69	16.73	16.73

Table 45: Conducted power measurement results of LTE Band XVII (Second antenna+WiFi antenna Simultaneous Transmission)

### 7.1.12 Conducted power measurements of GSM850 (Main Antenna)

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
GSM (CS)		33.50	32.58	32.57	32.57	-9.19	24.31	23.39	23.38	23.38
GPRS /EDGE (GMSK)	1 Tx Slot	33.50	32.16	32.30	32.26	-9.19	24.31	22.97	23.11	23.07
	<b>2 Tx Slots</b>	<b>31.50</b>	<b>30.43</b>	<b>30.44</b>	<b>30.42</b>	<b>-6.13</b>	<b>25.37</b>	<b>24.30</b>	<b>24.31</b>	<b>24.29</b>
	3 Tx Slots	29.50	28.46	28.47	28.40	-4.42	25.08	24.04	24.05	23.98
	4 Tx Slots	27.50	26.40	26.37	26.33	-3.18	24.32	23.22	23.19	23.15
EDGE (8PSK)	1 Tx Slot	27.00	26.29	26.24	26.17	-9.19	17.81	17.10	17.05	16.98
	2 Tx Slots	25.00	24.03	24.02	23.71	-6.13	18.87	17.90	17.89	17.58
	3 Tx Slots	23.00	21.94	21.85	21.82	-4.42	18.58	17.52	17.43	17.40
	4 Tx Slots	21.00	19.89	19.86	19.72	-3.18	17.82	16.71	16.68	16.54

Table 46: Conducted power measurement results of GSM850

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

### 7.1.13 Conducted power measurements of GSM1900 (Main Antenna)

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		<b>30.00</b>	<b>29.21</b>	<b>28.87</b>	<b>28.57</b>	<b>-9.19</b>	<b>20.81</b>	<b>20.02</b>	<b>19.68</b>	<b>19.38</b>
GPRS /EDGE (GMSK)	1 Tx Slot	30.00	29.20	28.90	28.59	-9.19	20.81	20.01	19.71	19.40
	2 Tx Slots	28.00	26.77	26.74	26.67	-6.13	21.87	20.64	20.61	20.54
	3 Tx Slots	26.00	24.95	24.74	24.68	-4.42	21.58	20.53	20.32	20.26
	4 Tx Slots	24.50	23.36	23.18	23.14	-3.18	21.32	20.18	20.00	19.96
EDGE (8PSK)	1 Tx Slot	26.00	25.03	24.61	24.55	-9.19	16.81	15.84	15.42	15.36
	2 Tx Slots	24.00	22.86	22.45	22.34	-6.13	17.87	16.73	16.32	16.21
	3 Tx Slots	21.50	20.47	20.09	20.17	-4.42	17.08	16.05	15.67	15.75
	4 Tx Slots	20.00	18.81	18.56	18.35	-3.18	16.82	15.63	15.38	15.17

Table 47: Conducted power measurement results of GSM1900 (Full power)

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		28.00	26.97	26.75	26.74	-9.19	18.81	17.78	17.56	17.55
GPRS /EDGE (GMSK)	1 Tx Slot	28.00	26.98	26.77	26.75	-9.19	18.81	17.79	17.58	17.56
	<b>2 Tx Slots</b>	<b>26.00</b>	<b>25.00</b>	<b>24.77</b>	<b>24.71</b>	<b>-6.13</b>	<b>19.87</b>	<b>18.87</b>	<b>18.64</b>	<b>18.58</b>
	3 Tx Slots	24.00	22.89	22.71	22.70	-4.42	19.58	18.47	18.29	18.28
	4 Tx Slots	22.50	21.46	21.32	21.26	-3.18	19.32	18.28	18.14	18.08
EDGE (8PSK)	1 Tx Slot	26.00	25.03	24.61	24.55	-9.19	16.81	15.84	15.42	15.36
	2 Tx Slots	24.00	22.86	22.45	22.34	-6.13	17.87	16.73	16.32	16.21
	3 Tx Slots	21.50	20.47	20.09	20.17	-4.42	17.08	16.05	15.67	15.75
	4 Tx Slots	20.00	18.81	18.56	18.35	-3.18	16.82	15.63	15.38	15.17

Table 48: Conducted power measurement results of GSM1900 (Proximity sensor on)

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

### 7.1.14 Conducted power measurements of UMTS Band II (Main Antenna)

UMTS1900 (Band II)		Tune-up	Average Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	<b>24.00</b>	<b>22.92</b>	<b>22.91</b>	<b>23.01</b>
	12.2kbps AMR	24.00	22.98	22.96	23.09
HSDPA	Subtest 1	23.00	22.19	22.13	22.17
	Subtest 2	23.00	22.11	22.14	22.19
	Subtest 3	22.00	21.54	21.77	21.22
	Subtest 4	22.00	21.53	21.75	21.22
HSUPA	Subtest 1	22.00	21.41	21.84	21.46
	Subtest 2	19.50	18.62	18.81	19.12
	Subtest 3	20.50	19.31	19.79	19.85
	Subtest 4	20.00	19.19	19.35	19.17
	Subtest 5	22.50	21.89	21.88	21.98
DC-HSDPA	Subtest 1	23.00	22.25	22.46	22.89
	Subtest 2	23.00	22.21	22.43	22.75
	Subtest 3	22.00	21.53	21.75	21.21
	Subtest 4	22.00	21.51	21.71	21.28

Table 49: Conducted power measurement results of UMTS Band II (Full power)

UMTS1900 (Band II)		Tune-up	Average Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	<b>21.00</b>	<b>20.01</b>	<b>19.97</b>	<b>20.13</b>
	12.2kbps AMR	21.00	19.97	20.00	20.06
HSDPA	Subtest 1	20.00	18.99	18.89	19.13
	Subtest 2	20.00	18.79	18.67	18.91
	Subtest 3	19.00	18.22	18.11	18.32
	Subtest 4	19.00	18.21	18.10	18.30
HSUPA	Subtest 1	20.00	18.79	18.67	18.33
	Subtest 2	16.50	15.81	15.77	16.02
	Subtest 3	18.00	17.13	17.01	17.13
	Subtest 4	17.00	16.24	16.36	16.54
	Subtest 5	20.00	18.96	18.84	19.06
DC-HSDPA	Subtest 1	20.00	18.83	18.75	19.27
	Subtest 2	20.00	18.97	18.60	18.83
	Subtest 3	19.50	18.04	18.04	18.33
	Subtest 4	19.50	18.22	18.00	18.25

Table 50: Conducted power measurement results of UMTS Band II (Hotspot on)

UMTS1900 (Band II)		Tune-up	Average Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	<b>22.00</b>	<b>20.92</b>	<b>20.97</b>	<b>21.11</b>
	12.2kbps AMR	22.00	20.91	20.98	21.09
HSDPA	Subtest 1	21.00	19.88	19.90	20.04
	Subtest 2	21.00	19.64	19.66	19.82
	Subtest 3	20.00	19.07	19.08	19.26
	Subtest 4	20.00	19.07	19.07	19.24
HSUPA	Subtest 1	20.00	19.40	19.83	19.41
	Subtest 2	17.50	16.80	16.96	16.80
	Subtest 3	19.00	17.90	17.90	17.59
	Subtest 4	18.00	17.30	16.81	17.21
	Subtest 5	21.00	19.83	19.89	20.02
DC-HSDPA	Subtest 1	21.00	19.95	19.72	20.16
	Subtest 2	21.00	19.76	19.80	19.75
	Subtest 3	20.50	18.91	19.01	19.31
	Subtest 4	20.50	19.15	18.89	19.12

Table 51: Conducted power measurement results of UMTS Band II (Proximity sensor on)

UMTS1900 (Band II)		Tune-up	Average Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	<b>19.00</b>	<b>17.92</b>	<b>17.92</b>	<b>18.07</b>
	12.2kbps AMR	19.00	17.93	17.94	18.05
HSDPA	Subtest 1	18.00	16.90	16.96	17.13
	Subtest 2	18.00	16.64	16.71	16.86
	Subtest 3	17.00	16.43	16.22	16.30
	Subtest 4	17.00	16.36	16.23	16.32
HSUPA	Subtest 1	17.00	15.80	16.04	17.00
	Subtest 2	14.50	13.58	13.71	13.89
	Subtest 3	15.50	14.56	14.61	14.29
	Subtest 4	15.00	14.12	14.41	14.56
	Subtest 5	17.50	16.81	16.87	16.89
DC-HSDPA	Subtest 1	18.00	16.89	17.02	17.14
	Subtest 2	18.00	16.61	16.61	16.83
	Subtest 3	17.00	16.51	16.34	16.14
	Subtest 4	17.00	16.31	16.43	16.46

Table 52: Conducted power measurement results of UMTS Band II (Proximity sensor on+hotspot on)

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.15 Conducted power measurements of UMTS Band IV (Main Antenna)

UMTS1700 (Band IV)		Tune-up	Average Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	<b>24.00</b>	<b>22.81</b>	<b>22.85</b>	<b>22.82</b>
	12.2kbps AMR	24.00	22.83	22.85	22.81
HSDPA	Subtest 1	23.00	21.80	21.91	21.81
	Subtest 2	23.00	21.59	21.62	21.61
	Subtest 3	22.50	21.12	21.20	21.16
	Subtest 4	22.50	21.22	21.19	21.21
HSUPA	Subtest 1	23.00	21.40	21.57	21.56
	Subtest 2	20.00	18.53	18.58	18.77
	Subtest 3	20.00	19.08	19.04	19.60
	Subtest 4	20.00	18.81	18.76	19.20
	Subtest 5	23.00	21.74	21.69	21.73
DC-HSDPA	Subtest 1	23.00	21.64	22.03	21.94
	Subtest 2	23.00	21.45	21.44	21.47
	Subtest 3	22.50	21.22	21.19	21.26
	Subtest 4	22.50	21.21	21.20	21.25

Table 53: Conducted power measurement results of UMTS Band IV (Full power)

UMTS1700 (Band IV)		Tune-up	Average Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	<b>21.00</b>	<b>19.86</b>	<b>19.94</b>	<b>19.88</b>
	12.2kbps AMR	21.00	19.85	19.96	19.89
HSDPA	Subtest 1	20.00	18.82	18.93	18.85
	Subtest 2	20.00	18.56	18.69	18.61
	Subtest 3	19.50	18.00	18.13	18.05
	Subtest 4	19.50	17.99	18.11	18.03
HSUPA	Subtest 1	20.00	18.47	18.54	18.54
	Subtest 2	17.00	15.80	15.80	15.61
	Subtest 3	18.00	16.98	17.14	17.09
	Subtest 4	17.00	15.86	16.24	16.23
	Subtest 5	20.00	18.73	18.88	18.79
DC-HSDPA	Subtest 1	20.00	18.93	19.08	18.89
	Subtest 2	20.00	18.39	18.59	18.65
	Subtest 3	19.50	18.16	18.29	17.88
	Subtest 4	19.50	18.15	18.23	17.96

Table 54: Conducted power measurement results of UMTS Band IV (Hotspot on)

UMTS1700 (Band IV)		Tune-up	Average Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	<b>22.00</b>	<b>20.89</b>	<b>20.93</b>	<b>20.91</b>
	12.2kbps AMR	22.00	20.89	20.91	20.89
HSDPA	Subtest 1	21.00	19.89	19.90	19.88
	Subtest 2	21.00	19.69	19.68	19.66
	Subtest 3	20.50	19.10	19.10	19.07
	Subtest 4	20.50	19.09	19.07	19.05
HSUPA	Subtest 1	21.00	20.72	20.42	20.88
	Subtest 2	18.00	16.84	16.74	16.97
	Subtest 3	19.00	17.69	17.85	17.65
	Subtest 4	18.00	16.45	16.68	16.96
	Subtest 5	21.00	19.34	19.08	19.48
DC-HSDPA	Subtest 1	21.00	20.00	20.07	19.75
	Subtest 2	21.00	19.84	19.58	19.84
	Subtest 3	20.50	19.16	19.03	19.13
	Subtest 4	20.50	19.17	19.04	18.93

Table 55: Conducted power measurement results of UMTS Band IV (Proximity sensor on)

UMTS1700 (Band IV)		Tune-up	Average Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	<b>18.00</b>	<b>17.52</b>	<b>17.42</b>	<b>17.51</b>
	12.2kbps AMR	18.00	17.50	17.51	17.41
HSDPA	Subtest 1	18.00	16.88	17.54	17.64
	Subtest 2	18.00	16.63	17.74	16.67
	Subtest 3	17.50	16.17	16.26	16.33
	Subtest 4	17.00	16.44	15.83	15.95
HSUPA	Subtest 1	18.50	17.75	18.04	17.95
	Subtest 2	16.00	15.14	15.12	14.93
	Subtest 3	17.00	16.49	16.65	16.82
	Subtest 4	16.00	15.66	15.79	15.72
	Subtest 5	18.50	18.47	18.34	18.22
DC-HSDPA	Subtest 1	18.00	16.52	17.49	17.59
	Subtest 2	18.00	16.61	17.88	16.64
	Subtest 3	17.50	16.10	16.17	16.15
	Subtest 4	17.00	16.32	15.99	16.07

Table 56: Conducted power measurement results of UMTS Band IV (Proximity sensor on+hotspot on)

- Note: 1) The conducted power of UMTS Band IV is measured with RMS detector.  
2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).  
3) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.



### 7.1.16 Conducted power measurements of UMTS Band V (Main Antenna)

UMTS850 (Band V)		Tune-up	Average Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	<b>24.00</b>	<b>22.90</b>	<b>22.89</b>	<b>22.92</b>
	12.2kbps AMR	24.00	22.93	22.80	22.89
HSDPA	Subtest 1	23.00	22.02	22.49	22.45
	Subtest 2	23.00	21.82	22.26	22.18
	Subtest 3	22.50	21.14	21.64	21.58
	Subtest 4	22.50	21.14	21.60	21.56
HSUPA	Subtest 1	22.50	21.16	21.76	21.65
	Subtest 2	20.00	18.89	19.34	19.36
	Subtest 3	21.00	20.22	19.92	19.79
	Subtest 4	21.00	19.29	19.83	19.72
	Subtest 5	22.50	21.95	21.66	22.34
DC-HSDPA	Subtest 1	23.00	22.08	22.52	22.46
	Subtest 2	23.00	21.82	22.25	22.05
	Subtest 3	22.50	21.32	21.80	21.52
	Subtest 4	22.50	21.32	21.68	21.42

Table 57: Conducted power measurement results of UMTS Band V

Note:

- 1) The conducted power of UMTS Band V is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

### 7.1.17 Conducted power measurements of LTE Band II (Main Antenna)

LTE Band II					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	23.50	22.28	22.82	22.84
		1	3	23.50	22.37	22.82	22.88
		1	5	23.50	22.31	22.68	22.88
		3	0	23.50	22.42	22.81	22.87
		3	2	23.50	22.41	22.81	22.86
		3	3	23.50	22.36	22.74	22.91
	16QAM	6	0	23.00	21.36	21.90	21.92
		1	0	23.00	21.38	22.22	21.99
		1	3	23.00	21.38	22.25	21.99
		1	5	23.00	21.35	22.15	21.99
		3	0	23.00	21.44	21.98	21.92
		3	2	23.00	21.43	22.00	21.89
		3	3	23.00	21.40	21.94	21.95
		6	0	22.00	20.50	20.79	21.01
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615CH	18900CH	19185CH
3MHz	QPSK	1	0	23.50	22.30	22.77	22.82
		1	7	23.50	22.50	23.10	22.99
		1	14	23.50	22.28	22.78	22.80
		8	0	23.00	21.43	21.91	21.86
		8	4	23.00	21.43	21.98	21.91
		8	7	23.00	21.38	21.91	21.87
		15	0	23.00	21.41	21.97	21.90
	16QAM	1	0	23.00	21.29	21.81	21.85
		1	7	23.00	21.45	22.04	22.00
		1	14	23.00	21.30	21.74	21.83
		8	0	22.00	20.43	20.83	20.76
		8	4	22.00	20.44	20.84	20.79
		8	7	22.00	20.39	20.72	20.83
		15	0	22.00	20.38	20.83	20.78

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	23.50	22.49	22.89	22.84
		1	13	23.50	22.68	23.04	23.13
		1	24	23.50	22.41	22.61	22.76
		12	0	23.00	21.66	21.99	22.09
		12	6	23.00	21.69	22.08	22.25
		12	13	23.00	21.57	21.91	22.08
		25	0	23.00	21.57	21.95	22.14
	16QAM	1	0	23.00	21.68	22.03	21.98
		1	13	23.00	21.83	22.16	22.40
		1	24	23.00	21.57	21.77	22.00
		12	0	22.00	20.68	21.04	20.93
		12	6	22.00	20.67	21.11	21.09
		12	13	22.00	20.60	20.90	20.91
		25	0	22.00	20.53	20.89	20.94
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	24.00	23.36	23.46	23.40
		1	25	24.00	22.85	23.08	23.08
		1	49	24.00	22.62	22.79	22.86
		25	0	23.00	21.69	21.99	21.90
		25	13	23.00	21.84	21.99	21.97
		25	25	23.00	21.74	21.92	22.06
		50	0	23.00	21.68	22.05	22.12
	16QAM	1	0	23.00	22.34	22.64	22.52
		1	25	23.00	22.05	22.24	21.97
		1	49	23.00	21.87	21.96	21.81
		25	0	22.00	20.57	21.00	20.87
		25	13	22.00	20.71	20.95	20.95
		25	25	22.00	20.61	20.88	20.91
		50	0	22.00	20.57	20.96	20.96

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	23.50	22.21	22.68	22.82
		1	38	23.50	22.87	23.09	23.01
		1	74	23.50	22.43	22.57	22.59
		36	0	23.00	21.61	21.98	21.99
		36	18	23.00	21.83	22.11	21.94
		36	39	23.00	21.70	21.92	21.79
		75	0	23.00	21.71	21.87	21.96
	16QAM	1	0	23.00	21.40	21.82	21.79
		1	38	23.00	22.08	22.15	21.97
		1	74	23.00	21.62	21.66	21.60
		36	0	22.00	20.58	21.01	20.90
		36	18	22.00	20.80	21.09	20.93
		36	39	22.00	20.67	20.89	20.77
		75	0	22.00	20.60	20.81	20.96
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	23.50	<b>22.23</b>	21.55	22.30
		1	50	23.50	22.11	<b>22.67</b>	22.09
		1	99	23.50	21.57	22.23	<b>22.32</b>
		50	0	23.00	21.59	21.88	21.92
		50	25	23.00	21.69	<b>22.07</b>	21.98
		50	50	23.00	21.60	21.88	21.83
		100	0	23.00	21.61	21.80	21.86
	16QAM	1	0	23.00	21.67	21.82	22.06
		1	50	23.00	22.41	22.39	22.35
		1	99	23.00	21.63	21.88	21.93
		50	0	22.00	20.49	20.83	20.89
		50	25	22.00	20.66	21.04	20.97
		50	50	22.00	20.56	20.79	20.83
		100	0	22.00	20.58	20.70	20.85

Table 58: Conducted power measurement results of LTE Band II (Full power)

LTE Band II					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	22.00	20.38	20.89	20.87
		1	3	22.00	20.43	20.88	20.93
		1	5	22.00	20.32	20.72	20.87
		3	0	22.00	20.37	20.90	20.90
		3	2	22.00	20.34	20.89	20.90
		3	3	22.00	20.35	20.82	20.91
		6	0	21.00	19.48	19.95	20.00
	16QAM	1	0	21.00	19.62	20.20	20.16
		1	3	21.00	19.59	20.21	20.20
		1	5	21.00	19.48	20.04	20.13
		3	0	21.00	19.53	19.98	20.07
		3	2	21.00	19.54	19.98	20.08
		3	3	21.00	19.49	19.89	20.06
		6	0	20.00	18.61	19.01	19.12
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615CH	18900CH	19185CH
3MHz	QPSK	1	0	22.00	20.33	20.81	20.80
		1	7	22.00	20.48	20.99	21.03
		1	14	22.00	20.22	20.68	20.82
		8	0	21.00	19.50	19.98	19.93
		8	4	21.00	19.51	19.95	19.98
		8	7	21.00	19.44	19.87	19.93
		15	0	21.00	19.47	19.93	19.97
	16QAM	1	0	21.00	19.47	19.91	19.92
		1	7	21.00	19.65	20.11	20.11
		1	14	21.00	19.40	19.73	19.89
		8	0	20.00	18.46	19.03	18.92
		8	4	20.00	18.43	19.04	18.95
		8	7	20.00	18.37	18.95	18.89
		15	0	20.00	18.41	18.99	18.99

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	22.00	20.60	20.99	20.89
		1	13	22.00	20.78	21.23	21.21
		1	24	22.00	20.44	20.74	20.79
		12	0	21.00	19.79	20.15	20.02
		12	6	21.00	19.80	20.25	20.18
		12	13	21.00	19.65	20.00	20.00
		25	0	21.00	19.66	20.11	20.06
	16QAM	1	0	21.00	19.83	20.50	20.23
		1	13	21.00	19.97	20.65	20.55
		1	24	21.00	19.65	20.11	20.13
		12	0	20.00	18.73	19.25	19.01
		12	6	20.00	18.74	19.34	19.19
		12	13	20.00	18.59	19.11	19.04
		25	0	20.00	18.60	19.18	19.07
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	22.00	21.28	21.68	21.68
		1	25	22.00	20.97	21.28	21.15
		1	49	22.00	20.68	20.89	20.89
		25	0	21.00	19.77	20.16	20.05
		25	13	21.00	19.90	20.16	20.06
		25	25	21.00	19.73	20.01	20.00
		50	0	21.00	19.69	20.15	20.13
	16QAM	1	0	21.00	20.70	20.97	20.88
		1	25	21.00	20.32	20.64	20.31
		1	49	21.00	19.92	20.24	19.98
		25	0	20.00	18.69	19.20	19.00
		25	13	20.00	18.83	19.22	19.06
		25	25	20.00	18.69	19.08	19.02
		50	0	20.00	18.68	19.16	19.12

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	22.00	20.38	20.74	20.84
		1	38	22.00	21.04	21.24	21.13
		1	74	22.00	20.58	20.61	20.52
		36	0	21.00	19.76	20.15	20.11
		36	18	21.00	19.90	20.18	20.03
		36	39	21.00	19.72	20.00	19.88
		75	0	21.00	19.72	20.02	20.09
	16QAM	1	0	21.00	19.64	20.08	19.95
		1	38	21.00	20.31	20.50	20.24
		1	74	21.00	19.81	19.96	19.74
		36	0	20.00	18.73	19.22	19.08
		36	18	20.00	18.89	19.21	19.08
		36	39	20.00	18.75	19.03	18.94
		75	0	20.00	18.68	19.02	19.15
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	22.00	20.62	20.77	21.12
		1	50	22.00	<b>21.45</b>	<b>21.31</b>	<b>21.60</b>
		1	99	22.00	20.59	20.97	20.98
		50	0	21.00	19.59	20.00	19.99
		50	25	21.00	19.77	<b>20.15</b>	20.08
		50	50	21.00	19.67	19.95	19.88
		100	0	21.00	19.70	19.92	<b>19.95</b>
	16QAM	1	0	21.00	19.73	20.00	20.19
		1	50	21.00	20.55	20.60	20.70
		1	99	21.00	19.81	20.12	19.98
		50	0	20.00	18.60	19.04	19.03
		50	25	20.00	18.74	19.20	19.13
		50	50	20.00	18.64	18.92	18.98
		100	0	20.00	18.69	18.90	18.97

Table 59: Conducted power measurement results of LTE Band II (Proximity sensor on)

LTE Band II					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	19.70	18.04	18.58	18.62
		1	3	19.70	18.03	18.65	18.67
		1	5	19.70	17.96	18.50	18.60
		3	0	19.70	18.09	18.62	18.58
		3	2	19.70	18.07	18.63	18.54
		3	3	19.70	18.02	18.56	18.54
		6	0	19.70	18.03	18.60	18.52
	16QAM	1	0	19.70	18.08	18.81	18.69
		1	3	19.70	18.07	18.81	18.71
		1	5	19.70	17.97	18.63	18.73
		3	0	19.70	18.04	18.69	18.72
		3	2	19.70	18.02	18.65	18.68
		3	3	19.70	17.98	18.63	18.70
		6	0	19.70	18.05	18.57	18.58
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615CH	18900CH	19185CH
3MHz	QPSK	1	0	19.70	17.93	18.48	18.51
		1	7	19.70	18.07	18.74	18.70
		1	14	19.70	17.79	18.37	18.40
		8	0	19.70	18.03	18.56	18.56
		8	4	19.70	18.01	18.59	18.59
		8	7	19.70	17.94	18.50	18.47
		15	0	19.70	17.99	18.57	18.57
	16QAM	1	0	19.70	18.21	18.64	18.55
		1	7	19.70	18.32	18.87	18.72
		1	14	19.70	18.04	18.52	18.51
		8	0	19.70	17.97	18.51	18.57
		8	4	19.70	17.96	18.56	18.54
		8	7	19.70	17.90	18.45	18.48
		15	0	19.70	17.93	18.52	18.55



Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	19.70	18.20	18.63	18.45
		1	13	19.70	18.35	18.86	18.78
		1	24	19.70	17.97	18.35	18.37
		12	0	19.70	18.29	18.73	18.64
		12	6	19.70	18.34	18.83	18.79
		12	13	19.70	18.19	18.63	18.61
		25	0	19.70	18.20	18.68	18.66
	16QAM	1	0	19.70	18.52	19.03	18.70
		1	13	19.70	18.68	19.18	19.03
		1	24	19.70	18.29	18.75	18.70
		12	0	19.70	18.32	18.76	18.57
		12	6	19.70	18.30	18.89	18.73
		12	13	19.70	18.20	18.67	18.54
		25	0	19.70	18.11	18.67	18.65
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	19.70	18.84	19.31	19.28
		1	25	19.70	18.55	18.90	18.76
		1	49	19.70	18.19	18.51	18.41
		25	0	19.70	18.28	18.72	18.60
		25	13	19.70	18.40	18.73	18.63
		25	25	19.70	18.26	18.61	18.58
		50	0	19.70	18.22	18.75	18.65
	16QAM	1	0	19.70	19.12	19.52	19.28
		1	25	19.70	18.74	19.02	18.76
		1	49	19.70	18.45	18.63	18.34
		25	0	19.70	18.20	18.67	18.60
		25	13	19.70	18.32	18.68	18.57
		25	25	19.70	18.19	18.56	18.58
		50	0	19.70	18.19	18.69	18.66

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	19.70	17.90	18.31	18.42
		1	38	19.70	18.57	18.85	18.79
		1	74	19.70	18.08	18.12	18.09
		36	0	19.70	18.23	18.68	18.65
		36	18	19.70	18.41	18.74	18.63
		36	39	19.70	18.31	18.60	18.44
		75	0	19.70	18.28	18.55	18.68
	16QAM	1	0	19.70	18.16	18.61	18.57
		1	38	19.70	18.79	19.18	18.84
		1	74	19.70	18.42	18.43	18.12
		36	0	19.70	18.14	18.65	18.65
		36	18	19.70	18.33	18.71	18.57
		36	39	19.70	18.23	18.57	18.38
		75	0	19.70	18.21	18.50	18.65
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	19.70	17.82	18.17	18.33
		1	50	19.70	18.68	18.84	<b>18.85</b>
		1	99	19.70	18.04	18.19	18.02
		50	0	19.70	18.15	18.52	18.57
		50	25	19.70	<b>18.35</b>	<b>18.76</b>	<b>18.67</b>
		50	50	19.70	18.21	18.53	18.45
		100	0	19.70	18.26	18.44	18.52
	16QAM	1	0	19.70	18.18	18.59	18.82
		1	50	19.70	18.93	19.19	19.31
		1	99	19.70	18.39	18.58	18.48
		50	0	19.70	18.10	18.48	18.59
		50	25	19.70	18.30	18.70	18.62
		50	50	19.70	18.18	18.47	18.44
		100	0	19.70	18.20	18.37	18.55

Table 60: Conducted power measurement results of LTE Band II (Hotspot on)

LTE Band II					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	17.80	16.21	16.70	16.72
		1	3	17.80	16.26	16.77	16.75
		1	5	17.80	16.09	16.59	16.67
		3	0	17.80	16.21	16.72	16.66
		3	2	17.80	16.20	16.74	16.70
		3	3	17.80	16.14	16.66	16.71
		6	0	17.80	16.15	16.76	16.70
	16QAM	1	0	17.80	16.34	17.11	16.66
		1	3	17.80	16.33	17.13	16.82
		1	5	17.80	16.15	16.98	16.72
		3	0	17.80	16.25	16.84	16.74
		3	2	17.80	16.23	16.86	16.72
		3	3	17.80	16.19	16.79	16.73
		6	0	17.80	16.12	16.68	16.72
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615CH	18900CH	19185CH
3MHz	QPSK	1	0	17.80	15.96	16.53	16.59
		1	7	17.80	16.27	16.86	16.84
		1	14	17.80	15.90	16.35	16.50
		8	0	17.80	16.14	16.68	16.66
		8	4	17.80	16.15	16.74	16.67
		8	7	17.80	16.06	16.55	16.59
		15	0	17.80	16.08	16.68	16.63
	16QAM	1	0	17.80	16.27	16.52	16.76
		1	7	17.80	16.51	16.77	17.01
		1	14	17.80	16.14	16.35	16.68
		8	0	17.80	16.16	16.69	16.68
		8	4	17.80	16.18	16.67	16.66
		8	7	17.80	16.09	16.57	16.59
		15	0	17.80	16.06	16.58	16.58

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	17.80	16.35	16.61	16.55
		1	13	17.80	16.52	16.87	16.84
		1	24	17.80	16.07	16.36	16.44
		12	0	17.80	16.42	16.74	16.78
		12	6	17.80	16.44	16.86	16.86
		12	13	17.80	16.34	16.66	16.66
		25	0	17.80	16.36	16.75	16.73
	16QAM	1	0	17.80	16.52	16.98	17.03
		1	13	17.80	16.69	17.17	17.44
		1	24	17.80	16.27	16.70	16.97
		12	0	17.80	16.52	16.80	16.76
		12	6	17.80	16.56	16.89	16.89
		12	13	17.80	16.39	16.69	16.69
		25	0	17.80	16.36	16.72	16.82
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	17.80	17.01	17.40	17.43
		1	25	17.80	16.71	17.01	16.94
		1	49	17.80	16.27	16.58	16.54
		25	0	17.80	16.43	16.78	16.78
		25	13	17.80	16.54	16.81	16.76
		25	25	17.80	16.37	16.71	16.70
		50	0	17.80	16.34	16.84	16.82
	16QAM	1	0	17.80	17.34	17.80	17.60
		1	25	17.80	16.98	17.28	17.20
		1	49	17.80	16.60	16.87	16.64
		25	0	17.80	16.38	16.81	16.73
		25	13	17.80	16.54	16.78	16.76
		25	25	17.80	16.42	16.68	16.70
		50	0	17.80	16.41	16.78	16.78

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	17.80	15.89	16.30	16.52
		1	38	17.80	16.61	16.94	16.98
		1	74	17.80	15.99	16.16	16.19
		36	0	17.80	16.36	16.75	16.77
		36	18	17.80	16.54	16.84	16.79
		36	39	17.80	16.38	16.70	16.58
		75	0	17.80	16.38	16.62	16.81
	16QAM	1	0	17.80	16.17	16.57	16.61
		1	38	17.80	16.90	17.21	17.04
		1	74	17.80	16.38	16.43	16.27
		36	0	17.80	16.32	16.72	16.71
		36	18	17.80	16.56	16.80	16.72
		36	39	17.80	16.41	16.67	16.51
		75	0	17.80	16.31	16.57	16.76
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	17.80	15.89	16.16	16.35
		1	50	17.80	16.81	16.94	<b>16.97</b>
		1	99	17.80	16.01	16.22	16.02
		50	0	17.80	16.27	16.57	16.67
		50	25	17.80	16.49	<b>16.86</b>	16.80
		50	50	17.80	16.31	16.61	16.56
		100	0	17.80	16.37	16.49	16.62
	16QAM	1	0	17.80	16.09	16.62	16.73
		1	50	17.80	16.96	17.41	17.29
		1	99	17.80	16.24	16.68	16.36
		50	0	17.80	16.24	16.53	16.62
		50	25	17.80	16.51	16.82	16.75
		50	50	17.80	16.33	16.56	16.51
		100	0	17.80	16.35	16.43	16.57

Table 61: Conducted power measurement results of LTE Band II (Proximity sensor on+Hotspot on)

### 7.1.18 Conducted power measurements of LTE Band IV (Main Antenna)

LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	23.50	22.24	22.70	22.48
		1	3	23.50	22.33	22.79	22.49
		1	5	23.50	22.22	22.65	22.35
		3	0	23.50	22.26	22.77	22.41
		3	2	23.50	22.27	22.78	22.40
		3	3	23.50	22.25	22.76	22.33
		6	0	23.00	21.49	21.96	21.63
	16QAM	1	0	23.00	21.50	22.10	21.74
		1	3	23.00	21.56	22.16	21.78
		1	5	23.00	21.52	22.02	21.63
		3	0	23.00	21.56	21.98	21.70
		3	2	23.00	21.58	21.99	21.69
		3	3	23.00	21.54	21.93	21.65
		6	0	22.00	20.62	20.92	20.81
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965CH	20175CH	20385CH
3MHz	QPSK	1	0	23.50	22.12	22.61	22.45
		1	7	23.50	22.32	22.87	22.62
		1	14	23.50	22.14	22.55	22.24
		8	0	23.00	21.53	21.91	21.66
		8	4	23.00	21.58	21.93	21.66
		8	7	23.00	21.48	21.89	21.59
		15	0	23.00	21.53	21.91	21.61
	16QAM	1	0	23.00	21.50	21.87	21.68
		1	7	23.00	21.80	22.07	21.82
		1	14	23.00	21.59	21.80	21.46
		8	0	22.00	20.59	20.97	20.84
		8	4	22.00	20.64	21.00	20.81
		8	7	22.00	20.60	21.11	20.74
		15	0	22.00	20.69	20.90	20.74

LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975CH	20175CH	20375CH
5MHz	QPSK	1	0	23.50	22.46	22.55	22.53
		1	13	23.50	22.84	22.77	22.56
		1	24	23.50	22.48	22.36	22.03
		12	0	23.00	21.75	21.93	21.83
		12	6	23.00	21.85	21.99	21.74
		12	13	23.00	21.81	21.84	21.47
		25	0	23.00	21.74	21.86	21.71
	16QAM	1	0	23.00	21.74	21.92	21.89
		1	13	23.00	22.09	22.17	21.98
		1	24	23.00	21.74	21.77	21.37
		12	0	22.00	20.94	20.86	20.96
		12	6	22.00	21.03	20.99	20.91
		12	13	22.00	20.71	20.83	20.65
		25	0	22.00	20.90	20.77	20.89
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000CH	20175CH	20350CH
10MHz	QPSK	1	0	23.50	22.72	22.89	23.13
		1	25	23.50	22.82	22.85	22.77
		1	49	23.50	22.87	23.05	22.42
		25	0	23.00	21.81	21.86	21.97
		25	13	23.00	21.87	21.88	21.82
		25	25	23.00	21.84	21.84	21.59
		50	0	23.00	21.88	21.80	21.76
	16QAM	1	0	23.00	22.13	22.26	22.35
		1	25	23.00	22.27	22.34	21.92
		1	49	23.00	22.14	22.34	21.65
		25	0	22.00	20.91	20.76	21.06
		25	13	22.00	20.76	20.86	20.93
		25	25	22.00	20.68	21.02	20.71
		50	0	22.00	20.77	20.69	20.93

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025CH	20175CH	20325CH
15MHz	QPSK	1	0	23.50	22.45	22.52	22.60
		1	38	23.50	23.00	22.89	22.92
		1	74	23.50	22.50	22.63	22.14
		36	0	23.00	21.89	21.92	22.11
		36	18	23.00	22.06	21.95	22.09
		36	39	23.00	21.88	22.00	21.81
		75	0	23.00	21.92	21.86	21.98
	16QAM	1	0	23.00	21.67	21.69	21.90
		1	38	23.00	22.25	22.05	22.18
		1	74	23.00	21.84	21.86	21.41
		36	0	22.00	20.74	20.80	21.21
		36	18	22.00	20.92	20.89	21.23
		36	39	22.00	20.74	21.19	20.97
		75	0	22.00	20.83	20.77	21.08
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050CH	20175CH	20300CH
20MHz	QPSK	1	0	23.50	21.58	21.68	21.86
		1	50	23.50	<b>22.95</b>	<b>22.82</b>	<b>23.04</b>
		1	99	23.50	22.50	22.55	22.12
		50	0	23.00	21.83	21.85	21.99
		50	25	23.00	21.93	21.85	<b>22.01</b>
		50	50	23.00	21.80	22.00	21.78
		100	0	23.00	21.82	21.95	21.98
	16QAM	1	0	23.00	21.84	21.91	22.11
		1	50	23.00	22.21	22.24	22.48
		1	99	23.00	21.83	21.98	21.53
		50	0	22.00	20.73	20.76	21.13
		50	25	22.00	20.78	20.75	21.12
		50	50	22.00	20.70	21.10	20.91
		100	0	22.00	20.74	20.78	21.04

Table 62: Conducted power measurement results of LTE Band IV(Full power)



LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	21.50	20.61	21.00	20.89
		1	3	21.50	20.72	21.04	20.91
		1	5	21.50	20.59	20.96	20.77
		3	0	21.50	20.68	21.02	20.86
		3	2	21.50	20.70	21.03	20.84
		3	3	21.50	20.65	21.01	20.78
		6	0	21.00	19.69	20.26	20.12
	16QAM	1	0	21.00	19.80	20.48	20.17
		1	3	21.00	19.90	20.62	20.22
		1	5	21.00	19.71	20.48	20.08
		3	0	21.00	19.77	20.32	20.31
		3	2	21.00	19.79	20.35	20.30
		3	3	21.00	19.77	20.27	20.26
		6	0	20.00	18.94	19.11	18.83
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965CH	20175CH	20385CH
3MHz	QPSK	1	0	21.50	20.54	20.90	20.84
		1	7	21.50	20.74	21.13	20.99
		1	14	21.50	20.50	20.94	20.66
		8	0	21.00	19.70	20.23	20.16
		8	4	21.00	19.68	20.28	20.14
		8	7	21.00	19.64	20.23	20.06
		15	0	21.00	19.64	20.25	20.08
	16QAM	1	0	21.00	19.75	20.20	20.12
		1	7	21.00	20.01	20.49	20.30
		1	14	21.00	19.79	20.13	19.98
		8	0	20.00	18.86	19.17	18.72
		8	4	20.00	18.90	19.14	18.72
		8	7	20.00	18.80	19.11	18.59
		15	0	20.00	18.85	19.13	18.66

LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975CH	20175CH	20375CH
5MHz	QPSK	1	0	21.50	20.56	20.64	21.00
		1	13	21.50	20.87	20.98	21.08
		1	24	21.50	20.50	20.56	20.50
		12	0	21.00	19.87	20.12	20.08
		12	6	21.00	19.99	20.21	20.09
		12	13	21.00	19.88	20.07	19.79
		25	0	21.00	19.88	20.07	20.00
	16QAM	1	0	21.00	19.89	20.24	20.30
		1	13	21.00	20.25	20.54	20.42
		1	24	21.00	19.88	20.08	20.04
		12	0	20.00	19.30	19.24	19.02
		12	6	20.00	19.31	19.32	19.04
		12	13	20.00	19.21	19.13	18.68
		25	0	20.00	19.15	19.19	18.86
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000CH	20175CH	20350CH
10MHz	QPSK	1	0	21.50	21.08	21.03	21.48
		1	25	21.50	20.98	21.11	21.22
		1	49	21.50	20.98	21.33	20.94
		25	0	21.00	19.90	20.11	20.15
		25	13	21.00	19.99	20.13	20.12
		25	25	21.00	19.96	20.08	19.88
		50	0	21.00	20.02	19.99	20.06
	16QAM	1	0	21.00	20.32	20.55	20.89
		1	25	21.00	20.40	20.66	20.37
		1	49	21.00	20.32	20.67	20.36
		25	0	20.00	19.21	19.15	19.13
		25	13	20.00	19.26	19.19	19.08
		25	25	20.00	19.16	19.11	18.84
		50	0	20.00	19.24	19.02	18.97

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025CH	20175CH	20325CH
15MHz	QPSK	1	0	21.50	20.44	20.69	21.09
		1	38	21.50	20.96	21.04	21.25
		1	74	21.50	20.57	20.97	20.60
		36	0	21.00	20.02	20.14	20.26
		36	18	21.00	20.13	20.13	20.29
		36	39	21.00	20.06	20.26	20.07
		75	0	21.00	20.05	20.11	20.14
	16QAM	1	0	21.00	19.91	20.26	20.16
		1	38	21.00	20.56	20.55	20.36
		1	74	21.00	20.10	20.28	20.02
		36	0	20.00	19.27	19.21	19.19
		36	18	20.00	19.37	19.27	19.26
		36	39	20.00	19.14	19.25	19.02
		75	0	20.00	19.22	19.16	19.11
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050CH	20175CH	20300CH
20MHz	QPSK	1	0	21.50	20.72	20.82	21.11
		1	50	21.50	21.00	21.08	<b>21.49</b>
		1	99	21.50	20.72	21.02	20.78
		50	0	21.00	19.92	20.09	20.20
		50	25	21.00	20.14	20.09	<b>20.25</b>
		50	50	21.00	20.05	20.21	20.15
		100	0	21.00	20.07	20.14	20.18
	16QAM	1	0	21.00	20.08	20.13	20.44
		1	50	21.00	20.56	20.45	20.67
		1	99	21.00	20.17	20.36	20.41
		50	0	20.00	19.16	19.15	19.26
		50	25	20.00	19.22	19.11	19.26
		50	50	20.00	19.07	19.21	19.07
		100	0	20.00	19.21	19.22	19.20

Table 63: Conducted power measurement results of LTE Band IV (Proximity sensor on)

LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	19.50	18.50	18.80	18.44
		1	3	19.50	18.57	18.94	18.49
		1	5	19.50	18.46	18.84	18.35
		3	0	19.50	18.55	18.88	18.40
		3	2	19.50	18.56	18.92	18.41
		3	3	19.50	18.52	18.84	18.35
		6	0	19.50	18.50	18.80	18.38
	16QAM	1	0	19.50	18.69	19.12	18.43
		1	3	19.50	18.78	19.27	18.56
		1	5	19.50	18.61	19.18	18.37
		3	0	19.50	18.65	18.92	18.44
		3	2	19.50	18.67	18.95	18.45
		3	3	19.50	18.63	18.88	18.35
		6	0	19.50	18.51	18.62	18.32
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
3MHz	QPSK	1	0	19.50	18.39	18.72	18.35
		1	7	19.50	18.61	18.98	18.56
		1	14	19.50	18.28	18.60	18.19
		8	0	19.50	18.52	18.79	18.40
		8	4	19.50	18.56	18.84	18.43
		8	7	19.50	18.45	18.80	18.36
		15	0	19.50	18.51	18.79	18.38
	16QAM	1	0	19.50	18.48	18.77	18.46
		1	7	19.50	18.70	19.09	18.67
		1	14	19.50	18.40	18.73	18.24
		8	0	19.50	18.53	18.74	18.36
		8	4	19.50	18.49	18.79	18.38
		8	7	19.50	18.45	18.71	18.26
		15	0	19.50	18.43	18.74	18.38
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965CH	20175CH	20385CH

LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975CH	20175CH	20375CH
5MHz	QPSK	1	0	19.50	18.77	18.63	18.61
		1	13	19.50	19.04	18.97	18.71
		1	24	19.50	18.61	18.52	18.06
		12	0	19.50	18.86	18.84	18.69
		12	6	19.50	18.93	18.93	18.70
		12	13	19.50	18.84	18.79	18.40
		25	0	19.50	18.81	18.85	18.60
	16QAM	1	0	19.50	18.86	18.87	18.88
		1	13	19.50	19.14	19.24	19.02
		1	24	19.50	18.69	18.78	18.46
		12	0	19.50	18.84	18.91	18.68
		12	6	19.50	18.99	18.93	18.69
		12	13	19.50	18.89	18.81	18.40
		25	0	19.50	18.78	18.80	18.54
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000CH	20175CH	20350CH
10MHz	QPSK	1	0	19.50	19.00	18.97	19.12
		1	25	19.50	19.08	19.04	18.88
		1	49	19.50	18.94	18.99	18.45
		25	0	19.50	18.88	18.79	18.78
		25	13	19.50	18.93	18.90	18.74
		25	25	19.50	18.87	18.81	18.50
		50	0	19.50	18.94	18.74	18.64
	16QAM	1	0	19.50	19.27	19.15	19.14
		1	25	19.50	19.28	19.27	18.98
		1	49	19.50	19.18	19.30	18.61
		25	0	19.50	18.80	18.77	18.75
		25	13	19.50	18.85	18.82	18.66
		25	25	19.50	18.74	18.74	18.45
		50	0	19.50	18.81	18.67	18.56

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025CH	20175CH	20325CH
15MHz	QPSK	1	0	19.50	18.59	18.66	18.77
		1	38	19.50	19.03	19.06	18.97
		1	74	19.50	18.51	18.81	18.25
		36	0	19.50	18.91	18.83	18.95
		36	18	19.50	19.04	18.91	18.92
		36	39	19.50	18.84	18.92	18.72
		75	0	19.50	18.95	18.87	18.82
	16QAM	1	0	19.50	18.91	18.91	18.72
		1	38	19.50	19.33	19.20	18.89
		1	74	19.50	18.82	18.97	18.19
		36	0	19.50	18.87	18.75	18.82
		36	18	19.50	18.94	18.88	18.87
		36	39	19.50	18.74	18.89	18.62
		75	0	19.50	18.85	18.76	18.76
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050CH	20175CH	20300CH
20MHz	QPSK	1	0	19.50	18.53	18.56	18.69
		1	50	19.50	19.03	19.00	<b>19.26</b>
		1	99	19.50	18.40	18.68	18.28
		50	0	19.50	18.85	18.75	<b>18.95</b>
		50	25	19.50	18.87	18.84	18.93
		50	50	19.50	18.70	18.90	18.72
		100	0	19.50	18.82	18.87	18.85
	16QAM	1	0	19.50	18.91	18.73	18.86
		1	50	19.50	19.29	19.16	19.34
		1	99	19.50	18.66	18.79	18.41
		50	0	19.50	18.85	18.67	18.83
		50	25	19.50	18.80	18.74	18.88
		50	50	19.50	18.71	18.82	18.62
		100	0	19.50	18.75	18.77	18.81

Table 64: Conducted power measurement results of LTE Band IV (Hotspot on)

LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	18.00	16.51	17.23	16.99
		1	3	18.00	16.58	17.29	16.99
		1	5	18.00	16.47	17.17	16.85
		3	0	18.00	16.54	17.24	16.91
		3	2	18.00	16.57	17.28	16.91
		3	3	18.00	16.53	17.25	16.92
		6	0	18.00	16.52	17.23	16.94
	16QAM	1	0	18.00	16.74	17.43	17.07
		1	3	18.00	16.74	17.55	17.10
		1	5	18.00	16.73	17.40	16.96
		3	0	18.00	16.57	17.31	17.06
		3	2	18.00	16.60	17.28	17.07
		3	3	18.00	16.56	17.27	17.01
		6	0	18.00	16.49	17.17	16.91
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965CH	20175CH	20385CH
3MHz	QPSK	1	0	18.00	16.29	17.08	16.95
		1	7	18.00	16.68	17.36	17.11
		1	14	18.00	16.35	16.97	16.77
		8	0	18.00	16.57	17.17	17.02
		8	4	18.00	16.62	17.21	16.93
		8	7	18.00	16.56	17.17	16.86
		15	0	18.00	16.56	17.16	16.87
	16QAM	1	0	18.00	16.57	17.12	17.05
		1	7	18.00	16.94	17.41	17.22
		1	14	18.00	16.64	16.97	16.78
		8	0	18.00	16.53	17.11	16.98
		8	4	18.00	16.56	17.15	16.88
		8	7	18.00	16.52	17.10	16.80
		15	0	18.00	16.51	17.11	16.76

LTE Band IV					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975CH	20175CH	20375CH
5MHz	QPSK	1	0	18.00	16.56	16.75	16.79
		1	13	18.00	16.91	17.07	16.84
		1	24	18.00	16.59	16.58	16.31
		12	0	18.00	16.81	16.98	16.89
		12	6	18.00	16.96	17.01	16.85
		12	13	18.00	16.84	16.86	16.61
		25	0	18.00	16.77	16.92	16.80
	16QAM	1	0	18.00	16.86	16.94	17.11
		1	13	18.00	17.22	17.26	17.18
		1	24	18.00	16.93	16.77	16.66
		12	0	18.00	16.77	16.97	16.84
		12	6	18.00	16.91	16.98	16.79
		12	13	18.00	16.82	16.85	16.54
		25	0	18.00	16.71	16.82	16.77
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000CH	20175CH	20350CH
10MHz	QPSK	1	0	18.00	16.96	17.23	17.43
		1	25	18.00	17.12	17.12	17.12
		1	49	18.00	17.16	17.15	16.83
		25	0	18.00	16.82	16.97	16.96
		25	13	18.00	16.92	16.96	16.92
		25	25	18.00	16.87	16.86	16.69
		50	0	18.00	16.87	16.79	16.85
	16QAM	1	0	18.00	17.27	17.43	17.52
		1	25	18.00	17.30	17.34	17.20
		1	49	18.00	17.42	17.35	16.97
		25	0	18.00	16.67	16.91	16.93
		25	13	18.00	16.78	16.85	16.89
		25	25	18.00	16.73	16.75	16.65
		50	0	18.00	16.73	16.64	16.79



Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025CH	20175CH	20325CH
15MHz	QPSK	1	0	18.00	16.49	16.89	16.87
		1	38	18.00	17.16	17.09	17.14
		1	74	18.00	16.76	16.77	16.43
		36	0	18.00	16.84	17.05	17.05
		36	18	18.00	17.00	16.96	17.08
		36	39	18.00	16.98	17.03	16.87
		75	0	18.00	16.90	16.92	16.92
	16QAM	1	0	18.00	16.85	17.04	17.03
		1	38	18.00	17.50	17.27	17.21
		1	74	18.00	17.12	16.93	16.48
		36	0	18.00	16.79	16.99	16.98
		36	18	18.00	16.95	16.90	17.00
		36	39	18.00	16.94	16.98	16.80
		75	0	18.00	16.83	16.85	16.85
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050CH	20175CH	20300CH
20MHz	QPSK	1	0	18.00	16.58	16.79	16.68
		1	50	18.00	17.11	17.16	<b>17.29</b>
		1	99	18.00	16.54	16.84	16.45
		50	0	18.00	16.88	17.03	17.02
		50	25	18.00	16.90	16.88	<b>17.06</b>
		50	50	18.00	16.74	17.01	16.94
		100	0	18.00	16.85	16.97	16.96
	16QAM	1	0	18.00	16.79	17.07	16.90
		1	50	18.00	17.37	17.38	17.56
		1	99	18.00	16.72	17.06	16.81
		50	0	18.00	16.79	16.98	16.93
		50	25	18.00	16.87	16.84	16.96
		50	50	18.00	16.71	16.96	16.81
		100	0	18.00	16.83	16.93	16.86

Table 65: Conducted power measurement results of LTE Band IV (Proximity sensor on+hotspot on)

### 7.1.19 Conducted power measurements of LTE Band V(Main Antenna)

LTE Band V					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	24.00	22.66	22.76	22.86
		1	3	24.00	22.78	22.82	22.92
		1	5	24.00	22.66	22.67	22.69
		3	0	24.00	22.74	22.75	22.82
		3	2	24.00	22.76	22.76	22.79
		3	3	24.00	22.70	22.70	22.70
		6	0	23.00	21.77	21.82	21.87
	16QAM	1	0	23.00	21.77	22.05	22.06
		1	3	23.00	21.91	22.15	22.16
		1	5	23.00	21.76	21.99	21.94
		3	0	23.00	21.80	21.92	21.98
		3	2	23.00	21.85	21.96	21.97
		3	3	23.00	21.80	21.89	21.92
		6	0	22.00	20.82	20.84	21.02
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20415CH	20525CH	20635CH
3MHz	QPSK	1	0	24.00	22.46	22.55	22.84
		1	7	24.00	22.91	22.86	22.99
		1	14	24.00	22.55	22.63	22.55
		8	0	23.00	21.75	21.77	21.86
		8	4	23.00	21.90	21.83	21.90
		8	7	23.00	21.87	21.81	21.79
		15	0	23.00	21.83	21.76	21.86
	16QAM	1	0	23.00	21.63	21.73	21.92
		1	7	23.00	22.07	22.03	22.11
		1	14	23.00	21.72	21.71	21.70
		8	0	22.00	20.77	20.86	20.95
		8	4	22.00	20.88	20.93	20.99
		8	7	22.00	20.85	20.91	20.88
		15	0	22.00	20.77	20.81	20.89

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20425CH	20525CH	20625CH
5MHz	QPSK	1	0	24.00	22.51	22.43	22.87
		1	13	24.00	22.92	22.78	22.96
		1	24	24.00	22.44	22.56	22.36
		12	0	23.00	21.85	21.74	22.05
		12	6	23.00	21.99	21.83	22.03
		12	13	23.00	21.73	21.76	21.72
		25	0	23.00	21.79	21.78	21.86
	16QAM	1	0	23.00	21.72	21.80	22.27
		1	13	23.00	22.20	22.18	22.36
		1	24	23.00	21.64	21.86	21.79
		12	0	22.00	20.86	20.83	21.10
		12	6	22.00	21.03	20.90	21.07
		12	13	22.00	20.71	20.83	20.79
		25	0	22.00	20.72	20.81	20.91
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20450CH	20525CH	20600CH
10MHz	QPSK	1	0	24.00	22.33	22.26	22.64
		1	25	24.00	<b>22.88</b>	<b>22.80</b>	<b>23.12</b>
		1	49	24.00	22.19	22.65	22.24
		25	0	23.00	21.72	21.62	21.95
		25	13	23.00	21.79	21.80	22.08
		25	25	23.00	21.60	21.73	21.73
		50	0	23.00	21.63	21.72	21.89
	16QAM	1	0	23.00	21.53	21.69	21.78
		1	25	23.00	22.08	22.17	22.32
		1	49	23.00	21.52	21.92	21.47
		25	0	22.00	20.69	20.63	20.94
		25	13	22.00	20.77	20.82	21.09
		25	25	22.00	20.59	20.73	20.76
		50	0	22.00	20.62	20.75	20.87

Table 66: Conducted power measurement results of LTE Band V (Full power)

LTE Band V					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	22.00	20.73	20.96	21.03
		1	3	22.00	20.96	21.05	21.15
		1	5	22.00	20.81	20.92	21.06
		3	0	22.00	20.81	20.94	21.08
		3	2	22.00	20.90	20.97	21.10
		3	3	22.00	20.86	20.93	21.05
		6	0	21.00	19.82	19.87	20.10
	16QAM	1	0	21.00	19.77	20.31	20.16
		1	3	21.00	19.99	20.45	20.29
		1	5	21.00	19.88	20.28	20.14
		3	0	21.00	19.77	20.07	20.22
		3	2	21.00	19.86	20.09	20.24
		3	3	21.00	19.83	20.04	20.23
		6	0	20.00	18.81	18.89	19.05
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20415CH	20525CH	20635CH
3MHz	QPSK	1	0	22.00	20.45	20.70	20.96
		1	7	22.00	21.00	21.05	21.22
		1	14	22.00	20.71	20.69	20.78
		8	0	21.00	19.83	19.78	19.97
		8	4	21.00	19.95	19.86	20.09
		8	7	21.00	19.95	19.82	19.96
		15	0	21.00	19.89	19.77	20.03
	16QAM	1	0	21.00	19.76	19.68	19.81
		1	7	21.00	20.13	20.17	20.28
		1	14	21.00	20.00	19.68	19.79
		8	0	20.00	18.72	18.85	19.03
		8	4	20.00	18.87	18.87	19.04
		8	7	20.00	18.84	18.87	18.95
		15	0	20.00	18.74	18.84	18.99

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20425CH	20525CH	20625CH
5MHz	QPSK	1	0	22.00	20.49	20.64	21.05
		1	13	22.00	21.11	20.99	21.16
		1	24	22.00	20.57	20.65	20.61
		12	0	21.00	19.87	19.75	20.10
		12	6	21.00	20.02	19.84	20.12
		12	13	21.00	19.79	19.76	19.89
		25	0	21.00	19.83	19.78	19.94
	16QAM	1	0	21.00	19.77	19.96	20.24
		1	13	21.00	20.32	20.32	20.42
		1	24	21.00	19.73	19.95	19.95
		12	0	20.00	18.78	18.84	19.11
		12	6	20.00	18.98	18.93	19.11
		12	13	20.00	18.76	18.83	18.85
		25	0	20.00	18.72	18.82	18.95
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20450CH	20525CH	20600CH
10MHz	QPSK	1	0	22.00	20.27	20.39	20.73
		1	25	22.00	20.99	20.96	<b>21.31</b>
		1	49	22.00	20.28	20.67	20.49
		25	0	21.00	19.77	19.70	19.97
		25	13	21.00	19.82	19.84	<b>20.13</b>
		25	25	21.00	19.69	19.74	19.82
		50	0	21.00	19.72	19.75	19.91
	16QAM	1	0	21.00	19.71	19.85	19.81
		1	25	21.00	20.27	20.21	20.35
		1	49	21.00	19.63	19.95	19.50
		25	0	20.00	18.72	18.72	18.98
		25	13	20.00	18.78	18.85	19.10
		25	25	20.00	18.56	18.76	18.82
		50	0	20.00	18.58	18.74	18.90

Table 67: Conducted power measurement results of LTE Band V (Proximity sensor on)

### 7.1.20 Conducted power measurements of LTE Band VII (Main Antenna)

LTE Band VII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	23.00	21.47	21.81	21.41
		1	13	23.00	21.56	21.69	21.23
		1	24	23.00	21.57	21.72	21.02
		12	0	22.00	20.52	20.72	20.43
		12	6	22.00	20.70	20.77	20.49
		12	13	22.00	20.65	20.56	20.30
		25	0	22.00	20.56	20.58	20.36
	16QAM	1	0	22.00	20.77	21.32	20.84
		1	13	22.00	20.83	21.13	20.72
		1	24	22.00	20.91	21.15	20.61
		12	0	22.00	20.95	21.17	20.78
		12	6	22.00	21.10	21.20	20.73
		12	13	22.00	20.95	21.06	20.56
		25	0	22.00	20.89	21.04	20.59
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	23.00	21.43	21.67	21.47
		1	25	23.00	21.74	21.70	21.24
		1	49	23.00	21.73	21.74	21.07
		25	0	22.00	20.63	20.64	20.36
		25	13	22.00	20.81	20.70	20.39
		25	25	22.00	20.78	20.62	20.29
		50	0	22.00	20.86	20.53	20.34
	16QAM	1	0	22.00	20.61	20.96	20.61
		1	25	22.00	20.96	20.97	20.55
		1	49	22.00	20.93	21.07	20.49
		25	0	22.00	20.90	21.00	20.71
		25	13	22.00	20.97	21.05	20.62
		25	25	22.00	21.02	20.96	20.57
		50	0	22.00	21.13	20.92	20.76

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	23.00	21.22	21.49	21.39
		1	38	23.00	21.74	21.70	21.24
		1	74	23.00	21.42	21.55	21.21
		36	0	22.00	20.72	20.56	20.40
		36	18	22.00	20.79	20.68	20.43
		36	39	22.00	20.59	20.54	20.21
		75	0	22.00	20.73	20.46	20.42
	16QAM	1	0	22.00	20.50	20.89	20.68
		1	38	22.00	21.03	21.08	20.65
		1	74	22.00	20.69	21.01	20.43
		36	0	22.00	21.06	20.92	20.71
		36	18	22.00	21.10	21.06	20.73
		36	39	22.00	20.97	20.98	20.58
		75	0	22.00	20.98	20.87	20.78
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	23.00	21.39	<b>21.62</b>	<b>21.67</b>
		1	50	23.00	<b>21.62</b>	<b>21.75</b>	21.35
		1	99	23.00	21.53	21.68	21.02
		50	0	22.00	<b>20.77</b>	20.48	20.59
		50	25	22.00	20.61	20.66	20.56
		50	50	22.00	20.54	20.65	20.33
		100	0	22.00	20.66	20.48	20.53
	16QAM	1	0	22.00	20.87	20.92	20.94
		1	50	22.00	20.97	20.91	20.68
		1	99	22.00	20.97	20.97	20.56
		50	0	22.00	21.08	20.85	20.92
		50	25	22.00	21.08	21.01	20.85
		50	50	22.00	20.87	21.00	20.56
		100	0	22.00	20.92	20.87	20.90

Table 68: Conducted power measurement results of LTE Band VII (Full power)

LTE Band VII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	21.00	19.93	20.06	19.90
		1	13	21.00	19.83	19.87	19.68
		1	24	21.00	20.00	19.81	19.72
		12	0	20.00	18.49	18.48	18.34
		12	6	20.00	18.61	18.59	18.37
		12	13	20.00	18.41	18.40	18.15
		25	0	20.00	18.48	18.41	18.26
	16QAM	1	0	20.00	18.91	19.10	18.88
		1	13	20.00	18.77	18.85	18.69
		1	24	20.00	18.85	18.85	18.62
		12	0	20.00	18.99	18.99	18.69
		12	6	20.00	19.07	19.10	18.74
		12	13	20.00	18.94	18.90	18.55
		25	0	20.00	18.86	18.82	18.63
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	21.00	19.83	19.97	19.85
		1	25	21.00	19.92	19.87	19.68
		1	49	21.00	20.07	19.91	19.77
		25	0	20.00	18.46	18.39	18.18
		25	13	20.00	18.59	18.46	18.28
		25	25	20.00	18.59	18.37	18.19
		50	0	20.00	18.66	18.35	18.30
	16QAM	1	0	20.00	18.82	19.03	18.69
		1	25	20.00	18.76	18.76	18.61
		1	49	20.00	18.81	18.75	18.50
		25	0	20.00	18.88	18.87	18.72
		25	13	20.00	18.97	18.90	18.71
		25	25	20.00	18.95	18.81	18.60
		50	0	20.00	19.08	18.76	18.68



Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	21.00	19.67	19.78	19.77
		1	38	21.00	20.01	19.87	19.74
		1	74	21.00	19.85	19.78	19.53
		36	0	20.00	18.57	18.32	18.19
		36	18	20.00	18.66	18.50	18.26
		36	39	20.00	18.43	18.25	18.17
		75	0	20.00	18.57	18.30	18.38
	16QAM	1	0	20.00	18.62	18.69	18.47
		1	38	20.00	18.89	18.79	18.49
		1	74	20.00	18.64	18.65	18.34
		36	0	20.00	19.03	18.77	18.72
		36	18	20.00	19.01	18.93	18.74
		36	39	20.00	18.85	18.75	18.59
		75	0	20.00	18.99	18.72	18.77
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	21.00	19.82	19.91	<b>20.05</b>
		1	50	21.00	19.99	19.89	19.80
		1	99	21.00	19.96	20.02	19.72
		50	0	20.00	18.57	18.24	18.45
		50	25	20.00	18.53	18.45	18.41
		50	50	20.00	18.35	18.44	18.22
		100	0	20.00	18.53	18.33	18.38
	16QAM	1	0	20.00	18.99	18.86	19.07
		1	50	20.00	19.02	18.85	18.84
		1	99	20.00	18.90	18.97	18.80
		50	0	20.00	19.03	18.70	18.91
		50	25	20.00	18.90	18.87	18.89
		50	50	20.00	18.77	18.88	18.66
		100	0	20.00	18.99	18.74	18.80

Table 69: Conducted power measurement results of LTE Band VII (Proximity sensor on)

LTE Band VII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	18.00	17.09	17.15	16.83
		1	13	18.00	17.05	16.93	16.59
		1	24	18.00	17.11	16.94	16.47
		12	0	18.00	16.87	16.75	16.59
		12	6	18.00	16.96	16.89	16.58
		12	13	18.00	16.78	16.73	16.35
		25	0	18.00	16.80	16.74	16.47
	16QAM	1	0	18.00	17.24	17.50	17.22
		1	13	18.00	17.25	17.33	17.07
		1	24	18.00	17.31	17.28	16.87
		12	0	18.00	16.76	16.79	16.51
		12	6	18.00	16.85	16.95	16.50
		12	13	18.00	16.72	16.77	16.26
		25	0	18.00	16.70	16.71	16.47
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	18.00	16.90	17.15	16.86
		1	25	18.00	17.08	17.00	16.63
		1	49	18.00	17.32	17.08	16.57
		25	0	18.00	16.74	16.68	16.45
		25	13	18.00	16.93	16.82	16.54
		25	25	18.00	17.00	16.74	16.43
		50	0	18.00	17.01	16.70	16.51
	16QAM	1	0	18.00	17.30	17.39	17.04
		1	25	18.00	17.43	17.32	16.88
		1	49	18.00	17.66	17.37	16.77
		25	0	18.00	16.68	16.66	16.41
		25	13	18.00	16.85	16.80	16.49
		25	25	18.00	16.92	16.72	16.40
		50	0	18.00	16.96	16.66	16.47

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	18.00	16.69	16.83	16.69
		1	38	18.00	17.22	17.01	16.61
		1	74	18.00	16.95	16.86	16.34
		36	0	18.00	16.88	16.59	16.42
		36	18	18.00	17.05	16.80	16.50
		36	39	18.00	16.81	16.67	16.30
		75	0	18.00	16.92	16.63	16.46
	16QAM	1	0	18.00	17.19	17.11	17.10
		1	38	18.00	17.61	17.33	16.95
		1	74	18.00	17.35	17.13	16.68
		36	0	18.00	16.91	16.64	16.48
		36	18	18.00	17.07	16.83	16.52
		36	39	18.00	16.83	16.71	16.34
		75	0	18.00	16.93	16.64	16.53
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	18.00	16.98	17.01	17.03
		1	50	18.00	<b>17.12</b>	16.97	16.72
		1	99	18.00	16.99	16.99	16.52
		50	0	18.00	16.95	16.54	16.78
		50	25	18.00	<b>16.96</b>	16.81	16.66
		50	50	18.00	16.72	16.82	16.32
		100	0	18.00	16.94	16.69	16.67
	16QAM	1	0	18.00	17.48	17.55	17.44
		1	50	18.00	17.57	17.46	17.21
		1	99	18.00	17.41	17.55	16.93
		50	0	18.00	16.96	16.54	16.80
		50	25	18.00	16.97	16.80	16.69
		50	50	18.00	16.73	16.82	16.35
		100	0	18.00	16.96	16.68	16.59

Table 70: Conducted power measurement results of LTE Band VII (Hotspot on)

LTE Band VII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	16.00	15.10	15.33	15.09
		1	13	16.00	15.26	15.07	14.86
		1	24	16.00	15.26	15.14	14.77
		12	0	16.00	14.91	14.92	14.77
		12	6	16.00	15.09	15.06	14.76
		12	13	16.00	14.94	14.84	14.54
		25	0	16.00	14.95	14.83	14.66
	16QAM	1	0	16.00	15.20	15.73	15.45
		1	13	16.00	15.40	15.44	15.21
		1	24	16.00	15.41	15.53	15.12
		12	0	16.00	14.91	15.04	14.73
		12	6	16.00	15.07	15.16	14.74
		12	13	16.00	14.89	14.91	14.49
		25	0	16.00	14.86	14.83	14.64
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	16.00	14.87	15.22	15.05
		1	25	16.00	15.20	15.11	14.96
		1	49	16.00	15.47	15.27	14.85
		25	0	16.00	14.79	14.84	14.71
		25	13	16.00	15.02	14.91	14.79
		25	25	16.00	15.19	14.83	14.62
		50	0	16.00	15.16	14.78	14.76
	16QAM	1	0	16.00	15.15	15.46	15.09
		1	25	16.00	15.59	15.37	15.05
		1	49	16.00	15.72	15.60	14.90
		25	0	16.00	14.79	14.86	14.67
		25	13	16.00	15.03	14.93	14.74
		25	25	16.00	15.12	14.84	14.57
		50	0	16.00	15.08	14.76	14.70

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	16.00	14.62	14.90	14.89
		1	38	16.00	15.39	15.11	14.90
		1	74	16.00	14.99	14.96	14.57
		36	0	16.00	14.93	14.76	14.72
		36	18	16.00	15.23	14.97	14.75
		36	39	16.00	15.02	14.85	14.59
		75	0	16.00	15.08	14.73	14.76
	16QAM	1	0	16.00	15.01	15.25	15.19
		1	38	16.00	15.83	15.44	15.17
		1	74	16.00	15.45	15.36	14.81
		36	0	16.00	14.96	14.74	14.68
		36	18	16.00	15.19	14.95	14.72
		36	39	16.00	14.98	14.82	14.56
		75	0	16.00	15.05	14.67	14.71
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	16.00	14.91	15.15	15.23
		1	50	16.00	<b>15.30</b>	15.09	14.93
		1	99	16.00	15.05	15.21	14.77
		50	0	16.00	15.10	14.72	15.02
		50	25	16.00	<b>15.17</b>	14.91	14.92
		50	50	16.00	14.93	14.93	14.62
		100	0	16.00	15.11	14.78	14.90
	16QAM	1	0	16.00	15.30	15.68	15.82
		1	50	16.00	15.70	15.49	15.51
		1	99	16.00	15.45	15.66	15.27
		50	0	16.00	15.05	14.68	15.00
		50	25	16.00	15.12	14.86	14.90
		50	50	16.00	14.88	14.90	14.60
		100	0	16.00	15.09	14.73	14.84

Table 71: Conducted power measurement results of LTE Band VII (Proximity sensor on+Hotspot on)

### 7.1.21 Conducted power measurements of LTE Band XII (Main Antenna)

LTE Band XII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23017CH	23095CH	23173CH
1.4MHz	QPSK	1	0	24.00	22.68	22.89	22.78
		1	3	24.00	22.93	22.99	22.86
		1	5	24.00	22.90	22.90	22.79
		3	0	24.00	22.73	22.85	22.78
		3	2	24.00	22.83	22.91	22.79
		3	3	24.00	22.86	22.87	22.78
		6	0	23.00	21.92	22.02	21.95
	16QAM	1	0	23.00	21.89	22.12	21.86
		1	3	23.00	22.11	22.20	21.99
		1	5	23.00	22.13	22.16	21.93
		3	0	23.00	21.83	21.99	21.95
		3	2	23.00	21.93	22.04	21.96
		3	3	23.00	21.93	22.01	21.97
		6	0	22.00	20.92	20.96	20.86
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
3MHz	QPSK	1	0	24.00	22.49	22.66	22.91
		1	7	24.00	23.02	23.00	23.02
		1	14	24.00	22.86	22.70	22.60
		8	0	23.00	21.89	21.92	22.01
		8	4	23.00	22.06	22.02	22.01
		8	7	23.00	21.93	21.91	21.90
		15	0	23.00	21.88	21.92	21.99
	16QAM	1	0	23.00	21.58	21.73	21.80
		1	7	23.00	22.21	22.10	22.01
		1	14	23.00	21.91	21.78	21.58
		8	0	22.00	20.87	20.83	20.87
		8	4	22.00	21.04	21.00	20.88
		8	7	22.00	20.83	20.81	20.78
		15	0	22.00	20.78	20.86	20.84
					23025CH	23095CH	23165CH

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23035CH	23095CH	23155CH
5MHz	QPSK	1	0	24.00	22.45	22.50	22.74
		1	13	24.00	23.15	22.83	22.93
		1	24	24.00	22.56	22.50	22.40
		12	0	23.00	21.87	21.79	22.02
		12	6	23.00	22.08	21.91	22.03
		12	13	23.00	21.79	21.81	21.80
		25	0	23.00	21.82	21.83	21.92
	16QAM	1	0	23.00	21.54	21.85	22.11
		1	13	23.00	22.15	22.23	22.27
		1	24	23.00	21.54	21.89	21.76
		12	0	22.00	20.79	20.83	20.96
		12	6	22.00	20.97	20.96	20.98
		12	13	22.00	20.73	20.89	20.75
		25	0	22.00	20.75	20.90	20.87
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23060CH	23095CH	23130CH
10MHz	QPSK	1	0	24.00	22.38	22.51	22.44
		1	25	24.00	<b>22.84</b>	<b>22.88</b>	<b>23.05</b>
		1	49	24.00	22.29	22.33	22.15
		25	0	23.00	21.76	21.73	21.80
		25	13	23.00	21.80	21.84	<b>21.95</b>
		25	25	23.00	21.59	21.68	21.68
		50	0	23.00	21.67	21.67	21.78
	16QAM	1	0	23.00	21.44	21.56	21.69
		1	25	23.00	21.97	22.10	22.22
		1	49	23.00	21.46	21.50	21.41
		25	0	22.00	20.69	20.74	20.74
		25	13	22.00	20.73	20.80	20.88
		25	25	22.00	20.53	20.62	20.60
		50	0	22.00	20.59	20.56	20.69

Table 72: Conducted power measurement results of LTE Band XII

### 7.1.22 Conducted power measurements of LTE Band XVII (Main Antenna)

LTE Band XVII					Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23755CH	23790CH	23825CH
5MHz	QPSK	1	0	24.00	22.52	22.75	22.85
		1	13	24.00	22.92	23.07	23.03
		1	24	24.00	22.69	22.71	22.45
		12	0	23.00	21.88	22.03	22.09
		12	6	23.00	22.02	22.19	22.14
		12	13	23.00	21.97	21.99	21.97
		25	0	23.00	21.98	22.08	22.07
	16QAM	1	0	23.00	21.77	21.92	22.19
		1	13	23.00	22.28	22.28	22.42
		1	24	23.00	21.89	21.88	21.93
		12	0	22.00	20.95	21.13	21.09
		12	6	22.00	21.12	21.24	21.12
		12	13	22.00	20.91	20.99	20.89
		25	0	22.00	21.01	21.03	21.09
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23780CH	23790CH	23800CH
10MHz	QPSK	1	0	24.00	22.43	22.48	22.59
		1	25	24.00	23.19	23.09	23.12
		1	49	24.00	22.59	22.41	22.34
		25	0	23.00	21.84	21.87	21.93
		25	13	23.00	22.11	22.10	22.12
		25	25	23.00	21.83	21.84	21.84
		50	0	23.00	21.84	21.89	21.87
	16QAM	1	0	23.00	21.71	21.70	21.64
		1	25	23.00	22.35	22.38	22.11
		1	49	23.00	21.77	21.58	21.33
		25	0	22.00	20.78	20.85	20.89
		25	13	22.00	21.01	21.12	21.01
		25	25	22.00	20.79	20.78	20.75
		50	0	22.00	20.75	20.80	20.88

Table 73: Conducted power measurement results of LTE Band XVII



### 7.1.23 Conducted power measurements of WiFi 2.4G

The output power of WiFi antenna is as following:

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1	16.5	<b>14.82</b>	Yes
	6	2437		16.5	14.81	Yes
	11	2462		16.5	14.77	Yes
802.11g	1	2412	6	17.0	15.66	No
	6	2437		17.0	15.49	No
	10	2457		17.0	15.21	No
	11	2462		15.5	13.51	No
802.11n-20M	1	2412	6.5	17.0	15.89	No
	6	2437		17.0	15.76	No
	10	2457		17.0	15.16	No
	11	2462		14.5	12.60	No
802.11n-40M	3	2422	13.5	14.5	12.53	No
	6	2437		14.5	12.55	No
	9	2452		14.5	12.58	No

Table 74: Conducted power measurement results of WiFi 2.4G(Full power level).

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1	11.0	<b>10.40</b>	Yes
	6	2437		11.0	<b>10.39</b>	Yes
	11	2462		11.0	<b>10.10</b>	Yes
802.11g	1	2412	6	11.0	10.34	No
	6	2437		11.0	10.35	No
	11	2462		11.0	10.05	No
802.11n-20M	1	2412	6.5	11.0	10.51	No
	6	2437		11.0	10.54	No
	11	2462		11.0	10.23	No
802.11n-40M	3	2422	13.5	11.0	10.17	No
	6	2437		11.0	10.10	No
	9	2452		11.0	9.27	No

Table 75: Conducted power measurement results of WiFi 2.4G (infrared proximity sensor on, reduced power level).

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

### 7.1.24 Conducted power measurements of BT

The output power of BT antenna is as following:

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	39CH	78CH
DH5	8.0	<b>6.05</b>	<b>7.45</b>	<b>7.65</b>
2DH5	8.0	4.10	5.21	5.51
3DH5	8.0	4.04	5.25	5.58

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	19CH	39CH
BT BLE	4.0	1.10	2.25	2.51

Table 76: Conducted power measurement results of BT.

Note:

- 1) The conducted power of BT is measured with RMS detector.
- 2) The bolded mode was selected for SAR testing.

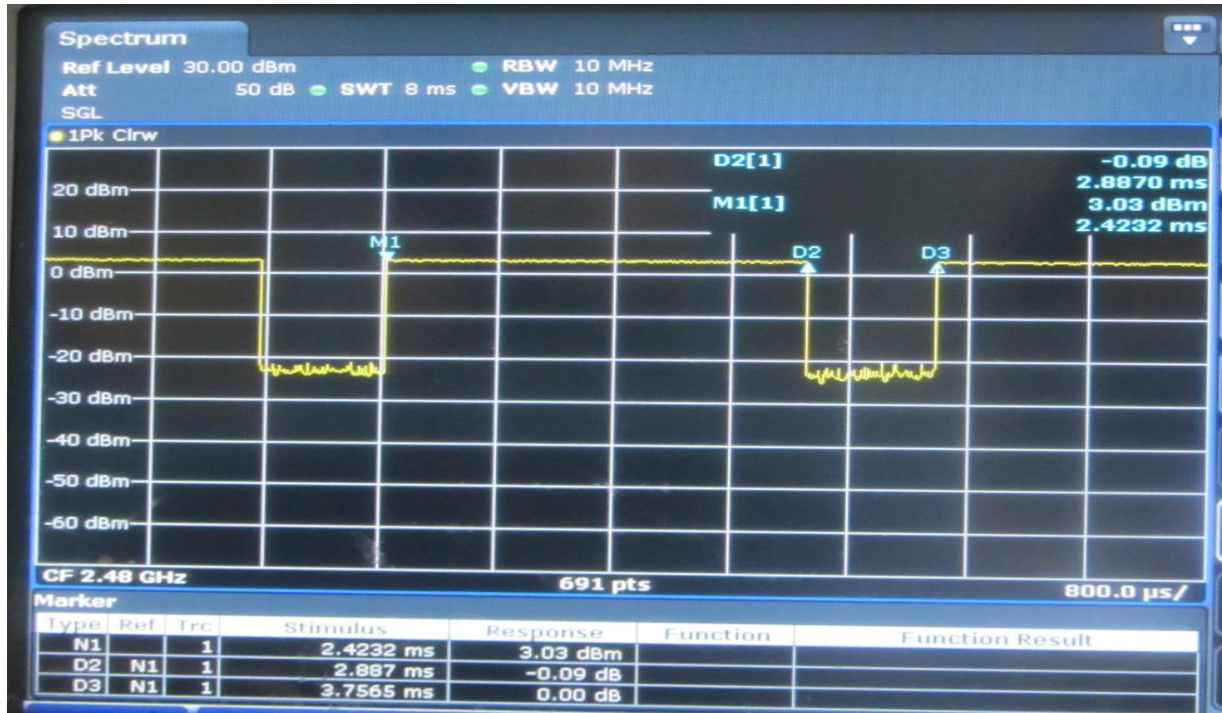


Figure: Bluetooth Transmission Plot

So the bluetooth duty cycle is calculated as below:

$$Duty\ cycle = pulse\ \frac{width}{period} * 100\% = \frac{2.887\ ms}{3.7565\ ms} * 100\% = 76.9\%$$

## 7.2 SAR measurement Results

### General Notes:

- 1) Per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8\text{W/kg}$  for 1-g or  $2.0\text{W/kg}$  for 10-g respectively, when the transmission band is  $\leq 100\text{MHz}$ .
  - $\leq 0.6\text{ W/kg}$  or  $1.5\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - $\leq 0.4\text{ W/kg}$  or  $1.0\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200\text{ MHz}$ .When the maximum output power variation across the required test channels is  $> \frac{1}{2}\text{ dB}$ , instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8\text{W/kg}$ ; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45\text{W/Kg}$ , only one repeated measurement is required.
- 4) Per KDB941225 D06, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is  $\leq 1.2\text{ W/kg}$ , no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is  $> 1.5\text{ W/kg}$ , or  $> 7.0\text{ W/kg}$  for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing(Refer to appendix B for details).
- 7) Per KDB 648474D04, for handsets with additional batteries, the highest reported SAR for each wireless technology, frequency band, operating mode and applicable exposure condition (head, body-worn accessory, hotspot mode, etc.) must be repeated with the specific accessory attached. In addition, for test cases where the measured SAR for a handset is greater than  $1.2\text{ W/kg}$ , these tests should also be repeated with the additional batteries.

### GSM Notes:

- 1) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
- 2) Per KDB648474 D04, the device does not support DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.

UMTS Notes:

1) Per KDB941225 D01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the Second mode.

LTE Notes:

1) The LTE test configurations are determined according to KDB941225 D05 SAR for LTE Devices. The general test procedures used for SAR testing can be found in Section 6.5.

2) A-MPR was disabled for all SAR test by setting NS\_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)

WiFi Notes:

Per KDB248227D01:

1) When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8$  W/kg or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is  $\leq 1.2$  W/kg or all required channels are tested..

2) The highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

3) The device not supports VoWiFi function. Head SAR for Wi-Fi antenna is evaluated at reduced power levels according to the real usage scenarios.

### 7.2.1 SAR measurement Result of GSM850 (Second Antenna)

Test Position of Head	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left touch	190/836.6	GSM	0.271	0.152	0.03	29.34	30.50	0.354	Battery1#	/
Left tilt	190/836.6	GSM	0.238	0.129	-0.06	29.34	30.50	0.311	Battery1#	/
Right touch	190/836.6	GSM	0.695	0.357	-0.08	29.34	30.50	0.908	Battery1#	/
Right tilt	190/836.6	GSM	0.587	0.284	-0.04	29.34	30.50	0.767	Battery1#	/
Right touch	190/836.6	GSM	0.666	0.345	-0.08	29.34	30.50	0.870	SIM2	/
Right touch	190/836.6	GSM	0.726	0.365	-0.04	29.34	30.50	0.948	Battery 2#	/
Right touch	190/836.6	GSM	0.705	0.361	-0.04	29.34	30.50	0.921	Battery 3#	/
Right touch	128/824.2	GSM	0.772	0.397	-0.03	29.37	30.50	1.001	Battery 2#	Yes
Right touch	251/848.8	GSM	0.630	0.323	-0.08	29.28	30.50	0.834	Battery 2#	/

Table 77: Head SAR test results of GSM850

Test Position of Body-Worn 15mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	190/836.6	GSM	0.236	0.175	-0.04	32.40	33.50	0.304	Battery1#	/
Back Side	190/836.6	GSM	0.353	0.254	-0.06	32.40	33.50	0.455	Battery1#	/
Back Side	190/836.6	GSM	0.334	0.196	-0.13	32.40	33.50	0.430	SIM2	/
Back Side	190/836.6	GSM	0.369	0.259	-0.03	32.40	33.50	0.475	Battery 2#	Yes
Back Side	190/836.6	GSM	0.288	0.192	-0.10	32.40	33.50	0.371	Battery 3#	/

Table 78: Body-Worn SAR test results of GSM850

Test Position of Hotspot 10mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	190/836.6	GPRS 2TS	0.105	0.061	0.09	25.30	26.50	0.138	Battery1#	/
Back Side	190/836.6	GPRS 2TS	0.184	0.103	-0.02	25.30	26.50	0.243	Battery1#	/
Left Side	190/836.6	GPRS 2TS	0.112	0.074	-0.05	25.30	26.50	0.148	Battery1#	/
Top Side	190/836.6	GPRS 2TS	0.087	0.042	-0.07	25.30	26.50	0.115	Battery1#	/
Back Side	190/836.6	GPRS 2TS	0.192	0.107	-0.12	25.30	26.50	0.253	SIM2	/
Back Side	190/836.6	GPRS 2TS	0.234	0.127	-0.12	25.30	26.50	0.308	Battery 2#	Yes
Back Side	190/836.6	GPRS 2TS	0.208	0.126	0.03	25.30	26.50	0.274	Battery 3#	/

Table 79: Hotspot SAR test results of GSM850

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
			1-g	10-g						
Front Side	190/836.6	GPRS 2TS	0.105	0.061	0.09	25.30	31.50	0.438	Battery1#	Yes
Back Side	190/836.6	GPRS 2TS	0.184	0.103	-0.02	25.30	31.50	0.767	Battery1#	Yes
Left Side	190/836.6	GPRS 2TS	0.112	0.074	-0.05	25.30	31.50	0.467	Battery1#	Yes
Top Side	190/836.6	GPRS 2TS	0.087	0.042	-0.07	25.30	31.50	0.364	Battery1#	Yes
Back Side	190/836.6	GPRS 2TS	0.192	0.107	-0.12	25.30	31.50	0.800	SIM2	Yes
Back Side	190/836.6	GPRS 2TS	0.234	0.127	-0.12	25.30	31.50	0.975	Battery 2#	Yes
Back Side	190/836.6	GPRS 2TS	0.208	0.126	0.03	25.30	31.50	0.867	Battery 3#	Yes

Table 80: Product Specific 10-g SAR test reduction evaluation of GSM850

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

## 7.2.2 SAR measurement Result of GSM1900 (Second Antenna)

Test Position of Head	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left touch	661/1880	GSM	0.100	0.063	0.06	26.31	28.00	0.148	Battery1#	/
Left tilt	661/1880	GSM	0.093	0.050	0.10	26.31	28.00	0.137	Battery1#	/
Right touch	661/1880	GSM	0.300	0.171	0.01	26.31	28.00	0.443	Battery1#	Yes
Right tilt	661/1880	GSM	0.183	0.101	0.11	26.31	28.00	0.270	Battery1#	/
Right touch	661/1880	GSM	0.246	0.141	0.10	26.31	28.00	0.363	SIM2	/
Right touch	661/1880	GSM	0.262	0.151	0.17	26.46	28.00	0.374	Battery 2#	/
Right touch	661/1880	GSM	0.148	0.084	0.13	26.46	28.00	0.211	Battery 3#	/
Right touch	512/1850.2	GSM	0.298	0.169	0.13	26.46	28.00	0.425	Battery1#	/
Right touch	810/1909.8	GSM	0.265	0.151	0.02	26.37	28.00	0.386	Battery1#	/

Table 81: Head SAR test results of GSM1900

Test Position of Body-Worn 15mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	661/1880	GSM	0.017	0.010	-0.12	28.44	30.00	0.024	Battery1#	/
Back Side	661/1880	GSM	0.031	0.017	-0.19	28.44	30.00	0.044	Battery1#	/
Back Side	661/1880	GSM	0.031	0.017	0.03	28.44	30.00	0.045	Battery 2#	/
Back Side	661/1880	GSM	0.032	0.018	-0.15	28.44	30.00	0.045	Battery 3#	Yes
Back Side	661/1880	GSM	0.030	0.017	-0.18	28.44	30.00	0.043	SIM2	/

Table 82: Body-Worn SAR test results of GSM1900

Test Position of Hotspot 10mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	661/1880	GPRS 2TS	0.015	0.008	-0.18	21.31	23.00	0.022	Battery1#	/
Back Side	661/1880	GPRS 2TS	0.026	0.013	0.16	21.31	23.00	0.039	Battery1#	/
Left Side	661/1880	GPRS 2TS	0.017	0.009	-0.15	21.31	23.00	0.025	Battery1#	/
Top Side	661/1880	GPRS 2TS	0.027	0.014	-0.13	21.31	23.00	0.040	Battery1#	/
Top Side	661/1880	GPRS 2TS	0.029	0.015	-0.17	21.31	23.00	0.042	Battery 2#	Yes
Top Side	661/1880	GPRS 2TS	0.028	0.015	0.11	21.31	23.00	0.041	Battery 3#	/
Top Side	661/1880	GPRS 2TS	0.027	0.014	0.11	21.31	23.00	0.040	SIM2	/

Table 83: Hotspot SAR test results of GSM1900

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
			1-g	10-g						
Front Side	661/1880	GPRS 2TS	0.015	0.008	-0.18	21.31	28.00	0.069	Battery1#	Yes
Back Side	661/1880	GPRS 2TS	0.026	0.013	0.16	21.31	28.00	0.122	Battery1#	Yes
Left Side	661/1880	GPRS 2TS	0.017	0.009	-0.15	21.31	28.00	0.079	Battery1#	Yes
Top Side	661/1880	GPRS 2TS	0.027	0.014	-0.13	21.31	28.00	0.125	Battery1#	Yes
Top Side	661/1880	GPRS 2TS	0.029	0.015	-0.17	21.31	28.00	0.133	Battery 2#	Yes
Top Side	661/1880	GPRS 2TS	0.028	0.015	0.11	21.31	28.00	0.131	Battery 3#	Yes
Top Side	661/1880	GPRS 2TS	0.027	0.014	0.11	21.31	28.00	0.127	SIM2	Yes

Table 84: Product Specific 10-g SAR test reduction evaluation of GSM1900

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.



### 7.2.3 SAR measurement Result of UMTS Band II(Second Antenna)

Test Position of Head	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left touch	9400/1880	RMC	0.107	0.065	0.00	18.77	20.00	0.142	Battery1#	/
Left tilt	9400/1880	RMC	0.096	0.056	0.01	18.77	20.00	0.127	Battery1#	/
Right touch	9400/1880	RMC	0.275	0.159	-0.12	18.77	20.00	0.365	Battery1#	/
Right tilt	9400/1880	RMC	0.223	0.121	-0.07	18.77	20.00	0.296	Battery1#	/
Right touch	9400/1880	RMC	0.288	0.165	-0.02	18.77	20.00	0.382	SIM2	/
Right touch	9400/1880	RMC	0.518	0.299	-0.04	18.77	20.00	0.688	Battery 2#	/
Right touch	9400/1880	RMC	0.545	0.314	-0.05	18.77	20.00	0.723	Battery 3#	/
Right touch	9262/1852.4	RMC	0.486	0.286	-0.05	18.63	20.00	0.666	Battery 3#	/
Right touch	9538/1907.6	RMC	0.623	0.359	-0.10	18.87	20.00	0.808	Battery 3#	Yes

Table 85: Head SAR test results of UMTS Band II

Test Position of Body-Worn 15mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	9400/1880	RMC	0.034	0.021	-0.11	21.80	23.00	0.044	Battery1#	/
Back Side	9400/1880	RMC	0.061	0.034	-0.18	21.80	23.00	0.081	Battery1#	/
Back Side	9400/1880	RMC	0.067	0.037	-0.19	21.80	23.00	0.088	Battery 2#	Yes
Back Side	9400/1880	RMC	0.061	0.033	-0.16	21.80	23.00	0.080	Battery 3#	/
Back Side	9400/1880	RMC	0.060	0.033	-0.15	21.80	23.00	0.079	SIM2	/

Table 86: Body-Worn SAR test results of UMTS Band II

Test Position of Hotspot 10mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	9400/1880	RMC	0.034	0.018	0.15	15.75	17.00	0.045	Battery1#	/
Back Side	9400/1880	RMC	0.071	0.036	0.03	15.75	17.00	0.095	Battery1#	Yes
Left Side	9400/1880	RMC	0.044	0.026	0.16	15.75	17.00	0.059	Battery1#	/
Top Side	9400/1880	RMC	0.054	0.028	-0.01	15.75	17.00	0.072	Battery1#	/
Back Side	9400/1880	RMC	0.066	0.034	-0.17	15.75	17.00	0.088	Battery 2#	/
Back Side	9400/1880	RMC	0.063	0.032	-0.18	15.75	17.00	0.084	Battery 3#	/
Back Side	9400/1880	RMC	0.063	0.031	0.16	15.75	17.00	0.083	Battery1#	/

Table 87: Hotspot SAR test results of UMTS Band II

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
			1-g	10-g						
Front Side	9400/1880	RMC	0.034	0.018	0.15	15.75	23.00	0.181	Battery1#	Yes
Back Side	9400/1880	RMC	0.071	0.036	0.03	15.75	23.00	0.379	Battery1#	Yes
Left Side	9400/1880	RMC	0.044	0.026	0.16	15.75	23.00	0.236	Battery1#	Yes
Top Side	9400/1880	RMC	0.054	0.028	-0.01	15.75	23.00	0.286	Battery1#	Yes
Back Side	9400/1880	RMC	0.066	0.034	-0.17	15.75	23.00	0.352	Battery 2#	Yes
Back Side	9400/1880	RMC	0.063	0.032	-0.18	15.75	23.00	0.334	Battery 3#	Yes
Back Side	9400/1880	RMC	0.063	0.031	0.16	15.75	23.00	0.332	Battery1#	Yes

Table 88: Product Specific 10-g SAR test reduction evaluation of UMTS Band II

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

## 7.2.4 SAR measurement Result of UMTS Band IV(Second Antenna)

Test Position of Head	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left touch	1413/1732.6	RMC	0.310	0.195	-0.01	19.92	21.00	0.398	Battery1#	/
Left tilt	1413/1732.6	RMC	0.322	0.179	-0.02	19.92	21.00	0.413	Battery1#	/
Right touch	1413/1732.6	RMC	0.683	0.386	-0.05	19.92	21.00	0.876	Battery1#	/
Right tilt	1413/1732.6	RMC	0.536	0.269	0.00	19.92	21.00	0.687	Battery1#	/
Right touch	1413/1732.6	RMC	0.770	0.422	-0.03	19.92	21.00	0.987	SIM2	/
Right touch	1413/1732.6	RMC	0.868	0.467	0.07	19.92	21.00	1.113	Battery 2#	Yes
Right touch-Repeated	1413/1732.6	RMC	0.731	0.412	-0.02	19.92	21.00	0.937	Battery 2#	/
Right touch	1413/1732.6	RMC	0.774	0.427	-0.03	19.92	21.00	0.993	Battery 3#	/
Right touch	1312/1712.4	RMC	0.791	0.434	0.03	19.95	21.00	1.007	Battery 2#	/
Right touch	1513/1752.6	RMC	0.758	0.421	0.03	19.96	21.00	0.963	Battery 2#	/

Table 89: Head SAR test results of UMTS Band IV

Test Position of Body-Worn 15mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	1413/1732.6	RMC	0.085	0.057	-0.15	21.95	23.00	0.108	Battery1#	/
Back Side	1413/1732.6	RMC	0.153	0.084	-0.13	21.95	23.00	0.195	Battery1#	Yes
Back Side	1413/1732.6	RMC	0.148	0.082	-0.13	21.95	23.00	0.188	SIM2	/
Back Side	1413/1732.6	RMC	0.105	0.058	-0.12	21.95	23.00	0.134	Battery 2#	/
Back Side	1413/1732.6	RMC	0.096	0.053	-0.13	21.95	23.00	0.122	Battery 3#	/

Table 90: Body-Worn SAR test results of UMTS Band IV

Test Position of Hotspot 10mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	1413/1732.6	RMC	0.078	0.042	-0.06	17.90	19.00	0.101	Battery1#	/
Back Side	1413/1732.6	RMC	0.139	0.072	0.08	17.90	19.00	0.179	Battery1#	/
Left Side	1413/1732.6	RMC	0.094	0.056	-0.17	17.90	19.00	0.121	Battery1#	/
Right Side	1413/1732.6	RMC	0.018	0.009	-0.14	17.90	19.00	0.023	Battery1#	/
Top Side	1413/1732.6	RMC	0.229	0.121	0.03	17.90	19.00	0.295	Battery1#	Yes
Top Side	1413/1732.6	RMC	0.139	0.073	-0.19	17.90	19.00	0.179	SIM2	/
Top Side	1413/1732.6	RMC	0.153	0.081	0.18	17.90	19.00	0.197	Battery 2#	/
Top Side	1413/1732.6	RMC	0.147	0.077	0.11	17.90	19.00	0.189	Battery 3#	/

Table 91: Hotspot SAR test results of UMTS Band IV

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
			1-g	10-g						
Front Side	1413/1732.6	RMC	0.078	0.042	-0.06	17.90	23.00	0.253	Battery1#	Yes
Back Side	1413/1732.6	RMC	0.139	0.072	0.08	17.90	23.00	0.450	Battery1#	Yes
Left Side	1413/1732.6	RMC	0.094	0.056	-0.17	17.90	23.00	0.303	Battery1#	Yes
Right Side	1413/1732.6	RMC	0.018	0.009	-0.14	17.90	23.00	0.057	Battery1#	Yes
Top Side	1413/1732.6	RMC	0.229	0.121	0.03	17.90	23.00	0.741	Battery1#	Yes
Top Side	1413/1732.6	RMC	0.139	0.073	-0.19	17.90	23.00	0.450	SIM2	Yes
Top Side	1413/1732.6	RMC	0.153	0.081	0.18	17.90	23.00	0.495	Battery 2#	Yes
Top Side	1413/1732.6	RMC	0.147	0.077	0.11	17.90	23.00	0.476	Battery 3#	Yes

Table 92: Product Specific 10-g SAR test reduction evaluation of UMTS Band IV

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

## 7.2.5 SAR measurement Result of UMTS Band V(Second Antenna)

Test Position of Head	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left touch	4182/836.4	RMC	0.336	0.190	0.11	19.34	20.50	0.439	Battery1#	/
Left tilt	4182/836.4	RMC	0.333	0.204	-0.18	19.34	20.50	0.435	Battery1#	/
Right touch	4182/836.4	RMC	0.563	0.287	-0.19	19.34	20.50	0.735	Battery1#	/
Right tilt	4182/836.4	RMC	0.544	0.316	-0.16	19.34	20.50	0.711	Battery1#	/
Right touch	4182/836.4	RMC	0.607	0.308	-0.02	19.34	20.50	0.793	SIM2	/
Right touch	4182/836.4	RMC	0.550	0.278	-0.02	19.34	20.50	0.718	Battery 2#	/
Right touch	4182/836.4	RMC	0.632	0.319	-0.07	19.34	20.50	0.826	Battery 3#	/
Right touch	4132/826.4	RMC	0.653	0.330	0.18	19.33	20.50	0.855	Battery 3#	Yes
Right touch	4233/846.6	RMC	0.592	0.300	-0.01	19.38	20.50	0.766	Battery 3#	/

Table 93: Head SAR test results of UMTS Band V

Test Position of Body-Worn 15mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	4182/836.4	RMC	0.185	0.112	-0.19	22.87	24.00	0.240	Battery1#	/
Back Side	4182/836.4	RMC	0.287	0.171	0.03	22.87	24.00	0.372	Battery1#	/
Back Side	4182/836.4	RMC	0.279	0.175	-0.01	22.87	24.00	0.362	SIM2	/
Back Side	4182/836.4	RMC	0.315	0.184	-0.05	22.87	24.00	0.409	Battery 2#	Yes
Back Side	4182/836.4	RMC	0.254	0.162	-0.09	22.87	24.00	0.329	Battery 3#	/

Table 94: Body-Worn SAR test results of UMTS Band V

Test Position of Hotspot 10mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	4182/836.4	RMC	0.091	0.053	-0.18	16.85	18.00	0.119	Battery1#	/
Back Side	4182/836.4	RMC	0.194	0.106	-0.17	16.85	18.00	0.253	Battery1#	Yes
Left Side	4182/836.4	RMC	0.083	0.055	-0.09	16.85	18.00	0.108	Battery1#	/
Top Side	4182/836.4	RMC	0.070	0.034	-0.12	16.85	18.00	0.091	Battery1#	/
Back Side	4182/836.4	RMC	0.160	0.103	-0.12	16.85	18.00	0.209	SIM2	/
Back Side	4182/836.4	RMC	0.161	0.100	-0.16	16.85	18.00	0.210	Battery 2#	/
Back Side	4182/836.4	RMC	0.171	0.093	-0.14	16.85	18.00	0.223	Battery 3#	/

Table 95: Hotspot SAR test results of UMTS Band V

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
			1-g	10-g						
Front Side	4182/836.4	RMC	0.091	0.053	-0.18	16.85	24.00	0.474	Battery1#	Yes
Back Side	4182/836.4	RMC	0.194	0.106	-0.17	16.85	24.00	1.006	Battery1#	Yes
Left Side	4182/836.4	RMC	0.083	0.055	-0.09	16.85	24.00	0.431	Battery1#	Yes
Top Side	4182/836.4	RMC	0.070	0.034	-0.12	16.85	24.00	0.362	Battery1#	Yes
Back Side	4182/836.4	RMC	0.160	0.103	-0.12	16.85	24.00	0.830	SIM2	Yes
Back Side	4182/836.4	RMC	0.161	0.100	-0.16	16.85	24.00	0.835	Battery 2#	Yes
Back Side	4182/836.4	RMC	0.171	0.093	-0.14	16.85	24.00	0.887	Battery 3#	Yes

Table 96: Product Specific 10-g SAR test reduction evaluation of UMTS Band V

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

## 7.2.6 SAR measurement Result of LTE Band II(Second Antenna)

Test Position of Head	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left touch	18700/1860	20M QPSK 1RB#50	0.253	0.158	-0.13	18.93	19.00	0.257	Battery1#	/
Left tilt	18700/1860	20M QPSK 1RB#50	0.208	0.113	-0.01	18.93	19.00	0.211	Battery1#	/
Right touch	18700/1860	20M QPSK 1RB#50	0.535	0.318	0.03	18.93	19.00	0.544	Battery1#	/
Right tilt	18700/1860	20M QPSK 1RB#50	0.378	0.210	0.03	18.93	19.00	0.384	Battery1#	/
Left touch	19100/1900	20M QPSK 50%RB#0	0.231	0.144	0.00	18.58	19.00	0.254	Battery1#	/
Left tilt	19100/1900	20M QPSK 50%RB#0	0.186	0.107	-0.08	18.58	19.00	0.205	Battery1#	/
Right touch	19100/1900	20M QPSK 50%RB#0	0.609	0.349	0.11	18.58	19.00	0.671	Battery1#	Yes
Right tilt	19100/1900	20M QPSK 50%RB#0	0.359	0.203	0.04	18.58	19.00	0.395	Battery1#	/
Right touch	19100/1900	20M QPSK 50%RB#0	0.507	0.300	0.13	18.58	19.00	0.558	SIM2	/
Right touch	19100/1900	20M QPSK 50%RB#0	0.428	0.249	0.00	18.58	19.00	0.471	Battery 2#	/
Right touch	19100/1900	20M QPSK 50%RB#0	0.417	0.242	0.00	18.58	19.00	0.459	Battery 3#	/
Right touch	18700/1860	20M QPSK 50%RB#25	0.584	0.334	0.03	18.52	19.00	0.652	Battery1#	/
Right touch	18900/1880	20M QPSK 50%RB#50	0.583	0.339	-0.04	18.17	19.00	0.706	Battery1#	/

Table 97: Head SAR test results of LTE Band II

Test Position of Body-Worn 15mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	18700/1860	20M QPSK 1RB#50	0.088	0.051	0.01	22.39	23.00	0.102	Battery1#	/
Back Side	18700/1860	20M QPSK 1RB#50	0.181	0.100	0.02	22.39	23.00	0.208	Battery1#	Yes
Front Side	18700/1860	20M QPSK 50%RB#25	0.072	0.041	0.04	21.92	22.50	0.083	Battery1#	/
Back Side	18700/1860	20M QPSK 50%RB#25	0.119	0.065	-0.05	21.92	22.50	0.136	Battery1#	/
Back Side	18700/1860	20M QPSK 1RB#50	0.154	0.084	-0.14	22.39	23.00	0.177	Battery 2#	/
Back Side	18700/1860	20M QPSK 1RB#50	0.153	0.083	0.01	22.39	23.00	0.176	Battery 3#	/
Back Side	18700/1860	20M QPSK 1RB#50	0.149	0.081	-0.05	22.39	23.00	0.171	SIM2	/

Table 98: Body-Worn SAR test results of LTE Band II

Test Position of Hotspot 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	18700/1860	20M QPSK 1RB#50	0.045	0.025	-0.01	16.66	16.70	0.045	Battery1#	/
Back Side	18700/1860	20M QPSK 1RB#50	0.091	0.046	0.16	16.66	16.70	0.091	Battery1#	/
Left Side	18700/1860	20M QPSK 1RB#50	0.059	0.035	0.18	16.66	16.70	0.060	Battery1#	/
Top Side	18700/1860	20M QPSK 1RB#50	0.065	0.033	-0.13	16.66	16.70	0.065	Battery1#	/
Front Side	18700/1860	20M QPSK 50%RB#25	0.036	0.021	-0.03	16.19	16.70	0.041	Battery1#	/
Back Side	18700/1860	20M QPSK 50%RB#25	0.071	0.036	-0.15	16.19	16.70	0.080	Battery1#	/
Left Side	18700/1860	20M QPSK 50%RB#25	0.055	0.032	0.00	16.19	16.70	0.061	Battery1#	/
Top Side	18700/1860	20M QPSK 50%RB#25	0.062	0.032	-0.10	16.19	16.70	0.070	Battery1#	/
Back Side	18700/1860	20M QPSK 1RB#50	0.084	0.043	-0.17	16.66	16.70	0.085	Battery 2#	/
Back Side	18700/1860	20M QPSK 1RB#50	0.101	0.051	-0.01	16.66	16.70	0.102	Battery 3#	Yes
Back Side	18700/1860	20M QPSK 1RB#50	0.086	0.043	-0.09	16.66	16.70	0.086	SIM2	/

Table 99: Hotspot SAR test results of LTE Band II

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
			1-g	10-g						
Front Side	18700/1860	20M QPSK 1RB#50	0.045	0.025	-0.01	16.66	23.00	0.192	Battery1#	Yes
Back Side	18700/1860	20M QPSK 1RB#50	0.091	0.046	0.16	16.66	23.00	0.390	Battery1#	Yes
Left Side	18700/1860	20M QPSK 1RB#50	0.059	0.035	0.18	16.66	23.00	0.254	Battery1#	Yes
Top Side	18700/1860	20M QPSK 1RB#50	0.065	0.033	-0.13	16.66	23.00	0.279	Battery1#	Yes
Front Side	18700/1860	20M QPSK 50%RB#25	0.036	0.021	-0.03	16.19	22.50	0.155	Battery1#	Yes
Back Side	18700/1860	20M QPSK 50%RB#25	0.071	0.036	-0.15	16.19	22.50	0.304	Battery1#	Yes
Left Side	18700/1860	20M QPSK 50%RB#25	0.055	0.032	0.00	16.19	22.50	0.233	Battery1#	Yes
Top Side	18700/1860	20M QPSK 50%RB#25	0.062	0.032	-0.10	16.19	22.50	0.264	Battery1#	Yes
Back Side	18700/1860	20M QPSK 1RB#50	0.084	0.043	-0.17	16.66	23.00	0.362	Battery 2#	Yes
Back Side	18700/1860	20M QPSK 1RB#50	0.101	0.051	-0.01	16.66	23.00	0.435	Battery 3#	Yes
Back Side	18700/1860	20M QPSK 1RB#50	0.086	0.043	-0.09	16.66	23.00	0.368	SIM2	Yes

Table 100: Product Specific 10-g SAR test reduction evaluation of LTE Band II



Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

## 7.2.7 SAR measurement Result of LTE Band IV(Second Antenna)

Test Position of Head	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left touch	20050/1720	20M QPSK 1RB#50	0.402	0.257	-0.07	20.57	21.00	0.444	Battery1#	/
Left tilt	20050/1720	20M QPSK 1RB#50	0.400	0.213	-0.13	20.57	21.00	0.442	Battery1#	/
Right touch	20050/1720	20M QPSK 1RB#50	0.752	0.436	0.17	20.57	21.00	0.830	Battery1#	/
Right touch	20175/1732.5	20M QPSK 1RB#0	0.690	0.401	0.01	20.40	21.00	0.792	Battery1#	/
Right touch	20300/1745	20M QPSK 1RB#50	0.740	0.430	0.01	20.48	21.00	0.834	Battery1#	/
Right tilt	20050/1720	20M QPSK 1RB#50	0.691	0.340	0.13	20.57	21.00	0.763	Battery1#	/
Left touch	20300/1745	20M QPSK 50%RB#50	0.380	0.237	-0.03	20.39	21.00	0.437	Battery1#	/
Left tilt	20300/1745	20M QPSK 50%RB#50	0.378	0.217	-0.02	20.39	21.00	0.435	Battery1#	/
Right touch	20300/1745	20M QPSK 50%RB#50	0.759	0.442	0.01	20.39	21.00	0.873	Battery1#	/
Right touch	20050/1720	20M QPSK 50%RB#25	0.684	0.388	-0.04	20.33	21.00	0.798	Battery1#	/
Right touch	20175/1732.5	20M QPSK 50%RB#0	0.651	0.373	0.00	20.21	21.00	0.781	Battery1#	/
Right tilt	20300/1745	20M QPSK 50%RB#50	0.670	0.334	-0.04	20.39	21.00	0.771	Battery1#	/
Right touch	20300/1745	20M QPSK 100%RB#0	0.696	0.403	-0.08	20.29	21.00	0.820	Battery1#	/
Right touch	20300/1745	20M QPSK 50%RB#50	0.825	0.471	-0.19	20.39	21.00	0.949	Battery 2#	Yes
Right touch-repeated	20300/1745	20M QPSK 50%RB#50	0.757	0.438	-0.07	20.39	21.00	0.871	Battery 2#	/
Right touch	20300/1745	20M QPSK 50%RB#50	0.803	0.463	-0.02	20.39	21.00	0.924	Battery 3#	/
Right touch	20300/1745	20M QPSK 50%RB#50	0.671	0.396	0.18	20.39	21.00	0.772	SIM2	/

Table 101: Head SAR test results of LTE Band IV

Test Position of Body-Worn 15mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	20050/1720	20M QPSK 1RB#50	0.143	0.083	-0.05	22.94	23.00	0.145	Battery1#	/
Back Side	20050/1720	20M QPSK 1RB#50	0.232	0.128	-0.11	22.94	23.00	0.235	Battery1#	/
Front Side	20050/1720	20M QPSK 50%RB#25	0.108	0.068	0.07	21.88	22.50	0.125	Battery1#	/
Back Side	20050/1720	20M QPSK 50%RB#25	0.180	0.098	-0.06	21.88	22.50	0.208	Battery1#	/
Back Side	20050/1720	20M QPSK 1RB#50	0.236	0.130	-0.10	22.94	23.00	0.239	SIM2	/
Back Side	20050/1720	20M QPSK 1RB#50	0.241	0.130	-0.11	22.94	23.00	0.244	Battery 2#	Yes
Back Side	20050/1720	20M QPSK 1RB#50	0.134	0.073	-0.11	22.94	23.00	0.136	Battery 3#	/

Table 102: Body-Worn SAR test results of LTE Band IV

Test Position of Hotspot 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	20050/1720	20M QPSK 1RB#50	0.085	0.045	-0.03	17.49	18.00	0.096	Battery1#	/
Back Side	20050/1720	20M QPSK 1RB#50	0.156	0.078	-0.16	17.49	18.00	0.175	Battery1#	/
Left Side	20050/1720	20M QPSK 1RB#50	0.068	0.039	-0.01	17.49	18.00	0.077	Battery1#	/
Top Side	20050/1720	20M QPSK 1RB#50	0.129	0.068	0.15	17.49	18.00	0.145	Battery1#	/
Front Side	20050/1720	20M QPSK 50%RB#25	0.079	0.044	0.03	17.31	18.00	0.093	Battery1#	/
Back Side	20050/1720	20M QPSK 50%RB#25	0.149	0.075	-0.13	17.31	18.00	0.175	Battery1#	/
Left Side	20050/1720	20M QPSK 50%RB#25	0.065	0.037	0.00	17.31	18.00	0.076	Battery1#	/
Top Side	20050/1720	20M QPSK 50%RB#25	0.125	0.063	0.12	17.31	18.00	0.147	Battery1#	/
Back Side	20050/1720	20M QPSK 1RB#50	0.149	0.076	-0.14	17.49	18.00	0.168	SIM2	/
Back Side	20050/1720	20M QPSK 1RB#50	0.160	0.080	-0.07	17.49	18.00	0.180	Battery 2#	Yes
Back Side	20050/1720	20M QPSK 1RB#50	0.149	0.075	-0.03	17.49	18.00	0.168	Battery 3#	/

Table 103: Hotspot SAR test results of LTE Band IV

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
			1-g	10-g						
Front Side	20050/1720	20M QPSK 1RB#50	0.085	0.045	-0.03	17.49	23.00	0.303	Battery1#	Yes
Back Side	20050/1720	20M QPSK 1RB#50	0.156	0.078	-0.16	17.49	23.00	0.555	Battery1#	Yes
Left Side	20050/1720	20M QPSK 1RB#50	0.068	0.039	-0.01	17.49	23.00	0.243	Battery1#	Yes
Top Side	20050/1720	20M QPSK 1RB#50	0.129	0.068	0.15	17.49	23.00	0.459	Battery1#	Yes
Front Side	20050/1720	20M QPSK 50%RB#25	0.079	0.044	0.03	17.31	22.50	0.262	Battery1#	Yes
Back Side	20050/1720	20M QPSK 50%RB#25	0.149	0.075	-0.13	17.31	22.50	0.492	Battery1#	Yes
Left Side	20050/1720	20M QPSK 50%RB#25	0.065	0.037	0.00	17.31	22.50	0.215	Battery1#	Yes
Top Side	20050/1720	20M QPSK 50%RB#25	0.125	0.063	0.12	17.31	22.50	0.413	Battery1#	Yes
Back Side	20050/1720	20M QPSK 1RB#50	0.149	0.076	-0.14	17.49	23.00	0.530	SIM2	Yes
Back Side	20050/1720	20M QPSK 1RB#50	0.160	0.080	-0.07	17.49	23.00	0.569	Battery 2#	Yes
Back Side	20050/1720	20M QPSK 1RB#50	0.149	0.075	-0.03	17.49	23.00	0.530	Battery 3#	Yes

Table 104: Product Specific 10-g SAR test reduction evaluation of LTE Band IV

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

## 7.2.8 SAR measurement Result of LTE Band V(Second Antenna)

Test Position of Head	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left touch	20600/844	10M QPSK 1RB#25	0.356	0.198	0.17	19.62	20.50	0.436	Battery1#	/
Left tilt	20600/844	10M QPSK 1RB#25	0.351	0.215	-0.13	19.62	20.50	0.430	Battery1#	/
Right touch	20600/844	10M QPSK 1RB#25	0.562	0.286	0.03	19.62	20.50	0.688	Battery1#	/
Right tilt	20600/844	10M QPSK 1RB#25	0.459	0.218	-0.10	19.62	20.50	0.562	Battery1#	/
Left touch	20600/844	10M QPSK 50%RB#13	0.351	0.194	0.19	19.47	20.50	0.445	Battery1#	/
Left tilt	20600/844	10M QPSK 50%RB#13	0.350	0.215	-0.19	19.47	20.50	0.444	Battery1#	/
Right touch	20600/844	10M QPSK 50%RB#13	0.556	0.282	0.00	19.47	20.50	0.705	Battery1#	/
Right tilt	20600/844	10M QPSK 50%RB#13	0.548	0.332	-0.13	19.47	20.50	0.695	Battery1#	/
Right touch	20600/844	10M QPSK 50%RB#13	0.569	0.287	-0.03	19.47	20.50	0.721	SIM2	/
Right touch	20600/844	10M QPSK 50%RB#13	0.576	0.291	0.02	19.47	20.50	0.730	Battery 2#	/
Right touch	20600/844	10M QPSK 50%RB#13	0.533	0.273	0.05	19.47	20.50	0.676	Battery 3#	/
Right touch	20450/829	10M QPSK 50%RB#13	0.630	0.320	-0.12	19.22	20.50	0.846	Battery 2#	/
Right touch	20525/836.5	10M QPSK 50%RB#13	0.713	0.363	-0.01	19.18	20.50	0.966	Battery 2#	Yes
Right touch	20600/844	10M QPSK 100%RB#0	0.632	0.379	-0.17	19.30	20.50	0.833	Battery 2#	/

Table 105: Head SAR test results of LTE Band V

Test Position of Body-Worn 15mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	20600/844	10M QPSK 1RB#25	0.074	0.044	-0.07	22.99	24.00	0.093	Battery1#	/
Back Side	20600/844	10M QPSK 1RB#25	0.150	0.086	-0.15	22.99	24.00	0.189	Battery1#	/
Front Side	20600/844	10M QPSK 50%RB#13	0.072	0.044	-0.09	21.92	23.00	0.092	Battery1#	/
Back Side	20600/844	10M QPSK 50%RB#13	0.146	0.084	-0.16	21.92	23.00	0.187	Battery1#	/
Back Side	20600/844	10M QPSK 1RB#25	0.135	0.078	-0.13	22.99	24.00	0.170	SIM2	
Back Side	20600/844	10M QPSK 1RB#25	0.150	0.086	-0.11	22.99	24.00	0.189	Battery 2#	/
Back Side	20600/844	10M QPSK 1RB#25	0.312	0.181	-0.09	22.99	24.00	0.394	Battery 3#	Yes

Table 106: Body-Worn SAR test results of LTE Band V

Test Position of Hotspot 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	20600/844	10M QPSK 1RB#25	0.076	0.044	-0.13	16.75	17.50	0.090	Battery1#	/
Back Side	20600/844	10M QPSK 1RB#25	0.155	0.085	-0.13	16.75	17.50	0.184	Battery1#	/
Left Side	20600/844	10M QPSK 1RB#25	0.066	0.043	-0.04	16.75	17.50	0.078	Battery1#	/
Top Side	20600/844	10M QPSK 1RB#25	0.059	0.028	-0.06	16.75	17.50	0.070	Battery1#	/
Front Side	20600/844	10M QPSK 50%RB#13	0.072	0.042	0.07	16.58	17.50	0.089	Battery1#	/
Back Side	20600/844	10M QPSK 50%RB#13	0.149	0.082	-0.15	16.58	17.50	0.184	Battery1#	/
Left Side	20600/844	10M QPSK 50%RB#13	0.064	0.042	-0.17	16.58	17.50	0.079	Battery1#	/
Top Side	20600/844	10M QPSK 50%RB#13	0.058	0.028	-0.01	16.58	17.50	0.072	Battery1#	/
Back Side	20600/844	10M QPSK 1RB#25	0.169	0.091	-0.19	16.75	17.50	0.201	SIM2	/
Back Side	20600/844	10M QPSK 1RB#25	0.162	0.089	-0.03	16.75	17.50	0.193	Battery 2#	/
Back Side	20600/844	10M QPSK 1RB#25	0.185	0.099	-0.07	16.75	17.50	0.220	Battery 3#	Yes

Table 107: Hotspot SAR test results of LTE Band V

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
			1-g	10-g						
Front Side	20600/844	10M QPSK 1RB#25	0.076	0.044	-0.13	16.75	24.00	0.404	Battery1#	Yes
Back Side	20600/844	10M QPSK 1RB#25	0.155	0.085	-0.13	16.75	24.00	0.823	Battery1#	Yes
Left Side	20600/844	10M QPSK 1RB#25	0.066	0.043	-0.04	16.75	24.00	0.349	Battery1#	Yes
Top Side	20600/844	10M QPSK 1RB#25	0.059	0.028	-0.06	16.75	24.00	0.311	Battery1#	Yes
Front Side	20600/844	10M QPSK 50%RB#13	0.072	0.042	0.07	16.58	23.00	0.317	Battery1#	Yes
Back Side	20600/844	10M QPSK 50%RB#13	0.149	0.082	-0.15	16.58	23.00	0.653	Battery1#	Yes
Left Side	20600/844	10M QPSK 50%RB#13	0.064	0.042	-0.17	16.58	23.00	0.281	Battery1#	Yes
Top Side	20600/844	10M QPSK 50%RB#13	0.058	0.028	-0.01	16.58	23.00	0.256	Battery1#	Yes
Back Side	20600/844	10M QPSK 1RB#25	0.169	0.091	-0.19	16.75	24.00	0.897	SIM2	Yes
Back Side	20600/844	10M QPSK 1RB#25	0.162	0.089	-0.03	16.75	24.00	0.860	Battery 2#	Yes
Back Side	20600/844	10M QPSK 1RB#25	0.185	0.100	-0.07	16.75	24.00	0.982	Battery 3#	Yes

Table 108: Product Specific 10-g SAR test reduction evaluation of LTE Band V

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

## 7.2.9 SAR measurement Result of LTE Band VII(Second Antenna)

Test Position of Head	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left touch	21100/2535	20M QPSK 1RB#50	0.185	0.090	0.06	15.48	16.00	0.209	Battery1#	/
Left tilt	21100/2535	20M QPSK 1RB#50	0.137	0.064	0.18	15.48	16.00	0.154	Battery1#	/
Right touch	21100/2535	20M QPSK 1RB#50	0.721	0.317	0.14	15.48	16.00	0.813	Battery1#	Yes
Right touch	20850/2510	20M QPSK 1RB#0	0.708	0.303	0.17	15.32	16.00	0.828	Battery1#	/
Right touch	21350/2560	20M QPSK 1RB#99	0.663	0.314	0.19	15.13	16.00	0.810	Battery1#	/
Right tilt	21100/2535	20M QPSK 1RB#50	0.448	0.190	0.07	15.48	16.00	0.505	Battery1#	/
Left touch	21100/2535	20M QPSK 50%RB#25	0.167	0.086	-0.19	15.23	16.00	0.199	Battery1#	/
Left tilt	21100/2535	20M QPSK 50%RB#25	0.136	0.069	0.16	15.23	16.00	0.162	Battery1#	/
Right touch	21100/2535	20M QPSK 50%RB#25	0.696	0.304	0.07	15.23	16.00	0.831	Battery1#	/
Right touch	20850/2510	20M QPSK 50%RB#0	0.682	0.298	0.07	15.02	16.00	0.855	Battery1#	/
Right touch	21350/2560	20M QPSK 50%RB#50	0.696	0.304	0.17	14.67	16.00	0.945	Battery1#	/
Right tilt	21100/2535	20M QPSK 50%RB#25	0.432	0.184	-0.16	15.23	16.00	0.516	Battery1#	/
Right touch	21100/2535	20M QPSK 100%RB#0	0.603	0.265	-0.06	14.98	16.00	0.763	Battery1#	/
Right touch	21350/2560	20M QPSK 50%RB#50	0.611	0.268	0.14	14.67	16.00	0.830	Battery 2#	/
Right touch	21350/2560	20M QPSK 50%RB#50	0.614	0.268	-0.17	14.67	16.00	0.834	Battery 3#	/
Right touch	21350/2560	20M QPSK 50%RB#50	0.578	0.258	0.04	14.67	16.00	0.785	SIM2	/

Table 109: Head SAR test results of LTE Band VII

Test Position of Body-Worn 15mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	21100/2535	20M QPSK 1RB#50	0.161	0.089	0.08	22.04	22.50	0.179	Battery1#	/
Back Side	21100/2535	20M QPSK 1RB#50	0.191	0.102	-0.10	22.04	22.50	0.212	Battery1#	Yes
Front Side	21100/2535	20M QPSK 50%RB#25	0.125	0.066	-0.19	20.87	21.50	0.145	Battery1#	/
Back Side	21100/2535	20M QPSK 50%RB#25	0.144	0.076	-0.17	20.87	21.50	0.166	Battery1#	/
Back Side	21100/2535	20M QPSK 1RB#50	0.169	0.090	-0.16	22.04	22.50	0.188	Battery 2#	/
Back Side	21100/2535	20M QPSK 1RB#50	0.182	0.096	-0.19	22.04	22.50	0.202	Battery 3#	/
Back Side	21100/2535	20M QPSK 1RB#50	0.182	0.097	-0.07	22.04	22.50	0.202	SIM2	/

Table 110: Body-Worn SAR test results of LTE Band VII



Test Position of Hotspot 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	21100/2535	20M QPSK 1RB#50	0.045	0.023	0.16	13.49	14.20	0.053	Battery1#	/
Back Side	21100/2535	20M QPSK 1RB#50	0.069	0.035	-0.16	13.49	14.20	0.081	Battery1#	/
Left Side	21100/2535	20M QPSK 1RB#50	0.026	0.139	0.16	13.49	14.20	0.030	Battery1#	/
Top Side	21100/2535	20M QPSK 1RB#50	0.028	0.012	-0.03	13.49	14.20	0.033	Battery1#	/
Front Side	21100/2535	20M QPSK 50%RB#25	0.044	0.021	-0.18	13.27	14.20	0.054	Battery1#	/
Back Side	21100/2535	20M QPSK 50%RB#25	0.065	0.033	-0.05	13.27	14.20	0.080	Battery1#	/
Left Side	21100/2535	20M QPSK 50%RB#25	0.025	0.014	-0.11	13.27	14.20	0.031	Battery1#	/
Top Side	21100/2535	20M QPSK 50%RB#25	0.026	0.011	0.16	13.27	14.20	0.032	Battery1#	/
Back Side	21100/2535	20M QPSK 1RB#50	0.071	0.034	-0.16	13.49	14.20	0.083	SIM2	/
Back Side	21100/2535	20M QPSK 1RB#50	0.079	0.038	-0.19	13.49	14.20	0.093	Battery 2#	Yes
Back Side	21100/2535	20M QPSK 1RB#50	0.066	0.032	-0.02	13.49	14.20	0.078	Battery 3#	/

Table 111: Hotspot SAR test results of LTE Band VII

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
			1-g	10-g						
Front Side	21100/2535	20M QPSK 1RB#50	0.045	0.023	0.16	13.49	22.50	0.357	Battery1#	Yes
Back Side	21100/2535	20M QPSK 1RB#50	0.069	0.035	-0.16	13.49	22.50	0.549	Battery1#	Yes
Left Side	21100/2535	20M QPSK 1RB#50	0.026	0.139	0.16	13.49	22.50	0.205	Battery1#	Yes
Top Side	21100/2535	20M QPSK 1RB#50	0.028	0.012	-0.03	13.49	22.50	0.224	Battery1#	Yes
Front Side	21100/2535	20M QPSK 50%RB#25	0.044	0.021	-0.18	13.27	21.50	0.290	Battery1#	Yes
Back Side	21100/2535	20M QPSK 50%RB#25	0.065	0.033	-0.05	13.27	21.50	0.430	Battery1#	Yes
Left Side	21100/2535	20M QPSK 50%RB#25	0.025	0.014	-0.11	13.27	21.50	0.166	Battery1#	Yes
Top Side	21100/2535	20M QPSK 50%RB#25	0.026	0.011	0.16	13.27	21.50	0.173	Battery1#	Yes
Back Side	21100/2535	20M QPSK 1RB#50	0.071	0.034	-0.16	13.49	22.50	0.563	SIM2	Yes
Back Side	21100/2535	20M QPSK 1RB#50	0.079	0.038	-0.19	13.49	22.50	0.630	Battery 2#	Yes
Back Side	21100/2535	20M QPSK 1RB#50	0.066	0.032	-0.02	13.49	22.50	0.527	Battery 3#	Yes

Table 112: Product Specific 10-g SAR test reduction evaluation of LTE Band VII

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

### 7.2.10 SAR measurement Result of LTE Band XII(Second Antenna)

Test Position of Head	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Left touch	23130/711	10M QPSK 1RB#25	0.461	0.261	0.08	20.87	21.50	0.533	Battery1#	/
Left tilt	23130/711	10M QPSK 1RB#25	0.457	0.302	-0.02	20.87	21.50	0.528	Battery1#	/
Right touch	23130/711	10M QPSK 1RB#25	0.839	0.432	-0.08	20.87	21.50	0.970	Battery1#	/
Right touch-Repeated	23130/711	10M QPSK 1RB#25	0.820	0.411	-0.03	20.87	21.50	0.948	Battery1#	/
Right touch	23060/704	10M QPSK 1RB#25	0.765	0.396	0.07	20.30	21.50	1.008	Battery1#	Yes
Right touch	23095/707.5	10M QPSK 1RB#25	0.804	0.417	-0.11	20.77	21.50	0.951	Battery1#	/
Right tilt	23130/711	10M QPSK 1RB#25	0.658	0.386	-0.17	20.87	21.50	0.761	Battery1#	/
Left touch	23130/711	10M QPSK 50%RB#13	0.645	0.367	-0.04	20.55	21.50	0.803	Battery1#	/
Left touch	23060/704	10M QPSK 50%RB#13	0.446	0.301	-0.18	20.14	21.50	0.610	Battery1#	/
Left touch	23095/707.5	10M QPSK 50%RB#13	0.488	0.331	-0.16	20.49	21.50	0.616	Battery1#	/
Left tilt	23130/711	10M QPSK 50%RB#13	0.412	0.274	-0.04	20.55	21.50	0.513	Battery1#	/
Right touch	23130/711	10M QPSK 50%RB#13	0.748	0.389	-0.07	20.55	21.50	0.931	Battery1#	/
Right touch	23060/704	10M QPSK 50%RB#13	0.582	0.296	-0.05	20.14	21.50	0.796	Battery1#	
Right touch	23095/707.5	10M QPSK 50%RB#13	0.676	0.345	-0.04	20.49	21.50	0.853	Battery1#	
Right tilt	23130/711	10M QPSK 50%RB#13	0.634	0.371	-0.11	20.55	21.50	0.789	Battery1#	/
Right touch	23130/711	10M QPSK 100%RB#0	0.728	0.372	0.02	20.30	21.50	0.960	Battery1#	/
Right touch	23060/704	10M QPSK 1RB#25	0.754	0.383	-0.16	20.30	21.50	0.994	SIM2	/
Right touch	23060/704	10M QPSK 1RB#25	0.748	0.381	-0.15	20.30	21.50	0.986	Battery 2#	/
Right touch	23060/704	10M QPSK 1RB#25	0.731	0.376	-0.13	20.30	21.50	0.964	Battery 3#	/

Table 113: Head SAR test results of LTE Band XII

Test Position of Body-Worn 15mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	23130/711	10M QPSK 1RB#25	0.089	0.065	-0.08	23.09	24.00	0.109	Battery1#	/
Back Side	23130/711	10M QPSK 1RB#25	0.308	0.183	-0.14	23.09	24.00	0.380	Battery1#	Yes
Front Side	23130/711	10M QPSK 50%RB#13	0.124	0.076	-0.06	22.04	23.00	0.155	Battery1#	/
Back Side	23130/711	10M QPSK 50%RB#13	0.247	0.147	-0.10	22.04	23.00	0.308	Battery1#	/
Back Side	23130/711	10M QPSK 1RB#25	0.179	0.106	-0.12	23.09	24.00	0.221	Battery 2#	/
Back Side	23130/711	10M QPSK 1RB#25	0.243	0.143	-0.14	23.09	24.00	0.300	Battery 3#	/
Back Side	23130/711	10M QPSK 1RB#25	0.174	0.102	-0.12	23.09	24.00	0.215	SIM2	/

Table 114: Body-Worn SAR test results of LTE Band XII

Test Position of Hotspot 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
			1-g	10-g						
Front Side	23130/711	10M QPSK 1RB#25	0.097	0.056	-0.10	17.51	18.00	0.109	Battery1#	/
Back Side	23130/711	10M QPSK 1RB#25	0.165	0.091	-0.12	17.51	18.00	0.185	Battery1#	/
Left Side	23130/711	10M QPSK 1RB#25	0.091	0.062	-0.18	17.51	18.00	0.102	Battery1#	/
Top Side	23130/711	10M QPSK 1RB#25	0.160	0.074	-0.09	17.51	18.00	0.179	Battery1#	/
Front Side	23130/711	10M QPSK 50%RB#13	0.075	0.046	-0.09	17.23	18.00	0.090	Battery1#	/
Back Side	23130/711	10M QPSK 50%RB#13	0.159	0.088	-0.19	17.23	18.00	0.190	Battery1#	/
Left Side	23130/711	10M QPSK 50%RB#13	0.089	0.061	-0.18	17.23	18.00	0.106	Battery1#	/
Top Side	23130/711	10M QPSK 50%RB#13	0.153	0.071	-0.07	17.23	18.00	0.183	Battery1#	/
Back Side	23130/711	10M QPSK 50%RB#13	0.171	0.093	-0.04	17.23	18.00	0.204	Battery 2#	/
Back Side	23130/711	10M QPSK 50%RB#13	0.180	0.098	-0.19	17.23	18.00	0.215	Battery 3#	Yes
Back Side	23130/711	10M QPSK 50%RB#13	0.175	0.096	-0.19	17.23	18.00	0.209	SIM2	/

Table 115: Hotspot SAR test results of LTE Band XII

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
			1-g	10-g						
Front Side	23130/711	10M QPSK 1RB#25	0.097	0.056	-0.10	17.51	24.00	0.433	Battery1#	Yes
Back Side	23130/711	10M QPSK 1RB#25	0.165	0.091	-0.12	17.51	24.00	0.735	Battery1#	Yes
Left Side	23130/711	10M QPSK 1RB#25	0.091	0.062	-0.18	17.51	24.00	0.406	Battery1#	Yes
Top Side	23130/711	10M QPSK 1RB#25	0.160	0.074	-0.09	17.51	24.00	0.713	Battery1#	Yes
Front Side	23130/711	10M QPSK 50%RB#13	0.075	0.046	-0.09	17.23	23.00	0.284	Battery1#	Yes
Back Side	23130/711	10M QPSK 50%RB#13	0.159	0.088	-0.19	17.23	23.00	0.600	Battery1#	Yes
Left Side	23130/711	10M QPSK 50%RB#13	0.089	0.061	-0.18	17.23	23.00	0.336	Battery1#	Yes
Top Side	23130/711	10M QPSK 50%RB#13	0.153	0.071	-0.07	17.23	23.00	0.578	Battery1#	Yes
Back Side	23130/711	10M QPSK 50%RB#13	0.171	0.093	-0.04	17.23	23.00	0.646	Battery 2#	Yes
Back Side	23130/711	10M QPSK 50%RB#13	0.180	0.098	-0.19	17.23	23.00	0.680	Battery 3#	Yes
Back Side	23130/711	10M QPSK 50%RB#13	0.175	0.096	-0.19	17.23	23.00	0.661	SIM2	Yes

Table 116: Product Specific 10-g SAR test reduction evaluation of LTE Band XII

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

### 7.2.11 SAR measurement Result of LTE Band XVII(Second Antenna)

SAR for LTE Band 17 (Frequency range:704-716 MHz) is covered by LTE Band 12 (Frequency range:699-716 MHz) due to similar frequency range,same maximum tune up limit and same channel bandwidth.

### 7.2.12 SAR measurement Result of GSM850(Main Antenna)

Test Position of Head	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Left touch	/	/	190/836.6	GSM	0.136	0.107	0.02	32.57	33.50	0.168	Battery1#	/
Left tilt	/	/	190/836.6	GSM	0.105	0.072	-0.07	32.57	33.50	0.130	Battery1#	/
Right touch	/	/	190/836.6	GSM	0.168	0.129	0.10	32.57	33.50	0.208	Battery1#	/
Right tilt	/	/	190/836.6	GSM	0.104	0.073	0.01	32.57	33.50	0.129	Battery1#	/
Right touch	/	/	190/836.6	GSM	0.159	0.110	0.03	32.57	33.50	0.197	SIM2	/
Right touch	/	/	190/836.6	GSM	0.134	0.092	0.13	32.57	33.50	0.166	Battery 2#	/
Right touch	/	/	190/836.6	GSM	0.138	0.096	0.01	32.57	33.50	0.171	Battery 3#	/
Right touch	/	/	128/824.2	GSM	0.192	0.150	0.08	32.58	33.50	0.237	Battery1#	Yes
Right touch	/	/	251/848.8	GSM	0.126	0.088	0.06	32.57	33.50	0.156	Battery1#	/

Table 117: Head SAR test results of GSM850

Test Position of Body-Worn	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	15mm	/	190/836.6	GSM	0.209	0.163	-0.09	32.57	33.50	0.259	Battery1#	/
Back Side	15mm	/	190/836.6	GSM	0.352	0.277	-0.01	32.57	33.50	0.436	Battery1#	/
Back Side	15mm	/	190/836.6	GSM	0.348	0.272	-0.02	32.57	33.50	0.431	SIM2	/
Back Side	15mm	/	190/836.6	GSM	0.355	0.276	-0.02	32.57	33.50	0.440	Battery 2#	/
Back Side	15mm	/	190/836.6	GSM	0.367	0.284	0.00	32.57	33.50	0.455	Battery 3#	Yes

Table 118: Body-Worn SAR test results of GSM850

Test Position of Hotspot	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
					1-g	10-g						
Front Side	10mm	/	190/836.6	GPRS 2TS	0.178	0.138	-0.03	30.44	31.50	0.227	Battery1#	Yes
Back Side	10mm	/	190/836.6	GPRS 2TS	0.339	0.266	-0.03	30.44	31.50	0.433	Battery1#	Yes
Left Side	10mm	/	190/836.6	GPRS 2TS	0.276	0.181	0.03	30.44	31.50	0.352	Battery1#	Yes
Right Side	10mm	/	190/836.6	GPRS 2TS	0.460	0.316	-0.14	30.44	31.50	0.587	Battery1#	Yes
Bottom Side	10mm	/	190/836.6	GPRS 2TS	0.111	0.059	0.10	30.44	31.50	0.142	Battery1#	Yes
Right Side	10mm	/	190/836.6	GPRS 2TS	0.393	0.259	-0.09	30.44	31.50	0.502	SIM2	Yes
Right Side	10mm	/	190/836.6	GPRS 2TS	0.395	0.262	-0.12	30.44	31.50	0.504	Battery 2#	Yes
Right Side	10mm	/	190/836.6	GPRS 2TS	0.414	0.275	-0.19	30.44	31.50	0.528	Battery 3#	Yes

Table 119: Hotspot SAR test results of GSM850

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

### 7.2.13 SAR measurement Result of GSM1900(Main Antenna)

Test Position of Head	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Left touch	/	State2	661/1880	GSM	0.062	0.040	0.06	28.87	30.00	0.080	Battery1#	/
Left touch	/	State1	661/1880	GSM	0.098	0.062	-0.03	28.87	30.00	0.127	Battery1#	/
Left tilt	/	State1	661/1880	GSM	0.068	0.039	0.01	28.87	30.00	0.088	Battery1#	/
Right touch	/	State1	661/1880	GSM	0.065	0.041	0.01	28.87	30.00	0.084	Battery1#	/
Right tilt	/	State1	661/1880	GSM	0.053	0.029	0.00	28.87	30.00	0.069	Battery1#	/
Left touch	/	State1	661/1880	GSM	0.126	0.080	-0.16	28.87	30.00	0.163	SIM2	/
Left touch	/	State1	661/1880	GSM	0.148	0.094	-0.05	28.87	30.00	0.192	Battery 2#	/
Left touch	/	State1	661/1880	GSM	0.151	0.097	-0.13	28.87	30.00	0.196	Battery 3#	Yes
Left touch	/	State2	661/1880	GSM	0.054	0.032	0.13	28.87	30.00	0.070	Battery 3#	/
Left touch	/	State1	512/1850.2	GSM	0.043	0.025	0.12	29.21	30.00	0.052	Battery 3#	/
Left touch	/	State1	810/1909.8	GSM	0.103	0.063	0.05	28.57	30.00	0.143	Battery 3#	/

Table 120: Head SAR test results of GSM1900

Test Position of Body-Worn	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	15mm	State2	661/1880	GSM	0.134	0.078	0.05	28.87	30.00	0.174	Battery1#	/
Front Side	15mm	State1	661/1880	GSM	0.201	0.117	0.06	28.87	30.00	0.261	Battery1#	/
Back Side	15mm	State1	661/1880	GSM	0.342	0.189	-0.03	28.87	30.00	0.444	Battery1#	/
Back Side	15mm	State1	661/1880	GSM	0.339	0.185	-0.03	28.87	30.00	0.440	Battery 2#	/
Back Side	15mm	State1	661/1880	GSM	0.382	0.208	-0.14	28.87	30.00	0.496	Battery 3#	Yes
Back Side	15mm	State2	661/1880	GSM	0.230	0.132	-0.08	28.87	30.00	0.298	Battery 3#	/
Back Side	15mm	State1	661/1880	GSM	0.306	0.168	-0.03	28.87	30.00	0.397	SIM2	/

Table 121: Body-Worn SAR test results of GSM1900



Test Position of Hotspot	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	10mm	State2	661/1880	GPRS 2TS	0.189	0.103	0.12	24.77	26.00	0.251	Battery1#	/
Front Side	10mm	State1	661/1880	GPRS 2TS	0.351	0.193	0.14	24.77	26.00	0.466	Battery1#	/
Back Side	10mm	State1	661/1880	GPRS 2TS	0.385	0.199	0.12	24.77	26.00	0.511	Battery1#	/
Left Side	10mm	State1	661/1880	GPRS 2TS	0.091	0.054	-0.07	26.74	28.00	0.122	Battery1#	/
Right Side	10mm	State1	661/1880	GPRS 2TS	0.097	0.056	0.18	26.74	28.00	0.129	Battery1#	/
Bottom Side	10mm	State1	661/1880	GPRS 2TS	0.713	0.376	0.06	24.77	26.00	0.946	Battery1#	Yes
Bottom Side	10mm	State2	661/1880	GPRS 2TS	0.391	0.204	-0.05	24.77	26.00	0.519	Battery1#	/
Bottom Side	10mm	State1	512/1850.2	GPRS 2TS	0.353	0.184	0.07	25.00	26.00	0.444	Battery1#	/
Bottom Side	10mm	State1	810/1909.8	GPRS 2TS	0.642	0.337	0.06	24.71	26.00	0.864	Battery1#	/
Bottom Side	10mm	State1	661/1880	GPRS 2TS	0.441	0.232	-0.02	24.77	26.00	0.585	Battery 2#	/
Bottom Side	10mm	State1	661/1880	GPRS 2TS	0.436	0.230	-0.13	24.77	26.00	0.579	Battery 3#	/
Bottom Side	10mm	State1	661/1880	GPRS 2TS	0.427	0.223	0.15	24.77	26.00	0.567	SIM2	/
Additional Body SAR test results with sensor off												
Front Side	11mm	State1	661/1880	GPRS 2TS	0.291	0.165	0.19	26.74	28.00	0.389	Battery1#	/
Back Side	13mm	State1	661/1880	GPRS 2TS	0.458	0.246	-0.10	26.74	28.00	0.612	Battery1#	/
Bottom Side	12mm	State1	661/1880	GPRS 2TS	0.539	0.293	0.05	26.74	28.00	0.720	Battery1#	/

Table 122: Hotspot SAR test results of GSM1900

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
					1-g	10-g						
Front Side	10mm	State2	661/1880	GPRS 2TS	0.189	0.103	0.12	24.77	28.00	0.398	Battery1#	Yes
Front Side	10mm	State1	661/1880	GPRS 2TS	0.351	0.193	0.14	24.77	28.00	0.738	Battery1#	Yes
Back Side	10mm	State1	661/1880	GPRS 2TS	0.385	0.199	0.12	24.77	28.00	0.810	Battery1#	Yes
Left Side	10mm	State1	661/1880	GPRS 2TS	0.091	0.054	-0.07	26.74	28.00	0.122	Battery1#	Yes
Right Side	10mm	State1	661/1880	GPRS 2TS	0.097	0.056	0.18	26.74	28.00	0.129	Battery1#	Yes
Bottom Side	10mm	State1	661/1880	GPRS 2TS	0.713	0.376	0.06	24.77	28.00	1.500	Battery1#	No
Bottom Side	10mm	State2	661/1880	GPRS 2TS	0.391	0.204	-0.05	24.77	28.00	0.823	Battery1#	Yes
Bottom Side	10mm	State1	512/1850.2	GPRS 2TS	0.353	0.184	0.07	25.00	28.00	0.704	Battery1#	Yes
Bottom Side	10mm	State1	810/1909.8	GPRS 2TS	0.642	0.337	0.06	24.71	28.00	1.369	Battery1#	Yes
Bottom Side	10mm	State1	661/1880	GPRS 2TS	0.441	0.232	-0.02	24.77	28.00	0.928	Battery 2#	Yes
Bottom Side	10mm	State1	661/1880	GPRS 2TS	0.436	0.230	-0.13	24.77	28.00	0.917	Battery 3#	Yes
Bottom Side	10mm	State1	661/1880	GPRS 2TS	0.427	0.223	0.15	24.77	28.00	0.898	SIM2	Yes
Additional Body SAR test results with sensor off												
Front Side	11mm	State1	661/1880	GPRS 2TS	0.291	0.165	0.19	26.74	28.00	0.389	Battery1#	Yes
Back Side	13mm	State1	661/1880	GPRS 2TS	0.458	0.246	-0.10	26.74	28.00	0.612	Battery1#	Yes
Bottom Side	12mm	State1	661/1880	GPRS 2TS	0.539	0.293	0.05	26.74	28.00	0.720	Battery1#	Yes

Table 123: Product Specific 10-g SAR test reduction evaluation of GSM1900

Note : According to the table above , only **Bottom Side** Product Specific 10-g SAR test is required for this frequency band:

Product Specific 10-g SAR	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Bottom Side	0mm	State2	661/1880	GPRS 2TS	0.343	0.178	-0.13	24.77	26.00	0.236	Battery1#	/
Bottom Side	0mm	State1	661/1880	GPRS 2TS	0.354	0.181	-0.08	24.77	26.00	0.240	Battery1#	/
Bottom Side	0mm	State1	661/1880	GPRS 2TS	0.418	0.194	0.12	24.77	26.00	0.258	Battery 2#	/
Bottom Side	0mm	State1	661/1880	GPRS 2TS	0.430	0.196	-0.13	24.77	26.00	0.260	Battery 3#	Yes
Bottom Side	0mm	State1	661/1880	GPRS 2TS	0.354	0.165	0.12	24.77	26.00	0.219	SIM2	/
Additional Body SAR test results with sensor off												
Bottom Side	12mm	State1	661/1880	GPRS 2TS	0.076	0.041	-0.15	26.74	28.00	0.055	Battery3#	/

Table 124: Product Specific 10-g SAR results of GSM1900

### 7.2.14 SAR measurement Result of UMTS Band II(Main Antenna)

Test Position of Head	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Left touch	/	State2	9400/1880	RMC	0.168	0.110	0.13	22.91	24.00	0.216	Battery1#	/
Left touch	/	State1	9400/1880	RMC	0.234	0.152	-0.02	22.91	24.00	0.301	Battery1#	/
Left tilt	/	State1	9400/1880	RMC	0.137	0.084	0.03	22.91	24.00	0.176	Battery1#	/
Right touch	/	State1	9400/1880	RMC	0.168	0.108	-0.13	22.91	24.00	0.216	Battery1#	/
Right tilt	/	State1	9400/1880	RMC	0.127	0.073	-0.07	22.91	24.00	0.163	Battery1#	/
Left touch	/	State1	9400/1880	RMC	0.232	0.149	-0.18	22.91	24.00	0.298	SIM2	/
Left touch	/	State1	9400/1880	RMC	0.251	0.163	0.15	22.91	24.00	0.323	Battery 2#	Yes
Left touch	/	State2	9400/1880	RMC	0.134	0.087	-0.17	22.91	24.00	0.172	Battery 2#	/
Left touch	/	State1	9400/1880	RMC	0.242	0.143	-0.09	22.91	24.00	0.311	Battery 3#	/
Left touch	/	State1	9262/1852.4	RMC	0.173	0.113	0.07	22.92	24.00	0.222	Battery 2#	/
Left touch	/	State1	9538/1907.6	RMC	0.246	0.158	0.07	23.01	24.00	0.309	Battery 2#	/

Table 125: Head SAR test results of UMTS Band II

Test Position of Body-Worn	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	15mm	State2	9400/1880	RMC	0.331	0.188	-0.18	22.91	24.00	0.425	Battery1#	/
Front Side	15mm	State1	9400/1880	RMC	0.494	0.281	0.15	22.91	24.00	0.635	Battery1#	/
Back Side	15mm	State1	9400/1880	RMC	0.833	0.453	-0.03	22.91	24.00	1.071	Battery1#	/
Back Side- Repeated	15mm	State1	9400/1880	RMC	0.864	0.477	-0.12	22.91	24.00	1.110	Battery1#	Yes
Back Side	15mm	State1	9400/1880	RMC	0.766	0.418	-0.02	22.91	24.00	0.985	SIM2	/
Back Side	15mm	State1	9262/1852.4	RMC	0.591	0.325	0.00	22.92	24.00	0.758	Battery1#	/
Back Side	15mm	State1	9538/1907.6	RMC	0.607	0.340	0.04	23.01	24.00	0.762	Battery1#	/
Back Side	15mm	State1	9400/1880	RMC	0.761	0.420	0.13	22.91	24.00	0.978	Battery 2#	/
Back Side	15mm	State1	9400/1880	RMC	0.748	0.414	-0.07	22.91	24.00	0.961	Battery 3#	/
Back Side	15mm	State2	9400/1880	RMC	0.267	0.151	-0.17	22.91	24.00	0.343	Battery1#	/

Table 126: Body-Worn SAR test results of UMTS Band II

Test Position of Hotspot	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	10mm	State2	9400/1880	RMC	0.214	0.114	0.08	17.92	19.00	0.274	Battery1#	/
Front Side	10mm	State1	9400/1880	RMC	0.313	0.170	-0.03	17.92	19.00	0.401	Battery1#	/
Back Side	10mm	State1	9400/1880	RMC	0.561	0.285	-0.10	17.92	19.00	0.719	Battery1#	/
Left Side	10mm	State1	9400/1880	RMC	0.190	0.106	0.11	19.97	21.00	0.241	Battery1#	/
Right Side	10mm	State1	9400/1880	RMC	0.121	0.068	0.08	19.97	21.00	0.153	Battery1#	/
Bottom Side	10mm	State1	9400/1880	RMC	0.694	0.364	0.16	17.92	19.00	0.890	Battery1#	/
Bottom Side	10mm	State1	9262/1852.4	RMC	0.622	0.325	0.13	17.92	19.00	0.798	Battery1#	/
Bottom Side	10mm	State1	9538/1907.6	RMC	0.540	0.283	0.11	18.07	19.00	0.669	Battery1#	/
Bottom Side	10mm	State1	9400/1880	RMC	0.711	0.372	0.12	17.92	19.00	0.912	SIM2	/
Bottom Side	10mm	State1	9400/1880	RMC	0.736	0.381	0.19	17.92	19.00	0.944	Battery 2#	/
Bottom Side	10mm	State2	9400/1880	RMC	0.471	0.247	0.19	17.92	19.00	0.604	Battery 2#	/
Bottom Side	10mm	State1	9400/1880	RMC	0.676	0.355	0.12	17.92	19.00	0.867	Battery 3#	/
Additional Body SAR test results with sensor off(hotspot on)												
Front Side	11mm	State1	9400/1880	RMC	0.454	0.245	-0.04	19.97	21.00	0.576	Battery1#	/
Back Side	13mm	State1	9400/1880	RMC	0.601	0.316	-0.03	19.97	21.00	0.762	Battery1#	/
Bottom Side	12mm	State1	9400/1880	RMC	0.814	0.442	0.18	19.97	21.00	1.032	Battery1#	Yes
Bottom Side-repeated	12mm	State1	9538/1907.6	RMC	0.786	0.431	0.17	20.13	21.00	0.960	Battery1#	/
Bottom Side	12mm	State1	9262/1852.4	RMC	0.774	0.425	0.12	20.01	21.00	0.972	Battery1#	/
Bottom Side	12mm	State1	9538/1907.6	RMC	0.561	0.308	0.18	20.13	21.00	0.685	Battery1#	/
Bottom Side	12mm	State2	9400/1880	RMC	0.453	0.242	0.11	19.97	21.00	0.574	Battery1#	/

Table 127: Hotspot SAR test results of UMTS Band II

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
					1-g	10-g						
Front Side	10mm	State2	9400/1880	RMC	0.214	0.114	0.08	17.92	24.00	0.868	Battery1#	Yes
Front Side	10mm	State1	9400/1880	RMC	0.313	0.170	-0.03	17.92	24.00	1.269	Battery1#	No
Back Side	10mm	State1	9400/1880	RMC	0.561	0.285	-0.10	17.92	24.00	2.275	Battery1#	No
Left Side	10mm	State1	9400/1880	RMC	0.190	0.106	0.11	19.97	24.00	0.481	Battery1#	Yes
Right Side	10mm	State1	9400/1880	RMC	0.121	0.068	0.08	19.97	24.00	0.306	Battery1#	Yes
Bottom Side	10mm	State1	9400/1880	RMC	0.694	0.364	0.16	17.92	24.00	2.814	Battery1#	No
Bottom Side	10mm	State1	9262/1852.4	RMC	0.622	0.325	0.13	17.92	24.00	2.522	Battery1#	No
Bottom Side	10mm	State1	9538/1907.6	RMC	0.540	0.283	0.11	18.07	24.00	2.115	Battery1#	No
Bottom Side	10mm	State1	9400/1880	RMC	0.711	0.372	0.12	17.92	24.00	2.883	SIM2	No
Bottom Side	10mm	State1	9400/1880	RMC	0.736	0.381	0.19	17.92	24.00	2.985	Battery 2#	No
Bottom Side	10mm	State2	9400/1880	RMC	0.471	0.247	0.19	17.92	24.00	1.910	Battery 2#	No
Bottom Side	10mm	State1	9400/1880	RMC	0.676	0.355	0.12	17.92	24.00	2.741	Battery 3#	No
Additional Body SAR test results with sensor off												
Front Side	11mm	State1	9400/1880	RMC	0.454	0.245	-0.04	19.97	24.00	1.148	Battery1#	Yes
Back Side	13mm	State1	9400/1880	RMC	0.601	0.316	-0.03	19.97	24.00	1.520	Battery1#	No
Bottom Side	12mm	State1	9400/1880	RMC	0.814	0.442	0.18	19.97	24.00	2.059	Battery1#	No
Bottom Side-repeated	12mm	State1	9538/1907.6	RMC	0.786	0.431	0.17	20.13	24.00	1.916	Battery1#	No
Bottom Side	12mm	State1	9262/1852.4	RMC	0.774	0.425	0.12	20.01	24.00	1.940	Battery1#	No
Bottom Side	12mm	State1	9538/1907.6	RMC	0.561	0.308	0.18	20.13	24.00	1.368	Battery1#	No
Bottom Side	12mm	State2	9400/1880	RMC	0.453	0.242	0.11	19.97	24.00	1.146	Battery1#	Yes

Table 128: Product Specific 10-g SAR test reduction evaluation of UMTS Band II

Note : According to the table above , **Front side**、**Bottom Side** and **Back side** Product Specific 10-g SAR test is required for this frequency band:

Product Specific 10-g SAR	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Bottom Side	0mm	State2	9400/1880	RMC	0.617	0.295	0.14	20.97	22.00	0.374	Battery1#	/
Bottom Side	0mm	State1	9400/1880	RMC	0.676	0.349	-0.13	20.97	22.00	0.442	Battery1#	/
Front Side	0mm	State1	9400/1880	RMC	1.520	0.875	0.11	20.97	22.00	1.109	Battery1#	/
Back Side	0mm	State1	9400/1880	RMC	2.660	1.130	0.16	20.97	22.00	1.432	Battery1#	Yes
Back Side	0mm	State1	9400/1880	RMC	2.450	1.100	0.04	20.97	22.00	1.394	SIM2	/
Back Side	0mm	State1	9400/1880	RMC	2.010	0.899	0.17	20.97	22.00	1.140	Battery 2#	/
Back Side	0mm	State1	9400/1880	RMC	1.930	0.841	0.19	20.97	22.00	1.066	Battery 3#	/
Back Side	0mm	State2	9400/1880	RMC	2.550	1.100	0.13	20.97	22.00	1.394	Battery1#	/
Additional Body SAR test results with sensor off												
Front Side	11mm	State1	9400/1880	RMC	0.812	0.429	0.03	22.91	24.00	0.551	Battery1#	/
Back Side	13mm	State1	9400/1880	RMC	1.130	0.593	0.01	22.91	24.00	0.762	Battery1#	/
Bottom Side	12mm	State1	9400/1880	RMC	1.720	0.934	0.15	22.91	24.00	1.200	Battery1#	/

Table 129: Product Specific 10-g SAR results of UMTS Band II

### 7.2.15 SAR measurement Result of UMTS Band IV(Main Antenna)

Test Position of Head	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Left touch	/	State2	1413/1732.6	RMC	0.249	0.157	-0.17	22.85	24.00	0.324	Battery1#	/
Left touch	/	State1	1413/1732.6	RMC	0.420	0.267	0.00	22.85	24.00	0.547	Battery1#	/
Left tilt	/	State1	1413/1732.6	RMC	0.138	0.083	-0.02	22.85	24.00	0.180	Battery1#	/
Right touch	/	State1	1413/1732.6	RMC	0.179	0.118	0.19	22.85	24.00	0.233	Battery1#	/
Right tilt	/	State1	1413/1732.6	RMC	0.117	0.067	-0.01	22.85	24.00	0.152	Battery1#	/
Left touch	/	State1	1413/1732.6	RMC	0.393	0.253	0.10	22.85	24.00	0.512	SIM2	/
Left touch	/	State1	1413/1732.6	RMC	0.347	0.222	-0.01	22.85	24.00	0.452	Battery 2#	/
Left touch	/	State1	1413/1732.6	RMC	0.372	0.238	-0.05	22.85	24.00	0.485	Battery 3#	/
Left touch	/	State1	1312/1712.4	RMC	0.296	0.190	-0.10	22.81	24.00	0.389	Battery1#	/
Left touch	/	State1	1513/1752.6	RMC	0.427	0.274	-0.06	22.82	24.00	0.560	Battery1#	Yes
Left touch	/	State2	1513/1752.6	RMC	0.296	0.173	0.11	22.82	24.00	0.388	Battery1#	/

Table 130: Head SAR test results of UMTS Band IV

Test Position of Body-Worn	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	15mm	State2	1413/1732.6	RMC	0.287	0.167	-0.11	22.85	24.00	0.374	Battery1#	/
Front Side	15mm	State1	1413/1732.6	RMC	0.403	0.236	-0.11	22.85	24.00	0.525	Battery1#	/
Back Side	15mm	State1	1413/1732.6	RMC	0.656	0.377	0.02	22.85	24.00	0.855	Battery1#	/
Back Side	15mm	State2	1413/1732.6	RMC	0.419	0.240	-0.06	22.85	24.00	0.546	Battery1#	/
Back Side	15mm	State1	1312/1712.4	RMC	0.547	0.305	-0.18	22.81	24.00	0.719	Battery1#	/
Back Side	15mm	State1	1513/1752.6	RMC	0.656	0.377	-0.19	22.82	24.00	0.861	Battery1#	/
Back Side	15mm	State1	1413/1732.6	RMC	0.452	0.264	-0.18	22.85	24.00	0.589	SIM2	/
Back Side	15mm	State1	1413/1732.6	RMC	0.659	0.379	-0.17	22.85	24.00	0.859	Battery 2#	/
Back Side	15mm	State1	1413/1732.6	RMC	0.660	0.376	0.07	22.85	24.00	0.860	Battery 3#	Yes
Back Side	15mm	State1	1413/1732.6	RMC	0.626	0.364	-0.16	22.85	24.00	0.816	Battery 3#	/

Table 131: Body-Worn SAR test results of UMTS Band IV

Test Position of Hotspot	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	10mm	State1	1413/1732.6	RMC	0.425	0.234	0.00	17.42	18.00	0.486	Battery1#	/
Front Side	10mm	State2	1413/1732.6	RMC	0.289	0.158	-0.16	17.42	18.00	0.330	Battery1#	/
Back Side	10mm	State1	1413/1732.6	RMC	0.525	0.287	0.08	17.42	18.00	0.600	Battery1#	/
Left Side	10mm	State1	1413/1732.6	RMC	0.171	0.102	-0.12	19.94	21.00	0.218	Battery1#	/
Right Side	10mm	State1	1413/1732.6	RMC	0.044	0.024	-0.13	19.94	21.00	0.056	Battery1#	/
Bottom Side	10mm	State1	1413/1732.6	RMC	1.090	0.594	-0.03	17.42	18.00	1.246	Battery1#	/
Bottom Side	10mm	State1	1312/1712.4	RMC	0.634	0.345	0.08	17.52	18.00	0.708	Battery1#	/
Bottom Side	10mm	State1	1513/1752.6	RMC	0.708	0.384	0.07	17.51	18.00	0.793	Battery1#	/
Bottom Side	10mm	State1	1413/1732.6	RMC	1.070	0.582	0.05	17.42	18.00	1.223	Battery 2#	/
Bottom Side	10mm	State1	1413/1732.6	RMC	1.110	0.607	-0.06	17.42	18.00	1.269	Battery 3#	Yes
Bottom Side-Repeated	10mm	State1	1413/1732.6	RMC	1.080	0.593	-0.13	17.42	18.00	1.234	Battery 3#	/
Bottom Side-holder perturbation verification	10mm	State1	1413/1732.6	RMC	0.967	0.528	0.02	17.42	18.00	1.105	Battery 3#	/
Bottom Side	10mm	State1	1413/1732.6	RMC	0.982	0.536	0.02	17.42	18.00	1.122	SIM2	/
Bottom Side	10mm	State2	1413/1732.6	RMC	0.676	0.368	-0.05	17.42	18.00	0.773	Battery 3#	/
Additional Body SAR test results with sensor off												
Front Side	11mm	State1	1413/1732.6	RMC	0.513	0.289	0.04	19.94	21.00	0.655	Battery1#	/
Back Side	13mm	State1	1413/1732.6	RMC	0.344	0.200	-0.12	19.94	21.00	0.439	Battery1#	/
Bottom Side	12mm	State1	1413/1732.6	RMC	0.873	0.490	-0.05	19.94	21.00	1.114	Battery1#	/
Bottom Side	12mm	State1	1312/1712.4	RMC	0.778	0.437	-0.13	19.86	21.00	1.012	Battery1#	/
Bottom Side	12mm	State1	1513/1752.6	RMC	0.855	0.479	-0.14	19.88	21.00	1.107	Battery1#	/

Table 132: Hotspot SAR test results of UMTS Band IV

Note: According to 201610 FCC TCB workshop RF exposure slides, when the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands.



Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
					1-g	10-g						
Front Side	10mm	State1	1413/1732.6	RMC	0.425	0.234	0.00	17.42	24.00	1.934	Battery1#	No
Front Side	10mm	State2	1413/1732.6	RMC	0.289	0.158	-0.16	17.42	24.00	1.315	Battery1#	No
Back Side	10mm	State1	1413/1732.6	RMC	0.525	0.287	0.08	17.42	24.00	2.389	Battery1#	No
Left Side	10mm	State1	1413/1732.6	RMC	0.171	0.102	-0.12	19.94	24.00	0.436	Battery1#	Yes
Right Side	10mm	State1	1413/1732.6	RMC	0.044	0.024	-0.13	19.94	24.00	0.112	Battery1#	Yes
Bottom Side	10mm	State1	1413/1732.6	RMC	1.090	0.594	-0.03	17.42	24.00	4.959	Battery1#	No
Bottom Side	10mm	State1	1312/1712.4	RMC	0.634	0.345	0.08	17.52	24.00	2.819	Battery1#	No
Bottom Side	10mm	State1	1513/1752.6	RMC	0.708	0.384	0.07	17.51	24.00	3.155	Battery1#	No
Bottom Side	10mm	State1	1413/1732.6	RMC	1.070	0.582	0.05	17.42	24.00	4.868	Battery 2#	No
Bottom Side	10mm	State1	1413/1732.6	RMC	1.110	0.607	-0.06	17.42	24.00	5.050	Battery 3#	No
Bottom Side- Repeated	10mm	State1	1413/1732.6	RMC	1.080	0.593	-0.13	17.42	24.00	4.914	Battery 3#	No
Bottom Side- holder perturbation verification	10mm	State1	1413/1732.6	RMC	0.967	0.528	0.02	17.42	24.00	4.400	Battery 3#	No
Bottom Side	10mm	State1	1413/1732.6	RMC	0.982	0.536	0.02	17.42	24.00	4.468	SIM2	No
Bottom Side	10mm	State2	1413/1732.6	RMC	0.676	0.368	-0.05	17.42	24.00	3.076	Battery 3#	No
Additional Body SAR test results with sensor off												
Front Side	11mm	State1	1413/1732.6	RMC	0.513	0.289	0.04	19.94	24.00	1.307	Battery1#	No
Back Side	13mm	State1	1413/1732.6	RMC	0.344	0.200	-0.12	19.94	24.00	0.876	Battery1#	Yes
Bottom Side	12mm	State1	1413/1732.6	RMC	0.873	0.490	-0.05	19.94	24.00	2.223	Battery1#	No
Bottom Side	12mm	State1	1312/1712.4	RMC	0.778	0.437	-0.13	19.86	24.00	2.018	Battery1#	No
Bottom Side	12mm	State1	1513/1752.6	RMC	0.855	0.479	-0.14	19.88	24.00	2.208	Battery1#	No

Table 133: Product Specific 10-g SAR test reduction evaluation of UMTS Band IV

Note : According to the table above , **Front side**、**Bottom Side** and **Back side** Product Specific 10-g SAR test is required for this frequency band:

Product Specific 10-g SAR	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	0mm	State2	1413/1732.6	RMC	3.300	1.470	0.01	20.93	22.00	1.881	Battery1#	/
Front Side	0mm	State1	1413/1732.6	RMC	3.850	1.700	0.14	20.93	22.00	2.175	Battery1#	/
Front Side	0mm	State1	1312/1712.4	RMC	4.070	1.760	-0.08	20.89	22.00	2.273	Battery1#	Yes
Front Side	0mm	State2	1312/1712.4	RMC	2.730	1.240	-0.11	20.93	22.00	1.586	Battery1#	/
Front Side	0mm	State1	1513/1752.6	RMC	3.530	1.510	-0.01	20.91	22.00	1.941	Battery1#	/
Back Side	0mm	State1	1413/1732.6	RMC	3.430	1.450	0.19	20.93	22.00	1.855	Battery1#	/
Bottom Side	0mm	State1	1413/1732.6	RMC	1.230	0.505	-0.14	20.93	22.00	0.646	Battery1#	/
Front Side	0mm	State1	1312/1712.4	RMC	3.890	1.690	0.18	20.89	22.00	2.182	Battery 2#	/
Front Side	0mm	State1	1312/1712.4	RMC	3.800	1.680	-0.10	20.89	22.00	2.169	Battery 3#	/
Front Side	0mm	State1	1312/1712.4	RMC	4.050	1.760	0.03	20.89	22.00	2.273	SIM2	/
Additional Body SAR test results with sensor off												
Front Side	10mm	State1	1413/1732.6	RMC	0.960	0.546	-0.19	22.85	24.00	1.251	Battery1#	/
Back Side	13mm	State1	1413/1732.6	RMC	1.050	0.601	-0.16	22.85	24.00	1.368	Battery1#	/
Bottom Side	12mm	State1	1413/1732.6	RMC	1.690	0.959	-0.11	22.85	24.00	2.202	Battery1#	/
Bottom Side	12mm	State1	1312/1712.4	RMC	1.660	0.943	-0.01	22.81	24.00	2.183	Battery1#	/
Bottom Side	12mm	State1	1513/1752.6	RMC	1.720	0.974	-0.11	22.82	24.00	2.257	Battery1#	/

Table 134: Product Specific 10-g SAR results of UMTS Band IV

## 7.2.16 SAR measurement Result of UMTS Band V(Main Antenna)

Test Position of Head	Dist.	Ant Tuning State	Channel Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Left touch	/	/	4182/836.4	RMC	0.159	0.122	0.01	22.89	24.00	0.205	Battery1#	/
Left tilt	/	/	4182/836.4	RMC	0.135	0.094	-0.17	22.89	24.00	0.174	Battery1#	/
Right touch	/	/	4182/836.4	RMC	0.198	0.152	0.05	22.89	24.00	0.256	Battery1#	/
Right tilt	/	/	4182/836.4	RMC	0.130	0.091	-0.09	22.89	24.00	0.168	Battery1#	/
Right touch	/	/	4182/836.4	RMC	0.196	0.150	0.03	22.89	24.00	0.253	SIM2	/
Right touch	/	/	4182/836.4	RMC	0.217	0.167	-0.01	22.89	24.00	0.280	Battery 2#	/
Right touch	/	/	4182/836.4	RMC	0.225	0.217	-0.06	22.89	24.00	0.291	Battery 3#	/
Right touch	/	/	4132/826.4	RMC	0.215	0.165	-0.03	22.90	24.00	0.277	Battery 3#	/
Right touch	/	/	4233/846.6	RMC	0.227	0.172	-0.06	22.92	24.00	0.291	Battery 3#	Yes

Table 135: Head SAR test results of UMTS Band V

Test Position of Body-Worn	Dist.	Ant Tuning State	Channel Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	15mm	/	4182/836.4	RMC	0.204	0.159	-0.03	22.89	24.00	0.263	Battery1#	/
Back Side	15mm	/	4182/836.4	RMC	0.354	0.276	-0.03	22.89	24.00	0.457	Battery1#	/
Back Side	15mm	/	4182/836.4	RMC	0.380	0.296	-0.06	22.89	24.00	0.491	SIM2	/
Back Side	15mm	/	4182/836.4	RMC	0.381	0.294	-0.04	22.89	24.00	0.492	Battery 2#	Yes
Back Side	15mm	/	4182/836.4	RMC	0.374	0.292	-0.04	22.89	24.00	0.483	Battery 3#	/

Table 136: Body-Worn SAR test results of UMTS Band V

Test Position of Hotspot	Dist.	Ant Tuning State	Channel Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	10mm	/	4182/836.4	RMC	0.206	0.159	-0.08	22.89	24.00	0.266	Battery1#	/
Back Side	10mm	/	4182/836.4	RMC	0.374	0.292	-0.06	22.89	24.00	0.483	Battery1#	/
Left Side	10mm	/	4182/836.4	RMC	0.285	0.196	-0.04	22.89	24.00	0.368	Battery1#	/
Right Side	10mm	/	4182/836.4	RMC	0.506	0.349	-0.07	22.89	24.00	0.653	Battery1#	Yes
Bottom Side	10mm	/	4182/836.4	RMC	0.143	0.074	-0.08	22.89	24.00	0.185	Battery1#	/
Right Side	10mm	/	4182/836.4	RMC	0.492	0.338	-0.19	22.89	24.00	0.635	SIM2	/
Right Side	10mm	/	4182/836.4	RMC	0.478	0.329	-0.11	22.89	24.00	0.617	Battery 2#	/
Right Side	10mm	/	4182/836.4	RMC	0.480	0.332	-0.13	22.89	24.00	0.620	Battery 3#	/

Table 137: Hotspot SAR test results of UMTS Band V

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

### 7.2.17 SAR measurement Result of LTE Band II (Main Antenna)

Test Position of Head	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Left touch	/	State2	18900/1880	20M QPSK 1RB#50	0.171	0.112	-0.16	22.67	23.50	0.207	Battery1#	/
Left touch	/	State1	18900/1880	20M QPSK 1RB#50	0.256	0.166	-0.16	22.67	23.50	0.310	Battery1#	/
Left tilt	/	State1	18900/1880	20M QPSK 1RB#50	0.191	0.117	-0.06	22.67	23.50	0.231	Battery1#	/
Right touch	/	State1	18900/1880	20M QPSK 1RB#50	0.185	0.121	-0.19	22.67	23.50	0.224	Battery1#	/
Right tilt	/	State1	18900/1880	20M QPSK 1RB#50	0.155	0.088	0.04	22.67	23.50	0.188	Battery1#	/
Left touch	/	State1	18900/1880	20M QPSK 50%RB#25	0.195	0.113	0.01	22.07	23.00	0.242	Battery1#	/
Left tilt	/	State1	18900/1880	20M QPSK 50%RB#25	0.152	0.093	-0.05	22.07	23.00	0.188	Battery1#	/
Right touch	/	State1	18900/1880	20M QPSK 50%RB#25	0.142	0.083	0.01	22.07	23.00	0.176	Battery1#	/
Right tilt	/	State1	18900/1880	20M QPSK 50%RB#25	0.119	0.064	0.04	22.07	23.00	0.147	Battery1#	/
Left touch	/	State1	18900/1880	20M QPSK 1RB#50	0.238	0.155	0.09	22.67	23.50	0.288	SIM2	/
Left touch	/	State1	18900/1880	20M QPSK 1RB#50	0.258	0.169	-0.11	22.67	23.50	0.312	Battery 2#	/
Left touch	/	State1	18900/1880	20M QPSK 1RB#50	0.265	0.174	-0.07	22.67	23.50	0.321	Battery 3#	Yes
Left touch	/	State2	18900/1880	20M QPSK 1RB#50	0.188	0.119	-0.15	22.67	23.50	0.228	Battery 3#	/
Left touch	/	State1	18700/1860	20M QPSK 1RB#0	0.171	0.112	-0.16	22.23	23.50	0.229	Battery 3#	/
Left touch	/	State1	19100/1900	20M QPSK 1RB#99	0.218	0.141	-0.01	22.32	23.50	0.286	Battery 3#	/

Table 138: Head SAR test results of LTE Band II

Test Position of Body-Worn	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	15mm	State2	18900/1880	20M QPSK 1RB#50	0.561	0.307	0.06	22.67	23.50	0.679	Battery1#	/
Front Side	15mm	State1	18900/1880	20M QPSK 1RB#50	0.607	0.351	-0.17	22.67	23.50	0.735	Battery1#	/
Back Side	15mm	State1	18900/1880	20M QPSK 1RB#50	0.866	0.475	-0.06	22.67	23.50	1.048	Battery1#	Yes
Back Side	15mm	State2	18900/1880	20M QPSK 1RB#50	0.763	0.421	-0.04	22.67	23.50	0.924	Battery1#	/
Back Side-repeated	15mm	State1	18900/1880	20M QPSK 1RB#50	0.794	0.435	-0.02	22.67	23.50	0.961	Battery1#	/
Back Side	15mm	State1	18700/1860	20M QPSK 1RB#0	0.628	0.341	-0.18	22.23	23.50	0.841	Battery1#	/
Back Side	15mm	State1	19100/1900	20M QPSK 1RB#99	0.717	0.397	-0.12	22.32	23.50	0.941	Battery1#	/
Front Side	15mm	State1	18900/1880	20M QPSK 50%RB#25	0.473	0.273	0.11	22.07	23.00	0.586	Battery1#	/
Back Side	15mm	State1	18900/1880	20M QPSK 50%RB#25	0.465	0.258	-0.16	22.07	23.00	0.576	Battery1#	/
Back Side	15mm	State1	19100/1900	20M QPSK 100%RB#0	0.554	0.307	-0.02	21.86	23.00	0.720	Battery1#	/
Back Side	15mm	State1	18900/1880	20M QPSK 1RB#50	0.639	0.348	0.01	22.67	23.50	0.774	Battery 2#	/
Back Side	15mm	State1	18900/1880	20M QPSK 1RB#50	0.624	0.316	0.08	22.67	23.50	0.755	Battery 3#	/
Back Side	15mm	State1	18900/1880	20M QPSK 1RB#50	0.638	0.357	-0.14	22.67	23.50	0.772	SIM2	/

Table 139: Body-Worn SAR test results of LTE Band II

Test Position of Hotspot	Dist.	Ant Tuning State	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	10mm	State2	19100/1900	20M QPSK 1RB#50	0.285	0.154	-0.12	16.97	17.80	0.345	Battery1#	/
Front Side	10mm	State1	19100/1900	20M QPSK 1RB#50	0.383	0.207	-0.04	16.97	17.80	0.464	Battery1#	/
Back Side	10mm	State1	19100/1900	20M QPSK 1RB#50	0.405	0.207	-0.02	16.97	17.80	0.490	Battery1#	/
Left Side	10mm	State1	19100/1900	20M QPSK 1RB#50	0.129	0.074	-0.11	18.85	19.70	0.157	Battery1#	/
Right Side	10mm	State1	19100/1900	20M QPSK 1RB#50	0.096	0.055	-0.06	18.85	19.70	0.116	Battery1#	/
Bottom Side	10mm	State1	19100/1900	20M QPSK 1RB#50	0.505	0.265	0.11	16.97	17.80	0.611	Battery1#	/
Front Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.415	0.222	-0.13	16.86	17.80	0.515	Battery1#	/
Back Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.442	0.225	-0.19	16.86	17.80	0.549	Battery1#	/
Left Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.129	0.073	-0.03	18.76	19.70	0.160	Battery1#	/
Right Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.098	0.056	-0.18	18.76	19.70	0.121	Battery1#	/
Bottom Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.561	0.293	0.17	16.86	17.80	0.697	Battery1#	/
Bottom Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.558	0.292	-0.15	16.86	17.80	0.693	SIM2	/
Bottom Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.572	0.299	-0.15	16.86	17.80	0.710	Battery 2#	/
Bottom Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.530	0.280	0.16	16.86	17.80	0.658	Battery 3#	/
Bottom Side	10mm	State2	18900/1880	20M QPSK 50%RB#25	0.408	0.214	0.02	16.86	17.80	0.507	Battery 2#	/
Additional Body SAR test results with sensor off(hotspot on)												
Front Side	11mm	State1	19100/1900	20M QPSK 1RB#50	0.318	0.174	0.14	18.85	19.70	0.387	Battery1#	/
Back Side	13mm	State1	19100/1900	20M QPSK 1RB#50	0.361	0.192	-0.12	18.85	19.70	0.439	Battery1#	/
Bottom Side	12mm	State1	19100/1900	20M QPSK 1RB#50	0.521	0.282	0.04	18.85	19.70	0.634	Battery1#	/
Front Side	11mm	State1	18900/1880	20M QPSK 50%RB#25	0.373	0.206	-0.06	18.76	19.70	0.463	Battery1#	/
Back Side	13mm	State1	18900/1880	20M QPSK 50%RB#25	0.440	0.239	0.04	18.76	19.70	0.546	Battery1#	/
Bottom Side	12mm	State1	18900/1880	20M QPSK 50%RB#25	0.646	0.359	0.08	18.76	19.70	0.802	Battery1#	Yes
Bottom Side	12mm	State2	18900/1880	20M QPSK 50%RB#25	0.594	0.322	0.10	18.76	19.70	0.738	Battery1#	/
Bottom Side	12mm	State1	18700/1860	20M QPSK 50%RB#25	0.418	0.220	0.10	18.35	19.70	0.570	Battery1#	/
Bottom Side	12mm	State1	19100/1900	20M QPSK 50%RB#25	0.584	0.316	0.07	18.67	19.70	0.740	Battery1#	/
Bottom Side	12mm	State1	19100/1900	20M QPSK 100%RB#0	0.535	0.280	0.08	18.52	19.70	0.702	Battery1#	/

Table 140: Hotspot SAR test results of LTE Band II

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Ant Tuning State	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
					1-g	10-g						
Front Side	10mm	State2	19100/1900	20M QPSK 1RB#50	0.285	0.154	-0.12	16.97	23.50	1.282	Front Side	No
Front Side	10mm	State1	19100/1900	20M QPSK 1RB#50	0.383	0.207	-0.04	16.97	23.50	1.723	Front Side	No
Back Side	10mm	State1	19100/1900	20M QPSK 1RB#50	0.405	0.207	-0.02	16.97	23.50	1.822	Back Side	No
Left Side	10mm	State1	19100/1900	20M QPSK 1RB#50	0.129	0.074	-0.11	18.85	23.50	0.376	Left Side	Yes
Right Side	10mm	State1	19100/1900	20M QPSK 1RB#50	0.096	0.055	-0.06	18.85	23.50	0.279	Right Side	Yes
Bottom Side	10mm	State1	19100/1900	20M QPSK 1RB#50	0.505	0.265	0.11	16.97	23.50	2.271	Bottom Side	No
Front Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.415	0.222	-0.13	16.86	23.00	1.706	Battery1#	No
Back Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.442	0.225	-0.19	16.86	23.00	1.817	Battery1#	No
Left Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.129	0.073	-0.03	18.76	23.00	0.342	Battery1#	Yes
Right Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.098	0.056	-0.18	18.76	23.00	0.259	Battery1#	Yes
Bottom Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.561	0.293	0.17	16.86	23.00	2.307	Battery1#	No
Bottom Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.558	0.292	-0.15	16.86	23.00	2.294	SIM2	No
Bottom Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.572	0.299	-0.15	16.86	23.00	2.352	Battery 2#	No
Bottom Side	10mm	State1	18900/1880	20M QPSK 50%RB#25	0.530	0.280	0.16	16.86	23.00	2.179	Battery 3#	No
Bottom Side	10mm	State2	18900/1880	20M QPSK 50%RB#25	0.408	0.214	0.02	16.86	23.00	1.677	Battery 2#	No
Additional Body SAR test results with sensor off												
Front Side	11mm	State1	19100/1900	20M QPSK 1RB#50	0.318	0.174	0.14	18.85	23.50	0.928	Battery1#	Yes
Back Side	13mm	State1	19100/1900	20M QPSK 1RB#50	0.361	0.192	-0.12	18.85	23.50	1.053	Battery1#	Yes
Bottom Side	12mm	State1	19100/1900	20M QPSK 1RB#50	0.521	0.282	0.04	18.85	23.50	1.520	Battery1#	No
Front Side	11mm	State1	18900/1880	20M QPSK 50%RB#25	0.373	0.206	-0.06	18.76	23.00	0.990	Battery1#	Yes
Back Side	13mm	State1	18900/1880	20M QPSK 50%RB#25	0.440	0.239	0.04	18.76	23.00	1.168	Battery1#	Yes
Bottom Side	12mm	State1	18900/1880	20M QPSK 50%RB#25	0.646	0.359	0.08	18.76	23.00	1.715	Battery1#	No
Bottom Side	12mm	State2	18900/1880	20M QPSK 50%RB#25	0.594	0.322	0.10	18.76	23.00	1.577	Battery1#	No
Bottom Side	12mm	State1	18700/1860	20M QPSK 50%RB#25	0.418	0.220	0.10	18.35	23.00	1.219	Battery1#	No
Bottom Side	12mm	State1	19100/1900	20M QPSK 50%RB#25	0.584	0.316	0.07	18.67	23.00	1.583	Battery1#	No
Bottom Side	12mm	State1	19100/1900	20M QPSK 100%RB#0	0.535	0.280	0.08	18.52	23.00	1.501	Battery1#	No

Table 141: Product Specific 10-g SAR test reduction evaluation of LTE Band II

Note : According to the table above ,**Front side**、**Bottom Side** and **Back side** Product Specific 10-g SAR test is required for this frequency band:

Product Specific 10-g SAR	Dist.	Ant Tuning State	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	0mm	State2	19100/1900	20M QPSK 1RB#50	2.680	1.260	0.12	21.60	22.00	1.382	Battery1#	/
Front Side	0mm	State1	19100/1900	20M QPSK 1RB#50	2.950	1.390	0.14	21.60	22.00	1.524	Battery1#	/
Back Side	0mm	State1	19100/1900	20M QPSK 1RB#50	3.470	1.510	-0.10	21.60	22.00	1.656	Battery1#	/
Back Side	0mm	State2	19100/1900	20M QPSK 1RB#50	4.480	1.950	0.18	21.60	22.00	2.138	Battery1#	/
Back Side	0mm	State2	18700/1860	20M QPSK 1RB#50	4.420	2.110	0.17	21.45	22.00	2.395	Battery1#	Yes
Back Side-Repeated	0mm	State2	18700/1860	20M QPSK 1RB#50	4.080	1.860	0.11	21.45	22.00	2.111	Battery1#	/
Back Side	0mm	State2	18900/1880	20M QPSK 1RB#50	3.020	1.430	0.11	21.31	22.00	1.676	Battery1#	/
Bottom Side	0mm	State1	19100/1900	20M QPSK 1RB#50	0.785	0.412	-0.09	21.60	22.00	0.452	Battery1#	/
Front Side	0mm	State1	18900/1880	20M QPSK 50%RB#25	1.940	0.926	-0.13	20.15	21.00	1.126	Battery1#	/
Back Side	0mm	State1	18900/1880	20M QPSK 50%RB#25	2.060	0.971	-0.03	20.15	21.00	1.181	Battery1#	/
Bottom Side	0mm	State1	18900/1880	20M QPSK 50%RB#25	0.467	0.245	-0.07	20.15	21.00	0.298	Battery1#	/
Back Side	0mm	State2	19100/1900	20M QPSK 100%RB#0	3.020	1.420	0.17	19.95	21.00	1.808	Battery1#	/
Back Side	0mm	State1	19100/1900	20M QPSK 1RB#50	3.320	1.500	-0.09	21.60	22.00	1.645	SIM2	/
Back Side	0mm	State1	19100/1900	20M QPSK 1RB#50	3.230	1.400	0.06	21.60	22.00	1.535	Battery 2#	/
Back Side	0mm	State1	19100/1900	20M QPSK 1RB#50	3.200	1.400	0.04	21.60	22.00	1.535	Battery 3#	/
Additional Body SAR test results with sensor off												
Front Side	11mm	State1	19100/1900	20M QPSK 1RB#50	0.936	0.497	-0.03	22.67	23.50	0.602	Battery1#	/
Back Side	13mm	State1	19100/1900	20M QPSK 1RB#50	1.170	0.588	-0.08	22.67	23.50	0.712	Battery1#	/
Bottom Side	12mm	State1	19100/1900	20M QPSK 1RB#50	1.610	0.873	0.17	22.67	23.50	1.057	Battery1#	/
Front Side	11mm	State1	18900/1880	20M QPSK 50%RB#25	0.800	0.446	-0.03	22.07	23.00	0.553	Battery1#	/
Back Side	13mm	State1	18900/1880	20M QPSK 50%RB#25	0.991	0.491	-0.03	22.07	23.00	0.608	Battery1#	/
Bottom Side	12mm	State1	18900/1880	20M QPSK 50%RB#25	1.270	0.657	0.11	22.07	23.00	0.814	Battery1#	/

Table 142: Product Specific 10-g SAR results of LTE Band II



### 7.2.18 SAR measurement Result of LTE Band IV(Main Antenna)

Test Position of Head	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Left touch	/	State2	20300/1745	20M QPSK 1RB#50	0.210	0.133	-0.15	23.04	23.50	0.233	Battery1#	/
Left touch	/	State1	20300/1745	20M QPSK 1RB#50	0.453	0.287	-0.04	23.04	23.50	0.504	Battery1#	Yes
Left tilt	/	State1	20300/1745	20M QPSK 1RB#50	0.125	0.076	0.01	23.04	23.50	0.139	Battery1#	/
Right touch	/	State1	20300/1745	20M QPSK 1RB#50	0.176	0.118	0.10	23.04	23.50	0.196	Battery1#	/
Right tilt	/	State1	20300/1745	20M QPSK 1RB#50	0.117	0.065	0.03	23.04	23.50	0.130	Battery1#	/
Left touch	/	State1	20300/1745	20M QPSK 50%RB#25	0.355	0.224	0.19	22.01	23.00	0.446	Battery1#	/
Left tilt	/	State1	20300/1745	20M QPSK 50%RB#25	0.105	0.069	-0.09	22.01	23.00	0.132	Battery1#	/
Right touch	/	State1	20300/1745	20M QPSK 50%RB#25	0.133	0.081	0.17	22.01	23.00	0.167	Battery1#	/
Right tilt	/	State1	20300/1745	20M QPSK 50%RB#25	0.092	0.051	0.05	22.01	23.00	0.116	Battery1#	/
Left touch	/	State1	20300/1745	20M QPSK 1RB#50	0.386	0.247	-0.14	23.04	23.50	0.429	Battery 2#	/
Left touch	/	State1	20300/1745	20M QPSK 1RB#50	0.390	0.250	0.16	23.04	23.50	0.434	Battery 3#	/
Left touch	/	State1	20300/1745	20M QPSK 1RB#50	0.396	0.252	0.12	23.04	23.50	0.440	SIM2	/
Left touch	/	State1	20050/1720	20M QPSK 1RB#50	0.302	0.183	-0.12	22.95	23.50	0.343	Battery1#	/
Left touch	/	State1	20175/1732.5	20M QPSK 1RB#50	0.276	0.167	0.13	22.82	23.50	0.323	Battery1#	/

Table 143: Head SAR test results of LTE Band IV

Test Position of Body-Worn	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	15mm	State2	20300/1745	20M QPSK 1RB#50	0.168	0.097	-0.11	23.04	23.50	0.187	Battery1#	/
Front Side	15mm	State1	20300/1745	20M QPSK 1RB#50	0.452	0.269	-0.11	23.04	23.50	0.503	Battery1#	/
Back Side	15mm	State1	20300/1745	20M QPSK 1RB#50	0.761	0.436	0.17	23.04	23.50	0.846	Battery1#	/
Front Side	15mm	State1	20300/1745	20M QPSK 50%RB#25	0.444	0.262	-0.15	22.01	23.00	0.558	Battery1#	/
Back Side	15mm	State1	20300/1745	20M QPSK 50%RB#25	0.522	0.302	-0.16	22.01	23.00	0.656	Battery1#	/
Back Side	15mm	State1	20300/1745	20M QPSK 1RB#50	0.507	0.296	-0.11	23.04	23.50	0.564	Battery 2#	/
Back Side	15mm	State1	20300/1745	20M QPSK 1RB#50	0.789	0.460	-0.12	23.04	23.50	0.877	Battery 3#	Yes
Back Side	15mm	State1	20050/1720	20M QPSK 1RB#50	0.489	0.284	-0.11	22.95	23.50	0.555	Battery 3#	/
Back Side	15mm	State1	20175/1732.5	20M QPSK 1RB#50	0.400	0.231	-0.17	22.82	23.50	0.468	Battery 3#	/
Back Side	15mm	State1	20300/1745	20M QPSK 100%RB#0	0.495	0.289	0.11	21.98	23.00	0.626	Battery3#	/
Back Side	15mm	State1	20300/1745	20M QPSK 1RB#50	0.704	0.408	-0.05	23.04	23.50	0.783	SIM2	/
Back Side	15mm	State2	20300/1745	20M QPSK 1RB#50	0.192	0.108	-0.10	23.04	23.50	0.213	Battery 3#	/

Table 144: Body-Worn SAR test results of LTE Band IV

Test Position of Hotspot	Dist.	Ant Tuning State	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	10mm	State2	20300/1745	20M QPSK 1RB#50	0.279	0.155	-0.07	17.29	18.00	0.329	Battery1#	/
Front Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.428	0.235	0.11	17.29	18.00	0.504	Battery1#	/
Back Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.530	0.279	-0.13	17.29	18.00	0.624	Battery1#	/
Left Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.150	0.092	-0.14	19.26	19.50	0.159	Battery1#	/
Right Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.036	0.020	-0.10	19.26	19.50	0.038	Battery1#	/
Bottom Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.651	0.355	-0.04	17.29	18.00	0.767	Battery1#	/
Bottom Side	10mm	State2	20300/1745	20M QPSK 1RB#50	0.359	0.190	0.09	17.29	18.00	0.423	Battery1#	/
Bottom Side	10mm	State1	20050/1720	20M QPSK 1RB#50	0.551	0.293	0.15	17.11	18.00	0.676	Battery1#	/
Bottom Side	10mm	State1	20175/1732.5	20M QPSK 1RB#50	0.525	0.279	0.19	17.16	18.00	0.637	Battery1#	/
Front Side	10mm	State1	20300/1745	20M QPSK 50%RB#25	0.399	0.220	-0.15	17.06	18.00	0.495	Battery1#	/
Back Side	10mm	State1	20300/1745	20M QPSK 50%RB#25	0.470	0.248	-0.07	17.06	18.00	0.584	Battery1#	/
Left Side	10mm	State1	20300/1745	20M QPSK 50%RB#0	0.139	0.085	-0.03	18.95	19.50	0.158	Battery1#	/
Right Side	10mm	State1	20300/1745	20M QPSK 50%RB#0	0.037	0.021	-0.06	18.95	19.50	0.041	Battery1#	/
Bottom Side	10mm	State1	20300/1745	20M QPSK 50%RB#25	0.615	0.335	-0.08	17.06	18.00	0.764	Battery1#	/
Bottom Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.557	0.295	0.12	17.29	18.00	0.656	SIM2	/
Bottom Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.585	0.309	0.03	17.29	18.00	0.689	Battery 2#	/
Bottom Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.592	0.312	0.08	17.29	18.00	0.697	Battery 3#	/
Additional Body SAR test results with sensor off(hotspot on)												
Front Side	11mm	State1	20300/1745	20M QPSK 1RB#50	0.411	0.232	-0.05	19.26	19.50	0.434	Battery1#	/
Back Side	13mm	State1	20300/1745	20M QPSK 1RB#50	0.449	0.250	-0.12	19.26	19.50	0.475	Battery1#	/
Bottom Side	12mm	State1	20300/1745	20M QPSK 1RB#50	0.747	0.419	0.12	19.26	19.50	0.789	Battery1#	Yes
Bottom Side	12mm	State2	20300/1745	20M QPSK 1RB#50	0.320	0.166	0.17	19.26	19.50	0.338	Battery1#	/
Front Side	11mm	State1	20300/1745	20M QPSK 50%RB#0	0.379	0.214	0.14	18.95	19.50	0.430	Battery1#	/
Back Side	13mm	State1	20300/1745	20M QPSK 50%RB#0	0.422	0.234	-0.07	18.95	19.50	0.479	Battery1#	/
Bottom Side	12mm	State1	20300/1745	20M QPSK 50%RB#0	0.680	0.381	0.08	18.95	19.50	0.772	Battery1#	/

Table 145: Hotspot SAR test results of LTE Band IV

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Ant Tuning State	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
					1-g	10-g						
Front Side	10mm	State2	20300/1745	20M QPSK 1RB#50	0.279	0.155	-0.07	17.29	23.50	1.166	Battery1#	Yes
Front Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.428	0.235	0.11	17.29	23.50	1.788	Battery1#	No
Back Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.530	0.279	-0.13	17.29	23.50	2.215	Battery1#	No
Left Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.150	0.092	-0.14	19.26	23.50	0.398	Battery1#	Yes
Right Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.036	0.020	-0.10	19.26	23.50	0.095	Battery1#	Yes
Bottom Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.651	0.355	-0.04	17.29	23.50	2.720	Battery1#	No
Bottom Side	10mm	State2	20300/1745	20M QPSK 1RB#50	0.359	0.190	0.09	17.29	23.50	1.500	Battery1#	No
Bottom Side	10mm	State1	20050/1720	20M QPSK 1RB#50	0.551	0.293	0.15	17.11	23.50	2.400	Battery1#	No
Bottom Side	10mm	State1	20175/1732.5	20M QPSK 1RB#50	0.525	0.279	0.19	17.16	23.50	2.260	Battery1#	No
Front Side	10mm	State1	20300/1745	20M QPSK 50%RB#25	0.399	0.220	-0.15	17.06	23.00	1.567	Battery1#	No
Back Side	10mm	State1	20300/1745	20M QPSK 50%RB#25	0.470	0.248	-0.07	17.06	23.00	1.845	Battery1#	No
Left Side	10mm	State1	20300/1745	20M QPSK 50%RB#0	0.139	0.085	-0.03	18.95	23.00	0.353	Battery1#	Yes
Right Side	10mm	State1	20300/1745	20M QPSK 50%RB#0	0.037	0.021	-0.06	18.95	23.00	0.093	Battery1#	Yes
Bottom Side	10mm	State1	20300/1745	20M QPSK 50%RB#25	0.615	0.335	-0.08	17.06	23.00	2.415	Battery1#	No
Bottom Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.557	0.295	0.12	17.29	23.00	2.074	SIM2	No
Bottom Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.585	0.309	0.03	17.29	23.00	2.178	Battery 2#	No
Bottom Side	10mm	State1	20300/1745	20M QPSK 1RB#50	0.592	0.312	0.08	17.29	23.00	2.205	Battery 3#	No
Additional Body SAR test results												
Front Side	11mm	State1	20300/1745	20M QPSK 1RB#50	0.411	0.232	-0.05	19.26	23.50	1.091	Battery1#	Yes
Back Side	13mm	State1	20300/1745	20M QPSK 1RB#50	0.449	0.250	-0.12	19.26	23.50	1.192	Battery1#	Yes
Bottom Side	12mm	State1	20300/1745	20M QPSK 1RB#50	0.747	0.419	0.12	19.26	23.50	1.983	Battery1#	No
Bottom Side	12mm	State2	20300/1745	20M QPSK 1RB#50	0.320	0.166	0.17	19.26	23.50	0.849	Battery1#	Yes
Front Side	11mm	State1	20300/1745	20M QPSK 50%RB#0	0.379	0.214	0.14	18.95	23.00	0.963	Battery1#	Yes
Back Side	13mm	State1	20300/1745	20M QPSK 50%RB#0	0.422	0.234	-0.07	18.95	23.00	1.072	Battery1#	Yes
Bottom Side	12mm	State1	20300/1745	20M QPSK 50%RB#0	0.680	0.381	0.08	18.95	23.00	1.728	Battery1#	No

Table 146: Product Specific 10-g SAR test reduction evaluation of LTE Band IV

Note : According to the table above , only **Bottom Side** and **Back side** Product Specific 10-g SAR test is required for this frequency band:

Product Specific 10-g SAR	Dist.	Ant Tuning State	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 10-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Back Side	0mm	State2	20300/1745	20M QPSK 1RB#50	2.470	1.060	0.15	21.49	21.50	1.062	Battery1#	/
Back Side	0mm	State1	20300/1745	20M QPSK 1RB#50	4.680	1.960	-0.16	21.49	21.50	1.965	Battery1#	Yes
Front Side	0mm	State1	20300/1745	20M QPSK 1RB#50	2.020	0.916	0.01	21.49	21.50	0.918	Battery1#	/
Bottom Side	0mm	State1	20300/1745	20M QPSK 1RB#50	0.769	0.396	-0.06	21.49	21.50	0.397	Battery1#	/
Back Side	0mm	State1	20300/1745	20M QPSK 50%RB#25	3.330	1.380	0.10	20.25	21.00	1.640	Battery1#	/
Front Side	0mm	State1	20300/1745	20M QPSK 50%RB#25	2.000	0.901	0.17	20.25	21.00	1.071	Battery1#	/
Bottom Side	0mm	State1	20300/1745	20M QPSK 50%RB#25	0.616	0.318	-0.07	20.25	21.00	0.378	Battery1#	/
Back Side	0mm	State1	20300/1745	20M QPSK 1RB#50	3.530	1.510	0.16	21.49	21.50	1.513	SIM2	/
Back Side	0mm	State1	20300/1745	20M QPSK 1RB#50	4.380	1.830	0.03	21.49	21.50	1.834	Battery 2#	/
Back Side	0mm	State1	20300/1745	20M QPSK 1RB#50	3.890	1.650	0.08	21.49	21.50	1.654	Battery 3#	/
Additional Body SAR test results with sensor off												
Front Side	11mm	State1	20300/1745	20M QPSK 1RB#50	1.000	0.556	0.13	23.04	23.50	0.618	Battery1#	/
Back Side	13mm	State1	20300/1745	20M QPSK 1RB#50	1.120	0.628	-0.03	23.04	23.50	0.698	Battery1#	/
Bottom Side	12mm	State1	20300/1745	20M QPSK 1RB#50	1.750	0.975	0.18	23.04	23.50	1.084	Battery1#	/
Front Side	11mm	State1	20300/1745	20M QPSK 50%RB#0	0.811	0.447	0.15	22.01	23.00	0.561	Battery1#	/
Back Side	13mm	State1	20300/1745	20M QPSK 50%RB#0	1.040	0.577	-0.04	22.01	23.00	0.725	Battery1#	/
Bottom Side	12mm	State1	20300/1745	20M QPSK 50%RB#0	1.420	0.794	0.16	22.01	23.00	0.997	Battery1#	/

Table 147: Product Specific 10-g SAR results of LTE Band IV

### 7.2.19 SAR measurement Result of LTE Band V(Main Antenna)

Test Position of Head	Dist.	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Left touch	/	20600/844	10M QPSK 1RB#25	0.172	0.131	-0.12	23.12	24.00	0.211	Battery1#	/
Left tilt	/	20600/844	10M QPSK 1RB#25	0.143	0.109	0.14	23.12	24.00	0.175	Battery1#	/
Right touch	/	20600/844	10M QPSK 1RB#25	0.214	0.163	-0.04	23.12	24.00	0.262	Battery1#	/
Right tilt	/	20600/844	10M QPSK 1RB#25	0.125	0.087	-0.06	23.12	24.00	0.153	Battery1#	/
Left touch	/	20600/844	10M QPSK 50%RB#13	0.131	0.100	-0.11	22.08	23.00	0.162	Battery1#	/
Left tilt	/	20600/844	10M QPSK 50%RB#13	0.101	0.070	0.00	22.08	23.00	0.125	Battery1#	/
Right touch	/	20600/844	10M QPSK 50%RB#13	0.167	0.128	0.02	22.08	23.00	0.206	Battery1#	/
Right tilt	/	20600/844	10M QPSK 50%RB#13	0.077	0.054	0.01	22.08	23.00	0.095	Battery1#	/
Right touch	/	20600/844	10M QPSK 1RB#25	0.200	0.154	0.01	23.12	24.00	0.245	SIM2	/
Right touch	/	20600/844	10M QPSK 1RB#25	0.220	0.165	0.04	23.12	24.00	0.269	Battery 2#	/
Right touch	/	20600/844	10M QPSK 1RB#25	0.190	0.130	-0.18	23.12	24.00	0.233	Battery 3#	/
Right touch	/	20450/829	10M QPSK 1RB#25	0.225	0.171	-0.04	22.88	24.00	0.291	Battery 2#	Yes
Right touch	/	20525/836.5	10M QPSK 1RB#25	0.188	0.128	-0.03	22.80	24.00	0.248	Battery 2#	/

Table 148: Head SAR test results of LTE Band V

Test Position of Body-Worn	Dist.	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	20600/844	10M QPSK 1RB#25	0.104	0.080	-0.06	23.12	24.00	0.127	Battery1#	/
Back Side	15mm	20600/844	10M QPSK 1RB#25	0.304	0.216	-0.05	23.12	24.00	0.372	Battery1#	/
Front Side	15mm	20600/844	10M QPSK 50%RB#13	0.080	0.056	-0.03	22.08	23.00	0.098	Battery1#	/
Back Side	15mm	20600/844	10M QPSK 50%RB#13	0.164	0.127	0.01	22.08	23.00	0.203	Battery1#	/
Back Side	15mm	20600/844	10M QPSK 1RB#25	0.314	0.241	-0.03	23.12	24.00	0.385	SIM2	/
Back Side	15mm	20600/844	10M QPSK 1RB#25	0.344	0.266	-0.04	23.12	24.00	0.421	Battery 2#	Yes
Back Side	15mm	20600/844	10M QPSK 1RB#25	0.305	0.219	0.17	23.12	24.00	0.374	Battery 3#	/

Table 149: Body-Worn SAR test results of LTE Band V

Test Position of Hotspot	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	20600/844	10M QPSK 1RB#25	0.197	0.151	-0.05	21.31	22.00	0.231	Battery1#	/
Back Side	10mm	20600/844	10M QPSK 1RB#25	0.246	0.188	0.14	21.31	22.00	0.288	Battery1#	/
Left Side	10mm	20600/844	10M QPSK 1RB#25	0.241	0.166	-0.07	23.12	24.00	0.295	Battery1#	/
Right Side	10mm	20600/844	10M QPSK 1RB#25	0.427	0.294	-0.14	23.12	24.00	0.523	Battery1#	Yes
Bottom Side	10mm	20600/844	10M QPSK 1RB#25	0.090	0.046	0.12	21.31	22.00	0.105	Battery1#	/
Front Side	10mm	20600/844	10M QPSK 50%RB#13	0.156	0.120	-0.06	20.13	21.00	0.191	Battery1#	/
Back Side	10mm	20600/844	10M QPSK 50%RB#13	0.185	0.143	-0.15	20.13	21.00	0.226	Battery1#	/
Left Side	10mm	20600/844	10M QPSK 50%RB#13	0.192	0.132	-0.02	22.08	23.00	0.237	Battery1#	/
Right Side	10mm	20600/844	10M QPSK 50%RB#13	0.356	0.247	-0.14	22.08	23.00	0.440	Battery1#	/
Bottom Side	10mm	20600/844	10M QPSK 50%RB#13	0.068	0.035	0.06	20.13	21.00	0.083	Battery1#	/
Right Side	10mm	20600/844	10M QPSK 1RB#25	0.215	0.148	-0.14	23.12	24.00	0.263	Battery 2#	/
Right Side	10mm	20600/844	10M QPSK 1RB#25	0.224	0.154	-0.09	23.12	24.00	0.274	Battery 3#	/
Right Side	10mm	20600/844	10M QPSK 1RB#25	0.399	0.268	0.17	23.12	24.00	0.489	SIM2	/
Additional Body SAR test results with sensor off											
Front Side	11mm	20600/844	10M QPSK 1RB#25	0.187	0.146	-0.17	23.12	24.00	0.229	Battery1#	/
Back Side	13mm	20600/844	10M QPSK 1RB#25	0.383	0.299	0.00	23.12	24.00	0.469	Battery1#	/
Bottom Side	12mm	20600/844	10M QPSK 1RB#25	0.099	0.053	0.12	23.12	24.00	0.121	Battery1#	/
Front Side	11mm	20600/844	10M QPSK 50%RB#13	0.150	0.118	0.12	22.08	23.00	0.185	Battery1#	/
Back Side	13mm	20600/844	10M QPSK 50%RB#13	0.277	0.219	-0.02	22.08	23.00	0.342	Battery1#	/
Bottom Side	12mm	20600/844	10M QPSK 50%RB#13	0.077	0.041	0.02	22.08	23.00	0.095	Battery1#	/

Table 150: Hotspot SAR test results of LTE Band V

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
				1-g	10-g						
Front Side	10mm	20600/844	10M QPSK 1RB#25	0.197	0.151	-0.05	21.31	24.00	0.366	Battery1#	Yes
Back Side	10mm	20600/844	10M QPSK 1RB#25	0.246	0.188	0.14	21.31	24.00	0.457	Battery1#	Yes
Left Side	10mm	20600/844	10M QPSK 1RB#25	0.241	0.166	-0.07	23.12	24.00	0.295	Battery1#	Yes
Right Side	10mm	20600/844	10M QPSK 1RB#25	0.427	0.294	-0.14	23.12	24.00	0.523	Battery1#	Yes
Bottom Side	10mm	20600/844	10M QPSK 1RB#25	0.090	0.046	0.12	21.31	24.00	0.167	Battery1#	Yes
Front Side	10mm	20600/844	10M QPSK 50%RB#13	0.156	0.120	-0.06	20.13	23.00	0.302	Battery1#	Yes
Back Side	10mm	20600/844	10M QPSK 50%RB#13	0.185	0.143	-0.15	20.13	23.00	0.358	Battery1#	Yes
Left Side	10mm	20600/844	10M QPSK 50%RB#13	0.192	0.132	-0.02	22.08	23.00	0.237	Battery1#	Yes
Right Side	10mm	20600/844	10M QPSK 50%RB#13	0.356	0.247	-0.14	22.08	23.00	0.440	Battery1#	Yes
Bottom Side	10mm	20600/844	10M QPSK 50%RB#13	0.068	0.035	0.06	20.13	23.00	0.132	Battery1#	Yes
Right Side	10mm	20600/844	10M QPSK 1RB#25	0.215	0.148	-0.14	21.31	24.00	0.263	Battery 2#	Yes
Right Side	10mm	20600/844	10M QPSK 1RB#25	0.224	0.154	-0.09	21.31	24.00	0.274	Battery 3#	Yes
Right Side	10mm	20600/844	10M QPSK 1RB#25	0.399	0.268	0.17	21.31	24.00	0.489	SIM2	Yes
Additional Body SAR test results with sensor off											
Front Side	11mm	20600/844	10M QPSK 1RB#25	0.187	0.146	-0.17	23.12	24.00	0.229	Battery1#	Yes
Back Side	13mm	20600/844	10M QPSK 1RB#25	0.383	0.299	0.00	23.12	24.00	0.469	Battery1#	Yes
Bottom Side	12mm	20600/844	10M QPSK 1RB#25	0.099	0.053	0.12	23.12	24.00	0.121	Battery1#	Yes
Front Side	11mm	20600/844	10M QPSK 50%RB#13	0.150	0.118	0.12	23.12	23.00	0.185	Battery1#	Yes
Back Side	13mm	20600/844	10M QPSK 50%RB#13	0.277	0.219	-0.02	23.12	23.00	0.342	Battery1#	Yes
Bottom Side	12mm	20600/844	10M QPSK 50%RB#13	0.077	0.041	0.02	23.12	23.00	0.095	Battery1#	Yes

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.



## 7.2.20 SAR measurement Result of LTE Band VII(Main Antenna)

Test Position of Head	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Left touch	/	State2	21100/2535	20M QPSK 1RB#50	0.081	0.044	-0.13	21.75	23.00	0.109	Battery1#	/
Left touch	/	State1	21100/2535	20M QPSK 1RB#50	0.210	0.118	-0.18	21.75	23.00	0.280	Battery1#	/
Left tilt	/	State1	21100/2535	20M QPSK 1RB#50	0.072	0.035	0.08	21.75	23.00	0.096	Battery1#	/
Right touch	/	State1	21100/2535	20M QPSK 1RB#50	0.124	0.073	-0.03	21.75	23.00	0.165	Battery1#	/
Right tilt	/	State1	21100/2535	20M QPSK 1RB#50	0.121	0.067	0.18	21.75	23.00	0.161	Battery1#	/
Left touch	/	State1	20850/2510	20M QPSK 50%RB#0	0.167	0.094	0.15	20.77	22.00	0.222	Battery1#	/
Left tilt	/	State1	20850/2510	20M QPSK 50%RB#0	0.053	0.025	0.12	20.77	22.00	0.070	Battery1#	/
Right touch	/	State1	20850/2510	20M QPSK 50%RB#0	0.098	0.058	0.03	20.77	22.00	0.130	Battery1#	/
Right tilt	/	State1	20850/2510	20M QPSK 50%RB#0	0.094	0.053	0.10	20.77	22.00	0.125	Battery1#	/
Left touch	/	State1	21100/2535	20M QPSK 1RB#50	0.357	0.198	0.02	21.75	23.00	0.476	SIM2	/
Left touch	/	State1	21100/2535	20M QPSK 1RB#50	0.382	0.210	0.10	21.75	23.00	0.509	Battery 2#	Yes
Left touch	/	State2	21100/2535	20M QPSK 1RB#50	0.089	0.048	0.00	21.75	23.00	0.118	Battery 2#	/
Left touch	/	State1	21100/2535	20M QPSK 1RB#50	0.343	0.190	0.18	21.75	23.00	0.457	Battery 3#	/
Left touch	/	State1	20850/2510	20M QPSK 1RB#50	0.317	0.165	0.19	21.62	23.00	0.436	Battery 2#	/
Left touch	/	State1	21350/2560	20M QPSK 1RB#0	0.320	0.165	-0.07	21.67	23.00	0.435	Battery 2#	/

Table 151: Head SAR test results of LTE Band VII

Test Position of Body-Worn	Dist.	Ant Tuning State	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	15mm	State2	21100/2535	20M QPSK 1RB#50	0.117	0.058	-0.13	21.75	23.00	0.156	Battery1#	/
Front Side	15mm	State1	21100/2535	20M QPSK 1RB#50	0.188	0.108	0.09	21.75	23.00	0.251	Battery1#	/
Back Side	15mm	State1	21100/2535	20M QPSK 1RB#50	0.220	0.122	-0.17	21.75	23.00	0.293	Battery1#	Yes
Front Side	15mm	State1	20850/2510	20M QPSK 50%RB#0	0.169	0.097	0.19	20.77	22.00	0.224	Battery1#	/
Back Side	15mm	State1	20850/2510	20M QPSK 50%RB#0	0.190	0.108	-0.01	20.77	22.00	0.252	Battery1#	/
Back Side	15mm	State1	21100/2535	20M QPSK 1RB#50	0.122	0.068	-0.06	21.75	23.00	0.163	Battery 2#	/
Back Side	15mm	State1	21100/2535	20M QPSK 1RB#50	0.212	0.119	0.13	21.75	23.00	0.283	Battery 3#	/
Back Side	15mm	State1	21100/2535	20M QPSK 1RB#50	0.162	0.091	-0.13	21.75	23.00	0.216	SIM2	/
Back Side	15mm	State2	21100/2535	20M QPSK 1RB#50	0.071	0.038	0.19	21.75	23.00	0.095	Battery1#	/

Table 152: Body-Worn SAR test results of LTE Band VII

Test Position of Hotspot	Dist.	Ant Tuning State	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
					1-g	10-g						
Front Side	10mm	State2	20850/2510	20M QPSK 1RB#50	0.073	0.034	0.09	15.30	16.00	0.086	Battery1#	/
Front Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.097	0.054	0.11	15.30	16.00	0.113	Battery1#	/
Back Side	10mm	State2	20850/2510	20M QPSK 1RB#50	0.137	0.075	0.14	15.30	16.00	0.161	Battery1#	/
Back Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.162	0.072	0.08	15.30	16.00	0.190	Battery1#	Yes
Left Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.122	0.065	0.06	17.12	18.00	0.149	Battery1#	/
Right Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.009	0.004	-0.02	17.12	18.00	0.011	Battery1#	/
Bottom Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.051	0.024	-0.03	15.30	16.00	0.059	Battery1#	/
Front Side	10mm	State1	20850/2510	20M QPSK 50%RB#25	0.097	0.053	-0.03	15.17	16.00	0.118	Battery1#	/
Back Side	10mm	State1	20850/2510	20M QPSK 50%RB#25	0.131	0.073	0.03	15.17	16.00	0.159	Battery1#	/
Left Side	10mm	State1	20850/2510	20M QPSK 50%RB#25	0.120	0.064	0.07	16.96	18.00	0.152	Battery1#	/
Right Side	10mm	State1	20850/2510	20M QPSK 50%RB#25	0.007	0.003	-0.11	16.96	18.00	0.009	Battery1#	/
Bottom Side	10mm	State1	20850/2510	20M QPSK 50%RB#25	0.048	0.023	0.04	15.17	16.00	0.058	Battery1#	/
Back Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.098	0.055	-0.03	15.30	16.00	0.116	Battery 2#	/
Back Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.122	0.067	-0.16	15.30	16.00	0.143	Battery 3#	/
Back Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.113	0.064	-0.19	15.30	16.00	0.133	SIM2	/
Additional Body SAR test results with sensor off(hotspot on)												
Front Side	11mm	State1	20850/2510	20M QPSK 1RB#50	0.151	0.084	0.06	17.12	18.00	0.185	Battery1#	/
Back Side	13mm	State1	20850/2510	20M QPSK 1RB#50	0.143	0.079	-0.17	17.12	18.00	0.175	Battery1#	/
Bottom Side	12mm	State1	20850/2510	20M QPSK 1RB#50	0.061	0.031	-0.16	17.12	18.00	0.075	Battery1#	/
Front Side	11mm	State1	20850/2510	20M QPSK 50%RB#25	0.148	0.082	0.16	16.96	18.00	0.188	Battery1#	/
Back Side	13mm	State1	20850/2510	20M QPSK 50%RB#25	0.130	0.072	-0.09	16.96	18.00	0.165	Battery1#	/
Bottom Side	12mm	State1	20850/2510	20M QPSK 50%RB#25	0.059	0.029	-0.07	16.96	18.00	0.075	Battery1#	/

Table 153: Hotspot SAR test results of LTE Band VII

Per KDB648474D04, when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold:

Test Position of Hotspot	Dist.	Ant Tuning State	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	Product Specific 10-g SAR Exclusion
					1-g	10-g						
Front Side	10mm	State2	20850/2510	20M QPSK 1RB#50	0.073	0.034	0.09	15.30	23.00	0.432	Battery1#	Yes
Front Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.097	0.054	0.11	15.30	23.00	0.568	Battery1#	Yes
Back Side	10mm	State2	20850/2510	20M QPSK 1RB#50	0.137	0.075	0.14	15.30	23.00	0.807	Battery1#	Yes
Back Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.162	0.072	0.08	15.30	23.00	0.954	Battery1#	Yes
Left Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.122	0.065	0.06	17.12	23.00	0.472	Battery1#	Yes
Right Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.009	0.004	-0.02	17.12	23.00	0.035	Battery1#	Yes
Bottom Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.051	0.024	-0.03	15.30	23.00	0.297	Battery1#	Yes
Front Side	10mm	State1	20850/2510	20M QPSK 50%RB#25	0.097	0.053	-0.03	15.17	22.00	0.468	Battery1#	Yes
Back Side	10mm	State1	20850/2510	20M QPSK 50%RB#25	0.131	0.073	0.03	15.17	22.00	0.631	Battery1#	Yes
Left Side	10mm	State1	20850/2510	20M QPSK 50%RB#25	0.120	0.064	0.07	16.96	22.00	0.383	Battery1#	Yes
Right Side	10mm	State1	20850/2510	20M QPSK 50%RB#25	0.007	0.003	-0.11	16.96	22.00	0.022	Battery1#	Yes
Bottom Side	10mm	State1	20850/2510	20M QPSK 50%RB#25	0.048	0.023	0.04	15.17	22.00	0.230	Battery1#	Yes
Back Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.098	0.055	-0.03	15.30	23.00	0.579	Battery 2#	Yes
Back Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.122	0.067	-0.16	15.30	23.00	0.718	Battery 3#	Yes
Back Side	10mm	State1	20850/2510	20M QPSK 1RB#50	0.113	0.064	-0.19	15.30	23.00	0.665	SIM2	Yes
Additional Body SAR test results with sensor off												
Front Side	11mm	State1	20850/2510	20M QPSK 1RB#50	0.151	0.084	0.06	17.12	23.00	0.585	Battery1#	Yes
Back Side	13mm	State1	20850/2510	20M QPSK 1RB#50	0.143	0.079	-0.17	17.12	23.00	0.554	Battery1#	Yes
Bottom Side	12mm	State1	20850/2510	20M QPSK 1RB#50	0.061	0.031	-0.16	17.12	23.00	0.236	Battery1#	Yes
Front Side	11mm	State1	20850/2510	20M QPSK 50%RB#25	0.148	0.082	0.16	16.96	22.00	0.472	Battery1#	Yes
Back Side	13mm	State1	20850/2510	20M QPSK 50%RB#25	0.130	0.072	-0.09	16.96	22.00	0.415	Battery1#	Yes
Bottom Side	12mm	State1	20850/2510	20M QPSK 50%RB#25	0.059	0.029	-0.07	16.96	22.00	0.188	Battery1#	Yes

Table 154: Product Specific 10-g SAR test reduction evaluation LTE Band VII

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

### 7.2.21 SAR measurement Result of LTE Band XII(Main Antenna)

Test Position of Head	Dist.	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Left touch	/	23130/711	10M QPSK 1RB#25	0.210	0.166	-0.01	23.05	24.00	0.261	Battery1#	/
Left tilt	/	23130/711	10M QPSK 1RB#25	0.109	0.077	-0.01	23.05	24.00	0.136	Battery1#	/
Right touch	/	23130/711	10M QPSK 1RB#25	0.233	0.183	0.02	23.05	24.00	0.290	Battery1#	/
Right tilt	/	23130/711	10M QPSK 1RB#25	0.109	0.078	-0.03	23.05	24.00	0.136	Battery1#	/
Left touch	/	23130/711	10M QPSK 50%RB#13	0.152	0.122	-0.08	21.95	23.00	0.194	Battery1#	/
Left tilt	/	23130/711	10M QPSK 50%RB#13	0.092	0.072	0.08	21.95	23.00	0.117	Battery1#	/
Right touch	/	23130/711	10M QPSK 50%RB#13	0.183	0.144	-0.15	21.95	23.00	0.233	Battery1#	/
Right tilt	/	23130/711	10M QPSK 50%RB#13	0.088	0.063	-0.10	21.95	23.00	0.112	Battery1#	/
Right touch	/	23130/711	10M QPSK 1RB#25	0.234	0.184	-0.10	23.05	24.00	0.291	SIM2	/
Right touch	/	23130/711	10M QPSK 1RB#25	0.234	0.185	-0.02	23.05	24.00	0.291	Battery 2#	/
Right touch	/	23130/711	10M QPSK 1RB#25	0.226	0.178	-0.14	23.05	24.00	0.281	Battery 3#	/
Right touch	/	23060/704	10M QPSK 1RB#25	0.231	0.181	-0.19	22.84	24.00	0.302	Battery 2#	/
Right touch	/	23095/707.5	10M QPSK 1RB#25	0.250	0.196	-0.12	22.88	24.00	0.324	Battery 2#	Yes

Table 155: Head SAR test results of LTE Band XII

Test Position of Body-Worn	Dist.	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	15mm	23130/711	10M QPSK 1RB#25	0.224	0.177	-0.04	23.05	24.00	0.279	Battery1#	/
Back Side	15mm	23130/711	10M QPSK 1RB#25	0.299	0.231	-0.03	23.05	24.00	0.372	Battery1#	/
Front Side	15mm	23130/711	10M QPSK 50%RB#13	0.176	0.140	-0.04	21.95	23.00	0.224	Battery1#	/
Back Side	15mm	23130/711	10M QPSK 50%RB#13	0.238	0.158	-0.03	21.95	23.00	0.303	Battery1#	/
Back Side	15mm	23130/711	10M QPSK 1RB#25	0.288	0.225	-0.06	23.05	24.00	0.358	SIM2	/
Back Side	15mm	23130/711	10M QPSK 1RB#25	0.265	0.202	-0.04	23.05	24.00	0.330	Battery 2#	/
Back Side	15mm	23130/711	10M QPSK 1RB#25	0.301	0.232	-0.03	23.05	24.00	0.375	Battery 3#	Yes

Table 156: Body-Worn SAR test results of LTE Band XII

Test Position of Hotspot	Dist.	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported 1-g SAR (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g						
Front Side	10mm	23130/711	10M QPSK 1RB#25	0.237	0.190	0.04	23.05	24.00	0.295	Battery1#	/
Back Side	10mm	23130/711	10M QPSK 1RB#25	0.332	0.249	-0.04	23.05	24.00	0.413	Battery1#	/
Left Side	10mm	23130/711	10M QPSK 1RB#25	0.181	0.123	-0.13	23.05	24.00	0.225	Battery1#	/
Right Side	10mm	23130/711	10M QPSK 1RB#25	0.299	0.205	-0.10	23.05	24.00	0.372	Battery1#	/
Bottom Side	10mm	23130/711	10M QPSK 1RB#25	0.099	0.053	0.01	23.05	24.00	0.123	Battery1#	/
Front Side	10mm	23130/711	10M QPSK 50%RB#13	0.177	0.128	0.02	21.95	23.00	0.225	Battery1#	/
Back Side	10mm	23130/711	10M QPSK 50%RB#13	0.253	0.180	-0.08	21.95	23.00	0.322	Battery1#	/
Left Side	10mm	23130/711	10M QPSK 50%RB#13	0.144	0.098	-0.13	21.95	23.00	0.183	Battery1#	/
Right Side	10mm	23130/711	10M QPSK 50%RB#13	0.240	0.164	-0.08	21.95	23.00	0.306	Battery1#	/
Bottom Side	10mm	23130/711	10M QPSK 50%RB#13	0.080	0.042	0.05	21.95	23.00	0.101	Battery1#	/
Back Side	10mm	23130/711	10M QPSK 1RB#25	0.352	0.265	-0.08	23.05	24.00	0.438	SIM2	/
Back Side	10mm	23130/711	10M QPSK 1RB#25	0.334	0.252	-0.06	23.05	24.00	0.416	Battery 2#	/
Back Side	10mm	23130/711	10M QPSK 1RB#25	0.364	0.274	-0.06	23.05	24.00	0.453	Battery 3#	Yes

Table 157: Hotspot SAR test results of LTE Band XII

Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

### 7.2.22 SAR measurement Result of LTE Band XVII(Main Antenna)

SAR for LTE Band 17 (Frequency range:704-716 MHz) is covered by LTE Band 12 (Frequency range:699-716 MHz) due to similar frequency range,same maximum tune up limit and same channel bandwidth.

## 7.2.23 SAR measurement Result of WiFi 2.4G

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	SAR Value (W/kg)		Power Drift (dB)	Actual duty factor	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported SAR1-g (W/kg)	Accessory Information	SAR Plot.
				1-g	10-g								
Left touch	1/2412	802.11b	0.254	0.263	0.127	0.14	99.33%	0.265	10.40	11.00	0.304	Battery1#	/
Left tilt	1/2412	802.11b	0.205	/	/	-0.06	99.33%	/	10.40	11.00	/	Battery1#	/
Right touch	1/2412	802.11b	0.116	/	/	0.13	99.33%	/	10.40	11.00	/	Battery1#	/
Right tilt	1/2412	802.11b	0.122	/	/	0.15	99.33%	/	10.40	11.00	/	Battery1#	/
Left touch	1/2412	802.11b	0.253	0.270	0.134	0.18	99.33%	0.272	10.40	11.00	0.312	Battery 2#	/
Left touch	1/2412	802.11b	0.282	0.278	0.135	-0.02	99.33%	0.280	10.40	11.00	0.321	Battery 3#	Yes
Left touch	6/2437	802.11b	0.256	0.252	0.122	0.00	99.33%	0.254	10.39	11.00	0.292	Battery 3#	/
Left touch	11/2462	802.11b	0.237	0.234	0.112	0.01	99.33%	0.236	10.10	11.00	0.290	Battery 3#	/

Table 158: Head SAR test results of WiFi 2.4G

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	11.00	12.59	0.321	/	Yes
802.11g	11.00	12.59	/	0.321	No
802.11n 20M	11.00	12.59	/	0.321	No
802.11n 40M	11.00	12.59	/	0.321	No

Note: Per KDB248227D01, for Head SAR test of WiFi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. The highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	SAR Value (W/kg)		Power Drift (dB)	Actual duty factor	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported SAR1-g (W/kg)	SAR Plot.
				1-g	10-g							
Front Side	1/2412	802.11b	0.034	/	/	-0.01	99.33%	/	14.82	16.50	/	/
Back Side	1/2412	802.11b	0.045	0.046	0.025	-0.12	99.33%	0.046	14.82	16.50	0.068	/
Back Side	1/2412	802.11b	0.050	0.052	0.028	0.13	99.33%	0.052	14.82	16.50	0.076	Yes
Back Side	1/2412	802.11b	0.046	0.046	0.024	0.11	99.33%	0.047	14.82	16.50	0.069	/

Table 159: Body-Worn SAR test results of WiFi 2.4G

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	16.50	44.67	0.076	/	Yes
802.11g	17.00	50.12	/	0.085	No
802.11n 20M	17.00	50.12	/	0.085	No
802.11n 40M	17.00	50.12	/	0.085	No

Note: Per KDB248227D01, for Body-worn SAR test of WiFi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. The highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	Area Scan 1-g SAR (W/kg)	SAR Value (W/kg)		Power Drift (dB)	Actual duty factor	Scaled 1-g SAR (W/kg)	Conducted Power (dBm)	Tune-up Power (dBm)	Reported SAR1-g (W/kg)	Actual duty factor	SAR Plot.
				1-g	10-g								
Front Side	1/2412	802.11b	0.086	/	/	0.00	99.33%	0.092	/	16.50	/	Battery1#	/
Back Side	1/2412	802.11b	0.103	0.109	0.056	0.19	99.33%	0.110	14.82	16.50	0.162	Battery1#	/
Right Side	1/2412	802.11b	0.101	/	/	-0.11	99.33%	0.101	/	16.50	/	Battery1#	/
Top Side	1/2412	802.11b	0.045	/	/	0.07	99.33%	0.052	/	16.50	/	Battery1#	/
Back Side	1/2412	802.11b	0.116	0.124	0.063	0.03	99.33%	0.125	14.82	16.50	0.184	Battery 2#	Yes
Back Side	1/2412	802.11b	0.089	0.095	0.048	-0.04	99.33%	0.095	14.82	16.50	0.140	Battery 3#	/

Table 160: Hotspot SAR test results of WiFi 2.4G

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	16.50	44.67	0.184	/	Yes
802.11g	17.00	50.12	/	0.206	No
802.11n 20M	17.00	50.12	/	0.206	No
802.11n 40M	17.00	50.12	/	0.206	No

Table 161: Hotspot SAR test results of WiFi 2.4G


Note:

- 1) Per KDB248227D01, for Hotspot SAR test of WiFi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. The highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.
- 2) Note: Per KDB 648474 D04, product specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.

### 7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v06.

The location of the antennas inside the device is shown as below picture:

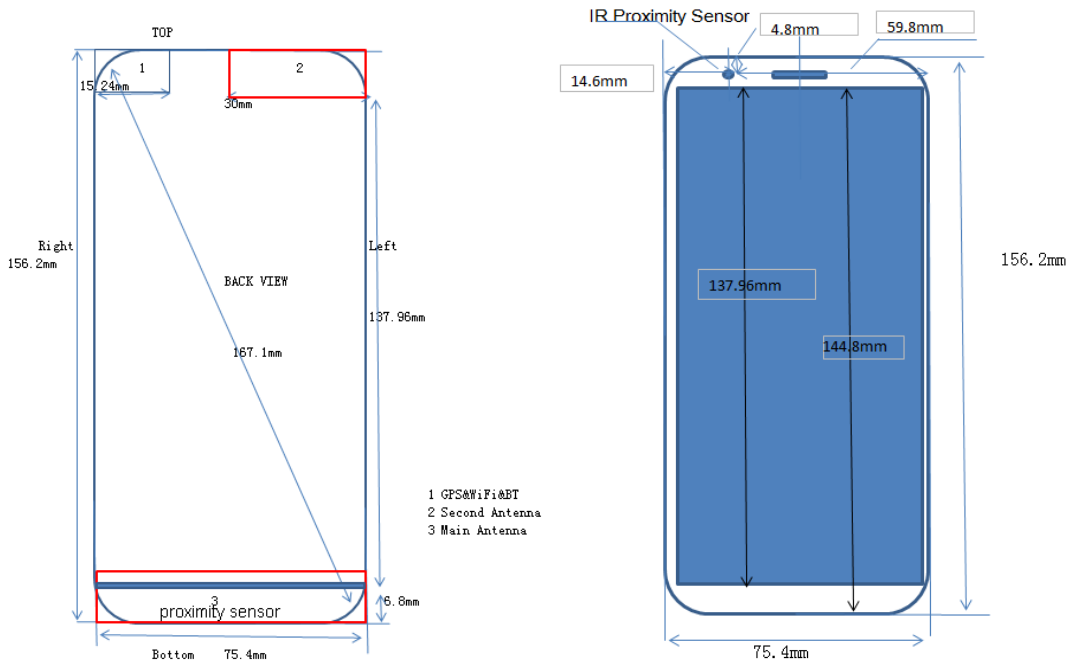

Note:

- 1) Per KDB 648474 D04, because the diagonal distance of this device is > 160mm, it is considered a “Phablet” device.
- 2) The device has two 2G/3G/4G Tx antennas (Main Antenna and Second Antenna). It can transmit from either Main Antenna or Second Antenna, but they can not transmit simultaneously.

Mode	Exposure Condition	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Main ant	Hotspot/ product specific 10-g SAR	Yes	Yes	Yes	Yes	No	Yes
Second ant	Hotspot/ product specific 10-g SAR	Yes	Yes	Yes	No	Yes	No
WiFi Ant/BT	Hotspot/ product specific 10-g SAR	Yes	Yes	No	Yes	Yes	No

Table 162: Sides for Hotspot// product specific 10-g SAR testing

Note:

- 1) Per KDB 941225 D06 and KDB 648474 D04, particular DUT edges were not required to be evaluated for Hotspot SAR if the antenna-to-edge distance is greater than 2.5cm;
- 2) Per KDB 648474 D04, when hotspot mode applies, product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg;



### 7.3.1 Stand-alone SAR test exclusion

Per FCC KDB 447498D01v06, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where:

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	$P_{\text{max}}$ (dBm)*	$P_{\text{max}}$ (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Head	8.00	6.31	5	2.480	1.99	3.00	Yes
BT	Body-Worn	8.00	6.31	15	2.480	0.66	3.00	Yes
BT	product specific 10-g SAR	8.00	6.31	5	2.480	1.99	7.50	Yes

Table 163: Standalone SAR test exclusion for BT

Note:

1)\* - maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$  for test separation distances  $\leq 50$  mm, where  $x = 7.5$  for 1-g SAR and  $x = 18.75$  for 10-g SAR.

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	$P_{\text{max}}$ (dBm)*	$P_{\text{max}}$ (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/kg)*
BT	Head	8.00	6.31	5	2.480	7.50	0.265
BT	Body-worn	8.00	6.31	15	2.480	7.50	0.088
BT	product specific 10-g SAR	8.00	6.31	5	2.480	18.75	0.106

Table 164: Estimated SAR calculation for BT

Note:

1) \* - maximum possible output power declared by manufacturer

2) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.

### 7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

NO.	Simultaneous Tx Combination	Head	Body-worn	Hotspot (10mm)	Product Specific 10-g (0mm)
1	GSM Voice(Main ant) + BT	Yes	Yes	NA	Yes
2	GSM DATA(Main ant) + BT	N/A	Yes	NA	Yes
3	GSM Voice(Second ant) + BT	Yes	Yes	NA	Yes
4	GSM DATA(Second ant)+ BT	N/A	Yes	NA	Yes
5	GSM Voice(Main ant) + WiFi	Yes	Yes	NA	Yes
6	GSM DATA(Main ant) + WiFi	N/A	Yes	Yes	Yes
7	GSM Voice(Second ant) + WiFi	Yes	Yes	NA	Yes
8	GSM DATA(Second ant) + WiFi	N/A	Yes	Yes	Yes
9	UMTS Voice(Main ant) + BT	Yes	Yes	NA	Yes
10	UMTS Data(Main ant) + BT	N/A	Yes	NA	Yes
11	UMTS Voice(Second ant) + BT	Yes	Yes	NA	Yes
12	UMTS Data(Second ant) + BT	N/A	Yes	NA	Yes
13	UMTS Voice(Main ant) + WiFi	Yes	Yes	NA	Yes
14	UMTS Data (Main ant) + WiFi	Yes*	Yes	Yes	Yes
15	UMTS Voice (Second ant)+ WiFi	Yes	Yes	NA	Yes
16	UMTS Data (Second ant)+ WiFi	Yes*	Yes	Yes	Yes
17	LTE(Main ant) + WiFi	Yes*	Yes*	Yes	Yes
18	LTE(Main ant) + BT	Yes*	Yes*	NA	Yes
19	LTE (Second ant)+ WiFi	Yes*	Yes*	Yes	Yes
20	LTE (Second ant) + BT	Yes*	Yes*	NA	Yes

Table 165: Simultaneous Transmission Possibilities

Note:

- 1) Wi-Fi and Bluetooth share the same Tx antenna and can't transmit simultaneously.
- 2) The device does not support DTM function.
- 3) \* VoLTE or pre-installed VOIP applications are considered.
- 4) The Main Antenna and Second Antenna can't transmit simultaneously.
- 5) The device not supports VoWiFi function.

### 7.3.3 SAR Summation Scenario

Test Position		Main antenna SAR <sub>Max</sub>										WiFi/BT antenna SAR <sub>Max</sub>		ΣSAR (1.6W/kg Limit for 1g and 4.0W/kg Limit for Product Specific 10-g SAR)	SPLSR	Volume scan
		GSM850	GSM1900	UMTS Band II	UMTS Band IV	UMTS Band V	LTE Band II	LTE Band IV	LTE Band V	LTE Band VII	LTE Band XIII	WiFi 2.4G	BT			
Head	Left touch	0.168	0.196	0.323	0.560	0.205	0.321	0.504	0.211	0.509	0.261	0.321	0.265	0.881	N/A	N/A
	Left tilt	0.130	0.088	0.176	0.180	0.174	0.231	0.139	0.175	0.096	0.136	0.321	0.265	0.552	N/A	N/A
	Right touch	0.237	0.084	0.216	0.233	0.291	0.224	0.196	0.291	0.165	0.324	0.321	0.265	0.645	N/A	N/A
Body-worn	Right tilt	0.129	0.069	0.163	0.152	0.168	0.188	0.130	0.153	0.161	0.136	0.321	0.265	0.509	N/A	N/A
	Front side	0.259	0.261	0.635	0.525	0.263	0.735	0.558	0.127	0.251	0.279	0.066	0.088	0.823	N/A	N/A
	Back side	0.455	0.496	1.110	0.861	0.492	1.048	0.877	0.421	0.293	0.375	0.066	0.088	1.198	N/A	N/A
Hotspot	Front side	0.227	0.466	0.576	0.655	0.266	0.515	0.504	0.231	0.188	0.295	0.184	/	0.839	N/A	N/A
	Back side	0.433	0.612	0.762	0.600	0.483	0.549	0.624	0.469	0.190	0.453	0.184	/	0.946	N/A	N/A
	Left side	0.352	0.121	0.241	0.218	0.368	0.160	0.159	0.295	0.152	0.225	/	/	0.368	N/A	N/A
	Right side	0.587	0.128	0.153	0.056	0.653	0.121	0.041	0.523	0.011	0.372	0.184	/	0.837	N/A	N/A
	Top side	/	/	/	/	/	/	/	/	/	/	0.184	/	0.184	N/A	N/A
	Bottom side	0.142	0.946	1.032	1.269	0.185	0.802	0.789	0.121	0.075	0.123	/	/	1.269	N/A	N/A
Product Specific 10-g	Front side	/	/	1.109	2.273	/	1.524	1.071	/	/	/	/	0.106	2.379	N/A	N/A
	Back side	/	/	1.432	1.855	/	2.395	1.965	/	/	/	/	0.106	2.501	N/A	N/A
	Left side	/	/	/	/	/	/	/	/	/	/	/	/	0.000	N/A	N/A
	Right side	/	/	/	/	/	/	/	/	/	/	/	0.106	0.106	N/A	N/A
	Top side	/	/	/	/	/	/	/	/	/	/	/	0.106	0.106	N/A	N/A
	Bottom side	/	0.260	1.200	2.257	/	0.942	1.084	/	/	/	/	0.106	2.363	N/A	N/A

Table 166: SAR Simultaneous Tx Combination of Main antenna and WiFi/BT antenna.

Test Position		Second antenna SAR <sub>Max</sub>										WiFi/BT antenna SAR <sub>Max</sub>		ΣSAR (1.6W/kg Limit for 1g and 4.0W/kg Limit for Product Specific 10-g SAR)	SPLSR	Volume scan
		GSM850	GSM1900	UMTS Band II	UMTS Band IV	UMTS Band V	LTE Band II	LTE Band IV	LTE Band V	LTE Band VII	LTE Band XII	WiFi 2.4G	BT			
Head	Left touch	0.354	0.148	0.142	0.398	0.439	0.257	0.444	0.445	0.209	0.803	0.321	0.265	1.124	N/A	N/A
	Left tilt	0.311	0.137	0.127	0.413	0.435	0.211	0.442	0.444	0.162	0.528	0.321	0.265	0.849	N/A	N/A
	Right touch	1.001	0.443	0.808	1.113	0.855	0.706	0.949	0.966	0.945	1.008	0.321	0.265	1.434	N/A	N/A
Body-worn	Right tilt	0.767	0.270	0.296	0.687	0.711	0.395	0.771	0.695	0.516	0.789	0.321	0.265	1.110	N/A	N/A
	Front side	0.304	0.024	0.044	0.108	0.240	0.102	0.145	0.093	0.179	0.155	0.066	0.088	0.392	N/A	N/A
	Back side	0.475	0.045	0.088	0.195	0.409	0.208	0.244	0.394	0.212	0.380	0.066	0.088	0.563	N/A	N/A
Hotspot	Front side	0.138	0.022	0.045	0.101	0.119	0.045	0.096	0.090	0.054	0.109	0.184	/	0.322	N/A	N/A
	Back side	0.308	0.039	0.095	0.179	0.253	0.102	0.180	0.220	0.093	0.215	0.184	/	0.492	N/A	N/A
	Left side	0.148	0.025	0.059	0.121	0.108	0.061	0.077	0.079	0.031	0.106	/	/	0.148	N/A	N/A
	Right side	/	/	/	/	/	/	/	/	/	/	0.184	/	0.184	N/A	N/A
	Top side	0.115	0.042	0.072	0.295	0.091	0.070	0.147	0.072	0.033	0.183	0.184	/	0.479	N/A	N/A
	Bottom side	/	/	/	/	/	/	/	/	/	/	/	/	0.000	N/A	N/A
Product Specific 10-g	Front side	/	/	/	/	/	/	/	/	/	/	/	0.106	0.106	N/A	N/A
	Back side	/	/	/	/	/	/	/	/	/	/	/	0.106	0.106	N/A	N/A
	Left side	/	/	/	/	/	/	/	/	/	/	/	/	0.000	N/A	N/A
	Right side	/	/	/	/	/	/	/	/	/	/	/	0.106	0.106	N/A	N/A
	Top side	/	/	/	/	/	/	/	/	/	/	/	0.106	0.106	N/A	N/A
	Bottom side	/	/	/	/	/	/	/	/	/	/	/	0.106	0.106	N/A	N/A

Table 167: SAR Simultaneous Tx Combination of Second antenna and WiFi/BT antenna.

### 7.3.4 Simultaneous Transmission Conclusion

The above numeral summed SAR results is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v06.

**Appendix A. System Check Plots**

(Pls See Appendix No.: SYBH(Z-SAR)005102017-2A, total: 26 pages)

**Appendix B. SAR Measurement Plots**

(Pls See Appendix No.: SYBH(Z-SAR)005102017-2B, total: 72 pages)

**Appendix C. Calibration Certificate**

(Pls See Appendix No.: SYBH(Z-SAR)005102017-2C, total: 101 pages)

**Appendix D. Photo documentation**

(Pls See Appendix No.: SYBH(Z-SAR)005102017-2D, total: 7 pages)

---

**End**