

# FCC Test Report

**FCC ID: QISBTW-W09**

**Project No.** : 1607C245  
**Equipment** : HUAWEI MediaPad M3  
**Model Name** : BTV-W09  
**Applicant** : Huawei Technologies Co.,Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

**Date of Receipt** : Jul. 25, 2016  
**Date of Test** : Jul. 25, 2016 ~ Aug. 03, 2016  
**Issued Date** : Aug. 04, 2016  
**Tested by** : BTL Inc.

**Testing Engineer** :   
(Bill Zhang)

**Technical Manager** :   
(James Chiu)

**Authorized Signatory** :   
(Steven Lu)

**B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



### Declaration

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

## Table of Contents

	Page
<b>REPORT ISSUED HISTORY</b>	<b>4</b>
<b>1 . CERIFICATION</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
<b>3 . GENERAL INFORMATION</b>	<b>8</b>
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	12
<b>4 . EMC EMISSION TEST</b>	<b>13</b>
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	32
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	32
4.2.2 MEASUREMENT INSTRUMENTS LIST	33
4.2.3 TEST PROCEDURE	34
4.2.4 DEVIATION FROM TEST STANDARD	34
4.2.5 TEST SETUP	35
4.2.6 EUT OPERATING CONDITIONS	36
4.2.7 TEST RESULTS-BELOW 1GHZ	36
4.2.8 TEST RESULTS-ABOVE 1GHZ	53

**REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
BTL-FCCE-1-1607C245	Original Issue.	Aug. 04, 2016

## 1. CERTIFICATION

Equipment : HUAWEI MediaPad M3  
Brand Name : HUAWEI  
Model Name : BTV-W09  
Applicant : Huawei Technologies Co.,Ltd.  
Manufacturer : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Factory : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Date of Test : Jul. 25, 2016 ~ Aug. 03, 2016  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B  
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1607C245) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE(2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{cisp}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad M3
Brand Name	HUAWEI
Model Name	BTV-W09
Model Difference	NA
Frequency	BT 4.1 Wi-Fi: 802.11b/g/n
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) DONGGUAN PHITEK ELECTRONICS CO.,LTD Model: HW-050200U01 #2 Supplied from battery. Manufacturer: (1) Sunwoda Electronic Co., LTD (2) SCUD (FUJIAN) Electronics Co., Ltd (3) Harbin Coslight Power Co., Ltd. Model: HB2899C0ECW
Power Rating	#1 I/P: 100V-240V~50/60 Hz,0.5A O/P: 5V---2A #2 DC 3.82V
HW Version	SH1BTVDL09M
SW Version	BTV-W09C001B102

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.

Item	Mfr/Brand	Model.
USB Cable	Luxshare Precision Industry Co., Ltd	L99U2018-CS-H
	SHEN ZHEN PANG NGAI INDUSTRIAL CO., LTD	H09-000543
	FOXCONN INTERCONNECT TECHNOLOGY	CUBB01M-HC306-DH
Earphone	Harman Embedded Audio, LLC	E050-0021-001

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	USB Copy(EUT with PC) + IDLE
Mode 2	Adapter+2.4GHz WIFI+BT+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earpone


For Conducted Test	
Final Test Mode	Description
Mode 1	USB Copy(EUT with PC) + IDLE
Mode 2	Adapter+2.4GHz WIFI+BT+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earpone

For Radiated Test	
Final Test Mode	Description
Mode 1	USB Copy(EUT with PC) + IDLE
Mode 2	Adapter+2.4GHz WIFI+BT+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earpone

### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1

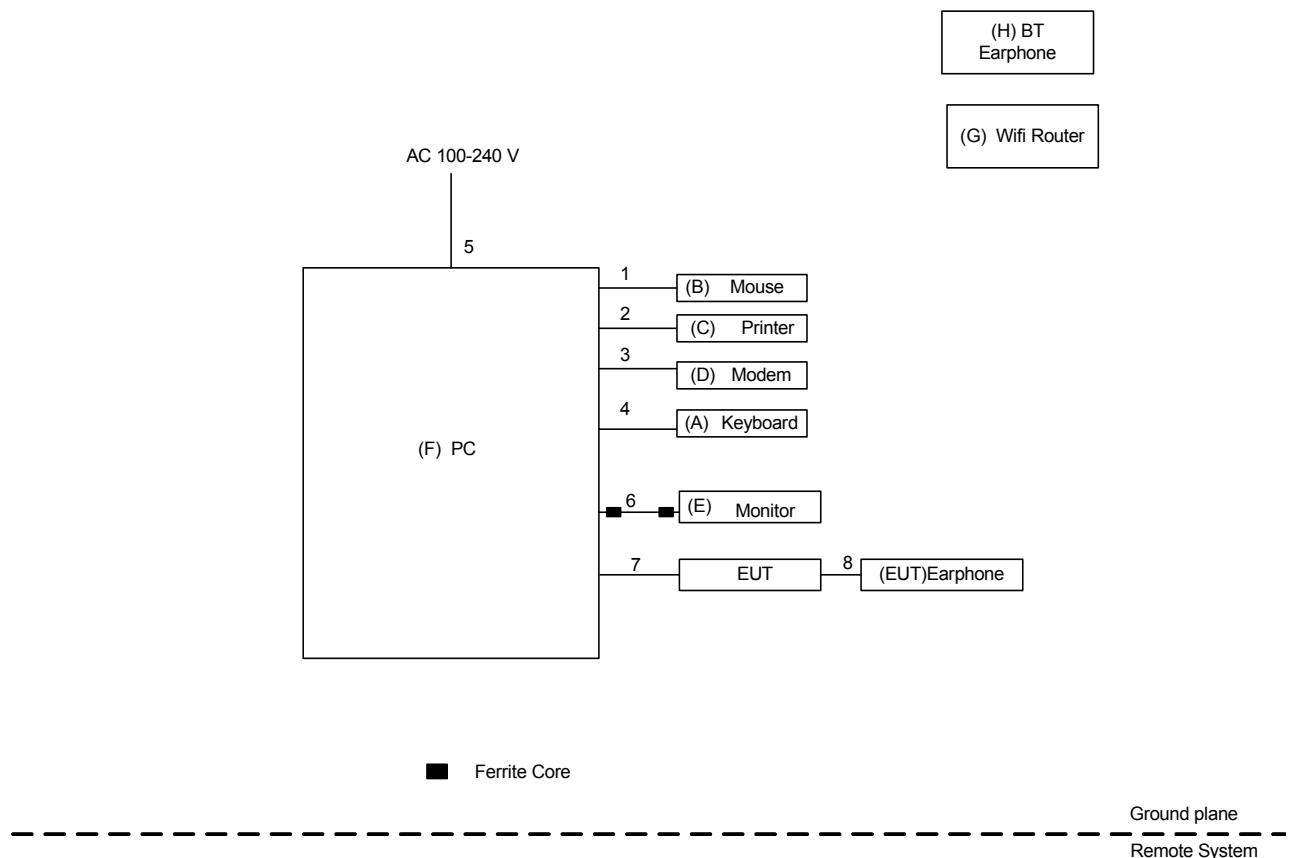

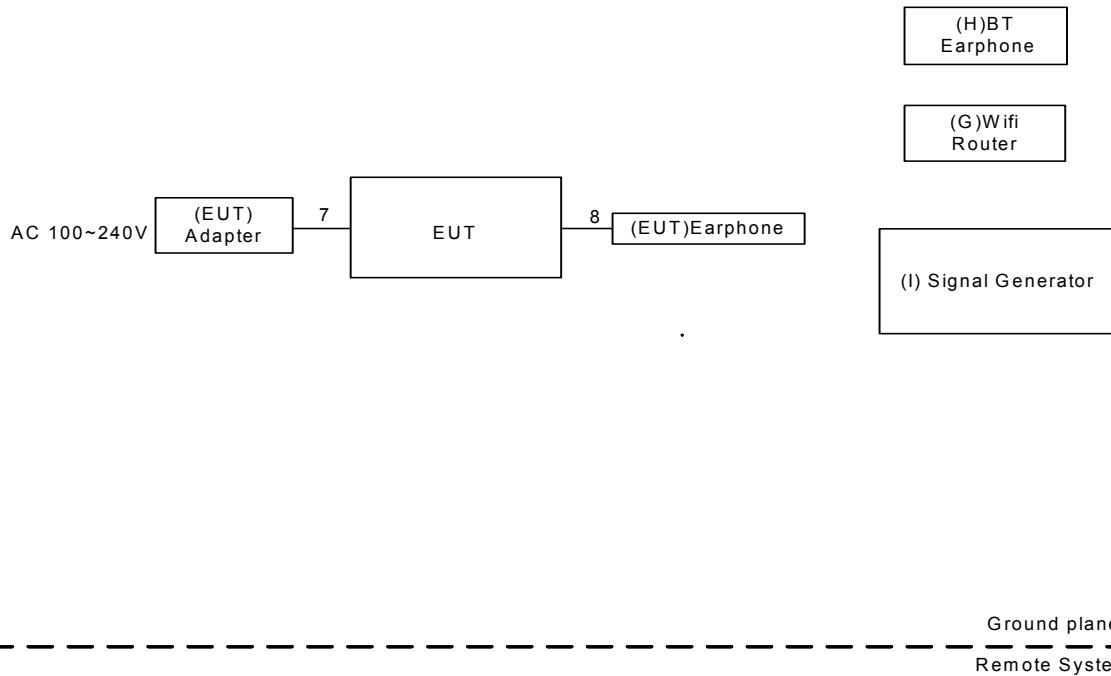**Mode 2, Mode 3, Mode 4**

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6AG-1WNS
F	PC	Dell 745	DCSM	DOC	G7K832X
G	wireless router	ASUS	RT-AC66U	MSQ-RTAC66U	E8ICGG000138
H	BT earphone	N/A	N/A	N/A	N/A
I	SignalGenerator	Agilent	E4438C	N/A	MY49071316

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.1m	Audio Cable

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value - Limit Value

#### 4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Artificial-Mains Network	SCHWARZBECK	NSLK 8127	8127685	Nov. 20, 2016
2	LISN	R&S	ENV216	100526	Mar. 27, 2017
3	Test Cable	N/A	RG400 12m	N/A	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESR3	101862	Nov. 20, 2016
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


#### 4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –Block Diagram of system tested (please refer to 3.3).
- f. First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

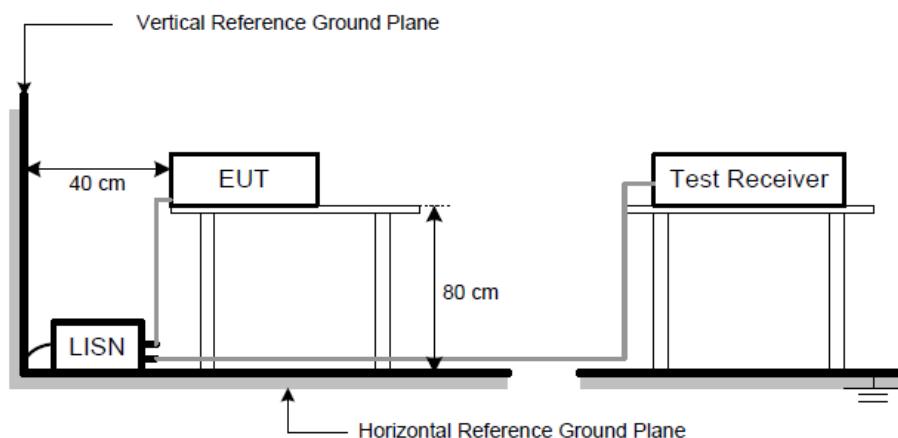

#### 4.1.6 EUT OPERATING CONDITIONS


The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

#### 4.1.7 TEST RESULTS

Remark:


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

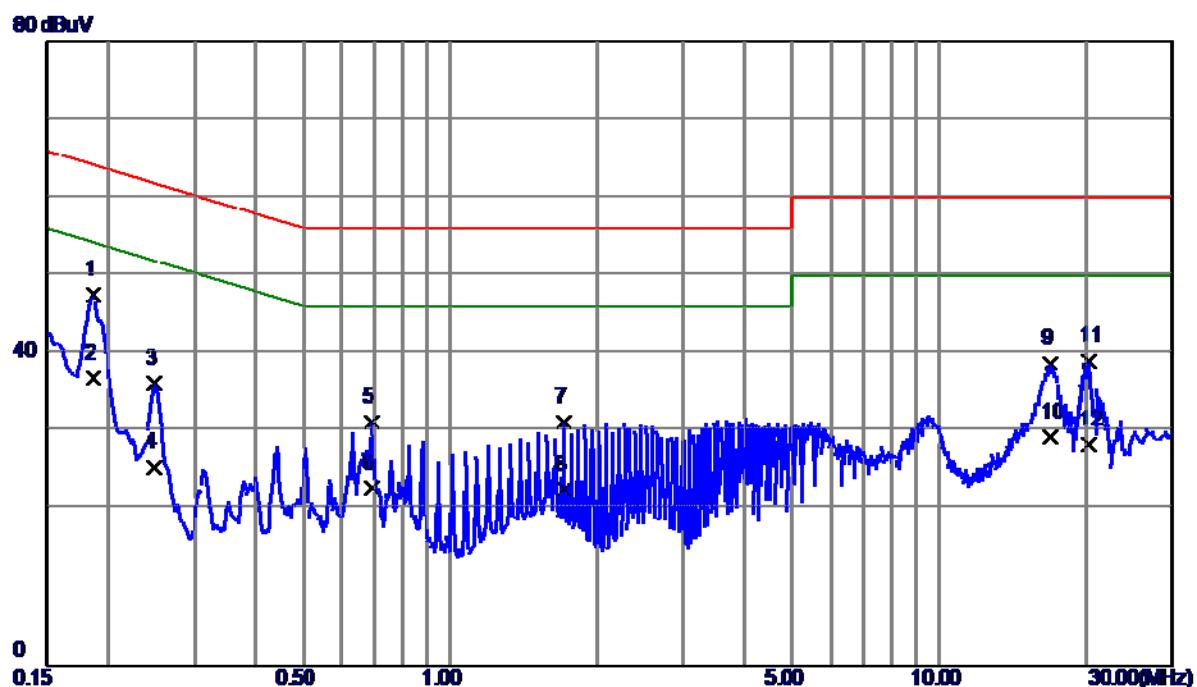


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1860	37.80	9.66	47.46	64.21	-16.75	QP
2	0.1860	27.20	9.66	36.86	54.21	-17.35	AVG
3	0.2490	26.35	9.79	36.14	61.79	-25.65	QP
4	0.2490	15.60	9.79	25.39	51.79	-26.40	AVG
5	0.6922	21.21	10.05	31.26	56.00	-24.74	QP
6	0.6922	12.60	10.05	22.65	46.00	-23.35	AVG
7	1.7025	21.03	10.11	31.14	56.00	-24.86	QP
8	1.7025	12.41	10.11	22.52	46.00	-23.48	AVG
9	16.8158	28.02	10.68	38.70	60.00	-21.30	QP
10	16.8158	18.60	10.68	29.28	50.00	-20.72	AVG
11	20.1705	28.32	10.68	39.00	60.00	-21.00	QP
12	20.1705	17.60	10.68	28.28	50.00	-21.72	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

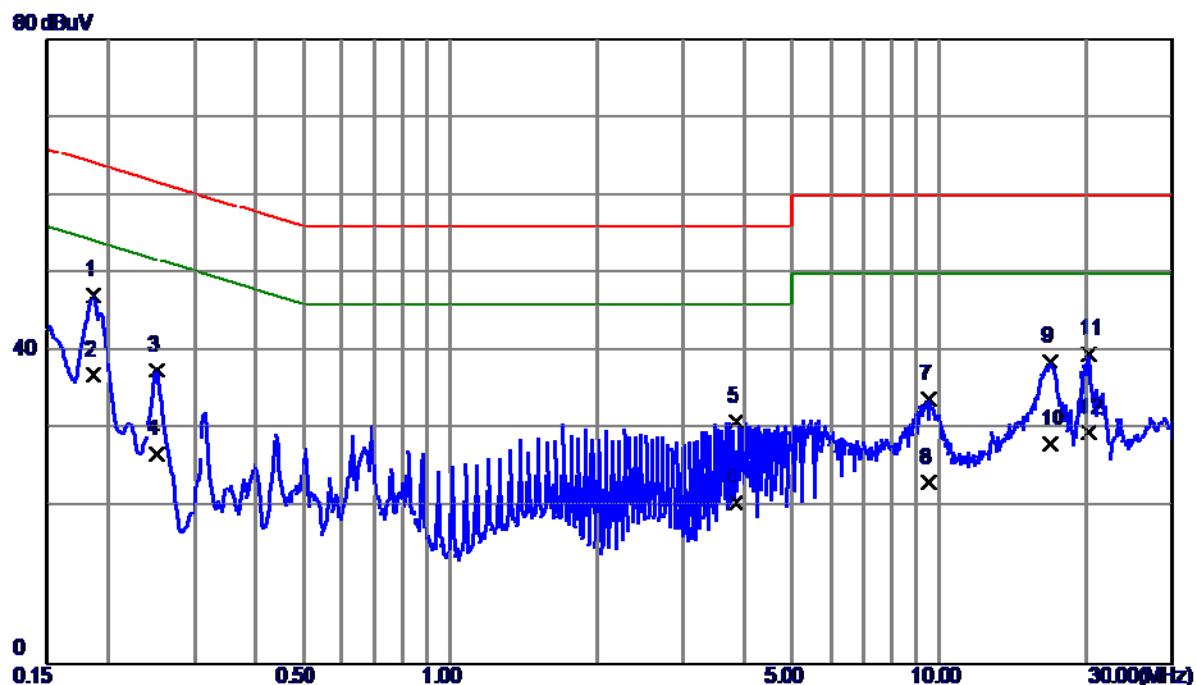


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1860	37.56	9.61	47.17	64.21	-17.04	QP
2	0.1860	27.30	9.61	36.91	54.21	-17.30	AVG
3	0.2513	27.94	9.69	37.63	61.71	-24.08	QP
4	0.2513	17.20	9.69	26.89	51.71	-24.82	AVG
5	3.8445	20.84	10.14	30.98	56.00	-25.02	QP
6	3.8445	10.50	10.14	20.64	46.00	-25.36	AVG
7	9.5077	23.64	10.27	33.91	60.00	-26.09	QP
8	9.5077	12.90	10.27	23.17	50.00	-26.83	AVG
9	16.8134	28.17	10.62	38.79	60.00	-21.21	QP
10	16.8134	17.60	10.62	28.22	50.00	-21.78	AVG
11	20.1660	28.93	10.68	39.61	60.00	-20.39	QP
12	20.1660	18.90	10.68	29.58	50.00	-20.42	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:PANG NGAI		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

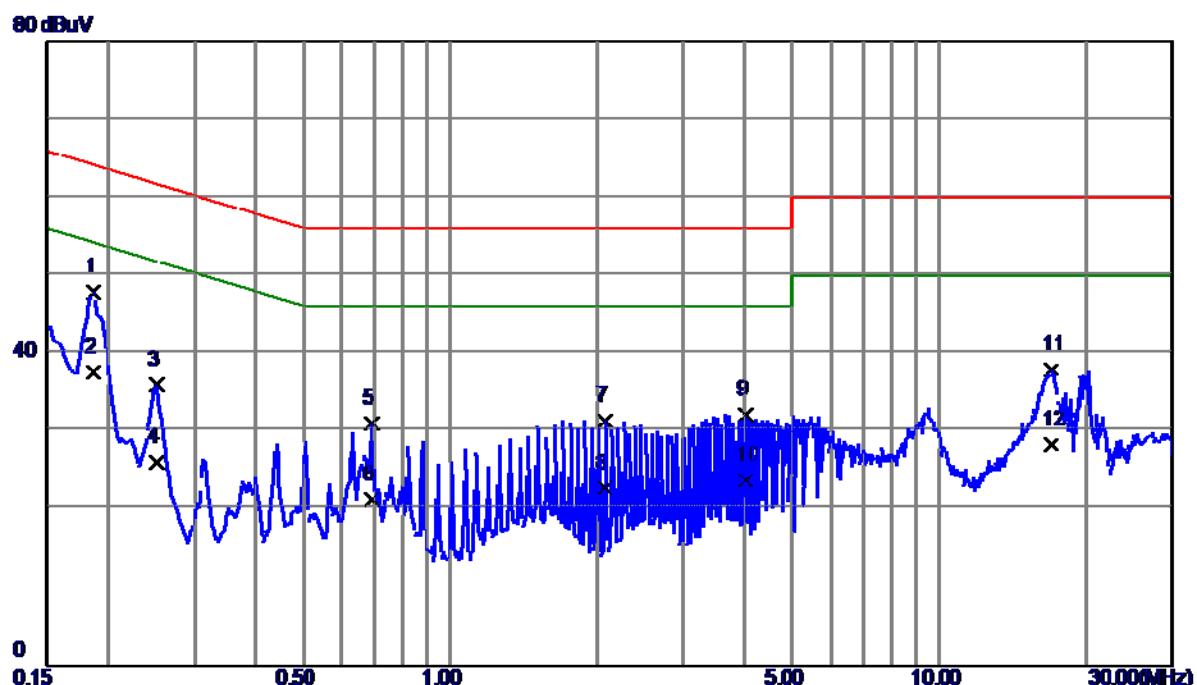


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0. 1860	38. 18	9. 66	47. 84	64. 21	-16. 37	QP
2	0. 1860	27. 90	9. 66	37. 56	54. 21	-16. 65	AVG
3	0. 2513	26. 16	9. 79	35. 95	61. 71	-25. 76	QP
4	0. 2513	16. 30	9. 79	26. 09	51. 71	-25. 62	AVG
5	0. 6922	20. 98	10. 05	31. 03	56. 00	-24. 97	QP
6	0. 6922	11. 20	10. 05	21. 25	46. 00	-24. 75	AVG
7	2. 0760	21. 36	10. 07	31. 43	56. 00	-24. 57	QP
8	2. 0760	12. 60	10. 07	22. 67	46. 00	-23. 33	AVG
9	4. 0268	22. 14	10. 06	32. 20	56. 00	-23. 80	QP
10	4. 0268	13. 60	10. 06	23. 66	46. 00	-22. 34	AVG
11	16. 9260	27. 29	10. 68	37. 97	60. 00	-22. 03	QP
12	16. 9260	17. 60	10. 68	28. 28	50. 00	-21. 72	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:PANG NGAI		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

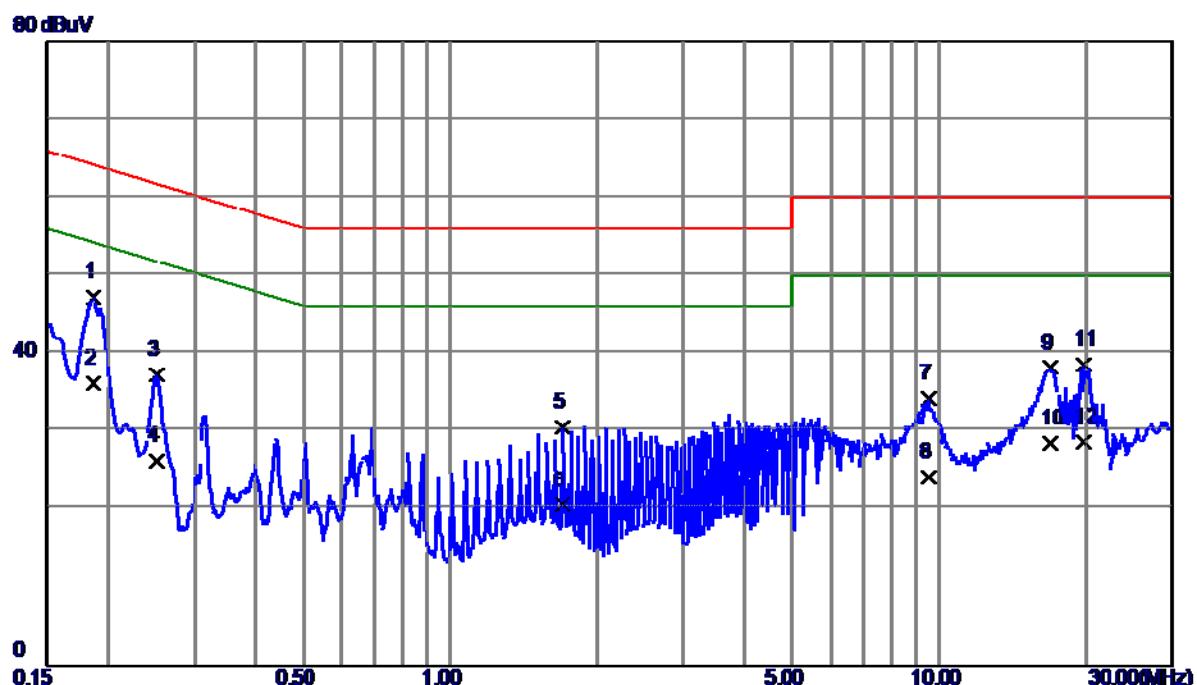


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1860	37.55	9.61	47.16	64.21	-17.05	QP
2	0.1860	26.50	9.61	36.11	54.21	-18.10	AVG
3	0.2513	27.59	9.69	37.28	61.71	-24.43	QP
4	0.2513	16.60	9.69	26.29	51.71	-25.42	AVG
5	1.7003	20.53	10.05	30.58	56.00	-25.42	QP
6	1.7003	10.51	10.05	20.56	46.00	-25.44	AVG
7	9.5010	23.98	10.27	34.25	60.00	-25.75	QP
8	9.5010	13.90	10.27	24.17	50.00	-25.83	AVG
9	16.8000	27.54	10.62	38.16	60.00	-21.84	QP
10	16.8000	17.80	10.62	28.42	50.00	-21.58	AVG
11	19.7790	27.90	10.68	38.58	60.00	-21.42	QP
12	19.7790	18.00	10.68	28.68	50.00	-21.32	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

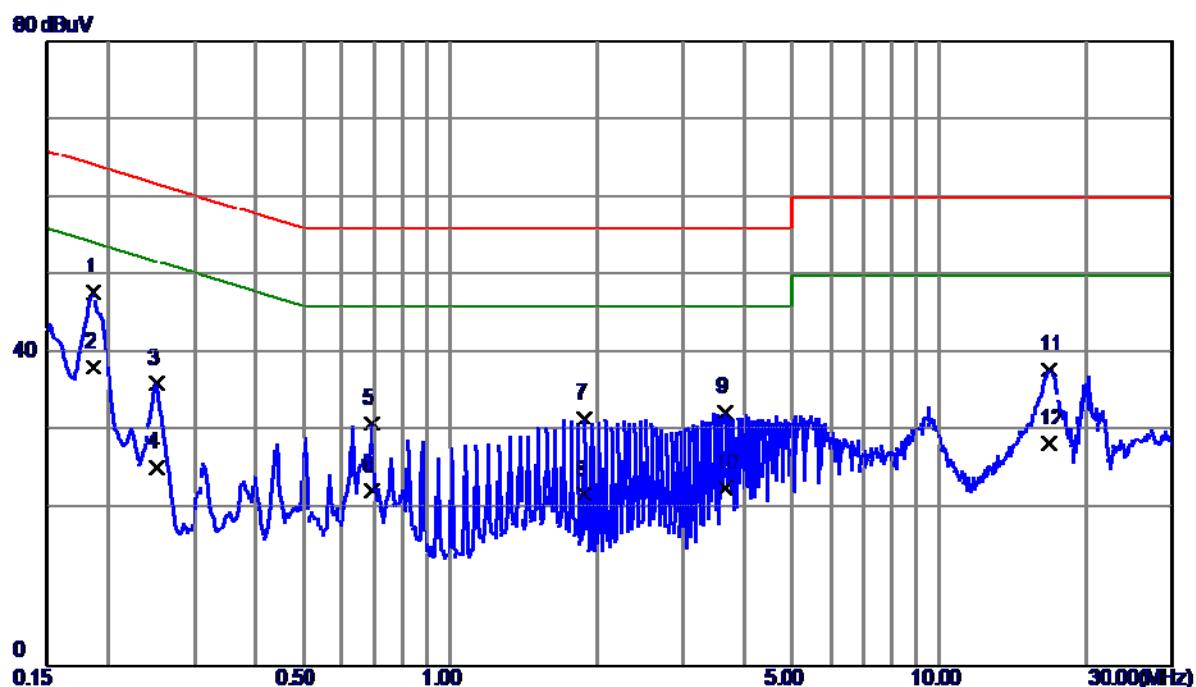


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1860	38. 17	9. 66	47. 83	64. 21	-16. 38	QP
2 *	0. 1860	28. 60	9. 66	38. 26	54. 21	-15. 95	AVG
3	0. 2513	26. 40	9. 79	36. 19	61. 71	-25. 52	QP
4	0. 2513	15. 70	9. 79	25. 49	51. 71	-26. 22	AVG
5	0. 6922	21. 05	10. 05	31. 10	56. 00	-24. 90	QP
6	0. 6922	12. 30	10. 05	22. 35	46. 00	-23. 65	AVG
7	1. 8893	21. 57	10. 09	31. 66	56. 00	-24. 34	QP
8	1. 8893	11. 89	10. 09	21. 98	46. 00	-24. 02	AVG
9	3. 6555	22. 36	10. 05	32. 41	56. 00	-23. 59	QP
10	3. 6555	12. 70	10. 05	22. 75	46. 00	-23. 25	AVG
11	16. 7955	27. 18	10. 68	37. 86	60. 00	-22. 14	QP
12	16. 7955	17. 80	10. 68	28. 48	50. 00	-21. 52	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

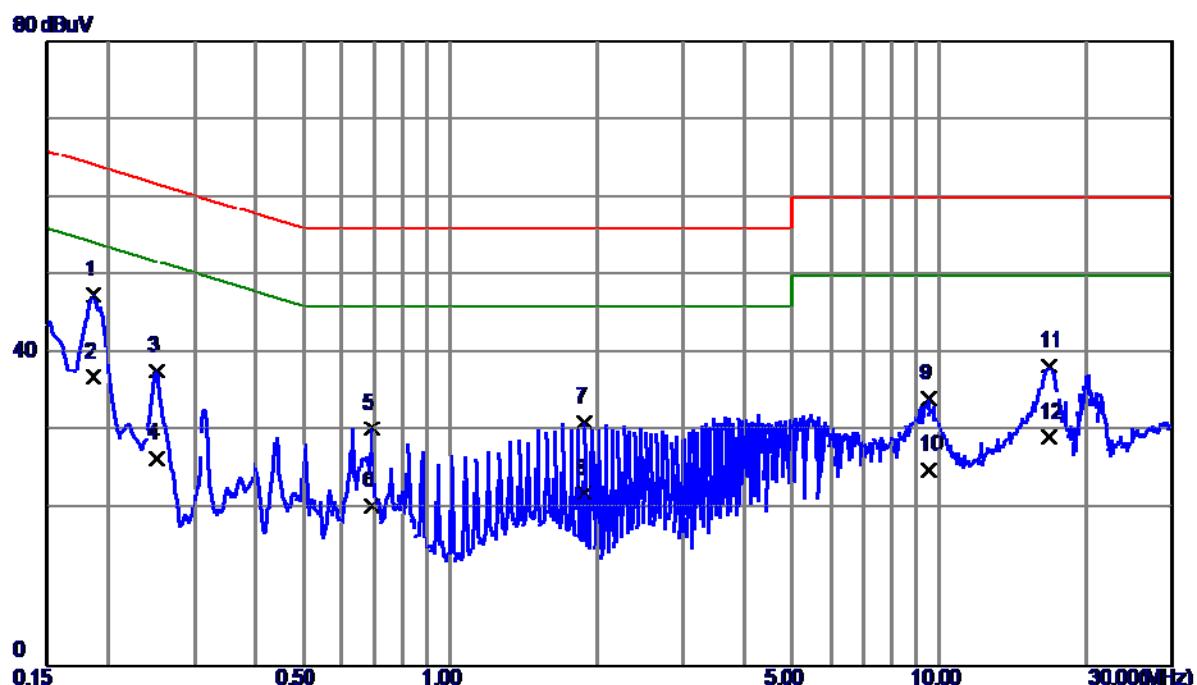


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1860	37.89	9.61	47.50	64.21	-16.71	QP
2	0.1860	27.30	9.61	36.91	54.21	-17.30	AVG
3	0.2513	28.09	9.69	37.78	61.71	-23.93	QP
4	0.2513	16.80	9.69	26.49	51.71	-25.22	AVG
5	0.6922	20.60	9.85	30.45	56.00	-25.55	QP
6	0.6922	10.60	9.85	20.45	46.00	-25.55	AVG
7	1.8870	21.13	10.06	31.19	56.00	-24.81	QP
8	1.8870	12.00	10.06	22.06	46.00	-23.94	AVG
9	9.4965	23.95	10.27	34.22	60.00	-25.78	QP
10	9.4965	14.90	10.27	25.17	50.00	-24.83	AVG
11	16.7955	27.74	10.62	38.36	60.00	-21.64	QP
12	16.7955	18.70	10.62	29.32	50.00	-20.68	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:Luxshare +Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

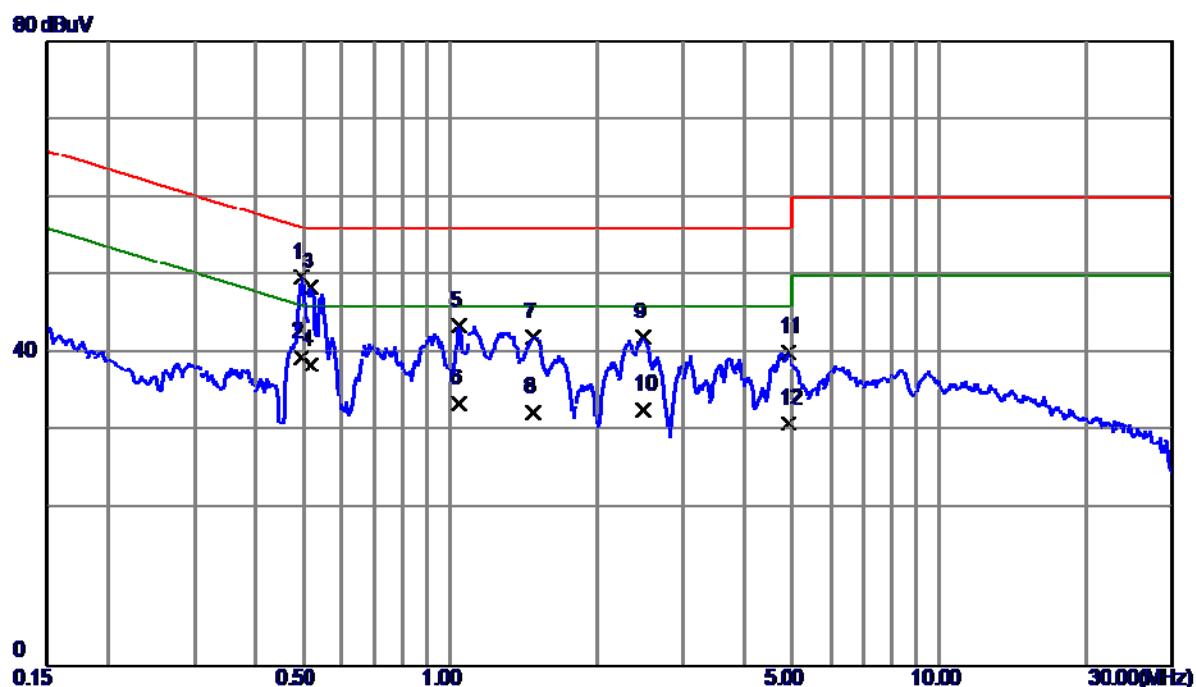


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.4965	39.83	9.91	49.74	56.06	-6.32	QP
2	0.4965	29.60	9.91	39.51	46.06	-6.55	AVG
3	0.5190	38.59	9.93	48.52	56.00	-7.48	QP
4	0.5190	28.70	9.93	38.63	46.00	-7.37	AVG
5	1.0410	33.34	10.14	43.48	56.00	-12.52	QP
6	1.0410	23.40	10.14	33.54	46.00	-12.46	AVG
7	1.4843	31.90	10.15	42.05	56.00	-13.95	QP
8	1.4843	22.40	10.15	32.55	46.00	-13.45	AVG
9	2.4900	31.94	10.09	42.03	56.00	-13.97	QP
10	2.4900	22.70	10.09	32.79	46.00	-13.21	AVG
11	4.9178	29.98	10.11	40.09	56.00	-15.91	QP
12	4.9178	20.90	10.11	31.01	46.00	-14.99	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:Luxshare +Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

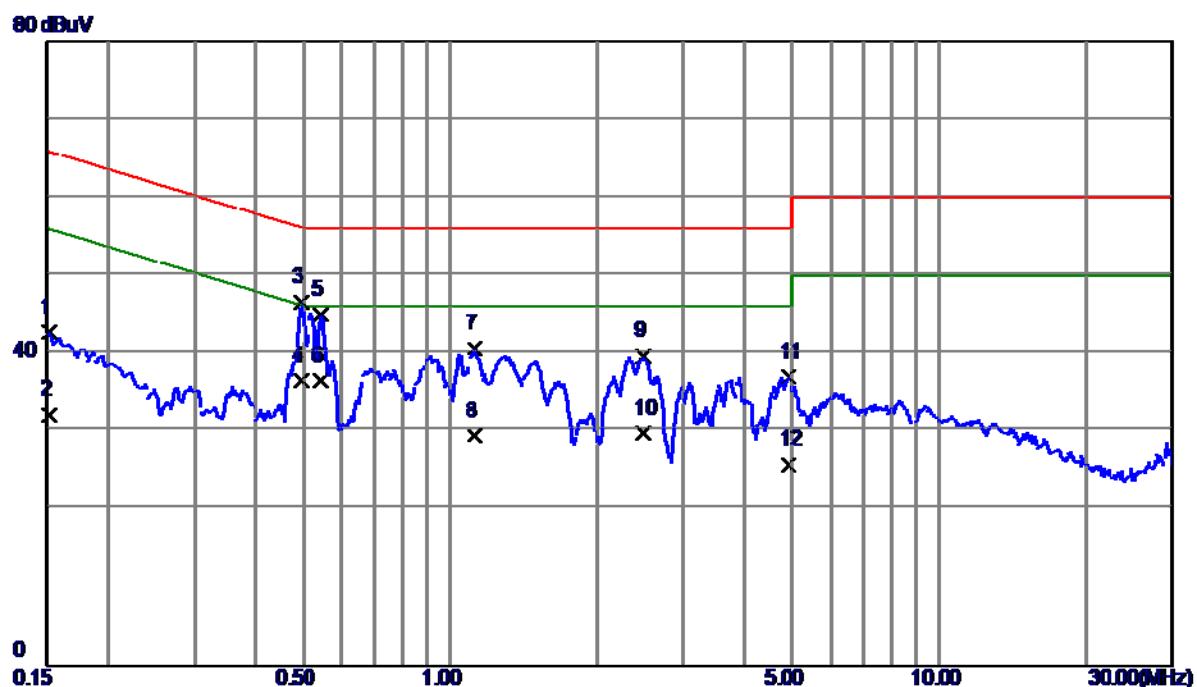


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1522	33.12	9.54	42.66	65.88	-23.22	QP
2	0.1522	22.60	9.54	32.14	55.88	-23.74	AVG
3 *	0.4965	36.73	9.81	46.54	56.06	-9.52	QP
4	0.4965	26.60	9.81	36.41	46.06	-9.65	AVG
5	0.5460	35.09	9.82	44.91	56.00	-11.09	QP
6	0.5460	26.60	9.82	36.42	46.00	-9.58	AVG
7	1.1265	30.67	9.93	40.60	56.00	-15.40	QP
8	1.1265	19.50	9.93	29.43	46.00	-16.57	AVG
9	2.4900	29.52	10.09	39.61	56.00	-16.39	QP
10	2.4900	19.60	10.09	29.69	46.00	-16.31	AVG
11	4.9358	26.72	10.30	37.02	56.00	-18.98	QP
12	4.9358	15.40	10.30	25.70	46.00	-20.30	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:PHITEK+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

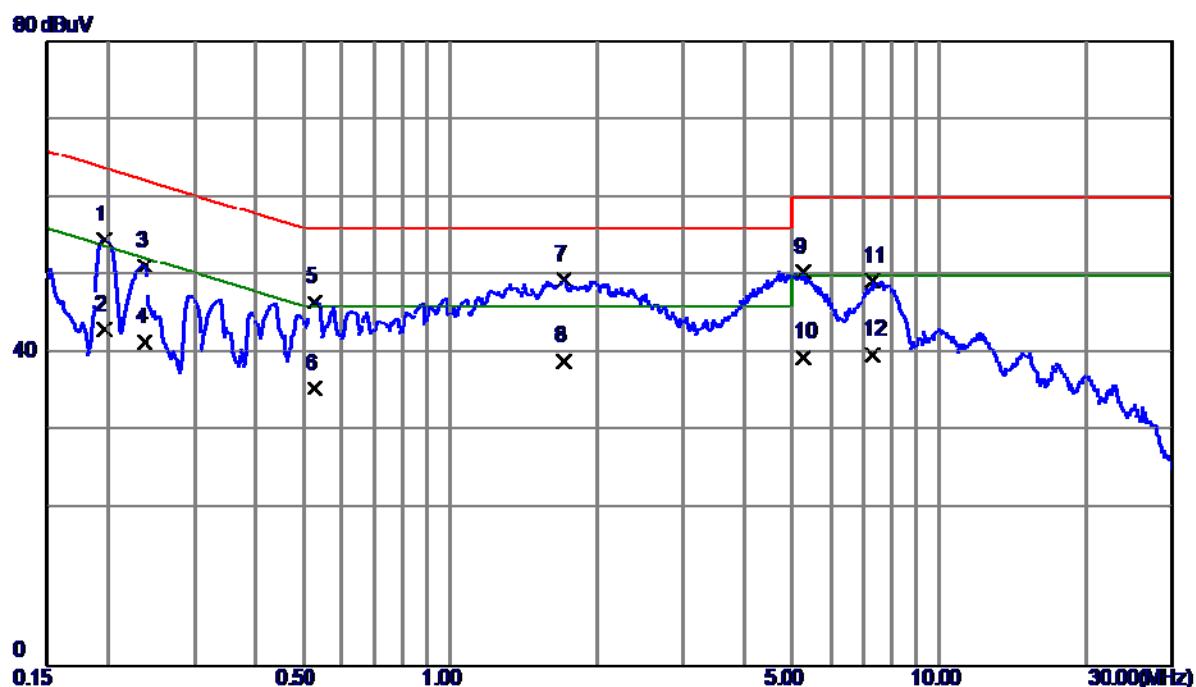


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1972	44. 85	9. 67	54. 52	63. 73	-9. 21	QP
2	0. 1972	33. 30	9. 67	42. 97	53. 73	-10. 76	AVG
3	0. 2377	41. 49	9. 76	51. 25	62. 18	-10. 93	QP
4	0. 2377	31. 61	9. 76	41. 37	52. 18	-10. 81	AVG
5	0. 5280	36. 66	9. 94	46. 60	56. 00	-9. 40	QP
6	0. 5280	25. 61	9. 94	35. 55	46. 00	-10. 45	AVG
7 *	1. 7070	39. 37	10. 11	49. 48	56. 00	-6. 52	QP
8	1. 7070	28. 91	10. 11	39. 02	46. 00	-6. 98	AVG
9	5. 2957	40. 35	10. 12	50. 47	60. 00	-9. 53	QP
10	5. 2957	29. 40	10. 12	39. 52	50. 00	-10. 48	AVG
11	7. 2915	39. 13	10. 21	49. 34	60. 00	-10. 66	QP
12	7. 2915	29. 70	10. 21	39. 91	50. 00	-10. 09	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:PHITEK+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

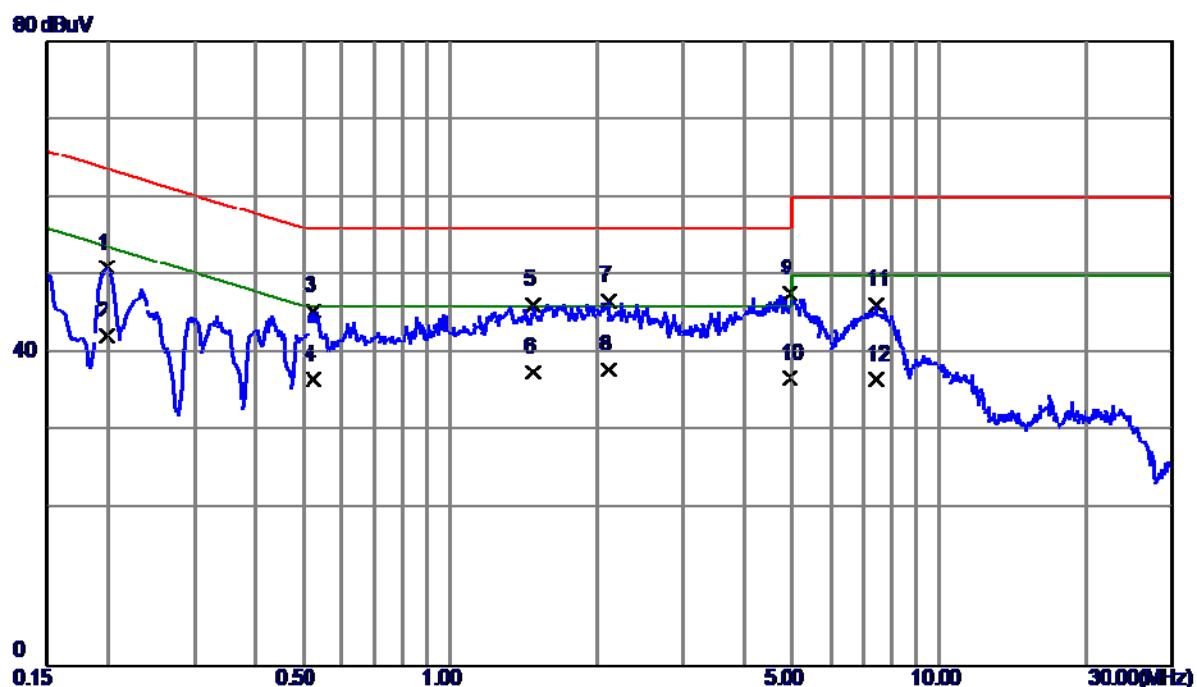


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1995	41. 29	9. 67	50. 96	63. 63	-12. 67	QP
2	0. 1995	32. 60	9. 67	42. 27	53. 63	-11. 36	AVG
3	0. 5257	35. 61	9. 82	45. 43	56. 00	-10. 57	QP
4	0. 5257	26. 80	9. 82	36. 62	46. 00	-9. 38	AVG
5	1. 4819	36. 22	10. 04	46. 26	56. 00	-9. 74	QP
6	1. 4819	27. 59	10. 04	37. 63	46. 00	-8. 37	AVG
7	2. 1053	36. 61	10. 07	46. 68	56. 00	-9. 32	QP
8 *	2. 1053	27. 90	10. 07	37. 97	46. 00	-8. 03	AVG
9	4. 9560	37. 35	10. 30	47. 65	56. 00	-8. 35	QP
10	4. 9560	26. 51	10. 30	36. 81	46. 00	-9. 19	AVG
11	7. 4310	35. 99	10. 28	46. 27	60. 00	-13. 73	QP
12	7. 4310	26. 41	10. 28	36. 69	50. 00	-13. 31	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+USB Cable:Luxshare +Battery:Harbin		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

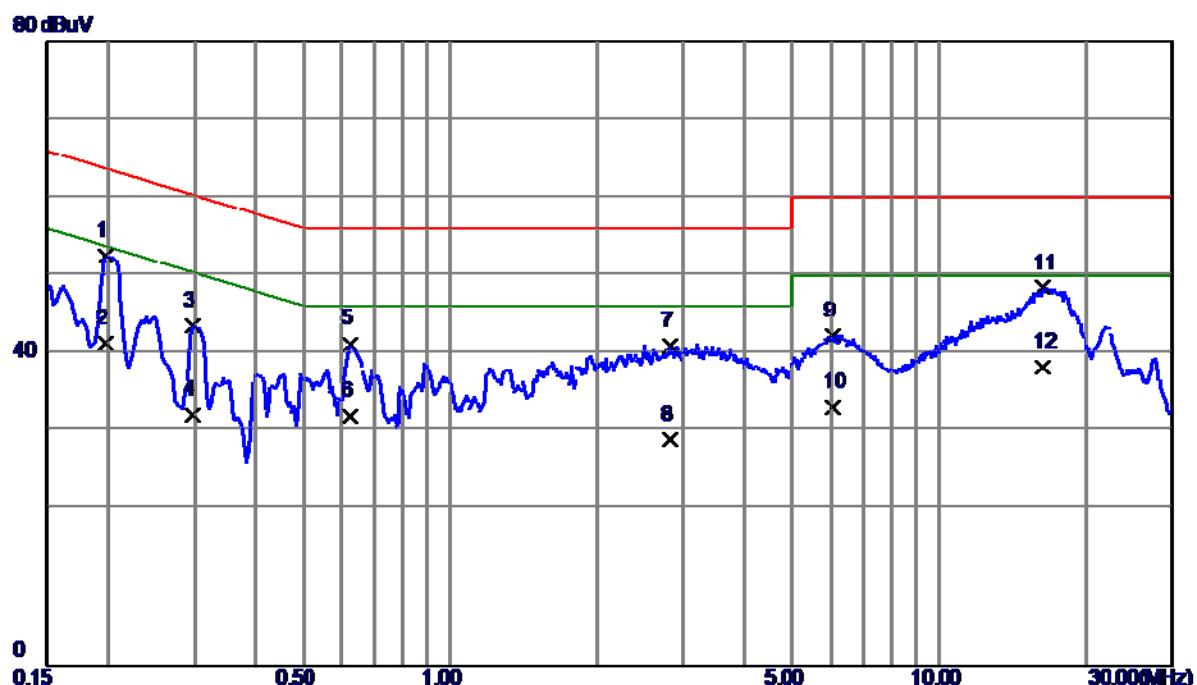


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0. 1973	42. 88	9. 67	52. 55	63. 72	-11. 17	QP
2	0. 1973	31. 60	9. 67	41. 27	53. 72	-12. 45	AVG
3	0. 2962	33. 76	9. 81	43. 57	60. 35	-16. 78	QP
4	0. 2962	22. 40	9. 81	32. 21	50. 35	-18. 14	AVG
5	0. 6247	31. 16	10. 04	41. 20	56. 00	-14. 80	QP
6	0. 6247	21. 90	10. 04	31. 94	46. 00	-14. 06	AVG
7	2. 8117	30. 93	10. 05	40. 98	56. 00	-15. 02	QP
8	2. 8117	18. 90	10. 05	28. 95	46. 00	-17. 05	AVG
9	6. 0338	32. 09	10. 15	42. 24	60. 00	-17. 76	QP
10	6. 0338	23. 00	10. 15	33. 15	50. 00	-16. 85	AVG
11	16. 2375	37. 72	10. 68	48. 40	60. 00	-11. 60	QP
12	16. 2375	27. 60	10. 68	38. 28	50. 00	-11. 72	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+USB Cable:Luxshare +Battery:Harbin		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

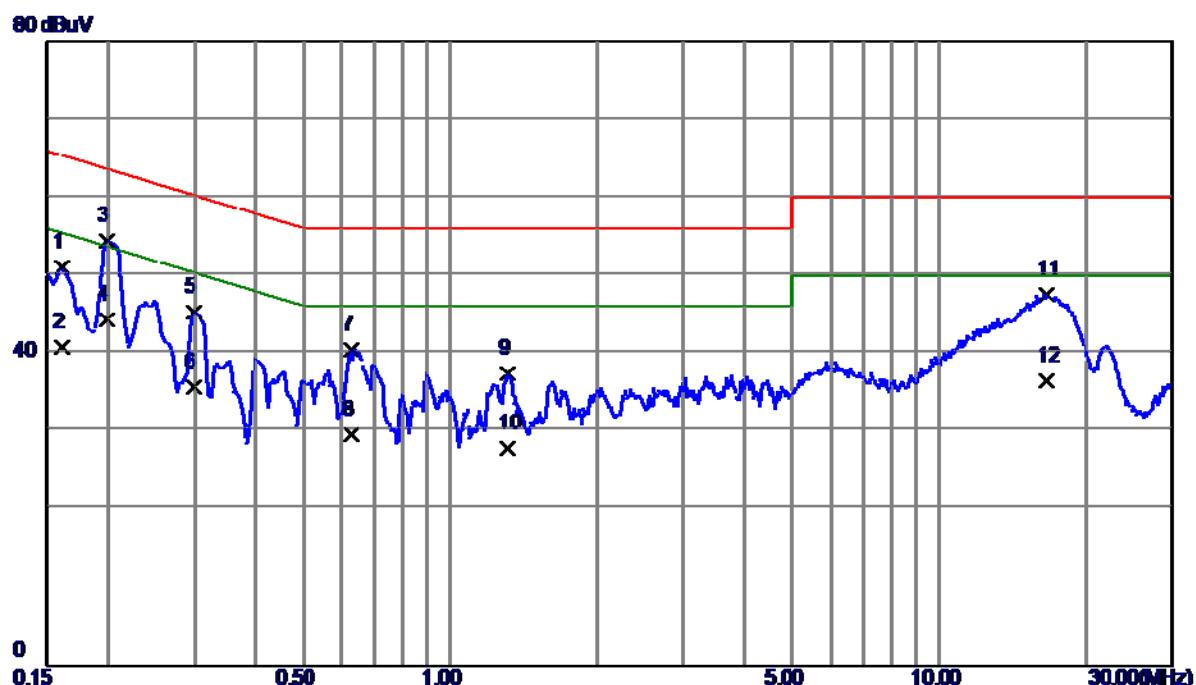


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1613	41. 42	9. 55	50. 97	65. 40	-14. 43	QP
2	0. 1613	31. 20	9. 55	40. 75	55. 40	-14. 65	AVG
3 *	0. 1995	44. 66	9. 67	54. 33	63. 63	-9. 30	QP
4	0. 1995	34. 60	9. 67	44. 27	53. 63	-9. 36	AVG
5	0. 2985	35. 58	9. 72	45. 30	60. 28	-14. 98	QP
6	0. 2985	26. 00	9. 72	35. 72	50. 28	-14. 56	AVG
7	0. 6270	30. 71	9. 84	40. 55	56. 00	-15. 45	QP
8	0. 6270	19. 80	9. 84	29. 64	46. 00	-16. 36	AVG
9	1. 3110	27. 49	9. 97	37. 46	56. 00	-18. 54	QP
10	1. 3110	17. 81	9. 97	27. 78	46. 00	-18. 22	AVG
11	16. 5525	36. 91	10. 61	47. 52	60. 00	-12. 48	QP
12	16. 5525	25. 90	10. 61	36. 51	50. 00	-13. 49	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:PHITEK+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

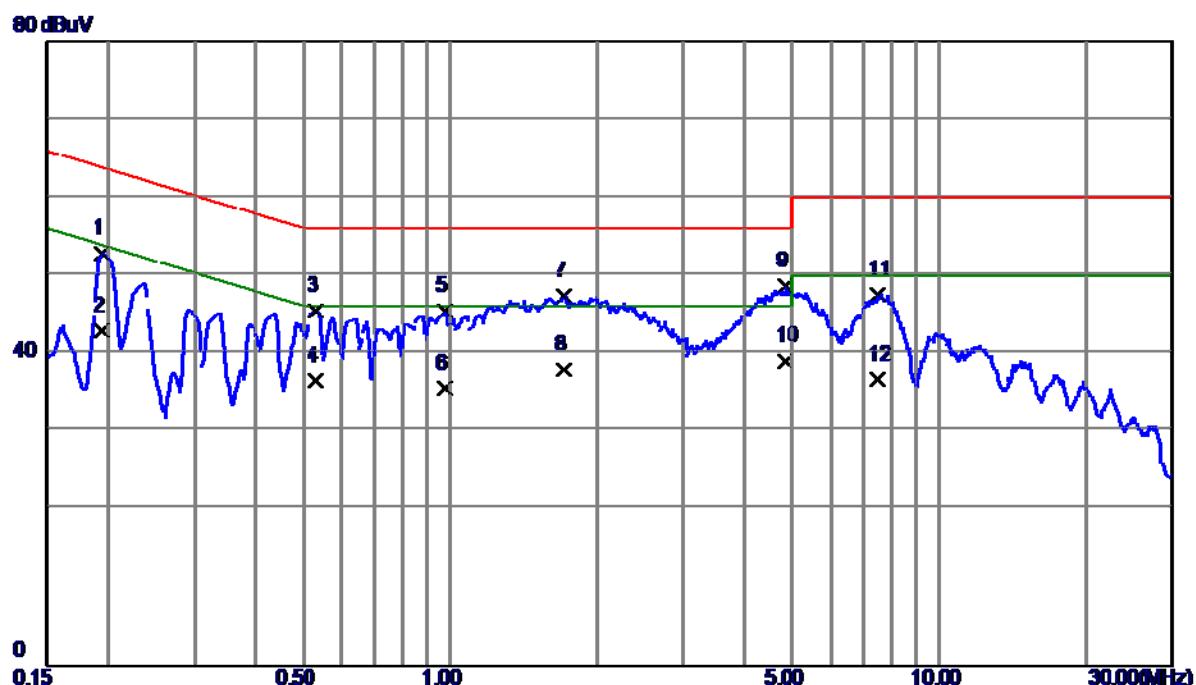


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1949	43. 06	9. 67	52. 73	63. 83	-11. 10	QP
2	0. 1949	33. 20	9. 67	42. 87	53. 83	-10. 96	AVG
3	0. 5325	35. 42	9. 95	45. 37	56. 00	-10. 63	QP
4	0. 5325	26. 60	9. 95	36. 55	46. 00	-9. 45	AVG
5	0. 9757	35. 32	10. 12	45. 44	56. 00	-10. 56	QP
6	0. 9757	25. 40	10. 12	35. 52	46. 00	-10. 48	AVG
7	1. 7048	37. 29	10. 11	47. 40	56. 00	-8. 60	QP
8	1. 7048	27. 81	10. 11	37. 92	46. 00	-8. 08	AVG
9	4. 8503	38. 61	10. 10	48. 71	56. 00	-7. 29	QP
10 *	4. 8503	28. 90	10. 10	39. 00	46. 00	-7. 00	AVG
11	7. 4895	37. 33	10. 23	47. 56	60. 00	-12. 44	QP
12	7. 4895	26. 40	10. 23	36. 63	50. 00	-13. 37	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:PHITEK+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

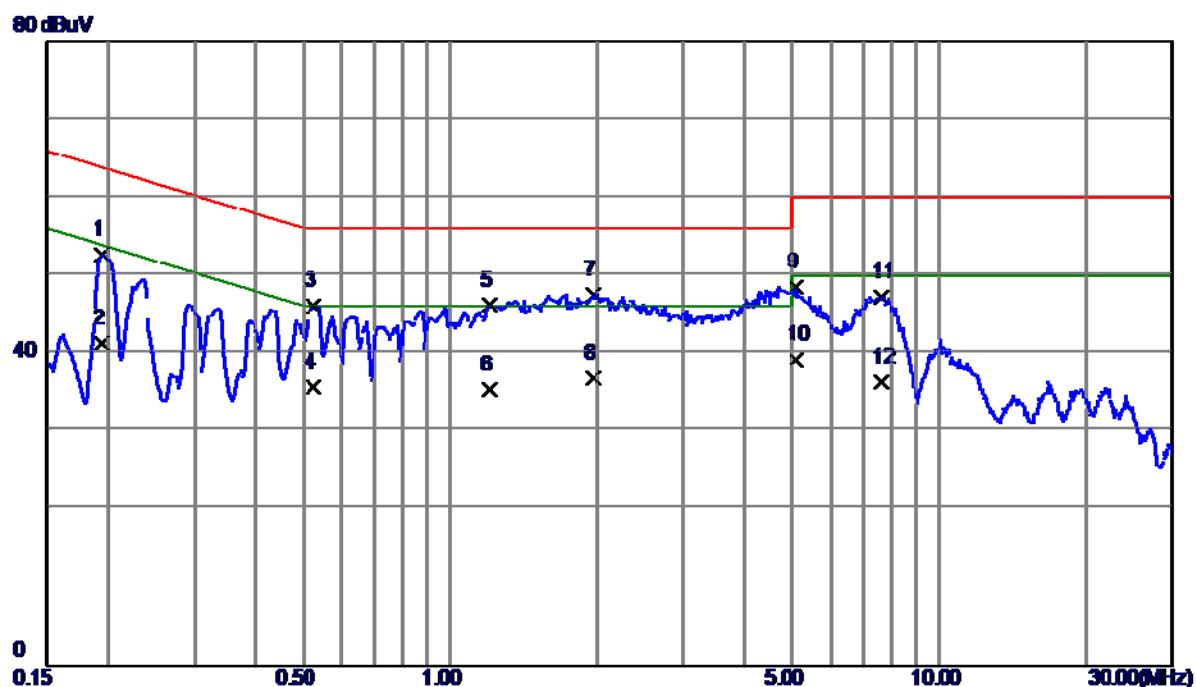


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0. 1949	42. 92	9. 65	52. 57	63. 83	-11. 26	QP
2	0. 1949	31. 60	9. 65	41. 25	53. 83	-12. 58	AVG
3	0. 5257	36. 27	9. 82	46. 09	56. 00	-9. 91	QP
4	0. 5257	25. 90	9. 82	35. 72	46. 00	-10. 28	AVG
5	1. 2030	36. 23	9. 93	46. 16	56. 00	-9. 84	QP
6	1. 2030	25. 40	9. 93	35. 33	46. 00	-10. 67	AVG
7 *	1. 9703	37. 45	10. 07	47. 52	56. 00	-8. 48	QP
8	1. 9703	26. 70	10. 07	36. 77	46. 00	-9. 23	AVG
9	5. 1068	38. 17	10. 31	48. 48	60. 00	-11. 52	QP
10	5. 1068	28. 89	10. 31	39. 20	50. 00	-10. 80	AVG
11	7. 6110	36. 93	10. 29	47. 22	60. 00	-12. 78	QP
12	7. 6110	26. 00	10. 29	36. 29	50. 00	-13. 71	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:PHITEK+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

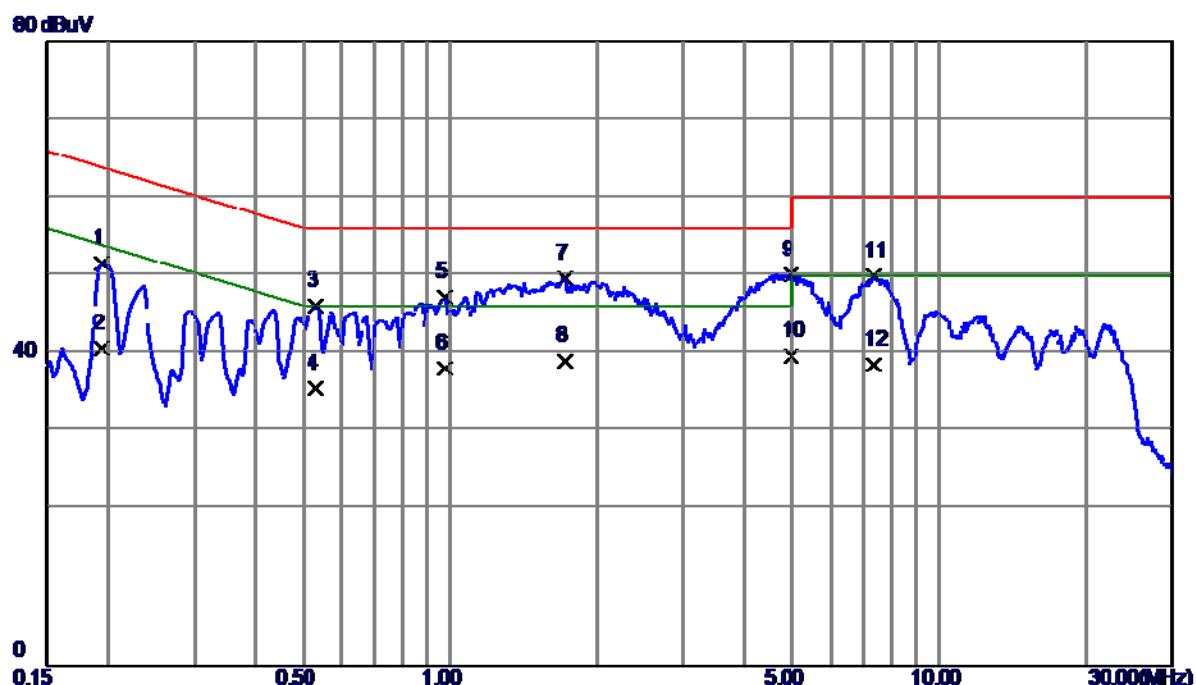

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1949	41.80	9.67	51.47	63.83	-12.36	QP
2	0.1949	31.00	9.67	40.67	53.83	-13.16	AVG
3	0.5325	36.12	9.95	46.07	56.00	-9.93	QP
4	0.5325	25.60	9.95	35.55	46.00	-10.45	AVG
5	0.9780	37.14	10.12	47.26	56.00	-8.74	QP
6	0.9780	27.90	10.12	38.02	46.00	-7.98	AVG
7	1.7115	39.52	10.11	49.63	56.00	-6.37	QP
8	1.7115	28.91	10.11	39.02	46.00	-6.98	AVG
9 *	4.9718	40.03	10.11	50.14	56.00	-5.86	QP
10	4.9718	29.60	10.11	39.71	46.00	-6.29	AVG
11	7.3343	39.68	10.22	49.90	60.00	-10.10	QP
12	7.3343	28.40	10.22	38.62	50.00	-11.38	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:PHITEK+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

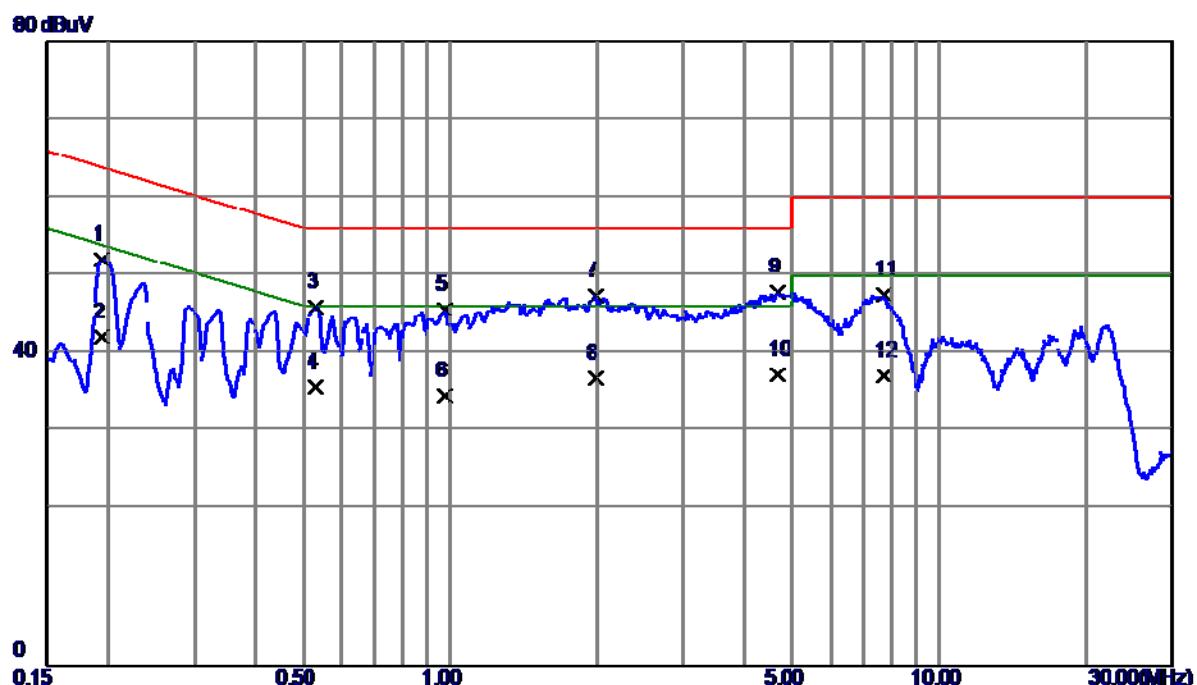

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1949	42.42	9.65	52.07	63.83	-11.76	QP
2	0.1949	32.50	9.65	42.15	53.83	-11.68	AVG
3	0.5325	36.12	9.82	45.94	56.00	-10.06	QP
4	0.5325	25.90	9.82	35.72	46.00	-10.28	AVG
5	0.9757	35.63	9.92	45.55	56.00	-10.45	QP
6	0.9757	24.60	9.92	34.52	46.00	-11.48	AVG
7	1.9860	37.24	10.07	47.31	56.00	-8.69	QP
8	1.9860	26.70	10.07	36.77	46.00	-9.23	AVG
9 *	4.6725	37.66	10.26	47.92	56.00	-8.08	QP
10	4.6725	27.00	10.26	37.26	46.00	-8.74	AVG
11	7.7100	37.26	10.29	47.55	60.00	-12.45	QP
12	7.7100	26.80	10.29	37.09	50.00	-12.91	AVG

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

#### Below 1 GHz

##### Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

#### Above 1 GHz

##### Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

#### NOTE:

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### 4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 27, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
10	Test Cable	emci	EMC104-SM-SM-100 00(1GHz—26.5GHz)	C-68	Jun. 27, 2017
11	Antenna	ETS	3115	00075789	Mar. 27, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

#### 4.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

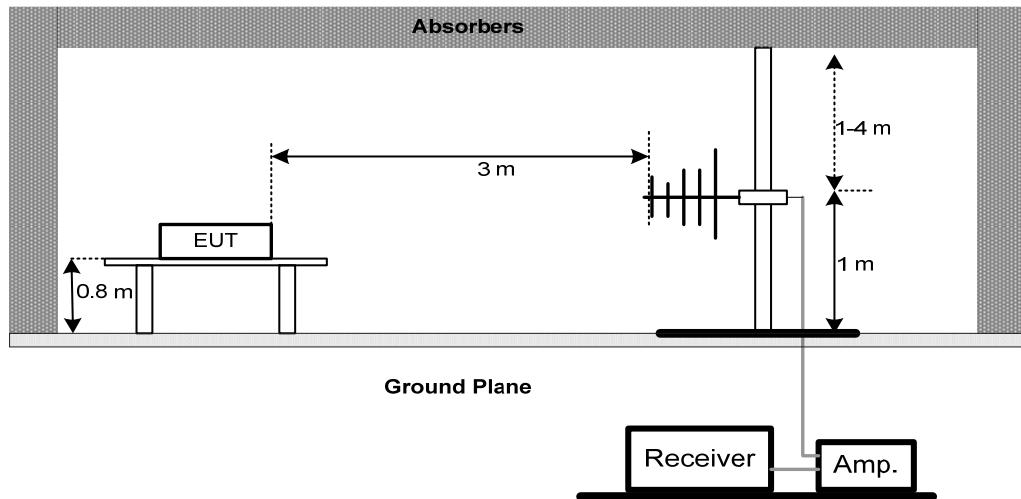

(B) Radiated Emission Test Set-Up Frequency 1 GHz-18GHz

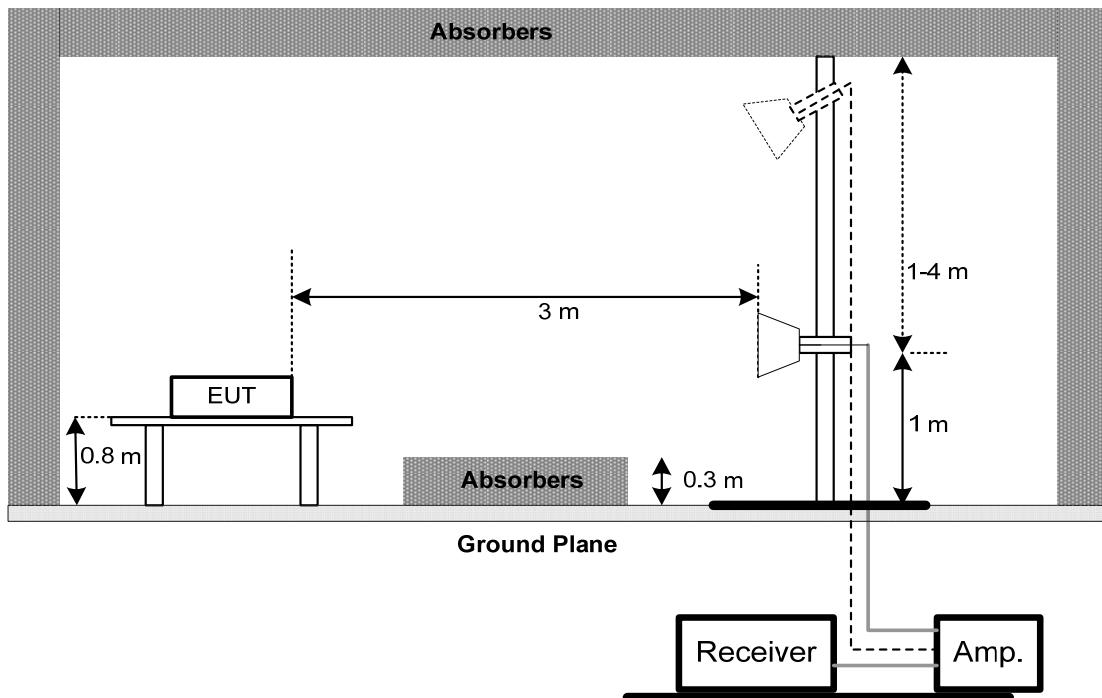

#### 4.2.6 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.7 TEST RESULTS-BELOW 1GHZ

Remark:


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

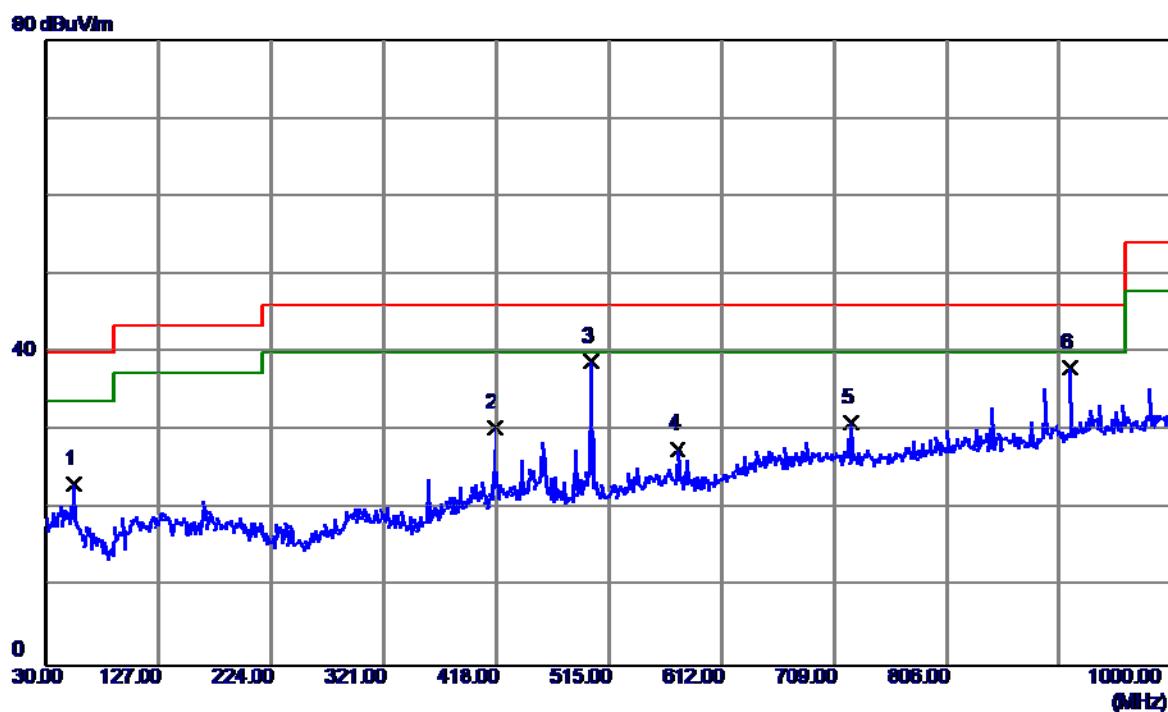


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	53.7650	35.43	-12.24	23.19	40.00	-16.81	QP
2	416.5450	37.49	-7.16	30.33	46.00	-15.67	QP
3 *	499.9650	46.49	-7.65	38.84	46.00	-7.16	QP
4	574.6550	32.35	-4.63	27.72	46.00	-18.28	QP
5	724.5200	31.73	-0.76	30.97	46.00	-15.03	QP
6	912.7000	36.05	2.07	38.12	46.00	-7.88	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

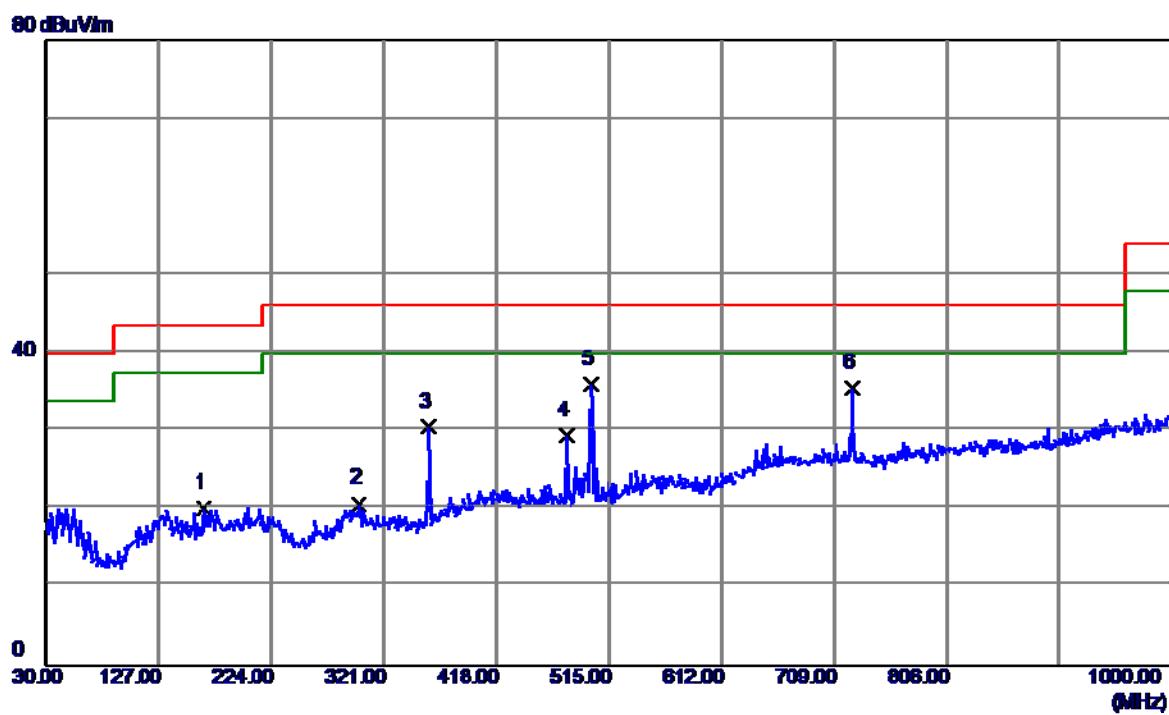


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	166.2850	31.52	-11.39	20.13	43.50	-23.37	QP
2	299.6600	30.66	-9.94	20.72	46.00	-25.28	QP
3	359.8000	40.60	-10.07	30.53	46.00	-15.47	QP
4	478.6250	36.80	-7.40	29.40	46.00	-16.60	QP
5 *	499.9650	43.64	-7.65	35.99	46.00	-10.01	QP
6	725.0050	36.21	-0.76	35.45	46.00	-10.55	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:PANG NGAI		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

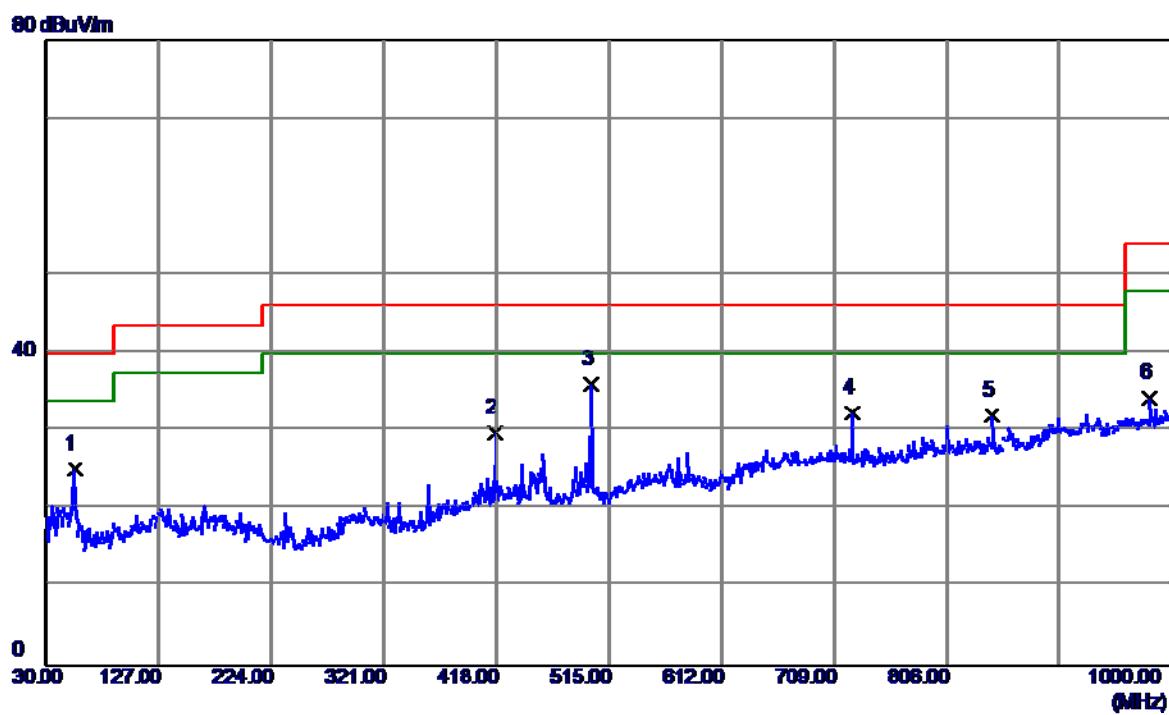


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	54.2500	37.34	-12.25	25.09	40.00	-14.91	QP
2	416.5450	36.88	-7.16	29.72	46.00	-16.28	QP
3 *	499.9650	43.68	-7.65	36.03	46.00	-9.97	QP
4	725.0050	33.07	-0.76	32.31	46.00	-13.69	QP
5	845.2850	31.36	0.60	31.96	46.00	-14.04	QP
6	980.6000	30.58	3.65	34.23	54.00	-19.77	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:PANG NGAI		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

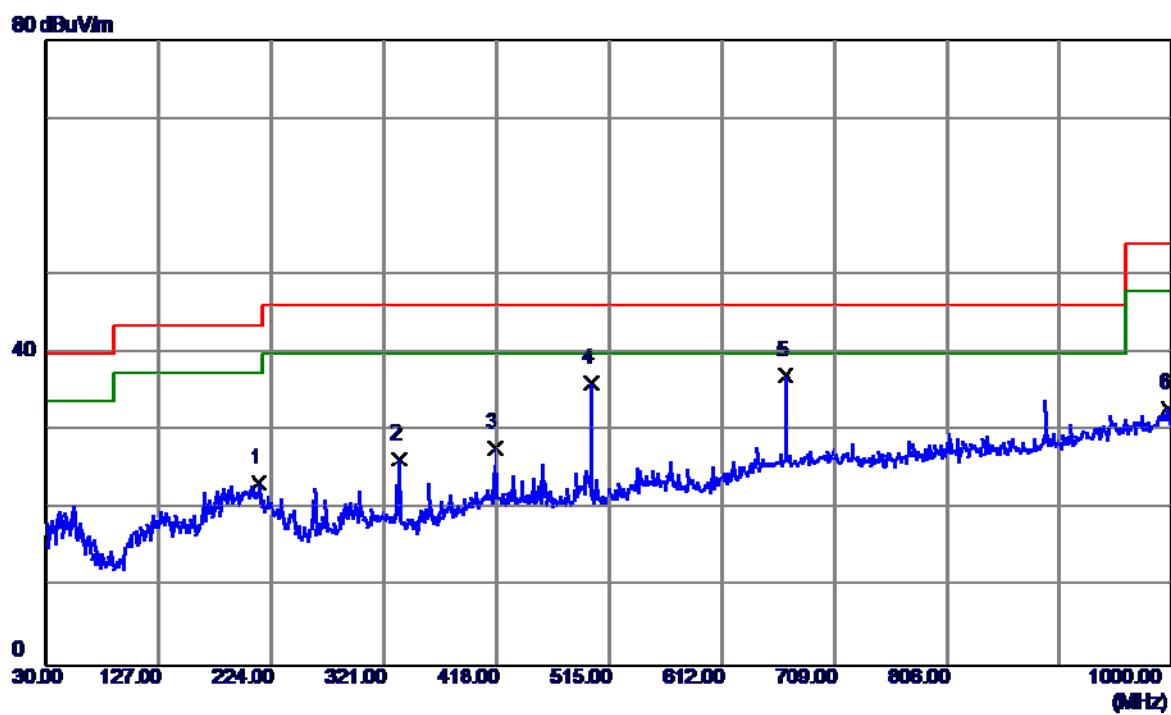


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	213.3300	37.43	-14.05	23.38	43.50	-20.12	QP
2	333.6099	36.92	-10.50	26.42	46.00	-19.58	QP
3	417.0300	35.03	-7.16	27.87	46.00	-18.13	QP
4	499.9650	43.78	-7.65	36.13	46.00	-9.87	QP
5 *	666.8050	38.49	-1.34	37.15	46.00	-8.85	QP
6	996.6050	29.15	3.88	33.03	54.00	-20.97	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

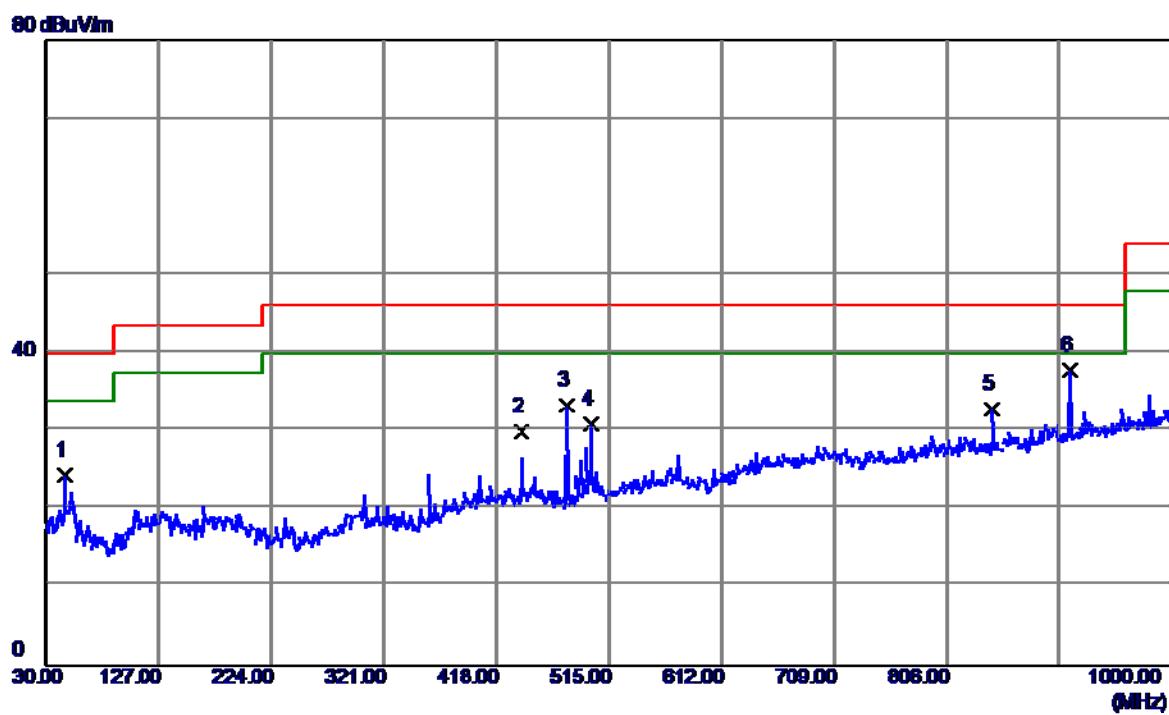


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	46.0050	36.34	-12.07	24.27	40.00	-15.73	QP
2	439.3400	37.00	-7.10	29.90	46.00	-16.10	QP
3	478.6250	40.66	-7.40	33.26	46.00	-12.74	QP
4	499.9650	38.51	-7.65	30.86	46.00	-15.14	QP
5	845.2850	32.26	0.60	32.86	46.00	-13.14	QP
6 *	912.7000	35.68	2.07	37.75	46.00	-8.25	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

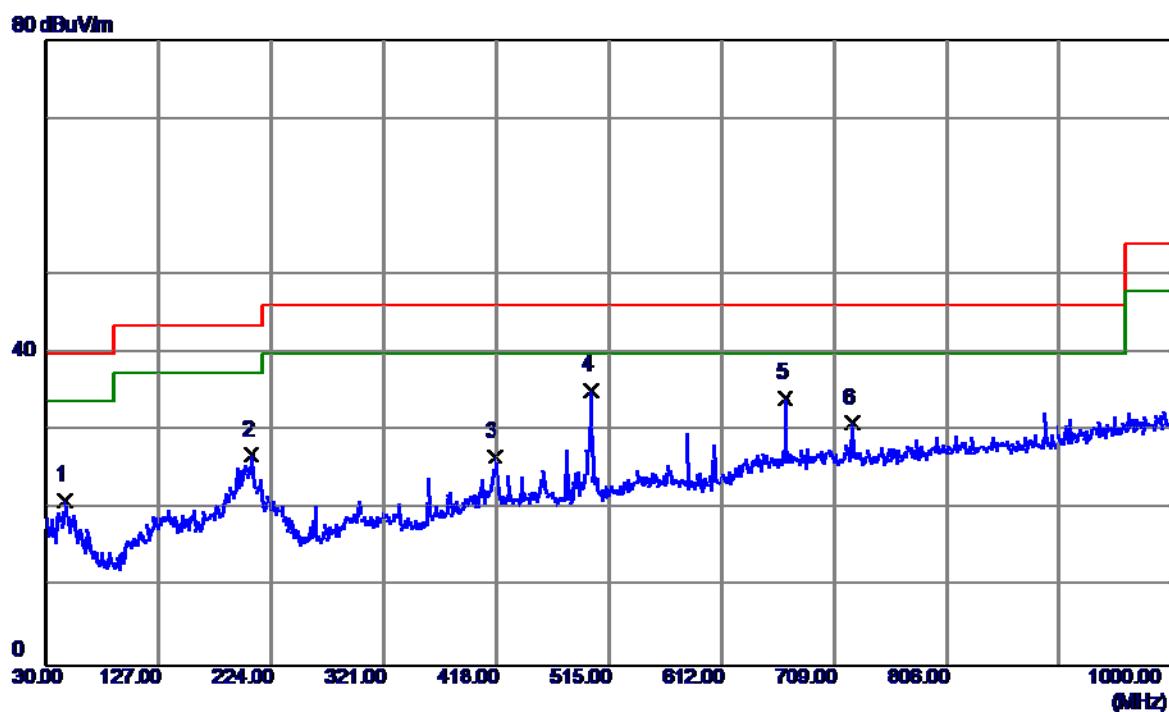


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m dB	Margin	Detector
1	46.0050	33.22	-12.07	21.15	40.00	-18.85	QP
2	206.5399	40.90	-13.94	26.96	43.50	-16.54	QP
3	417.0300	33.95	-7.16	26.79	46.00	-19.21	QP
4 *	499.9650	42.82	-7.65	35.17	46.00	-10.83	QP
5	666.8050	35.63	-1.34	34.29	46.00	-11.71	QP
6	725.0050	31.79	-0.76	31.03	46.00	-14.97	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+ USB Cable:FOXCONN+ Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

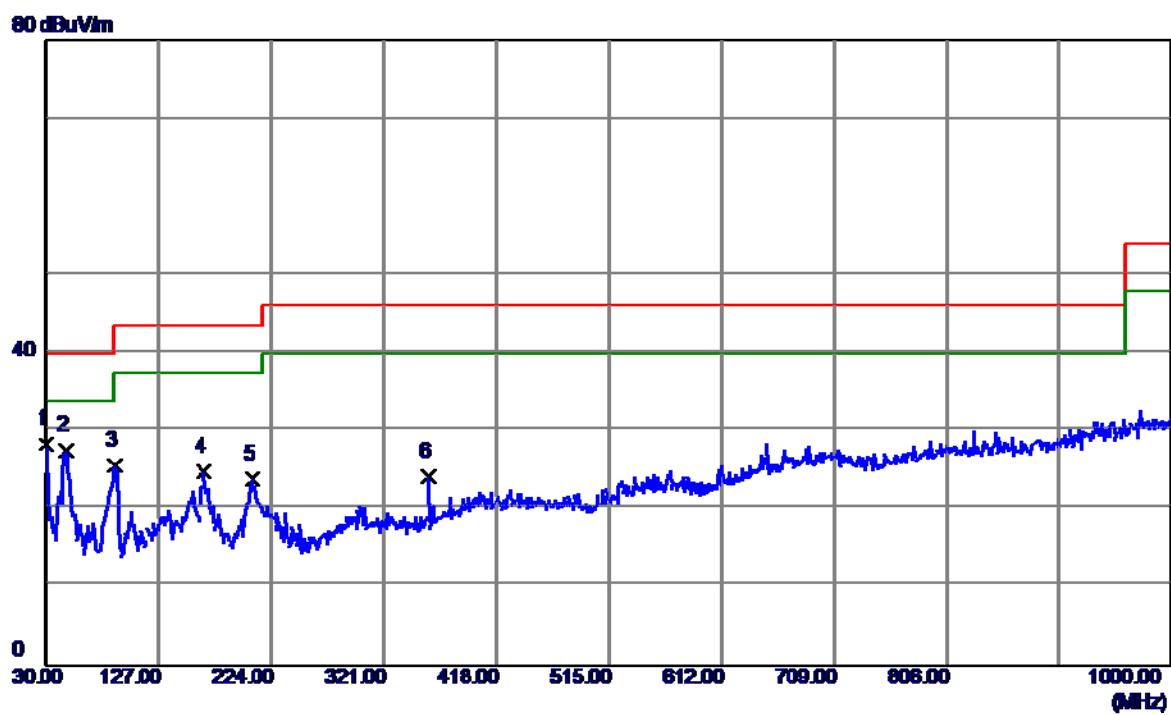


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	41.17	-12.80	28.37	40.00	-11.63	QP
2	46.9750	39.73	-12.25	27.48	40.00	-12.52	QP
3	89.1700	41.91	-16.37	25.54	43.50	-17.96	QP
4	166.2850	36.27	-11.39	24.88	43.50	-18.62	QP
5	207.9950	37.88	-14.01	23.87	43.50	-19.63	QP
6	359.8000	34.16	-10.07	24.09	46.00	-21.91	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+ USB Cable:FOXCONN+ Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

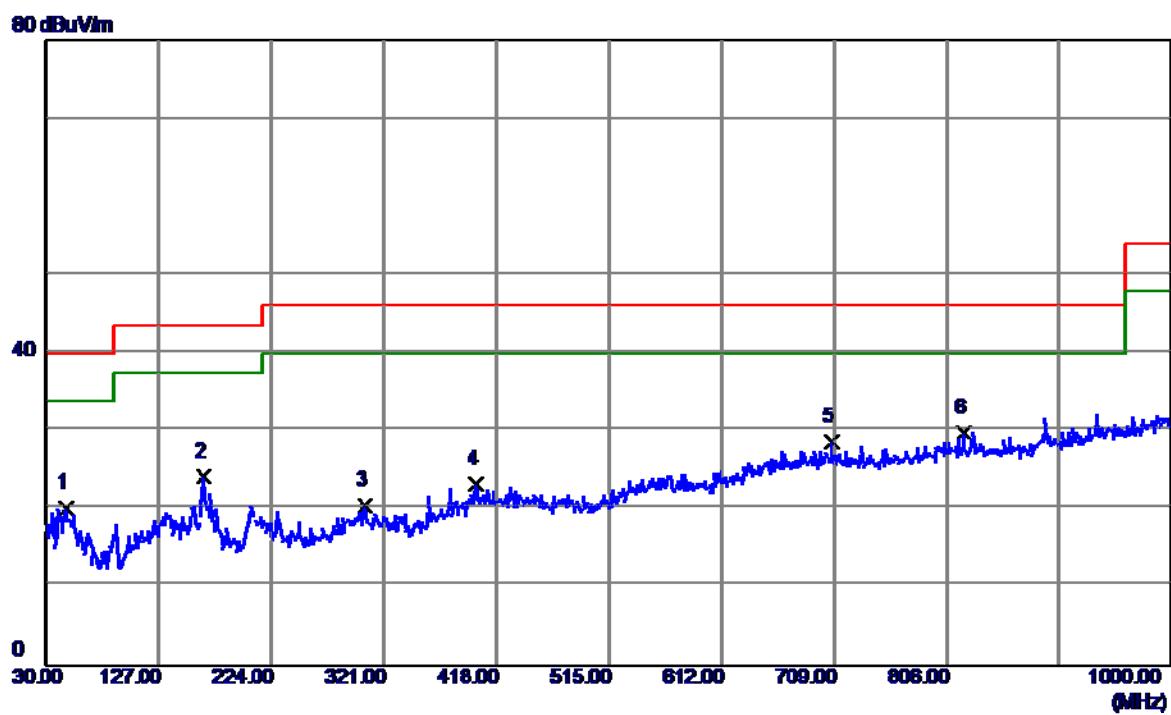


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	46.9750	32.38	-12.25	20.13	40.00	-19.87	QP
2	165.8000	35.57	-11.48	24.09	43.50	-19.41	QP
3	304.9950	30.50	-10.02	20.48	46.00	-25.52	QP
4	400.5400	30.33	-7.20	23.13	46.00	-22.87	QP
5	706.5750	29.32	-0.68	28.64	46.00	-17.36	QP
6 *	821.0349	29.14	0.60	29.74	46.00	-16.26	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:PHITEK+ USB Cable:FOXCONN+Battery:Harbin		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

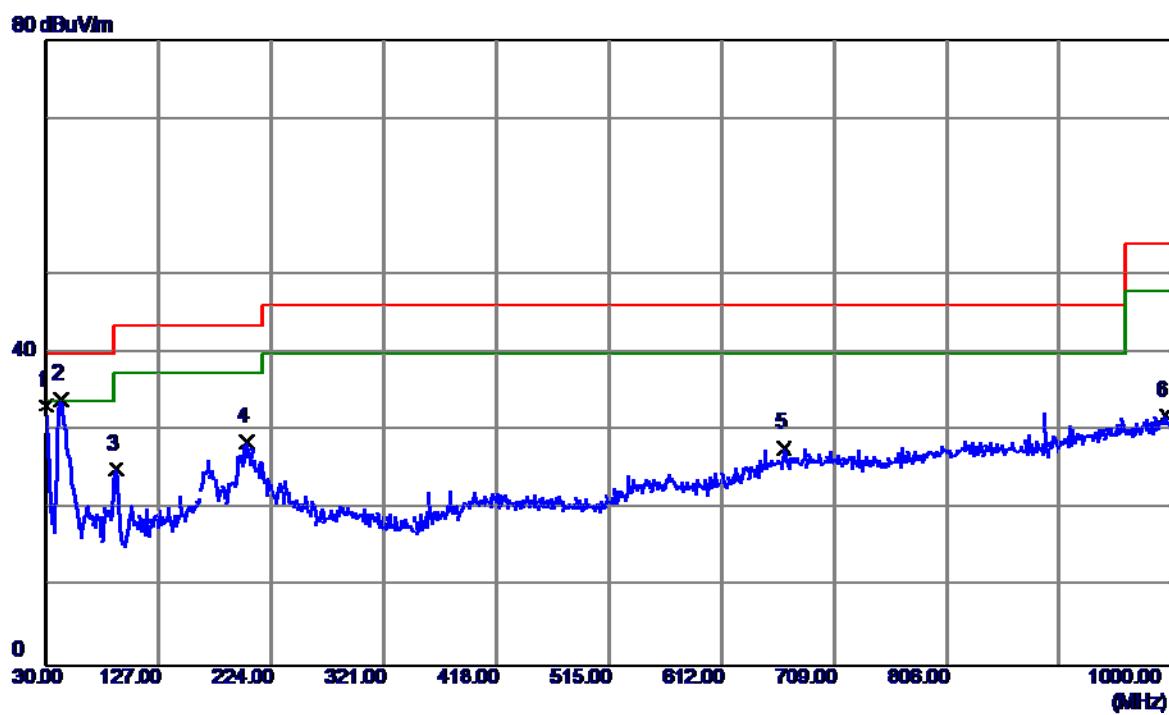


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m dB	Margin	Detector
1	30.0000	46.01	-12.80	33.21	40.00	-6.79	QP
2 *	42.6100	46.08	-11.97	34.11	40.00	-5.89	QP
3	90.6250	41.53	-16.38	25.15	43.50	-18.35	QP
4	202.1750	42.44	-13.74	28.70	43.50	-14.80	QP
5	666.3200	29.18	-1.35	27.83	46.00	-18.17	QP
6	994.6650	28.13	3.85	31.98	54.00	-22.02	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:PHITEK+ USB Cable:FOXCONN+Battery:Harbin		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

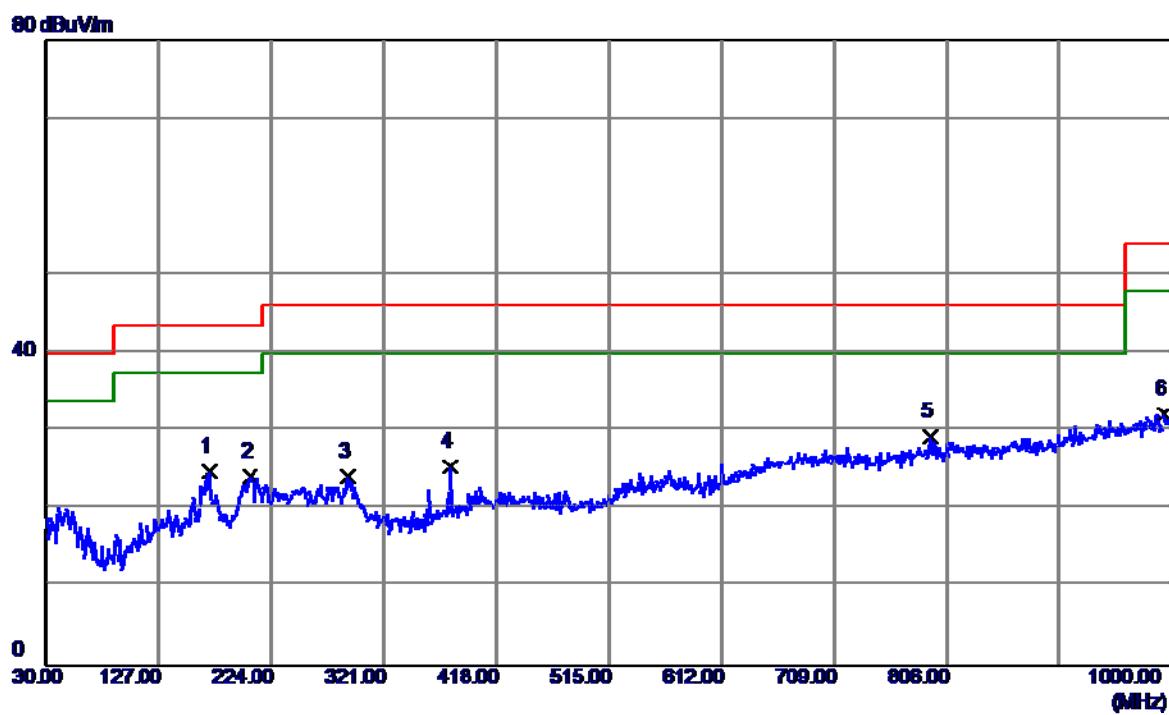


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	171.1350	35.72	-10.87	24.85	43.50	-18.65	QP
2	205.5700	38.01	-13.90	24.11	43.50	-19.39	QP
3	289.4750	34.17	-10.07	24.10	46.00	-21.90	QP
4	378.2300	34.20	-8.75	25.45	46.00	-20.55	QP
5 *	791.4500	28.95	0.36	29.31	46.00	-16.69	QP
6	993.6950	28.34	3.84	32.18	54.00	-21.82	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

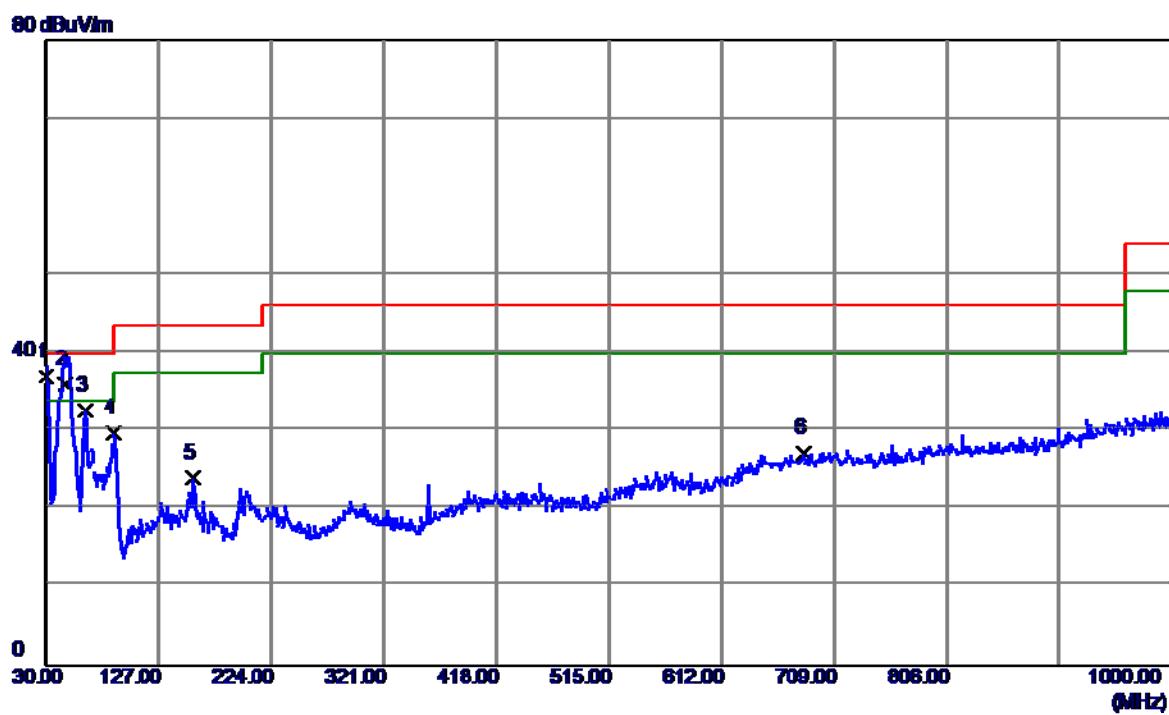


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m dB	Margin	Detector
1 *	30.0000	49.80	-12.80	37.00	40.00	-3.00	QP
2	46.2050	48.15	-12.11	36.04	40.00	-3.96	QP
3	62.9800	46.63	-13.95	32.68	40.00	-7.32	QP
4	87.7149	46.05	-16.32	29.73	40.00	-10.27	QP
5	155.6150	36.30	-12.28	24.02	43.50	-19.48	QP
6	682.8100	28.22	-1.01	27.21	46.00	-18.79	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

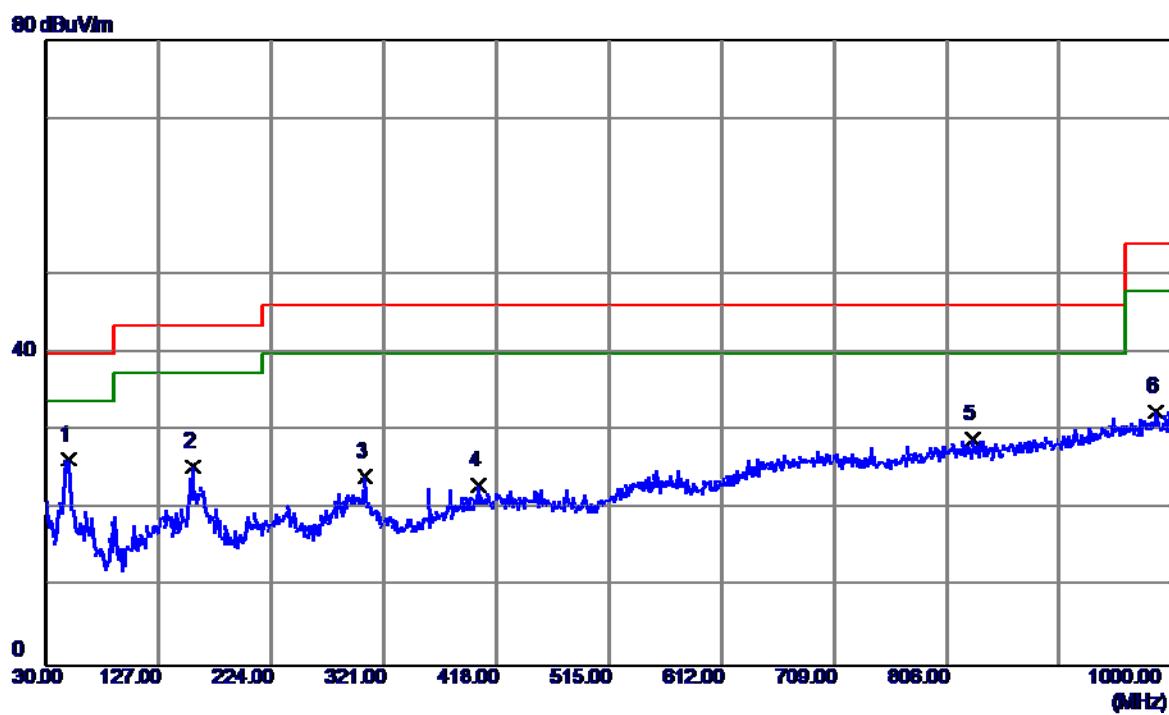


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	48. 9150	38. 58	-12. 26	26. 32	40. 00	-13. 68	QP
2	155. 6150	37. 73	-12. 28	25. 45	43. 50	-18. 05	QP
3	304. 5100	34. 22	-10. 01	24. 21	46. 00	-21. 79	QP
4	402. 4800	30. 18	-7. 19	22. 99	46. 00	-23. 01	QP
5	828. 7950	28. 29	0. 60	28. 89	46. 00	-17. 11	QP
6	985. 9350	28. 69	3. 73	32. 42	54. 00	-21. 58	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	ERR		

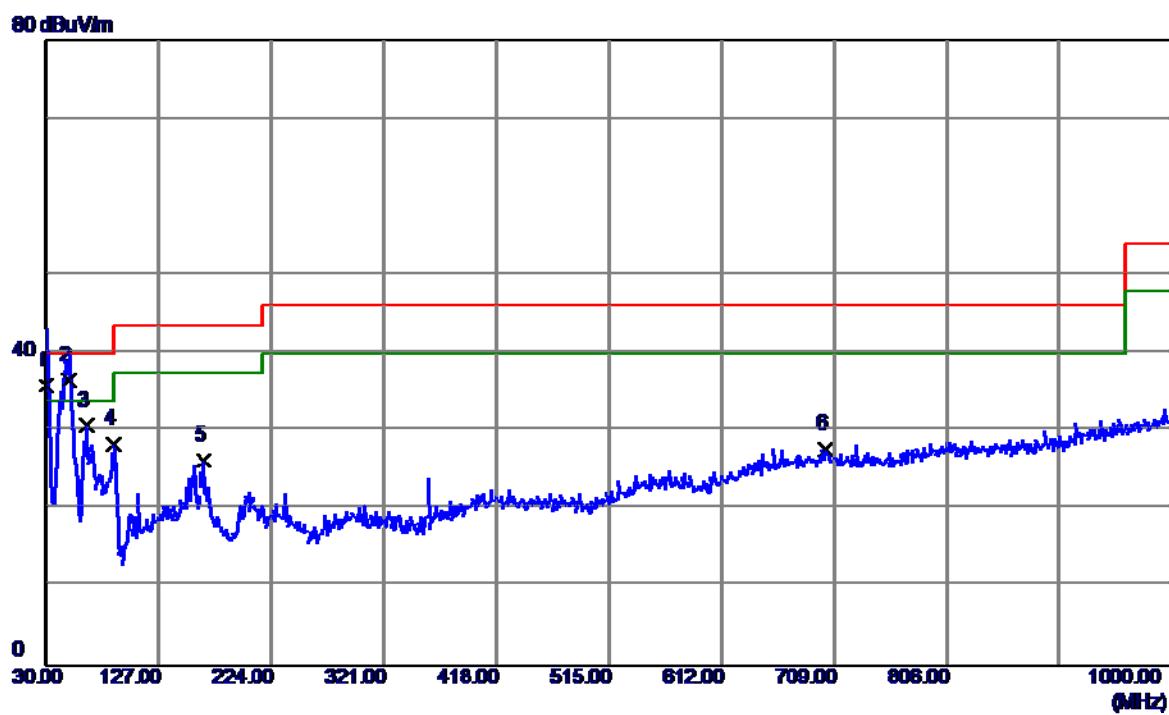


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m dB	Margin	Detector
1	30.0000	48.58	-12.80	35.78	40.00	-4.22	QP
2 *	49.4000	48.66	-12.16	36.50	40.00	-3.50	QP
3	64.4350	44.52	-13.80	30.72	40.00	-9.28	QP
4	88.2000	44.60	-16.34	28.26	43.50	-15.24	QP
5	166.2850	37.58	-11.39	26.19	43.50	-17.31	QP
6	701.7250	28.39	-0.66	27.73	46.00	-18.27	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

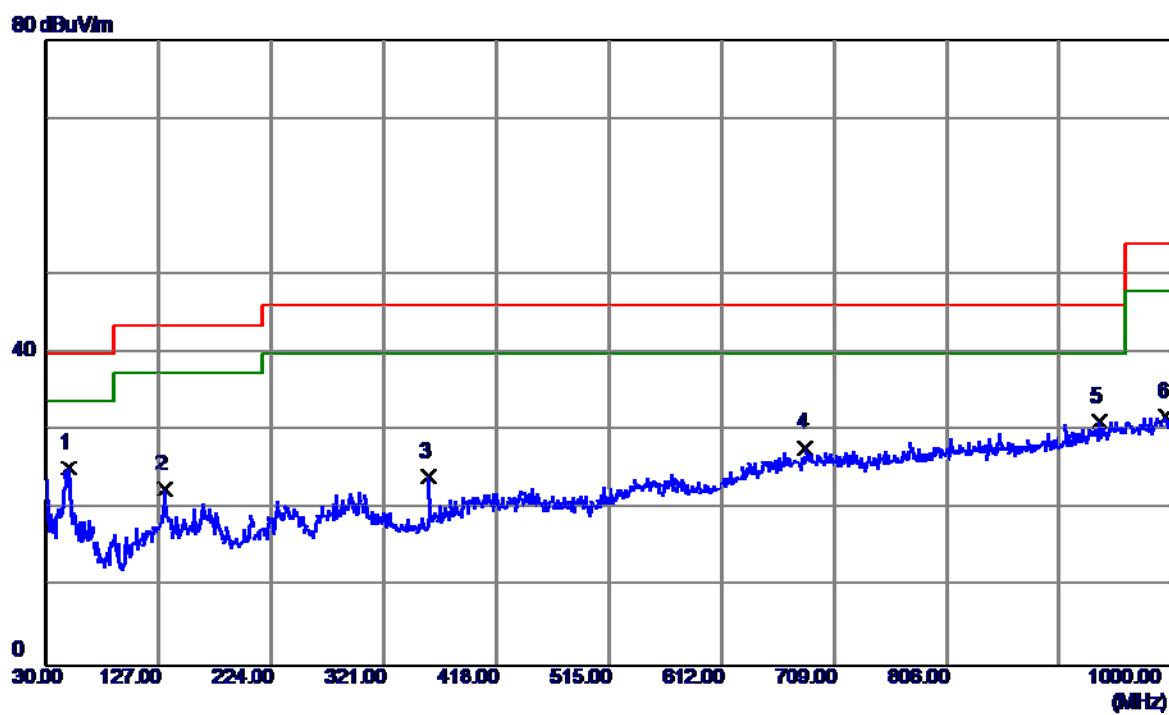


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	49.4000	37.40	-12.16	25.24	40.00	-14.76	QP
2	132.3350	33.87	-11.31	22.56	43.50	-20.94	QP
3	359.8000	34.28	-10.07	24.21	46.00	-21.79	QP
4	684.7500	28.77	-0.97	27.80	46.00	-18.20	QP
5	936.9500	28.42	2.81	31.23	46.00	-14.77	QP
6	995.1500	27.95	3.86	31.81	54.00	-22.19	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

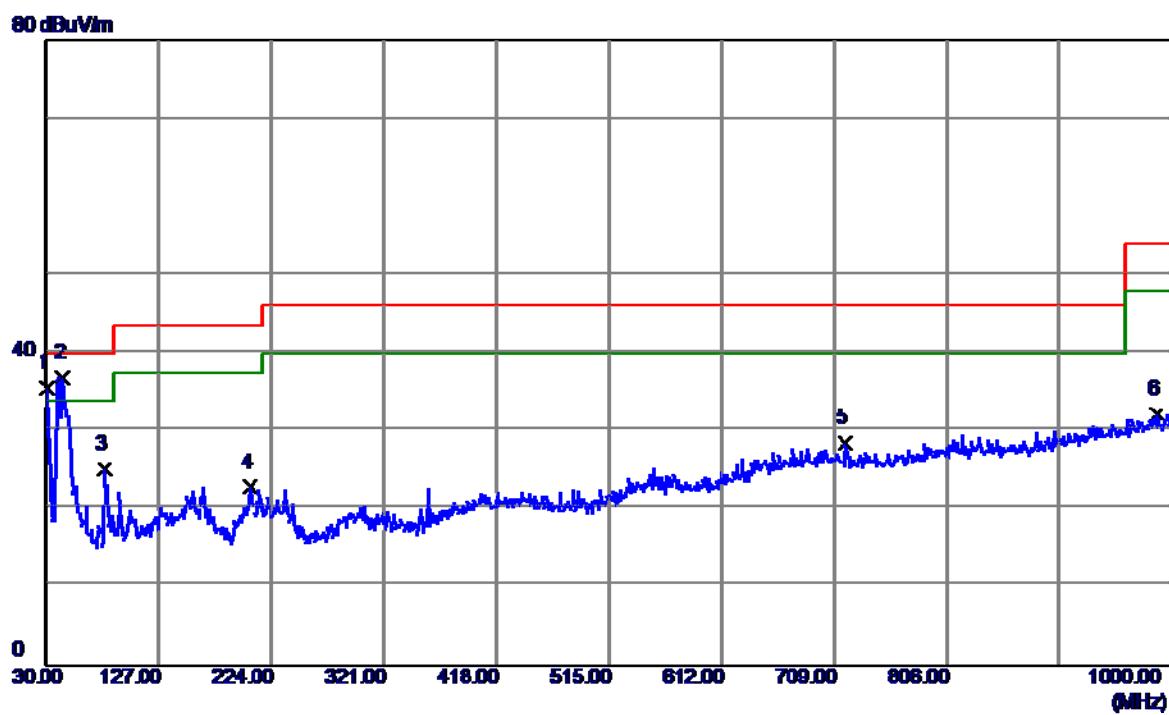

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30. 9700	48. 54	-12. 99	35. 55	40. 00	-4. 45	QP
2 *	44. 5500	48. 58	-11. 79	36. 79	40. 00	-3. 21	QP
3	80. 9250	41. 79	-16. 67	25. 12	40. 00	-14. 88	QP
4	206. 0549	36. 72	-13. 92	22. 80	43. 50	-20. 70	QP
5	719. 1850	29. 20	-0. 73	28. 47	46. 00	-17. 53	QP
6	987. 3900	28. 42	3. 75	32. 17	54. 00	-21. 83	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

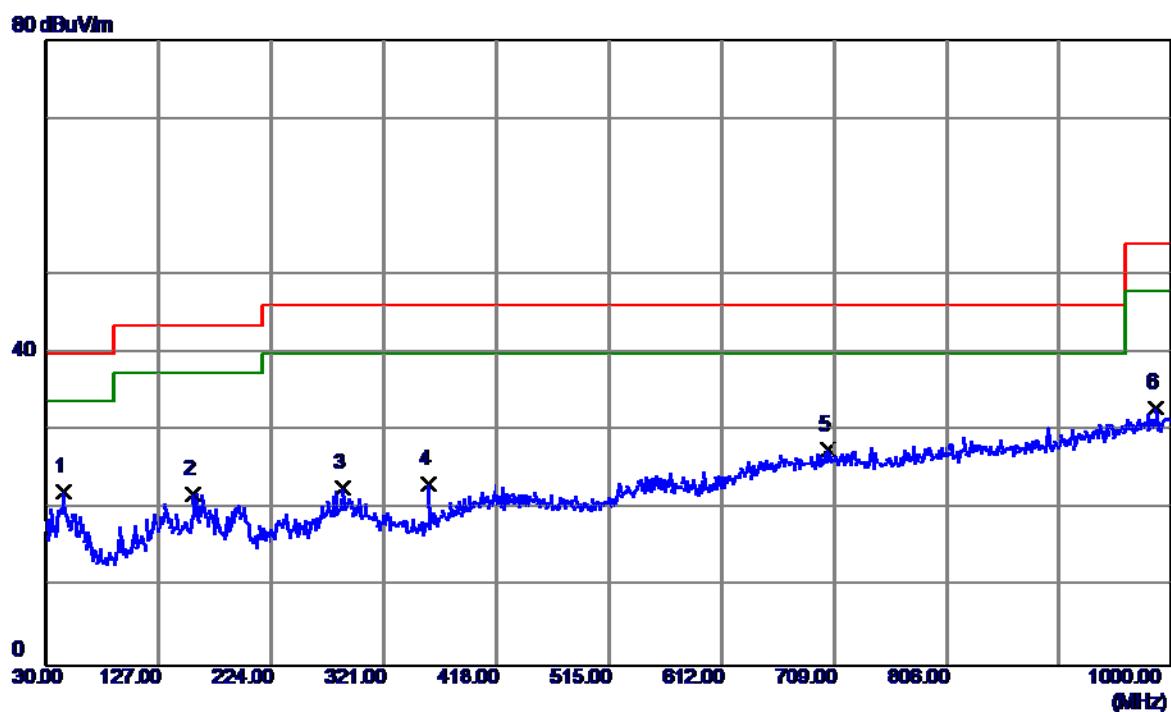


No.	Freq.	Reading Level	Correct Factor	Measure m	Limit	Margin	
						MHz	dBuV/m
1 *	45. 0350	34. 12	-11. 88	22. 24	40. 00	-17. 76	QP
2	156. 1000	34. 23	-12. 31	21. 92	43. 50	-21. 58	QP
3	285. 5950	33. 54	-10. 75	22. 79	46. 00	-23. 21	QP
4	359. 8000	33. 25	-10. 07	23. 18	46. 00	-22. 82	QP
5	703. 1800	28. 26	-0. 66	27. 60	46. 00	-18. 40	QP
6	986. 4200	29. 26	3. 73	32. 99	54. 00	-21. 01	QP

#### 4.2.8 TEST RESULTS-ABOVE 1GHZ

Remark:


- (1) All readings are Peak unless otherwise stated QP in column of『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “\*” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

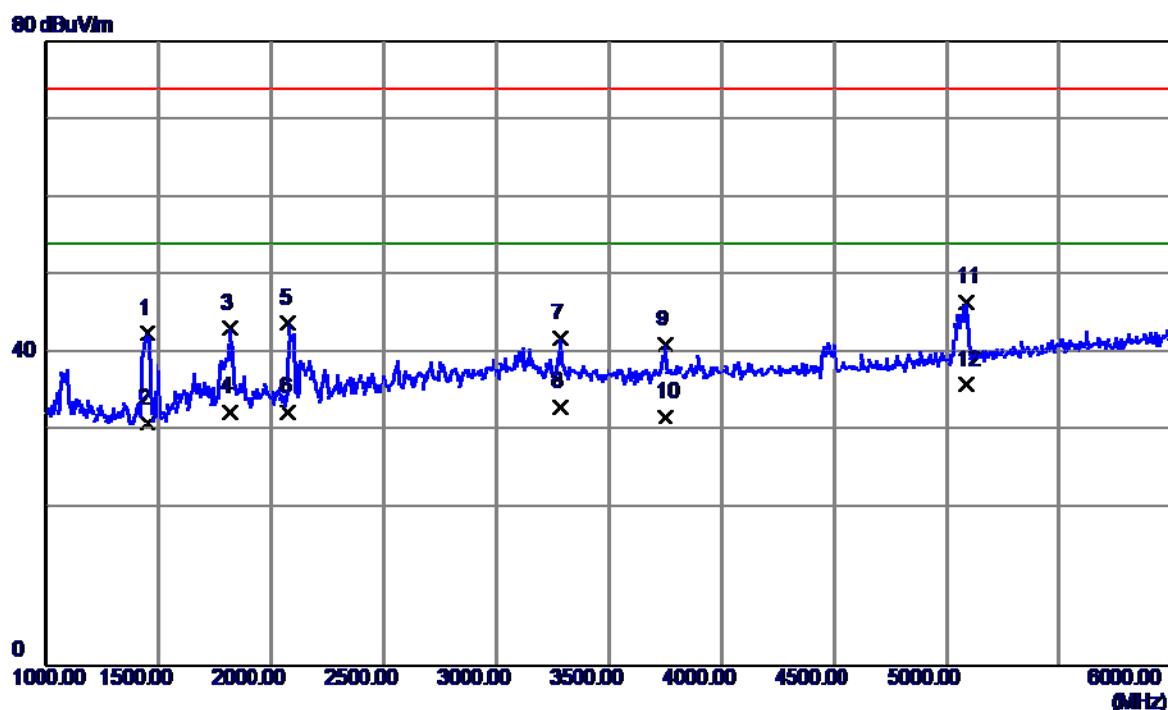


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1	1450.0000	49.34	-6.78	42.56	74.00	-31.44	Peak
2	1450.0000	37.80	-6.78	31.02	54.00	-22.98	AVG
3	1815.0000	47.42	-4.24	43.18	74.00	-30.82	Peak
4	1815.0000	36.70	-4.24	32.46	54.00	-21.54	AVG
5	2075.0000	46.41	-2.54	43.87	74.00	-30.13	Peak
6	2075.0000	35.09	-2.54	32.55	54.00	-21.45	AVG
7	3285.0000	40.58	1.41	41.99	74.00	-32.01	Peak
8	3285.0000	31.69	1.41	33.10	54.00	-20.90	AVG
9	3750.0000	39.03	2.13	41.16	74.00	-32.84	Peak
10	3750.0000	29.70	2.13	31.83	54.00	-22.17	AVG
11	5090.0000	40.61	5.89	46.50	74.00	-27.50	Peak
12 *	5090.0000	30.11	5.89	36.00	54.00	-18.00	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

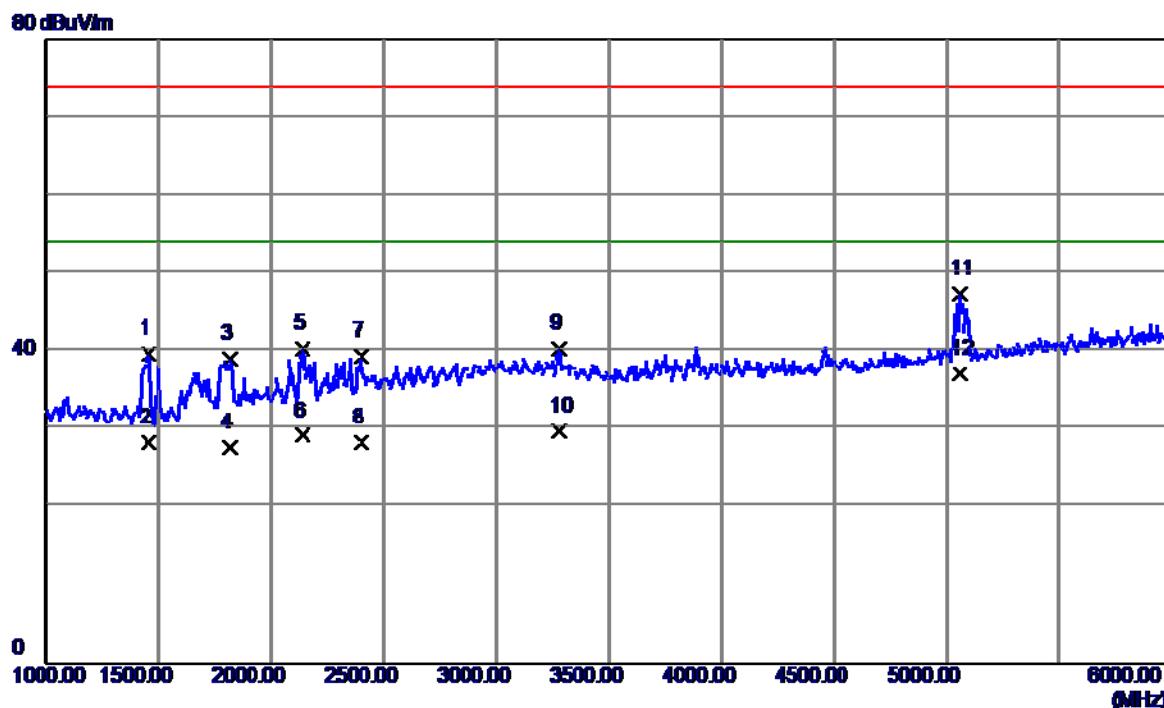


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1455.0000	46.39	-6.77	39.62	74.00	-34.38	Peak
2	1455.0000	35.10	-6.77	28.33	54.00	-25.67	AVG
3	1815.0000	43.26	-4.24	39.02	74.00	-34.98	Peak
4	1815.0000	31.90	-4.24	27.66	54.00	-26.34	AVG
5	2140.0000	42.58	-2.30	40.28	74.00	-33.72	Peak
6	2140.0000	31.50	-2.30	29.20	54.00	-24.80	AVG
7	2400.0000	40.68	-1.34	39.34	74.00	-34.66	Peak
8	2400.0000	29.60	-1.34	28.26	54.00	-25.74	AVG
9	3280.0000	38.85	1.41	40.26	74.00	-33.74	Peak
10	3280.0000	28.40	1.41	29.81	54.00	-24.19	AVG
11	5060.0000	41.50	5.80	47.30	74.00	-26.70	Peak
12 *	5060.0000	31.39	5.80	37.19	54.00	-16.81	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:PANG NGAI		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

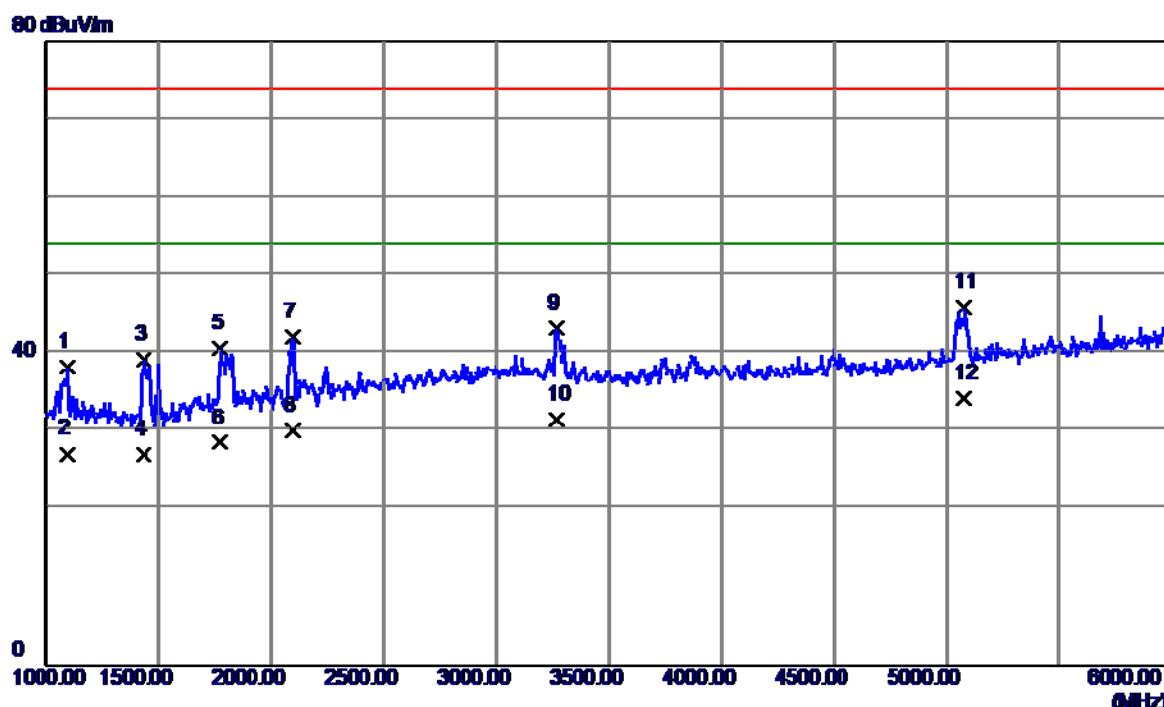


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1095.0000	45.96	-7.69	38.27	74.00	-35.73	Peak
2	1095.0000	34.81	-7.69	27.12	54.00	-26.88	AVG
3	1435.0000	45.96	-6.82	39.14	74.00	-34.86	Peak
4	1435.0000	33.90	-6.82	27.08	54.00	-26.92	AVG
5	1775.0000	45.12	-4.54	40.58	74.00	-33.42	Peak
6	1775.0000	33.10	-4.54	28.56	54.00	-25.44	AVG
7	2095.0000	44.62	-2.47	42.15	74.00	-31.85	Peak
8	2095.0000	32.59	-2.47	30.12	54.00	-23.88	AVG
9	3265.0000	41.81	1.42	43.23	74.00	-30.77	Peak
10	3265.0000	30.10	1.42	31.52	54.00	-22.48	AVG
11	5080.0000	40.13	5.86	45.99	74.00	-28.01	Peak
12 *	5080.0000	28.40	5.86	34.26	54.00	-19.74	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:PANG NGAI		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

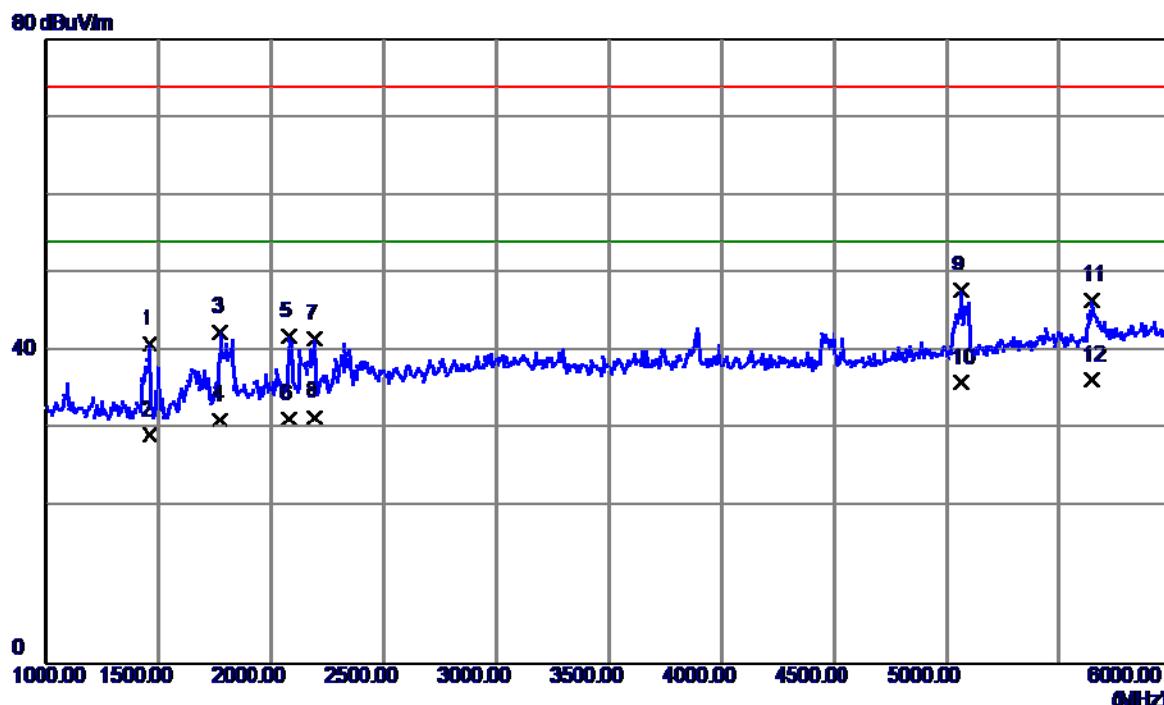


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1460.0000	47.65	-6.75	40.90	74.00	-33.10	Peak
2	1460.0000	36.09	-6.75	29.34	54.00	-24.66	AVG
3	1775.0000	47.02	-4.54	42.48	74.00	-31.52	Peak
4	1775.0000	35.80	-4.54	31.26	54.00	-22.74	AVG
5	2080.0000	44.41	-2.52	41.89	74.00	-32.11	Peak
6	2080.0000	33.90	-2.52	31.38	54.00	-22.62	AVG
7	2195.0000	43.70	-2.10	41.60	74.00	-32.40	Peak
8	2195.0000	33.70	-2.10	31.60	54.00	-22.40	AVG
9	5065.0000	41.96	5.81	47.77	74.00	-26.23	Peak
10	5065.0000	30.21	5.81	36.02	54.00	-17.98	AVG
11	5645.0000	38.79	7.74	46.53	74.00	-27.47	Peak
12 *	5645.0000	28.60	7.74	36.34	54.00	-17.66	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

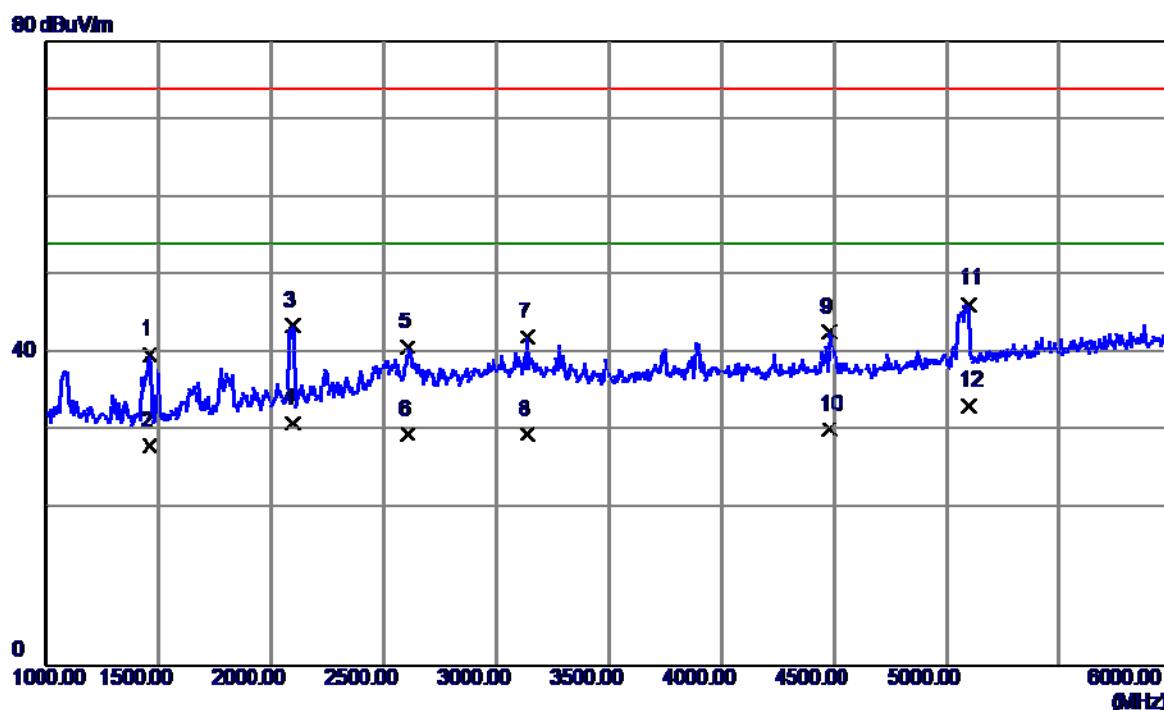


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1460.0000	46.59	-6.75	39.84	74.00	-34.16	Peak
2	1460.0000	34.89	-6.75	28.14	54.00	-25.86	AVG
3	2095.0000	45.98	-2.47	43.51	74.00	-30.49	Peak
4	2095.0000	33.49	-2.47	31.02	54.00	-22.98	AVG
5	2605.0000	41.28	-0.44	40.84	74.00	-33.16	Peak
6	2605.0000	30.09	-0.44	29.65	54.00	-24.35	AVG
7	3140.0000	40.65	1.47	42.12	74.00	-31.88	Peak
8	3140.0000	28.20	1.47	29.67	54.00	-24.33	AVG
9	4480.0000	39.24	3.46	42.70	74.00	-31.30	Peak
10	4480.0000	26.79	3.46	30.25	54.00	-23.75	AVG
11	5100.0000	40.39	5.93	46.32	74.00	-27.68	Peak
12 *	5100.0000	27.30	5.93	33.23	54.00	-20.77	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB Copy(EUT with PC) + IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

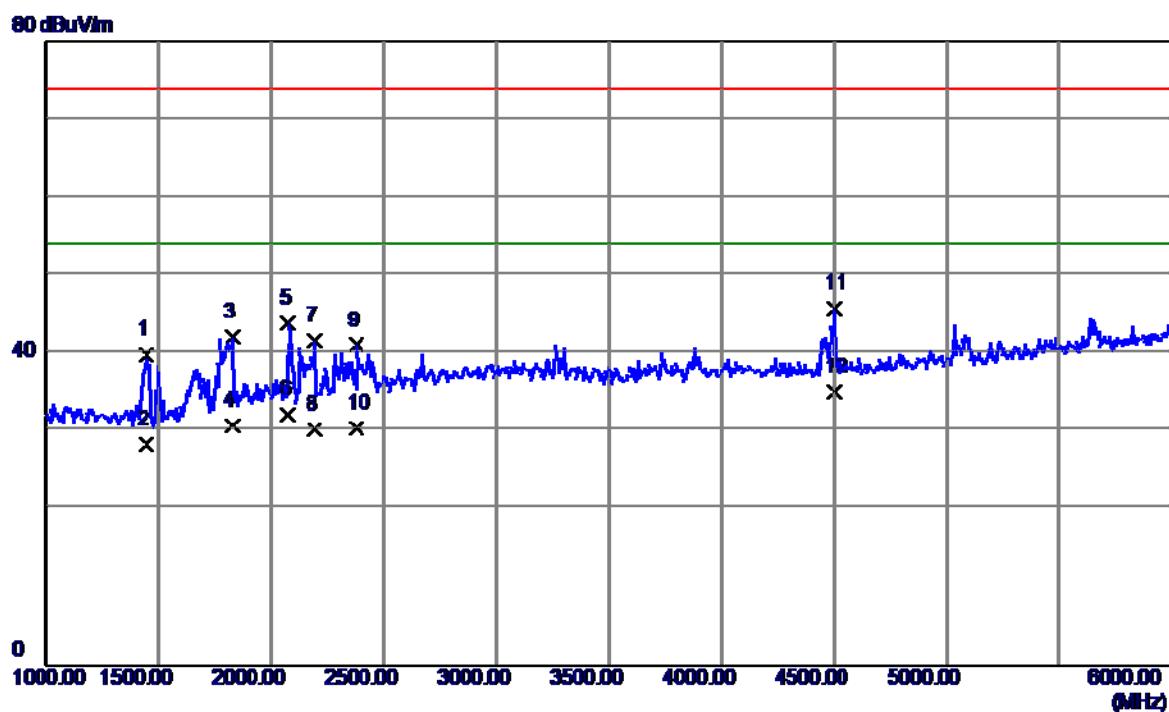


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1445.0000	46.70	-6.79	39.91	74.00	-34.09	Peak
2	1445.0000	35.10	-6.79	28.31	54.00	-25.69	AVG
3	1830.0000	46.16	-4.12	42.04	74.00	-31.96	Peak
4	1830.0000	34.90	-4.12	30.78	54.00	-23.22	AVG
5	2075.0000	46.40	-2.54	43.86	74.00	-30.14	Peak
6	2075.0000	34.69	-2.54	32.15	54.00	-21.85	AVG
7	2195.0000	43.64	-2.10	41.54	74.00	-32.46	Peak
8	2195.0000	32.30	-2.10	30.20	54.00	-23.80	AVG
9	2380.0000	42.45	-1.41	41.04	74.00	-32.96	Peak
10	2380.0000	31.80	-1.41	30.39	54.00	-23.61	AVG
11	4500.0000	42.34	3.48	45.82	74.00	-28.18	Peak
12 *	4500.0000	31.60	3.48	35.08	54.00	-18.92	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+ USB Cable:FOXCONN+ Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

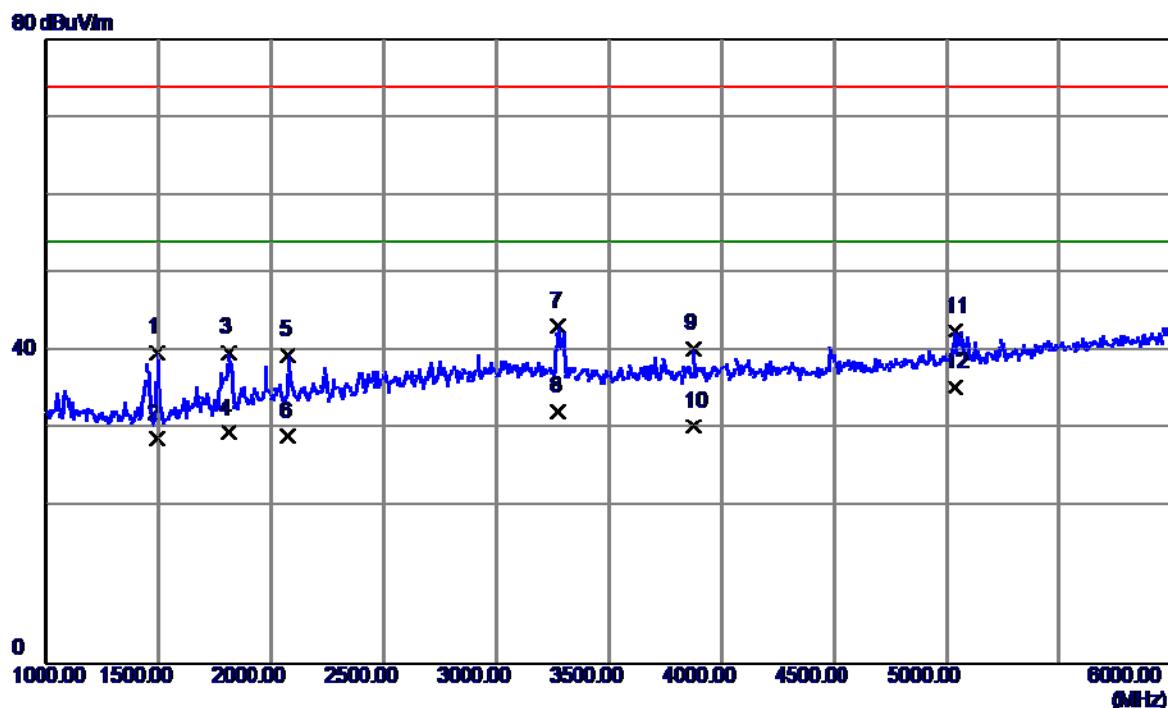


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	46.43	-6.66	39.77	74.00	-34.23	Peak
2	1495.0000	35.39	-6.66	28.73	54.00	-25.27	AVG
3	1810.0000	44.19	-4.28	39.91	74.00	-34.09	Peak
4	1810.0000	33.80	-4.28	29.52	54.00	-24.48	AVG
5	2075.0000	42.06	-2.54	39.52	74.00	-34.48	Peak
6	2075.0000	31.69	-2.54	29.15	54.00	-24.85	AVG
7	3275.0000	41.78	1.41	43.19	74.00	-30.81	Peak
8	3275.0000	30.91	1.41	32.32	54.00	-21.68	AVG
9	3880.0000	37.80	2.56	40.36	74.00	-33.64	Peak
10	3880.0000	27.80	2.56	30.36	54.00	-23.64	AVG
11	5040.0000	36.85	5.73	42.58	74.00	-31.42	Peak
12 *	5040.0000	29.71	5.73	35.44	54.00	-18.56	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+ USB Cable:FOXCONN+ Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

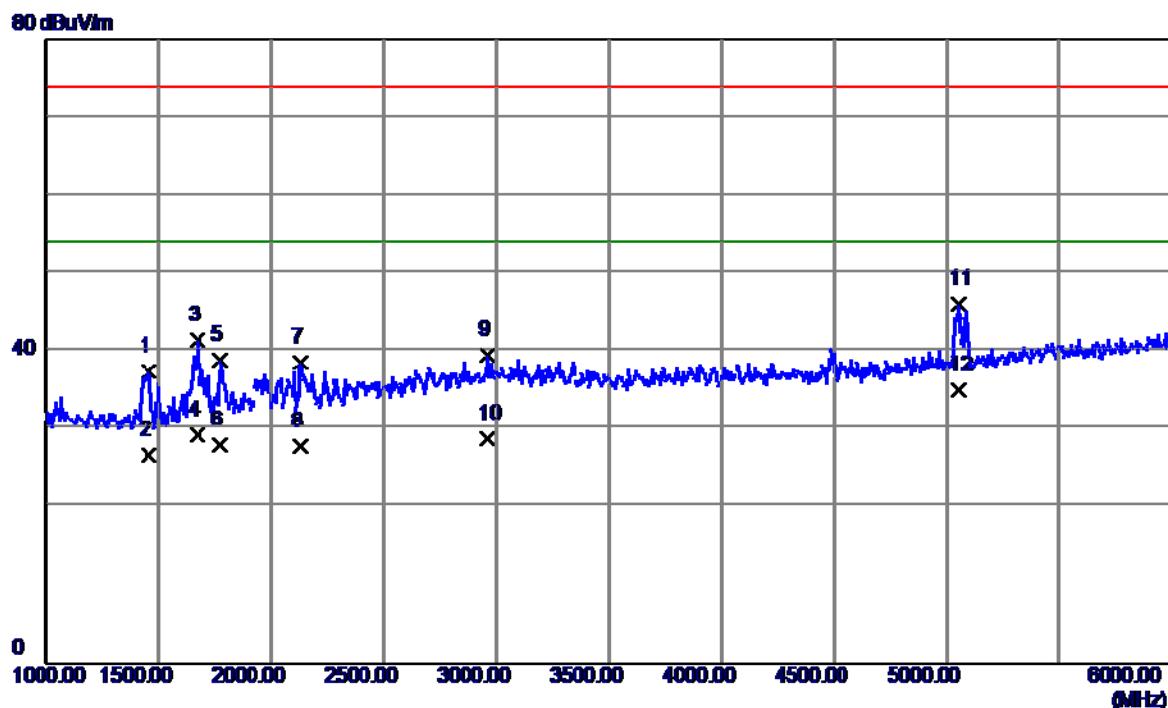


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1455.0000	44.14	-6.77	37.37	74.00	-36.63	Peak
2	1455.0000	33.50	-6.77	26.73	54.00	-27.27	AVG
3	1670.0000	46.75	-5.35	41.40	74.00	-32.60	Peak
4	1670.0000	34.70	-5.35	29.35	54.00	-24.65	AVG
5	1770.0000	43.45	-4.58	38.87	74.00	-35.13	Peak
6	1770.0000	32.60	-4.58	28.02	54.00	-25.98	AVG
7	2130.0000	40.83	-2.34	38.49	74.00	-35.51	Peak
8	2130.0000	30.11	-2.34	27.77	54.00	-26.23	AVG
9	2960.0000	38.24	1.33	39.57	74.00	-34.43	Peak
10	2960.0000	27.50	1.33	28.83	54.00	-25.17	AVG
11	5055.0000	40.27	5.78	46.05	74.00	-27.95	Peak
12 *	5055.0000	29.30	5.78	35.08	54.00	-18.92	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	AdapterBYD+ USB Cable:FOXCONN+ Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

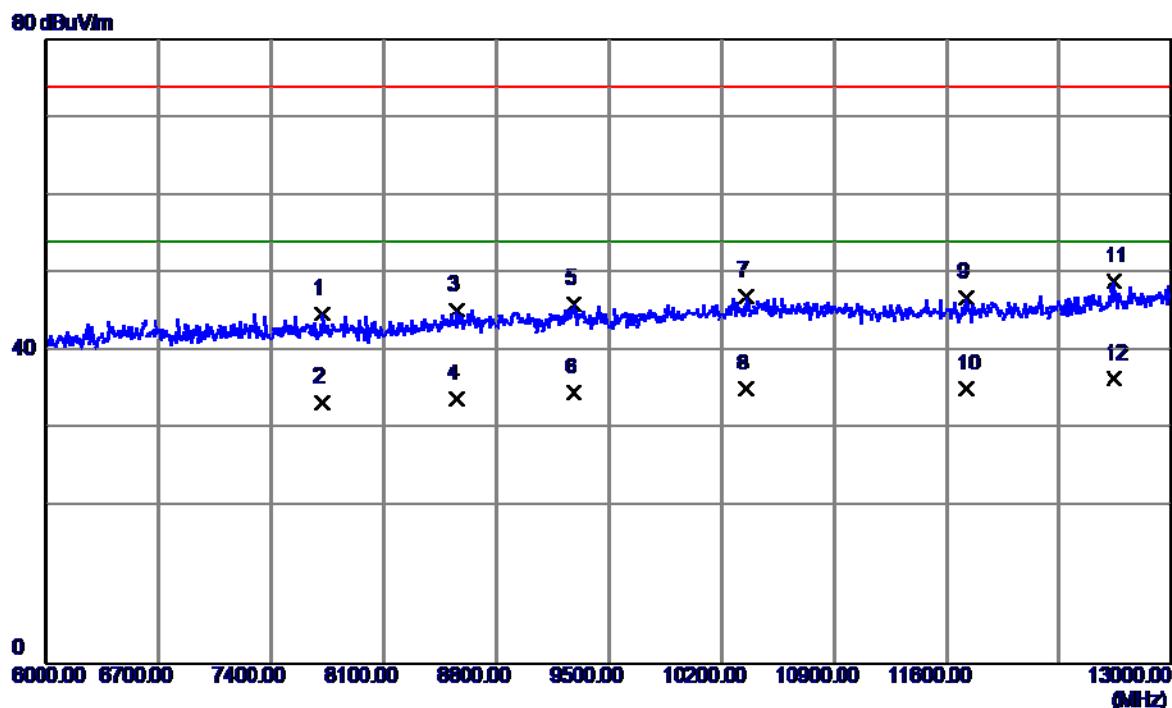


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7722.0000	32.99	11.74	44.73	74.00	-29.27	Peak
2	7722.0000	21.70	11.74	33.44	54.00	-20.56	AVG
3	8548.0000	32.22	13.04	45.26	74.00	-28.74	Peak
4	8548.0000	20.90	13.04	33.94	54.00	-20.06	AVG
5	9283.0000	32.78	13.28	46.06	74.00	-27.94	Peak
6	9283.0000	21.40	13.28	34.68	54.00	-19.32	AVG
7	10354.0000	32.03	14.95	46.98	74.00	-27.02	Peak
8	10354.0000	20.29	14.95	35.24	54.00	-18.76	AVG
9	11726.0000	31.42	15.48	46.90	74.00	-27.10	Peak
10	11726.0000	19.79	15.48	35.27	54.00	-18.73	AVG
11	12643.0000	32.07	16.95	49.02	74.00	-24.98	Peak
12 *	12643.0000	19.59	16.95	36.54	54.00	-17.46	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+ USB Cable:FOXCONN+ Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

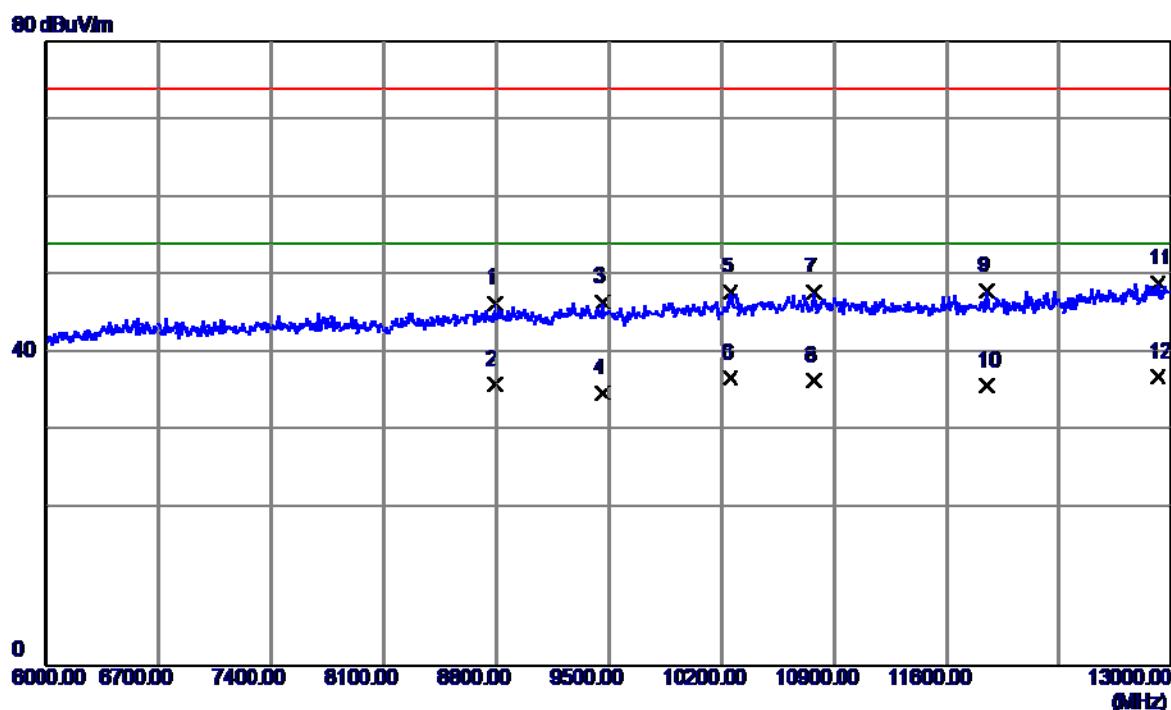


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1	8793.0000	33.19	13.22	46.41	74.00	-27.59	Peak
2	8793.0000	22.80	13.22	36.02	54.00	-17.98	AVG
3	9458.0000	33.33	13.22	46.55	74.00	-27.45	Peak
4	9458.0000	21.61	13.22	34.83	54.00	-19.17	AVG
5	10256.0000	33.05	14.72	47.77	74.00	-26.23	Peak
6	10256.0000	22.10	14.72	36.82	54.00	-17.18	AVG
7	10774.0000	32.23	15.64	47.87	74.00	-26.13	Peak
8	10774.0000	20.81	15.64	36.45	54.00	-17.55	AVG
9	11852.0000	32.50	15.48	47.98	74.00	-26.02	Peak
10	11852.0000	20.30	15.48	35.78	54.00	-18.22	AVG
11	12916.0000	31.12	17.86	48.98	74.00	-25.02	Peak
12 *	12916.0000	19.10	17.86	36.96	54.00	-17.04	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:PHITEK+ USB Cable:FOXCONN+Battery:Harbin		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

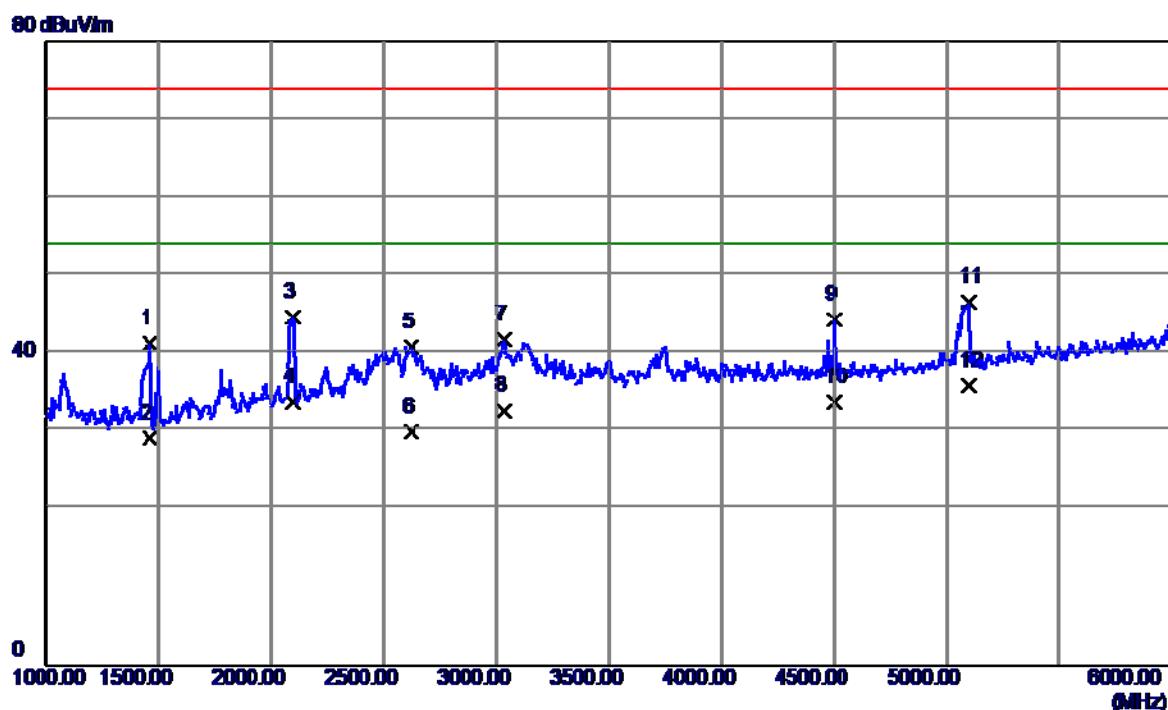


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1460.0000	48.09	-6.75	41.34	74.00	-32.66	Peak
2	1460.0000	35.89	-6.75	29.14	54.00	-24.86	AVG
3	2095.0000	47.13	-2.47	44.66	74.00	-29.34	Peak
4	2095.0000	36.19	-2.47	33.72	54.00	-20.28	AVG
5	2620.0000	41.22	-0.37	40.85	74.00	-33.15	Peak
6	2620.0000	30.29	-0.37	29.92	54.00	-24.08	AVG
7	3035.0000	40.21	1.51	41.72	74.00	-32.28	Peak
8	3035.0000	31.20	1.51	32.71	54.00	-21.29	AVG
9	4500.0000	40.83	3.48	44.31	74.00	-29.69	Peak
10	4500.0000	30.30	3.48	33.78	54.00	-20.22	AVG
11	5100.0000	40.66	5.93	46.59	74.00	-27.41	Peak
12 *	5100.0000	29.90	5.93	35.83	54.00	-18.17	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:PHITEK+ USB Cable:FOXCONN+Battery:Harbin		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

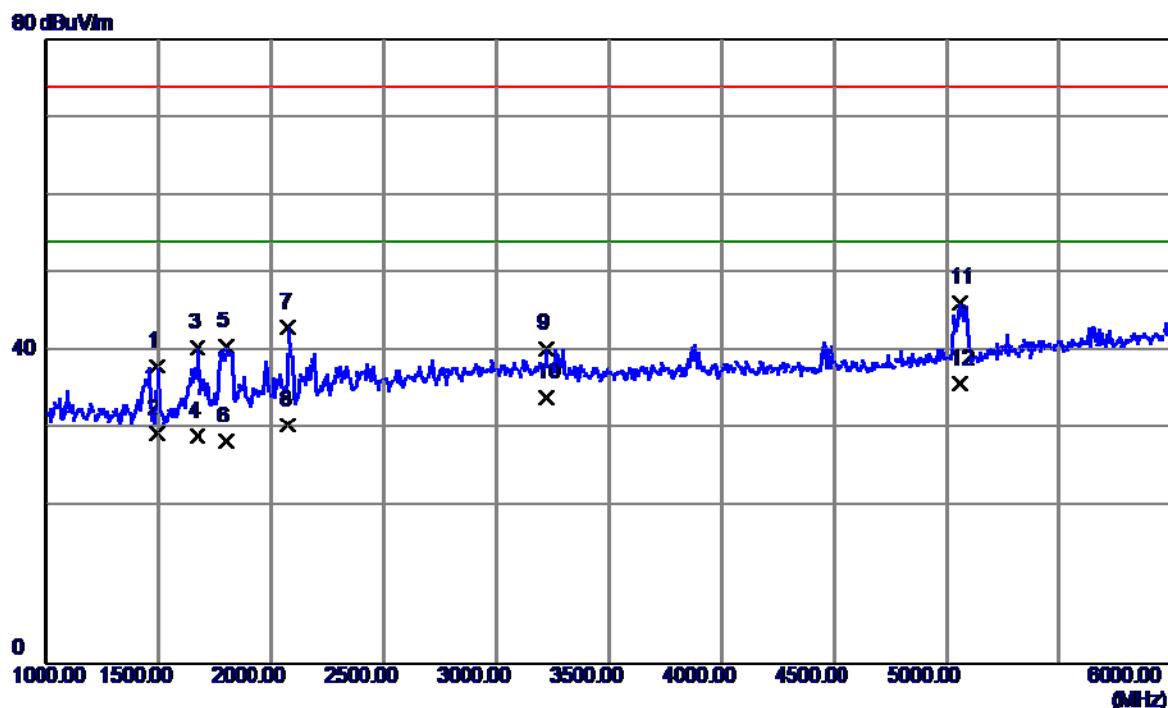


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	44.69	-6.66	38.03	74.00	-35.97	Peak
2	1495.0000	36.09	-6.66	29.43	54.00	-24.57	AVG
3	1670.0000	45.80	-5.35	40.45	74.00	-33.55	Peak
4	1670.0000	34.50	-5.35	29.15	54.00	-24.85	AVG
5	1800.0000	44.95	-4.35	40.60	74.00	-33.40	Peak
6	1800.0000	32.80	-4.35	28.45	54.00	-25.55	AVG
7	2075.0000	45.61	-2.54	43.07	74.00	-30.93	Peak
8	2075.0000	33.09	-2.54	30.55	54.00	-23.45	AVG
9	3220.0000	38.87	1.44	40.31	74.00	-33.69	Peak
10	3220.0000	32.69	1.44	34.13	54.00	-19.87	AVG
11	5060.0000	40.45	5.80	46.25	74.00	-27.75	Peak
12 *	5060.0000	30.09	5.80	35.89	54.00	-18.11	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:PHITEK+ USB Cable:FOXCONN+Battery:Harbin		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

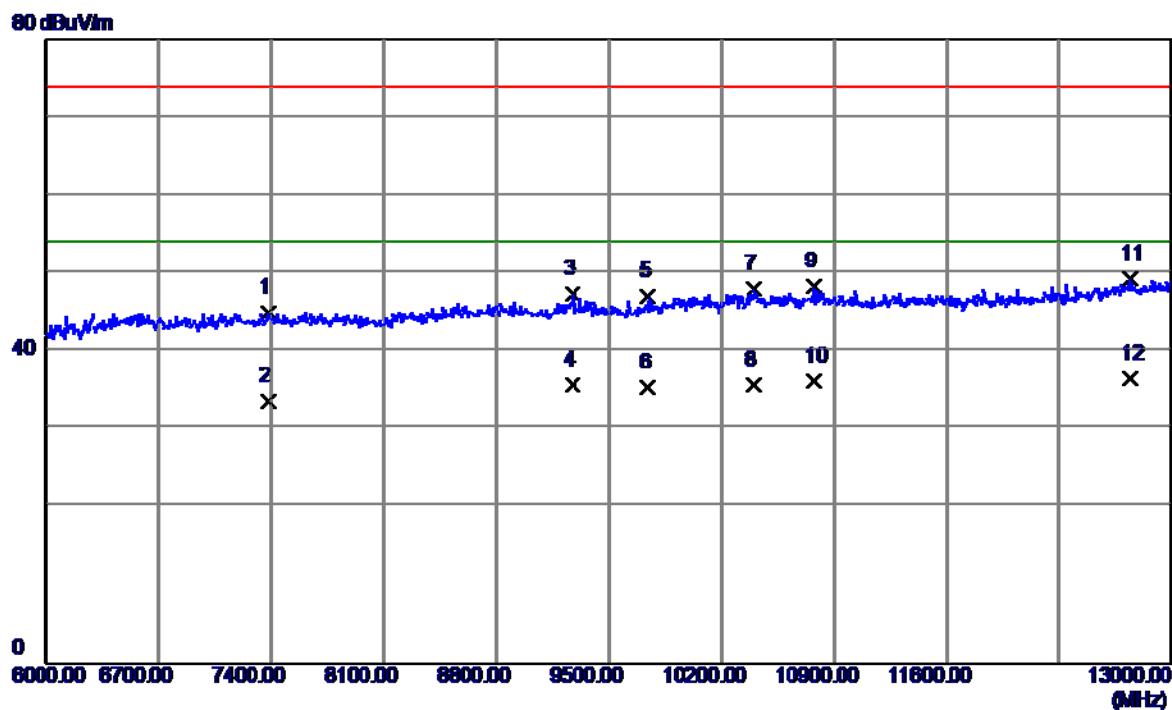


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1	7386.0000	33.46	11.52	44.98	74.00	-29.02	Peak
2	7386.0000	22.10	11.52	33.62	54.00	-20.38	AVG
3	9276.0000	34.05	13.28	47.33	74.00	-26.67	Peak
4	9276.0000	22.41	13.28	35.69	54.00	-18.31	AVG
5	9745.0000	33.43	13.65	47.08	74.00	-26.92	Peak
6	9745.0000	21.71	13.65	35.36	54.00	-18.64	AVG
7	10403.0000	32.91	15.06	47.97	74.00	-26.03	Peak
8	10403.0000	20.61	15.06	35.67	54.00	-18.33	AVG
9	10774.0000	32.62	15.64	48.26	74.00	-25.74	Peak
10	10774.0000	20.51	15.64	36.15	54.00	-17.85	AVG
11	12741.0000	31.99	17.27	49.26	74.00	-24.74	Peak
12 *	12741.0000	19.21	17.27	36.48	54.00	-17.52	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:PHITEK+ USB Cable:FOXCONN+Battery:Harbin		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

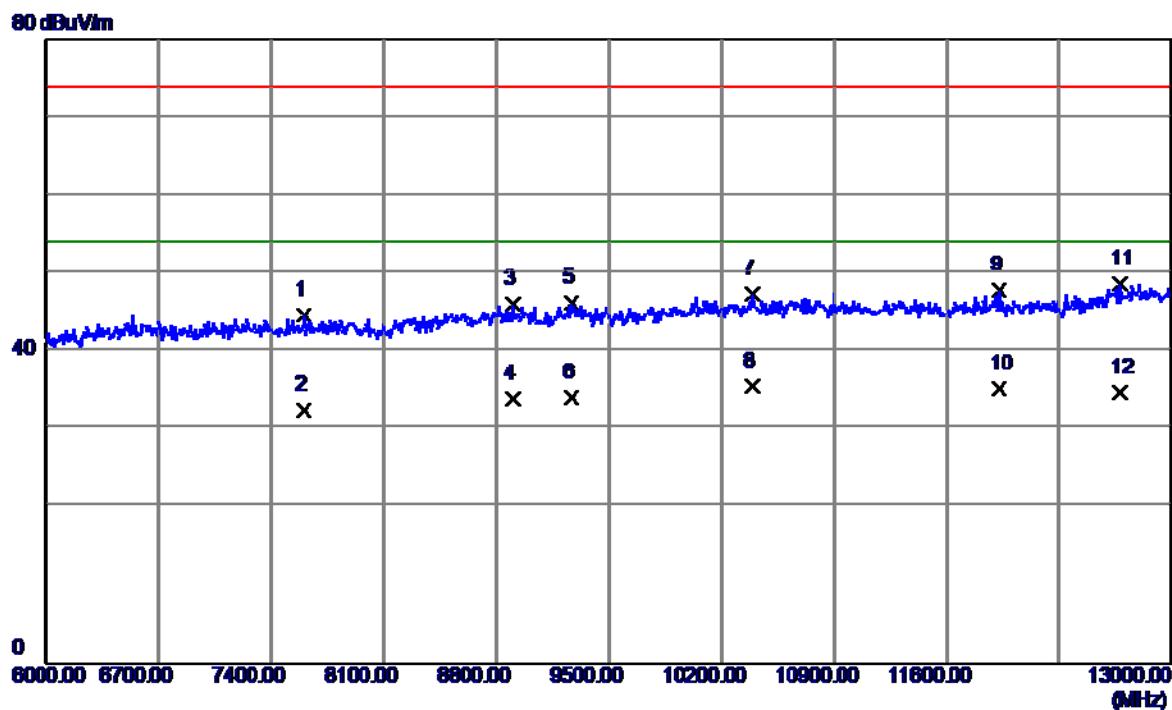


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7603.0000	32.89	11.74	44.63	74.00	-29.37	Peak
2	7603.0000	20.70	11.74	32.44	54.00	-21.56	AVG
3	8898.0000	32.75	13.30	46.05	74.00	-27.95	Peak
4	8898.0000	20.60	13.30	33.90	54.00	-20.10	AVG
5	9269.0000	32.94	13.29	46.23	74.00	-27.77	Peak
6	9269.0000	20.80	13.29	34.09	54.00	-19.91	AVG
7	10396.0000	32.33	15.05	47.38	74.00	-26.62	Peak
8 *	10396.0000	20.40	15.05	35.45	54.00	-18.55	AVG
9	11929.0000	32.29	15.48	47.77	74.00	-26.23	Peak
10	11929.0000	19.79	15.48	35.27	54.00	-18.73	AVG
11	12685.0000	31.54	17.09	48.63	74.00	-25.37	Peak
12	12685.0000	17.60	17.09	34.69	54.00	-19.31	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

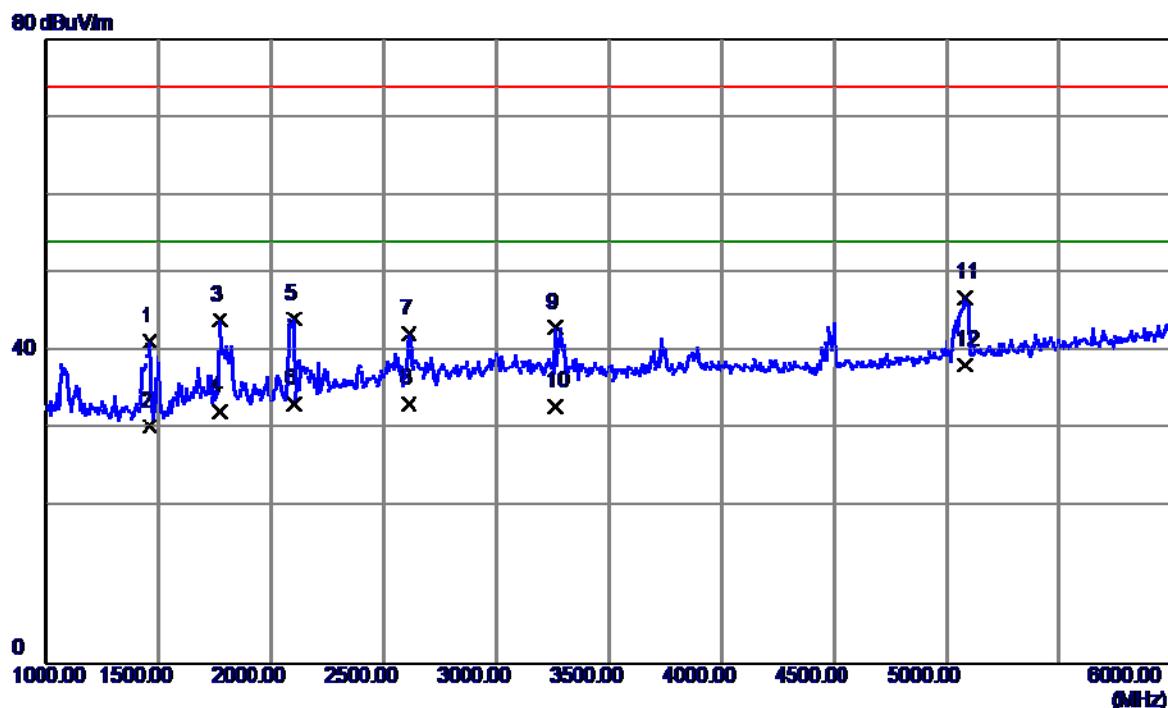


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1460.0000	48.09	-6.75	41.34	74.00	-32.66	Peak
2	1460.0000	37.09	-6.75	30.34	54.00	-23.66	AVG
3	1770.0000	48.60	-4.58	44.02	74.00	-29.98	Peak
4	1770.0000	36.90	-4.58	32.32	54.00	-21.68	AVG
5	2100.0000	46.64	-2.45	44.19	74.00	-29.81	Peak
6	2100.0000	35.80	-2.45	33.35	54.00	-20.65	AVG
7	2610.0000	42.72	-0.42	42.30	74.00	-31.70	Peak
8	2610.0000	33.70	-0.42	33.28	54.00	-20.72	AVG
9	3260.0000	41.63	1.42	43.05	74.00	-30.95	Peak
10	3260.0000	31.51	1.42	32.93	54.00	-21.07	AVG
11	5085.0000	41.01	5.88	46.89	74.00	-27.11	Peak
12 *	5085.0000	32.40	5.88	38.28	54.00	-15.72	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

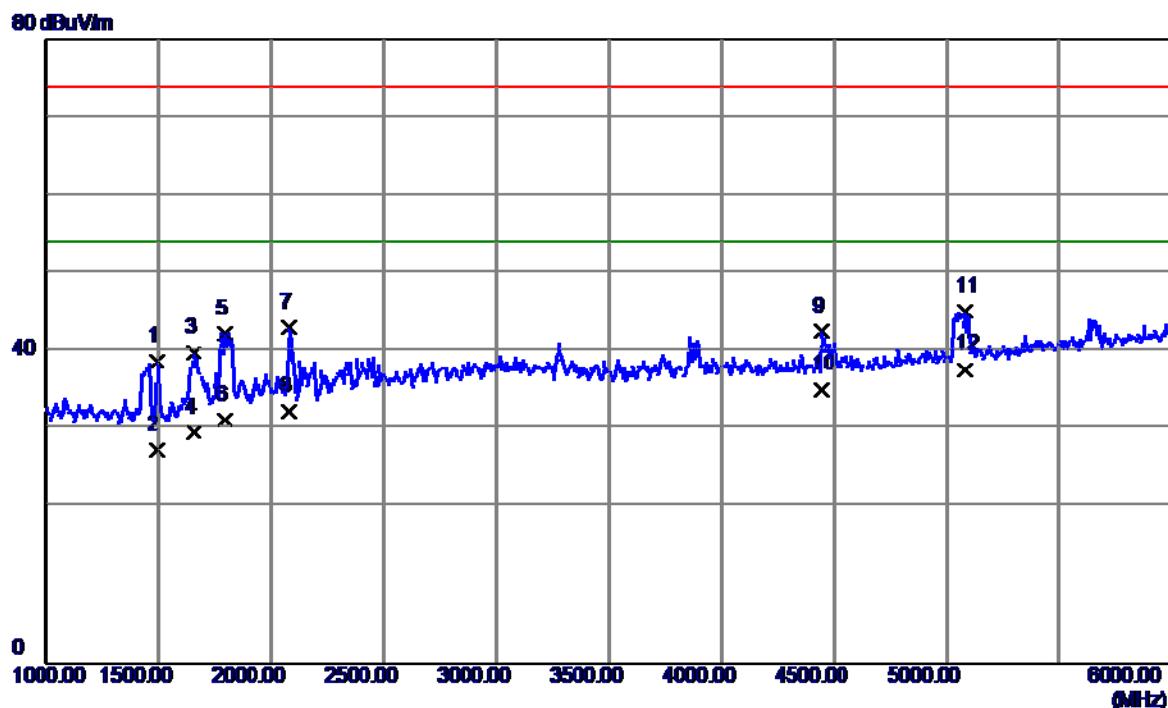


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	45.40	-6.66	38.74	74.00	-35.26	Peak
2	1495.0000	34.09	-6.66	27.43	54.00	-26.57	AVG
3	1655.0000	45.25	-5.46	39.79	74.00	-34.21	Peak
4	1655.0000	35.10	-5.46	29.64	54.00	-24.36	AVG
5	1795.0000	46.70	-4.39	42.31	74.00	-31.69	Peak
6	1795.0000	35.60	-4.39	31.21	54.00	-22.79	AVG
7	2080.0000	45.53	-2.52	43.01	74.00	-30.99	Peak
8	2080.0000	34.90	-2.52	32.38	54.00	-21.62	AVG
9	4445.0000	39.20	3.42	42.62	74.00	-31.38	Peak
10	4445.0000	31.70	3.42	35.12	54.00	-18.88	AVG
11	5085.0000	39.18	5.88	45.06	74.00	-28.94	Peak
12 *	5085.0000	31.80	5.88	37.68	54.00	-16.32	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

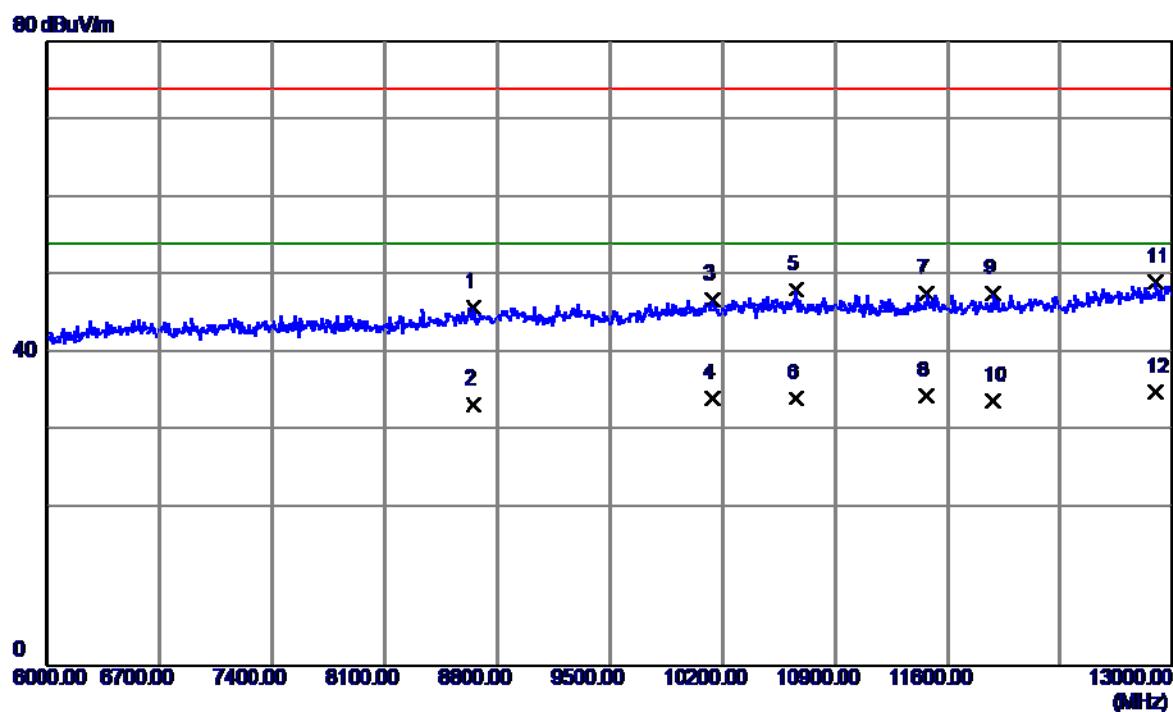


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
						dBuV/m	dB
1	8653. 0000	32. 78	13. 12	45. 90	74. 00	-28. 10	Peak
2	8653. 0000	20. 39	13. 12	33. 51	54. 00	-20. 49	AVG
3	10137. 0000	32. 40	14. 44	46. 84	74. 00	-27. 16	Peak
4	10137. 0000	19. 81	14. 44	34. 25	54. 00	-19. 75	AVG
5	10662. 0000	32. 66	15. 50	48. 16	74. 00	-25. 84	Peak
6	10662. 0000	18. 70	15. 50	34. 20	54. 00	-19. 80	AVG
7	11467. 0000	32. 22	15. 51	47. 73	74. 00	-26. 27	Peak
8	11467. 0000	19. 10	15. 51	34. 61	54. 00	-19. 39	AVG
9	11880. 0000	32. 20	15. 48	47. 68	74. 00	-26. 32	Peak
10	11880. 0000	18. 50	15. 48	33. 98	54. 00	-20. 02	AVG
11	12895. 0000	31. 31	17. 79	49. 10	74. 00	-24. 90	Peak
12 *	12895. 0000	17. 20	17. 79	34. 99	54. 00	-19. 01	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

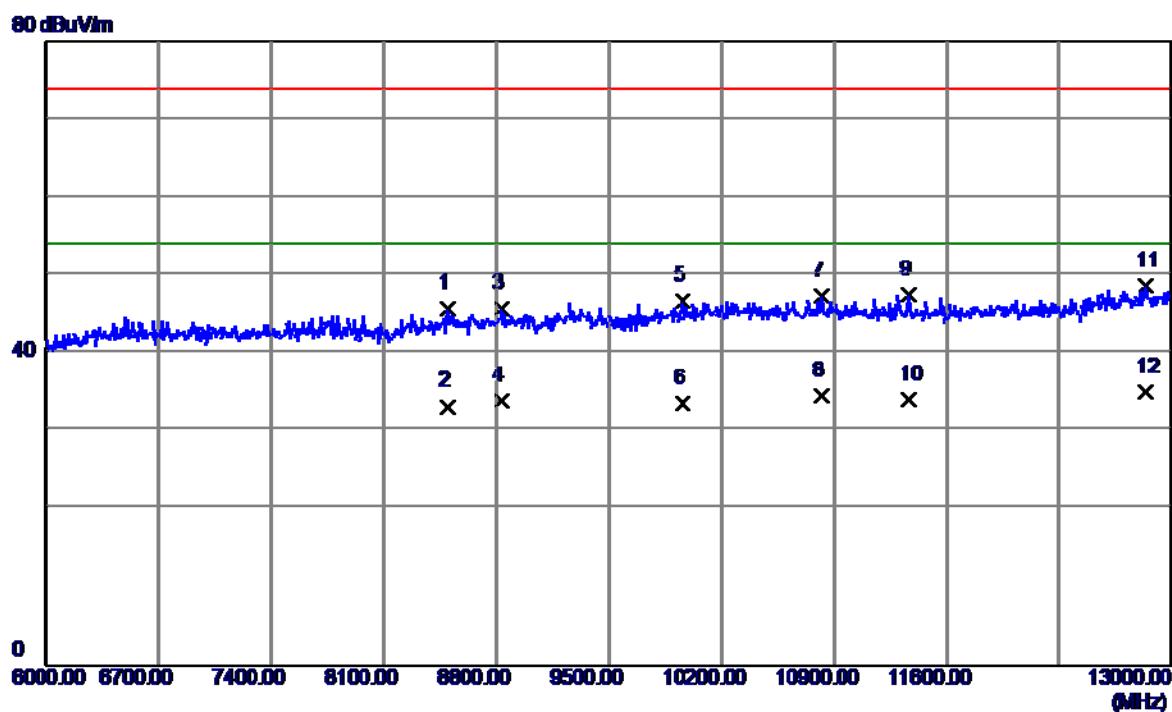


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	
1	8499.0000	32.69	13.00	45.69	74.00	-28.31	Peak
2	8499.0000	20.20	13.00	33.20	54.00	-20.80	AVG
3	8828.0000	32.54	13.25	45.79	74.00	-28.21	Peak
4	8828.0000	20.60	13.25	33.85	54.00	-20.15	AVG
5	9962.0000	32.64	14.05	46.69	74.00	-27.31	Peak
6	9962.0000	19.60	14.05	33.65	54.00	-20.35	AVG
7	10823.0000	31.71	15.70	47.41	74.00	-26.59	Peak
8	10823.0000	18.91	15.70	34.61	54.00	-19.39	AVG
9	11369.0000	31.93	15.60	47.53	74.00	-26.47	Peak
10	11369.0000	18.49	15.60	34.09	54.00	-19.91	AVG
11	12839.0000	31.03	17.60	48.63	74.00	-25.37	Peak
12 *	12839.0000	17.50	17.60	35.10	54.00	-18.90	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

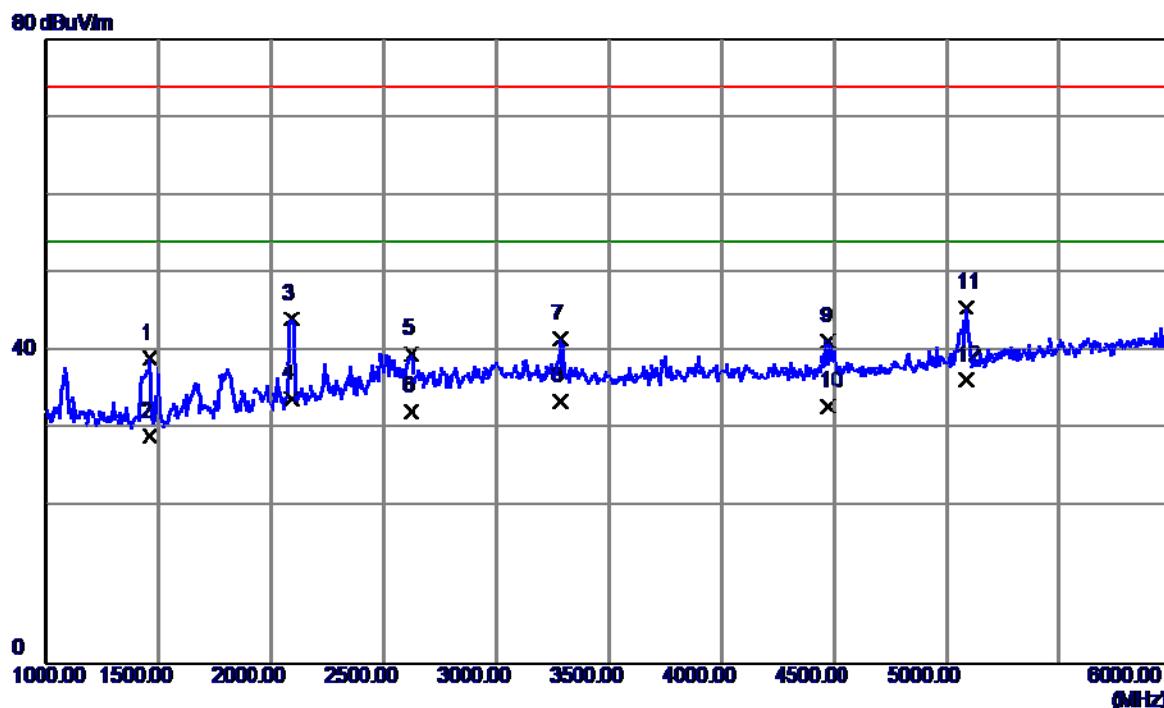


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1460.0000	45.87	-6.75	39.12	74.00	-34.88	Peak
2	1460.0000	35.89	-6.75	29.14	54.00	-24.86	AVG
3	2090.0000	46.70	-2.49	44.21	74.00	-29.79	Peak
4	2090.0000	36.41	-2.49	33.92	54.00	-20.08	AVG
5	2620.0000	40.01	-0.37	39.64	74.00	-34.36	Peak
6	2620.0000	32.69	-0.37	32.32	54.00	-21.68	AVG
7	3285.0000	40.18	1.41	41.59	74.00	-32.41	Peak
8	3285.0000	32.19	1.41	33.60	54.00	-20.40	AVG
9	4475.0000	37.90	3.45	41.35	74.00	-32.65	Peak
10	4475.0000	29.50	3.45	32.95	54.00	-21.05	AVG
11	5090.0000	39.77	5.89	45.66	74.00	-28.34	Peak
12 *	5090.0000	30.41	5.89	36.30	54.00	-17.70	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

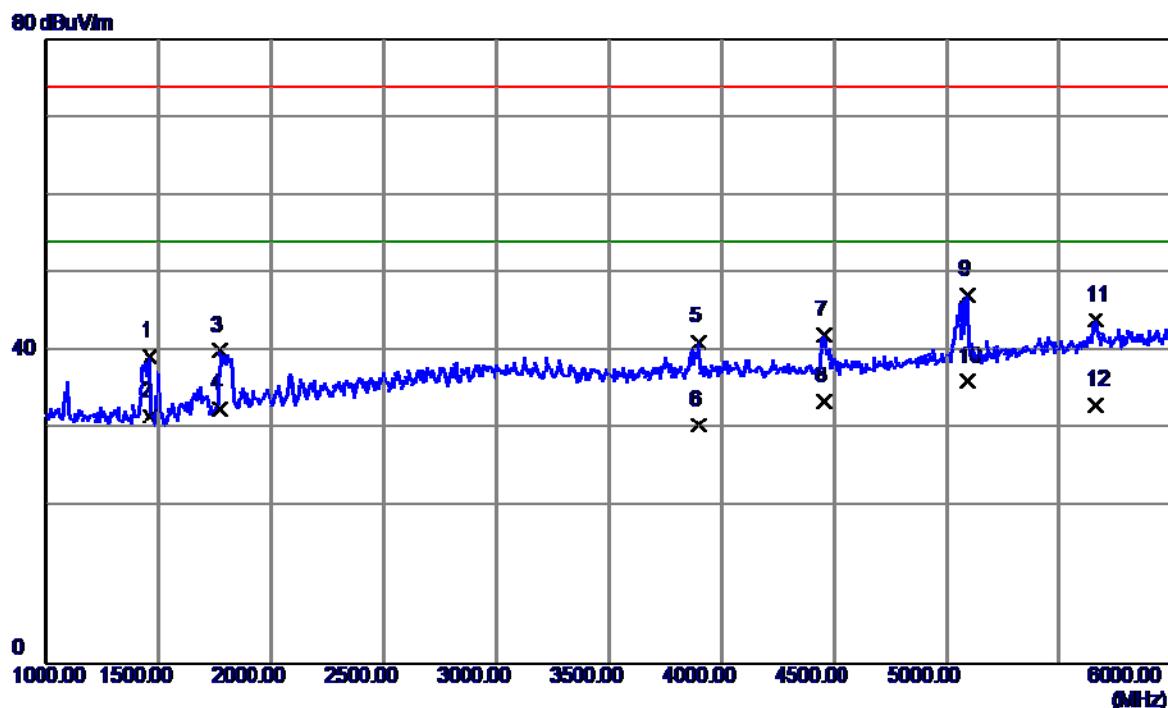


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1460.0000	46.18	-6.75	39.43	74.00	-34.57	Peak
2	1460.0000	38.39	-6.75	31.64	54.00	-22.36	AVG
3	1770.0000	44.66	-4.58	40.08	74.00	-33.92	Peak
4	1770.0000	37.20	-4.58	32.62	54.00	-21.38	AVG
5	3900.0000	38.58	2.62	41.20	74.00	-32.80	Peak
6	3900.0000	27.91	2.62	30.53	54.00	-23.47	AVG
7	4455.0000	38.69	3.43	42.12	74.00	-31.88	Peak
8	4455.0000	30.10	3.43	33.53	54.00	-20.47	AVG
9	5095.0000	41.22	5.91	47.13	74.00	-26.87	Peak
10 *	5095.0000	30.21	5.91	36.12	54.00	-17.88	AVG
11	5660.0000	36.14	7.79	43.93	74.00	-30.07	Peak
12	5660.0000	25.40	7.79	33.19	54.00	-20.81	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

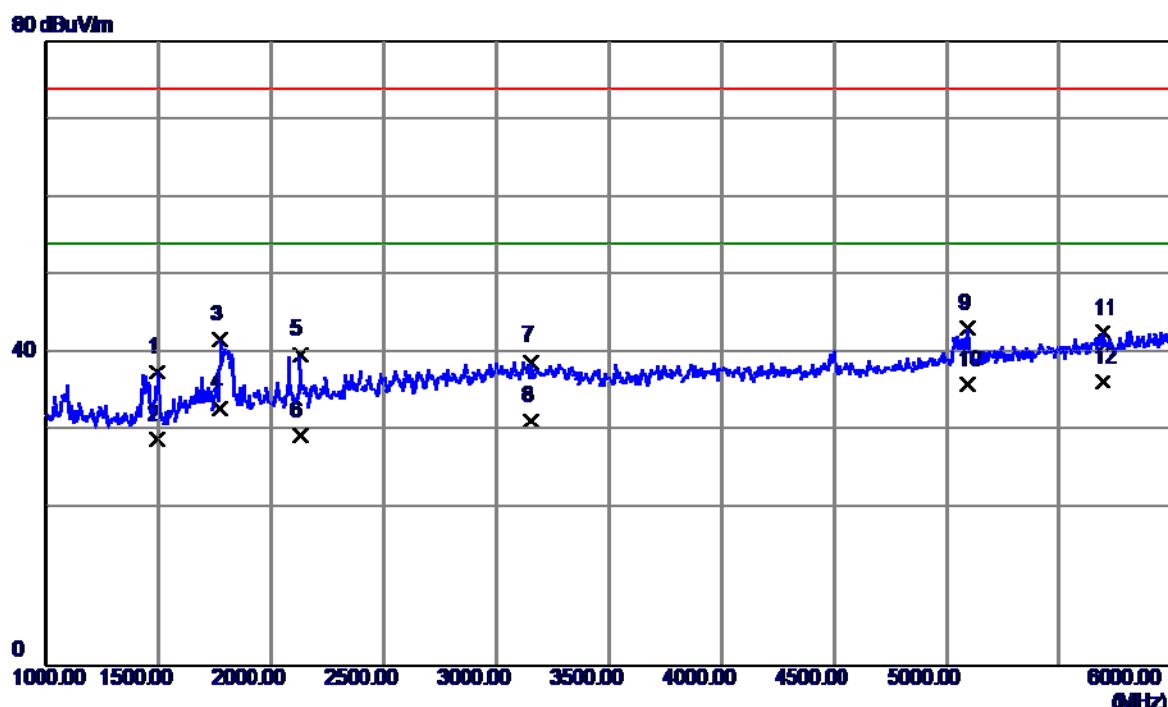

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	44.33	-6.66	37.67	74.00	-36.33	Peak
2	1495.0000	35.69	-6.66	29.03	54.00	-24.97	AVG
3	1770.0000	46.30	-4.58	41.72	74.00	-32.28	Peak
4	1770.0000	37.60	-4.58	33.02	54.00	-20.98	AVG
5	2125.0000	42.16	-2.36	39.80	74.00	-34.20	Peak
6	2125.0000	31.80	-2.36	29.44	54.00	-24.56	AVG
7	3155.0000	37.50	1.46	38.96	74.00	-35.04	Peak
8	3155.0000	29.90	1.46	31.36	54.00	-22.64	AVG
9	5095.0000	37.29	5.91	43.20	74.00	-30.80	Peak
10	5095.0000	30.11	5.91	36.02	54.00	-17.98	AVG
11	5695.0000	34.72	7.92	42.64	74.00	-31.36	Peak
12 *	5695.0000	28.40	7.92	36.32	54.00	-17.68	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-W09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:HK+ USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

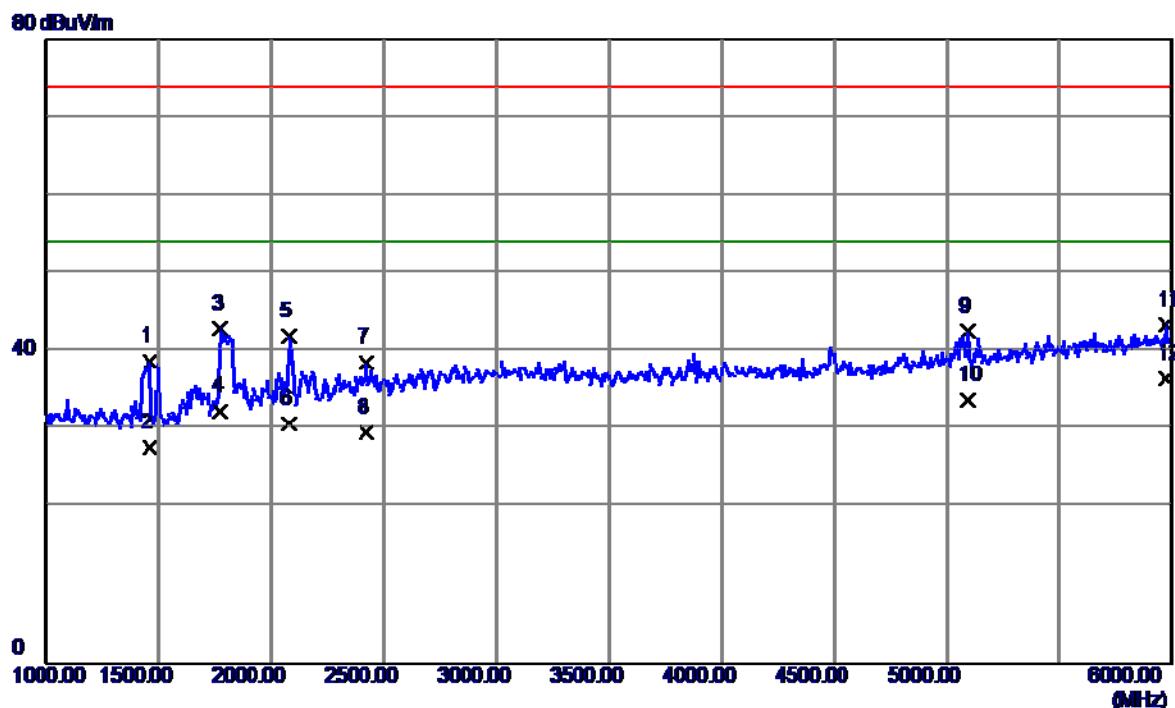

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1460.0000	45.48	-6.75	38.73	74.00	-35.27	Peak
2	1460.0000	34.49	-6.75	27.74	54.00	-26.26	AVG
3	1775.0000	47.48	-4.54	42.94	74.00	-31.06	Peak
4	1775.0000	36.80	-4.54	32.26	54.00	-21.74	AVG
5	2080.0000	44.50	-2.52	41.98	74.00	-32.02	Peak
6	2080.0000	33.20	-2.52	30.68	54.00	-23.32	AVG
7	2420.0000	39.84	-1.27	38.57	74.00	-35.43	Peak
8	2420.0000	30.80	-1.27	29.53	54.00	-24.47	AVG
9	5095.0000	36.70	5.91	42.61	74.00	-31.39	Peak
10	5095.0000	27.91	5.91	33.82	54.00	-20.18	AVG
11	5975.0000	34.47	8.90	43.37	74.00	-30.63	Peak
12 *	5975.0000	27.60	8.90	36.50	54.00	-17.50	AVG