


Appendix G

Radiated Emission of Enclosure in Idle Mode

According to FCC Part 15.109


ADAPTER TPCA-053065E

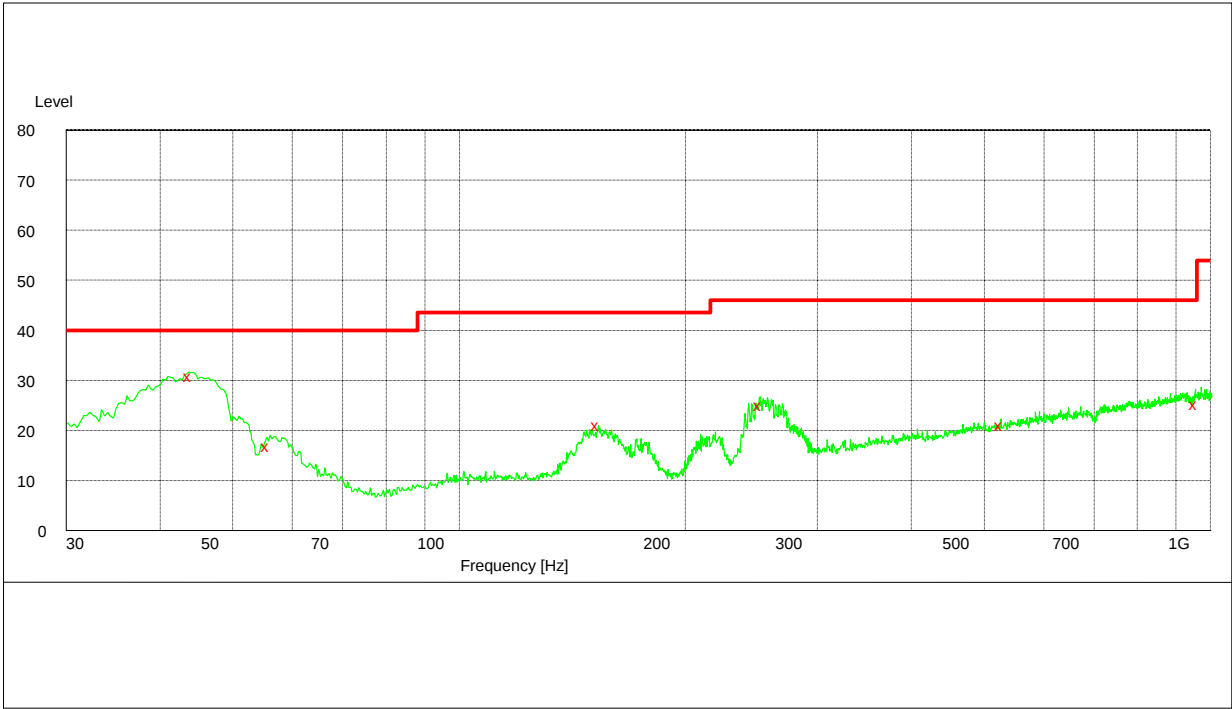

MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
43.980000	31.00	-13.5	40.0	9.0	108.0	360.00	VERTICAL
55.680000	16.90	-17.6	40.0	23.1	190.0	32.00	VERTICAL
153.420000	21.10	-14.5	43.5	22.4	162.0	15.00	HORIZONTAL
252.180000	25.20	-10.8	46.0	20.8	100.0	360.00	HORIZONTAL
528.600000	21.00	-5.0	46.0	25.0	273.0	82.00	VERTICAL
959.400000	25.60	1.6	46.0	20.4	155.0	84.00	HORIZONTAL

ADAPTER XQLCHW07

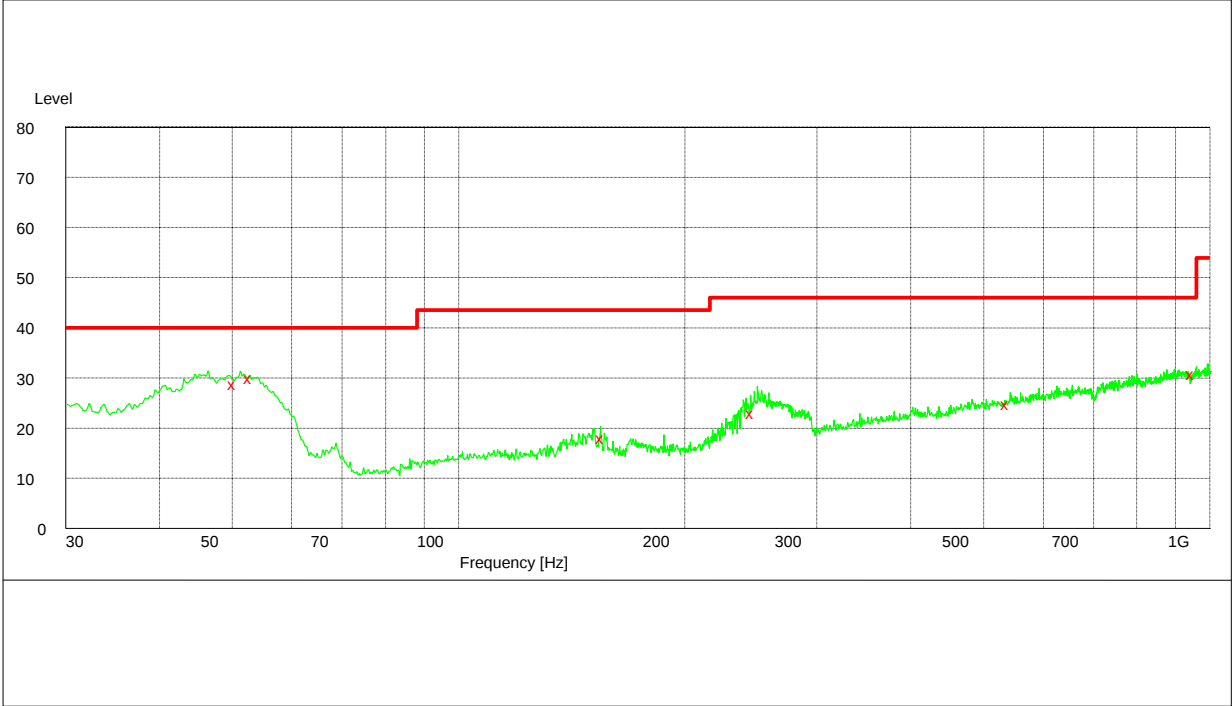

MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
50.640000	29.40	-15.9	40.0	10.6	100.0	74.00	VERTICAL
53.460000	30.90	-17.0	40.0	9.1	245.0	355.00	VERTICAL
154.560000	18.90	-14.5	43.5	24.6	200.0	127.00	VERTICAL
246.840000	22.30	-11.1	46.0	23.7	115.0	6.00	HORIZONTAL
539.100000	25.70	-4.7	46.0	20.3	241.0	197.00	HORIZONTAL
959.940000	30.70	1.6	46.0	15.3	225.0	302.00	HORIZONTAL