

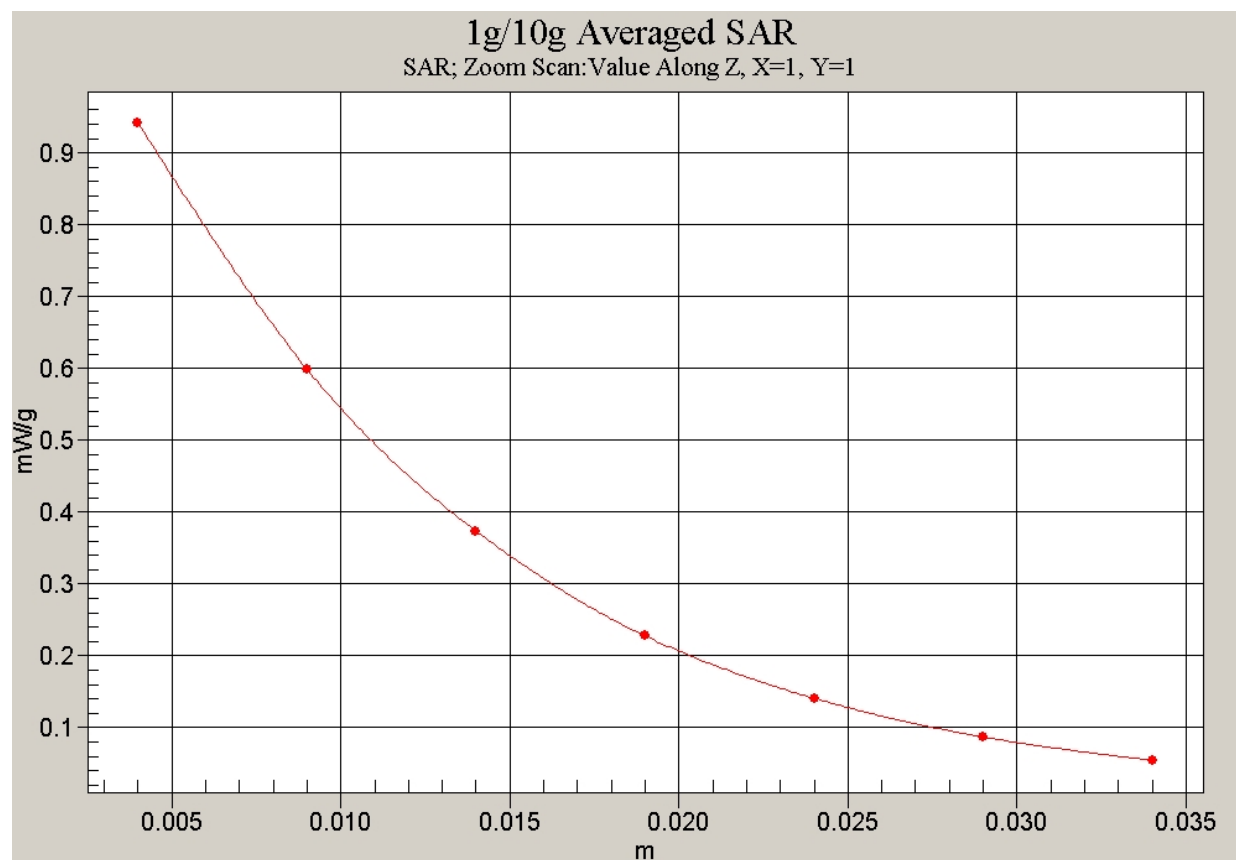


Fig. 10 Z-Scan at power reference point (CDMA 1900MHz, CH600)

CDMA 1900 MHz Left Tilt Low

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CDMA 1900 Frequency: 1851.25 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Tilt Low/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.483 mW/g


Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.8 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.695 W/kg

SAR(1 g) = 0.425 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.452 mW/g

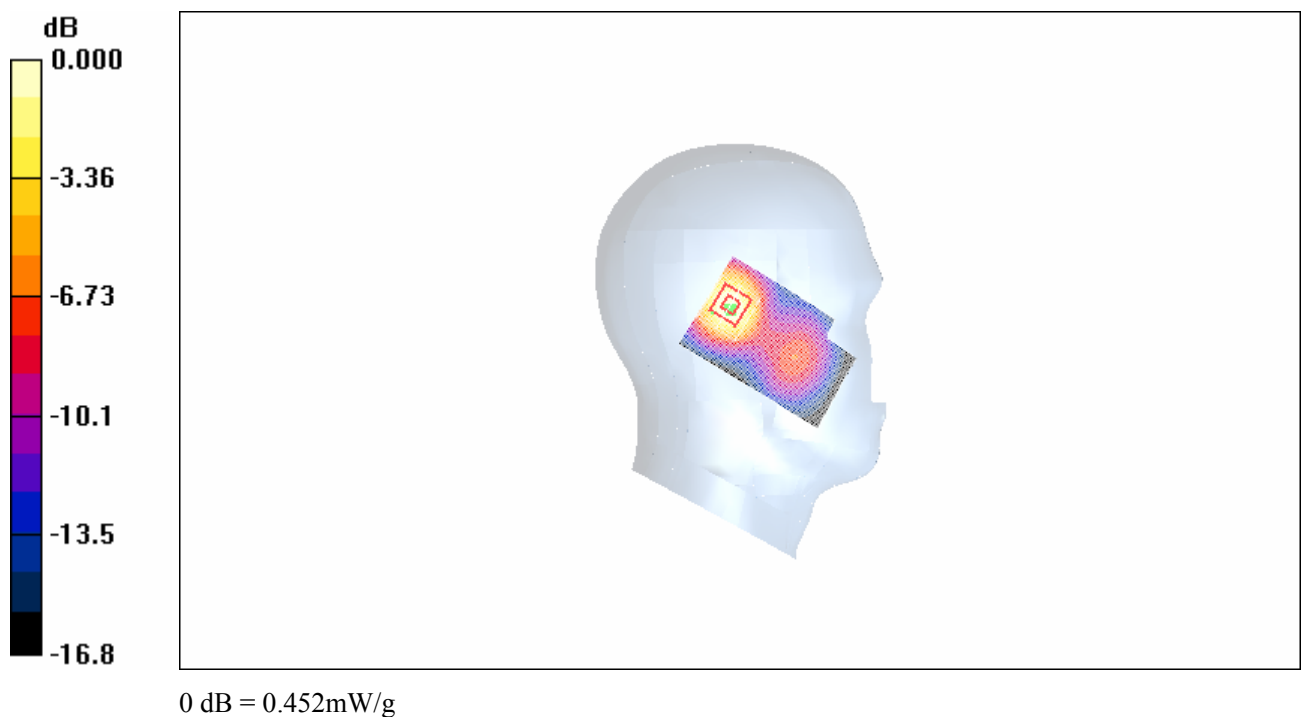**Fig. 11 Left Hand Tilt 15° CDMA 1900MHz CH25**

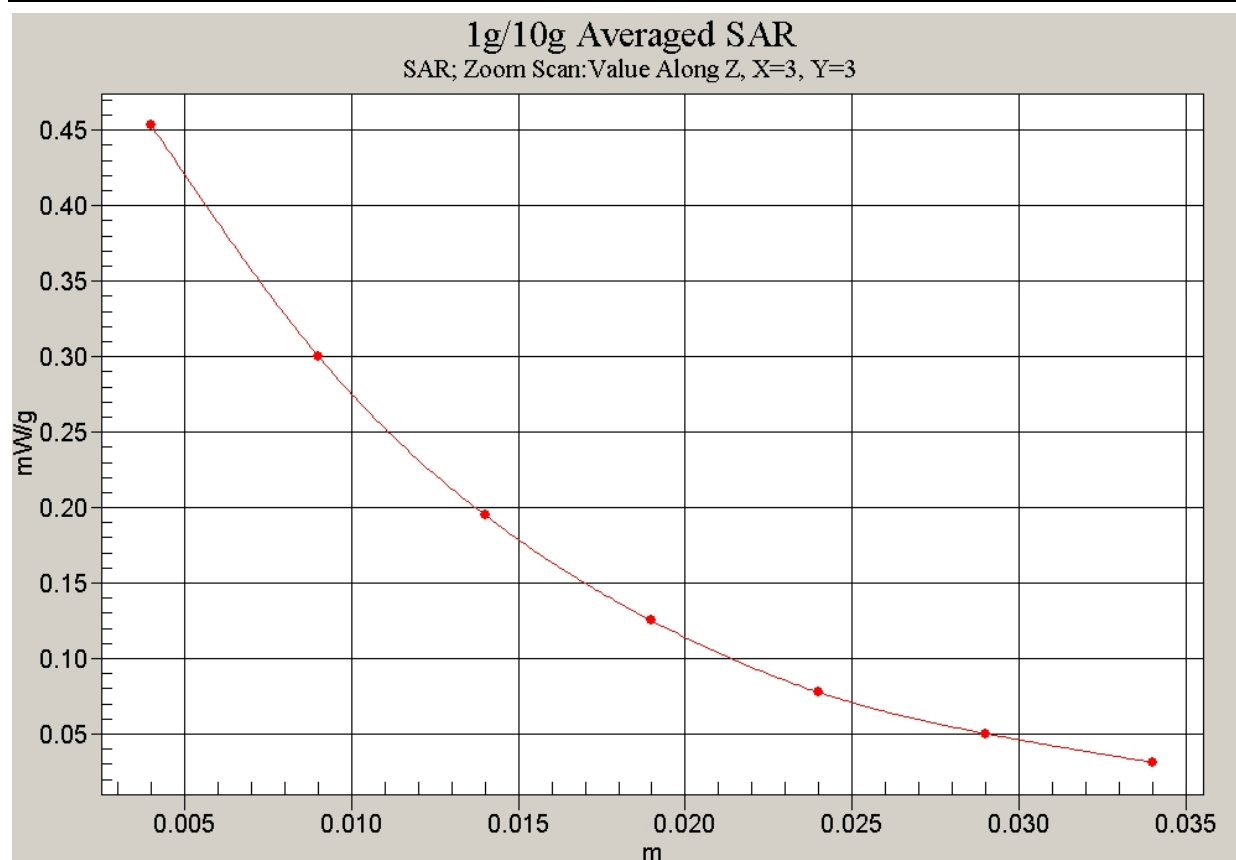


Fig. 12 Z-Scan at power reference point (CDMA 1900MHz, CH25)

CDMA 1900 MHz Right Cheek High

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CDMA 1900 Frequency: 1908.75 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)


Cheek High/Area Scan (51x81x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (interpolated) = 0.761 mW/g**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.3 V/m; Power Drift = -0.169 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.675 mW/g; SAR(10 g) = 0.394 mW/g

Maximum value of SAR (measured) = 0.718 mW/g

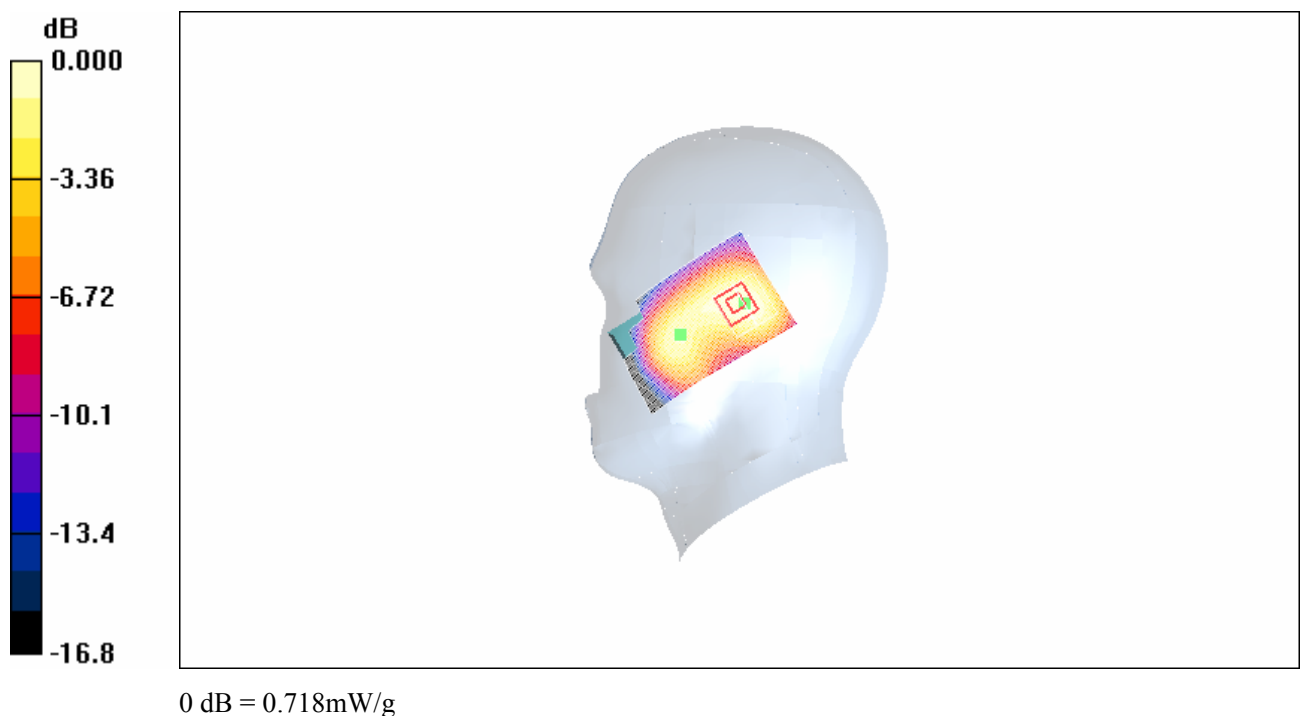**Fig. 13 Right Hand Touch Cheek CDMA 1900MHz CH1175**

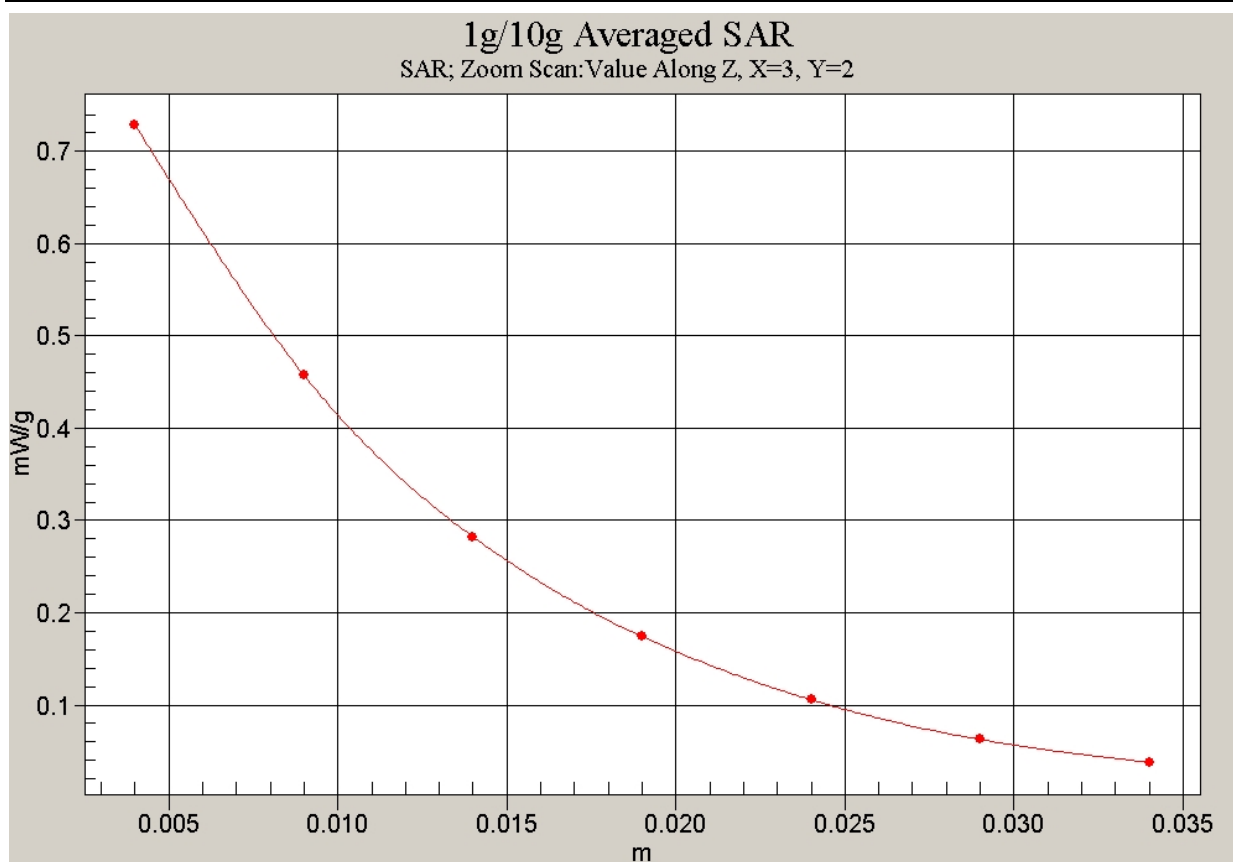


Fig. 14 Z-Scan at power reference point (CDMA 1900MHz, CH1175)

CDMA 1900 MHz Right Cheek Middle

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CDMA 1900 Frequency: 1880 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Cheek Middle/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.773 mW/g


Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.1 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.673 mW/g; SAR(10 g) = 0.391 mW/g

Maximum value of SAR (measured) = 0.723 mW/g

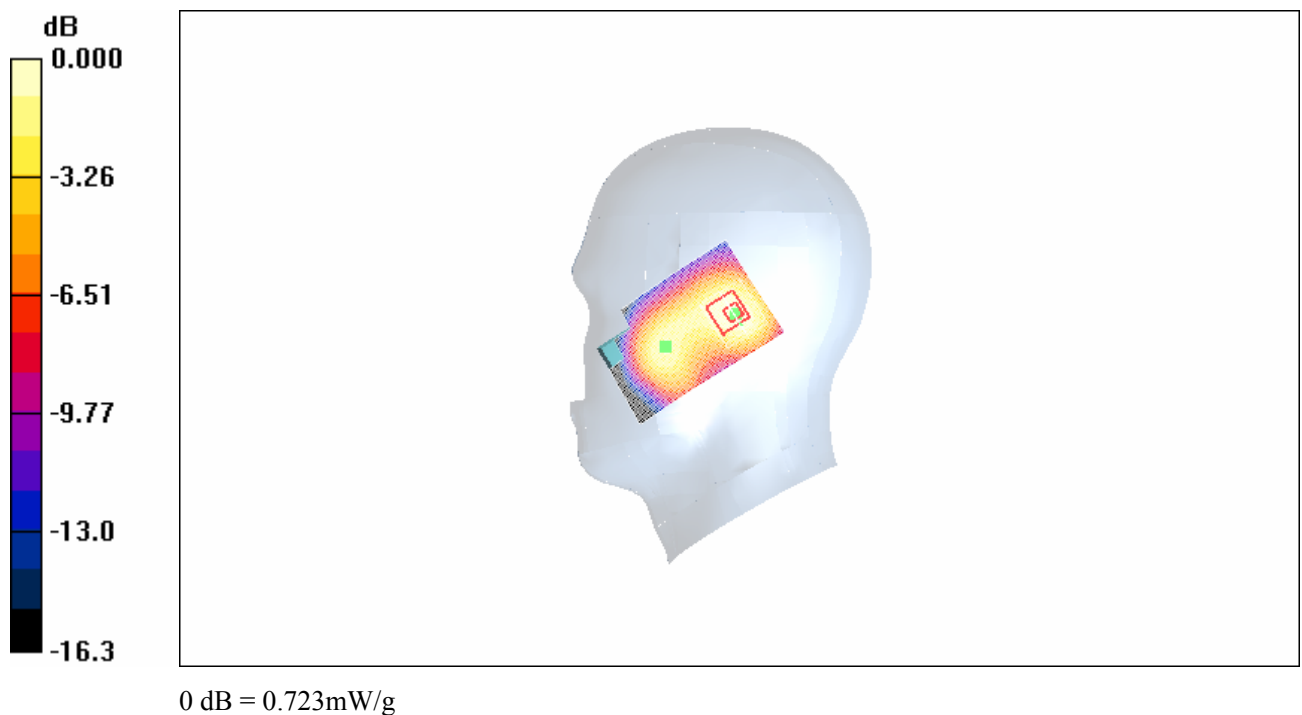**Fig. 15 Right Hand Touch Cheek CDMA 1900MHz CH600**

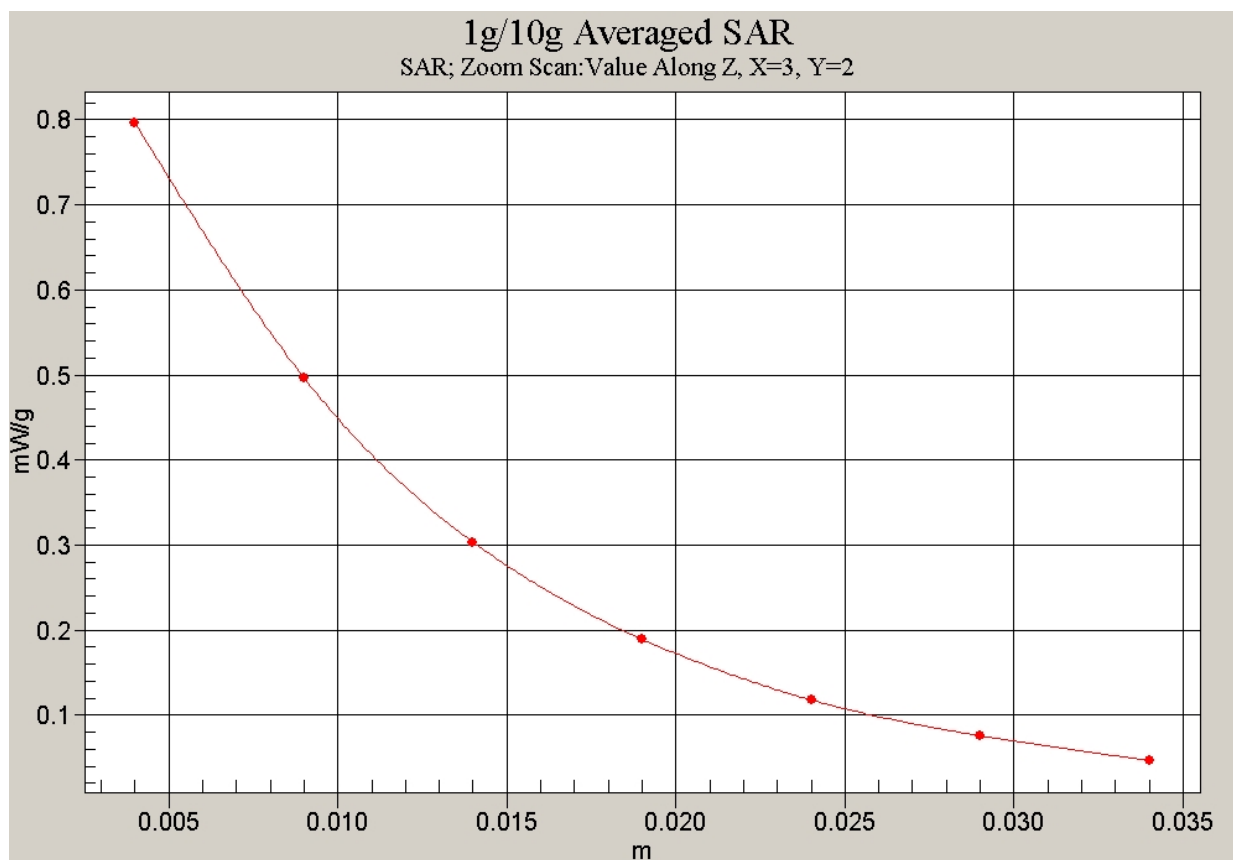


Fig. 16 Z-Scan at power reference point (CDMA 1900MHz, CH600)

CDMA 1900 MHz Right Cheek Low

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CDMA 1900 Frequency: 1851.25 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)


Cheek Low/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.392 mW/g**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.9 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.340 mW/g; SAR(10 g) = 0.199 mW/g

Maximum value of SAR (measured) = 0.369 mW/g

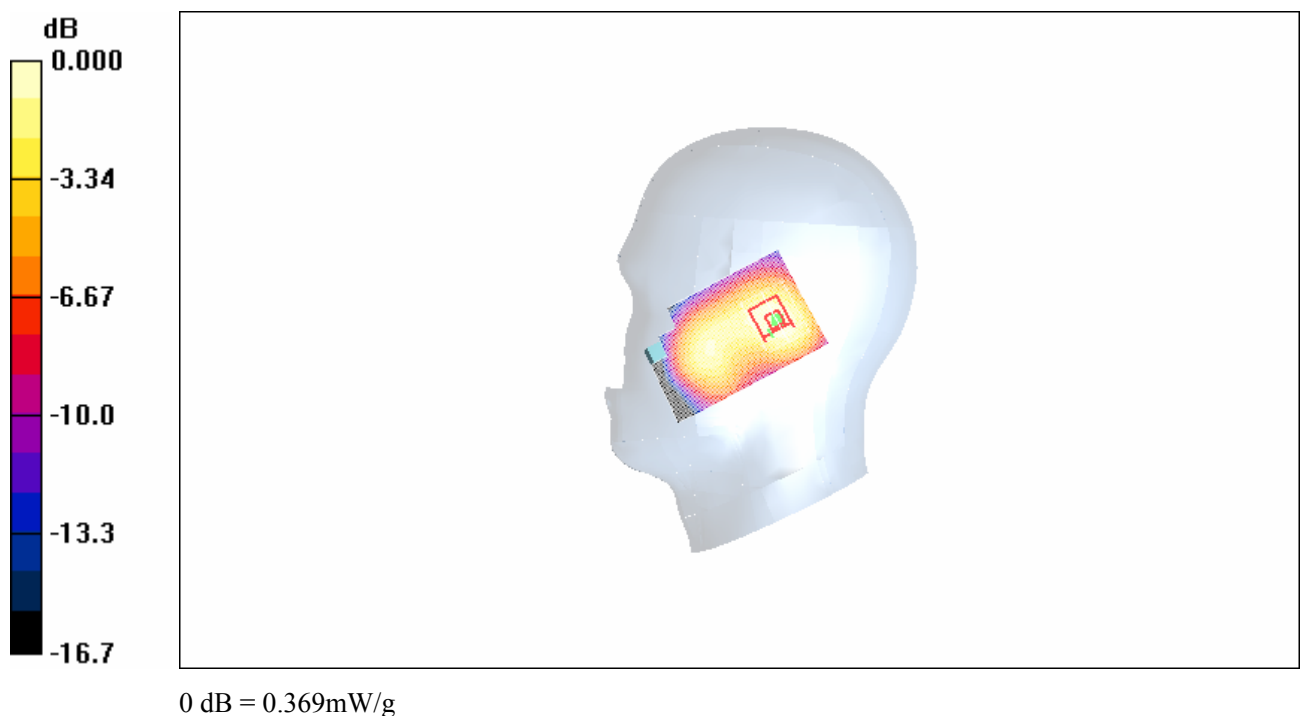**Fig. 17 Right Hand Touch Cheek CDMA 1900MHz CH25**

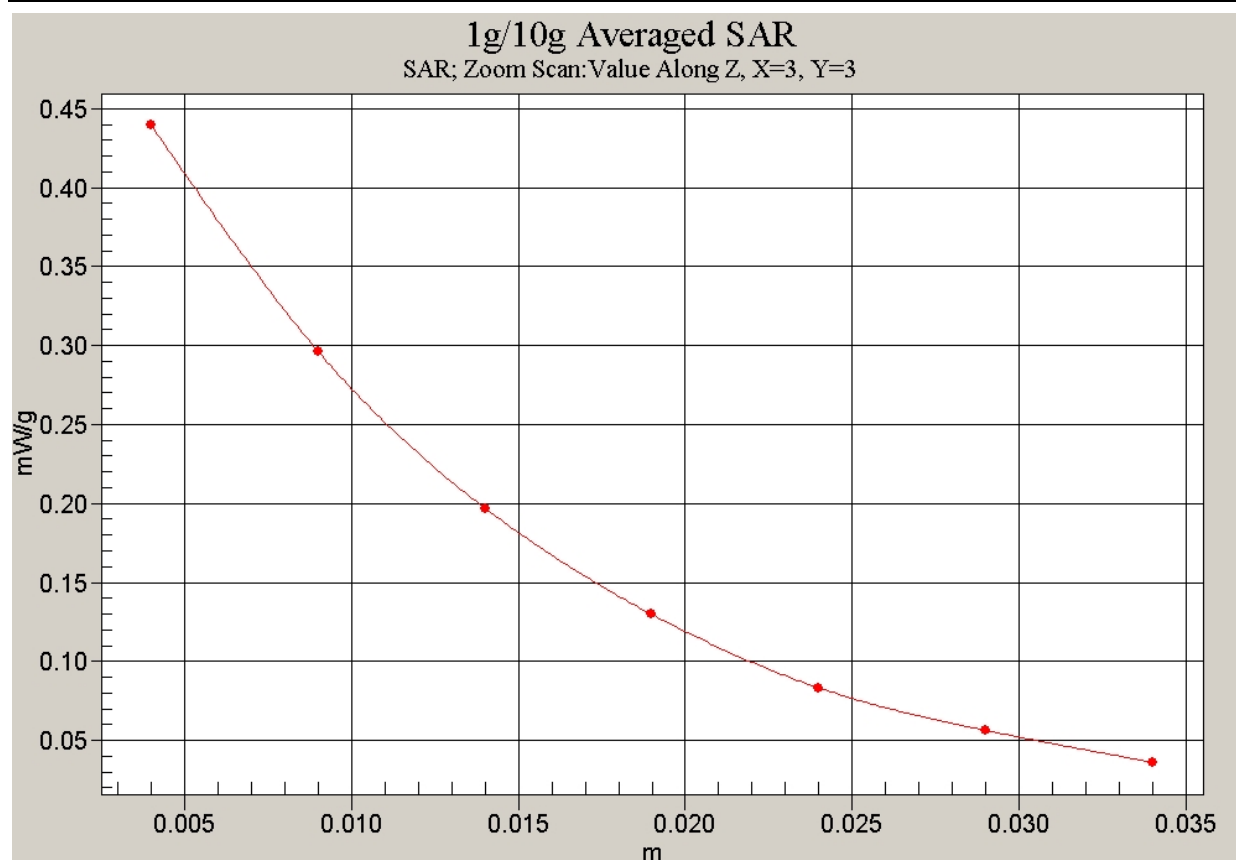


Fig. 18 Z-Scan at power reference point (CDMA 1900MHz, CH25)

CDMA 1900 MHz Right Tilt High

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CDMA 1900 Frequency: 1908.75 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Tilt High/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.921 mW/g


Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = -0.126 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.786 mW/g; SAR(10 g) = 0.425 mW/g

Maximum value of SAR (measured) = 0.845 mW/g

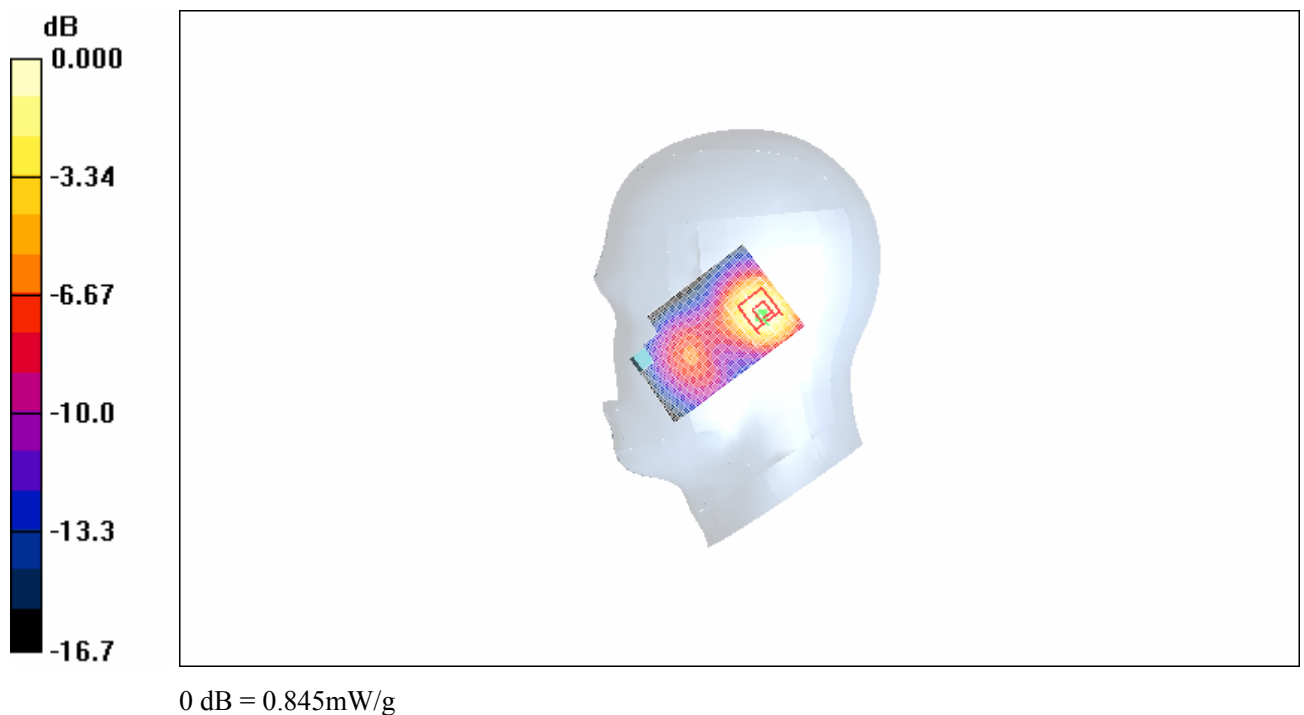**Fig. 19 Right Hand Tilt 15° CDMA 1900MHz CH1175**

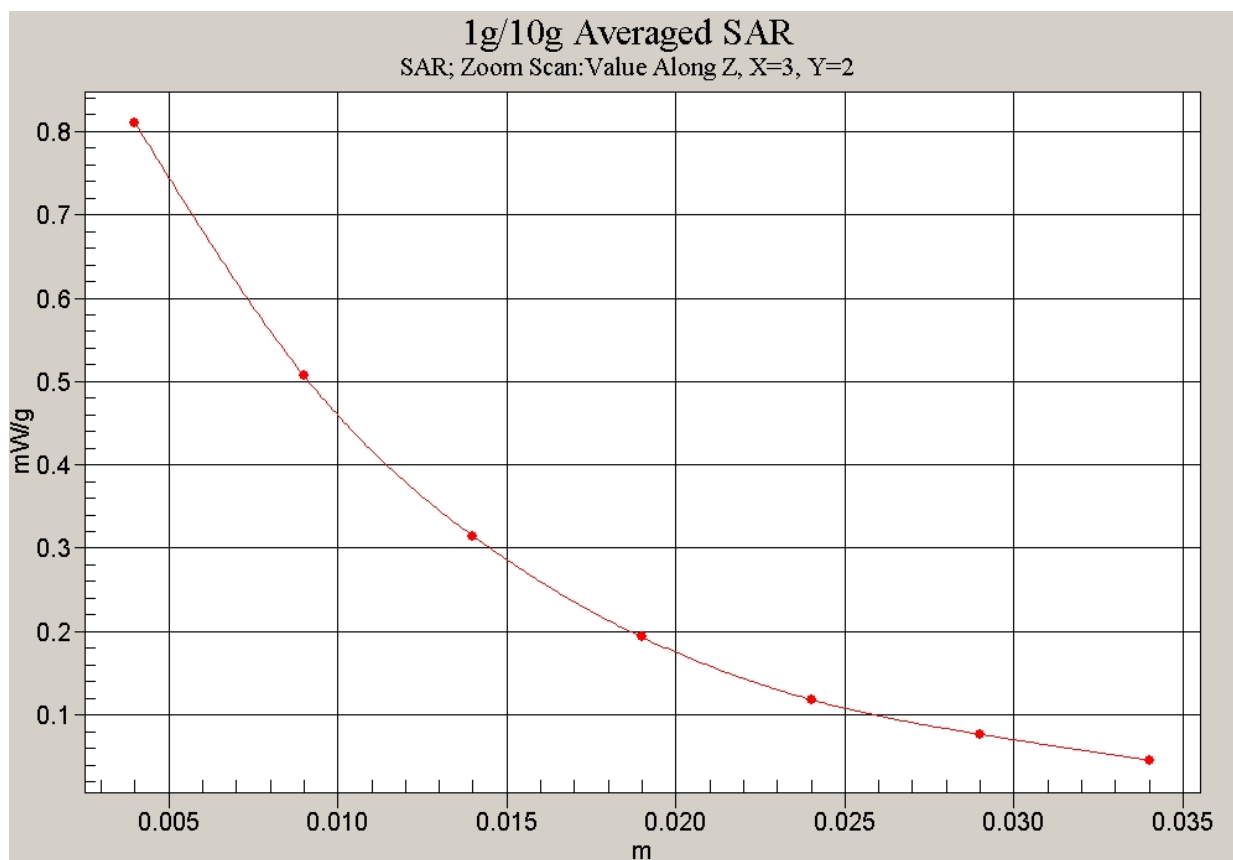


Fig. 20 Z-Scan at power reference point (CDMA 1900MHz, CH1175)

CDMA 1900 MHz Right Tilt Middle

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CDMA 1900 Frequency: 1880 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Tilt Middle/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.895 mW/g


Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.6 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.768 mW/g; SAR(10 g) = 0.418 mW/g

Maximum value of SAR (measured) = 0.837 mW/g

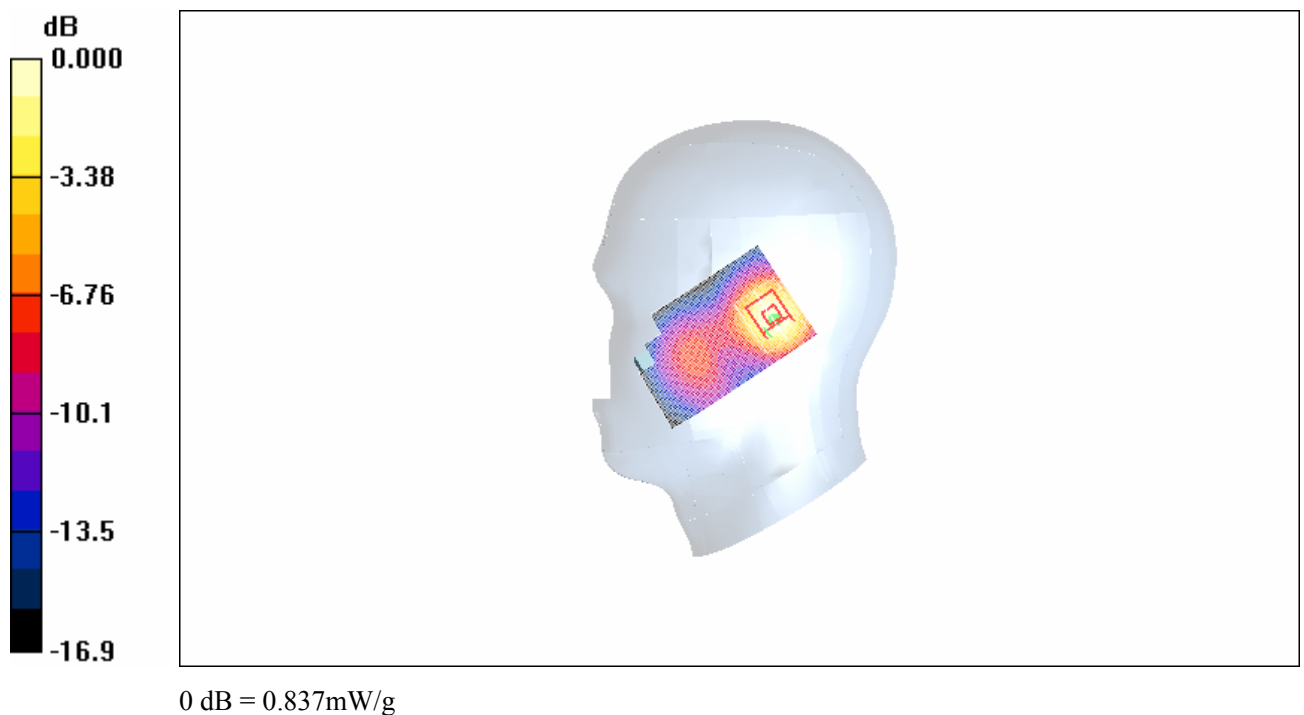**Fig. 21 Right Hand Tilt 15° CDMA 1900MHz CH600**

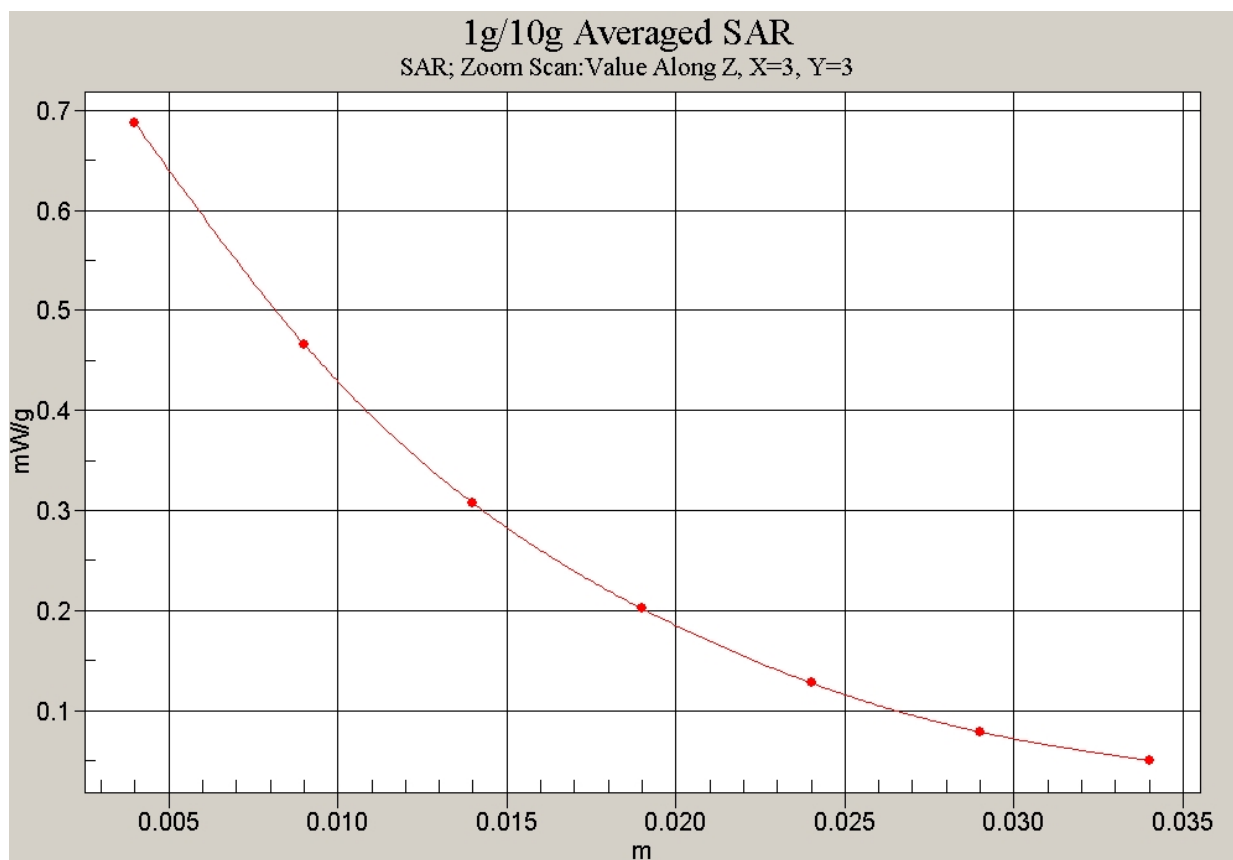


Fig. 22 Z-Scan at power reference point (CDMA 1900MHz, CH600)

CDMA 1900 MHz Right Tilt Low

Electronics: DAE3 Sn536

Medium: Head 1900 MHz

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.33$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CDMA 1900 Frequency: 1851.25 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)

Tilt Low/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.481 mW/g


Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.8 V/m; Power Drift = -0.197 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.415 mW/g; SAR(10 g) = 0.225 mW/g

Maximum value of SAR (measured) = 0.443 mW/g

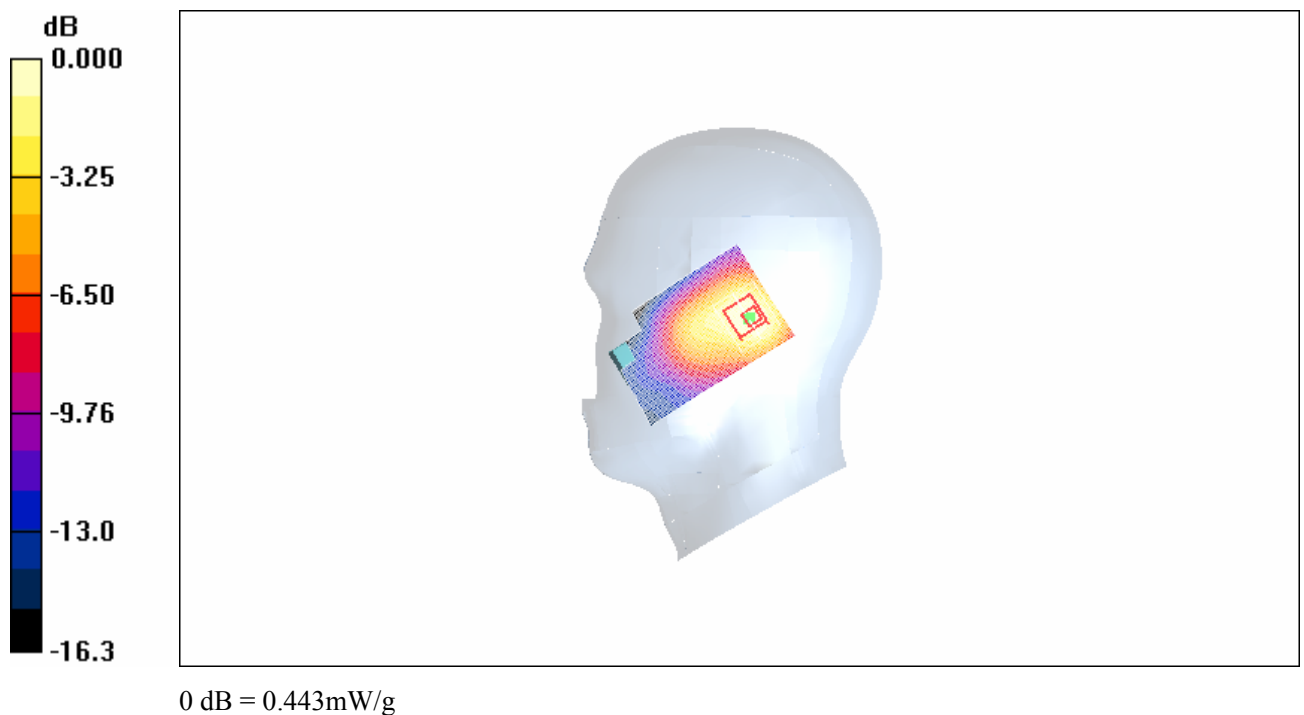**Fig. 23 Right Hand Tilt 15° CDMA 1900MHz CH25**

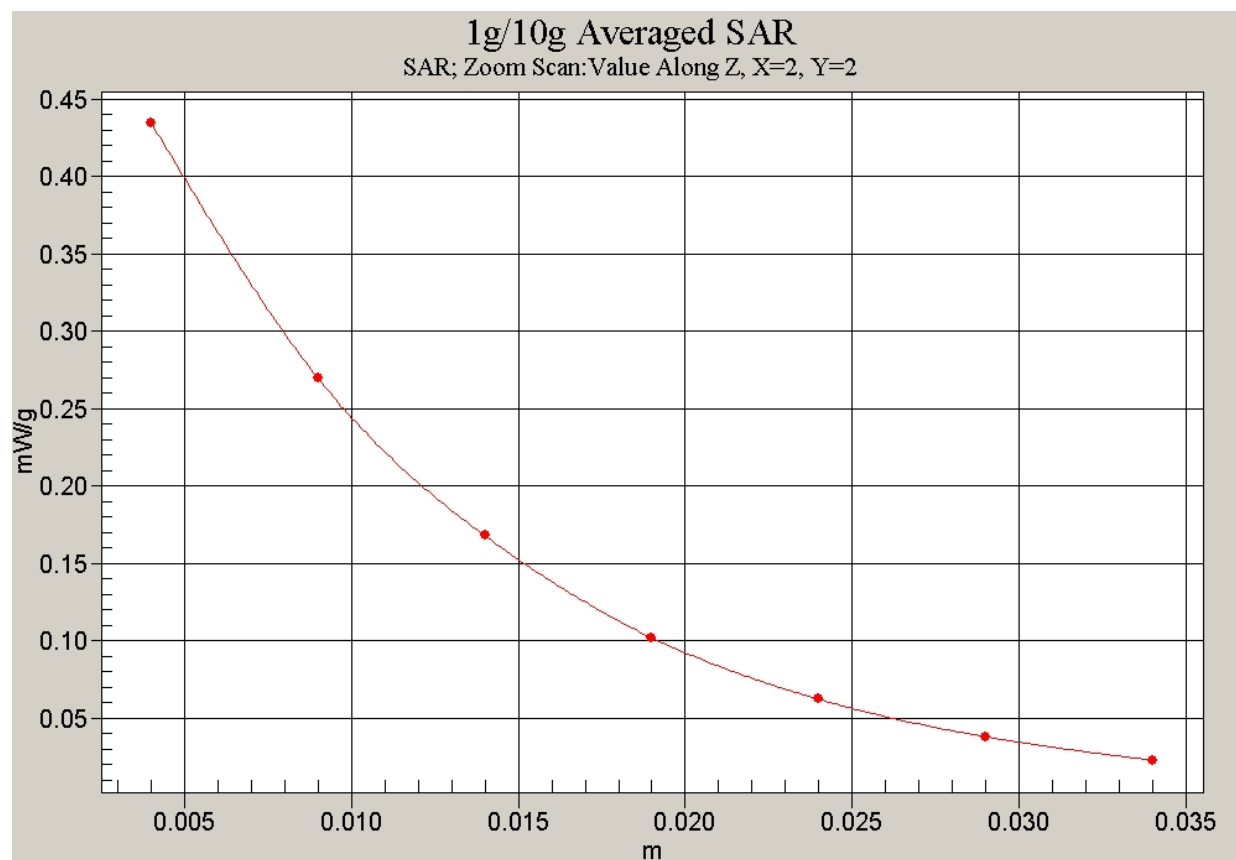


Fig. 24 Z-Scan at power reference point (CDMA 1900MHz, CH25)

CDMA 1900 MHz Body Toward Ground High

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CDMA 1900 Frequency: 1908.75 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(5.4, 5.4, 5.4)


Toward Ground High/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.392 mW/g**Toward Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = -0.200 dB

Peak SAR (extrapolated) = 0.552 W/kg

SAR(1 g) = 0.345 mW/g; SAR(10 g) = 0.218 mW/g

Maximum value of SAR (measured) = 0.367 mW/g

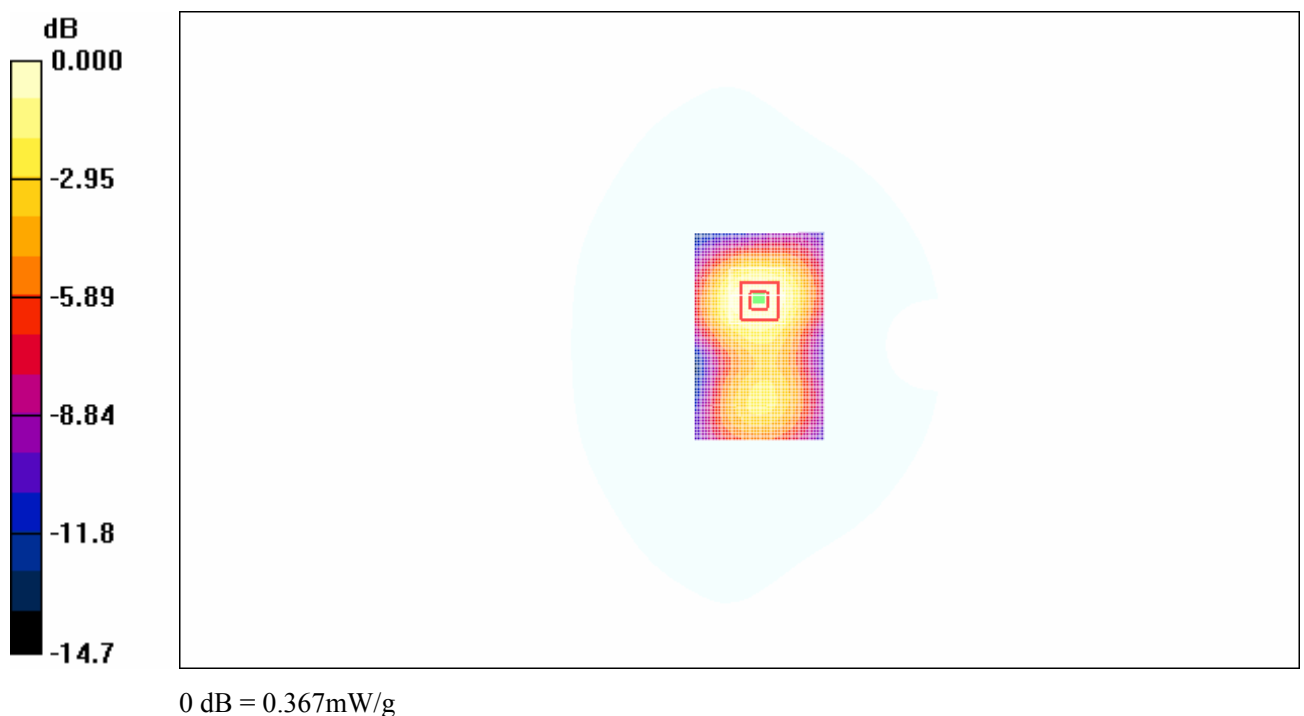**Fig. 25 CDMA 1900MHz, Body, Towards Ground, CH1175**

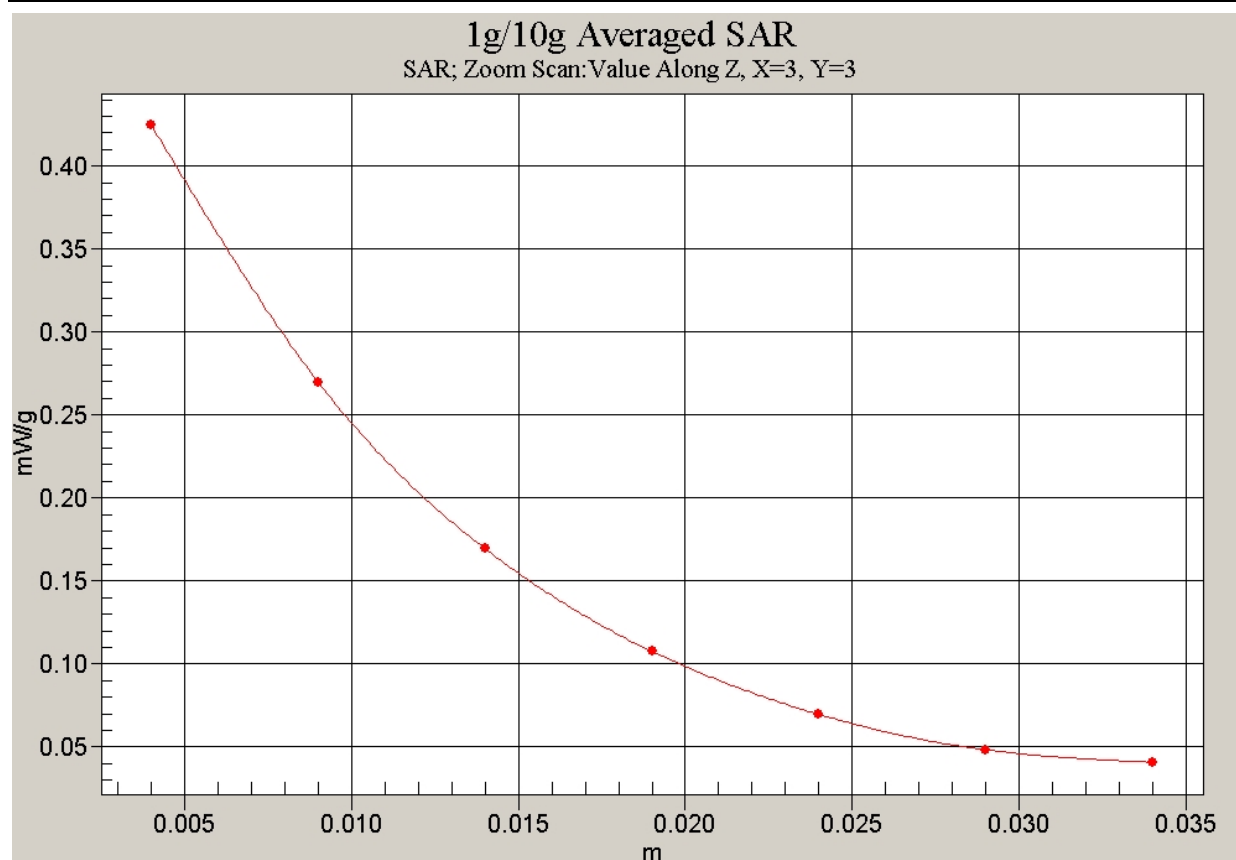


Fig. 26 Z-Scan at power reference point (CDMA 1900MHz, Body, Towards Ground, CH1175)

CDMA 1900 MHz Body Toward Ground Middle

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CDMA 1900 Frequency: 1880 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)

Toward Ground Middle/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.445 mW/g


Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.405 mW/g

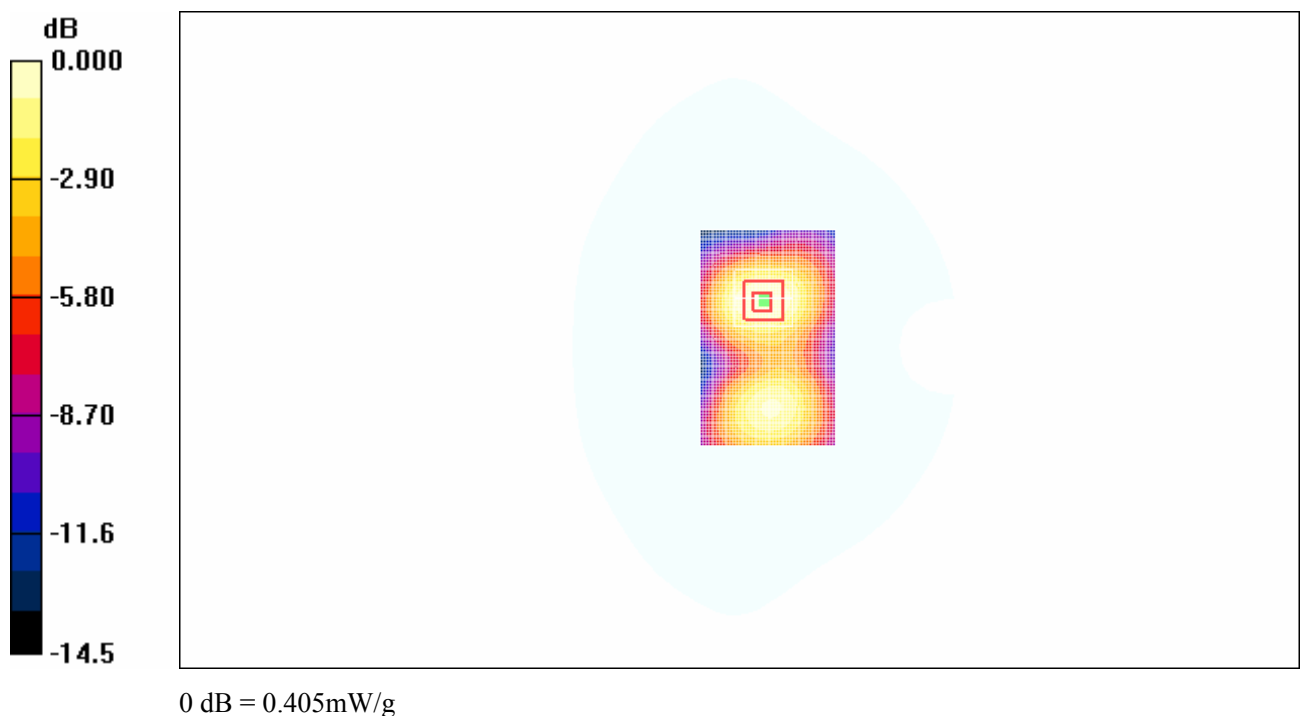**Fig. 27 CDMA 1900MHz, Body, Towards Ground, CH600**

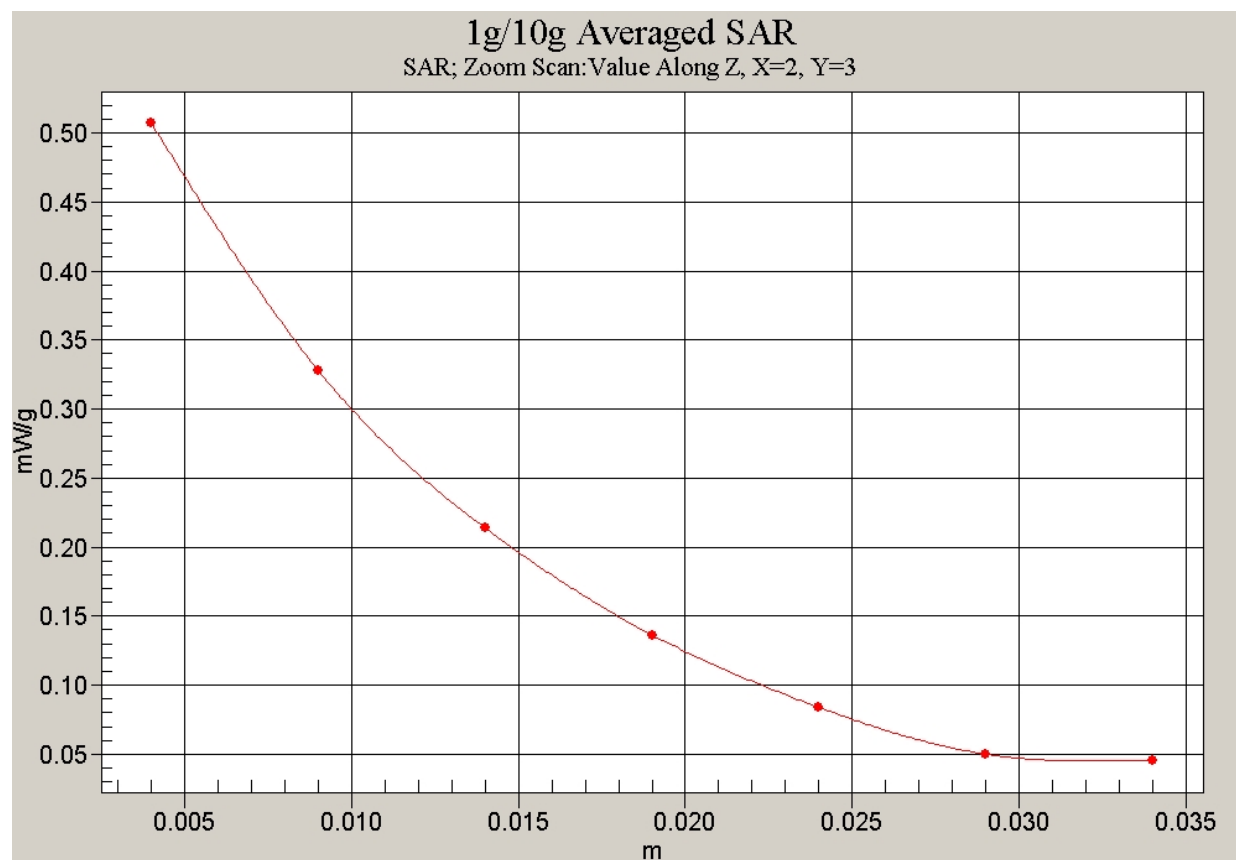


Fig. 28 Z-Scan at power reference point (CDMA 1900MHz, Body, Towards Ground, CH600)

CDMA 1900 MHz Body Toward Ground Low

Electronics: DAE3 Sn536

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: CDMA 1900 Frequency: 1851.25 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(4.88, 4.88, 4.88)


Toward Ground Low/Area Scan (51x81x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (interpolated) = 0.236 mW/g**Toward Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.5 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.210 mW/g; SAR(10 g) = 0.134 mW/g

Maximum value of SAR (measured) = 0.225 mW/g

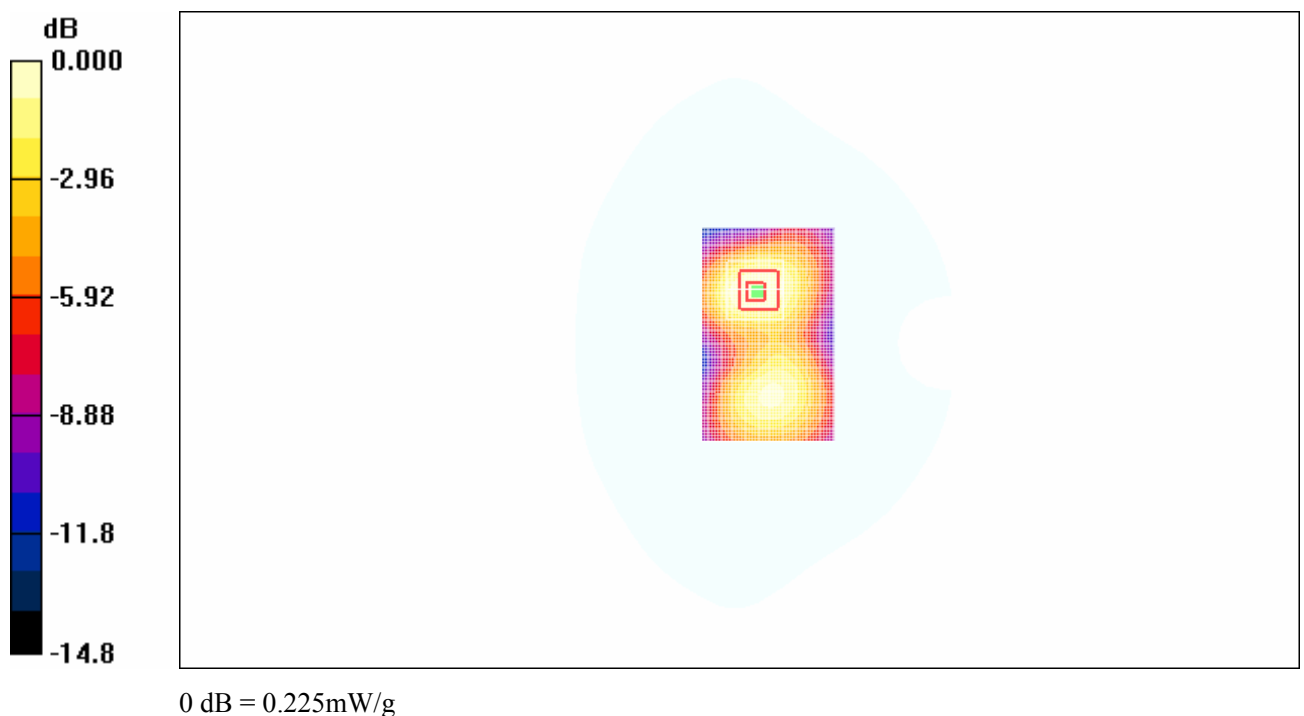**Fig. 29 CDMA 1900MHz, Body, Towards Ground, CH25**