

FCC Test Report

FCC ID: QISCRO-LX2

Project No. : 1701C155H
Equipment : Smart Phone
Model Name : CRO-L02
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Jan. 18, 2017
Date of Test : Jan. 18, 2017 ~ May 17, 2017
Issued Date : May 19, 2017
Tested by : BTL Inc.

Testing Engineer : Kevin Li
(Kevin Li)

Technical Manager : Bill Zhang
(Bill Zhang)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . CERIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 EUT OPERATING CONDITIONS	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION	14
4.1.2 MEASUREMENT INSTRUMENTS LIST	14
4.1.3 TEST PROCEDURE	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	15
4.1.6 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	46
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	46
4.2.2 MEASUREMENT INSTRUMENTS LIST	47
4.2.3 TEST PROCEDURE	48
4.2.4 DEVIATION FROM TEST STANDARD	48
4.2.5 TEST SETUP	49
4.2.6 TEST RESULTS-BELOW 1GHZ	49
4.2.7 TEST RESULTS-ABOVE 1GHZ	80

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1701C155C	Original report.	Apr. 06, 2017
BTL-FCCE-1-1701C155H	Compared with previous report (BTL-FCCE-1-1701C155C) 1. Added new antenna. 2. Added new battery. 3. Added new earphone. So all the test results have been re-evaluated and recorded in the test report.	May 19, 2017

1. CERIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : CRO-L02
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Date of Test : Jan. 18, 2017 ~ May 17, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1701C155H) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE(2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	CRO-L02
Model Difference	N/A
Frequency	GSM 850/1900 WCDMA B2/5 LTE B5/7
Power Source	#1 DC Voltage supplied from AC/DC adapter. #2 Battery Supplied.
Power Rating	#1:AC 100–240V 50/60Hz DC 5V 1A #2:DC 3.82V 2200mAh
HW Version	HL1CROM
SW Version	Cairo-L02C636B022

Note:

1. For a more detailed features description, please refer to the manufacturer’s specifications or the user's manual.

Item	Mfr/Brand	Model.
Battery	SCUD (FUJIAN) Electronics Co., Ltd	HB3742A0EZC+
	Shenzhen Desay Battery Tech Co., Ltd.	
	Sunwoda Electronic Co.,LTD.	
USB Cable	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUBB01M-HC208-DH
	HONGLIN TECHNOLOGY CO.,LTD	130-26654
	Luxshare Precision Industry Co., Ltd.	L99U2013-CS-H
Earphone	Jiangxi Lianchuang Hongsheng Electronic Co.,LTD	MEMD1632B580C00
	BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD	1311-3291-3.5mm-229
	MERRY ELECTRONICS CO., LTD.	EMC309-001
	Jiangxi Lianchuang Hongsheng Electronic Co.,LTD (Black)	MEMD1532B528000
	BOLUO COUNTY QUANCHENG ELECTRONIC CO.,LTD (Black)	1293#+3283# 3.5MM-150
	GoerTek (Black),	HA1-3
	GoerTek (White)	NA12
Adapter	HUIZHOU BYD ELECTRONIC CO., LTD.	HW-050100U01
	Shenzhen Huntkey Electric Co., Ltd.	
	DONG GUAN PHITEK ELECTRONICS CO., LTD.	

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+Playing+Speaker
Mode 4	Adapter+Traffic (GSM)+ Earphone
Mode 5	Adapter+Traffic (WCDMA)
Mode 6	Adapter+Traffic (LTE)


For Conducted Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+Playing+Speaker
Mode 4	Adapter+Traffic (GSM)+ Earphone
Mode 5	Adapter+Traffic (WCDMA)
Mode 6	Adapter+Traffic (LTE)

For Radiated Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+Idle+ Earphone
Mode 2	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone
Mode 3	Adapter+Idle+Playing+Speaker
Mode 4	Adapter+Traffic (GSM)+ Earphone
Mode 5	Adapter+Traffic (WCDMA)
Mode 6	Adapter+Traffic (LTE)


3.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED Mode 1

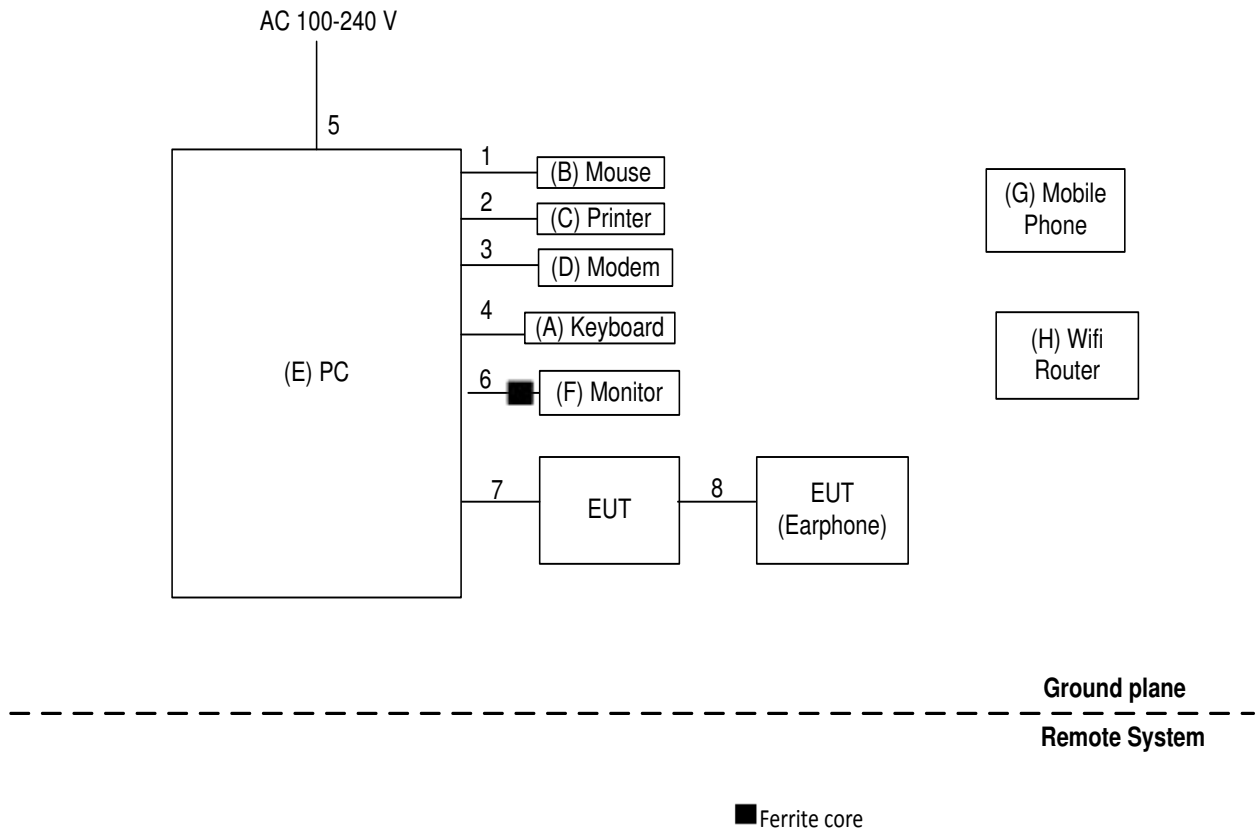

Mode 2-6

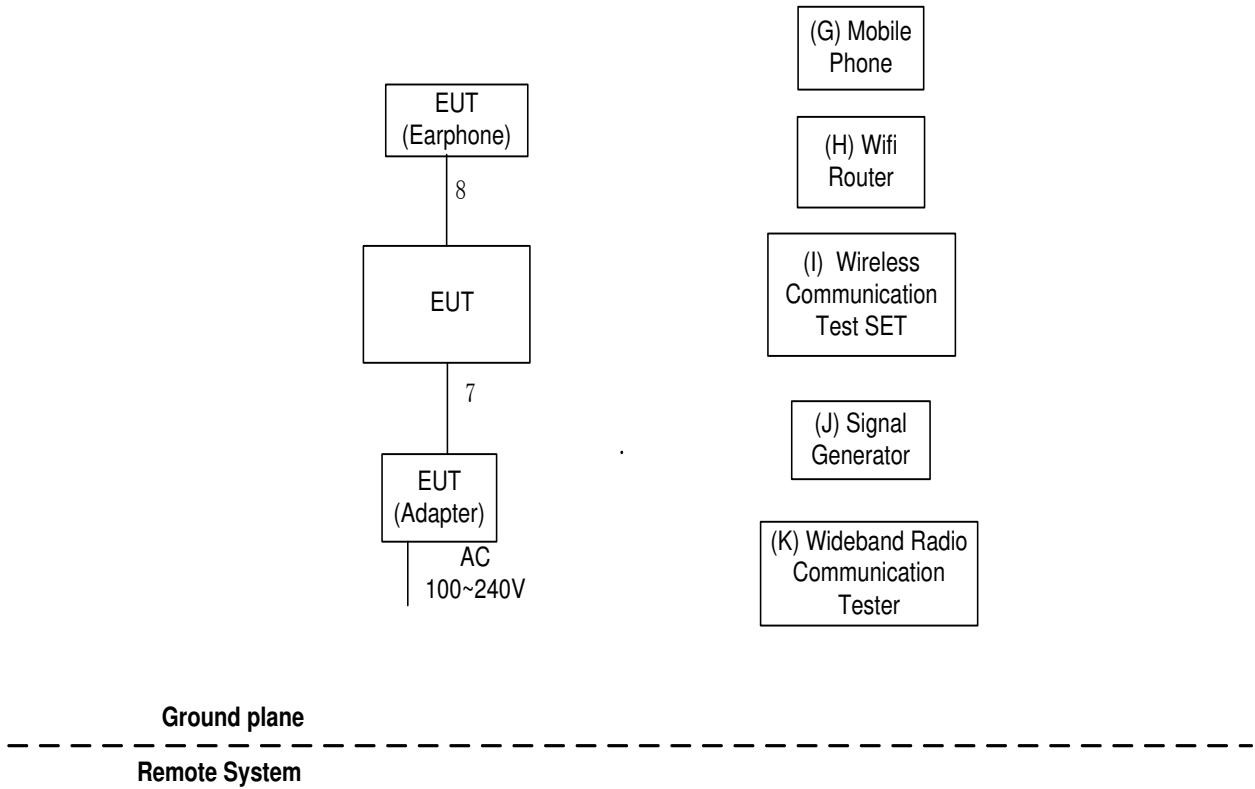

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	PC	Dell	DCSM 745	DOC	G7K832X
F	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6AG-1WNS
G	Mobile phone	samsung	SGH-1747	A3LSGH1747	R31C208VLDB
H	Wireless Router	ASUS	RT-AC66U	MSQ-RTAC66U	E8ICGG000138
I	Wireless Communication Test SET	Agilent	(8960 Series)E5515C	N/A	MY48364183
J	Signal Generator	Agilent	E4438C	N/A	MY49071316
K	Wideband Radio Communication Tester	RS	CMW500	N/A	122125

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.2m	Earphone Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
2	LISN	EMCO	3816/2	00052765	Mar. 26, 2018
3	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 26, 2018
4	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
5	Cable	emci	RG223(9K Hz-30MHz) (5m)	N/A	Mar. 07, 2018
6	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

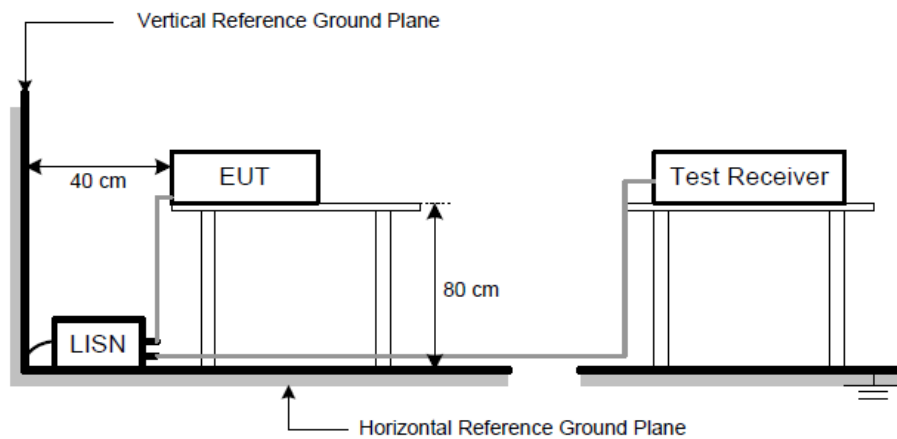


4.1.6 TEST RESULTS

Remark


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz,VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

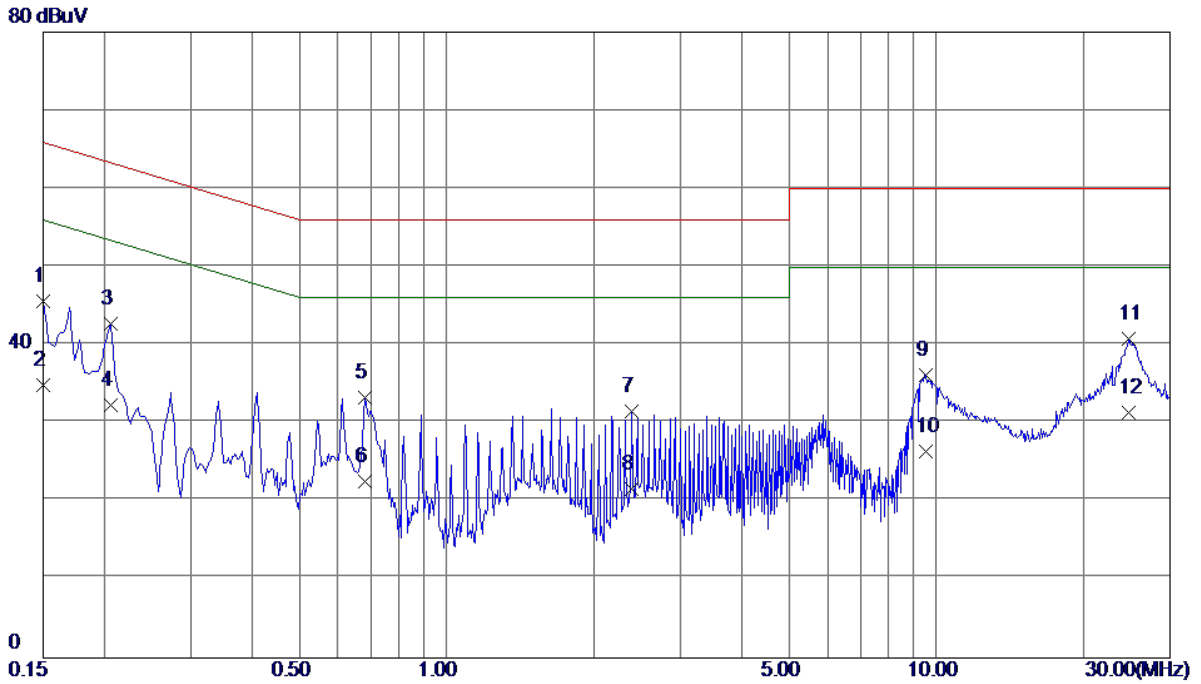


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	35.99	9.57	45.56	66.00	-20.44	QP
2	0.1500	25.30	9.57	34.87	56.00	-21.13	AVG
3	0.2060	33.19	9.57	42.76	63.37	-20.61	QP
4	0.2060	22.80	9.57	32.37	53.37	-21.00	AVG
5	0.6820	23.57	9.71	33.28	56.00	-22.72	QP
6	0.6820	12.90	9.71	22.61	46.00	-23.39	AVG
7	2.3860	21.36	10.18	31.54	56.00	-24.46	QP
8	2.3860	11.40	10.18	21.58	46.00	-24.42	AVG
9	9.5420	25.75	10.48	36.23	60.00	-23.77	QP
10	9.5420	15.90	10.48	26.38	50.00	-23.62	AVG
11	24.6660	29.99	10.84	40.83	60.00	-19.17	QP
12 *	24.6660	20.49	10.84	31.33	50.00	-18.67	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

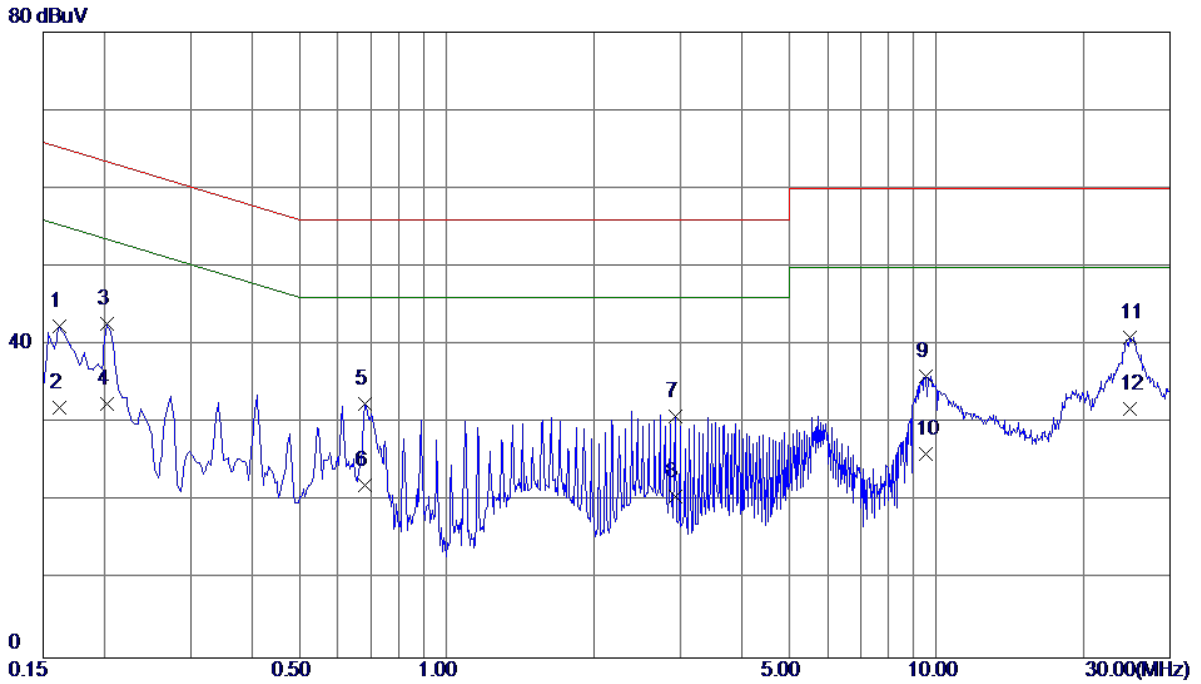


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1620	32.83	9.51	42.34	65.36	-23.02	QP
2	0.1620	22.50	9.51	32.01	55.36	-23.35	AVG
3	0.2020	33.09	9.57	42.66	63.53	-20.87	QP
4	0.2020	22.90	9.57	32.47	53.53	-21.06	AVG
5	0.6820	22.91	9.51	32.42	56.00	-23.58	QP
6	0.6820	12.50	9.51	22.01	46.00	-23.99	AVG
7	2.9300	20.90	9.96	30.86	56.00	-25.14	QP
8	2.9300	10.70	9.96	20.66	46.00	-25.34	AVG
9	9.5420	25.48	10.53	36.01	60.00	-23.99	QP
10	9.5420	15.60	10.53	26.13	50.00	-23.87	AVG
11	24.8700	30.03	10.99	41.02	60.00	-18.98	QP
12 *	24.8700	20.80	10.99	31.79	50.00	-18.21	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Foxconn+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

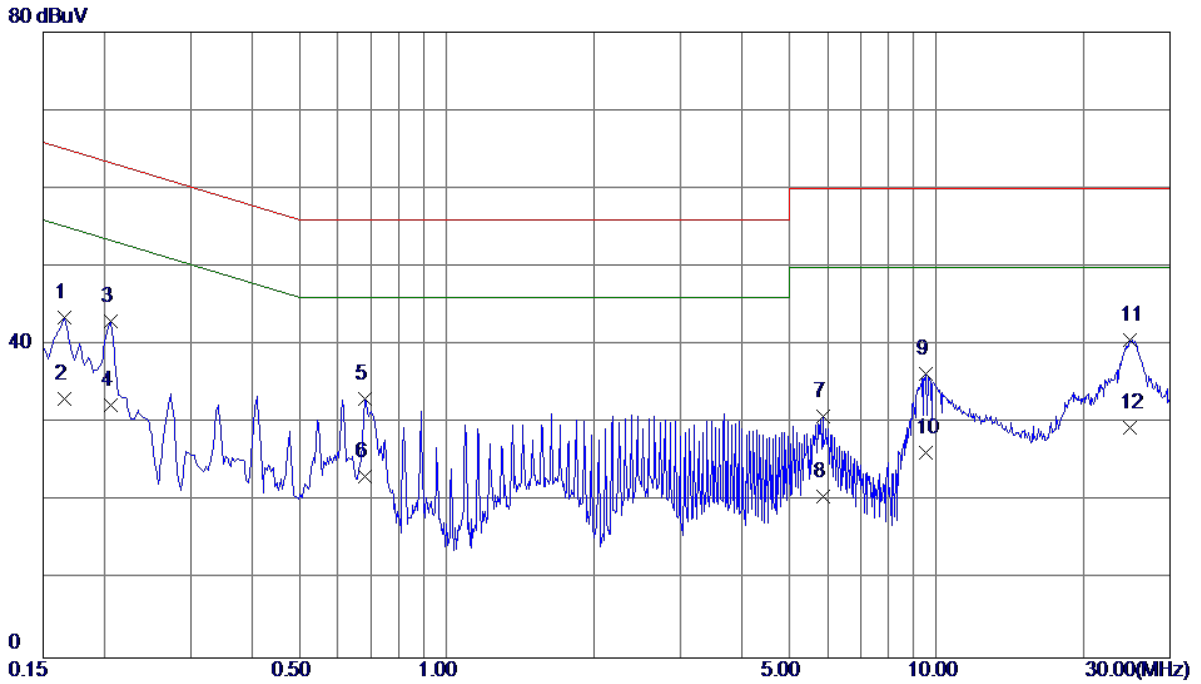


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	34.02	9.57	43.59	65.16	-21.57	QP
2	0.1660	23.60	9.57	33.17	55.16	-21.99	AVG
3	0.2060	33.40	9.57	42.97	63.37	-20.40	QP
4	0.2060	22.80	9.57	32.37	53.37	-21.00	AVG
5	0.6820	23.34	9.71	33.05	56.00	-22.95	QP
6	0.6820	13.50	9.71	23.21	46.00	-22.79	AVG
7	5.8620	20.58	10.32	30.90	60.00	-29.10	QP
8	5.8620	10.39	10.32	20.71	50.00	-29.29	AVG
9	9.5420	25.77	10.48	36.25	60.00	-23.75	QP
10	9.5420	15.80	10.48	26.28	50.00	-23.72	AVG
11 *	24.8140	29.78	10.84	40.62	60.00	-19.38	QP
12	24.8140	18.60	10.84	29.44	50.00	-20.56	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Foxconn+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

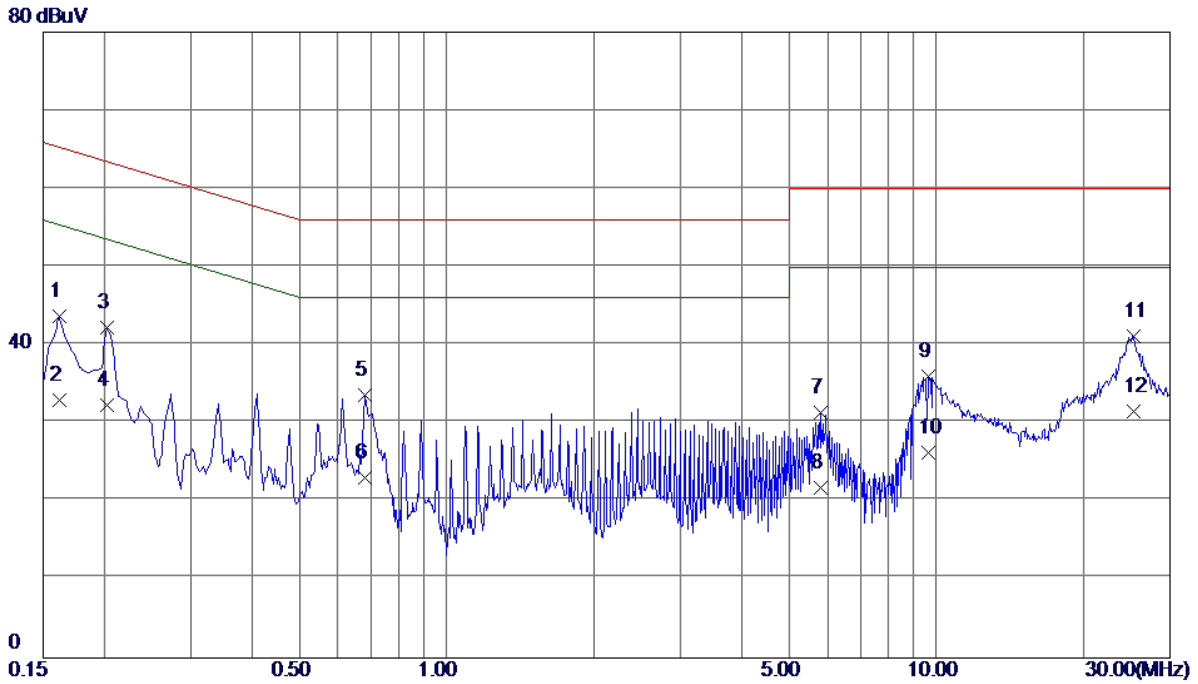


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1620	34.10	9.51	43.61	65.36	-21.75	QP
2	0.1620	23.50	9.51	33.01	55.36	-22.35	AVG
3	0.2020	32.60	9.57	42.17	63.53	-21.36	QP
4	0.2020	22.80	9.57	32.37	53.53	-21.16	AVG
5	0.6820	24.04	9.51	33.55	56.00	-22.45	QP
6	0.6820	13.60	9.51	23.11	46.00	-22.89	AVG
7	5.7940	21.14	10.23	31.37	60.00	-28.63	QP
8	5.7940	11.47	10.23	21.70	50.00	-28.30	AVG
9	9.6100	25.53	10.54	36.07	60.00	-23.93	QP
10	9.6100	15.70	10.54	26.24	50.00	-23.76	AVG
11	25.2780	30.11	10.99	41.10	60.00	-18.90	QP
12 *	25.2780	20.60	10.99	31.59	50.00	-18.41	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:HONGLIN+Battery:SCUD+Earphone:MERRY		
Test Engineer	Kevin Li		

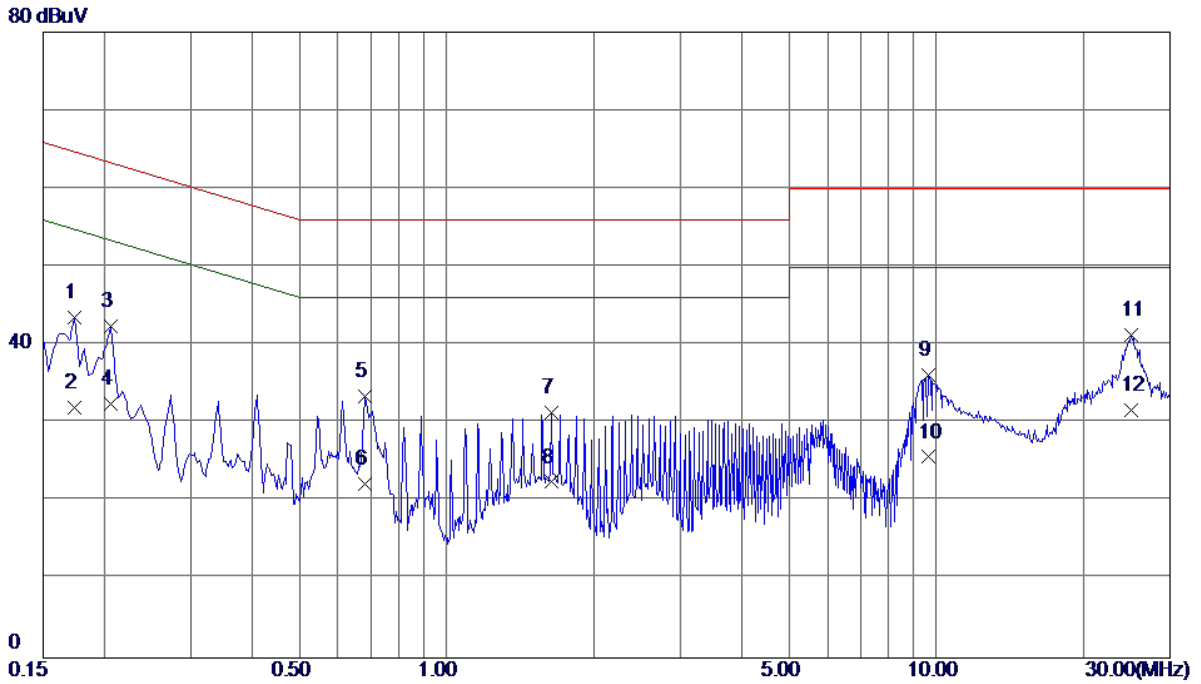


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1740	33.93	9.57	43.50	64.77	-21.27	QP
2	0.1740	22.50	9.57	32.07	54.77	-22.70	AVG
3	0.2060	32.77	9.57	42.34	63.37	-21.03	QP
4	0.2060	22.90	9.57	32.47	53.37	-20.90	AVG
5	0.6820	23.72	9.71	33.43	56.00	-22.57	QP
6	0.6820	12.50	9.71	22.21	46.00	-23.79	AVG
7	1.6340	21.36	9.98	31.34	56.00	-24.66	QP
8	1.6340	12.50	9.98	22.48	46.00	-23.52	AVG
9	9.6140	25.71	10.48	36.19	60.00	-23.81	QP
10	9.6140	15.20	10.48	25.68	50.00	-24.32	AVG
11	25.0220	30.45	10.84	41.29	60.00	-18.71	QP
12 *	25.0220	20.90	10.84	31.74	50.00	-18.26	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:HONGLIN+Battery:SCUD+Earphone:MERRY		
Test Engineer	Kevin Li		

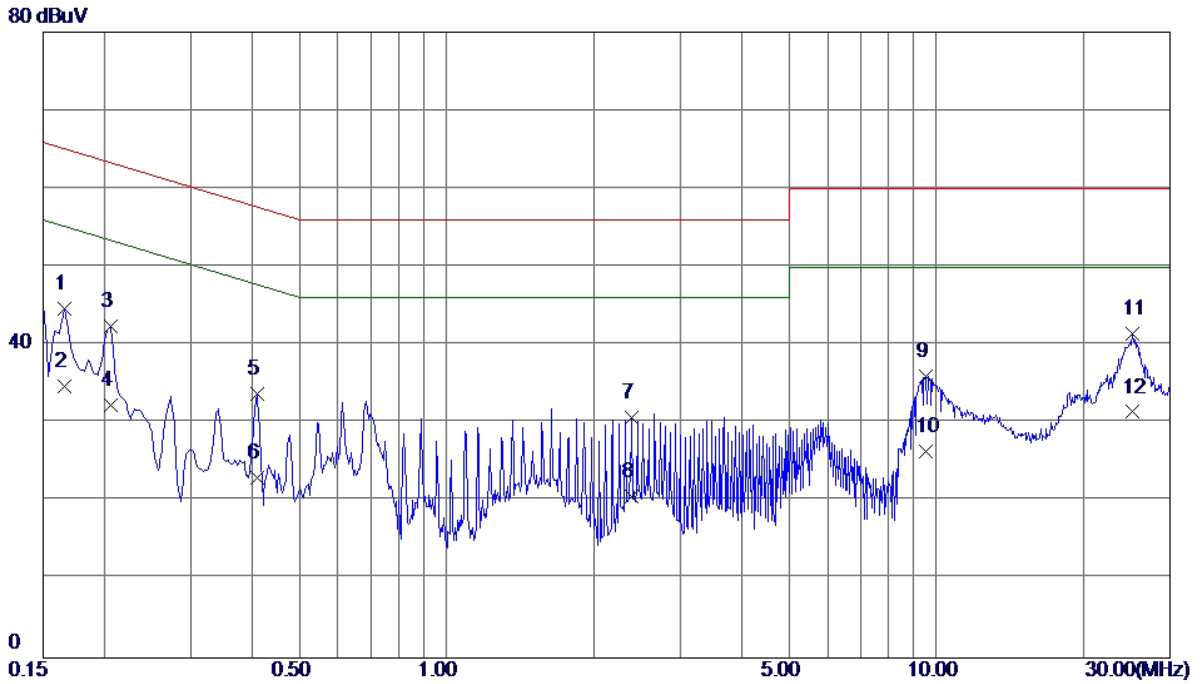


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	35.12	9.49	44.61	65.16	-20.55	QP
2	0.1660	25.30	9.49	34.79	55.16	-20.37	AVG
3	0.2060	32.80	9.57	42.37	63.37	-21.00	QP
4	0.2060	22.80	9.57	32.37	53.37	-21.00	AVG
5	0.4100	24.21	9.48	33.69	57.65	-23.96	QP
6	0.4100	13.50	9.48	22.98	47.65	-24.67	AVG
7	2.3860	20.75	9.91	30.66	56.00	-25.34	QP
8	2.3860	10.70	9.91	20.61	46.00	-25.39	AVG
9	9.5460	25.53	10.53	36.06	60.00	-23.94	QP
10	9.5460	15.90	10.53	26.43	50.00	-23.57	AVG
11 *	25.0940	30.47	10.99	41.46	60.00	-18.54	QP
12	25.0940	20.45	10.99	31.44	50.00	-18.56	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

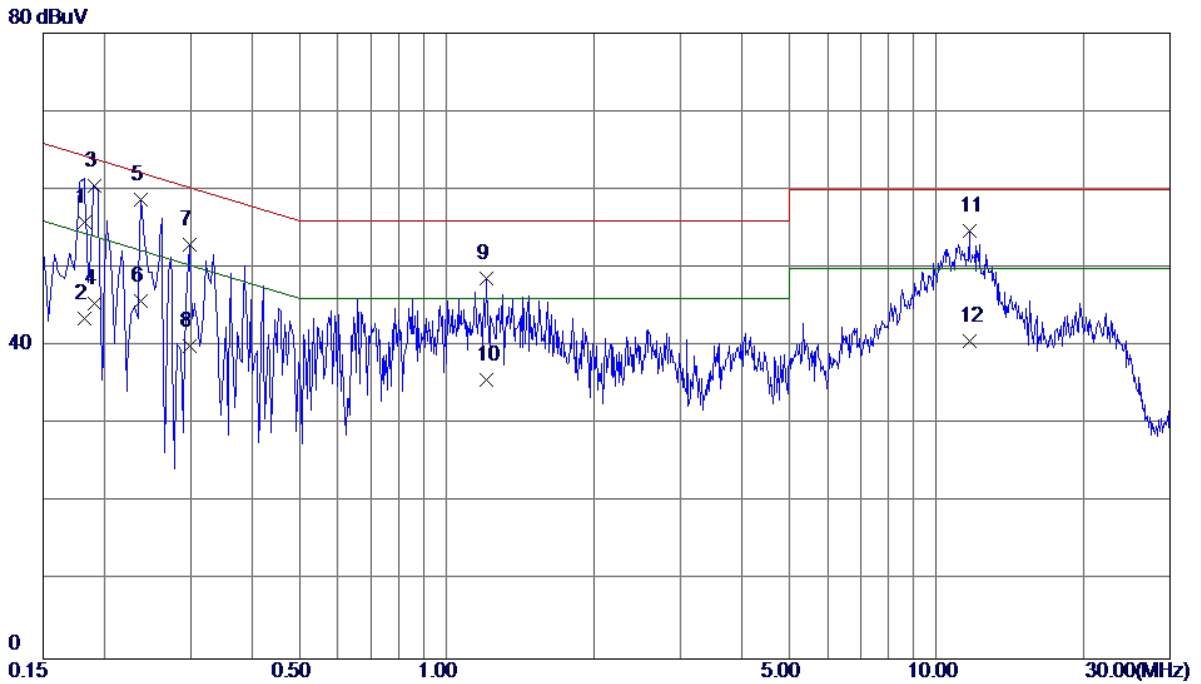


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1819	46.20	9.57	55.77	64.40	-8.63	QP
2	0.1819	33.90	9.57	43.47	54.40	-10.93	AVG
3	0.1904	50.90	9.57	60.47	64.02	-3.55	QP
4	0.1904	35.90	9.57	45.47	54.02	-8.55	AVG
5 *	0.2380	49.19	9.57	58.76	62.17	-3.41	QP
6	0.2380	36.20	9.57	45.77	52.17	-6.40	AVG
7	0.2980	43.42	9.58	53.00	60.30	-7.30	QP
8	0.2980	30.40	9.58	39.98	50.30	-10.32	AVG
9	1.2059	38.76	9.86	48.62	56.00	-7.38	QP
10	1.2059	25.79	9.86	35.65	46.00	-10.35	AVG
11	11.6820	44.21	10.56	54.77	60.00	-5.23	QP
12	11.6820	30.10	10.56	40.66	50.00	-9.34	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

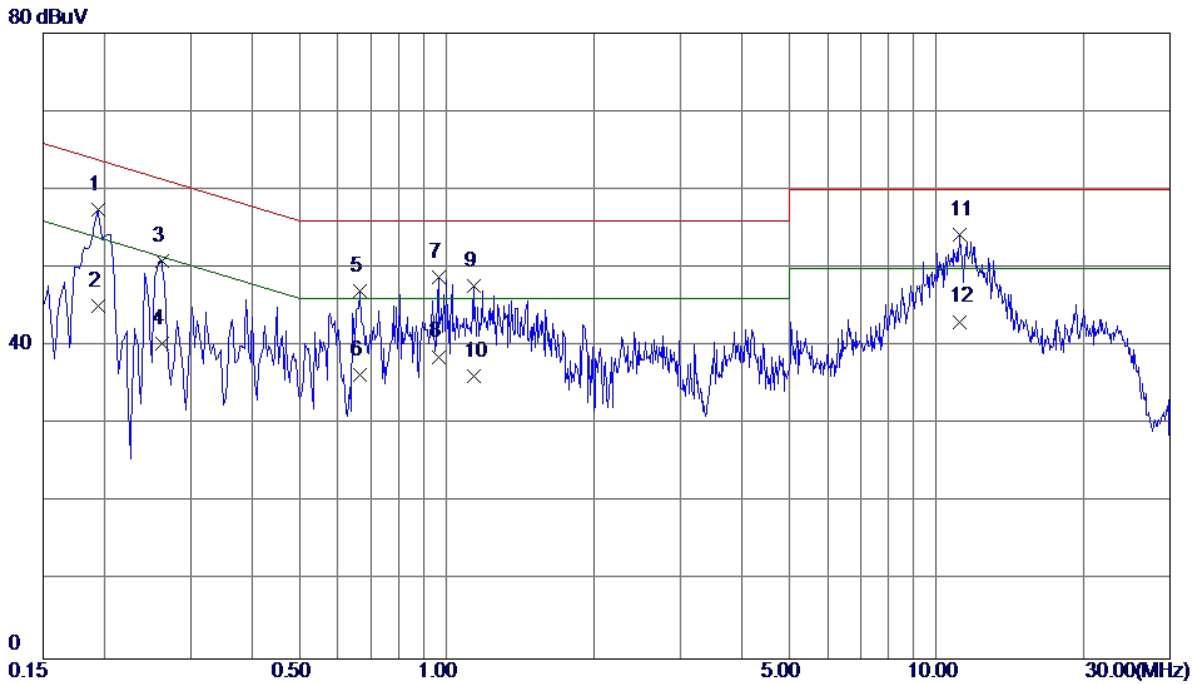


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	47.93	9.55	57.48	63.86	-6.38	QP
2	0.1940	35.60	9.55	45.15	53.86	-8.71	AVG
3	0.2620	41.30	9.57	50.87	61.37	-10.50	QP
4	0.2620	30.80	9.57	40.37	51.37	-11.00	AVG
5	0.6660	37.59	9.51	47.10	56.00	-8.90	QP
6	0.6660	26.80	9.51	36.31	46.00	-9.69	AVG
7	0.9620	39.09	9.74	48.83	56.00	-7.17	QP
8	0.9620	28.90	9.74	38.64	46.00	-7.36	AVG
9	1.1340	37.91	9.75	47.66	56.00	-8.34	QP
10	1.1340	26.40	9.75	36.15	46.00	-9.85	AVG
11 *	11.1740	43.57	10.62	54.19	60.00	-5.81	QP
12	11.1740	32.50	10.62	43.12	50.00	-6.88	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

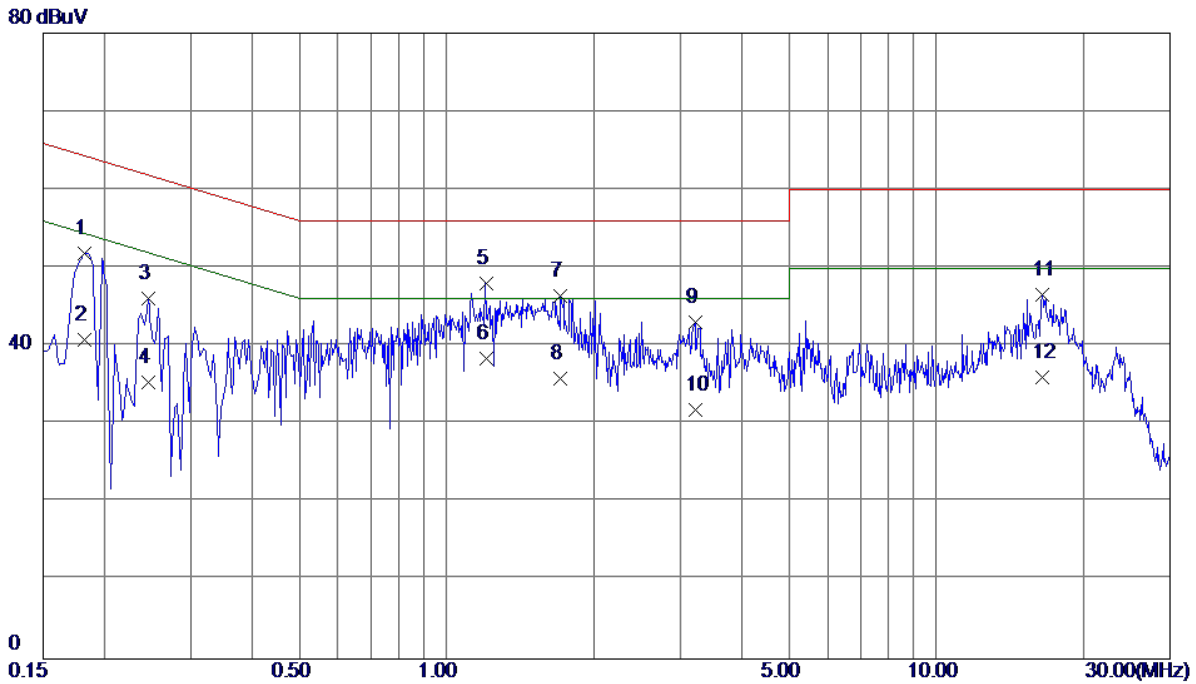


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1819	42.22	9.57	51.79	64.40	-12.61	QP
2	0.1819	31.20	9.57	40.77	54.40	-13.63	AVG
3	0.2460	36.55	9.57	46.12	61.89	-15.77	QP
4	0.2460	25.80	9.57	35.37	51.89	-16.52	AVG
5	1.2020	38.08	9.85	47.93	56.00	-8.07	QP
6 *	1.2020	28.60	9.85	38.45	46.00	-7.55	AVG
7	1.7100	36.46	9.99	46.45	56.00	-9.55	QP
8	1.7100	25.90	9.99	35.89	46.00	-10.11	AVG
9	3.2220	32.68	10.29	42.97	56.00	-13.03	QP
10	3.2220	21.50	10.29	31.79	46.00	-14.21	AVG
11	16.4820	35.77	10.73	46.50	60.00	-13.50	QP
12	16.4820	25.30	10.73	36.03	50.00	-13.97	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

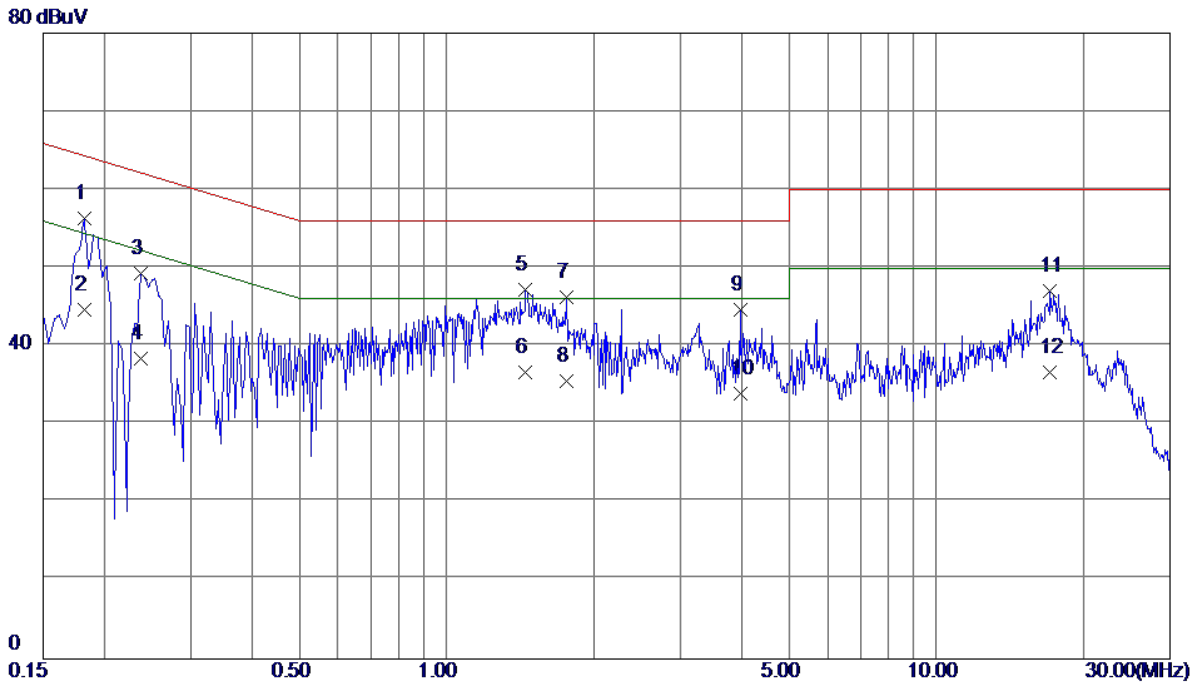


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1819	46.84	9.51	56.35	64.40	-8.05	QP
2	0.1819	35.20	9.51	44.71	54.40	-9.69	AVG
3	0.2380	39.65	9.57	49.22	62.17	-12.95	QP
4	0.2380	28.90	9.57	38.47	52.17	-13.70	AVG
5	1.4500	37.48	9.77	47.25	56.00	-8.75	QP
6	1.4500	26.80	9.77	36.57	46.00	-9.43	AVG
7	1.7580	36.51	9.79	46.30	56.00	-9.70	QP
8	1.7580	25.70	9.79	35.49	46.00	-10.51	AVG
9	3.9820	34.50	10.09	44.59	56.00	-11.41	QP
10	3.9820	23.90	10.09	33.99	46.00	-12.01	AVG
11	17.0580	36.29	10.78	47.07	60.00	-12.93	QP
12	17.0580	25.80	10.78	36.58	50.00	-13.42	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

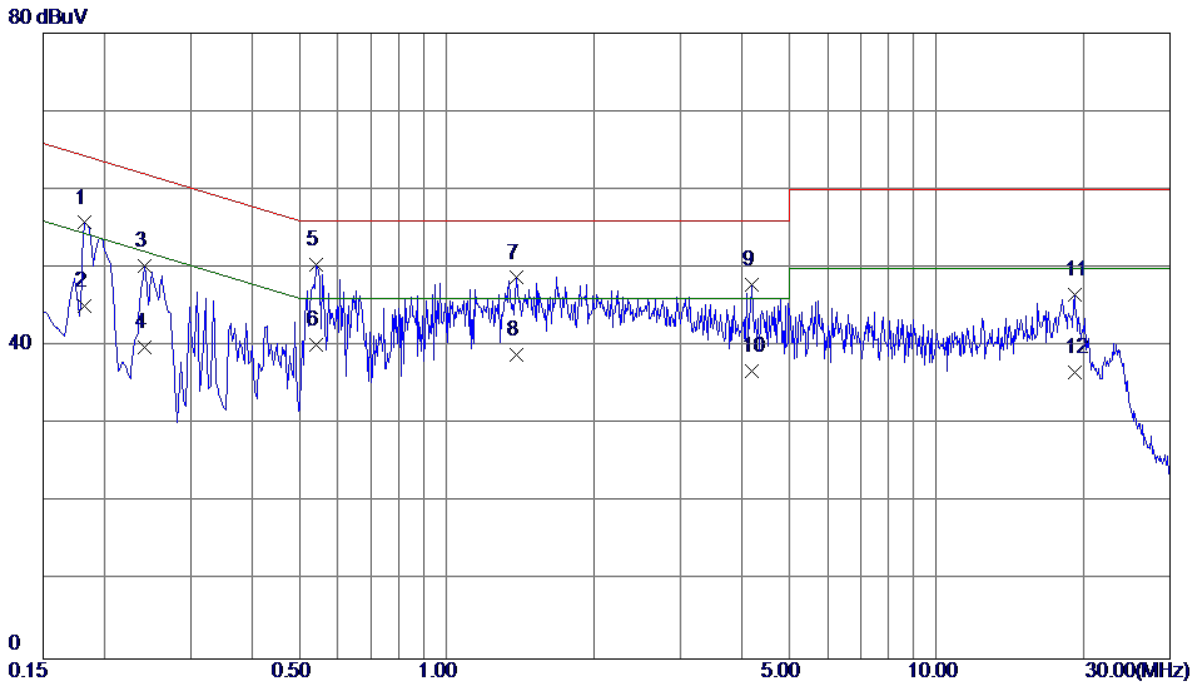


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1819	46.19	9.57	55.76	64.40	-8.64	QP
2	0.1819	35.60	9.57	45.17	54.40	-9.23	AVG
3	0.2420	40.73	9.57	50.30	62.03	-11.73	QP
4	0.2420	30.20	9.57	39.77	52.03	-12.26	AVG
5 *	0.5420	40.74	9.69	50.43	56.00	-5.57	QP
6	0.5420	30.50	9.69	40.19	46.00	-5.81	AVG
7	1.3900	38.79	9.93	48.72	56.00	-7.28	QP
8	1.3900	28.90	9.93	38.83	46.00	-7.17	AVG
9	4.1900	37.47	10.36	47.83	56.00	-8.17	QP
10	4.1900	26.50	10.36	36.86	46.00	-9.14	AVG
11	19.1700	35.74	10.78	46.52	60.00	-13.48	QP
12	19.1700	25.80	10.78	36.58	50.00	-13.42	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

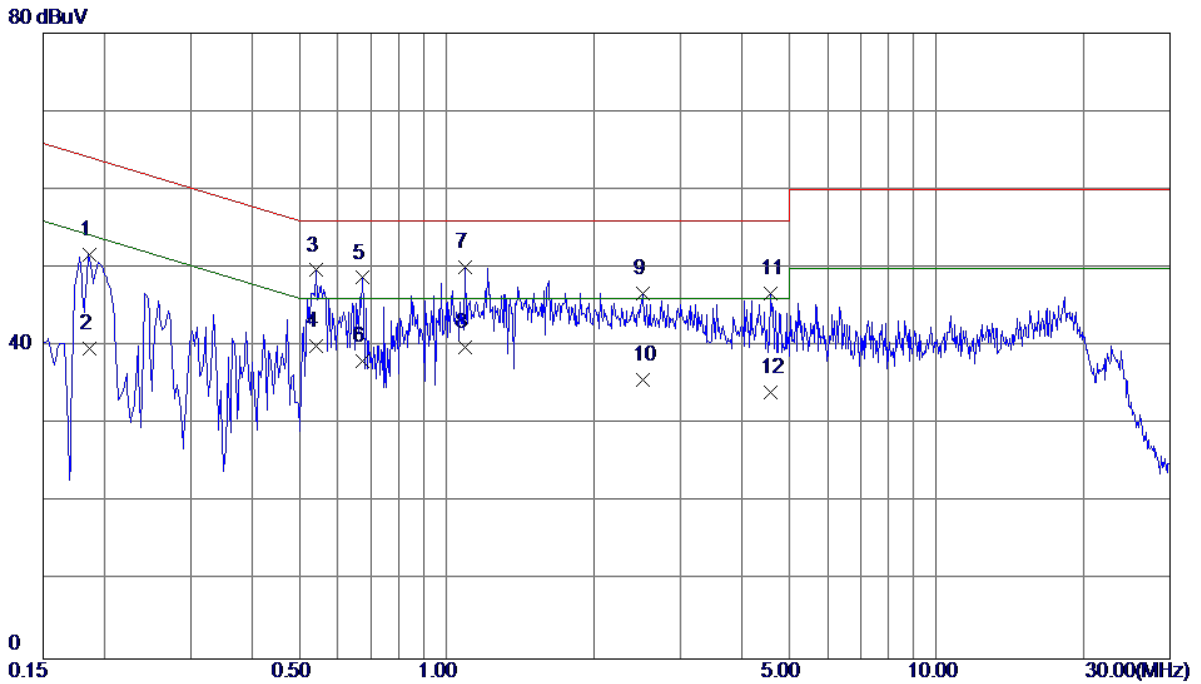


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1860	42.15	9.52	51.67	64.21	-12.54	QP
2	0.1860	30.20	9.52	39.72	54.21	-14.49	AVG
3	0.5420	40.19	9.49	49.68	56.00	-6.32	QP
4	0.5420	30.50	9.49	39.99	46.00	-6.01	AVG
5	0.6740	39.21	9.51	48.72	56.00	-7.28	QP
6	0.6740	28.60	9.51	38.11	46.00	-7.89	AVG
7 *	1.0900	40.33	9.75	50.08	56.00	-5.92	QP
8	1.0900	30.10	9.75	39.85	46.00	-6.15	AVG
9	2.5220	36.82	9.94	46.76	56.00	-9.24	QP
10	2.5220	25.80	9.94	35.74	46.00	-10.26	AVG
11	4.5739	36.53	10.18	46.71	56.00	-9.29	QP
12	4.5739	23.90	10.18	34.08	46.00	-11.92	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

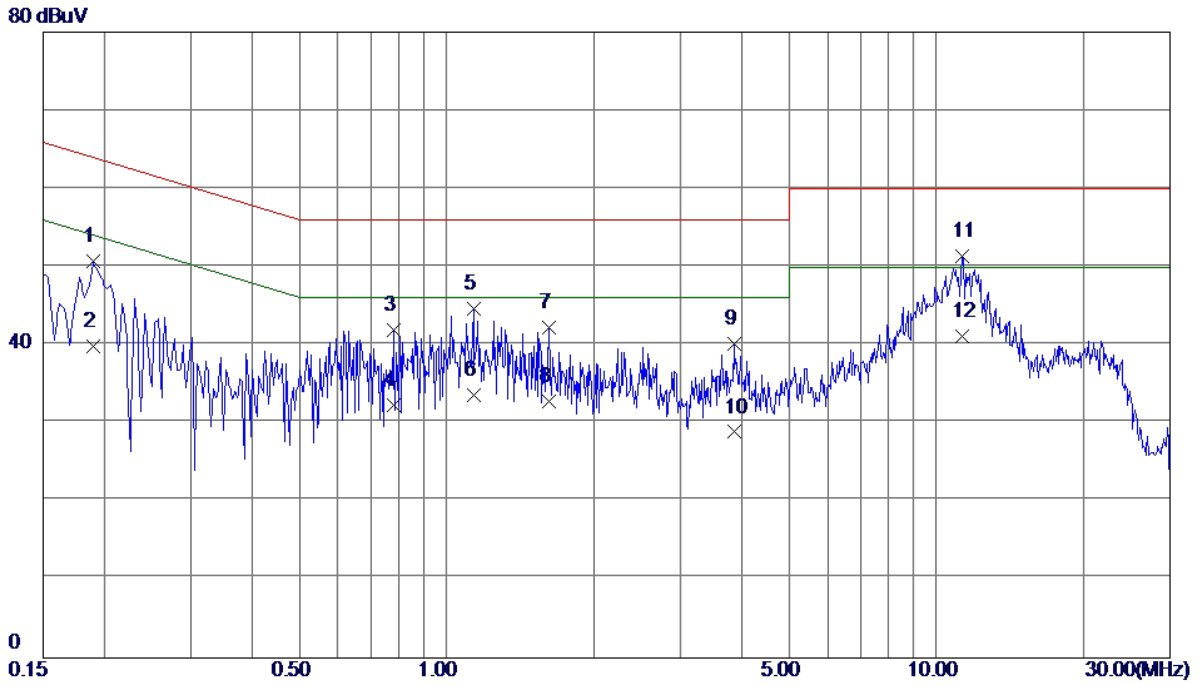


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1900	41.18	9.57	50.75	64.04	-13.29	QP
2	0.1900	30.20	9.57	39.77	54.04	-14.27	AVG
3	0.7780	32.14	9.80	41.94	56.00	-14.06	QP
4	0.7780	22.50	9.80	32.30	46.00	-13.70	AVG
5	1.1340	34.72	9.85	44.57	56.00	-11.43	QP
6	1.1340	23.80	9.85	33.65	46.00	-12.35	AVG
7	1.6180	32.26	9.98	42.24	56.00	-13.76	QP
8	1.6180	22.80	9.98	32.78	46.00	-13.22	AVG
9	3.8580	29.76	10.37	40.13	56.00	-15.87	QP
10	3.8580	18.51	10.37	28.88	46.00	-17.12	AVG
11 *	11.2739	40.87	10.54	51.41	60.00	-8.59	QP
12	11.2739	30.61	10.54	41.15	50.00	-8.85	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

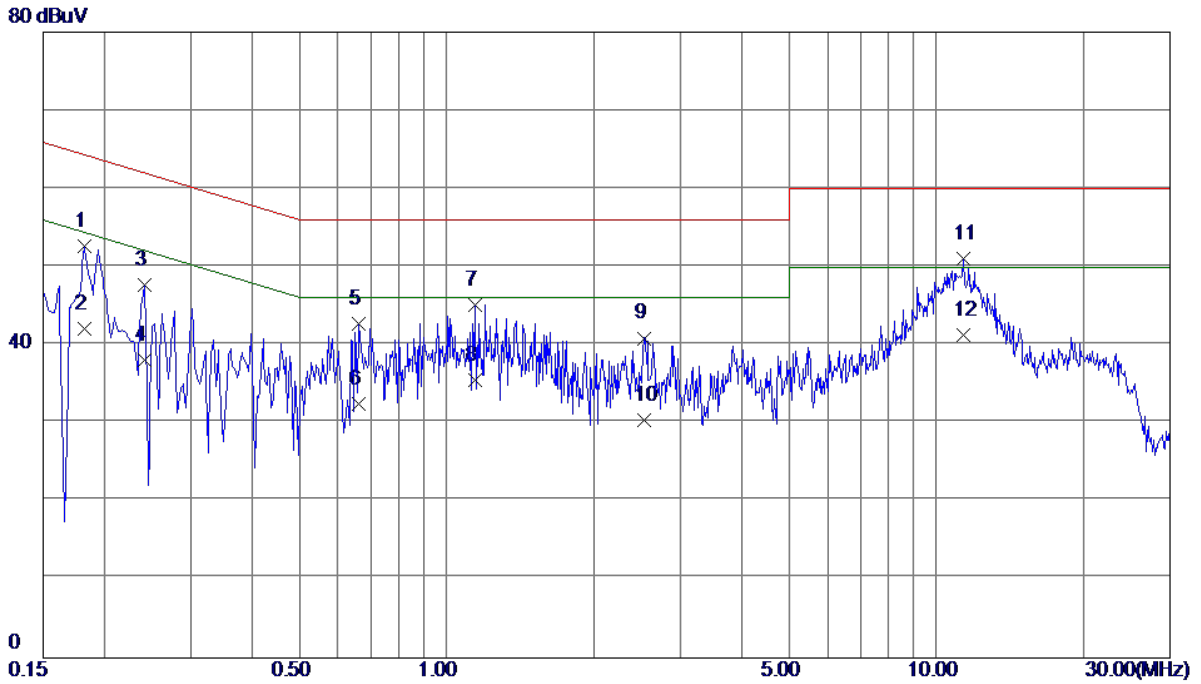


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1819	43.18	9.51	52.69	64.40	-11.71	QP
2	0.1819	32.60	9.51	42.11	54.40	-12.29	AVG
3	0.2420	38.19	9.57	47.76	62.03	-14.27	QP
4	0.2420	28.50	9.57	38.07	52.03	-13.96	AVG
5	0.6620	33.16	9.51	42.67	56.00	-13.33	QP
6	0.6620	22.90	9.51	32.41	46.00	-13.59	AVG
7	1.1420	35.41	9.75	45.16	56.00	-10.84	QP
8	1.1420	25.70	9.75	35.45	46.00	-10.55	AVG
9	2.5340	30.94	9.94	40.88	56.00	-15.12	QP
10	2.5340	20.50	9.94	30.44	46.00	-15.56	AVG
11	11.3660	40.40	10.62	51.02	60.00	-8.98	QP
12 *	11.3660	30.60	10.62	41.22	50.00	-8.78	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

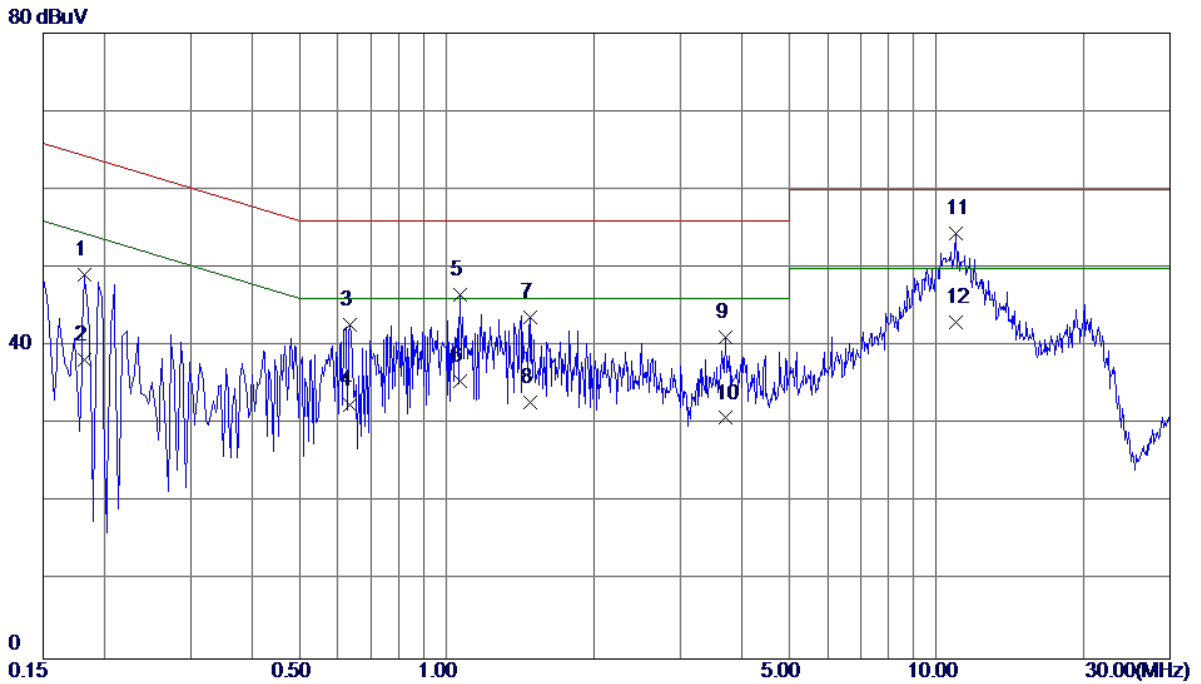


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1819	39.54	9.57	49.11	64.40	-15.29	QP
2	0.1819	28.60	9.57	38.17	54.40	-16.23	AVG
3	0.6340	32.95	9.70	42.65	56.00	-13.35	QP
4	0.6340	22.80	9.70	32.50	46.00	-13.50	AVG
5	1.0660	36.73	9.84	46.57	56.00	-9.43	QP
6	1.0660	25.70	9.84	35.54	46.00	-10.46	AVG
7	1.4819	33.71	9.97	43.68	56.00	-12.32	QP
8	1.4819	22.89	9.97	32.86	46.00	-13.14	AVG
9	3.7020	30.83	10.35	41.18	56.00	-14.82	QP
10	3.7020	20.45	10.35	30.80	46.00	-15.20	AVG
11 *	10.9819	43.86	10.53	54.39	60.00	-5.61	QP
12	10.9819	32.50	10.53	43.03	50.00	-6.97	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

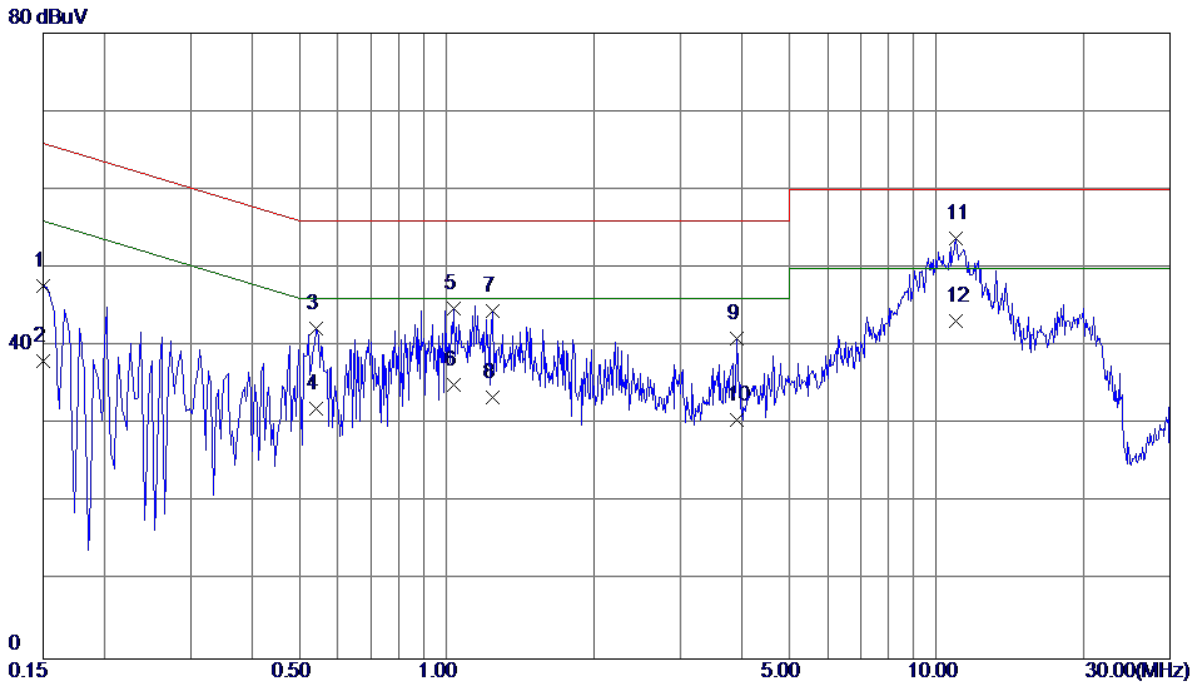


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	38.13	9.57	47.70	66.00	-18.30	QP
2	0.1500	28.50	9.57	38.07	56.00	-17.93	AVG
3	0.5420	32.71	9.49	42.20	56.00	-13.80	QP
4	0.5420	22.50	9.49	31.99	46.00	-14.01	AVG
5	1.0339	35.07	9.74	44.81	56.00	-11.19	QP
6	1.0339	25.30	9.74	35.04	46.00	-10.96	AVG
7	1.2420	34.69	9.76	44.45	56.00	-11.55	QP
8	1.2420	23.69	9.76	33.45	46.00	-12.55	AVG
9	3.9140	30.82	10.08	40.90	56.00	-15.10	QP
10	3.9140	20.50	10.08	30.58	46.00	-15.42	AVG
11 *	10.9940	43.13	10.61	53.74	60.00	-6.26	QP
12	10.9940	32.60	10.61	43.21	50.00	-6.79	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

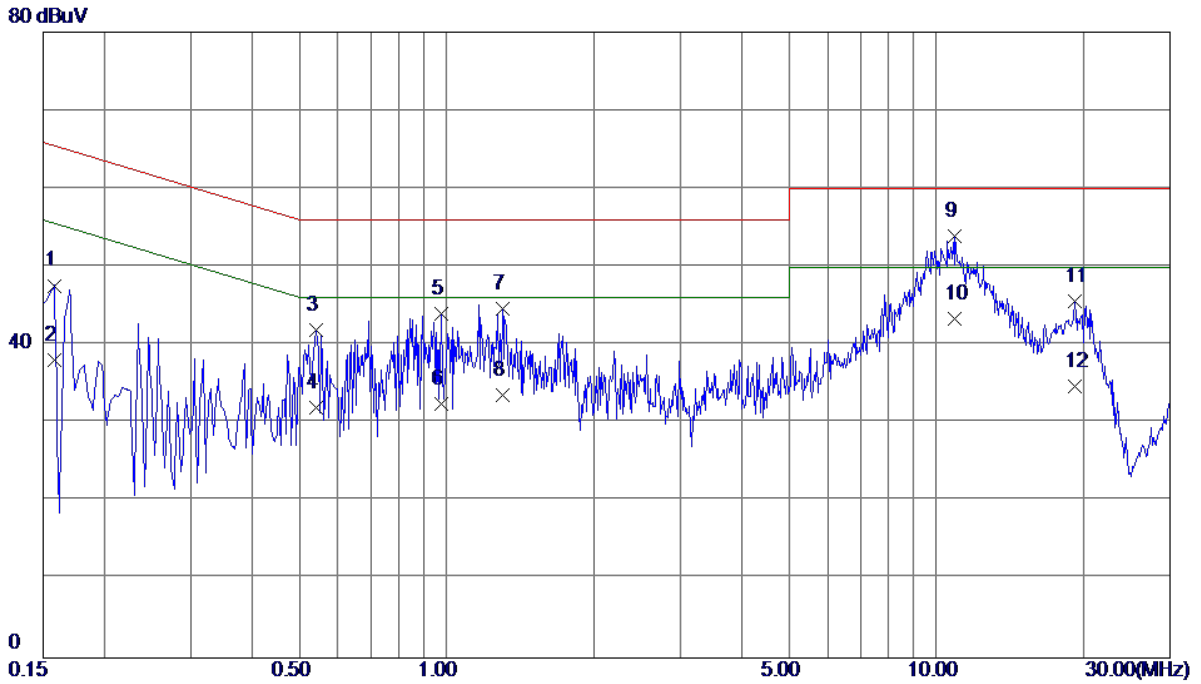


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1580	38.07	9.53	47.60	65.57	-17.97	QP
2	0.1580	28.60	9.53	38.13	55.57	-17.44	AVG
3	0.5420	32.49	9.49	41.98	56.00	-14.02	QP
4	0.5420	22.50	9.49	31.99	46.00	-14.01	AVG
5	0.9780	34.24	9.74	43.98	56.00	-12.02	QP
6	0.9780	22.80	9.74	32.54	46.00	-13.46	AVG
7	1.2980	34.87	9.76	44.63	56.00	-11.37	QP
8	1.2980	23.80	9.76	33.56	46.00	-12.44	AVG
9 *	10.9100	43.28	10.61	53.89	60.00	-6.11	QP
10	10.9100	32.80	10.61	43.41	50.00	-6.59	AVG
11	19.1580	34.67	10.87	45.54	60.00	-14.46	QP
12	19.1580	23.89	10.87	34.76	50.00	-15.24	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

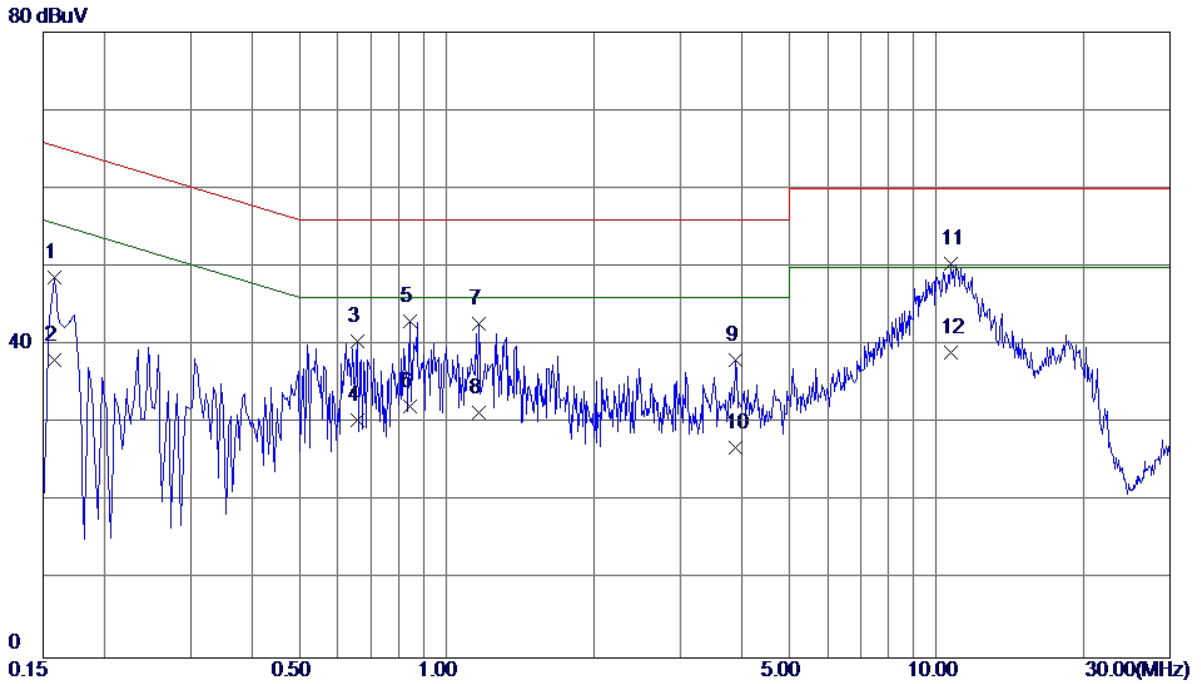


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1580	39.15	9.53	48.68	65.57	-16.89	QP
2	0.1580	28.50	9.53	38.03	55.57	-17.54	AVG
3	0.6580	30.93	9.51	40.44	56.00	-15.56	QP
4	0.6580	20.90	9.51	30.41	46.00	-15.59	AVG
5	0.8420	33.43	9.67	43.10	56.00	-12.90	QP
6	0.8420	22.49	9.67	32.16	46.00	-13.84	AVG
7	1.1620	32.93	9.75	42.68	56.00	-13.32	QP
8	1.1620	21.60	9.75	31.35	46.00	-14.65	AVG
9	3.8860	27.93	10.08	38.01	56.00	-17.99	QP
10	3.8860	16.80	10.08	26.88	46.00	-19.12	AVG
11 *	10.7100	39.87	10.61	50.48	60.00	-9.52	QP
12	10.7100	28.50	10.61	39.11	50.00	-10.89	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

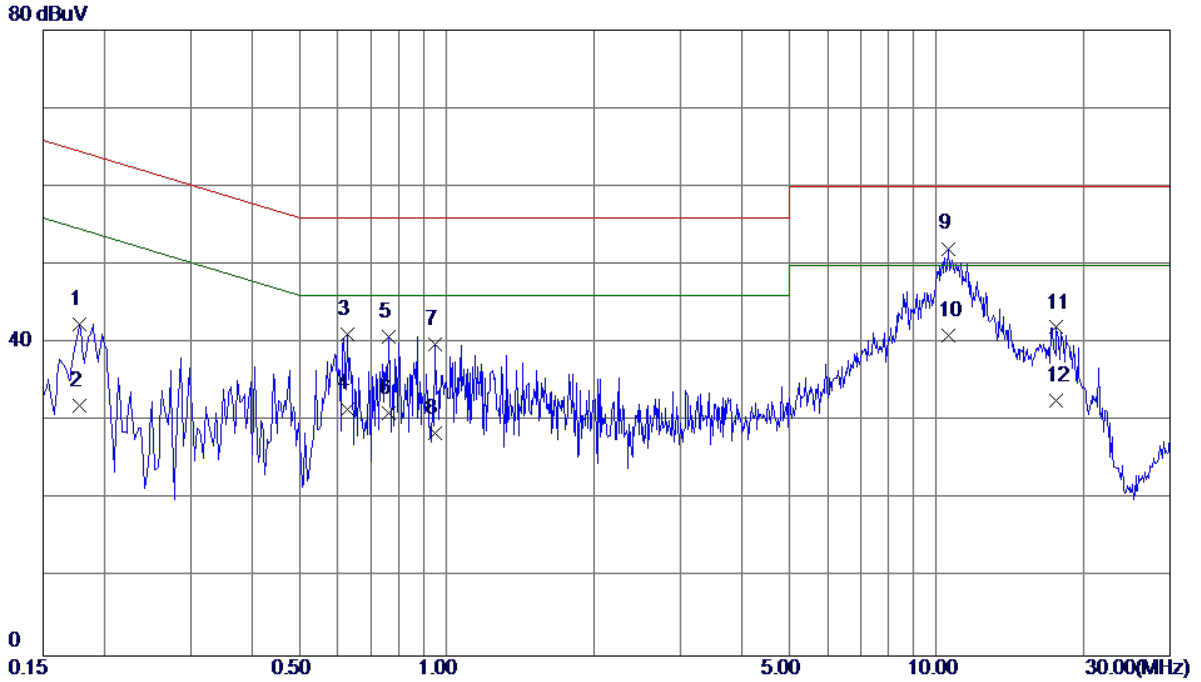


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1780	32.79	9.57	42.36	64.58	-22.22	QP
2	0.1780	22.50	9.57	32.07	54.58	-22.51	AVG
3	0.6260	31.41	9.70	41.11	56.00	-14.89	QP
4	0.6260	21.90	9.70	31.60	46.00	-14.40	AVG
5	0.7620	31.00	9.78	40.78	56.00	-15.22	QP
6	0.7620	21.30	9.78	31.08	46.00	-14.92	AVG
7	0.9460	29.96	9.83	39.79	56.00	-16.21	QP
8	0.9460	18.60	9.83	28.43	46.00	-17.57	AVG
9 *	10.5820	41.57	10.51	52.08	60.00	-7.92	QP
10	10.5820	30.50	10.51	41.01	50.00	-8.99	AVG
11	17.5740	31.25	10.75	42.00	60.00	-18.00	QP
12	17.5740	21.90	10.75	32.65	50.00	-17.35	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	24°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

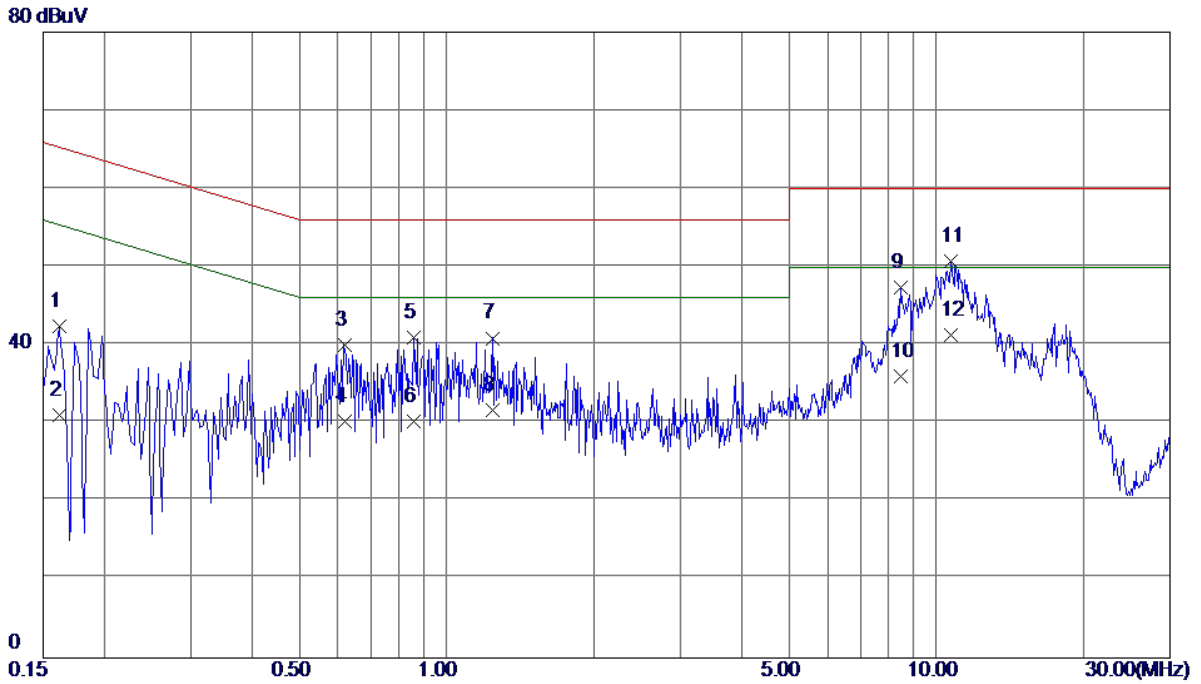


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1620	32.82	9.51	42.33	65.36	-23.03	QP
2	0.1620	21.50	9.51	31.01	55.36	-24.35	AVG
3	0.6180	30.54	9.50	40.04	56.00	-15.96	QP
4	0.6180	20.80	9.50	30.30	46.00	-15.70	AVG
5	0.8580	31.24	9.68	40.92	56.00	-15.08	QP
6	0.8580	20.61	9.68	30.29	46.00	-15.71	AVG
7	1.2380	31.12	9.76	40.88	56.00	-15.12	QP
8	1.2380	21.90	9.76	31.66	46.00	-14.34	AVG
9	8.4580	36.98	10.39	47.37	60.00	-12.63	QP
10	8.4580	25.60	10.39	35.99	50.00	-14.01	AVG
11	10.7060	40.11	10.61	50.72	60.00	-9.28	QP
12 *	10.7060	30.70	10.61	41.31	50.00	-8.69	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:Sunwoda+Earphone:Lianchuang(Black)		
Test Engineer	Kevin Li		

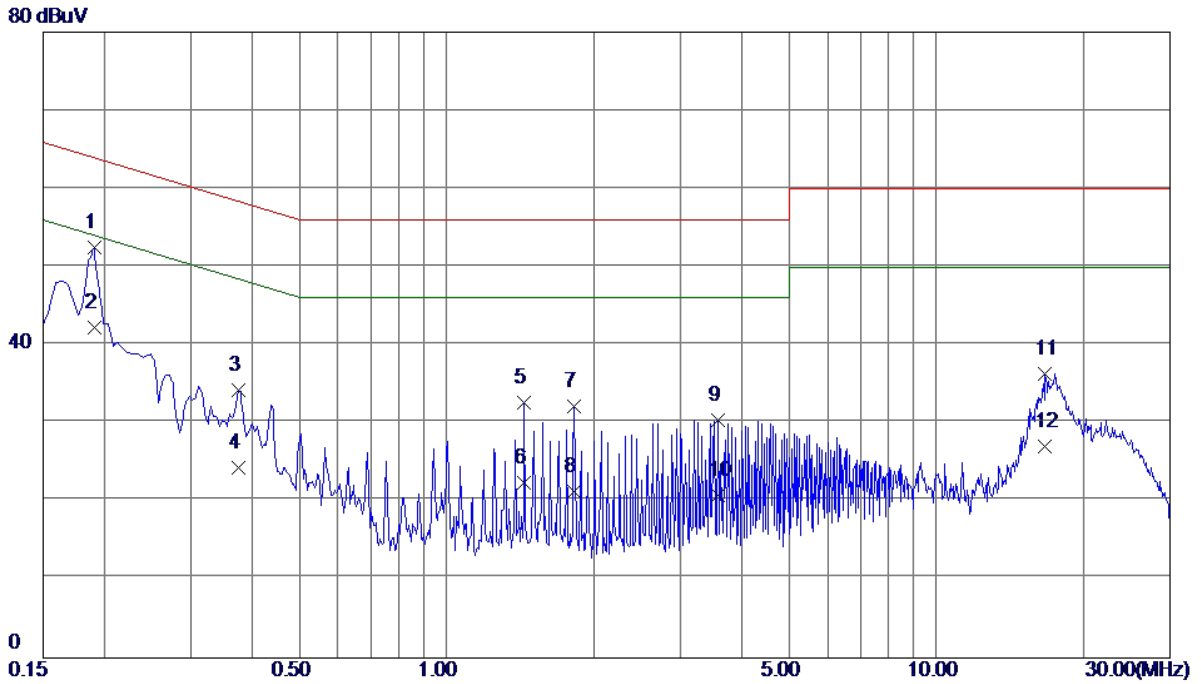


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1905	42.77	9.73	52.50	64.01	-11.51	QP
2	0.1905	32.50	9.73	42.23	54.01	-11.78	AVG
3	0.3750	24.46	9.75	34.21	58.39	-24.18	QP
4	0.3750	14.50	9.75	24.25	48.39	-24.14	AVG
5	1.4415	22.84	9.81	32.65	56.00	-23.35	QP
6	1.4415	12.60	9.81	22.41	46.00	-23.59	AVG
7	1.8195	22.35	9.80	32.15	56.00	-23.85	QP
8	1.8195	11.51	9.80	21.31	46.00	-24.69	AVG
9	3.5745	20.59	9.86	30.45	56.00	-25.55	QP
10	3.5745	11.00	9.86	20.86	46.00	-25.14	AVG
11	16.6785	26.09	10.26	36.35	60.00	-23.65	QP
12	16.6785	16.80	10.26	27.06	50.00	-22.94	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:Sunwoda+Earphone:Lianchuang(Black)		
Test Engineer	Kevin Li		

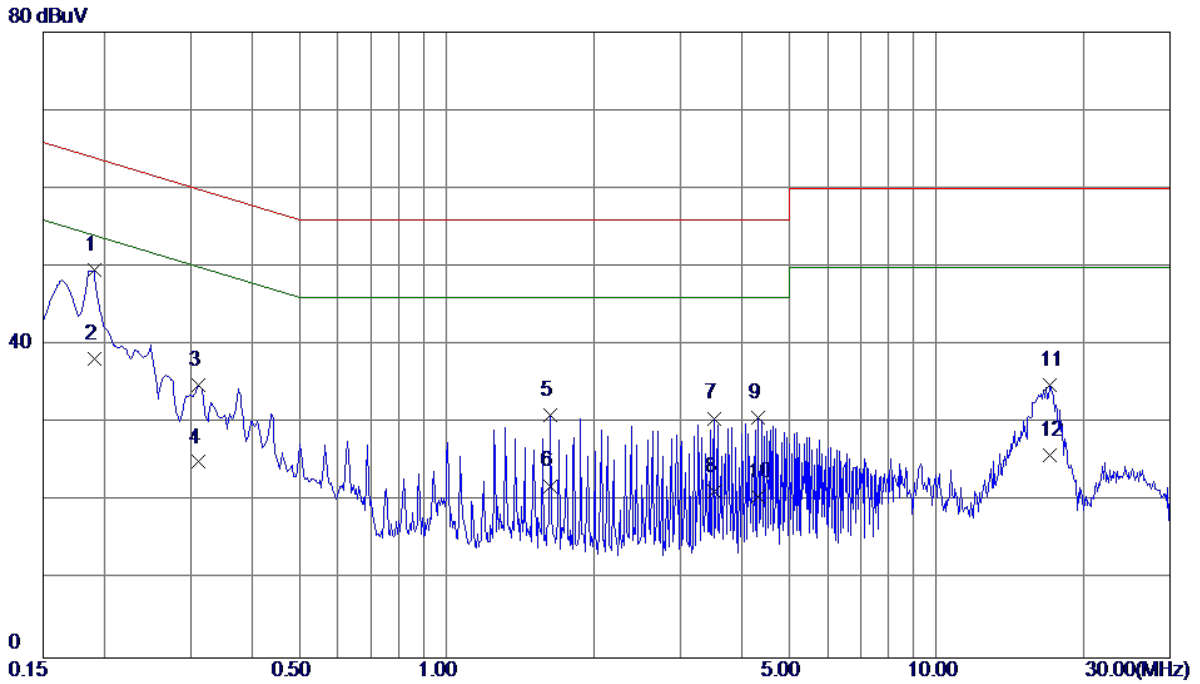


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1905	39.87	9.65	49.52	64.01	-14.49	QP
2	0.1905	28.60	9.65	38.25	54.01	-15.76	AVG
3	0.3120	25.27	9.64	34.91	59.92	-25.01	QP
4	0.3120	15.40	9.64	25.04	49.92	-24.88	AVG
5	1.6305	21.36	9.70	31.06	56.00	-24.94	QP
6	1.6305	12.30	9.70	22.00	46.00	-24.00	AVG
7	3.5115	20.86	9.78	30.64	56.00	-25.36	QP
8	3.5115	11.50	9.78	21.28	46.00	-24.72	AVG
9	4.3260	20.94	9.80	30.74	56.00	-25.26	QP
10	4.3260	10.80	9.80	20.60	46.00	-25.40	AVG
11	17.0565	24.61	10.32	34.93	60.00	-25.07	QP
12	17.0565	15.60	10.32	25.92	50.00	-24.08	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Lianchuang(Black)		
Test Engineer	Kevin Li		

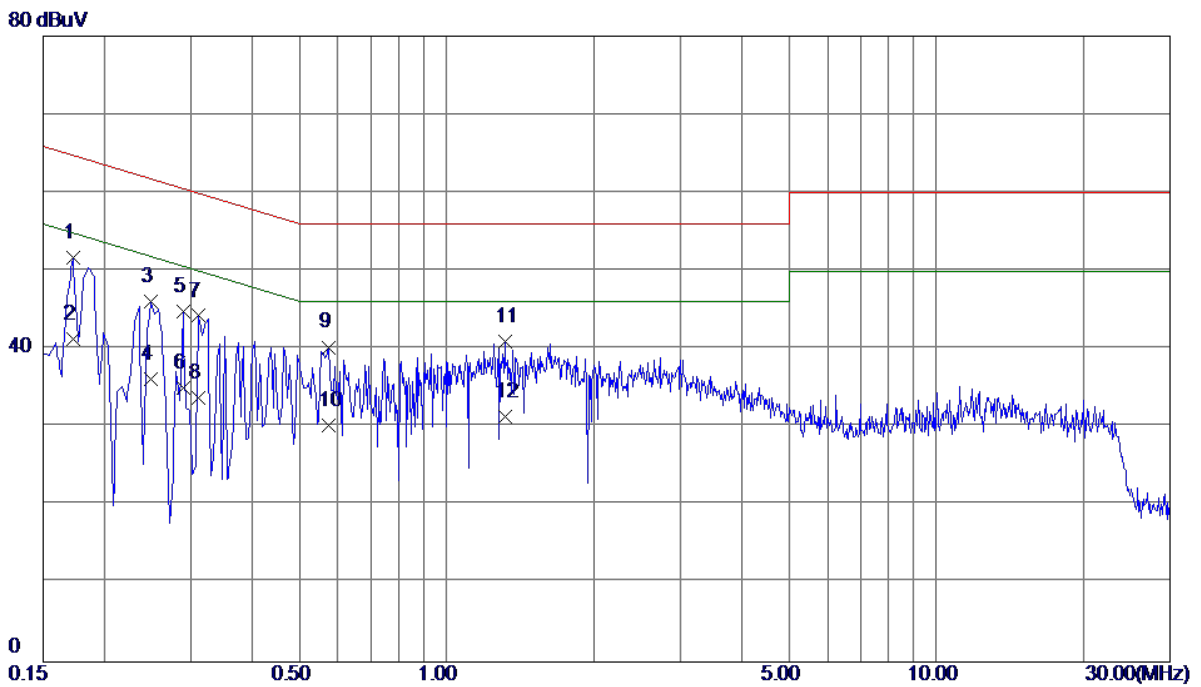


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1725	41.99	9.74	51.73	64.84	-13.11	QP
2	0.1725	31.50	9.74	41.24	54.84	-13.60	AVG
3	0.2490	36.31	9.73	46.04	61.79	-15.75	QP
4	0.2490	26.50	9.73	36.23	51.79	-15.56	AVG
5	0.2895	35.07	9.72	44.79	60.54	-15.75	QP
6	0.2895	25.30	9.72	35.02	50.54	-15.52	AVG
7	0.3120	34.51	9.73	44.24	59.92	-15.68	QP
8	0.3120	24.10	9.73	33.83	49.92	-16.09	AVG
9	0.5730	30.48	9.76	40.24	56.00	-15.76	QP
10	0.5730	20.50	9.76	30.26	46.00	-15.74	AVG
11	1.3154	31.15	9.80	40.95	56.00	-15.05	QP
12	1.3154	21.50	9.80	31.30	46.00	-14.70	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Lianchuang(Black)		
Test Engineer	Kevin Li		

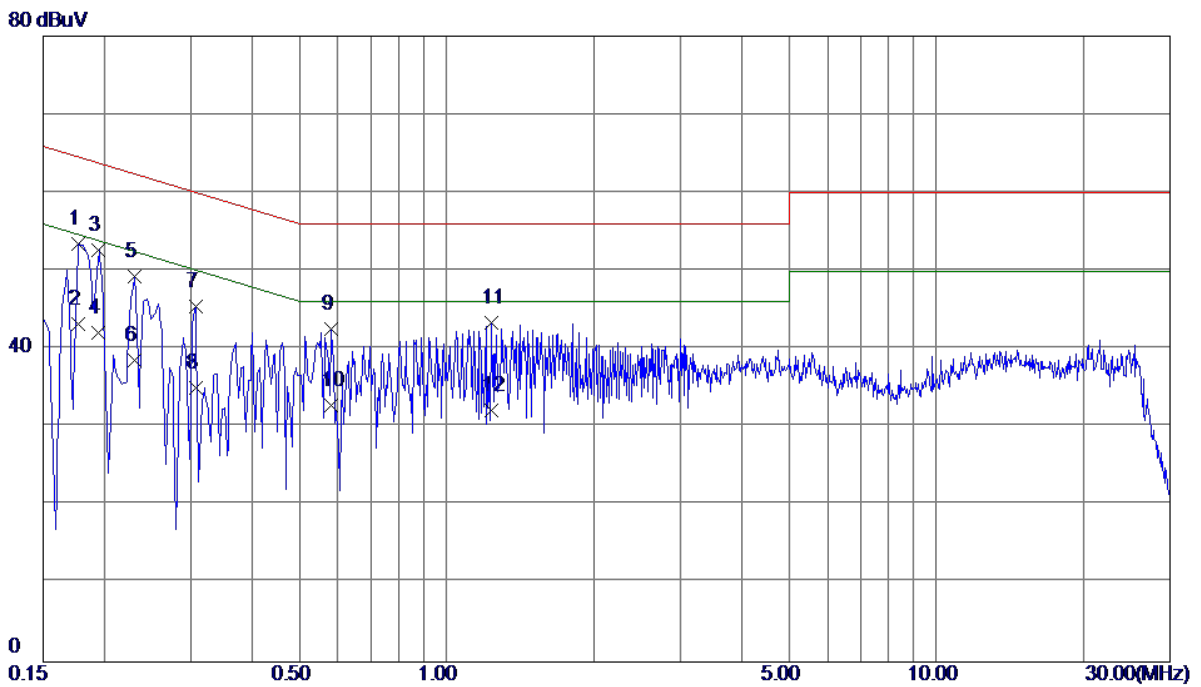


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1770	43.80	9.64	53.44	64.63	-11.19	QP
2	0.1770	33.60	9.64	43.24	54.63	-11.39	AVG
3 *	0.1949	43.00	9.65	52.65	63.83	-11.18	QP
4	0.1949	32.50	9.65	42.15	53.83	-11.68	AVG
5	0.2310	39.63	9.64	49.27	62.41	-13.14	QP
6	0.2310	28.90	9.64	38.54	52.41	-13.87	AVG
7	0.3075	35.75	9.64	45.39	60.04	-14.65	QP
8	0.3075	25.40	9.64	35.04	50.04	-15.00	AVG
9	0.5820	32.91	9.66	42.57	56.00	-13.43	QP
10	0.5820	23.20	9.66	32.86	46.00	-13.14	AVG
11	1.2345	33.65	9.68	43.33	56.00	-12.67	QP
12	1.2345	22.49	9.68	32.17	46.00	-13.83	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Quancheng(Black)		
Test Engineer	Kevin Li		

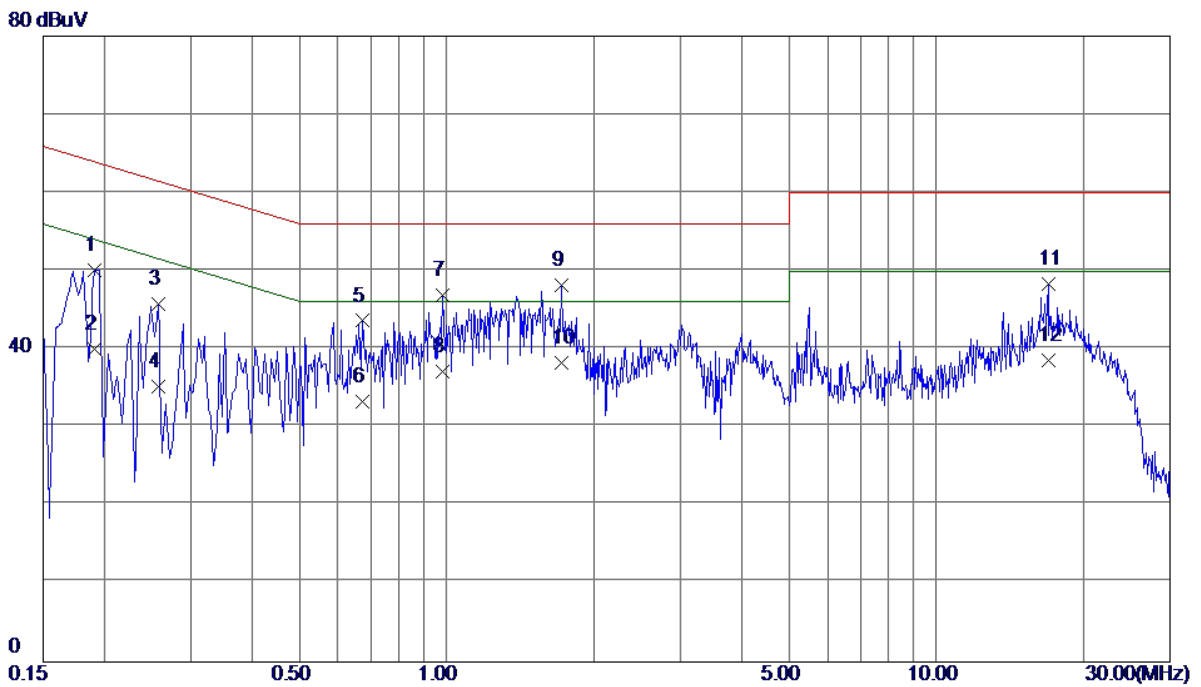


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1905	40.41	9.73	50.14	64.01	-13.87	QP
2	0.1905	30.25	9.73	39.98	54.01	-14.03	AVG
3	0.2580	35.99	9.72	45.71	61.50	-15.79	QP
4	0.2580	25.41	9.72	35.13	51.50	-16.37	AVG
5	0.6720	33.83	9.77	43.60	56.00	-12.40	QP
6	0.6720	23.50	9.77	33.27	46.00	-12.73	AVG
7	0.9825	37.18	9.77	46.95	56.00	-9.05	QP
8	0.9825	27.40	9.77	37.17	46.00	-8.83	AVG
9	1.7115	38.29	9.81	48.10	56.00	-7.90	QP
10 *	1.7115	28.39	9.81	38.20	46.00	-7.80	AVG
11	16.9169	38.02	10.26	48.28	60.00	-11.72	QP
12	16.9169	28.36	10.26	38.62	50.00	-11.38	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Quancheng(Black)		
Test Engineer	Kevin Li		

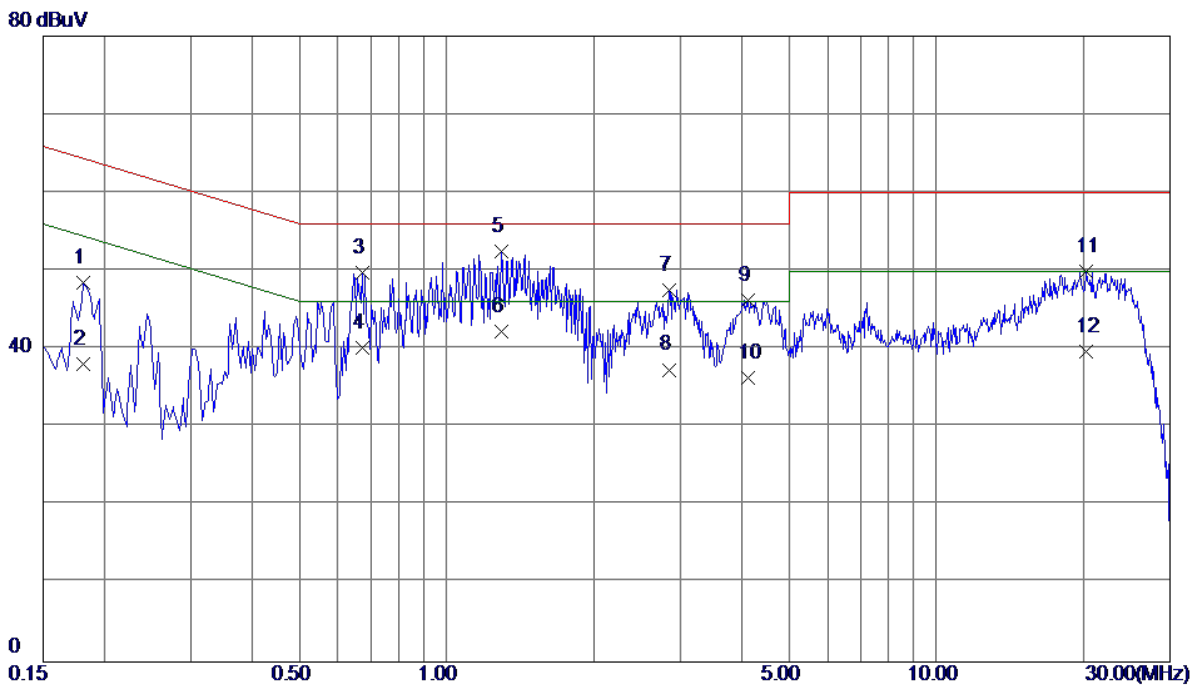


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1815	38.81	9.65	48.46	64.42	-15.96	QP
2	0.1815	28.49	9.65	38.14	54.42	-16.28	AVG
3	0.6720	40.04	9.67	49.71	56.00	-6.29	QP
4	0.6720	30.50	9.67	40.17	46.00	-5.83	AVG
5 *	1.2930	42.81	9.68	52.49	56.00	-3.51	QP
6	1.2930	32.60	9.68	42.28	46.00	-3.72	AVG
7	2.8410	37.77	9.75	47.52	56.00	-8.48	QP
8	2.8410	27.61	9.75	37.36	46.00	-8.64	AVG
9	4.1325	36.45	9.79	46.24	56.00	-9.76	QP
10	4.1325	26.50	9.79	36.29	46.00	-9.71	AVG
11	20.1705	39.51	10.37	49.88	60.00	-10.12	QP
12	20.1705	29.39	10.37	39.76	50.00	-10.24	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Goer(White)		
Test Engineer	Kevin Li		

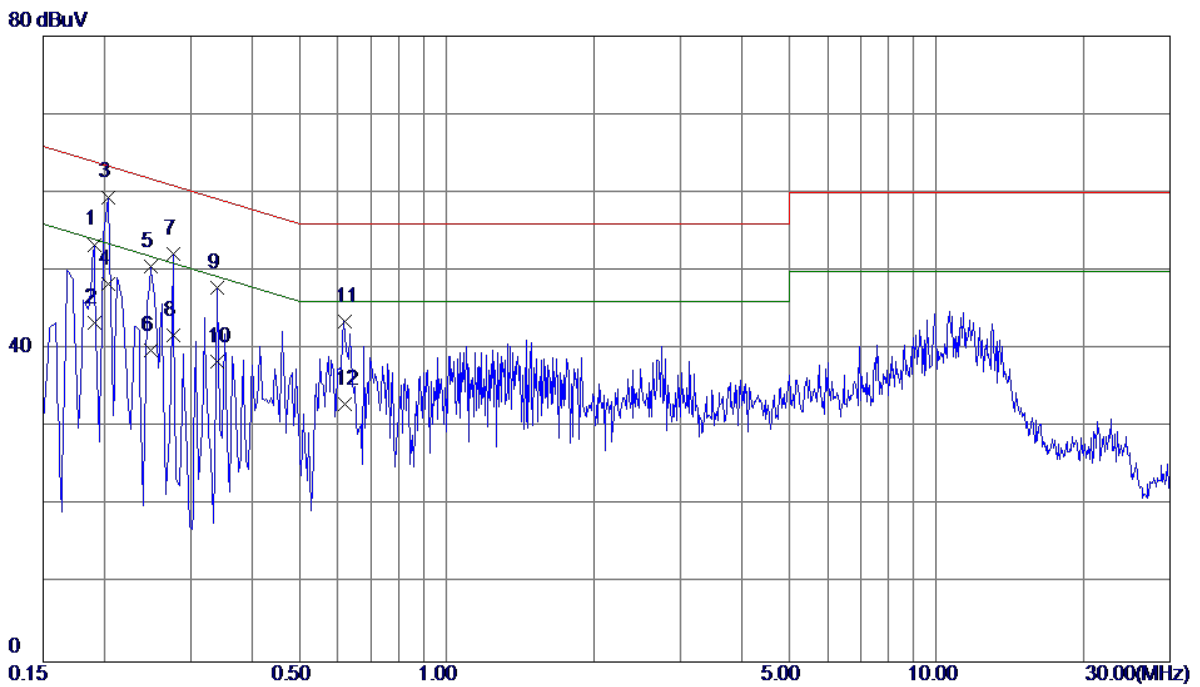


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1905	43.63	9.73	53.36	64.01	-10.65	QP
2	0.1905	33.60	9.73	43.33	54.01	-10.68	AVG
3 *	0.2040	49.72	9.72	59.44	63.45	-4.01	QP
4	0.2040	38.60	9.72	48.32	53.45	-5.13	AVG
5	0.2490	40.80	9.73	50.53	61.79	-11.26	QP
6	0.2490	30.10	9.73	39.83	51.79	-11.96	AVG
7	0.2760	42.48	9.72	52.20	60.94	-8.74	QP
8	0.2760	32.10	9.72	41.82	50.94	-9.12	AVG
9	0.3390	38.11	9.74	47.85	59.23	-11.38	QP
10	0.3390	28.60	9.74	38.34	49.23	-10.89	AVG
11	0.6180	33.72	9.76	43.48	56.00	-12.52	QP
12	0.6180	23.20	9.76	32.96	46.00	-13.04	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Goer(Black)		
Test Engineer	Kevin Li		

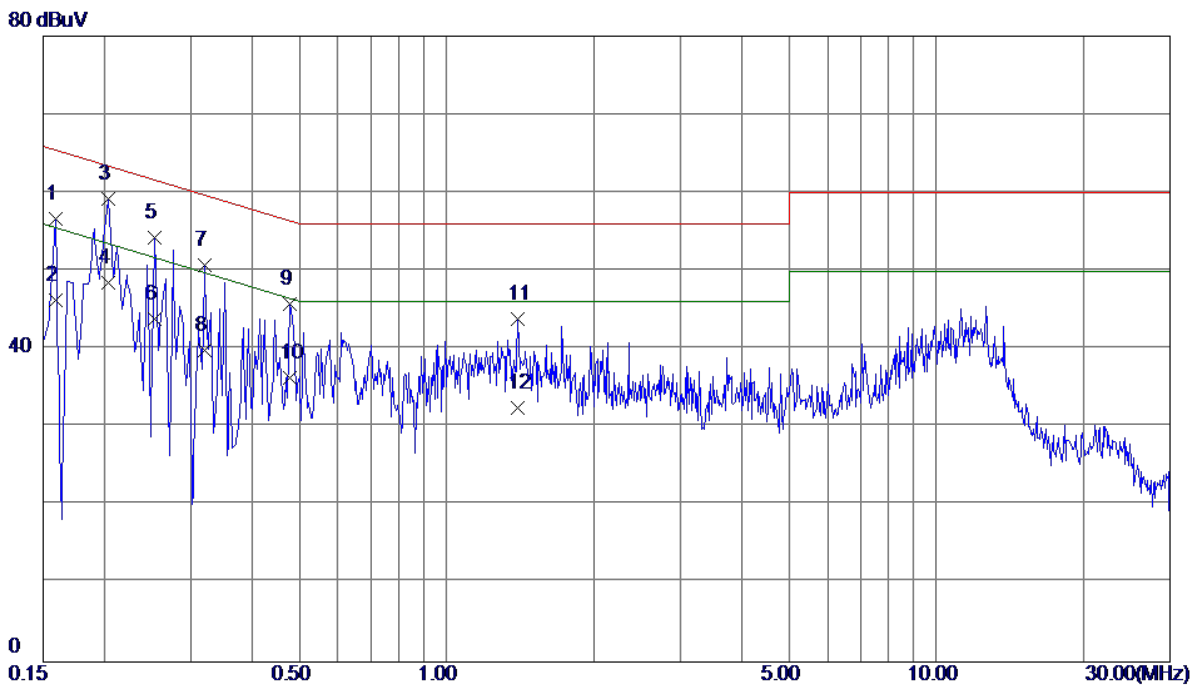


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1590	46.93	9.75	56.68	65.52	-8.84	QP
2	0.1590	36.50	9.75	46.25	55.52	-9.27	AVG
3 *	0.2040	49.50	9.72	59.22	63.45	-4.23	QP
4	0.2040	38.69	9.72	48.41	53.45	-5.04	AVG
5	0.2535	44.51	9.73	54.24	61.64	-7.40	QP
6	0.2535	34.10	9.73	43.83	51.64	-7.81	AVG
7	0.3209	40.92	9.73	50.65	59.68	-9.03	QP
8	0.3209	30.10	9.73	39.83	49.68	-9.85	AVG
9	0.4785	36.05	9.76	45.81	56.37	-10.56	QP
10	0.4785	26.50	9.76	36.26	46.37	-10.11	AVG
11	1.3965	33.97	9.80	43.77	56.00	-12.23	QP
12	1.3965	22.61	9.80	32.41	46.00	-13.59	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Goer(White)		
Test Engineer	Kevin Li		

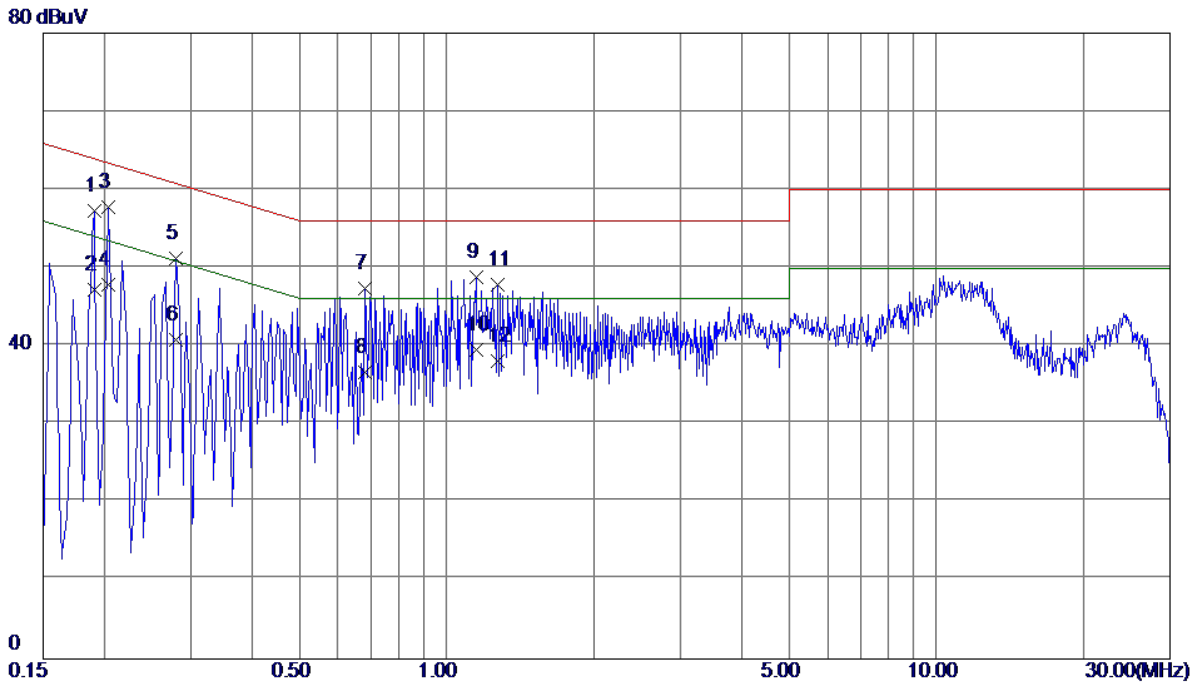

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1905	47.61	9.65	57.26	64.01	-6.75	QP
2	0.1905	37.50	9.65	47.15	54.01	-6.86	AVG
3	0.2040	48.13	9.65	57.78	63.45	-5.67	QP
4 *	0.2040	38.20	9.65	47.85	53.45	-5.60	AVG
5	0.2805	41.59	9.64	51.23	60.80	-9.57	QP
6	0.2805	31.10	9.64	40.74	50.80	-10.06	AVG
7	0.6809	37.62	9.67	47.29	56.00	-8.71	QP
8	0.6809	26.90	9.67	36.57	46.00	-9.43	AVG
9	1.1490	39.17	9.68	48.85	56.00	-7.15	QP
10	1.1490	29.79	9.68	39.47	46.00	-6.53	AVG
11	1.2705	38.14	9.68	47.82	56.00	-8.18	QP
12	1.2705	28.40	9.68	38.08	46.00	-7.92	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Goer(Black)		
Test Engineer	Kevin Li		

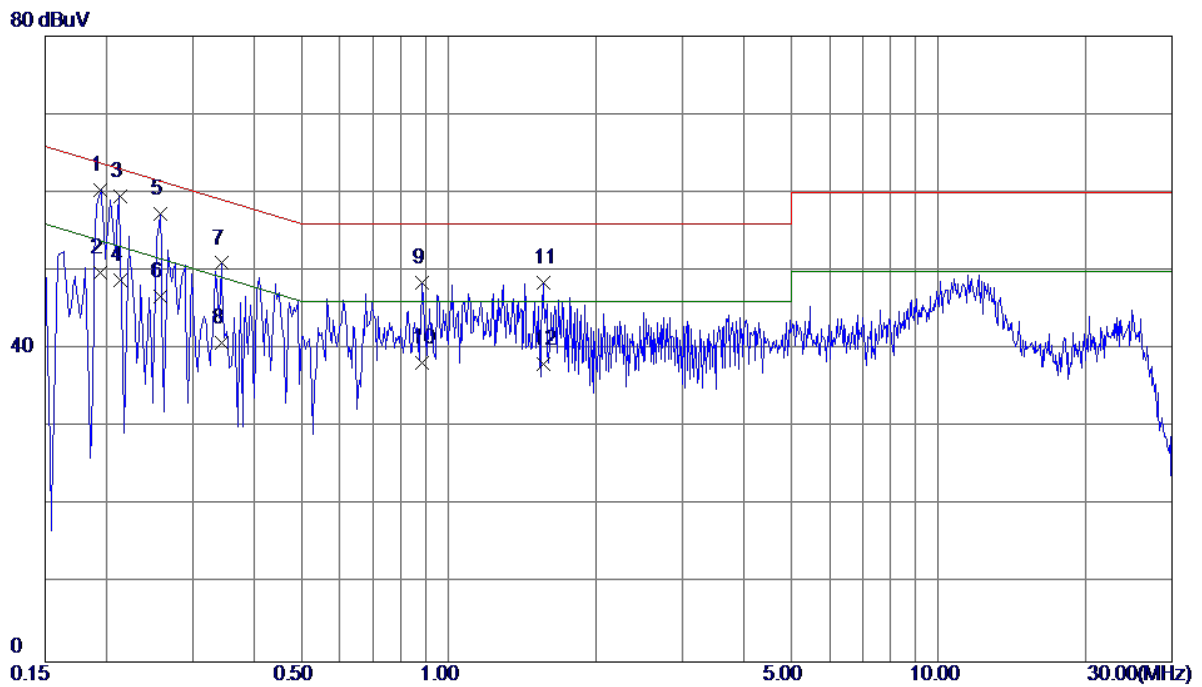

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1949	50.67	9.65	60.32	63.83	-3.51	QP
2	0.1949	40.10	9.65	49.75	53.83	-4.08	AVG
3	0.2130	49.89	9.65	59.54	63.09	-3.55	QP
4	0.2130	39.19	9.65	48.84	53.09	-4.25	AVG
5	0.2580	47.64	9.64	57.28	61.50	-4.22	QP
6	0.2580	37.10	9.64	46.74	51.50	-4.76	AVG
7	0.3435	41.30	9.66	50.96	59.12	-8.16	QP
8	0.3435	31.10	9.66	40.76	49.12	-8.36	AVG
9	0.8835	38.85	9.67	48.52	56.00	-7.48	QP
10	0.8835	28.50	9.67	38.17	46.00	-7.83	AVG
11	1.5585	38.80	9.69	48.49	56.00	-7.51	QP
12	1.5585	28.40	9.69	38.09	46.00	-7.91	AVG

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	ETS	3142B	26419	Mar. 26, 2018
2	Amplifier	SONOMA	310N	186128	Feb. 22, 2018
3	EMI Test Receiver	R&S	ESCI	100895	Mar. 26, 2018
4	Cable	emci	LMR-400(30MHz-1GHz)(7m+7m)	N/A	Jun. 27, 2017
5	Controller	ETS-Lindgren	2090	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
7	Antenna	ETS	3142B	26419	Mar. 26, 2018
8	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
9	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017
10	Receiver	Agilent	N9038A	MY52130039	Sep. 04, 2017
11	Cable	emci	LMR-400(30MHz-1GHz)(8m+5m)	N/A	Jun. 27, 2017
12	Controller	CT	SC100	N/A	N/A
13	Controller	MF	MF-7802	MF780208416	N/A
14	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

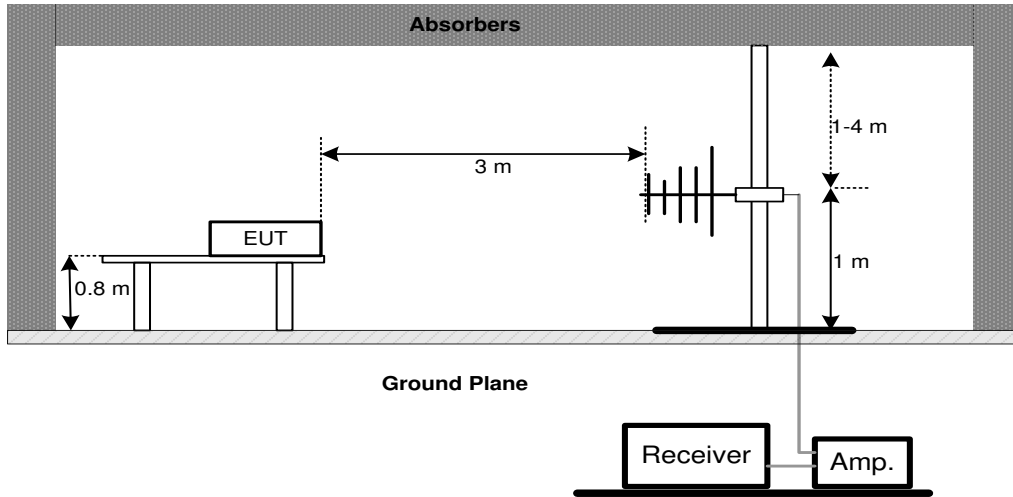

(B) Radiated Emission Test Set-Up Frequency 1 GHz

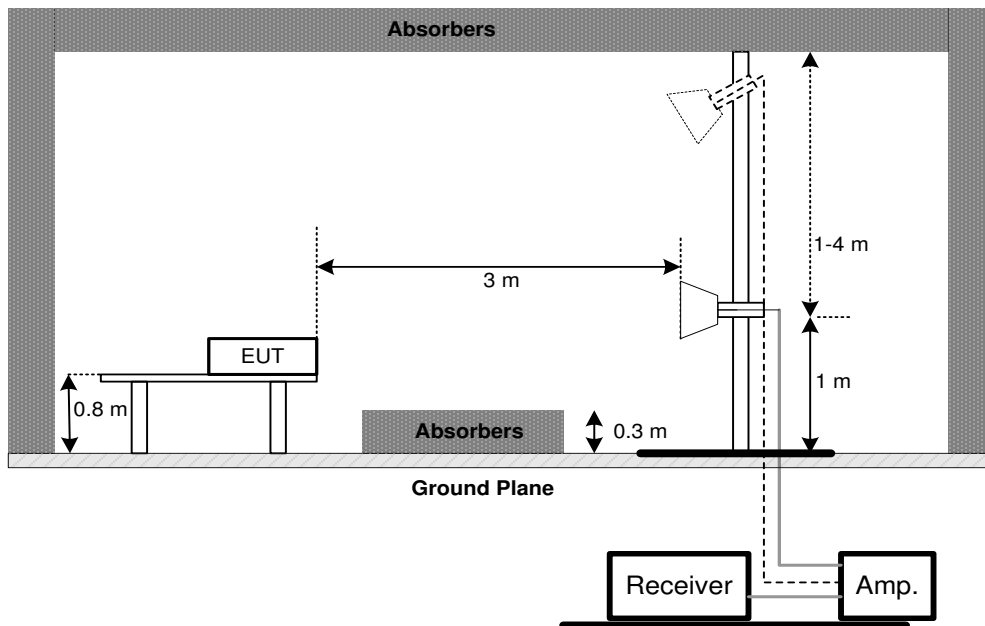


4.2.6 TEST RESULTS-BELOW 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

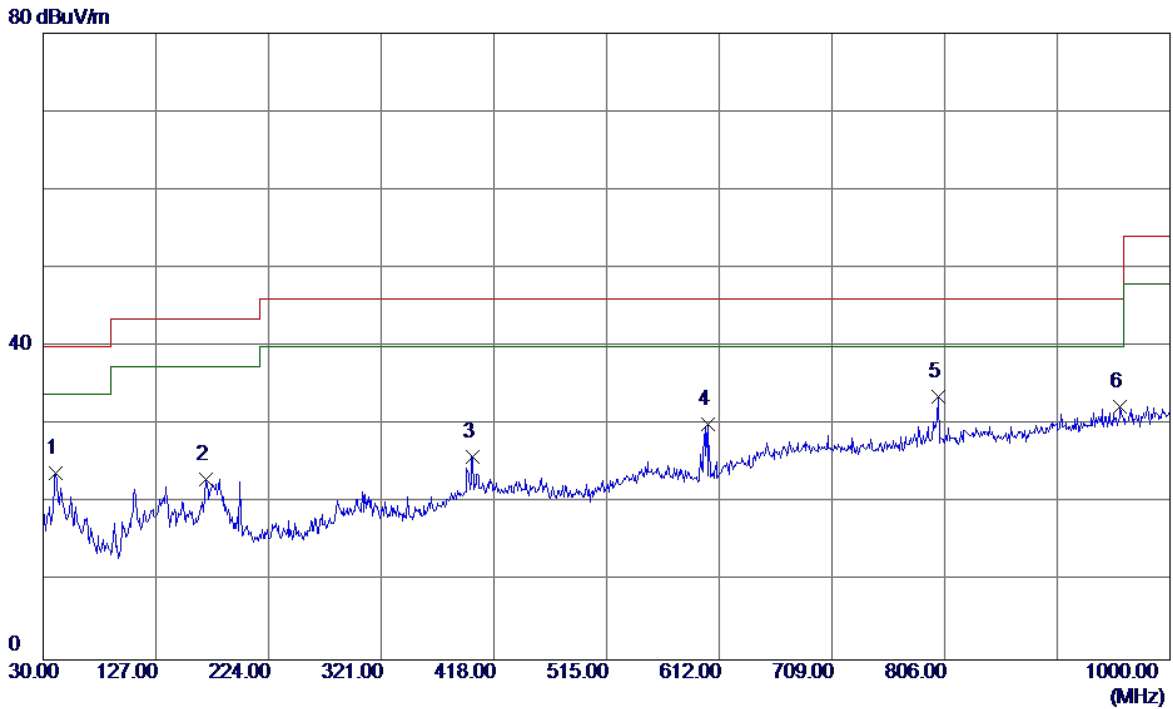


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	41.1550	36.07	-12.28	23.79	40.00	-16.21	QP
2	170.1649	33.80	-10.73	23.07	43.50	-20.43	QP
3	399.5700	33.20	-7.23	25.97	46.00	-20.03	QP
4	601.8150	34.74	-4.72	30.02	46.00	-15.98	QP
5 *	800.1800	32.92	0.61	33.53	46.00	-12.47	QP
6	957.3200	28.98	3.31	32.29	46.00	-13.71	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

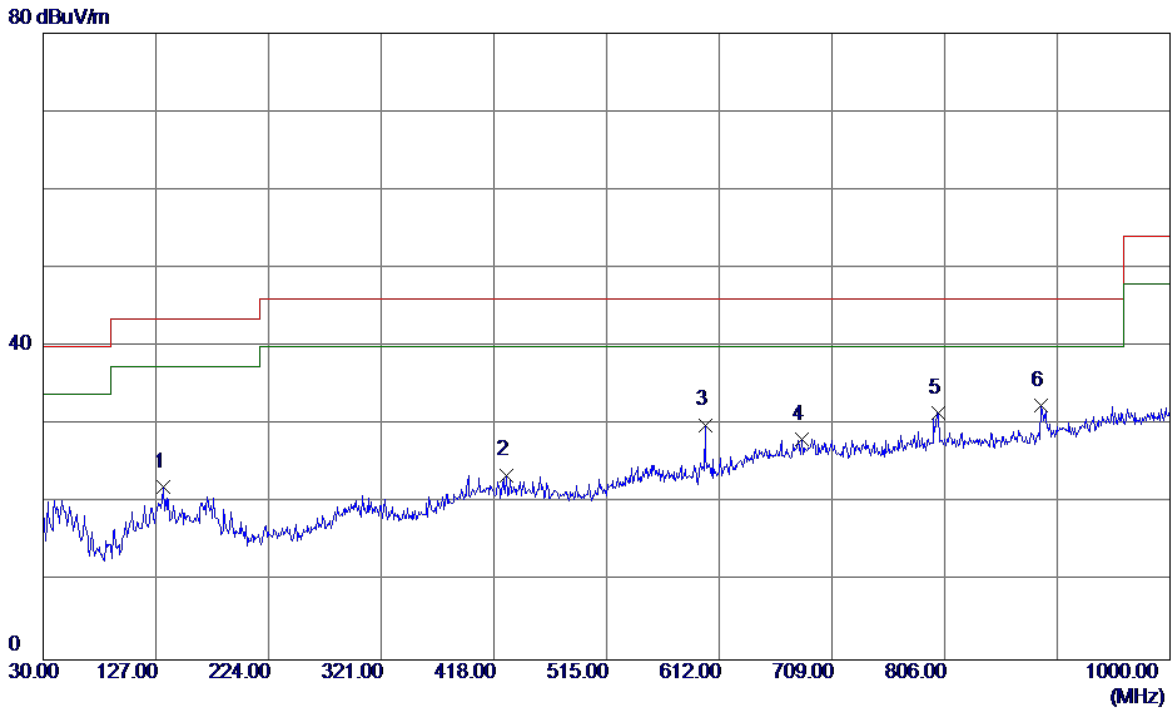


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	133.3049	33.48	-11.38	22.10	43.50	-21.40	QP
2	428.6700	30.73	-7.13	23.60	46.00	-22.40	QP
3	599.8750	34.83	-4.83	30.00	46.00	-16.00	QP
4	683.2950	29.21	-1.00	28.21	46.00	-17.79	QP
5	800.1800	30.97	0.61	31.58	46.00	-14.42	QP
6 *	888.9350	31.10	1.44	32.54	46.00	-13.46	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Foxconn+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

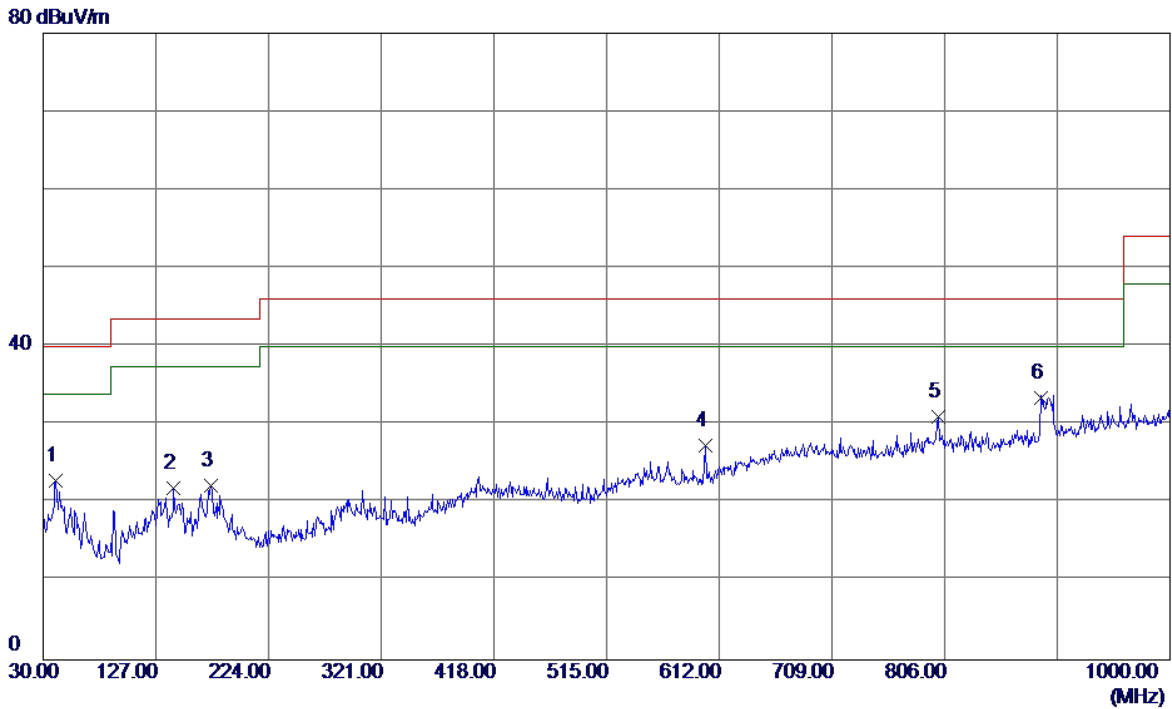


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	40.6699	35.20	-12.38	22.82	40.00	-17.18	QP
2	142.5200	33.76	-11.89	21.87	43.50	-21.63	QP
3	174.0450	33.51	-11.29	22.22	43.50	-21.28	QP
4	599.8750	32.15	-4.83	27.32	46.00	-18.68	QP
5	800.1800	30.45	0.61	31.06	46.00	-14.94	QP
6 *	888.9350	32.03	1.44	33.47	46.00	-12.53	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Foxconn+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

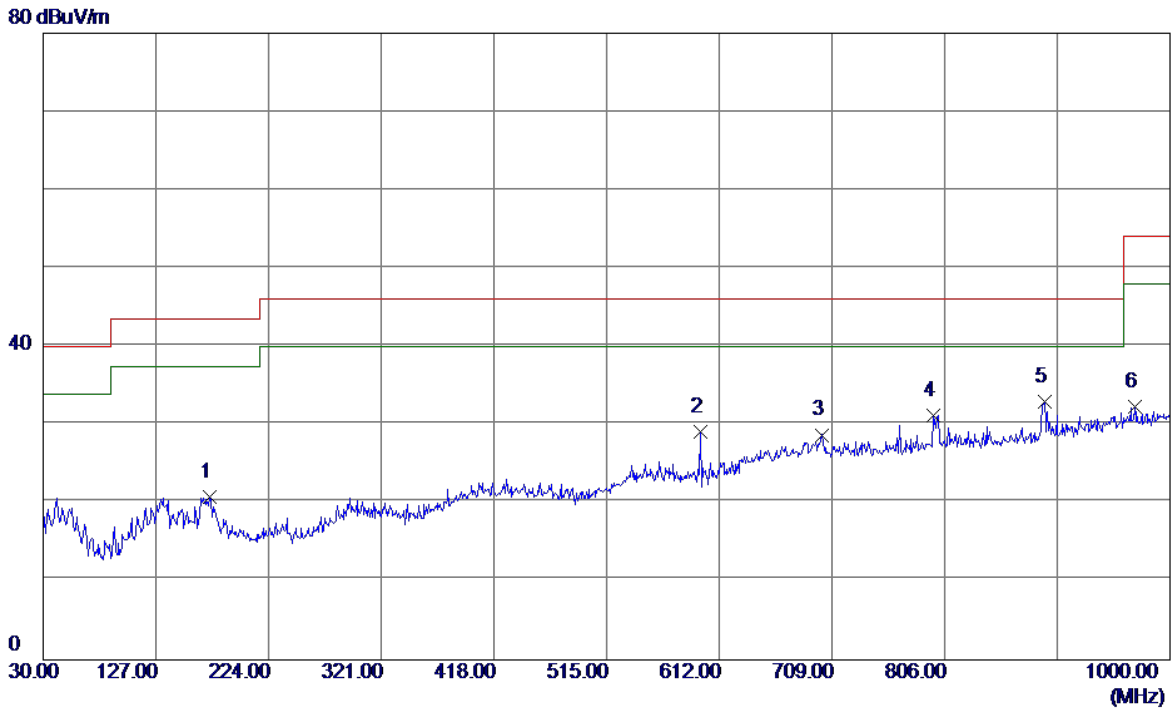


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	173.5600	32.04	-11.22	20.82	43.50	-22.68	QP
2	595.5100	33.86	-4.79	29.07	46.00	-16.93	QP
3	700.7550	29.37	-0.65	28.72	46.00	-17.28	QP
4	796.7849	30.74	0.51	31.25	46.00	-14.75	QP
5 *	891.8450	31.39	1.50	32.89	46.00	-13.11	QP
6	969.4450	28.84	3.49	32.33	54.00	-21.67	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:HONGLIN+Battery:SCUD+Earphone:MERRY		
Test Engineer	Kevin Li		

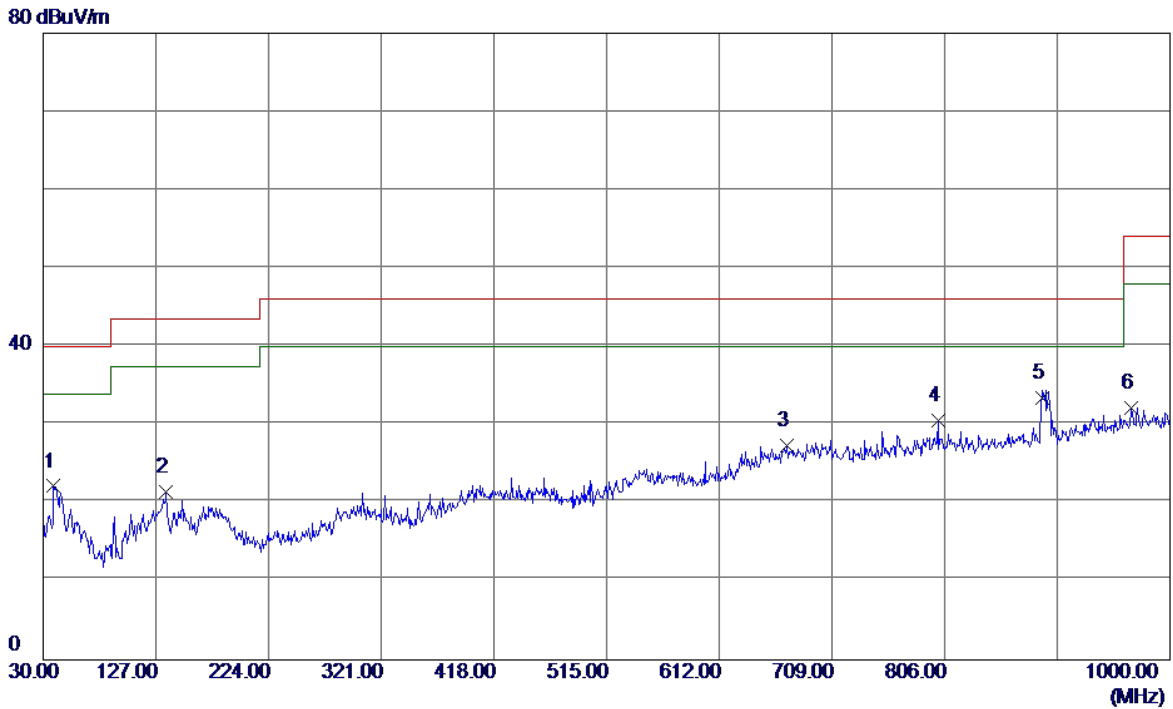

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.7300	34.88	-12.72	22.16	40.00	-17.84	QP
2	135.7300	33.03	-11.56	21.47	43.50	-22.03	QP
3	670.6850	28.58	-1.26	27.32	46.00	-18.68	QP
4	800.1800	29.94	0.61	30.55	46.00	-15.45	QP
5 *	890.3900	32.00	1.47	33.47	46.00	-12.53	QP
6	967.0200	28.77	3.45	32.22	54.00	-21.78	QP


EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:HONGLIN+Battery:SCUD+Earphone:MERRY		
Test Engineer	Kevin Li		

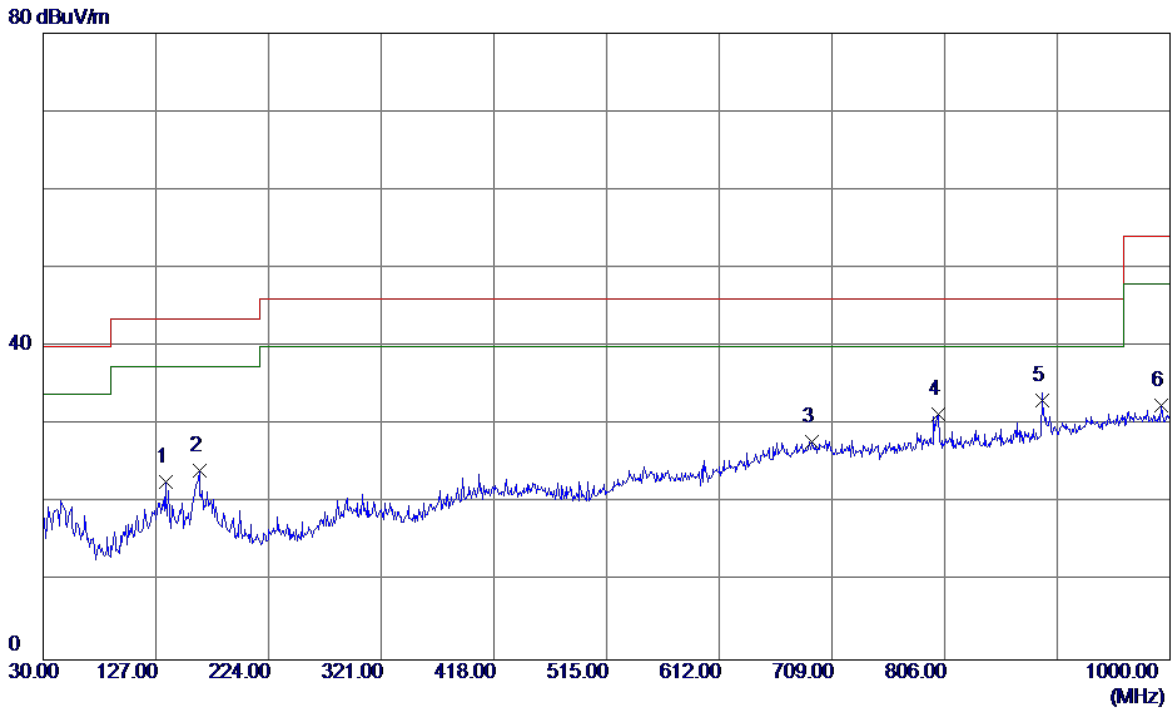

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	135.2450	34.22	-11.53	22.69	43.50	-20.81	QP
2	164.3450	35.84	-11.75	24.09	43.50	-19.41	QP
3	691.5400	28.72	-0.83	27.89	46.00	-18.11	QP
4	800.1800	30.70	0.61	31.31	46.00	-14.69	QP
5 *	889.9050	31.64	1.46	33.10	46.00	-12.90	QP
6	992.7250	28.62	3.82	32.44	54.00	-21.56	QP


EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

80 dBuV/m

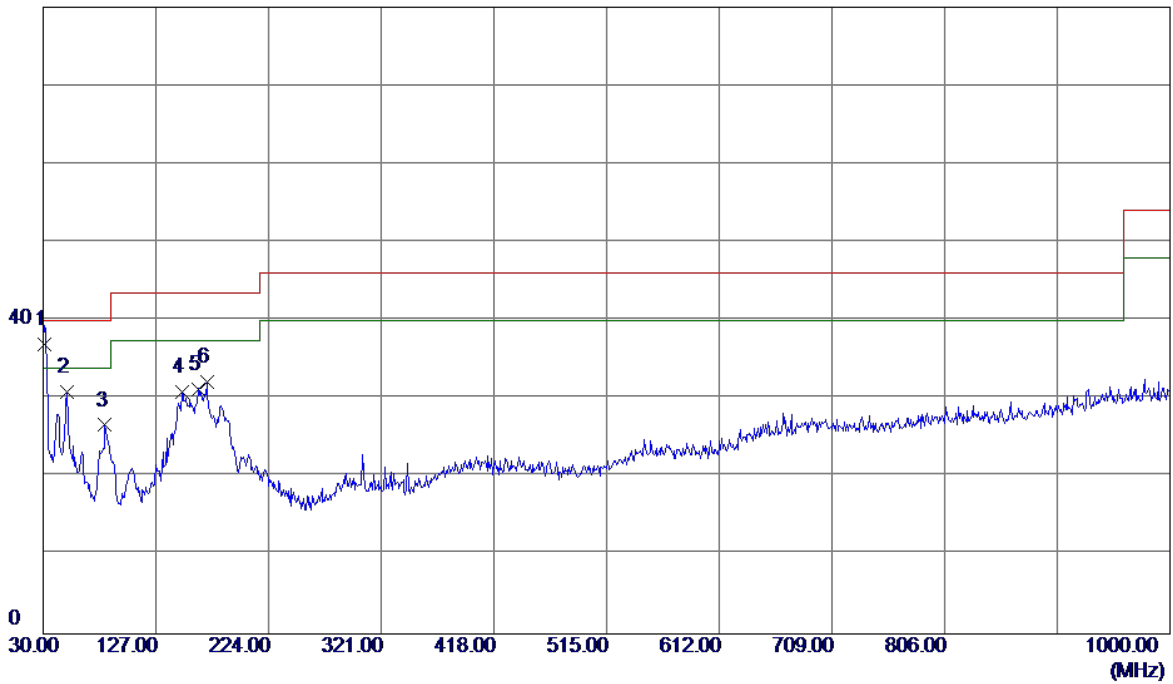


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.9972	49.90	-12.99	36.91	40.00	-3.09	QP
2	50.8550	43.06	-12.24	30.82	40.00	-9.18	QP
3	83.3500	43.05	-16.41	26.64	40.00	-13.36	QP
4	149.7950	42.79	-11.91	30.88	43.50	-12.62	QP
5	163.3750	43.11	-11.93	31.18	43.50	-12.32	QP
6	171.1350	43.05	-10.87	32.18	43.50	-11.32	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

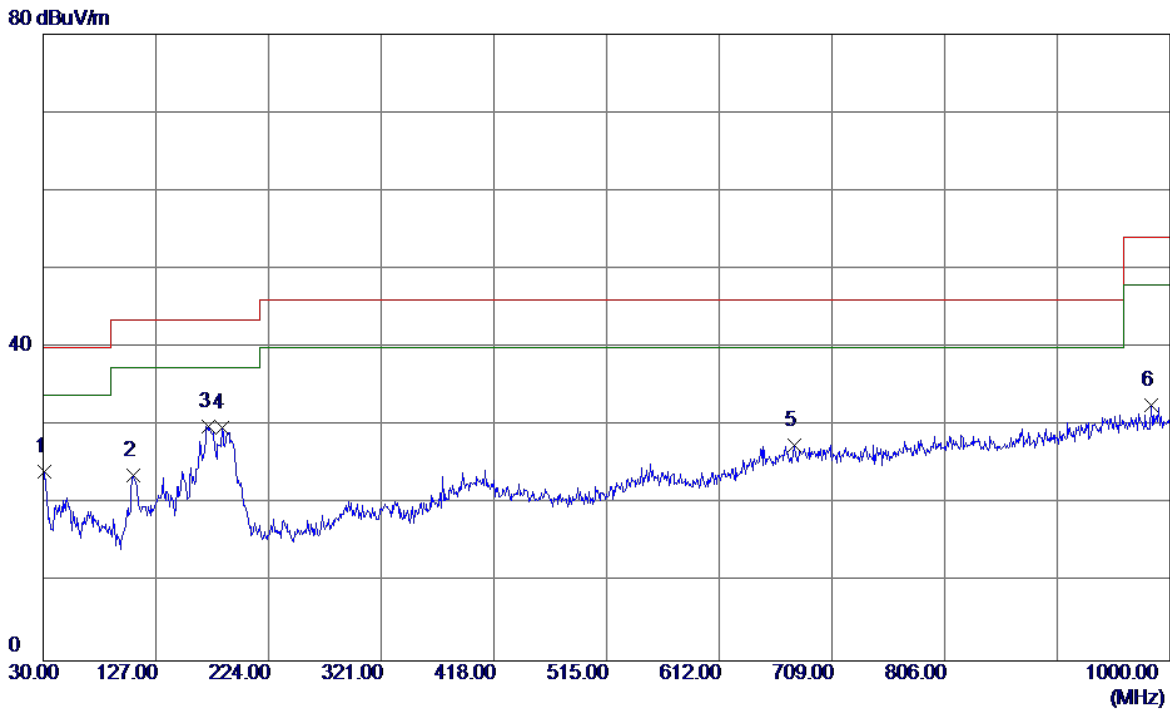


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.4550	37.22	-13.08	24.14	40.00	-15.86	QP
2	108.0850	37.72	-13.99	23.73	43.50	-19.77	QP
3 *	172.5900	41.02	-11.08	29.94	43.50	-13.56	QP
4	183.7450	42.28	-12.54	29.74	43.50	-13.76	QP
5	676.9900	28.65	-1.13	27.52	46.00	-18.48	QP
6	983.9950	28.93	3.70	32.63	54.00	-21.37	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

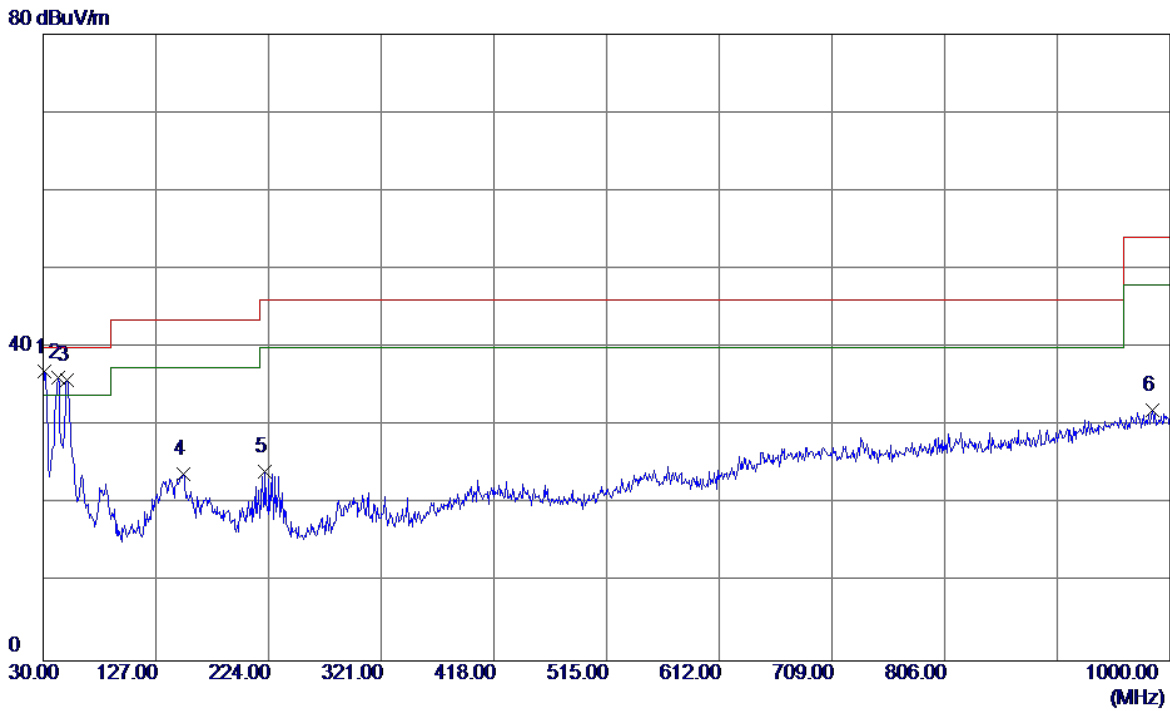


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	31.4550	49.96	-13.08	36.88	40.00	-3.12	QP
2	42.6100	48.17	-11.97	36.20	40.00	-3.80	QP
3	50.8550	48.12	-12.24	35.88	40.00	-4.12	QP
4	150.2800	35.71	-11.93	23.78	43.50	-19.72	QP
5	221.0900	38.00	-13.85	24.15	46.00	-21.85	QP
6	984.9650	28.35	3.71	32.06	54.00	-21.94	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

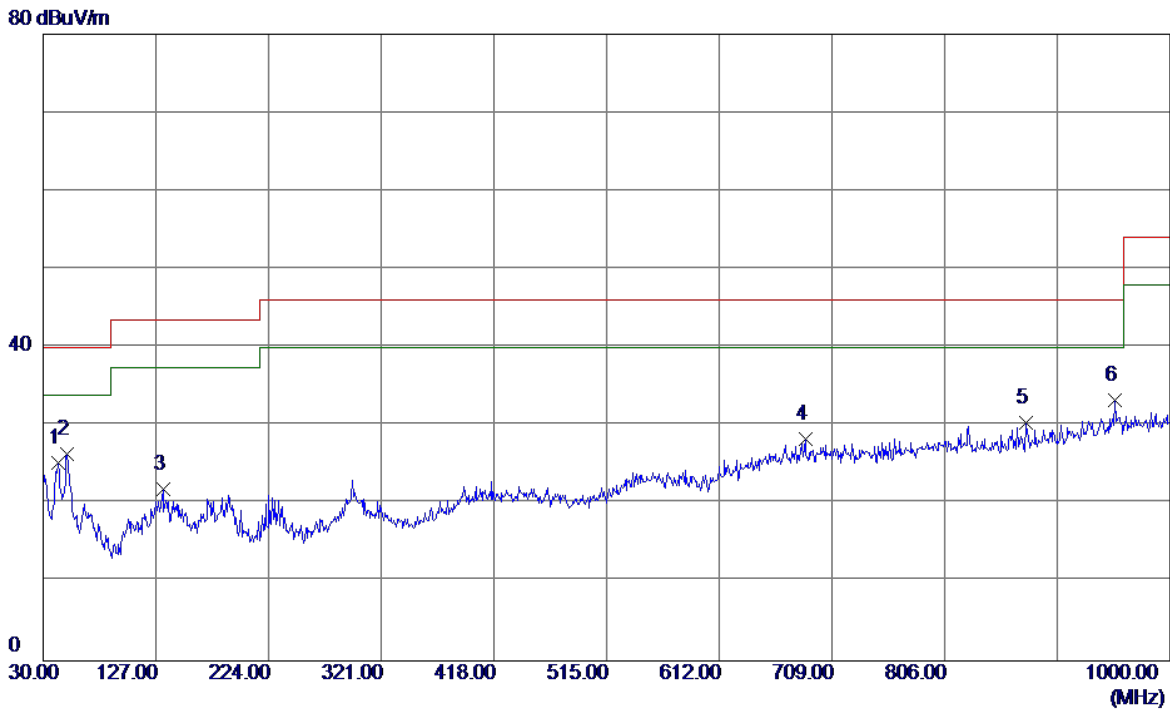


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	42.6100	37.20	-11.97	25.23	40.00	-14.77	QP
2	50.8550	38.70	-12.24	26.46	40.00	-13.54	QP
3	133.3049	33.27	-11.38	21.89	43.50	-21.61	QP
4	686.2050	29.26	-0.94	28.32	46.00	-17.68	QP
5	876.3250	29.24	1.17	30.41	46.00	-15.59	QP
6 *	952.9550	30.07	3.25	33.32	46.00	-12.68	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

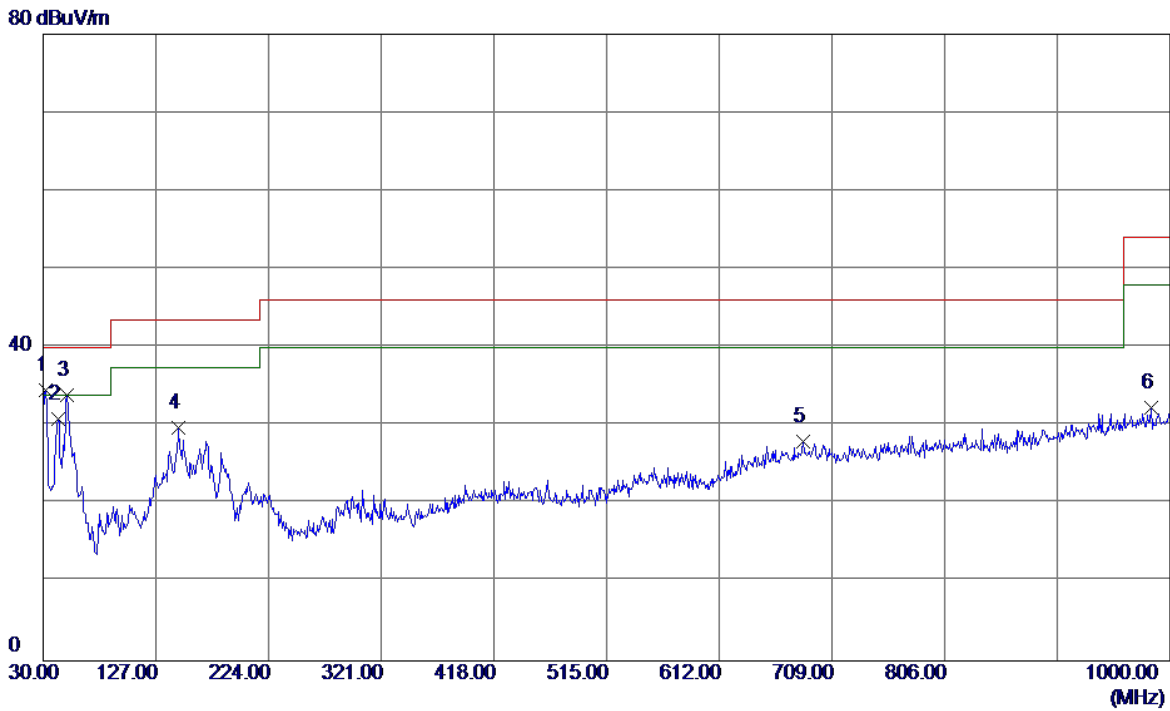


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	32.4250	47.84	-13.27	34.57	40.00	-5.43	QP
2	43.0950	42.71	-11.87	30.84	40.00	-9.16	QP
3	50.3700	46.10	-12.12	33.98	40.00	-6.02	QP
4	146.4000	41.71	-11.90	29.81	43.50	-13.69	QP
5	683.7800	29.06	-0.99	28.07	46.00	-17.93	QP
6	983.5100	28.56	3.69	32.25	54.00	-21.75	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

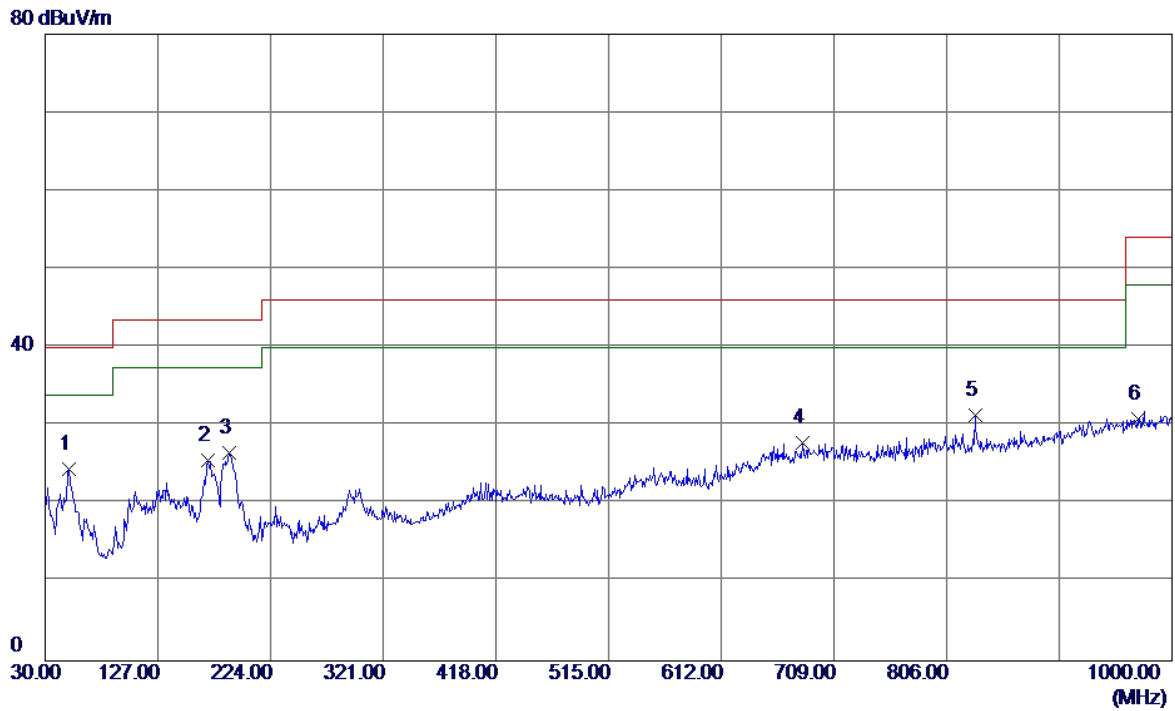


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	50.8550	36.66	-12.24	24.42	40.00	-15.58	QP
2	170.1649	36.35	-10.73	25.62	43.50	-17.88	QP
3	188.5950	39.55	-13.05	26.50	43.50	-17.00	QP
4	681.8400	28.89	-1.03	27.86	46.00	-18.14	QP
5 *	830.7350	30.70	0.60	31.30	46.00	-14.70	QP
6	970.4150	27.40	3.50	30.90	54.00	-23.10	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

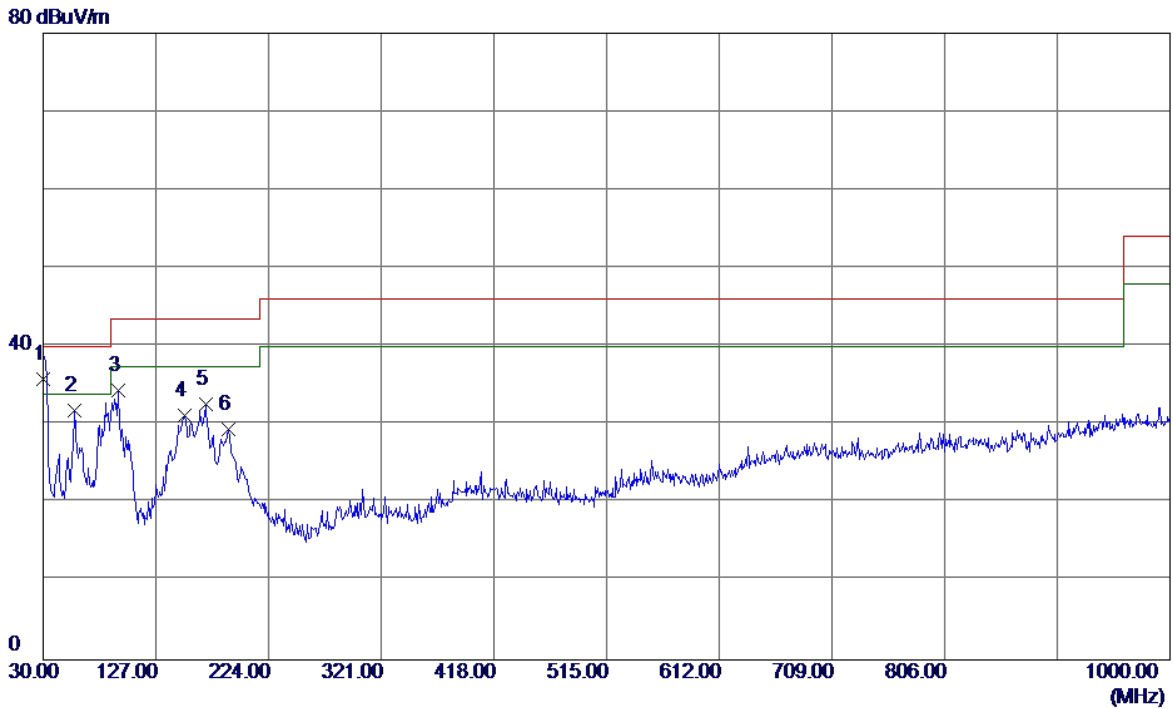


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	48.72	-12.80	35.92	40.00	-4.08	QP
2	56.6750	44.43	-12.62	31.81	40.00	-8.19	QP
3	94.5050	50.70	-16.28	34.42	43.50	-9.08	QP
4	151.7350	43.18	-12.03	31.15	43.50	-12.35	QP
5	169.6799	43.41	-10.76	32.65	43.50	-10.85	QP
6	189.0800	42.51	-13.10	29.41	43.50	-14.09	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

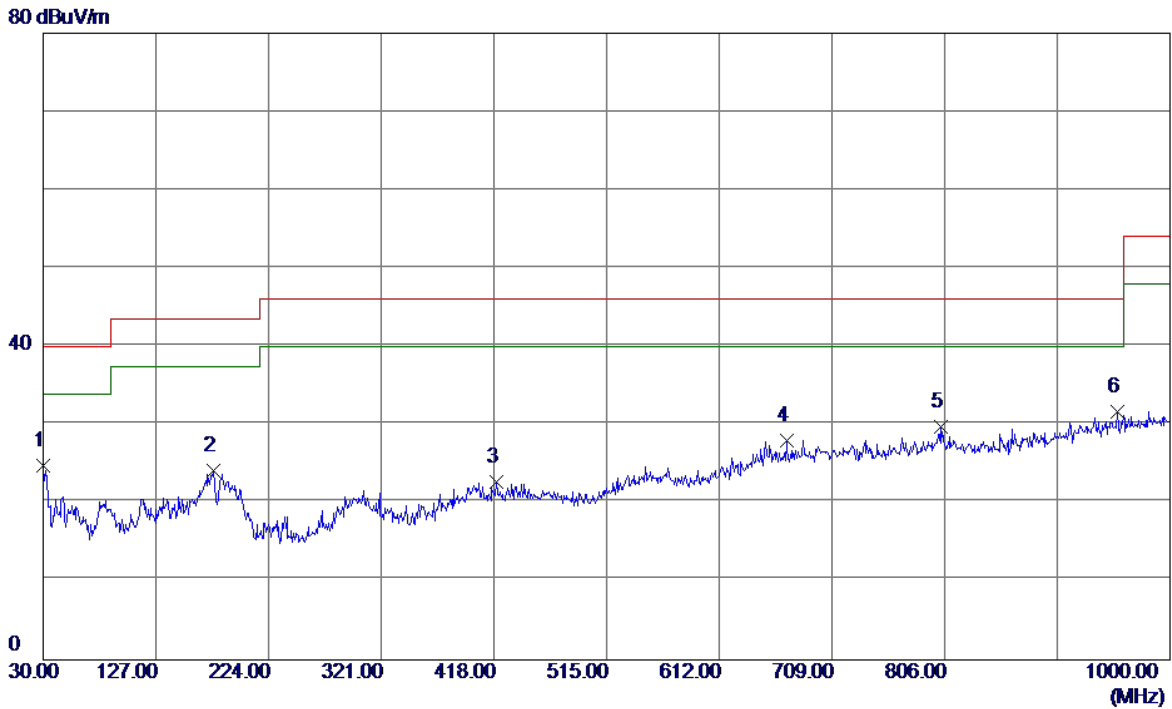


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	37.58	-12.80	24.78	40.00	-15.22	QP
2	176.4700	35.79	-11.64	24.15	43.50	-19.35	QP
3	420.4250	29.81	-7.15	22.66	46.00	-23.34	QP
4	669.7150	29.33	-1.28	28.05	46.00	-17.95	QP
5	802.6050	29.22	0.61	29.83	46.00	-16.17	QP
6 *	954.4100	28.41	3.27	31.68	46.00	-14.32	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

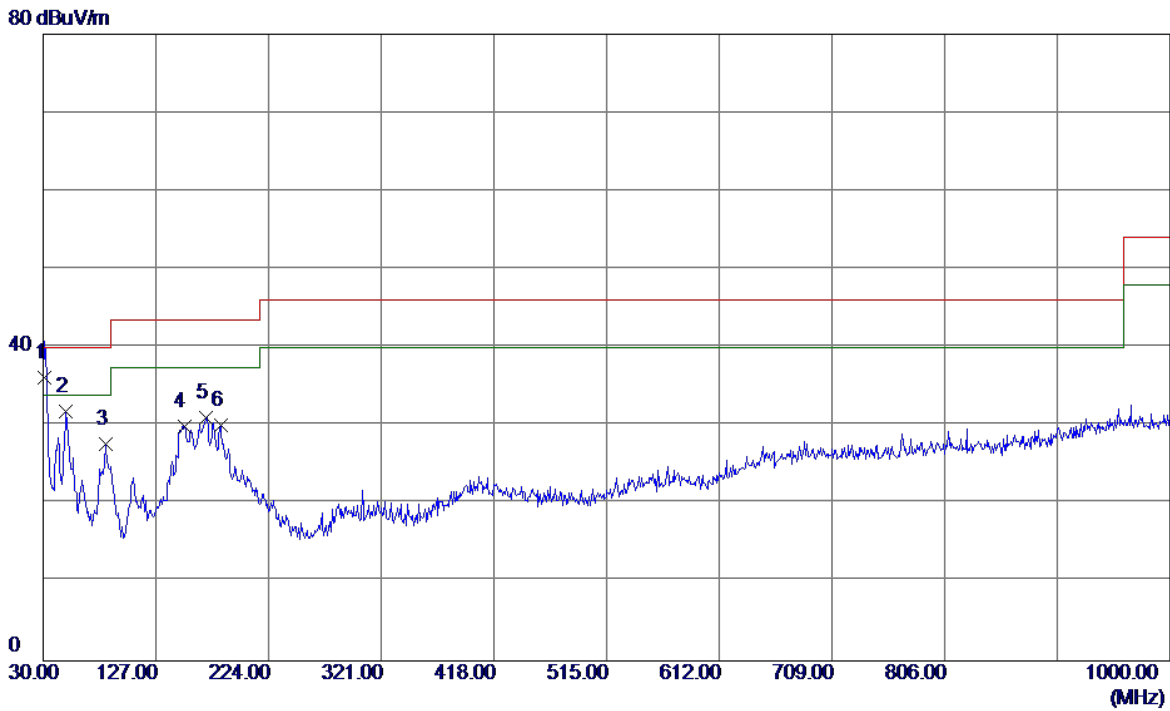


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	31.4550	49.26	-13.08	36.18	40.00	-3.82	QP
2	49.8849	43.88	-12.05	31.83	40.00	-8.17	QP
3	83.8350	44.10	-16.36	27.74	40.00	-12.26	QP
4	151.2500	41.90	-12.00	29.90	43.50	-13.60	QP
5	170.1649	41.81	-10.73	31.08	43.50	-12.42	QP
6	182.7750	42.48	-12.44	30.04	43.50	-13.46	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

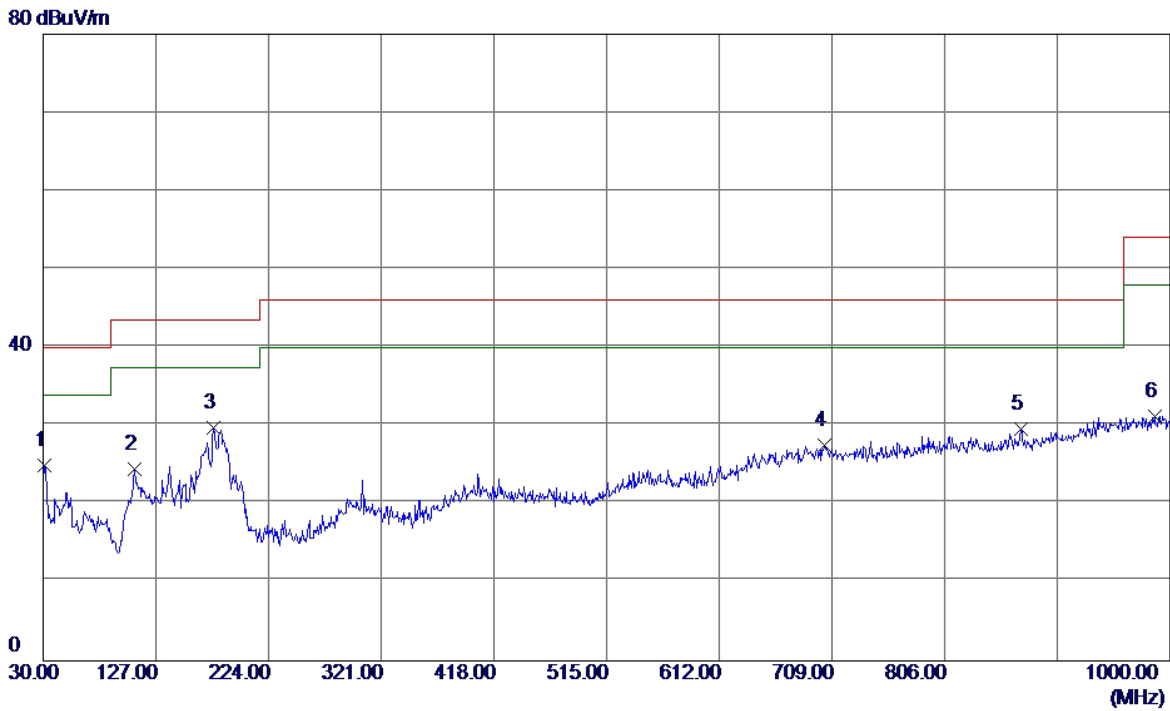


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.4550	38.07	-13.08	24.99	40.00	-15.01	QP
2	108.5700	38.51	-13.96	24.55	43.50	-18.95	QP
3 *	176.9550	41.41	-11.71	29.70	43.50	-13.80	QP
4	702.2100	28.18	-0.66	27.52	46.00	-18.48	QP
5	871.4750	28.57	1.06	29.63	46.00	-16.37	QP
6	986.9050	27.47	3.74	31.21	54.00	-22.79	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

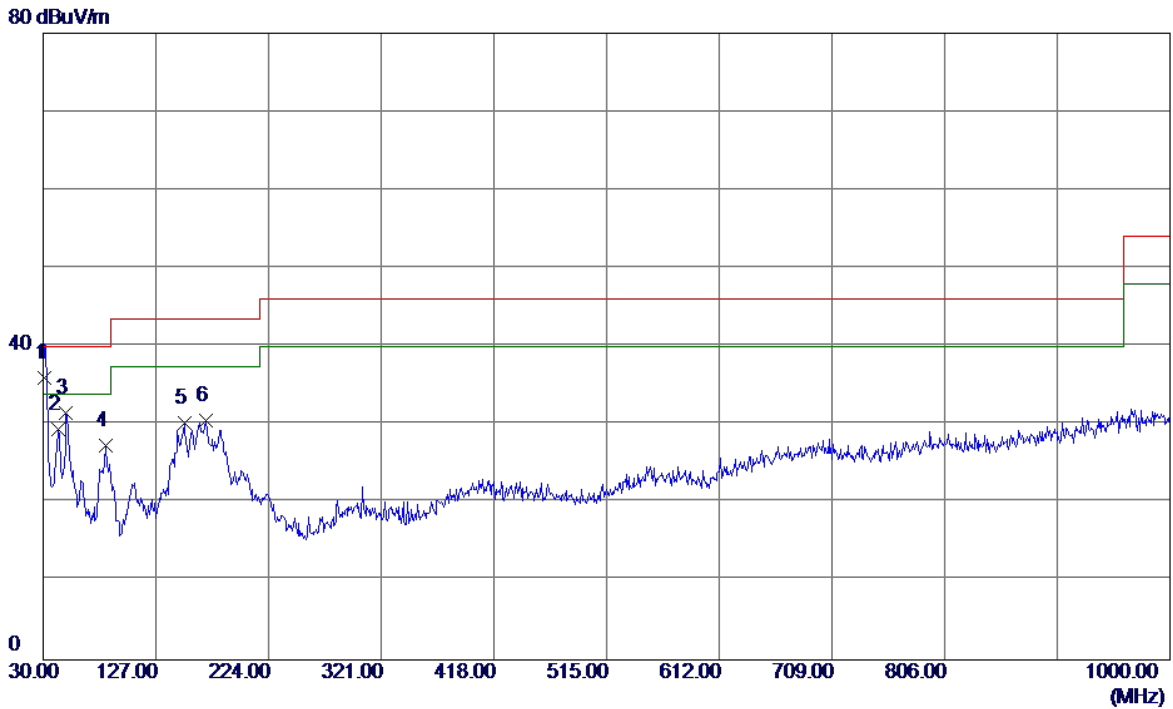


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	31.4550	49.06	-13.08	35.98	40.00	-4.02	QP
2	43.0950	41.30	-11.87	29.43	40.00	-10.57	QP
3	49.8849	43.61	-12.05	31.56	40.00	-8.44	QP
4	83.8350	43.75	-16.36	27.39	40.00	-12.61	QP
5	151.7350	42.29	-12.03	30.26	43.50	-13.24	QP
6	170.1649	41.31	-10.73	30.58	43.50	-12.92	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

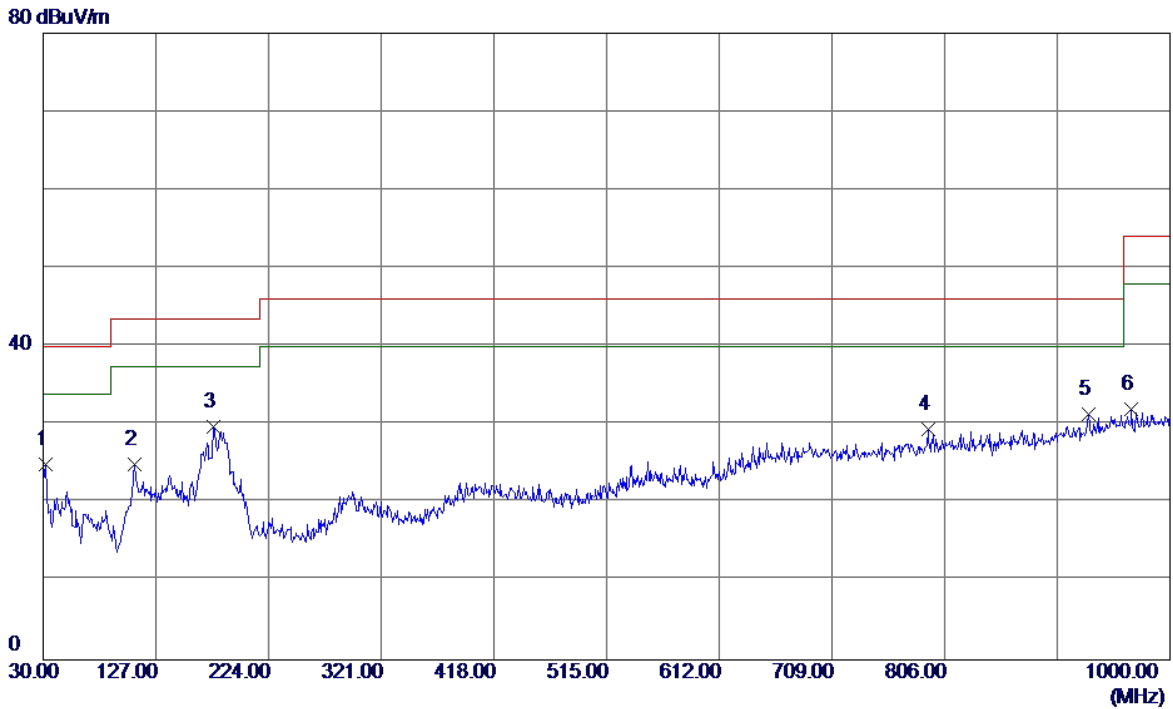


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.9400	38.18	-13.17	25.01	40.00	-14.99	QP
2	108.5700	38.88	-13.96	24.92	43.50	-18.58	QP
3 *	176.9550	41.44	-11.71	29.73	43.50	-13.77	QP
4	791.9350	29.09	0.37	29.46	46.00	-16.54	QP
5	929.6750	28.71	2.58	31.29	46.00	-14.71	QP
6	967.0200	28.57	3.45	32.02	54.00	-21.98	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

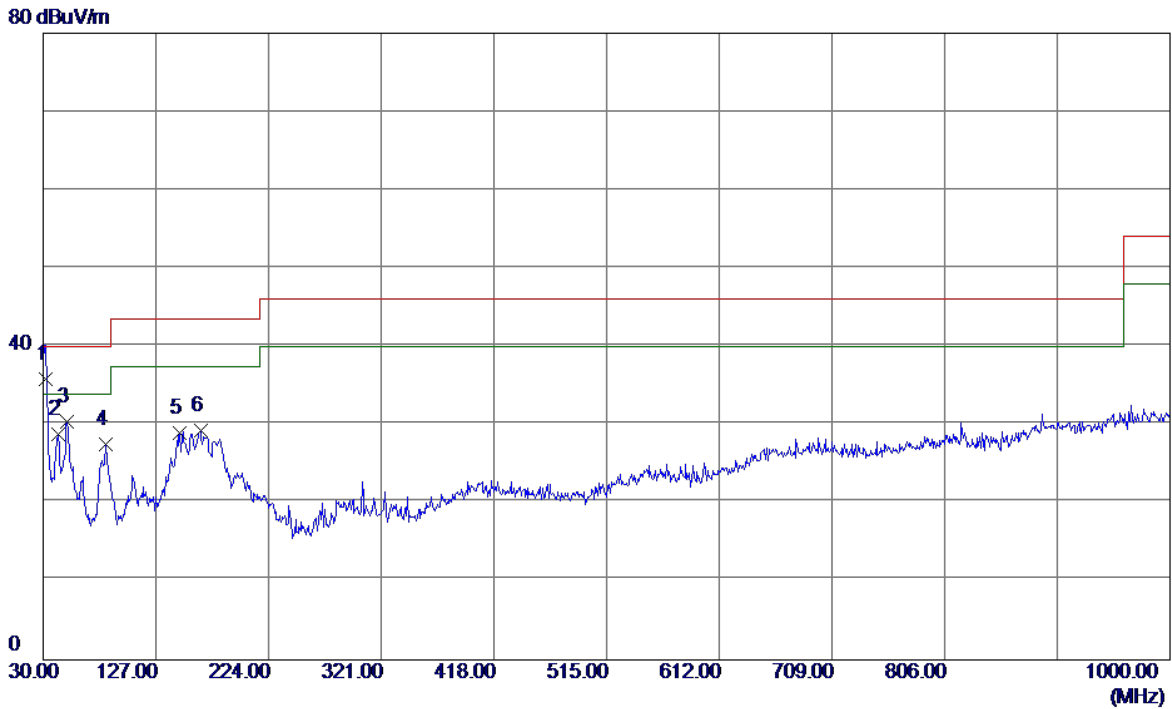


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	31.9400	49.09	-13.17	35.92	40.00	-4.08	QP
2	43.0950	40.62	-11.87	28.75	40.00	-11.25	QP
3	50.8550	42.58	-12.24	30.34	40.00	-9.66	QP
4	83.8350	43.90	-16.36	27.54	40.00	-12.46	QP
5	147.3700	40.84	-11.91	28.93	43.50	-14.57	QP
6	165.3150	40.80	-11.57	29.23	43.50	-14.27	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

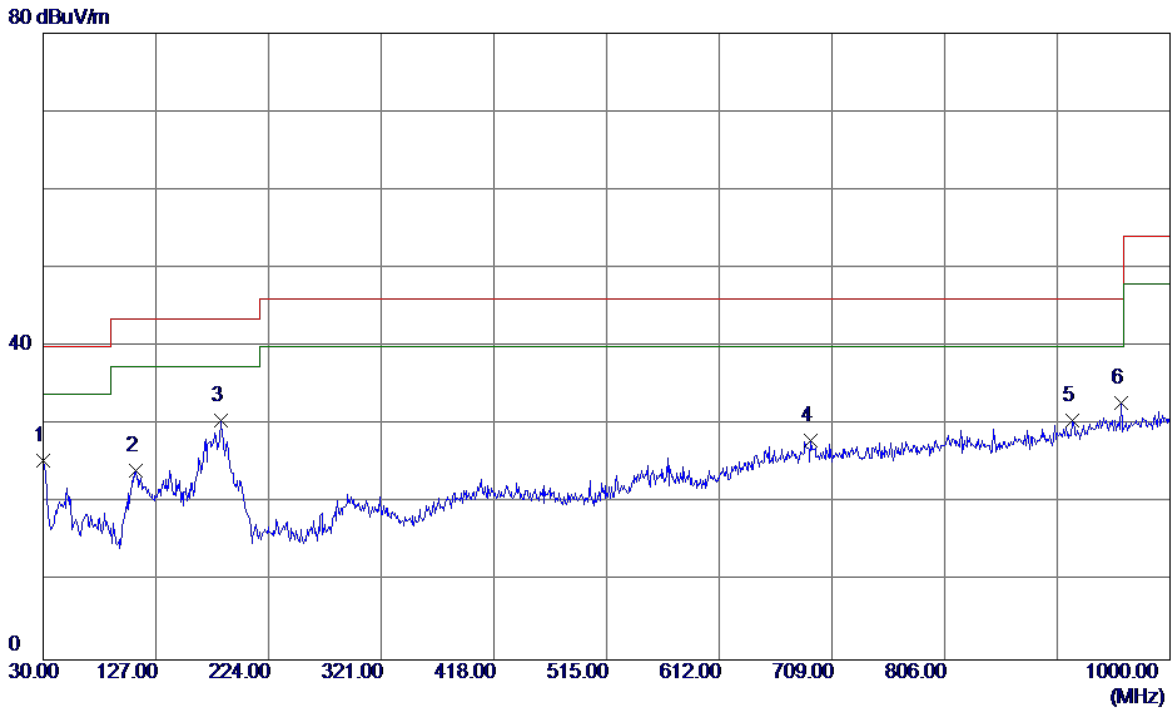


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	38.25	-12.80	25.45	40.00	-14.55	QP
2	110.0250	38.00	-13.86	24.14	43.50	-19.36	QP
3 *	182.7750	42.93	-12.44	30.49	43.50	-13.01	QP
4	691.0550	28.87	-0.84	28.03	46.00	-17.97	QP
5	916.0950	28.44	2.17	30.61	46.00	-15.39	QP
6	957.8050	29.47	3.32	32.79	46.00	-13.21	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:Sunwoda+Earphone:Lianchuang(Black)		
Test Engineer	Kevin Li		

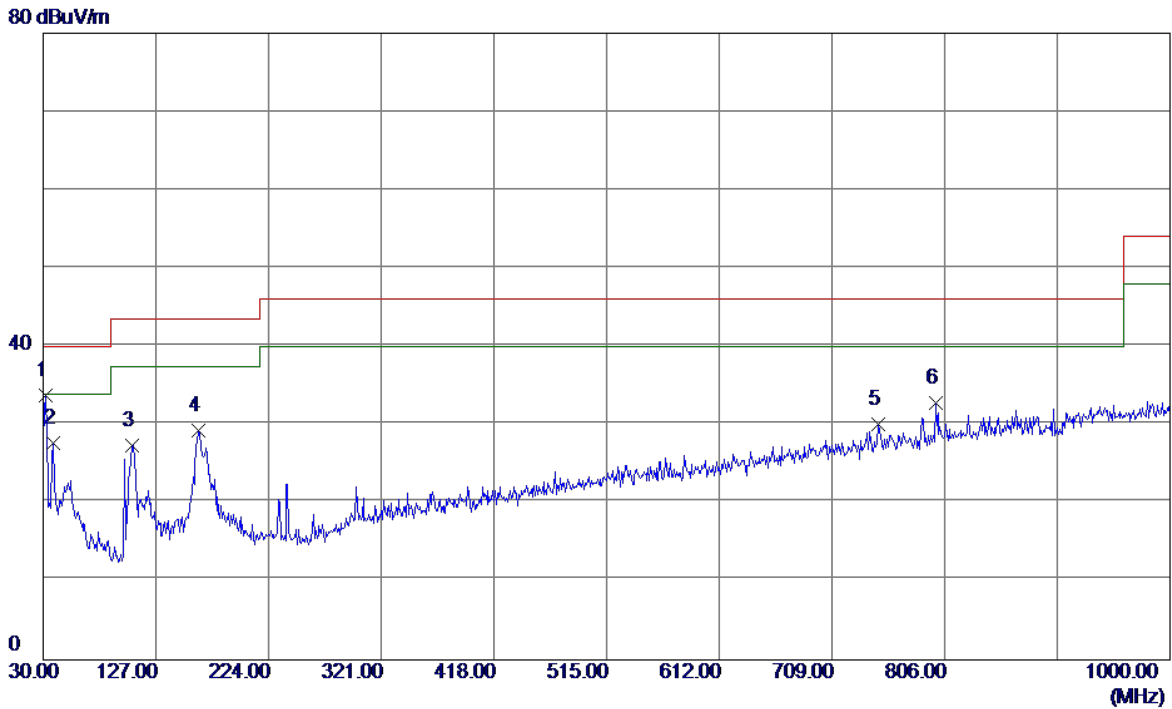


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	31.9400	47.38	-13.68	33.70	40.00	-6.30	QP
2	38.7300	40.40	-12.77	27.63	40.00	-12.37	QP
3	106.6300	43.10	-15.72	27.38	43.50	-16.12	QP
4	163.8600	40.68	-11.36	29.32	43.50	-14.18	QP
5	748.7700	30.19	-0.16	30.03	46.00	-15.97	QP
6	798.2400	32.11	0.76	32.87	46.00	-13.13	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:Sunwoda+Earphone:Lianchuang(Black)		
Test Engineer	Kevin Li		

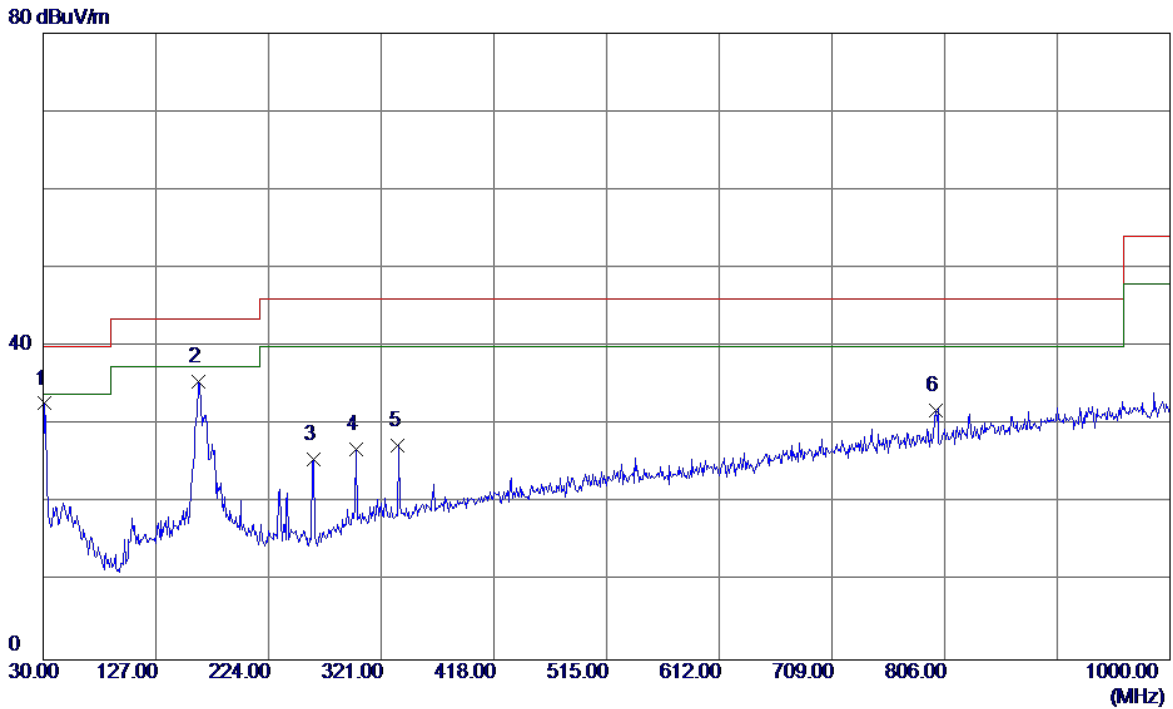


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.9700	46.56	-13.84	32.72	40.00	-7.28	QP
2	163.8600	46.92	-11.36	35.56	43.50	-7.94	QP
3	262.8000	38.92	-13.37	25.55	46.00	-20.45	QP
4	299.6600	37.61	-10.69	26.92	46.00	-19.08	QP
5	335.5500	37.16	-9.82	27.34	46.00	-18.66	QP
6	798.2400	31.13	0.76	31.89	46.00	-14.11	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Lianchuang(Black)		
Test Engineer	Kevin Li		

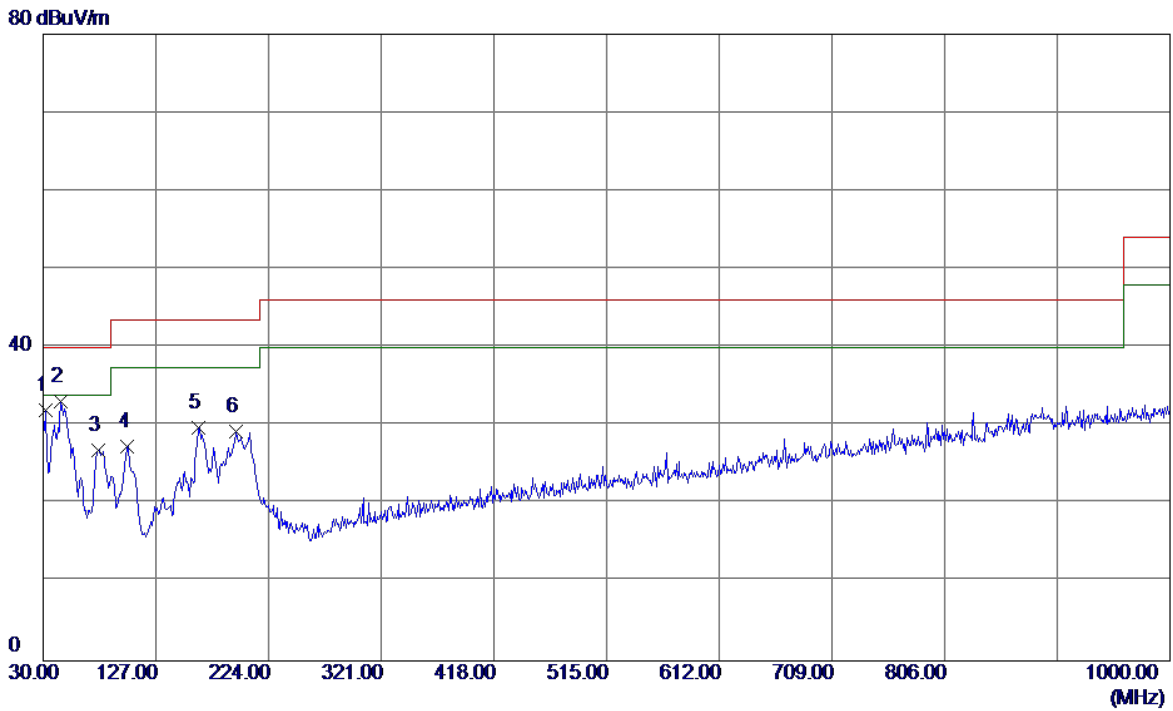


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.9400	45.69	-13.68	32.01	40.00	-7.99	QP
2 *	45.5200	44.88	-11.80	33.08	40.00	-6.92	QP
3	77.5300	43.13	-16.20	26.93	40.00	-13.07	QP
4	102.7500	43.78	-16.41	27.37	43.50	-16.13	QP
5	163.8600	41.09	-11.36	29.73	43.50	-13.77	QP
6	195.8700	41.12	-11.86	29.26	43.50	-14.24	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Lianchuang(Black)		
Test Engineer	Kevin Li		

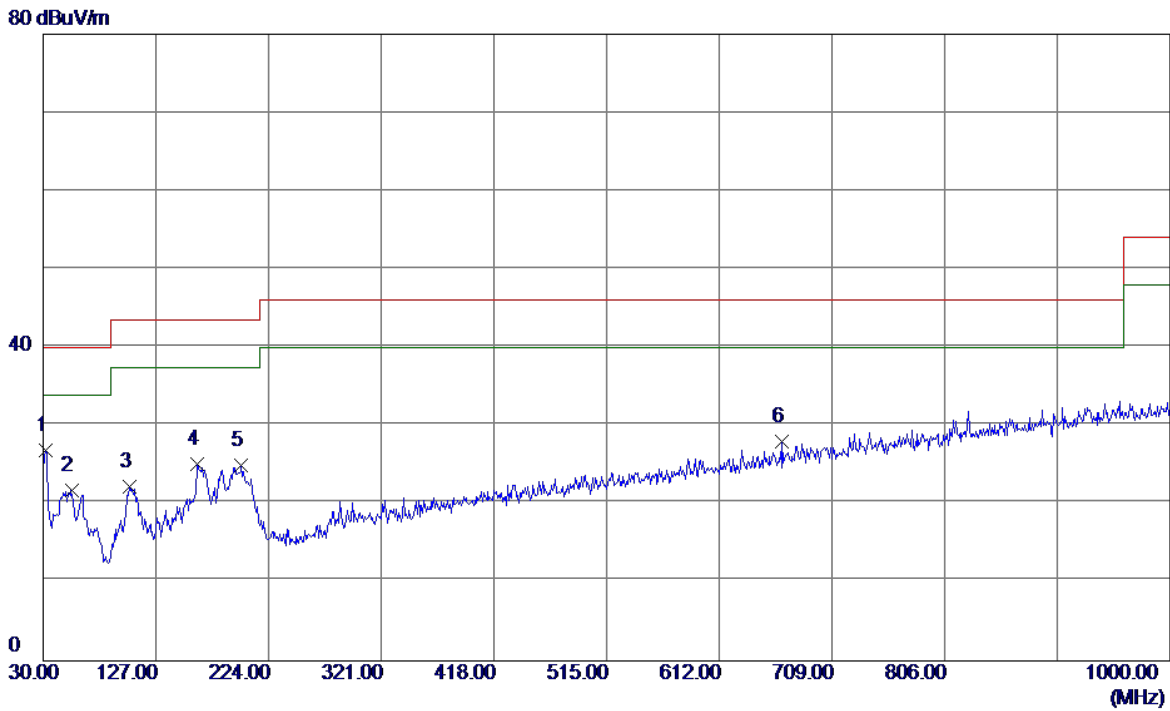


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	31.9400	40.55	-13.68	26.87	40.00	-13.13	QP
2	54.2500	33.80	-12.00	21.80	40.00	-18.20	QP
3	104.6900	38.26	-16.06	22.20	43.50	-21.30	QP
4	162.8900	36.56	-11.41	25.15	43.50	-18.35	QP
5	200.7200	37.22	-12.20	25.02	43.50	-18.48	QP
6	666.3200	29.89	-1.90	27.99	46.00	-18.01	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Quancheng(Black)		
Test Engineer	Kevin Li		

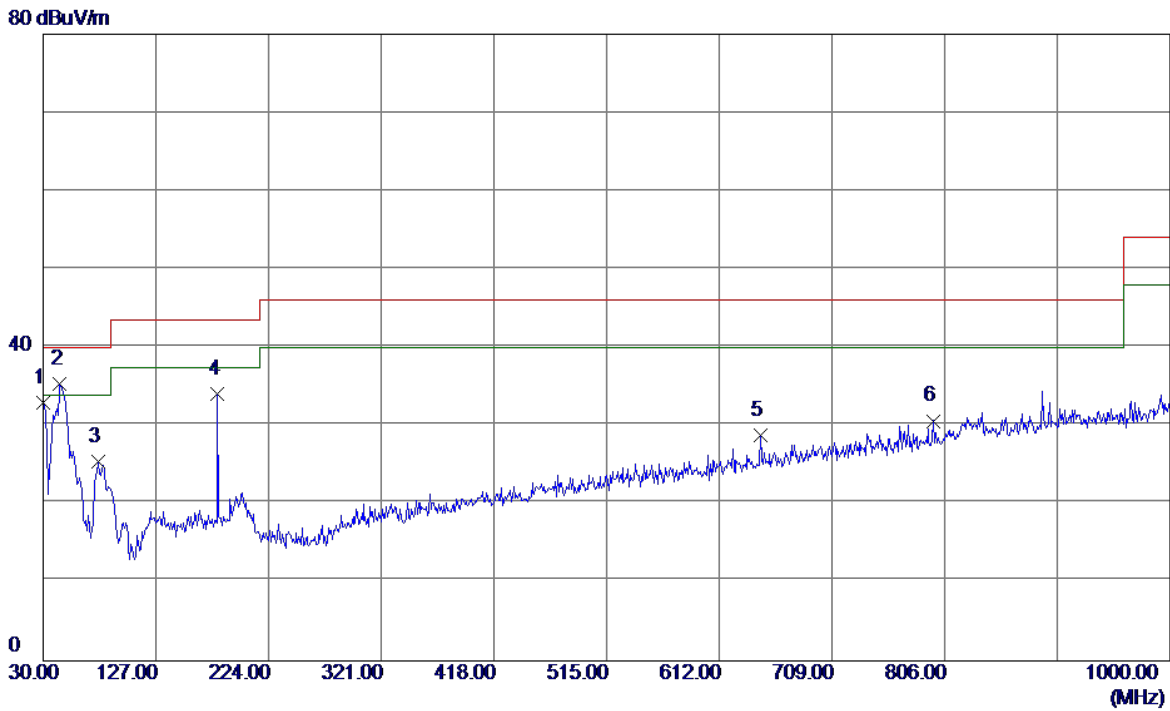


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	46.97	-13.99	32.98	40.00	-7.02	QP
2 *	44.5500	47.27	-11.90	35.37	40.00	-4.63	QP
3	77.5300	41.71	-16.20	25.51	40.00	-14.49	QP
4	180.3500	45.56	-11.44	34.12	43.50	-9.38	QP
5	647.8900	31.20	-2.37	28.83	46.00	-17.17	QP
6	796.3000	29.92	0.72	30.64	46.00	-15.36	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Quancheng(Black)		
Test Engineer	Kevin Li		

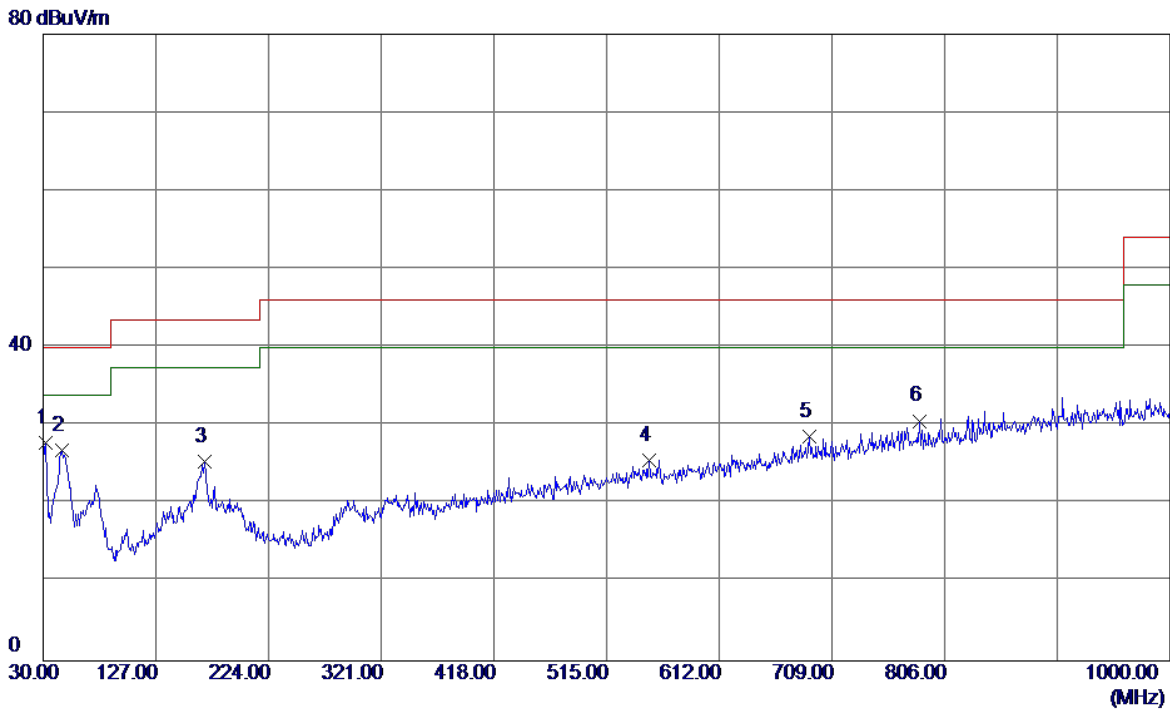


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	31.9400	41.59	-13.68	27.91	40.00	-12.09	QP
2	46.4900	38.58	-11.76	26.82	40.00	-13.18	QP
3	168.7100	36.55	-11.14	25.41	43.50	-18.09	QP
4	551.8600	30.11	-4.52	25.59	46.00	-20.41	QP
5	689.6000	30.00	-1.33	28.67	46.00	-17.33	QP
6	784.6599	30.14	0.50	30.64	46.00	-15.36	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Goer(Black)		
Test Engineer	Kevin Li		

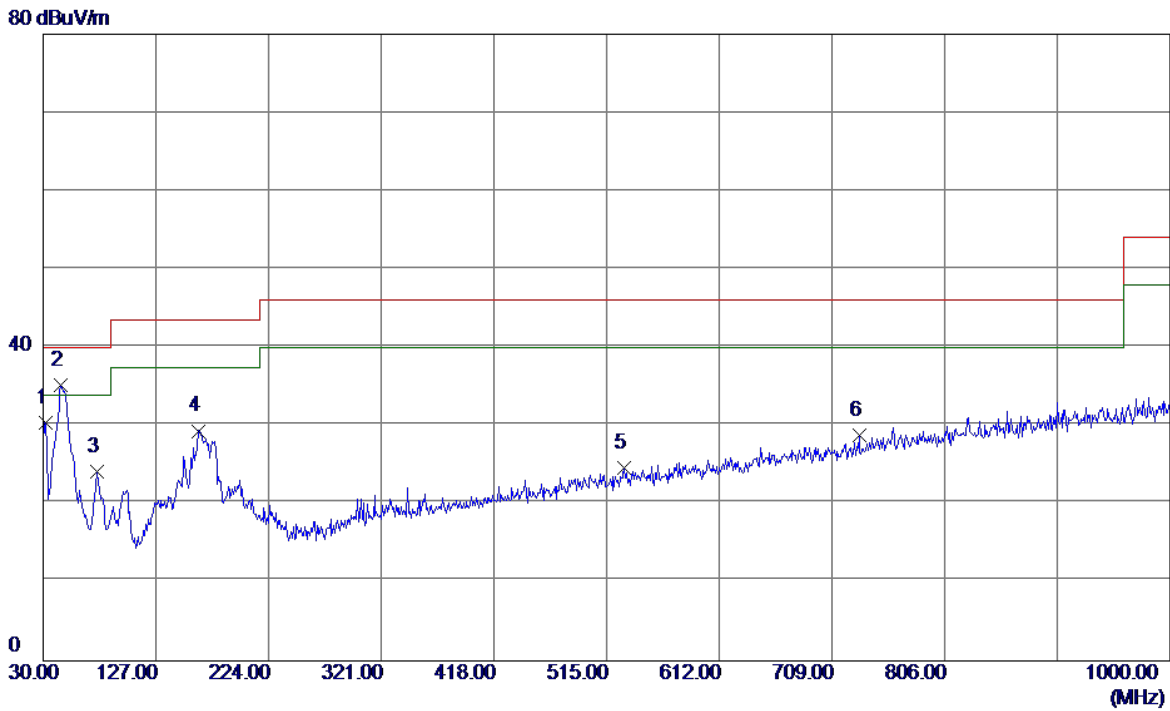


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.9400	44.14	-13.68	30.46	40.00	-9.54	QP
2 *	45.5200	46.94	-11.80	35.14	40.00	-4.86	QP
3	76.5600	40.09	-15.99	24.10	40.00	-15.90	QP
4	163.8600	40.72	-11.36	29.36	43.50	-14.14	QP
5	530.5200	29.74	-5.05	24.69	46.00	-21.31	QP
6	732.2800	29.30	-0.47	28.83	46.00	-17.17	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Goer(Black)		
Test Engineer	Kevin Li		

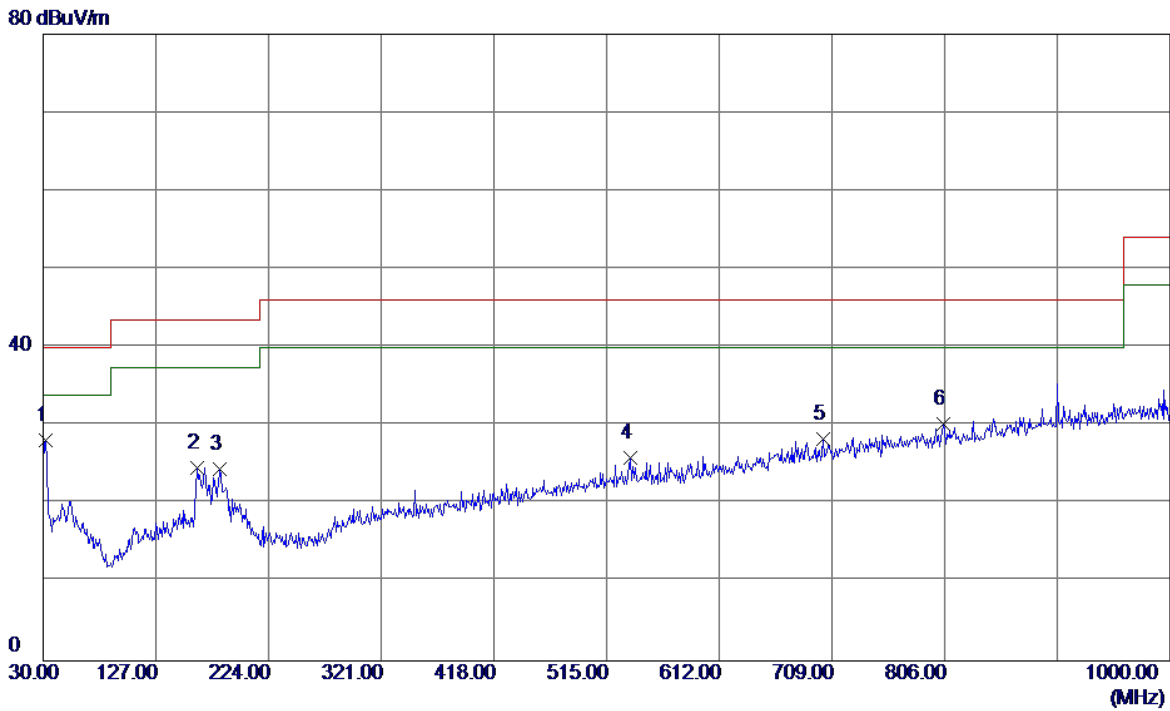


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	31.9400	41.85	-13.68	28.17	40.00	-11.83	QP
2	162.8900	35.99	-11.41	24.58	43.50	-18.92	QP
3	182.2899	35.88	-11.45	24.43	43.50	-19.07	QP
4	535.3700	30.83	-4.93	25.90	46.00	-20.10	QP
5	701.2400	29.35	-1.05	28.30	46.00	-17.70	QP
6	805.0300	29.37	0.90	30.27	46.00	-15.73	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Goer(White)		
Test Engineer	Kevin Li		

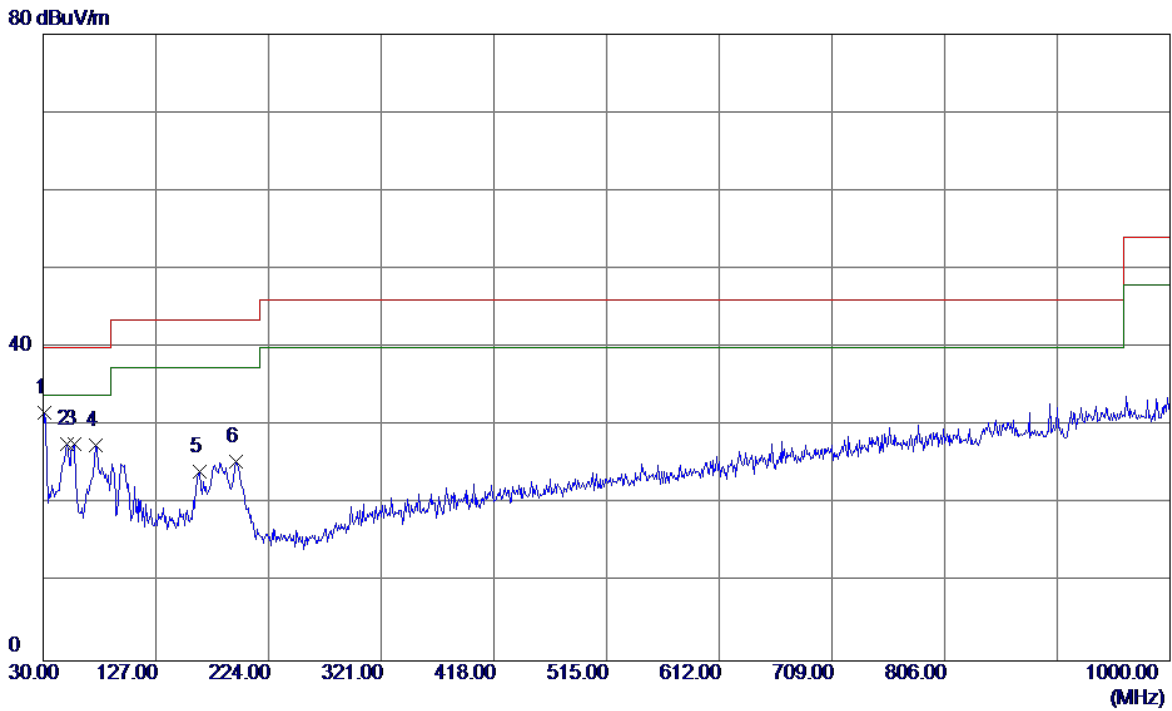

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.9700	45.55	-13.84	31.71	40.00	-8.29	QP
2	50.3700	39.55	-11.84	27.71	40.00	-12.29	QP
3	57.1600	40.12	-12.50	27.62	40.00	-12.38	QP
4	75.5899	43.24	-15.78	27.46	40.00	-12.54	QP
5	164.8300	35.53	-11.32	24.21	43.50	-19.29	QP
6	195.8700	37.35	-11.86	25.49	43.50	-18.01	QP

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Goer(White)		
Test Engineer	Kevin Li		

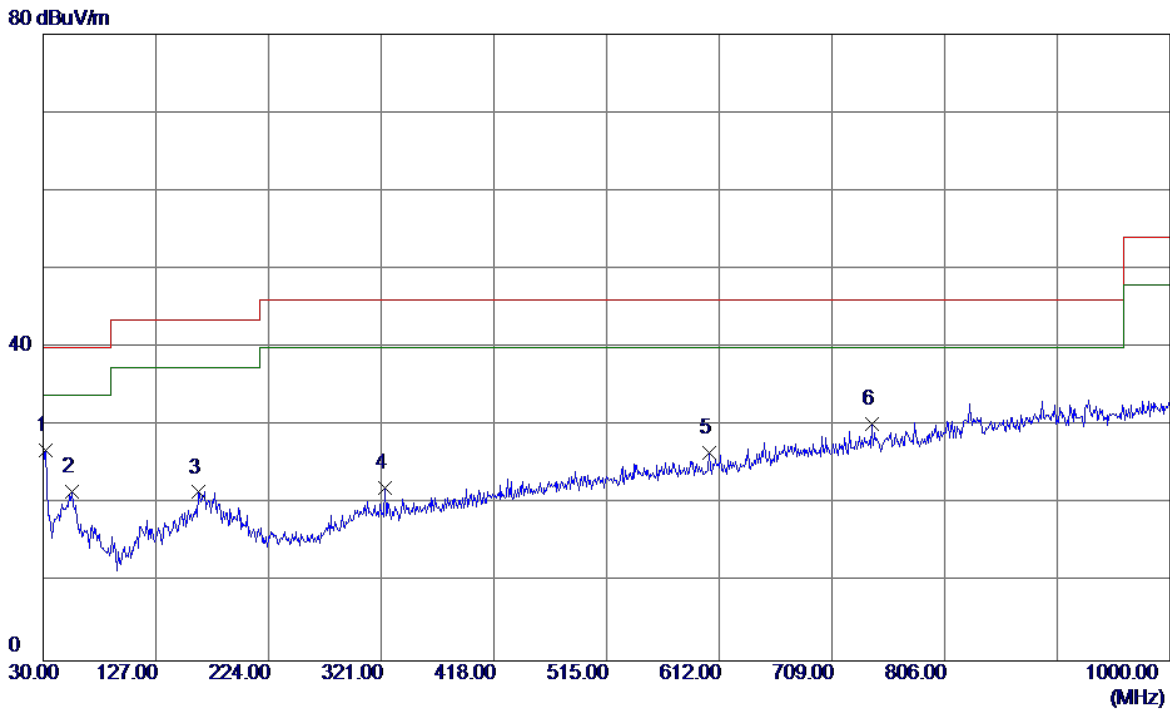


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	31.9400	40.61	-13.68	26.93	40.00	-13.07	QP
2	55.2200	33.74	-12.09	21.65	40.00	-18.35	QP
3	163.8600	32.88	-11.36	21.52	43.50	-21.98	QP
4	323.9100	32.13	-10.09	22.04	46.00	-23.96	QP
5	603.2700	30.26	-3.65	26.61	46.00	-19.39	QP
6	742.9500	30.46	-0.27	30.19	46.00	-15.81	QP

4.2.7 TEST RESULTS-ABOVE 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of 『Note 』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

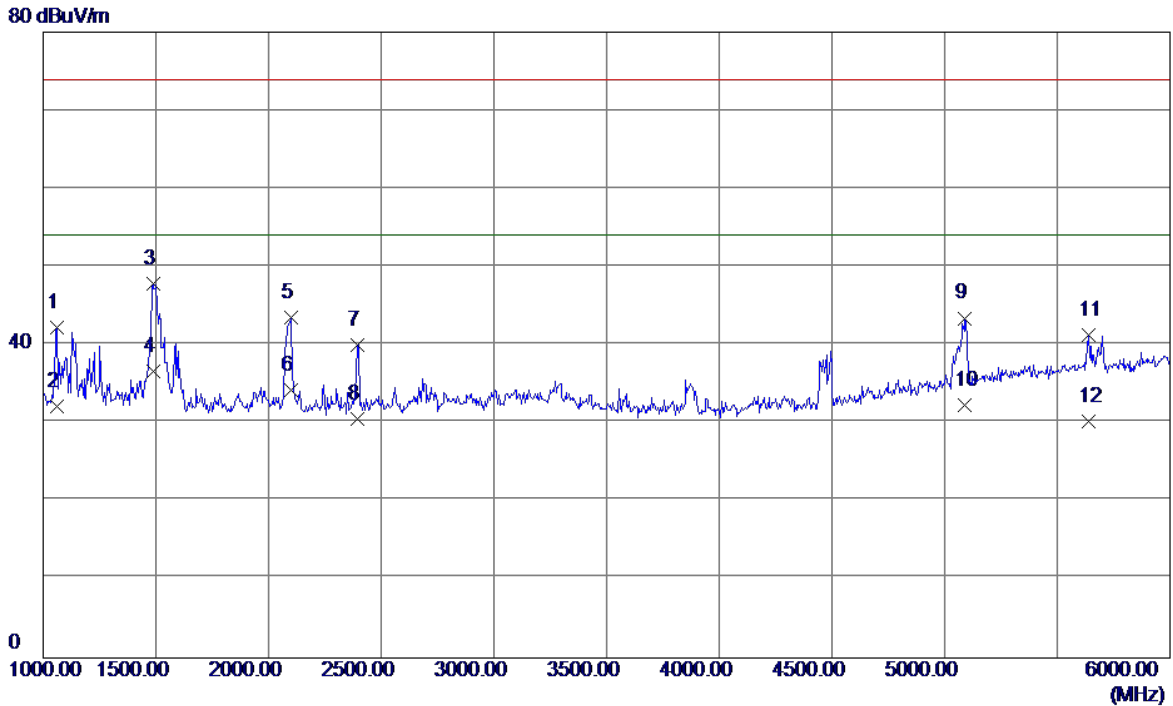


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1060.0000	48.69	-6.52	42.17	74.00	-31.83	Peak
2	1060.0000	38.68	-6.52	32.16	54.00	-21.84	AVG
3	1487.5000	52.80	-4.99	47.81	74.00	-26.19	Peak
4 *	1487.5000	41.56	-4.99	36.57	54.00	-17.43	AVG
5	2100.0000	45.52	-2.02	43.50	74.00	-30.50	Peak
6	2100.0000	36.22	-2.02	34.20	54.00	-19.80	AVG
7	2392.5000	40.49	-0.42	40.07	74.00	-33.93	Peak
8	2392.5000	31.02	-0.42	30.60	54.00	-23.40	AVG
9	5090.0000	36.82	6.62	43.44	74.00	-30.56	Peak
10	5090.0000	25.75	6.62	32.37	54.00	-21.63	AVG
11	5637.5000	33.15	8.13	41.28	74.00	-32.72	Peak
12	5637.5000	22.14	8.13	30.27	54.00	-23.73	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

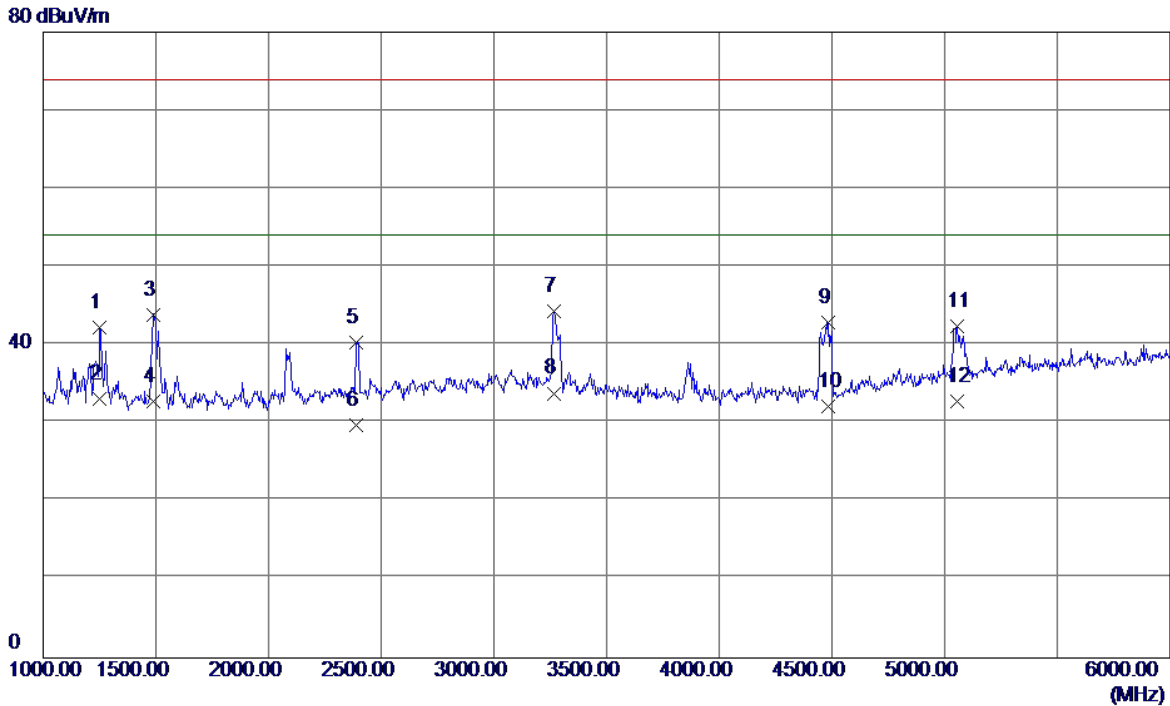


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1252.5000	48.11	-5.83	42.28	74.00	-31.72	Peak
2	1252.5000	39.01	-5.83	33.18	54.00	-20.82	AVG
3	1490.0000	48.91	-4.99	43.92	74.00	-30.08	Peak
4	1490.0000	37.83	-4.99	32.84	54.00	-21.16	AVG
5	2390.0000	40.80	-0.43	40.37	74.00	-33.63	Peak
6	2390.0000	30.21	-0.43	29.78	54.00	-24.22	AVG
7	3267.5000	41.95	2.32	44.27	74.00	-29.73	Peak
8 *	3267.5000	31.52	2.32	33.84	54.00	-20.16	AVG
9	4485.0000	39.06	3.85	42.91	74.00	-31.09	Peak
10	4485.0000	28.32	3.85	32.17	54.00	-21.83	AVG
11	5055.0000	35.88	6.50	42.38	74.00	-31.62	Peak
12	5055.0000	26.30	6.50	32.80	54.00	-21.20	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Foxconn+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

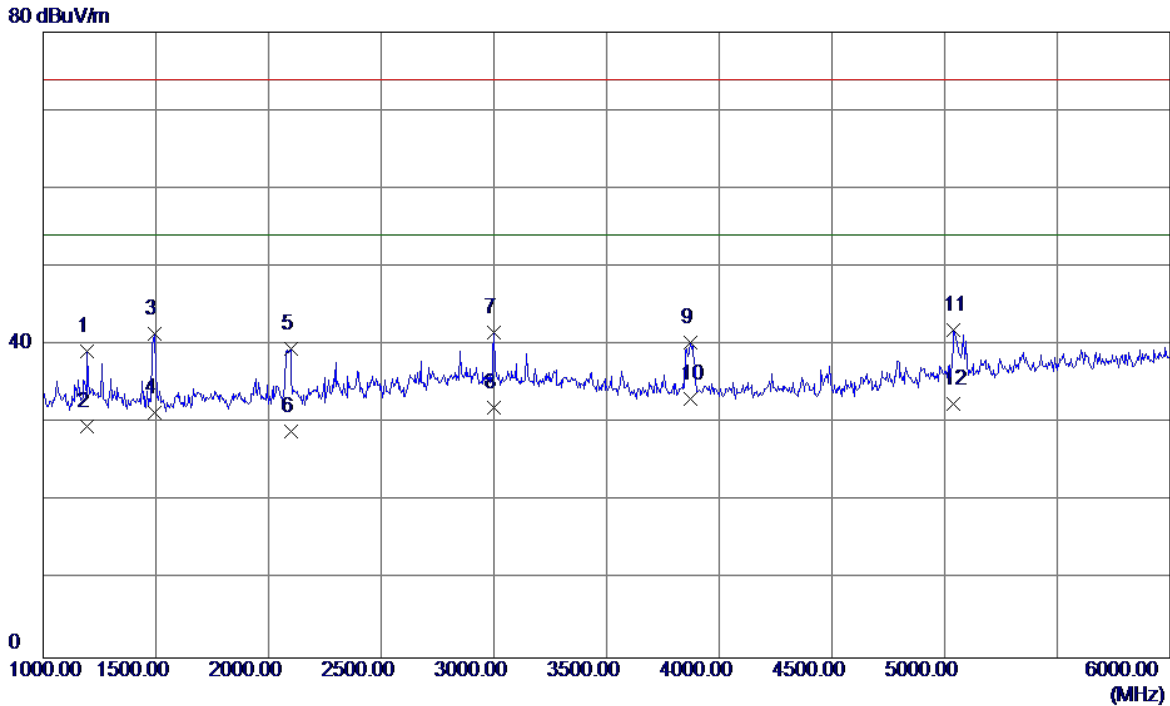


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1195.0000	45.27	-6.04	39.23	74.00	-34.77	Peak
2	1195.0000	35.70	-6.04	29.66	54.00	-24.34	AVG
3	1492.5000	46.46	-4.98	41.48	74.00	-32.52	Peak
4	1492.5000	36.32	-4.98	31.34	54.00	-22.66	AVG
5	2097.5000	41.50	-2.04	39.46	74.00	-34.54	Peak
6	2097.5000	30.98	-2.04	28.94	54.00	-25.06	AVG
7	3000.0000	39.20	2.40	41.60	74.00	-32.40	Peak
8	3000.0000	29.56	2.40	31.96	54.00	-22.04	AVG
9	3872.5000	37.77	2.60	40.37	74.00	-33.63	Peak
10 *	3872.5000	30.56	2.60	33.16	54.00	-20.84	AVG
11	5040.0000	35.41	6.45	41.86	74.00	-32.14	Peak
12	5040.0000	25.99	6.45	32.44	54.00	-21.56	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Foxconn+Battery:DESAY+Earphone:QUANCHENG		
Test Engineer	Kevin Li		

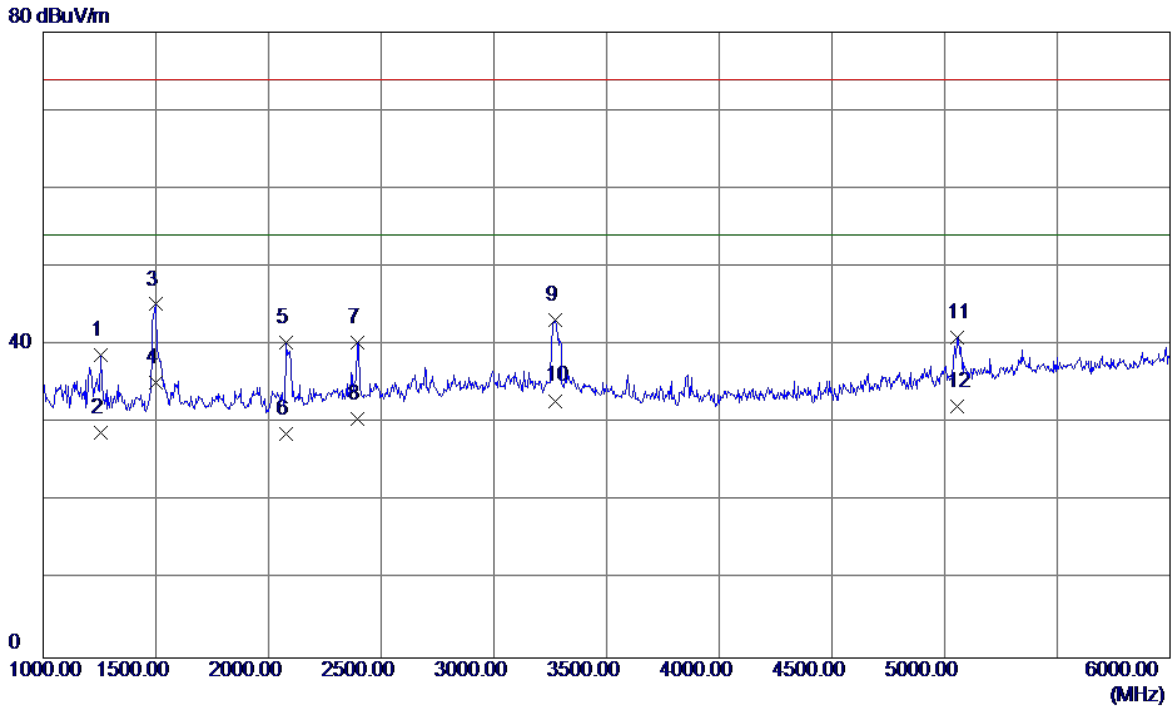


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1255.0000	44.55	-5.82	38.73	74.00	-35.27	Peak
2	1255.0000	34.55	-5.82	28.73	54.00	-25.27	AVG
3	1497.5000	50.16	-4.96	45.20	74.00	-28.80	Peak
4 *	1497.5000	40.23	-4.96	35.27	54.00	-18.73	AVG
5	2080.0000	42.50	-2.13	40.37	74.00	-33.63	Peak
6	2080.0000	30.77	-2.13	28.64	54.00	-25.36	AVG
7	2392.5000	40.79	-0.42	40.37	74.00	-33.63	Peak
8	2392.5000	30.99	-0.42	30.57	54.00	-23.43	AVG
9	3270.0000	40.88	2.32	43.20	74.00	-30.80	Peak
10	3270.0000	30.56	2.32	32.88	54.00	-21.12	AVG
11	5057.5000	34.43	6.51	40.94	74.00	-33.06	Peak
12	5057.5000	25.67	6.51	32.18	54.00	-21.82	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:HONGLIN+Battery:SCUD+Earphone:MERRY		
Test Engineer	Kevin Li		

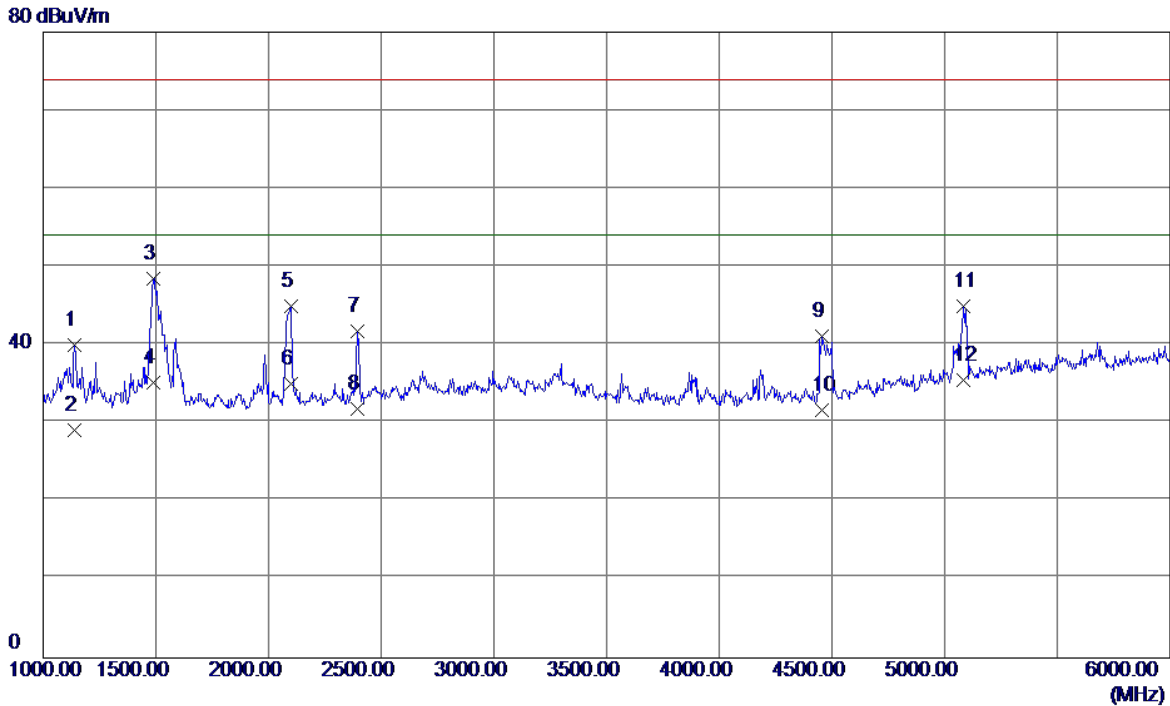


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1140.0000	46.30	-6.23	40.07	74.00	-33.93	Peak
2	1140.0000	35.36	-6.23	29.13	54.00	-24.87	AVG
3	1487.5000	53.48	-4.99	48.49	74.00	-25.51	Peak
4	1487.5000	40.12	-4.99	35.13	54.00	-18.87	AVG
5	2097.5000	47.07	-2.04	45.03	74.00	-28.97	Peak
6	2097.5000	37.02	-2.04	34.98	54.00	-19.02	AVG
7	2392.5000	42.24	-0.42	41.82	74.00	-32.18	Peak
8	2392.5000	32.23	-0.42	31.81	54.00	-22.19	AVG
9	4457.5000	37.38	3.78	41.16	74.00	-32.84	Peak
10	4457.5000	27.89	3.78	31.67	54.00	-22.33	AVG
11	5082.5000	38.39	6.59	44.98	74.00	-29.02	Peak
12 *	5082.5000	28.91	6.59	35.50	54.00	-18.50	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:HONGLIN+Battery:SCUD+Earphone:MERRY		
Test Engineer	Kevin Li		

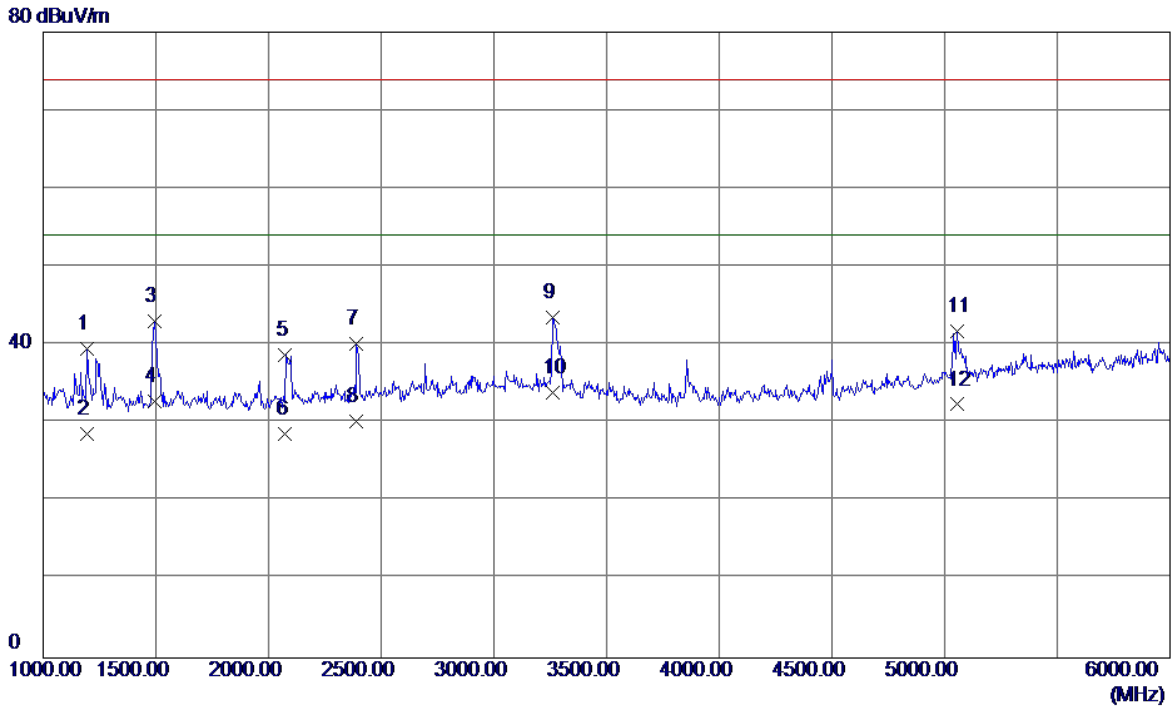


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1192.5000	45.63	-6.04	39.59	74.00	-34.41	Peak
2	1192.5000	34.63	-6.04	28.59	54.00	-25.41	AVG
3	1495.0000	48.05	-4.97	43.08	74.00	-30.92	Peak
4	1495.0000	37.82	-4.97	32.85	54.00	-21.15	AVG
5	2075.0000	40.95	-2.16	38.79	74.00	-35.21	Peak
6	2075.0000	30.86	-2.16	28.70	54.00	-25.30	AVG
7	2390.0000	40.57	-0.43	40.14	74.00	-33.86	Peak
8	2390.0000	30.66	-0.43	30.23	54.00	-23.77	AVG
9	3260.0000	41.22	2.32	43.54	74.00	-30.46	Peak
10 *	3260.0000	31.56	2.32	33.88	54.00	-20.12	AVG
11	5057.5000	35.31	6.51	41.82	74.00	-32.18	Peak
12	5057.5000	25.89	6.51	32.40	54.00	-21.60	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

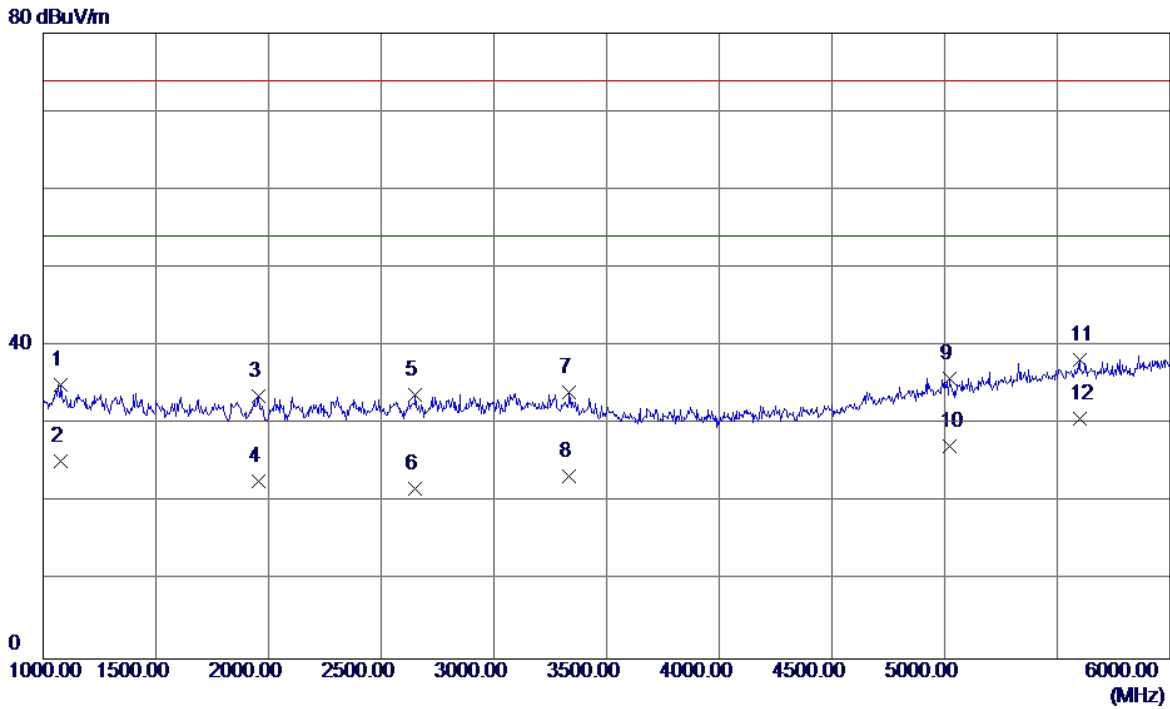


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1080.0000	41.54	-6.45	35.09	74.00	-38.91	Peak
2	1080.0000	31.67	-6.45	25.22	54.00	-28.78	AVG
3	1957.5000	36.40	-2.77	33.63	74.00	-40.37	Peak
4	1957.5000	25.56	-2.77	22.79	54.00	-31.21	AVG
5	2650.0000	32.91	0.84	33.75	74.00	-40.25	Peak
6	2650.0000	20.87	0.84	21.71	54.00	-32.29	AVG
7	3335.0000	31.82	2.30	34.12	74.00	-39.88	Peak
8	3335.0000	21.02	2.30	23.32	54.00	-30.68	AVG
9	5020.0000	29.45	6.38	35.83	74.00	-38.17	Peak
10	5020.0000	20.78	6.38	27.16	54.00	-26.84	AVG
11	5597.5000	30.18	8.10	38.28	74.00	-35.72	Peak
12 *	5597.5000	22.65	8.10	30.75	54.00	-23.25	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

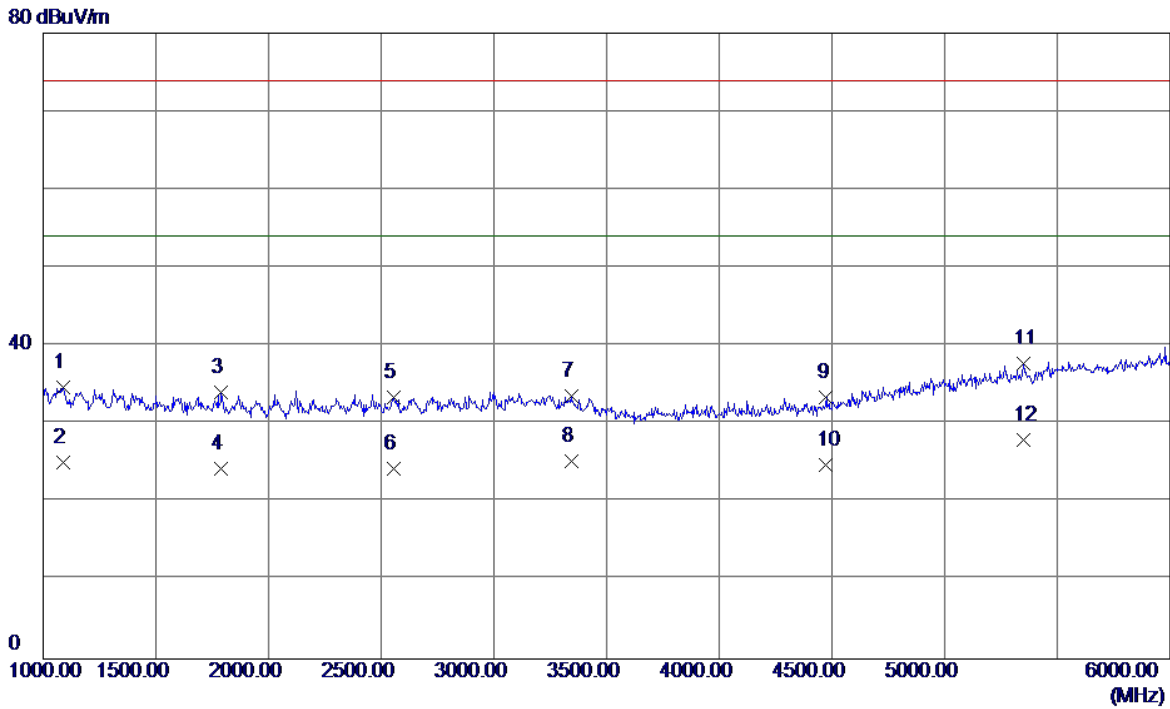


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1087.5000	41.15	-6.42	34.73	74.00	-39.27	Peak
2	1087.5000	31.55	-6.42	25.13	54.00	-28.87	AVG
3	1790.0000	37.63	-3.57	34.06	74.00	-39.94	Peak
4	1790.0000	27.88	-3.57	24.31	54.00	-29.69	AVG
5	2557.5000	32.99	0.43	33.42	74.00	-40.58	Peak
6	2557.5000	23.88	0.43	24.31	54.00	-29.69	AVG
7	3342.5000	31.29	2.30	33.59	74.00	-40.41	Peak
8	3342.5000	22.99	2.30	25.29	54.00	-28.71	AVG
9	4475.0000	29.63	3.82	33.45	74.00	-40.55	Peak
10	4475.0000	21.02	3.82	24.84	54.00	-29.16	AVG
11	5352.5000	30.18	7.51	37.69	74.00	-36.31	Peak
12 *	5352.5000	20.55	7.51	28.06	54.00	-25.94	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

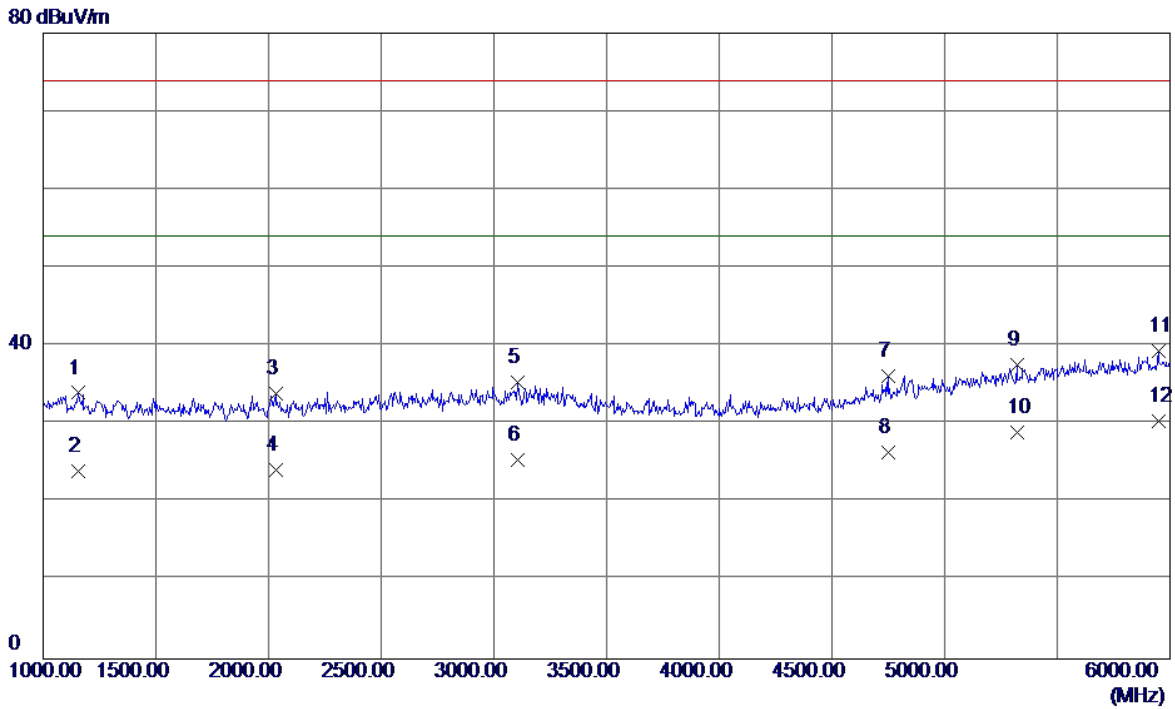


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1157.5000	40.17	-6.17	34.00	74.00	-40.00	Peak
2	1157.5000	30.22	-6.17	24.05	54.00	-29.95	AVG
3	2032.5000	36.37	-2.39	33.98	74.00	-40.02	Peak
4	2032.5000	26.56	-2.39	24.17	54.00	-29.83	AVG
5	3105.0000	33.01	2.37	35.38	74.00	-38.62	Peak
6	3105.0000	23.03	2.37	25.40	54.00	-28.60	AVG
7	4747.5000	31.15	5.08	36.23	74.00	-37.77	Peak
8	4747.5000	21.34	5.08	26.42	54.00	-27.58	AVG
9	5322.5000	30.24	7.41	37.65	74.00	-36.35	Peak
10	5322.5000	21.58	7.41	28.99	54.00	-25.01	AVG
11	5947.5000	30.97	8.41	39.38	74.00	-34.62	Peak
12 *	5947.5000	21.98	8.41	30.39	54.00	-23.61	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

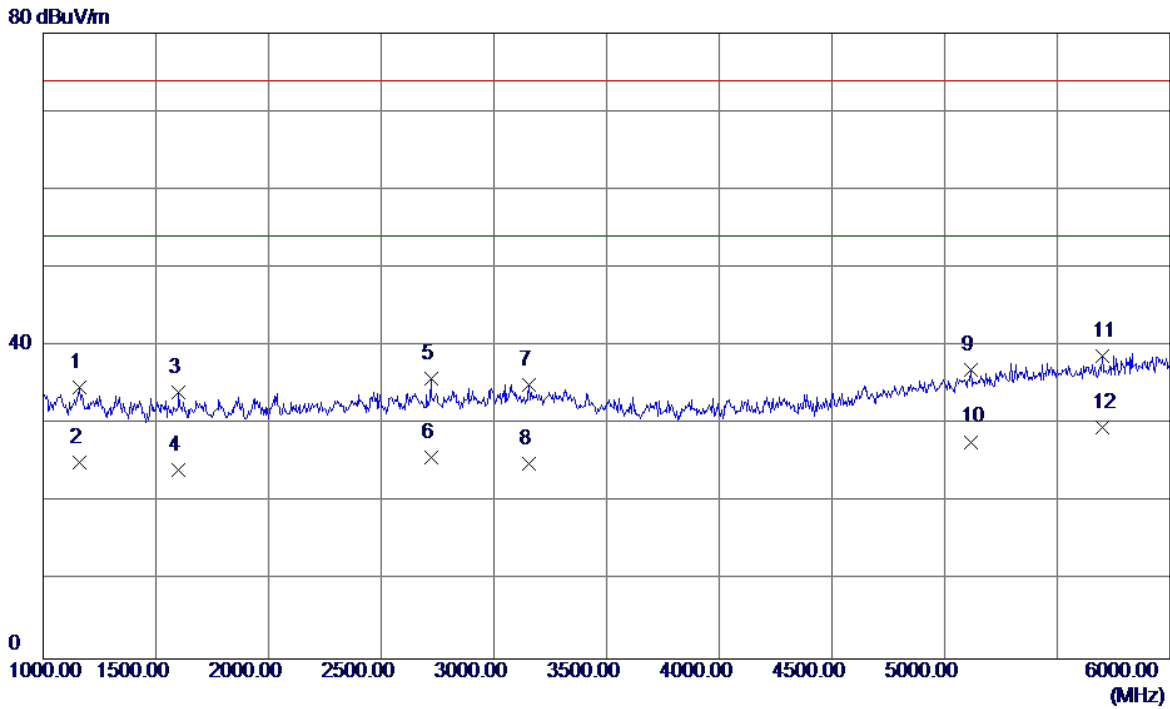


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1160.0000	40.94	-6.16	34.78	74.00	-39.22	Peak
2	1160.0000	31.22	-6.16	25.06	54.00	-28.94	AVG
3	1602.5000	38.47	-4.46	34.01	74.00	-39.99	Peak
4	1602.5000	28.57	-4.46	24.11	54.00	-29.89	AVG
5	2722.5000	34.65	1.16	35.81	74.00	-38.19	Peak
6	2722.5000	24.56	1.16	25.72	54.00	-28.28	AVG
7	3155.0000	32.64	2.36	35.00	74.00	-39.00	Peak
8	3155.0000	22.65	2.36	25.01	54.00	-28.99	AVG
9	5117.5000	30.25	6.71	36.96	74.00	-37.04	Peak
10	5117.5000	21.05	6.71	27.76	54.00	-26.24	AVG
11	5700.0000	30.48	8.19	38.67	74.00	-35.33	Peak
12 *	5700.0000	21.35	8.19	29.54	54.00	-24.46	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

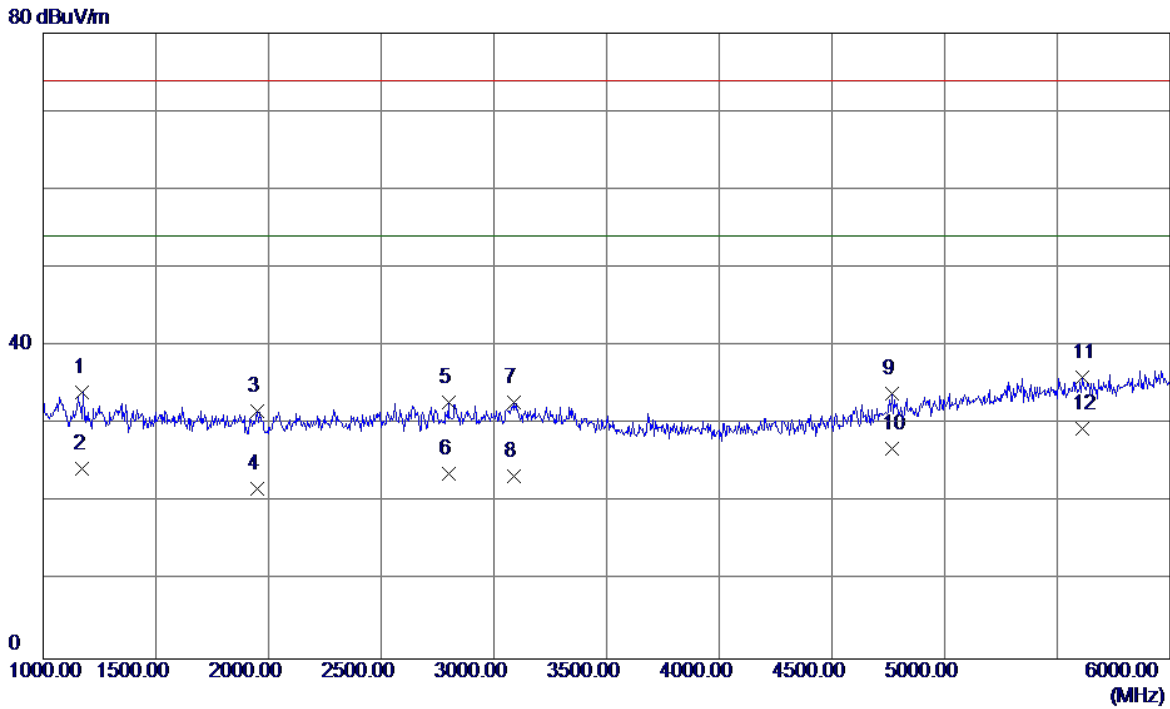

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1175.0000	40.19	-6.11	34.08	74.00	-39.92	Peak
2	1175.0000	30.49	-6.11	24.38	54.00	-29.62	AVG
3	1950.0000	34.44	-2.81	31.63	74.00	-42.37	Peak
4	1950.0000	24.58	-2.81	21.77	54.00	-32.23	AVG
5	2797.5000	31.28	1.50	32.78	74.00	-41.22	Peak
6	2797.5000	22.12	1.50	23.62	54.00	-30.38	AVG
7	3087.5000	30.48	2.37	32.85	74.00	-41.15	Peak
8	3087.5000	21.03	2.37	23.40	54.00	-30.60	AVG
9	4765.0000	28.78	5.17	33.95	74.00	-40.05	Peak
10	4765.0000	21.78	5.17	26.95	54.00	-27.05	AVG
11	5612.5000	27.95	8.11	36.06	74.00	-37.94	Peak
12 *	5612.5000	21.33	8.11	29.44	54.00	-24.56	AVG


EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

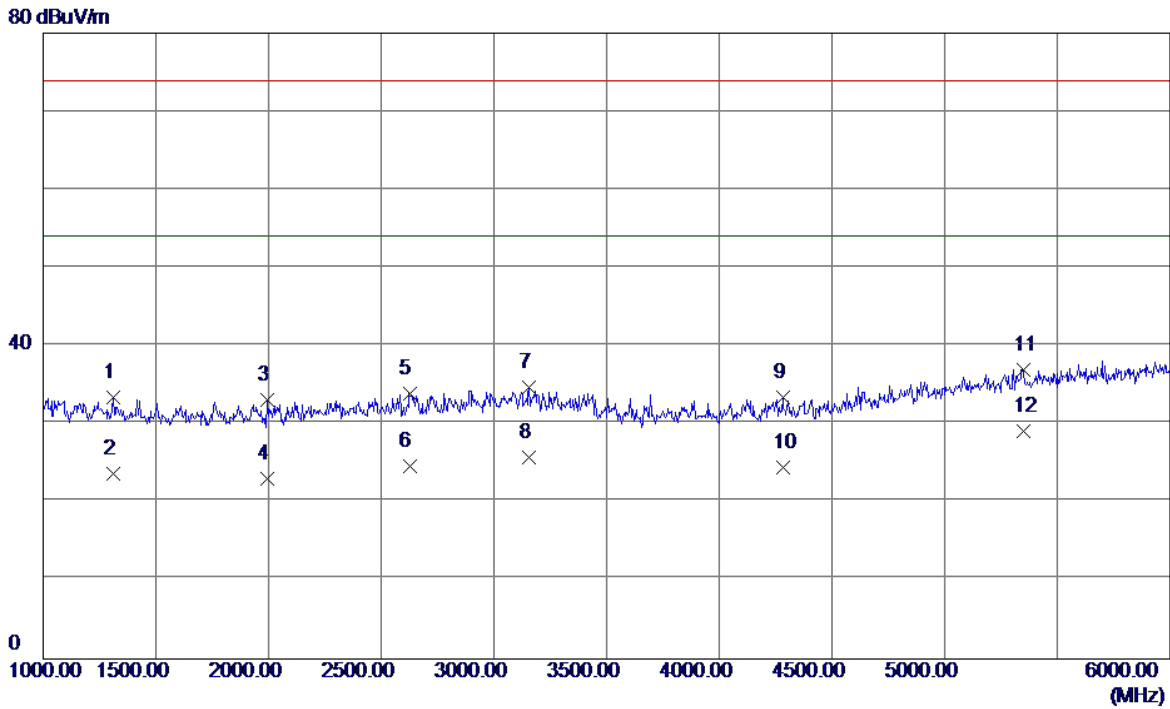

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1312.5000	39.01	-5.62	33.39	74.00	-40.61	Peak
2	1312.5000	29.33	-5.62	23.71	54.00	-30.29	AVG
3	1995.0000	35.69	-2.59	33.10	74.00	-40.90	Peak
4	1995.0000	25.65	-2.59	23.06	54.00	-30.94	AVG
5	2625.0000	33.21	0.73	33.94	74.00	-40.06	Peak
6	2625.0000	23.86	0.73	24.59	54.00	-29.41	AVG
7	3155.0000	32.43	2.36	34.79	74.00	-39.21	Peak
8	3155.0000	23.34	2.36	25.70	54.00	-28.30	AVG
9	4282.5000	30.05	3.38	33.43	74.00	-40.57	Peak
10	4282.5000	21.05	3.38	24.43	54.00	-29.57	AVG
11	5347.5000	29.48	7.49	36.97	74.00	-37.03	Peak
12 *	5347.5000	21.56	7.49	29.05	54.00	-24.95	AVG


EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

80 dBuV/m

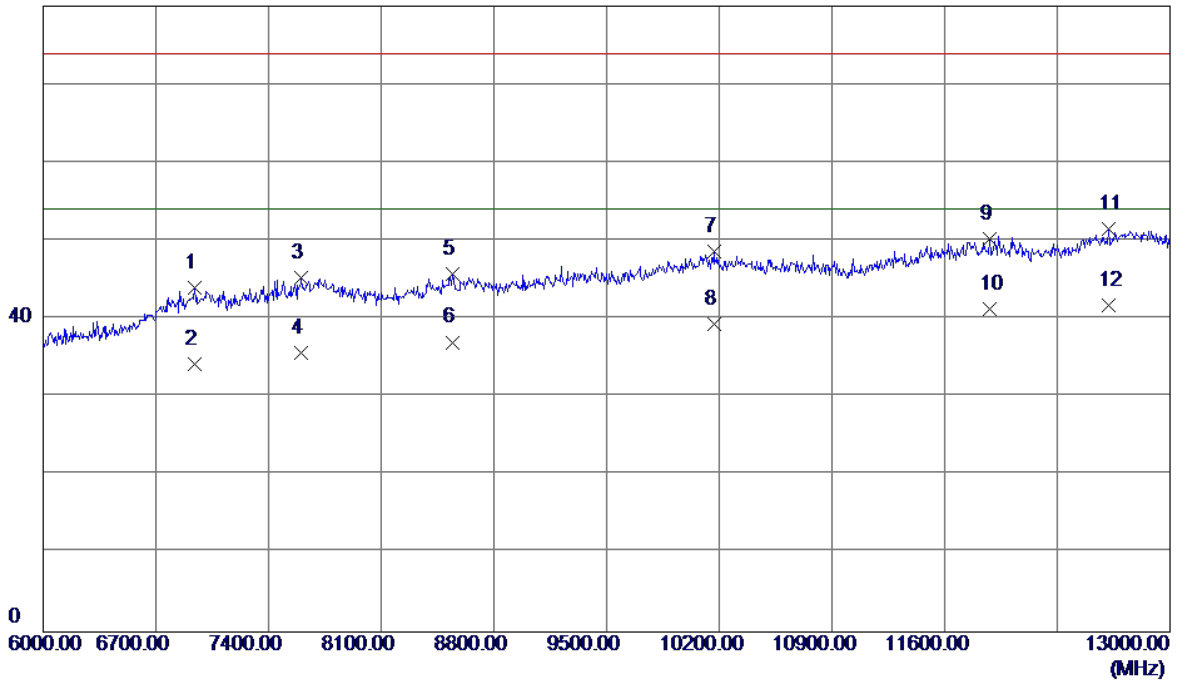


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6938.0000	32.77	11.20	43.97	74.00	-30.03	Peak
2	6938.0000	23.04	11.20	34.24	54.00	-19.76	AVG
3	7603.0000	32.62	12.62	45.24	74.00	-28.76	Peak
4	7603.0000	23.13	12.62	35.75	54.00	-18.25	AVG
5	8541.0000	32.36	13.47	45.83	74.00	-28.17	Peak
6	8541.0000	23.57	13.47	37.04	54.00	-16.96	AVG
7	10168.5000	32.72	15.93	48.65	74.00	-25.35	Peak
8	10168.5000	23.47	15.93	39.40	54.00	-14.60	AVG
9	11883.5000	32.58	17.60	50.18	74.00	-23.82	Peak
10	11883.5000	23.75	17.60	41.35	54.00	-12.65	AVG
11	12618.5000	33.26	18.26	51.52	74.00	-22.48	Peak
12 *	12618.5000	23.56	18.26	41.82	54.00	-12.18	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

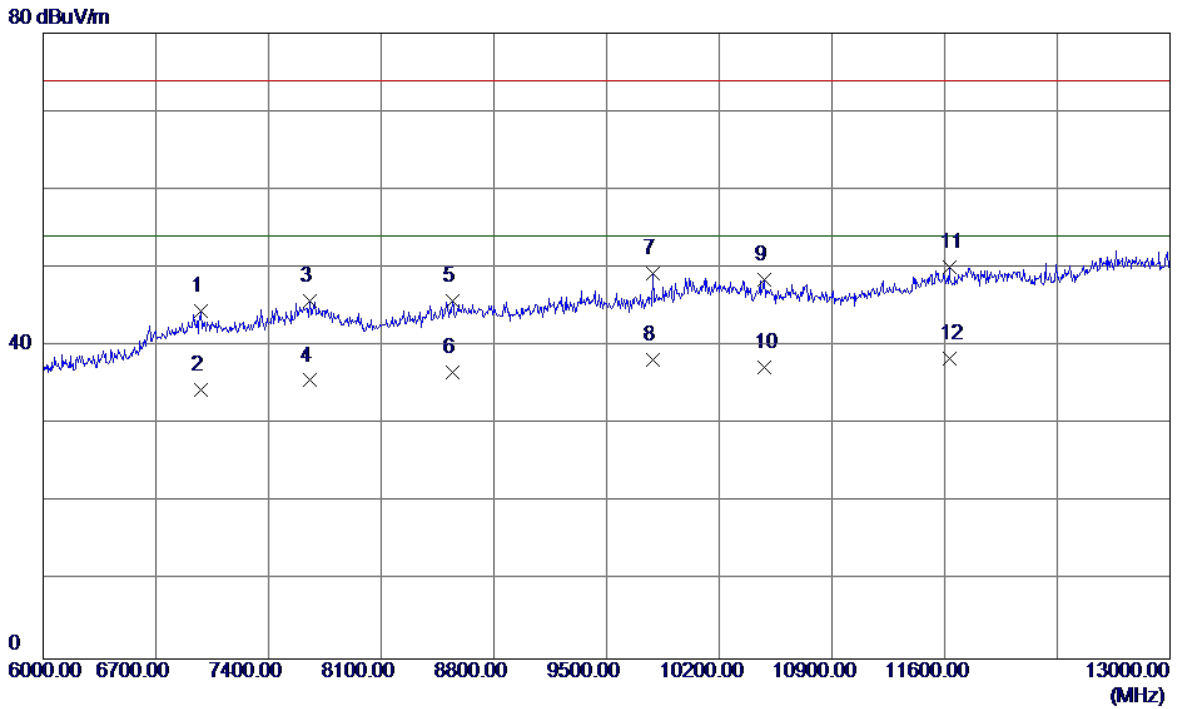


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6980.0000	33.16	11.35	44.51	74.00	-29.49	Peak
2	6980.0000	23.06	11.35	34.41	54.00	-19.59	AVG
3	7655.5000	33.14	12.60	45.74	74.00	-28.26	Peak
4	7655.5000	23.00	12.60	35.60	54.00	-18.40	AVG
5	8544.5000	32.33	13.48	45.81	74.00	-28.19	Peak
6	8544.5000	23.11	13.48	36.59	54.00	-17.41	AVG
7	9787.0000	34.14	15.12	49.26	74.00	-24.74	Peak
8	9787.0000	23.05	15.12	38.17	54.00	-15.83	AVG
9	10483.5000	31.88	16.63	48.51	74.00	-25.49	Peak
10	10483.5000	20.65	16.63	37.28	54.00	-16.72	AVG
11	11628.0000	32.34	17.80	50.14	74.00	-23.86	Peak
12 *	11628.0000	20.66	17.80	38.46	54.00	-15.54	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

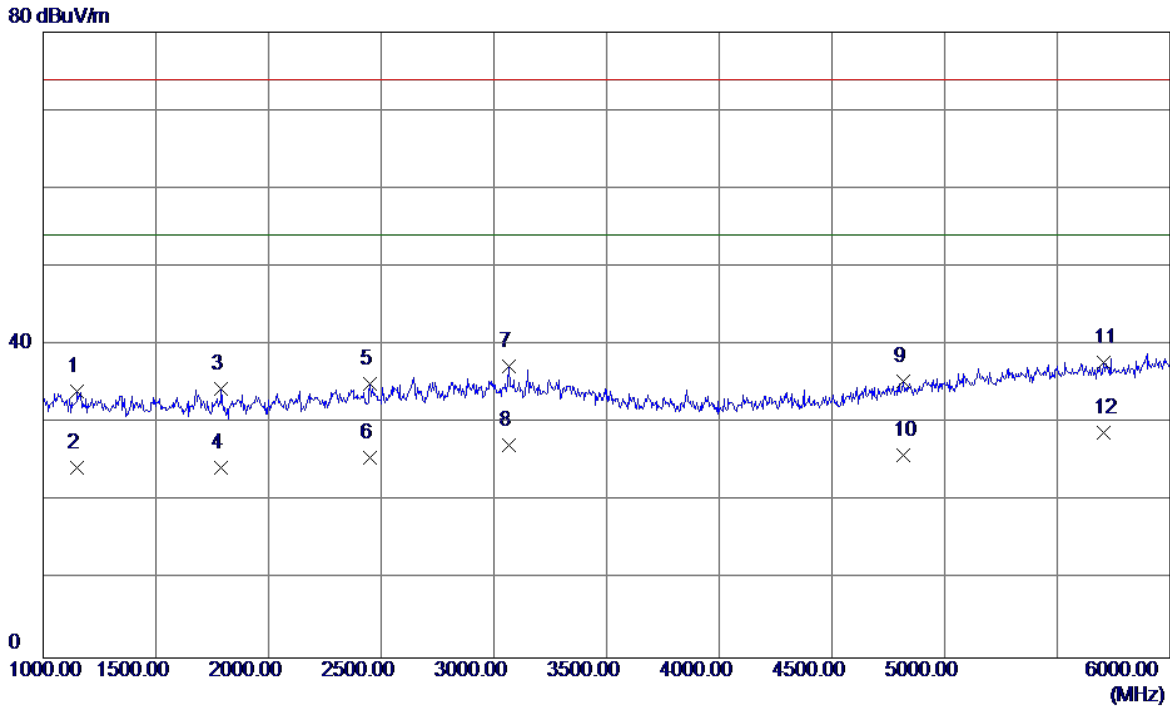


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1152.5000	40.26	-6.19	34.07	74.00	-39.93	Peak
2	1152.5000	30.56	-6.19	24.37	54.00	-29.63	AVG
3	1790.0000	37.98	-3.57	34.41	74.00	-39.59	Peak
4	1790.0000	27.88	-3.57	24.31	54.00	-29.69	AVG
5	2450.0000	35.19	-0.10	35.09	74.00	-38.91	Peak
6	2450.0000	25.63	-0.10	25.53	54.00	-28.47	AVG
7	3065.0000	34.88	2.38	37.26	74.00	-36.74	Peak
8	3065.0000	24.78	2.38	27.16	54.00	-26.84	AVG
9	4815.0000	29.88	5.41	35.29	74.00	-38.71	Peak
10	4815.0000	20.56	5.41	25.97	54.00	-28.03	AVG
11	5705.0000	29.51	8.19	37.70	74.00	-36.30	Peak
12 *	5705.0000	20.61	8.19	28.80	54.00	-25.20	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+Playing+Speaker		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

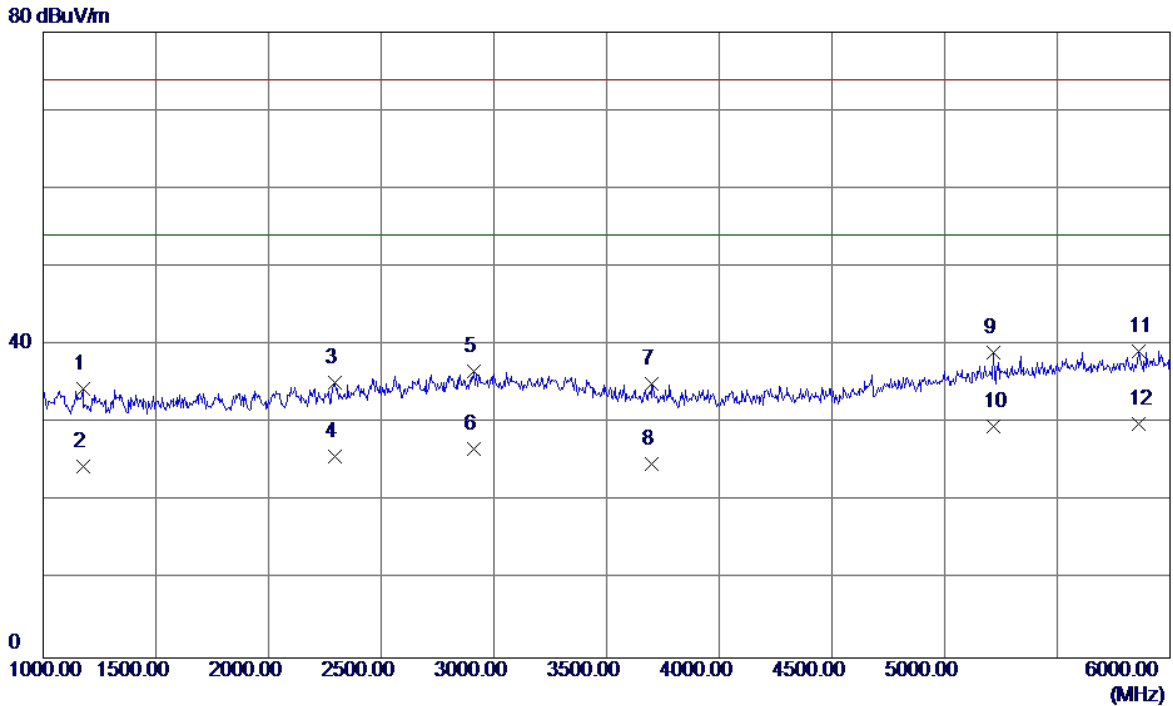


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1177.5000	40.52	-6.10	34.42	74.00	-39.58	Peak
2	1177.5000	30.55	-6.10	24.45	54.00	-29.55	AVG
3	2292.5000	36.19	-0.97	35.22	74.00	-38.78	Peak
4	2292.5000	26.79	-0.97	25.82	54.00	-28.18	AVG
5	2912.5000	34.66	2.01	36.67	74.00	-37.33	Peak
6	2912.5000	24.66	2.01	26.67	54.00	-27.33	AVG
7	3700.0000	32.59	2.44	35.03	74.00	-38.97	Peak
8	3700.0000	22.34	2.44	24.78	54.00	-29.22	AVG
9	5215.0000	32.07	7.04	39.11	74.00	-34.89	Peak
10	5215.0000	22.53	7.04	29.57	54.00	-24.43	AVG
11	5860.0000	30.89	8.33	39.22	74.00	-34.78	Peak
12 *	5860.0000	21.55	8.33	29.88	54.00	-24.12	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

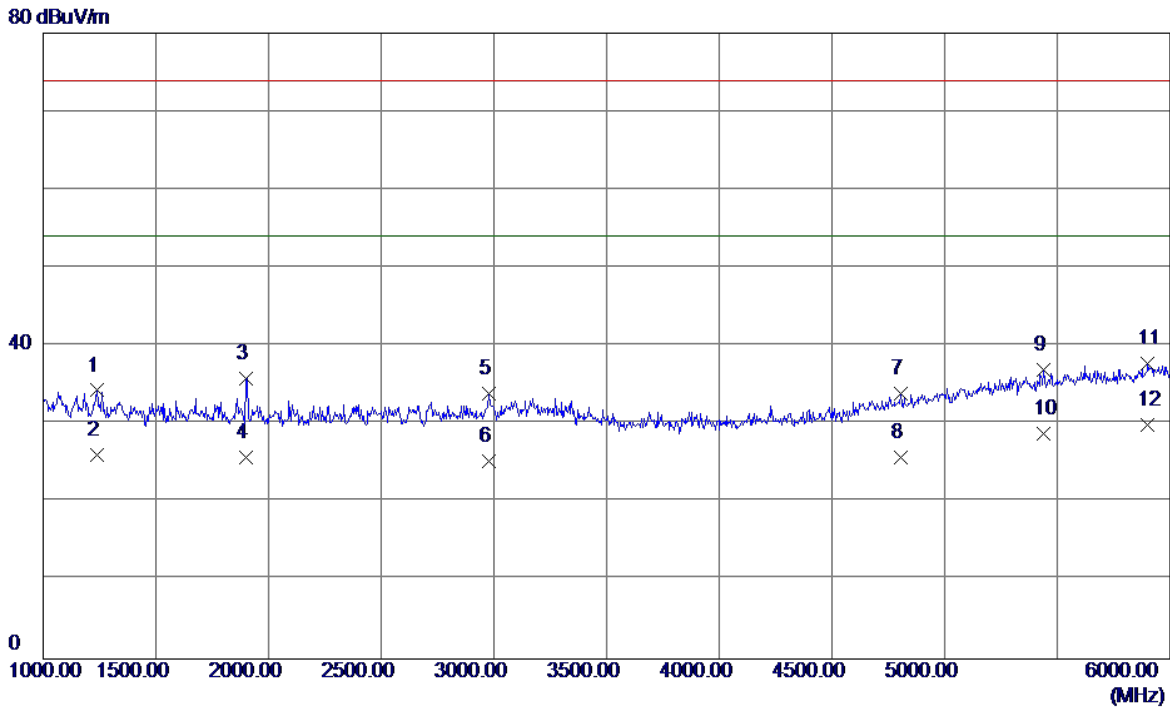


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1237.5000	40.20	-5.88	34.32	74.00	-39.68	Peak
2	1237.5000	31.89	-5.88	26.01	54.00	-27.99	AVG
3	1902.5000	38.84	-3.03	35.81	74.00	-38.19	Peak
4	1902.5000	28.75	-3.03	25.72	54.00	-28.28	AVG
5	2977.5000	31.65	2.30	33.95	74.00	-40.05	Peak
6	2977.5000	22.98	2.30	25.28	54.00	-28.72	AVG
7	4805.0000	28.61	5.36	33.97	74.00	-40.03	Peak
8	4805.0000	20.45	5.36	25.81	54.00	-28.19	AVG
9	5440.0000	29.10	7.81	36.91	74.00	-37.09	Peak
10	5440.0000	21.03	7.81	28.84	54.00	-25.16	AVG
11	5900.0000	29.41	8.37	37.78	74.00	-36.22	Peak
12 *	5900.0000	21.54	8.37	29.91	54.00	-24.09	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (GSM)+ Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD+Earphone:Lianchuang		
Test Engineer	Kevin Li		

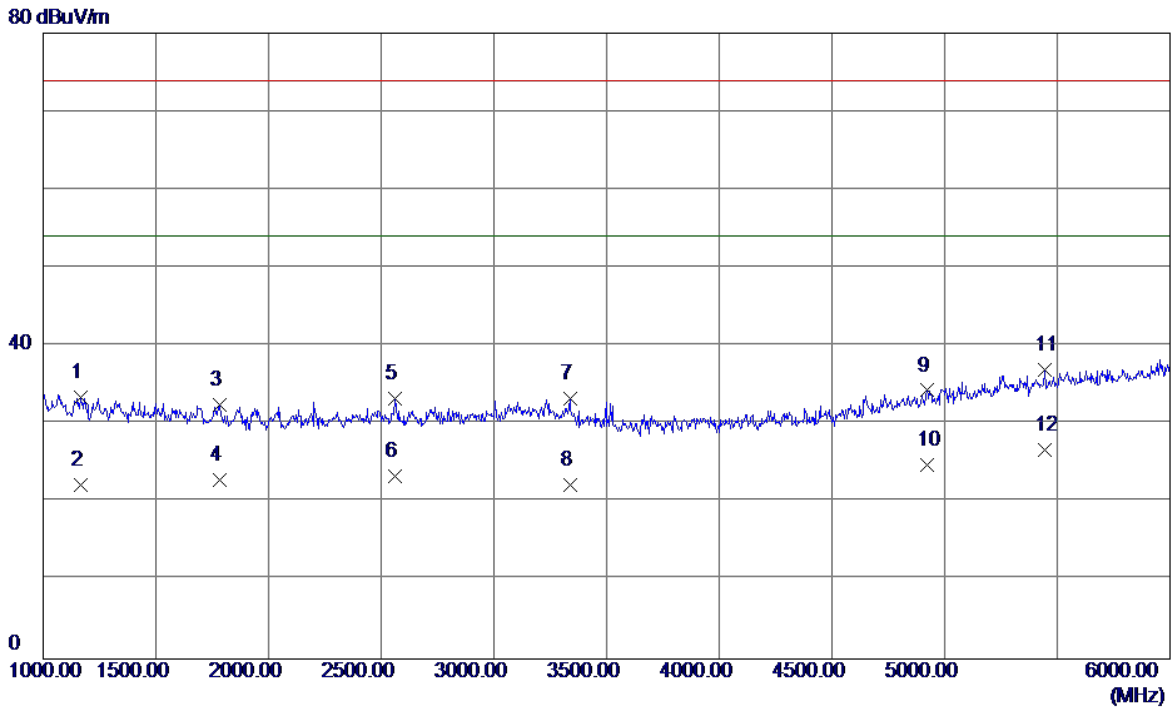


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1167.5000	39.52	-6.13	33.39	74.00	-40.61	Peak
2	1167.5000	28.36	-6.13	22.23	54.00	-31.77	AVG
3	1782.5000	36.07	-3.61	32.46	74.00	-41.54	Peak
4	1782.5000	26.46	-3.61	22.85	54.00	-31.15	AVG
5	2560.0000	32.78	0.44	33.22	74.00	-40.78	Peak
6	2560.0000	22.88	0.44	23.32	54.00	-30.68	AVG
7	3337.5000	30.93	2.30	33.23	74.00	-40.77	Peak
8	3337.5000	20.00	2.30	22.30	54.00	-31.70	AVG
9	4922.5000	28.39	5.93	34.32	74.00	-39.68	Peak
10	4922.5000	18.88	5.93	24.81	54.00	-29.19	AVG
11	5442.5000	29.17	7.81	36.98	74.00	-37.02	Peak
12 *	5442.5000	18.85	7.81	26.66	54.00	-27.34	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

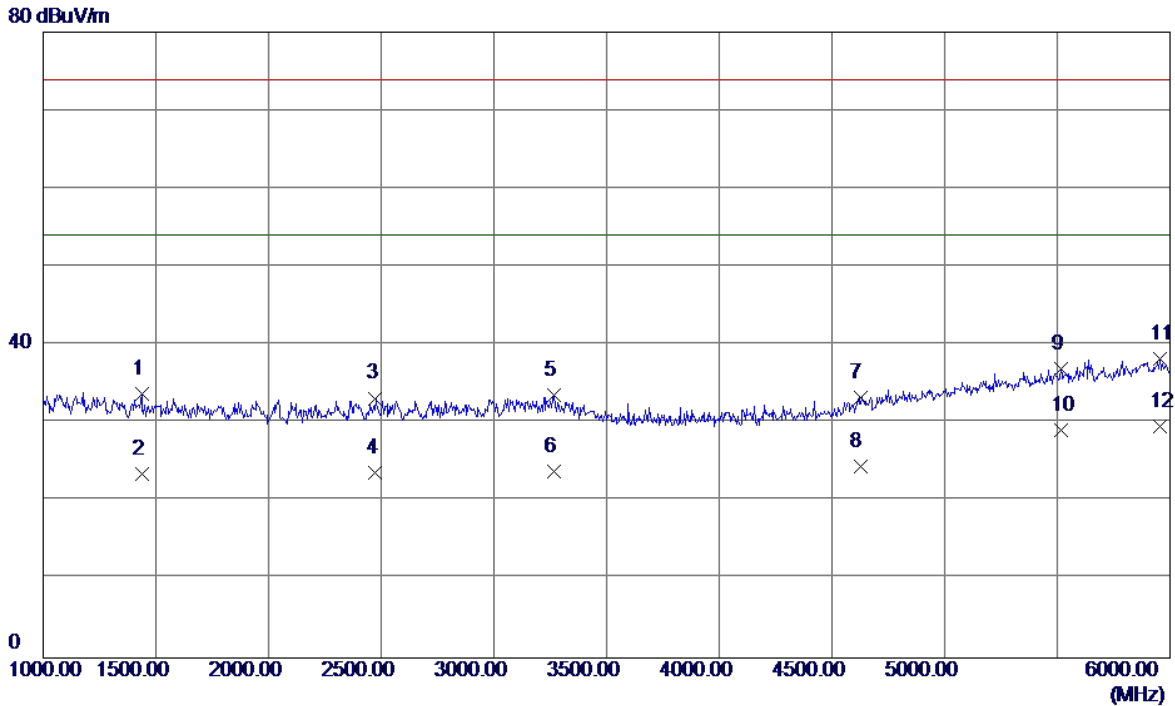


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1437.5000	38.87	-5.17	33.70	74.00	-40.30	Peak
2	1437.5000	28.65	-5.17	23.48	54.00	-30.52	AVG
3	2475.0000	33.17	0.03	33.20	74.00	-40.80	Peak
4	2475.0000	23.67	0.03	23.70	54.00	-30.30	AVG
5	3265.0000	31.24	2.32	33.56	74.00	-40.44	Peak
6	3265.0000	21.56	2.32	23.88	54.00	-30.12	AVG
7	4625.0000	28.85	4.49	33.34	74.00	-40.66	Peak
8	4625.0000	20.00	4.49	24.49	54.00	-29.51	AVG
9	5517.5000	28.99	8.03	37.02	74.00	-36.98	Peak
10	5517.5000	21.02	8.03	29.05	54.00	-24.95	AVG
11	5955.0000	29.76	8.42	38.18	74.00	-35.82	Peak
12 *	5955.0000	21.12	8.42	29.54	54.00	-24.46	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (WCDMA)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

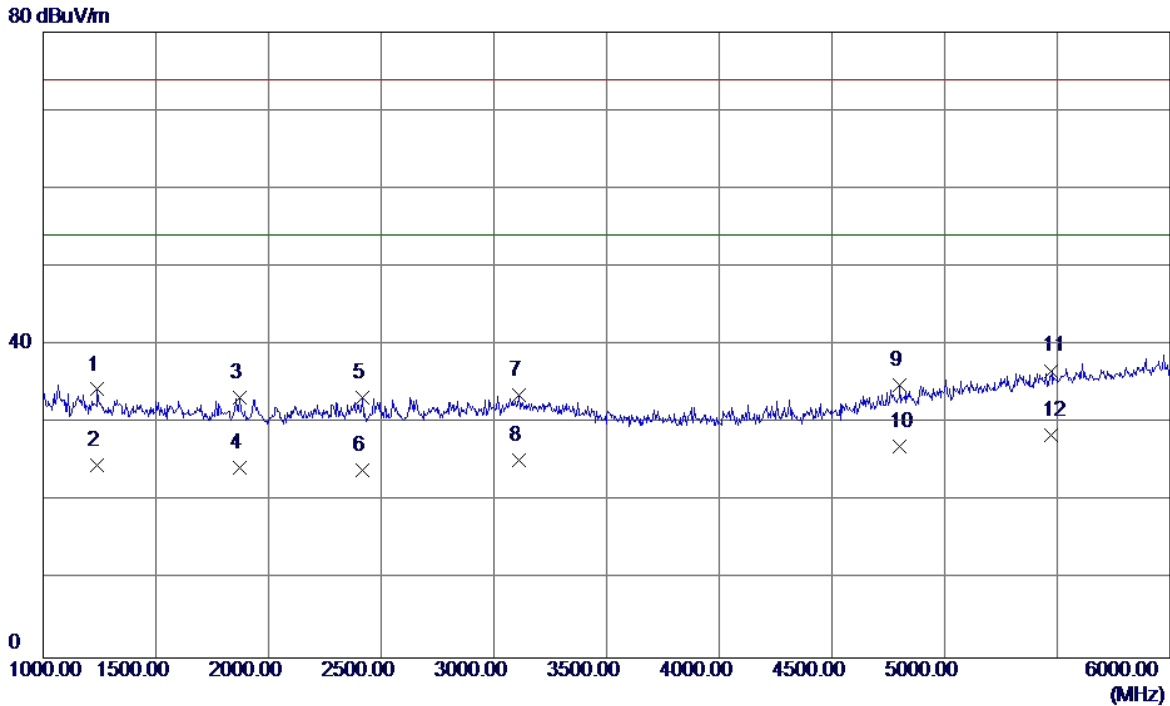


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1240.0000	40.20	-5.88	34.32	74.00	-39.68	Peak
2	1240.0000	30.57	-5.88	24.69	54.00	-29.31	AVG
3	1870.0000	36.47	-3.19	33.28	74.00	-40.72	Peak
4	1870.0000	27.55	-3.19	24.36	54.00	-29.64	AVG
5	2417.5000	33.61	-0.28	33.33	74.00	-40.67	Peak
6	2417.5000	24.30	-0.28	24.02	54.00	-29.98	AVG
7	3110.0000	31.24	2.37	33.61	74.00	-40.39	Peak
8	3110.0000	22.89	2.37	25.26	54.00	-28.74	AVG
9	4800.0000	29.53	5.34	34.87	74.00	-39.13	Peak
10	4800.0000	21.66	5.34	27.00	54.00	-27.00	AVG
11	5475.0000	28.80	7.92	36.72	74.00	-37.28	Peak
12 *	5475.0000	20.58	7.92	28.50	54.00	-25.50	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

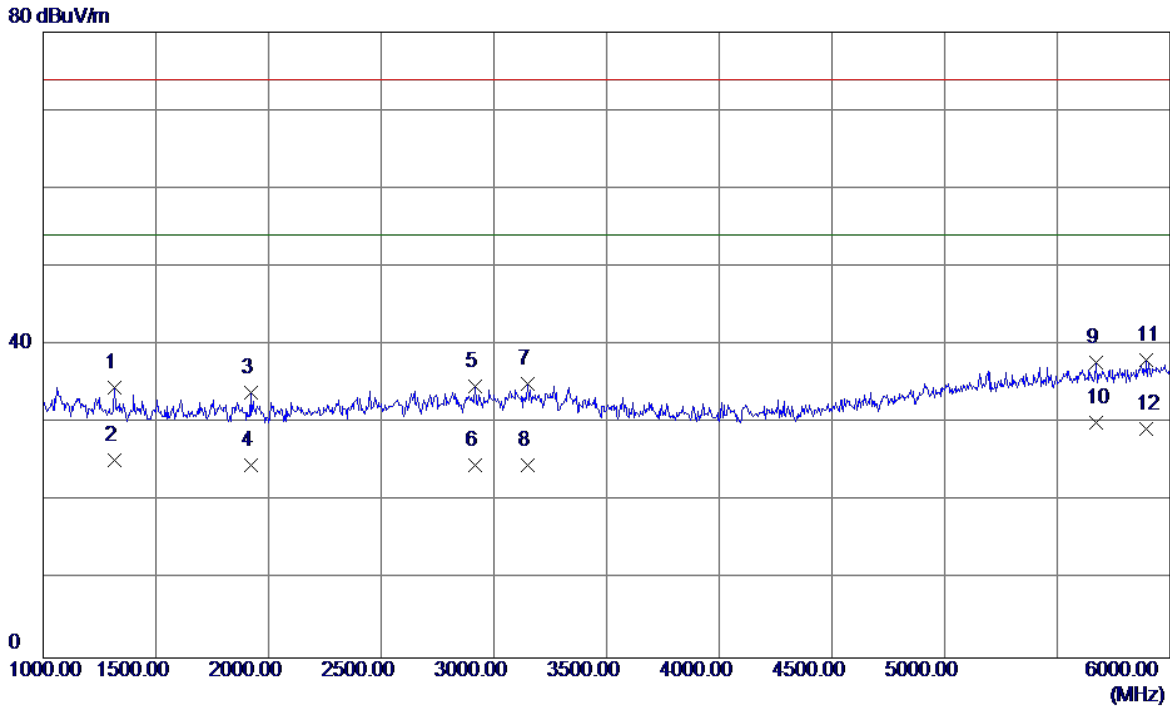


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1315.0000	40.10	-5.61	34.49	74.00	-39.51	Peak
2	1315.0000	30.88	-5.61	25.27	54.00	-28.73	AVG
3	1920.0000	36.84	-2.95	33.89	74.00	-40.11	Peak
4	1920.0000	27.56	-2.95	24.61	54.00	-29.39	AVG
5	2915.0000	32.63	2.02	34.65	74.00	-39.35	Peak
6	2915.0000	22.65	2.02	24.67	54.00	-29.33	AVG
7	3152.5000	32.63	2.36	34.99	74.00	-39.01	Peak
8	3152.5000	22.31	2.36	24.67	54.00	-29.33	AVG
9	5670.0000	29.60	8.16	37.76	74.00	-36.24	Peak
10 *	5670.0000	21.87	8.16	30.03	54.00	-23.97	AVG
11	5895.0000	29.70	8.37	38.07	74.00	-35.93	Peak
12	5895.0000	20.98	8.37	29.35	54.00	-24.65	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic (LTE)		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:SCUD		
Test Engineer	Kevin Li		

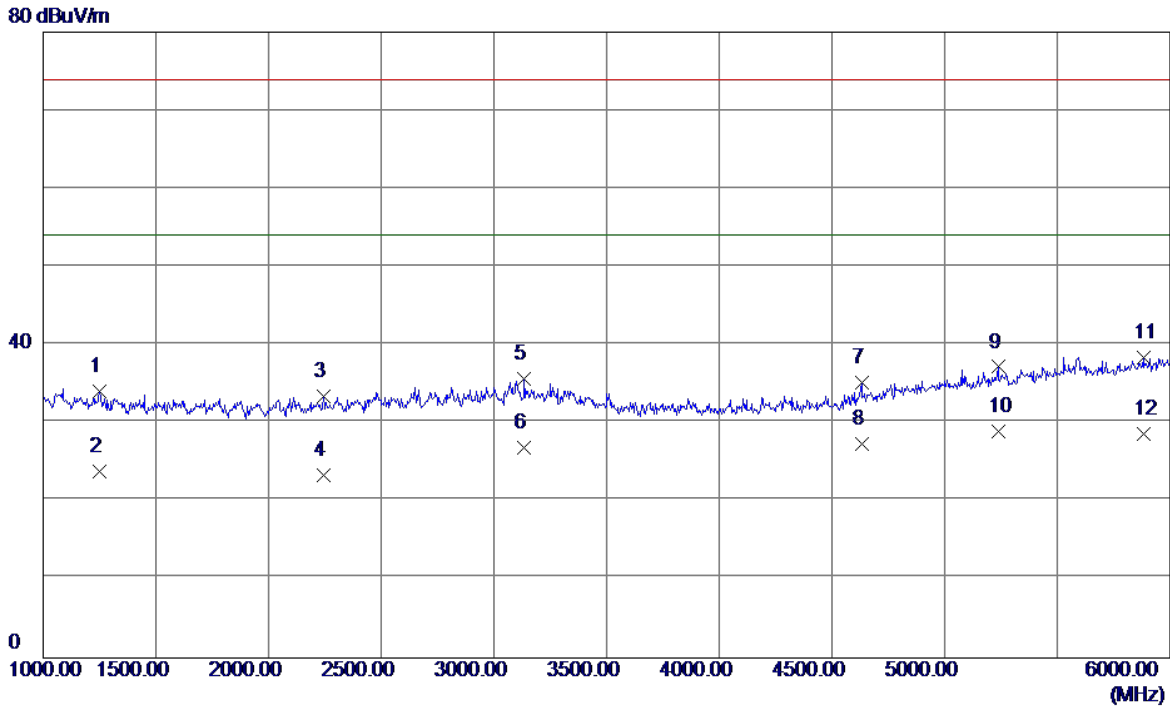


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1250.0000	39.86	-5.84	34.02	74.00	-39.98	Peak
2	1250.0000	29.65	-5.84	23.81	54.00	-30.19	AVG
3	2242.5000	34.64	-1.24	33.40	74.00	-40.60	Peak
4	2242.5000	24.56	-1.24	23.32	54.00	-30.68	AVG
5	3135.0000	33.33	2.36	35.69	74.00	-38.31	Peak
6	3135.0000	24.55	2.36	26.91	54.00	-27.09	AVG
7	4632.5000	30.61	4.52	35.13	74.00	-38.87	Peak
8	4632.5000	22.78	4.52	27.30	54.00	-26.70	AVG
9	5237.5000	30.08	7.12	37.20	74.00	-36.80	Peak
10 *	5237.5000	21.88	7.12	29.00	54.00	-25.00	AVG
11	5882.5000	30.06	8.35	38.41	74.00	-35.59	Peak
12	5882.5000	20.27	8.35	28.62	54.00	-25.38	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:Sunwoda+Earphone:Quancheng(Black)		
Test Engineer	Kevin Li		

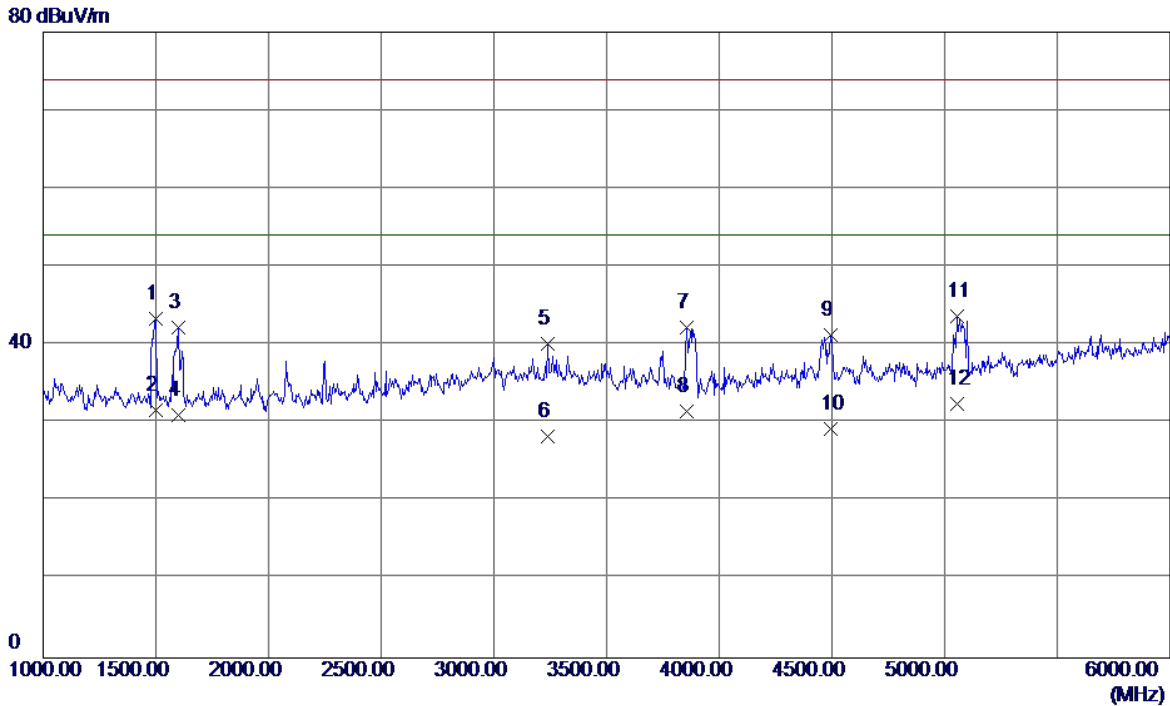


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	46.90	-3.59	43.31	74.00	-30.69	Peak
2	1500.0000	35.22	-3.59	31.63	54.00	-22.37	AVG
3	1600.0000	45.45	-3.22	42.23	74.00	-31.77	Peak
4	1600.0000	34.26	-3.22	31.04	54.00	-22.96	AVG
5	3240.0000	35.94	4.16	40.10	74.00	-33.90	Peak
6	3240.0000	24.11	4.16	28.27	54.00	-25.73	AVG
7	3855.0000	37.26	4.99	42.25	74.00	-31.75	Peak
8	3855.0000	26.51	4.99	31.50	54.00	-22.50	AVG
9	4495.0000	34.98	6.23	41.21	74.00	-32.79	Peak
10	4495.0000	23.05	6.23	29.28	54.00	-24.72	AVG
11	5055.0000	36.39	7.24	43.63	74.00	-30.37	Peak
12 *	5055.0000	25.23	7.24	32.47	54.00	-21.53	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+Idle+ Earphone		
Note	USB Cable:Luxshare+Battery:Sunwoda+Earphone:Quancheng(Black)		
Test Engineer	Kevin Li		

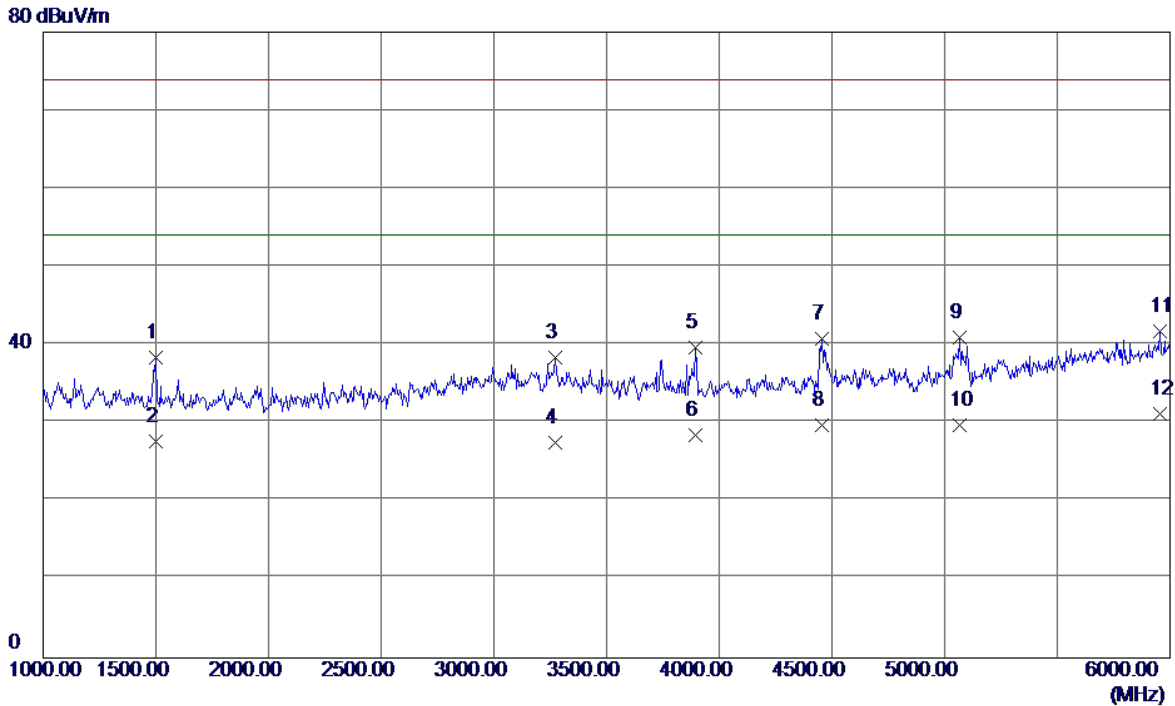


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	42.04	-3.59	38.45	74.00	-35.55	Peak
2	1500.0000	31.21	-3.59	27.62	54.00	-26.38	AVG
3	3270.0000	34.11	4.22	38.33	74.00	-35.67	Peak
4	3270.0000	23.25	4.22	27.47	54.00	-26.53	AVG
5	3895.0000	34.63	5.02	39.65	74.00	-34.35	Peak
6	3895.0000	23.50	5.02	28.52	54.00	-25.48	AVG
7	4455.0000	34.72	6.14	40.86	74.00	-33.14	Peak
8	4455.0000	23.59	6.14	29.73	54.00	-24.27	AVG
9	5065.0000	33.68	7.27	40.95	74.00	-33.05	Peak
10	5065.0000	22.51	7.27	29.78	54.00	-24.22	AVG
11	5955.0000	31.16	10.66	41.82	74.00	-32.18	Peak
12 *	5955.0000	20.51	10.66	31.17	54.00	-22.83	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Lianchuang(Black)		
Test Engineer	Kevin Li		

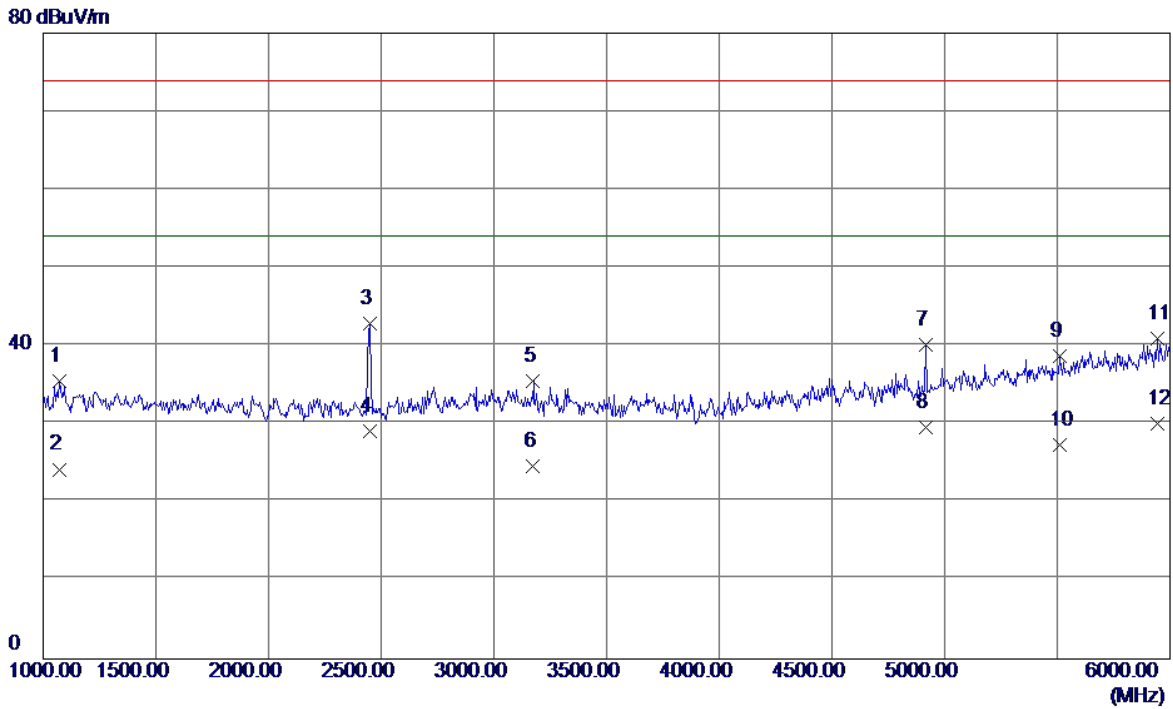


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1070.0000	40.88	-5.33	35.55	74.00	-38.45	Peak
2	1070.0000	29.57	-5.33	24.24	54.00	-29.76	AVG
3	2450.0000	42.25	0.61	42.86	74.00	-31.14	Peak
4	2450.0000	28.51	0.61	29.12	54.00	-24.88	AVG
5	3175.0000	31.44	4.03	35.47	74.00	-38.53	Peak
6	3175.0000	20.55	4.03	24.58	54.00	-29.42	AVG
7	4915.0000	33.20	6.90	40.10	74.00	-33.90	Peak
8	4915.0000	22.65	6.90	29.55	54.00	-24.45	AVG
9	5510.0000	29.87	8.86	38.73	74.00	-35.27	Peak
10	5510.0000	18.48	8.86	27.34	54.00	-26.66	AVG
11	5945.0000	30.33	10.62	40.95	74.00	-33.05	Peak
12 *	5945.0000	19.53	10.62	30.15	54.00	-23.85	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Phitek+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Lianchuang(Black)		
Test Engineer	Kevin Li		

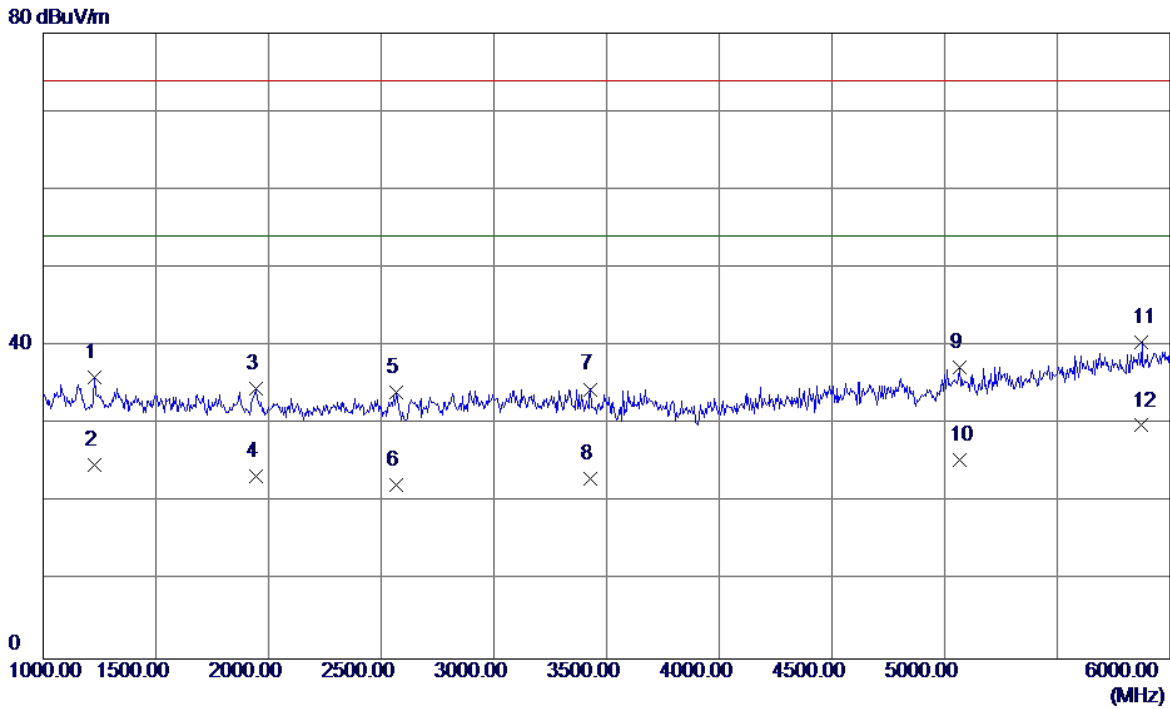


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1230.0000	40.66	-4.68	35.98	74.00	-38.02	Peak
2	1230.0000	29.54	-4.68	24.86	54.00	-29.14	AVG
3	1945.0000	36.46	-1.96	34.50	74.00	-39.50	Peak
4	1945.0000	25.32	-1.96	23.36	54.00	-30.64	AVG
5	2565.0000	32.82	1.24	34.06	74.00	-39.94	Peak
6	2565.0000	21.05	1.24	22.29	54.00	-31.71	AVG
7	3430.0000	29.96	4.52	34.48	74.00	-39.52	Peak
8	3430.0000	18.47	4.52	22.99	54.00	-31.01	AVG
9	5065.0000	29.98	7.27	37.25	74.00	-36.75	Peak
10	5065.0000	18.24	7.27	25.51	54.00	-28.49	AVG
11	5875.0000	30.15	10.33	40.48	74.00	-33.52	Peak
12 *	5875.0000	19.51	10.33	29.84	54.00	-24.16	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Quancheng(Black)		
Test Engineer	Kevin Li		

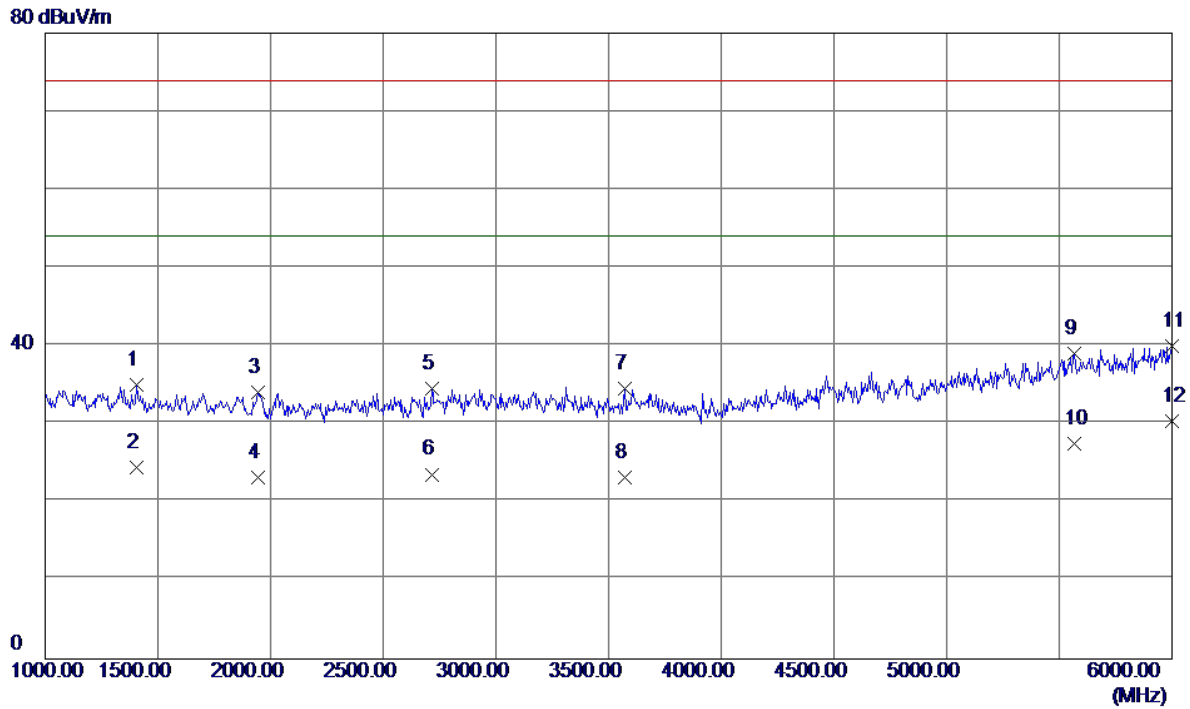


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1405.0000	39.00	-3.97	35.03	74.00	-38.97	Peak
2	1405.0000	28.44	-3.97	24.47	54.00	-29.53	AVG
3	1945.0000	36.08	-1.96	34.12	74.00	-39.88	Peak
4	1945.0000	25.12	-1.96	23.16	54.00	-30.84	AVG
5	2715.0000	32.43	2.09	34.52	74.00	-39.48	Peak
6	2715.0000	21.51	2.09	23.60	54.00	-30.40	AVG
7	3570.0000	29.90	4.72	34.62	74.00	-39.38	Peak
8	3570.0000	18.47	4.72	23.19	54.00	-30.81	AVG
9	5565.0000	29.95	9.08	39.03	74.00	-34.97	Peak
10	5565.0000	18.51	9.08	27.59	54.00	-26.41	AVG
11	6000.0000	29.11	10.84	39.95	74.00	-34.05	Peak
12 *	6000.0000	19.63	10.84	30.47	54.00	-23.53	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Quancheng(Black)		
Test Engineer	Kevin Li		

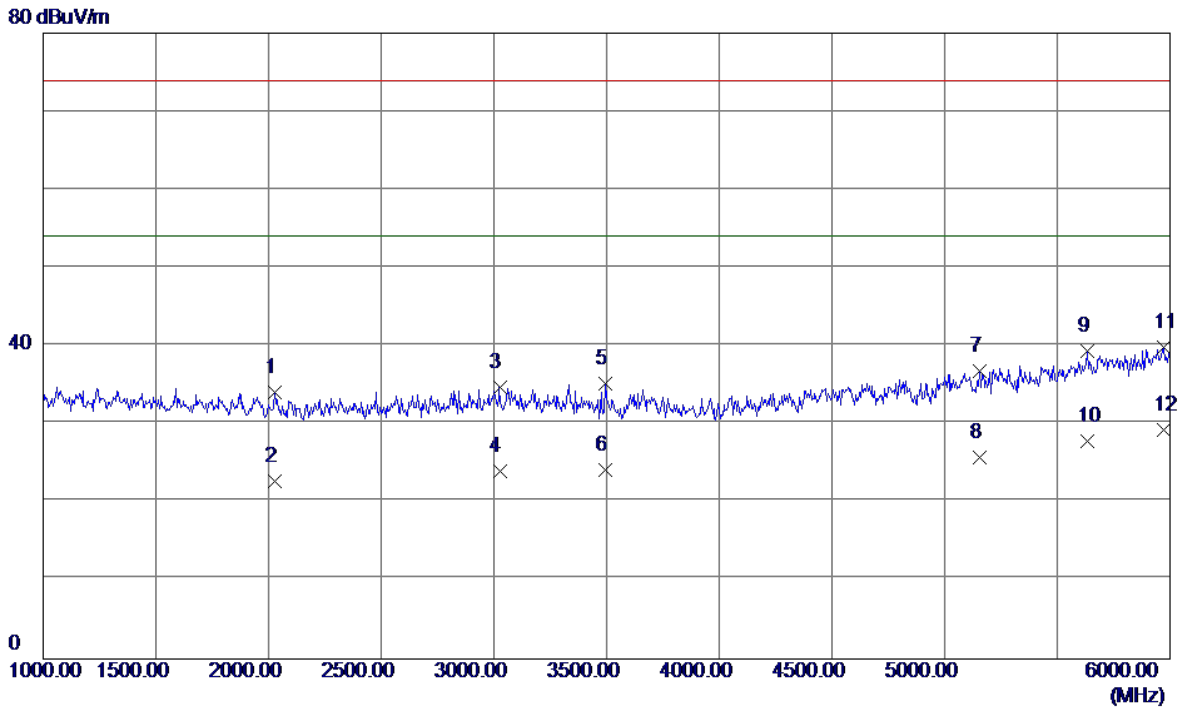


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2030.0000	35.61	-1.60	34.01	74.00	-39.99	Peak
2	2030.0000	24.25	-1.60	22.65	54.00	-31.35	AVG
3	3025.0000	31.01	3.75	34.76	74.00	-39.24	Peak
4	3025.0000	20.25	3.75	24.00	54.00	-30.00	AVG
5	3495.0000	30.52	4.65	35.17	74.00	-38.83	Peak
6	3495.0000	19.55	4.65	24.20	54.00	-29.80	AVG
7	5155.0000	29.22	7.59	36.81	74.00	-37.19	Peak
8	5155.0000	18.14	7.59	25.73	54.00	-28.27	AVG
9	5635.0000	29.96	9.36	39.32	74.00	-34.68	Peak
10	5635.0000	18.47	9.36	27.83	54.00	-26.17	AVG
11	5970.0000	29.18	10.72	39.90	74.00	-34.10	Peak
12 *	5970.0000	18.52	10.72	29.24	54.00	-24.76	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Goer(Black)		
Test Engineer	Kevin Li		

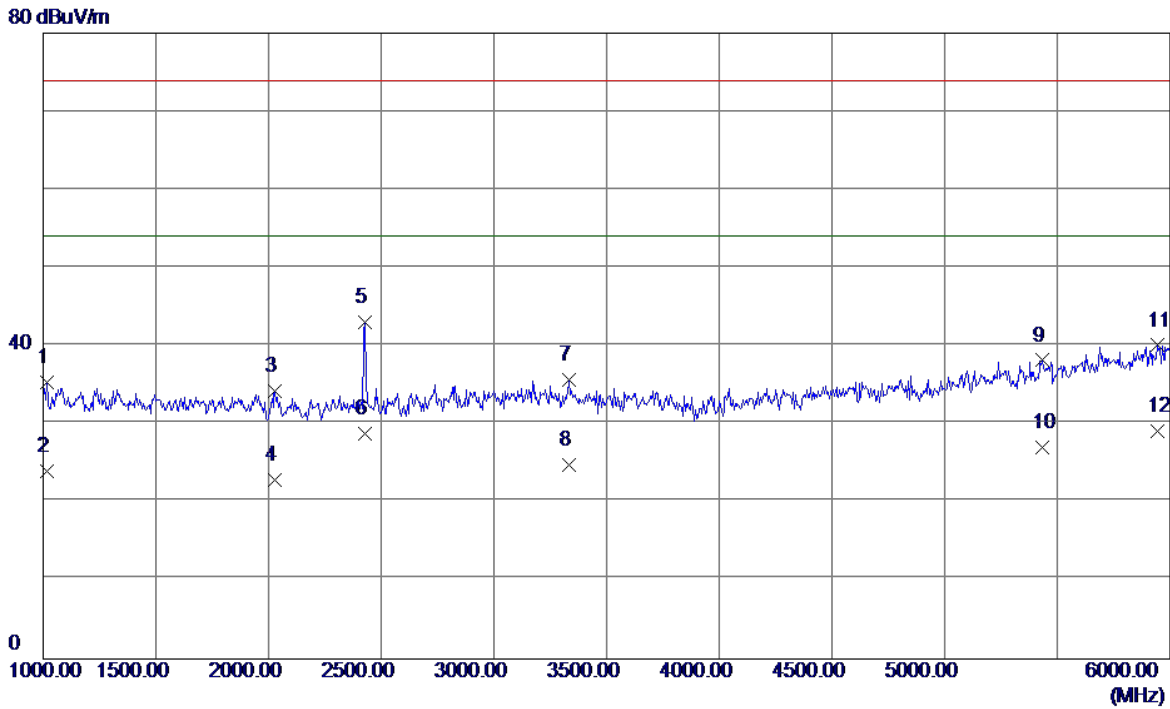


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1015.0000	40.90	-5.55	35.35	74.00	-38.65	Peak
2	1015.0000	29.52	-5.55	23.97	54.00	-30.03	AVG
3	2030.0000	35.84	-1.60	34.24	74.00	-39.76	Peak
4	2030.0000	24.50	-1.60	22.90	54.00	-31.10	AVG
5	2430.0000	42.56	0.51	43.07	74.00	-30.93	Peak
6	2430.0000	28.25	0.51	28.76	54.00	-25.24	AVG
7	3335.0000	31.35	4.34	35.69	74.00	-38.31	Peak
8	3335.0000	20.51	4.34	24.85	54.00	-29.15	AVG
9	5435.0000	29.58	8.58	38.16	74.00	-35.84	Peak
10	5435.0000	18.48	8.58	27.06	54.00	-26.94	AVG
11	5945.0000	29.46	10.62	40.08	74.00	-33.92	Peak
12 *	5945.0000	18.51	10.62	29.13	54.00	-24.87	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:BYD+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Goer(Black)		
Test Engineer	Kevin Li		

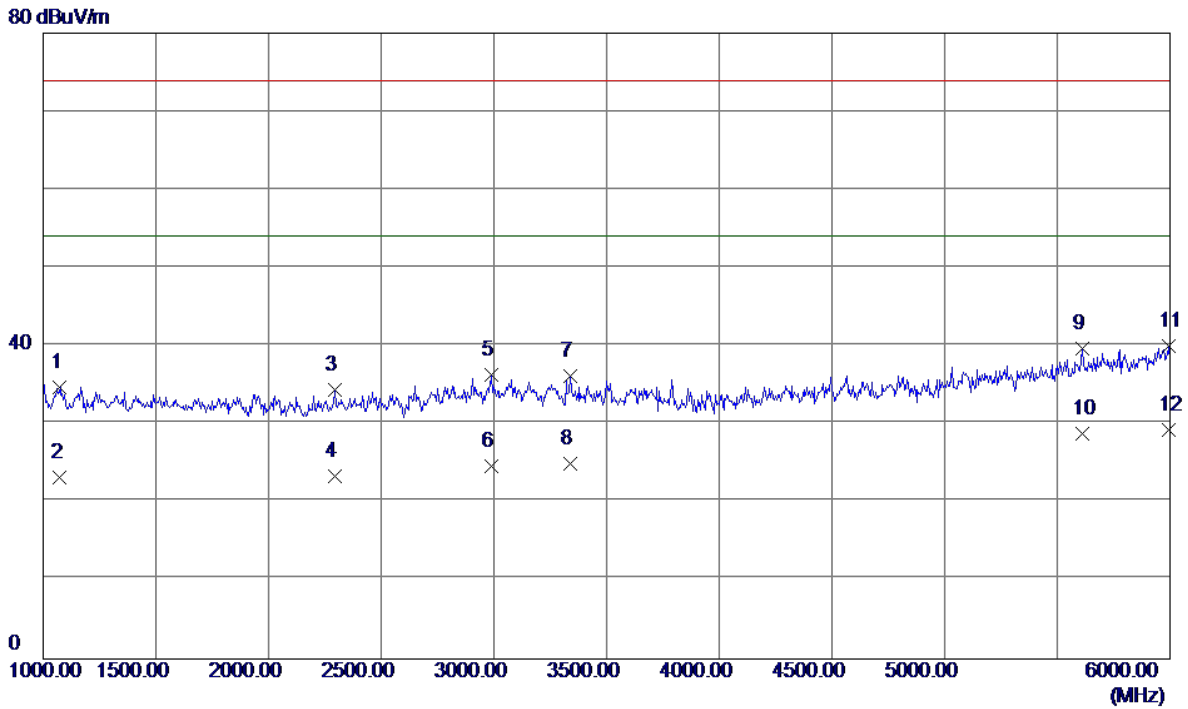


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1075.0000	40.00	-5.31	34.69	74.00	-39.31	Peak
2	1075.0000	28.55	-5.31	23.24	54.00	-30.76	AVG
3	2295.0000	34.65	-0.21	34.44	74.00	-39.56	Peak
4	2295.0000	23.52	-0.21	23.31	54.00	-30.69	AVG
5	2990.0000	32.66	3.64	36.30	74.00	-37.70	Peak
6	2990.0000	21.05	3.64	24.69	54.00	-29.31	AVG
7	3340.0000	31.80	4.35	36.15	74.00	-37.85	Peak
8	3340.0000	20.58	4.35	24.93	54.00	-29.07	AVG
9	5610.0000	30.42	9.26	39.68	74.00	-34.32	Peak
10	5610.0000	19.54	9.26	28.80	54.00	-25.20	AVG
11	5995.0000	29.24	10.82	40.06	74.00	-33.94	Peak
12 *	5995.0000	18.47	10.82	29.29	54.00	-24.71	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Goer(White)		
Test Engineer	Kevin Li		

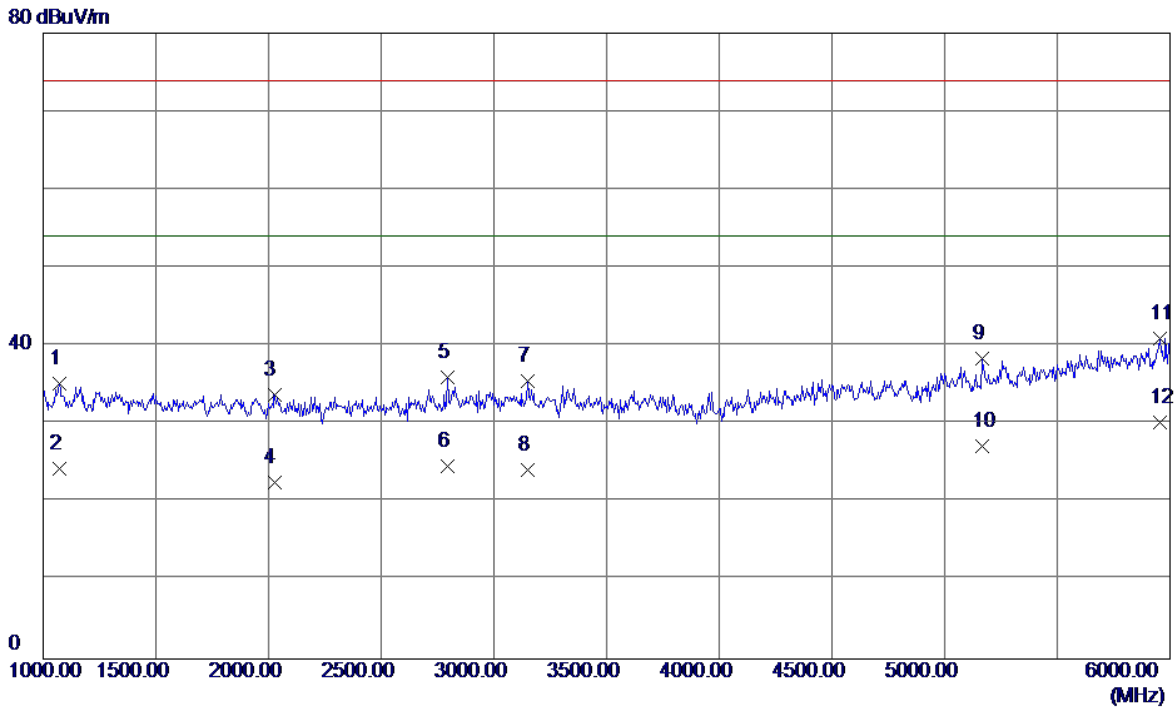


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1070.0000	40.55	-5.33	35.22	74.00	-38.78	Peak
2	1070.0000	29.59	-5.33	24.26	54.00	-29.74	AVG
3	2025.0000	35.38	-1.63	33.75	74.00	-40.25	Peak
4	2025.0000	24.21	-1.63	22.58	54.00	-31.42	AVG
5	2795.0000	33.48	2.54	36.02	74.00	-37.98	Peak
6	2795.0000	22.06	2.54	24.60	54.00	-29.40	AVG
7	3150.0000	31.49	3.99	35.48	74.00	-38.52	Peak
8	3150.0000	20.24	3.99	24.23	54.00	-29.77	AVG
9	5165.0000	30.78	7.63	38.41	74.00	-35.59	Peak
10	5165.0000	19.53	7.63	27.16	54.00	-26.84	AVG
11	5955.0000	30.27	10.66	40.93	74.00	-33.07	Peak
12 *	5955.0000	19.58	10.66	30.24	54.00	-23.76	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Goer(White)		
Test Engineer	Kevin Li		

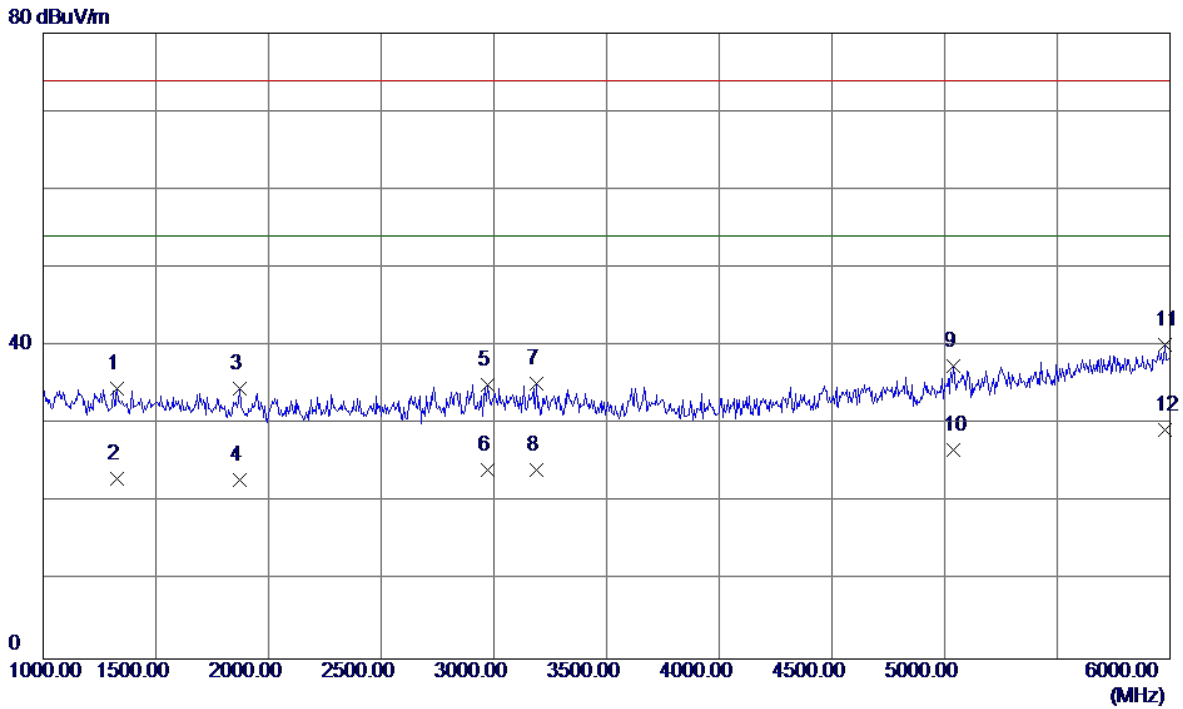


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1330.0000	38.78	-4.27	34.51	74.00	-39.49	Peak
2	1330.0000	27.25	-4.27	22.98	54.00	-31.02	AVG
3	1870.0000	36.85	-2.23	34.62	74.00	-39.38	Peak
4	1870.0000	25.13	-2.23	22.90	54.00	-31.10	AVG
5	2970.0000	31.55	3.53	35.08	74.00	-38.92	Peak
6	2970.0000	20.63	3.53	24.16	54.00	-29.84	AVG
7	3190.0000	31.20	4.06	35.26	74.00	-38.74	Peak
8	3190.0000	20.12	4.06	24.18	54.00	-29.82	AVG
9	5040.0000	30.28	7.18	37.46	74.00	-36.54	Peak
10	5040.0000	19.58	7.18	26.76	54.00	-27.24	AVG
11	5980.0000	29.38	10.76	40.14	74.00	-33.86	Peak
12 *	5980.0000	18.47	10.76	29.23	54.00	-24.77	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Quancheng(Black)		
Test Engineer	Kevin Li		

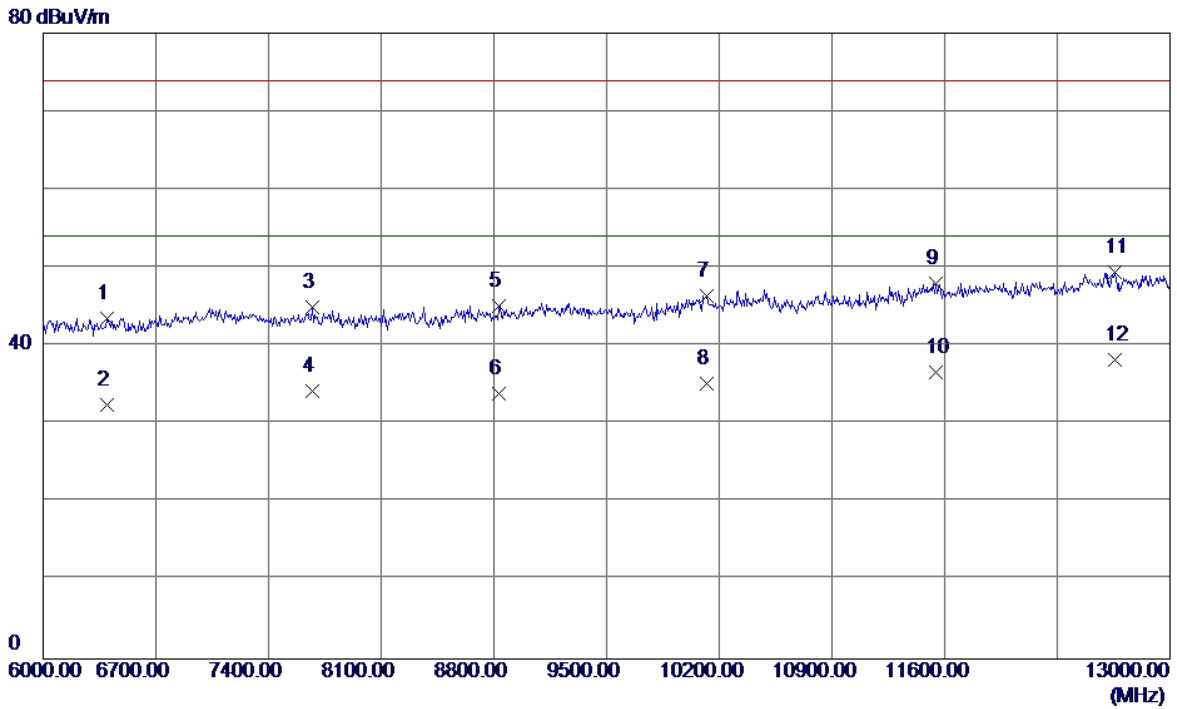

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6399.0000	32.60	10.91	43.51	74.00	-30.49	Peak
2	6399.0000	21.52	10.91	32.43	54.00	-21.57	AVG
3	7673.0000	32.27	12.70	44.97	74.00	-29.03	Peak
4	7673.0000	21.54	12.70	34.24	54.00	-19.76	AVG
5	8835.0000	30.82	14.35	45.17	74.00	-28.83	Peak
6	8835.0000	19.58	14.35	33.93	54.00	-20.07	AVG
7	10123.0000	30.87	15.57	46.44	74.00	-27.56	Peak
8	10123.0000	19.57	15.57	35.14	54.00	-18.86	AVG
9	11544.0000	30.96	17.06	48.02	74.00	-25.98	Peak
10	11544.0000	19.54	17.06	36.60	54.00	-17.40	AVG
11	12657.0000	30.75	18.75	49.50	74.00	-24.50	Peak
12 *	12657.0000	19.48	18.75	38.23	54.00	-15.77	AVG

EUT	Smart Phone	Model Name	CRO-L02
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+BT+WIFI+GPS+Camera on+Earphone		
Note	Adapter:Huntkey+USB Cable:Luxshare+Battery:Sunwoda+Earphone:Quancheng(Black)		
Test Engineer	Kevin Li		

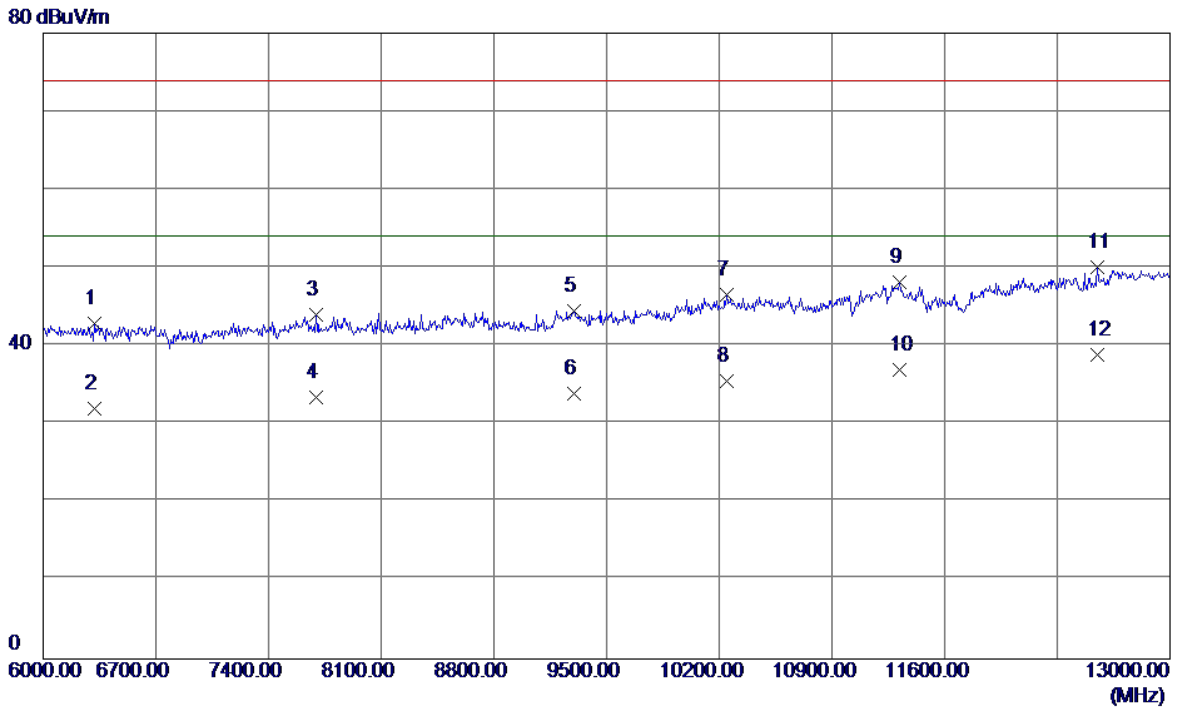

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6322.0000	32.08	10.80	42.88	74.00	-31.12	Peak
2	6322.0000	21.25	10.80	32.05	54.00	-21.95	AVG
3	7694.0000	31.32	12.73	44.05	74.00	-29.95	Peak
4	7694.0000	20.66	12.73	33.39	54.00	-20.61	AVG
5	9297.0000	30.19	14.36	44.55	74.00	-29.45	Peak
6	9297.0000	19.55	14.36	33.91	54.00	-20.09	AVG
7	10249.0000	30.64	15.92	46.56	74.00	-27.44	Peak
8	10249.0000	19.57	15.92	35.49	54.00	-18.51	AVG
9	11320.0000	31.36	16.77	48.13	74.00	-25.87	Peak
10	11320.0000	20.25	16.77	37.02	54.00	-16.98	AVG
11	12552.0000	31.62	18.39	50.01	74.00	-23.99	Peak
12 *	12552.0000	20.44	18.39	38.83	54.00	-15.17	AVG