

**Appendix B. SAR Measurement Plots**

Table of contents
GSM 850 Head
GSM 850 Body
GSM1900 Head
GSM1900 Body
UMTS Band 2 Head
UMTS Band 2 Body
UMTS Band 4 Head
UMTS Band 4 Body
UMTS Band 5 Head
UMTS Band 5 Body
LTE Band 2 Head
LTE Band 2 Body
LTE Band 4 Head
LTE Band 4 Body
LTE Band 5 Head
LTE Band 5 Body
LTE Band 7 Head
LTE Band 7 Body
WiFi 2.4G Head
WiFi 2.4G Body
BT Head

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 GSM850 190CH Left Touch

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 40.318$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.55, 6.55, 6.55); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.249 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.254 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.180 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

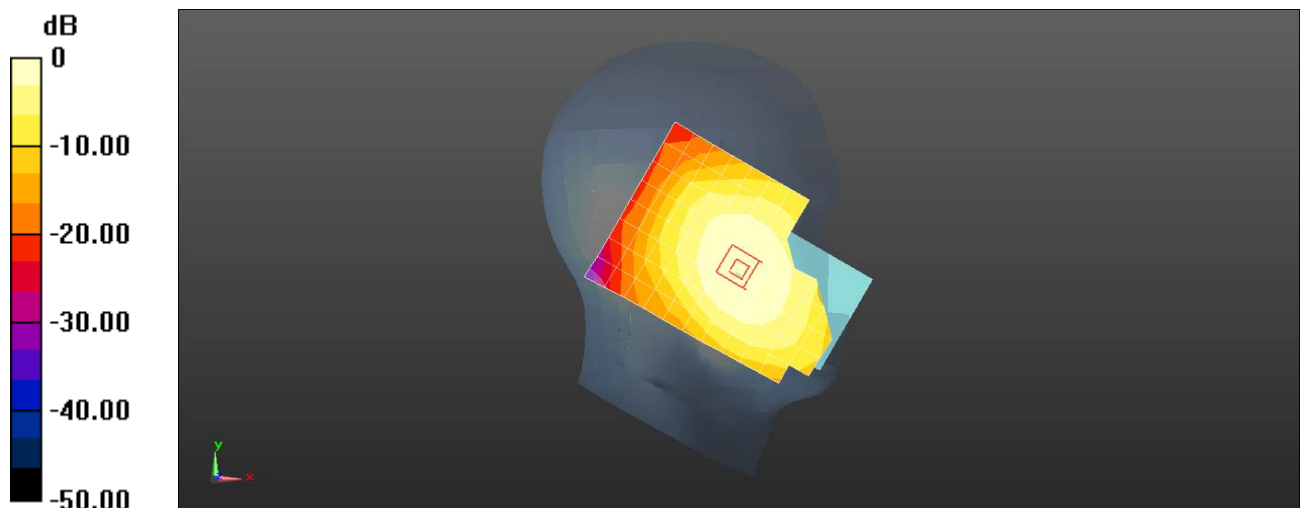

0 dB = 0.249 W/kg = -6.04 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 GSM850 190CH Back side 15mm

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 1.013$ S/m; $\epsilon_r = 56.283$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.27, 6.27, 6.27); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.582 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.91 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.555 W/kg; SAR(10 g) = 0.453 W/kg

Maximum value of SAR (measured) = 0.595 W/kg

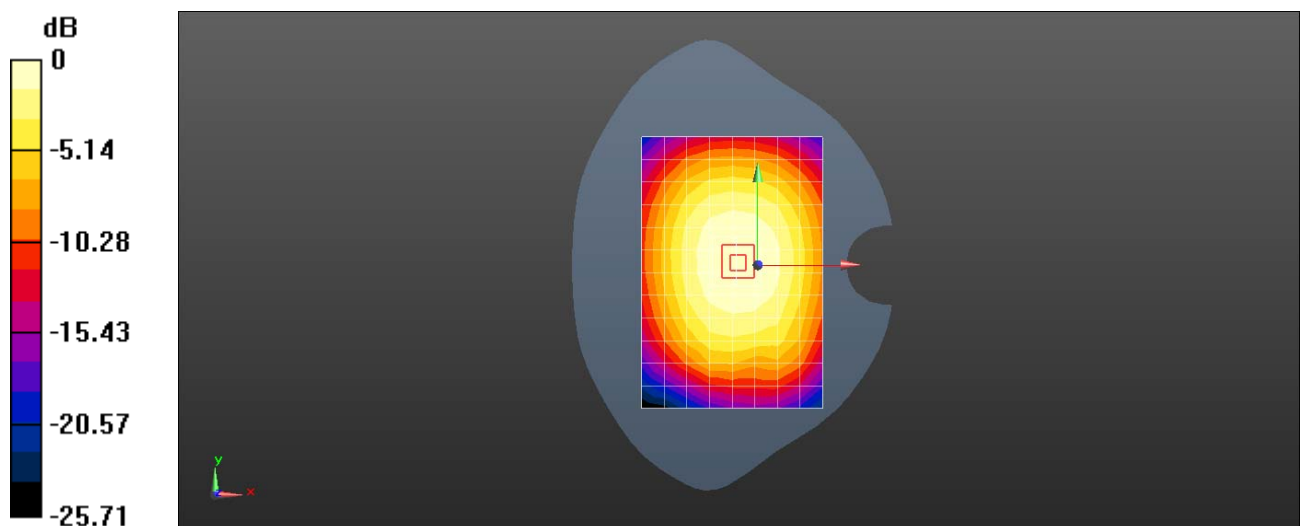

0 dB = 0.582 W/kg = -2.35 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 GSM850 GPRS 1TS 190CH Back side 10mm with Battery2

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837$ MHz; $\sigma = 1.013$ S/m; $\epsilon_r = 56.283$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.27, 6.27, 6.27); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.597 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 25.12 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.657 W/kg

SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.469 W/kg

Maximum value of SAR (measured) = 0.605 W/kg

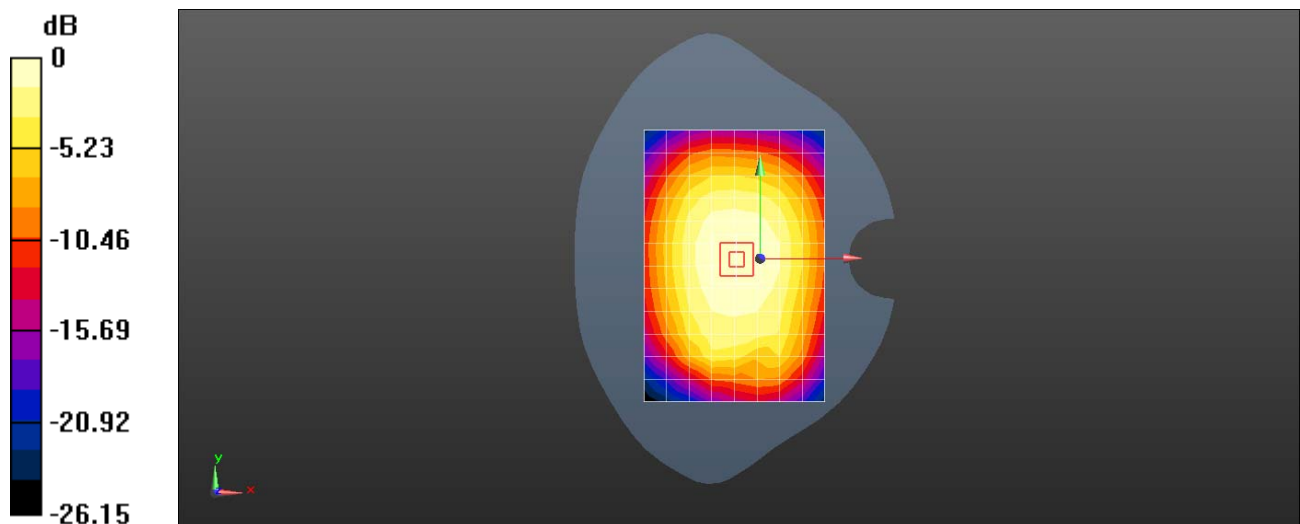

0 dB = 0.597 W/kg = -2.24 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 GSM1900 661CH Right Touch

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 39.596$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.73, 7.73, 7.73); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.253 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.137 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.300 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.242 W/kg

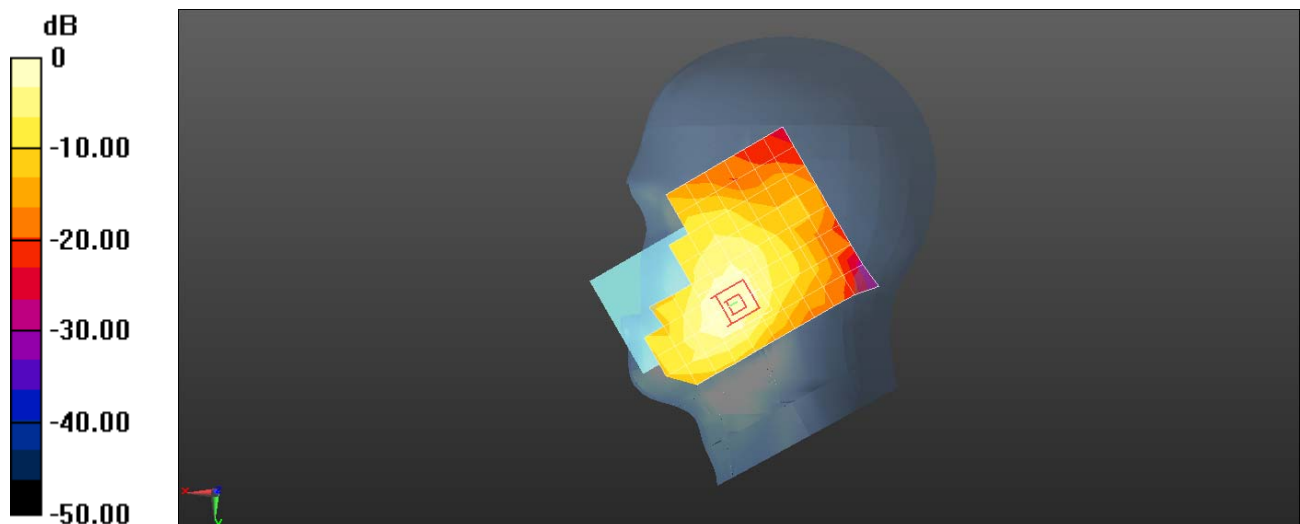

0 dB = 0.253 W/kg = -5.97 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 GSM1900 661CH Back Side 15mm with Battery3

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ S/m; $\epsilon_r = 51.651$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.7, 7.7, 7.7); Calibrated: 2017-7-24;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.383 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.374 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.542 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.173 W/kg

Maximum value of SAR (measured) = 0.466 W/kg

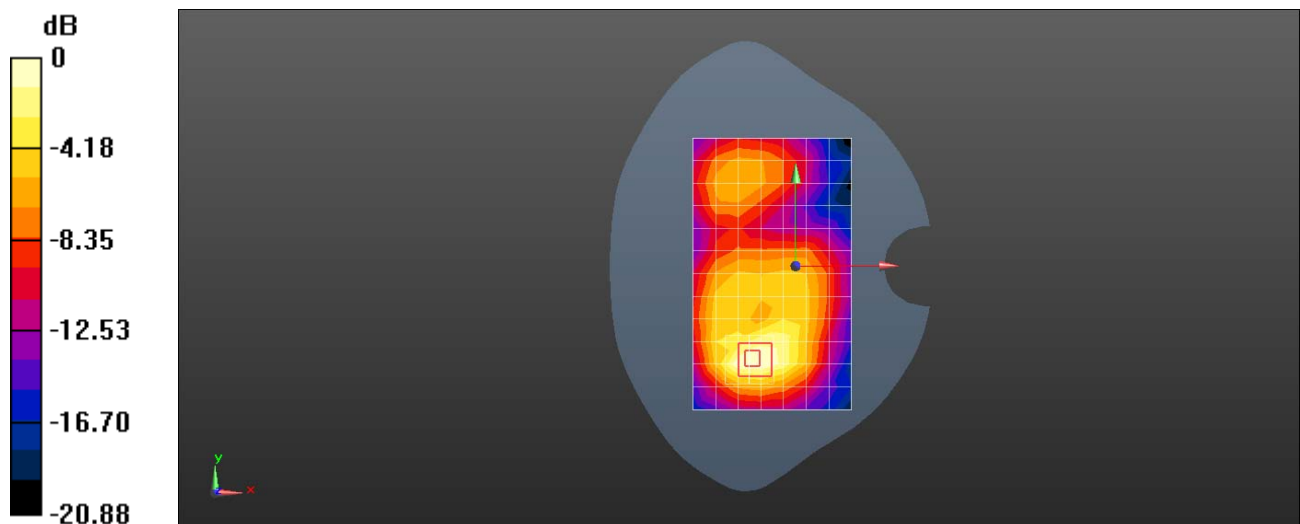

0 dB = 0.383 W/kg = -4.17 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 GSM1900 GPRS 1TS 661CH Back Side 10mm with Battery3

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-1TS (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ S/m; $\epsilon_r = 51.651$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.7, 7.7, 7.7); Calibrated: 2017-7-24;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = 1.0, 31.0
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.421 W/kg


Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.592 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.735 W/kg

SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.579 W/kg

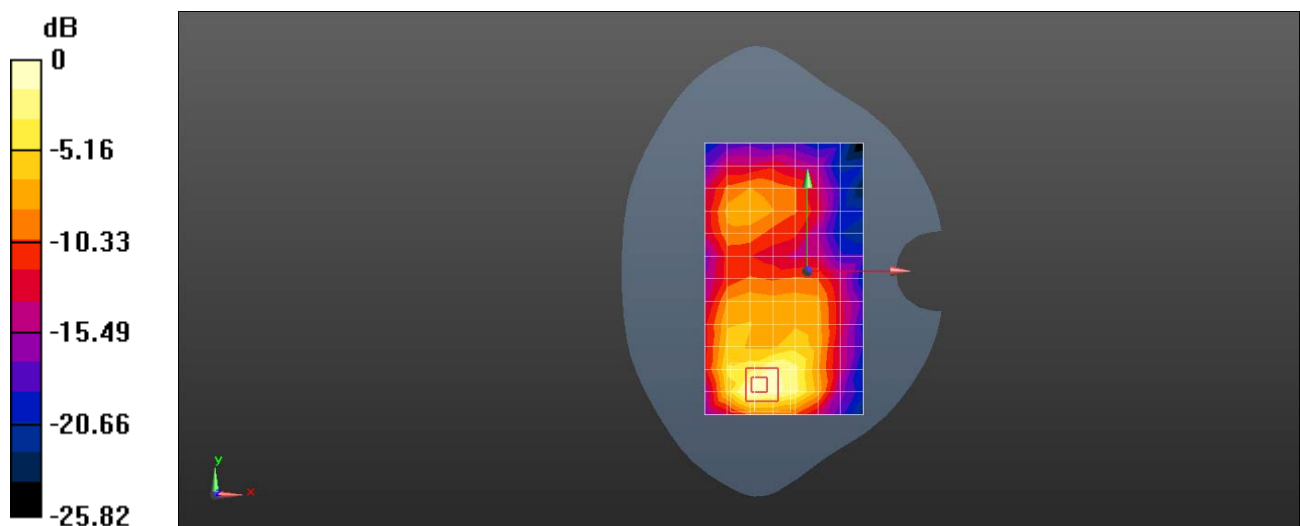

0 dB = 0.421 W/kg = -3.76 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 UMTS Band 2 9400CH Left Touch with Battery3-Main Antenna

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.426$ S/m; $\epsilon_r = 38.831$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.73, 7.73, 7.73); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.315 W/kg


Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.208 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.958 W/kg

SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.319 W/kg

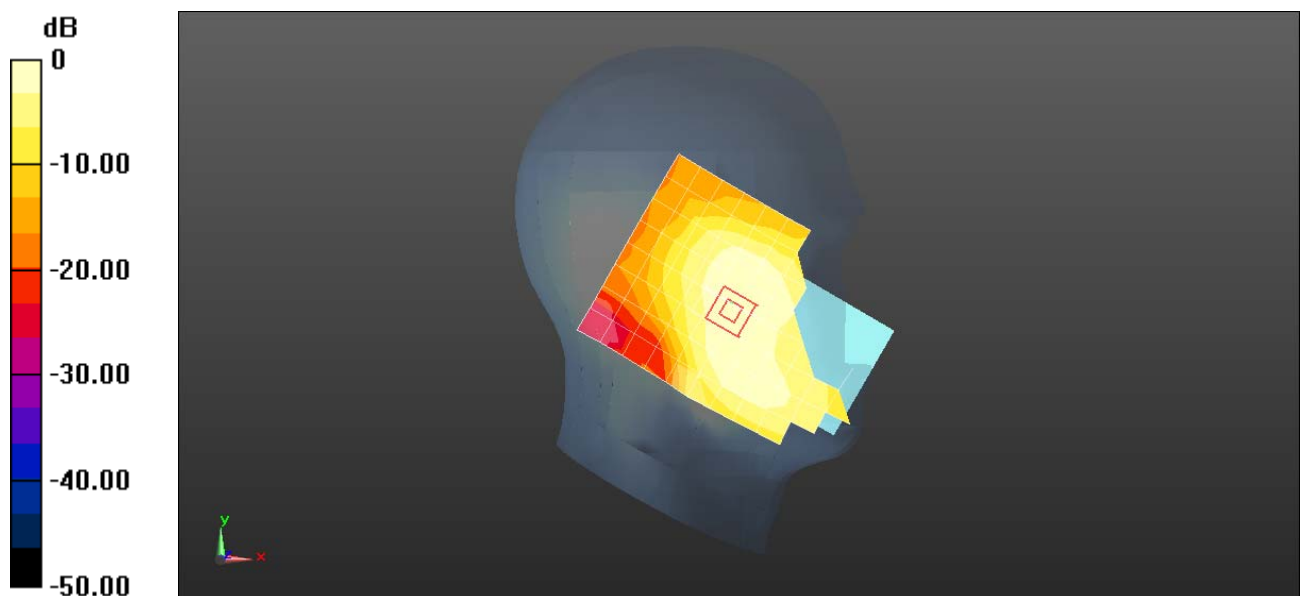

0 dB = 0.315 W/kg = -5.02 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 UMTS Band 2 9400CH Front Side 15mm with Battery3

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ S/m; $\epsilon_r = 51.651$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.7, 7.7, 7.7); Calibrated: 2017-7-24;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.407 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.542 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.446 W/kg

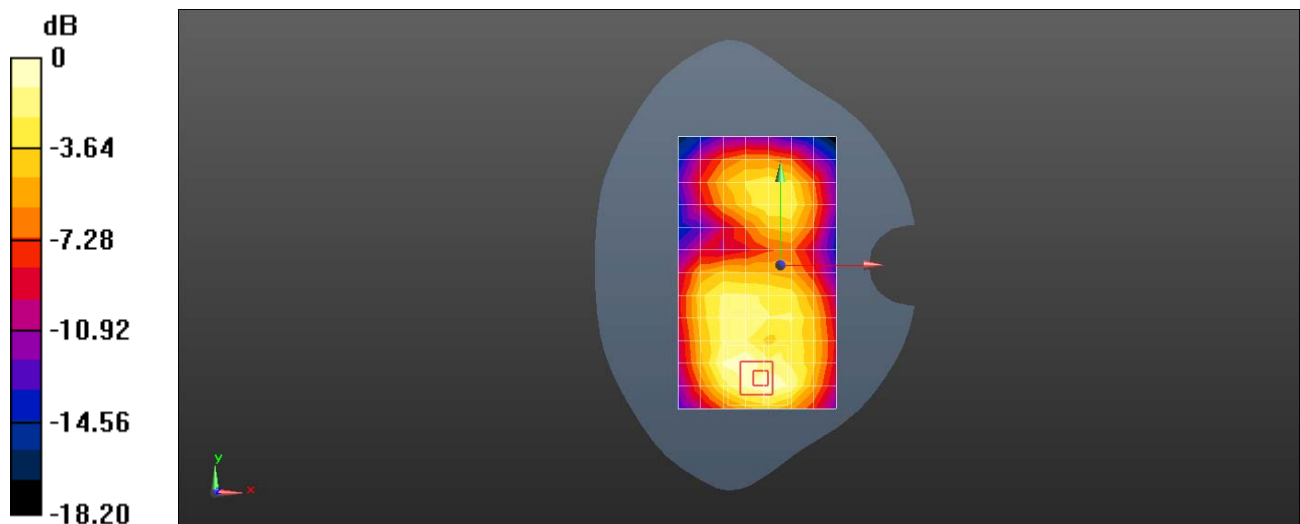

0 dB = 0.407 W/kg = -3.90 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 UMTS Band 2 9400CH Bottom Side 10mm

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ S/m; $\epsilon_r = 51.651$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.7, 7.7, 7.7); Calibrated: 2017-7-24;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.563 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.46 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.691 W/kg

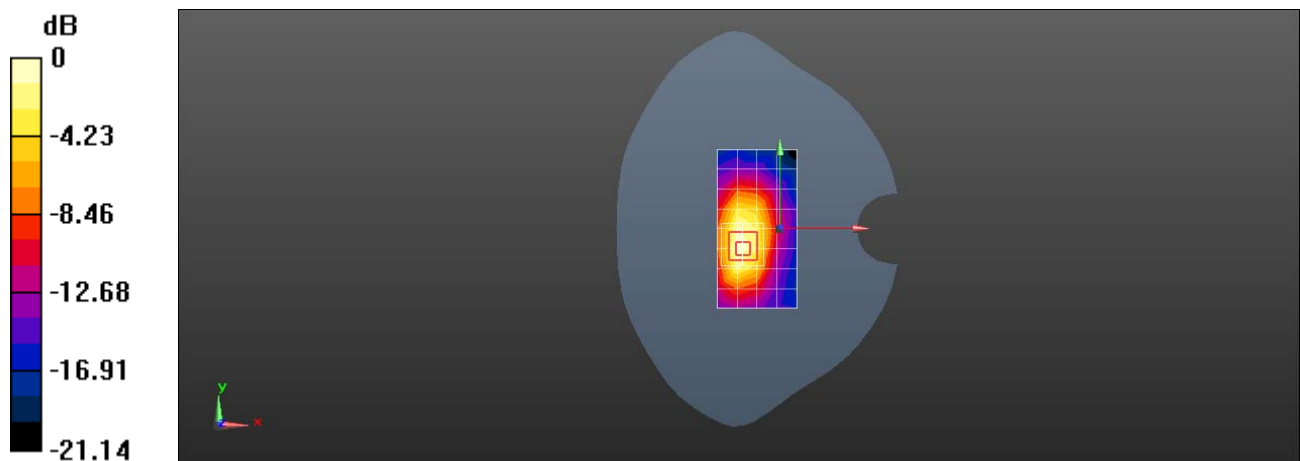

0 dB = 0.563 W/kg = -2.49 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 UMTS Band 4 1413CH Right Touch with Battery3

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 41.379$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.54, 5.54, 5.54); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.245 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.762 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.236 W/kg

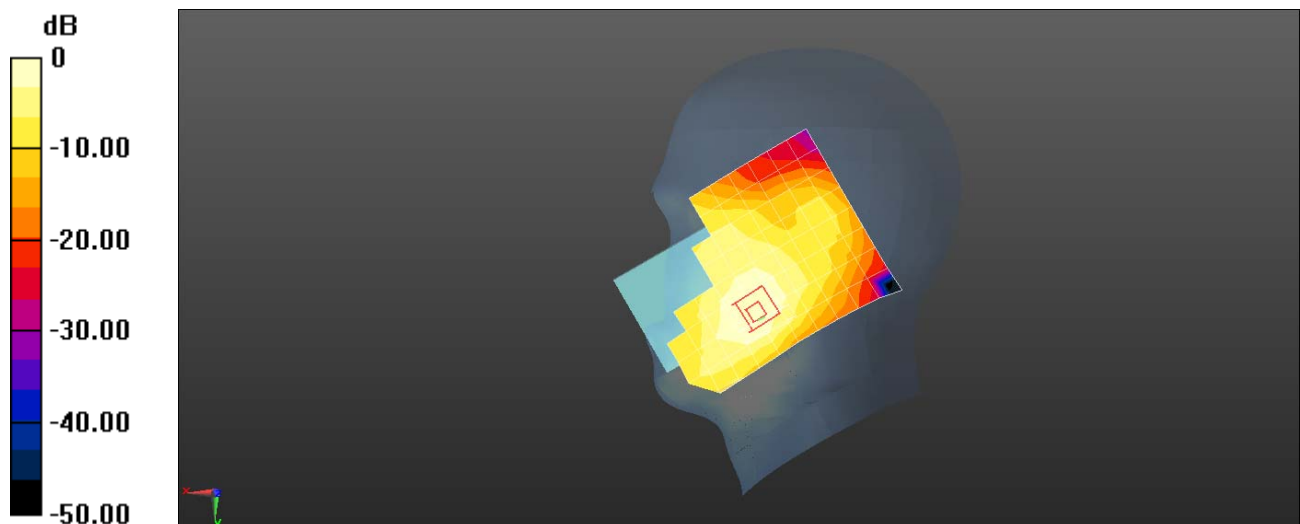

0 dB = 0.245 W/kg = -6.11 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 UMTS Band 4 1413CH Back Side 15mm with Battery3

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 53.282$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.18, 5.18, 5.18); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.460 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.669 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.261 W/kg

Maximum value of SAR (measured) = 0.484 W/kg

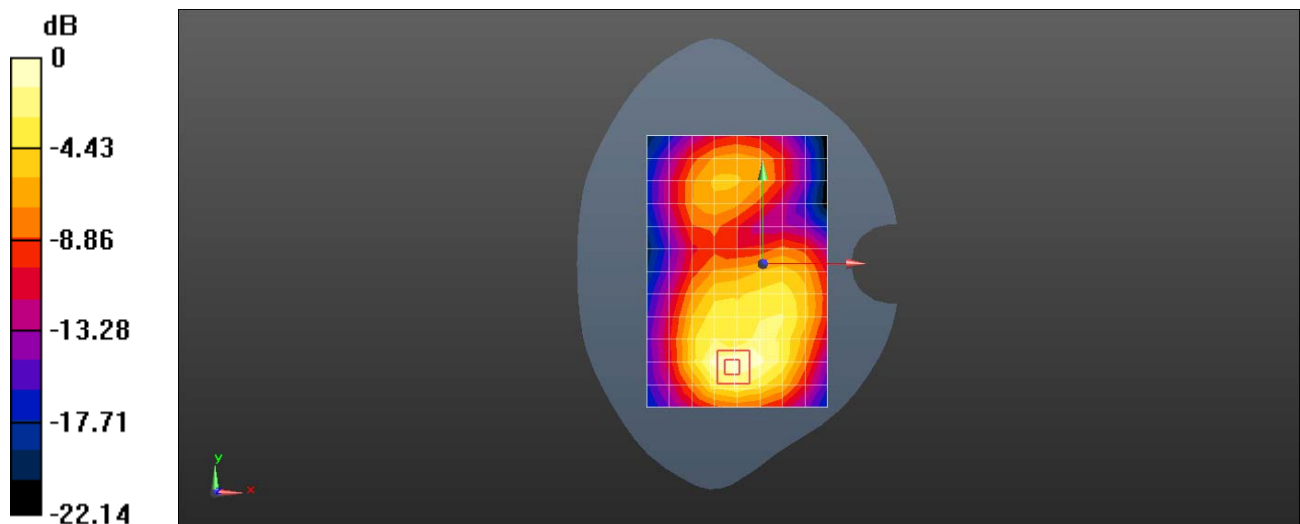

0 dB = 0.460 W/kg = -3.37 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 UMTS Band 4 1413CH Back Side 10mm

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 53.282$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.18, 5.18, 5.18); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.378 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.642 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.754 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.290 W/kg

Maximum value of SAR (measured) = 0.607 W/kg

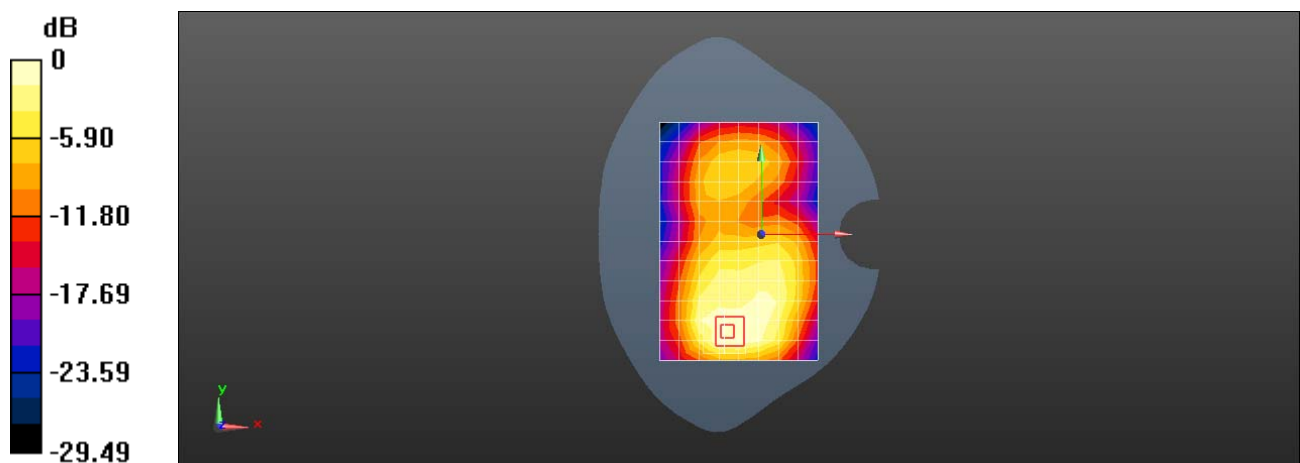

0 dB = 0.378 W/kg = -4.23 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 UMTS Band 5 4182CH Left Touch

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 40.324$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.55, 6.55, 6.55); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.288 W/kg

Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 7.986 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.205 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.293 W/kg

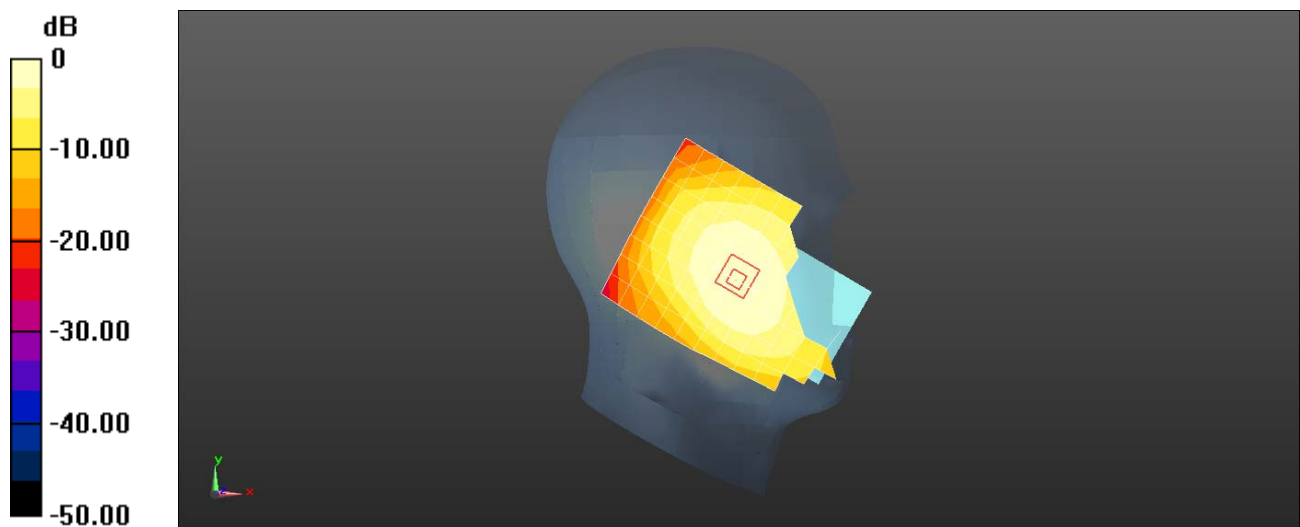

0 dB = 0.288 W/kg = -5.41 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 UMTS Band 5 4182CH Front side 15mm

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 54.391$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.27, 6.27, 6.27); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.355 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 19.80 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.274 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.358 W/kg

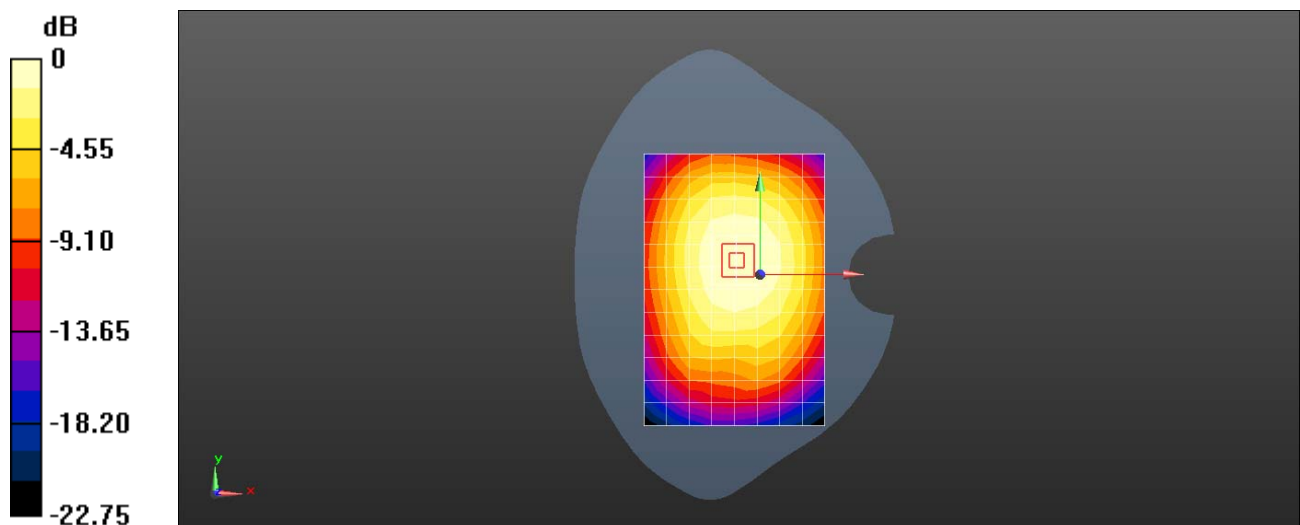

0 dB = 0.355 W/kg = -4.50 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 UMTS Band 5 4182CH Back side 10mm

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 1.013$ S/m; $\epsilon_r = 56.283$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.27, 6.27, 6.27); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.537 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 23.73 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.419 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.536 W/kg

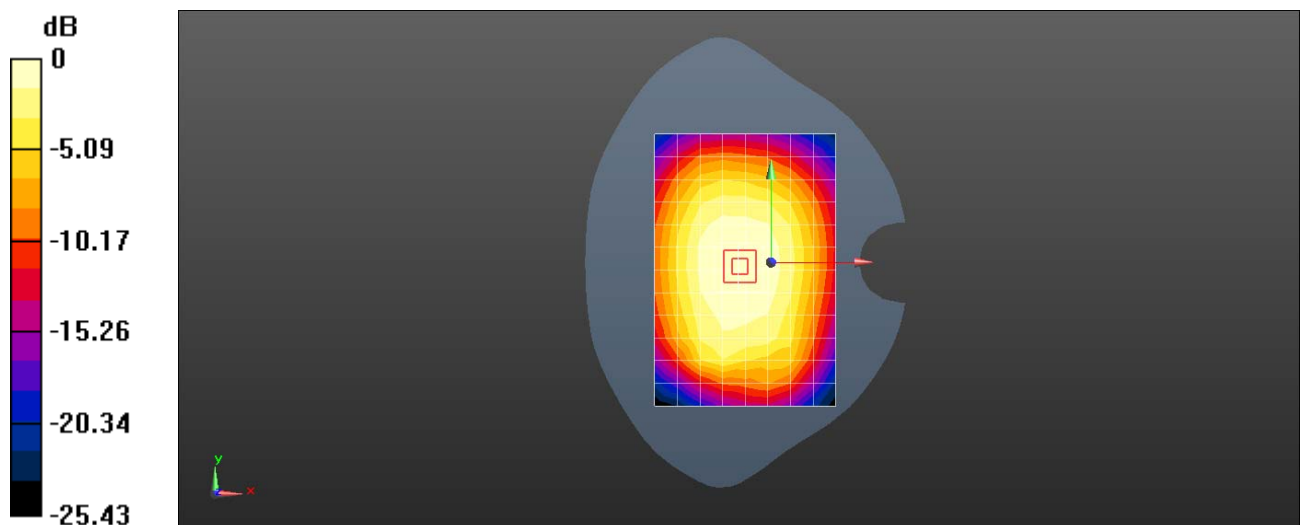

0 dB = 0.537 W/kg = -2.70 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 LTE Band 2 20M QPSK 1RB 50 Offset 18900CH Right Touch with Battery3

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 39.596$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.73, 7.73, 7.73); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.477 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.904 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.575 W/kg

SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.463 W/kg

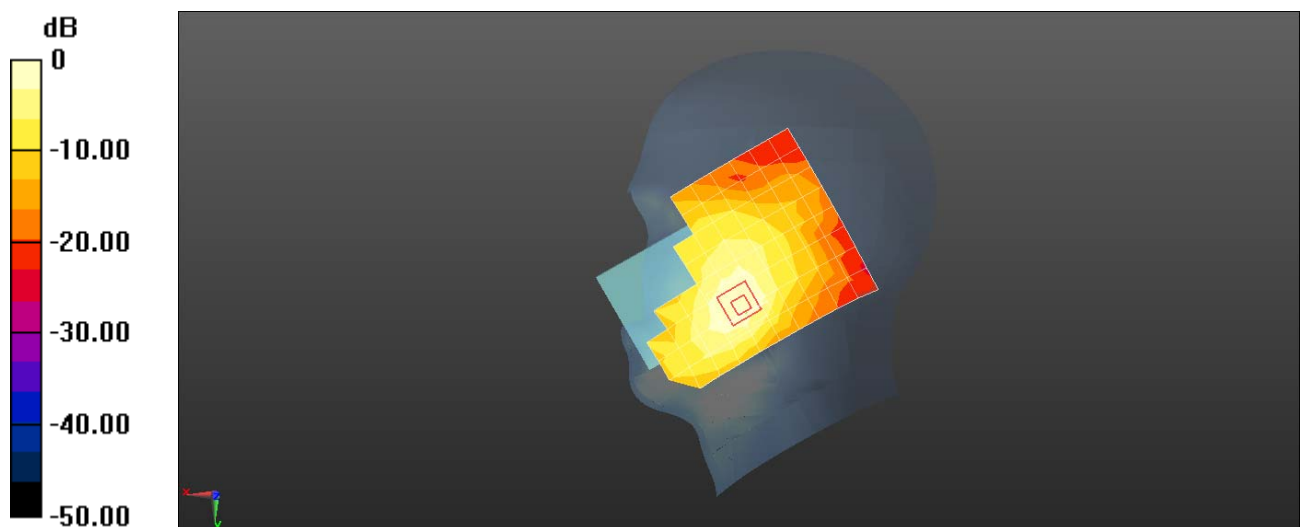

0 dB = 0.477 W/kg = -3.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 LTE Band 2 20M QPSK 1RB 50 Offset 18900CH Front Side 15mm

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ S/m; $\epsilon_r = 51.651$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.7, 7.7, 7.7); Calibrated: 2017-7-24;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.432 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.012 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.504 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.445 W/kg

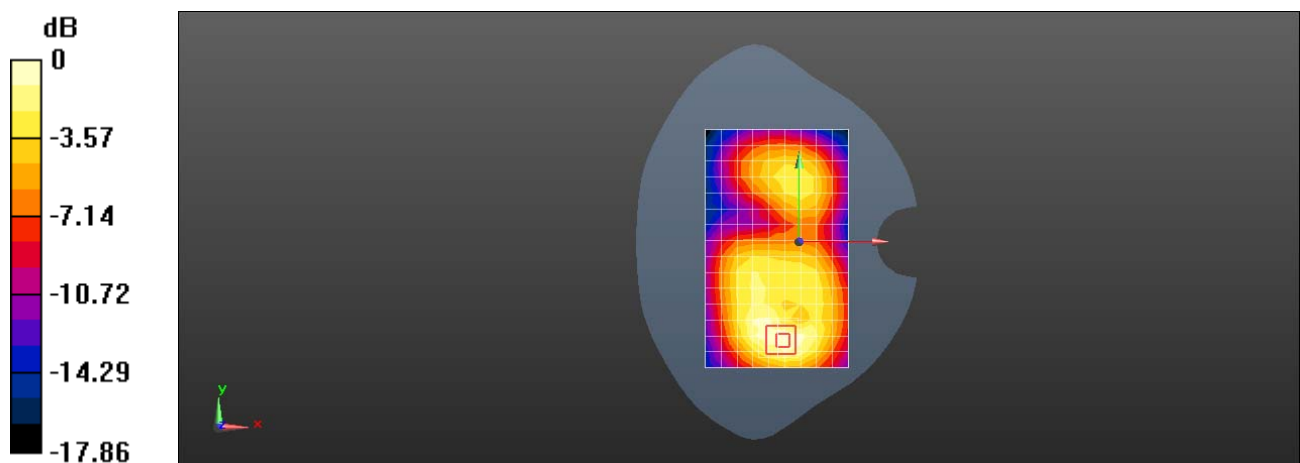

0 dB = 0.432 W/kg = -3.65 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 LTE Band 2 20M QPSK 1RB 50 Offset 18900CH Back Side 10mm with Battery2

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.454$ S/m; $\epsilon_r = 51.651$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3744; ConvF(7.7, 7.7, 7.7); Calibrated: 2017-7-24;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.634 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.042 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.803 W/kg

SAR(1 g) = 0.483 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.697 W/kg

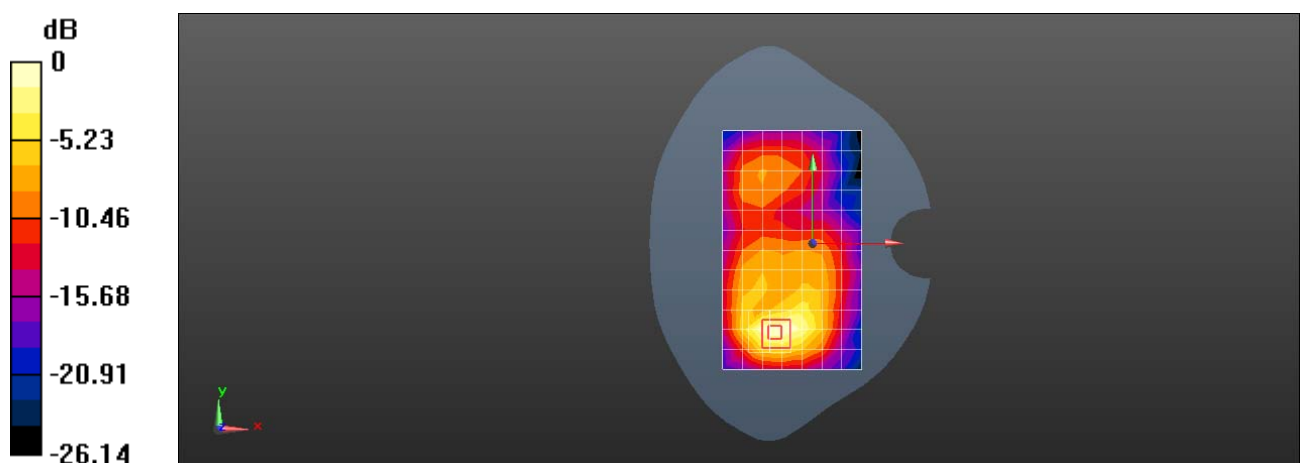

0 dB = 0.634 W/kg = -1.98 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 LTE Band 4 20M QPSK 1RB 25 offset 20175CH Right Touch with Battery2

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 41.38$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.54, 5.54, 5.54); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.212 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.109 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.122 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

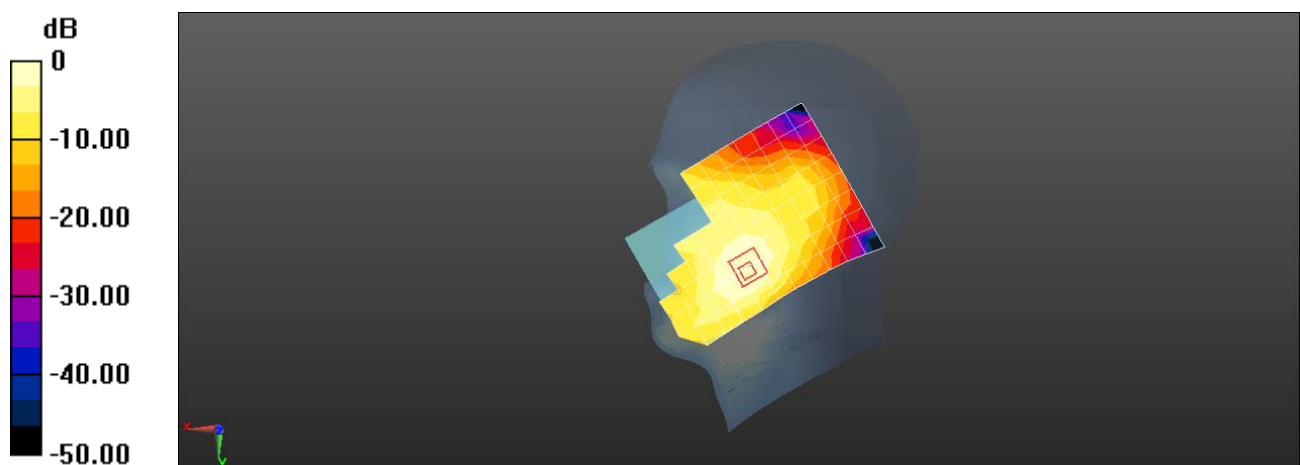

0 dB = 0.212 W/kg = -6.74 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 LTE Band 4 20M QPSK 1RB 50 offset 20175CH Front Side 15mm with Battery3

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 53.284$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.18, 5.18, 5.18); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.274 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 6.585 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.172 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.290 W/kg

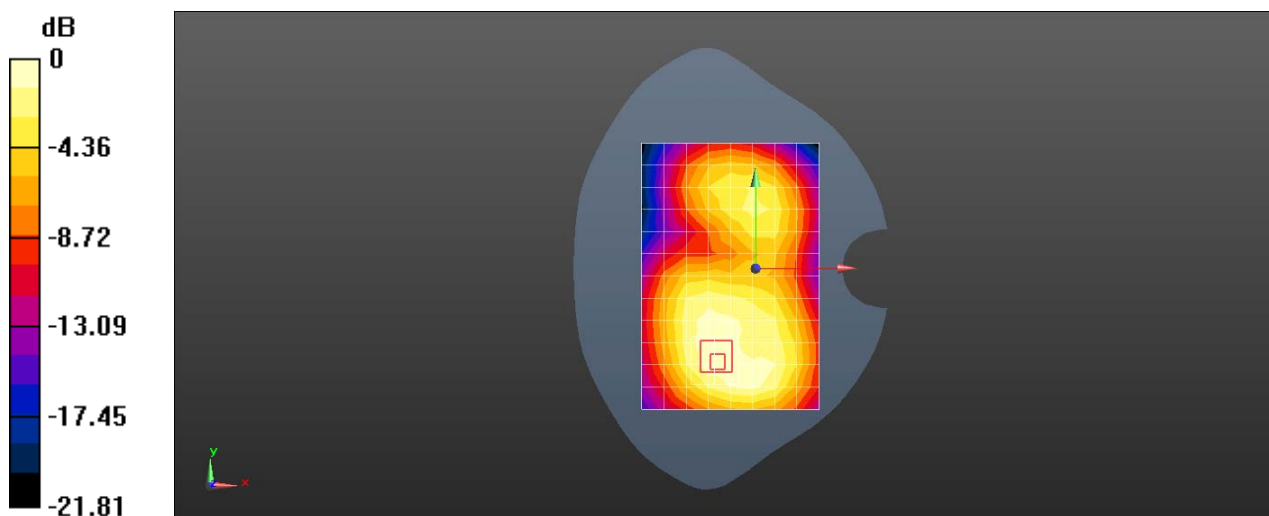

0 dB = 0.274 W/kg = -5.62 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 LTE Band 4 20M QPSK 1RB 50 offset 20175CH Bottom Side 10mm

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.464$ S/m; $\epsilon_r = 53.284$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(5.18, 5.18, 5.18); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.612 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 21.18 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.861 W/kg

SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.333 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.688 W/kg

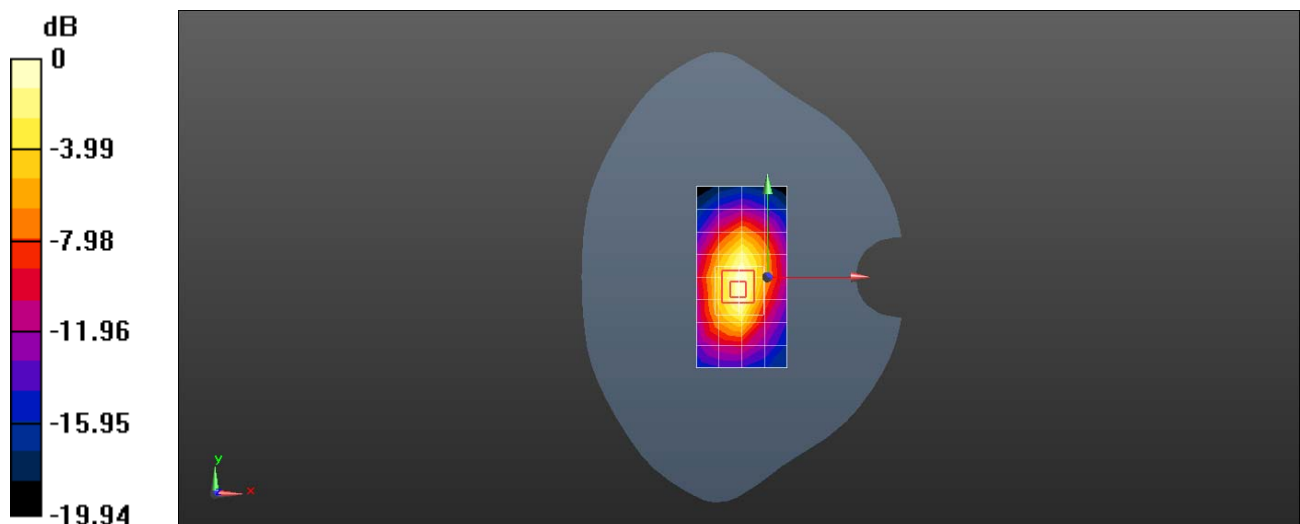

0 dB = 0.612 W/kg = -2.13 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 LTE Band 5 10M QPSK 1RB 25 offset 20525CH Left Touch

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 40.323$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.55, 6.55, 6.55); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.241 W/kg

Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 7.024 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.284 W/kg

SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.176 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.248 W/kg

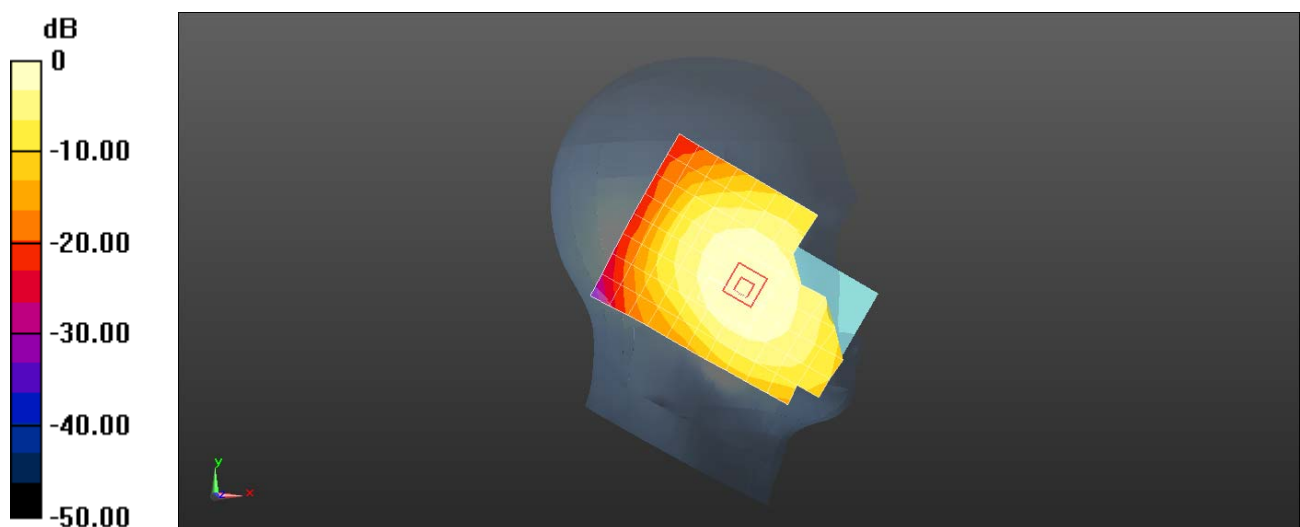

0 dB = 0.241 W/kg = -6.18 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 LTE Band 5 10M QPSK 50%RB 13 Offset 20525CH Back Side 15mm

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.945$ S/m; $\epsilon_r = 54.391$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.27, 6.27, 6.27); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.379 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 20.09 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.293 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.386 W/kg

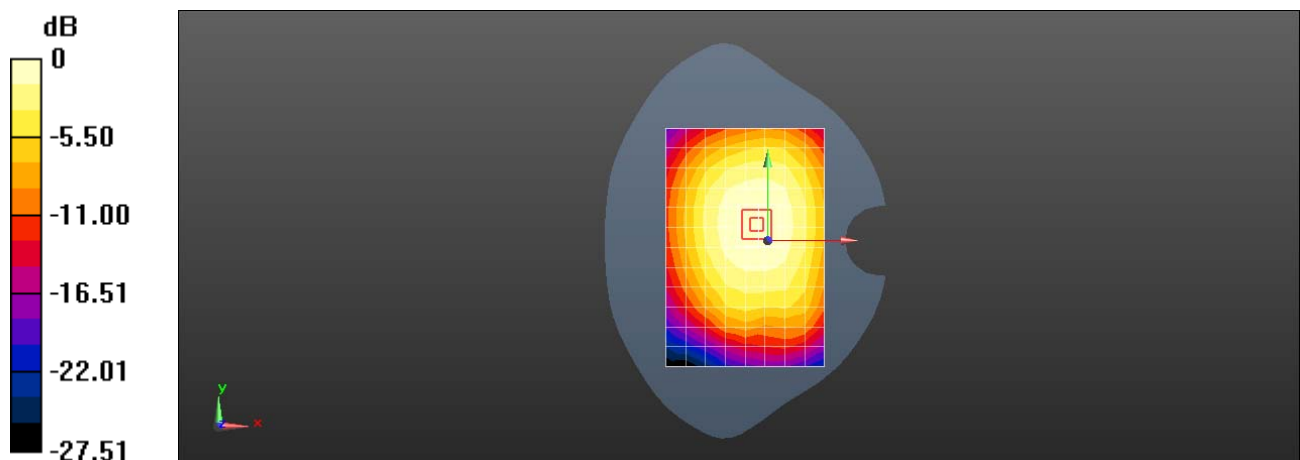

0 dB = 0.379 W/kg = -4.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 LTE Band 5 10M QPSK 50%RB 13 Offset 20450CH Back Side 10mm

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, LTE-FDD (SC-FDMA, 10MHz, QPSK/16-QAM) (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 829$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 56.302$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(6.27, 6.27, 6.27); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.436 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.85 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.338 W/kg

Maximum value of SAR (measured) = 0.437 W/kg

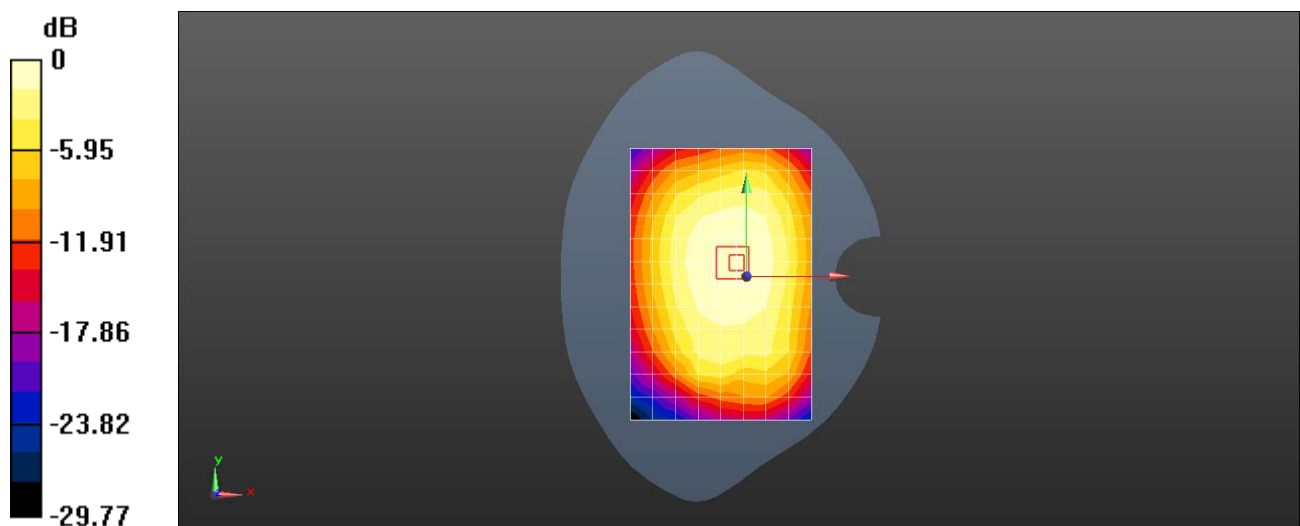

0 dB = 0.436 W/kg = -3.61 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 LTE Band 7 20M QPSK 1RB 50 Offset 21100CH Right Touch with Battery3

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 38.492$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3736; ConvF(7.01, 7.01, 7.01); Calibrated: 2017-4-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM1; Type: SAM; Serial: TP-1475
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.151 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.432 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

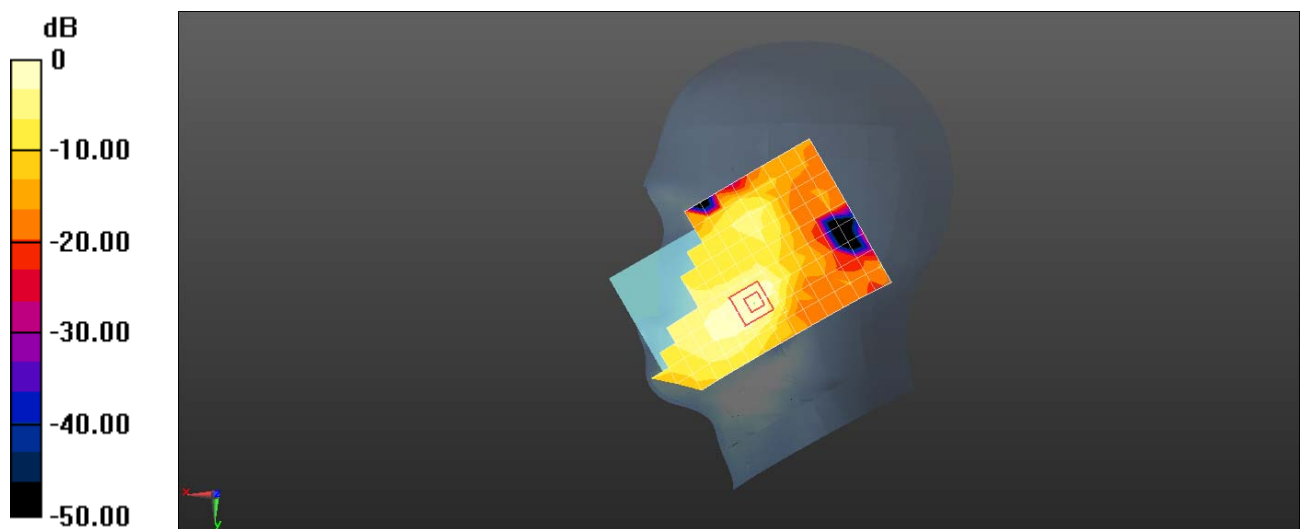

0 dB = 0.151 W/kg = -8.21 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 LTE Band 7 20M QPSK 50%RB 25 Offset 21350CH Back Side 15mm

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.091$ S/m; $\epsilon_r = 51.191$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7489; ConvF(7.91, 7.91, 7.91); Calibrated: 2018-1-9;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn905; Calibrated: 2017-6-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.614 W/kg


Configuration/Body/Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.622 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.725 W/kg

SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.616 W/kg

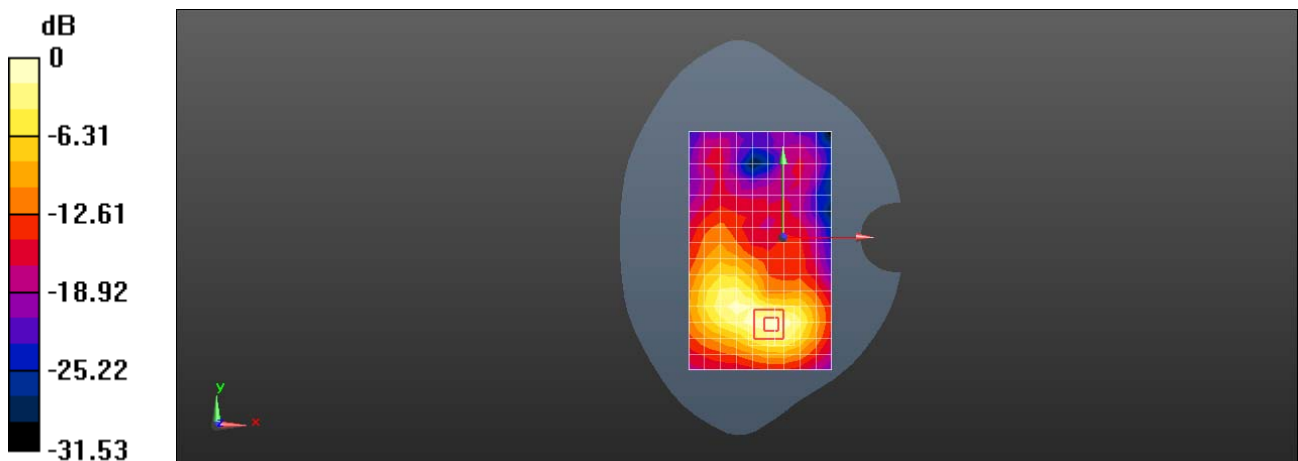

0 dB = 0.614 W/kg = -2.12 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 LTE Band 7 20M QPSK 50%RB 0 Offset 21350CH Back Side 10mm with Battery3

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR1

Communication System: UID 0, LTE-FDD (SC-FDMA, 20MHz, QPSK/16-QAM) (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 2.062$ S/m; $\epsilon_r = 52.87$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: EX3DV4 - SN7489; ConvF(7.91, 7.91, 7.91); Calibrated: 2018-1-9;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn905; Calibrated: 2017-6-20
- ε Phantom: SAM2; Type: SAM; Serial: TP:1474
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.584 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.640 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 0.813 W/kg

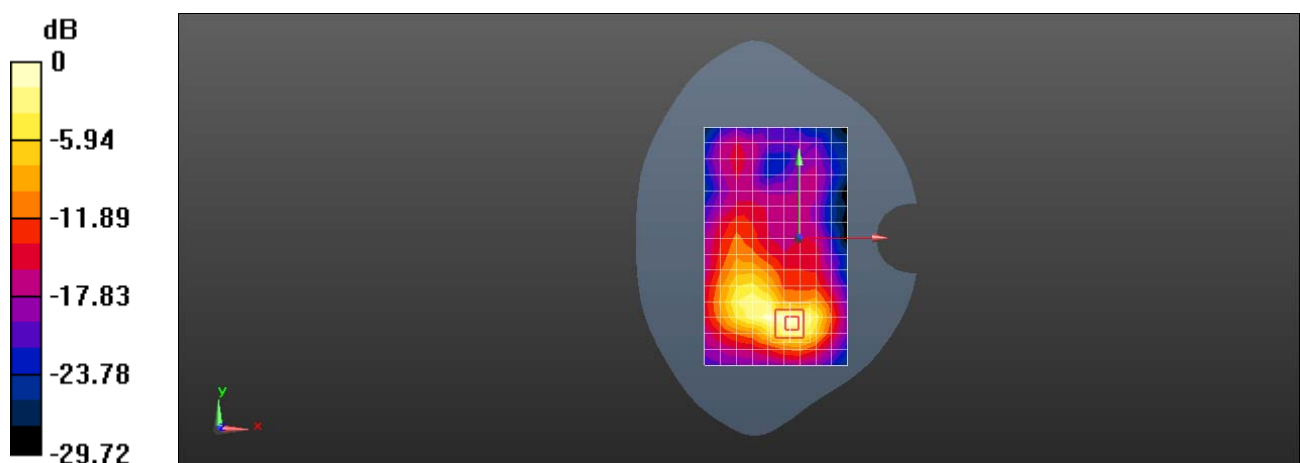

0 dB = 0.584 W/kg = -2.34 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 WiFi 2.4G 11b 11CH Left Touch with Battery2

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.87 \text{ S/m}$; $\epsilon_r = 40.119$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (11x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.431 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 9.995 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.787 W/kg

SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 0.472 W/kg

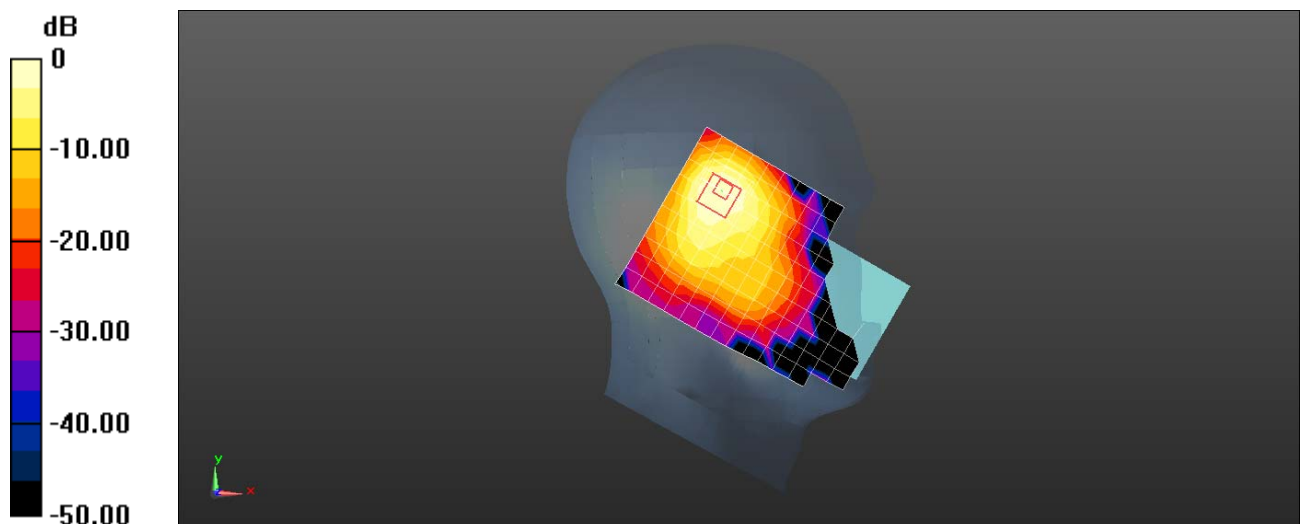

0 dB = 0.431 W/kg = -3.66 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 WiFi 2.4G 11b 11CH Front side 15mm

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 54.243$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 -SN3168; ConvF(4.59, 4.59, 4.59); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.161 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.222 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

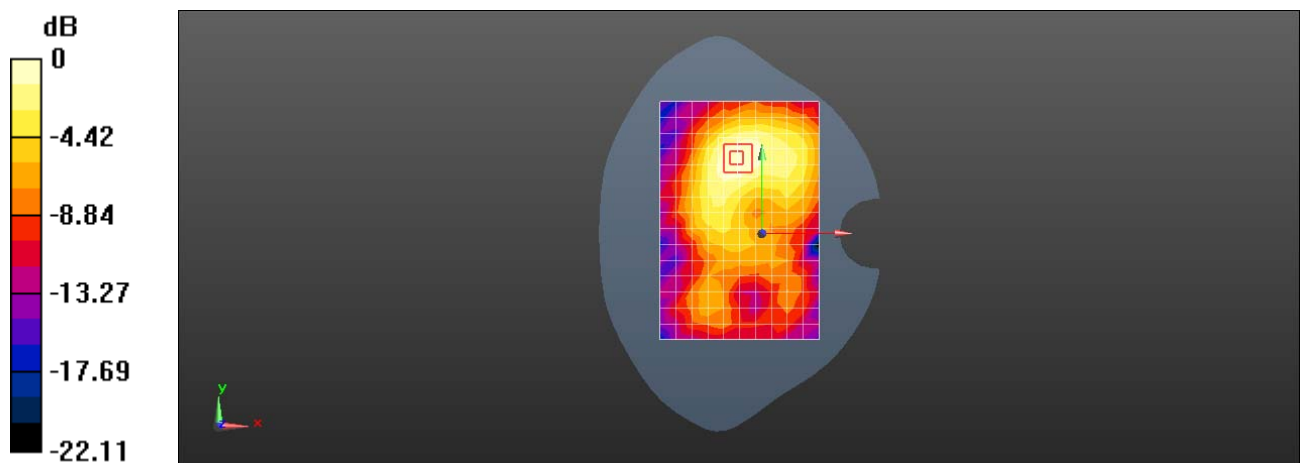

0 dB = 0.161 W/kg = -7.93 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

DRA-LX3 WiFi 2.4G 11b 11CH Back side 10mm with Battery2

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.877$ S/m; $\epsilon_r = 54.243$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- ε Probe: ES3DV3 - SN3168; ConvF(4.59, 4.59, 4.59); Calibrated: 2017-9-28;
- ε Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- ε Electronics: DAE4 Sn852; Calibrated: 2017-4-27
- ε Phantom: SAM4; Type: SAM; Serial: TP-1620
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (11x16x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.329 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.146 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.523 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.337 W/kg

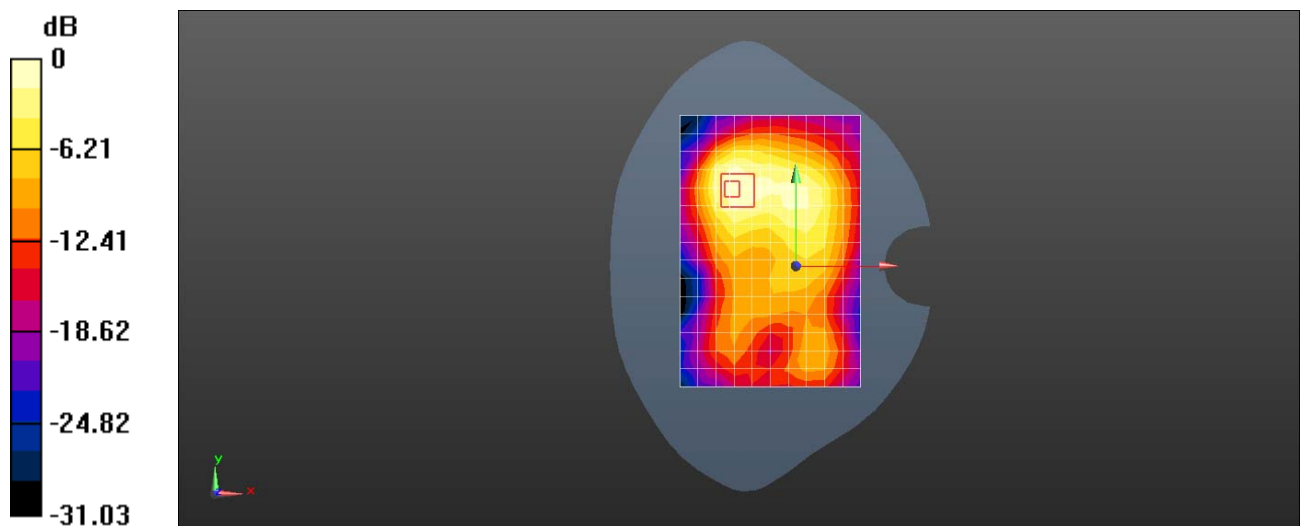

0 dB = 0.329 W/kg = -4.83 dBW/kg

Test Laboratory: HUAWE SAR/HAC Lab

DRA-LX3 BT 78CH Left Tilt

DUT: DRA-LX3; Type: Smart Phone; Serial: SAR2


Communication System: UID 0, BT (0); Frequency: 2480 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2480$ MHz; $\sigma = 1.827$ S/m; $\epsilon_r = 40.117$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- ε Probe: EX3DV4 - SN3898; ConvF(7.55, 7.55, 7.55); Calibrated: 2017-6-27;
- ε Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- ε Electronics: DAE4 Sn1236; Calibrated: 2017-7-21
- ε Phantom: SAM3; Type: SAM; Serial: TP-1597
- ε DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (9x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.00654 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 1.378 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.0130 W/kg
SAR(1 g) = 0.00532 W/kg; SAR(10 g) = 0.00258 W/kg
Maximum value of SAR (measured) = 0.00808 W/kg

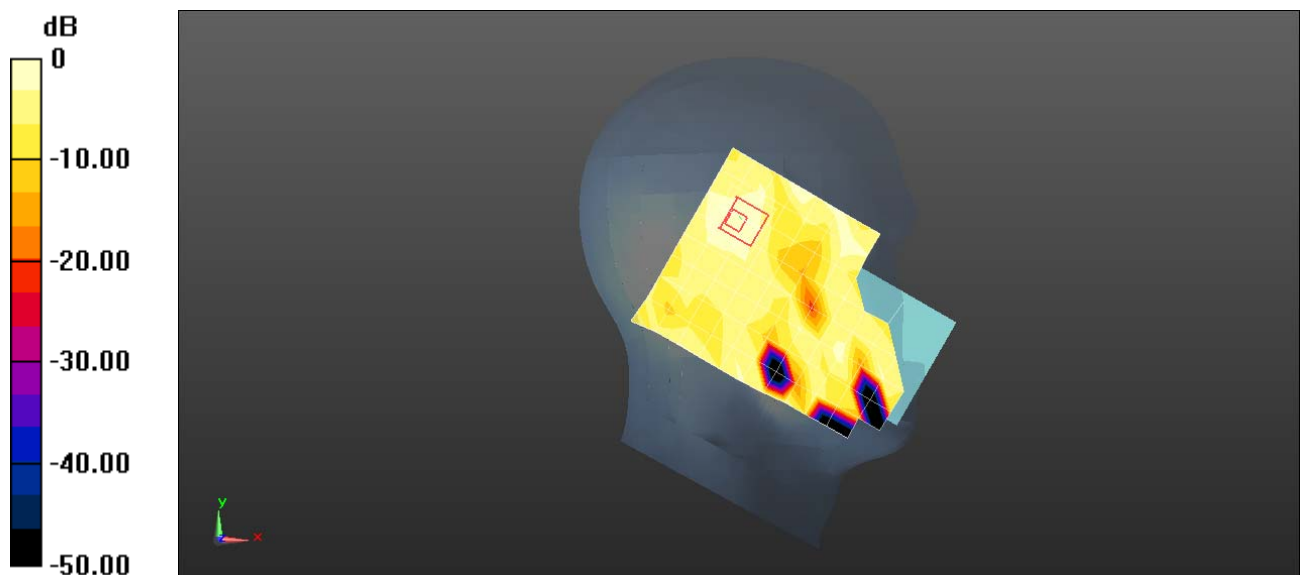

0 dB = 0.00654 W/kg = -21.84 dBW/kg