



Report No.: RZA2010-0591FCC



# OET 65


# TEST REPORT

Product Name	HSPA USB Stick
Model	E173s-2
FCC ID	QISE173S-2
Client	Huawei Technologies Co., Ltd.

TA Technology (Shanghai) Co., Ltd.



## GENERAL SUMMARY

<b>Product Name</b>	HSPA USB Stick	<b>Model</b>	E173s-2
<b>FCC ID</b>	QISE173S-2		
<b>Report No.</b>	RZA2010-0591FCC		
<b>Client</b>	Huawei Technologies Co., Ltd.		
<b>Manufacturer</b>	Huawei Technologies Co., Ltd.		
<b>Reference Standard(s)</b>	<p><b>IEEE Std C95.1, 1999:</b> IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p><b>SUPPLEMENT C Edition 01-01 to OET BULLETIN 65 Edition 97-01 June 2001 including DA 02-1438, published June 2002:</b> Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions</p> <p><b>KDB 447498 D02 -2009.11.13</b></p>		
<b>Conclusion</b>	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: <b>Pass</b></p> <p style="text-align: right;">(Stamp)</p> <p style="text-align: right;"><b>Date of issue: July 6<sup>th</sup>, 2010</b></p> 		
<b>Comment</b>	The test result only responds to the measured sample.		

Approved by 杨伟中

Yang Weizhong

Revised by 凌敏宝

Ling Minbao

Performed by 薛超峰

Xue Chaofeng

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**TABLE OF CONTENT**

1. General Information .....	5
1.1. Notes of the test report .....	5
1.2. Testing laboratory .....	5
1.3. Applicant Information .....	6
1.4. Manufacturer Information.....	6
1.5. Information of EUT.....	7
1.6. Test Date .....	7
2. Operational Conditions during Test .....	8
2.1. General description of test procedures .....	8
2.2. GSM Test Configuration .....	8
2.3. Position of module in Portable devices .....	9
2.4. Picture of host product .....	10
3. SAR Measurements System Configuration.....	12
3.1. SAR Measurement Set-up .....	12
3.2. DASY5 E-field Probe System .....	13
3.2.1. EX3DV4 Probe Specification .....	13
3.2.2. E-field Probe Calibration .....	14
3.3. Other Test Equipment .....	14
3.3.1. Device Holder for Transmitters .....	14
3.3.2. Phantom .....	15
3.4. Scanning procedure.....	15
3.5. Data Storage and Evaluation .....	17
3.5.1. Data Storage.....	17
3.5.2. Data Evaluation by SEMCAD .....	17
3.6. System check.....	20
3.7. Equivalent Tissues .....	21
4. Laboratory Environment.....	21
5. Characteristics of the Test.....	22
5.1. Applicable Limit Regulations .....	22
5.2. Applicable Measurement Standards .....	22
6. Conducted Output Power Measurement.....	23
6.1. Summary .....	23
6.2. Conducted Power Results .....	23
7. Test Results .....	25
7.1. Dielectric Performance.....	25
7.2. System check.....	25
7.3. Summary of Measurement Results .....	26
7.3.1. GSM 850(GPRS/EGPRS).....	26
7.3.2. GSM 1900(GPRS/EGPRS).....	28
7.4. Conclusion .....	29
8. Measurement Uncertainty .....	30

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

---

9. Main Test Instruments .....	31
ANNEX A: Test Layout .....	32
ANNEX B: System Check Results .....	34
ANNEX C: Graph Results .....	38
ANNEX D: Probe Calibration Certificate .....	72
ANNEX E: D835V2 Dipole Calibration Certificate .....	81
ANNEX F: D1900V2 Dipole Calibration Certificate (5d111).....	90
ANNEX G: D1900V2 Dipole Calibration Certificate(5d018).....	99
ANNEX H: DAE4 Calibration Certificate.....	108
ANNEX I: The EUT Appearances and Test Configuration .....	113

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### 1. General Information

#### 1.1. Notes of the test report

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

#### 1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Yang Weizhong  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [yangweizhong@ta-shanghai.com](mailto:yangweizhong@ta-shanghai.com)

**TA Technology (Shanghai) Co., Ltd.  
Test Report**

Report No. RZA2010-0591FCC

Page 6 of 115

**1.3. Applicant Information**

Company: Huawei Technologies Co., Ltd.  
Address: Bantian, Longgang District  
City: Shenzhen  
Postal Code: 518129  
Country: P.R. China  
Contact: Zhang Ting  
Telephone: 0755-28780808  
Fax: 0755-28780808

**1.4. Manufacturer Information**

Company: Huawei Technologies Co., Ltd.  
Address: Bantian, Longgang District  
City: Shenzhen  
Postal Code: 518129  
Country: P.R.China  
Telephone: 0755-28780808  
Fax: 0755-28780808

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

### 1.5. Information of EUT

#### General information

Device type :	portable device				
Exposure category:	uncontrolled environment / general population				
Name of EUT:	HSPA USB Stick				
IMEI or SN:	352097040008336				
Device operating configurations :					
Operating mode(s):	GSM850; (tested) GSM1900; (tested)				
Test modulation:	GMSK,8PSK				
GPRS multislot class :	12				
EGPRS multislot class:	12				
Operating frequency range(s)	Band	Tx (MHz)	Rx (MHz)		
	GSM850	824.2 ~ 848.8	869.2 ~ 893.8		
	GSM1900	1850.2 ~ 1909.8	1930.2 ~ 1989.8		
Power class	GSM 850: 4, tested with power level 5				
	GSM 1900: 1, tested with power level 0				
Test channel (Low –Middle –High)	128 -190 - 251 512 - 661 - 810	(GSM850) (tested) (GSM1900) (tested)			
Hardware version:	CH1E173SM				
Software version:	11.002.00.00.00				
Antenna type:	Internal antenna				
Used host products:	BenQ Joybook R55V IBM T61 Lenovo Y450				

Equipment Under Test (EUT) is a HSPA USB Stick with internal antenna. During SAR test of the EUT, it was connected to a portable computer. SAR is tested for the EUT respectively for GSM 850 and GSM1900. The EUT have GPRS (class 12) and EGPRS (class 12) functions.

Since the EUT only has the data transfer function, but does not have the voice transfer function, the tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS and EGPRS, The measurements were performed in combination with three different host products (BenQ Joybook R55V, IBM T61, Lenovo Y450). BenQ Joybook R55V and IBM T61 laptop have horizontal USB slot, Lenovo Y450 laptop has vertical USB slot.

The sample undergoing test was selected by the Client.

Components list please refer to documents of the manufacturer.

### 1.6. Test Date

The test is performed on May 3, 2010 to July 6, 2010 .

## **2. Operational Conditions during Test**

### **2.1. General description of test procedures**

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

Since the EUT only has the data transfer function, but does not have the voice transfer function, the tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS and EGPRS. The measurements were performed in combination with three different host products (BenQ Joybook R55V, IBM T61, Lenovo Y450). BenQ Joybook R55V and IBM T61 laptop have horizontal USB slot, Lenovo Y450 laptop has vertical USB slot.

### **2.2. GSM Test Configuration**

For the body SAR tests for GSM 850, GSM 1900, a communication link is set up with a System Simulator (SS) by air link. The EUT is commanded to operate at maximum transmitting power. Since the EUT only has the data transfer function, but does not have the speech transfer function. The tests in the band of GSM 850, GSM 1900 are only performed in the mode of GPRS and EGPRS. The GPRS class is 12 for this EUT; it has at most 4 timeslots in uplink. The EGPRS class is 12 for this EUT; it has at most 4 timeslots in uplink.

SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

**Table 1: The allowed power reduction in the multi-slot configuration**

<b>Number of timeslots in uplink assignment</b>	<b>Permissible nominal reduction of maximum output power,(dB)</b>
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

### **2.3. Position of module in Portable devices**

The measurements were performed in combination with three different host products (BenQ Joybook R55V, IBM T61, and Lenovo Y450). BenQ Joybook R55V and IBM T61 laptop have horizontal USB slot, Lenovo Y450 laptop has vertical USB slot.

A test distance of 5mm or less, according to KDB 447498 D02 -2009.11.13, should be considered for the orientation that can satisfy such requirements.

For each channel, the EUT is tested at the following 4 test positions:

- Test Position 1: The EUT is connected to the portable computer with horizontal USB slot. The back side of the EUT towards the bottom of the flat phantom. (ANNEX I Picture 6)
- Test Position 2: The EUT is connected to the portable computer with horizontal USB slot. The front side of the EUT towards the bottom of the flat phantom. (ANNEX I Picture 7)
- Test Position 3: The EUT is connected to the portable computer through a 19 cm USB cable. The left side of the EUT towards the bottom of the flat phantom. (ANNEX I Picture 8)
- Test Position 4: The EUT is connected to the portable computer with vertical USB slot. The right side of the EUT towards the bottom of the flat phantom. (ANNEX I Picture 9)

# TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2010-0591FCC

Page 10 of 115

## 2.4. Picture of host product

During the test, BenQ Joybook R55V, IBM T61 and Lenovo Y450 laptops were used as an assistant to help to setup communication. (See Picture 1)



Picture 1-a: IBM T61 Close



Picture 1-b: IBM T61 Open



Picture 1-c: BenQ Joybook R55V(118) Close



Picture 1-d: BenQ Joybook R55V(118) Open



Picture 1-e: Lenovo Y450 Close



Picture 1-f: Lenovo Y450 Open

**TA Technology (Shanghai) Co., Ltd.  
Test Report**

Report No. RZA2010-0591FCC

Page 11 of 115



Picture 1-g: IBM T61 with horizontal USB slot



Picture 1-h: Lenovo Y450 with Vertical USB slot



Picture 1-i: BenQ Joybook R55V with horizontal USB slot



Picture 1-j: 19 cm USB cable

**Picture 1: Computer as a test assistant**

### 3. SAR Measurements System Configuration

#### 3.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

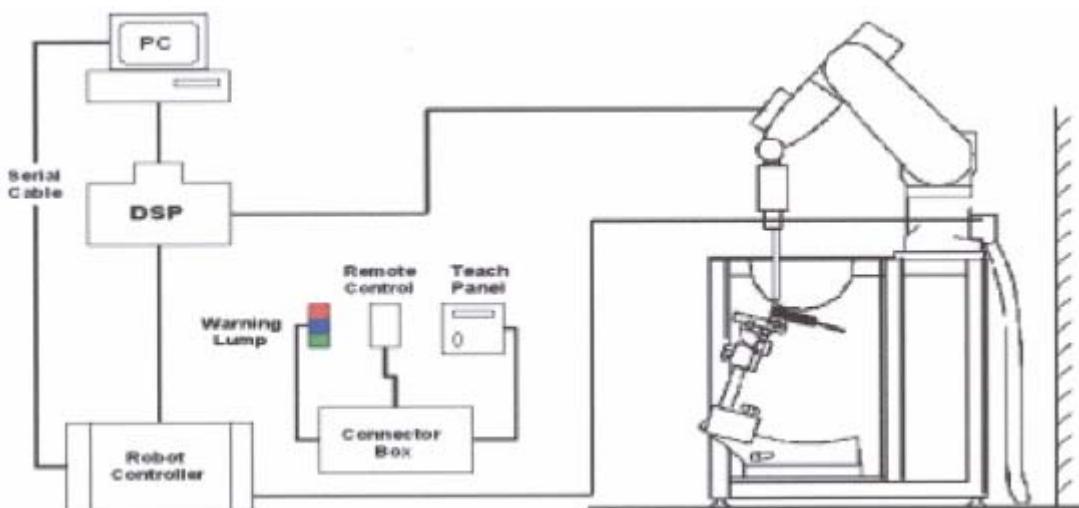


Figure 1. SAR Lab Test Measurement Set-up

### 3.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

#### 3.2.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1750 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



**Figure 2. EX3DV4 E-field Probe**



**Figure 3. EX3DV4 E-field probe**

### 3.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),  
 $C$  = Heat capacity of tissue (brain or muscle),  
 $\Delta T$  = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:  
 $\sigma$  = Simulated tissue conductivity,  
 $\rho$  = Tissue density ( $\text{kg/m}^3$ ).

### 3.3. Other Test Equipment

#### 3.3.1. Device Holder for Transmitters

**Construction:** Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

**Material:** POM, Acrylic glass, Foam

### 3.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Figure 4.Generic Twin Phantom

### 3.4. Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max.  $\pm 5\%$ .
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- Area Scan  
The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 10 mm x 10 mm is set. During the scan the distance of the probe to the phantom remains

# TA Technology (Shanghai) Co., Ltd.

## Test Report

unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space.

They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

### **3.5. Data Storage and Evaluation**

#### **3.5.1. Data Storage**

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA5". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### **3.5.2. Data Evaluation by SEMCAD**

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcp <sub>i</sub>

Device parameters:	- Frequency	f
	- Crest factor	cf

Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c_f / d_c p_i$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$U_i$  = input signal of channel i (i = x, y, z)

$c_f$  = crest factor of exciting field (DASY parameter)

$d_c p_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$Norm_i$  = sensor sensitivity of channel i (i = x, y, z)  
 [mV/(V/m)<sup>2</sup>] for E-field Probes

$ConvF$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel i in V/m

$H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot .) / ( \cdot 1000)$$

with  $SAR$  = local specific absorption rate in mW/g

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**$E_{tot}$**  = total field strength in V/m

$\sigma$  = conductivity in [mho/m] or [Siemens/m]

$\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

**$E_{tot}$**  = total electric field strength in V/m

**$H_{tot}$**  = total magnetic field strength in A/m

### 3.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 6.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

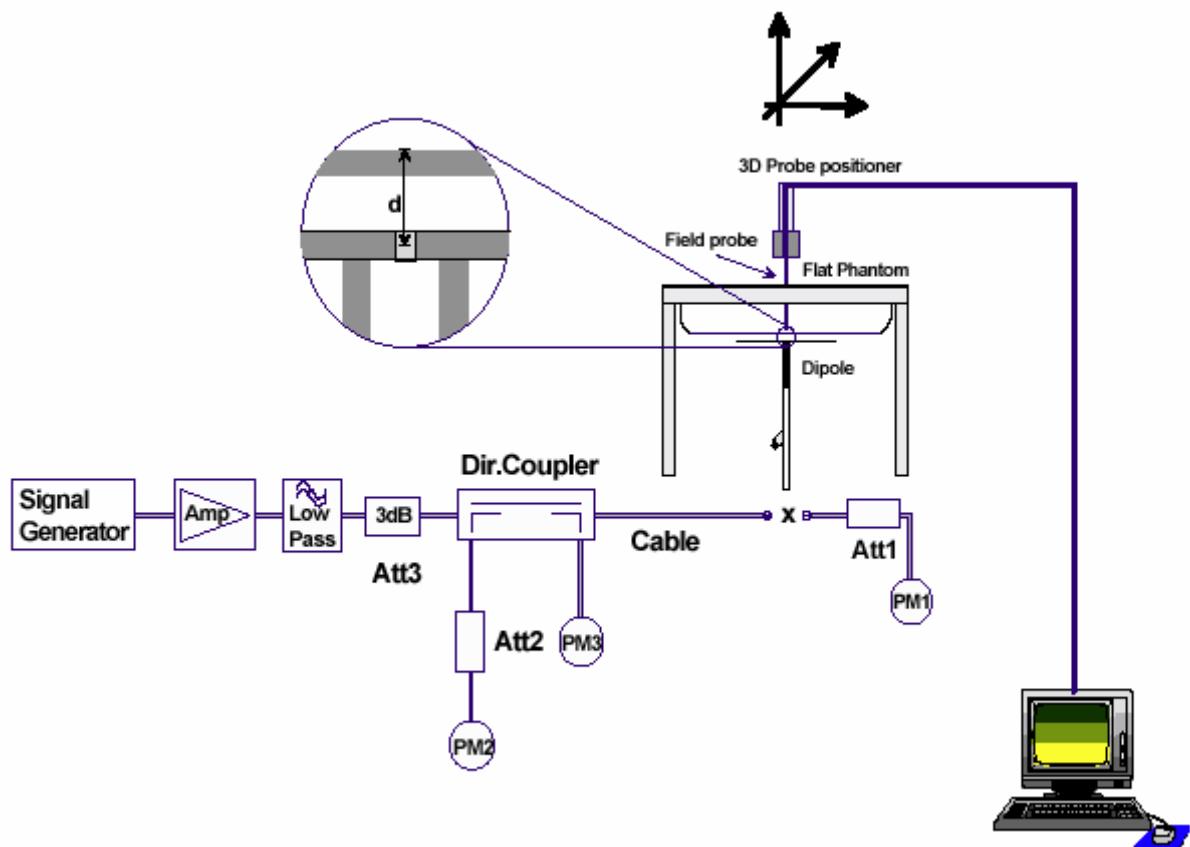


Figure 5. System Check Set-up

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### 3.7. Equivalent Tissues

The liquid is consisted of water, sugar, salt, Glycol monobutyl, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 2 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by OET 65.

Table 2: Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Body)835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

### 4. Laboratory Environment

Table 3: The Ambient Conditions during Test

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## **5. Characteristics of the Test**

### **5.1. Applicable Limit Regulations**

**IEEE Std C95.1, 1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

### **5.2. Applicable Measurement Standards**

**SUPPLEMENT C Edition 01-01 to OET BULLETIN 65 Edition 97-01 June 2001 including DA 02-1438, published June 2002:** Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions

**KDB 447498 D02 -2009.11.13**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

## 6. Conducted Output Power Measurement

### 6.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

### 6.2. Conducted Power Results

**Table 4: Conducted Power Measurement Results**

<b>GSM 850+GPRS</b>		<b>Conducted Power</b>		
		CH128	CH192	CH251
1 timeslot	Before Test (dBm)	31.41	31.52	31.49
	After Test (dBm)	31.40	31.51	31.48
2 timeslots	Before Test (dBm)	30.78	30.93	30.96
	After Test (dBm)	30.77	30.92	30.95
3 timeslots	Before Test (dBm)	28.77	28.91	29.02
	After Test (dBm)	28.76	28.90	29.01
4 timeslots	Before Test (dBm)	26.78	26.94	27.03
	After Test (dBm)	26.77	26.93	27.02
<b>GSM 850+EGPRS</b>		<b>Conducted Power</b>		
		CH128	CH192	CH251
1 timeslot	Before Test (dBm)	24.85	24.88	24.99
	After Test (dBm)	24.84	24.87	24.98
2 timeslots	Before Test (dBm)	24.52	24.45	23.89
	After Test (dBm)	24.51	24.44	23.88
3 timeslots	Before Test (dBm)	22.37	22.10	21.48
	After Test (dBm)	22.36	22.11	21.47
4 timeslots	Before Test (dBm)	20.73	20.72	19.59
	After Test (dBm)	20.72	20.71	19.58
<b>GSM 1900+GPRS</b>		<b>Conducted Power</b>		
		CH512	CH661	CH810

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

		Before Test (dBm)	29.53	29.48	29.81
		After Test (dBm)	29.52	29.47	29.80
		Before Test (dBm)	27.81	27.73	27.70
		After Test (dBm)	27.80	27.72	27.71
		Before Test (dBm)	25.82	25.75	25.81
		After Test (dBm)	25.81	25.74	25.80
		Before Test (dBm)	23.95	23.86	23.88
		After Test (dBm)	23.94	23.85	23.86
<b>GSM 1900+EGPRS</b>			<b>Conducted Power</b>		
			CH512	CH661	CH810
		Before Test (dBm)	24.78	24.88	24.91
		After Test (dBm)	24.77	24.87	24.90
		Before Test (dBm)	23.55	23.89	23.76
		After Test (dBm)	23.54	23.88	23.75
		Before Test (dBm)	21.36	21.72	21.65
		After Test (dBm)	21.35	21.71	21.64
		Before Test (dBm)	19.52	19.78	19.68
		After Test (dBm)	19.51	19.77	19.67

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

## 7. Test Results

### 7.1. Dielectric Performance

**Table 5: Dielectric Performance of Body Tissue Simulating Liquid**

Frequency	Description	Dielectric Parameters		Temp °C
		$\epsilon_r$	$\sigma(\text{s/m})$	
835MHz (body)	Target value ±5% window	55.20 52.44 — 57.96	0.97 0.92 — 1.02	/
	Measurement value 2010-5-20	55.39	1.00	21.5
	Measurement value 2010-7-6	55.38	1.01	21.4
1900MHz (body)	Target value ±5% window	53.30 50.64 — 55.97	1.52 1.44 — 1.60	/
	Measurement value 2010-5-3	53.88	1.49	21.7
	Measurement value 2010-7-6	53.01	1.56	21.6

### 7.2. System check

**Table 6: System check**

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp °C
		10g	1g	$\epsilon_r$	$\sigma(\text{s/m})$	
835MHz	Recommended result ±10% window	1.68 1.51 - 1.85	2.56 2.30 - 2.82	53	0.99	/
	Measurement value 2010-5-20	1.57	2.38	55.39	1.00	21.9
	Measurement value 2010-7-6	1.56	2.36	55.38	1.01	21.8
1900 MHz	Recommended result ±10% window	5.52 4.97—6.07	10.50 9.45 — 11.55	54	1.55	/
	Measurement value 2010-5-3	5.12	10.01	53.88	1.49	21.7
	Recommended result ±10% window	5.61 5.05 - 6.17	10.7 9.63- 11.77	53.6	1.55	/
	Measurement value 2010-7-6	5.11	10.00	53.01	1.56	21.6

Note: 1. The graph results see ANNEX B.

2. Target Values used derive from the calibration certificate and 250 mW is used as feeding power to the Calibrated dipole.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

### 7.3. Summary of Measurement Results

#### 7.3.1. GSM 850(GPRS/EGPRS)

Table 7: SAR Values [GSM850 (GPRS/EGPRS)]

Limit of SAR (W/kg)			10 g Average	1g Average	Power Drift(dB)	Graph Results	
			2.0	1.6	± 0.21		
Test Case Of Body		Measurement Result (W/kg)			Power Drift(dB)		
Different Test Position	Different Timeslots	Channel	10 g Average	1 g Average			
<b>IBM T61</b>							
Test Position 1	4 timeslots	High	0.650	1.080	0.086	Figure 10	
		Middle	0.629	1.040	-0.058	Figure 11	
		Low	0.491	0.807	-0.017	Figure 12	
	3 timeslots	High	0.768	1.270	-0.019	Figure 13	
		Middle	0.702	1.160	-0.113	Figure 14	
		Low	0.581	0.951	-0.184	Figure 15	
	2 timeslots	High	0.839	1.390	-0.062	Figure 16	
		Middle	0.750	1.250	-0.054	Figure 17	
		Low	0.625	1.030	-0.077	Figure 18	
	1 timeslot	High	0.624	1.030	0.133	Figure 19	
		Middle	0.580	0.967	0.025	Figure 20	
		Low	0.492	0.809	-0.084	Figure 21	
<b>BenQ Joybook R55V</b>							
Test Position 2	2 timeslots	High	0.619	1.010	-0.045	Figure 22	
		Middle	0.562	0.913	-0.108	Figure 23	
		Low	0.558	0.908	-0.176	Figure 24	
<b>Lenovo Y450</b>							
Test Position 3	2 timeslots	Middle	0.377	0.602	-0.087	Figure 25	
Test Position 4	2 timeslots	Middle	0.286	0.422	-0.014	Figure 26	
<b>Worst case position of GPRS with EGPRS(GMSK Modulation)</b>							
Test Position 1	2 timeslots	High	0.858	1.430	-0.054	Figure 27	
<b>Worst case position of GPRS with EGPRS(8PSK Modulation)</b>							
Test Position 1	2 timeslots	High	0.177	0.295	-0.095	Figure 28	

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Table 8: Extrapolated SAR Values of highest measured SAR [GSM 850 (GPRS/EGPRS)]**

Limit of SAR (W/kg)			Conducted Power	1g Average	Tune-up procedures	1g Average
				1.6		1.6
Test Case Of Body			Measurement Result (dBm)	Measurement Result (W/kg)	Maximum Power(dBm)	Extrapolated Result (W/kg)
Different Test Position	Different Timeslots	Channel				
<b>EGPRS(GMSK Modulation)maximum SAR value extrapolated result</b>						
Test Position 1	2 timeslots	High	30.96	1.43	31.2	1.51
<b>EGPRS(8PSK Modulation)maximum SAR value extrapolated result</b>						
Test Position 1	2 timeslots	High	23.89	0.295	24.7	0.355
<b>GPRS maximum SAR value extrapolated result</b>						
Test Position 1	2 timeslots	High	30.96	1.39	31.2	1.47
	3 timeslots	High	29.02	1.27	29.2	1.32

Note: 1. SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**7.3.2. GSM 1900(GPRS/EGPRS)**

**Table 9: SAR Values [GSM1900 (GPRS/EGPRS)]**

Limit of SAR (W/kg)			10 g Average	1g Average	Power Drift(dB)	Graph Results
			2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)			Power Drift(dB)	
Different Test Position	Different Timeslots	Channel	10 g Average	1 g Average	Power Drift(dB)	
<b>IBM T61</b>						
Test Position 1	4 timeslots	Middle	0.383	0.717	-0.102	Figure 29
	3 timeslots	High	0.483	0.915	-0.059	Figure 30
		Middle	0.441	0.828	-0.014	Figure 31
		Low	0.517	0.975	-0.015	Figure 32
	2 timeslots	High	0.510	0.966	-0.009	Figure 33
		Middle	0.464	0.880	0.112	Figure 34
		Low	0.536	1.010	-0.124	Figure 35
	1 timeslot	Middle	0.382	0.723	0.024	Figure 36
<b>BenQ Joybook R55V</b>						
Test Position 2	2 timeslots	Middle	0.391	0.730	-0.088	Figure 37
<b>Lenovo Y450</b>						
Test Position 3	2 timeslots	Middle	0.423	0.762	-0.062	Figure 38
Test Position 4	2 timeslots	Middle	0.057	0.101	-0.141	Figure 39
<b>Worst case position of GPRS with EGPRS(GMSK Modulation)</b>						
Test Position 1	2 timeslots	Low	0.539	1.020	-0.191	Figure 40
<b>Worst case position of GPRS with EGPRS(8PSK Modulation)</b>						
Test Position 1	2 timeslots	Low	0.209	0.382	-0.024	Figure 41

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Table 10: Extrapolated SAR Values of highest measured SAR [GSM 1900 (GPRS/EGPRS)]**

Limit of SAR (W/kg)			Conducted Power	1g Average	Tune-up procedures	1g Average
				1.6		1.6
Test Case Of Body			Measurement Result (dBm)	Measurement Result (W/kg)	Maximum Power(dBm)	Extrapolated Result (W/kg)
Different Test Position	Different Timeslots	Channel				
<b>EGPRS(GMSK Modulation)maximum SAR value extrapolated result</b>						
Test Position 1	2 timeslots	Low	27.81	1.02	28.2	1.12
<b>EGPRS(8PSK Modulation)maximum SAR value extrapolated result</b>						
Test Position 1	2 timeslots	Low	23.55	0.382	24.2	0.444
<b>GPRS maximum SAR value extrapolated result</b>						
Test Position 1	2 timeslots	Low	27.81	1.01	28.2	1.1

Note: 1. SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

#### 7.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized Extrapolated SAR<sub>1g</sub> is **1.510** W/kg that is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

# TA Technology (Shanghai) Co., Ltd. Test Report

## 8. Measurement Uncertainty

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 31 of 115

20	-phantom	B	4.0	R	$\sqrt{3}$	1	2.3	$\infty$
21	-liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.64	1.8	$\infty$
22	-liquid conductivity (measurement uncertainty)	B	5.0	N	1	0.64	3.2	$\infty$
23	-liquid permittivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	$\infty$
24	-liquid permittivity (measurement uncertainty )	B	5.0	N	1	0.6	3.0	$\infty$
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					12.0	
Expanded uncertainty (confidence interval of 95 %)			$u_e = 2u_c$	N	k=2		24.0	

## 9. Main Test Instruments

**Table 11: List of Main Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 13, 2009	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 13, 2010	One year
04	Power sensor	Agilent 8481H	MY41091316	March 26, 2010	One year
05	Signal Generator	HP 8341B	2730A00804	September 13, 2009	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	Validation Kit 835MHz	D835V2	4d082	July 13, 2009	One year
08	Validation Kit 1900MHz	D1900V2	5d018	June 26, 2009	One year
09	Validation Kit 1900MHz	D1900V2	5d111	July 14, 2009	One year
10	BTS	E5515C	MY48360988	December 4, 2009	One year
11	E-field Probe	EX3DV4	3677	September 23, 2009	One year
12	DAE	DAE4	871	November 11, 2009	One year

**\*\*\*END OF REPORT BODY\*\*\***

**TA Technology (Shanghai) Co., Ltd.  
Test Report**

Report No. RZA2010-0591FCC

Page 32 of 115

**ANNEX A: Test Layout**



**Picture 2: Specific Absorption Rate Test Layout**

**TA Technology (Shanghai) Co., Ltd.  
Test Report**

Report No. RZA2010-0591FCC

Page 33 of 115



Picture 3: Liquid depth in the Flat Phantom (835 MHz)  
(15.2cm deep)



Picture 4: Liquid depth in the Flat Phantom (1900 MHz)  
(15.3cm deep)

## ANNEX B: System Check Results

### System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d082

Date/Time: 5/20/2010 1:33 PM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 1.00$  mho/m;  $\epsilon_r = 55.39$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**d=15mm, Pin=250mW/Area Scan (101x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.93 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.7 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 3.59 W/kg

**SAR(1 g) = 2.38 mW/g; SAR(10 g) = 1.57 mW/g**

Maximum value of SAR (measured) = 2.92 mW/g

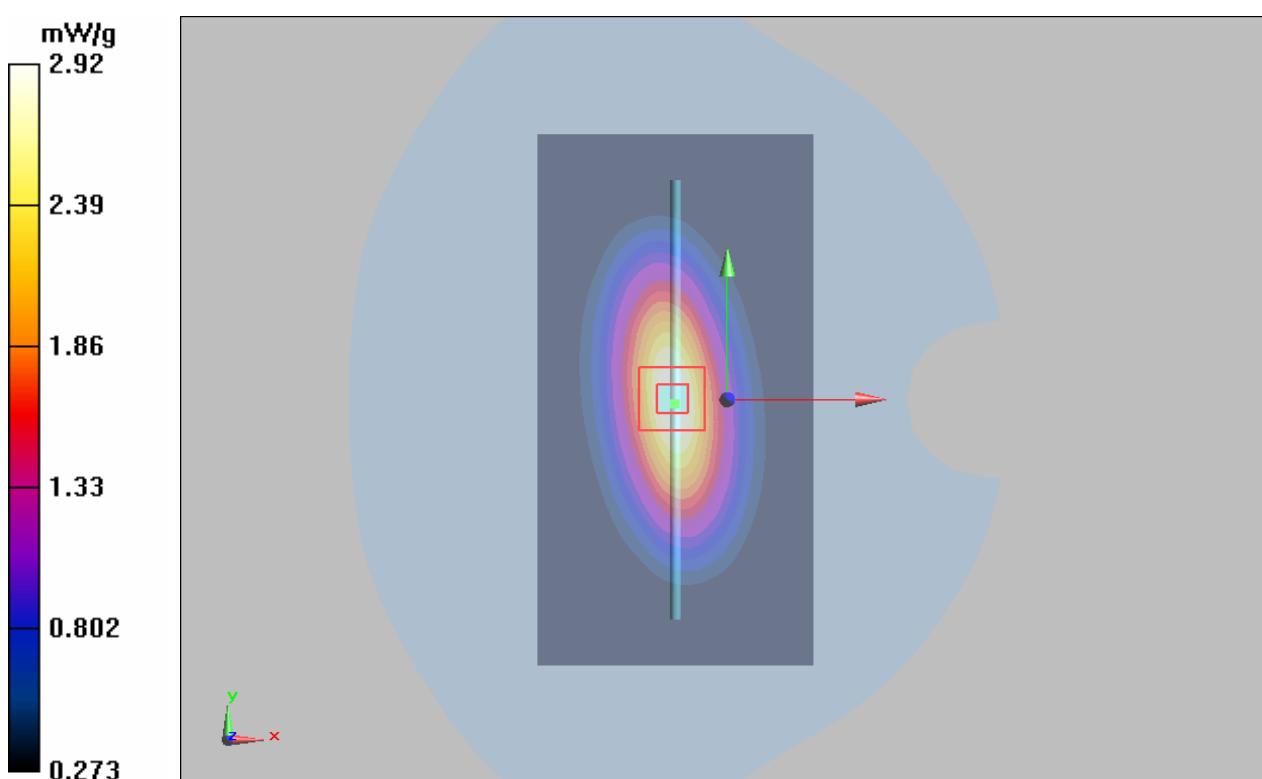


Figure 6 System Performance Check 835MHz 250mW

### System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d082

Date/Time: 7/6/2010 9:33 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55.38$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**d=15mm, Pin=250mW/Area Scan (101x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.91 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.5 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 3.54 W/kg

**SAR(1 g) = 2.36 mW/g; SAR(10 g) = 1.56 mW/g**

Maximum value of SAR (measured) = 2.92 mW/g

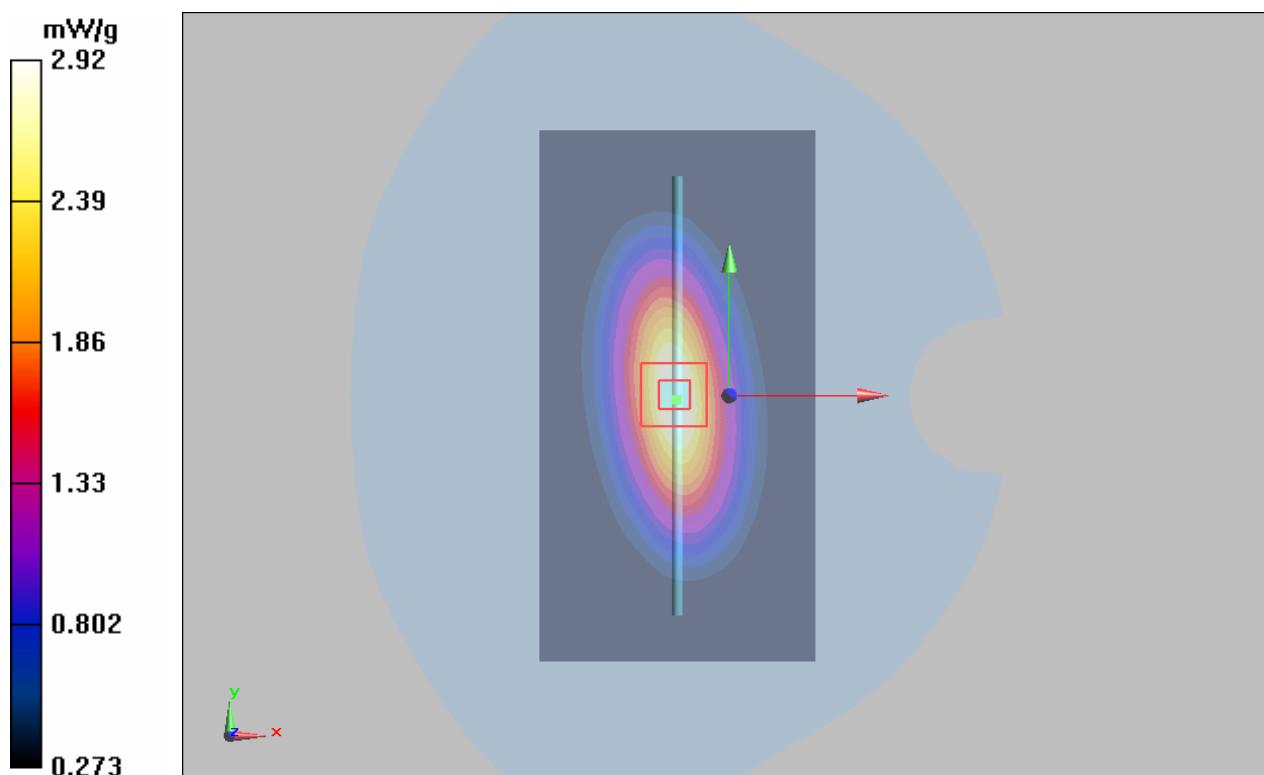


Figure 7 System Performance Check 835MHz 250mW

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 36 of 115

### System Performance Check at 1900 MHz

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d018**

Date/Time: 5/3/2010 7:04:18 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 53.88$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**d=10mm, Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.9 mW/g


**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.0 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 18.9 W/kg

**SAR(1 g) = 10.01 mW/g; SAR(10 g) = 5.12 mW/g**

Maximum value of SAR (measured) = 11.3 mW/g

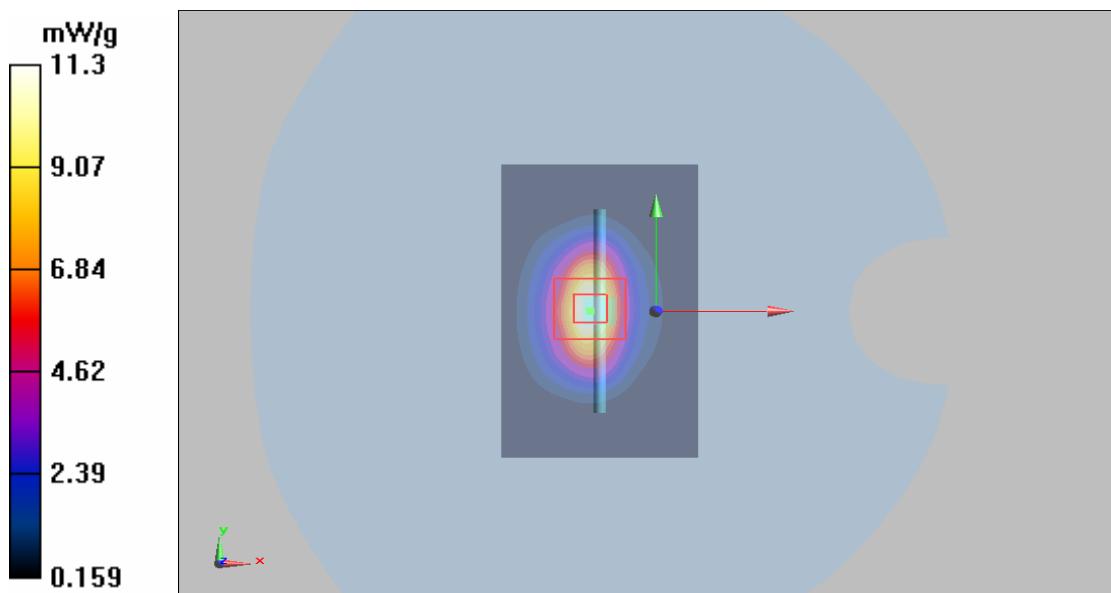

**Figure 8 System Performance Check 1900MHz 250mW**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 37 of 115

### System Performance Check at 1900 MHz

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d111**

Date/Time: 7/6/2010 7:24:18 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.56$  mho/m;  $\epsilon_r = 53.01$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**d=10mm, Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.9 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.0 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 18.9 W/kg

**SAR(1 g) = 10.00 mW/g; SAR(10 g) = 5.11 mW/g**

Maximum value of SAR (measured) = 11.3 mW/g

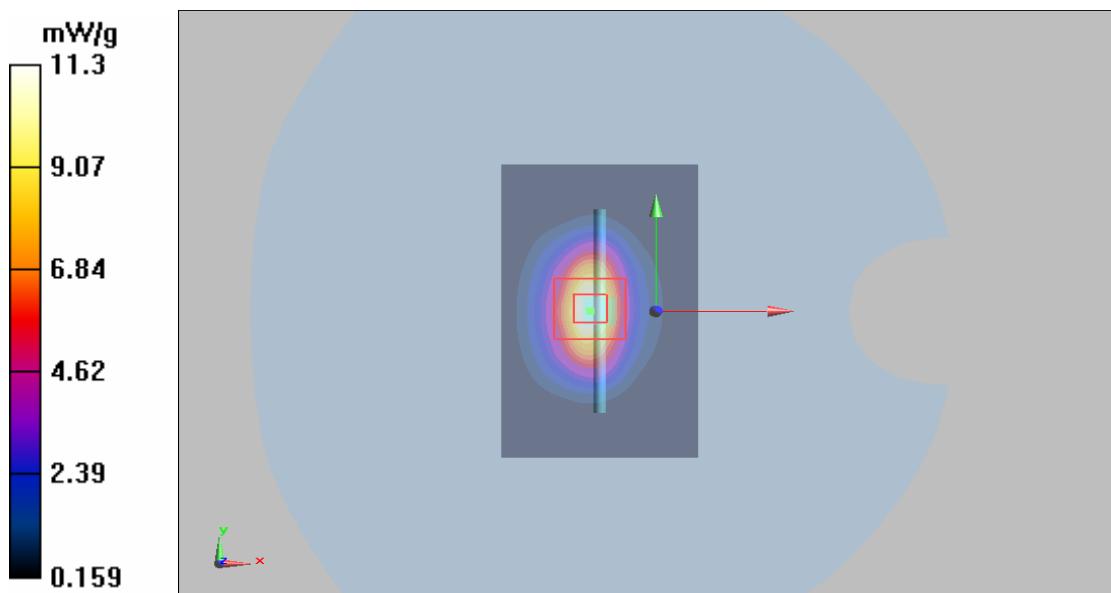


Figure 9 System Performance Check 1900MHz 250mW

## ANNEX C: Graph Results

### GSM 850 GPRS (4 timeslots in uplink) with IBM T61 Test Position 1 High Frequency

Date/Time: 5/20/2010 3:39:52 PM

Communication System: GSM 850+GPRS(4Up); Frequency: 848.8 MHz; Duty Cycle: 1:2.075

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.17 mW/g

**Test Position 1 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.1 V/m; Power Drift = 0.086 dB

Peak SAR (extrapolated) = 1.70 W/kg

**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.650 mW/g**

Maximum value of SAR (measured) = 1.20 mW/g

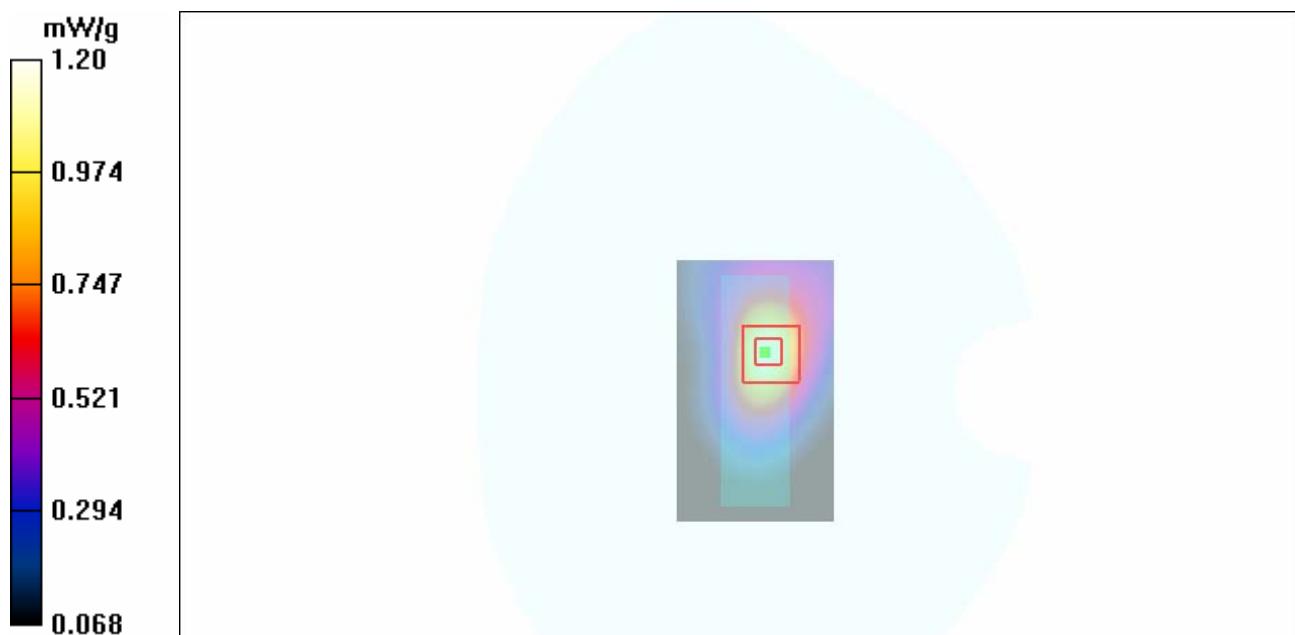


Figure 10 GSM 850 GPRS (4 timeslots in uplink) with IBM T61 Test Position 1 Channel 251

**GSM 850 GPRS (4 timeslots in uplink) with IBM T61 Test Position 1 Middle Frequency**

Date/Time: 5/20/2010 3:00:35 PM

Communication System: GSM 850+GPRS(4Up); Frequency: 837 MHz; Duty Cycle: 1:2.075

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.19 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.3 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.629 mW/g**

Maximum value of SAR (measured) = 1.15 mW/g

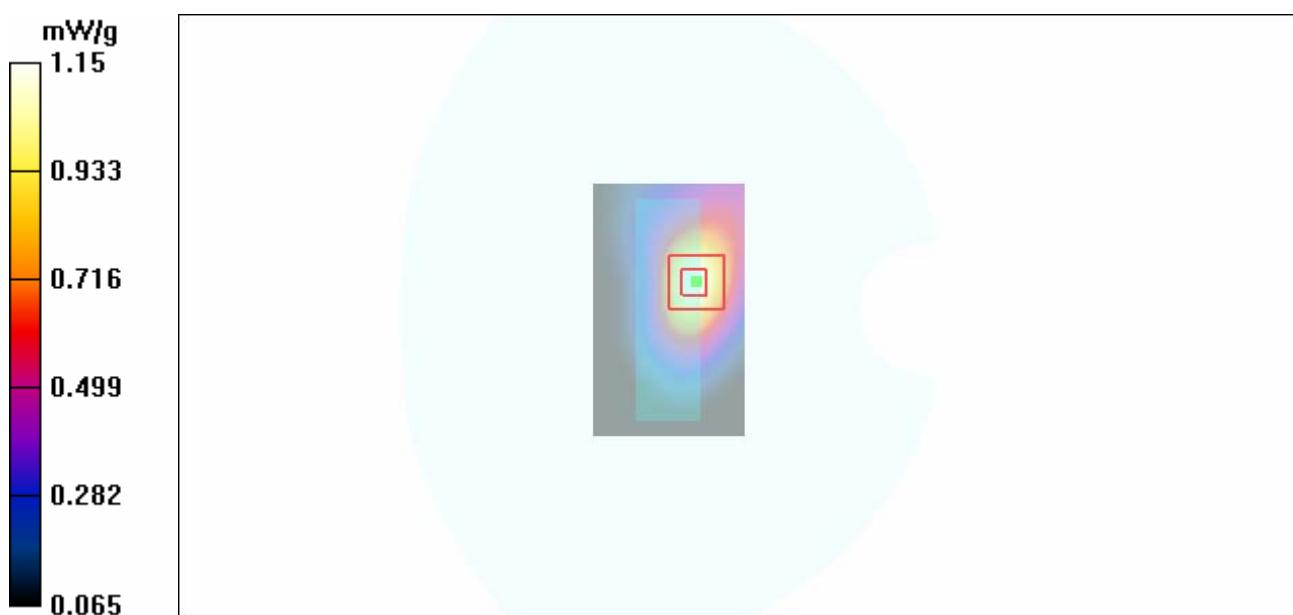


Figure 11 GSM 850 GPRS (4 timeslots in uplink) with IBM T61 Test Position 1 Channel 192

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 850 GPRS (4 timeslots in uplink) with IBM T61 Test Position 1 Low Frequency**

Date/Time: 5/20/2010 3:20:49 PM

Communication System: GSM 850+GPRS(4Up); Frequency: 824.2 MHz; Duty Cycle: 1:2.075

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.884 mW/g


**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.9 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.807 mW/g; SAR(10 g) = 0.491 mW/g**

Maximum value of SAR (measured) = 0.886 mW/g

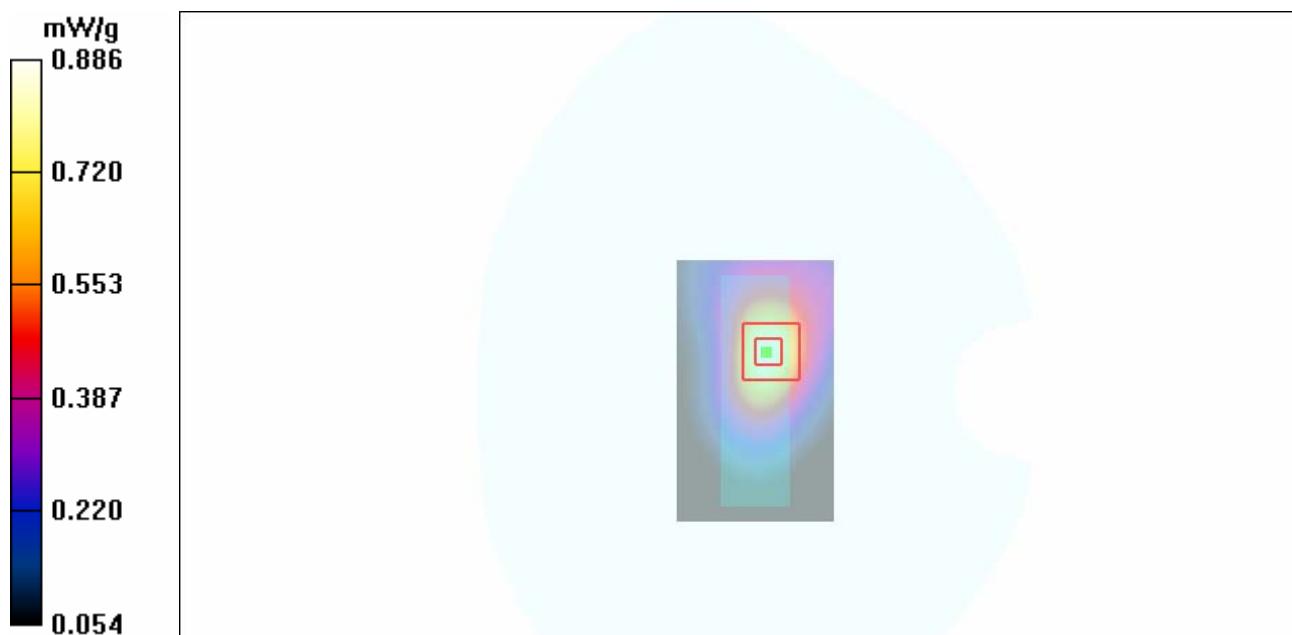

**Figure 12 GSM 850 GPRS (4 timeslots in uplink) with IBM T61 Test Position 1 Channel 128**

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0591FCC

Page 41 of 115

**GSM 850 GPRS (3 timeslots in uplink) with IBM T61 Test Position 1 High Frequency**

Date/Time: 5/20/2010 4:38:45 PM

Communication System: GSM850 + GPRS(3Up); Frequency: 848.8 MHz; Duty Cycle: 1:2.767

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.46 mW/g


**Test Position 1 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.3 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.768 mW/g**

Maximum value of SAR (measured) = 1.41 mW/g

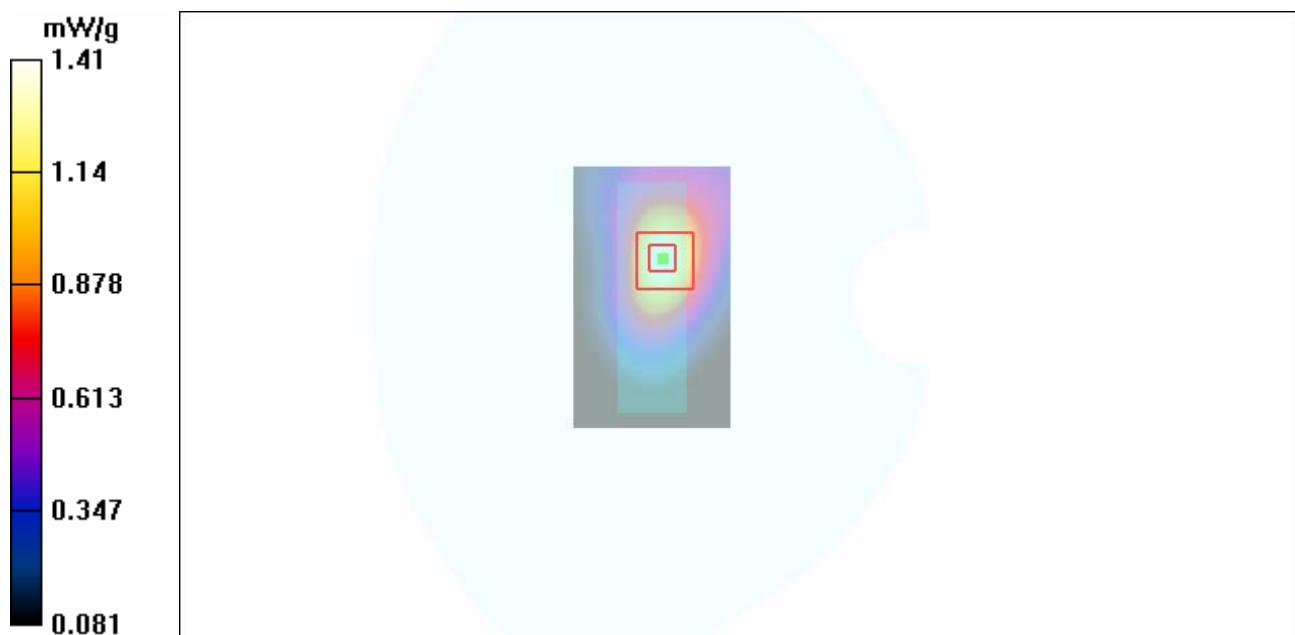

**Figure 13 GSM 850 GPRS (3 timeslots in uplink) with IBM T61 Test Position 1 Channel 251**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 850 GPRS (3 timeslots in uplink) with IBM T61 Test Position 1 Middle Frequency**

Date/Time: 5/20/2010 3:58:36 PM

Communication System: GSM850 + GPRS(3Up); Frequency: 837 MHz; Duty Cycle: 1:2.767

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.30 mW/g


**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.9 V/m; Power Drift = -0.113 dB

Peak SAR (extrapolated) = 1.82 W/kg

**SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.702 mW/g**

Maximum value of SAR (measured) = 1.28 mW/g

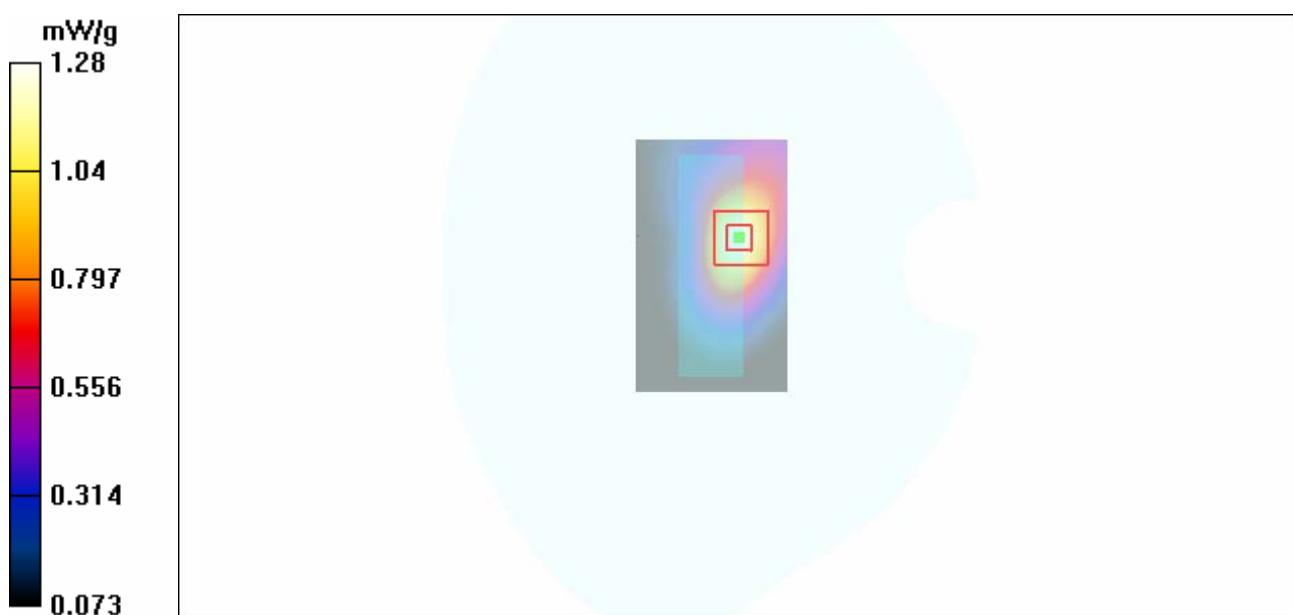

**Figure 14 GSM 850 GPRS (3 timeslots in uplink) with IBM T61 Test Position 1 Channel 192**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 850 GPRS (3 timeslots in uplink) with IBM T61 Test Position 1 Low Frequency**

Date/Time: 5/20/2010 4:17:45 PM

Communication System: GSM850 + GPRS(3Up); Frequency: 824.2 MHz; Duty Cycle: 1:2.767

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.07 mW/g


**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.8 V/m; Power Drift = -0.184 dB

Peak SAR (extrapolated) = 1.48 W/kg

**SAR(1 g) = 0.951 mW/g; SAR(10 g) = 0.581 mW/g**

Maximum value of SAR (measured) = 1.05 mW/g

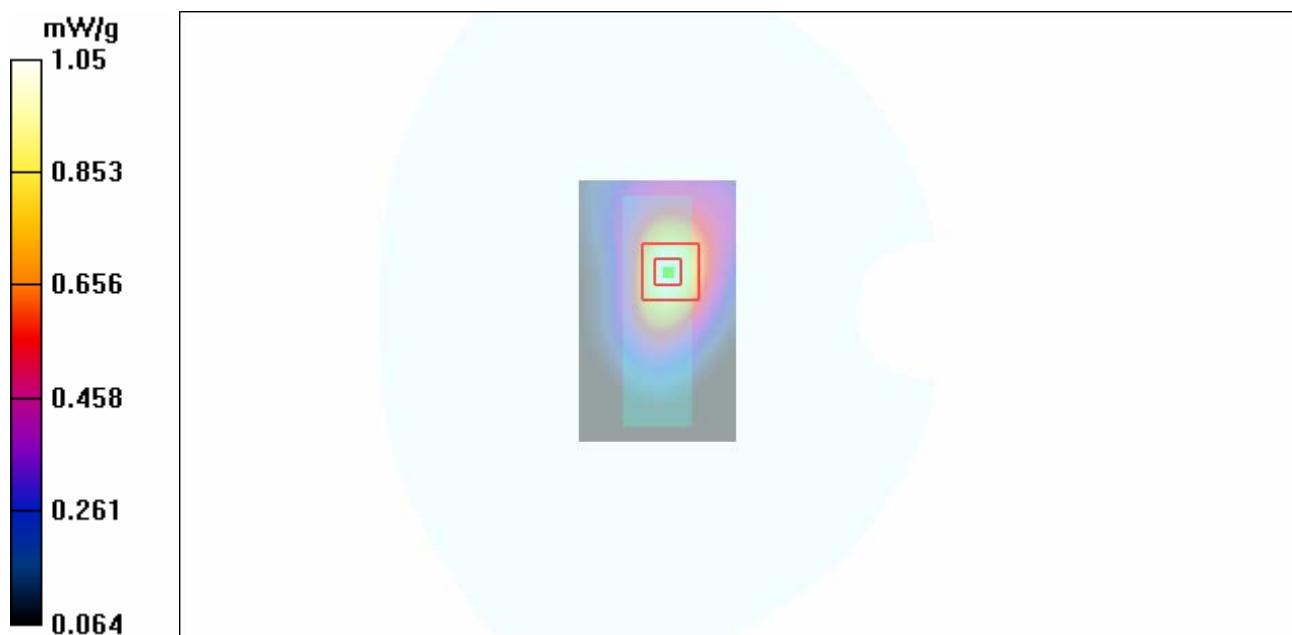

**Figure 15 GSM 850 GPRS (3 timeslots in uplink) with IBM T61 Test Position 1 Channel 128**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 850 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 High Frequency**

Date/Time: 5/20/2010 6:03:32 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.62 mW/g


**Test Position 1 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.0 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 2.20 W/kg

**SAR(1 g) = 1.39 mW/g; SAR(10 g) = 0.839 mW/g**

Maximum value of SAR (measured) = 1.54 mW/g

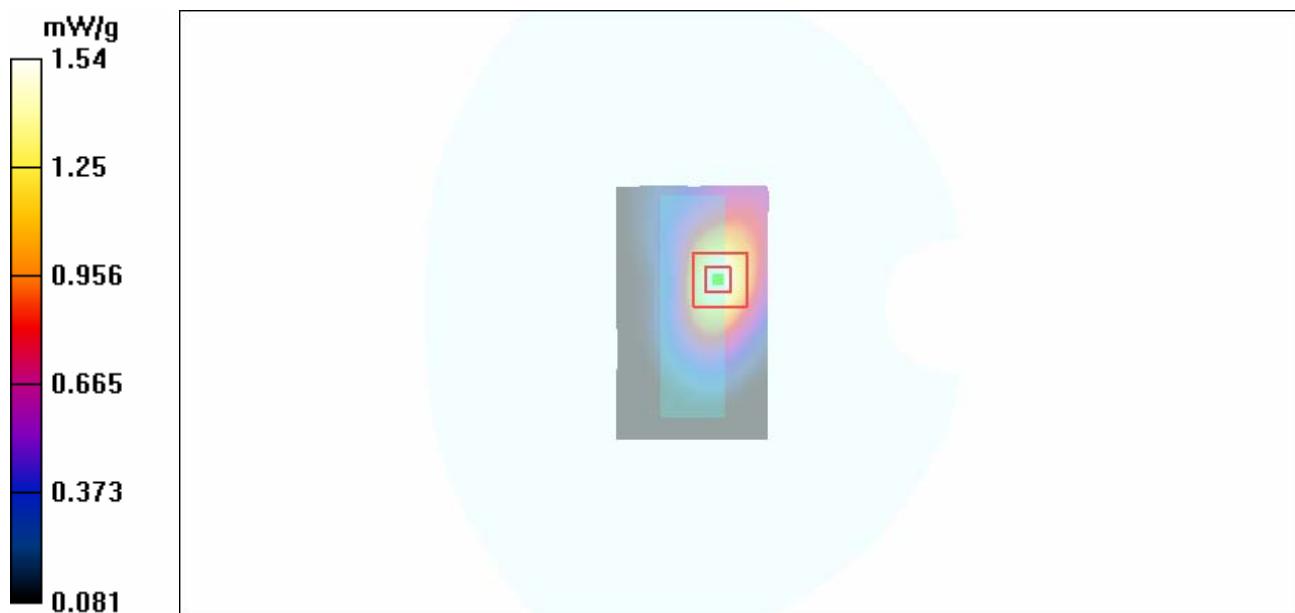

**Figure 16 GSM 850 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Channel 251**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 850 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Middle Frequency**

Date/Time: 5/20/2010 6:22:46 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.39 mW/g


**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.9 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 1.97 W/kg

**SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.750 mW/g**

Maximum value of SAR (measured) = 1.38 mW/g

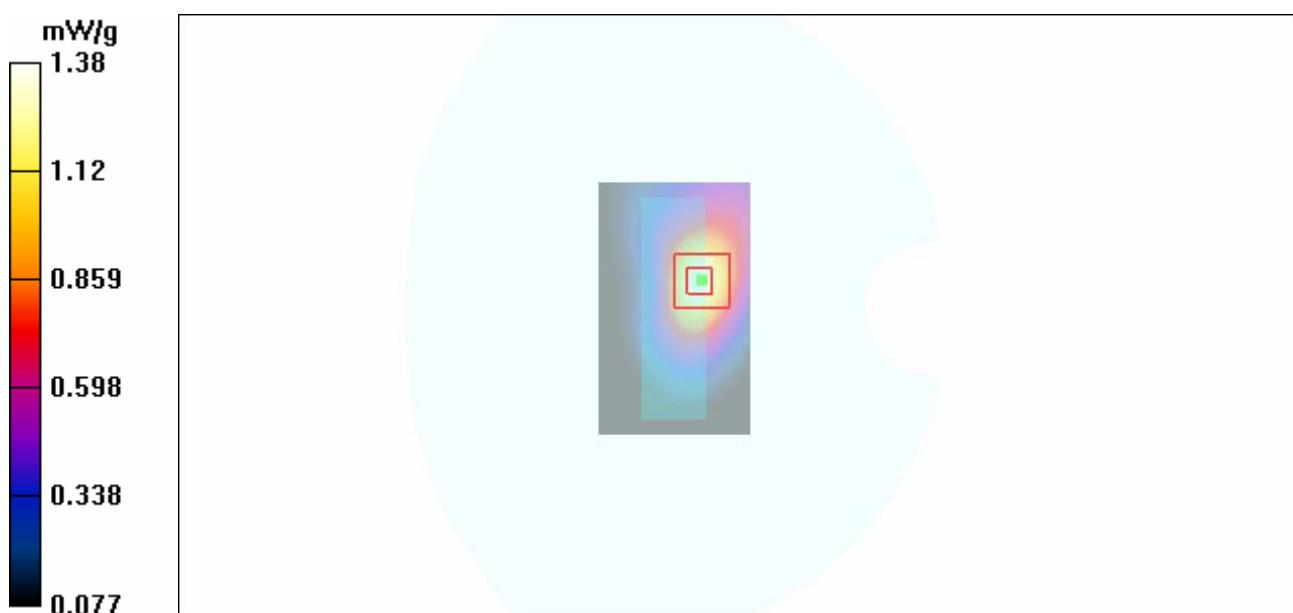

**Figure 17 GSM 850 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Channel 192**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 46 of 115

**GSM 850 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Low Frequency**

Date/Time: 5/20/2010 6:41:59 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.16 mW/g

**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.5 V/m; Power Drift = -0.077 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.625 mW/g**

Maximum value of SAR (measured) = 1.15 mW/g



**Figure 18 GSM 850 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Channel 128**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 850 GPRS (1 timeslot in uplink) with IBM T61 Test Position 1 High Frequency**

Date/Time: 5/20/2010 5:14:00 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.13 mW/g


**Test Position 1 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.6 V/m; Power Drift = 0.133 dB

Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.624 mW/g**

Maximum value of SAR (measured) = 1.15 mW/g

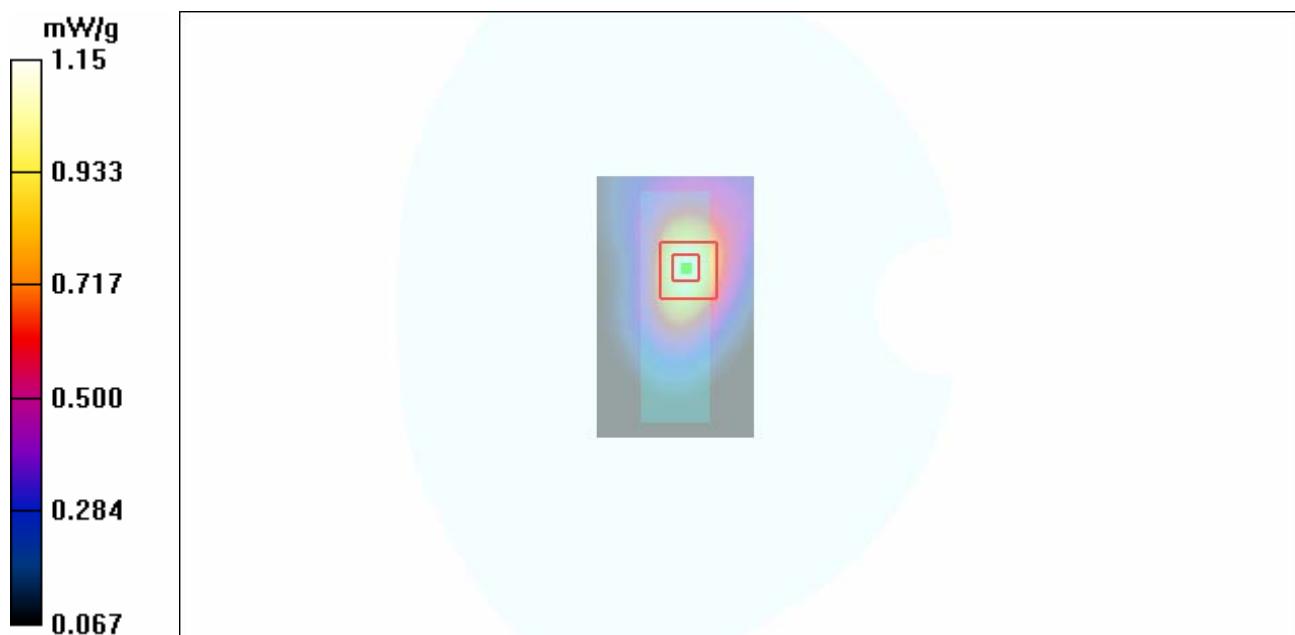

**Figure 19 GSM 850 GPRS (1 timeslot in uplink) with IBM T61 Test Position 1 Channel 251**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 850 GPRS (1 timeslot in uplink) with IBM T61 Test Position 1 Middle Frequency**

Date/Time: 5/20/2010 4:56:13 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 837 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 1 \text{ mho/m}$ ;  $\epsilon_r = 55.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x101x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 1.01 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 24.6 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 0.967 mW/g; SAR(10 g) = 0.580 mW/g**

Maximum value of SAR (measured) = 1.08 mW/g



**Figure 20 GSM 850 GPRS (1 timeslot in uplink) with IBM T61 Test Position 1 Channel 192**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 850 GPRS (1 timeslot in uplink) with IBM T61 Test Position 1 Low Frequency**

Date/Time: 5/20/2010 5:35:31 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.949 mW/g


**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 1.27 W/kg<sup>41</sup>

**SAR(1 g) = 0.809 mW/g; SAR(10 g) = 0.492 mW/g**

Maximum value of SAR (measured) = 0.895 mW/g

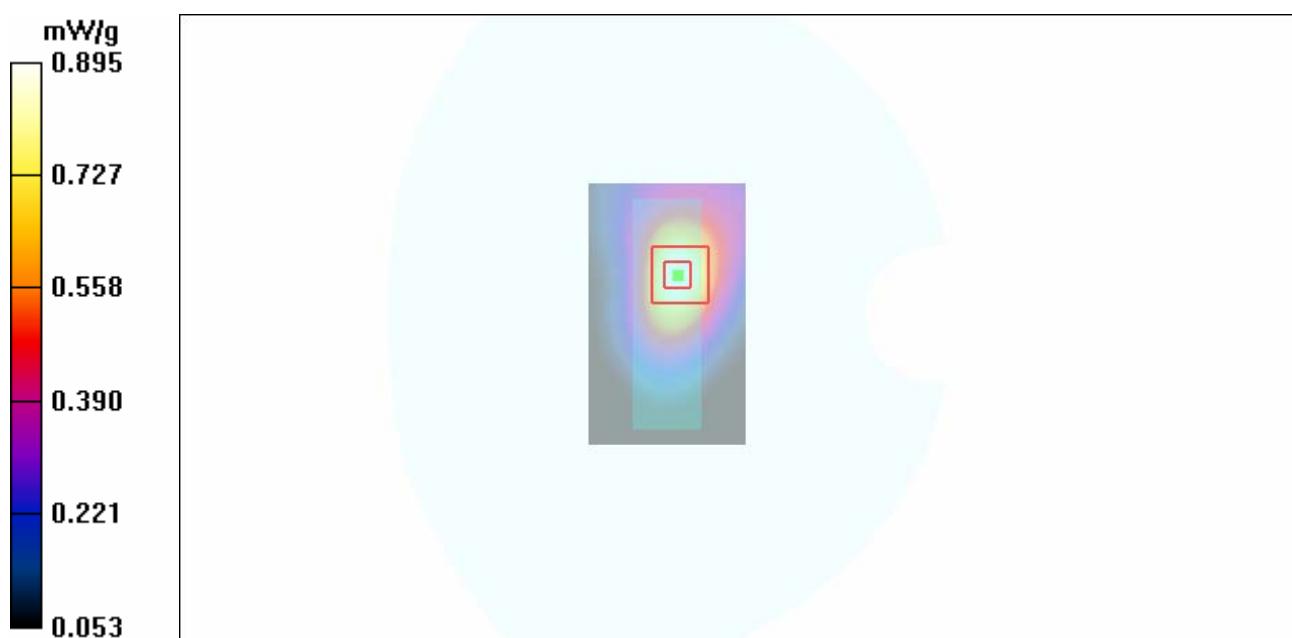

**Figure 21 GSM 850 GPRS (1 timeslot in uplink) with IBM T61 Test Position 1 Channel 128**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 50 of 115

**GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 High Frequency**

Date/Time: 5/20/2010 9:03:42 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.13 mW/g


**Test Position 2 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.5 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 1.58 W/kg

**SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.619 mW/g**

Maximum value of SAR (measured) = 1.11 mW/g

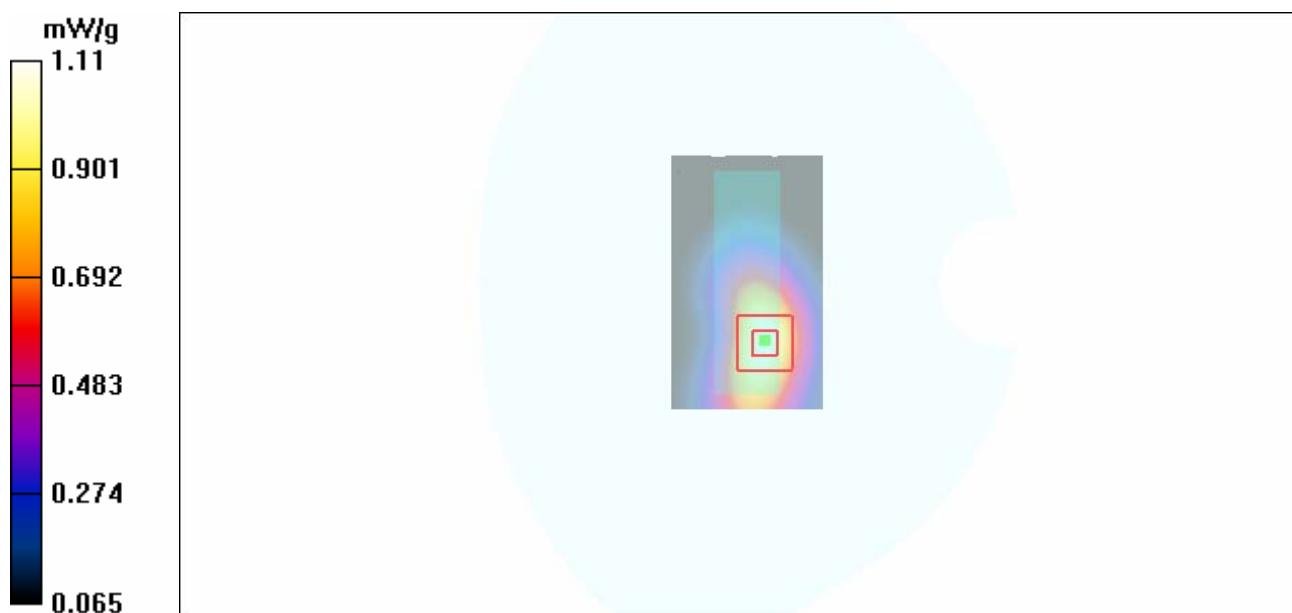

**Figure 22 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 251**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Middle Frequency**

Date/Time: 5/20/2010 7:54:54 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.998 mW/g


**Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.6 V/m; Power Drift = -0.108 dB

Peak SAR (extrapolated) = 1.43 W/kg

**SAR(1 g) = 0.913 mW/g; SAR(10 g) = 0.562 mW/g**

Maximum value of SAR (measured) = 1.00 mW/g

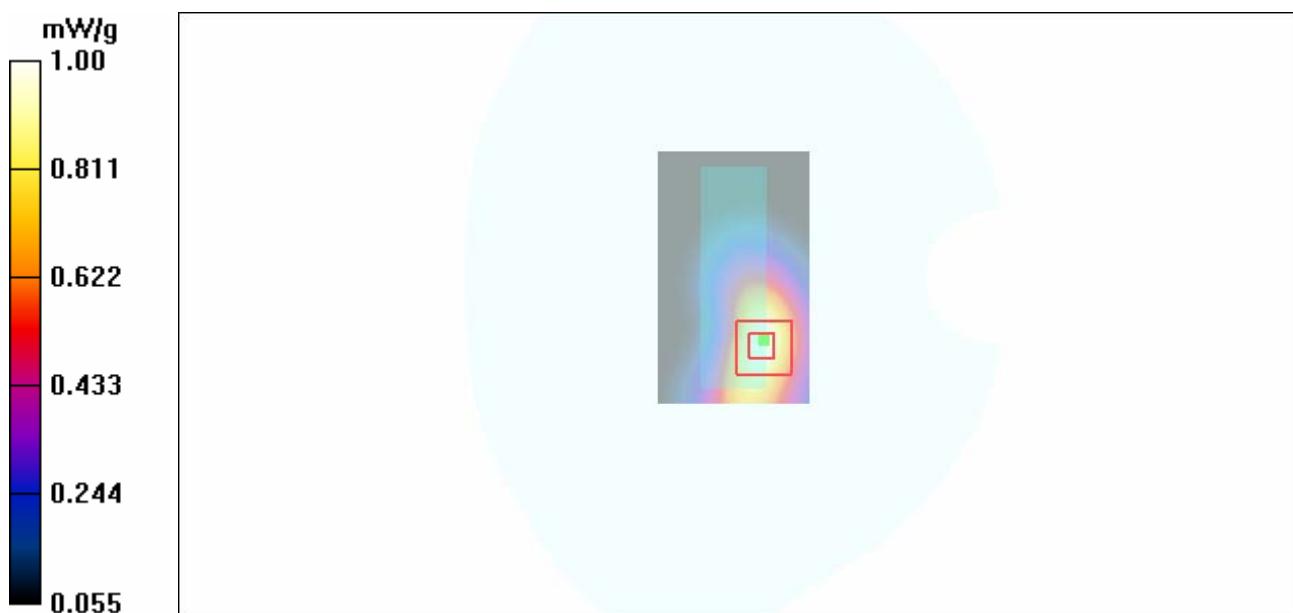

**Figure 23 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 192**

## GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Low Frequency

Date/Time: 5/20/2010 9:22:44 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 55.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.01 mW/g


**Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.2 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.908 mW/g; SAR(10 g) = 0.558 mW/g**

Maximum value of SAR (measured) = 0.992 mW/g

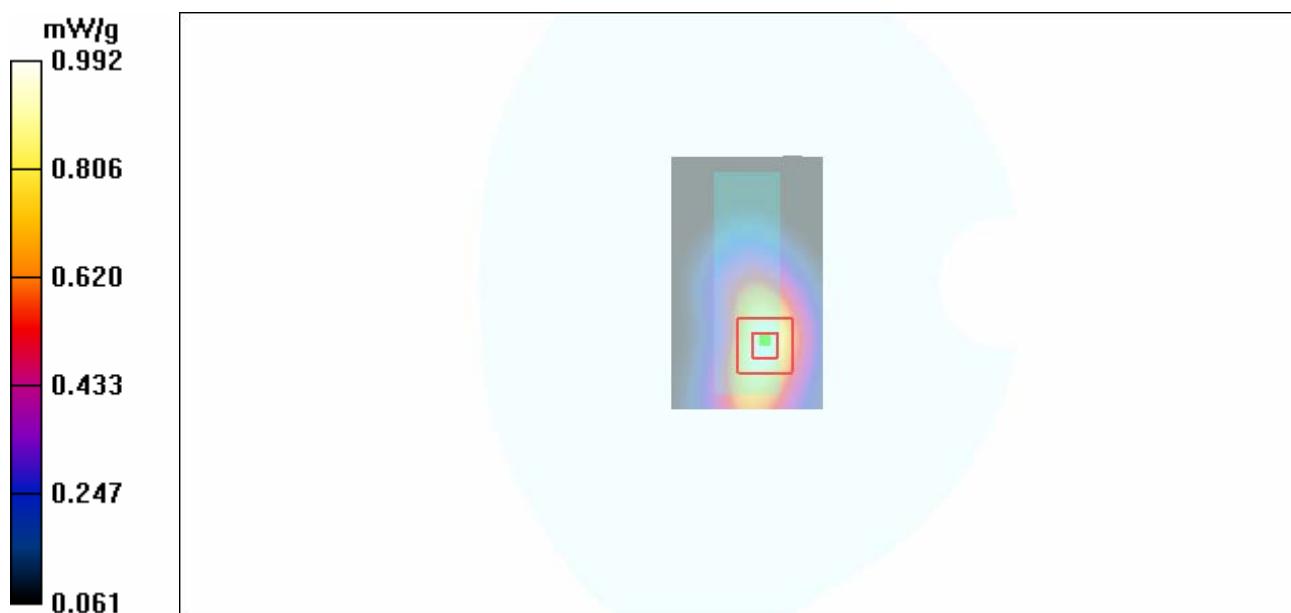

**Figure 24 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 128**

**GSM 850 GPRS (2 timeslot in uplink) with Lenovo Y450 Test Position 3 Middle Frequency**

Date/Time: 5/20/2010 8:17:42 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 3 Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.677 mW/g


**Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.5 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.945 W/kg

**SAR(1 g) = 0.602 mW/g; SAR(10 g) = 0.377 mW/g**

Maximum value of SAR (measured) = 0.663 mW/g

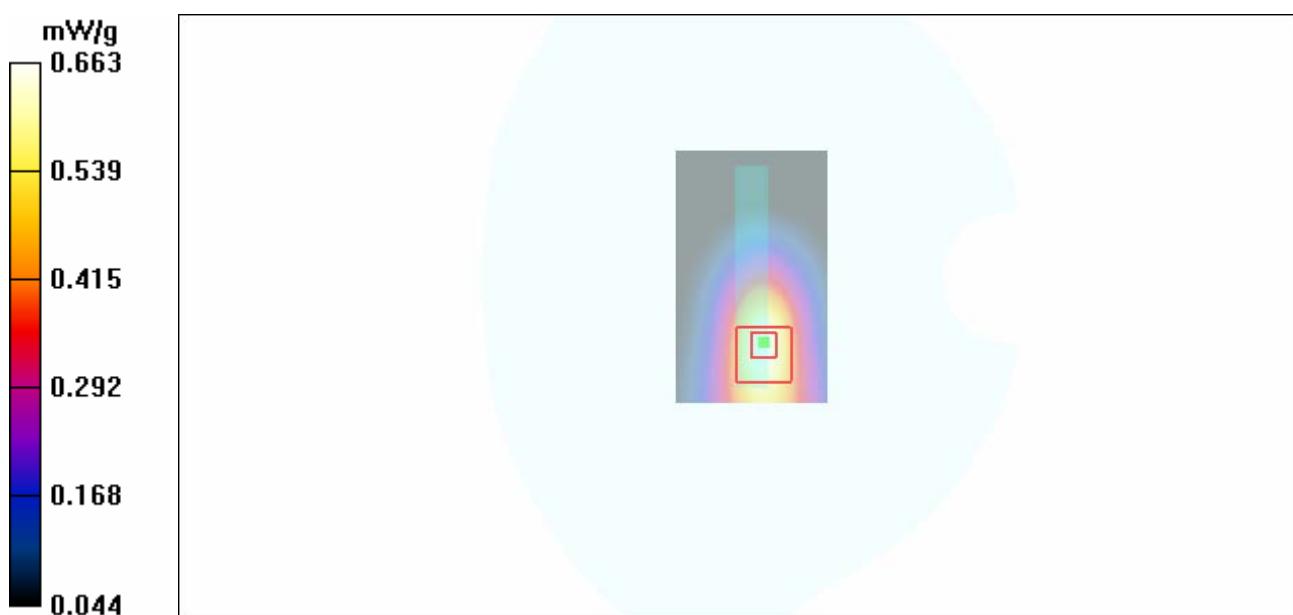

**Figure 25 GSM 850 GPRS (2 timeslot in uplink) with Lenovo Y450 Test Position 3 Channel 192**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y450 Test Position 4 Middle Frequency**

Date/Time: 5/20/2010 8:39:51 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 4 Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.489 mW/g

**Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.9 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.608 W/kg

**SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.286 mW/g**

Maximum value of SAR (measured) = 0.458 mW/g



**Figure 26 GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y450 Test Position 4 Channel 192**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 850 EGPRS (QPSK) (2 timeslots in uplink) with IBM T61 Test Position 1 High Frequency**

Date/Time: 5/20/2010 9:50:22 PM

Communication System: GSM850 + EGPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.63 mW/g


**Test Position 1 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.3 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 2.30 W/kg

**SAR(1 g) = 1.43 mW/g; SAR(10 g) = 0.858 mW/g**


Maximum value of SAR (measured) = 1.59 mW/g

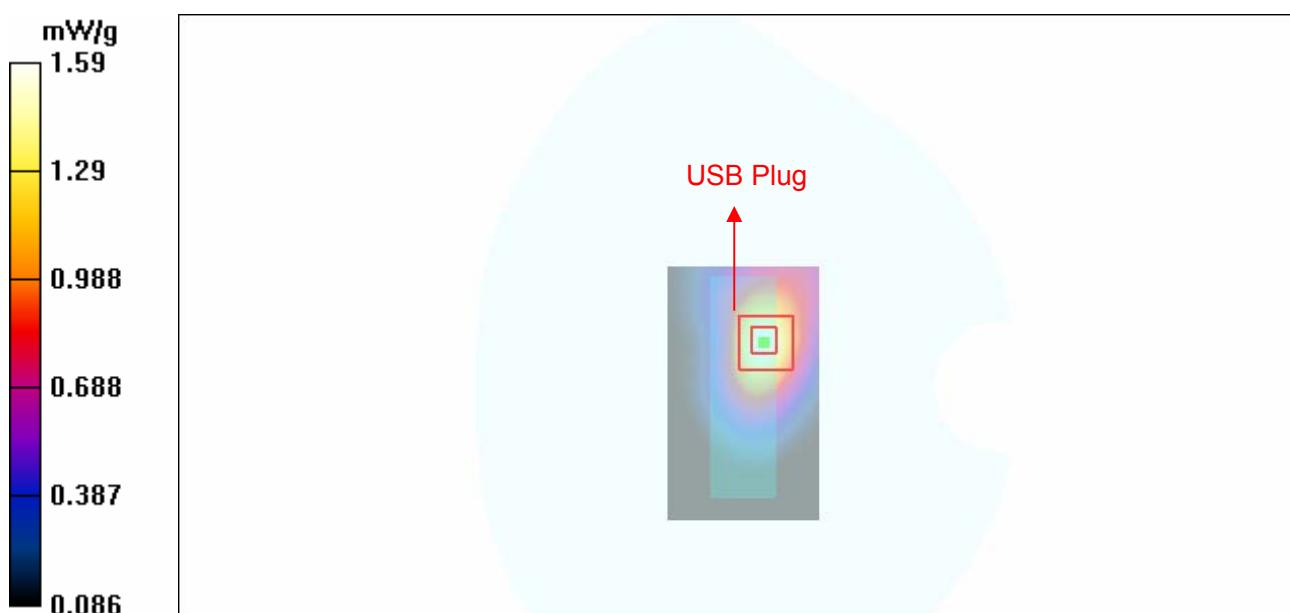

**TA Technology (Shanghai) Co., Ltd.  
Test Report**

Report No. RZA2010-0591FCC

Page 56 of 115

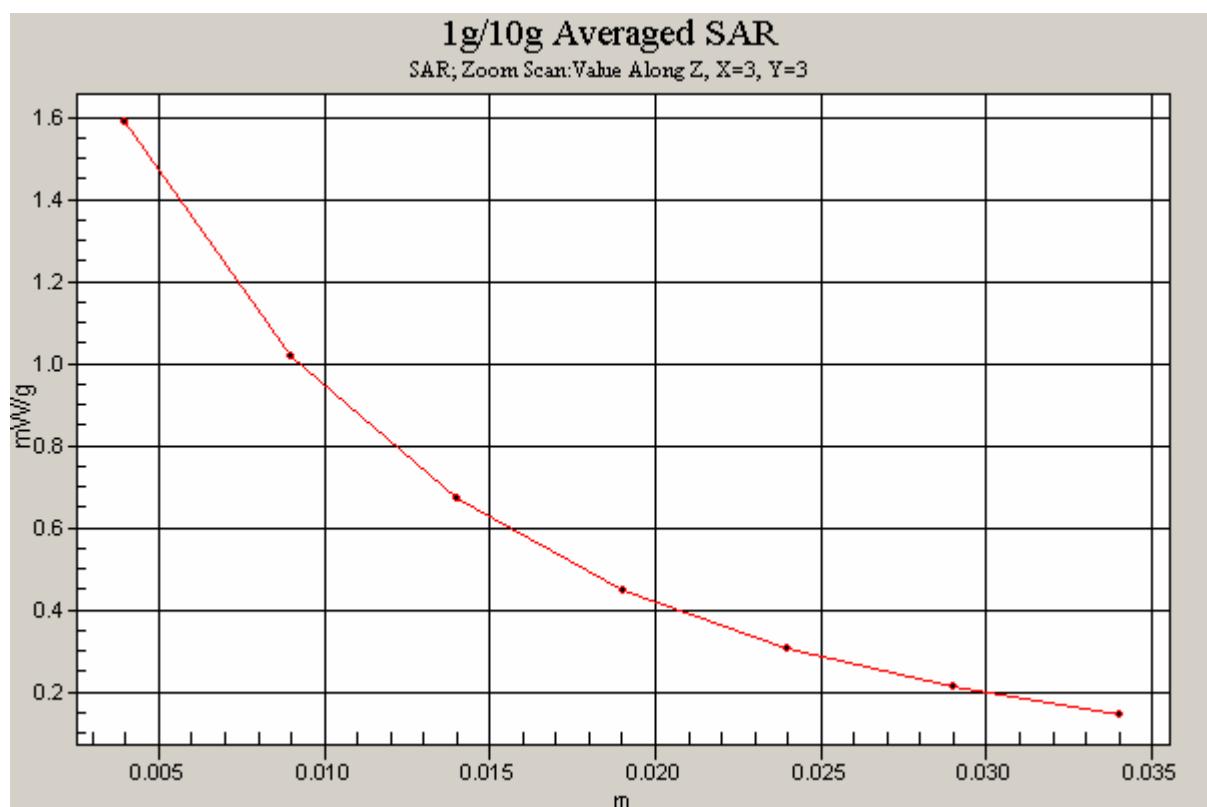

**Figure 27 GSM 850 EGPRS (QPSK) (2 timeslots in uplink) with IBM T61 Test Position 1 Channel**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 850 EGPRS (8PSK) (2 timeslots in uplink) with IBM T61 Test Position 1 High Frequency**

Date/Time: 7/6/2010 3:32:56 PM

Communication System: GSM850 + EGPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 849$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.358 mW/g


**Test Position 1 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 0.477 W/kg

**SAR(1 g) = 0.295 mW/g; SAR(10 g) = 0.177 mW/g**

Maximum value of SAR (measured) = 0.326 mW/g

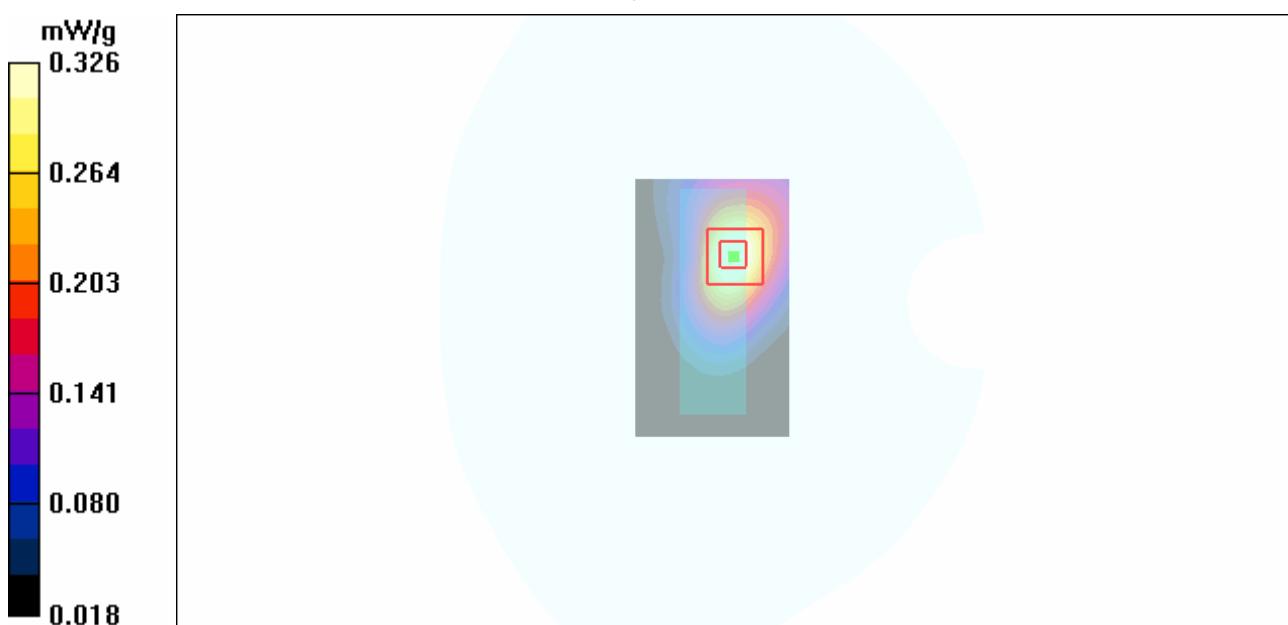

**Figure 28 GSM 850 EGPRS (8PSK) (2 timeslots in uplink) with IBM T61 Test Position 1 Channel**

**GSM 1900 GPRS (4 timeslots in uplink) with IBM T61 Test Position 1 Middle Frequency**

Date/Time: 5/3/2010 9:32:14 PM

Communication System: PCS 1900+GPRS(4Up); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.842 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.9 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.717 mW/g; SAR(10 g) = 0.383 mW/g**

Maximum value of SAR (measured) = 0.785 mW/g

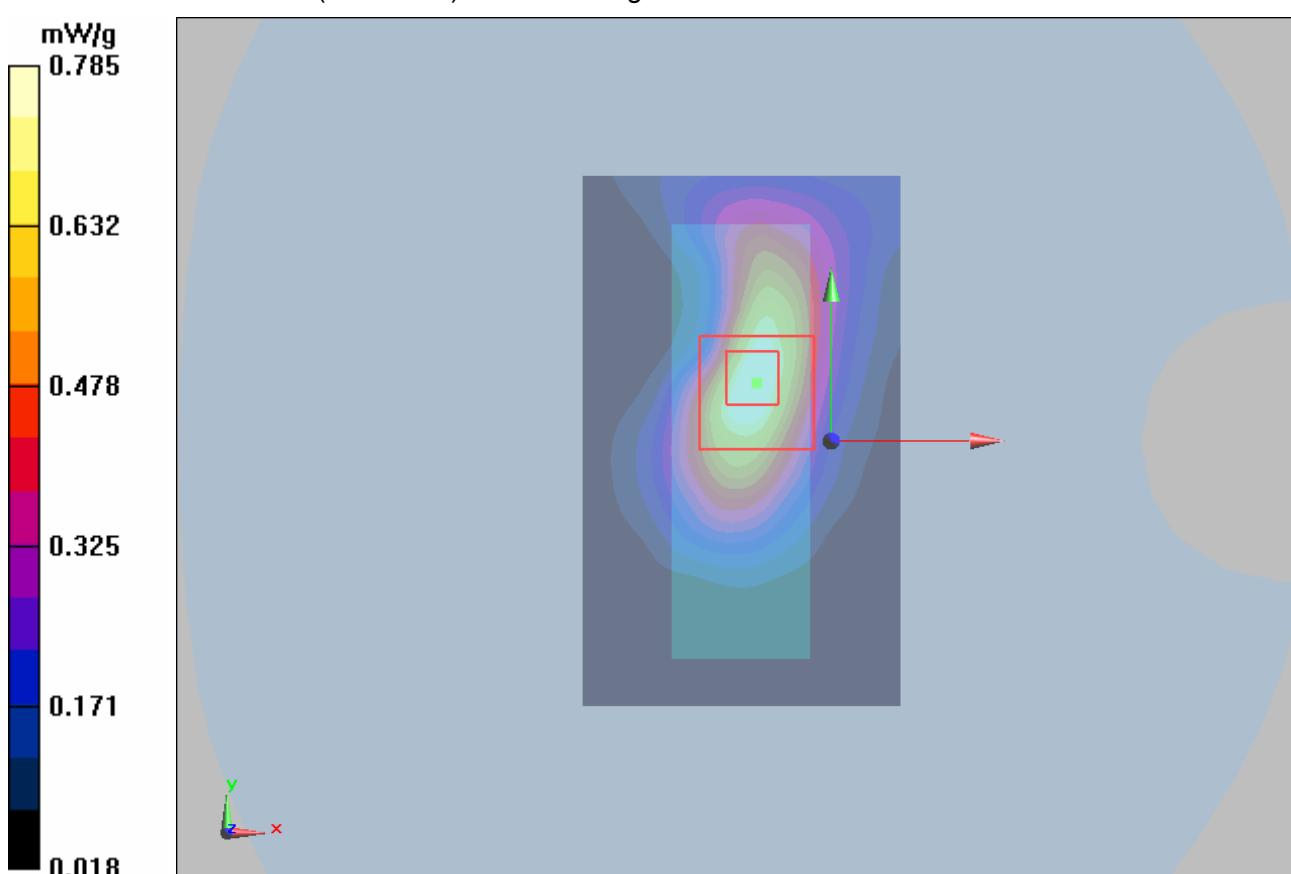


Figure 29 GSM 1900 GPRS (4 timeslots in uplink) with IBM T61 Test Position 1 Channel 661

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 1900 GPRS (3 timeslots in uplink) with IBM T61 Test Position 1 High Frequency**

Date/Time: 5/3/2010 8:30:33 AM

Communication System: PCS 1900+GPRS(3Up); Frequency: 1909.8 MHz; Duty Cycle: 1:2.767

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.12 mW/g


**Test Position 1 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.8 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 1.75 W/kg

**SAR(1 g) = 0.915 mW/g; SAR(10 g) = 0.483 mW/g**

Maximum value of SAR (measured) = 1.01 mW/g

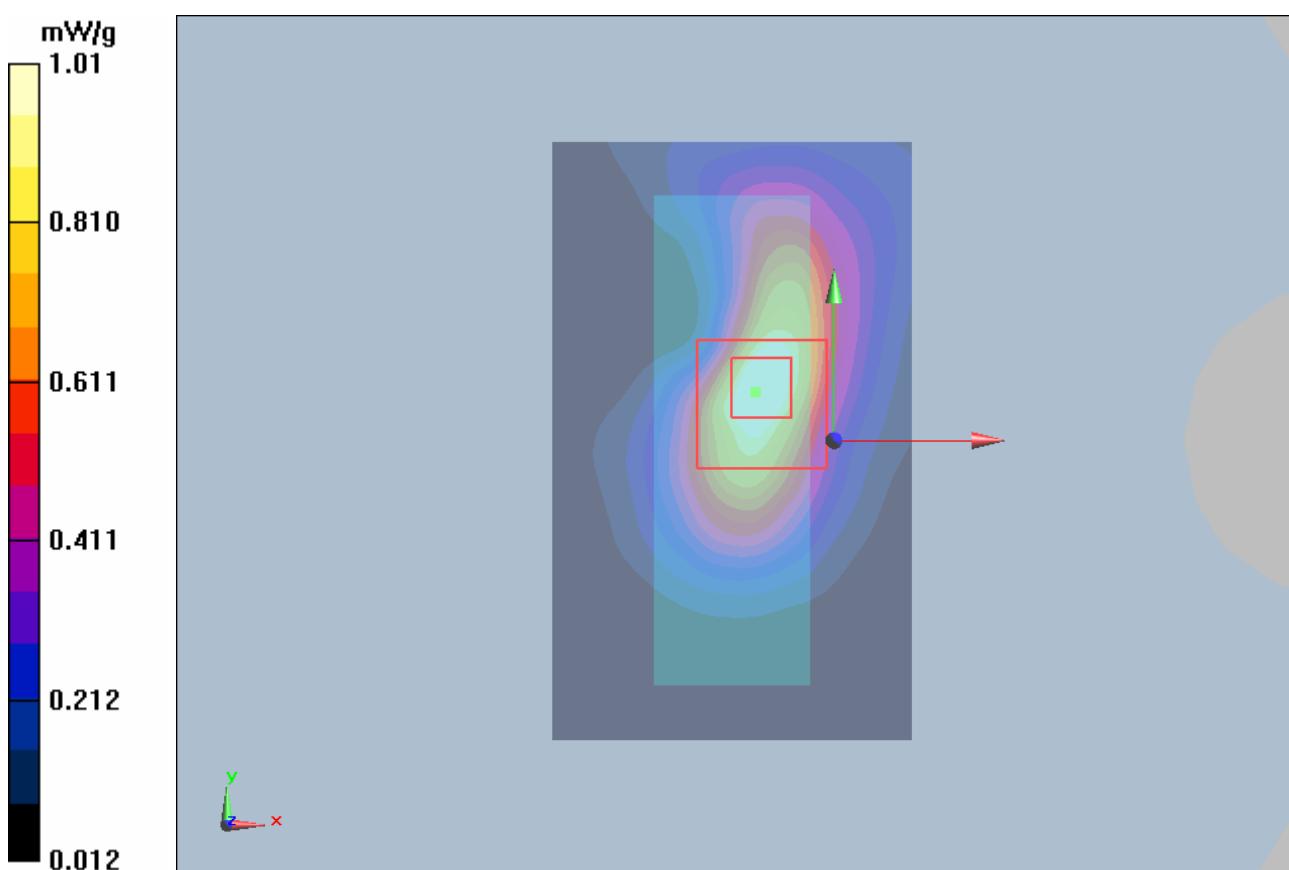

**Figure 30 GSM 1900 GPRS (3 timeslots in uplink) with IBM T61 Test Position 1 Channel 810**

**GSM 1900 GPRS (3 timeslots in uplink) with IBM T61 Test Position 1 Middle Frequency**

Date/Time: 5/3/2010 9:56:53 PM

Communication System: PCS 1900+GPRS(3Up); Frequency: 1880 MHz; Duty Cycle: 1:2.767

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.955 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.4 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 1.62 W/kg

**SAR(1 g) = 0.828 mW/g; SAR(10 g) = 0.441 mW/g**

Maximum value of SAR (measured) = 0.915 mW/g

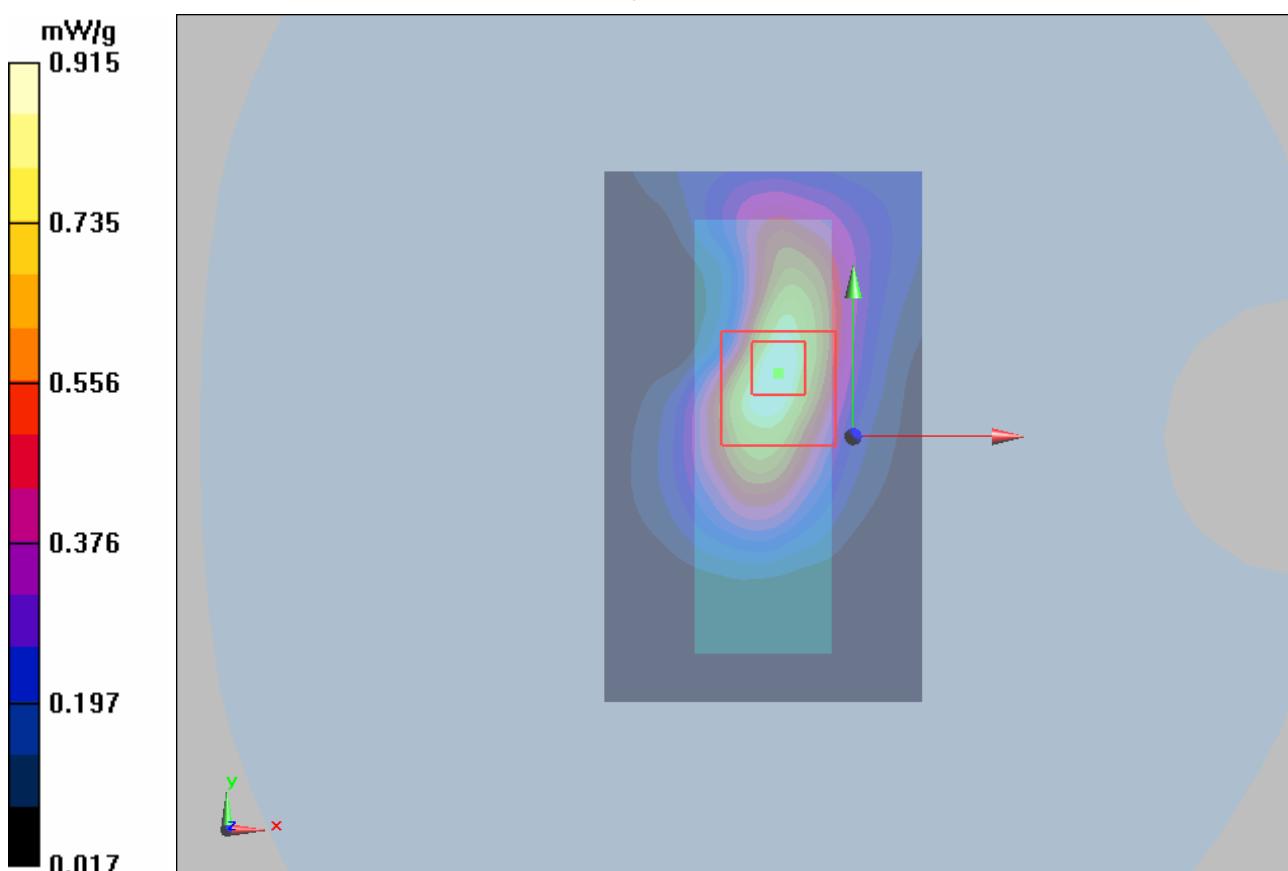


Figure 31 GSM 1900 GPRS (3 timeslots in uplink) with IBM T61 Test Position 1 Channel 661

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0591FCC

Page 61 of 115

**GSM 1900 GPRS (3 timeslots in uplink) with IBM T61 Test Position 1 Low Frequency**

Date/Time: 5/3/2010 8:55:11 AM

Communication System: PCS 1900+GPRS(3Up); Frequency: 1850.2 MHz; Duty Cycle: 1:2.767

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.15 mW/g


**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.3 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 1.9 W/kg

**SAR(1 g) = 0.975 mW/g; SAR(10 g) = 0.517 mW/g**

Maximum value of SAR (measured) = 1.08 mW/g

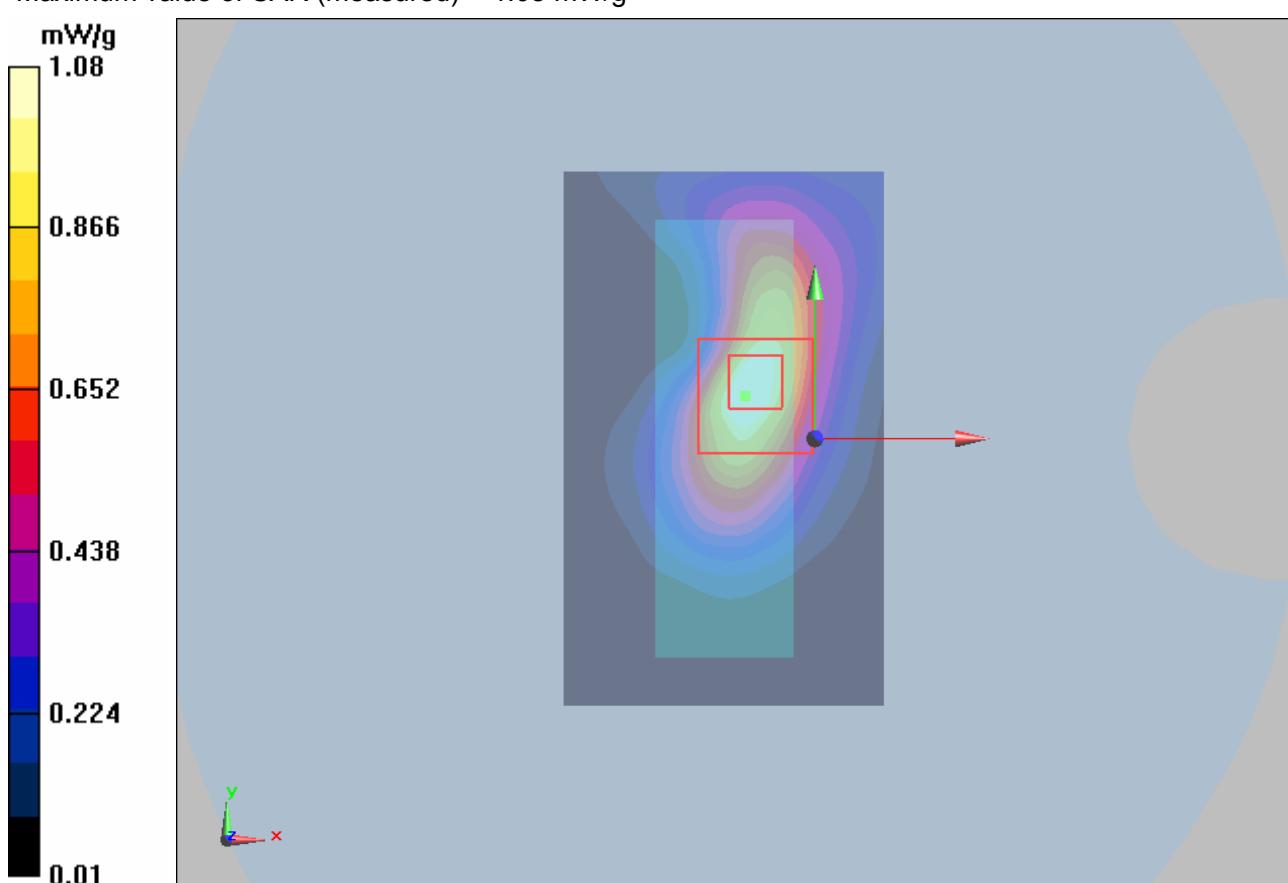

**Figure 32 GSM 1900 GPRS (3 timeslots in uplink) with IBM T61 Test Position 1 Channel 512**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 High Frequency**

Date/Time: 5/3/2010 9:44:46 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.15 mW/g


**Test Position 1 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.9 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 1.97 W/kg

**SAR(1 g) = 0.966 mW/g; SAR(10 g) = 0.510 mW/g**

Maximum value of SAR (measured) = 1.07 mW/g

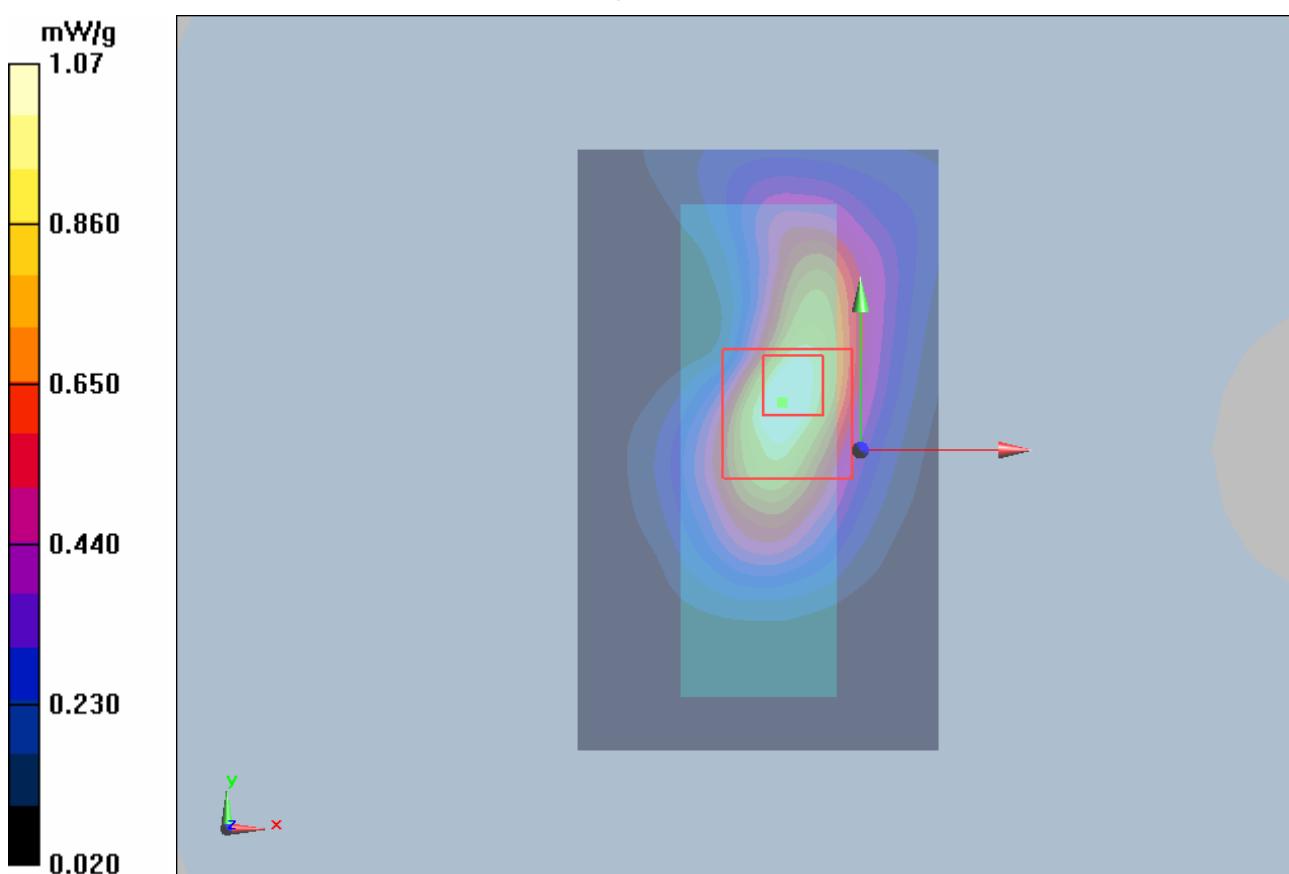

**Figure 33 GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Channel 810**

**GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Middle Frequency**

Date/Time: 5/3/2010 10:21:42 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.02 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.8 V/m; Power Drift = 0.112 dB

Peak SAR (extrapolated) = 1.74 W/kg

**SAR(1 g) = 0.880 mW/g; SAR(10 g) = 0.464 mW/g**

Maximum value of SAR (measured) = 0.980 mW/g

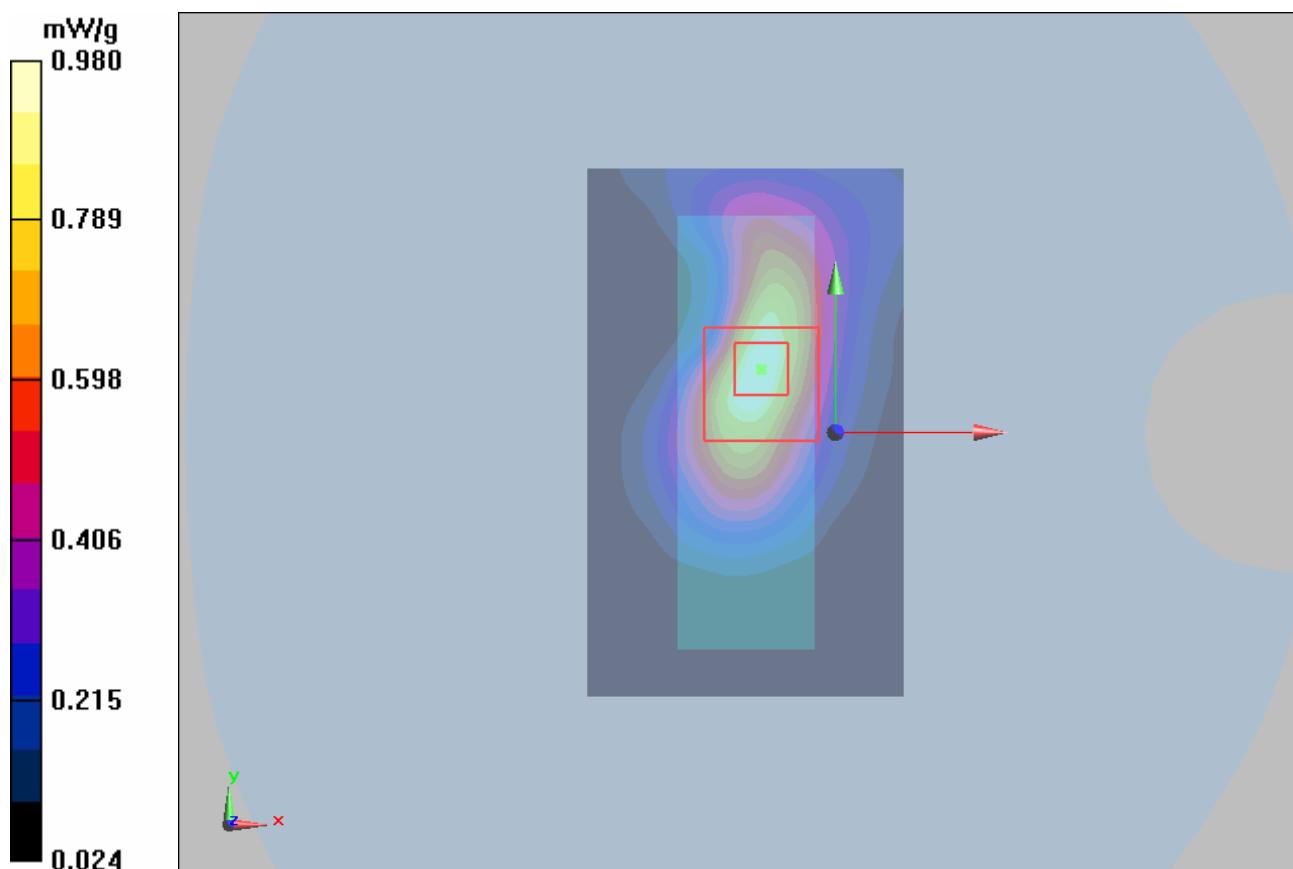


Figure 34 GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Channel 661

TA Technology (Shanghai) Co., Ltd.  
Test Report

Report No. RZA2010-0591FCC

Page 64 of 115

**GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Low Frequency**

Date/Time: 5/3/2010 9:20:05 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5°C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.18 mW/g


**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.8 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 1.95 W/kg

**SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.536 mW/g**

Maximum value of SAR (measured) = 1.12 mW/g

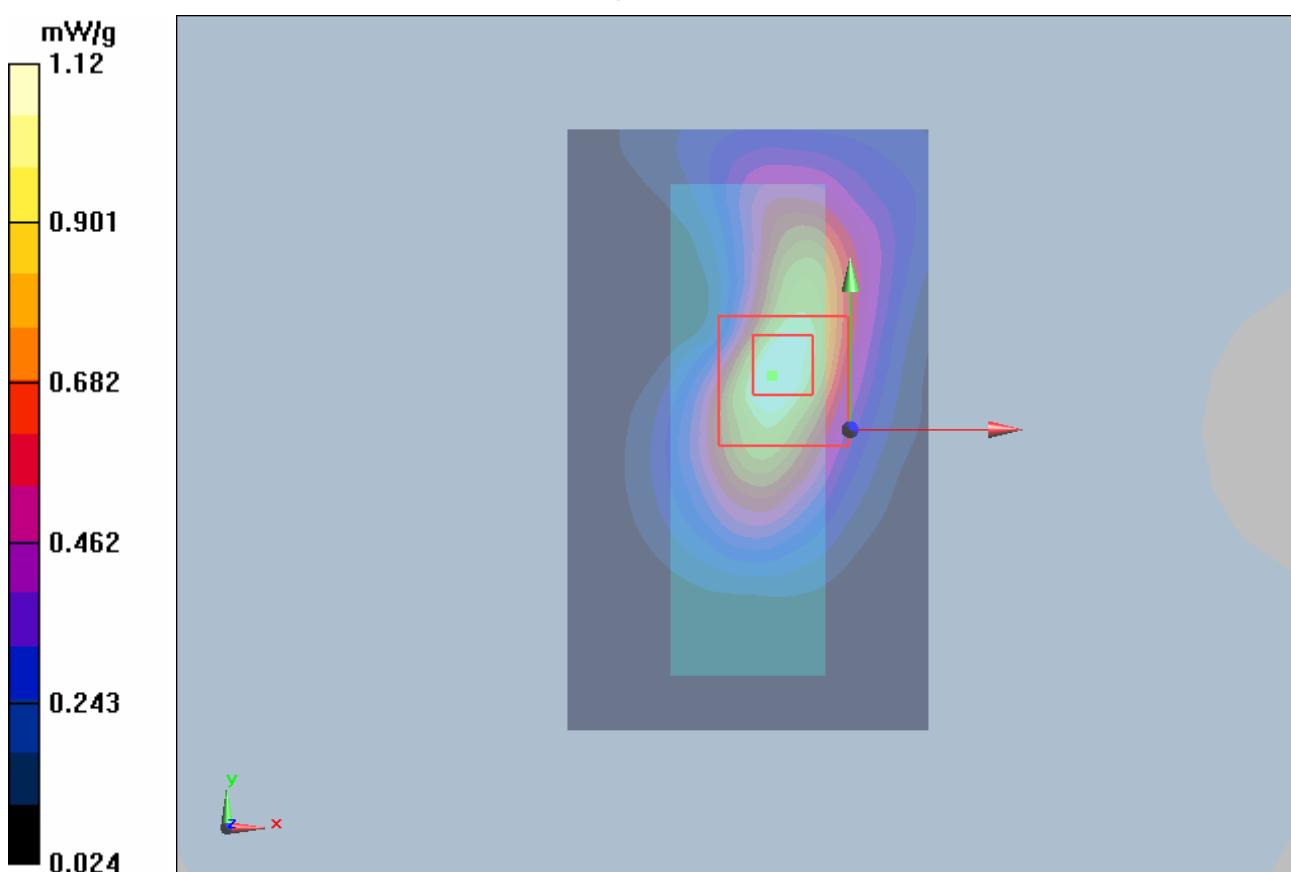

**Figure 35 GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 1 Channel 512**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 65 of 115

**GSM 1900 GPRS (1 timeslot in uplink) with IBM T61 Test Position 1 Middle Frequency**

Date/Time: 5/3/2010 10:46:33 PM

Communication System: PCS 1900+GPRS(1Up); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.833 mW/g


**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.7 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 1.38 W/kg

**SAR(1 g) = 0.723 mW/g; SAR(10 g) = 0.382 mW/g**

Maximum value of SAR (measured) = 0.803 mW/g

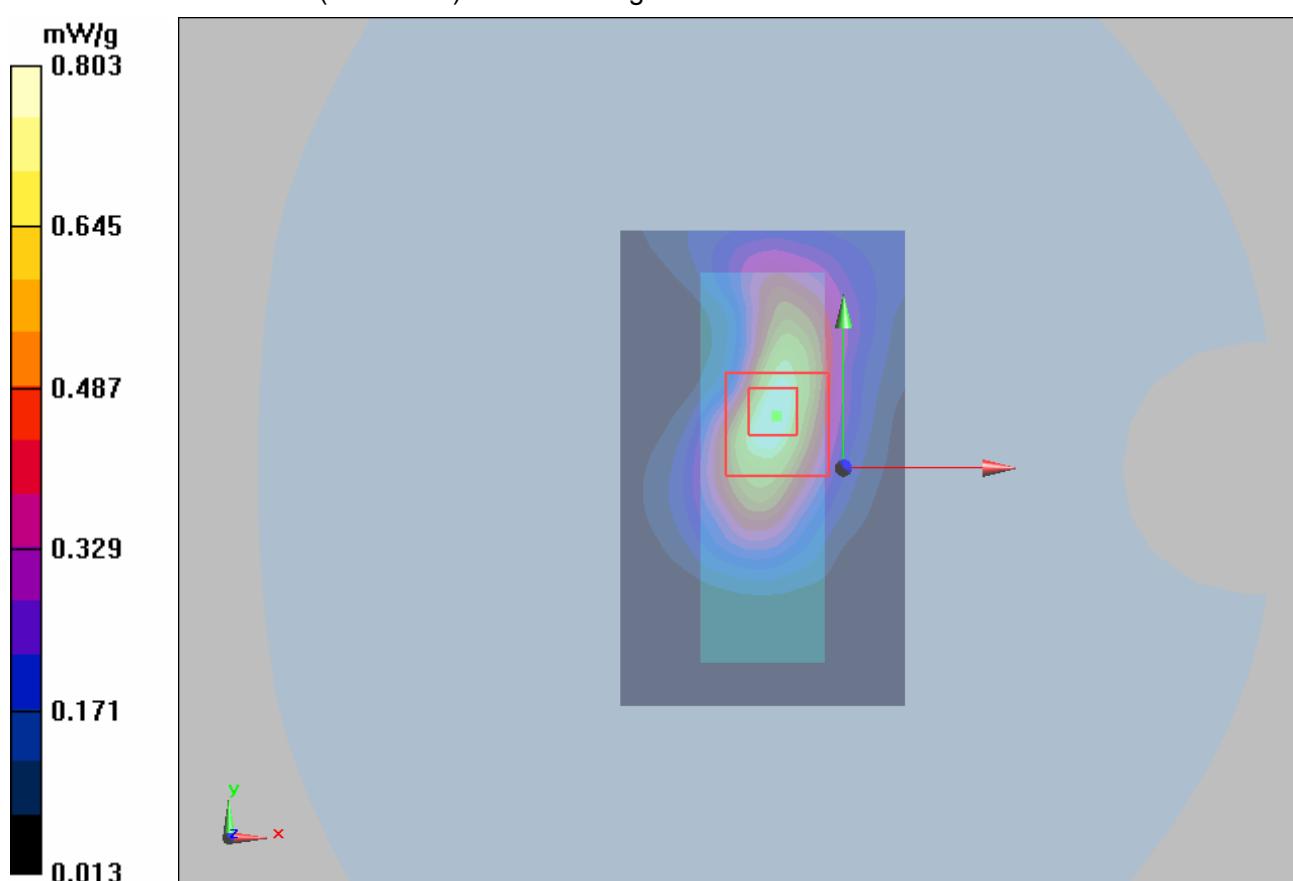

**Figure 36 GSM 1900 GPRS (1 timeslot in uplink) with IBM T61 Test Position 1 Channel 661**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 66 of 115

**GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Middle Frequency**

Date/Time: 5/3/2010 4:17:37 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 2 Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.878 mW/g


**Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.8 V/m; Power Drift = -0.088 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.730 mW/g; SAR(10 g) = 0.391 mW/g**

Maximum value of SAR (measured) = 0.813 mW/g

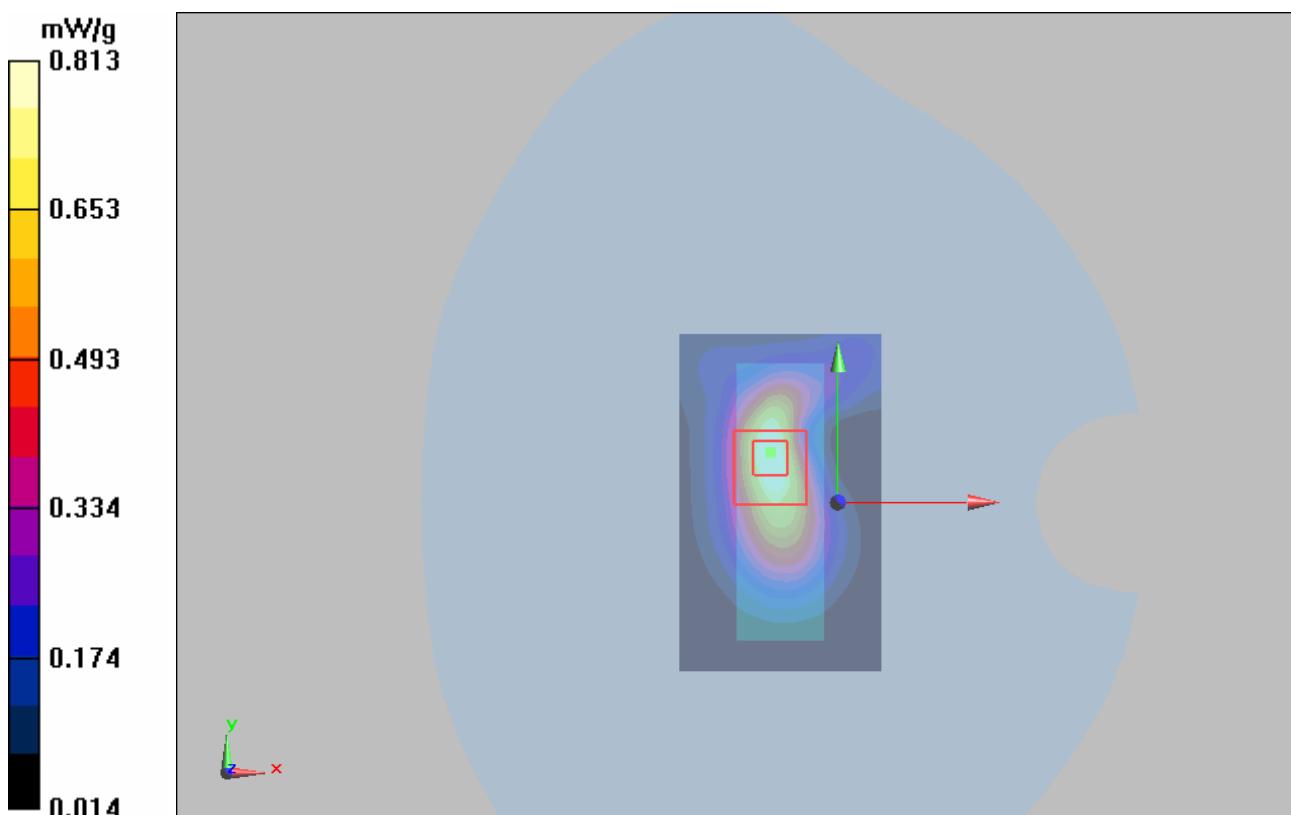

**Figure 37 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 661**

## GSM 1900 GPRS (2 timeslots in uplink) with Lenovo Y450 Test Position 3 Middle Frequency

Date/Time: 5/3/2010 3:41:38 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 3 Middle/Area Scan (51x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.854 mW/g

**Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.6 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 1.38 W/kg

**SAR(1 g) = 0.762 mW/g; SAR(10 g) = 0.423 mW/g**

Maximum value of SAR (measured) = 0.837 mW/g

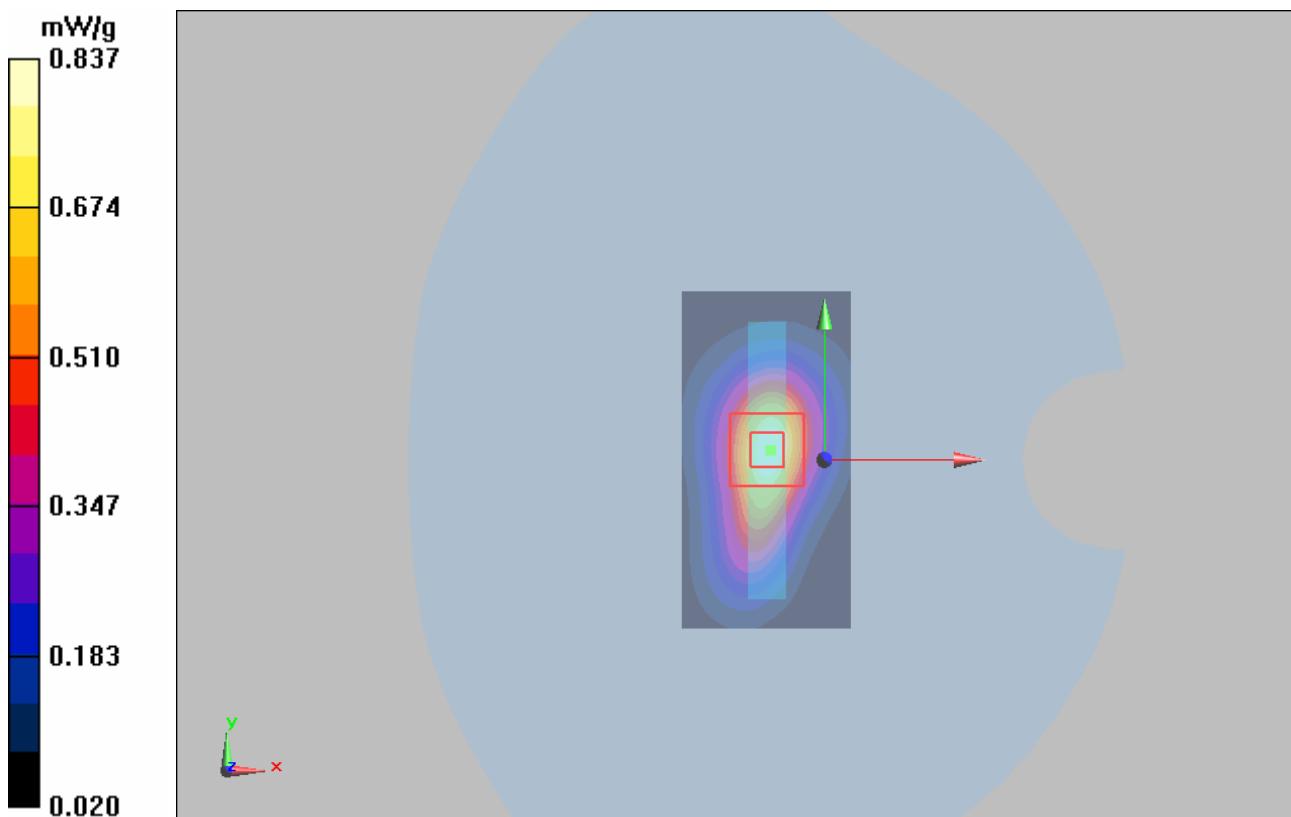


Figure 38 GSM 1900 GPRS (2 timeslots in uplink) with Lenovo Y450 Test Position 3 Channel 661

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 68 of 115

**GSM 1900 GPRS (2 timeslots in uplink) with Lenovo Y450 Test Position 4 Middle Frequency**

Date/Time: 5/3/2010 3:05:37 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 4 Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.112 mW/g


**Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.18 V/m; Power Drift = -0.141 dB

Peak SAR (extrapolated) = 0.193 W/kg

**SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.057 mW/g**

Maximum value of SAR (measured) = 0.104 mW/g

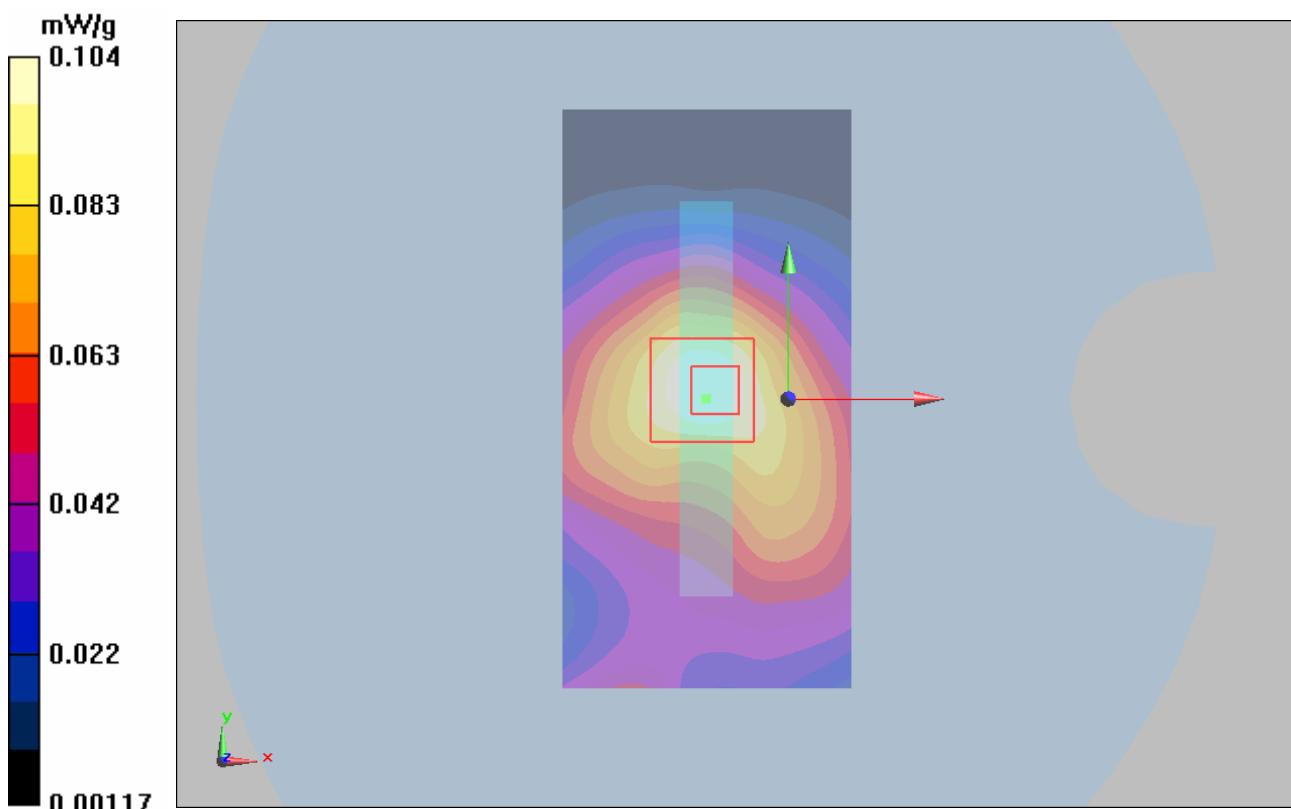

**Figure 39 GSM 1900 GPRS (2 timeslots in uplink) with Lenovo Y450 Test Position 4 Channel 661**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 69 of 115

**GSM 1900 EGPRS (QPSK) (2 timeslots in uplink) with IBM T61 Test Position 1 Low Frequency**

Date/Time: 5/3/2010 10:12:49 AM

Communication System: PCS 1900+EGPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 52.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.21 mW/g


**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26 V/m; Power Drift = -0.191 dB

Peak SAR (extrapolated) = 1.94 W/kg

**SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.539 mW/g**


Maximum value of SAR (measured) = 1.14 mW/g

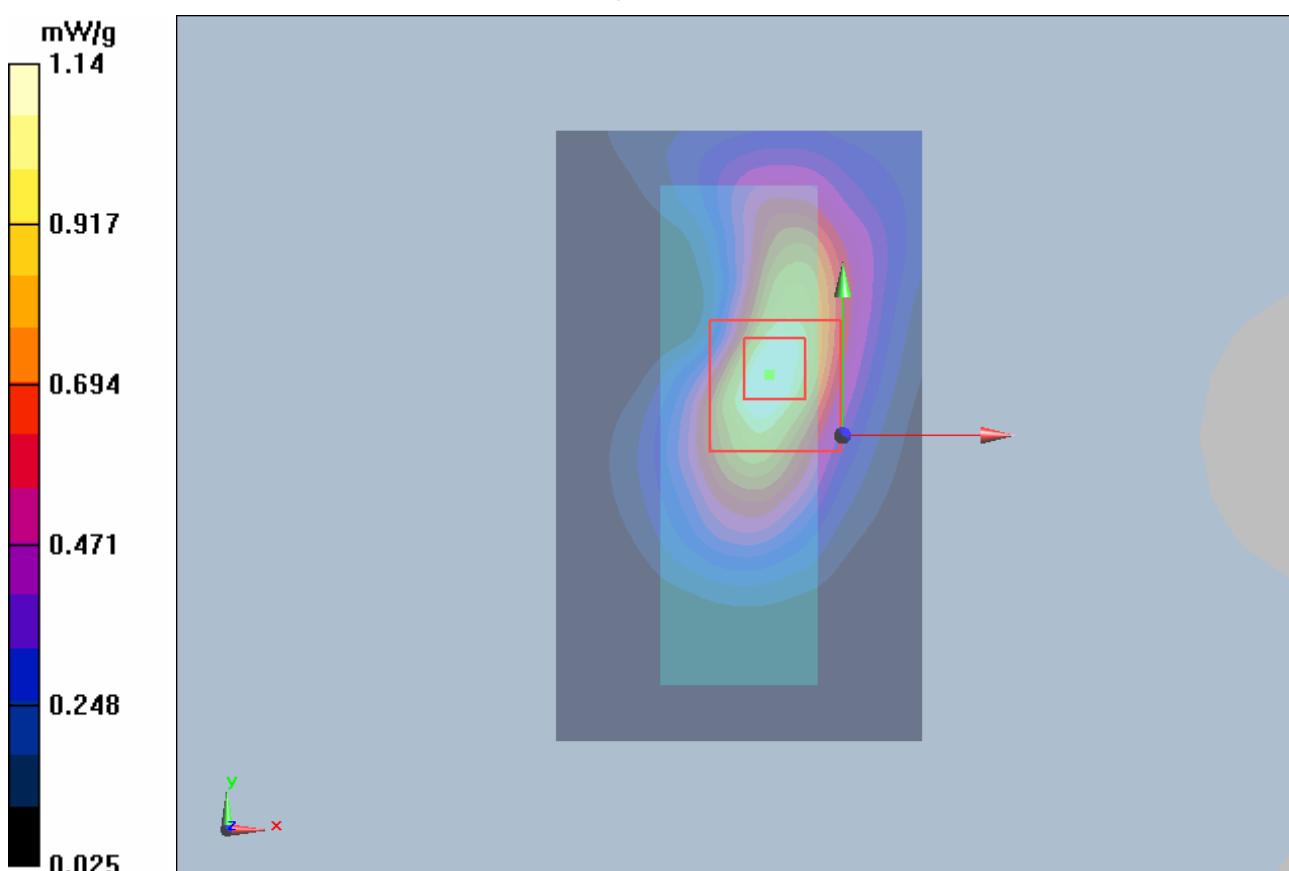

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 70 of 115

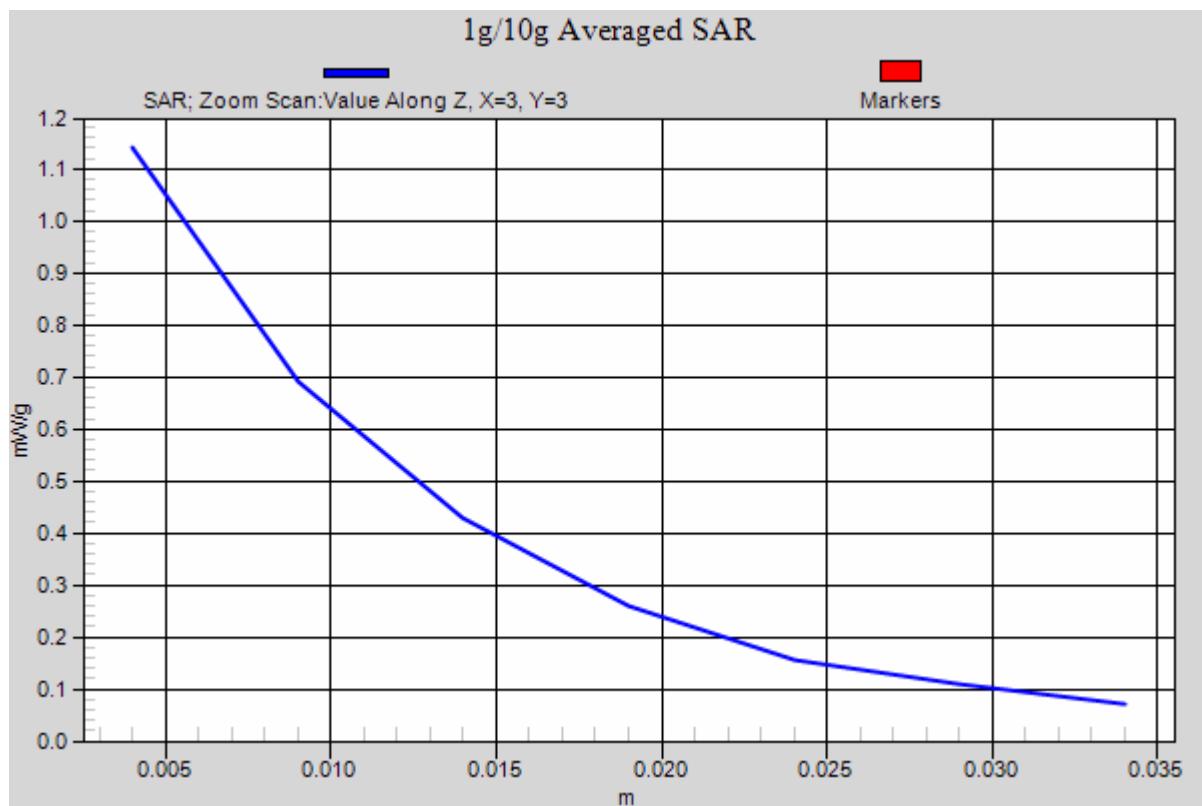

**Figure 40 GSM 1900 EGPRS (QPSK) (2 timeslots in uplink) with IBM T61 Test Position 1 Channel 512**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 71 of 115

**GSM 1900 EGPRS (8PSK) (2 timeslots in uplink) with IBM T61 Test Position 1 Low Frequency**

Date/Time: 7/6/2010 4:25:20 PM

Communication System: PCS 1900+EGPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.51$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Test Position 1 Low/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.459 mW/g


**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.669 W/kg

**SAR(1 g) = 0.382 mW/g; SAR(10 g) = 0.209 mW/g**

Maximum value of SAR (measured) = 0.426 mW/g

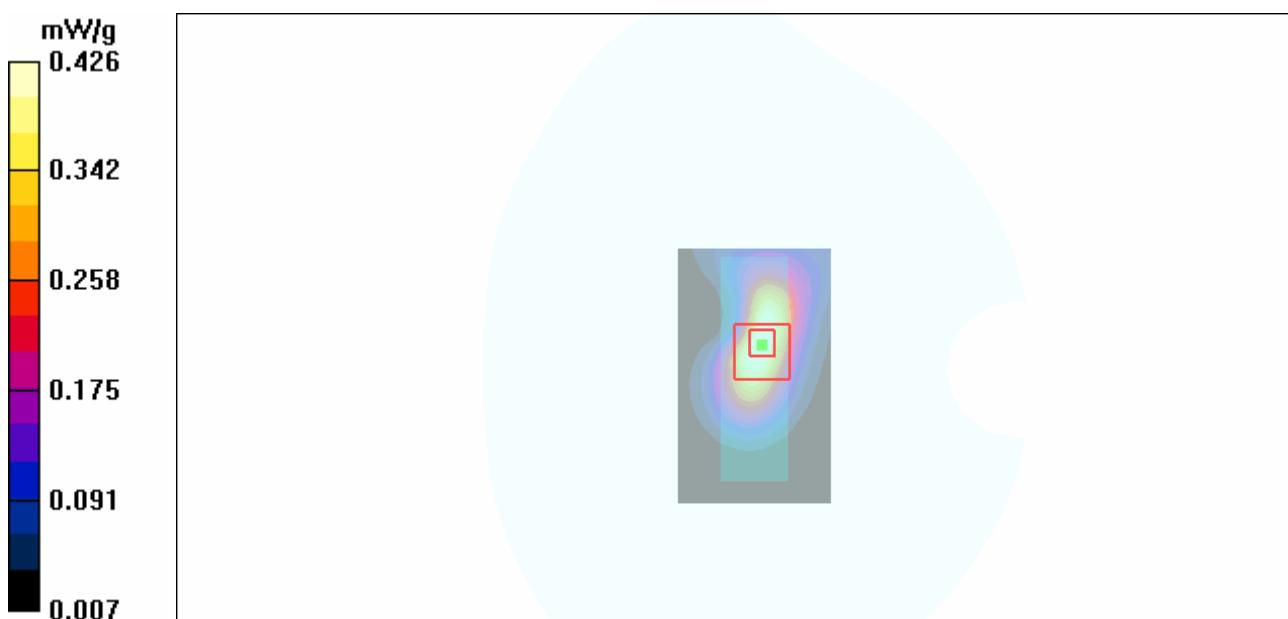

**Figure 41 GSM 1900 EGPRS (8PSK) (2 timeslots in uplink) with IBM T61 Test Position 1 Channel**

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 72 of 115

**ANNEX D: Probe Calibration Certificate**

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
**Zeughausstrasse 43, 8004 Zurich, Switzerland**



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalementage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA (Auden)**

Certificate No: **EX3-3677\_Sep09**

**CALIBRATION CERTIFICATE**

Object	EX3DV4 - SN:3677		
Calibration procedure(s)	QA CAL-01.v6, QA CAL-12.v5, QA CAL-23.v3 and QA CAL-25.v2 Calibration procedure for dosimetric E-field probes		
Calibration date:	September 23, 2009		
Condition of the calibrated item	In Tolerance		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature <math>(22 \pm 3)^\circ\text{C}</math> and humidity <math>&lt; 70\%</math>.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p>			
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10
Reference Probe ES3DV2	SN: 3013	2-Jan-09 (No. ES3-3013_Jan09)	Jan-10
DAE4	SN: 660	9-Sep-08 (No. DAE4-660_Sep08)	Sep-09
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09
Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Katja Pokovic	Technical Manager	
Issued: September 23, 2009			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0591FCC

Page 73 of 115

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

### Glossary:

TSL	tissue simulating liquid
NORM $x,y,z$	sensitivity in free space
ConvF	sensitivity in TSL / NORM $x,y,z$
DCP	diode compression point
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- $NORMx,y,z$ : Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).  $NORMx,y,z$  are only intermediate values, i.e., the uncertainties of  $NORMx,y,z$  does not effect the  $E^2$ -field uncertainty inside TSL (see below *ConvF*).
- $NORM(f)x,y,z = NORMx,y,z * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- $DCPx,y,z$ : DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORMx,y,z * ConvF$  whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 74 of 115

**EX3DV4 SN:3677**

**September 23, 2009**

# **Probe EX3DV4**

## **SN:3677**

Manufactured:	September 9, 2008
Last calibrated:	November 7, 2008
Recalibrated:	September 23, 2009

**Calibrated for DASY Systems**

(Note: non-compatible with DASY2 system!)

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0591FCC

Page 75 of 115

EX3DV4 SN:3677

September 23, 2009

### DASY - Parameters of Probe: EX3DV4 SN:3677

#### Sensitivity in Free Space<sup>A</sup>

NormX	<b>0.42</b> $\pm$ 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	<b>0.47</b> $\pm$ 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	<b>0.40</b> $\pm$ 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$

#### Diode Compression<sup>B</sup>

DCP X	<b>91</b> mV
DCP Y	<b>92</b> mV
DCP Z	<b>93</b> mV

#### Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

#### Boundary Effect

##### TSL                    900 MHz                    Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance	<b>2.0 mm</b>	<b>3.0 mm</b>
SAR <sub>be</sub> [%]      Without Correction Algorithm	8.2	4.4
SAR <sub>be</sub> [%]      With Correction Algorithm	0.8	0.5

##### TSL                    1750 MHz                    Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance	<b>2.0 mm</b>	<b>3.0 mm</b>
SAR <sub>be</sub> [%]      Without Correction Algorithm	7.5	3.9
SAR <sub>be</sub> [%]      With Correction Algorithm	0.8	0.4

#### Sensor Offset

##### Probe Tip to Sensor Center                    1.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC


Page 76 of 115

EX3DV4 SN:3677

September 23, 2009

**Frequency Response of E-Field**

(TEM-Cell:ifi110 EXX, Waveguide: R22)

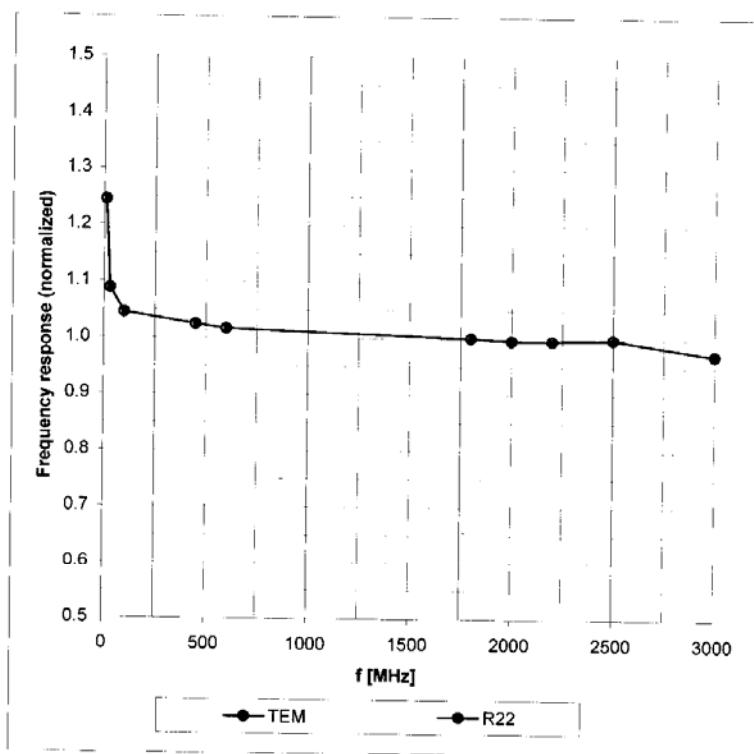

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**



Report No. RZA2010-0591FCC

Page 77 of 115

**EX3DV4 SN:3677**

**September 23, 2009**

**Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$**

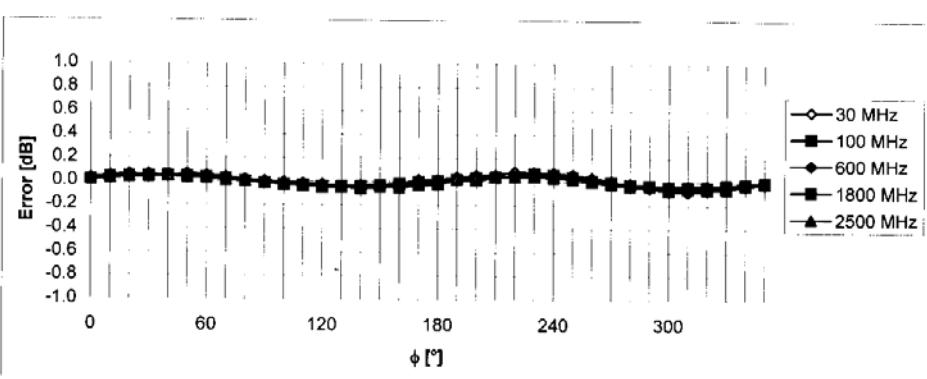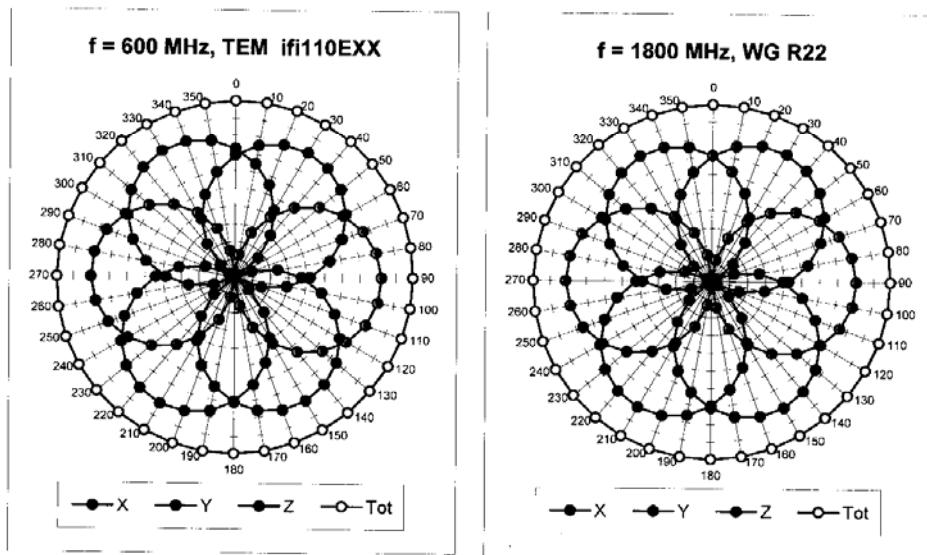

**Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )**

TA Technology (Shanghai) Co., Ltd.  
Test Report


Report No. RZA2010-0591FCC

Page 78 of 115

EX3DV4 SN:3677

September 23, 2009

**Dynamic Range f(SAR<sub>head</sub>)**  
(Waveguide R22, f = 1800 MHz)

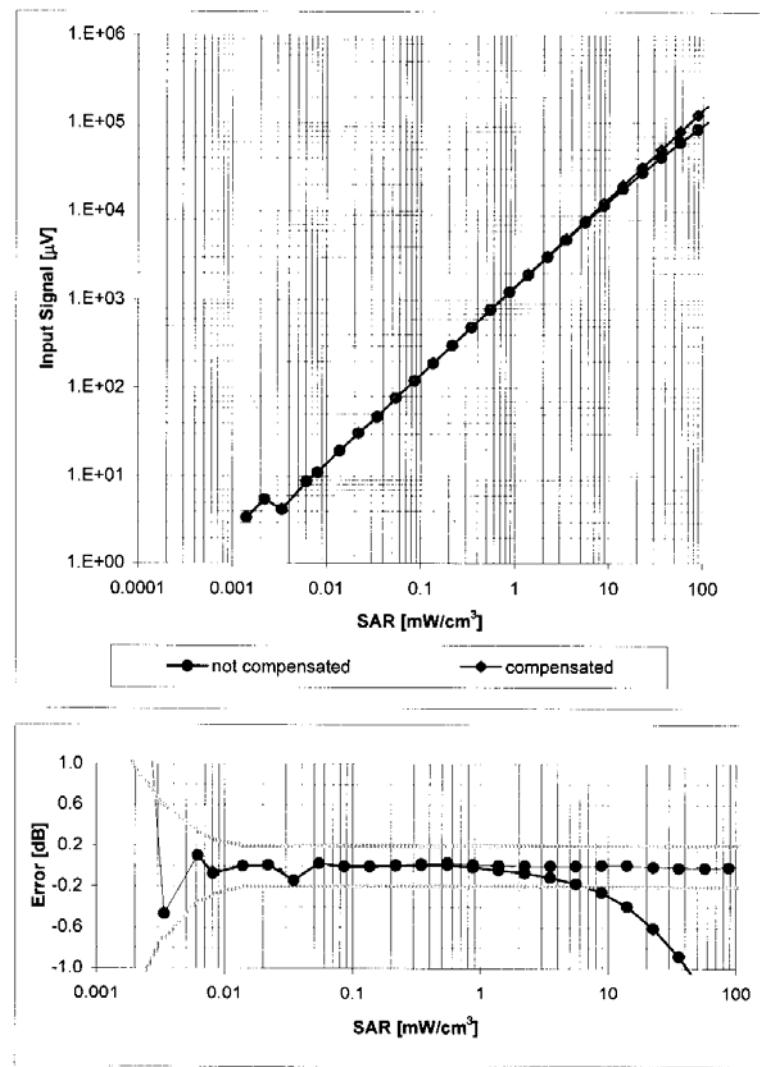


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

EX3DV4 SN:3677

September 23, 2009

**Conversion Factor Assessment**

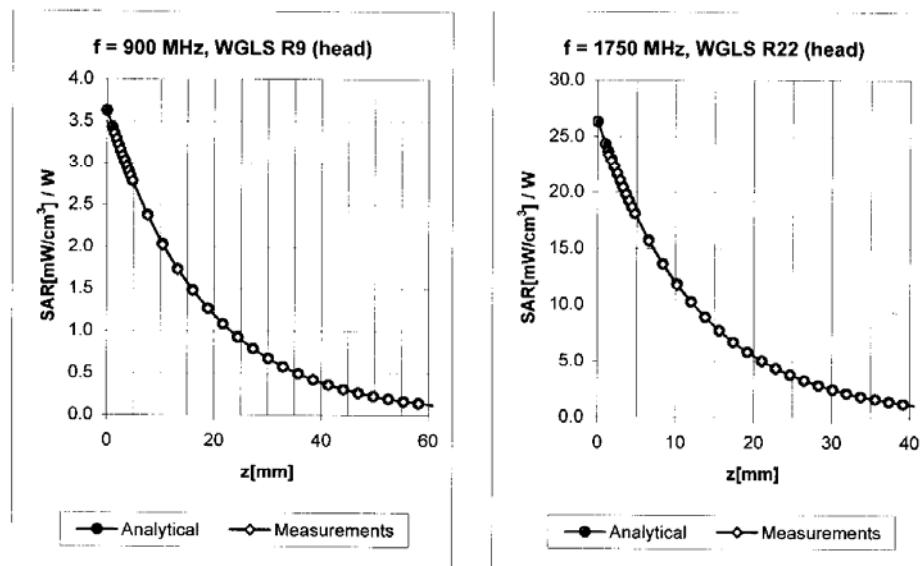

f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.68	0.64	9.20	± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.71	0.62	8.91	± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.68	0.62	8.04	± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.70	0.60	7.53	± 11.0% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.32	0.49	10.43	± 13.3% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.54	0.73	9.11	± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.63	0.71	8.89	± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.55	0.74	7.70	± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.30	1.01	7.62	± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.56	0.68	7.28	± 11.0% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**


Report No. RZA2010-0591FCC

Page 80 of 115

**EX3DV4 SN:3677**

**September 23, 2009**

**Deviation from Isotropy in HSL**  
**Error ( $\phi, \theta$ ), f = 900 MHz**

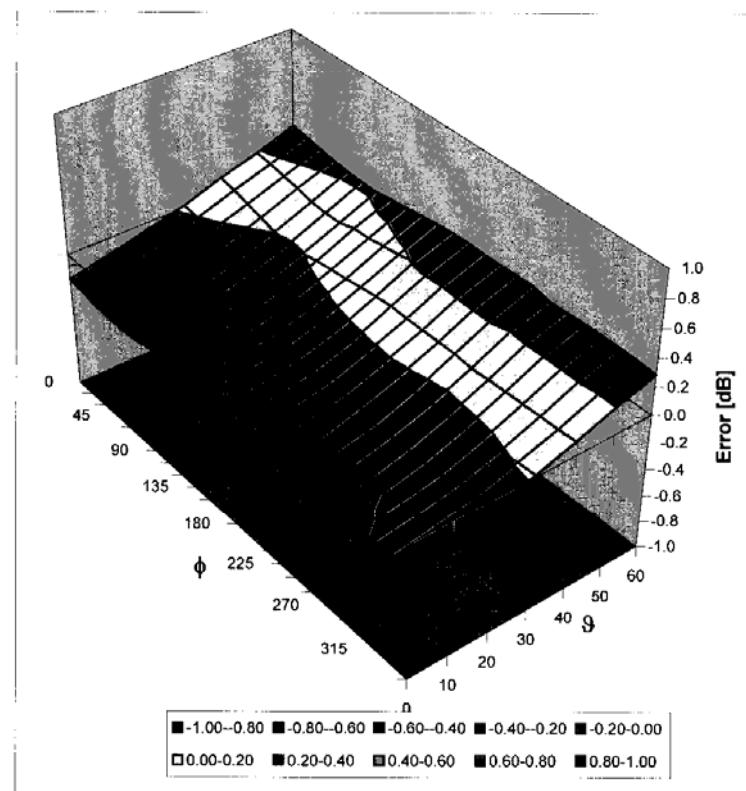

**Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  (k=2)**

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0591FCC

Page 81 of 115

### ANNEX E: D835V2 Dipole Calibration Certificate

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client

ATL (Auden)

Certificate No: D835V2-4d082\_Jul09

#### CALIBRATION CERTIFICATE

Object D835V2 - SN: 4d082

Calibration procedure(s) QA CAL-05.v7  
Calibration procedure for dipole validation kits

Calibration date: July 13, 2009

Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV2	SN: 3025	30-Apr-09 (No. ES3-3025_Apr09)	Apr-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by:	Name	Function	Signature
	Jeton Kastrati	Laboratory Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Issued: July 13, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0591FCC

Page 82 of 115

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- d) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

### Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.4 $\pm$ 6 %	0.89 mho/m $\pm$ 6 %
Head TSL temperature during test	(22.2 $\pm$ 0.2) °C	---	---

### SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.42 mW / g
SAR normalized	normalized to 1W	9.68 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	9.71 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.58 mW / g
SAR normalized	normalized to 1W	6.32 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	6.34 mW / g $\pm$ 16.5 % (k=2)

<sup>1</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0591FCC

Page 84 of 115

### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.0 ± 6 %	0.99 mho/m ± 6 %
Body TSL temperature during test	(22.5 ± 0.2) °C	—	—

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.56 mW / g
SAR normalized	normalized to 1W	10.2 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	10.0 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.68 mW / g
SAR normalized	normalized to 1W	6.72 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	6.61 mW / g ± 16.5 % (k=2)

<sup>2</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### Appendix

#### Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.3 $\Omega$ - 2.5 $j\Omega$
Return Loss	- 29.5 dB

#### Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.3 $\Omega$ - 4.3 $j\Omega$
Return Loss	- 26.6 dB

#### General Antenna Parameters and Design

Electrical Delay (one direction)	1.390 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

#### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 17, 2008

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0591FCC

Page 86 of 115

### DASY5 Validation Report for Head TSL

Date/Time: 13.07.2009 11:31:45

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082**

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

#### DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(5.86, 5.86, 5.86); Calibrated: 30.04.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45


**Pin=250mW; dip=15mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.4 V/m; Power Drift = 0.00639 dB

Peak SAR (extrapolated) = 3.62 W/kg

**SAR(1 g) = 2.42 mW/g; SAR(10 g) = 1.58 mW/g**

Maximum value of SAR (measured) = 2.8 mW/g

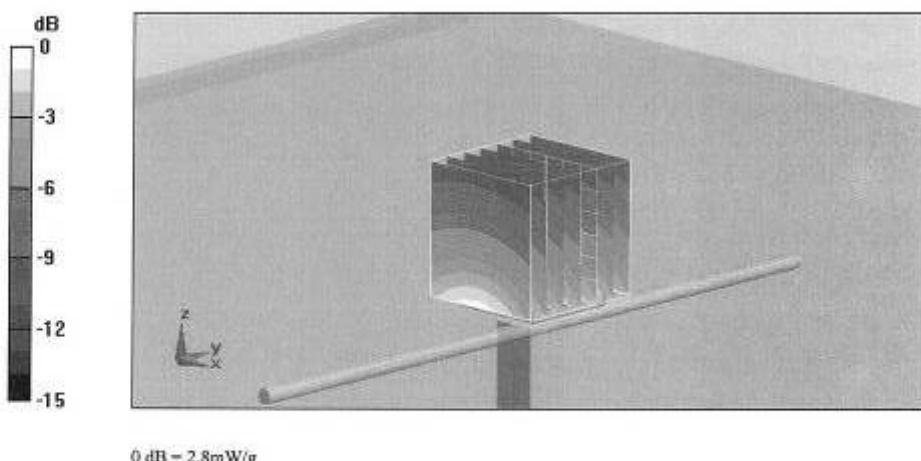


**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 87 of 115

**Impedance Measurement Plot for Head TSL**

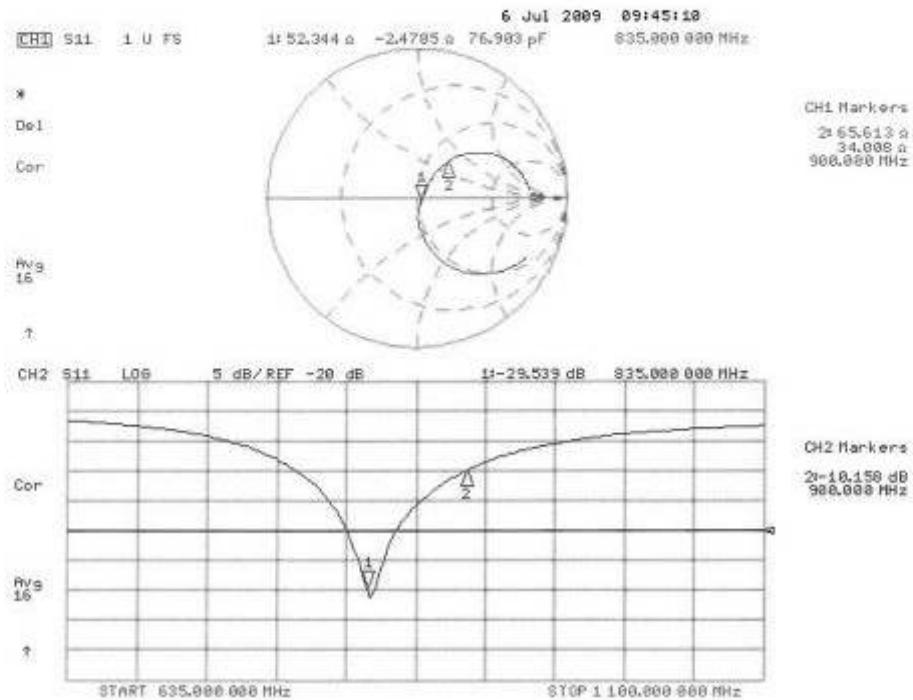

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0591FCC

Page 88 of 115

### DASY5 Validation Report for Body TSL

Date/Time: 13.07.2009 11:50:13

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium: MSL900

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(5.79, 5.79, 5.79); Calibrated: 30.04.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45


**Pin = 250mW, d = 15mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.4 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 3.76 W/kg

SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.68 mW/g

Maximum value of SAR (measured) = 2.97 mW/g

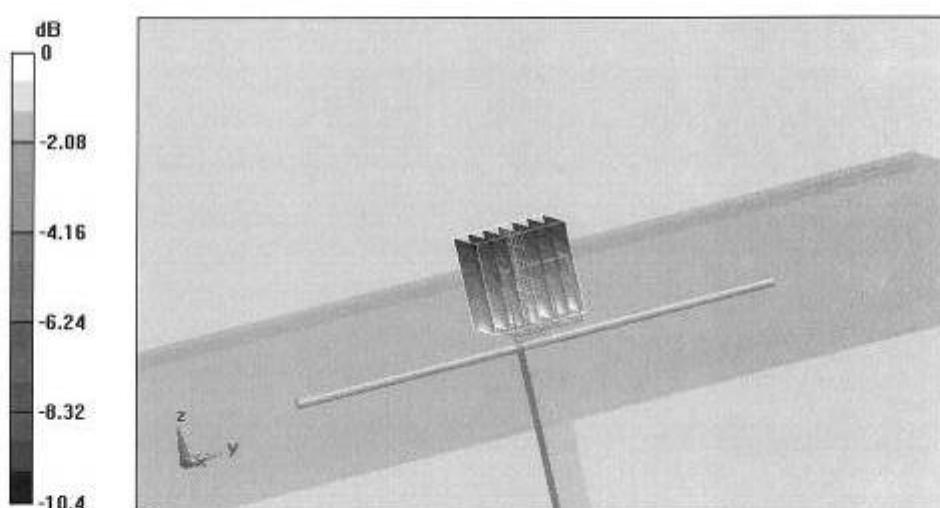


0 dB = 2.97mW/g

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No. RZA2010-0591FCC

Page 89 of 115

**Impedance Measurement Plot for Body TSL**

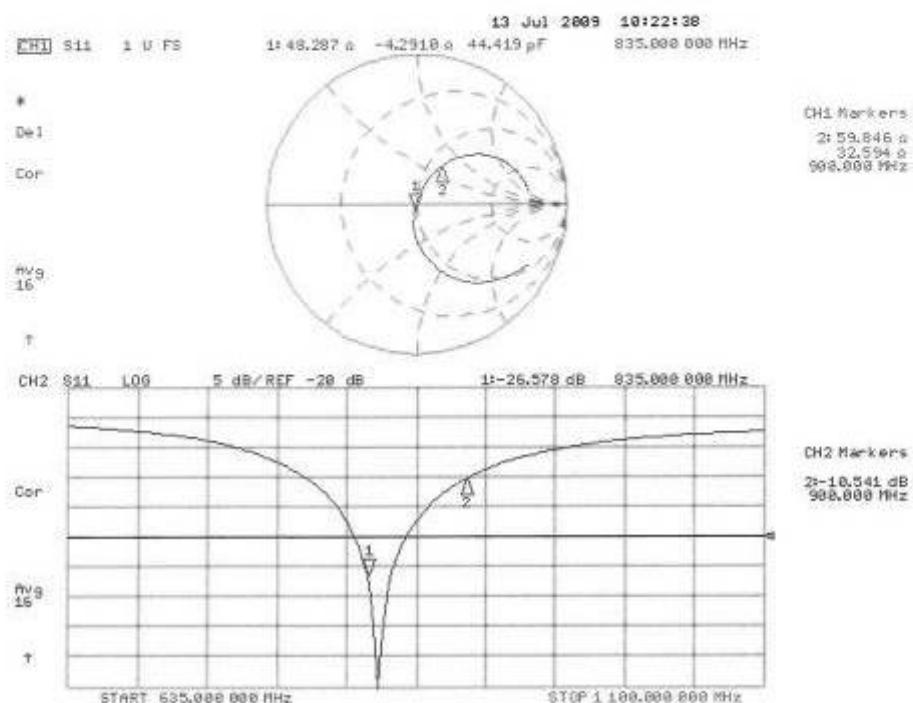

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No. RZA2010-0591FCC

Page 90 of 115

## ANNEX F: D1900V2 Dipole Calibration Certificate (5d111)

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client ATL (Auden)

Certificate No: D1900V2-5d111\_Jul09

### CALIBRATION CERTIFICATE

Object D1900V2 - SN: 5d111

Calibration procedure(s) QA CAL-05.v7  
Calibration procedure for dipole validation kits

Calibration date: July 14, 2009

Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-09 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5086 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV2	SN: 3025	30-Apr-09 (No. ES3-3025_Apr09)	Apr-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by:	Name	Function	Signature
	Mike Meili	Laboratory Technician	

Approved by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Issued: July 14, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.