



Appendix A. System Check Plots

Table of contents
SystemPerformanceCheck-D835-ES-Body
SystemPerformanceCheck-D1900-EX-Body

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D835-EX-Body

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d092

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 54.785$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.11, 6.11, 6.11); Calibrated: 9/27/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1474
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 2.491 mW/g


Configuration/d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 54.518 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.9800

SAR(1 g) = 2.63 mW/g; SAR(10 g) = 1.72 mW/g

Maximum value of SAR (measured) = 2.846 mW/g

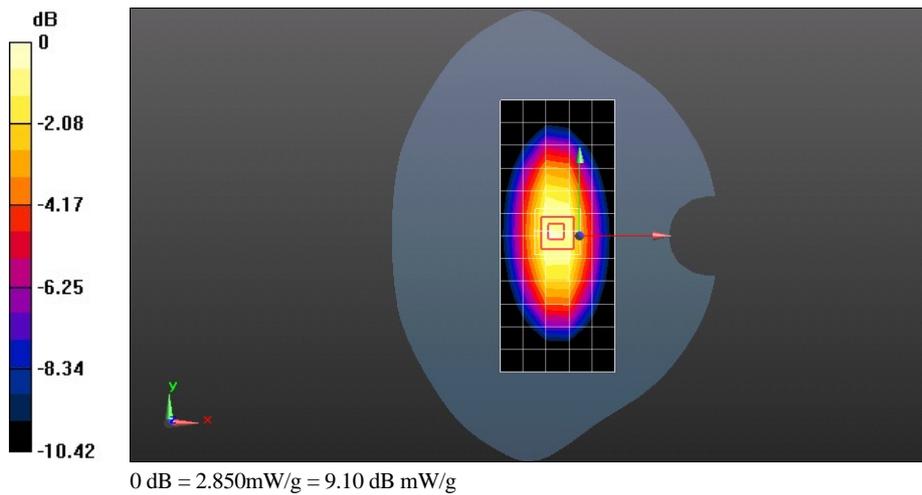

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D1900-EX-Body

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d143

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.592$ mho/m; $\epsilon_r = 51.006$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 8.713 mW/g

Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 75.572 V/m; Power Drift = 0.150 dB

Peak SAR (extrapolated) = 20.4470

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 5.45 mW/g

Maximum value of SAR (measured) = 12.189 mW/g

