

FCC Test Report

FCC ID: QISE5573FS-508

Project No. : 1804C039
Equipment : Mobile WiFi
Test Model : E5573Fs-508
Series Model : N/A
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian,
Longgang District ,Shenzhen 518129, P.R.China

Date of Receipt : Apr. 09, 2018
Date of Test : Apr. 09, 2018 ~ Apr. 28, 2018
Issued Date : May 04, 2018
Tested by : BTL Inc.

Testing Engineer : Sam Wang
(Sam Wang)
Technical Manager : Bill Zhang
(Bill Zhang)
Authorized Signatory : Kevin Li
(Kevin Li)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . CERIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 EUT OPERATING CONDITIONS	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	47
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	47
4.2.2 MEASUREMENT INSTRUMENTS LIST	48
4.2.3 TEST PROCEDURE	49
4.2.4 DEVIATION FROM TEST STANDARD	49
4.2.5 TEST SETUP	50
4.2.6 TEST RESULTS-BELOW 1GHZ	50
4.2.7 TEST RESULTS-ABOVE 1GHZ	83

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1804C039	Original Issue.	May 04, 2018

1. CERIFICATION

Equipment : Mobile WiFi
Brand Name : HUAWEI
Test Model : E5573Fs-508
Series Model : N/A
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Date of Test : Apr. 09, 2018 ~ Apr. 28, 2018
Test Sample : Engineering Sample No. D180403101, D180403102
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1804C039) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE(2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 500 MHz which does exceed 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile WiFi
Brand Name	HUAWEI
Frequency	WCDMA B2/4/5 LTE B2/4/5/7
Test Model	E5573Fs-508
Series Model	N/A
Model Difference	N/A
Power Source	#1 DC Voltage supplied from AC/DC adapter. #2 Battery Supplied.
Power Rating	#1:AC 100–240V 50/60Hz DC 5V 1A #2:DC 3.82V 2200mAh
HW Version	CL1E5577ESM02
SW Version	8.0.1.1 (H331SP11C00)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2.

Item	Mfr/Brand	Model.
Battery	SCUD (FUJIAN) Electronics Co., Ltd	HB434666RBC
	Sunwoda Electronic Co.,LTD.	
USB Cable	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUBB01M-HC208-DH
	HONGLIN TECHNOLOGY CO.,LTD	02451044 130-26654
	Luxshare Precision Industry Co., Ltd.	L99U2013-CS-H
	MING JI ELECTRONICS CO., LTD.	203-0786-0
Adapter	HUIZHOU BYD ELECTRONIC CO., LTD.	HW-050100E01 HW-050100B01 HW-050100U01 HW-050100A01
	Shenzhen Huntkey Electric Co., Ltd.	
	DONG GUAN PHITEK ELECTRONICS CO., LTD.	

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Adapter+Idle+Wifi
Mode 2	Adapter+Traffic(WCDMA)+Wifi
Mode 3	Adapter+Traffic(LTE)+Wifi
Mode 4	Connet To PC+ Wifi

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+Idle+Wifi
Mode 2	Adapter+Traffic(WCDMA)+Wifi
Mode 3	Adapter+Traffic(LTE)+Wifi
Mode 4	Connet To PC+ Wifi

For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+Idle+Wifi
Mode 2	Adapter+Traffic(WCDMA)+Wifi
Mode 3	Adapter+Traffic(LTE)+Wifi
Mode 4	Connet To PC+ Wifi

3.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use. The standard test signals and output signal as following:

Mode 1~ 3

1. EUT Connected to adapter via DC cable.
2. EUT Connected to Notebook via WIFI function.
3. EUT Connected to Wireless Communication Test SET & Wideband Radio Communication Tester via WCDMA & LTE function.


Mode 4

1. EUT Connected to PC via USB cable.
2. EUT Connected to Notebook via WIFI function.
3. EUT Connected to Wireless Communication Test SET & Wideband Radio Communication Tester via WCDMA & LTE function.
4. Send "H" pattern to serial port device (Modem).


As the keyboard and mouse are strictly input devices, no data is transmitted to (from) them during test. They are, however, continuously scanned for data input activity.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Mode 1~3

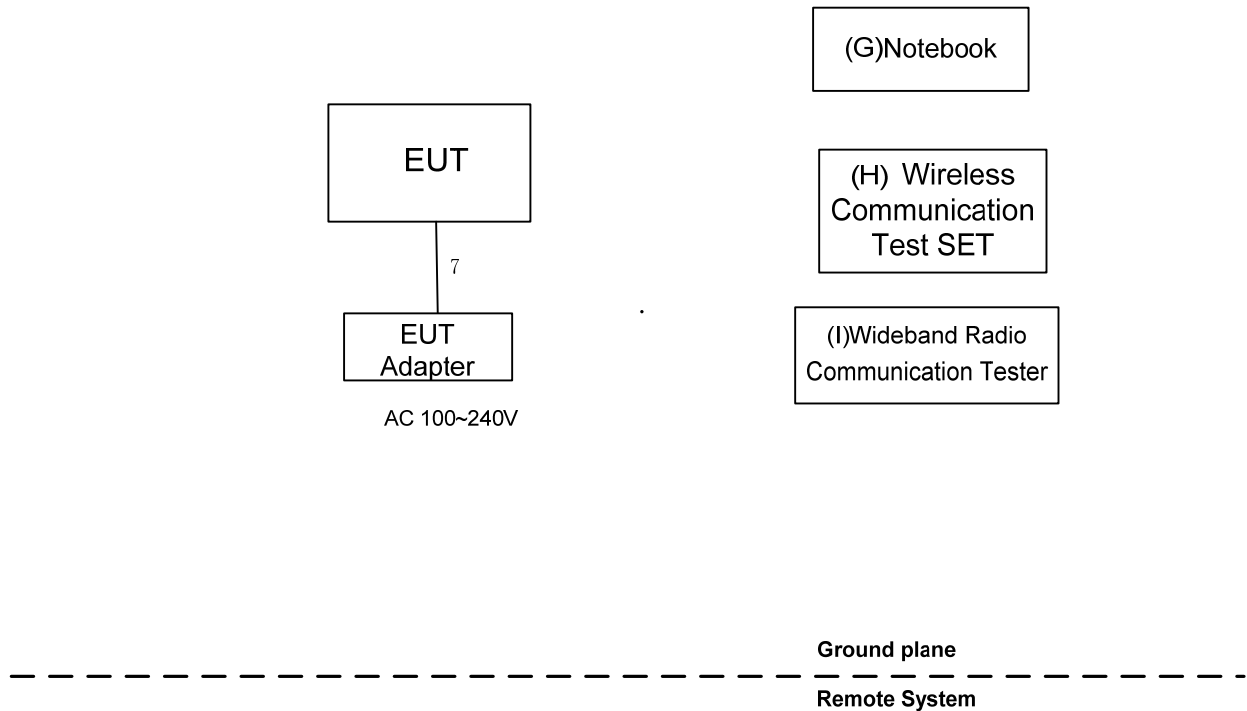

Mode 4

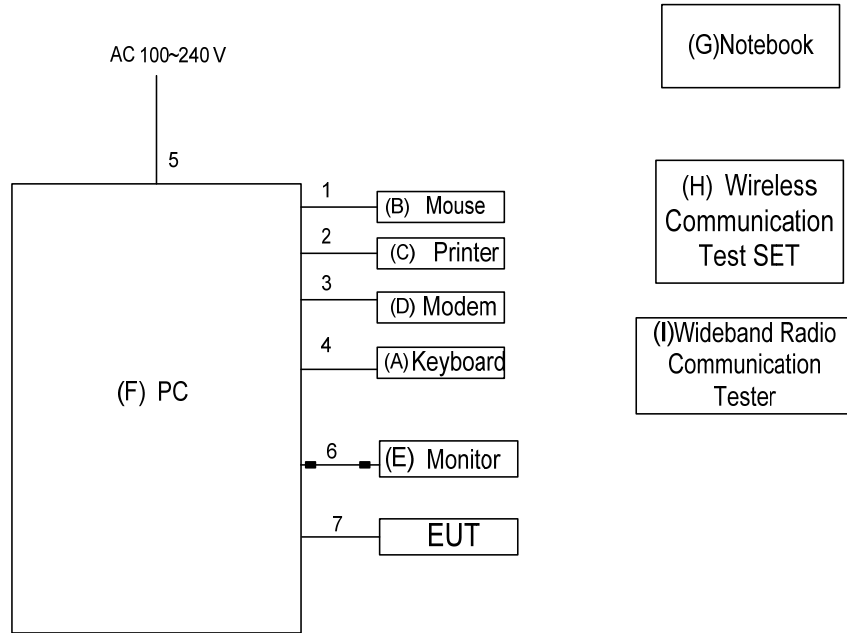

----- Ground plane -----
Remote System

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	Mouse	DELL	MS111-P	DOC	CN011D3V71581279OLOT
B	Keyboard	DELL	KB212-B	DOC	CN0HTXH97158125004DXA01
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	PC	Dell	DCSM	DOC	G7K832X
F	Monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6AG-1WNS
G	Notebook	hp	hstnn-169c-3	DOC	CNU02203XG
H	Wireless Communication Test SET	Agilent	(8960Series) E5515C	N/A	MY48364183
I	Wideband Radio Communication Tester	RS	CMW500	N/A	122125

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.5m	Parallel Cable
3	YES	NO	1.5m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
2	Cable		RG223	12m	Oct. 19, 2018
3	LISN	EMCO	3816/2	00052765	Mar. 11, 2019
4	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 11, 2019
5	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 11, 2019
6	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

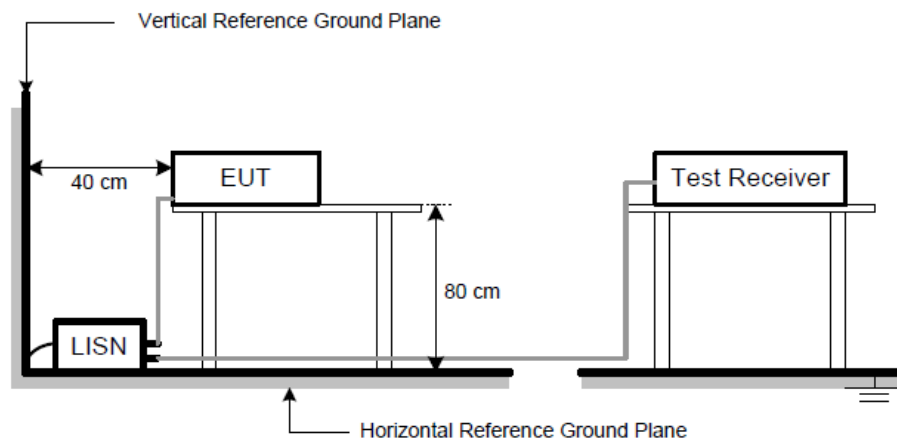


4.1.6 TEST RESULTS

Remark


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.3 sec./MHz ◦ Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform ◦ In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

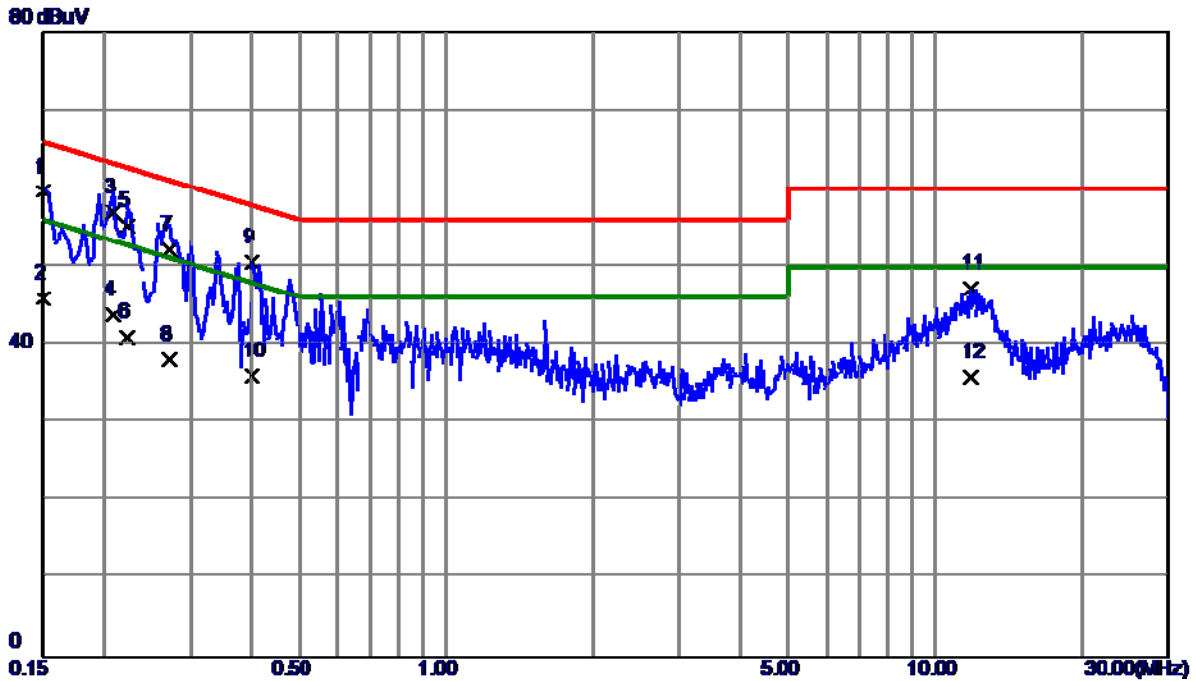


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	49.78	9.82	59.60	66.00	-6.40	QP
2	0.1500	36.10	9.82	45.92	56.00	-10.08	AVG
3 *	0.2085	47.10	9.82	56.92	63.26	-6.34	QP
4	0.2085	34.00	9.82	43.82	53.26	-9.44	AVG
5	0.2220	45.35	9.82	55.17	62.74	-7.57	QP
6	0.2220	31.20	9.82	41.02	52.74	-11.72	AVG
7	0.2714	42.30	9.82	52.12	61.07	-8.95	QP
8	0.2714	28.30	9.82	38.12	51.07	-12.95	AVG
9	0.4020	40.76	9.81	50.57	57.81	-7.24	QP
10	0.4020	26.20	9.81	36.01	47.81	-11.80	AVG
11	11.8005	36.62	10.58	47.20	60.00	-12.80	QP
12	11.8005	25.30	10.58	35.88	50.00	-14.12	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

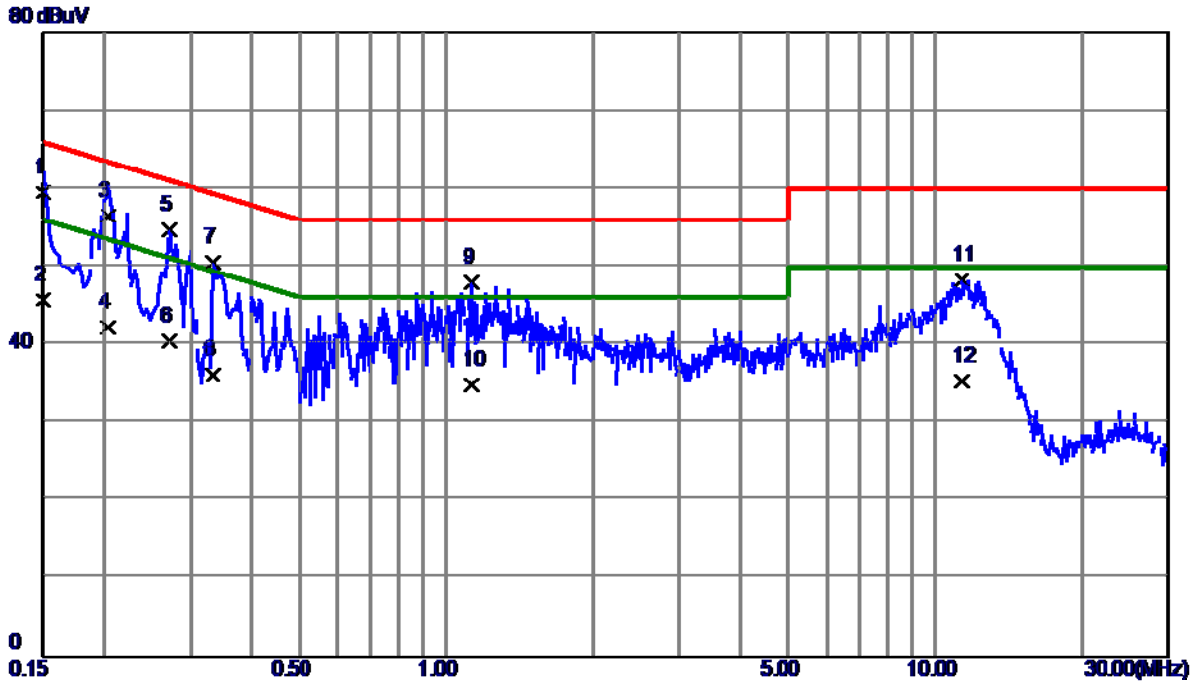


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	49.60	9.91	59.51	66.00	-6.49	QP
2	0.1500	35.80	9.91	45.71	56.00	-10.29	AVG
3	0.2040	46.50	9.91	56.41	63.45	-7.04	QP
4	0.2040	32.30	9.91	42.21	53.45	-11.24	AVG
5 *	0.2714	44.83	9.92	54.75	61.07	-6.32	QP
6	0.2714	30.61	9.92	40.53	51.07	-10.54	AVG
7	0.3345	40.56	9.94	50.50	59.34	-8.84	QP
8	0.3345	26.15	9.94	36.09	49.34	-13.25	AVG
9	1.1310	27.86	10.13	47.99	56.00	-8.01	QP
10	1.1310	24.80	10.13	34.93	46.00	-11.07	AVG
11	11.3325	37.46	10.83	48.29	60.00	-11.71	QP
12	11.3325	24.60	10.83	35.43	50.00	-14.57	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+Wifi		
Note	Adapter:Phitek+Battery:Sunwada+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

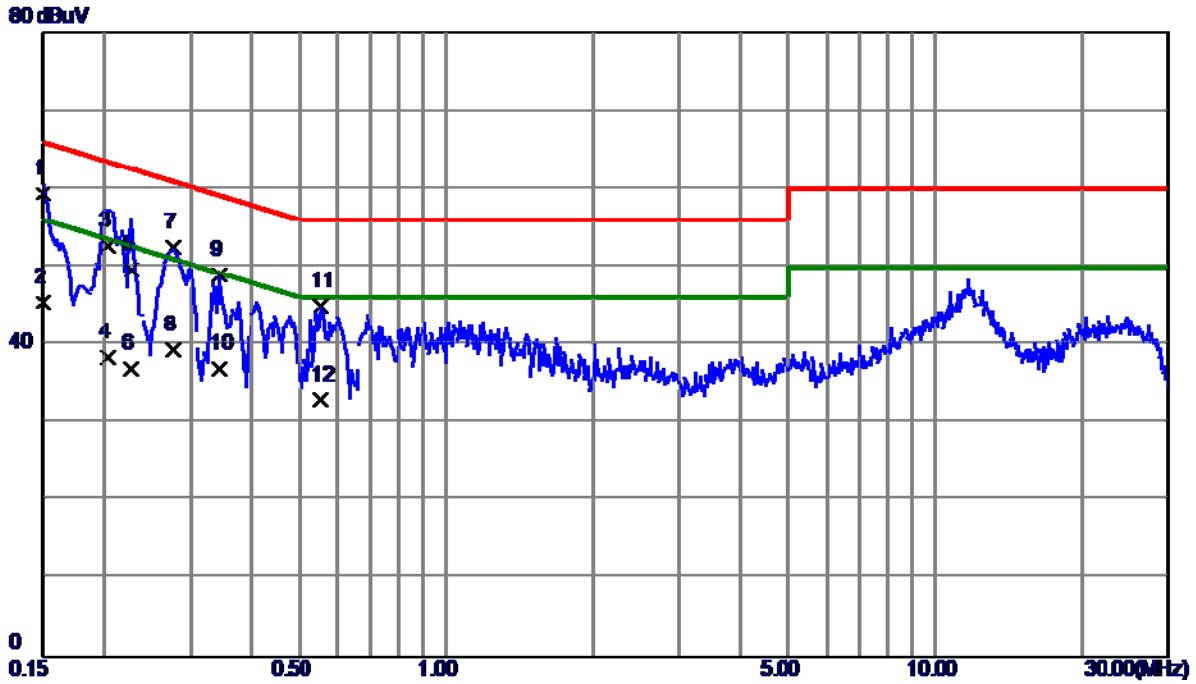


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1500	49.50	9.82	59.32	66.00	-6.68	QP
2	0.1500	35.60	9.82	45.42	56.00	-10.58	AVG
3	0.2040	42.80	9.82	52.62	63.45	-10.83	QP
4	0.2040	28.60	9.82	38.42	53.45	-15.03	AVG
5	0.2265	39.80	9.82	49.62	62.58	-12.96	QP
6	0.2265	27.20	9.82	37.02	52.58	-15.56	AVG
7	0.2760	42.67	9.82	52.49	60.94	-8.45	QP
8	0.2760	29.60	9.82	39.42	50.94	-11.52	AVG
9	0.3435	39.07	9.81	48.88	59.12	-10.24	QP
10	0.3435	27.10	9.81	36.91	49.12	-12.21	AVG
11	0.5550	35.21	9.81	45.02	56.00	-10.98	QP
12	0.5550	23.20	9.81	33.01	46.00	-12.99	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+Wifi		
Note	Adapter:Phitek+Battery:Sunwada+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

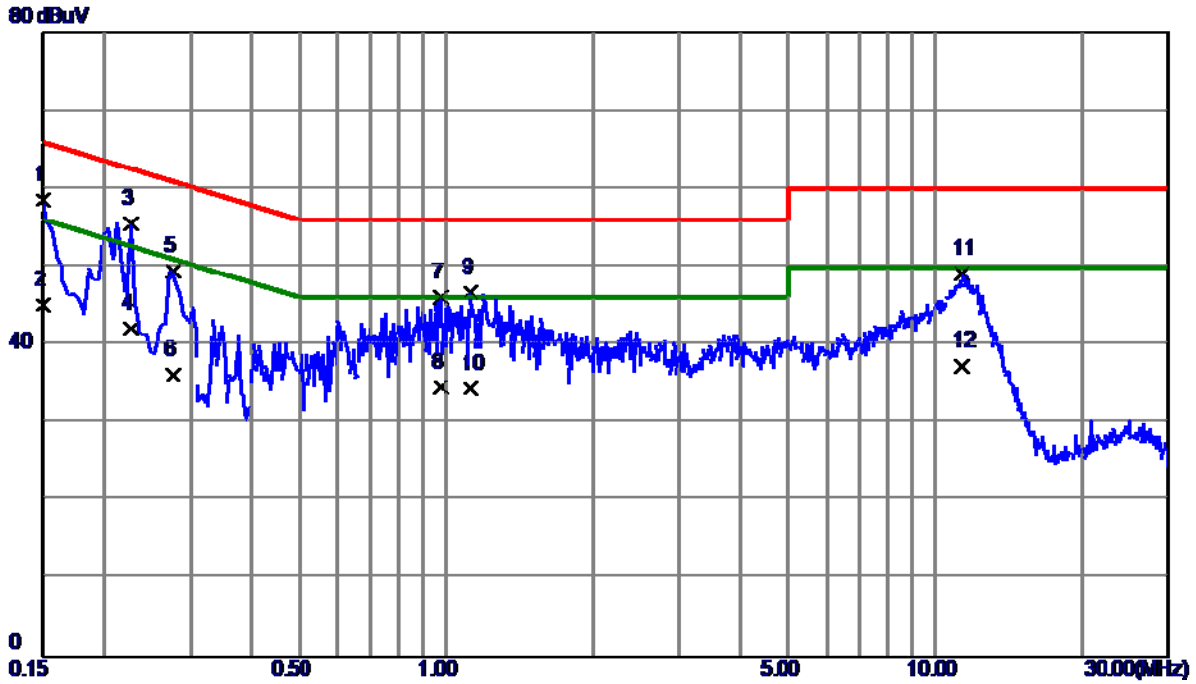


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	48.69	9.91	58.60	66.00	-7.40	QP
2	0.1500	35.20	9.91	45.11	56.00	-10.89	AVG
3 *	0.2265	45.63	9.92	55.55	62.58	-7.03	QP
4	0.2265	32.09	9.92	42.01	52.58	-10.57	AVG
5	0.2760	39.50	9.93	49.43	60.94	-11.51	QP
6	0.2760	26.29	9.93	36.22	50.94	-14.72	AVG
7	0.9735	36.03	10.11	46.14	56.00	-9.86	QP
8	0.9735	24.50	10.11	34.61	46.00	-11.39	AVG
9	1.1265	36.61	10.13	46.74	56.00	-9.26	QP
10	1.1265	24.30	10.13	34.43	46.00	-11.57	AVG
11	11.3595	38.29	10.84	49.13	60.00	-10.87	QP
12	11.3595	26.49	10.84	37.33	50.00	-12.67	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

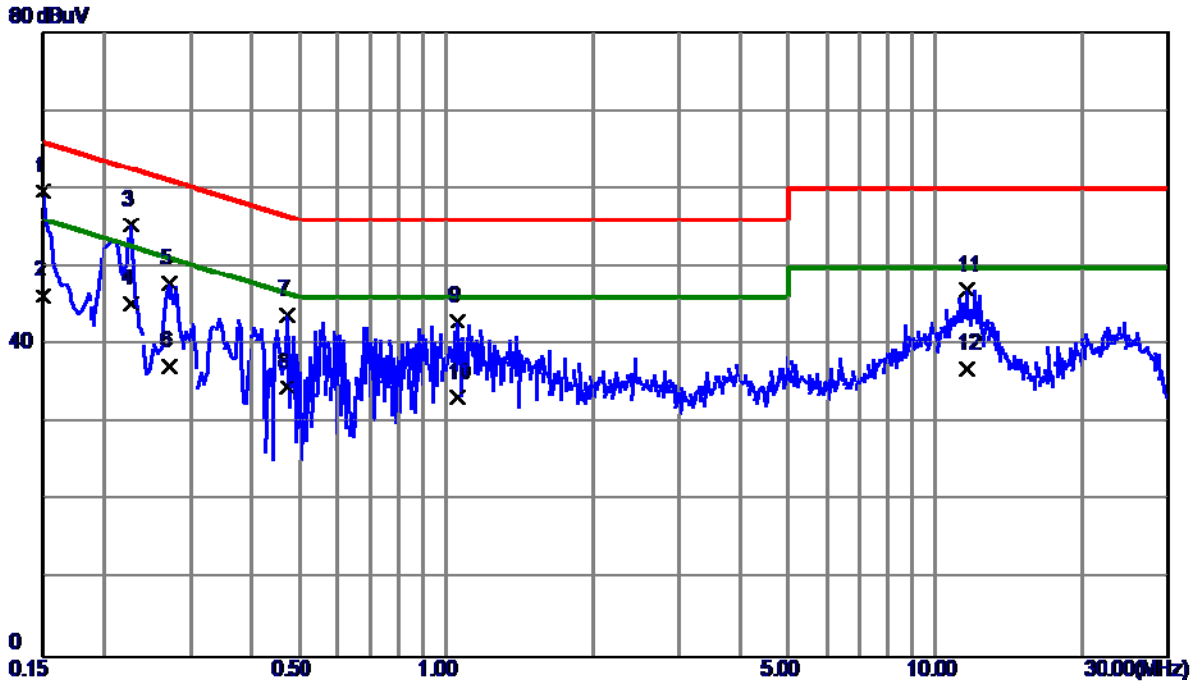


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1500	49.83	9.82	59.65	66.00	-6.35	QP
2	0.1500	36.50	9.82	46.32	56.00	-9.68	AVG
3	0.2265	45.52	9.82	55.34	62.58	-7.24	QP
4	0.2265	35.40	9.82	45.22	52.58	-7.36	AVG
5	0.2714	37.99	9.82	47.81	61.07	-13.26	QP
6	0.2714	27.50	9.82	37.32	51.07	-13.75	AVG
7	0.4740	34.12	9.80	43.92	56.44	-12.52	QP
8	0.4740	24.80	9.80	34.60	46.44	-11.84	AVG
9	1.0500	33.15	9.92	43.07	56.00	-12.93	QP
10	1.0500	23.40	9.92	33.32	46.00	-12.68	AVG
11	11.6115	36.54	10.57	47.11	60.00	-12.89	QP
12	11.6115	26.41	10.57	36.98	50.00	-13.02	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

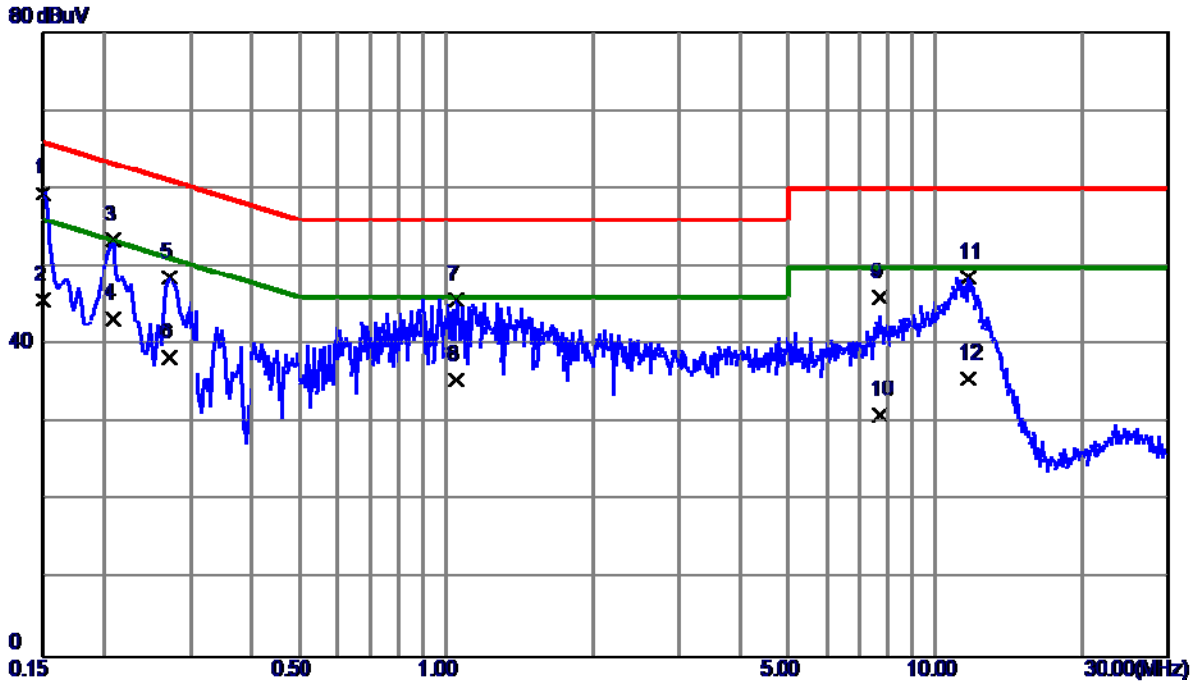


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1500	49.53	9.91	59.44	66.00	-6.56	QP
2	0.1500	35.80	9.91	45.71	56.00	-10.29	AVG
3	0.2085	43.60	9.91	53.51	63.26	-9.75	QP
4	0.2085	33.40	9.91	43.31	53.26	-9.95	AVG
5	0.2714	38.66	9.92	48.58	61.07	-12.49	QP
6	0.2714	28.51	9.92	38.43	51.07	-12.64	AVG
7	1.0455	35.68	10.12	45.80	56.00	-10.20	QP
8	1.0455	25.40	10.12	35.52	46.00	-10.48	AVG
9	7.6785	35.40	10.63	46.03	60.00	-13.97	QP
10	7.6785	20.40	10.63	31.03	50.00	-18.97	AVG
11	11.7015	37.84	10.86	48.70	60.00	-11.30	QP
12	11.7015	24.80	10.86	35.66	50.00	-14.34	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Huntkey+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

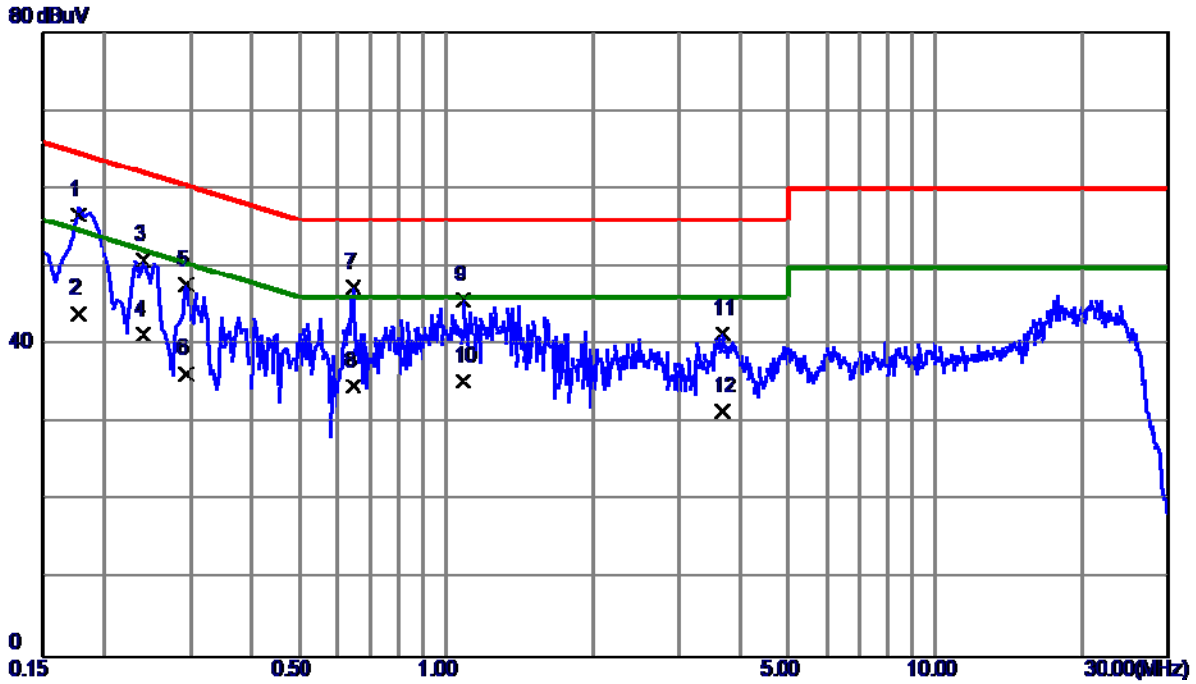


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1770	46.84	9.82	56.66	64.63	-7.97	QP
2	0.1770	34.11	9.82	43.93	54.63	-10.70	AVG
3	0.2400	41.00	9.82	50.82	62.10	-11.28	QP
4	0.2400	31.50	9.82	41.32	52.10	-10.78	AVG
5	0.2940	37.93	9.82	47.75	60.41	-12.66	QP
6	0.2940	26.50	9.82	36.32	50.41	-14.09	AVG
7	0.6450	37.58	9.85	47.43	56.00	-8.57	QP
8	0.6450	24.80	9.85	34.65	46.00	-11.35	AVG
9	1.0859	35.83	9.93	45.76	56.00	-10.24	QP
10	1.0859	25.40	9.93	35.33	46.00	-10.67	AVG
11	3.6780	31.33	10.10	41.43	56.00	-14.57	QP
12	3.6780	21.40	10.10	31.50	46.00	-14.50	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Huntkey+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

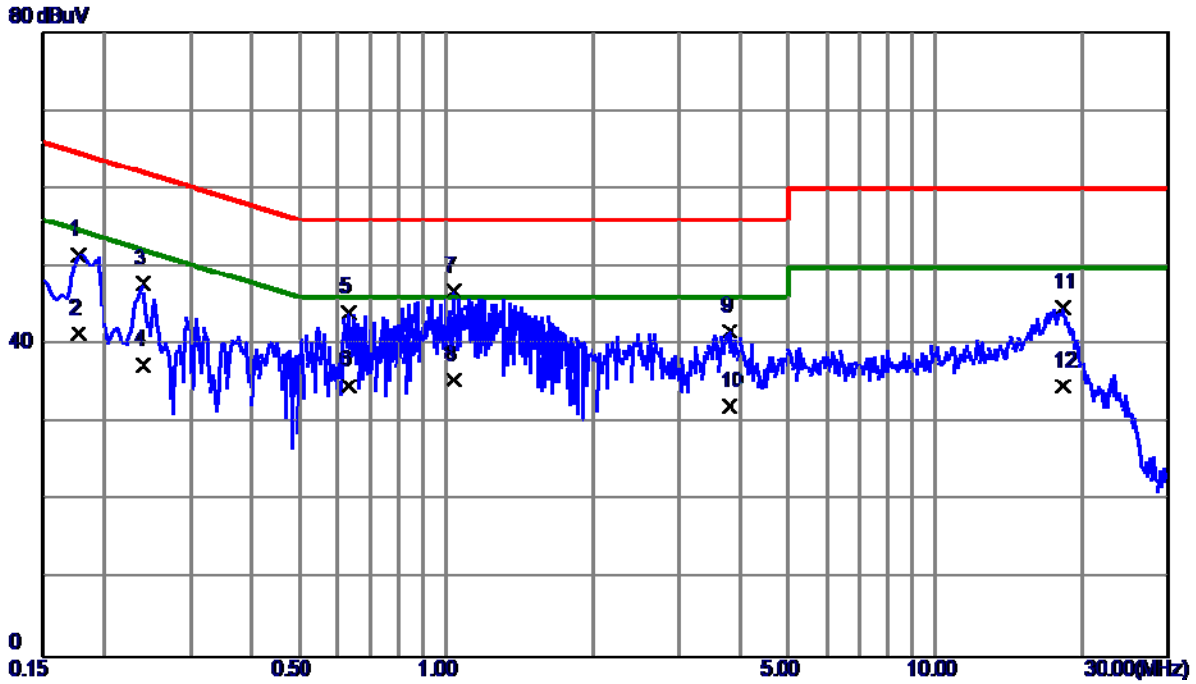


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1770	41.68	9.91	51.59	64.63	-13.04	QP
2	0.1770	31.51	9.91	41.42	54.63	-13.21	AVG
3	0.2400	37.85	9.92	47.77	62.10	-14.33	QP
4	0.2400	27.50	9.92	37.42	52.10	-14.68	AVG
5	0.6315	34.16	10.00	44.16	56.00	-11.84	QP
6	0.6315	24.80	10.00	34.80	46.00	-11.20	AVG
7 *	1.0320	36.78	10.12	46.90	56.00	-9.10	QP
8	1.0320	25.40	10.12	35.52	46.00	-10.48	AVG
9	3.8040	31.48	10.30	41.78	56.00	-14.22	QP
10	3.8040	21.90	10.30	32.20	46.00	-13.80	AVG
11	18.2535	33.47	11.34	44.81	60.00	-15.19	QP
12	18.2535	23.41	11.34	34.75	50.00	-15.25	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:BYD+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

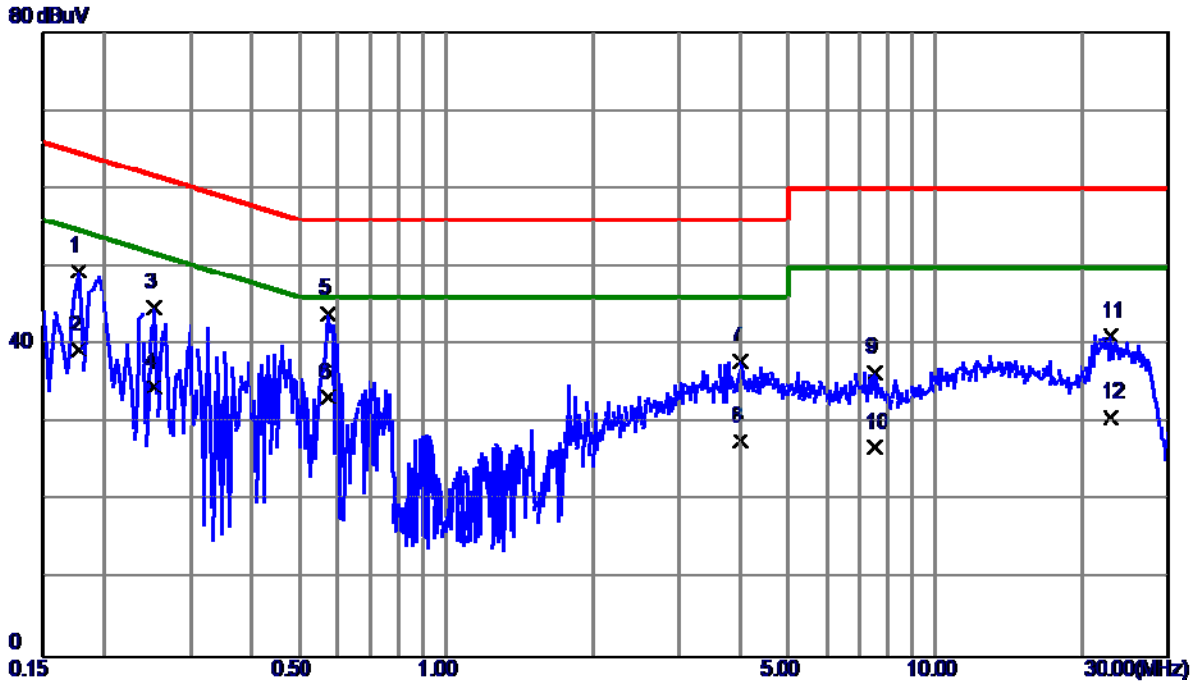


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1770	39.55	9.82	49.37	64.63	-15.26	QP
2	0.1770	29.51	9.82	39.33	54.63	-15.30	AVG
3	0.2535	34.91	9.82	44.73	61.64	-16.91	QP
4	0.2535	24.80	9.82	34.62	51.64	-17.02	AVG
5 *	0.5730	34.17	9.82	43.99	56.00	-12.01	QP
6	0.5730	23.40	9.82	33.22	46.00	-12.78	AVG
7	4.0109	27.78	10.13	37.91	56.00	-18.09	QP
8	4.0109	17.54	10.13	27.67	46.00	-18.33	AVG
9	7.5030	26.10	10.36	36.46	60.00	-23.54	QP
10	7.5030	16.49	10.36	26.85	50.00	-23.15	AVG
11	22.9380	29.96	11.15	41.11	60.00	-18.89	QP
12	22.9380	19.51	11.15	30.66	50.00	-19.34	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:BYD+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

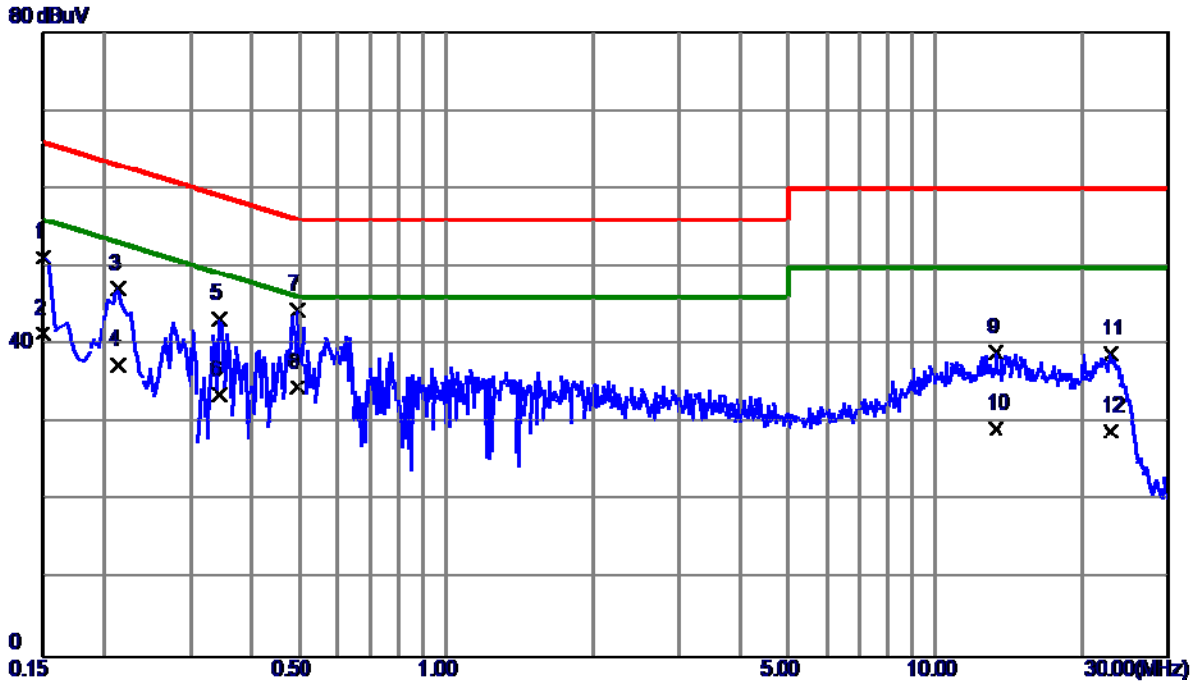


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	41.31	9.91	51.22	66.00	-14.78	QP
2	0.1500	31.50	9.91	41.41	56.00	-14.59	AVG
3	0.2130	37.35	9.91	47.26	63.09	-15.83	QP
4	0.2130	27.51	9.91	37.42	53.09	-15.67	AVG
5	0.3435	33.38	9.95	43.33	59.12	-15.79	QP
6	0.3435	23.60	9.95	33.55	49.12	-15.57	AVG
7	0.4965	34.49	9.94	44.43	56.06	-11.63	QP
8 *	0.4965	24.60	9.94	34.54	46.06	-11.52	AVG
9	13.2765	28.14	10.97	39.11	60.00	-20.89	QP
10	13.2765	18.30	10.97	29.27	50.00	-20.73	AVG
11	22.8570	27.44	11.48	38.92	60.00	-21.08	QP
12	22.8570	17.51	11.48	28.99	50.00	-21.01	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(LTE)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

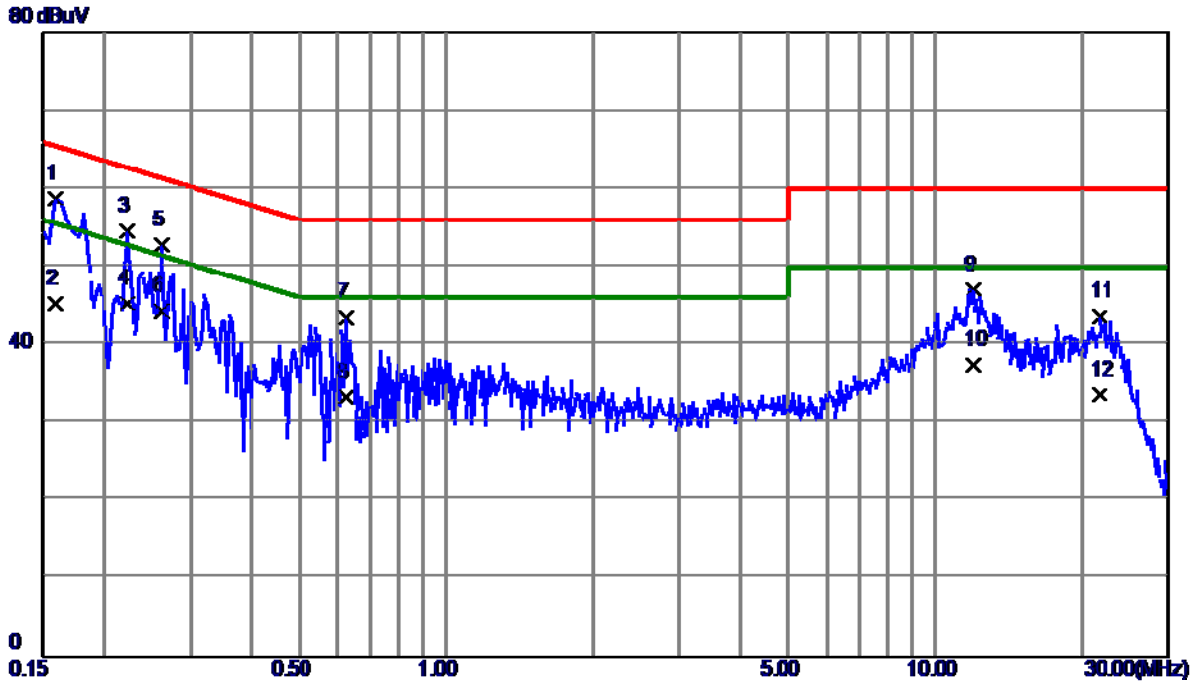


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1590	48.89	9.82	58.71	65.52	-6.81	QP
2	0.1590	35.40	9.82	45.22	55.52	-10.30	AVG
3	0.2220	44.74	9.82	54.56	62.74	-8.18	QP
4	0.2220	35.40	9.82	45.22	52.74	-7.52	AVG
5	0.2625	42.96	9.82	52.78	61.35	-8.57	QP
6	0.2625	34.50	9.82	44.32	51.35	-7.03	AVG
7	0.6224	33.69	9.84	43.53	56.00	-12.47	QP
8	0.6224	23.40	9.84	33.24	46.00	-12.76	AVG
9	11.9805	36.53	10.59	47.12	60.00	-12.88	QP
10	11.9805	26.91	10.59	37.50	50.00	-12.50	AVG
11	21.7275	32.45	11.17	43.62	60.00	-16.38	QP
12	21.7275	22.40	11.17	33.57	50.00	-16.43	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(LTE)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

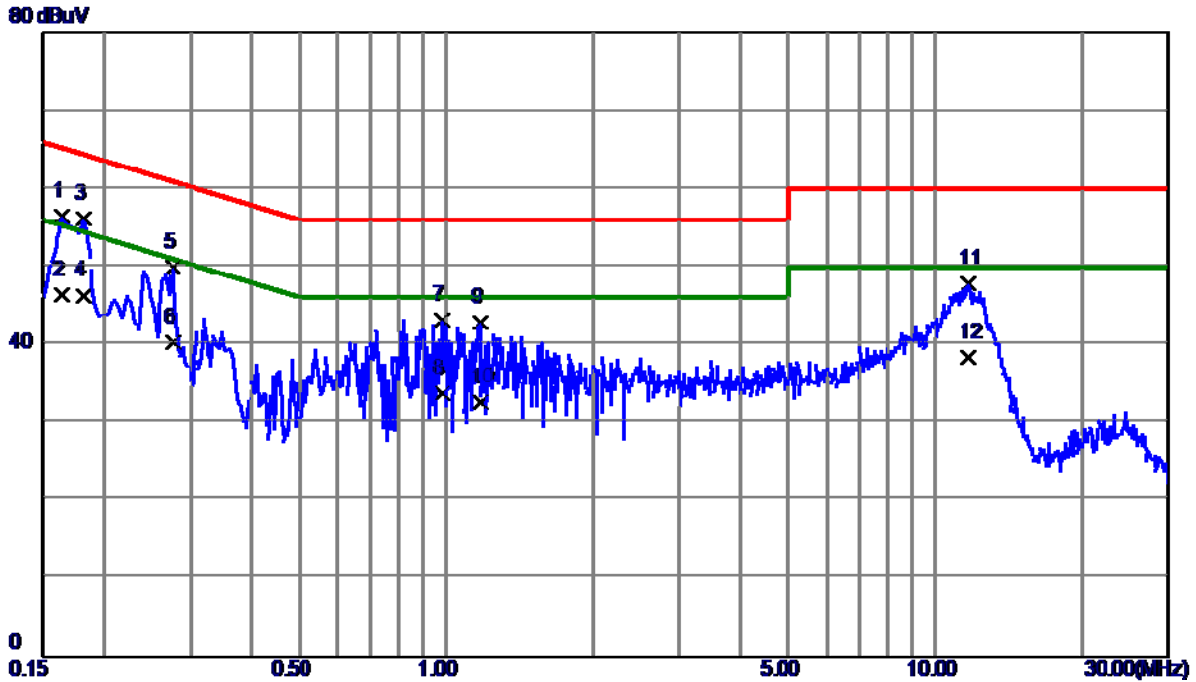


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1635	46.61	9.91	56.52	65.28	-8.76	QP
2	0.1635	36.50	9.91	46.41	55.28	-8.87	AVG
3	0.1815	46.27	9.91	56.18	64.42	-8.24	QP
4 *	0.1815	36.41	9.91	46.32	54.42	-8.10	AVG
5	0.2760	40.01	9.93	49.94	60.94	-11.00	QP
6	0.2760	30.39	9.93	40.32	50.94	-10.62	AVG
7	0.9825	33.14	10.12	43.26	56.00	-12.74	QP
8	0.9825	23.70	10.12	33.82	46.00	-12.18	AVG
9	1.1760	32.69	10.13	42.82	56.00	-13.18	QP
10	1.1760	22.50	10.13	32.63	46.00	-13.37	AVG
11	11.6790	37.05	10.86	47.91	60.00	-12.09	QP
12	11.6790	27.50	10.86	38.36	50.00	-11.64	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:HONGLIN 1.0m		
Test Engineer	Sam Wang		

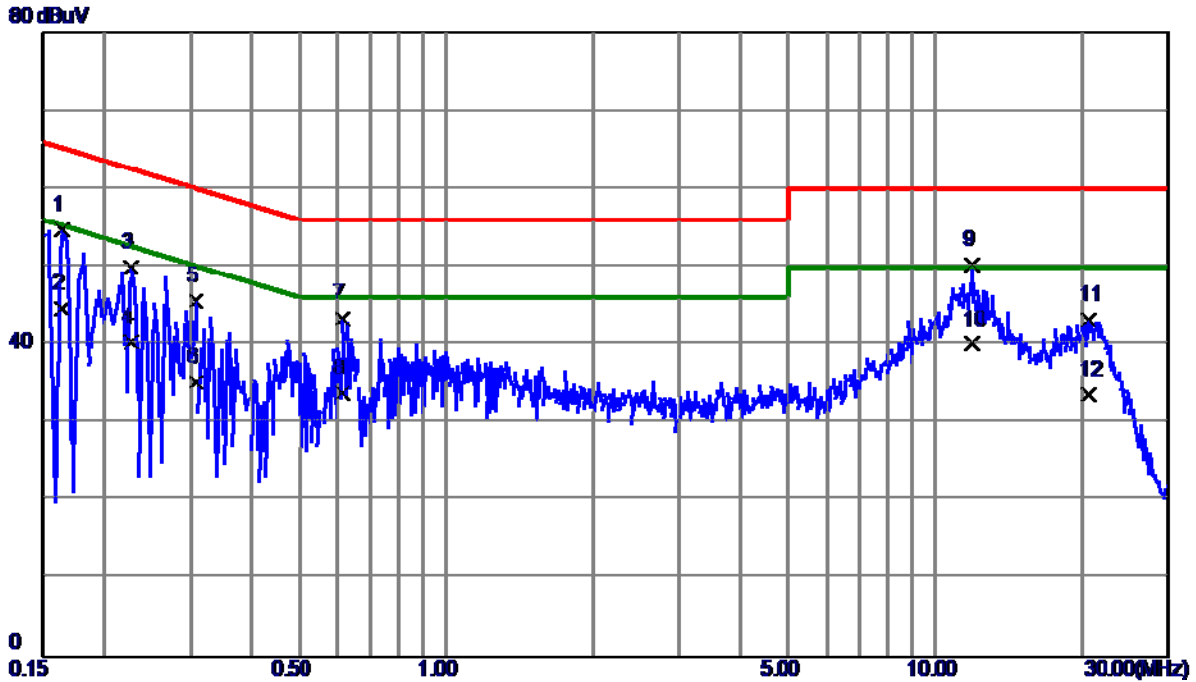


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1635	44.90	9.82	54.72	65.28	-10.56	QP
2	0.1635	34.80	9.82	44.62	55.28	-10.66	AVG
3	0.2265	40.13	9.82	49.95	62.58	-12.63	QP
4	0.2265	30.50	9.82	40.32	52.58	-12.26	AVG
5	0.3075	35.83	9.82	45.65	60.04	-14.39	QP
6	0.3075	25.40	9.82	35.22	50.04	-14.82	AVG
7	0.6134	33.55	9.84	43.39	56.00	-12.61	QP
8	0.6134	23.90	9.84	33.74	46.00	-12.26	AVG
9 *	11.8725	39.72	10.59	50.31	60.00	-9.69	QP
10	11.8725	29.49	10.59	40.08	50.00	-9.92	AVG
11	20.5439	32.00	11.18	43.18	60.00	-16.82	QP
12	20.5439	22.40	11.18	33.58	50.00	-16.42	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:HONGLIN 1.0m		
Test Engineer	Sam Wang		

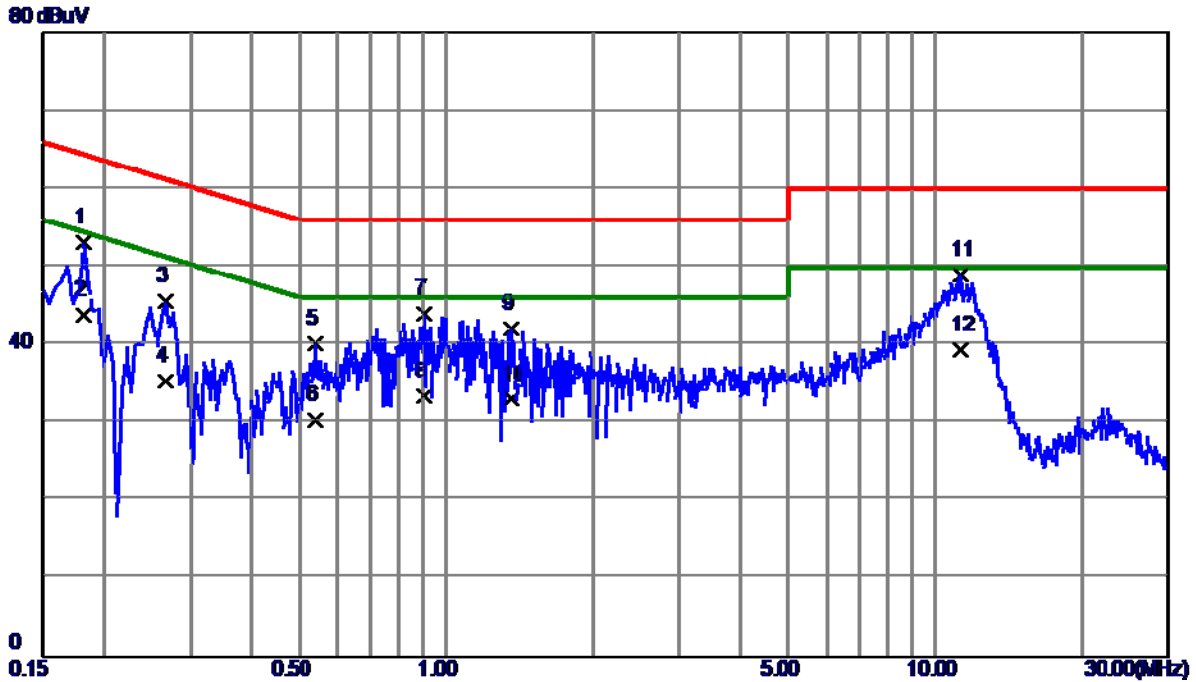


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1815	43.18	9.91	53.09	64.42	-11.33	QP
2 *	0.1815	33.91	9.91	43.82	54.42	-10.60	AVG
3	0.2670	35.66	9.92	45.58	61.21	-15.63	QP
4	0.2670	25.41	9.92	35.33	51.21	-15.88	AVG
5	0.5415	30.26	9.96	40.22	56.00	-15.78	QP
6	0.5415	20.40	9.96	30.36	46.00	-15.64	AVG
7	0.9015	33.85	10.10	43.95	56.00	-12.05	QP
8	0.9015	23.40	10.10	33.50	46.00	-12.50	AVG
9	1.3560	32.00	10.14	42.14	56.00	-13.86	QP
10	1.3560	22.90	10.14	33.04	46.00	-12.96	AVG
11	11.2695	38.15	10.83	48.98	60.00	-11.02	QP
12	11.2695	28.50	10.83	39.33	50.00	-10.67	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:FOXCONN 1.0m		
Test Engineer	Sam Wang		

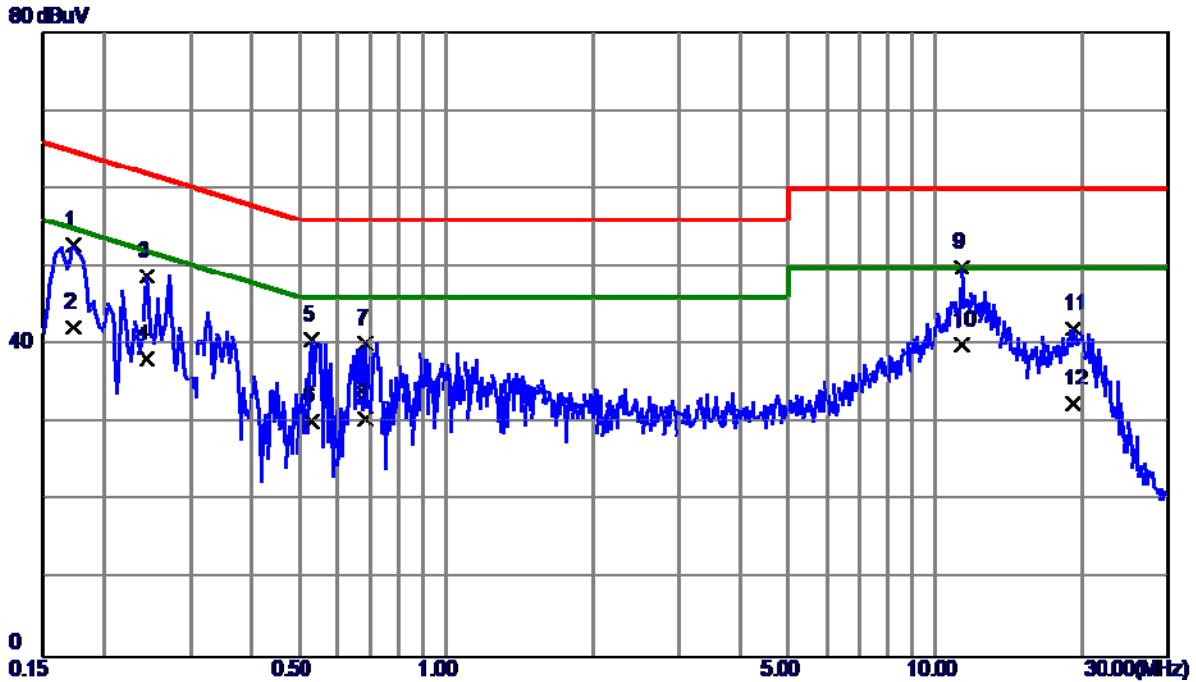


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1725	42.98	9.82	52.80	64.84	-12.04	QP
2	0.1725	32.40	9.82	42.22	54.84	-12.62	AVG
3	0.2445	38.95	9.82	48.77	61.94	-13.17	QP
4	0.2445	28.40	9.82	38.22	51.94	-13.72	AVG
5	0.5325	30.90	9.80	40.70	56.00	-15.30	QP
6	0.5325	20.40	9.80	30.20	46.00	-15.80	AVG
7	0.6855	30.29	9.86	40.15	56.00	-15.85	QP
8	0.6855	20.70	9.86	30.56	46.00	-15.44	AVG
9	11.3460	39.38	10.56	49.94	60.00	-10.06	QP
10 *	11.3460	29.50	10.56	40.06	50.00	-9.94	AVG
11	19.1940	31.01	11.12	42.13	60.00	-17.87	QP
12	19.1940	21.40	11.12	32.52	50.00	-17.48	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:FOXCONN 1.0m		
Test Engineer	Sam Wang		

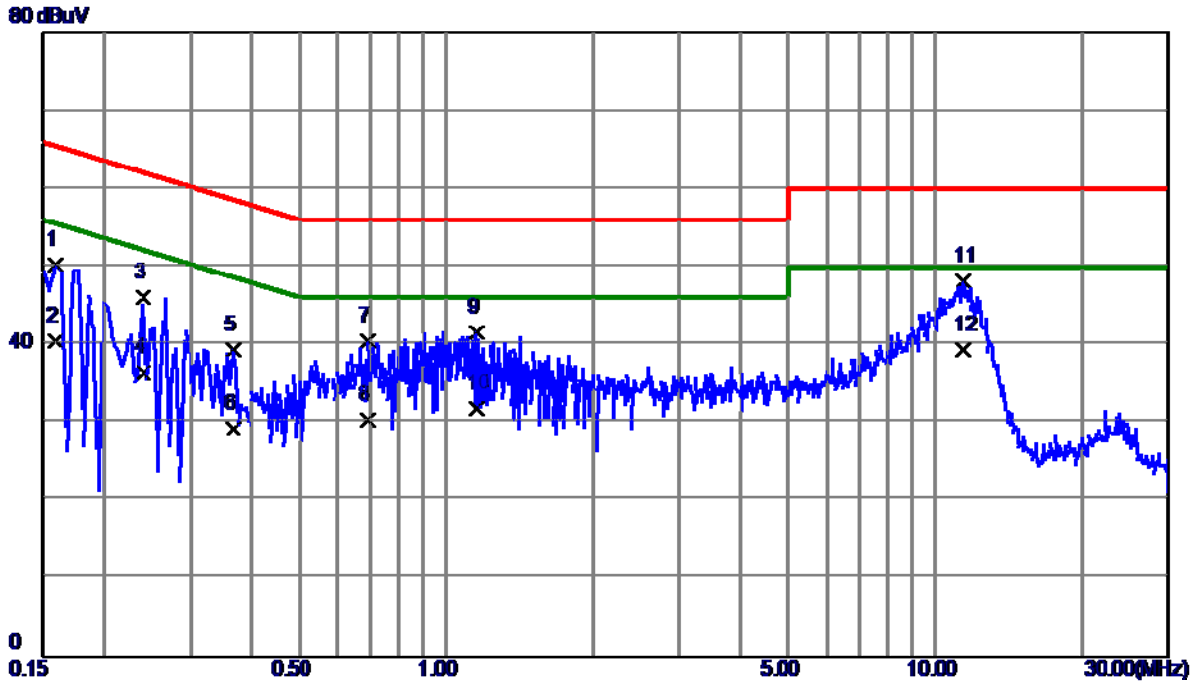


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1590	40.31	9.91	50.22	65.52	-15.30	QP
2	0.1590	30.50	9.91	40.41	55.52	-15.11	AVG
3	0.2400	36.13	9.92	46.05	62.10	-16.05	QP
4	0.2400	26.50	9.92	36.42	52.10	-15.68	AVG
5	0.3660	29.46	9.95	39.41	58.59	-19.18	QP
6	0.3660	19.40	9.95	29.35	48.59	-19.24	AVG
7	0.6945	30.46	10.04	40.50	56.00	-15.50	QP
8	0.6945	20.40	10.04	30.44	46.00	-15.56	AVG
9	1.1535	31.51	10.13	41.64	56.00	-14.36	QP
10	1.1535	21.70	10.13	31.83	46.00	-14.17	AVG
11	11.4360	37.35	10.84	48.19	60.00	-11.81	QP
12 *	11.4360	28.50	10.84	39.34	50.00	-10.66	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:MING JI 1.0m		
Test Engineer	Sam Wang		

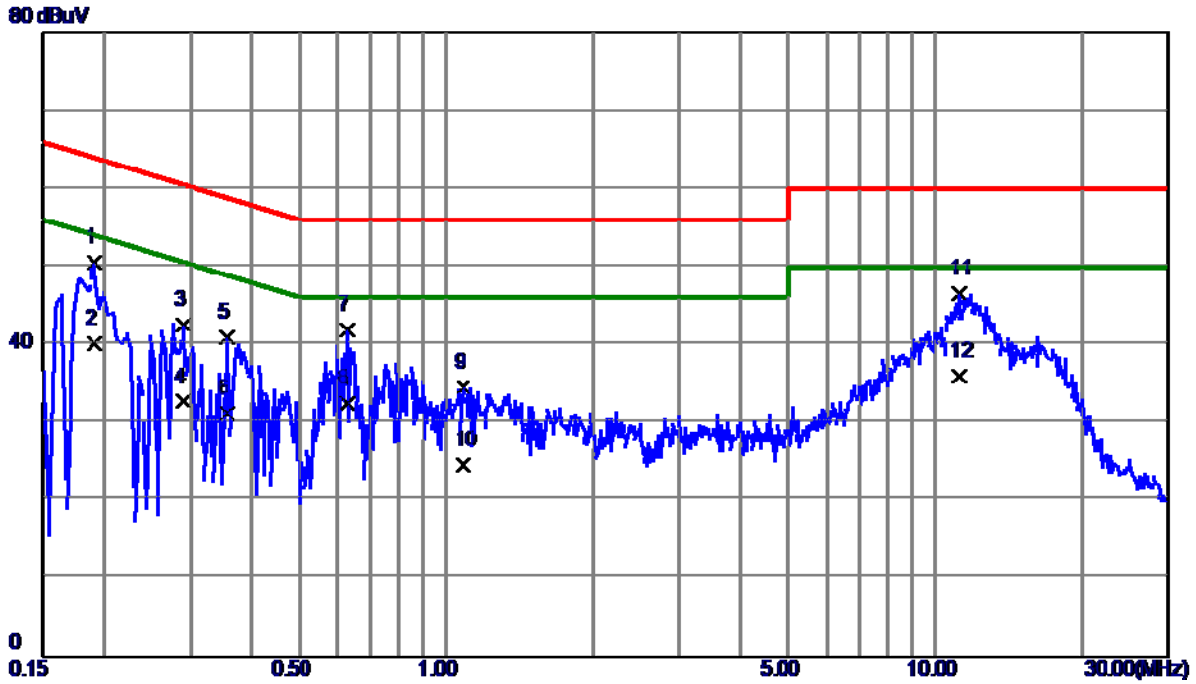


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1905	40.77	9.82	50.59	64.01	-13.42	QP
2	0.1905	30.40	9.82	40.22	54.01	-13.79	AVG
3	0.2895	32.67	9.82	42.49	60.54	-18.05	QP
4	0.2895	22.90	9.82	32.72	50.54	-17.82	AVG
5	0.3570	31.14	9.81	40.95	58.80	-17.85	QP
6	0.3570	21.40	9.81	31.21	48.80	-17.59	AVG
7	0.6270	32.13	9.84	41.97	56.00	-14.03	QP
8	0.6270	22.70	9.84	32.54	46.00	-13.46	AVG
9	1.0859	24.59	9.93	34.52	56.00	-21.48	QP
10	1.0859	14.70	9.93	24.63	46.00	-21.37	AVG
11	11.1975	35.97	10.55	46.52	60.00	-13.48	QP
12	11.1975	25.40	10.55	35.95	50.00	-14.05	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:MING JI 1.0m		
Test Engineer	Sam Wang		

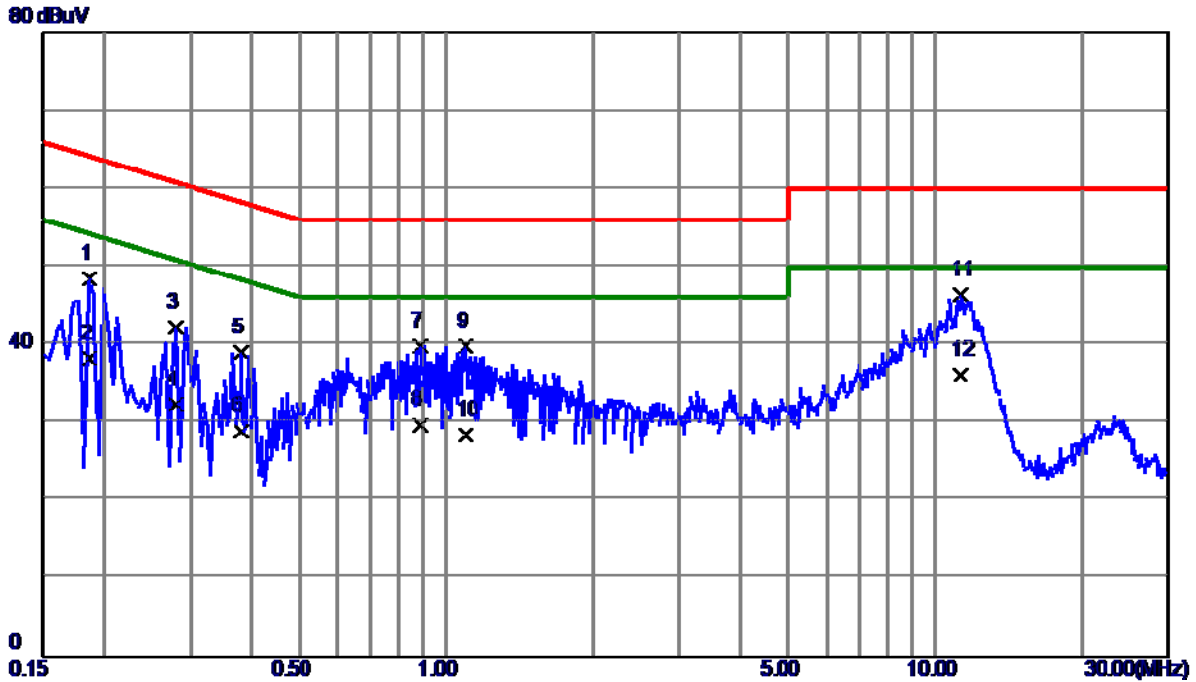


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1860	38.53	9.91	48.44	64.21	-15.77	QP
2	0.1860	28.40	9.91	38.31	54.21	-15.90	AVG
3	0.2805	32.34	9.93	42.27	60.80	-18.53	QP
4	0.2805	22.39	9.93	32.32	50.80	-18.48	AVG
5	0.3795	29.13	9.95	39.08	58.29	-19.21	QP
6	0.3795	19.00	9.95	28.95	48.29	-19.34	AVG
7	0.8880	29.79	10.09	39.88	56.00	-16.12	QP
8	0.8880	19.60	10.09	29.69	46.00	-16.31	AVG
9	1.0995	29.64	10.13	39.77	56.00	-16.23	QP
10	1.0995	18.40	10.13	28.53	46.00	-17.47	AVG
11 *	11.2830	35.63	10.83	46.46	60.00	-13.54	QP
12	11.2830	25.40	10.83	36.23	50.00	-13.77	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Mingji 0.17m		
Test Engineer	Sam Wang		

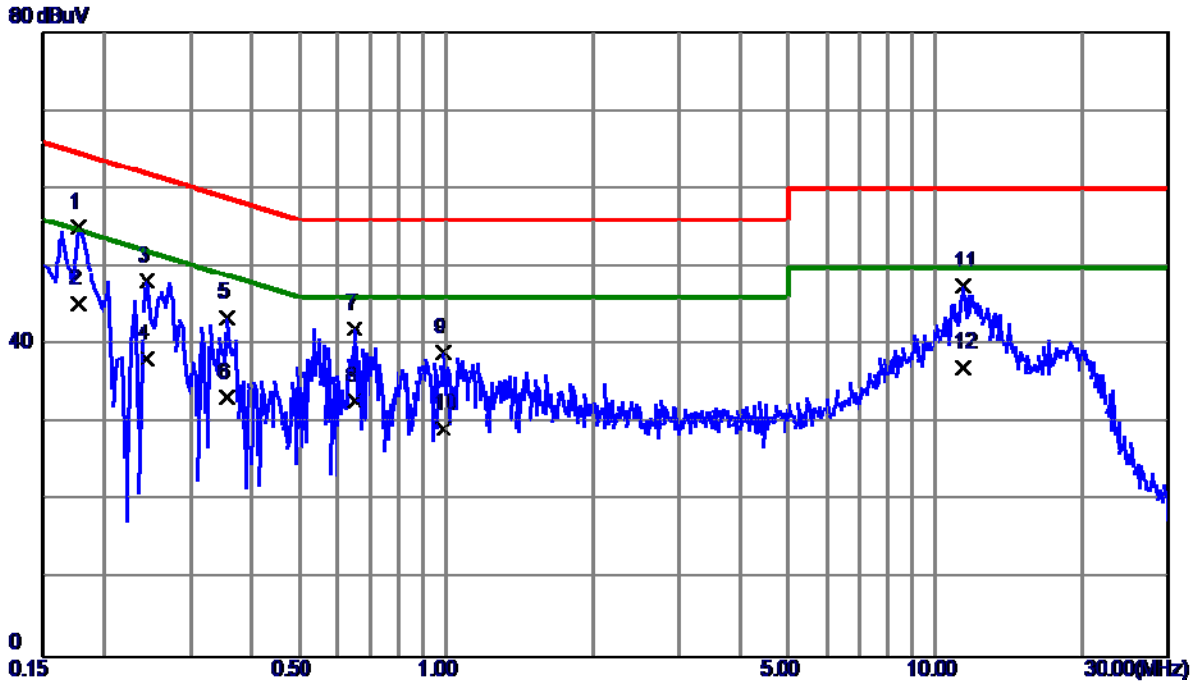


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1770	45.19	9.82	55.01	64.63	-9.62	QP
2 *	0.1770	35.41	9.82	45.23	54.63	-9.40	AVG
3	0.2445	38.27	9.82	48.09	61.94	-13.85	QP
4	0.2445	28.40	9.82	38.22	51.94	-13.72	AVG
5	0.3570	33.78	9.81	43.59	58.80	-15.21	QP
6	0.3570	23.40	9.81	33.21	48.80	-15.59	AVG
7	0.6495	32.30	9.85	42.15	56.00	-13.85	QP
8	0.6495	22.90	9.85	32.75	46.00	-13.25	AVG
9	0.9870	29.07	9.92	38.99	56.00	-17.01	QP
10	0.9870	19.40	9.92	29.32	46.00	-16.68	AVG
11	11.4360	36.89	10.56	47.45	60.00	-12.55	QP
12	11.4360	26.50	10.56	37.06	50.00	-12.94	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Mingji 0.17m		
Test Engineer	Sam Wang		

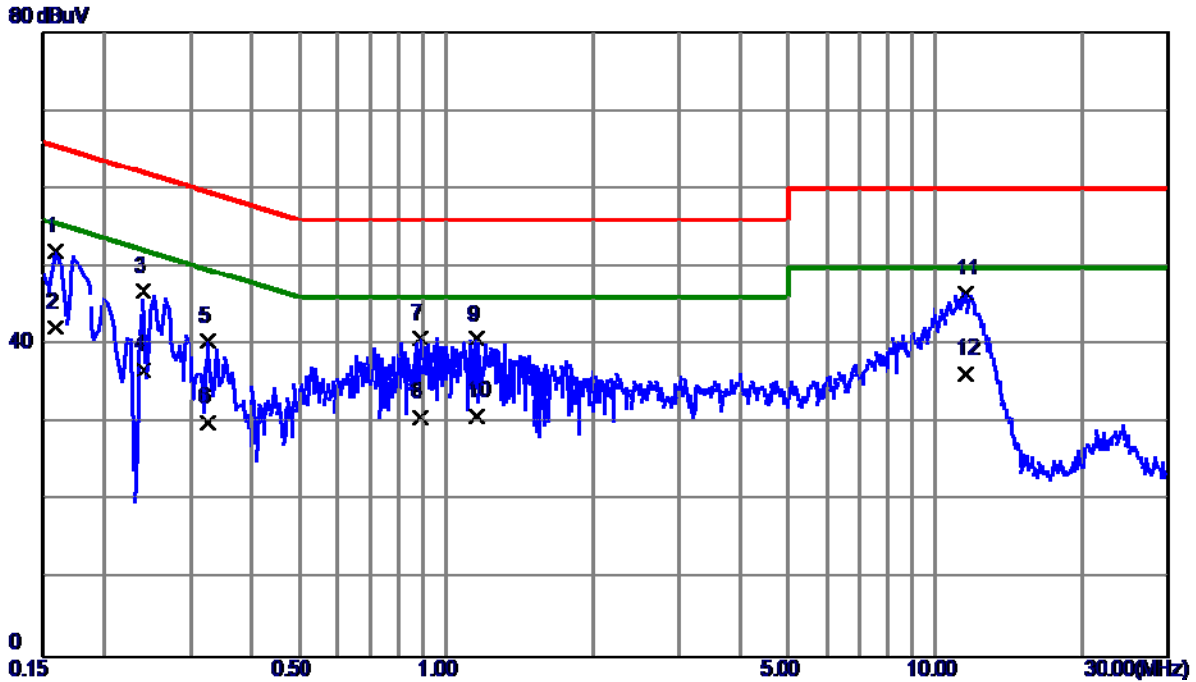


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1590	42.16	9.91	52.07	65.52	-13.45	QP
2 *	0.1590	32.40	9.91	42.31	55.52	-13.21	AVG
3	0.2400	36.97	9.92	46.89	62.10	-15.21	QP
4	0.2400	26.90	9.92	36.82	52.10	-15.28	AVG
5	0.3255	30.47	9.94	40.41	59.57	-19.16	QP
6	0.3255	20.10	9.94	30.04	49.57	-19.53	AVG
7	0.8880	30.77	10.09	40.86	56.00	-15.14	QP
8	0.8880	20.60	10.09	30.69	46.00	-15.31	AVG
9	1.1535	30.59	10.13	40.72	56.00	-15.28	QP
10	1.1535	20.70	10.13	30.83	46.00	-15.17	AVG
11	11.5710	35.75	10.85	46.60	60.00	-13.40	QP
12	11.5710	25.40	10.85	36.25	50.00	-13.75	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

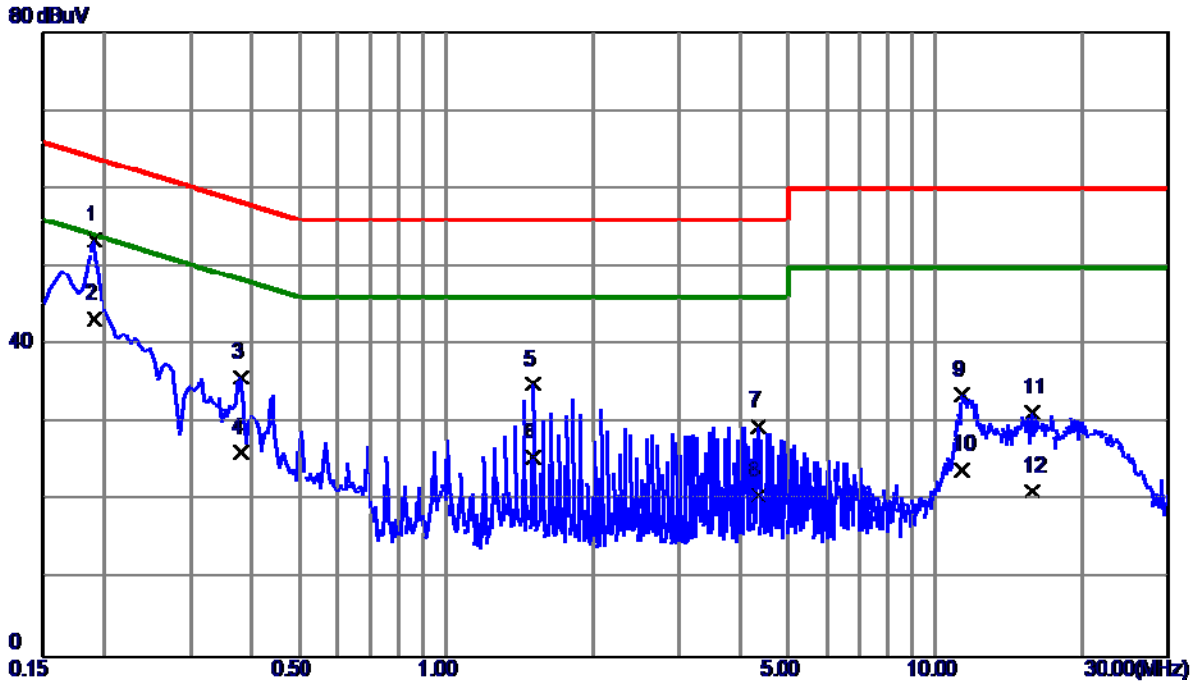


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1905	43.61	9.82	53.43	64.01	-10.58	QP
2	0.1905	33.50	9.82	43.32	54.01	-10.69	AVG
3	0.3795	26.07	9.81	35.88	58.29	-22.41	QP
4	0.3795	16.50	9.81	26.31	48.29	-21.98	AVG
5	1.5090	25.00	9.96	34.96	56.00	-21.04	QP
6	1.5090	15.70	9.96	25.66	46.00	-20.34	AVG
7	4.3395	19.50	10.15	29.65	56.00	-26.35	QP
8	4.3395	10.50	10.15	20.65	46.00	-25.35	AVG
9	11.3820	23.08	10.56	33.64	60.00	-26.36	QP
10	11.3820	13.50	10.56	24.06	50.00	-25.94	AVG
11	15.7830	20.58	10.82	31.40	60.00	-28.60	QP
12	15.7830	10.50	10.82	21.32	50.00	-28.68	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

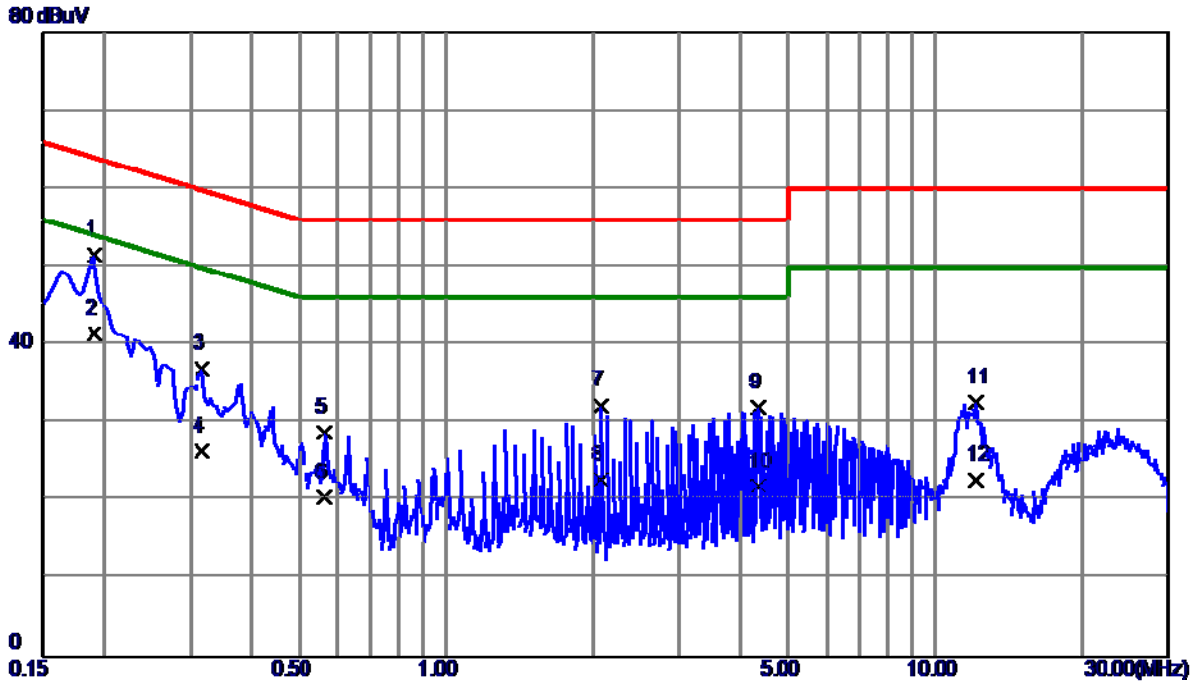


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1905	41.65	9.91	51.56	64.01	-12.45	QP
2	0.1905	31.50	9.91	41.41	54.01	-12.60	AVG
3	0.3165	26.98	9.94	36.92	59.80	-22.88	QP
4	0.3165	16.50	9.94	26.44	49.80	-23.36	AVG
5	0.5639	18.89	9.97	28.86	56.00	-27.14	QP
6	0.5639	10.50	9.97	20.47	46.00	-25.53	AVG
7	2.0760	22.05	10.19	32.24	56.00	-23.76	QP
8	2.0760	12.50	10.19	22.69	46.00	-23.31	AVG
9	4.3395	21.70	10.34	32.04	56.00	-23.96	QP
10	4.3395	11.50	10.34	21.84	46.00	-24.16	AVG
11	12.1335	21.72	10.89	32.61	60.00	-27.39	QP
12	12.1335	11.90	10.89	22.79	50.00	-27.21	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Connet To PC+ Wifi		
Note	Battery:Sunwada+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

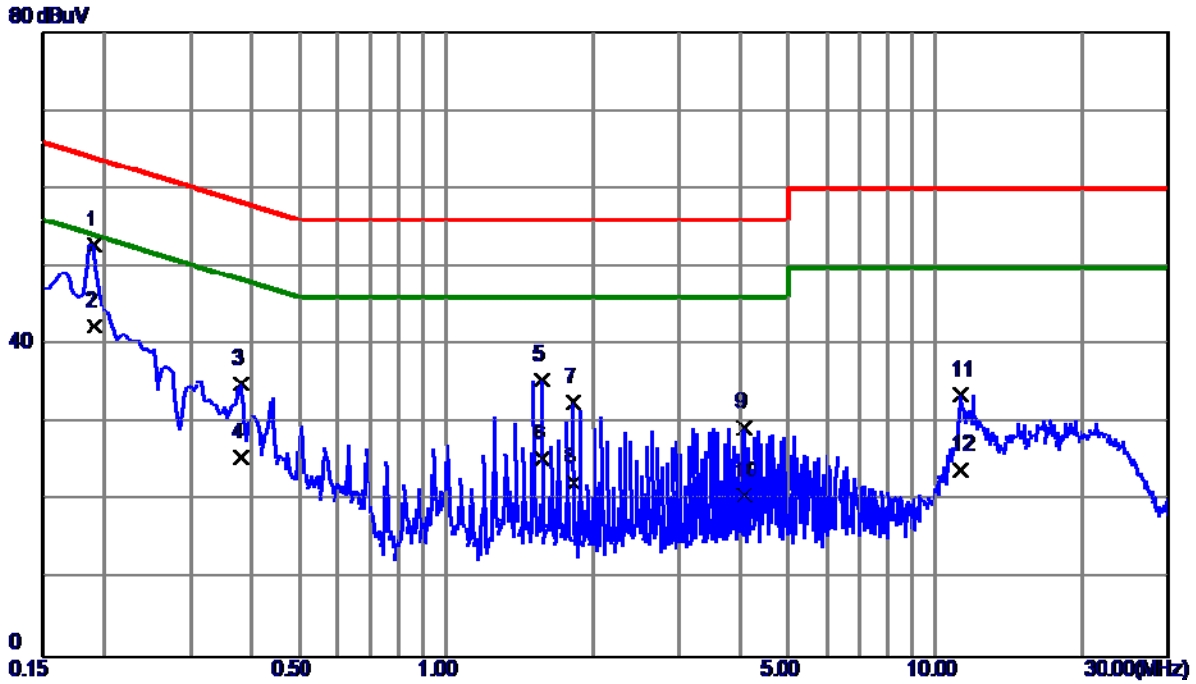


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1905	43.00	9.82	52.82	64.01	-11.19	QP
2	0.1905	32.60	9.82	42.42	54.01	-11.59	AVG
3	0.3795	25.26	9.81	35.07	58.29	-23.22	QP
4	0.3795	15.80	9.81	25.61	48.29	-22.68	AVG
5	1.5720	25.50	9.96	35.46	56.00	-20.54	QP
6	1.5720	15.50	9.96	25.46	46.00	-20.54	AVG
7	1.8240	22.63	9.98	32.61	56.00	-23.39	QP
8	1.8240	12.41	9.98	22.39	46.00	-23.61	AVG
9	4.0875	19.24	10.13	29.37	56.00	-26.63	QP
10	4.0875	10.50	10.13	20.63	46.00	-25.37	AVG
11	11.3190	23.06	10.56	33.62	60.00	-26.38	QP
12	11.3190	13.50	10.56	24.06	50.00	-25.94	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Connet To PC+ Wifi		
Note	Battery:Sunwada+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

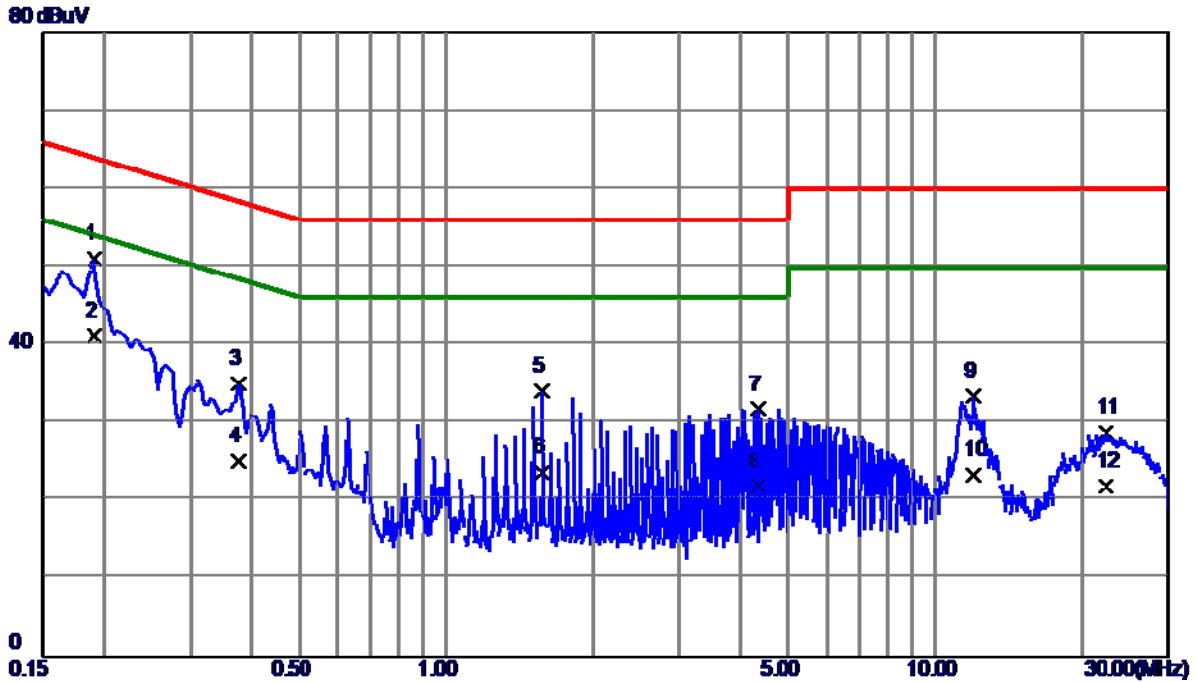


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1905	41.08	9.91	50.99	64.01	-13.02	QP
2 *	0.1905	31.20	9.91	41.11	54.01	-12.90	AVG
3	0.3750	25.02	9.95	34.97	58.39	-23.42	QP
4	0.3750	15.20	9.95	25.15	48.39	-23.24	AVG
5	1.5720	23.94	10.16	34.10	56.00	-21.90	QP
6	1.5720	13.50	10.16	23.66	46.00	-22.34	AVG
7	4.3395	21.42	10.34	31.76	56.00	-24.24	QP
8	4.3395	11.50	10.34	21.84	46.00	-24.16	AVG
9	11.9445	22.56	10.88	33.44	60.00	-26.56	QP
10	11.9445	12.47	10.88	23.35	50.00	-26.65	AVG
11	22.3170	17.25	11.48	28.73	60.00	-31.27	QP
12	22.3170	10.51	11.48	21.99	50.00	-28.01	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:HONGLIN 1.0m		
Test Engineer	Sam Wang		

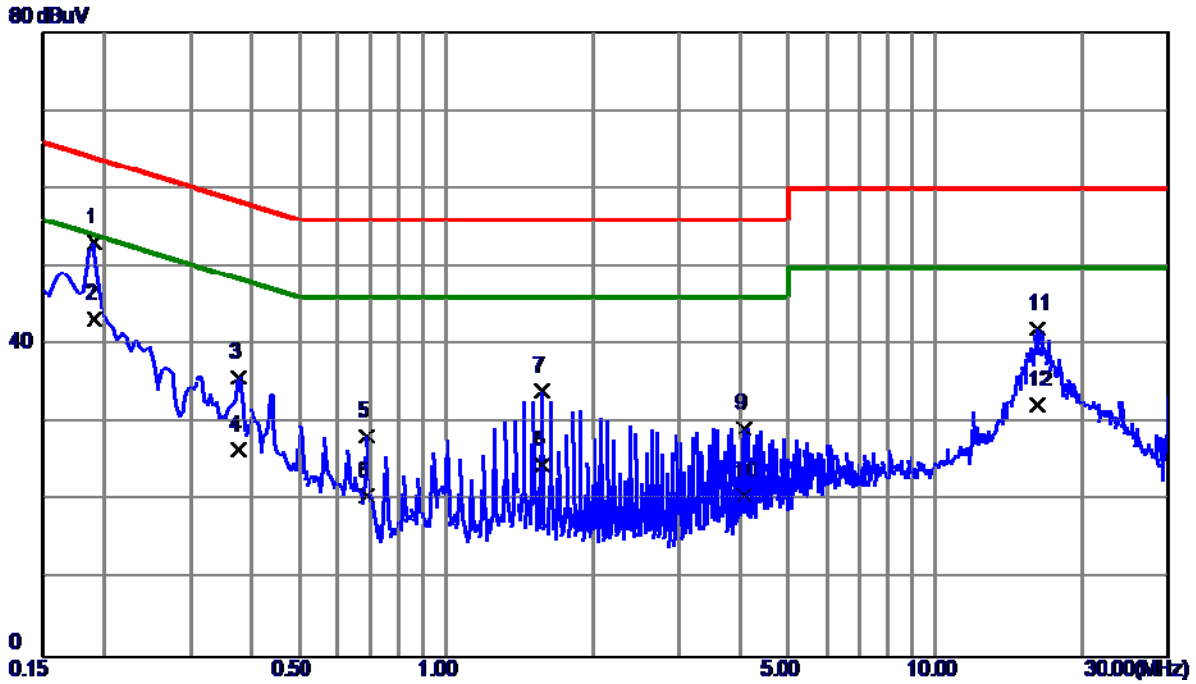


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1905	43.32	9.82	53.14	64.01	-10.87	QP
2 *	0.1905	33.60	9.82	43.42	54.01	-10.59	AVG
3	0.3750	26.10	9.81	35.91	58.39	-22.48	QP
4	0.3750	16.80	9.81	26.61	48.39	-21.78	AVG
5	0.6900	18.40	9.87	28.27	56.00	-27.73	QP
6	0.6900	10.80	9.87	20.67	46.00	-25.33	AVG
7	1.5720	24.11	9.96	34.07	56.00	-21.93	QP
8	1.5720	14.70	9.96	24.66	46.00	-21.34	AVG
9	4.0830	19.18	10.13	29.31	56.00	-26.69	QP
10	4.0830	10.50	10.13	20.63	46.00	-25.37	AVG
11	16.1430	31.23	10.85	42.08	60.00	-17.92	QP
12	16.1430	21.40	10.85	32.25	50.00	-17.75	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:HONGLIN 1.0m		
Test Engineer	Sam Wang		

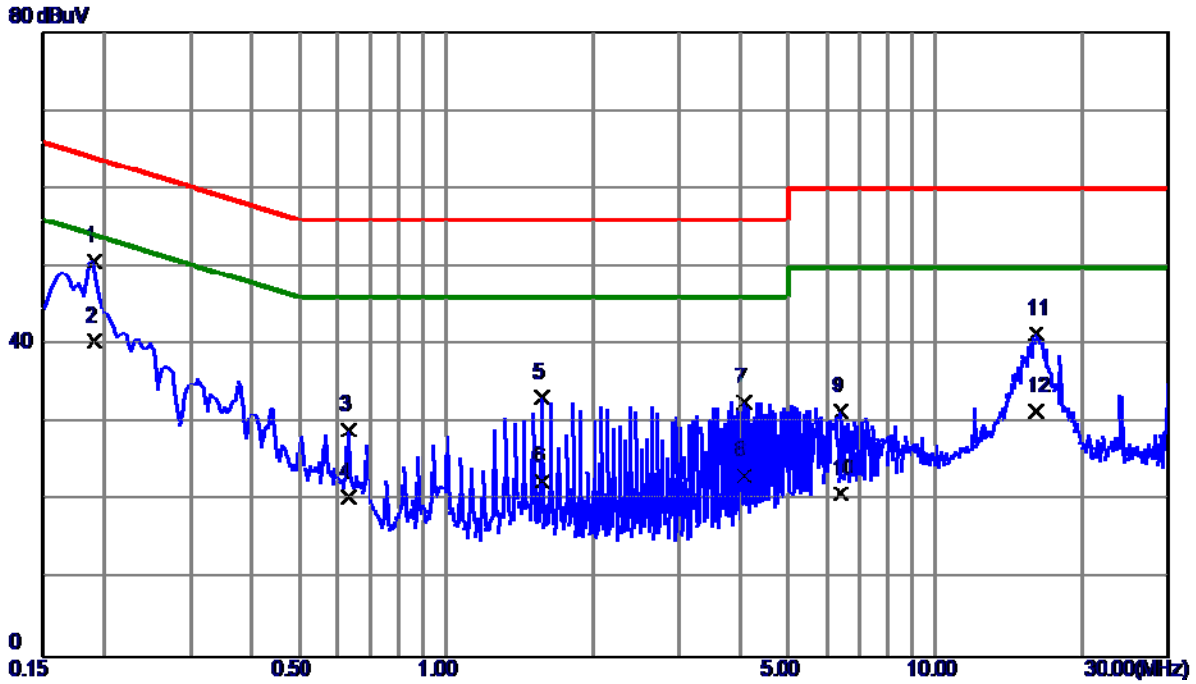


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1905	40.82	9.91	50.73	64.01	-13.28	QP
2	0.1905	30.50	9.91	40.41	54.01	-13.60	AVG
3	0.6314	19.14	10.00	29.14	56.00	-26.86	QP
4	0.6314	10.50	10.00	20.50	46.00	-25.50	AVG
5	1.5720	23.19	10.16	33.35	56.00	-22.65	QP
6	1.5720	12.40	10.16	22.56	46.00	-23.44	AVG
7	4.0830	22.36	10.32	32.68	56.00	-23.32	QP
8	4.0830	12.90	10.32	23.22	46.00	-22.78	AVG
9	6.4095	20.98	10.53	31.51	60.00	-28.49	QP
10	6.4095	10.50	10.53	21.03	50.00	-28.97	AVG
11	16.0755	30.23	11.17	41.40	60.00	-18.60	QP
12	16.0755	20.40	11.17	31.57	50.00	-18.43	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:FOXCONN 1.0m		
Test Engineer	Sam Wang		

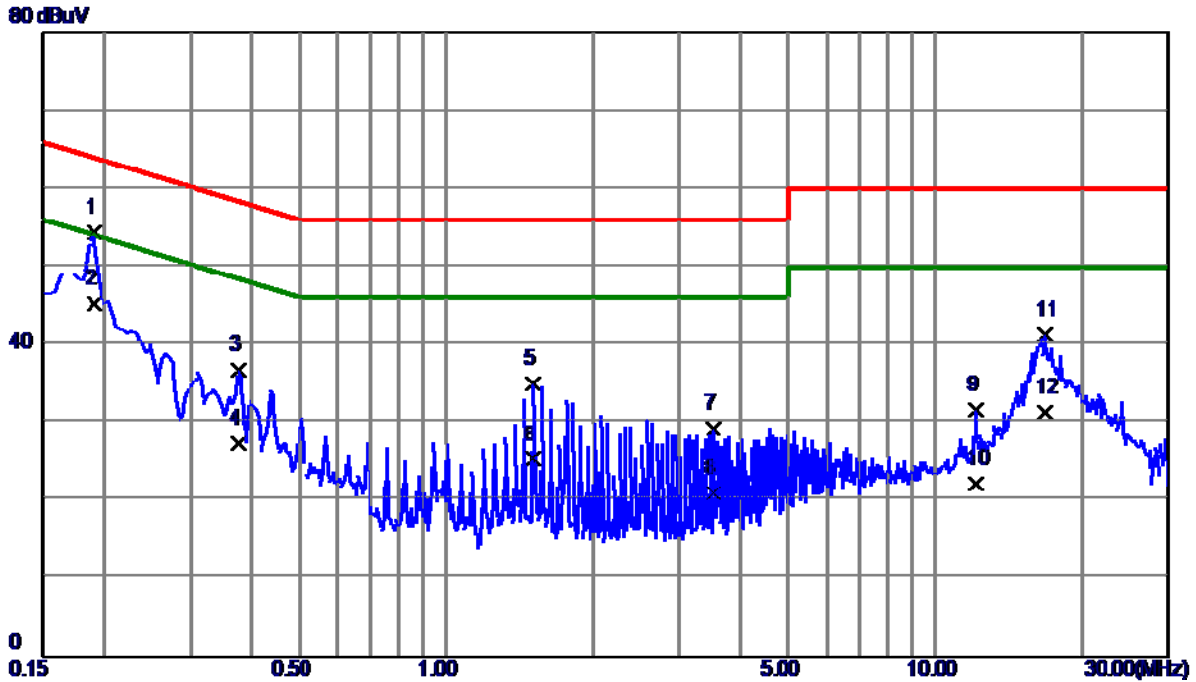


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1905	44.52	9.82	54.34	64.01	-9.67	QP
2 *	0.1905	35.40	9.82	45.22	54.01	-8.79	AVG
3	0.3750	27.02	9.81	36.83	58.39	-21.56	QP
4	0.3750	17.50	9.81	27.31	48.39	-21.08	AVG
5	1.5090	25.03	9.96	34.99	56.00	-21.01	QP
6	1.5090	15.40	9.96	25.36	46.00	-20.64	AVG
7	3.5205	19.18	10.09	29.27	56.00	-26.73	QP
8	3.5205	10.91	10.09	21.00	46.00	-25.00	AVG
9	12.0840	21.05	10.60	31.65	60.00	-28.35	QP
10	12.0840	11.60	10.60	22.20	50.00	-27.80	AVG
11	16.7280	30.32	10.90	41.22	60.00	-18.78	QP
12	16.7280	20.40	10.90	31.30	50.00	-18.70	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:FOXCONN 1.0m		
Test Engineer	Sam Wang		

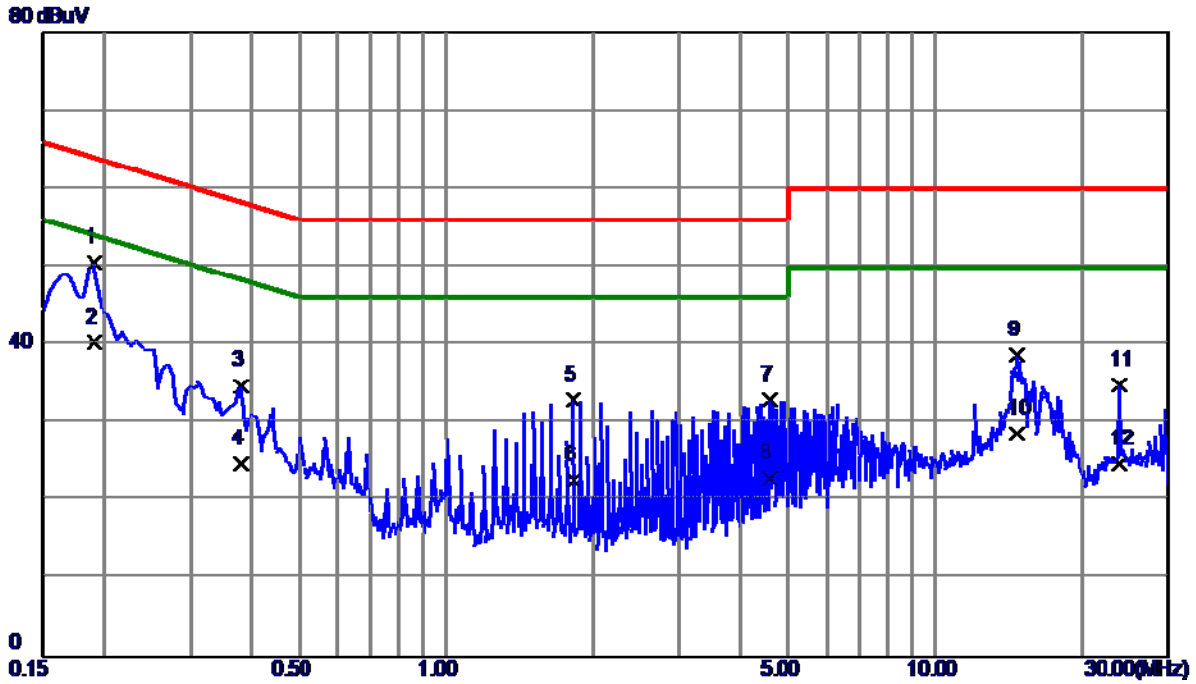


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1905	40.71	9.91	50.62	64.01	-13.39	QP
2	0.1905	30.40	9.91	40.31	54.01	-13.70	AVG
3	0.3795	24.85	9.95	34.80	58.29	-23.49	QP
4	0.3795	14.90	9.95	24.85	48.29	-23.44	AVG
5	1.8240	22.73	10.18	32.91	56.00	-23.09	QP
6	1.8240	12.60	10.18	22.78	46.00	-23.22	AVG
7	4.5870	22.57	10.37	32.94	56.00	-23.06	QP
8	4.5870	12.49	10.37	22.86	46.00	-23.14	AVG
9	14.7030	27.62	11.07	38.69	60.00	-21.31	QP
10	14.7030	17.50	11.07	28.57	50.00	-21.43	AVG
11	23.8335	23.43	11.48	34.91	60.00	-25.09	QP
12	23.8335	13.40	11.48	24.88	50.00	-25.12	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:MING JI 1.0m		
Test Engineer	Sam Wang		

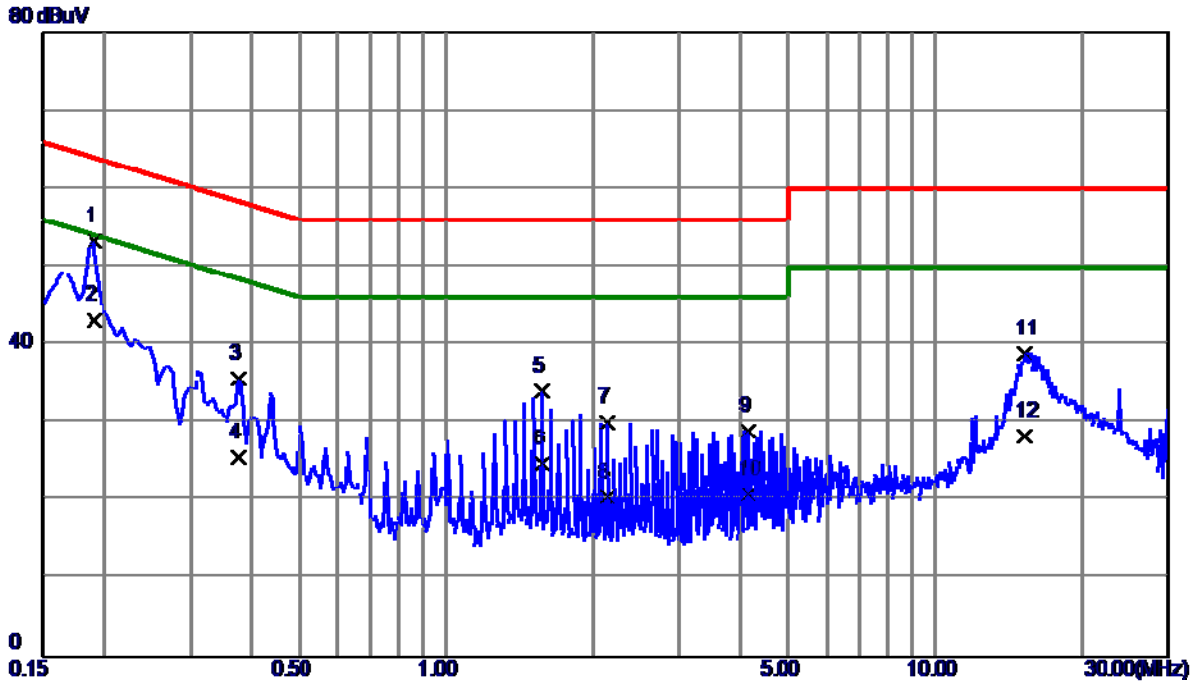


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1905	43.49	9.82	53.31	64.01	-10.70	QP
2	0.1905	33.40	9.82	43.22	54.01	-10.79	AVG
3	0.3750	25.93	9.81	35.74	58.39	-22.65	QP
4	0.3750	15.80	9.81	25.61	48.39	-22.78	AVG
5	1.5720	24.09	9.96	34.05	56.00	-21.95	QP
6	1.5720	14.90	9.96	24.86	46.00	-21.14	AVG
7	2.1345	20.04	10.01	30.05	56.00	-25.95	QP
8	2.1345	10.50	10.01	20.51	46.00	-25.49	AVG
9	4.1460	18.89	10.14	29.03	56.00	-26.97	QP
10	4.1460	10.59	10.14	20.73	46.00	-25.27	AVG
11	15.2025	28.12	10.77	38.89	60.00	-21.11	QP
12	15.2025	17.49	10.77	28.26	50.00	-21.74	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:MING JI 1.0m		
Test Engineer	Sam Wang		

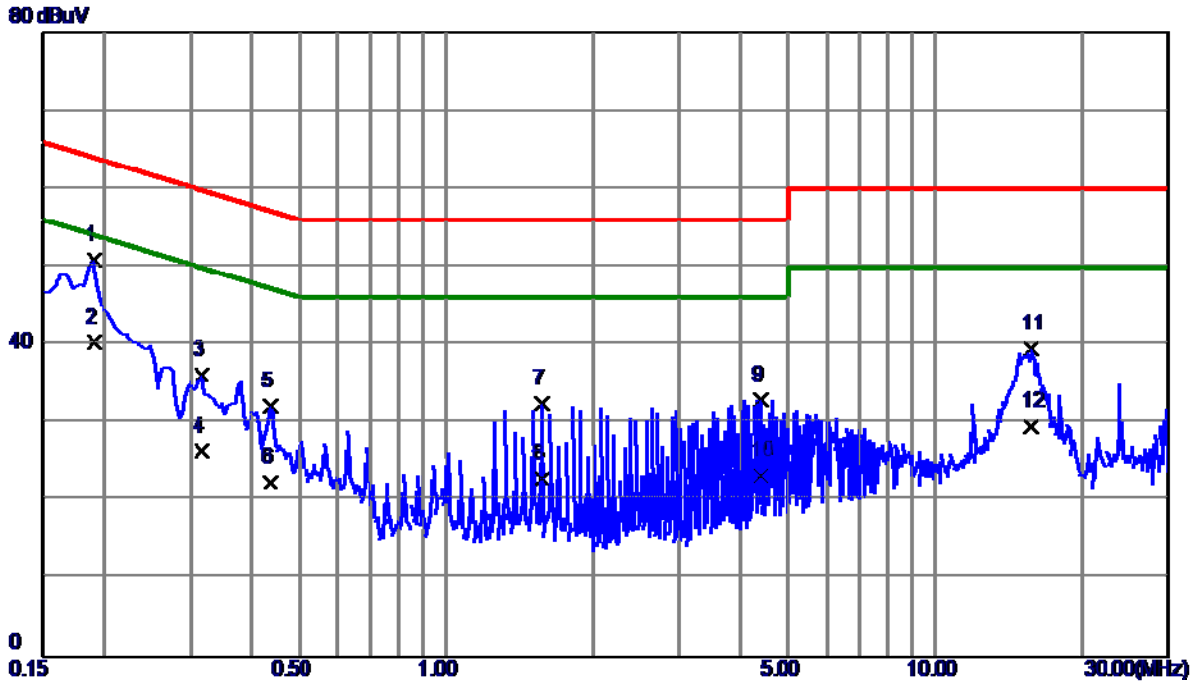


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1905	40.93	9.91	50.84	64.01	-13.17	QP
2	0.1905	30.40	9.91	40.31	54.01	-13.70	AVG
3	0.3165	26.22	9.94	36.16	59.80	-23.64	QP
4	0.3165	16.50	9.94	26.44	49.80	-23.36	AVG
5	0.4380	22.23	9.95	32.18	57.10	-24.92	QP
6	0.4380	12.39	9.95	22.34	47.10	-24.76	AVG
7	1.5720	22.31	10.16	32.47	56.00	-23.53	QP
8	1.5720	12.70	10.16	22.86	46.00	-23.14	AVG
9	4.3980	22.61	10.35	32.96	56.00	-23.04	QP
10	4.3980	12.90	10.35	23.25	46.00	-22.75	AVG
11	15.7020	28.41	11.14	39.55	60.00	-20.45	QP
12	15.7020	18.40	11.14	29.54	50.00	-20.46	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:Mingji 0.17m		
Test Engineer	Sam Wang		

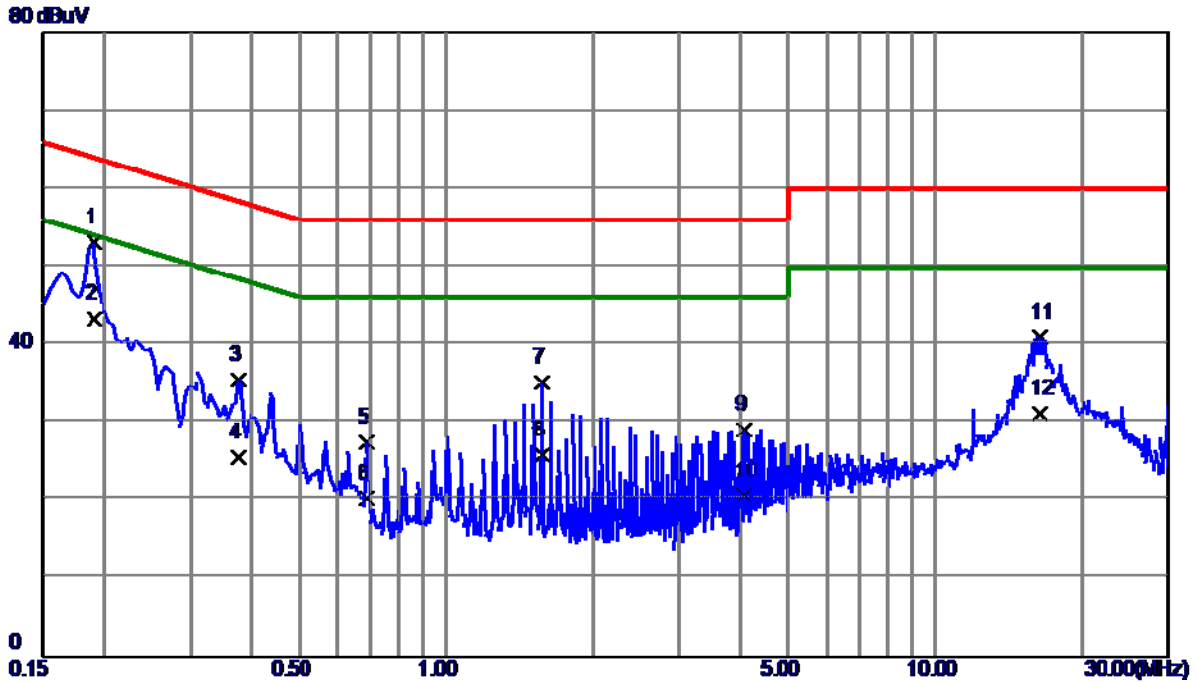

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1905	43.25	9.82	53.07	64.01	-10.94	QP
2 *	0.1905	33.50	9.82	43.32	54.01	-10.69	AVG
3	0.3750	25.71	9.81	35.52	58.39	-22.87	QP
4	0.3750	15.80	9.81	25.61	48.39	-22.78	AVG
5	0.6900	17.72	9.87	27.59	56.00	-28.41	QP
6	0.6900	10.50	9.87	20.37	46.00	-25.63	AVG
7	1.5720	25.20	9.96	35.16	56.00	-20.84	QP
8	1.5720	15.90	9.96	25.86	46.00	-20.14	AVG
9	4.0830	18.98	10.13	29.11	56.00	-26.89	QP
10	4.0830	10.50	10.13	20.63	46.00	-25.37	AVG
11	16.3275	30.14	10.87	41.01	60.00	-18.99	QP
12	16.3275	20.40	10.87	31.27	50.00	-18.73	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:Mingji 0.17m		
Test Engineer	Sam Wang		

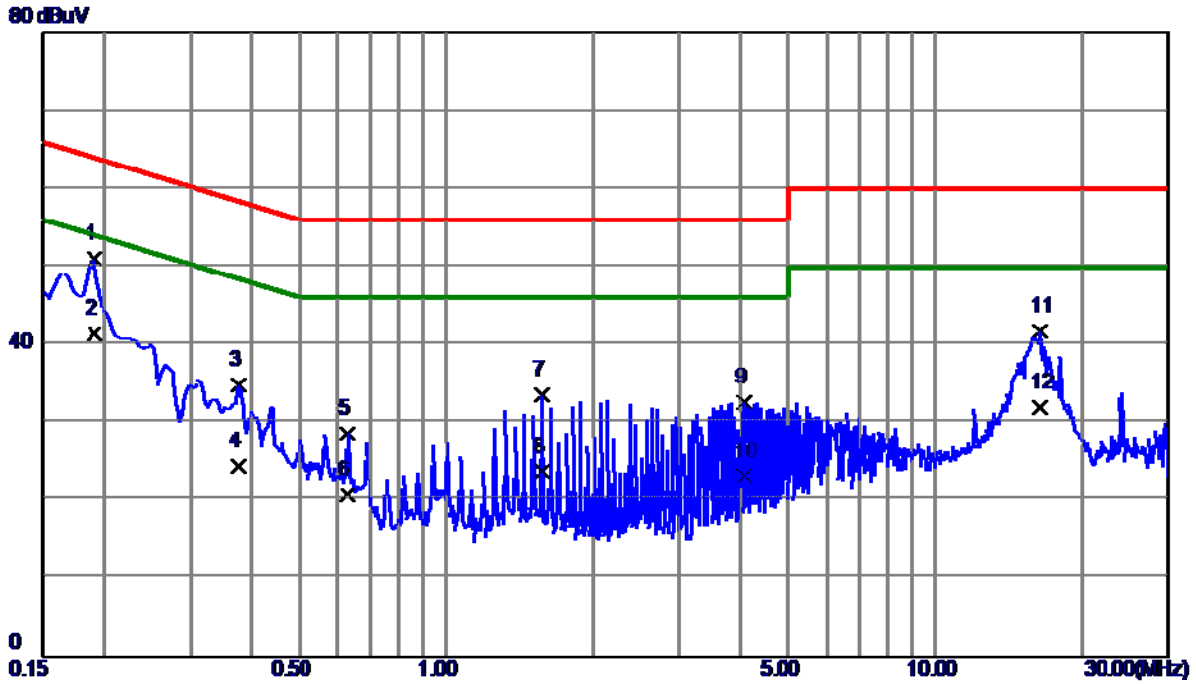

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1905	41.14	9.91	51.05	64.01	-12.96	QP
2 *	0.1905	31.50	9.91	41.41	54.01	-12.60	AVG
3	0.3750	24.90	9.95	34.85	58.39	-23.54	QP
4	0.3750	14.50	9.95	24.45	48.39	-23.94	AVG
5	0.6270	18.68	10.00	28.68	56.00	-27.32	QP
6	0.6270	10.80	10.00	20.80	46.00	-25.20	AVG
7	1.5720	23.47	10.16	33.63	56.00	-22.37	QP
8	1.5720	13.60	10.16	23.76	46.00	-22.24	AVG
9	4.0830	22.38	10.32	32.70	56.00	-23.30	QP
10	4.0830	12.80	10.32	23.12	46.00	-22.88	AVG
11	16.3905	30.51	11.20	41.71	60.00	-18.29	QP
12	16.3905	20.80	11.20	32.00	50.00	-18.00	AVG

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 11, 2019
2	Amplifier	HP	8447D	2944A09673	Oct. 19, 2018
3	Receiver	Agilent	N9038A	MY5213003 9	Aug. 20, 2018
4	Cable	emci	LMR-400(30 MHz-1GHz)(8 m+5m)	N/A	Jun. 26, 2018
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF7802084 16	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1- 01	N/A	N/A
8	Amplifier	Agilent	8449B	3008A02274	Mar. 11, 2019
9	Antenna	EM	EM-6876-1	230	Feb. 07, 2019
10	Controller	MF	MF-7802	MF7802084 16	N/A
11	Cable	emci	EMC104-SM- SM-12000(12 m)	N/A	Jun. 26, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

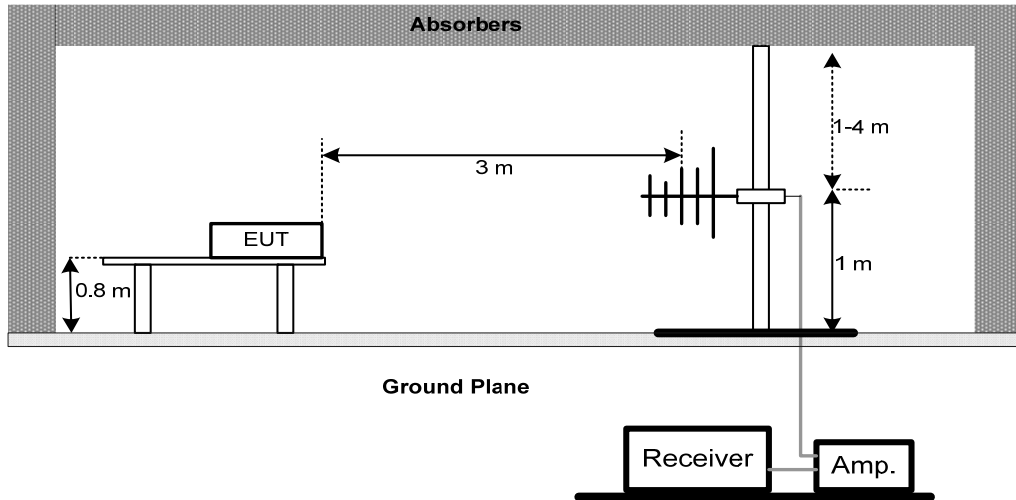

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

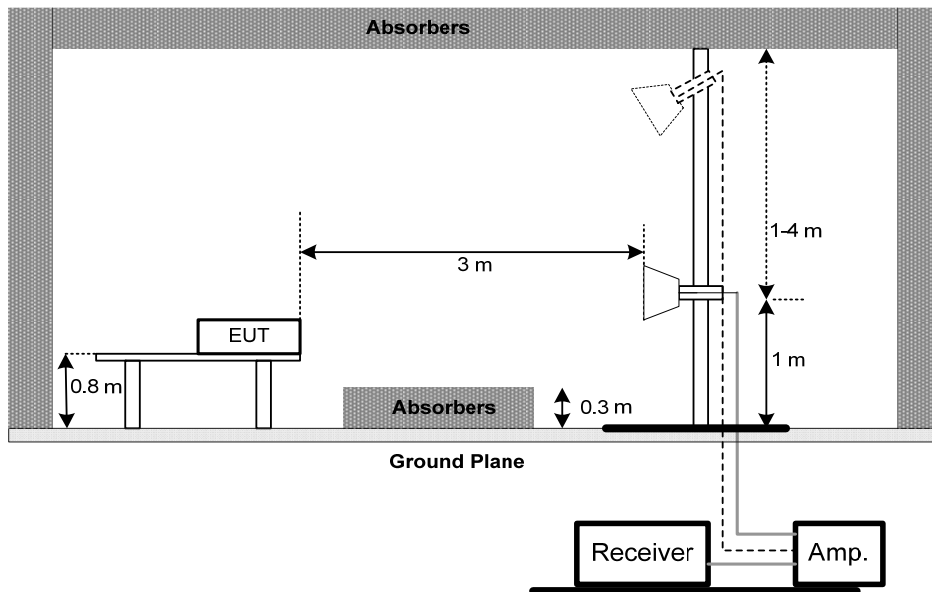


4.2.6 TEST RESULTS-BELOW 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

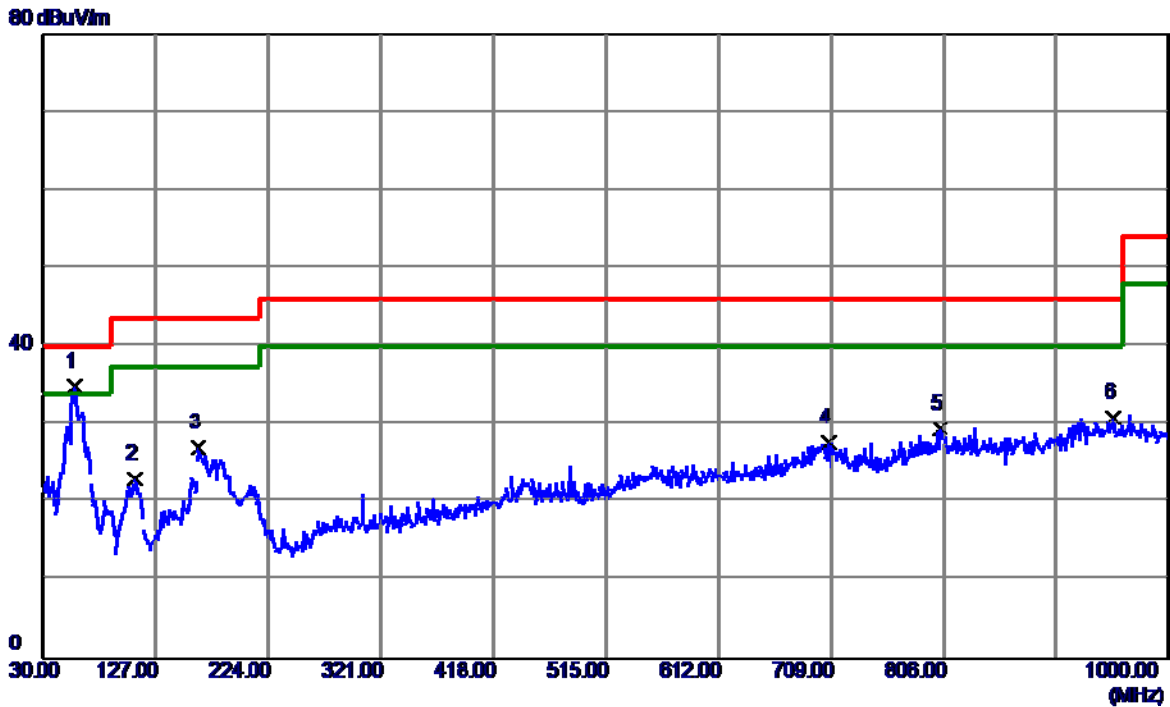


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	57.1600	48.67	-13.81	34.86	40.00	-5.14	QP
2	108.5700	39.02	-15.92	23.10	43.50	-20.40	QP
3	163.8600	37.36	-10.29	27.07	43.50	-16.43	QP
4	707.0600	28.72	-1.11	27.61	46.00	-18.39	QP
5	803.0900	29.00	0.46	29.46	46.00	-16.54	QP
6	952.4700	28.29	2.53	30.82	46.00	-15.18	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

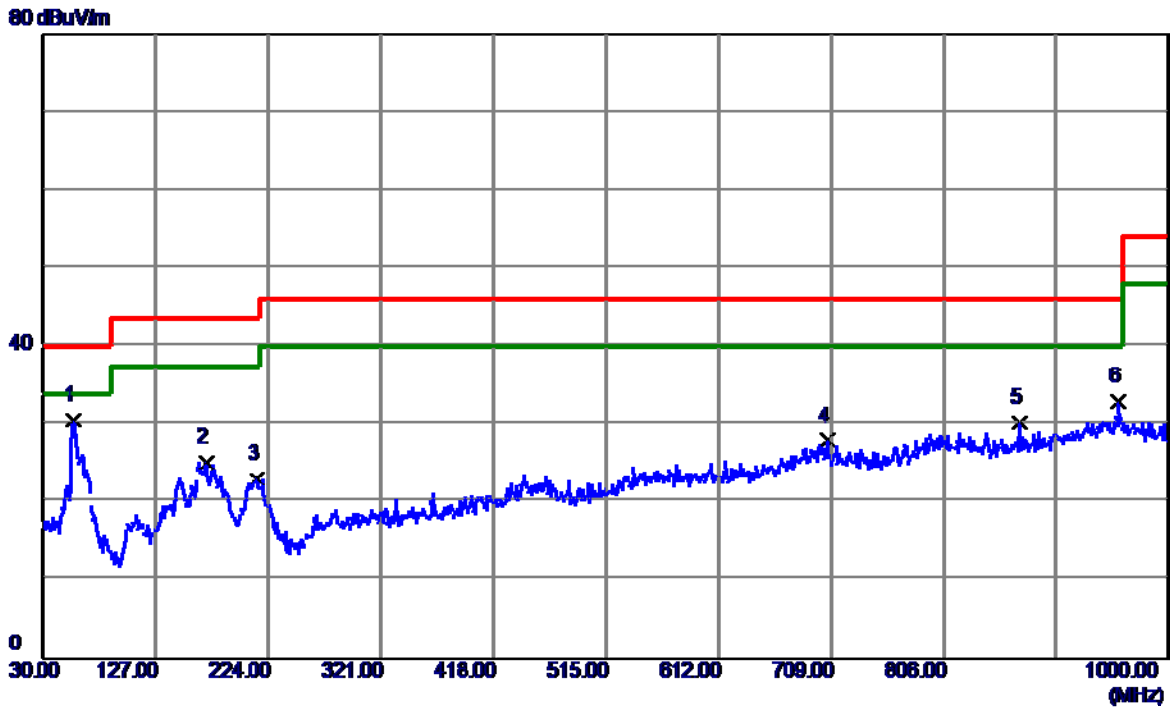


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	56.1900	44.21	-13.72	30.49	40.00	-9.51	QP
2	170.6500	35.88	-10.81	25.07	43.50	-18.43	QP
3	214.3000	37.17	-14.16	23.01	43.50	-20.49	QP
4	706.0900	29.00	-1.08	27.92	46.00	-18.08	QP
5	871.9600	30.06	0.11	30.17	46.00	-15.83	QP
6	957.3200	30.55	2.43	32.98	46.00	-13.02	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+Wifi		
Note	Adapter:Phitek+Battery:Sunwada+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

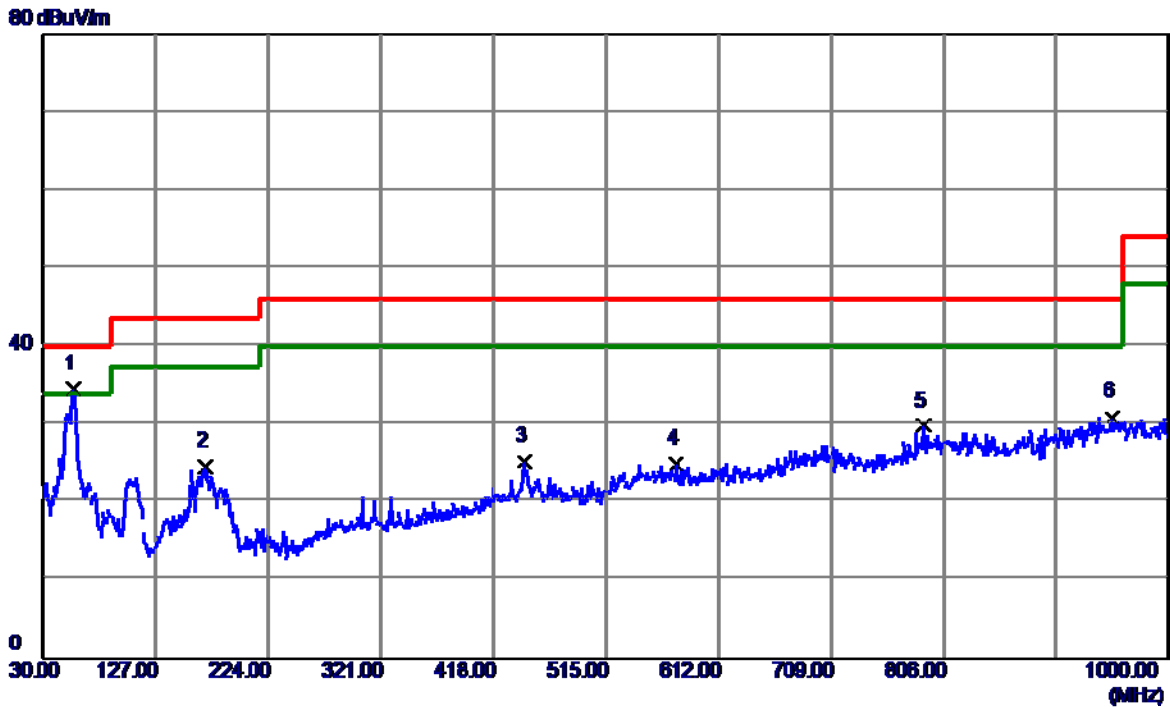


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	56.1900	48.26	-13.72	34.54	40.00	-5.46	QP
2	169.6799	35.40	-10.73	24.67	43.50	-18.83	QP
3	445.1600	31.90	-6.55	25.35	46.00	-20.65	QP
4	575.1400	29.12	-4.22	24.90	46.00	-21.10	QP
5	788.5400	29.98	-0.14	29.84	46.00	-16.16	QP
6	951.5000	28.41	2.55	30.96	46.00	-15.04	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+Wifi		
Note	Adapter:Phitek+Battery:Sunwada+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

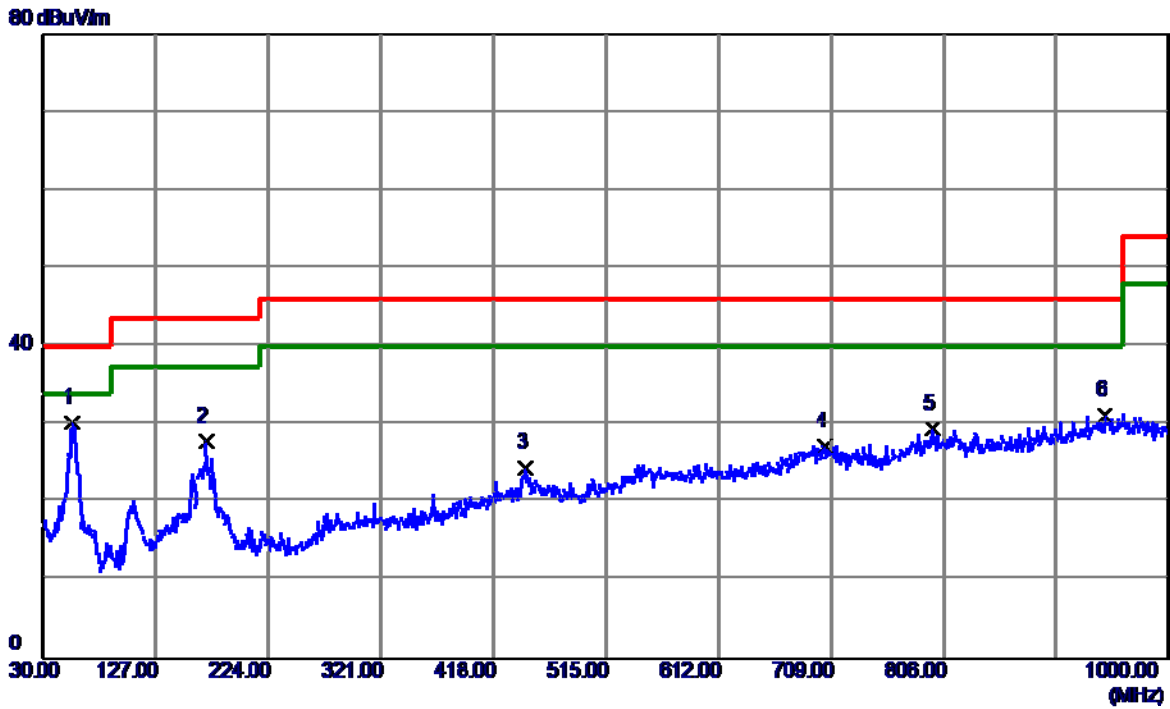


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	55.2200	43.98	-13.67	30.31	40.00	-9.69	QP
2	170.6500	38.63	-10.81	27.82	43.50	-15.68	QP
3	446.1300	30.97	-6.51	24.46	46.00	-21.54	QP
4	703.1800	28.27	-1.00	27.27	46.00	-18.73	QP
5	796.3000	29.08	0.29	29.37	46.00	-16.63	QP
6	944.7100	28.82	2.36	31.18	46.00	-14.82	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

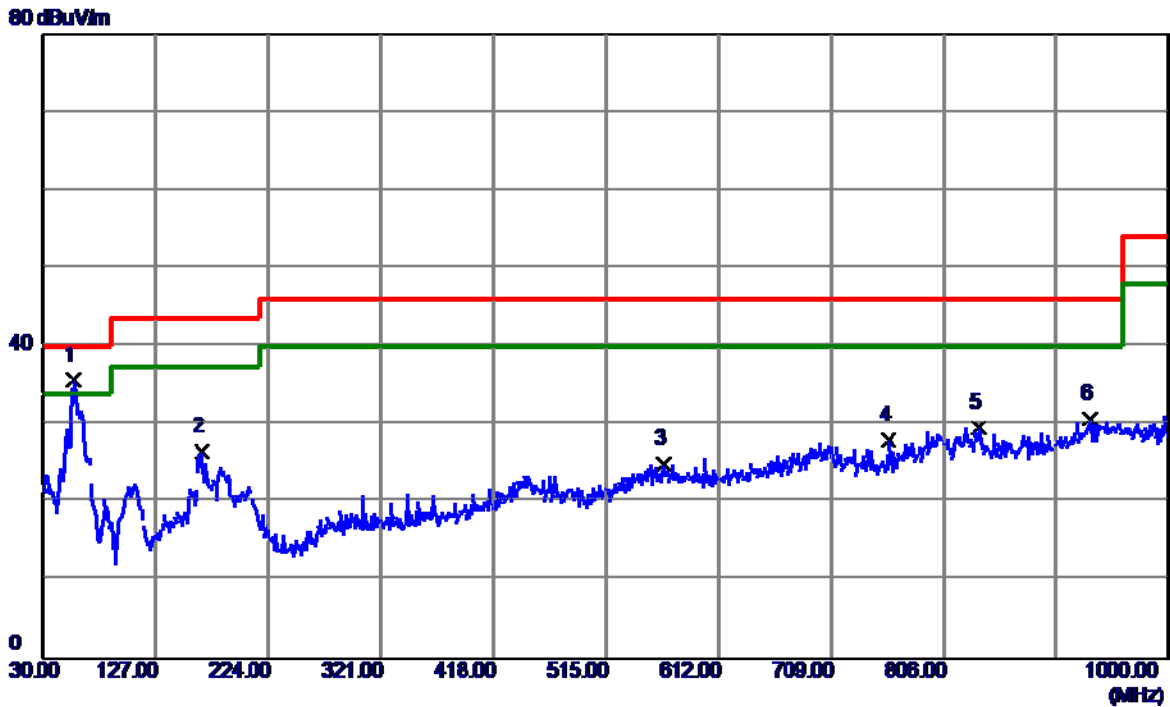


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	56.1900	49.35	-13.72	35.63	40.00	-4.37	QP
2	166.7700	37.04	-10.51	26.53	43.50	-16.97	QP
3	564.4699	29.15	-4.21	24.94	46.00	-21.06	QP
4	758.4699	29.87	-1.82	28.05	46.00	-17.95	QP
5	836.0700	29.65	0.00	29.65	46.00	-16.35	QP
6	932.1000	28.89	1.83	30.72	46.00	-15.28	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

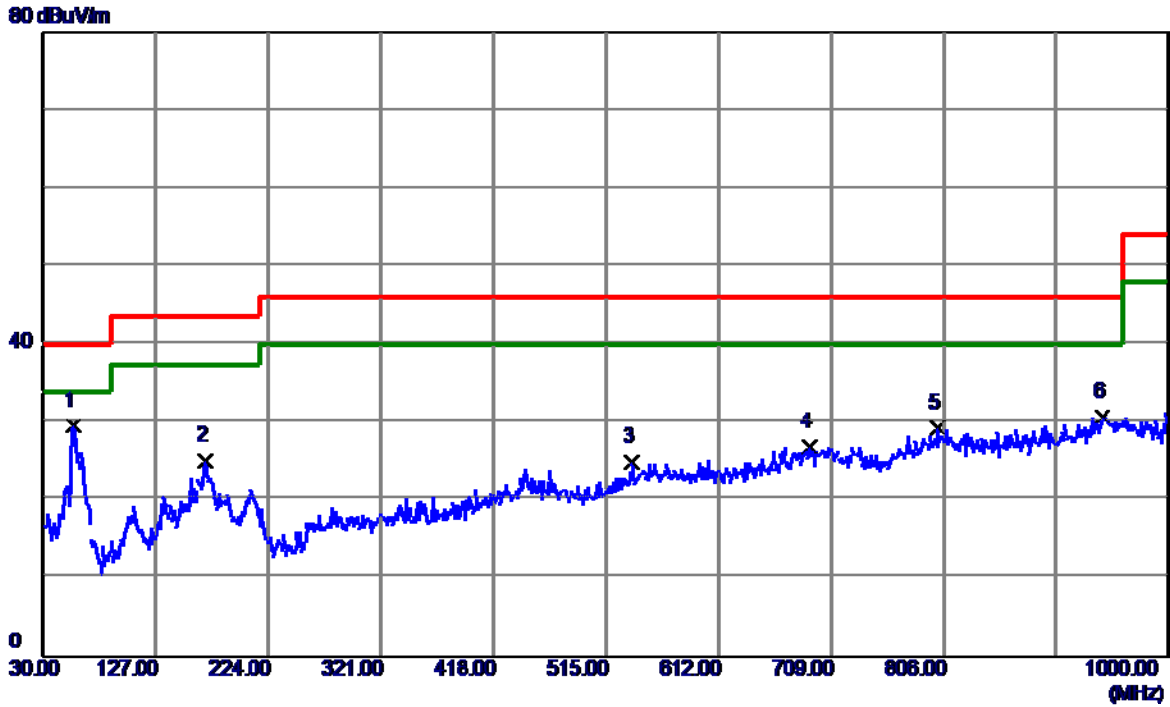


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	56.1900	43.38	-13.72	29.66	40.00	-10.34	QP
2	169.6799	35.91	-10.73	25.18	43.50	-18.32	QP
3	537.3100	29.95	-4.98	24.97	46.00	-21.03	QP
4	690.5700	28.18	-1.37	26.81	46.00	-19.19	QP
5	800.1800	28.74	0.50	29.24	46.00	-16.76	QP
6	942.7700	28.44	2.28	30.72	46.00	-15.28	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Huntkey+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

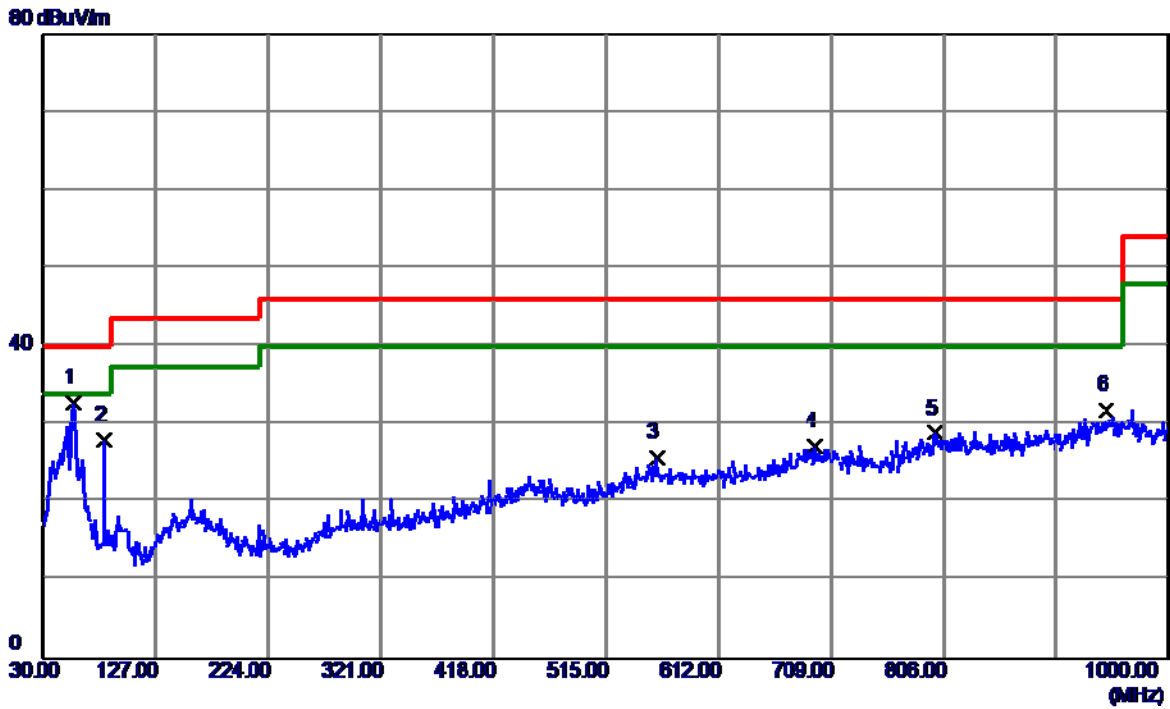


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	56.1900	46.47	-13.72	32.75	40.00	-7.25	QP
2	82.3800	46.01	-17.98	28.03	40.00	-11.97	QP
3	558.6500	30.00	-4.20	25.80	46.00	-20.20	QP
4	694.4500	28.46	-1.19	27.27	46.00	-18.73	QP
5	798.2400	28.48	0.40	28.88	46.00	-17.12	QP
6	945.6800	29.49	2.40	31.89	46.00	-14.11	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Huntkey+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

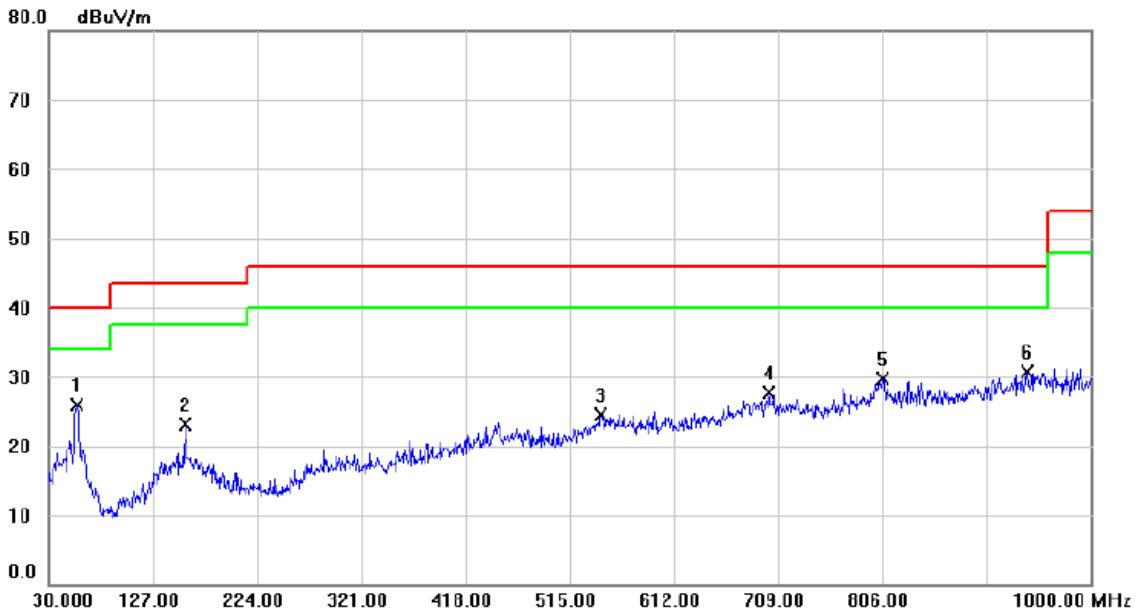


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.1900	39.70	-13.72	25.98	40.00	-14.02	QP	
2		157.0700	33.25	-10.20	23.05	43.50	-20.45	QP	
3		544.1000	28.97	-4.54	24.43	46.00	-21.57	QP	
4		700.2700	28.61	-0.92	27.69	46.00	-18.31	QP	
5		806.9700	29.24	0.41	29.65	46.00	-16.35	QP	
6		940.8300	28.59	2.19	30.78	46.00	-15.22	QP	

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:BYD+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

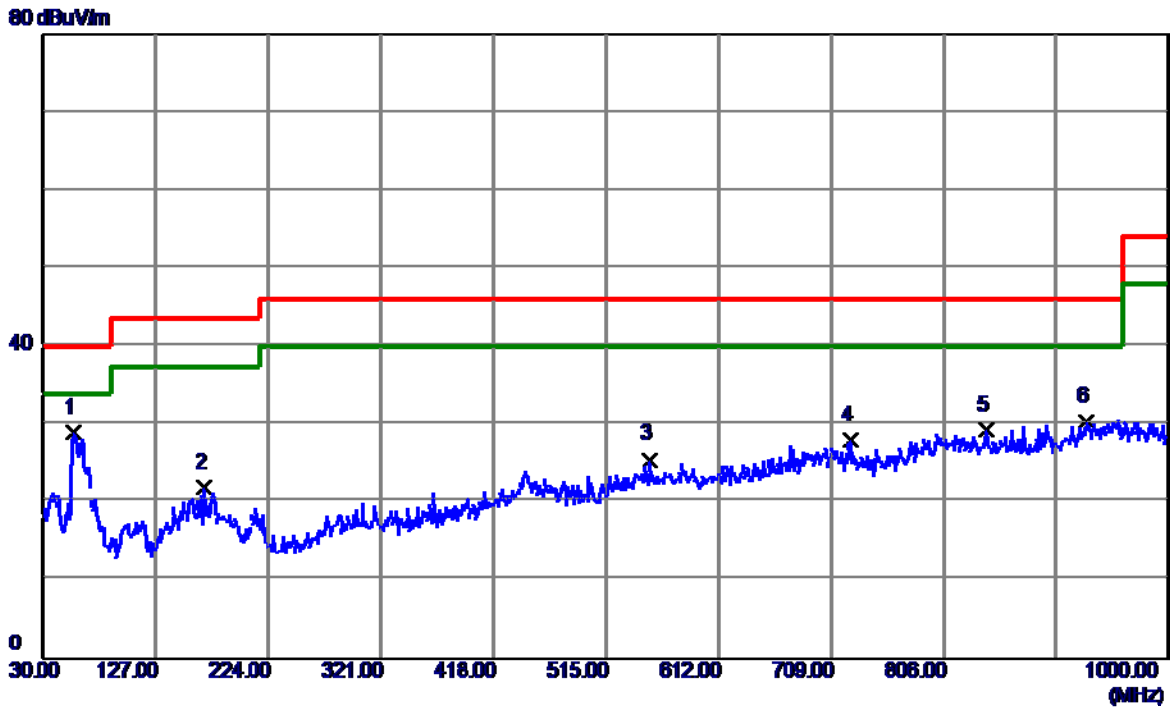


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	56.1900	42.71	-13.72	28.99	40.00	-11.01	QP
2	168.7100	32.53	-10.66	21.87	43.50	-21.63	QP
3	552.8300	29.71	-4.19	25.52	46.00	-20.48	QP
4	726.4600	29.67	-1.65	28.02	46.00	-17.98	QP
5	842.8600	29.40	-0.09	29.31	46.00	-16.69	QP
6	929.1900	28.64	1.71	30.35	46.00	-15.65	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:BYD+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

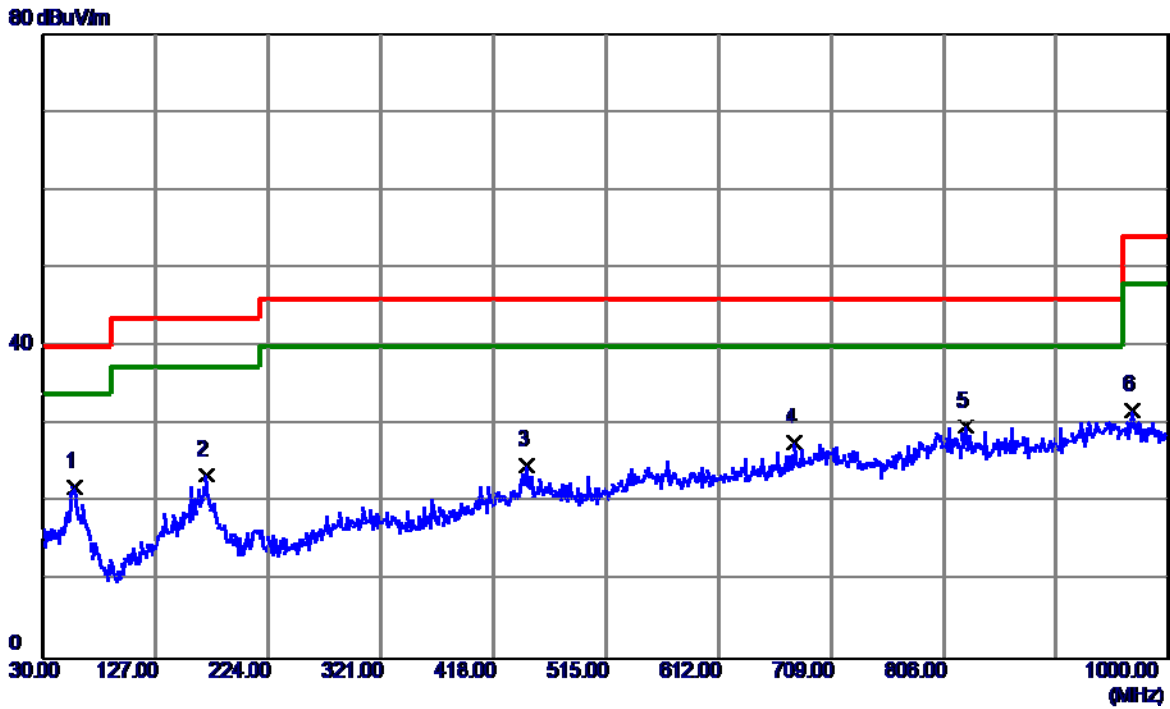


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	57.1600	35.81	-13.81	22.00	40.00	-18.00	QP
2	170.6500	34.30	-10.81	23.49	43.50	-20.01	QP
3	447.1000	31.27	-6.46	24.81	46.00	-21.19	QP
4	677.9600	29.66	-1.99	27.67	46.00	-18.33	QP
5 *	825.4000	29.67	0.15	29.82	46.00	-16.18	QP
6	968.9600	29.63	2.19	31.82	54.00	-22.18	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

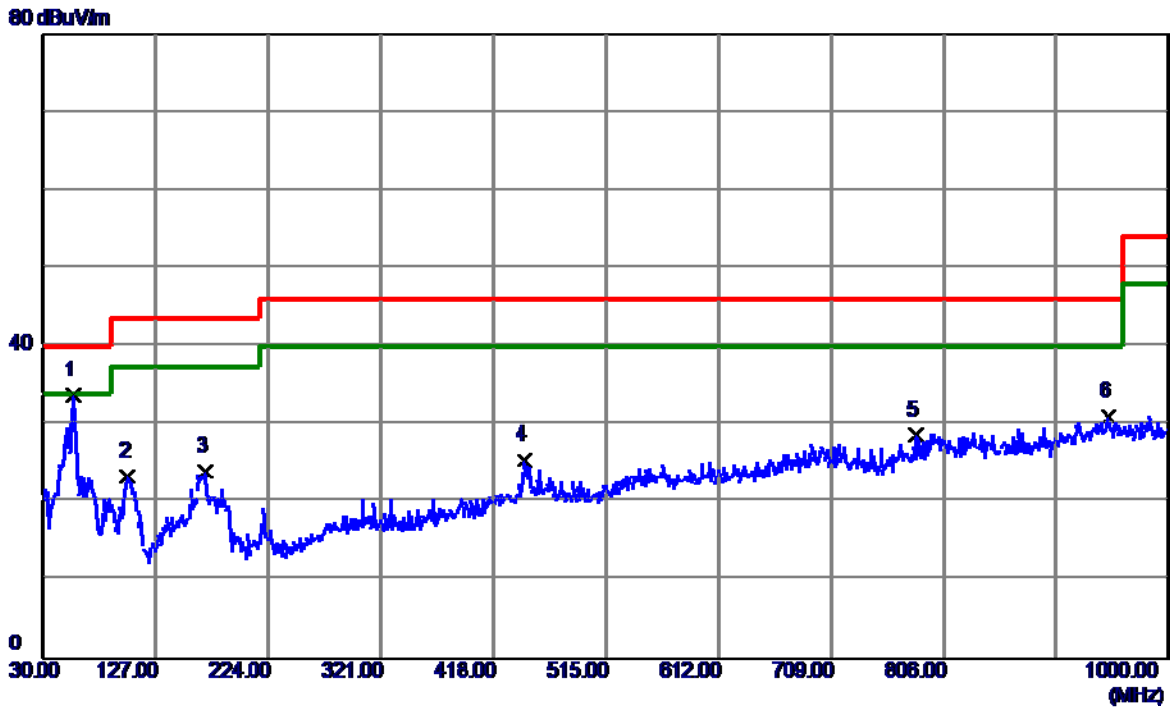


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	56.1900	47.46	-13.72	33.74	40.00	-6.26	QP
2	102.7500	40.40	-17.00	23.40	43.50	-20.10	QP
3	169.6799	34.69	-10.73	23.96	43.50	-19.54	QP
4	445.1600	31.99	-6.55	25.44	46.00	-20.56	QP
5	782.7199	29.18	-0.47	28.71	46.00	-17.29	QP
6	948.5900	28.45	2.52	30.97	46.00	-15.03	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

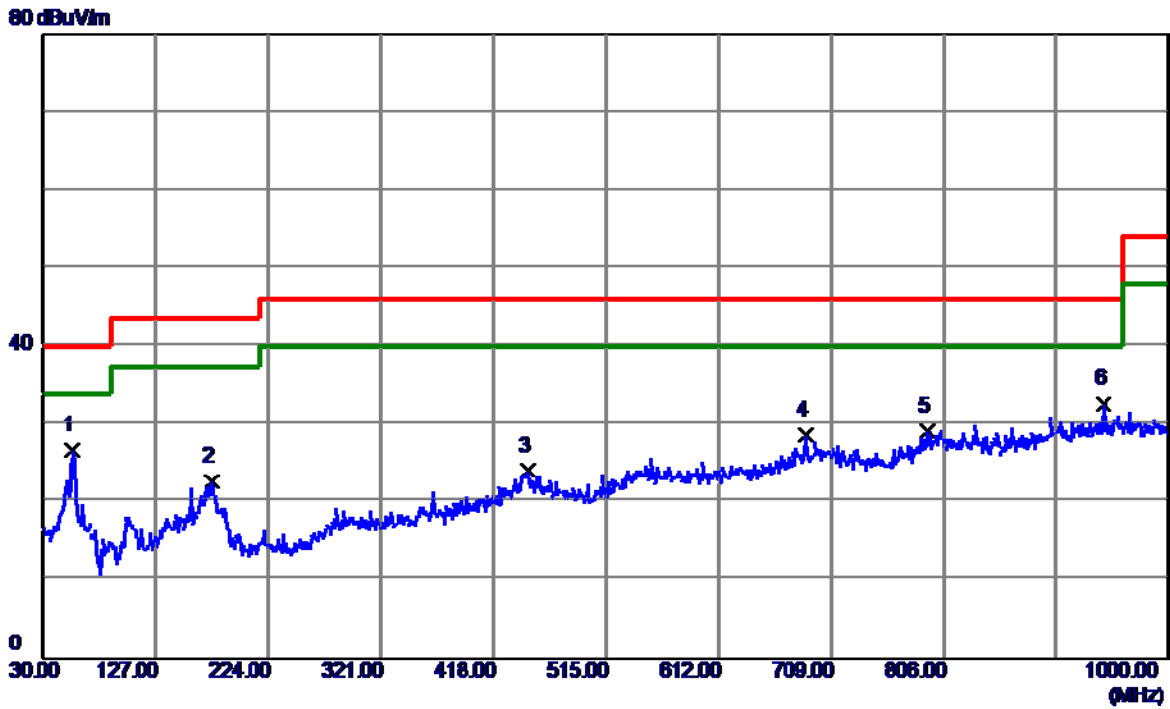


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	55.2200	40.32	-13.67	26.65	40.00	-13.35	QP
2	175.5000	33.96	-11.27	22.69	43.50	-20.81	QP
3	448.0700	30.50	-6.42	24.08	46.00	-21.92	QP
4	687.6599	30.16	-1.52	28.64	46.00	-17.36	QP
5	791.4500	29.07	0.02	29.09	46.00	-16.91	QP
6 *	943.7400	30.36	2.32	32.68	46.00	-13.32	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:HONGLIN 1.0m		
Test Engineer	Sam Wang		

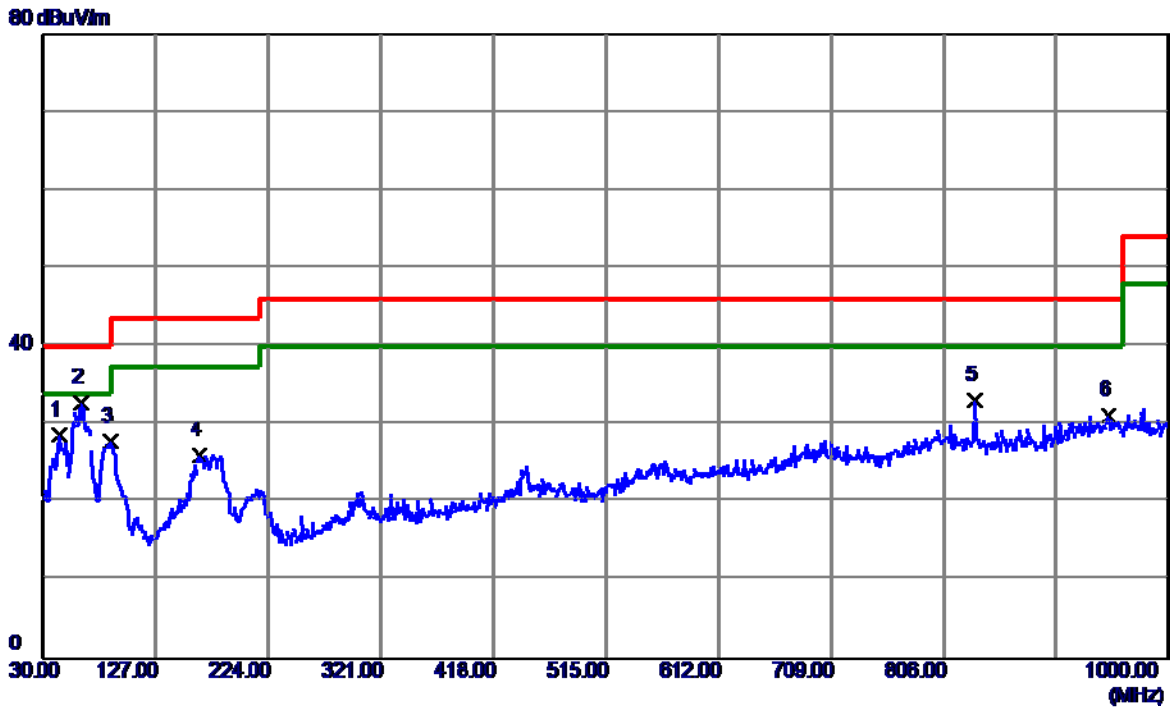


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	43.5800	42.20	-13.57	28.63	40.00	-11.37	QP
2 *	62.4950	47.32	-14.55	32.77	40.00	-7.23	QP
3	88.6850	45.88	-18.11	27.77	43.50	-15.73	QP
4	164.3450	36.46	-10.33	26.13	43.50	-17.37	QP
5	833.1599	33.12	0.04	33.16	46.00	-12.84	QP
6	948.5900	28.63	2.52	31.15	46.00	-14.85	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:HONGLIN 1.0m		
Test Engineer	Sam Wang		

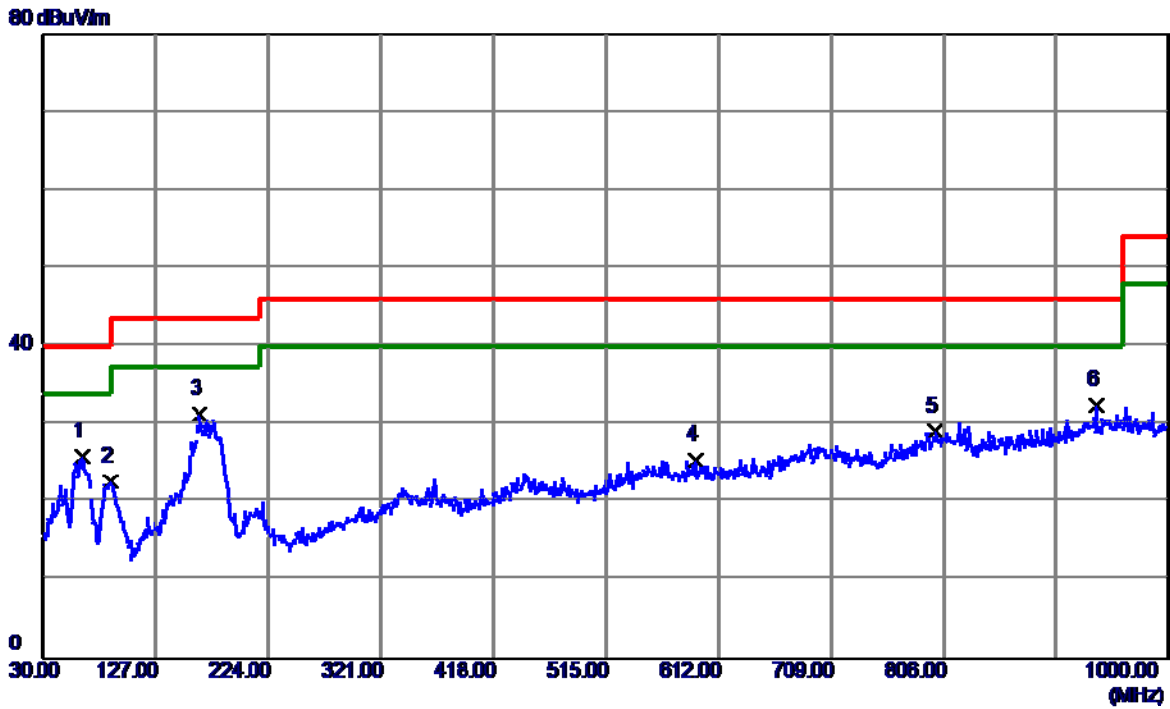


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	63.4650	40.55	-14.70	25.85	40.00	-14.15	QP
2	88.2000	40.75	-18.08	22.67	43.50	-20.83	QP
3 *	164.8300	41.70	-10.37	31.33	43.50	-12.17	QP
4	592.1150	29.66	-4.25	25.41	46.00	-20.59	QP
5	798.7250	28.67	0.43	29.10	46.00	-16.90	QP
6	936.9500	30.38	2.03	32.41	46.00	-13.59	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:FOXCONN 1.0m		
Test Engineer	Sam Wang		

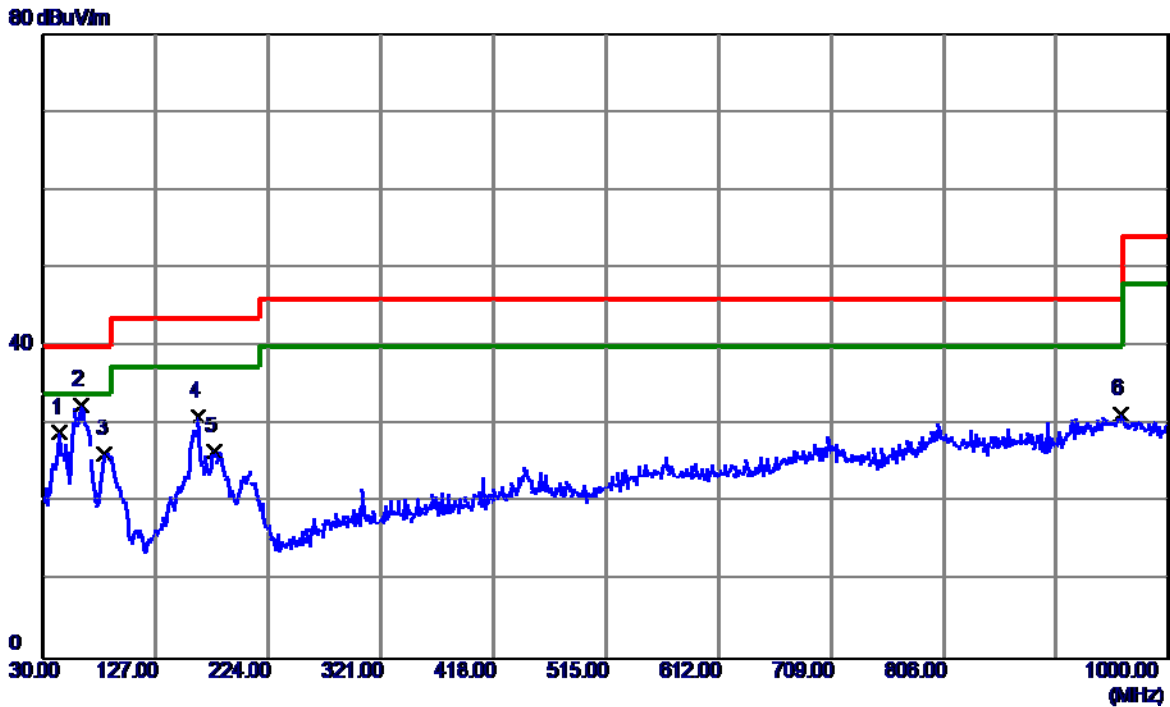


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	44.5500	42.65	-13.63	29.02	40.00	-10.98	QP
2 *	62.4950	47.07	-14.55	32.52	40.00	-7.48	QP
3	83.3500	44.24	-17.95	26.29	40.00	-13.71	QP
4	163.8600	41.39	-10.29	31.10	43.50	-12.40	QP
5	177.4400	38.02	-11.46	26.56	43.50	-16.94	QP
6	959.2600	28.98	2.39	31.37	46.00	-14.63	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:FOXCONN 1.0m		
Test Engineer	Sam Wang		

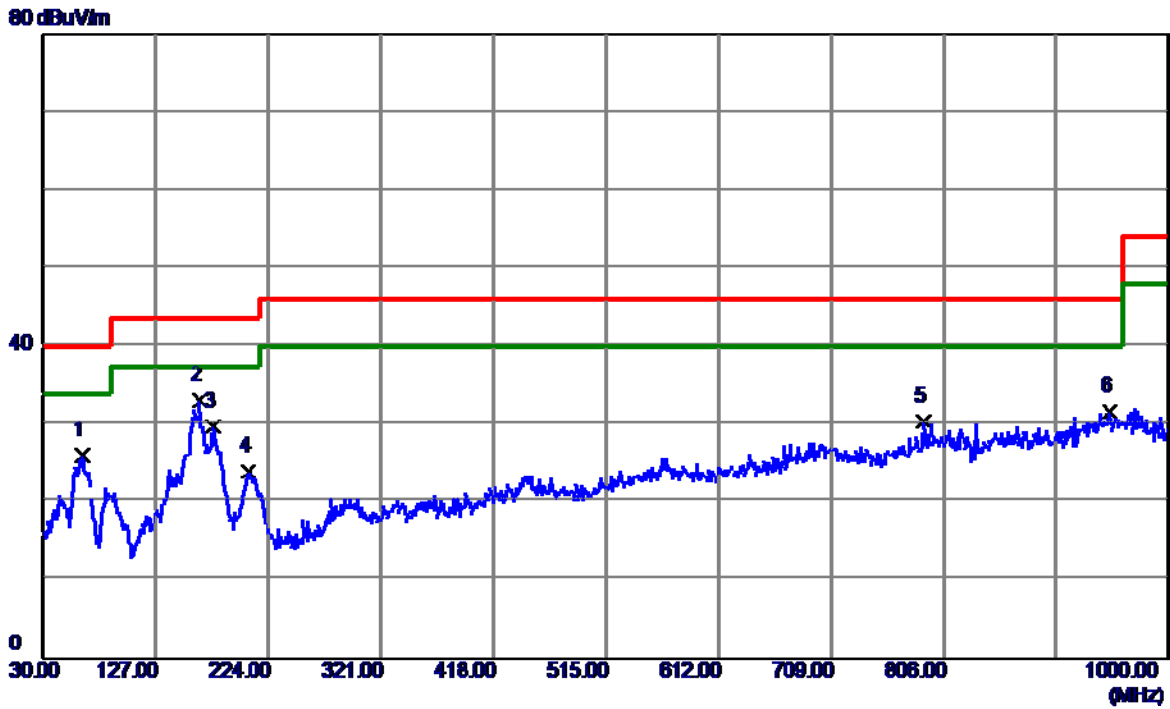


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	62.9800	40.78	-14.63	26.15	40.00	-13.85	QP
2 *	164.8300	43.56	-10.37	33.19	43.50	-10.31	QP
3	176.9550	41.10	-11.41	29.69	43.50	-13.81	QP
4	207.0250	38.25	-14.25	24.00	43.50	-19.50	QP
5	789.0250	30.48	-0.11	30.37	46.00	-15.63	QP
6	949.0750	29.10	2.54	31.64	46.00	-14.36	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:MING JI 1.0m		
Test Engineer	Sam Wang		

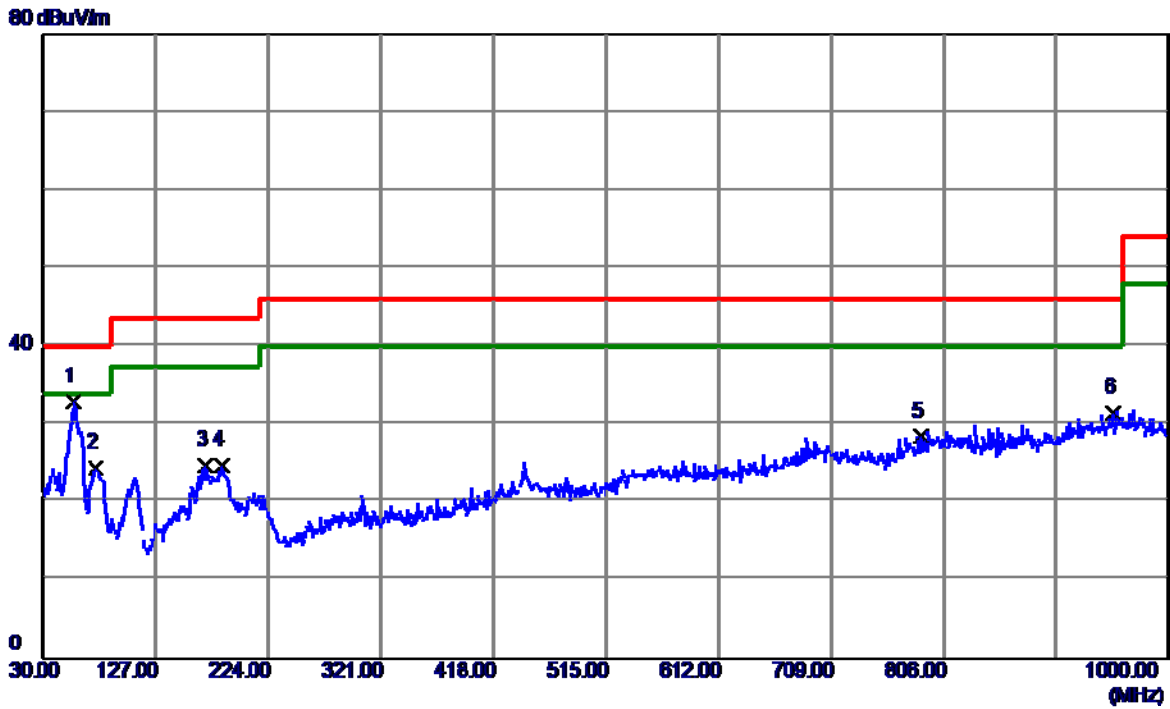


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	56.1900	46.75	-13.72	33.03	40.00	-6.97	QP
2	75.5899	41.47	-16.92	24.55	40.00	-15.45	QP
3	170.1649	35.58	-10.77	24.81	43.50	-18.69	QP
4	184.2300	36.87	-12.14	24.73	43.50	-18.77	QP
5	786.1150	28.80	-0.28	28.52	46.00	-17.48	QP
6	952.9550	29.03	2.52	31.55	46.00	-14.45	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:MING JI 1.0m		
Test Engineer	Sam Wang		

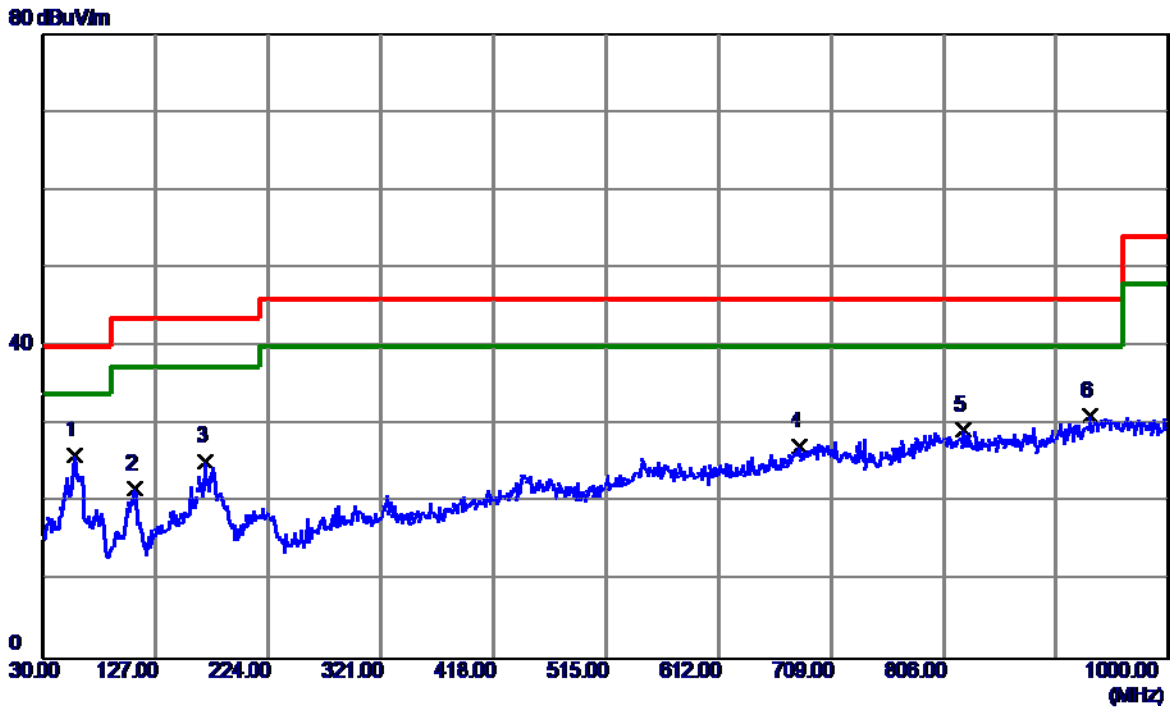


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	57.1600	39.93	-13.81	26.12	40.00	-13.88	QP
2	109.0550	37.64	-15.83	21.81	43.50	-21.69	QP
3	170.1649	36.12	-10.77	25.35	43.50	-18.15	QP
4	681.8400	29.01	-1.80	27.21	46.00	-18.79	QP
5	822.9750	29.14	0.18	29.32	46.00	-16.68	QP
6	931.6150	29.31	1.81	31.12	46.00	-14.88	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Mingji 0.17m		
Test Engineer	Sam Wang		

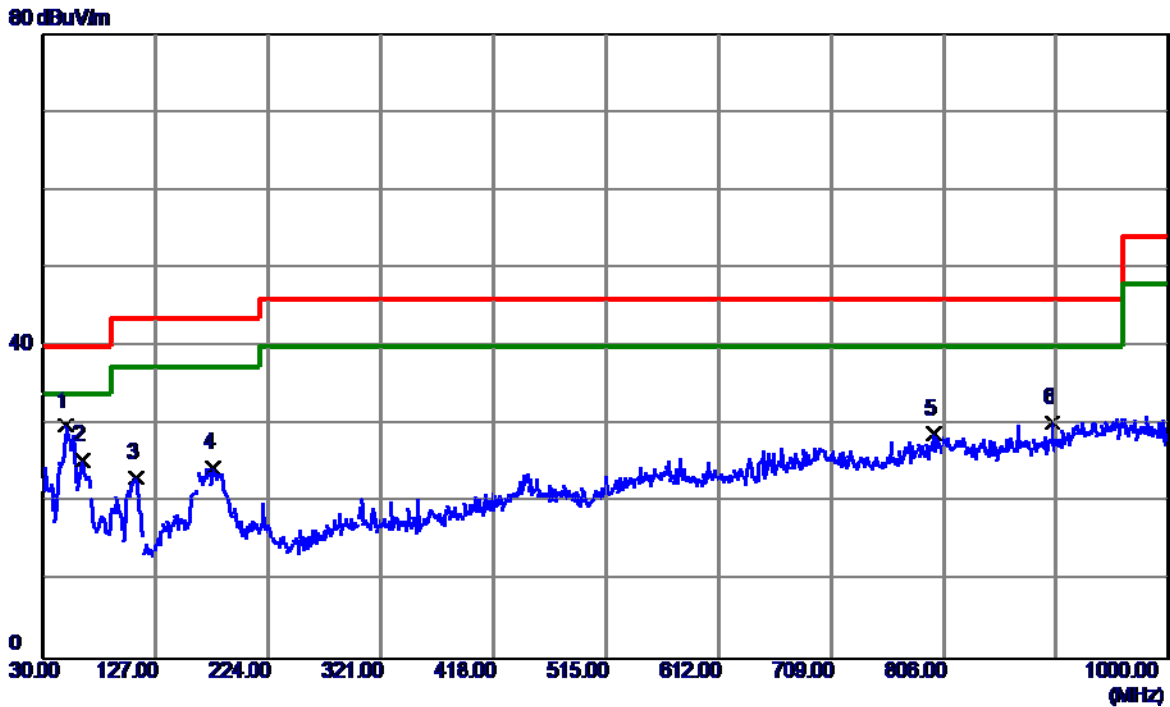


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	49.8849	43.10	-13.26	29.84	40.00	-10.16	QP
2	63.4650	40.17	-14.70	25.47	40.00	-14.53	QP
3	109.5400	38.90	-15.74	23.16	43.50	-20.34	QP
4	176.4700	35.85	-11.37	24.48	43.50	-19.02	QP
5	797.2700	28.43	0.35	28.78	46.00	-17.22	QP
6	899.6050	29.78	0.48	30.26	46.00	-15.74	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Mingji 0.17m		
Test Engineer	Sam Wang		

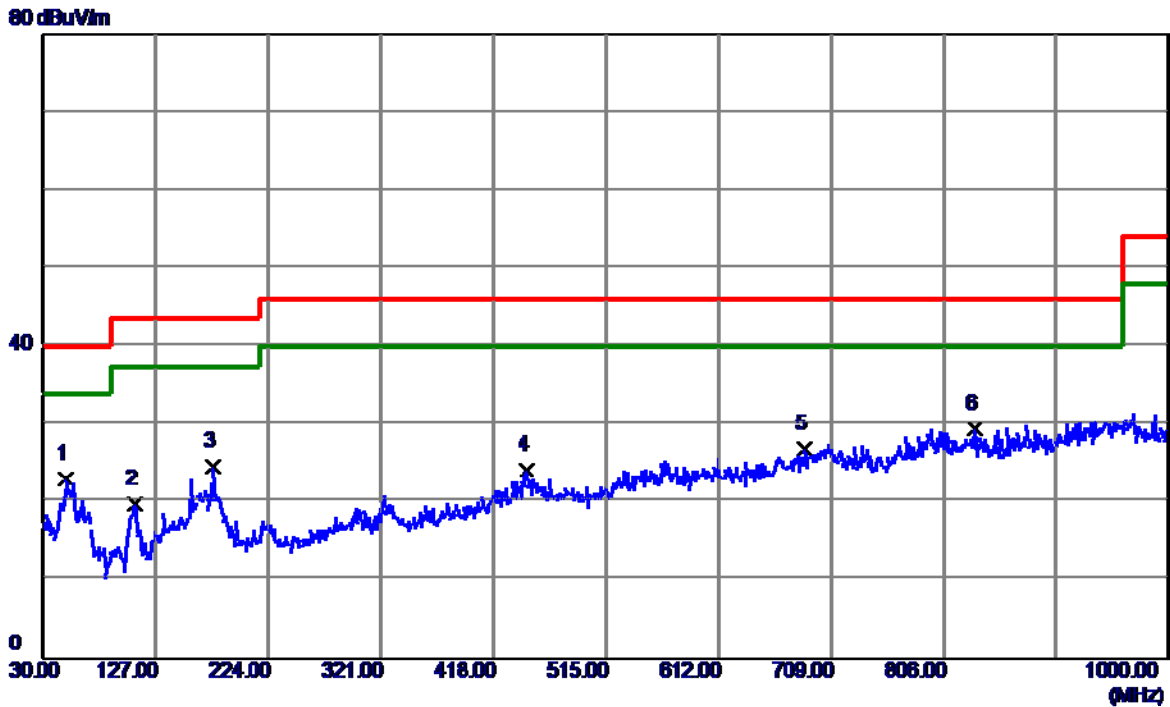


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	49.8849	36.31	-13.26	23.05	40.00	-16.95	QP
2	109.0550	35.64	-15.83	19.81	43.50	-23.69	QP
3	176.9550	35.98	-11.41	24.57	43.50	-18.93	QP
4	447.5850	30.61	-6.44	24.17	46.00	-21.83	QP
5	686.6900	28.39	-1.56	26.83	46.00	-19.17	QP
6 *	832.6750	29.35	0.05	29.40	46.00	-16.60	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Karpin Zhong		

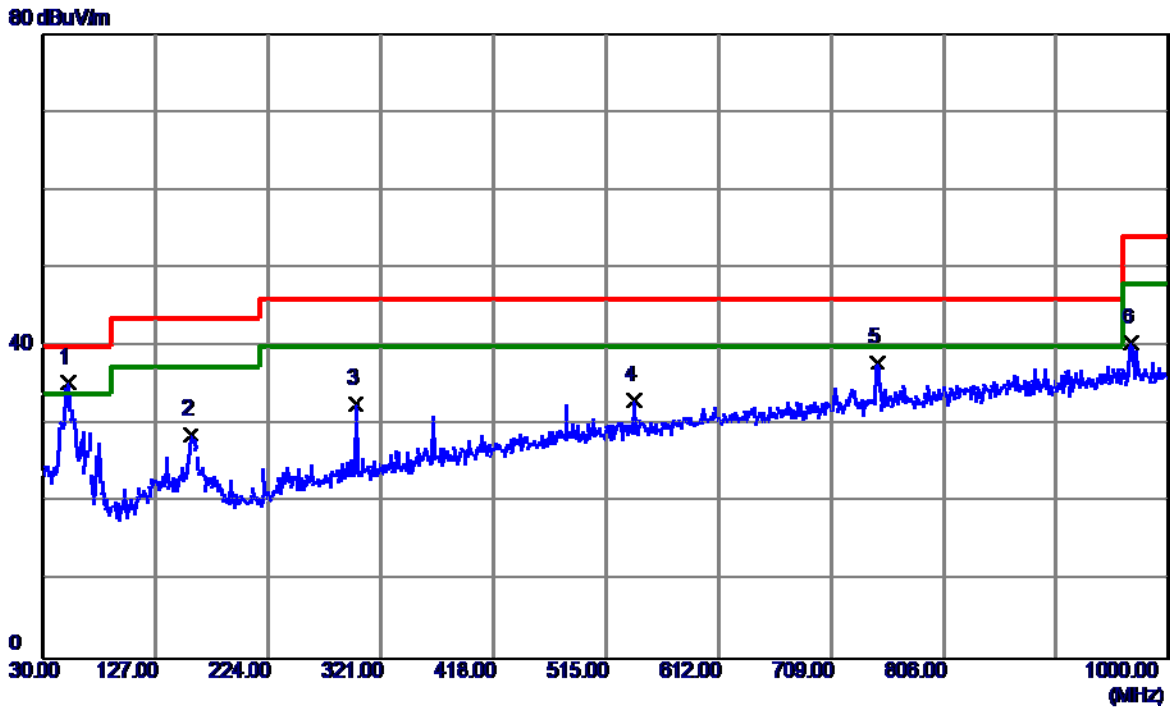


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	51.3400	40.41	-5.09	35.32	40.00	-4.68	QP
2	157.0700	33.80	-5.08	28.72	43.50	-14.78	QP
3	299.6600	36.87	-4.22	32.65	46.00	-13.35	QP
4	540.2199	31.49	1.59	33.08	46.00	-12.92	QP
5	748.7700	32.06	5.91	37.97	46.00	-8.03	QP
6	967.9900	31.78	8.69	40.47	54.00	-13.53	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Karpin Zhong		

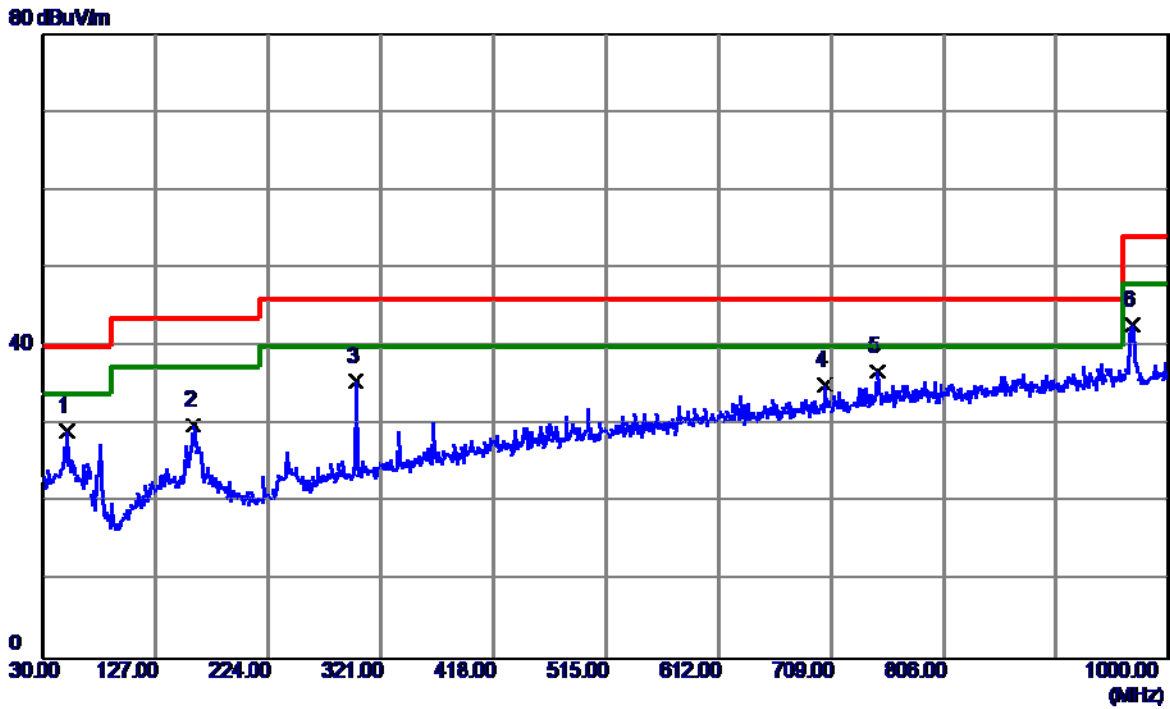


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	50.3700	34.22	-5.05	29.17	40.00	-10.83	QP
2	159.0100	35.01	-5.05	29.96	43.50	-13.54	QP
3	299.6600	39.79	-4.22	35.57	46.00	-10.43	QP
4	703.1800	30.17	4.91	35.08	46.00	-10.92	QP
5 *	748.7700	30.84	5.91	36.75	46.00	-9.25	QP
6	968.9600	34.03	8.69	42.72	54.00	-11.28	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:Sunwada+USB Cable:Luxshare 1.0m		
Test Engineer	Karpin Zhong		

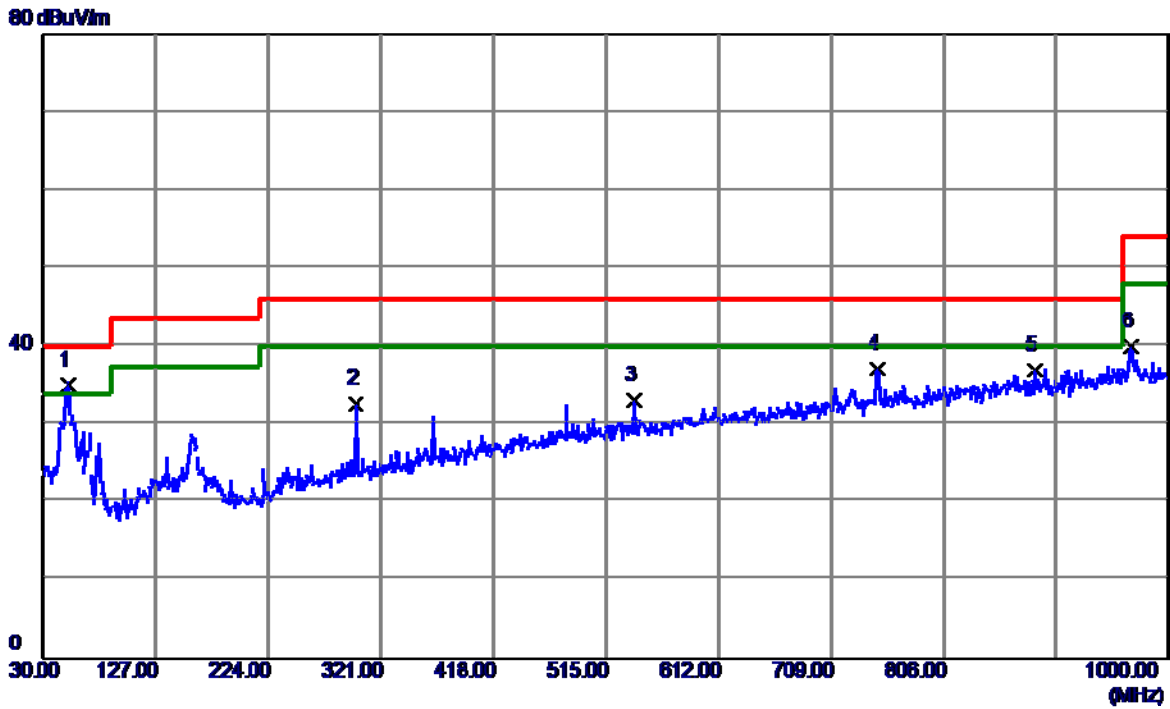


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	51.3400	40.16	-5.09	35.07	40.00	-4.93	QP
2	299.6600	36.87	-4.22	32.65	46.00	-13.35	QP
3	540.2199	31.49	1.59	33.08	46.00	-12.92	QP
4	748.7700	31.28	5.91	37.19	46.00	-8.81	QP
5	884.5700	29.36	7.54	36.90	46.00	-9.10	QP
6	967.9900	31.25	8.69	39.94	54.00	-14.06	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:Sunwada+USB Cable:Luxshare 1.0m		
Test Engineer	Karpin Zhong		

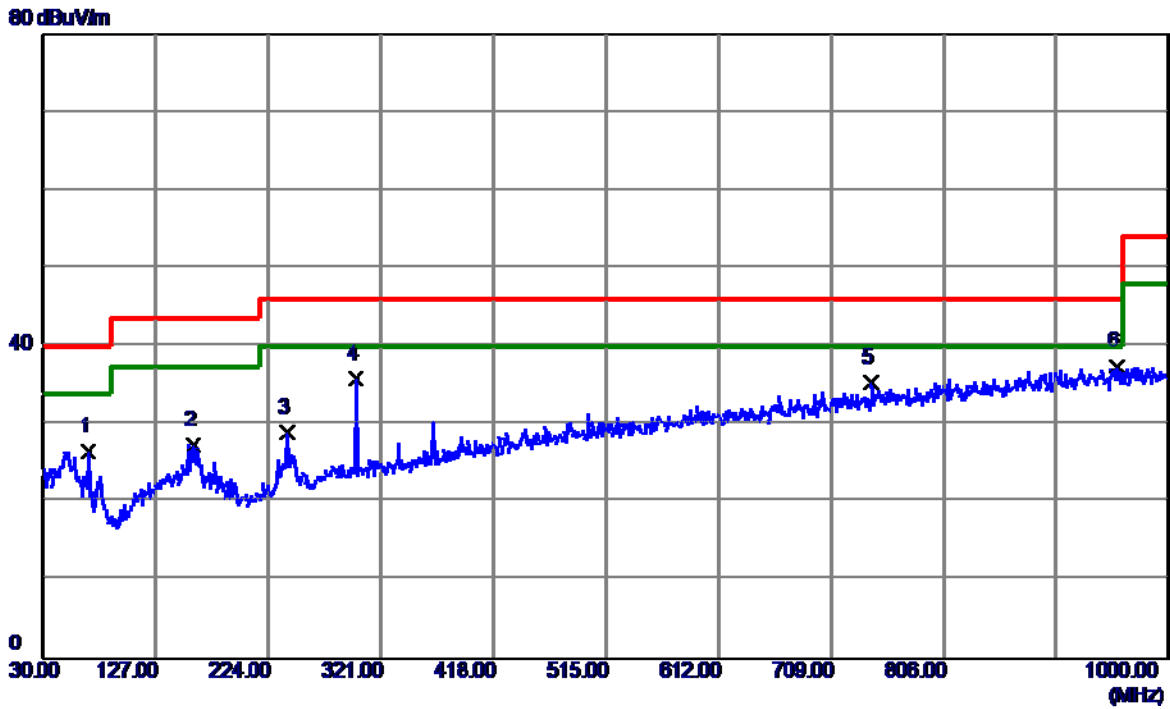


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	68.8000	34.20	-7.59	26.61	40.00	-13.39	QP
2	159.0100	32.34	-5.05	27.29	43.50	-16.21	QP
3	240.4900	35.14	-6.16	28.98	46.00	-17.02	QP
4	299.6600	40.00	-4.22	35.78	46.00	-10.22	QP
5	743.9200	29.50	5.80	35.30	46.00	-10.70	QP
6 *	955.3800	28.84	8.60	37.44	46.00	-8.56	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:HONGLIN 1.0m		
Test Engineer	Sam Wang		

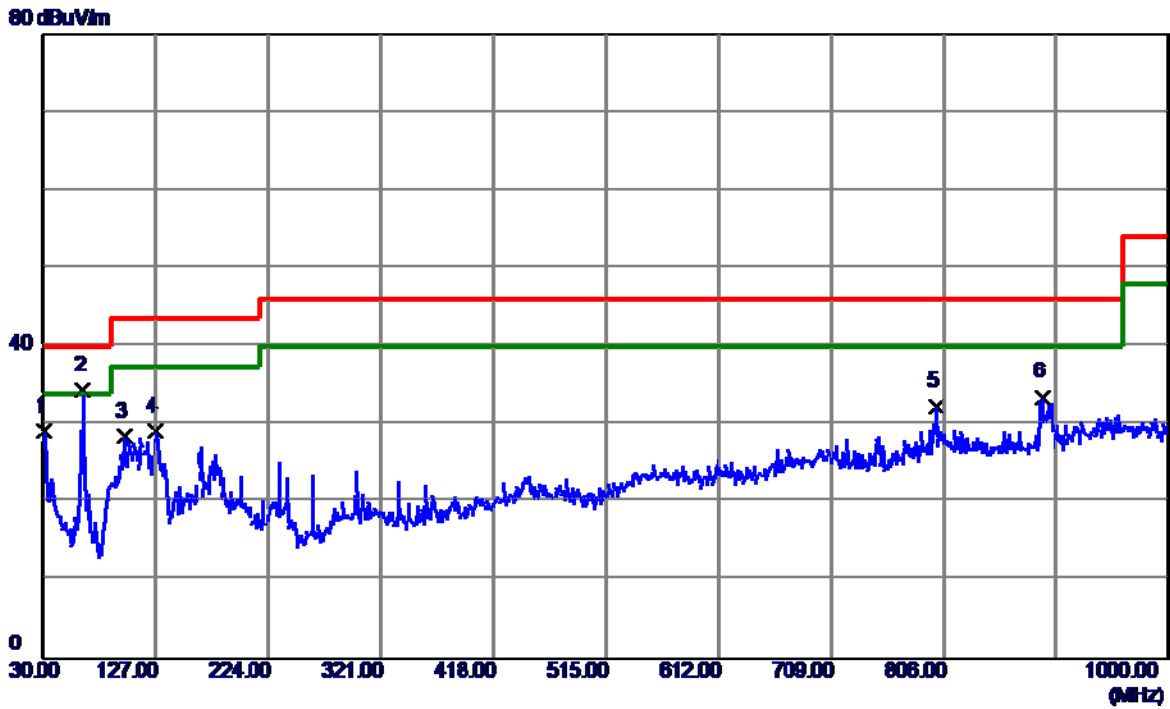


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.4550	42.66	-13.55	29.11	40.00	-10.89	QP
2 *	63.9500	49.13	-14.78	34.35	40.00	-5.65	QP
3	99.8399	46.07	-17.52	28.55	43.50	-14.95	QP
4	127.4850	42.34	-13.25	29.09	43.50	-14.41	QP
5	799.6950	31.81	0.48	32.29	46.00	-13.71	QP
6	890.8750	33.15	0.37	33.52	46.00	-12.48	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:HONGLIN 1.0m		
Test Engineer	Sam Wang		

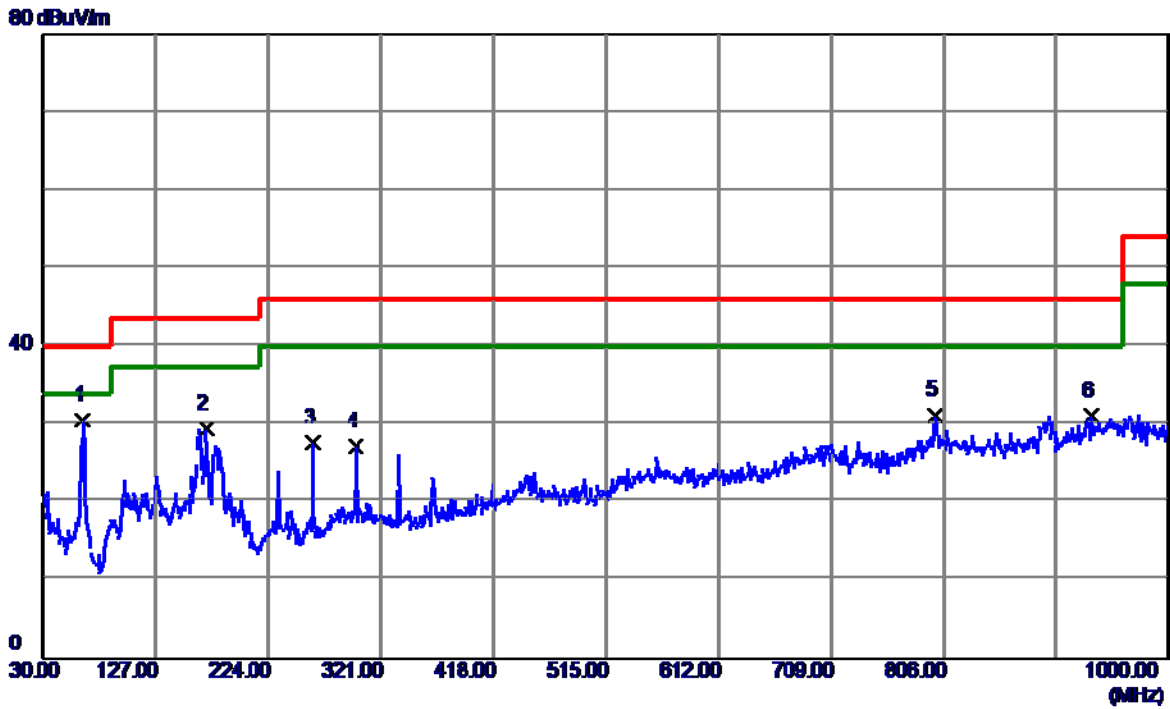


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	63.9500	45.29	-14.78	30.51	40.00	-9.49	QP
2	170.6500	40.19	-10.81	29.38	43.50	-14.12	QP
3	262.3150	40.46	-12.82	27.64	46.00	-18.36	QP
4	299.1750	37.76	-10.61	27.15	46.00	-18.85	QP
5	798.2400	30.85	0.40	31.25	46.00	-14.75	QP
6	933.5550	29.23	1.89	31.12	46.00	-14.88	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:FOXCONN 1.0m		
Test Engineer	Sam Wang		

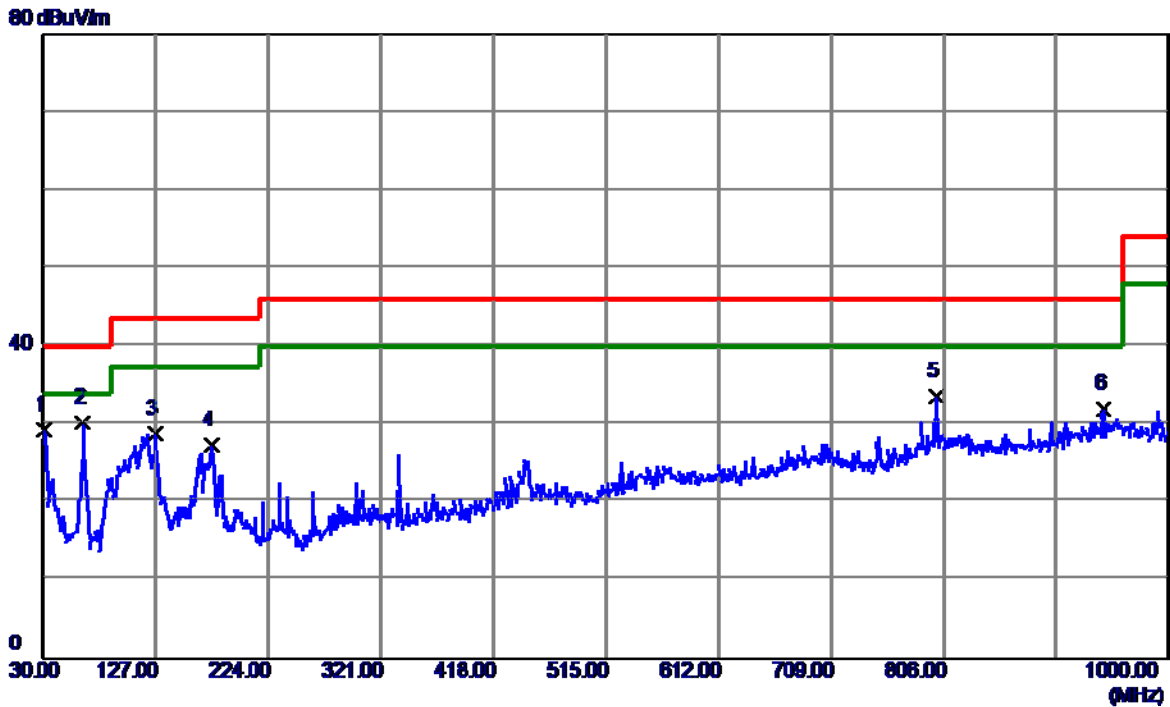


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.4550	42.78	-13.55	29.23	40.00	-10.77	QP
2 *	63.9500	45.01	-14.78	30.23	40.00	-9.77	QP
3	126.5150	42.25	-13.44	28.81	43.50	-14.69	QP
4	175.5000	38.62	-11.27	27.35	43.50	-16.15	QP
5	799.6950	33.05	0.48	33.53	46.00	-12.47	QP
6	943.7400	29.66	2.32	31.98	46.00	-14.02	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:FOXCONN 1.0m		
Test Engineer	Sam Wang		

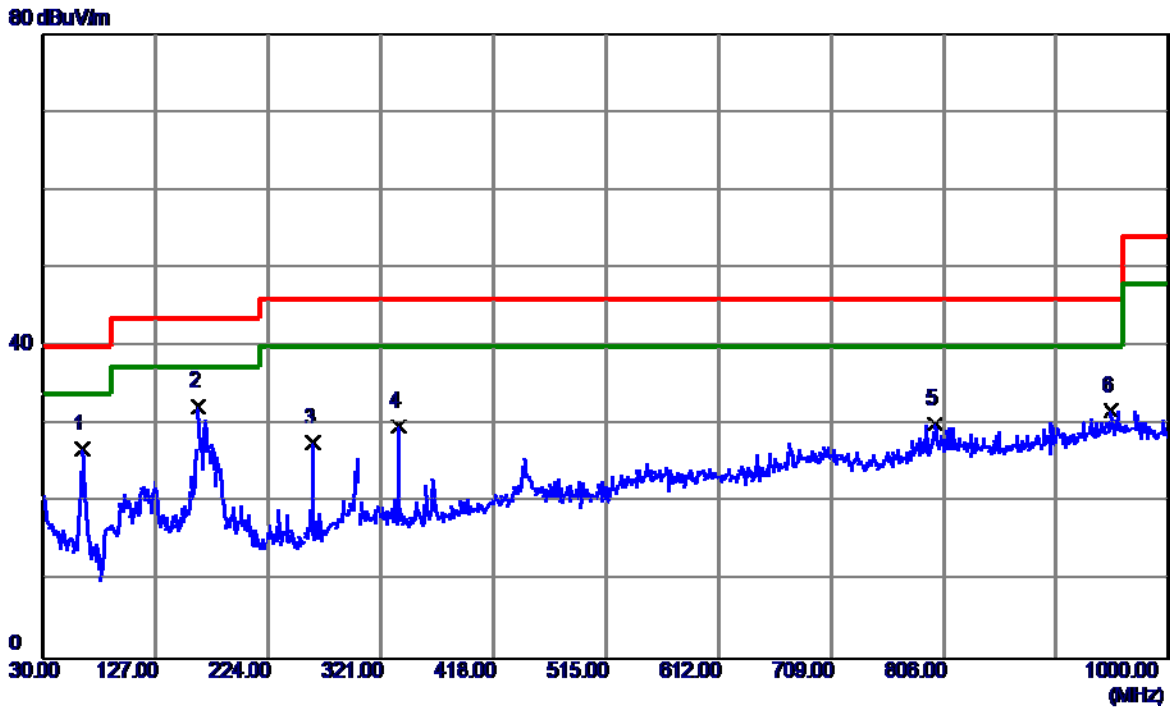


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	63.4650	41.55	-14.70	26.85	40.00	-13.15	QP
2 *	163.8600	42.58	-10.29	32.29	43.50	-11.21	QP
3	262.3150	40.53	-12.82	27.71	46.00	-18.29	QP
4	336.0350	40.16	-10.47	29.69	46.00	-16.31	QP
5	798.2400	29.62	0.40	30.02	46.00	-15.98	QP
6	950.0450	29.18	2.58	31.76	46.00	-14.24	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:MING JI 1.0m		
Test Engineer	Sam Wang		

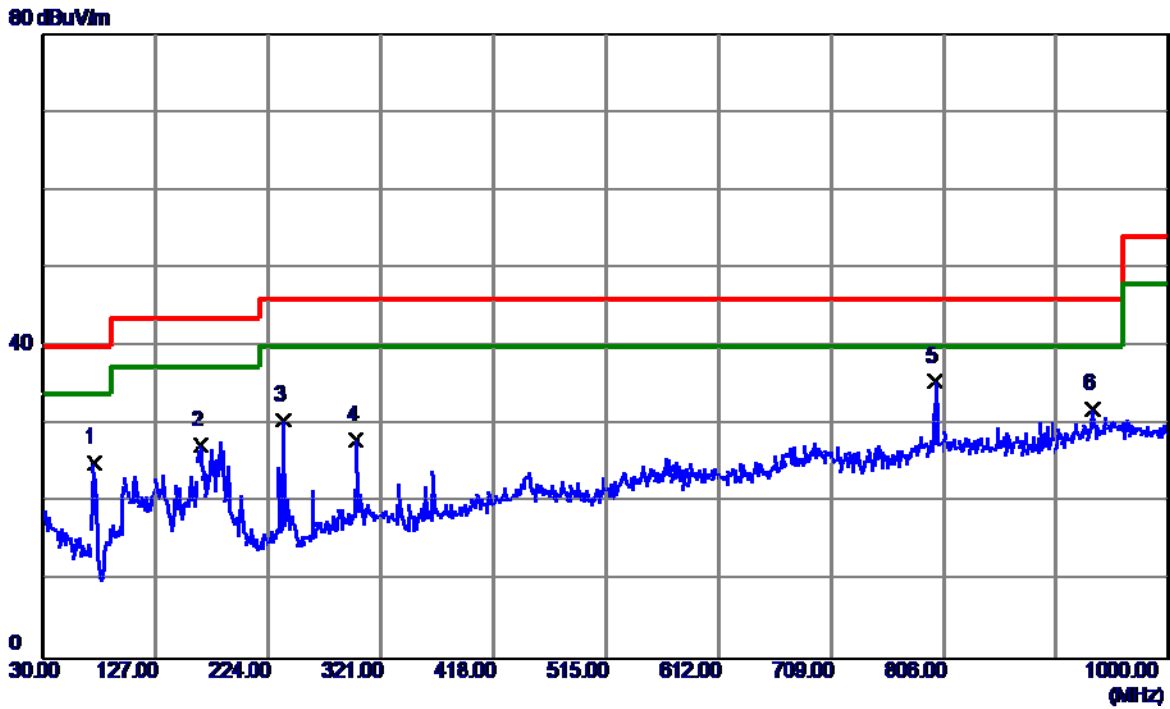


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	73.6500	41.67	-16.49	25.18	40.00	-14.82	QP
2	166.2850	37.84	-10.47	27.37	43.50	-16.13	QP
3	236.6100	44.56	-14.04	30.52	46.00	-15.48	QP
4	299.6600	38.56	-10.59	27.97	46.00	-18.03	QP
5 *	798.2400	35.08	0.40	35.48	46.00	-10.52	QP
6	934.0400	30.15	1.91	32.06	46.00	-13.94	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:MING JI 1.0m		
Test Engineer	Sam Wang		

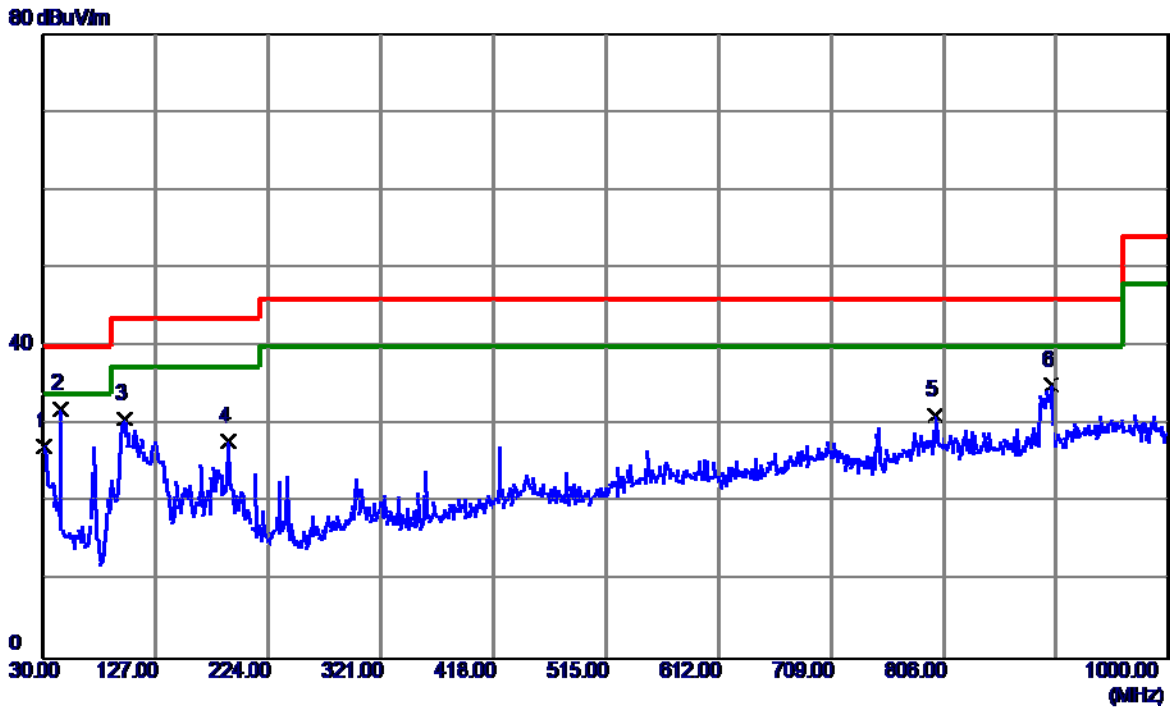


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.4550	40.80	-13.55	27.25	40.00	-12.75	QP
2 *	45.0350	45.61	-13.65	31.96	40.00	-8.04	QP
3	99.8399	48.24	-17.52	30.72	43.50	-12.78	QP
4	189.0800	40.43	-12.65	27.78	43.50	-15.72	QP
5	798.2400	30.78	0.40	31.18	46.00	-14.82	QP
6	898.6350	34.55	0.47	35.02	46.00	-10.98	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable: MING JI 0.17m		
Test Engineer	Sam Wang		

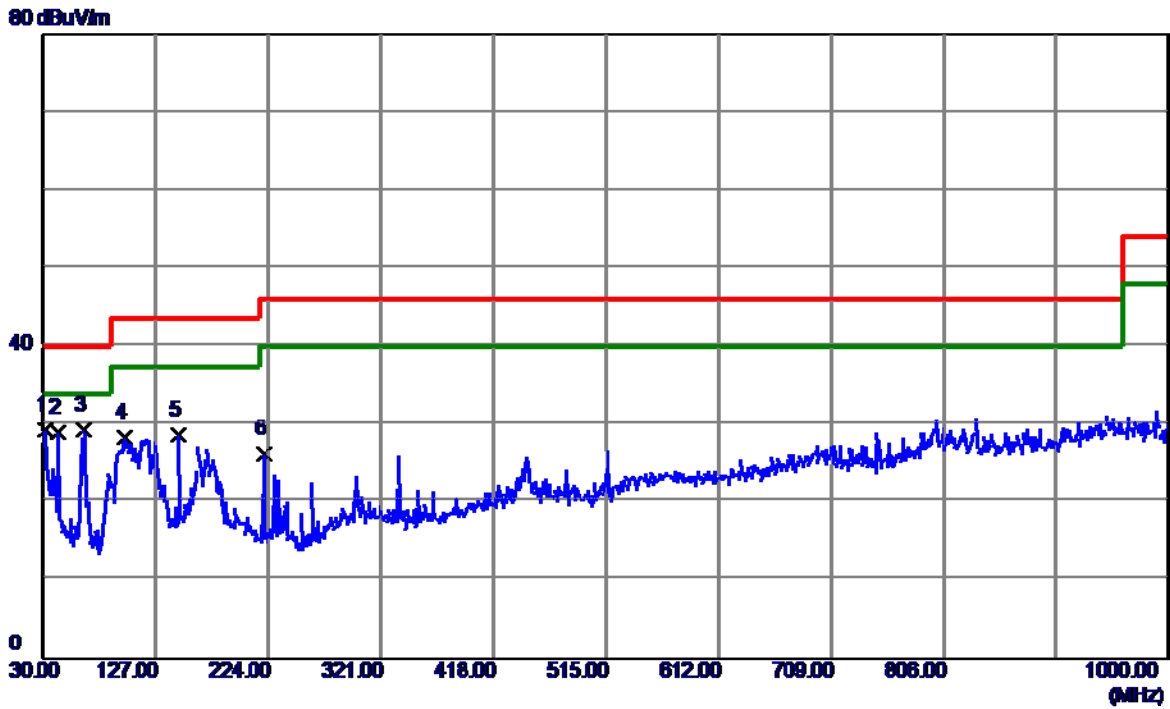

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	31.9400	42.88	-13.60	29.28	40.00	-10.72	QP
2	43.0950	42.55	-13.52	29.03	40.00	-10.97	QP
3	64.4350	44.09	-14.85	29.24	40.00	-10.76	QP
4	99.8399	45.89	-17.52	28.37	43.50	-15.13	QP
5	146.8850	39.50	-10.86	28.64	43.50	-14.86	QP
6	220.6050	40.16	-13.92	26.24	46.00	-19.76	QP

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable: MING JI 0.17m		
Test Engineer	Sam Wang		

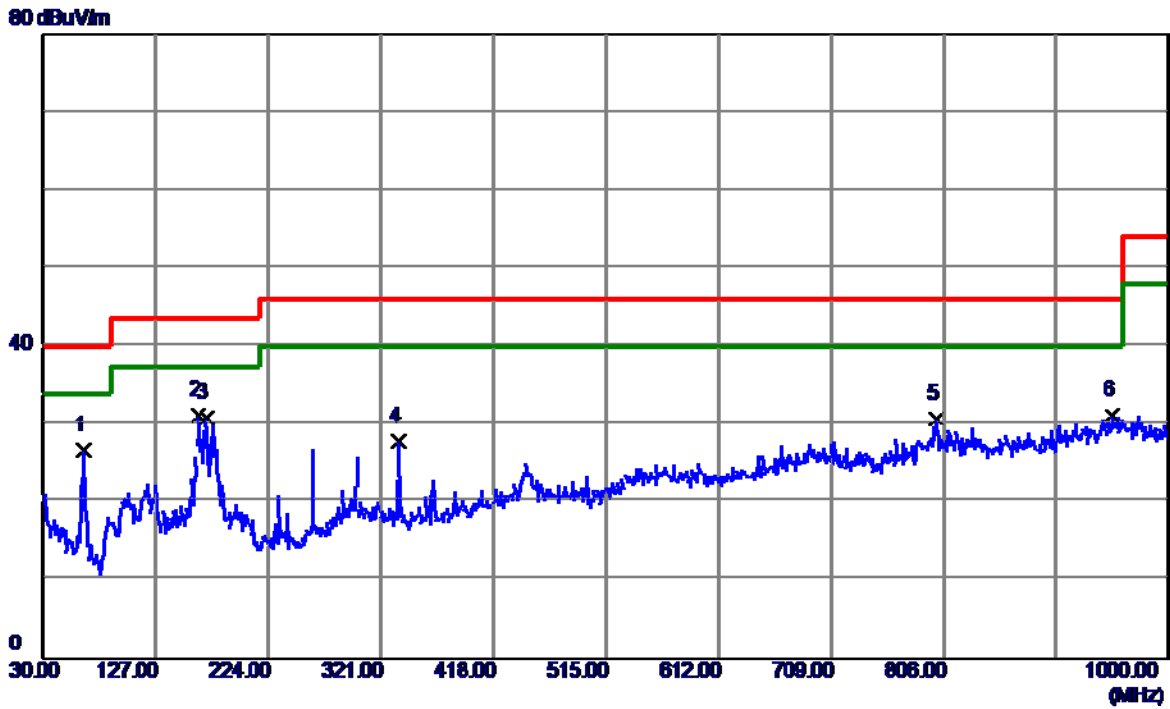


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	64.9200	41.71	-14.93	26.78	40.00	-13.22	QP
2 *	163.8600	41.52	-10.29	31.23	43.50	-12.27	QP
3	170.6500	41.64	-10.81	30.83	43.50	-12.67	QP
4	336.0350	38.37	-10.47	27.90	46.00	-18.10	QP
5	799.6950	30.31	0.48	30.79	46.00	-15.21	QP
6	951.5000	28.66	2.55	31.21	46.00	-14.79	QP

4.2.7 TEST RESULTS-ABOVE 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of『 Note 』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

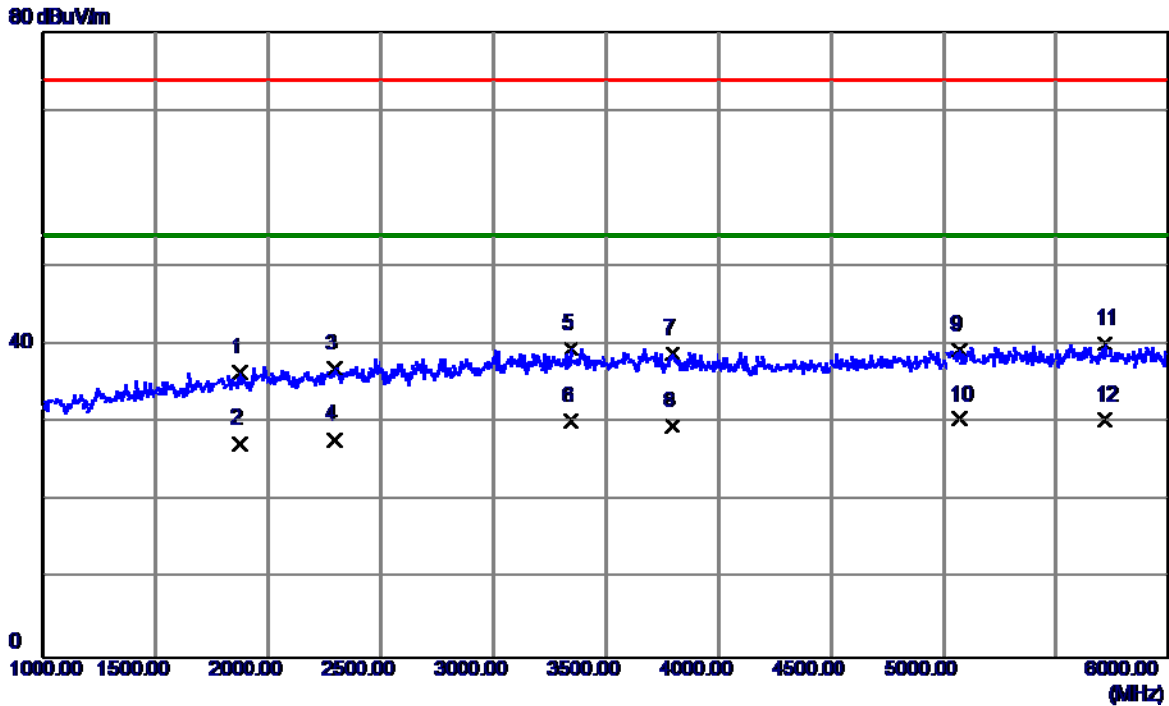


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1870.0000	38.30	-1.83	36.47	74.00	-37.53	Peak
2	1870.0000	29.26	-1.83	27.43	54.00	-26.57	AVG
3	2295.0000	37.19	-0.24	36.95	74.00	-37.05	Peak
4	2295.0000	28.06	-0.24	27.82	54.00	-26.18	AVG
5	3345.0000	36.38	3.20	39.58	74.00	-34.42	Peak
6	3345.0000	27.06	3.20	30.26	54.00	-23.74	AVG
7	3795.0000	34.73	4.21	38.94	74.00	-35.06	Peak
8	3795.0000	25.39	4.21	29.60	54.00	-24.40	AVG
9	5070.0000	32.33	7.07	39.40	74.00	-34.60	Peak
10 *	5070.0000	23.41	7.07	30.48	54.00	-23.52	AVG
11	5715.0000	32.12	8.00	40.12	74.00	-33.88	Peak
12	5715.0000	22.43	8.00	30.43	54.00	-23.57	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

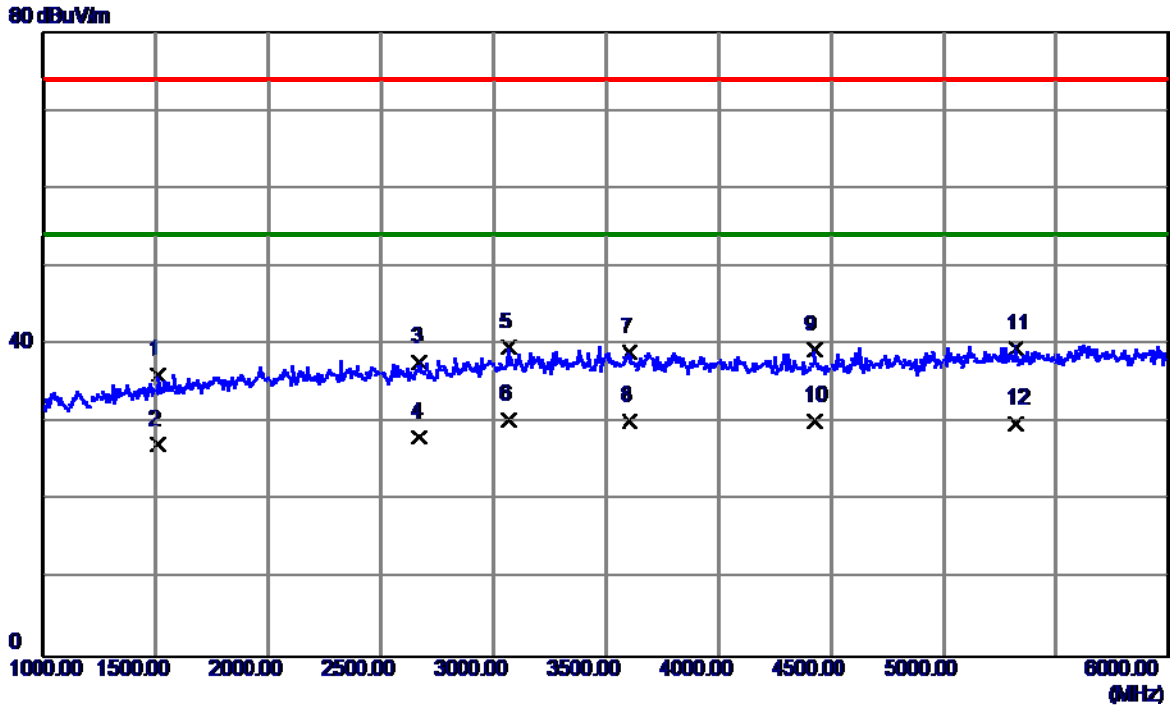


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1510.0000	40.03	-3.92	36.11	74.00	-37.89	Peak
2	1510.0000	31.12	-3.92	27.20	54.00	-26.80	AVG
3	2675.0000	36.92	0.89	37.81	74.00	-36.19	Peak
4	2675.0000	27.34	0.89	28.23	54.00	-25.77	AVG
5	3065.0000	37.49	2.16	39.65	74.00	-34.35	Peak
6 *	3065.0000	28.26	2.16	30.42	54.00	-23.58	AVG
7	3605.0000	35.13	3.93	39.06	74.00	-34.94	Peak
8	3605.0000	26.34	3.93	30.27	54.00	-23.73	AVG
9	4425.0000	34.34	5.04	39.38	74.00	-34.62	Peak
10	4425.0000	25.27	5.04	30.31	54.00	-23.69	AVG
11	5320.0000	32.19	7.39	39.58	74.00	-34.42	Peak
12	5320.0000	22.60	7.39	29.99	54.00	-24.01	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+Wifi		
Note	Adapter:Phitek+Battery:Sunwada+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

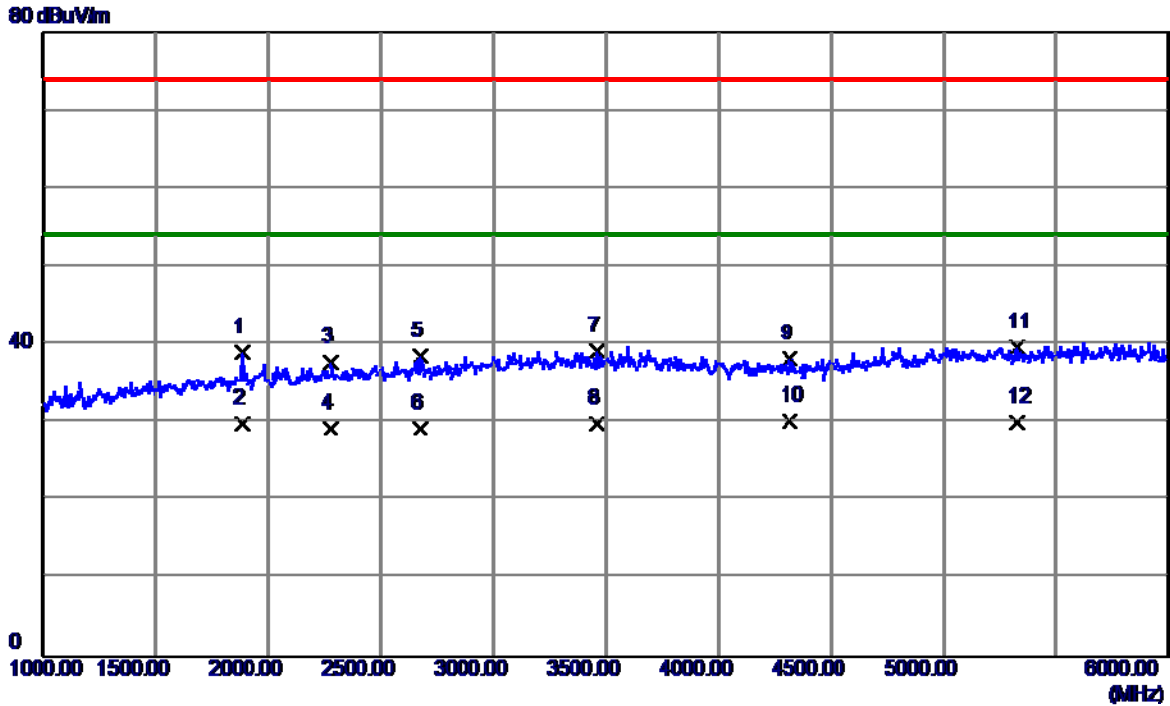


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1885.0000	40.77	-1.74	39.03	74.00	-34.97	Peak
2	1885.0000	31.62	-1.74	29.88	54.00	-24.12	AVG
3	2280.0000	38.07	-0.28	37.79	74.00	-36.21	Peak
4	2280.0000	29.54	-0.28	29.26	54.00	-24.74	AVG
5	2680.0000	37.69	0.91	38.60	74.00	-35.40	Peak
6	2680.0000	28.34	0.91	29.25	54.00	-24.75	AVG
7	3460.0000	35.55	3.62	39.17	74.00	-34.83	Peak
8	3460.0000	26.23	3.62	29.85	54.00	-24.15	AVG
9	4315.0000	33.29	4.90	38.19	74.00	-35.81	Peak
10 *	4315.0000	25.33	4.90	30.23	54.00	-23.77	AVG
11	5330.0000	32.27	7.40	39.67	74.00	-34.33	Peak
12	5330.0000	22.68	7.40	30.08	54.00	-23.92	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+Wifi		
Note	Adapter:Phitek+Battery:Sunwada+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

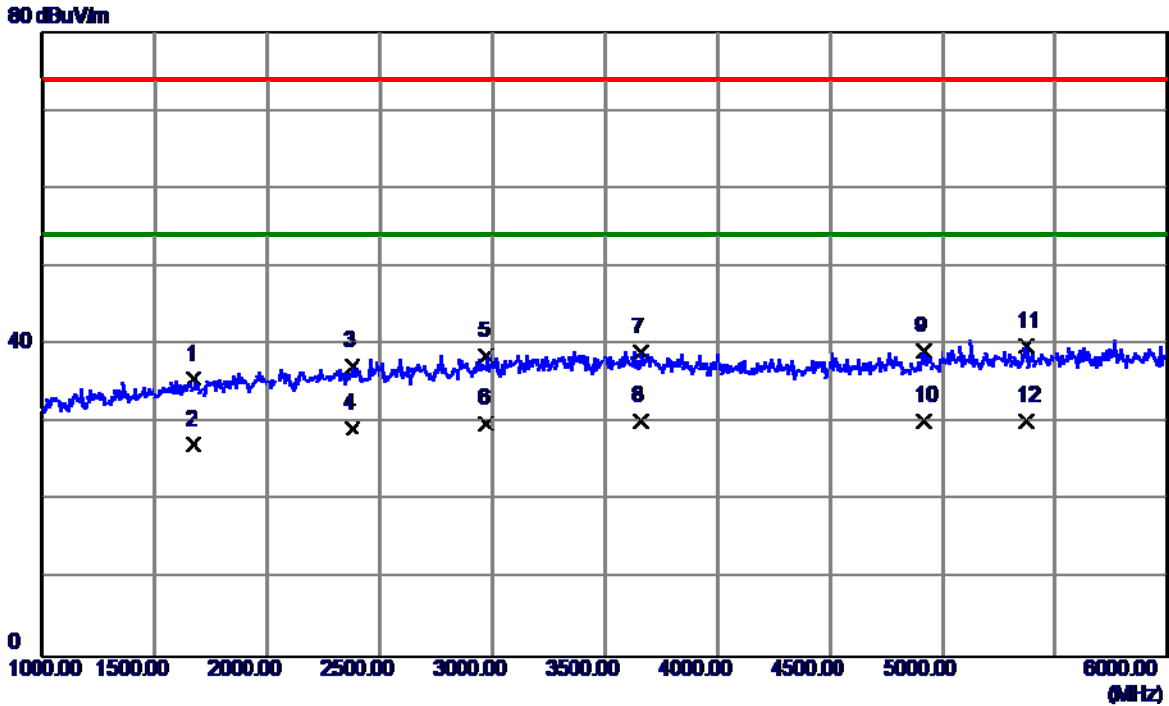


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1675.0000	38.56	-2.96	35.60	74.00	-38.40	Peak
2	1675.0000	30.15	-2.96	27.19	54.00	-26.81	AVG
3	2380.0000	37.34	0.00	37.34	74.00	-36.66	Peak
4	2380.0000	29.35	0.00	29.35	54.00	-24.65	AVG
5	2975.0000	36.75	1.84	38.59	74.00	-35.41	Peak
6	2975.0000	28.12	1.84	29.96	54.00	-24.04	AVG
7	3660.0000	35.08	4.01	39.09	74.00	-34.91	Peak
8	3660.0000	26.21	4.01	30.22	54.00	-23.78	AVG
9	4915.0000	32.51	6.67	39.18	74.00	-34.82	Peak
10 *	4915.0000	23.64	6.67	30.31	54.00	-23.69	AVG
11	5370.0000	32.37	7.45	39.82	74.00	-34.18	Peak
12	5370.0000	22.81	7.45	30.26	54.00	-23.74	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

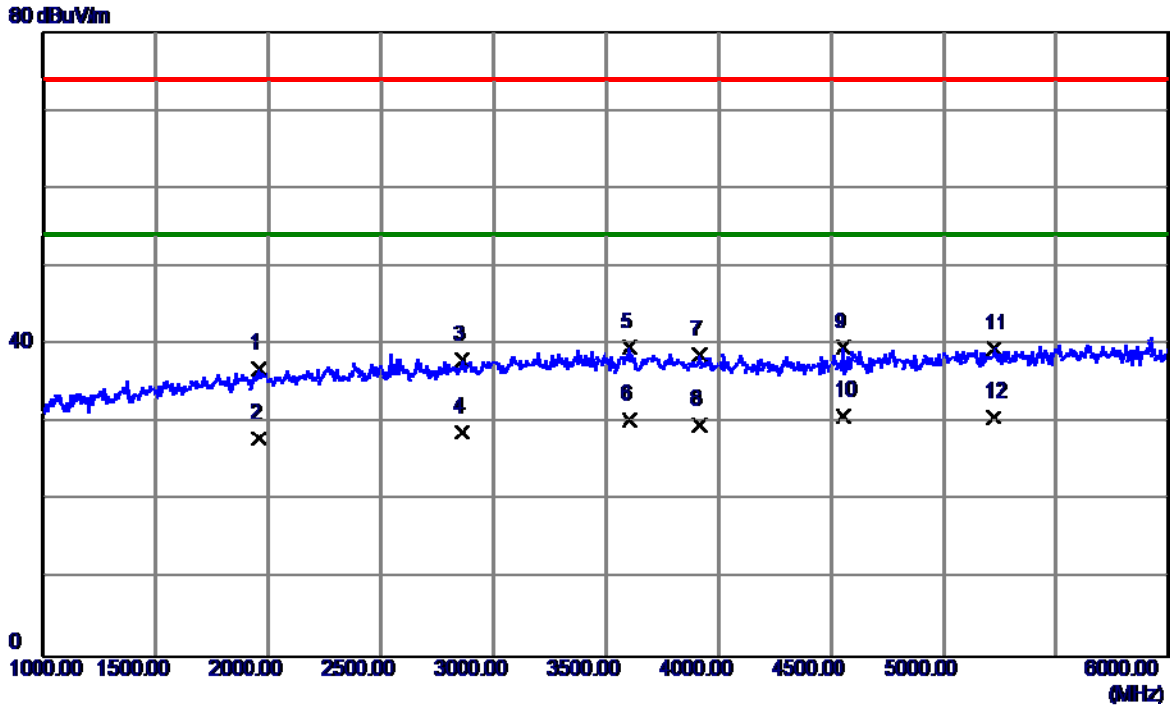


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1960.0000	38.31	-1.30	37.01	74.00	-36.99	Peak
2	1960.0000	29.34	-1.30	28.04	54.00	-25.96	AVG
3	2860.0000	36.64	1.48	38.12	74.00	-35.88	Peak
4	2860.0000	27.39	1.48	28.87	54.00	-25.13	AVG
5	3605.0000	35.77	3.93	39.70	74.00	-34.30	Peak
6	3605.0000	26.50	3.93	30.43	54.00	-23.57	AVG
7	3915.0000	34.29	4.39	38.68	74.00	-35.32	Peak
8	3915.0000	25.33	4.39	29.72	54.00	-24.28	AVG
9	4555.0000	34.37	5.33	39.70	74.00	-34.30	Peak
10 *	4555.0000	25.61	5.33	30.94	54.00	-23.06	AVG
11	5220.0000	32.20	7.26	39.46	74.00	-34.54	Peak
12	5220.0000	23.42	7.26	30.68	54.00	-23.32	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

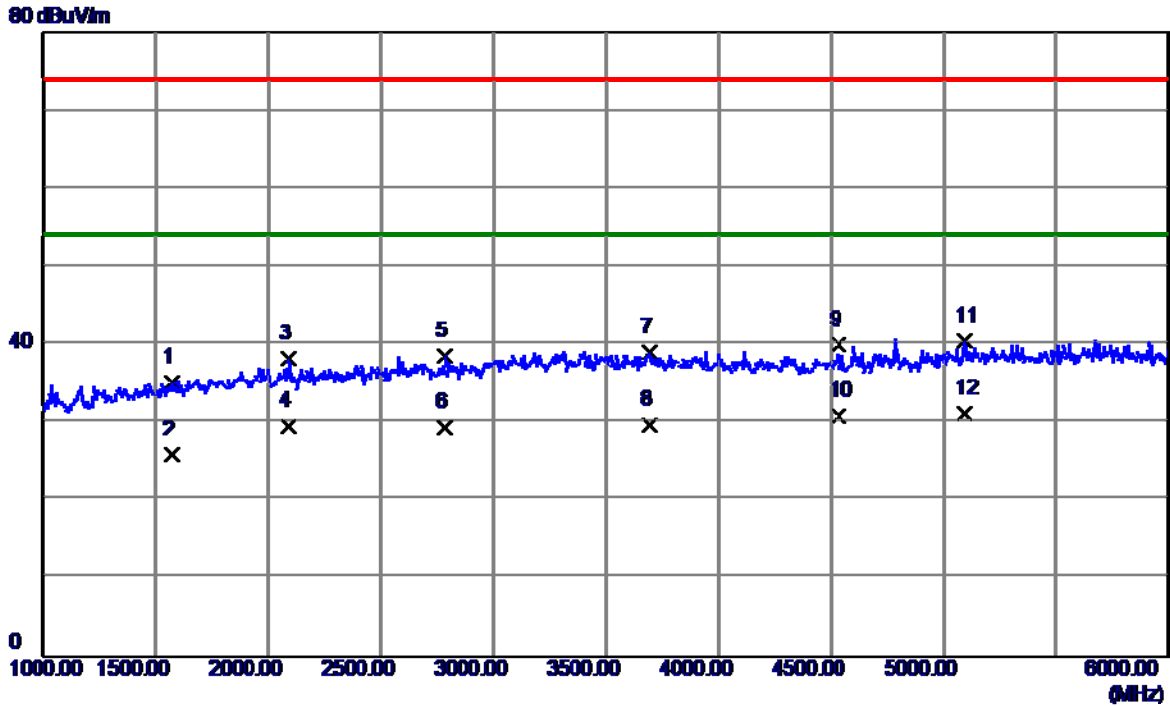


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1570.0000	38.75	-3.57	35.18	74.00	-38.82	Peak
2	1570.0000	29.46	-3.57	25.89	54.00	-28.11	AVG
3	2090.0000	39.01	-0.82	38.19	74.00	-35.81	Peak
4	2090.0000	30.38	-0.82	29.56	54.00	-24.44	AVG
5	2785.0000	37.37	1.24	38.61	74.00	-35.39	Peak
6	2785.0000	28.27	1.24	29.51	54.00	-24.49	AVG
7	3695.0000	34.97	4.06	39.03	74.00	-34.97	Peak
8	3695.0000	25.76	4.06	29.82	54.00	-24.18	AVG
9	4535.0000	34.78	5.26	40.04	74.00	-33.96	Peak
10	4535.0000	25.62	5.26	30.88	54.00	-23.12	AVG
11	5095.0000	33.41	7.10	40.51	74.00	-33.49	Peak
12 *	5095.0000	24.12	7.10	31.22	54.00	-22.78	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Huntkey+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

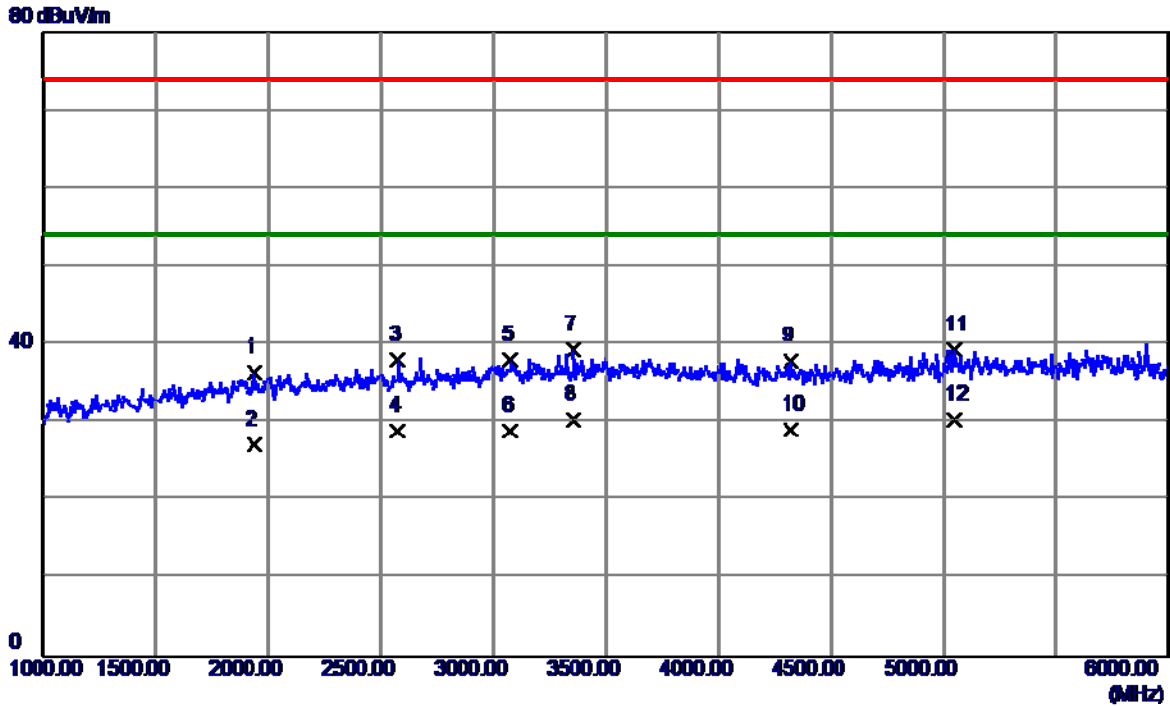


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1940.0000	37.90	-1.42	36.48	74.00	-37.52	Peak
2	1940.0000	28.62	-1.42	27.20	54.00	-26.80	AVG
3	2575.0000	37.52	0.58	38.10	74.00	-35.90	Peak
4	2575.0000	28.35	0.58	28.93	54.00	-25.07	AVG
5	3075.0000	35.89	2.20	38.09	74.00	-35.91	Peak
6	3075.0000	26.74	2.20	28.94	54.00	-25.06	AVG
7	3355.0000	36.16	3.23	39.39	74.00	-34.61	Peak
8 *	3355.0000	27.24	3.23	30.47	54.00	-23.53	AVG
9	4320.0000	33.03	4.91	37.94	74.00	-36.06	Peak
10	4320.0000	24.27	4.91	29.18	54.00	-24.82	AVG
11	5050.0000	32.26	7.04	39.30	74.00	-34.70	Peak
12	5050.0000	23.38	7.04	30.42	54.00	-23.58	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Huntkey+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

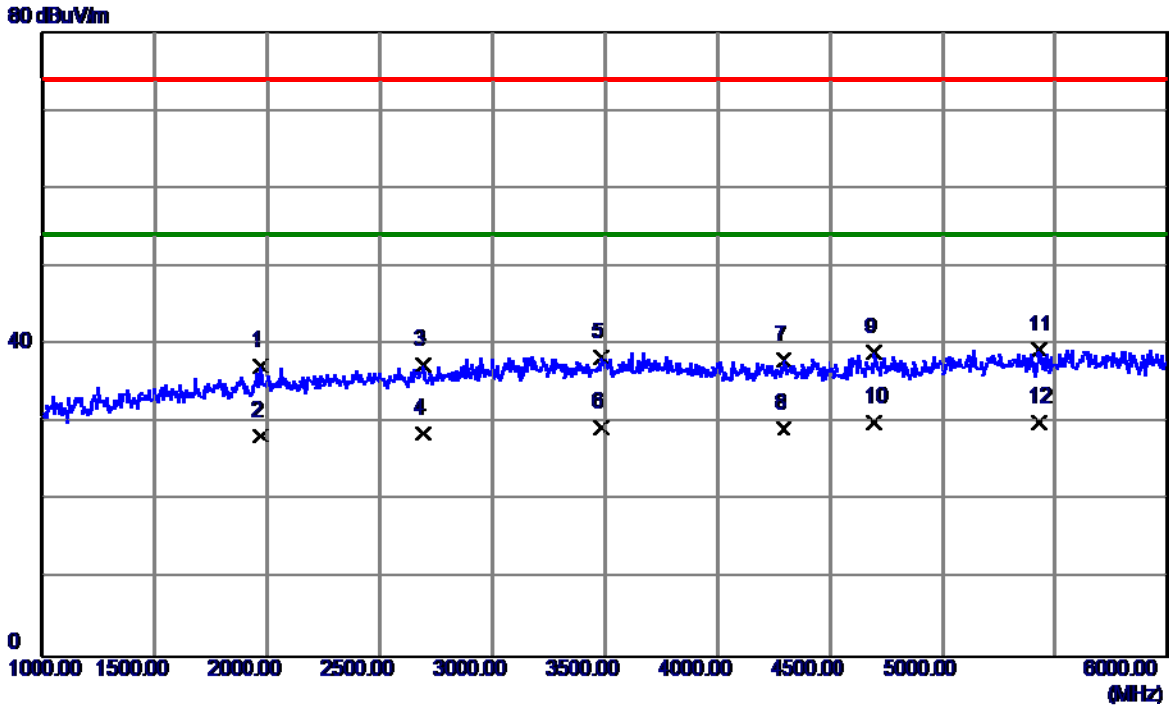


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1970.0000	38.45	-1.24	37.21	74.00	-36.79	Peak
2	1970.0000	29.51	-1.24	28.27	54.00	-25.73	AVG
3	2695.0000	36.49	0.96	37.45	74.00	-36.55	Peak
4	2695.0000	27.63	0.96	28.59	54.00	-25.41	AVG
5	3485.0000	34.75	3.71	38.46	74.00	-35.54	Peak
6	3485.0000	25.68	3.71	29.39	54.00	-24.61	AVG
7	4295.0000	33.18	4.88	38.06	74.00	-35.94	Peak
8	4295.0000	24.35	4.88	29.23	54.00	-24.77	AVG
9	4695.0000	33.26	5.85	39.11	74.00	-34.89	Peak
10	4695.0000	24.18	5.85	30.03	54.00	-23.97	AVG
11	5425.0000	31.79	7.52	39.31	74.00	-34.69	Peak
12 *	5425.0000	22.63	7.52	30.15	54.00	-23.85	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:BYD+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

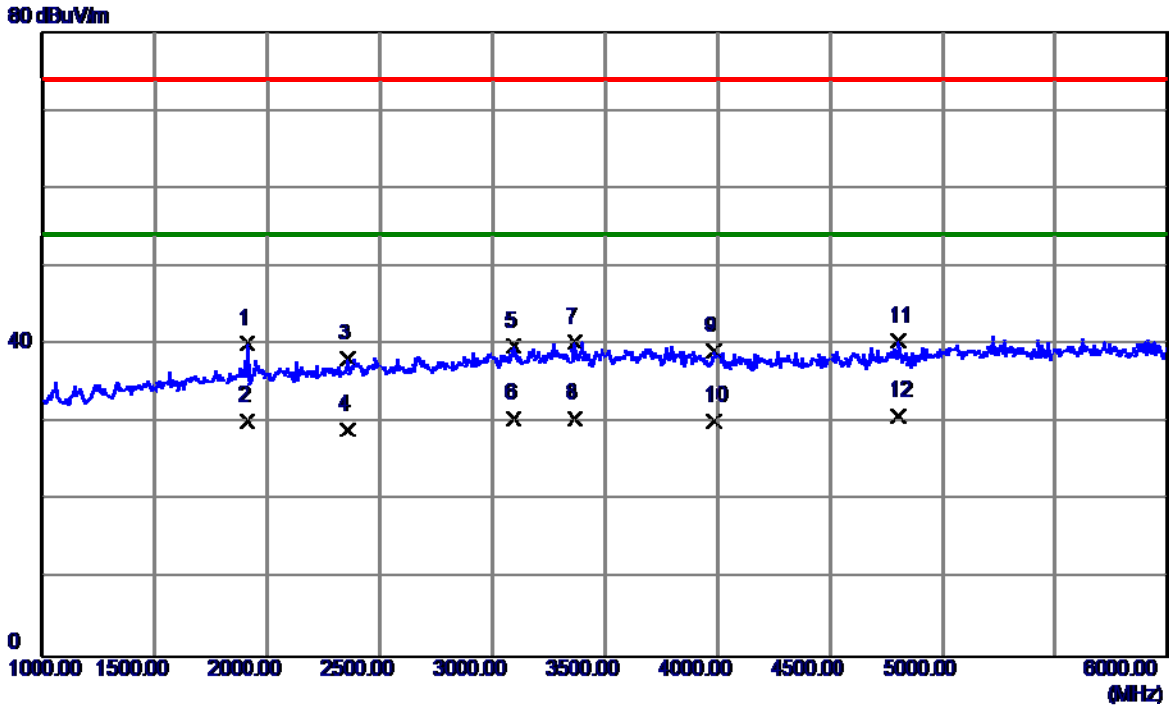


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1910.0000	41.77	-1.59	40.18	74.00	-33.82	Peak
2	1910.0000	31.86	-1.59	30.27	54.00	-23.73	AVG
3	2355.0000	38.35	-0.07	38.28	74.00	-35.72	Peak
4	2355.0000	29.24	-0.07	29.17	54.00	-24.83	AVG
5	3095.0000	37.60	2.27	39.87	74.00	-34.13	Peak
6	3095.0000	28.35	2.27	30.62	54.00	-23.38	AVG
7	3365.0000	37.08	3.27	40.35	74.00	-33.65	Peak
8	3365.0000	27.35	3.27	30.62	54.00	-23.38	AVG
9	3985.0000	34.64	4.50	39.14	74.00	-34.86	Peak
10	3985.0000	25.71	4.50	30.21	54.00	-23.79	AVG
11	4805.0000	34.21	6.26	40.47	74.00	-33.53	Peak
12 *	4805.0000	24.62	6.26	30.88	54.00	-23.12	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:BYD+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

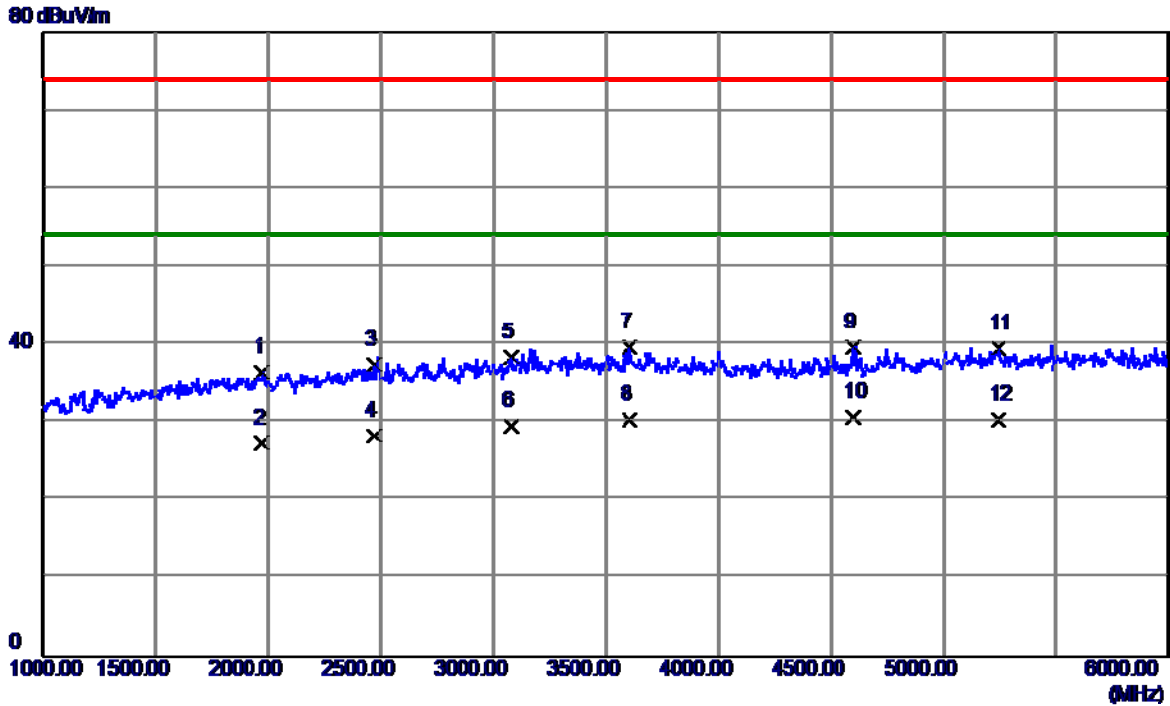


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1975.0000	37.63	-1.22	36.41	74.00	-37.59	Peak
2	1975.0000	28.53	-1.22	27.31	54.00	-26.69	AVG
3	2470.0000	37.24	0.26	37.50	74.00	-36.50	Peak
4	2470.0000	28.05	0.26	28.31	54.00	-25.69	AVG
5	3080.0000	36.19	2.22	38.41	74.00	-35.59	Peak
6	3080.0000	27.33	2.22	29.55	54.00	-24.45	AVG
7	3605.0000	35.72	3.93	39.65	74.00	-34.35	Peak
8	3605.0000	26.46	3.93	30.39	54.00	-23.61	AVG
9	4600.0000	34.15	5.50	39.65	74.00	-34.35	Peak
10 *	4600.0000	25.23	5.50	30.73	54.00	-23.27	AVG
11	5245.0000	32.22	7.29	39.51	74.00	-34.49	Peak
12	5245.0000	23.16	7.29	30.45	54.00	-23.55	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

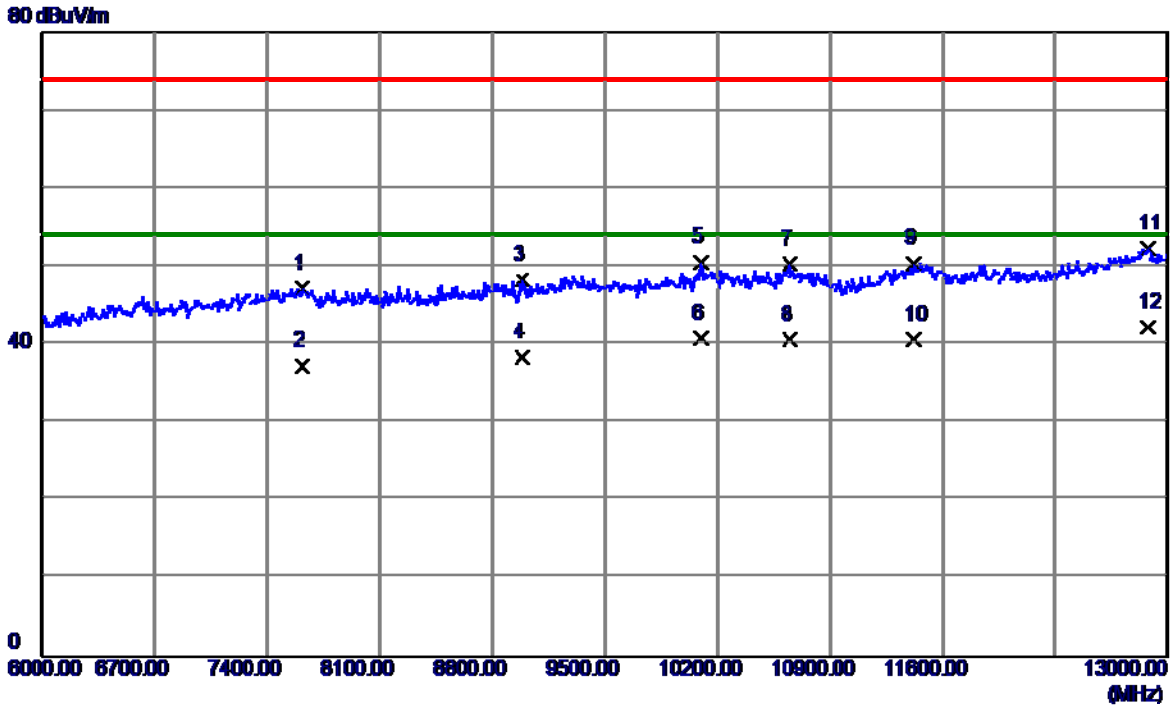


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7617.0000	33.48	13.79	47.27	74.00	-26.73	Peak
2	7617.0000	23.51	13.79	37.30	54.00	-16.70	AVG
3	8989.0000	33.08	15.19	48.27	74.00	-25.73	Peak
4	8989.0000	23.21	15.19	38.40	54.00	-15.60	AVG
5	10102.0000	34.13	16.38	50.51	74.00	-23.49	Peak
6	10102.0000	24.35	16.38	40.73	54.00	-13.27	AVG
7	10655.0000	33.01	17.31	50.32	74.00	-23.68	Peak
8	10655.0000	23.31	17.31	40.62	54.00	-13.38	AVG
9	11425.0000	32.37	18.03	50.40	74.00	-23.60	Peak
10	11425.0000	22.67	18.03	40.70	54.00	-13.30	AVG
11	12874.0000	31.83	20.53	52.36	74.00	-21.64	Peak
12 *	12874.0000	21.69	20.53	42.22	54.00	-11.78	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

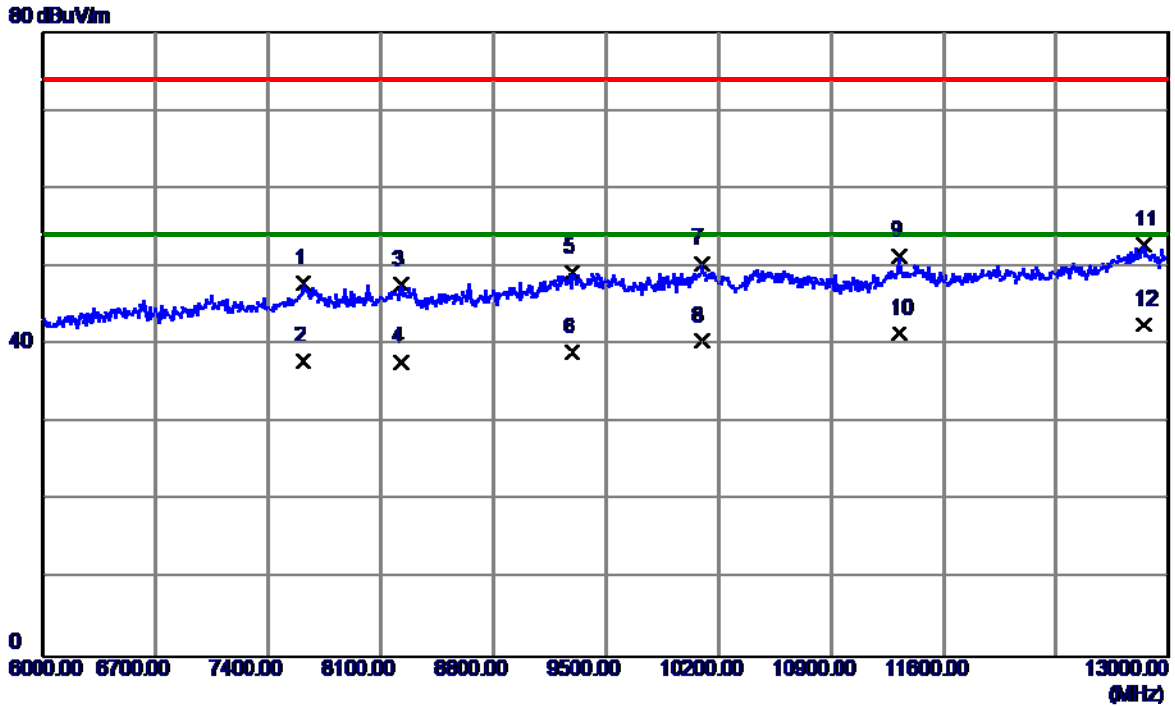


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7617.0000	34.06	13.79	47.85	74.00	-26.15	Peak
2	7617.0000	24.20	13.79	37.99	54.00	-16.01	AVG
3	8226.0000	33.56	14.15	47.71	74.00	-26.29	Peak
4	8226.0000	23.65	14.15	37.80	54.00	-16.20	AVG
5	9290.0000	33.73	15.51	49.24	74.00	-24.76	Peak
6	9290.0000	23.51	15.51	39.02	54.00	-14.98	AVG
7	10095.0000	34.01	16.36	50.37	74.00	-23.63	Peak
8	10095.0000	24.12	16.36	40.48	54.00	-13.52	AVG
9	11327.0000	33.53	17.77	51.30	74.00	-22.70	Peak
10	11327.0000	23.62	17.77	41.39	54.00	-12.61	AVG
11	12846.0000	32.36	20.41	52.77	74.00	-21.23	Peak
12 *	12846.0000	22.15	20.41	42.56	54.00	-11.44	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

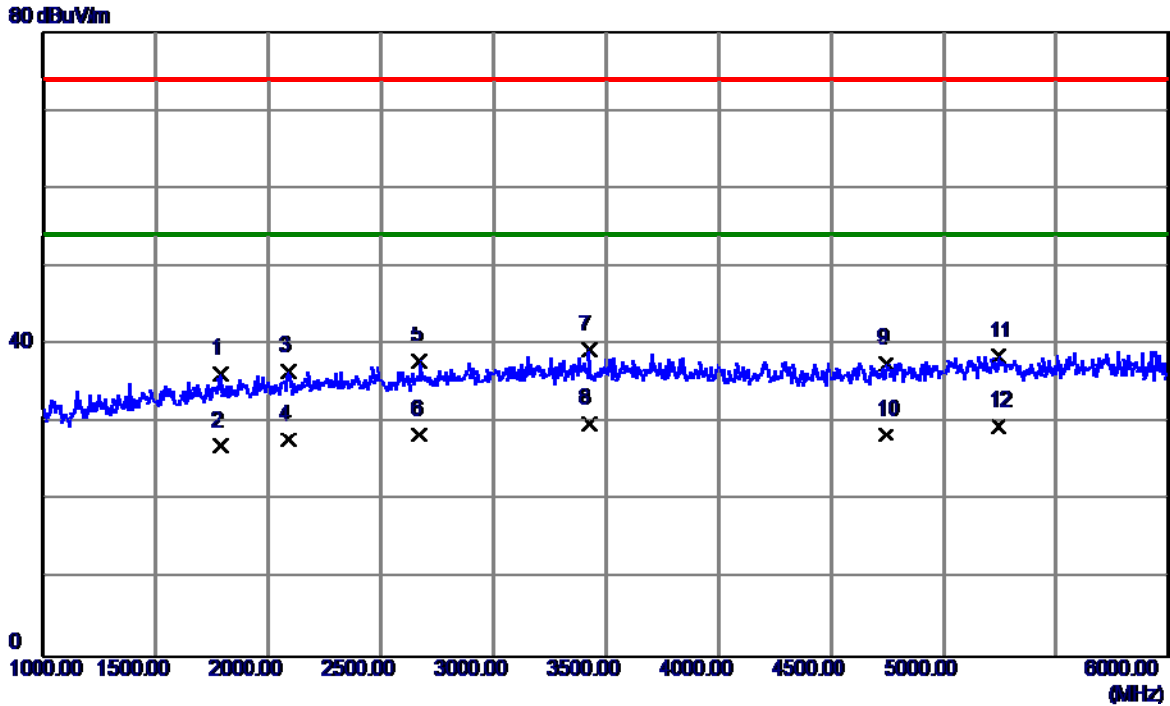


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1790.0000	38.58	-2.29	36.29	74.00	-37.71	Peak
2	1790.0000	29.31	-2.29	27.02	54.00	-26.98	AVG
3	2090.0000	37.52	-0.82	36.70	74.00	-37.30	Peak
4	2090.0000	28.61	-0.82	27.79	54.00	-26.21	AVG
5	2675.0000	36.97	0.89	37.86	74.00	-36.14	Peak
6	2675.0000	27.59	0.89	28.48	54.00	-25.52	AVG
7	3425.0000	35.83	3.49	39.32	74.00	-34.68	Peak
8 *	3425.0000	26.39	3.49	29.88	54.00	-24.12	AVG
9	4745.0000	31.57	6.04	37.61	74.00	-36.39	Peak
10	4745.0000	22.41	6.04	28.45	54.00	-25.55	AVG
11	5245.0000	31.30	7.29	38.59	74.00	-35.41	Peak
12	5245.0000	22.36	7.29	29.65	54.00	-24.35	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

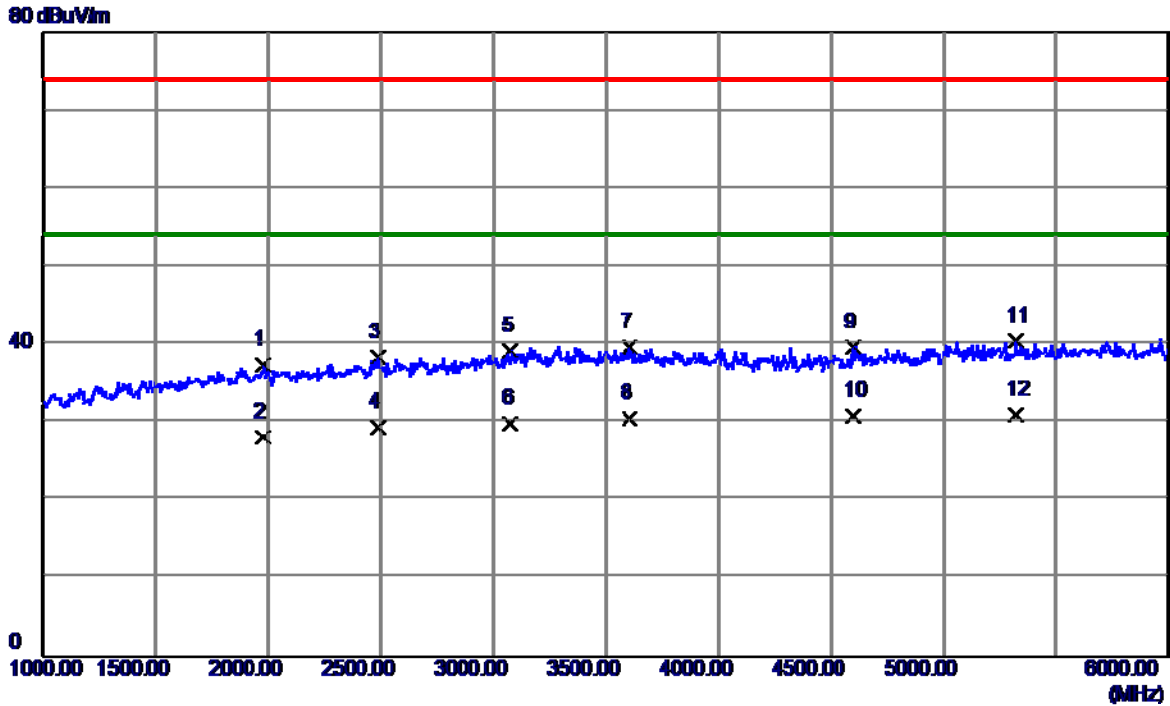


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1980.0000	38.70	-1.19	37.51	74.00	-36.49	Peak
2	1980.0000	29.37	-1.19	28.18	54.00	-25.82	AVG
3	2490.0000	38.04	0.31	38.35	74.00	-35.65	Peak
4	2490.0000	29.12	0.31	29.43	54.00	-24.57	AVG
5	3075.0000	36.97	2.20	39.17	74.00	-34.83	Peak
6	3075.0000	27.65	2.20	29.85	54.00	-24.15	AVG
7	3605.0000	35.72	3.93	39.65	74.00	-34.35	Peak
8	3605.0000	26.57	3.93	30.50	54.00	-23.50	AVG
9	4600.0000	34.15	5.50	39.65	74.00	-34.35	Peak
10	4600.0000	25.36	5.50	30.86	54.00	-23.14	AVG
11	5320.0000	33.11	7.39	40.50	74.00	-33.50	Peak
12 *	5320.0000	23.59	7.39	30.98	54.00	-23.02	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:HONGLIN1.0m		
Test Engineer	Sam Wang		

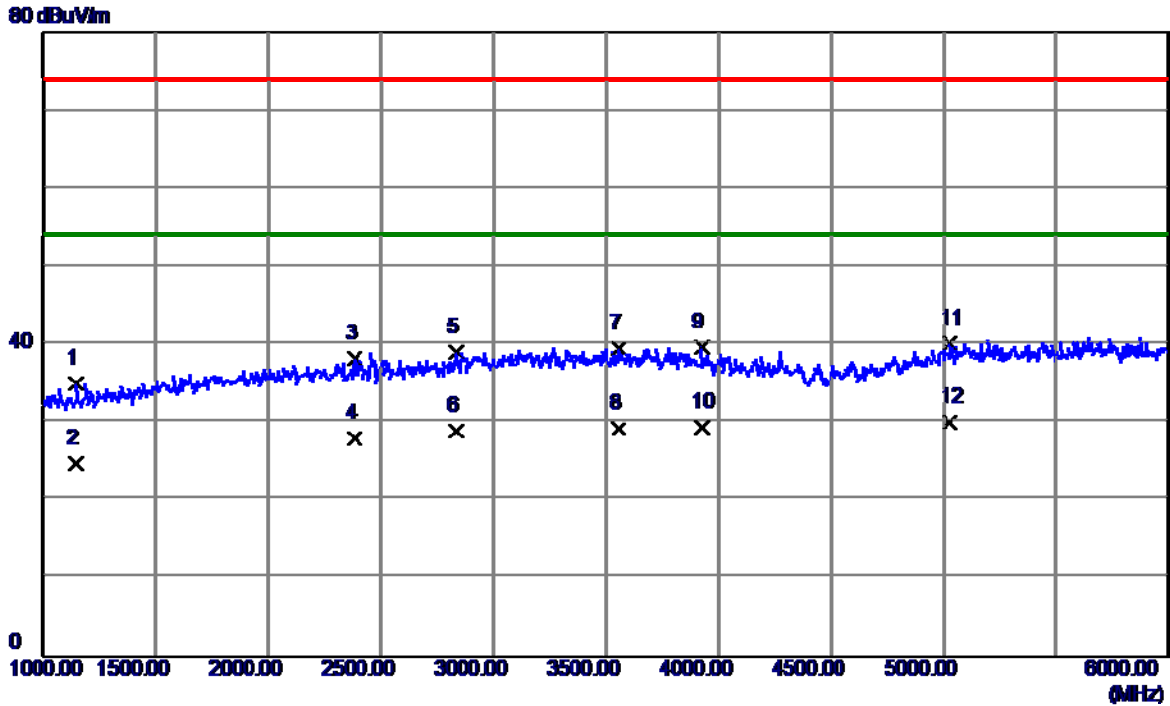


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1145.0000	41.76	-6.75	35.01	74.00	-38.99	Peak
2	1145.0000	31.57	-6.75	24.82	54.00	-29.18	AVG
3	2385.0000	38.21	0.02	38.23	74.00	-35.77	Peak
4	2385.0000	28.03	0.02	28.05	54.00	-25.95	AVG
5	2832.5000	37.62	1.39	39.01	74.00	-34.99	Peak
6	2832.5000	27.52	1.39	28.91	54.00	-25.09	AVG
7	3557.5000	35.69	3.86	39.55	74.00	-34.45	Peak
8	3557.5000	25.48	3.86	29.34	54.00	-24.66	AVG
9	3925.0000	35.26	4.41	39.67	74.00	-34.33	Peak
10	3925.0000	25.06	4.41	29.47	54.00	-24.53	AVG
11	5030.0000	33.11	7.02	40.13	74.00	-33.87	Peak
12 *	5030.0000	23.04	7.02	30.06	54.00	-23.94	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:HONGLIN1.0m		
Test Engineer	Sam Wang		

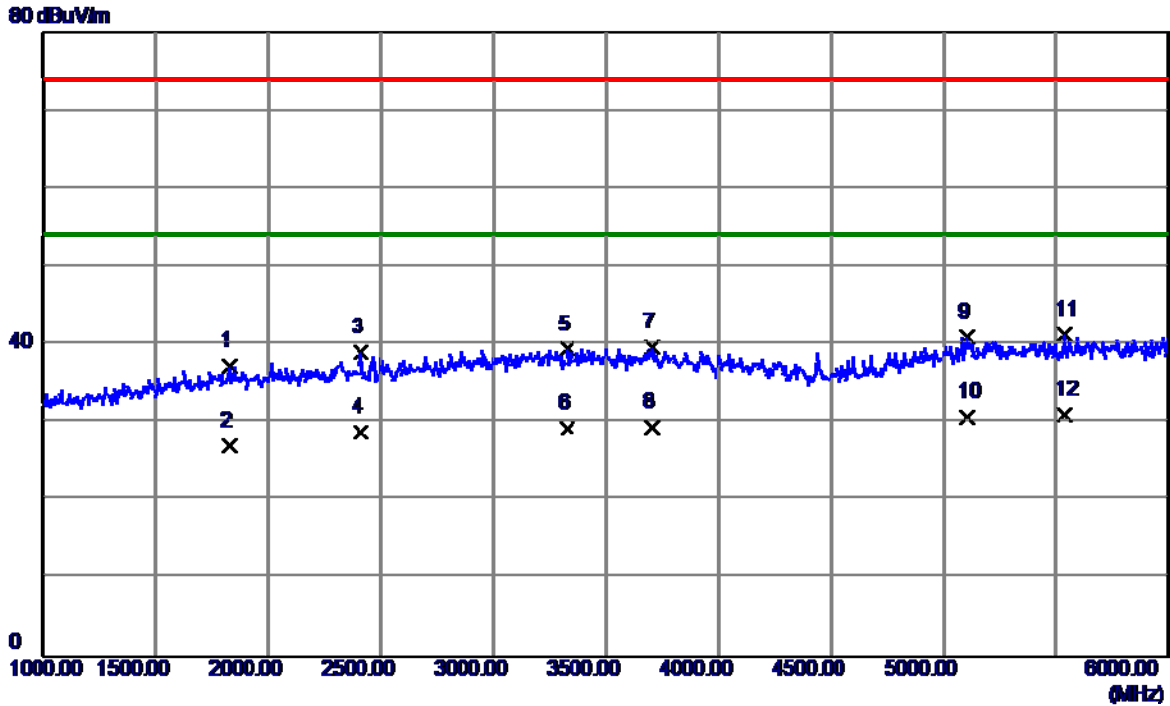


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1827.5000	39.32	-2.07	37.25	74.00	-36.75	Peak
2	1827.5000	29.15	-2.07	27.08	54.00	-26.92	AVG
3	2410.0000	38.98	0.09	39.07	74.00	-34.93	Peak
4	2410.0000	28.64	0.09	28.73	54.00	-25.27	AVG
5	3330.0000	36.30	3.14	39.44	74.00	-34.56	Peak
6	3330.0000	26.14	3.14	29.28	54.00	-24.72	AVG
7	3705.0000	35.54	4.08	39.62	74.00	-34.38	Peak
8	3705.0000	25.37	4.08	29.45	54.00	-24.55	AVG
9	5105.0000	33.91	7.11	41.02	74.00	-32.98	Peak
10	5105.0000	23.54	7.11	30.65	54.00	-23.35	AVG
11	5537.5000	33.56	7.69	41.25	74.00	-32.75	Peak
12 *	5537.5000	23.29	7.69	30.98	54.00	-23.02	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:FOXCONN 1.0m		
Test Engineer	Sam Wang		

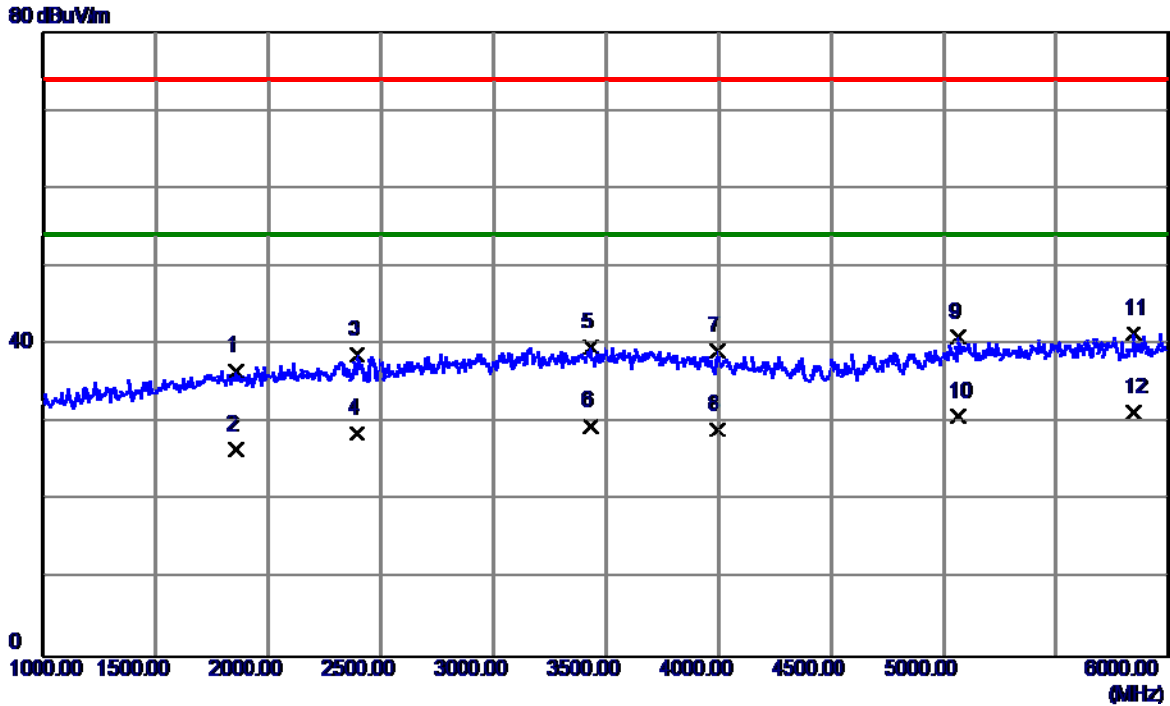


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1857.5000	38.56	-1.90	36.66	74.00	-37.34	Peak
2	1857.5000	28.42	-1.90	26.52	54.00	-27.48	AVG
3	2395.0000	38.74	0.04	38.78	74.00	-35.22	Peak
4	2395.0000	28.64	0.04	28.68	54.00	-25.32	AVG
5	3432.5000	36.22	3.52	39.74	74.00	-34.26	Peak
6	3432.5000	26.13	3.52	29.65	54.00	-24.35	AVG
7	3992.5000	34.69	4.51	39.20	74.00	-34.80	Peak
8	3992.5000	24.61	4.51	29.12	54.00	-24.88	AVG
9	5065.0000	33.97	7.06	41.03	74.00	-32.97	Peak
10	5065.0000	23.74	7.06	30.80	54.00	-23.20	AVG
11	5842.5000	33.25	8.23	41.48	74.00	-32.52	Peak
12 *	5842.5000	23.07	8.23	31.30	54.00	-22.70	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:FOXCONN 1.0m		
Test Engineer	Sam Wang		

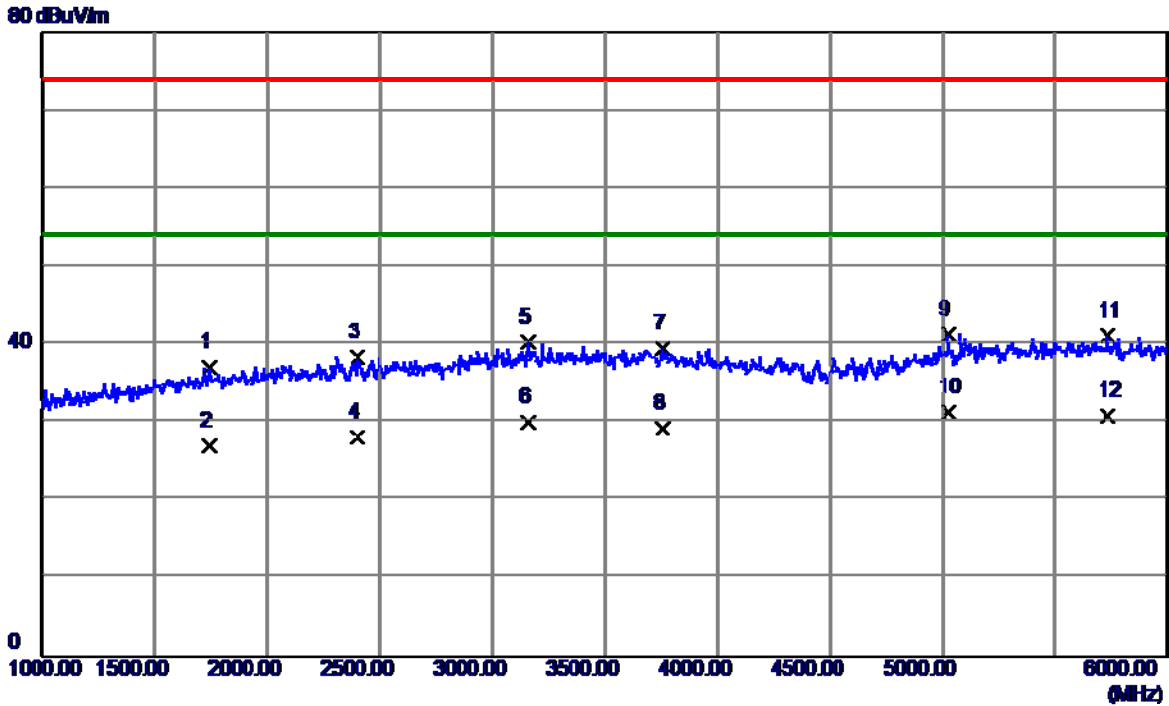


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1742.5000	39.76	-2.57	37.19	74.00	-36.81	Peak
2	1742.5000	29.54	-2.57	26.97	54.00	-27.03	AVG
3	2402.5000	38.38	0.07	38.45	74.00	-35.55	Peak
4	2402.5000	28.14	0.07	28.21	54.00	-25.79	AVG
5	3160.0000	37.84	2.51	40.35	74.00	-33.65	Peak
6	3160.0000	27.63	2.51	30.14	54.00	-23.86	AVG
7	3757.5000	35.30	4.16	39.46	74.00	-34.54	Peak
8	3757.5000	25.14	4.16	29.30	54.00	-24.70	AVG
9	5025.0000	34.27	7.01	41.28	74.00	-32.72	Peak
10 *	5025.0000	24.33	7.01	31.34	54.00	-22.66	AVG
11	5732.5000	33.07	8.03	41.10	74.00	-32.90	Peak
12	5732.5000	22.87	8.03	30.90	54.00	-23.10	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:MING JI 1.0m		
Test Engineer	Sam Wang		

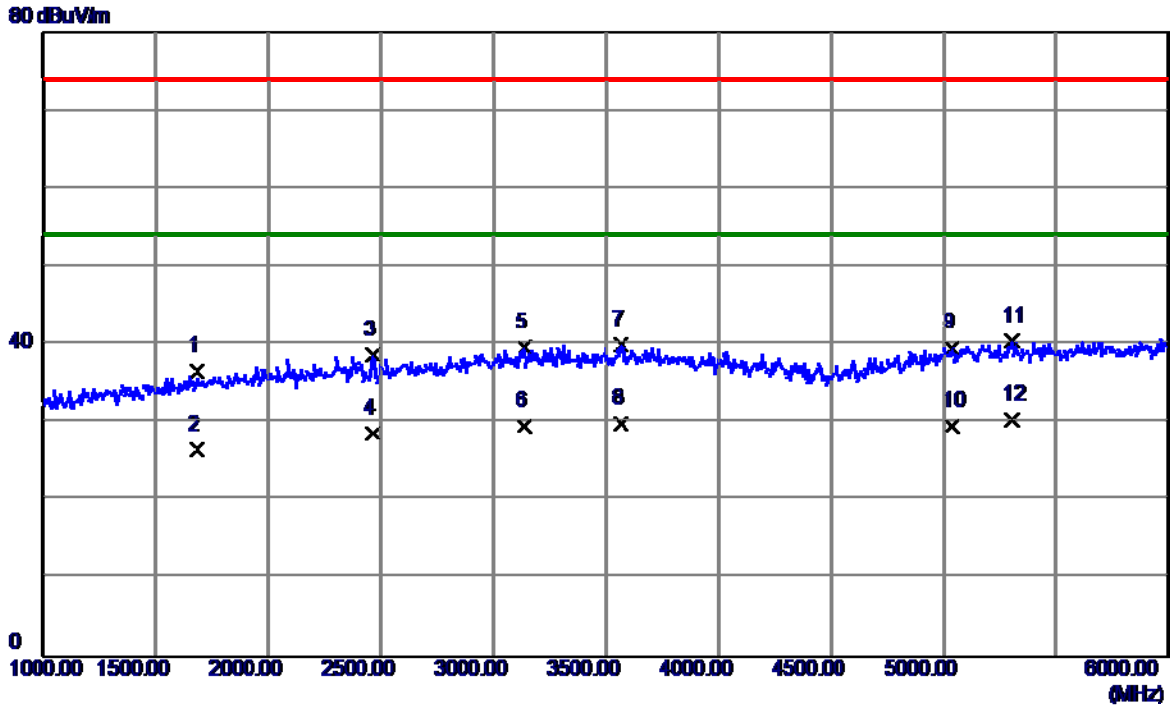


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1682.5000	39.62	-2.92	36.70	74.00	-37.30	Peak
2	1682.5000	29.54	-2.92	26.62	54.00	-27.38	AVG
3	2467.5000	38.48	0.25	38.73	74.00	-35.27	Peak
4	2467.5000	28.36	0.25	28.61	54.00	-25.39	AVG
5	3137.5000	37.22	2.43	39.65	74.00	-34.35	Peak
6	3137.5000	27.14	2.43	29.57	54.00	-24.43	AVG
7	3567.5000	36.07	3.87	39.94	74.00	-34.06	Peak
8	3567.5000	26.04	3.87	29.91	54.00	-24.09	AVG
9	5037.5000	32.57	7.03	39.60	74.00	-34.40	Peak
10	5037.5000	22.50	7.03	29.53	54.00	-24.47	AVG
11	5305.0000	33.07	7.37	40.44	74.00	-33.56	Peak
12 *	5305.0000	23.00	7.37	30.37	54.00	-23.63	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:MING JI 1.0m		
Test Engineer	Sam Wang		

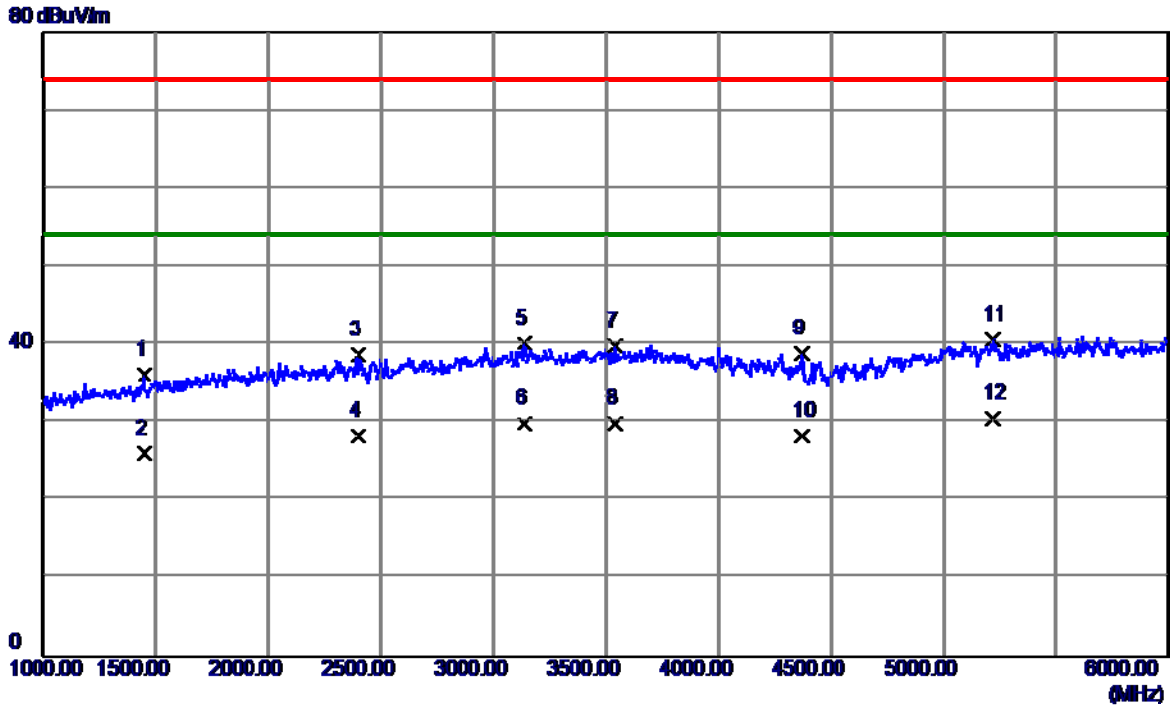


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1447.5000	40.50	-4.39	36.11	74.00	-37.89	Peak
2	1447.5000	30.42	-4.39	26.03	54.00	-27.97	AVG
3	2400.0000	38.69	0.06	38.75	74.00	-35.25	Peak
4	2400.0000	28.26	0.06	28.32	54.00	-25.68	AVG
5	3140.0000	37.67	2.44	40.11	74.00	-33.89	Peak
6	3140.0000	27.50	2.44	29.94	54.00	-24.06	AVG
7	3537.5000	36.03	3.83	39.86	74.00	-34.14	Peak
8	3537.5000	26.14	3.83	29.97	54.00	-24.03	AVG
9	4370.0000	33.87	4.97	38.84	74.00	-35.16	Peak
10	4370.0000	23.36	4.97	28.33	54.00	-25.67	AVG
11	5215.0000	33.41	7.26	40.67	74.00	-33.33	Peak
12 *	5215.0000	23.23	7.26	30.49	54.00	-23.51	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:MING JI 0.17m		
Test Engineer	Sam Wang		

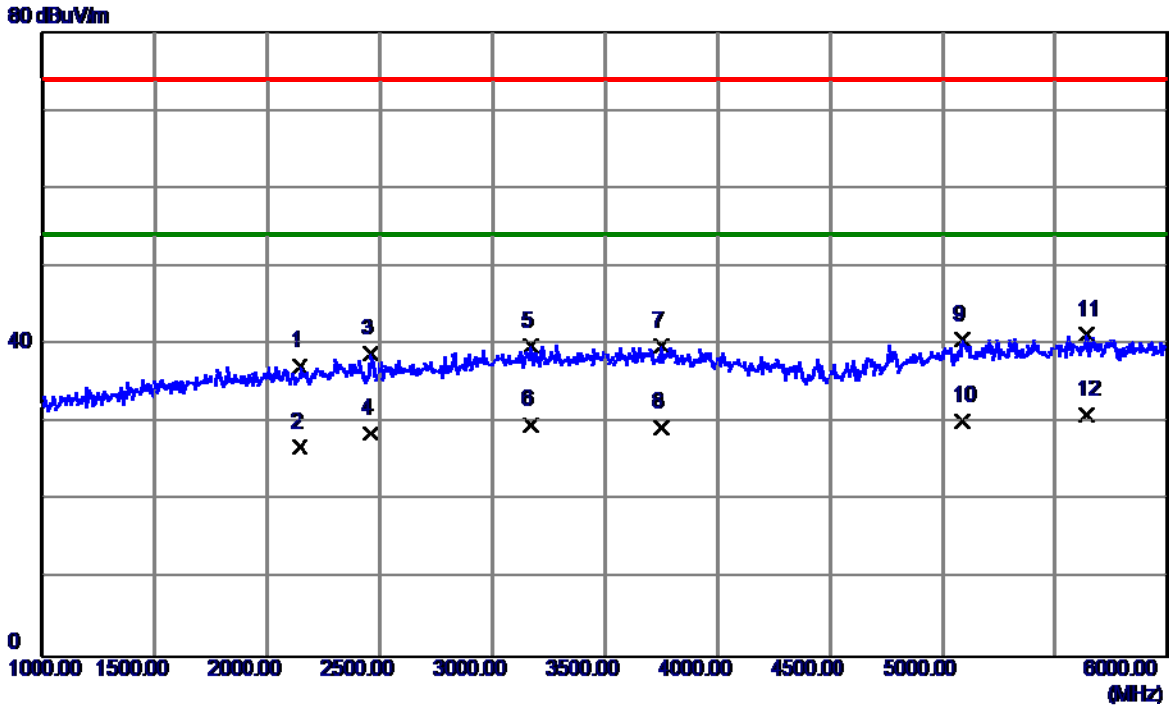


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2145.0000	37.92	-0.66	37.26	74.00	-36.74	Peak
2	2145.0000	27.57	-0.66	26.91	54.00	-27.09	AVG
3	2460.0000	38.63	0.23	38.86	74.00	-35.14	Peak
4	2460.0000	28.45	0.23	28.68	54.00	-25.32	AVG
5	3170.0000	37.25	2.55	39.80	74.00	-34.20	Peak
6	3170.0000	27.21	2.55	29.76	54.00	-24.24	AVG
7	3752.5000	35.62	4.15	39.77	74.00	-34.23	Peak
8	3752.5000	25.26	4.15	29.41	54.00	-24.59	AVG
9	5090.0000	33.60	7.10	40.70	74.00	-33.30	Peak
10	5090.0000	23.14	7.10	30.24	54.00	-23.76	AVG
11	5640.0000	33.40	7.87	41.27	74.00	-32.73	Peak
12 *	5640.0000	23.18	7.87	31.05	54.00	-22.95	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)+Wifi		
Note	Adapter:Phitek+Battery:SCUD+USB Cable:MING JI 0.17m		
Test Engineer	Sam Wang		

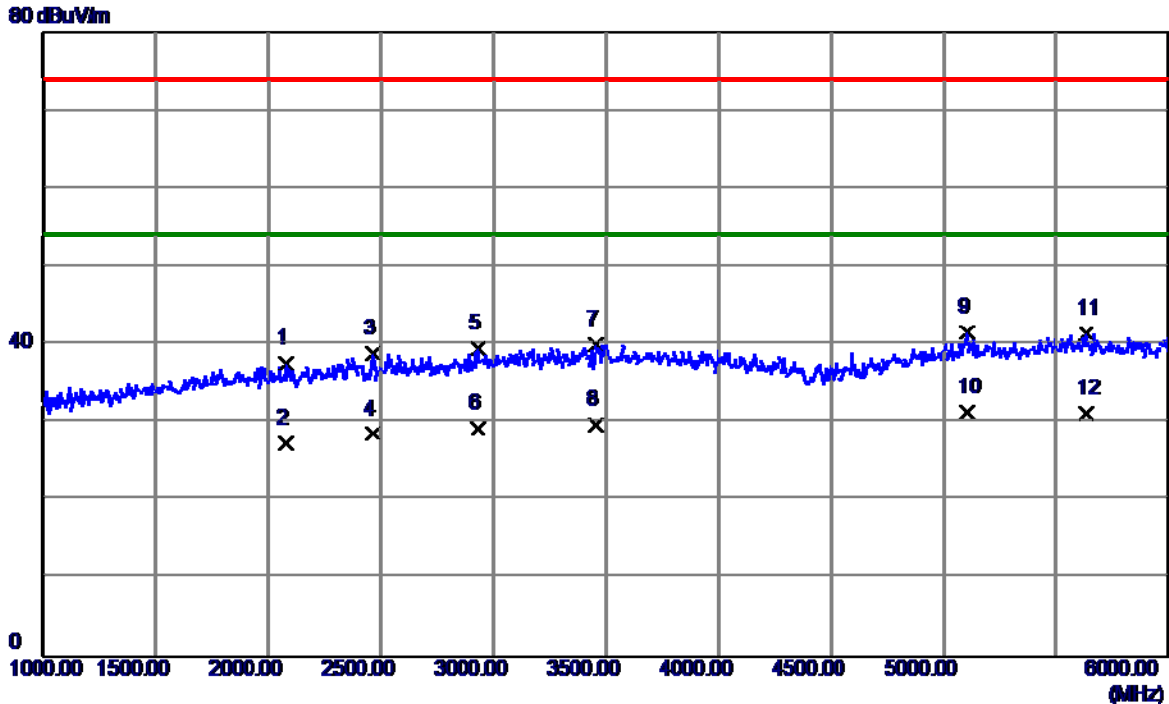


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2080.0000	38.50	-0.84	37.66	74.00	-36.34	Peak
2	2080.0000	28.23	-0.84	27.39	54.00	-26.61	AVG
3	2465.0000	38.69	0.24	38.93	74.00	-35.07	Peak
4	2465.0000	28.32	0.24	28.56	54.00	-25.44	AVG
5	2932.5000	37.79	1.71	39.50	74.00	-34.50	Peak
6	2932.5000	27.51	1.71	29.22	54.00	-24.78	AVG
7	3457.5000	36.36	3.61	39.97	74.00	-34.03	Peak
8	3457.5000	26.21	3.61	29.82	54.00	-24.18	AVG
9	5107.5000	34.41	7.12	41.53	74.00	-32.47	Peak
10 *	5107.5000	24.26	7.12	31.38	54.00	-22.62	AVG
11	5632.5000	33.56	7.86	41.42	74.00	-32.58	Peak
12	5632.5000	23.29	7.86	31.15	54.00	-22.85	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

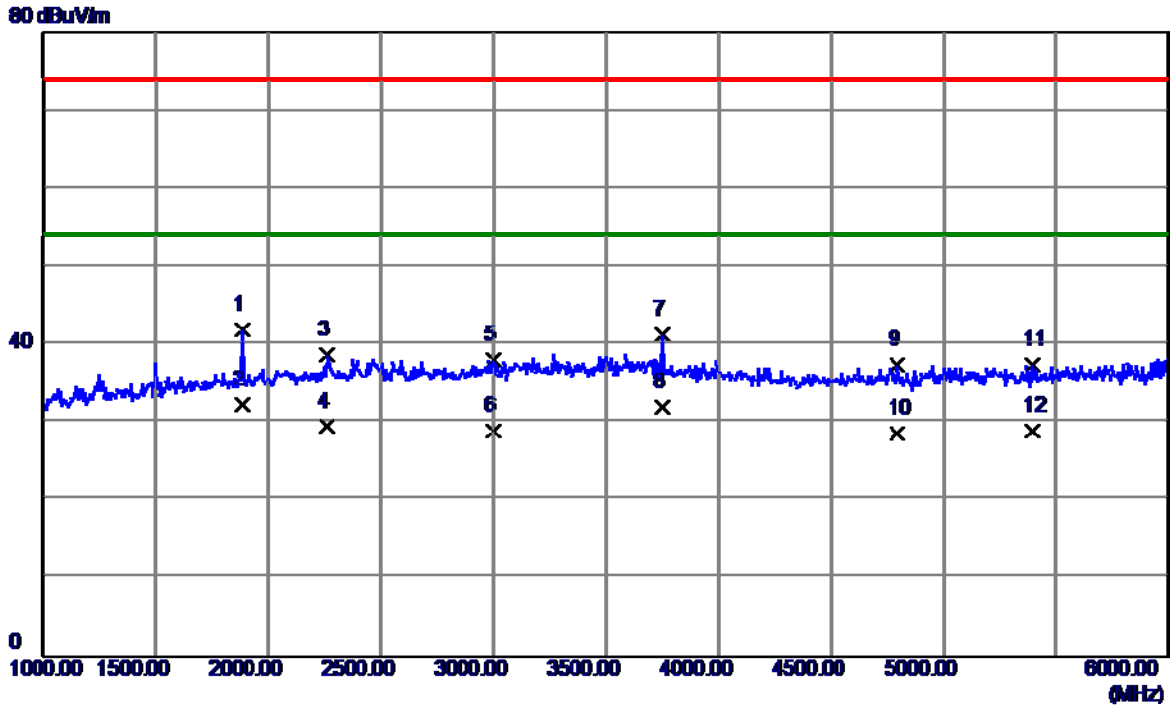


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1885.0000	43.22	-1.30	41.92	74.00	-32.08	Peak
2 *	1885.0000	33.55	-1.30	32.25	54.00	-21.75	AVG
3	2260.0000	38.59	0.16	38.75	74.00	-35.25	Peak
4	2260.0000	29.36	0.16	29.52	54.00	-24.48	AVG
5	3000.0000	35.53	2.48	38.01	74.00	-35.99	Peak
6	3000.0000	26.42	2.48	28.90	54.00	-25.10	AVG
7	3750.0000	36.38	4.92	41.30	74.00	-32.70	Peak
8	3750.0000	27.15	4.92	32.07	54.00	-21.93	AVG
9	4795.0000	30.31	7.11	37.42	74.00	-36.58	Peak
10	4795.0000	21.47	7.11	28.58	54.00	-25.42	AVG
11	5395.0000	28.99	8.39	37.38	74.00	-36.62	Peak
12	5395.0000	20.54	8.39	28.93	54.00	-25.07	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

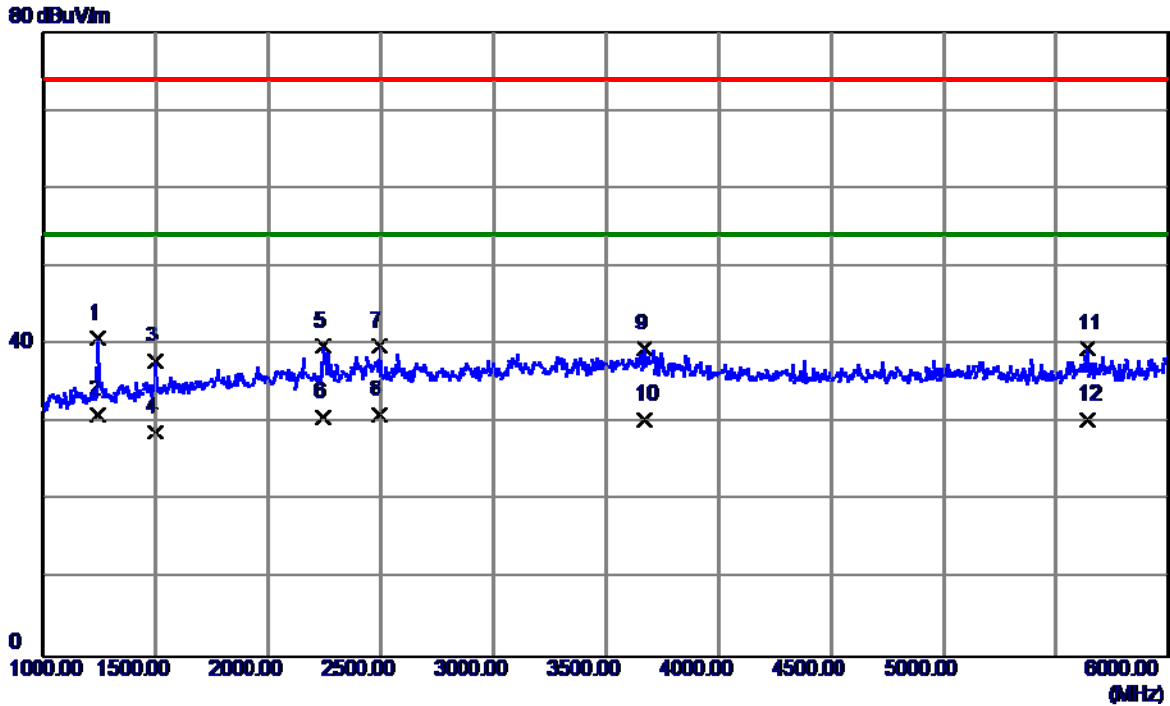


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1245.0000	46.54	-5.67	40.87	74.00	-33.13	Peak
2 *	1245.0000	36.67	-5.67	31.00	54.00	-23.00	AVG
3	1500.0000	41.61	-3.63	37.98	74.00	-36.02	Peak
4	1500.0000	32.41	-3.63	28.78	54.00	-25.22	AVG
5	2245.0000	39.76	0.12	39.88	74.00	-34.12	Peak
6	2245.0000	30.53	0.12	30.65	54.00	-23.35	AVG
7	2495.0000	38.99	0.86	39.85	74.00	-34.15	Peak
8	2495.0000	30.13	0.86	30.99	54.00	-23.01	AVG
9	3670.0000	34.74	4.78	39.52	74.00	-34.48	Peak
10	3670.0000	25.65	4.78	30.43	54.00	-23.57	AVG
11	5640.0000	30.65	8.80	39.45	74.00	-34.55	Peak
12	5640.0000	21.53	8.80	30.33	54.00	-23.67	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

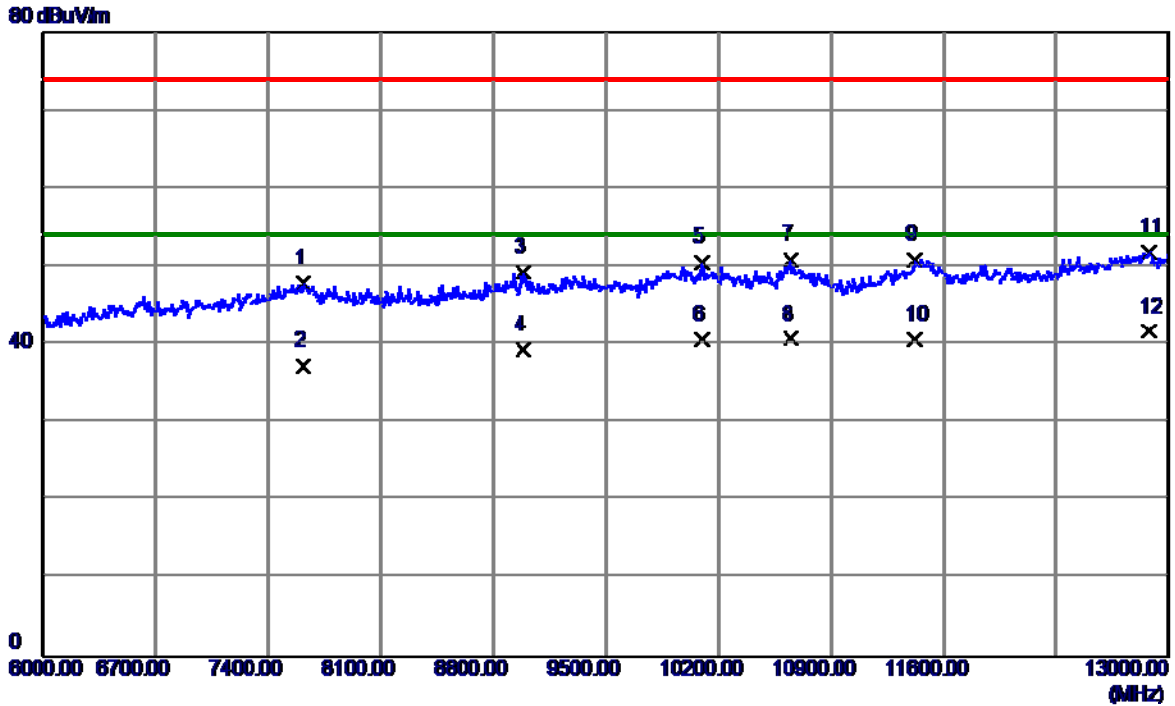


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7617.0000	33.98	13.79	47.77	74.00	-26.23	Peak
2	7617.0000	23.56	13.79	37.35	54.00	-16.65	AVG
3	8989.0000	34.08	15.19	49.27	74.00	-24.73	Peak
4	8989.0000	24.12	15.19	39.31	54.00	-14.69	AVG
5	10102.0000	34.13	16.38	50.51	74.00	-23.49	Peak
6	10102.0000	24.22	16.38	40.60	54.00	-13.40	AVG
7	10655.0000	33.51	17.31	50.82	74.00	-23.18	Peak
8	10655.0000	23.41	17.31	40.72	54.00	-13.28	AVG
9	11425.0000	32.87	18.03	50.90	74.00	-23.10	Peak
10	11425.0000	22.67	18.03	40.70	54.00	-13.30	AVG
11	12874.0000	31.33	20.53	51.86	74.00	-22.14	Peak
12 *	12874.0000	21.15	20.53	41.68	54.00	-12.32	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

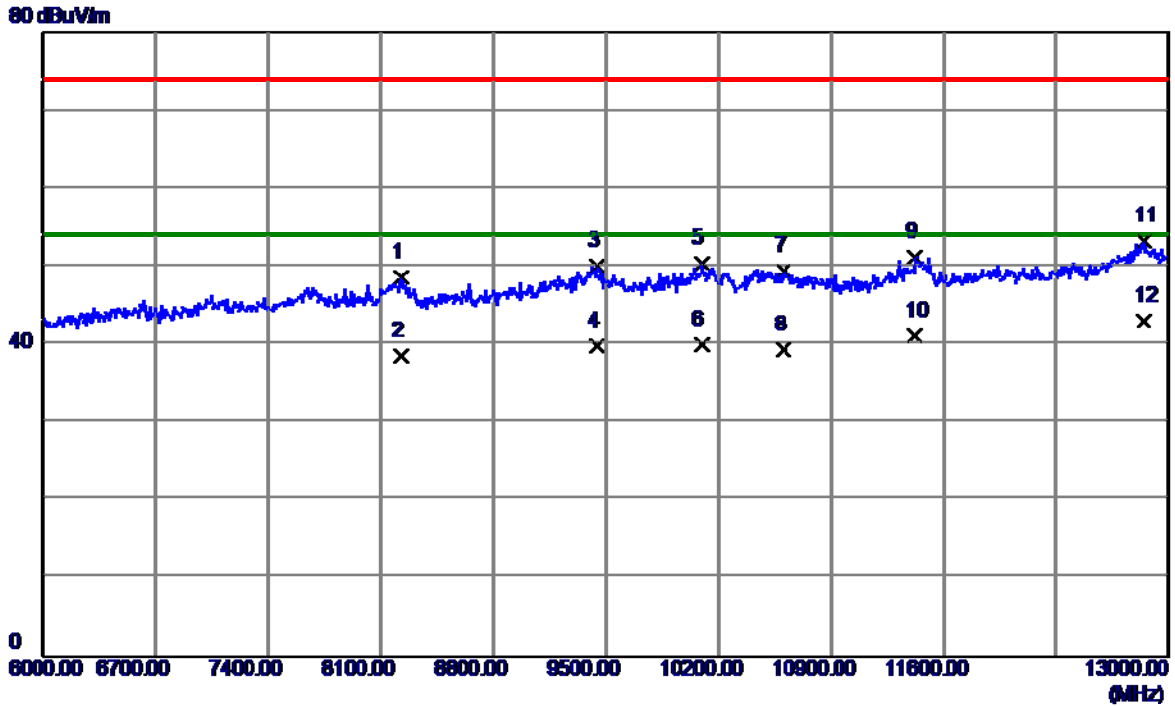


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	8226.0000	34.56	14.15	48.71	74.00	-25.29	Peak
2	8226.0000	24.35	14.15	38.50	54.00	-15.50	AVG
3	9444.0000	34.46	15.66	50.12	74.00	-23.88	Peak
4	9444.0000	24.21	15.66	39.87	54.00	-14.13	AVG
5	10095.0000	34.01	16.36	50.37	74.00	-23.63	Peak
6	10095.0000	23.63	16.36	39.99	54.00	-14.01	AVG
7	10606.0000	32.14	17.37	49.51	74.00	-24.49	Peak
8	10606.0000	22.05	17.37	39.42	54.00	-14.58	AVG
9	11425.0000	33.19	18.03	51.22	74.00	-22.78	Peak
10	11425.0000	23.16	18.03	41.19	54.00	-12.81	AVG
11	12846.0000	32.86	20.41	53.27	74.00	-20.73	Peak
12 *	12846.0000	22.57	20.41	42.98	54.00	-11.02	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:Sunwada+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

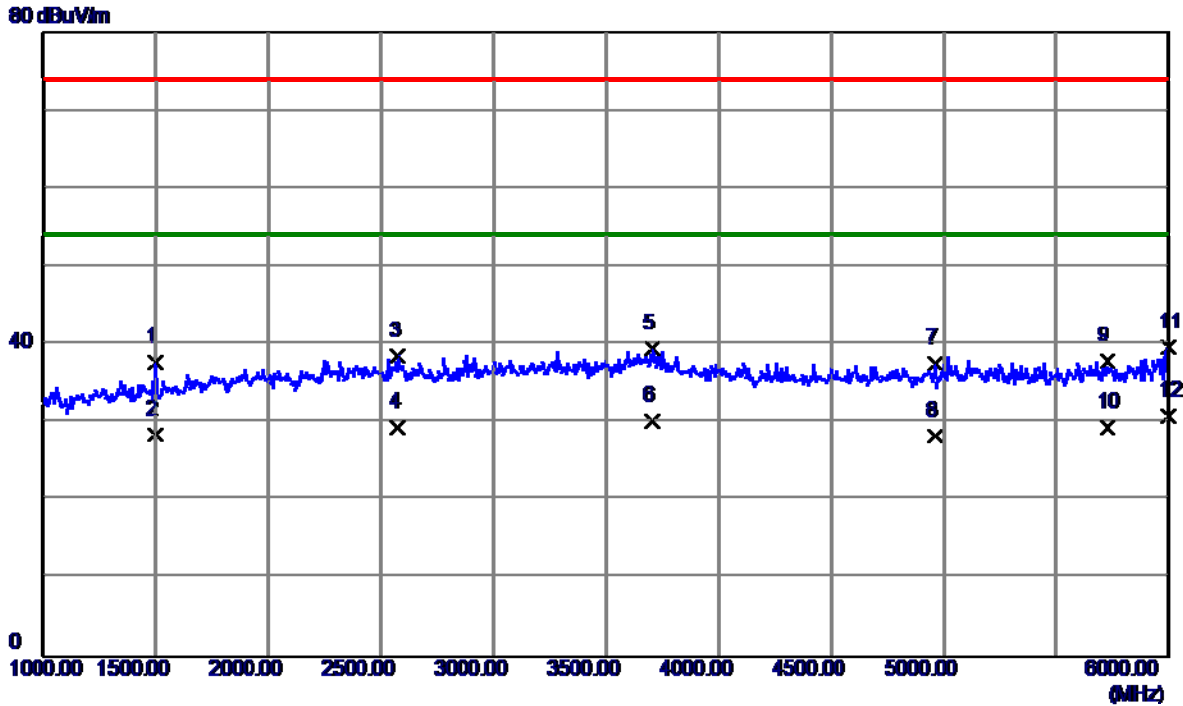


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	41.33	-3.63	37.70	74.00	-36.30	Peak
2	1500.0000	32.06	-3.63	28.43	54.00	-25.57	AVG
3	2575.0000	37.52	1.11	38.63	74.00	-35.37	Peak
4	2575.0000	28.30	1.11	29.41	54.00	-24.59	AVG
5	3705.0000	34.62	4.84	39.46	74.00	-34.54	Peak
6	3705.0000	25.47	4.84	30.31	54.00	-23.69	AVG
7	4960.0000	29.83	7.70	37.53	74.00	-36.47	Peak
8	4960.0000	20.65	7.70	28.35	54.00	-25.65	AVG
9	5725.0000	29.01	8.96	37.97	74.00	-36.03	Peak
10	5725.0000	20.45	8.96	29.41	54.00	-24.59	AVG
11	6000.0000	30.20	9.49	39.69	74.00	-34.31	Peak
12 *	6000.0000	21.32	9.49	30.81	54.00	-23.19	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:Sunwada+USB Cable:Luxshare 1.0m		
Test Engineer	Sam Wang		

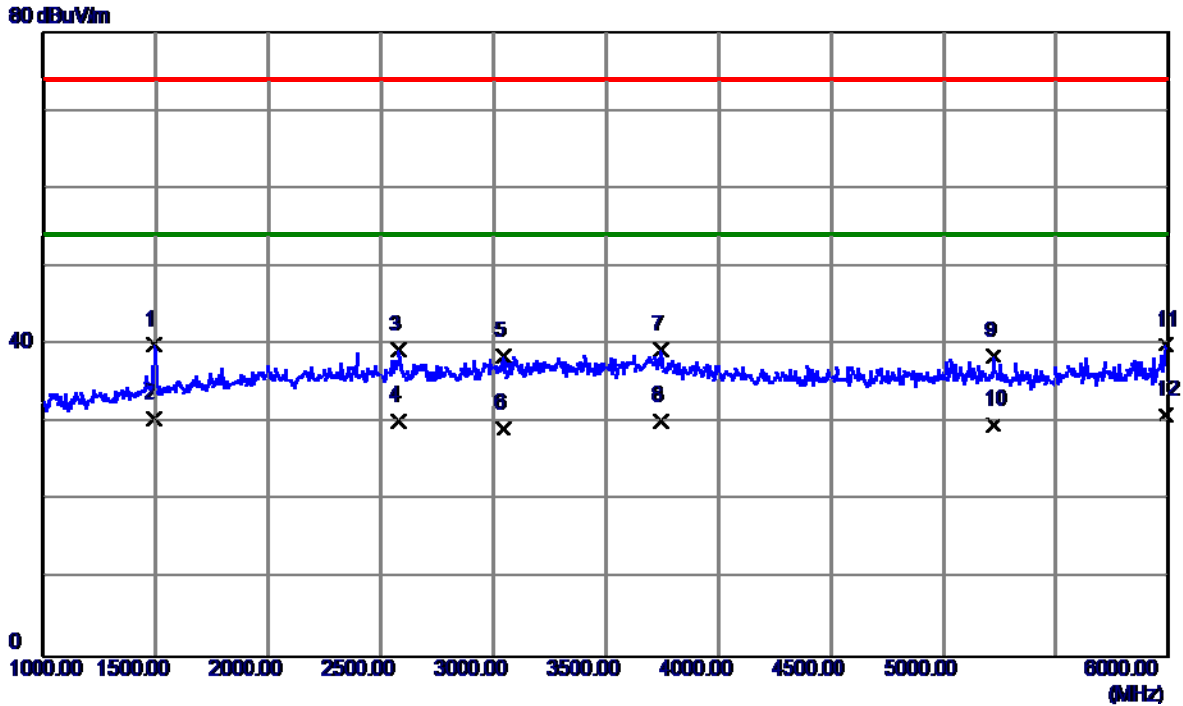


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	43.64	-3.67	39.97	74.00	-34.03	Peak
2	1495.0000	34.23	-3.67	30.56	54.00	-23.44	AVG
3	2580.0000	38.28	1.13	39.41	74.00	-34.59	Peak
4	2580.0000	29.08	1.13	30.21	54.00	-23.79	AVG
5	3045.0000	35.91	2.66	38.57	74.00	-35.43	Peak
6	3045.0000	26.57	2.66	29.23	54.00	-24.77	AVG
7	3745.0000	34.39	4.91	39.30	74.00	-34.70	Peak
8	3745.0000	25.40	4.91	30.31	54.00	-23.69	AVG
9	5220.0000	30.44	8.14	38.58	74.00	-35.42	Peak
10	5220.0000	21.63	8.14	29.77	54.00	-24.23	AVG
11	5990.0000	30.55	9.47	40.02	74.00	-33.98	Peak
12 *	5990.0000	21.54	9.47	31.01	54.00	-22.99	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:HONGLIN1.0m		
Test Engineer	Sam Wang		

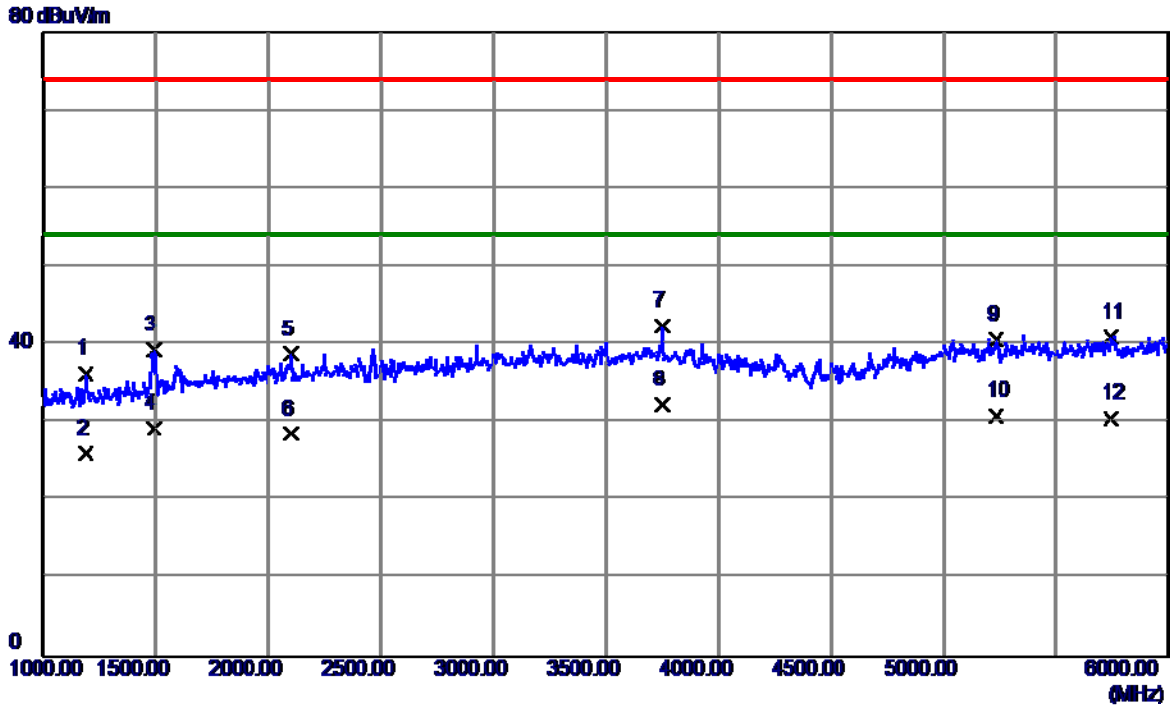


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1187.5000	42.77	-6.42	36.35	74.00	-37.65	Peak
2	1187.5000	32.47	-6.42	26.05	54.00	-27.95	AVG
3	1495.0000	43.37	-4.02	39.35	74.00	-34.65	Peak
4	1495.0000	33.25	-4.02	29.23	54.00	-24.77	AVG
5	2100.0000	39.59	-0.79	38.80	74.00	-35.20	Peak
6	2100.0000	29.35	-0.79	28.56	54.00	-25.44	AVG
7	3747.5000	38.22	4.14	42.36	74.00	-31.64	Peak
8 *	3747.5000	28.14	4.14	32.28	54.00	-21.72	AVG
9	5232.5000	33.39	7.28	40.67	74.00	-33.33	Peak
10	5232.5000	23.62	7.28	30.90	54.00	-23.10	AVG
11	5742.5000	32.87	8.05	40.92	74.00	-33.08	Peak
12	5742.5000	22.52	8.05	30.57	54.00	-23.43	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:HONGLIN1.0m		
Test Engineer	Sam Wang		

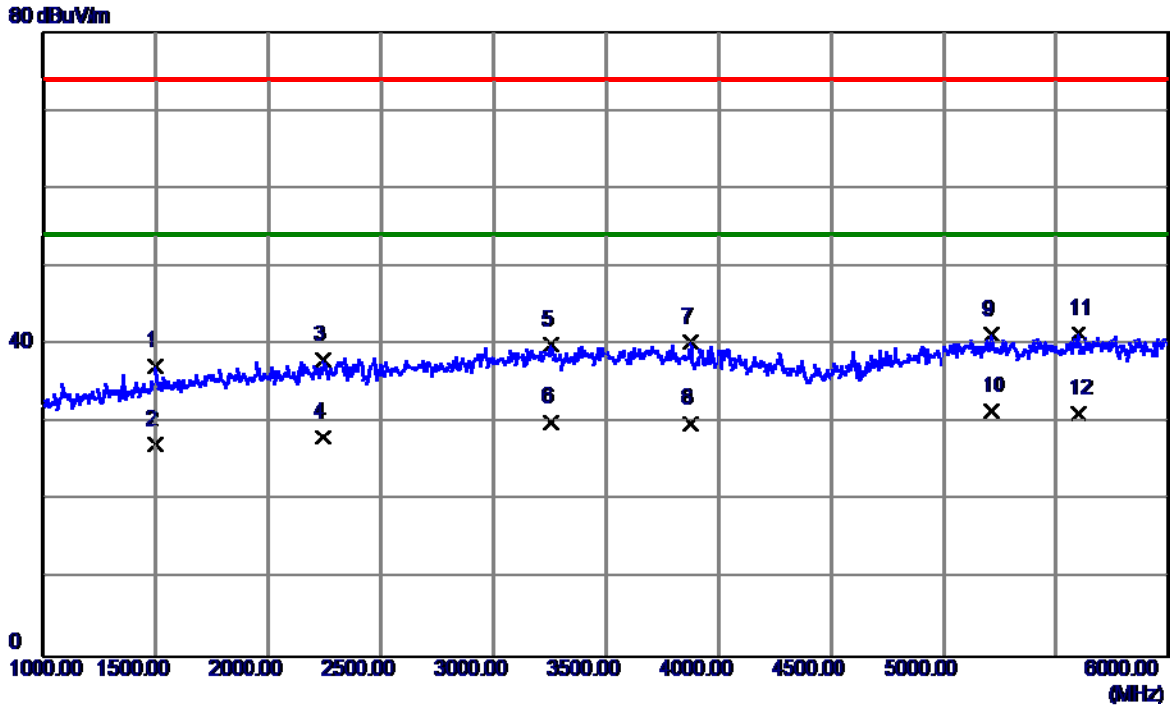


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	41.25	-3.98	37.27	74.00	-36.73	Peak
2	1500.0000	31.17	-3.98	27.19	54.00	-26.81	AVG
3	2245.0000	38.41	-0.38	38.03	74.00	-35.97	Peak
4	2245.0000	28.53	-0.38	28.15	54.00	-25.85	AVG
5	3255.0000	37.08	2.86	39.94	74.00	-34.06	Peak
6	3255.0000	27.21	2.86	30.07	54.00	-23.93	AVG
7	3877.5000	35.92	4.34	40.26	74.00	-33.74	Peak
8	3877.5000	25.61	4.34	29.95	54.00	-24.05	AVG
9	5212.5000	34.00	7.25	41.25	74.00	-32.75	Peak
10 *	5212.5000	24.32	7.25	31.57	54.00	-22.43	AVG
11	5600.0000	33.71	7.80	41.51	74.00	-32.49	Peak
12	5600.0000	23.40	7.80	31.20	54.00	-22.80	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:FOXCONN 1.0m		
Test Engineer	Sam Wang		

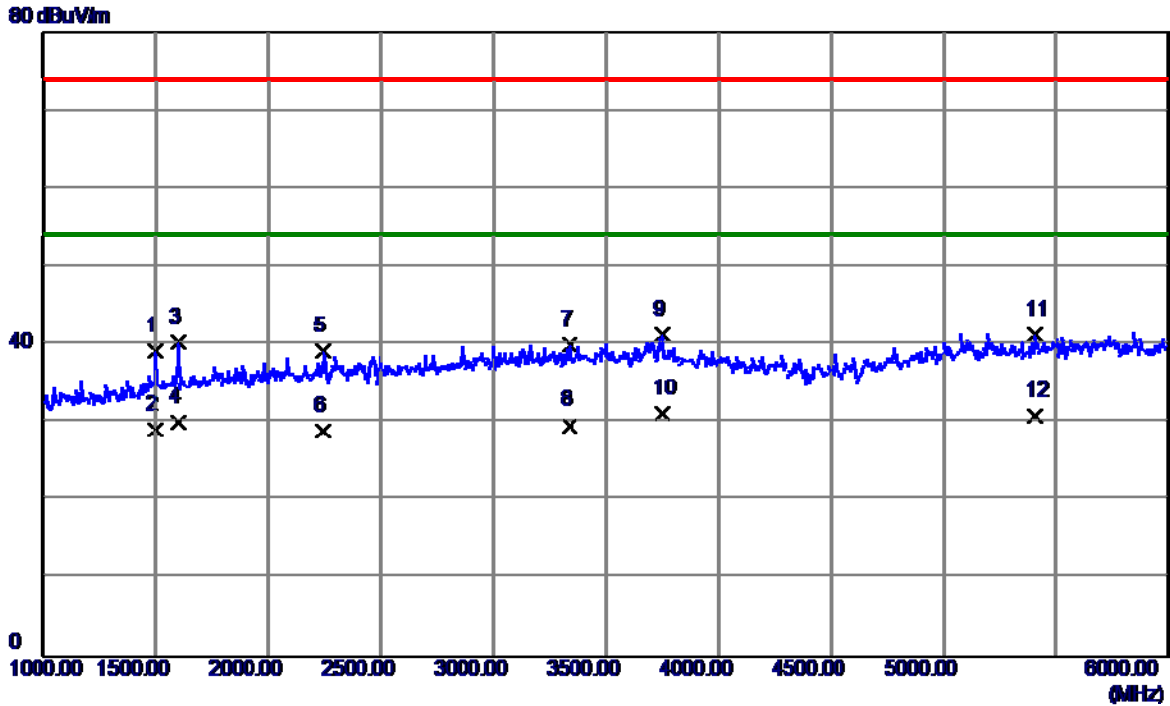


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	43.21	-3.98	39.23	74.00	-34.77	Peak
2	1500.0000	33.08	-3.98	29.10	54.00	-24.90	AVG
3	1600.0000	43.73	-3.40	40.33	74.00	-33.67	Peak
4	1600.0000	33.51	-3.40	30.11	54.00	-23.89	AVG
5	2245.0000	39.55	-0.38	39.17	74.00	-34.83	Peak
6	2245.0000	29.34	-0.38	28.96	54.00	-25.04	AVG
7	3337.5000	36.83	3.17	40.00	74.00	-34.00	Peak
8	3337.5000	26.51	3.17	29.68	54.00	-24.32	AVG
9	3747.5000	37.18	4.14	41.32	74.00	-32.68	Peak
10 *	3747.5000	27.06	4.14	31.20	54.00	-22.80	AVG
11	5407.5000	33.77	7.50	41.27	74.00	-32.73	Peak
12	5407.5000	23.42	7.50	30.92	54.00	-23.08	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:FOXCONN 1.0m		
Test Engineer	Sam Wang		

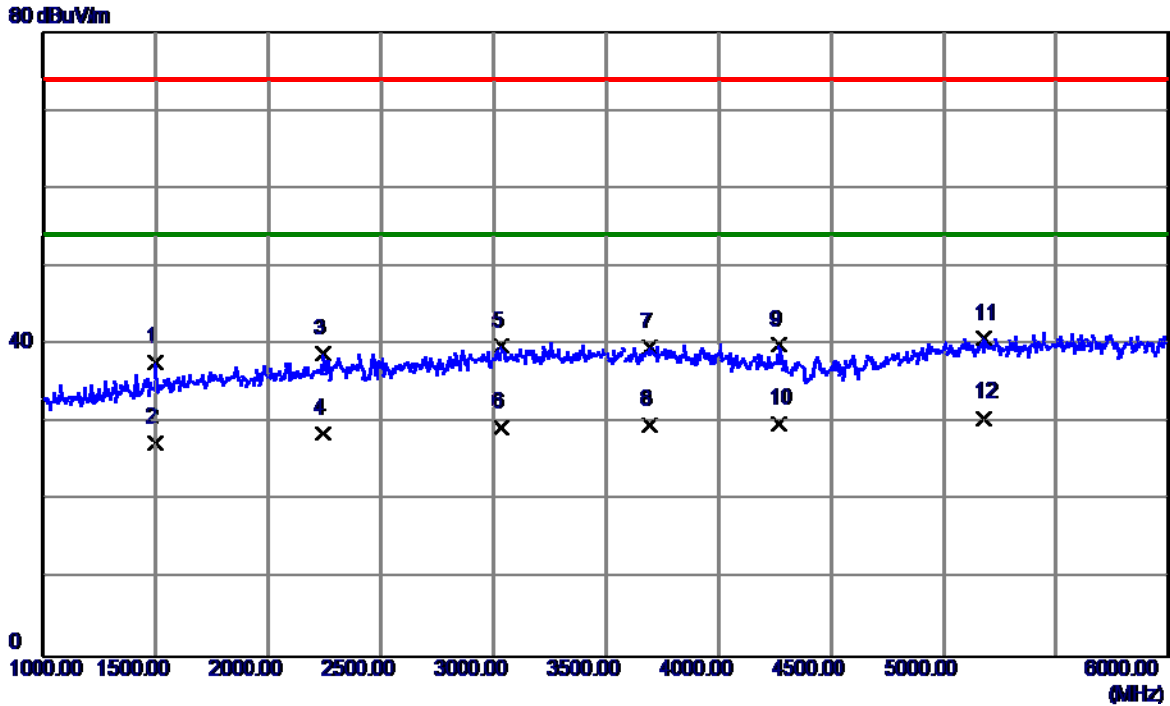


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	41.67	-3.98	37.69	74.00	-36.31	Peak
2	1500.0000	31.42	-3.98	27.44	54.00	-26.56	AVG
3	2245.0000	39.28	-0.38	38.90	74.00	-35.10	Peak
4	2245.0000	29.06	-0.38	28.68	54.00	-25.32	AVG
5	3035.0000	37.76	2.05	39.81	74.00	-34.19	Peak
6	3035.0000	27.35	2.05	29.40	54.00	-24.60	AVG
7	3692.5000	35.68	4.06	39.74	74.00	-34.26	Peak
8	3692.5000	25.77	4.06	29.83	54.00	-24.17	AVG
9	4265.0000	35.10	4.84	39.94	74.00	-34.06	Peak
10	4265.0000	25.01	4.84	29.85	54.00	-24.15	AVG
11	5180.0000	33.66	7.21	40.87	74.00	-33.13	Peak
12 *	5180.0000	23.43	7.21	30.64	54.00	-23.36	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:MING JI 1.0m		
Test Engineer	Sam Wang		

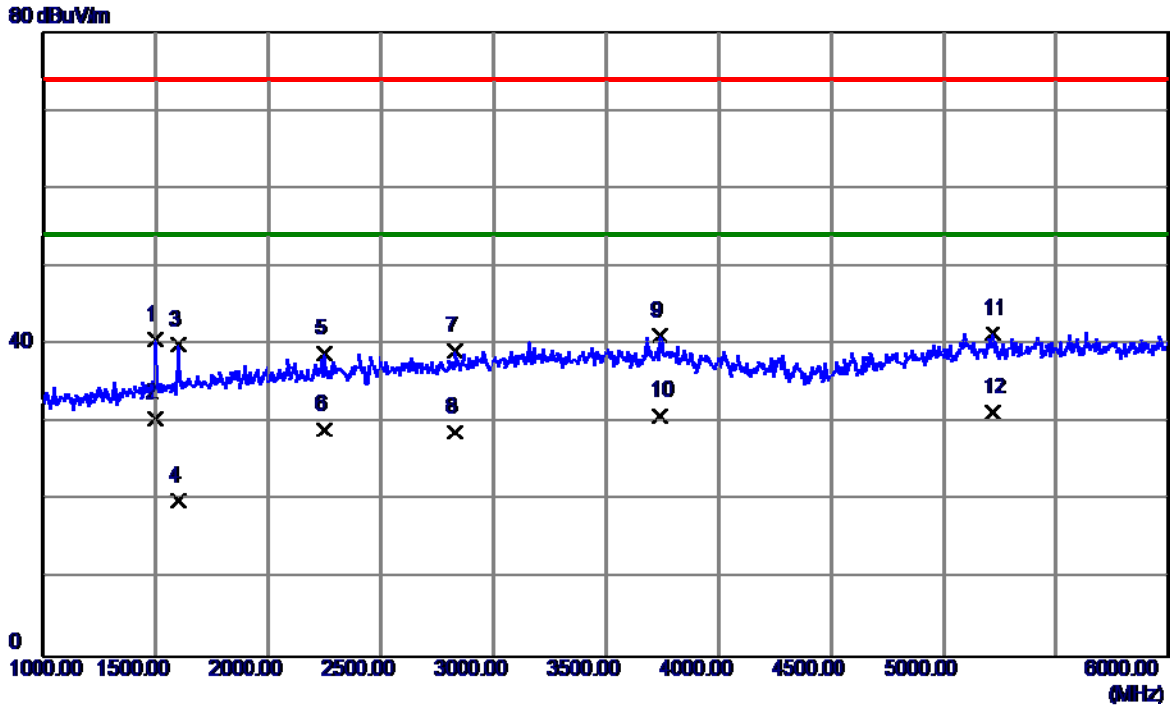


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	44.60	-3.98	40.62	74.00	-33.38	Peak
2	1500.0000	34.52	-3.98	30.54	54.00	-23.46	AVG
3	1597.5000	43.40	-3.41	39.99	74.00	-34.01	Peak
4	1597.5000	23.36	-3.41	19.95	54.00	-34.05	AVG
5	2247.5000	39.32	-0.37	38.95	74.00	-35.05	Peak
6	2247.5000	29.53	-0.37	29.16	54.00	-24.84	AVG
7	2830.0000	37.77	1.38	39.15	74.00	-34.85	Peak
8	2830.0000	27.42	1.38	28.80	54.00	-25.20	AVG
9	3740.0000	36.98	4.13	41.11	74.00	-32.89	Peak
10	3740.0000	26.82	4.13	30.95	54.00	-23.05	AVG
11	5217.5000	34.13	7.26	41.39	74.00	-32.61	Peak
12 *	5217.5000	24.07	7.26	31.33	54.00	-22.67	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:MING JI 1.0m		
Test Engineer	Sam Wang		

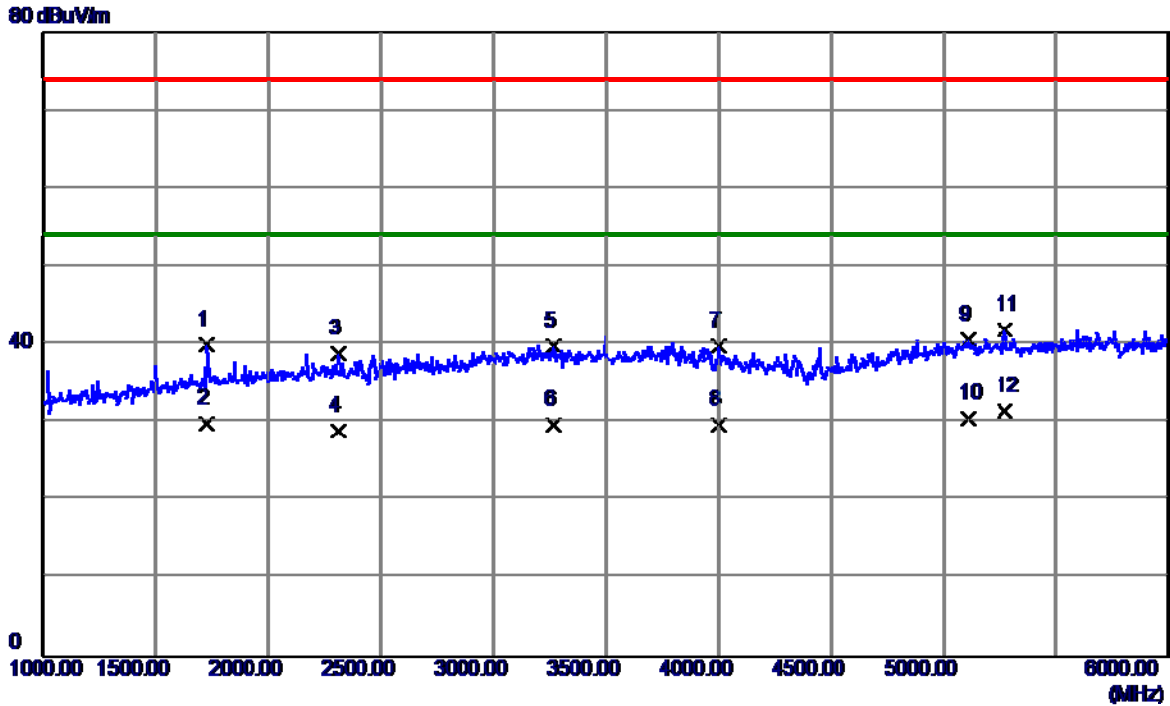


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1730.0000	42.62	-2.64	39.98	74.00	-34.02	Peak
2	1730.0000	32.58	-2.64	29.94	54.00	-24.06	AVG
3	2310.0000	39.14	-0.20	38.94	74.00	-35.06	Peak
4	2310.0000	29.22	-0.20	29.02	54.00	-24.98	AVG
5	3265.0000	37.01	2.90	39.91	74.00	-34.09	Peak
6	3265.0000	26.87	2.90	29.77	54.00	-24.23	AVG
7	3997.5000	35.40	4.52	39.92	74.00	-34.08	Peak
8	3997.5000	25.31	4.52	29.83	54.00	-24.17	AVG
9	5112.5000	33.50	7.12	40.62	74.00	-33.38	Peak
10	5112.5000	23.46	7.12	30.58	54.00	-23.42	AVG
11	5272.5000	34.61	7.33	41.94	74.00	-32.06	Peak
12 *	5272.5000	24.15	7.33	31.48	54.00	-22.52	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:MING JI 0.17m		
Test Engineer	Sam Wang		

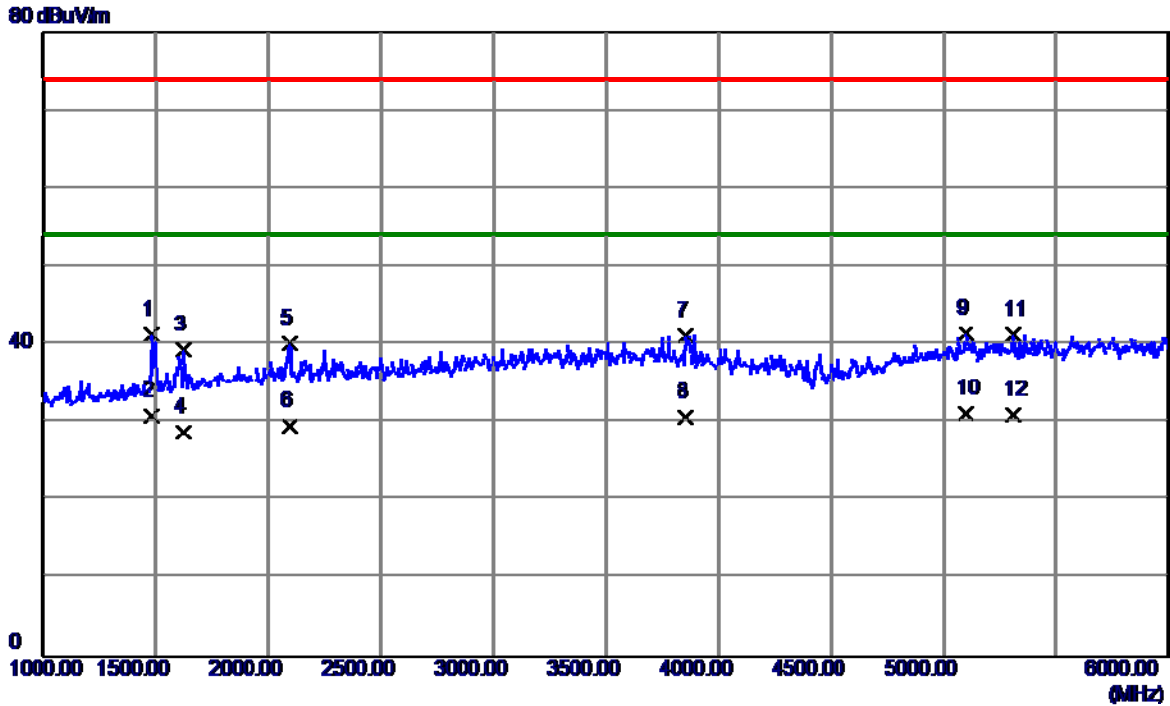

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1485.0000	45.40	-4.10	41.30	74.00	-32.70	Peak
2	1485.0000	35.03	-4.10	30.93	54.00	-23.07	AVG
3	1620.0000	42.69	-3.28	39.41	74.00	-34.59	Peak
4	1620.0000	32.15	-3.28	28.87	54.00	-25.13	AVG
5	2092.5000	40.91	-0.81	40.10	74.00	-33.90	Peak
6	2092.5000	30.45	-0.81	29.64	54.00	-24.36	AVG
7	3855.0000	36.78	4.30	41.08	74.00	-32.92	Peak
8	3855.0000	26.35	4.30	30.65	54.00	-23.35	AVG
9	5100.0000	34.26	7.11	41.37	74.00	-32.63	Peak
10 *	5100.0000	24.08	7.11	31.19	54.00	-22.81	AVG
11	5310.0000	33.92	7.38	41.30	74.00	-32.70	Peak
12	5310.0000	23.62	7.38	31.00	54.00	-23.00	AVG

EUT	Mobile WiFi	Model Name	E5573Fs-508
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Connet To PC+ Wifi		
Note	Battery:SCUD+USB Cable:MING JI 0.17m		
Test Engineer	Sam Wang		

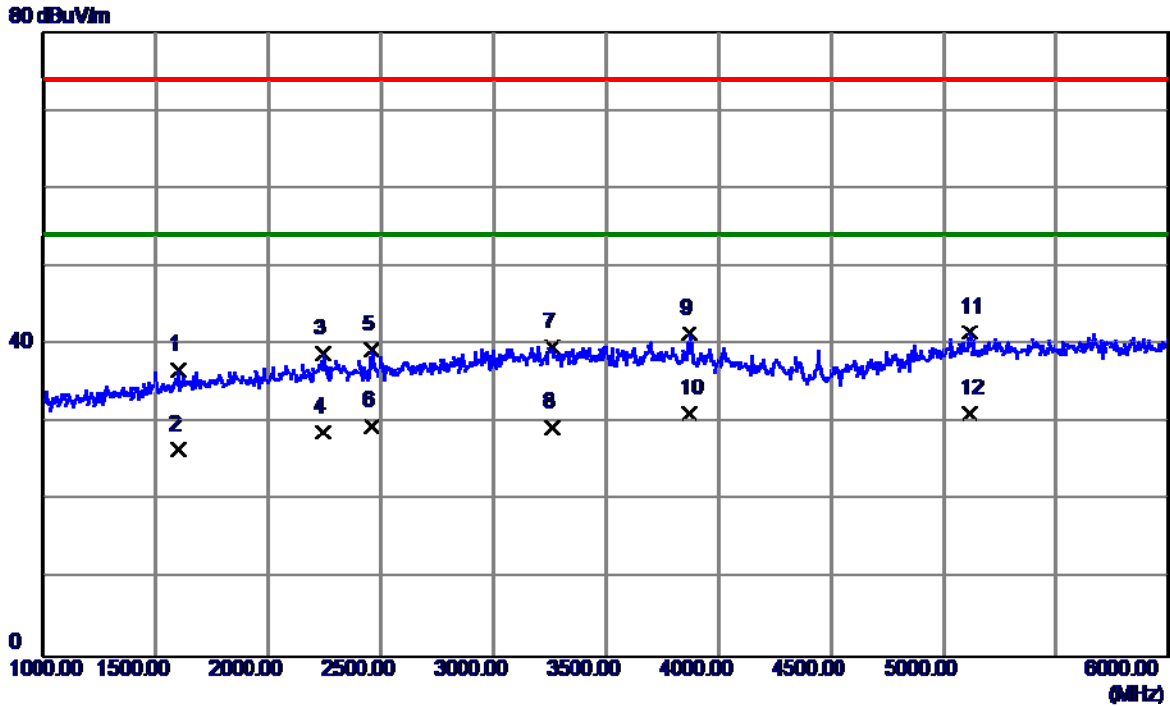

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1597.5000	40.18	-3.41	36.77	74.00	-37.23	Peak
2	1597.5000	30.04	-3.41	26.63	54.00	-27.37	AVG
3	2245.0000	39.25	-0.38	38.87	74.00	-35.13	Peak
4	2245.0000	29.15	-0.38	28.77	54.00	-25.23	AVG
5	2460.0000	39.19	0.23	39.42	74.00	-34.58	Peak
6	2460.0000	29.41	0.23	29.64	54.00	-24.36	AVG
7	3260.0000	36.81	2.88	39.69	74.00	-34.31	Peak
8	3260.0000	26.58	2.88	29.46	54.00	-24.54	AVG
9	3870.0000	37.10	4.33	41.43	74.00	-32.57	Peak
10	3870.0000	26.85	4.33	31.18	54.00	-22.82	AVG
11	5115.0000	34.42	7.13	41.55	74.00	-32.45	Peak
12 *	5115.0000	24.07	7.13	31.20	54.00	-22.80	AVG