



Appendix B. SAR Measurement Plots

Table of contents
GSM850 Body
GSM1900 Body
UMTS Band V Body
UMTS Band II Body
WiFi 2450 MHz Body

Test Laboratory: HUAWEI SAR/HAC Lab

E5730s-6 GSM850 GPRS 2TS 190CH Back side 10mm

DUT: E5730s-6; Type: Mobile WiFi; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.10015

Medium parameters used: $f = 837$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 54.015$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.31 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 35.021 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.924 W/kg

Maximum value of SAR (measured) = 1.35 W/kg

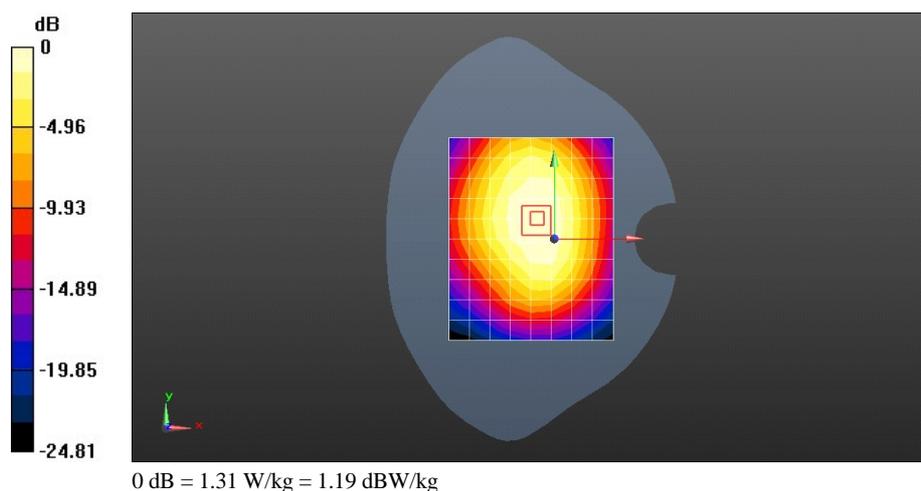

Test Laboratory: HUAWEI SAR/HAC Lab

E5730s-6 GSM1900 GPRS 2TS 512CH Right Side 10mm with battery 2#

DUT: E5730s-6; Type: Mobile WiFi; Serial: SAR1

Communication System: UID 0, HW-GSM\GPRS\EGPRS-2TS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:4.10015

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 54.034$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (8x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.40 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 27.264 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.680 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.45 W/kg

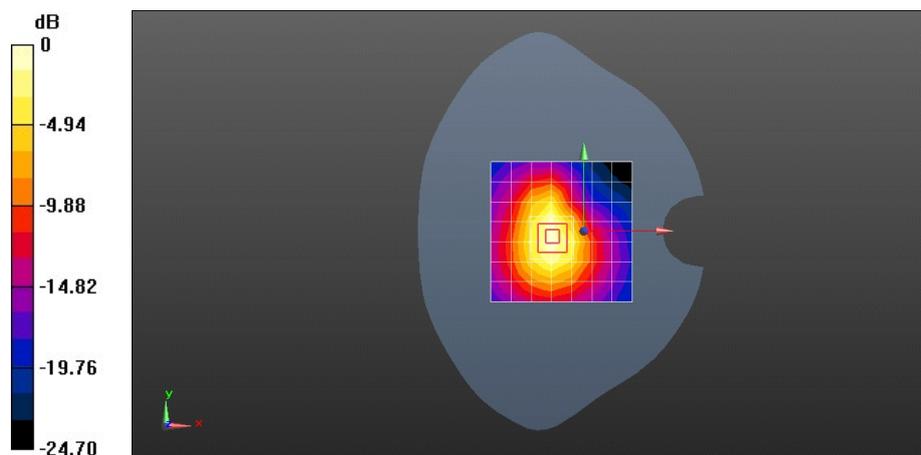

0 dB = 1.40 W/kg = 1.46 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

E5730s-6 UMTS Band V 4182CH Back side 10mm

DUT: E5730s-6; Type: Mobile WiFi; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 54.023$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(6.06, 6.06, 6.06); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.731 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.949 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.855 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.509 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.741 W/kg

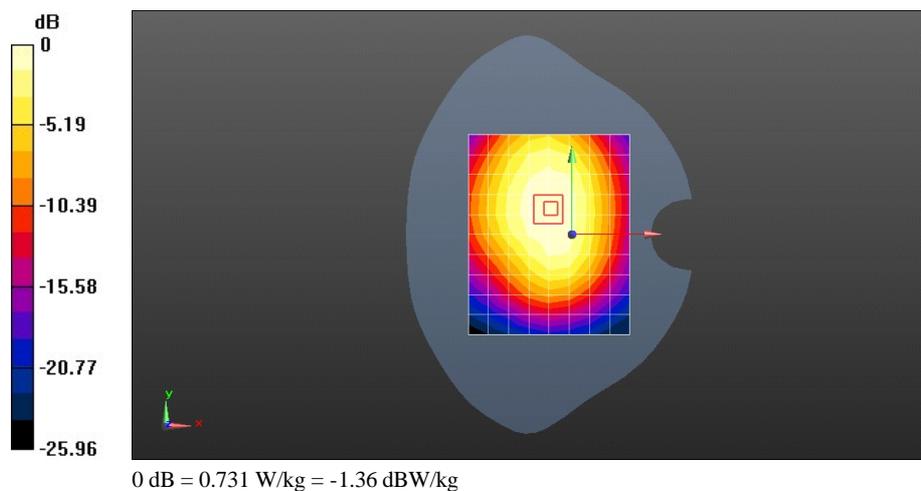

Test Laboratory: HUAWEI SAR/HAC Lab

E5730s-6 UMTS Band II 9262CH Right Side 10mm

DUT: E5730s-6; Type: Mobile WiFi; Serial: SAR1

Communication System: UID 0, HW-UMTS-FDD(WCDMA) (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 54.028$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.72, 4.72, 4.72); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.33 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.699 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.643 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.35 W/kg

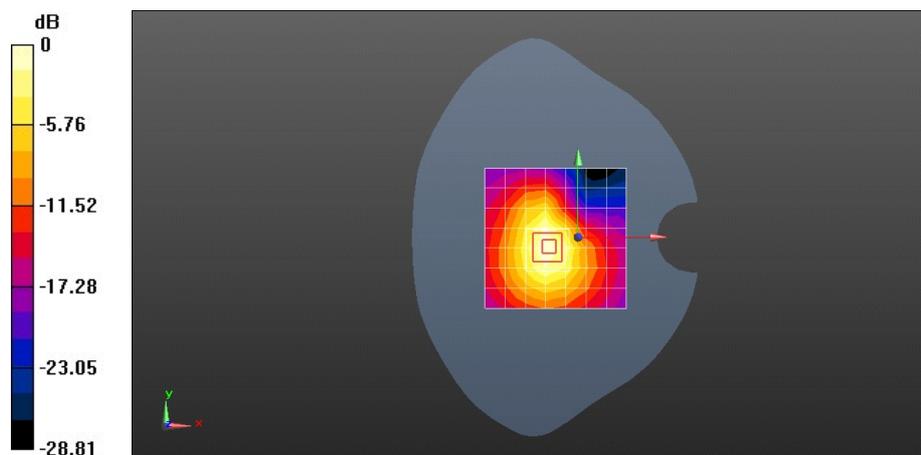

0 dB = 1.33 W/kg = 1.24 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

E5730s-6 WiFi 802.11b 6CH Top Side 10mm with battery 2#

DUT: E5730s-6; Type: Mobile WiFi; Serial: SAR1

Communication System: UID 0, WiFi(802.11a/b/g/n/ac) (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.984$ S/m; $\epsilon_r = 51.989$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: ES3DV3 - SN3168; ConvF(4.25, 4.25, 4.25); Calibrated: 2013-9-30;
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE4 Sn1236; Calibrated: 2013-11-25
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Configuration/Body/Area Scan (9x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.138 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.662 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.226 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.146 W/kg

