


## Appendix F

# Radiated Emission of Enclosure in Idle Mode

According to FCC Part 15.109


# 1 Test Result of E800 without adapter GPRS1900

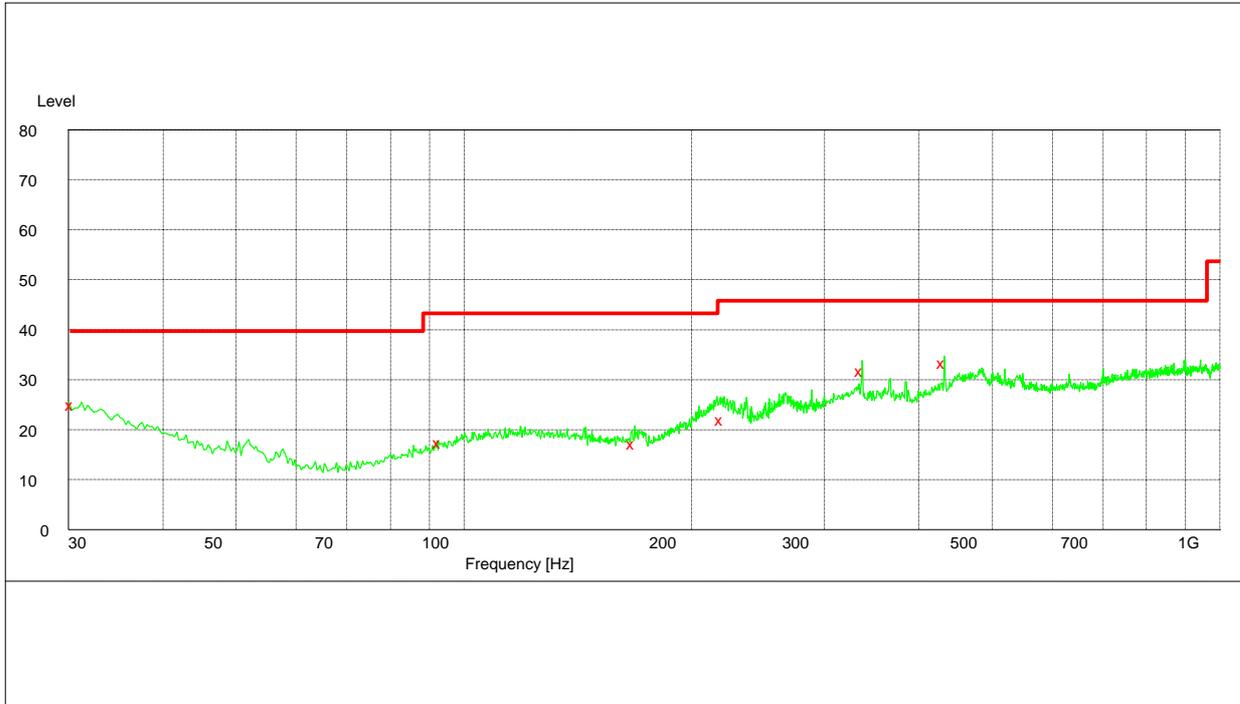

MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
30.420000	23.40	-4.3	40.0	16.6	112.0	273.00	VERTICAL
93.000000	18.10	-12.1	40.0	21.9	231.0	56.00	HORIZONTAL
168.000000	17.40	-11.8	43.5	26.1	140.0	278.00	HORIZONTAL
219.900000	22.00	-11.3	46.0	24.0	112.0	57.00	HORIZONTAL
336.000000	31.80	-5.9	46.0	14.2	100.0	120.00	HORIZONTAL
432.000000	33.40	-3.9	46.0	12.6	195.0	312.00	HORIZONTAL

## 2 Test Result of E800 with adapter GPRS1900

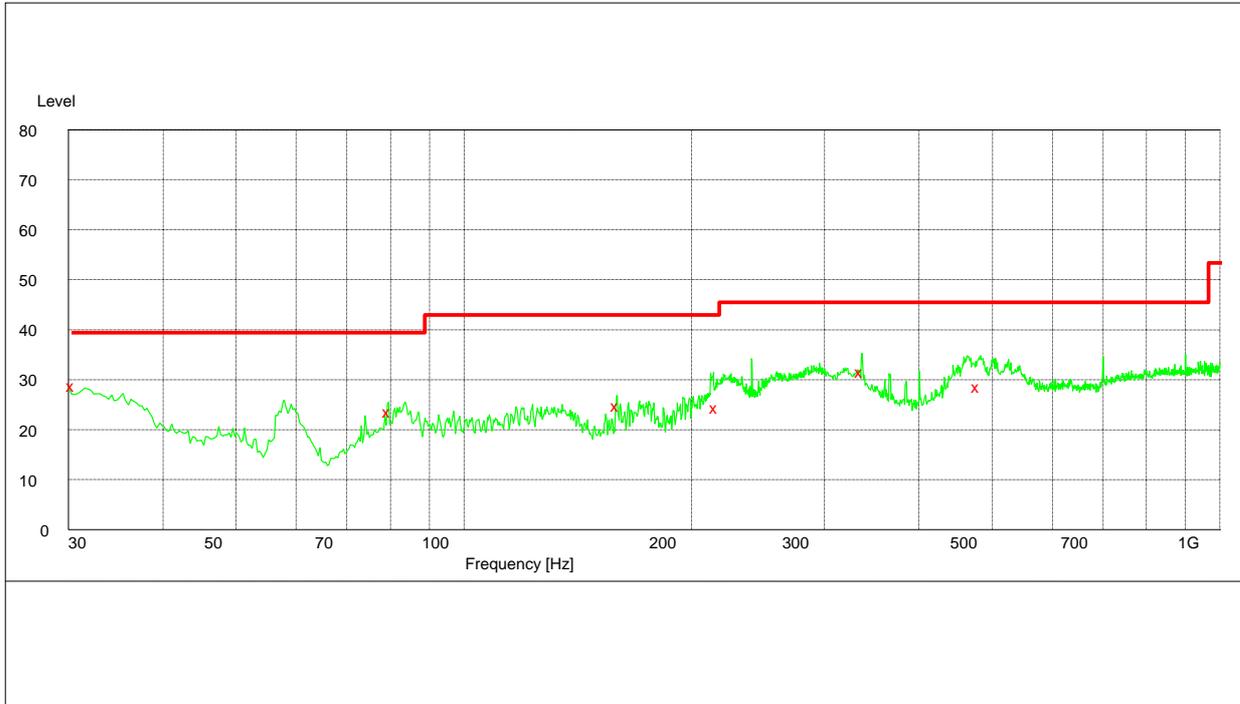

### MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBµV/m)	Transd (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
30.180000	21.20	-4.2	40.0	18.8	112.0	253.00	VERTICAL
79.800000	15.00	-14.7	40.0	25.0	141.0	134.00	VERTICAL
159.960000	25.60	-11.6	40.0	16.4	100.0	268.00	VERTICAL
216.000000	24.40	-11.5	40.0	15.6	133.0	239.00	HORIZONTAL
336.000000	31.70	-5.9	47.0	15.3	100.0	139.00	HORIZONTAL
480.000000	28.80	-3.9	47.0	18.2	100.0	199.00	VERTICAL