



NO.: RZA2009-1100



OET 65

TEST REPORT

| | |
|---------------------|-------------------------------|
| Product Name | CDMA1X EVDO Rev.A USB Stick |
| FCC ID | QISEC122 |
| Model | HUAWEI EC122/HUAWEI EC150 |
| Client | HUAWEI Technologies Co., Ltd. |

TA Technology (Shanghai) Co., Ltd.



GENERAL SUMMARY

| | | | |
|---------------------|--|-------------------|---------------------------|
| Product Name | CDMA1X EVDO Rev.A USB Stick | Model | HUAWEI EC122/HUAWEI EC150 |
| FCC ID | QISEC122 | Report No. | RZA2009 -1100 |
| Client | HUAWEI Technologies Co., Ltd. | | |
| Manufacturer | HUAWEI Technologies Co., Ltd. | | |
| Standard(s) | <p>ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p>OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.</p> <p>IEC 62209-2:2008(106/162/CDV): Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)for wireless communication devices used in close proximity to the human body .(frequency rang of 30MHz to 6GHz)</p> | | |
| Conclusion | <p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.</p> <p>General Judgment: Pass</p> <p style="text-align: right;">(Stamp) </p> <p style="text-align: right;">Date of issue: September 2nd, 2009</p> | | |
| Comment | The test result only responds to the measured sample. | | |

Approved by 杨伟中
Yang Weizhong

Revised by 凌敏宝
Ling Minbao

Performed by 李进昌
Li Jinchang

TABLE OF CONTENT

| | | |
|--------|--|----|
| 1. | General Information | 5 |
| 1.1. | NOTES OF THE TEST REPORT | 5 |
| 1.2. | TESTING LABORATORY | 5 |
| 1.3. | APPLICANT INFORMATION | 6 |
| 1.4. | MANUFACTURER INFORMATION | 6 |
| 1.5. | INFORMATION OF EUT | 7 |
| 1.6. | TEST DATE | 7 |
| 2. | Operational Conditions during Test | 8 |
| 2.1. | GENERAL DESCRIPTION OF TEST PROCEDURES | 8 |
| 2.2. | INFORMATION FOR THE MEASUREMENT OF CDMA 1X DEVICES | 8 |
| 2.2.1. | <i>Output Power Verification</i> | 8 |
| 2.2.2. | <i>Body SAR measurement</i> | 8 |
| 2.3. | INFORMATION FOR THE MEASUREMENT OF CDMA 1X EV-DO DEVICES | 9 |
| 2.3.1. | <i>Output Power Verification for EV-DO</i> | 9 |
| 2.3.2. | <i>SAR measurement</i> | 9 |
| 2.4. | POSITION OF MODULE IN PORTABLE DEVICES | 10 |
| 2.5. | PICTURE OF HOST PRODUCT | 11 |
| 3. | SAR Measurements System Configuration | 13 |
| 3.1. | SAR MEASUREMENT SET-UP | 13 |
| 3.2. | DASY 4 E-FIELD PROBE SYSTEM | 14 |
| 3.2.1. | <i>ET3DV6 Probe Specification</i> | 14 |
| 3.2.2. | <i>E-field Probe Calibration</i> | 15 |
| 3.3. | OTHER TEST EQUIPMENT | 15 |
| 3.3.1. | <i>Device Holder for Transmitters</i> | 15 |
| 3.3.2. | <i>Phantom</i> | 16 |
| 3.4. | SCANNING PROCEDURE | 16 |
| 3.5. | DATA STORAGE AND EVALUATION | 18 |
| 3.5.1. | <i>Data Storage</i> | 18 |
| 3.5.2. | <i>Data Evaluation by SEMCAD</i> | 18 |
| 3.6. | SYSTEM CHECK | 21 |
| 3.7. | EQUIVALENT TISSUES | 22 |
| 4. | Laboratory Environment | 22 |
| 5. | Characteristics of the Test | 23 |
| 5.1. | APPLICABLE LIMIT REGULATIONS | 23 |
| 5.2. | APPLICABLE MEASUREMENT STANDARDS | 23 |
| 6. | Conducted Output Power Measurement | 24 |
| 6.1. | SUMMARY | 24 |
| 6.2. | CONDUCTED POWER RESULTS | 24 |
| 7. | Test Results | 25 |
| 7.1. | DIELECTRIC PERFORMANCE | 25 |

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-1100

Page 4 of 88

| | | |
|----------|---|----|
| 7.2. | SYSTEM CHECK | 25 |
| 7.3. | SUMMARY OF MEASUREMENT RESULTS..... | 26 |
| 7.3.1. | <i>Summary of Measurement Results (CDMA Cellular)</i> | 26 |
| 7.3.2. | <i>Summary of Measurement Results (CDMA Cellular EV-DO)</i> | 27 |
| 7.4. | CONCLUSION..... | 28 |
| 8. | Measurement Uncertainty | 29 |
| 9. | Main Test Instruments | 30 |
| ANNEX A: | Test Layout | 31 |
| ANNEX B: | System Check Results | 32 |
| ANNEX C: | Graph Results | 34 |
| ANNEX D: | Probe Calibration Certificate | 64 |
| ANNEX E: | D835V2 Dipole Calibration Certificate | 73 |
| ANNEX F: | DAE4 Calibration Certificate | 82 |
| ANNEX G: | The EUT Appearances and Test Configuration | 87 |

1. General Information

1.1. Notes of the test report

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.
Address: Room4, No.399, Cailun Rd, Zhangjiang Hi-Tech Park, Pudong Shanghai, China
City: Shanghai
Post code: 201203
Country: P. R. China
Contact: Yang Weizhong
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: yangweizhong@ta-shanghai.com

1.3. Applicant Information

Company: HUAWEI Technologies Co., Ltd.
Address: Bantian, Longgang District
City: Shenzhen
Postal Code: 518129
Country: P.R. China
Contact: Zhang Ting
Telephone: 0755-28780808
Fax: 0755-28780808

1.4. Manufacturer Information

Company: HUAWEI Technologies Co., Ltd.
Address: Bantian, Longgang District
City: Shenzhen
Postal Code: 518129
Country: P.R. China
Telephone: 0755-28780808
Fax: 0755-28780808

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-1100

Page 7 of 88

1.5. Information of EUT

General information

| | | | |
|-------------------------------------|---|----------------|----------------|
| Device type : | portable device | | |
| Exposure category: | uncontrolled environment / general population | | |
| Name of EUT: | CDMA1X EVDO Rev.A USB Stick | | |
| IMEI or SN: | HI2AA10971400118 | | |
| Device operating configurations : | | | |
| Operating mode(s): | CDMA Cellular | | |
| Test Modulation: | QPSK | | |
| Operating frequency range(s) | Band | TX(MHz) | Rx(MHz) |
| | CDMA Cellular | 824.7 ~ 848.31 | 869.7 ~ 893.31 |
| Test channel (Low –Middle –High) | 1013 -384 – 777 (CDMA Cellular) (tested) | | |
| hardware version: | CE7EC122M | | |
| software version: | 11.102.12.00.000 | | |
| antenna type: | Internal antenna | | |

Equipment Under Test (EUT) is a model of CDMA1X EVDO Rev.A USB Stick. During SAR test of the EUT, it was connected to a portable computer. The tests in the band of CDMA Cellular are performed in the mode of CDMA and EVDO. The measurements were performed in combination with two different host products (IBM T61, BenQ Joybook R55V). IBM T61 laptop has vertical USB slot and horizontal USB slot, BenQ Joybook R55V laptop has horizontal USB slot.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

1.6. Test Date

The test is performed on August 30, 2009.

2. Operational Conditions during Test

2.1. General description of test procedures

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

2.2. Information for the measurement of CDMA 1x devices

2.2.1. Output Power Verification

Test Parameter setup for maximum RF output power according to section 4.4.5 of 3GPP2

| Parameter | Units | Value |
|------------------|-------------|-------|
| I or | dBm/1.23MHz | -104 |
| PilotE c /I or | dB | -7 |
| TrafficE c /I or | dB | -7.4 |

For SAR test, the maximum power output is very important and essential; it is identical under the measurement uncertainty. It is proper to use typical Test Mode 3 (FW RC3, RVS RC3, SO55) as the worst case for SAR test.

2.2.2. Body SAR measurement

SAR is measured in RC3 with the EUT configured to transmit at full rate using TDSO/SO32 transmit at full rate on FCH with all other code channels disabled. SAR for multiple code channels (FCH+SCHn) is not required when the maximum average output of each RF channel is less than 0.25dB higher than measured with FCH only.

Body SAR in RC1 is not required because the maximum average output of each channel is less than 0.25 dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate using the body exposure configuration that results in the highest SAR for that channel in RC3.

Test communication setup meet as followings:

| | |
|--|---|
| Communication standard between mobile station and base station simulator | 3GPP2 C.S0011-B |
| Radio configuration | RC3 (Supporting CDMA 1X) |
| Spreading Rate | SR1 |
| Data Rate | 9600bps |
| Service Options | SO55 (Test loop back mode 1) |
| Service Options | SO32 (Test Data service mode) |
| Multiplex Options | The mobile station does not support this service. |

2.3. Information for the measurement of CDMA 1x EV-DO devices

2.3.1. Output Power Verification for EV-DO

Maximum output power is verified on the High, Middle, Low channel according to procedures in section 3.1.1.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rev.0 and section 4.3.4 of 3GPP2 C.S0033-A for Rev. A. For Rev. A, maximum output power for both Subtype 0/1 and Subtype 2 Physical Layer configurations should be measured.

2.3.2. SAR measurement

SAR is measured using FTAP/RTAP and FETAP/RETAP respectively for Rev.0 and Rev. A devices. The AT is tested with a Reverse Data Channel rate of 153.6kbps IN Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations. Both FTAP and FETAP are configured with a Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2kbps with the ACK Channel transmitting in all slots. AT power control should be in "All Bits Up" conditions for TAP/ETAP.

Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev.0. SAR for Subtype 2 Physical Layer configurations is not required for Rev. A when the maximum average output of each RF channels is less that measured in Subtype 0/1 Physical Layer configurations. Otherwise, SAR is measured on the maximum output channel for Rev. A using the exposure configuration that results in the highest SAR for that RF channels in Rev.0¹⁴.

For Ev-Do devices that also support 1x RTT voice and/or data operations, SAR is not required for 1x RTT when the maximum average output of each channel is less than ¼ dB higher than that measured in Subtype 0/1 Physical Layer configurations for Rev. 0. Otherwise, the 'Body SAR Measurements' procedures in the 'CDMA-2000 1x Handsets' section should be applied.

2.4. Position of module in Portable devices

The measurements were performed in combination with two host products (IBMT61, BenQ Joybook R55V). IBM T61 laptop has vertical USB slot and horizontal USB slot, BenQ Joybook R55V laptop has horizontal USB slot.

A test distance of 5mm or less, according to KDB 447498, should be considered for the orientation that can satisfy such requirements.

For each channel, the EUT is tested at the following 5 test positions:

- Test Position 1: The EUT is connected to the portable computer with horizontal USB slot. The back side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 5-a)
- Test Position 2: The EUT is connected to the portable computer with horizontal USB slot. The front side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 5-b)
- Test Position 3: The EUT is connected to the portable computer with horizontal USB slot. The top side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 5-c)
- Test Position 4: The EUT is connected to the portable computer with vertical USB slot. The left side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 5-d)
- Test Position 5: The EUT is connected to the portable computer with vertical USB slot. The right side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 5-e)

2.5. Picture of host product

During the test, IBM T61 and BenQ Joybook R55V laptop were used as an assistant to help to setup communication. (See Picture 1)



Picture 1-a: IBM T61 Close



Picture 1-b: IBM T61 Open



Picture 1-c: BenQ Joybook R55V Close



Picture 1-d: BenQ Joybook R55V Open



Picture 1-e: BenQ Joybook R55V with horizontal USB slot



Picture 1-f: IBM T61 with horizontal USB slot



Picture 1-g: IBM T61 with vertical USB slot

Picture 1: Computer as a test assistant

3. SAR Measurements System Configuration

3.1. SAR Measurement Set-up

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY4 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

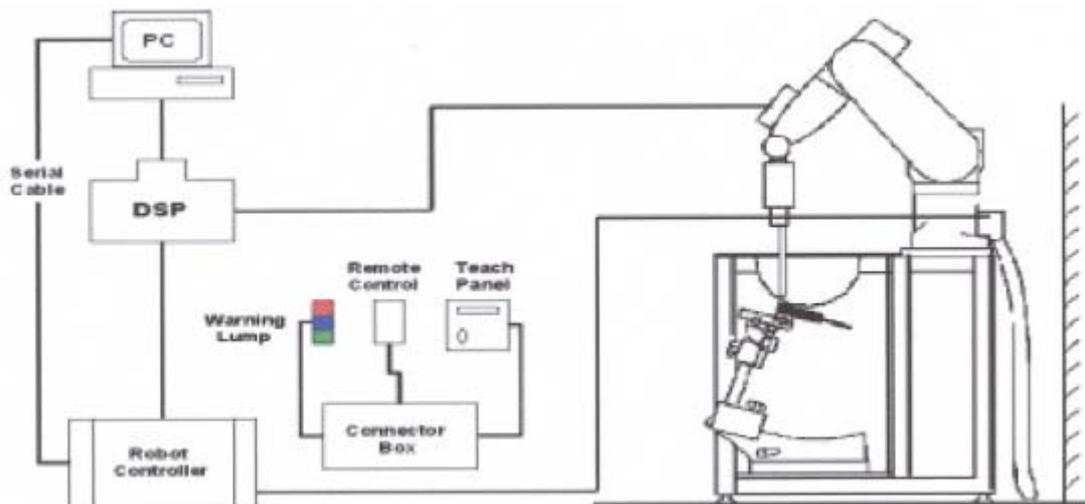


Figure 1. SAR Lab Test Measurement Set-up

3.2. DASY 4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

3.2.1. ET3DV6 Probe Specification

| | |
|-------------------|---|
| Construction | Symmetrical design with triangular core Built-in optical fiber for surface detection System (ET3DV6 only) Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.q., glycol) |
| Calibration | In air from 10 MHz to 3 GHz In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz, 1750 MHz, 1950MHz and 2450 MHz. (accuracy±8%) Calibration for other liquids and frequencies upon request |
| Frequency | 10 MHz to 2.5 GHz; Linearity: ±0.2 dB (30 MHz to 2.5 GHz) |
| Directivity | ±0.2 dB in brain tissue (rotation around probe axis) ±0.4 dB in brain tissue (rotation around probe axis) |
| Dynamic Range | 5u W/g to > 100mW/g; Linearity: ±0.2dB |
| Surface Detection | ±0.2 mm repeatability in air and clear liquids over diffuse reflecting surface (ET3DV6 only) |
| Dimensions | Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm |
| Application | General dosimetry up to 2.5GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary Phantoms |

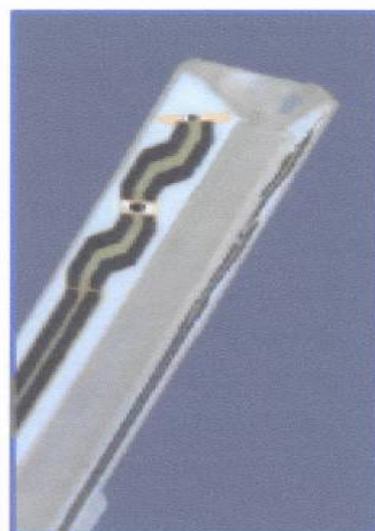


Figure 2 ET3DV6 E-field Probe



Figure 3 ET3DV6 E-field probe

3.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:
 σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m³).

3.3. Other Test Equipment

3.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the die rent positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the inference of the clamp on the test results could thus be lowered.



Figure 4. Device Holder

3.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

| | |
|-----------------|---------------------------------|
| Shell Thickness | 2±0.1 mm |
| Filling Volume | Approx. 20 liters |
| Dimensions | 810 x 1000 x 500 mm (H x L x W) |
| Available | Special |



Figure 5. Generic Twin Phantom

3.4. Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %.
- The "surface check" measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)
- Area Scan
The Area Scan is used as a fast scan in two dimensions to find the area of high field values

before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY4 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

3.5. Data Storage and Evaluation

3.5.1. Data Storage

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

| | | |
|--------------------|---------------------------|---|
| Probe parameters: | - Sensitivity | Norm _i , a _{i0} , a _{i1} , a _{i2} |
| | - Conversion factor | ConvF _i |
| | - Diode compression point | Dcp _i |
| Device parameters: | - Frequency | f |
| | - Crest factor | cf |
| Media parameters: | - Conductivity | |
| | - Density | |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal,

the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \dots) / (\dots \cdot 1000)$$

with **SAR** = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with **P_{pwe}** = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

3.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 5.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY 4 system.

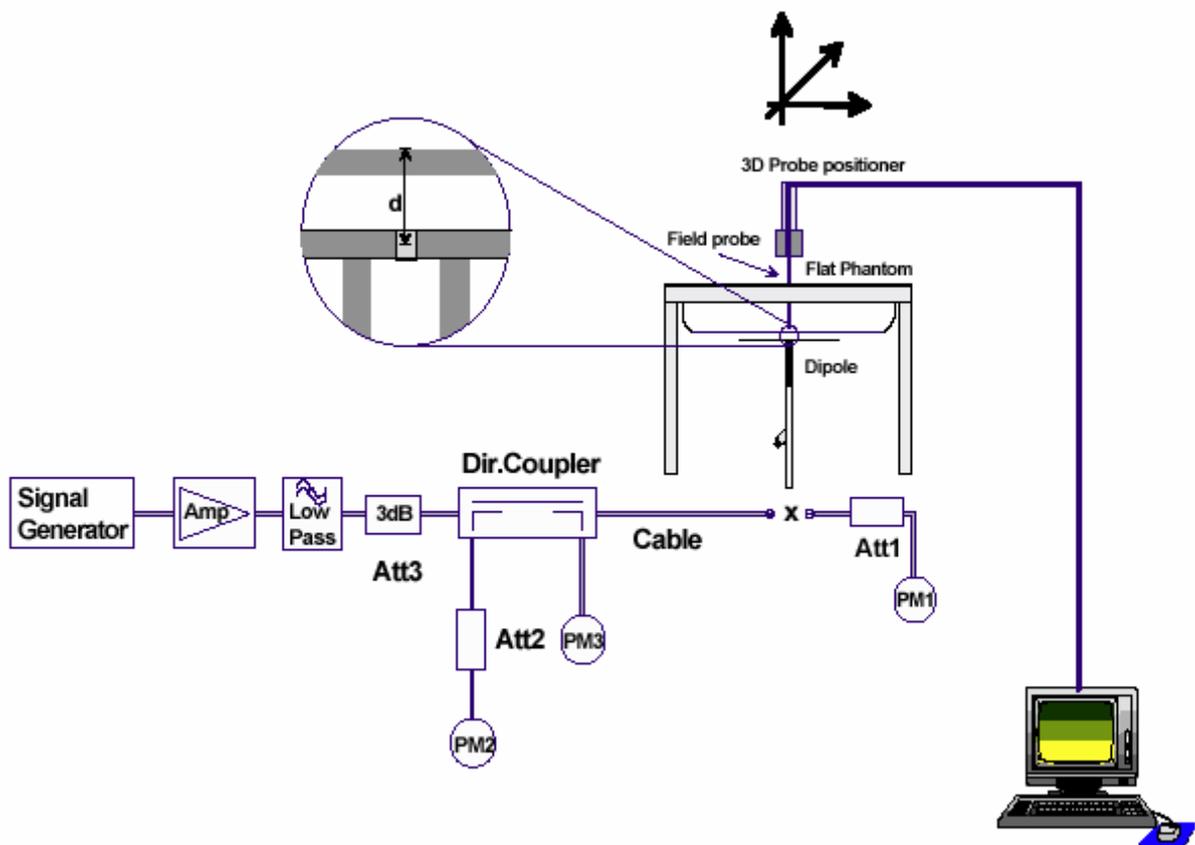


Figure 6. System check Set-up

3.7. Equivalent Tissues

The liquid is consisted of water, sugar, salt, Glycol, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

Table 1: Composition of the Body Tissue Equivalent Matter

| MIXTURE% | FREQUENCY (Body)835MHz |
|---------------------------------------|--|
| Water | 52.5 |
| Sugar | 45 |
| Salt | 1.4 |
| Preventol | 0.1 |
| Cellulose | 1.0 |
| Dielectric Parameters Target Value | f=835MHz $\epsilon=55.2$ $\sigma=0.97$ |

4. Laboratory Environment

Table 2: The Ambient Conditions during Test

| | |
|---|---------------------------|
| Temperature | Min. = 20°C, Max. = 25 °C |
| Relative humidity | Min. = 30%, Max. = 70% |
| Ground system resistance | < 0.5 Ω |
| Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards. | |

5. Characteristics of the Test

5.1. Applicable Limit Regulations

ANSI/IEEE Std C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

5.2. Applicable Measurement Standards

OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

IEC 62209-2:2008(106/162/CDV): Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body .(frequency rang of 30MHz to 6GHz).

6. Conducted Output Power Measurement

6.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

6.2. Conducted Power Results

Table 3: Conducted Power Measurement Results

| CDMA Cellular (RC3) | Conducted Power | | |
|-------------------------------------|----------------------------|----------------------------|----------------------------|
| | Channel 777 (848.31MHz) | Channel 384 (836.52MHz) | Channel 1013 (824.7MHz) |
| Before test (dBm) | 23.85 | 23.90 | 24.13 |
| After test (dBm) | 23.86 | 23.91 | 24.12 |
| CDMA Cellular (RC1) | Conducted Power | | |
| | Channel 777 (848.31MHz) | Channel 384 (836.52MHz) | Channel 1013 (824.7MHz) |
| Before test (dBm) | 23.82 | 23.87 | 24.07 |
| After test (dBm) | 23.83 | 23.86 | 24.06 |
| CDMA Cellular + EV-DO (Subtype0) | Conducted Power | | |
| | Channel 777 (848.31MHz) | Channel 384 (836.52MHz) | Channel 1013 (824.7MHz) |
| Before Test(dBm) | 23.77 | 23.79 | 24.15 |
| After Test(dBm) | 23.78 | 23.80 | 24.14 |
| CDMA Cellular + EV-DO (Subtype2) | Conducted Power | | |
| | Channel 777 (848.31MHz) | Channel 384 (836.52MHz) | Channel 1013 (824.7MHz) |
| Before Test(dBm) | 23.82 | 23.75 | 24.10 |
| After Test(dBm) | 23.83 | 23.74 | 24.11 |

7. Test Results

7.1. Dielectric Performance

Table 4: Dielectric Performance of Body Tissue Simulating Liquid

| Frequency | Description | Dielectric Parameters | | Temp °C |
|------------------|--------------------------------|------------------------|---------------------|------------|
| | | ϵ_r | σ (s/m) | |
| 835MHz (body) | Target value ±5% window | 55.20 52.44 – 57.96 | 0.97 0.92 – 1.02 | / |
| | Measurement value 2009-8-30 | 55.07 | 1.02 | 21.5 |

7.2. System check

Table 5: System Check for Body tissue stimulant

| Frequency | Description | SAR(W/kg) | | Dielectric Parameters | | Temp °C |
|-----------|-----------------------------------|---------------------|---------------------|-----------------------|----------------|------------|
| | | 10g | 1g | ϵ_r | σ (s/m) | |
| 835MHz | Recommended result ±10% window | 1.58 1.42 – 1.74 | 2.41 2.17 – 2.65 | 54.60 | 0.99 | / |
| | Measurement value 2009-8-30 | 1.58 | 2.40 | 55.07 | 1.02 | 21.9 |

Note: 1. The graph results see ANNEX B.

2. Target Values used derive from the calibration certificate and 250 mW is used as feeding power to the Calibrated dipole.

TA Technology (Shanghai) Co., Ltd.

Test Report

7.3. Summary of Measurement Results

7.3.1. Summary of Measurement Results (CDMA Cellular)

Table 6: SAR Values (CDMA Cellular)

| Limit of SAR (W/kg) | | 10 g Average | 1 g Average | Power Drift (dB) | Graph Results |
|-------------------------|---------|--------------------------|-------------|------------------|---------------|
| | | 2.0 | 1.6 | ± 0.21 | |
| Test Case Of Body | | Measurement Result(W/kg) | | Power Drift(dB) | |
| Different Test Position | Channel | 10 g Average | 1 g Average | Power Drift(dB) | |
| IBM T61 | | | | | |
| Test Position 1 | Middle | 0.451 | 0.726 | -0.038 | Figure 9 |
| Test Position 3 | Middle | 0.045 | 0.131 | -0.048 | Figure 11 |
| Test Position 4 | Middle | 0.349 | 0.550 | 0.009 | Figure 13 |
| Test Position 5 | Middle | 0.153 | 0.222 | -0.181 | Figure 15 |
| BenQ Joybook R55V | | | | | |
| Test Position 2 | High | 0.537 | 0.865 | 0.041 | Figure 17 |
| | Middle | 0.466 | 0.734 | -0.069 | Figure 19 |
| | Low | 0.572 | 0.888 | -0.124 | Figure 21 |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst position.

Table 7: SAR Values [CDMA Cellular, enhanced energy coupling at increased separation distances]

| Different Test Position | Distance of EUT to Phantom | Channel | Measurement Result (W/kg) | 50% of initial position SAR (W/kg) | 125% of initial position SAR (W/kg) |
|-------------------------|----------------------------|---------|---------------------------|------------------------------------|-------------------------------------|
| Test Position 2 | initial position | Low | 1.062 | 0.531 | 1.328 |
| | 5mm | | 0.557 | | |
| | 10mm | | 0.346 | | |

- Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.
2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
 3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd.

Test Report

7.3.2. Summary of Measurement Results (CDMA Cellular EV-DO)

Table 8: SAR Values (CDMA Cellular EV-DO)

| Limit of SAR (W/kg) | | 10 g Average | 1 g Average | Power Drift (dB) | Graph Results |
|--|---------|--------------------------|-------------|------------------|---------------|
| | | 2.0 | 1.6 | ± 0.21 | |
| Test Case Of Body | | Measurement Result(W/kg) | | Power Drift(dB) | |
| Different Test Position | Channel | 10 g Average | 1 g Average | Power Drift(dB) | |
| IBM T61 (Rev.0) | | | | | |
| Test Position 1 | High | 0.543 | 0.898 | 0.031 | Figure 23 |
| | Middle | 0.480 | 0.779 | 0.061 | Figure 25 |
| | Low | 0.528 | 0.839 | -0.193 | Figure 27 |
| Test Position 3 | Middle | 0.094 | 0.317 | -0.141 | Figure 29 |
| Test Position 4 | Middle | 0.403 | 0.633 | 0.076 | Figure 31 |
| Test Position 5 | Middle | 0.170 | 0.247 | -0.130 | Figure 33 |
| BenQ Joybook R55V (Rev.0) | | | | | |
| Test Position 2 | Middle | 0.427 | 0.671 | -0.065 | Figure 35 |
| Worst case of EV-DO Rev.0 with EV-DO Rev.A | | | | | |
| Test Position 1 | High | 0.557 | 0.924 | 0.194 | Figure 37 |

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst position.

Table 9: SAR Values (CDMA Cellular EV-DO, enhanced energy coupling at increased separation distances)

| Different Test Position | Distance of EUT to Phantom | Channel | Measurement Result (W/kg) | 50% of initial position SAR (W/kg) | 125% of initial position SAR (W/kg) |
|-------------------------|----------------------------|---------|---------------------------|------------------------------------|-------------------------------------|
| Test Position 1 | initial position | High | 1.089 | 0.545 | 1.361 |
| | 5mm | | 0.550 | | |
| | 10mm | | 0.324 | | |

Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.

2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

7.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR_{1g} is 0.924 W/kg that is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-1100

Page 29 of 88

8. Measurement Uncertainty

| No. | source | Type | Uncertainty Value (%) | Probability Distribution | k | c_i | Standard uncertainty u_i (%) | Degree of freedom V_{eff} or v_i |
|---------------------|---|------|-----------------------|--------------------------|------------|--------------|--------------------------------|--------------------------------------|
| 1 | System repetivity | A | 0.5 | N | 1 | 1 | 0.5 | 9 |
| Measurement system | | | | | | | | |
| 2 | probe calibration | B | 5.9 | N | 1 | 1 | 5.9 | ∞ |
| 3 | axial isotropy of the probe | B | 4.7 | R | $\sqrt{3}$ | $\sqrt{0.5}$ | 1.9 | ∞ |
| 4 | Hemispherical isotropy of the probe | B | 9.4 | R | $\sqrt{3}$ | $\sqrt{0.5}$ | 3.9 | ∞ |
| 6 | boundary effect | B | 1.9 | R | $\sqrt{3}$ | 1 | 1.1 | ∞ |
| 7 | probe linearity | B | 4.7 | R | $\sqrt{3}$ | 1 | 2.7 | ∞ |
| 8 | System detection limits | B | 1.0 | R | $\sqrt{3}$ | 1 | 0.6 | ∞ |
| 9 | readout Electronics | B | 1.0 | N | 1 | 1 | 1.0 | ∞ |
| 10 | response time | B | 0 | R | $\sqrt{3}$ | 1 | 0 | ∞ |
| 11 | integration time | B | 4.32 | R | $\sqrt{3}$ | 1 | 2.5 | ∞ |
| 12 | noise | B | 0 | R | $\sqrt{3}$ | 1 | 0 | ∞ |
| 13 | RF Ambient Conditions | B | 3 | R | $\sqrt{3}$ | 1 | 1.73 | ∞ |
| 14 | Probe Positioner Mechanical Tolerance | B | 0.4 | R | $\sqrt{3}$ | 1 | 0.2 | ∞ |
| 15 | Probe Positioning with respect to Phantom Shell | B | 2.9 | R | $\sqrt{3}$ | 1 | 1.7 | ∞ |
| 16 | Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation | B | 3.9 | R | $\sqrt{3}$ | 1 | 2.3 | ∞ |
| Test sample Related | | | | | | | | |
| 17 | -Test Sample Positioning | A | 2.9 | N | 1 | 1 | 2.9 | 5 |
| 18 | -Device Holder Uncertainty | A | 4.1 | N | 1 | 1 | 4.1 | 5 |
| 19 | -Output Power Variation - SAR drift measurement | B | 5.0 | R | $\sqrt{3}$ | 1 | 2.9 | ∞ |
| Physical parameter | | | | | | | | |

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-1100

Page 30 of 88

| | | | | | | | | |
|--|--|---|-----|---|--|-----------------|------|----------|
| 20 | -phantom | B | 4.0 | R | $\sqrt{3}$ | 1 | 2.3 | ∞ |
| 21 | -liquid conductivity (deviation from target) | B | 5.0 | R | $\sqrt{3}$ | $\frac{0.6}{4}$ | 1.8 | ∞ |
| 22 | -liquid conductivity (measurement uncertainty) | B | 5.0 | N | 1 | $\frac{0.6}{4}$ | 3.2 | ∞ |
| 23 | -liquid permittivity (deviation from target) | B | 5.0 | R | $\sqrt{3}$ | 0.6 | 1.7 | ∞ |
| 24 | -liquid permittivity (measurement uncertainty) | B | 5.0 | N | 1 | 0.6 | 3.0 | ∞ |
| Combined standard uncertainty | | | | | $u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$ | | 12.0 | |
| Expanded uncertainty (confidence interval of 95 %) | | | | | $u_e = 2u_c$ | N | k=2 | 24.0 |

9. Main Test Instruments

Table 10: List of Main Instruments


| No. | Name | Type | Serial Number | Calibration Date | Valid Period |
|-----|-----------------------|----------------|---------------|--------------------------|--------------|
| 01 | Network analyzer | Agilent 8753E | US37390326 | September 14, 2008 | One year |
| 02 | Dielectric Probe Kit | Agilent 85070E | US44020115 | No Calibration Requested | |
| 03 | Power meter | Agilent E4417A | GB41291714 | March 14, 2009 | One year |
| 04 | Power sensor | Agilent 8481H | MY41091316 | March 14, 2009 | One year |
| 05 | Signal Generator | HP 8341B | 2730A00804 | September 14, 2008 | One year |
| 06 | Amplifier | IXA-020 | 0401 | No Calibration Requested | |
| 07 | Validation Kit 835MHz | D835V2 | 4d020 | July 15, 2009 | One year |
| 08 | BTS | E5515C | GB46490218 | September 14, 2008 | One year |
| 09 | E-field Probe | ET3DV6 | 1737 | November 25, 2008 | One year |
| 10 | DAE | DAE4 | 452 | November 18, 2008 | One year |

END OF REPORT BODY

ANNEX A: Test Layout



Picture 2 Specific Absorption Rate Test Layout

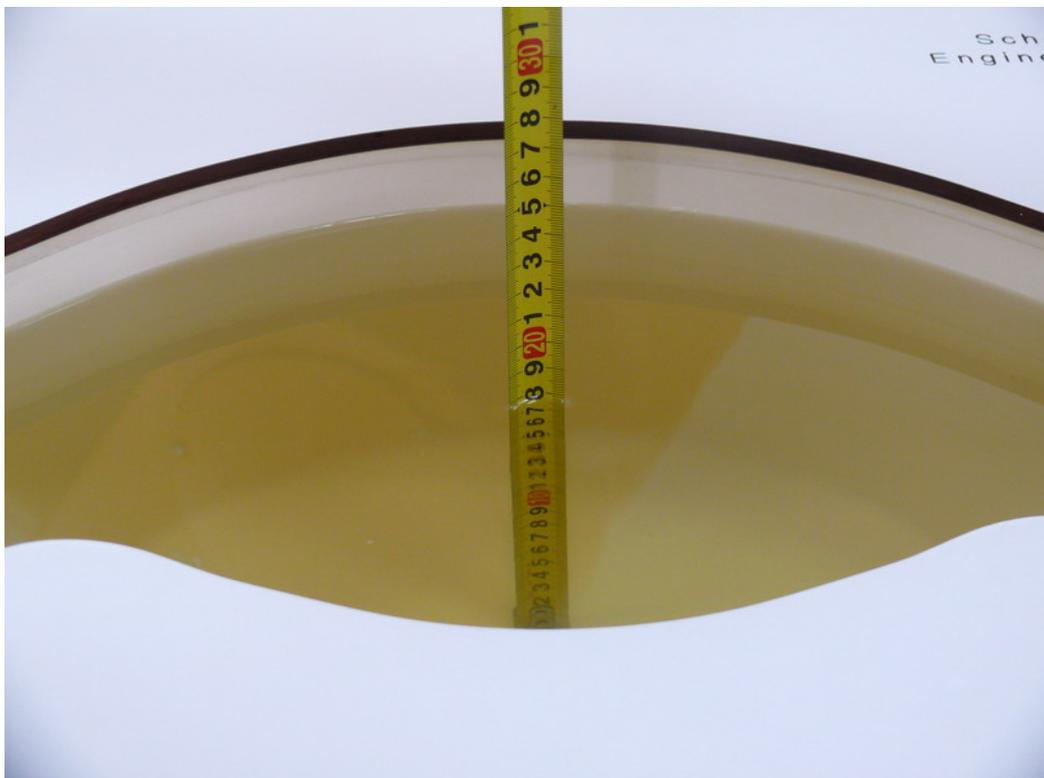

Picture 3 Liquid depth in the Flat Phantom (835 MHz)

ANNEX B: System Check Results

System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d020

Date/Time: 8/30/2009 7:20:49 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.02 \text{ mho/m}$; $\epsilon_r = 55.07$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: $22.3 \text{ }^\circ\text{C}$ Liquid Temperature: $21.5 \text{ }^\circ\text{C}$

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 – SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (101x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.93 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.7 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.58 mW/g

Maximum value of SAR (measured) = 2.92 mW/g

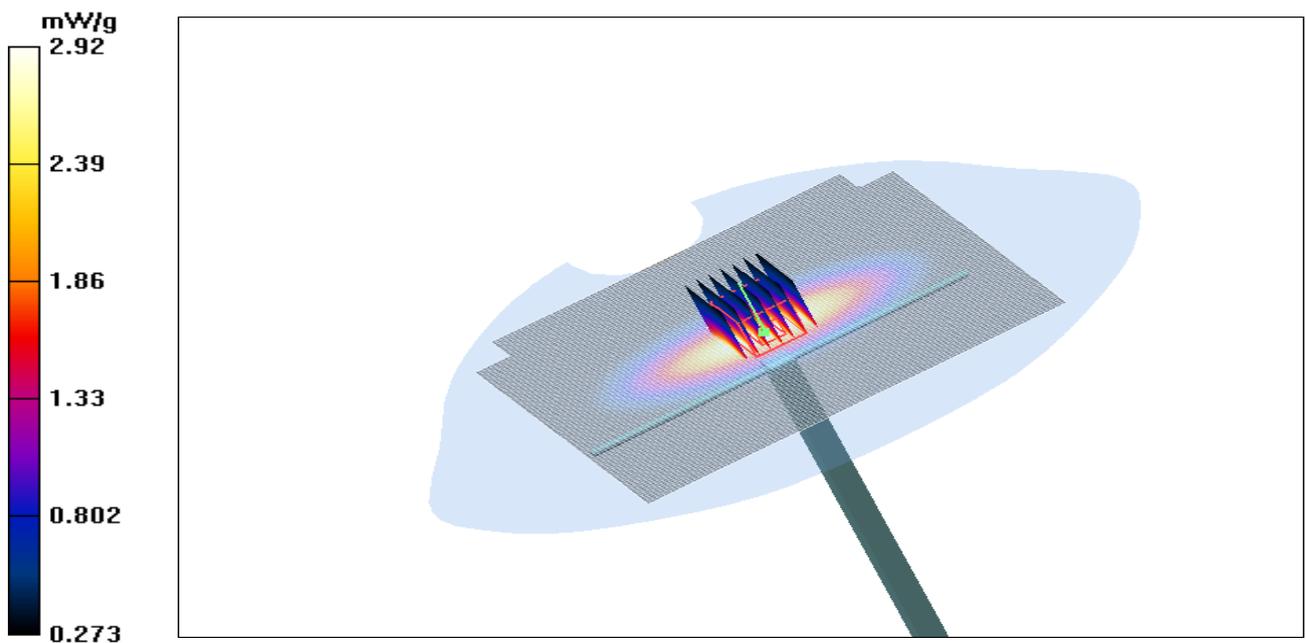


Figure 7 System Performance Check 835MHz 250mW

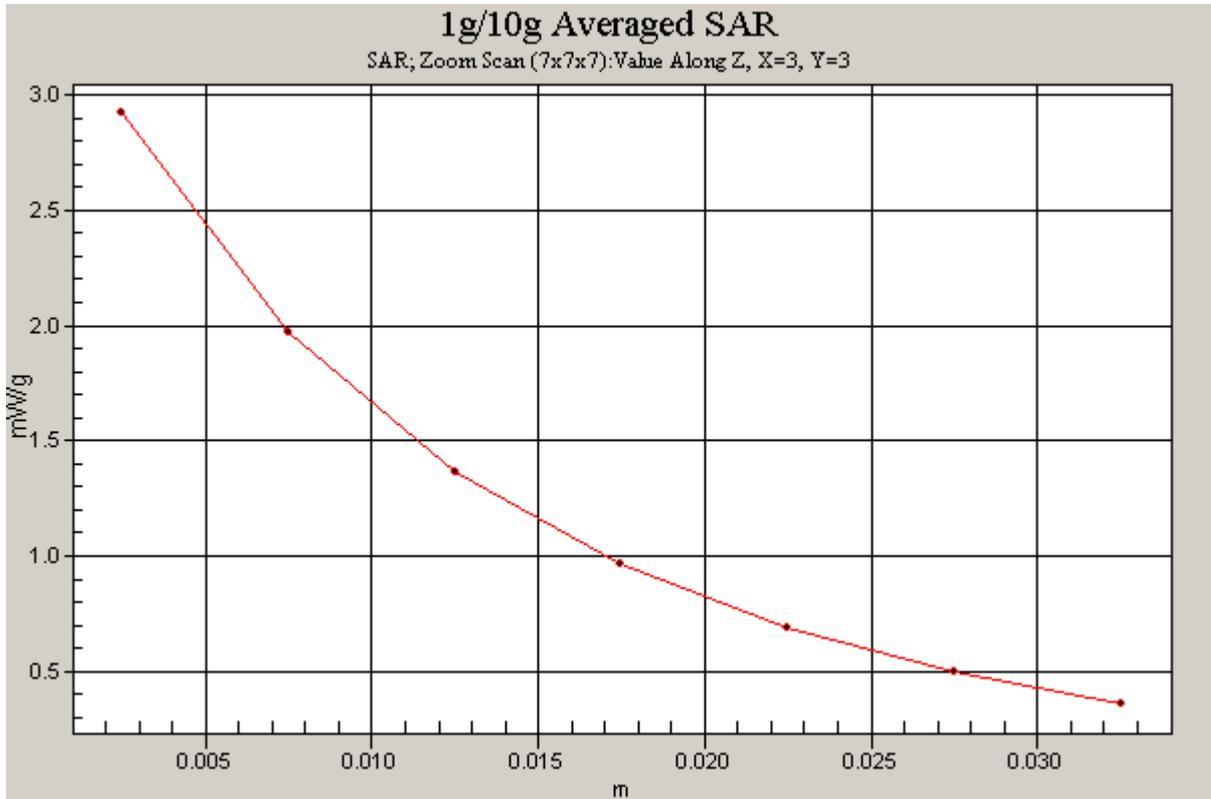


Figure 8 Z-Scan at power reference point (system Check at 835 MHz dipole)

ANNEX C: Graph Results

CDMA Cellular with IBM T61 Test Position 1 Middle

Date/Time: 8/30/2009 10:08:37 AM

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.835 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.726 mW/g; SAR(10 g) = 0.451 mW/g

Maximum value of SAR (measured) = 0.791 mW/g

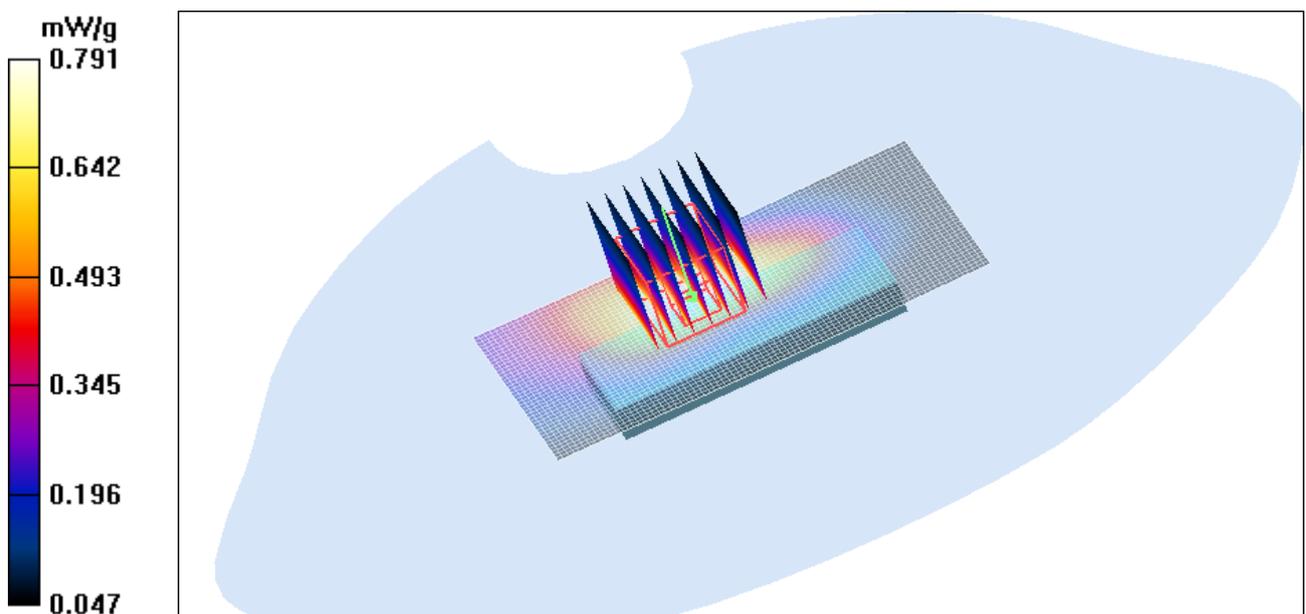


Figure 9 CDMA Cellular with IBM T61 Test Position 1 Channel 384

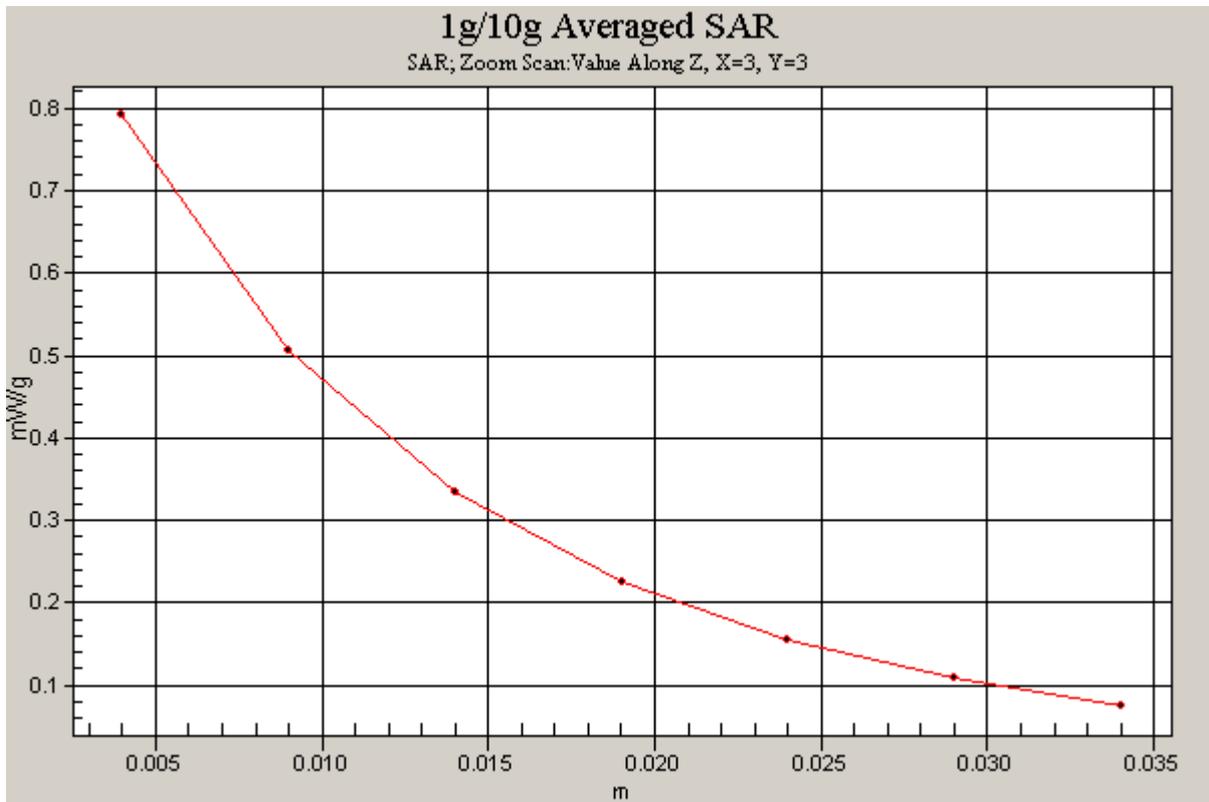


Figure 10 Z-Scan at power reference point (CDMA Cellular with IBM T61 Test Position 1 Channel 384)

CDMA Cellular with IBM T61 Test Position 3 Middle

Date/Time: 8/30/2009 11:06:33 AM

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (51x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.109 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.137 mW/g

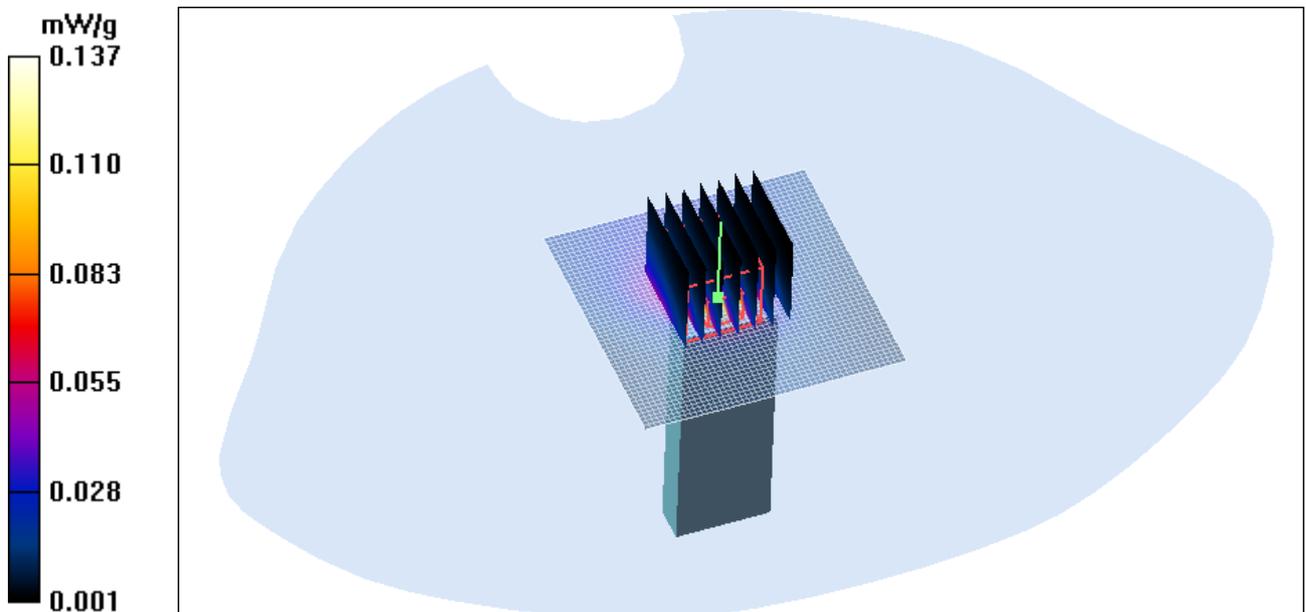


Figure 11 CDMA Cellular with IBM T61 Test Position 3 Channel 384

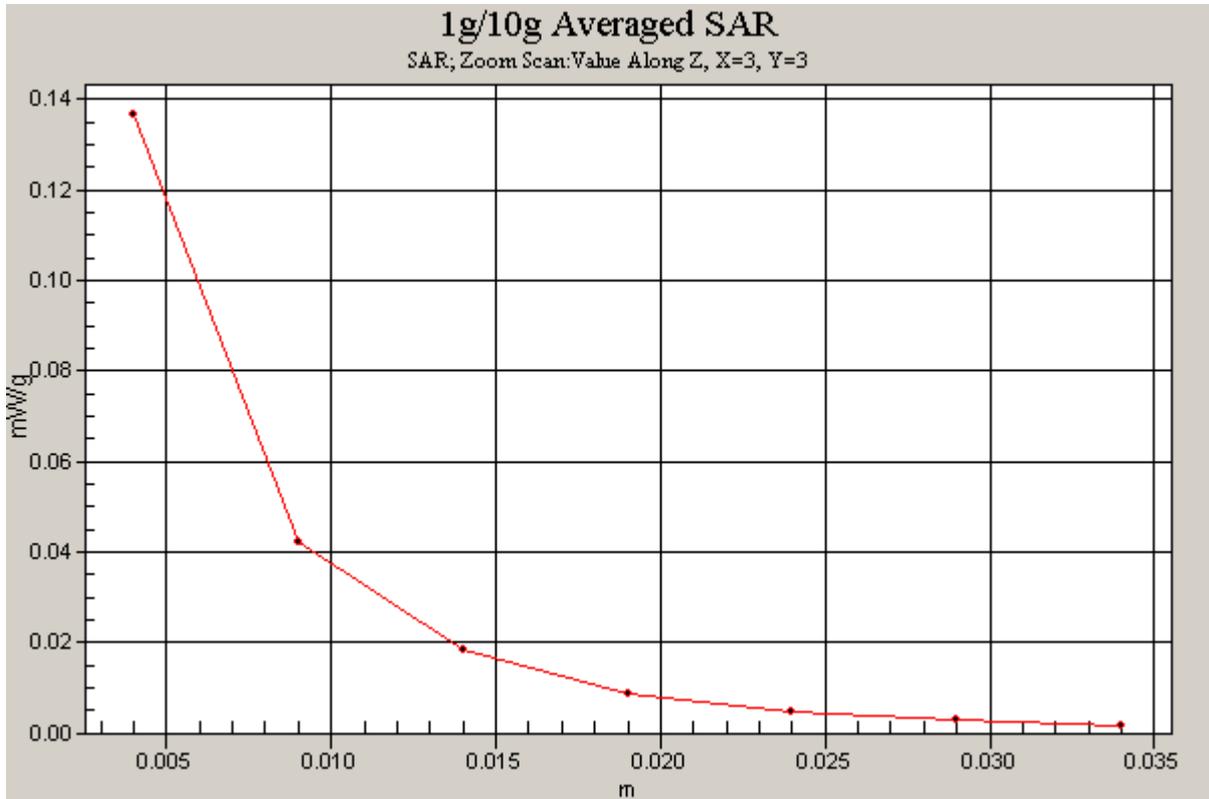


Figure 12 Z-Scan at power reference point (CDMA Cellular with IBM T61 Test Position 3 Channel 384)

CDMA Cellular with IBM T61 Test Position 4 Middle

Date/Time: 8/30/2009 10:48:05 AM

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.593 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.9 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.842 W/kg

SAR(1 g) = 0.550 mW/g; SAR(10 g) = 0.349 mW/g

Maximum value of SAR (measured) = 0.603 mW/g

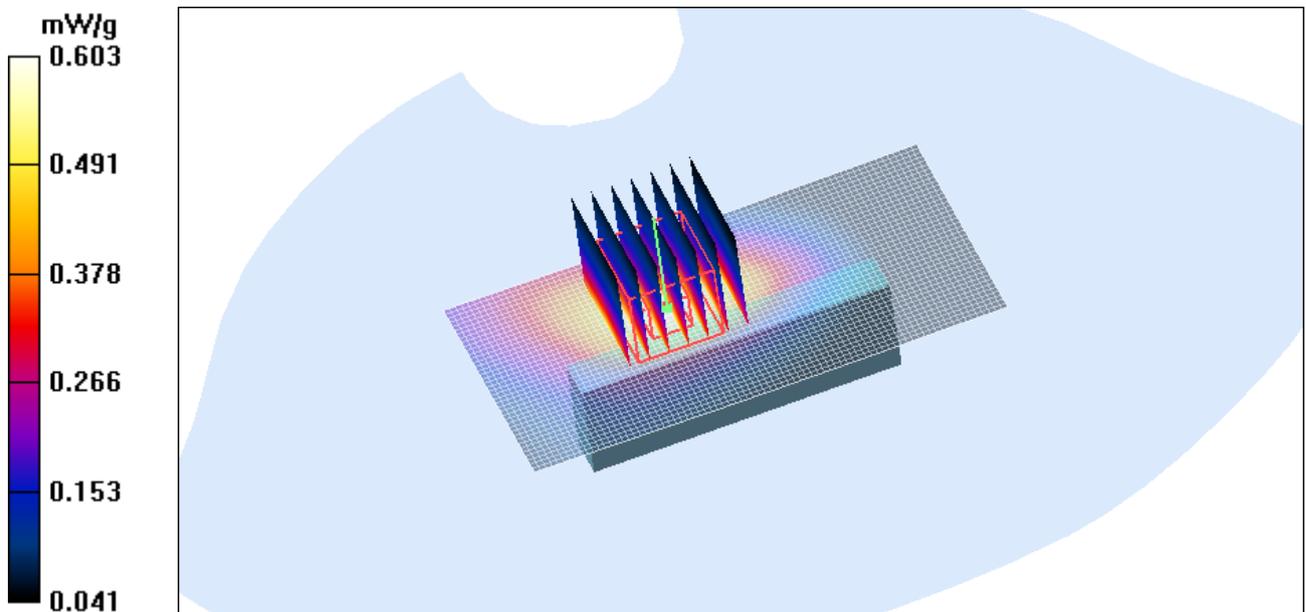


Figure 13 CDMA Cellular with IBM T61 Test Position 4 Channel 384

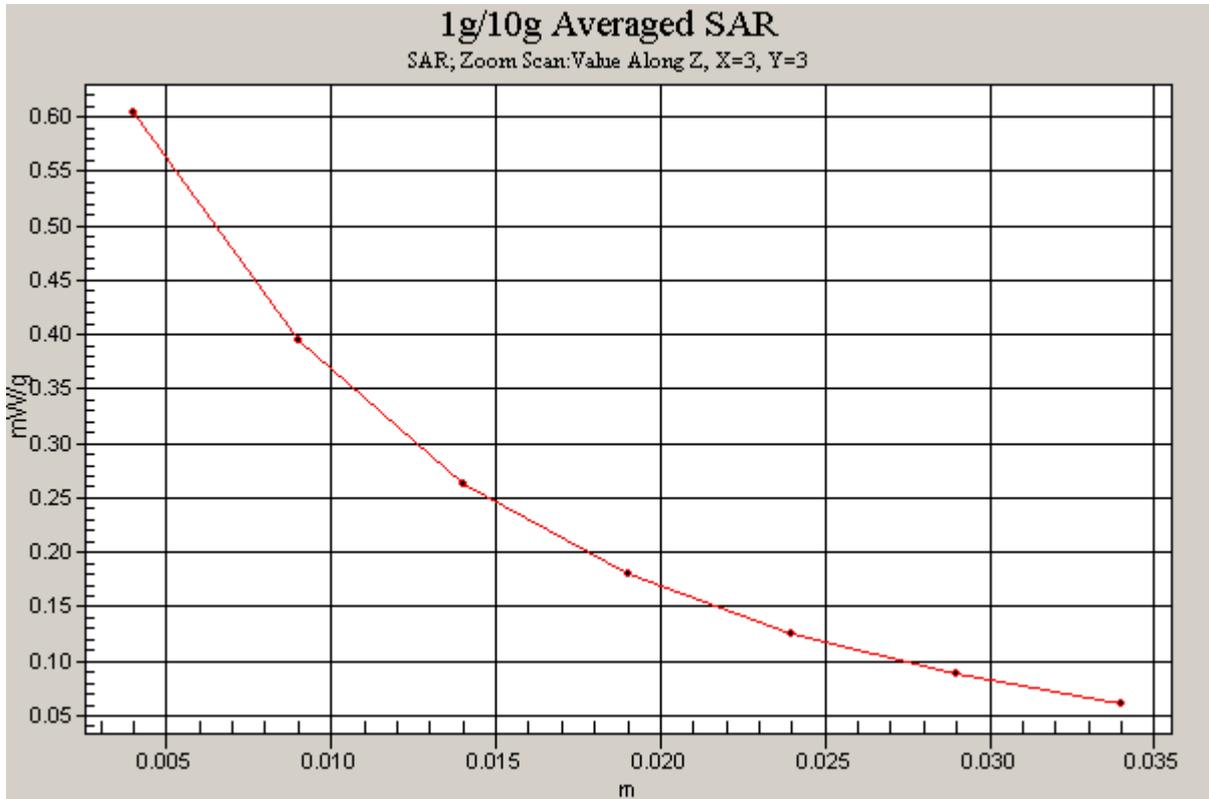


Figure 14 Z-Scan at power reference point (CDMA Cellular with IBM T61 Test Position 4 Channel 384)

CDMA Cellular with IBM T61 Test Position 5 Middle

Date/Time: 8/30/2009 10:28:54 AM

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 5 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.247 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = -0.181 dB

Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.222 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.238 mW/g

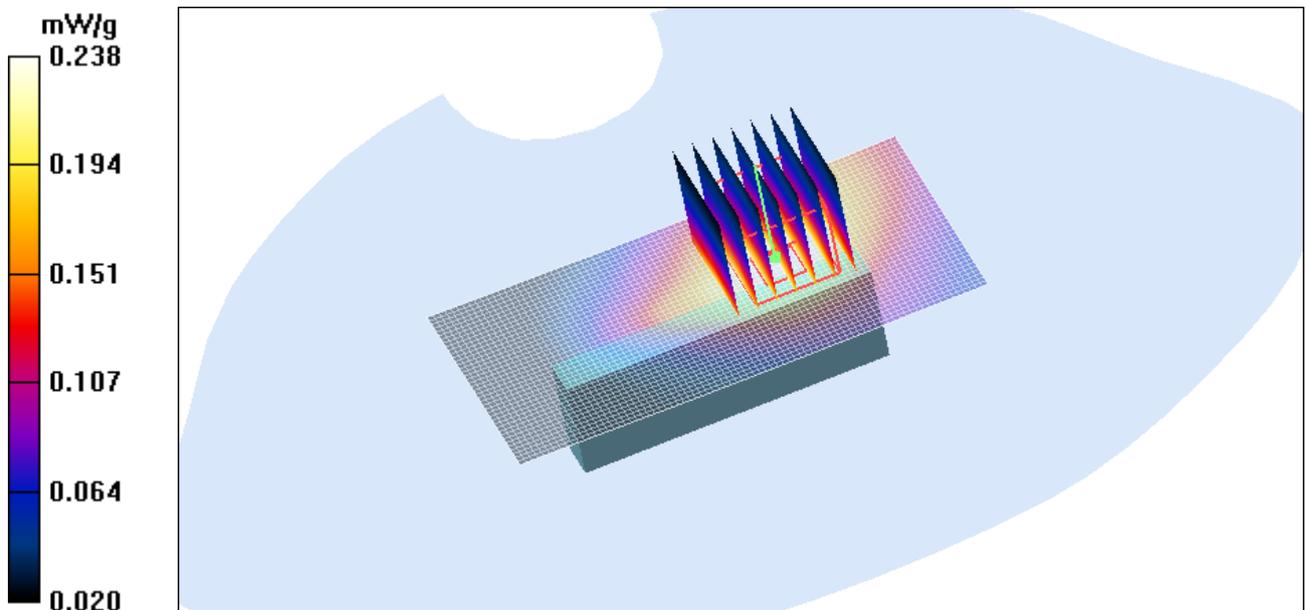


Figure 15 CDMA Cellular with IBM T61 Test Position 5 Channel 384

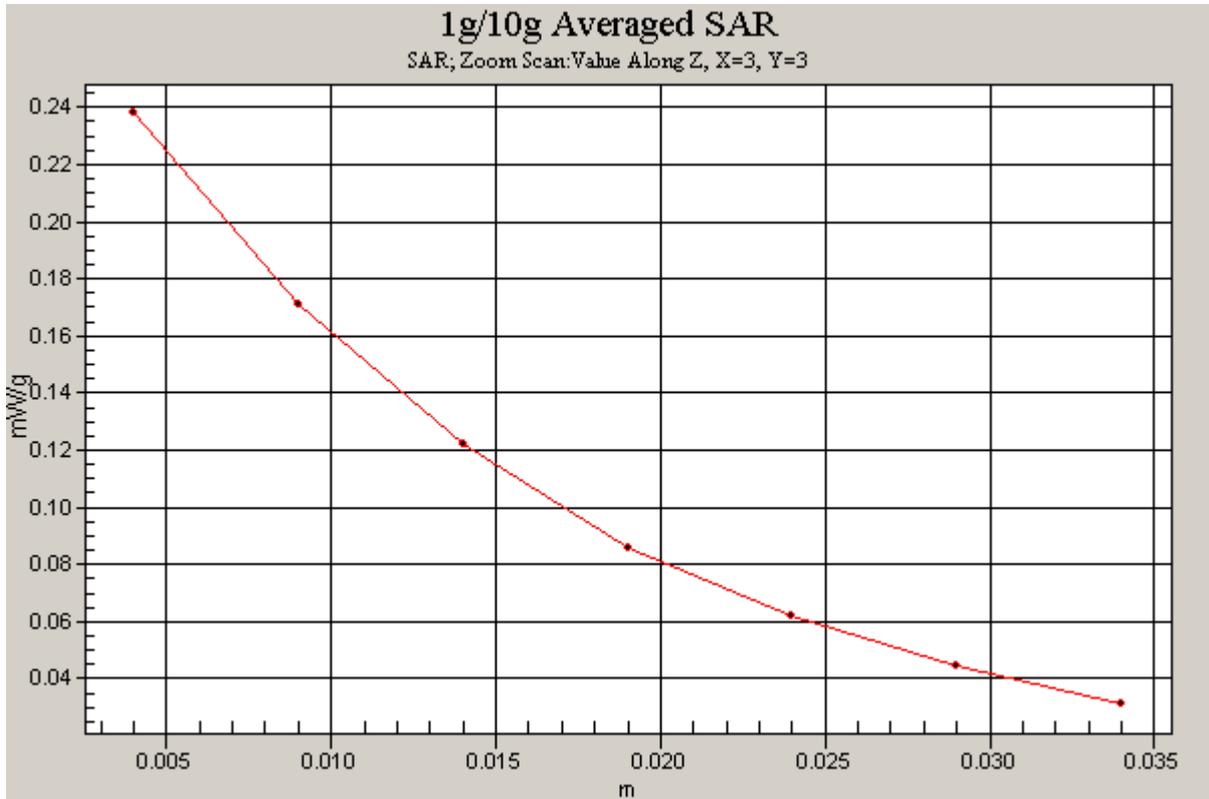


Figure 16 Z-Scan at power reference point (CDMA Cellular with IBM T61 Test Position 5 Channel 384)

CDMA Cellular with BenQ Joybook R55V Test Position 2 High

Date/Time: 8/30/2009 11:45:14 AM

Communication System: CDMA Cellular; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.03$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 High/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.956 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.2 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.865 mW/g; SAR(10 g) = 0.537 mW/g

Maximum value of SAR (measured) = 0.942 mW/g

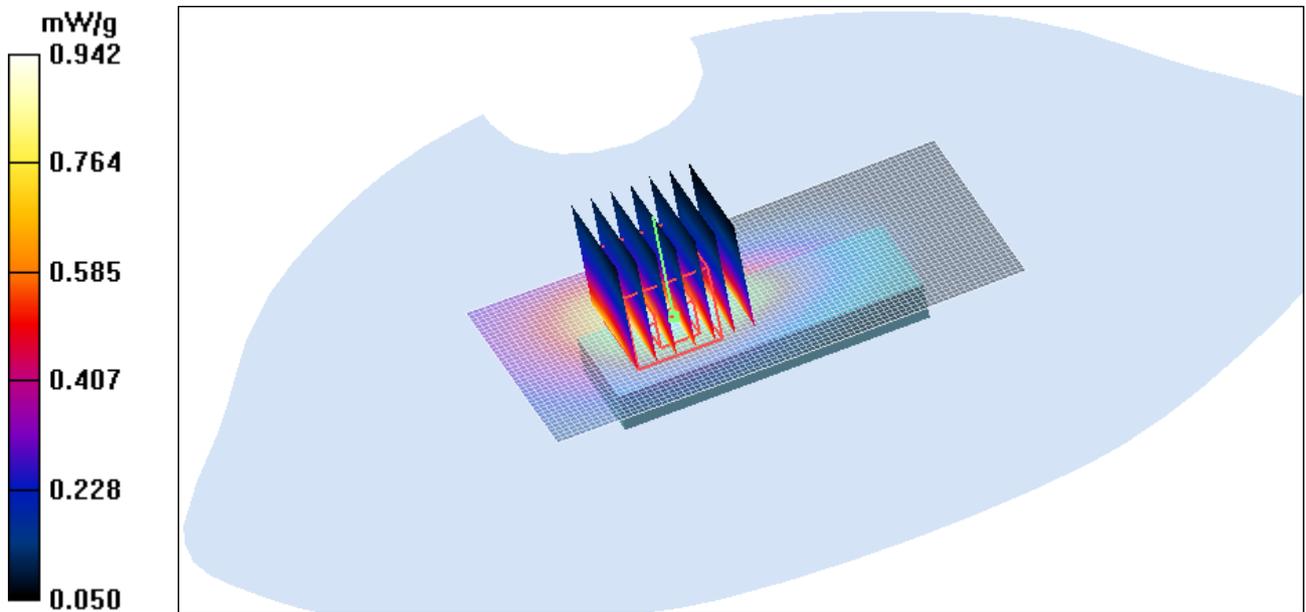


Figure 17 CDMA Cellular with BenQ Joybook R55V Test Position 2 Channel 777

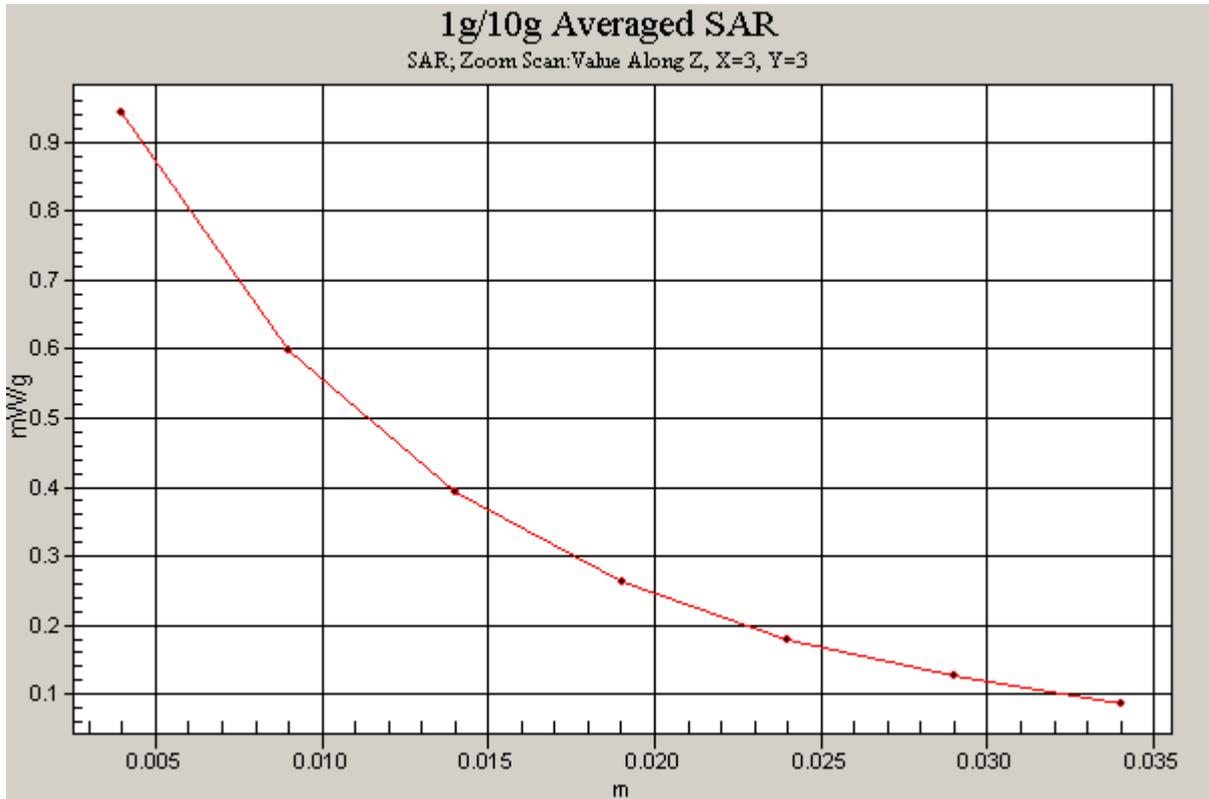


Figure 18 Z-Scan at power reference point (CDMA Cellular with BenQ Joybook R55V Test Position 2 Channel 777)

CDMA Cellular with BenQ Joybook R55V Test Position 2 Middle

Date/Time: 8/30/2009 11:27:42 AM

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.829 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.0 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.734 mW/g; SAR(10 g) = 0.466 mW/g

Maximum value of SAR (measured) = 0.792 mW/g

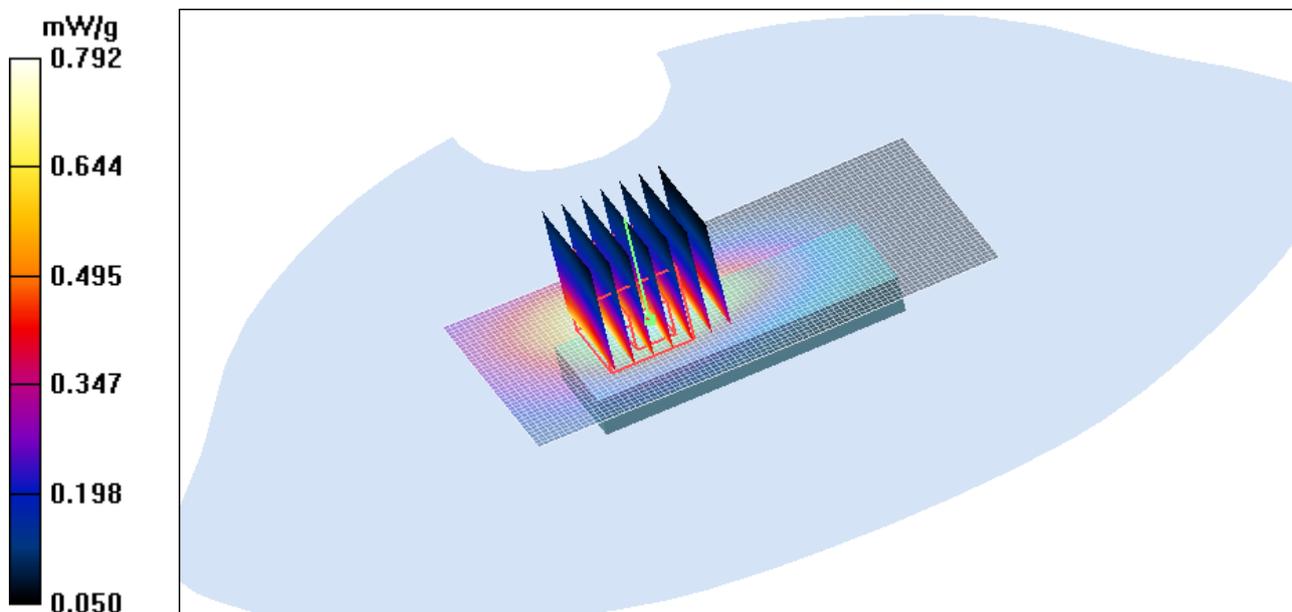


Figure 19 CDMA Cellular with BenQ Joybook R55V Test Position 2 Channel 384

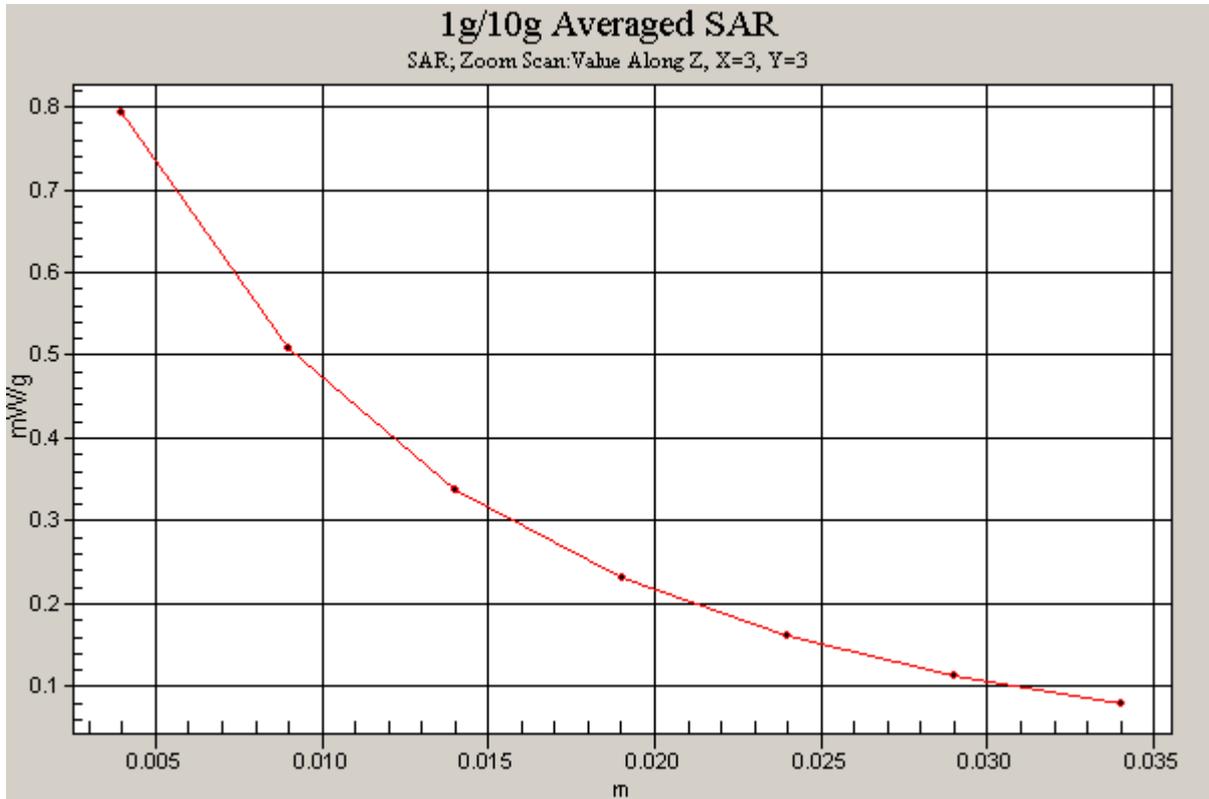


Figure 20 Z-Scan at power reference point (CDMA Cellular with BenQ Joybook R55V Test Position 2 Channel 384)

CDMA Cellular with BenQ Joybook R55V Test Position 2 Low

Date/Time: 8/30/2009 12:01:27 PM

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Low/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.984 mW/g

Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.2 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.888 mW/g; SAR(10 g) = 0.572 mW/g

Maximum value of SAR (measured) = 0.957 mW/g

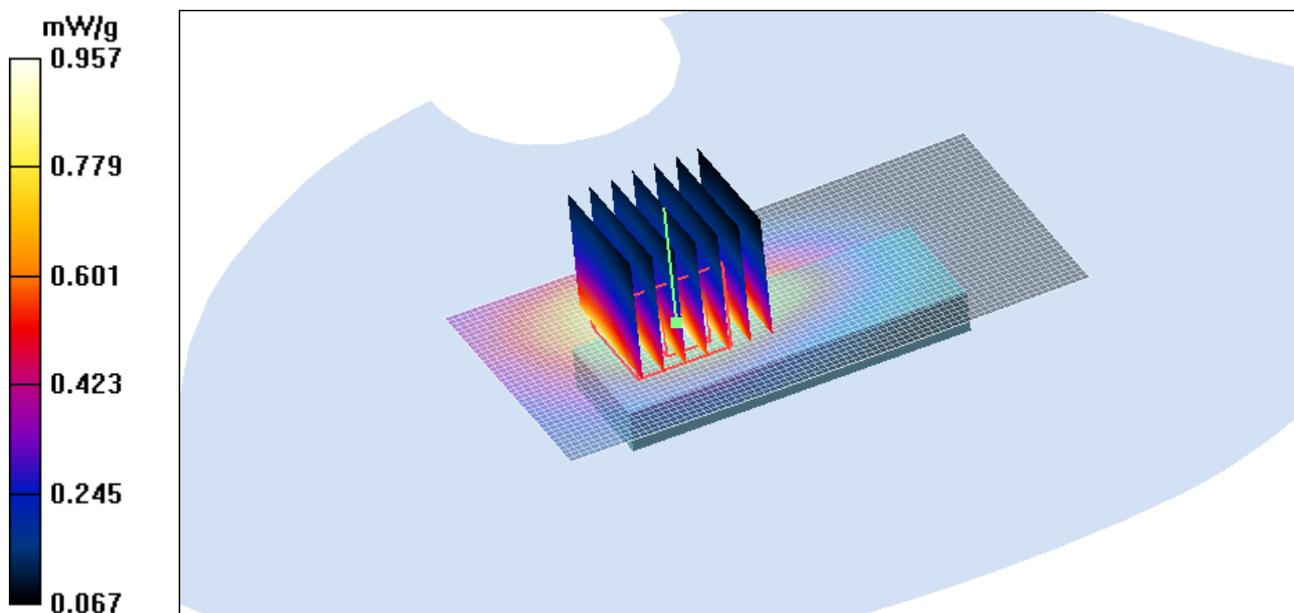


Figure 21 CDMA Cellular with BenQ Joybook R55V Test Position 2 Channel 1013

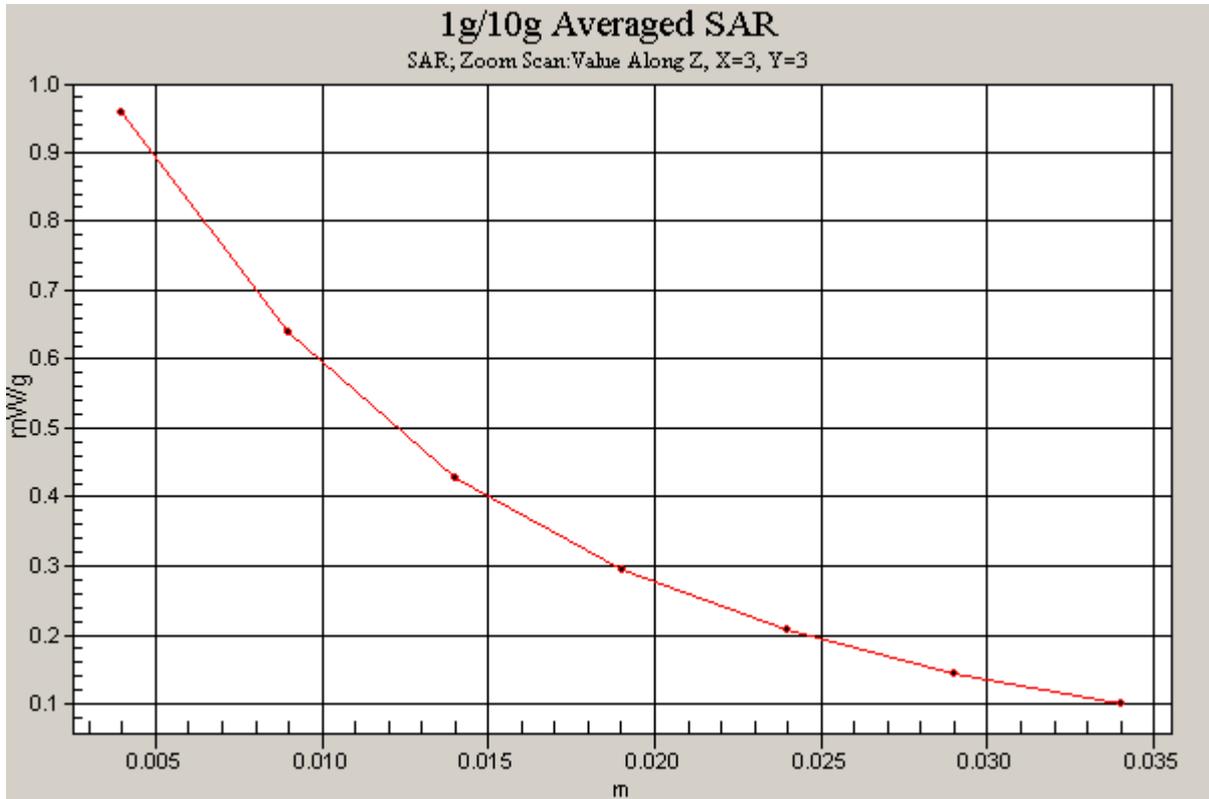


Figure 22 Z-Scan at power reference point (CDMA Cellular with BenQ Joybook R55V Test Position 2 Channel 1013)

CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 1 High

Date/Time: 8/30/2009 2:41:21 PM

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.03$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 High/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.02 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.8 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.898 mW/g; SAR(10 g) = 0.543 mW/g

Maximum value of SAR (measured) = 0.990 mW/g

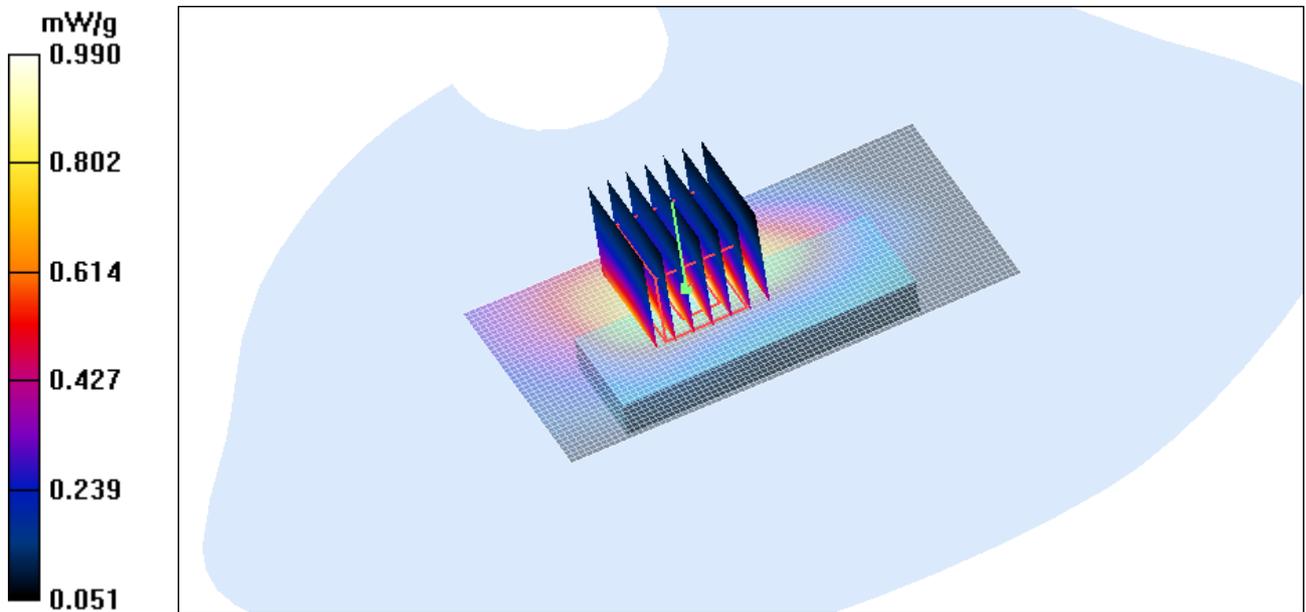


Figure 23 CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 1 Channel 777

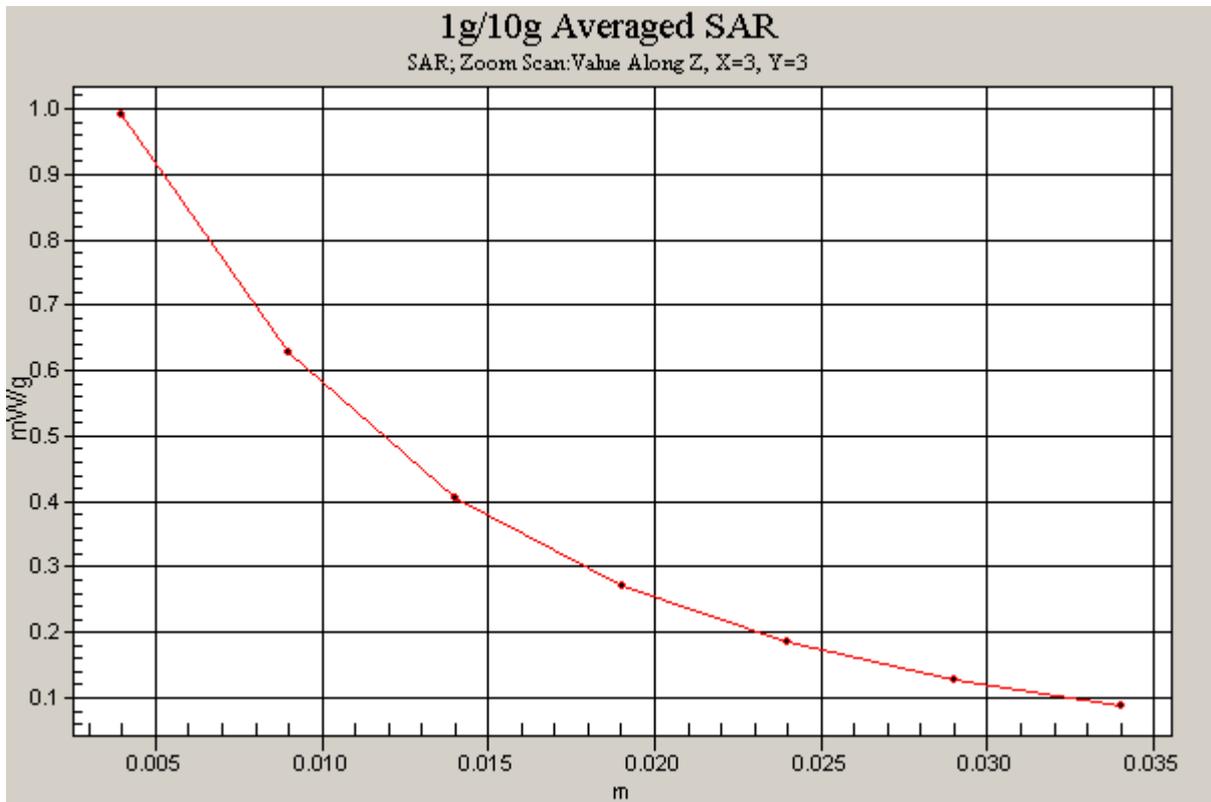


Figure 24 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 1 Channel 777)

CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 1 Middle

Date/Time: 8/30/2009 12:40:38 PM

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.840 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.779 mW/g; SAR(10 g) = 0.480 mW/g

Maximum value of SAR (measured) = 0.844 mW/g

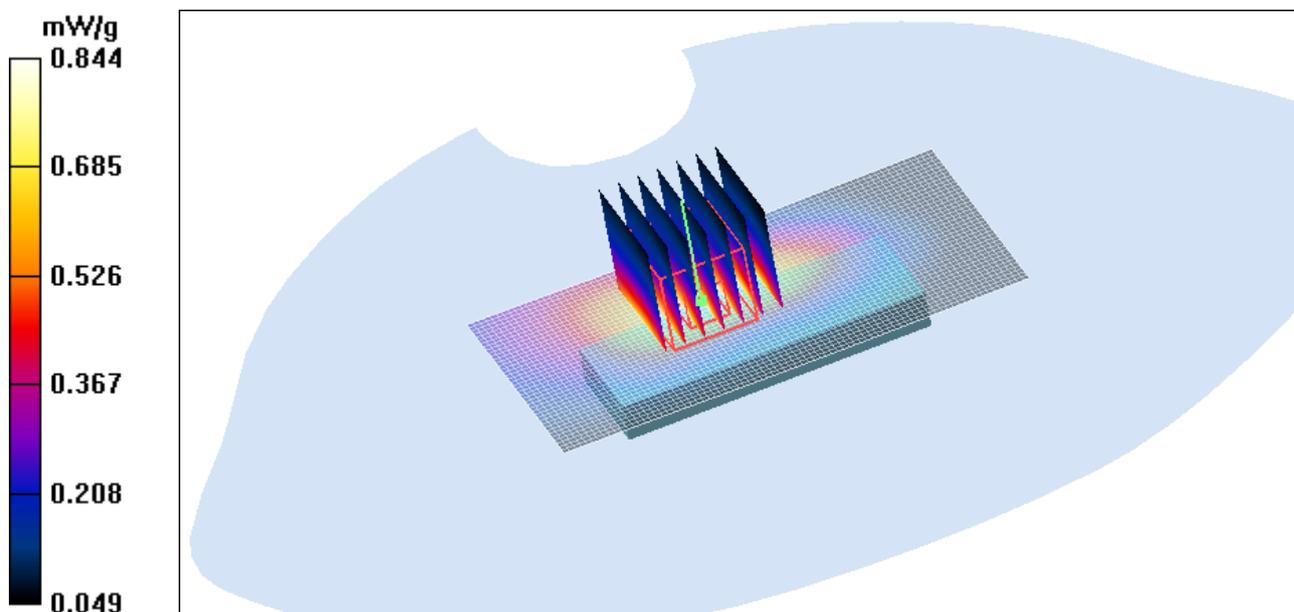


Figure 25 CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 1 Channel 384

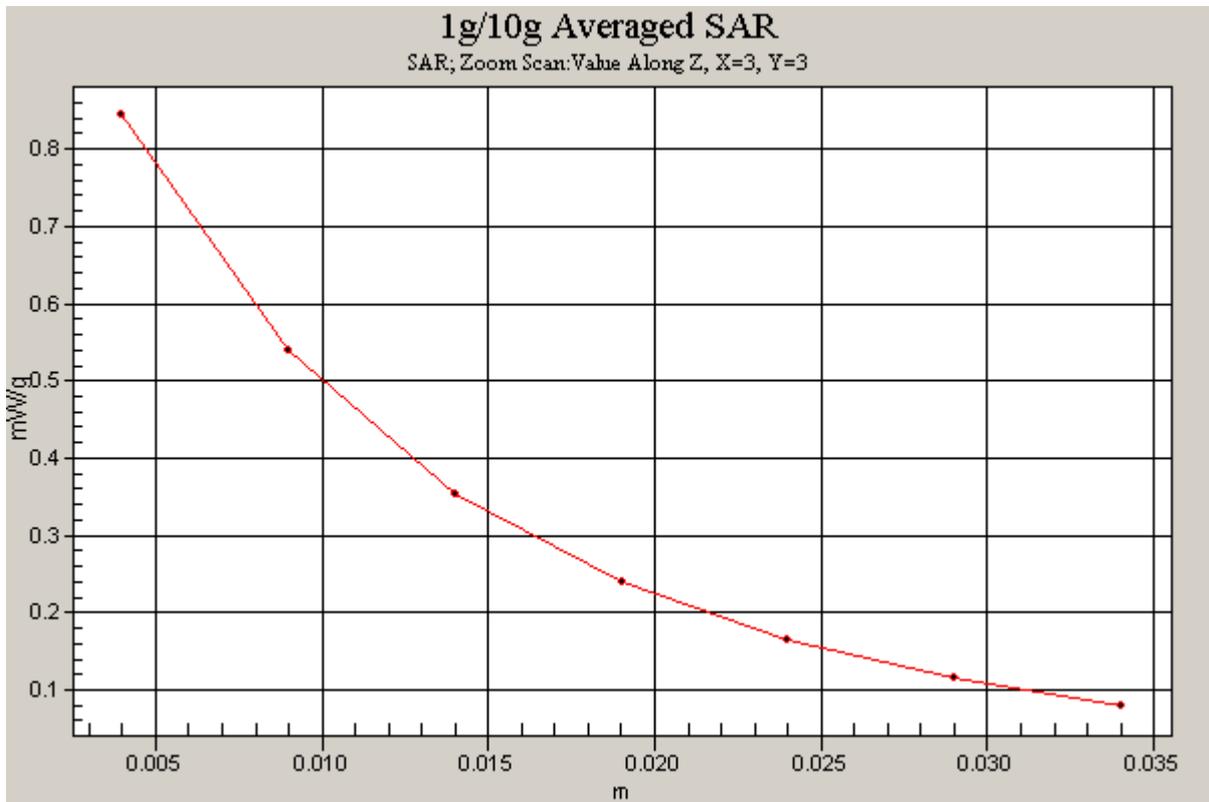


Figure 26 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 1 Channel 384)

CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 1 Low

Date/Time: 8/30/2009 3:00:12 PM

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Low/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.896 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.1 V/m; Power Drift = -0.193 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.839 mW/g; SAR(10 g) = 0.528 mW/g

Maximum value of SAR (measured) = 0.914 mW/g

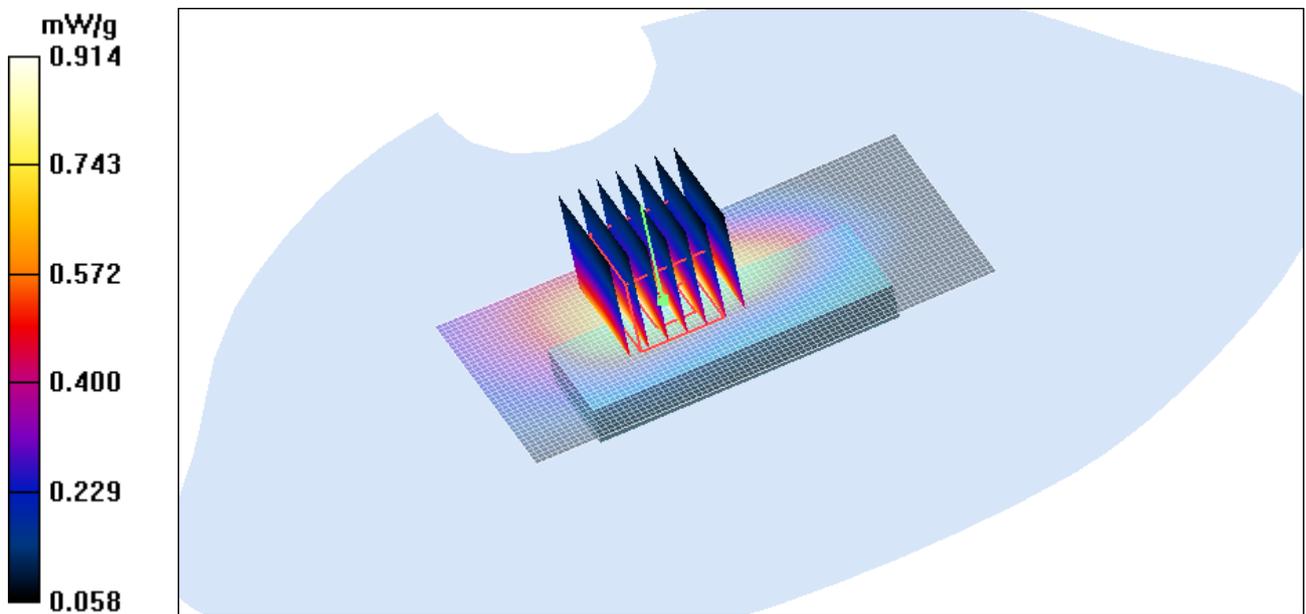


Figure 27 CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 1 Channel 1013

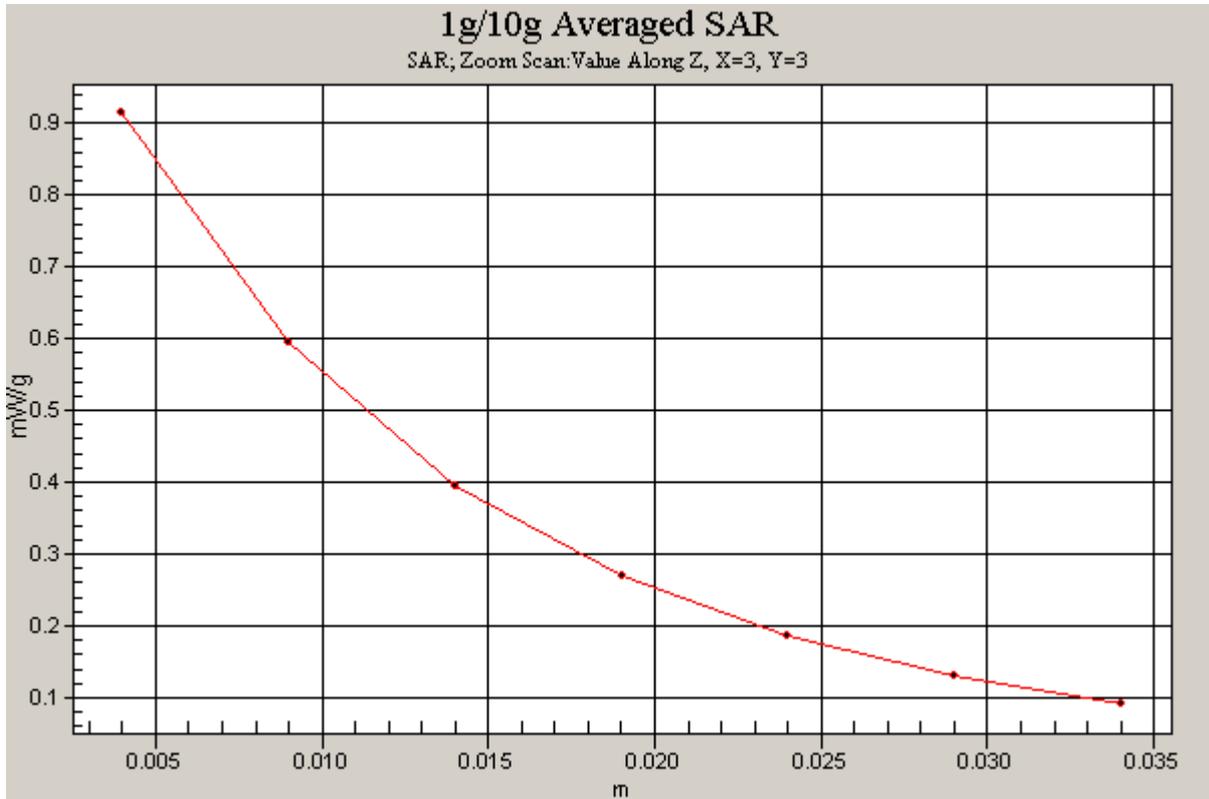


Figure 28 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 1 Channel 1013)

CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 3 Middle

Date/Time: 8/30/2009 1:03:35 PM

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (51x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.234 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.4 V/m; Power Drift = -0.141 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.317 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.306 mW/g

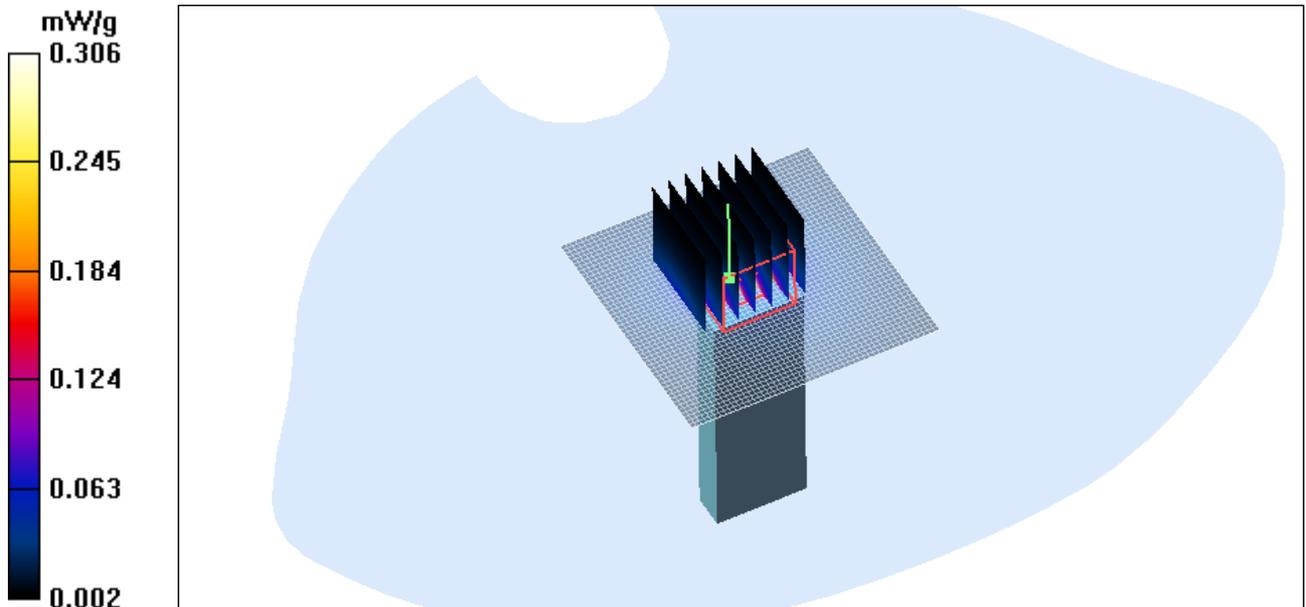


Figure 29 CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 3 Channel 384

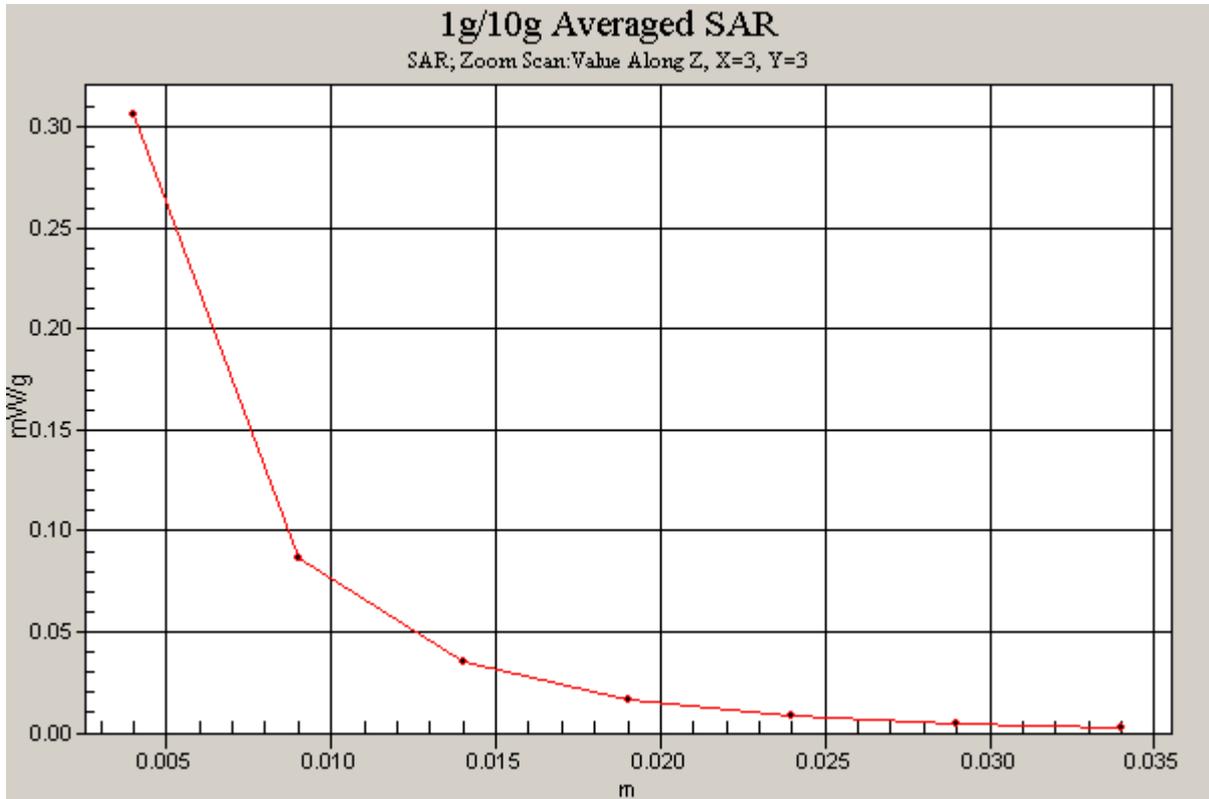


Figure 30 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 3 Channel 384)

CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 4 Middle

Date/Time: 8/30/2009 1:44:26 PM

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.674 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.5 V/m; Power Drift = 0.076 dB

Peak SAR (extrapolated) = 0.971 W/kg

SAR(1 g) = 0.633 mW/g; SAR(10 g) = 0.403 mW/g

Maximum value of SAR (measured) = 0.691 mW/g

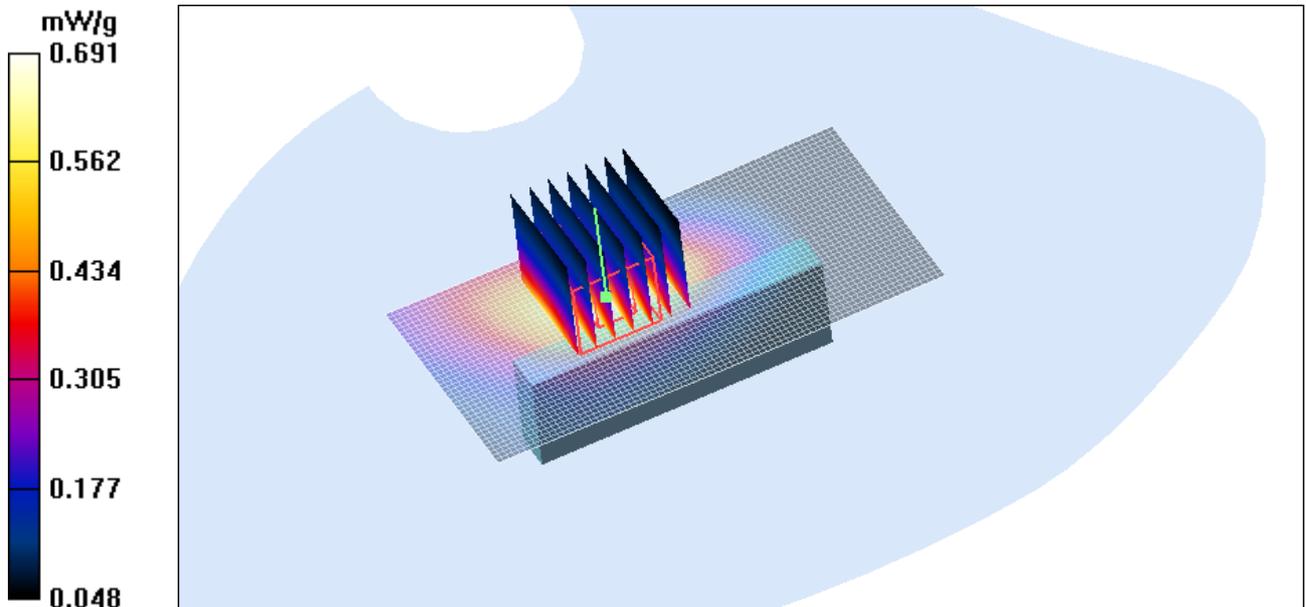


Figure 31 CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 4 Channel 384

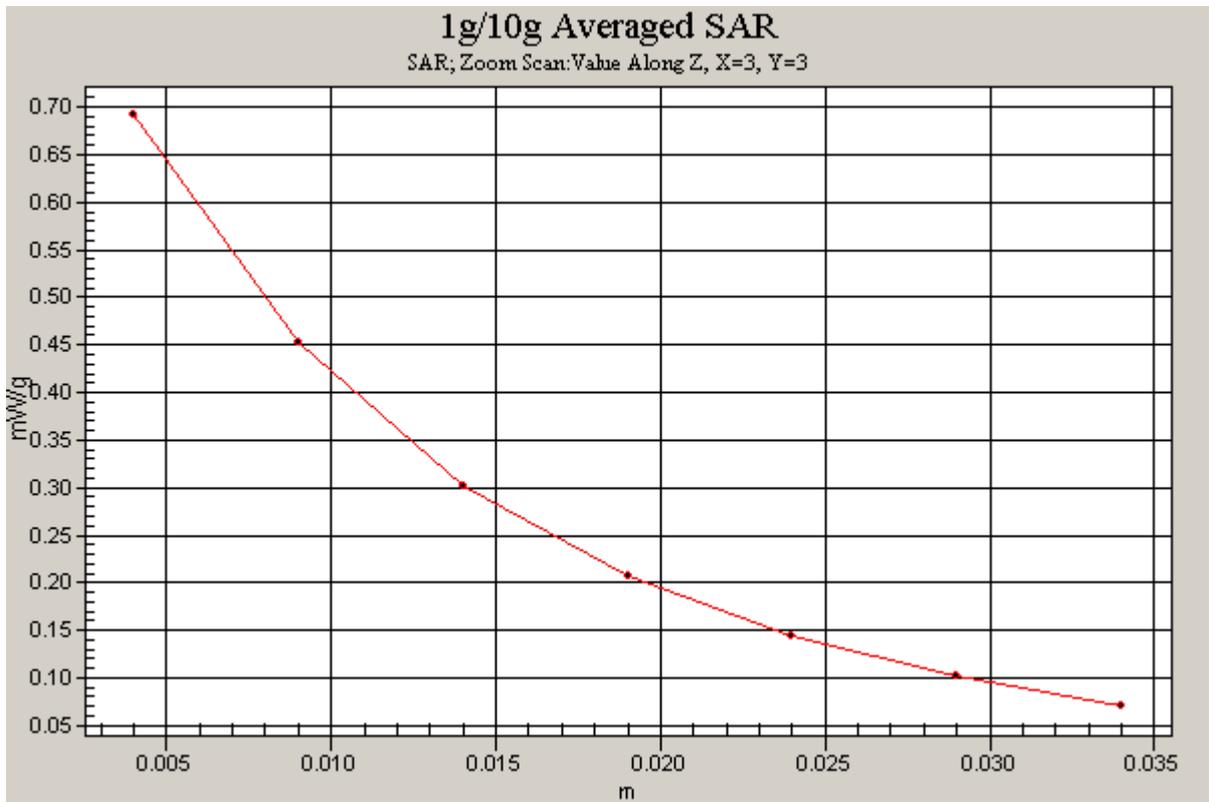


Figure 32 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 4 Channel 384)

CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 5 Middle

Date/Time: 8/30/2009 1:26:25 PM

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 5 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.272 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = -0.130 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.266 mW/g

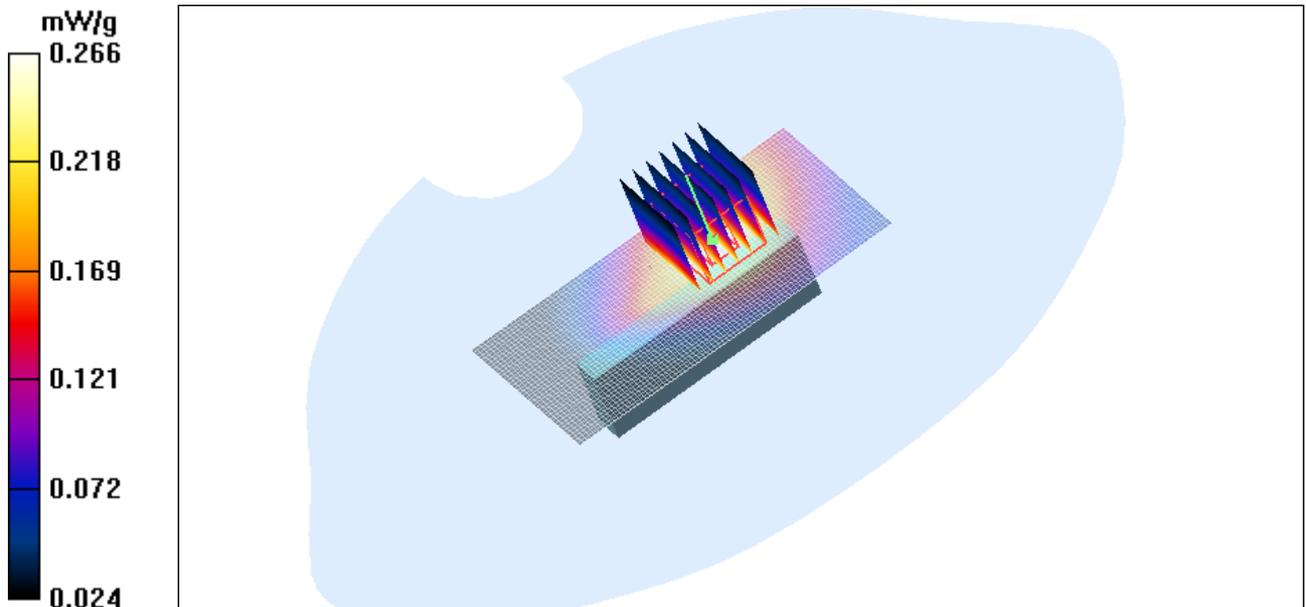


Figure 33 CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 5 Channel 384

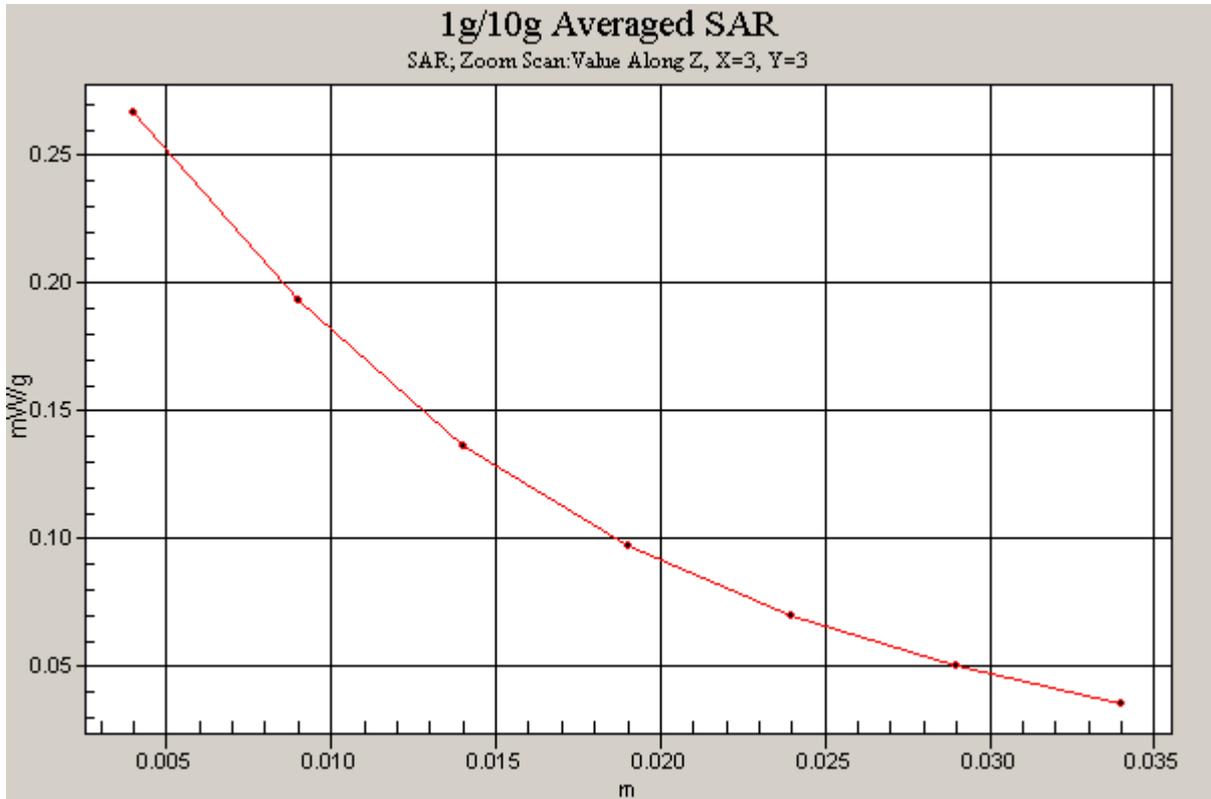


Figure 34 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 with IBM T61 Test Position 5 Channel 384)

CDMA Cellular EV-DO REV.0 with BenQ Joybook R55V Test Position 2 Middle

Date/Time: 8/30/2009 2:05:49 PM

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.732 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.3 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.427 mW/g

Maximum value of SAR (measured) = 0.727 mW/g

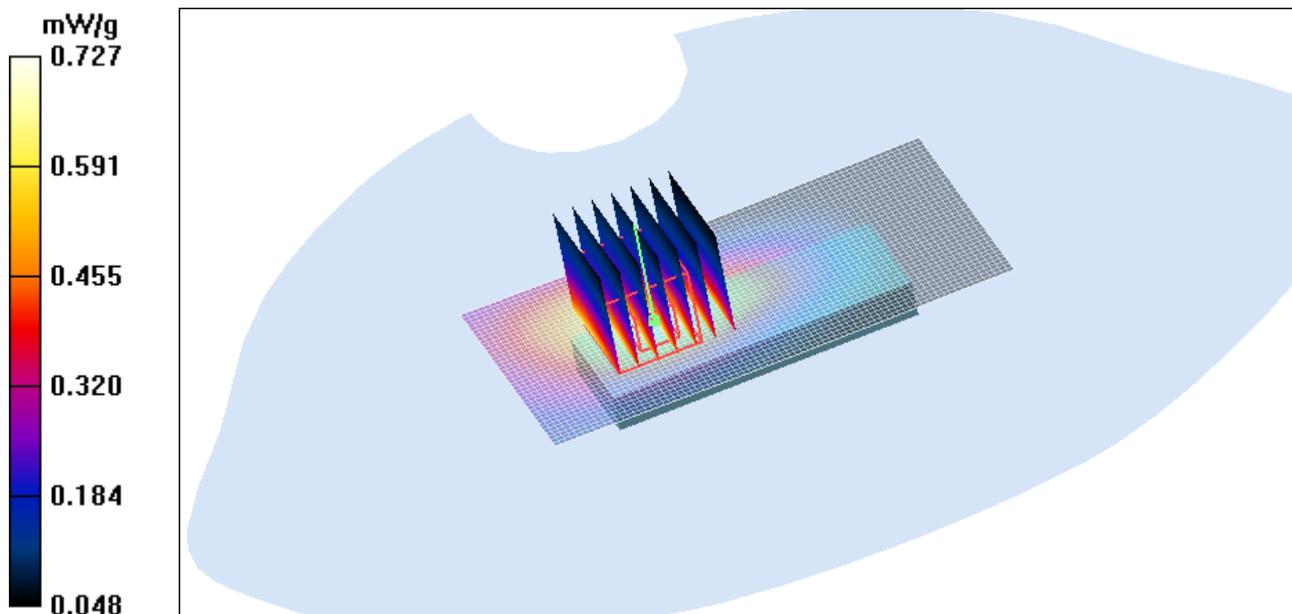


Figure 35 CDMA Cellular EV-DO REV.0 with BenQ Joybook R55V Test Position 2 Channel 384

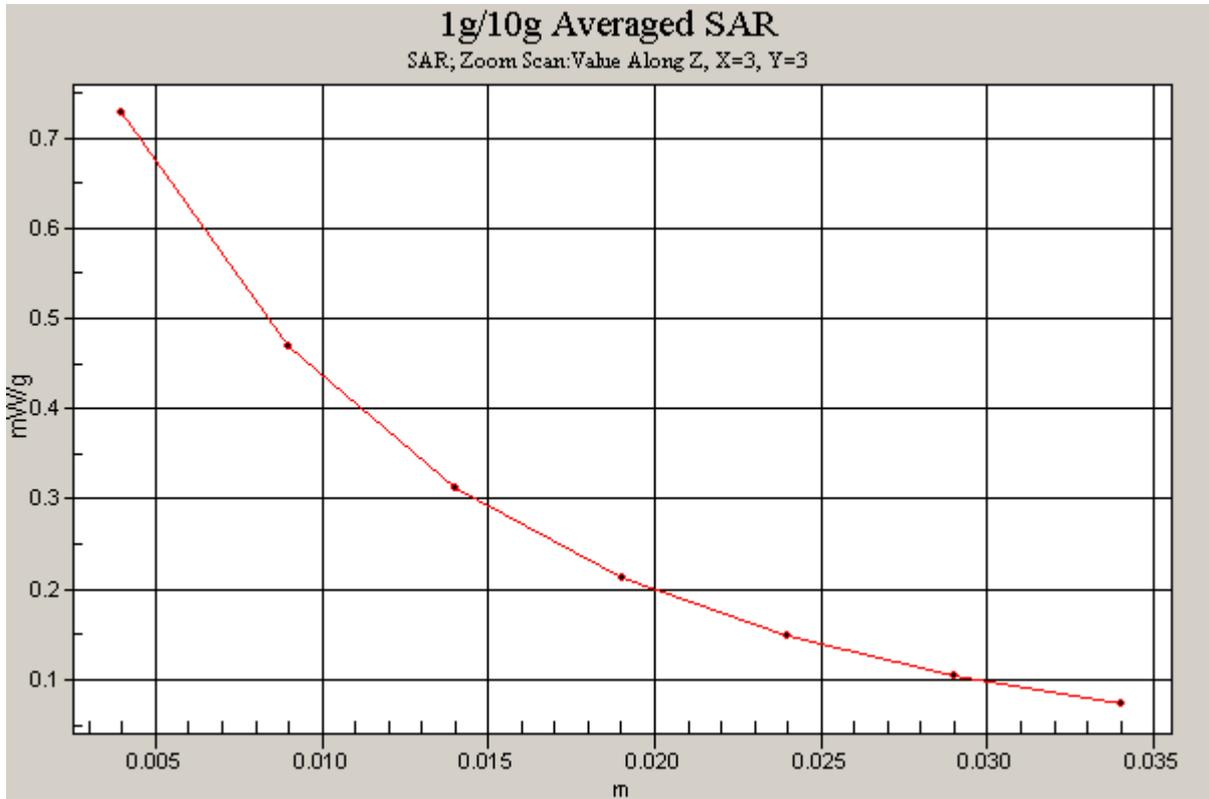


Figure 36 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 with BenQ Joybook R55V Test Position 2 Channel 384)

CDMA Cellular EV-DO REV.A with IBM T61 Test Position 1 High

Date/Time: 8/30/2009 3:21:39 PM

Communication System: CDMA Cellular EVDO Rev.A; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.03$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: ET3DV6 - SN1737; ConvF(6.14, 6.14, 6.14); Calibrated: 11/25/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 High/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.970 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.0 V/m; Power Drift = 0.194 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.924 mW/g; SAR(10 g) = 0.557 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

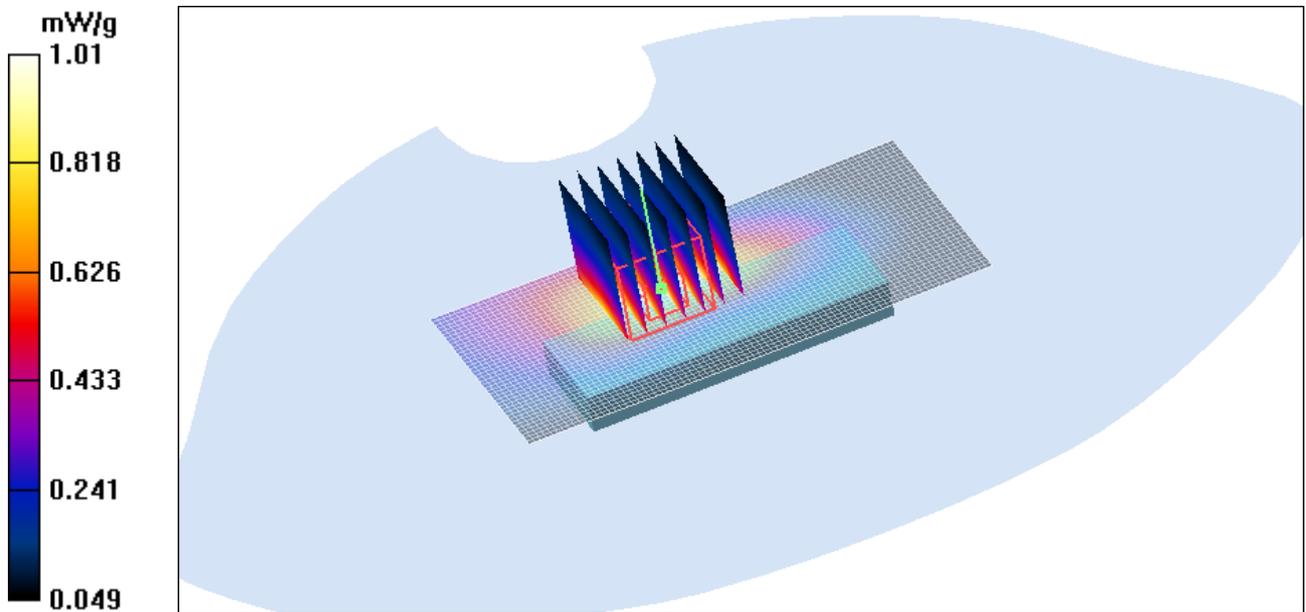


Figure 37 CDMA Cellular EV-DO REV.A with IBM T61 Test Position 1 Channel 777

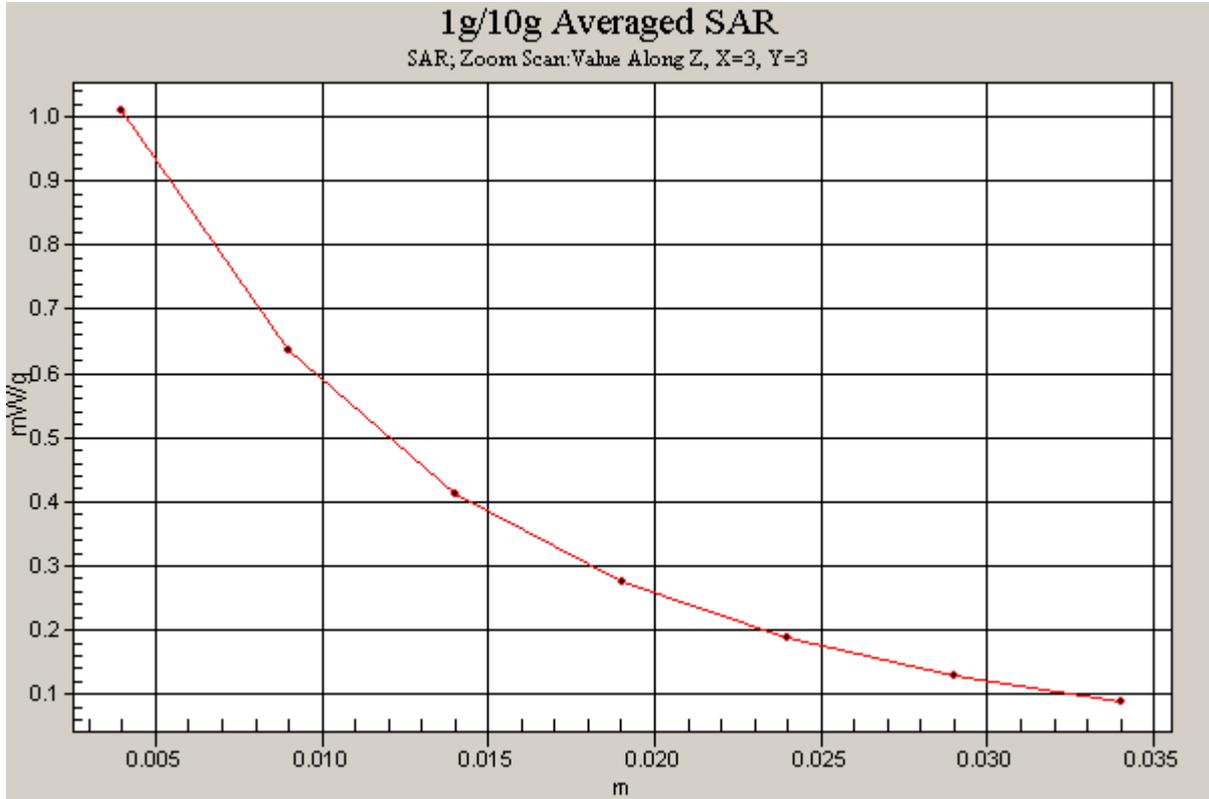


Figure 38 Z-Scan at power reference point (CDMA Cellular EV-DO REV.A with IBM T61 Test Position 1 Channel 777)

TA Technology (Shanghai) Co., Ltd. Test Report

No. RZA2009-1100

Page 64 of 88

ANNEX D: Probe Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA Shanghai (Auden)**

Certificate No: **ET3-1737_Nov08**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1737**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v5 and QA CAL-23.v3
Calibration procedure for dosimetric E-field probes**

Calibration date: **November 25, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B | GB41293874 | 1-Apr-08 (No. 217-00788) | Apr-09 |
| Power sensor E4412A | MY41495277 | 1-Apr-08 (No. 217-00788) | Apr-09 |
| Power sensor E4412A | MY41498087 | 1-Apr-08 (No. 217-00788) | Apr-09 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 1-Jul-08 (No. 217-00865) | Jul-09 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 31-Mar-08 (No. 217-00787) | Apr-09 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 1-Jul-08 (No. 217-00866) | Jul-09 |
| Reference Probe ES3DV2 | SN: 3013 | 2-Jan-08 (No. ES3-3013_Jan08) | Jan-09 |
| DAE4 | SN: 660 | 9-Sep-08 (No. DAE4-660_Sep08) | Sep-09 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (in house check Oct-07) | In house check: Oct-09 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (in house check Oct-08) | In house check: Oct-09 |

| | Name | Function | Signature |
|----------------|---------------|-------------------|-----------|
| Calibrated by: | Katja Pokovic | Technical Manager | |
| Approved by: | Niels Kuster | Quality Manager | |

Issued: November 25, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

| | |
|--------------------------|--|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| Polarization φ | φ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 SN:1737

November 25, 2008

Probe ET3DV6

SN:1737

| | |
|------------------|--------------------|
| Manufactured: | September 27, 2002 |
| Last calibrated: | February 19, 2007 |
| Repaired: | November 18, 2008 |
| Recalibrated: | November 25, 2008 |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1737

November 25, 2008

DASY - Parameters of Probe: ET3DV6 SN:1737

Sensitivity in Free Space^A

Diode Compression^B

| | | | | |
|-------|--------------|-------------------------------------|-------|-------|
| NormX | 1.42 ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP X | 93 mV |
| NormY | 1.68 ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Y | 94 mV |
| NormZ | 1.63 ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Z | 85 mV |

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

| | | | |
|---|------------------------------|---------------|---------------|
| Sensor Center to Phantom Surface Distance | | 3.7 mm | 4.7 mm |
| SAR _{be} [%] | Without Correction Algorithm | 10.7 | 6.9 |
| SAR _{be} [%] | With Correction Algorithm | 0.3 | 0.4 |

TSL 1750 MHz Typical SAR gradient: 10 % per mm

| | | | |
|---|------------------------------|---------------|---------------|
| Sensor Center to Phantom Surface Distance | | 3.7 mm | 4.7 mm |
| SAR _{be} [%] | Without Correction Algorithm | 12.5 | 8.4 |
| SAR _{be} [%] | With Correction Algorithm | 0.8 | 0.5 |

Sensor Offset

Probe Tip to Sensor Center **2.7 mm**

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).


^B Numerical linearization parameter: uncertainty not required.

ET3DV6 SN:1737

November 25, 2008

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)



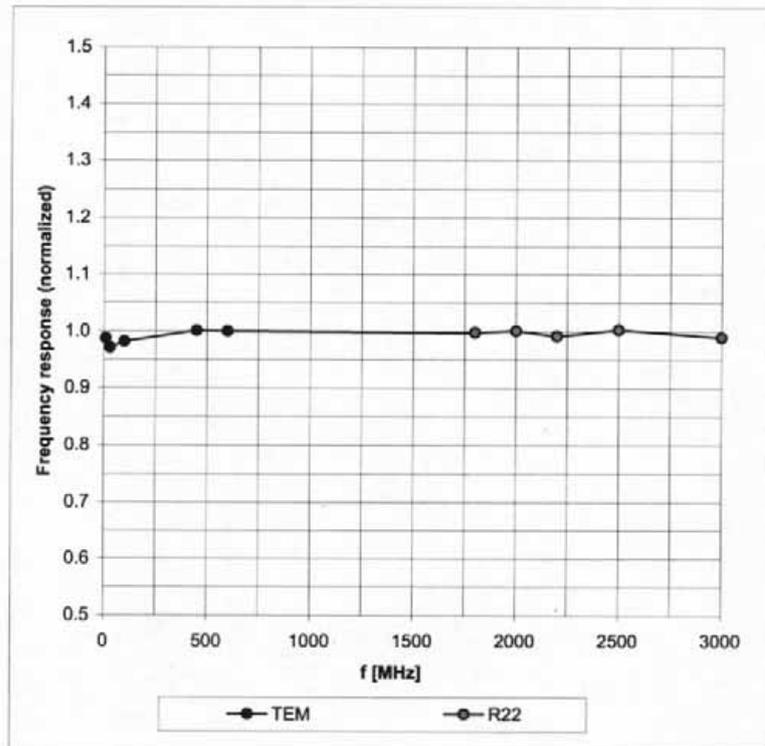


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ET3DV6 SN:1737

November 25, 2008

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

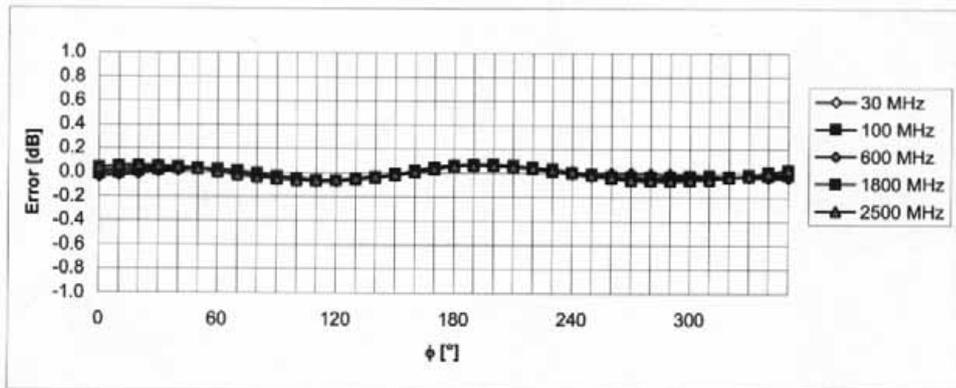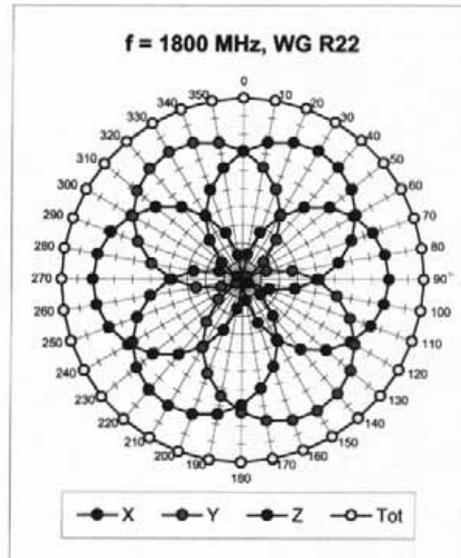
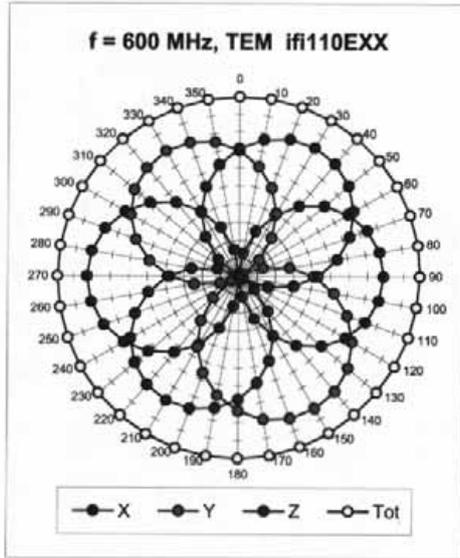


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ET3DV6 SN:1737

November 25, 2008

Dynamic Range f(SAR_{head})
(Waveguide R22, f = 1800 MHz)

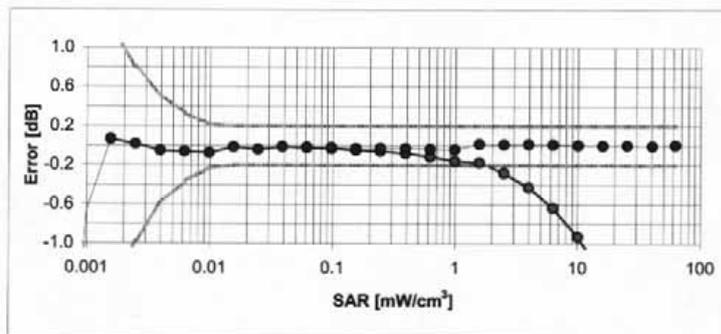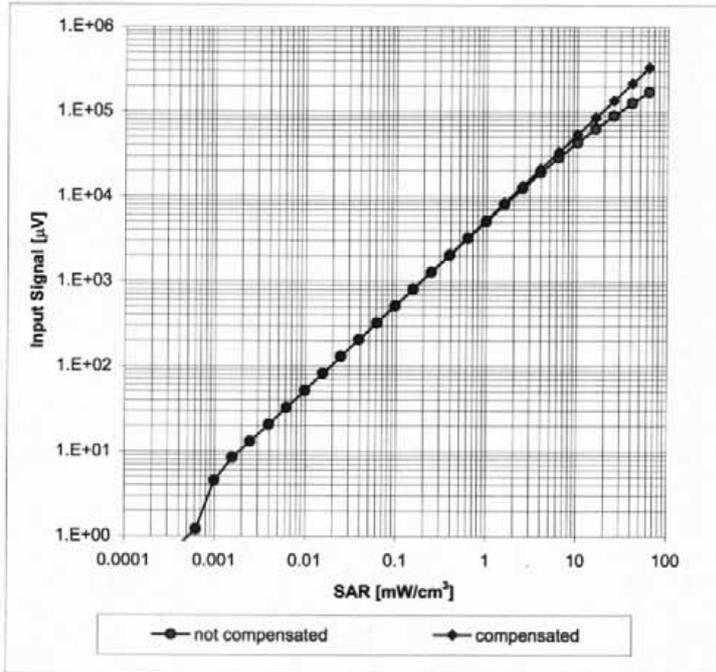

Uncertainty of Linearity Assessment: ± 0.6% (k=2)